

## SAR EVALUATION REPORT

For

### Beijing ULINK Technology Co., Ltd.

No.9-161, Fuqian street, Niulanshan town, Shunyi District, Beijing, China

**FCC ID: 2AMIWUZ100**

|                                                                                                                                                                                                                                                                           |                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                    | <b>Product Type:</b><br>Mobile WiFi |
| <b>Report Number:</b> RBJ191119050-20                                                                                                                                                                                                                                     |                                     |
| <b>Report Date:</b> 2020-05-11                                                                                                                                                                                                                                            |                                     |
| <b>Reviewed By:</b>                                                                                                                                                                                                                                                       | Rocky Xiao<br>RF Engineer           |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                     |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

| Attestation of Test Results |                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                  |              |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------------|
| EUT Information             | EUT Description                                                                                                                                                                                                                                                                                                                                                                                                                          | Mobile WiFi                      |              |
|                             | Tested Model                                                                                                                                                                                                                                                                                                                                                                                                                             | UZ-100                           |              |
|                             | Multiple Model                                                                                                                                                                                                                                                                                                                                                                                                                           | UZ-111-1                         |              |
|                             | FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2AMIWUZ100                       |              |
|                             | Serial Number                                                                                                                                                                                                                                                                                                                                                                                                                            | RBJ191119050-SA-S1               |              |
|                             | Test Date                                                                                                                                                                                                                                                                                                                                                                                                                                | 2020-02-14~ 2020-05-08           |              |
| MODE                        |                                                                                                                                                                                                                                                                                                                                                                                                                                          | Max. SAR Level(s) Reported(W/kg) | Limit (W/kg) |
| GSM 850                     | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.20                             | 1.6          |
| PCS 1900                    | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.78                             |              |
| WCDMA Band 2                | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.74                             |              |
| LTE Band 2                  | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.72                             |              |
| LTE Band 4                  | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 1.25                             |              |
| LTE Band 5                  | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.35                             |              |
| LTE Band 7                  | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.88                             |              |
| LTE Band 12&17              | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.32                             |              |
| LTE Band 18                 | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.23                             |              |
| LTE Band 40                 | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.32                             |              |
| LTE Band 41&38              | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.46                             |              |
| WLAN 2.4G                   | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.16                             |              |
| WLAN 5.2G                   | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.09                             |              |
| WLAN 5.8G                   | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.24                             |              |
| Simultaneous                | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 1.42                             |              |
|                             | 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                              | 1.42 (Hotspot)                   |              |
| Applicable Standards        | FCC 47 CFR part 2.1093<br>Radiofrequency radiation exposure evaluation: portable devices                                                                                                                                                                                                                                                                                                                                                 |                                  |              |
|                             | RF Exposure Procedures: TCB Workshop April 2019                                                                                                                                                                                                                                                                                                                                                                                          |                                  |              |
|                             | IEEE1528:2013<br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques                                                                                                                                                                                                                                        |                                  |              |
|                             | IEC 62209-2:2010<br>Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)                                                                            |                                  |              |
|                             | KDB procedures<br>KDB 447498 D01 General RF Exposure Guidance v06<br>KDB 648474 D04 Handset SAR v01r03<br>KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04<br>KDB 865664 D02 RF Exposure Reporting v01r02<br>KDB 941225 D01 3G SAR Procedures v03r01<br>KDB 941225 D05 SAR for LTE Devices v02r05<br>KDB 941225 D06 Hotspot Mode v02r01<br>KDB 248227 D01 802 11 Wi-Fi SAR v02r02                                                  |                                  |              |
|                             | Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.<br>The results and statements contained in this report pertain only to the device(s) evaluated. |                                  |              |

## **TABLE OF CONTENTS**

|                                                                                 |            |
|---------------------------------------------------------------------------------|------------|
| <b>DOCUMENT REVISION HISTORY .....</b>                                          | <b>4</b>   |
| <b>EUT DESCRIPTION .....</b>                                                    | <b>5</b>   |
| TECHNICAL SPECIFICATION .....                                                   | 5          |
| <b>REFERENCE, STANDARDS, AND GUIDELINES.....</b>                                | <b>6</b>   |
| SAR LIMITS .....                                                                | 7          |
| <b>FACILITIES.....</b>                                                          | <b>8</b>   |
| <b>DESCRIPTION OF TEST SYSTEM .....</b>                                         | <b>9</b>   |
| <b>EQUIPMENT LIST AND CALIBRATION .....</b>                                     | <b>15</b>  |
| EQUIPMENTS LIST & CALIBRATION INFORMATION .....                                 | 15         |
| <b>SAR MEASUREMENT SYSTEM VERIFICATION .....</b>                                | <b>16</b>  |
| LIQUID VERIFICATION .....                                                       | 16         |
| SYSTEM ACCURACY VERIFICATION.....                                               | 21         |
| SAR SYSTEM VALIDATION DATA .....                                                | 23         |
| <b>EUT TEST STRATEGY AND METHODOLOGY .....</b>                                  | <b>37</b>  |
| TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....                 | 37         |
| CHEEK/TOUCH POSITION .....                                                      | 38         |
| EAR/TILT POSITION .....                                                         | 38         |
| TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS .....                     | 39         |
| TEST DISTANCE FOR SAR EVALUATION.....                                           | 39         |
| SAR EVALUATION PROCEDURE.....                                                   | 40         |
| <b>CONDUCTED OUTPUT POWER MEASUREMENT .....</b>                                 | <b>41</b>  |
| PROVISION APPLICABLE .....                                                      | 41         |
| TEST PROCEDURE .....                                                            | 41         |
| RADIO CONFIGURATION .....                                                       | 41         |
| MAXIMUM TARGET OUTPUT POWER .....                                               | 47         |
| TEST RESULTS: .....                                                             | 48         |
| <b>STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....</b>                       | <b>71</b>  |
| ANTENNA LOCATION .....                                                          | 71         |
| ANTENNA DISTANCE TO EDGE .....                                                  | 71         |
| STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....                               | 71         |
| STANDALONE SAR ESTIMATION: .....                                                | 72         |
| SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT(HOTSPOT MODE).....    | 72         |
| SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT(STANDALONE MODE)..... | 73         |
| SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT .....                 | 74         |
| <b>SAR MEASUREMENT RESULTS.....</b>                                             | <b>75</b>  |
| SAR TEST DATA.....                                                              | 75         |
| <b>SAR MEASUREMENT VARIABILITY .....</b>                                        | <b>89</b>  |
| <b>SAR SIMULTANEOUS TRANSMISSION DESCRIPTION .....</b>                          | <b>90</b>  |
| <b>SAR PLOTS.....</b>                                                           | <b>98</b>  |
| <b>APPENDIX A MEASUREMENT UNCERTAINTY .....</b>                                 | <b>99</b>  |
| <b>APPENDIX B EUT TEST POSITION PHOTOS .....</b>                                | <b>101</b> |
| <b>APPENDIX C CALIBRATION CERTIFICATES .....</b>                                | <b>102</b> |

---

**DOCUMENT REVISION HISTORY**

---

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 1.0             | RBJ191119050-20 | Original Report         | 2020-05-11       |

## EUT DESCRIPTION

This report has been prepared on behalf of **Beijing ULINK Technology Co., Ltd.** and their product **Mobile WiFi**, Model: **UZ-100**, FCC ID: **2AMIWUZ100** or the EUT (Equipment under Test) as referred to in the rest of this report.

**Notes:** Model UZ-100 and UZ-111-1 are identical, UZ-100 was selected for fully testing, the detailed information about the difference can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

\*All measurement and test data in this report was gathered from production sample serial number: RBJ191119050-SA-S1(Assigned by BACL).The EUT supplied by the applicant was received on 2019-11-19.

## Technical Specification

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Device Type:</b>           | Portable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Exposure Category:</b>     | Population / Uncontrolled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Antenna Type(s):</b>       | Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>DTM Type:</b>              | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Body-Worn Accessories:</b> | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Face-Head Accessories:</b> | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Operation Mode:</b>        | GPRS(Class 12); EGPRS(Class 12),<br>WCDMA( R99 (Data), HSDPA /HSUPA/DC-HSDPA/HSPA+),<br>FDD-LTE, TDD-LTE, WLAN and Bluetooth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Frequency Band:</b>        | GSM 850: 824-849 MHz(TX); 869-894 MHz(RX)<br>PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>LTE Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX)<br>LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX)<br>LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX)<br>LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX)<br>LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX)<br>LTE Band 18: 815-830 MHz(TX); 860-875 MHz(RX)<br>LTE Band 38: 2570-2620 MHz(TX); 2570-2620 MHz(RX)<br>LTE Band 40: 2305-2315 MHz(TX); 2305-2315 MHz(RX)<br>2350-2360 MHz(TX); 2350-2360 MHz(RX)<br>LTE Band 41: 2535-2655 MHz(TX); 2535-2655 MHz(RX)<br>WLAN 2.4G: 2412 -2462 MHz/2422 -2452 MHz<br>WLAN 5G:5150-5250 MHz/5725-5850 MHz |
| <b>Conducted RF Power:</b>    | GSM 850: 32.22 dBm; PCS 1900: 30.12 dBm<br>WCDMA Band 2: 23.77 dBm<br>LTE Band 2: 23.51 dBm; LTE Band 4: 23.33 dBm<br>LTE Band 5: 22.89 dBm; LTE Band 7: 23.74 dBm<br>LTE Band 12: 23.56 dBm; LTE Band 17: 22.83 dBm<br>LTE Band 18: 23.40 dBm; LTE Band 38: 23.44 dBm<br>LTE Band 40: 23.81 dBm; LTE Band 41: 24.08 dBm<br>WLAN 2.4G: 14.93 dBm; WLAN 5.2G: 13.29 dBm<br>WLAN 5.8G: 13.57 dBm; Bluetooth: 5.30 dBm<br>BLE: -1.05 dBm                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Power Source:</b>          | 3.63 VDC From Rechargeable Battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Normal Operation:</b>      | Body-worn(Hotspot)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## REFERENCE, STANDARDS, AND GUIDELINES

---

### **FCC:**

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

### **CE:**

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

**SAR Limits****FCC Limit**

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | <b>1.60</b>                                                    | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

**CE Limit**

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 10 g of<br>tissue)            | 2.0                                                            | 10                                                     |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

## FACILITIES

---

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

The test sites and measurement facilities used to collect data are located at:

|                                    |                                               |
|------------------------------------|-----------------------------------------------|
| <input type="checkbox"/> SAR Lab 1 | <input checked="" type="checkbox"/> SAR Lab 2 |
|------------------------------------|-----------------------------------------------|

## DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**EX3DV4 E-Field Probes**

|                      |                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency</b>     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                                                |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                                                                       |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to > 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)                                                                                                                        |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                                                                          |
| <b>Application</b>   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |
| <b>Compatibility</b> | DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI                                                                                                                                                                |

**Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7329 Calibrated: 2019/10/22**

| Calibration Frequency Point(MHz) | Frequency Range(MHz) |      | Conversion Factor |       |       |
|----------------------------------|----------------------|------|-------------------|-------|-------|
|                                  | From                 | To   | X                 | Y     | Z     |
| 750 Head                         | 650                  | 850  | 9.97              | 9.97  | 9.97  |
| 750 Body                         | 650                  | 850  | 10.14             | 10.14 | 10.14 |
| 900 Head                         | 850                  | 1000 | 9.68              | 9.68  | 9.68  |
| 1450 Head                        | 1350                 | 1550 | 8.68              | 8.68  | 8.68  |
| 1750 Head                        | 1650                 | 1850 | 8.39              | 8.39  | 8.39  |
| 1900 Head                        | 1850                 | 2000 | 8.29              | 8.29  | 8.29  |
| 2300 Head                        | 2200                 | 2400 | 7.90              | 7.90  | 7.90  |
| 2450 Head                        | 2400                 | 2550 | 7.60              | 7.60  | 7.60  |
| 2600 Head                        | 2550                 | 2700 | 7.42              | 7.42  | 7.42  |
| 5200 Head                        | 5090                 | 5250 | 5.57              | 5.57  | 5.57  |
| 5300 Head                        | 5250                 | 5410 | 5.30              | 5.30  | 5.30  |
| 5600 Head                        | 5490                 | 5700 | 4.72              | 4.72  | 4.72  |
| 5800 Head                        | 5700                 | 5910 | 4.67              | 4.67  | 4.67  |

### SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- \_ Left Head
- \_ Right Head
- \_ Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

### Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

### Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

### Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

### Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

#### Recommended Tissue Dielectric Parameters for Head liquid

**Table A.3 – Dielectric properties of the head tissue-equivalent liquid**

| Frequency<br>MHz | Relative permittivity<br>$\epsilon_r$ | Conductivity ( $\sigma$ )<br>S/m |
|------------------|---------------------------------------|----------------------------------|
| 300              | 45,3                                  | 0,87                             |
| 450              | 43,5                                  | 0,87                             |
| 750              | 41,9                                  | 0,89                             |
| 835              | 41,5                                  | 0,90                             |
| 900              | 41,5                                  | 0,97                             |
| 1 450            | 40,5                                  | 1,20                             |
| 1 500            | 40,4                                  | 1,23                             |
| 1 640            | 40,2                                  | 1,31                             |
| 1 750            | 40,1                                  | 1,37                             |
| 1 800            | 40,0                                  | 1,40                             |
| 1 900            | 40,0                                  | 1,40                             |
| 2 000            | 40,0                                  | 1,40                             |
| 2 100            | 39,8                                  | 1,49                             |
| 2 300            | 39,5                                  | 1,67                             |
| 2 450            | 39,2                                  | 1,80                             |
| 2 600            | 39,0                                  | 1,96                             |
| 3 000            | 38,5                                  | 2,40                             |
| 3 500            | 37,9                                  | 2,91                             |
| 4 000            | 37,4                                  | 3,43                             |
| 4 500            | 36,8                                  | 3,94                             |
| 5 000            | 36,2                                  | 4,45                             |
| 5 200            | 36,0                                  | 4,66                             |
| 5 400            | 35,8                                  | 4,86                             |
| 5 600            | 35,5                                  | 5,07                             |
| 5 800            | 35,3                                  | 5,27                             |
| 6 000            | 35,1                                  | 5,48                             |

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

**Note:**

- 1, Effective February 19, 2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.
- 2, Mix and Match of traditional FCC SAR TSLs and IEC 62209-1 TSL in a single application is not permitted TSL can be changed in a Permissive Change.
- 3, If SAR increases and original SAR > 1.2 W/kg, additional SAR measurements will be required IEC 62209-1 TSL is an alternative, not mandatory at this time.
- 4, If FCC parameters are used,  $\pm 5\%$  tolerance. If IEC parameters,  $\pm 10\%$ .
- 5, In this case, IEC parameters applied

## EQUIPMENT LIST AND CALIBRATION

### Equipments List & Calibration Information

| Equipment                                 | Model         | S/N           | Calibration Date | Calibration Due Date |
|-------------------------------------------|---------------|---------------|------------------|----------------------|
| DASY5 Test Software                       | DASY52.10     | N/A           | NCR              | NCR                  |
| DASY5 Measurement Server                  | DASY5 4.5.12  | 1567          | NCR              | NCR                  |
| Data Acquisition Electronics              | DAE4          | 772           | 2019/10/6        | 2020/10/5            |
| E-Field Probe                             | EX3DV4        | 7329          | 2019/10/22       | 2020/10/21           |
| Mounting Device                           | MD4HHTV5      | BJPCTC0152    | NCR              | NCR                  |
| Twin SAM                                  | Twin SAM V5.0 | 1412          | NCR              | NCR                  |
| Dipole, 750 MHz                           | D750V3        | 1167          | 2019/11/20       | 2022/11/19           |
| Dipole, 1750 MHz                          | D1750V2       | 1141          | 2018/6/25        | 2021/6/24            |
| Dipole, 1900 MHz                          | D1900V2       | 543           | 2019/10/15       | 2022/10/14           |
| Dipole, 2300 MHz                          | D2300V2       | 1085          | 2018/5/9         | 2021/5/9             |
| Dipole, 2450 MHz                          | D2450V2       | 971           | 2018/6/26        | 2021/6/25            |
| Dipole, 2600 MHz                          | D2600V2       | 1132          | 2019/11/19       | 2022/11/18           |
| Dipole, 5GHz                              | D5GHzV2       | 1246          | 2019/11/19       | 2022/11/18           |
| Simulated Tissue 750 MHz                  | TS-750        | 1709075001    | Each Time        | /                    |
| Simulated Tissue 1750 MHz                 | TS-1750       | 1703175001    | Each Time        | /                    |
| Simulated Tissue 1900 MHz                 | TS-1900       | 1703190001    | Each Time        | /                    |
| Simulated Tissue 2300 MHz                 | TS-2300       | 1709230001    | Each Time        | /                    |
| Simulated Tissue 2450 MHz                 | TS-2450       | 1703245001    | Each Time        | /                    |
| Simulated Tissue 2600 MHz                 | TS-2600       | 1709260001    | Each Time        | /                    |
| Simulated Tissue 5250 MHz                 | TS-5250       | 1701525001    | Each Time        | /                    |
| Simulated Tissue 5800 MHz                 | TS-5800       | 1701580001    | Each Time        | /                    |
| Network Analyzer                          | 8753C         | 3033A02857    | 2019/9/12        | 2020/9/11            |
| Dielectric assessment kit                 | 1253          | SM DAK 040 CA | NCR              | NCR                  |
| synthesized signal generator              | 8665B         | 3438a00584    | 2019/9/12        | 2020/9/11            |
| EPM Series Power Meter                    | E4419B        | MY45103907    | 2019/5/9         | 2020/5/9             |
| Power Amplifier                           | ZVA-183-S+    | 5969001149    | NCR              | NCR                  |
| Directional Coupler                       | 441493        | 520Z          | NCR              | NCR                  |
| Attenuator                                | 20dB, 100W    | LN749         | NCR              | NCR                  |
| Attenuator                                | 6dB, 150W     | 2754          | NCR              | NCR                  |
| Wireless communication tester             | E5515C        | MY48367501    | 2019/9/12        | 2020/9/11            |
| R&S, universal Radio Communication Tester | CMU200        | 106891        | 2019/9/12        | 2020/9/11            |
| Wideband Radio Communication Tester       | CMW500        | 110479        | 2019/9/12        | 2020/9/11            |

## SAR MEASUREMENT SYSTEM VERIFICATION

### Liquid Verification



Liquid Verification Setup Block Diagram

### Liquid Verification Results

| Frequency (MHz) | Liquid Type              | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|--------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                          | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 704             | Simulated Tissue 750 MHz | 43.301           | 0.873          | 42.15        | 0.89           | 2.73               | -1.91                | $\pm 10$      |
| 707.5           | Simulated Tissue 750 MHz | 43.258           | 0.876          | 42.13        | 0.89           | 2.68               | -1.57                | $\pm 10$      |
| 711             | Simulated Tissue 750 MHz | 42.197           | 0.872          | 42.11        | 0.89           | 0.21               | -2.02                | $\pm 10$      |
| 750             | Simulated Tissue 750 MHz | 42.964           | 0.879          | 41.9         | 0.89           | 2.54               | -1.24                | $\pm 10$      |
| 822.5           | Simulated Tissue 750 MHz | 40.918           | 0.889          | 41.56        | 0.9            | -1.54              | -1.22                | $\pm 10$      |
| 824.2           | Simulated Tissue 750 MHz | 40.889           | 0.895          | 41.55        | 0.9            | -1.59              | -0.56                | $\pm 10$      |
| 829             | Simulated Tissue 750 MHz | 40.838           | 0.901          | 41.53        | 0.9            | -1.67              | 0.11                 | $\pm 10$      |
| 836.5           | Simulated Tissue 750 MHz | 40.832           | 0.898          | 41.5         | 0.9            | -1.61              | -0.22                | $\pm 10$      |
| 836.6           | Simulated Tissue 750 MHz | 40.808           | 0.902          | 41.5         | 0.9            | -1.67              | 0.22                 | $\pm 10$      |
| 844             | Simulated Tissue 750 MHz | 40.811           | 0.905          | 41.5         | 0.91           | -1.66              | -0.55                | $\pm 10$      |
| 848.8           | Simulated Tissue 750 MHz | 40.667           | 0.912          | 41.5         | 0.91           | -2.01              | 0.22                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/15.

| Frequency (MHz) | Liquid Type              | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|--------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                          | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 704             | Simulated Tissue 750 MHz | 42.993           | 0.874          | 42.15        | 0.89           | 2                  | -1.8                 | $\pm 10$      |
| 707.5           | Simulated Tissue 750 MHz | 42.966           | 0.878          | 42.13        | 0.89           | 1.98               | -1.35                | $\pm 10$      |
| 711             | Simulated Tissue 750 MHz | 42.935           | 0.879          | 42.11        | 0.89           | 1.96               | -1.24                | $\pm 10$      |
| 750             | Simulated Tissue 750 MHz | 41.457           | 0.88           | 41.9         | 0.89           | -1.06              | -1.12                | $\pm 10$      |
| 822.5           | Simulated Tissue 750 MHz | 40.974           | 0.881          | 41.56        | 0.9            | -1.41              | -2.11                | $\pm 10$      |
| 824.2           | Simulated Tissue 750 MHz | 40.869           | 0.886          | 41.55        | 0.9            | -1.64              | -1.56                | $\pm 10$      |
| 829             | Simulated Tissue 750 MHz | 40.865           | 0.889          | 41.53        | 0.9            | -1.6               | -1.22                | $\pm 10$      |
| 836.5           | Simulated Tissue 750 MHz | 40.834           | 0.89           | 41.5         | 0.9            | -1.6               | -1.11                | $\pm 10$      |
| 836.6           | Simulated Tissue 750 MHz | 40.805           | 0.892          | 41.5         | 0.9            | -1.67              | -0.89                | $\pm 10$      |
| 844             | Simulated Tissue 750 MHz | 40.587           | 0.895          | 41.5         | 0.91           | -2.2               | -1.65                | $\pm 10$      |
| 848.8           | Simulated Tissue 750 MHz | 40.56            | 0.897          | 41.5         | 0.91           | -2.27              | -1.43                | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/08.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1720            | Simulated Tissue 1750 MHz | 41.372           | 1.32           | 40.13        | 1.35           | 3.09               | -2.22                | $\pm 10$      |
| 1732.5          | Simulated Tissue 1750 MHz | 41.267           | 1.333          | 40.12        | 1.36           | 2.86               | -1.99                | $\pm 10$      |
| 1745            | Simulated Tissue 1750 MHz | 41.157           | 1.352          | 40.1         | 1.37           | 2.64               | -1.31                | $\pm 10$      |
| 1750            | Simulated Tissue 1750 MHz | 41.037           | 1.341          | 40.1         | 1.37           | 2.34               | -2.12                | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/16.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1720            | Simulated Tissue 1750 MHz | 41.189           | 1.335          | 40.13        | 1.35           | 2.64               | -1.11                | $\pm 10$      |
| 1732.5          | Simulated Tissue 1750 MHz | 41.182           | 1.342          | 40.12        | 1.36           | 2.65               | -1.32                | $\pm 10$      |
| 1745            | Simulated Tissue 1750 MHz | 41.021           | 1.348          | 40.1         | 1.37           | 2.3                | -1.61                | $\pm 10$      |
| 1750            | Simulated Tissue 1750 MHz | 41.021           | 1.357          | 40.1         | 1.37           | 2.3                | -0.95                | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/08.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1850.2          | Simulated Tissue 1900 MHz | 39.369           | 1.36           | 40           | 1.4            | -1.58              | -2.86                | $\pm 10$      |
| 1852.4          | Simulated Tissue 1900 MHz | 39.345           | 1.365          | 40           | 1.4            | -1.64              | -2.5                 | $\pm 10$      |
| 1860            | Simulated Tissue 1900 MHz | 39.216           | 1.364          | 40           | 1.4            | -1.96              | -2.57                | $\pm 10$      |
| 1880            | Simulated Tissue 1900 MHz | 38.966           | 1.381          | 40           | 1.4            | -2.59              | -1.36                | $\pm 10$      |
| 1900            | Simulated Tissue 1900 MHz | 39.026           | 1.41           | 40           | 1.4            | -2.44              | 0.71                 | $\pm 10$      |
| 1907.6          | Simulated Tissue 1900 MHz | 39.004           | 1.412          | 40           | 1.4            | -2.49              | 0.86                 | $\pm 10$      |
| 1909.8          | Simulated Tissue 1900 MHz | 39.024           | 1.414          | 40           | 1.4            | -2.44              | 1                    | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/16.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1850.2          | Simulated Tissue 1900 MHz | 39.309           | 1.36           | 40           | 1.4            | -1.73              | -2.86                | $\pm 10$      |
| 1852.4          | Simulated Tissue 1900 MHz | 39.301           | 1.371          | 40           | 1.4            | -1.75              | -2.07                | $\pm 10$      |
| 1860            | Simulated Tissue 1900 MHz | 39.169           | 1.374          | 40           | 1.4            | -2.08              | -1.86                | $\pm 10$      |
| 1880            | Simulated Tissue 1900 MHz | 39.011           | 1.396          | 40           | 1.4            | -2.47              | -0.29                | $\pm 10$      |
| 1900            | Simulated Tissue 1900 MHz | 39.004           | 1.415          | 40           | 1.4            | -2.49              | 1.07                 | $\pm 10$      |
| 1907.6          | Simulated Tissue 1900 MHz | 39.002           | 1.418          | 40           | 1.4            | -2.49              | 1.29                 | $\pm 10$      |
| 1909.8          | Simulated Tissue 1900 MHz | 38.992           | 1.422          | 40           | 1.4            | -2.52              | 1.57                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/06.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2300            | Simulated Tissue 2300 MHz | 39.87            | 1.668          | 39.5         | 1.67           | 0.94               | -0.12                | $\pm 10$      |
| 2310            | Simulated Tissue 2300 MHz | 39.772           | 1.677          | 39.48        | 1.68           | 0.74               | -0.18                | $\pm 10$      |
| 2355            | Simulated Tissue 2300 MHz | 39.428           | 1.71           | 39.39        | 1.72           | 0.1                | -0.58                | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/14.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2300            | Simulated Tissue 2300 MHz | 39.881           | 1.707          | 39.5         | 1.67           | 0.96               | 2.22                 | $\pm 10$      |
| 2310            | Simulated Tissue 2300 MHz | 39.842           | 1.715          | 39.48        | 1.68           | 0.92               | 2.08                 | $\pm 10$      |
| 2355            | Simulated Tissue 2300 MHz | 39.786           | 1.743          | 39.39        | 1.72           | 1.01               | 1.34                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/08.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2412            | Simulated Tissue 2450 MHz | 40.024           | 1.749          | 39.28        | 1.77           | 1.89               | -1.19                | $\pm 10$      |
| 2437            | Simulated Tissue 2450 MHz | 40.264           | 1.76           | 39.23        | 1.79           | 2.64               | -1.68                | $\pm 10$      |
| 2450            | Simulated Tissue 2450 MHz | 40.169           | 1.754          | 39.2         | 1.8            | 2.47               | -2.56                | $\pm 10$      |
| 2462            | Simulated Tissue 2450 MHz | 39.509           | 1.777          | 39.18        | 1.81           | 0.84               | -1.82                | $\pm 10$      |
| 2510            | Simulated Tissue 2450 MHz | 40.171           | 1.808          | 39.12        | 1.86           | 2.69               | -2.8                 | $\pm 10$      |
| 2535            | Simulated Tissue 2450 MHz | 40.102           | 1.877          | 39.09        | 1.89           | 2.59               | -0.69                | $\pm 10$      |
| 2545            | Simulated Tissue 2450 MHz | 40.074           | 1.911          | 39.07        | 1.9            | 2.57               | 0.58                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/17.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2450            | Simulated Tissue 2450 MHz | 40.156           | 1.761          | 39.2         | 1.8            | 2.44               | -2.17                | $\pm 10$      |
| 2506            | Simulated Tissue 2450 MHz | 40.272           | 1.819          | 39.13        | 1.86           | 2.92               | -2.2                 | $\pm 10$      |
| 2510            | Simulated Tissue 2450 MHz | 40.158           | 1.815          | 39.12        | 1.86           | 2.65               | -2.42                | $\pm 10$      |
| 2535            | Simulated Tissue 2450 MHz | 40.061           | 1.918          | 39.09        | 1.89           | 2.48               | 1.48                 | $\pm 10$      |
| 2545            | Simulated Tissue 2450 MHz | 40.032           | 1.939          | 39.07        | 1.9            | 2.46               | 2.05                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/07.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2560            | Simulated Tissue 2600 MHz | 39.918           | 1.944          | 39.05        | 1.92           | 2.22               | 1.25                 | $\pm 10$      |
| 2595            | Simulated Tissue 2600 MHz | 40.286           | 1.981          | 39.01        | 1.95           | 3.27               | 1.59                 | $\pm 10$      |
| 2600            | Simulated Tissue 2600 MHz | 40.165           | 1.986          | 39           | 1.96           | 2.99               | 1.33                 | $\pm 10$      |
| 2645            | Simulated Tissue 2600 MHz | 39.682           | 2.036          | 38.94        | 2.01           | 1.91               | 1.29                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/17.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2560            | Simulated Tissue 2600 MHz | 39.869           | 1.976          | 39.05        | 1.92           | 2.1                | 2.92                 | $\pm 10$      |
| 2595            | Simulated Tissue 2600 MHz | 39.773           | 2.015          | 39.01        | 1.95           | 1.96               | 3.33                 | $\pm 10$      |
| 2600            | Simulated Tissue 2600 MHz | 39.752           | 2.022          | 39           | 1.96           | 1.93               | 3.16                 | $\pm 10$      |
| 2645            | Simulated Tissue 2600 MHz | 39.609           | 2.033          | 38.94        | 2.01           | 1.72               | 1.14                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/05/07.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 5180            | Simulated Tissue 5250 MHz | 36.529           | 4.677          | 36.02        | 4.64           | 1.41               | 0.8                  | $\pm 10$      |
| 5200            | Simulated Tissue 5250 MHz | 36.454           | 4.695          | 36           | 4.66           | 1.26               | 0.75                 | $\pm 10$      |
| 5240            | Simulated Tissue 5250 MHz | 36.328           | 4.714          | 35.96        | 4.7            | 1.02               | 0.3                  | $\pm 10$      |
| 5250            | Simulated Tissue 5250 MHz | 35.698           | 4.704          | 35.95        | 4.71           | -0.7               | -0.13                | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/17.

| Frequency (MHz) | Liquid Type               | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|---------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                           | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 5745            | Simulated Tissue 5800 MHz | 35.58            | 5.311          | 35.36        | 5.22           | 0.62               | 1.74                 | $\pm 10$      |
| 5785            | Simulated Tissue 5800 MHz | 35.804           | 5.342          | 35.32        | 5.26           | 1.37               | 1.56                 | $\pm 10$      |
| 5800            | Simulated Tissue 5800 MHz | 35.568           | 5.412          | 35.3         | 5.27           | 0.76               | 2.69                 | $\pm 10$      |
| 5825            | Simulated Tissue 5800 MHz | 35.431           | 5.464          | 35.28        | 5.3            | 0.43               | 3.09                 | $\pm 10$      |

\*Liquid Verification above was performed on 2020/02/17.


## System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$ .

## System Verification Setup Block Diagram

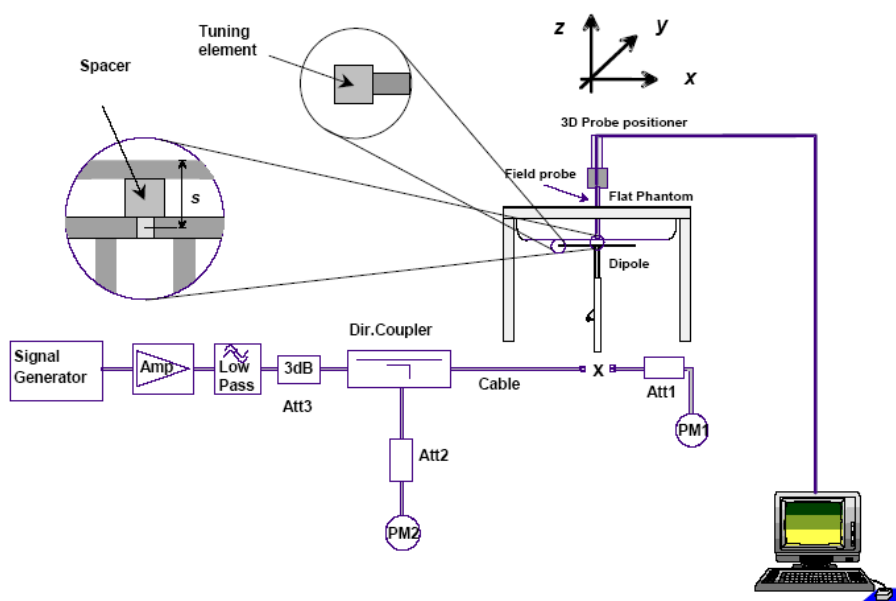

## System Accuracy Check Results

| Date       | Frequency Band | Liquid Type               | Input Power (mW) | Measured SAR (W/kg) |       | Normalized to 1W (W/kg) | Target Value (W/kg) | Delta (%) | Tolerance (%) |
|------------|----------------|---------------------------|------------------|---------------------|-------|-------------------------|---------------------|-----------|---------------|
| 2020/02/15 | 750 MHz        | Simulated Tissue 750 MHz  | 100              | 1g                  | 0.808 | 8.08                    | 8.38                | -3.58     | $\pm 10$      |
| 2020/05/08 | 750 MHz        | Simulated Tissue 750 MHz  | 100              | 1g                  | 0.801 | 8.01                    | 8.38                | -4.42     | $\pm 10$      |
| 2020/02/16 | 1750 MHz       | Simulated Tissue 1750 MHz | 100              | 1g                  | 3.48  | 34.8                    | 36.8                | -5.43     | $\pm 10$      |
| 2020/05/08 | 1750 MHz       | Simulated Tissue 1750 MHz | 100              | 1g                  | 3.49  | 34.9                    | 36.8                | -5.16     | $\pm 10$      |
| 2020/02/16 | 1900 MHz       | Simulated Tissue 1900 MHz | 100              | 1g                  | 4.27  | 42.7                    | 40.2                | 6.22      | $\pm 10$      |
| 2020/05/06 | 1900 MHz       | Simulated Tissue 1900 MHz | 100              | 1g                  | 3.88  | 38.8                    | 40.2                | -3.48     | $\pm 10$      |
| 2020/02/14 | 2300 MHz       | Simulated Tissue 2300 MHz | 100              | 1g                  | 5.16  | 51.6                    | 49.4                | 4.45      | $\pm 10$      |
| 2020/05/08 | 2300 MHz       | Simulated Tissue 2300 MHz | 100              | 1g                  | 5.18  | 51.8                    | 49.4                | 4.86      | $\pm 10$      |

| Date       | Frequency Band | Liquid Type               | Input Power (mW) | Measured SAR (W/kg) |      | Normalized to 1W (W/kg) | Target Value (W/kg) | Delta (%) | Tolerance (%) |
|------------|----------------|---------------------------|------------------|---------------------|------|-------------------------|---------------------|-----------|---------------|
| 2020/02/17 | 2450 MHz       | Simulated Tissue 2450 MHz | 100              | 1g                  | 5.47 | 54.7                    | 53.3                | 2.63      | ±10           |
| 2020/05/07 | 2450 MHz       | Simulated Tissue 2450 MHz | 100              | 1g                  | 5.68 | 56.8                    | 53.3                | 6.57      | ±10           |
| 2020/02/17 | 2600 MHz       | Simulated Tissue 2600 MHz | 100              | 1g                  | 5.45 | 54.5                    | 55.5                | -1.80     | ±10           |
| 2020/05/07 | 2600 MHz       | Simulated Tissue 2600 MHz | 100              | 1g                  | 5.37 | 53.7                    | 55.5                | -3.24     | ±10           |
| 2020/02/17 | 5250 MHz       | Simulated Tissue 5250 MHz | 100              | 1g                  | 7.86 | 78.6                    | 75.0                | 4.80      | ±10           |
| 2020/02/17 | 5800 MHz       | Simulated Tissue 5800 MHz | 100              | 1g                  | 7.98 | 79.8                    | 77.9                | 2.44      | ±10           |

\*The SAR values above are normalized to 1 Watt forward power.

## SAR SYSTEM VALIDATION DATA

### System Performance 750 MHz on 2020/02/15

**DUT: D750V3; Type: 750 MHz; Serial: 1167**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 42.964$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.97, 9.97, 9.97) @ 750 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.28 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.528 W/kg**

Maximum value of SAR (measured) = 1.12 W/kg

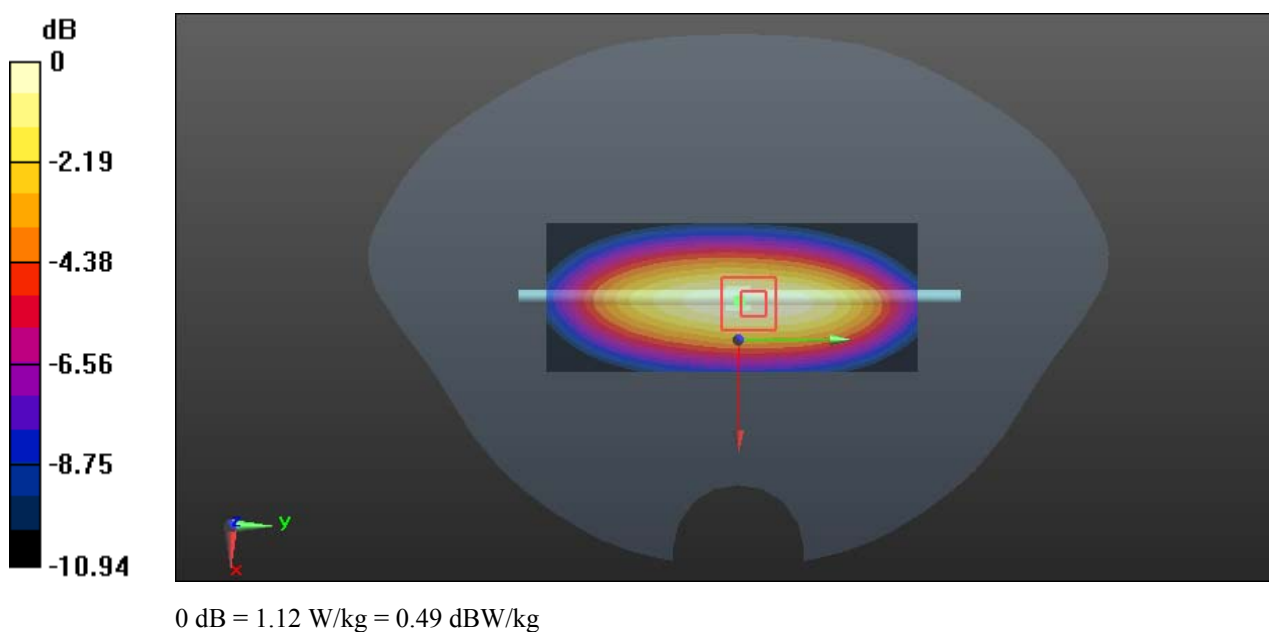

**System Performance 750 MHz on 2020/05/08****DUT: D750V3; Type: 750 MHz; Serial: 1167**


Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.97, 9.97, 9.97) @ 750 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

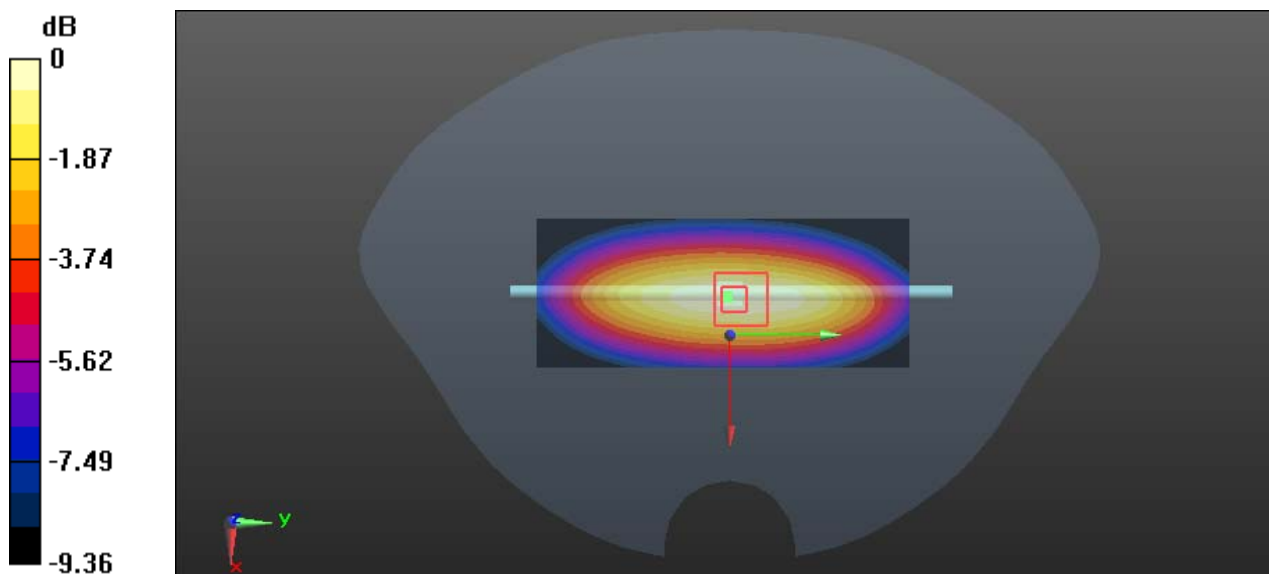**Area Scan (41x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) =  $1.05 \text{ W/kg}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $30.96 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$ Peak SAR (extrapolated) =  $1.25 \text{ W/kg}$ **SAR(1 g) =  $0.801 \text{ W/kg}$ ; SAR(10 g) =  $0.525 \text{ W/kg}$** Maximum value of SAR (measured) =  $1.08 \text{ W/kg}$  $0 \text{ dB} = 1.08 \text{ W/kg} = 0.33 \text{ dBW/kg}$

**System Performance 1750 MHz on 2020/02/16****DUT: D1750V2; Type: 1750 MHz; Serial: 1141**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 41.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.39, 8.39, 8.39) @ 1750 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.72 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.46 W/kg

**SAR(1 g) = 3.48 W/kg; SAR(10 g) = 1.86 W/kg**

Maximum value of SAR (measured) = 5.42 W/kg

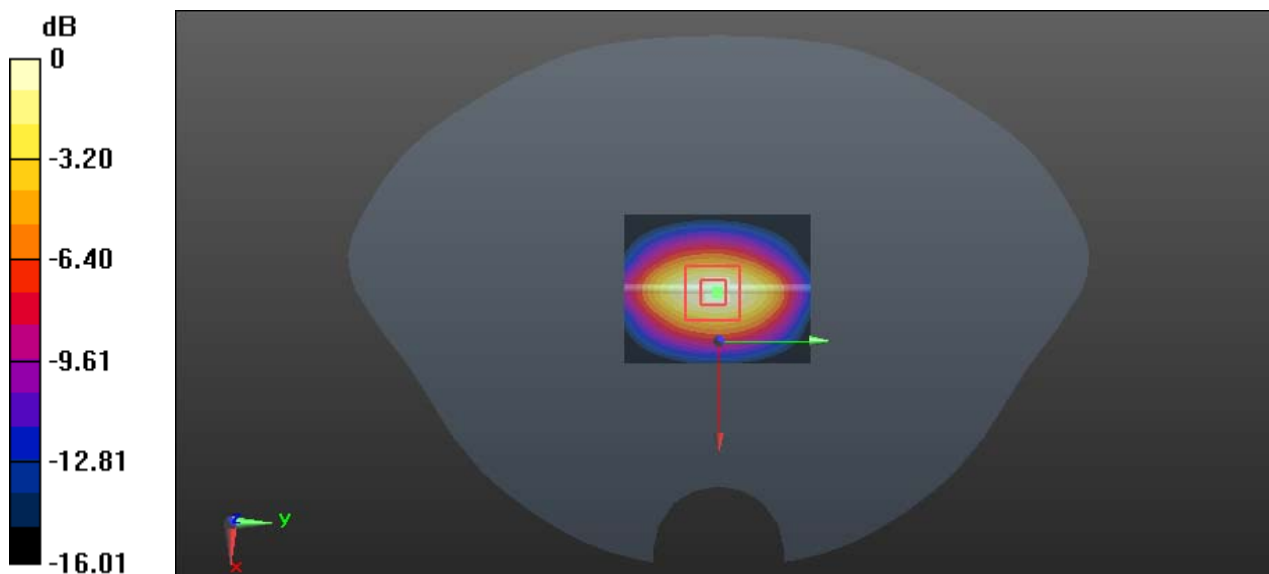

**System Performance 1750MHz on 2020/05/08****DUT: D1750V2; Type: 1750 MHz; Serial: 1141**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 41.021$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.39, 8.39, 8.39) @ 1750 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.68 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.89 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 6.61 W/kg

**SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.91 W/kg**

Maximum value of SAR (measured) = 5.39 W/kg

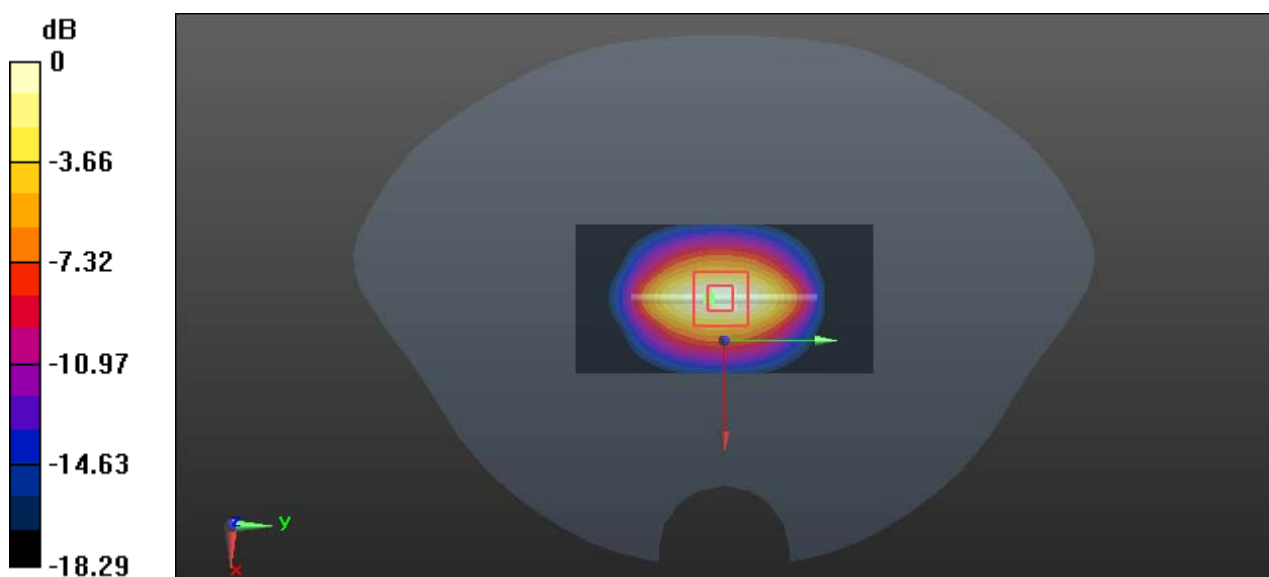

**System Performance 1900 MHz on 2020/02/16****DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 39.026$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- EX3DV4 - SN7329; ConvF(8.29, 8.29, 8.29) @ 1900 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.96 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.74 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 7.85 W/kg

**SAR(1 g) = 4.27 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 6.54 W/kg

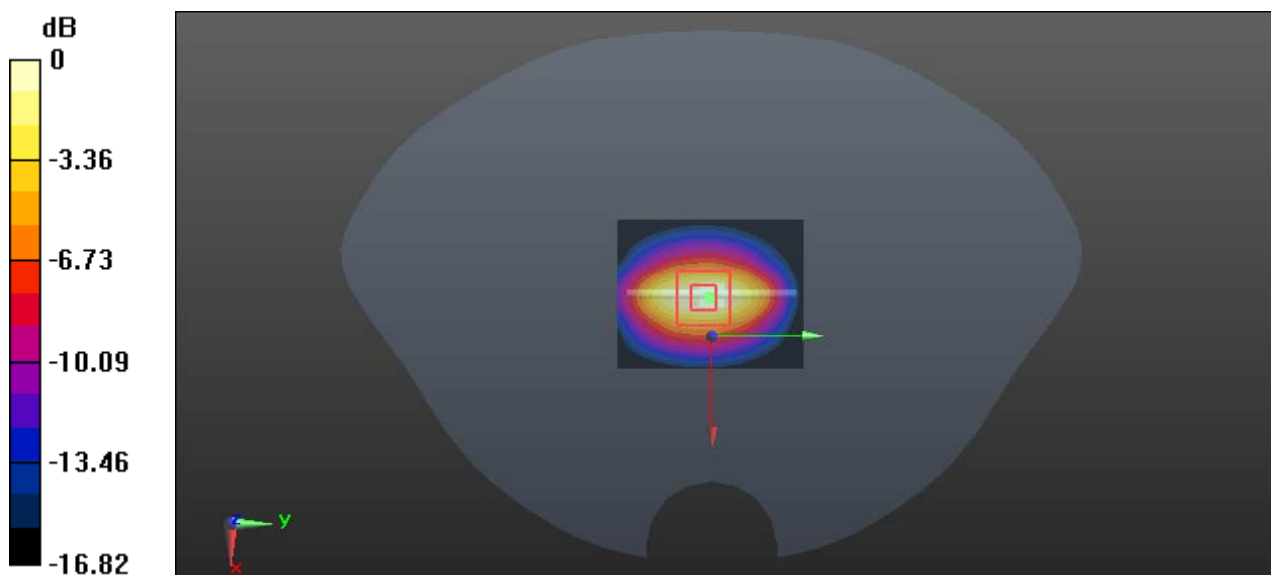

0 dB = 6.54 W/kg = 8.16 dBW/kg

**System Performance 1900MHz on 2020/05/06****DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.415$  S/m;  $\epsilon_r = 39.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.29, 8.29, 8.29) @ 1900 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.53 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.39 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 6.85 W/kg

**SAR(1 g) = 3.88 W/kg; SAR(10 g) = 2.01 W/kg**

Maximum value of SAR (measured) = 4.19 W/kg

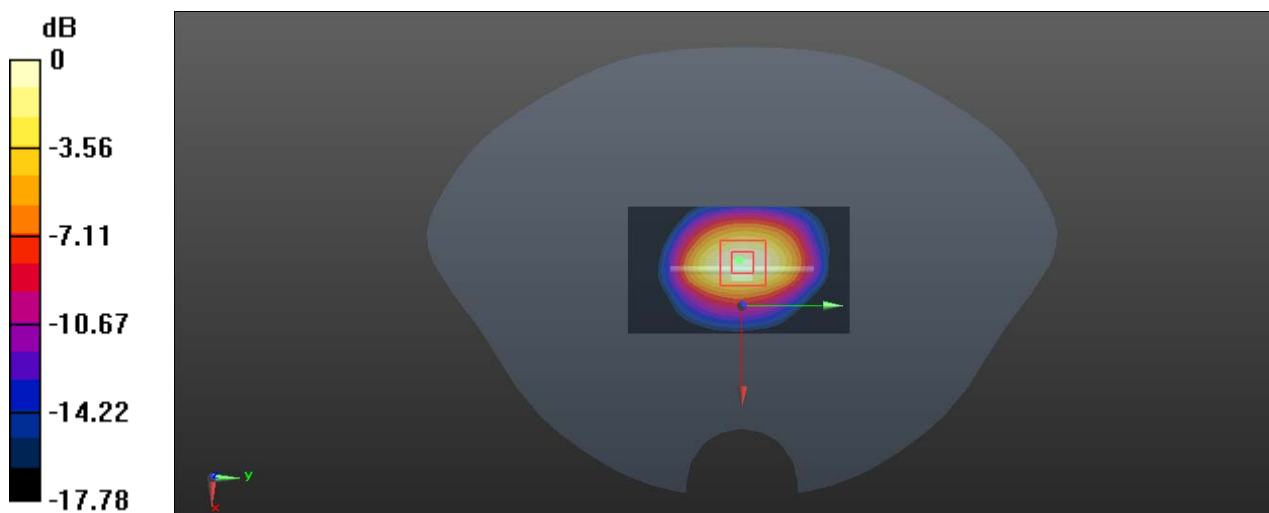

0 dB = 4.19 W/kg = 6.22 dBW/kg

**System Performance 2300MHz on 2020/02/14****DUT: D2300V2; Type: 2300 MHz; Serial: 1085**

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.668$  S/m;  $\epsilon_r = 39.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- EX3DV4 - SN7329; ConvF(7.9, 7.9, 7.9) @ 2300 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.83 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 5.16 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 8.91 W/kg

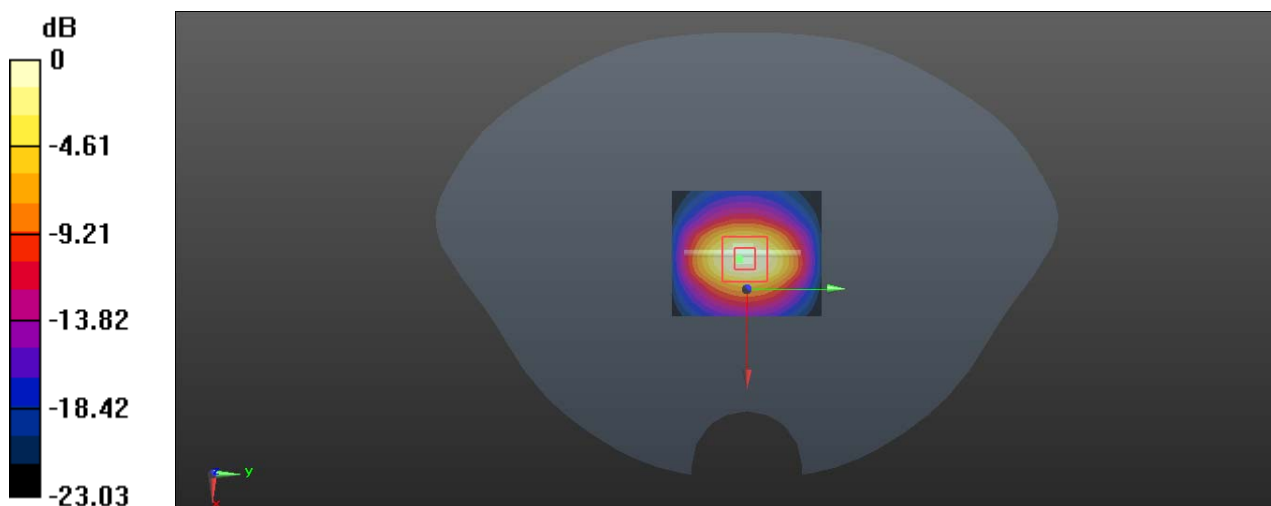

0 dB = 8.91 W/kg = 9.50 dBW/kg

**System Performance 2300MHz on 2020/05/08****DUT: D2300V2; Type: 2300 MHz; Serial: 1085**

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.707$  S/m;  $\epsilon_r = 39.881$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.9, 7.9, 7.9) @ 2300 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.93 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.78 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 5.18 W/kg; SAR(10 g) = 2.37 W/kg**

Maximum value of SAR (measured) = 8.94 W/kg

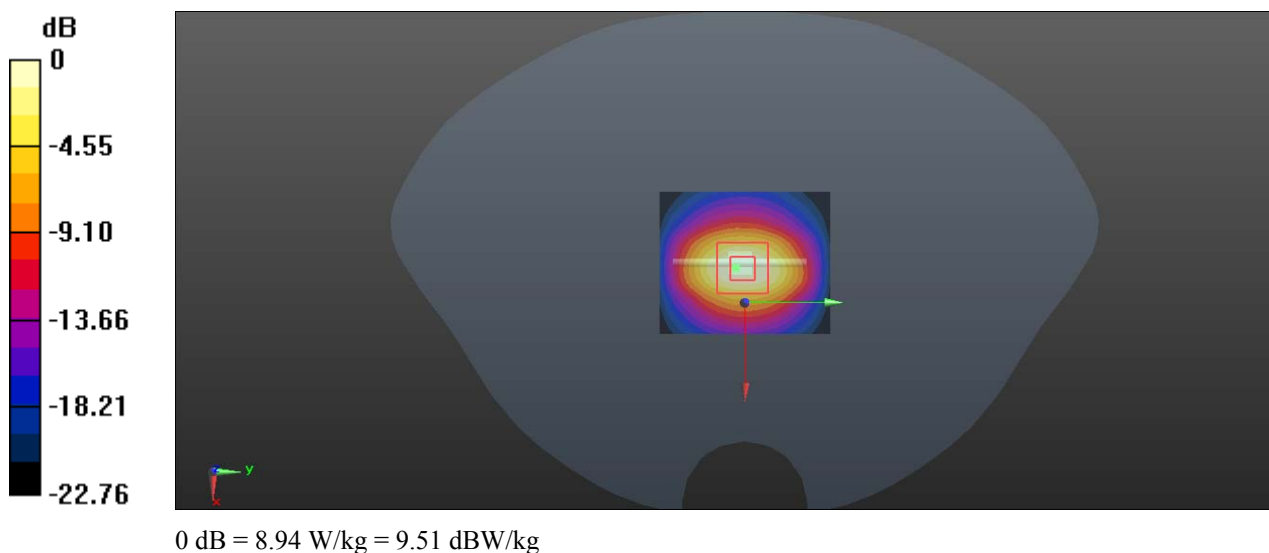

**System Performance 2450MHz on 2020/02/17****DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.754$  S/m;  $\epsilon_r = 40.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

D ASY5 Configuration:

- EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2450 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.75 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.23 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 11.4 W/kg

**SAR(1 g) = 5.47 W/kg; SAR(10 g) = 2.49 W/kg**

Maximum value of SAR (measured) = 8.57 W/kg

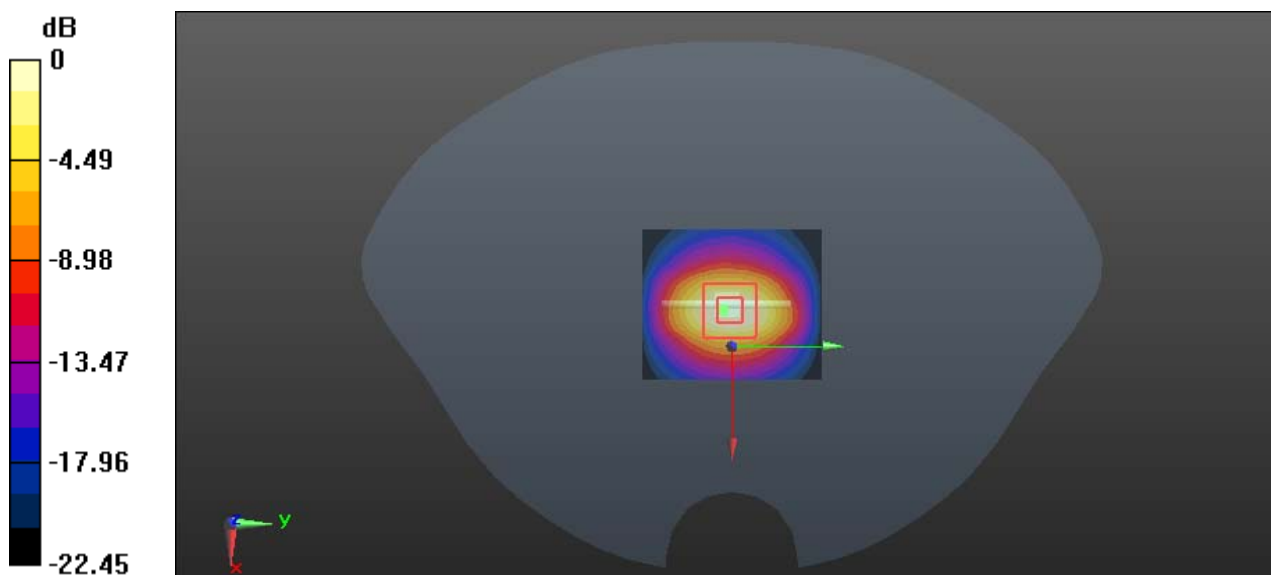

0 dB = 8.57 W/kg = 9.33 dBW/kg

**System Performance 2450MHz on 2020/05/07****DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.761$  S/m;  $\epsilon_r = 40.156$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.6, 7.6, 7.6) @ 2450 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.6 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 75.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 5.68 W/kg; SAR(10 g) = 2.61 W/kg**

Maximum value of SAR (measured) = 9.48 W/kg

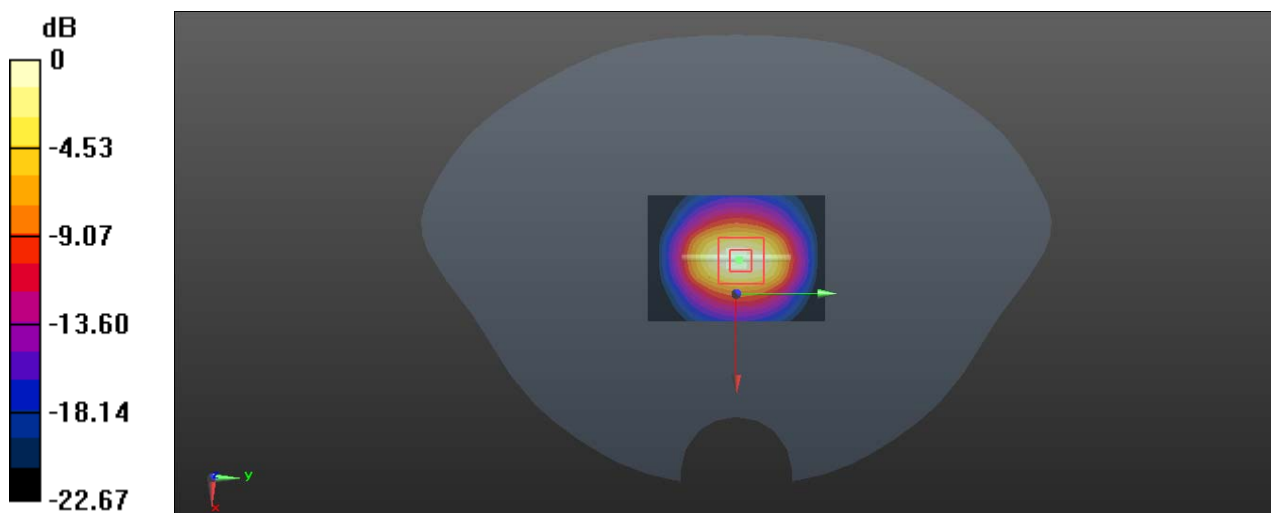

0 dB = 9.48 W/kg = 9.77 dBW/kg

**System Performance 2600MHz on 2020/02/17****DUT: D2600V2; Type: 2600 MHz; Serial: 1132**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.986$  S/m;  $\epsilon_r = 40.165$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- EX3DV4 - SN7329; ConvF(7.42, 7.42, 7.42) @ 2600 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 11.2 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.41V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 12.6 W/kg

**SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 9.49 W/kg

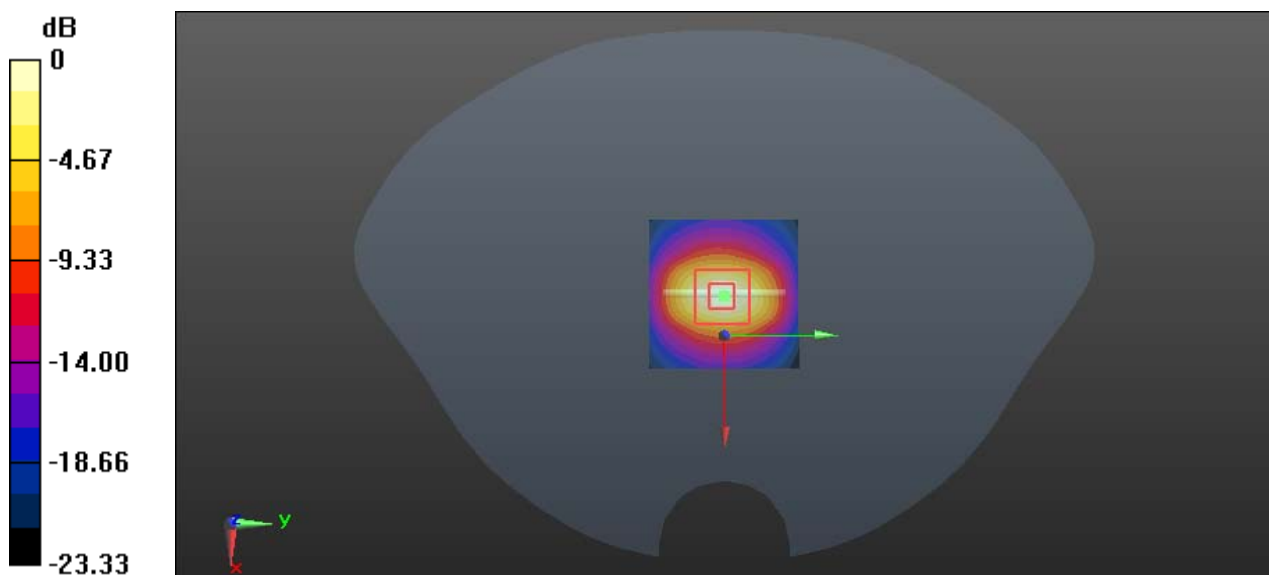

0 dB = 9.49 W/kg = 9.77 dBW/kg

**System Performance 2600MHz on 2020/05/07****DUT: D2600V2; Type: 2600 MHz; Serial: 1132**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.022$  S/m;  $\epsilon_r = 39.752$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.42, 7.42, 7.42) @ 2600 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 11.1 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 5.37 W/kg; SAR(10 g) = 2.37 W/kg**

Maximum value of SAR (measured) = 9.39 W/kg

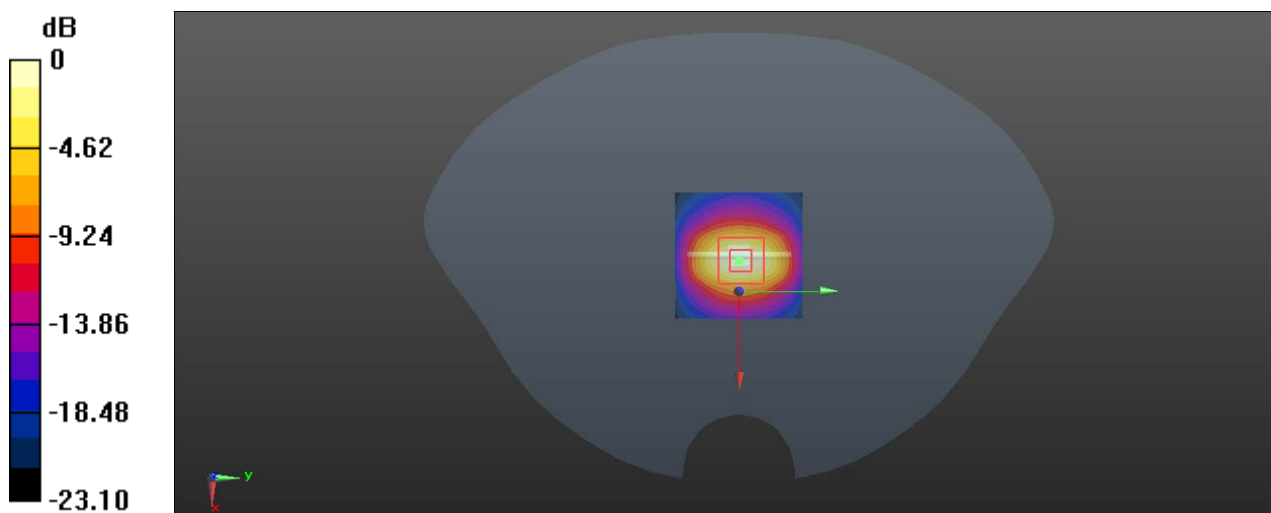

0 dB = 9.39 W/kg = 9.73 dBW/kg

**System Performance 5250 MHz****DUT: Dipole D5GHzV2; Type: 5250 MHz; Serial: SN:1246**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.704$  S/m;  $\epsilon_r = 35.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.57, 5.57, 5.57) @ 5250 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (31x51x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.3 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 42.51 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.6 W/kg

**SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 19.4 W/kg

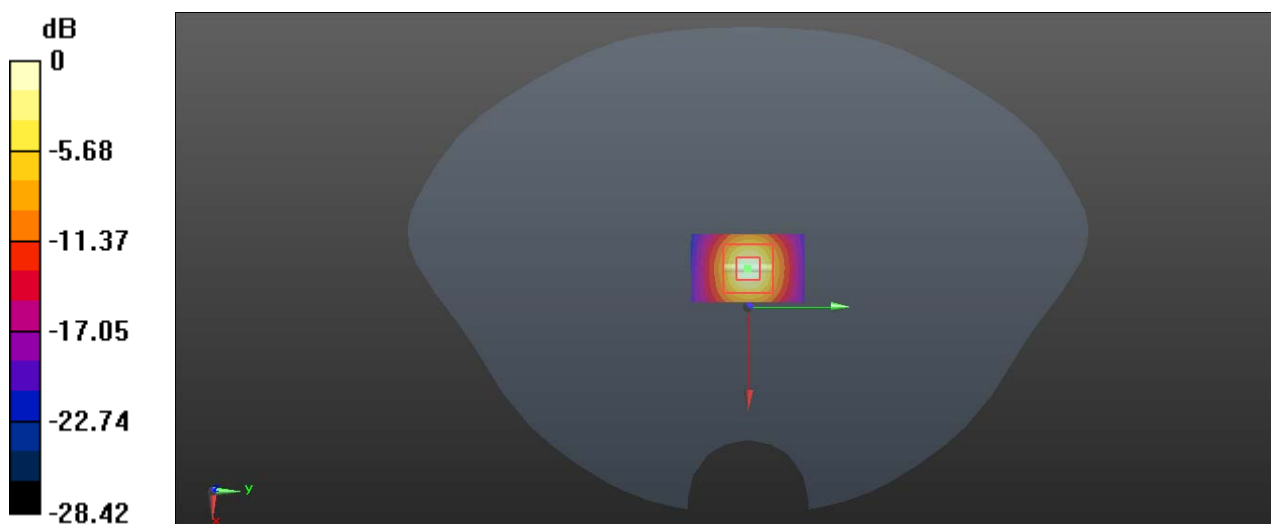

0 dB = 19.4 W/kg = 12.88 dBW/kg

**System Performance 5800 MHz****DUT: Dipole D5GHzV2; Type: 5800 MHz; Serial: 1246**


Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.412 \text{ S/m}$ ;  $\epsilon_r = 35.568$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.67, 4.67, 4.67) @ 5800 MHz; Calibrated: 2019/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2019/10/6
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)


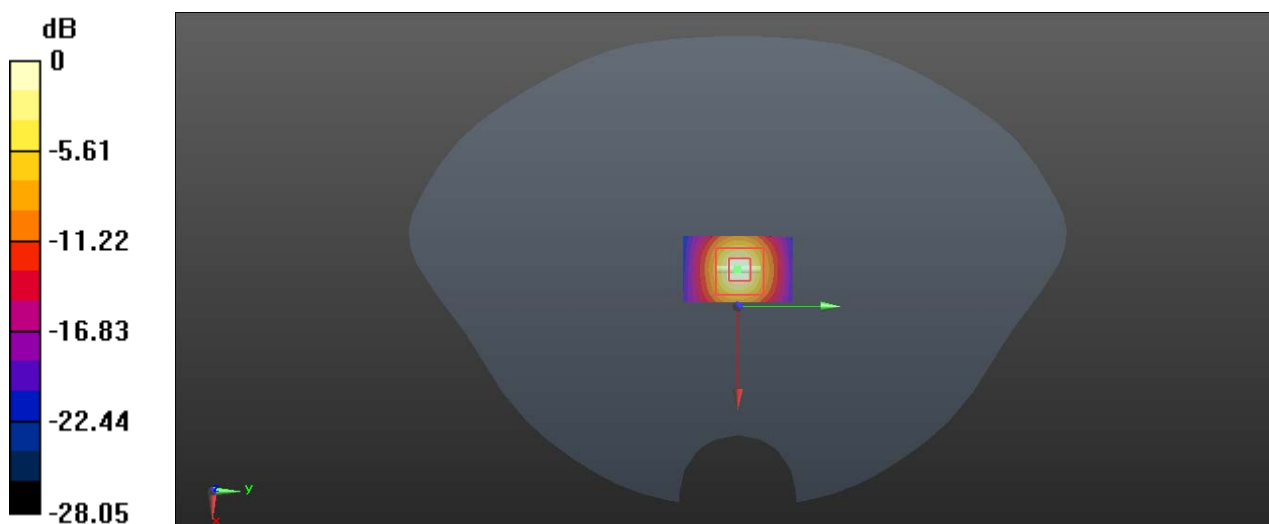
**Area Scan (31x51x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) =  $21.8 \text{ W/kg}$ **Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$ Reference Value =  $41.42 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$ Peak SAR (extrapolated) =  $32.4 \text{ W/kg}$ **SAR(1 g) =  $7.98 \text{ W/kg}$ ; SAR(10 g) =  $2.32 \text{ W/kg}$** Maximum value of SAR (measured) =  $20.1 \text{ W/kg}$  $0 \text{ dB} = 20.1 \text{ W/kg} = 13.03 \text{ dBW/kg}$

## EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

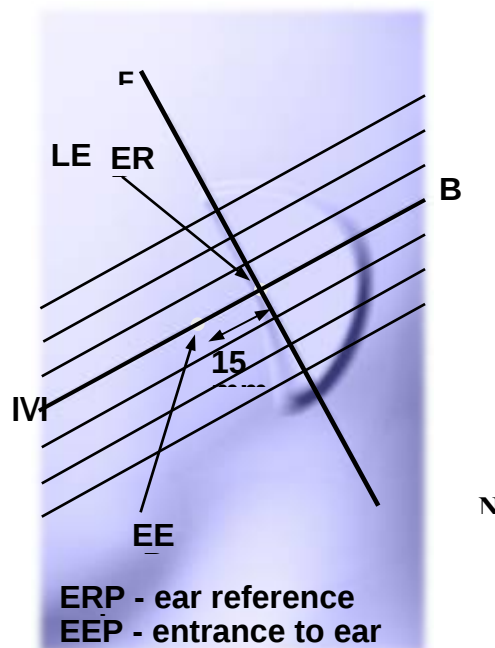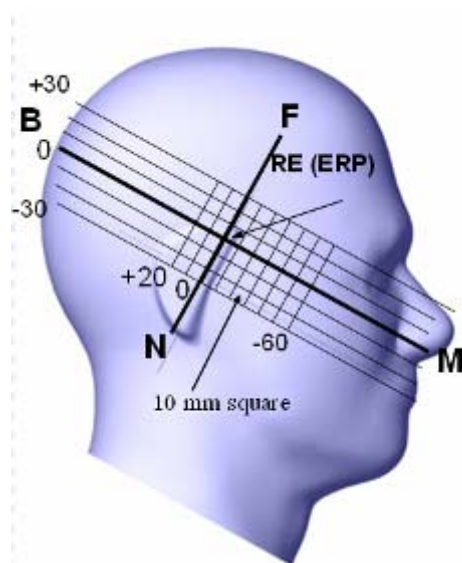

## Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

### Cheek /Touch Position

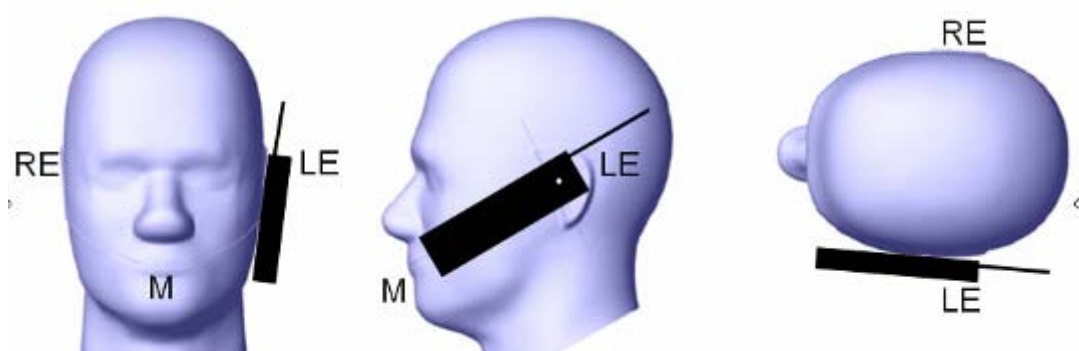


## Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.


2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 to 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

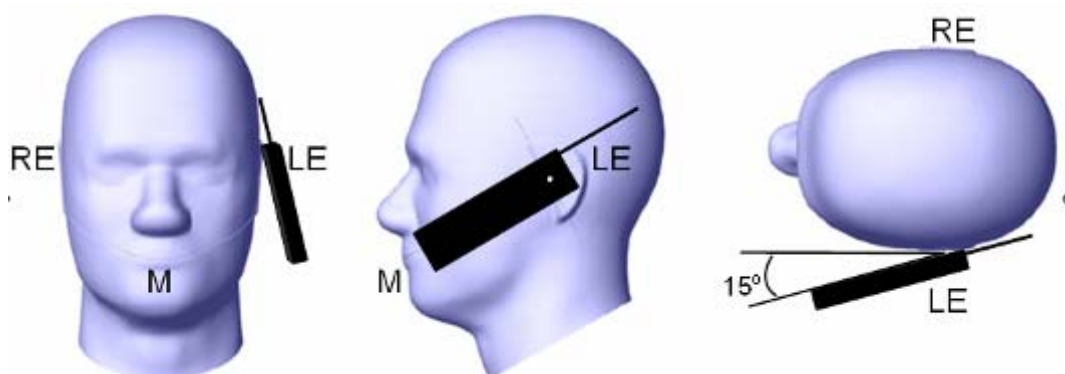**Ear /Tilt 15° Position****Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

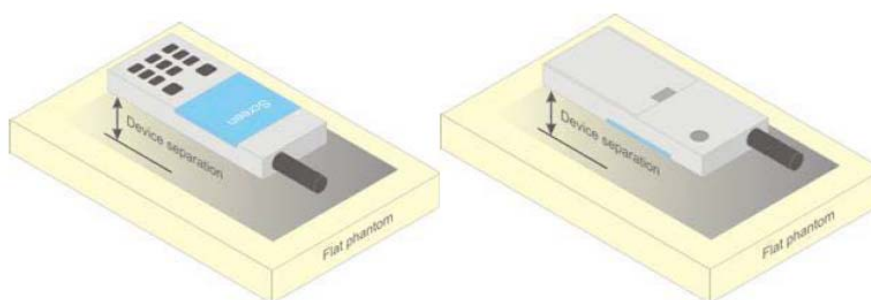

**Figure 5 – Test positions for body-worn devices**

**Test Distance for SAR Evaluation**

In this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

## SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


## CONDUCTED OUTPUT POWER MEASUREMENT

### Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

### Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through Connector.

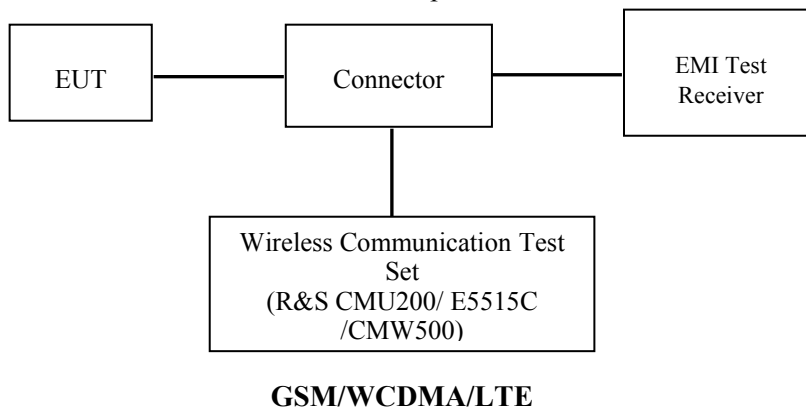

### Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

#### GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma

- > 33 dBm for GPRS 850

- > 30 dBm for GPRS 1900

- > 27 dBm for EGPRS 850

- > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                   |                         |              |
|-----------------------------------|-------------------------|--------------|
| <b>WCDMA<br/>General Settings</b> | Loopback Mode           | Test Mode 1  |
|                                   | Rel99 RMC               | 12.2kbps RMC |
|                                   | Power Control Algorithm | Algorithm2   |
|                                   | $\beta_c/\beta_d$       | 8/15         |

**HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                    | Mode                        | HSDPA        | HSDPA | HSDPA | HSDPA |
|------------------------------------|-----------------------------|--------------|-------|-------|-------|
|                                    | Subset                      | 1            | 2     | 3     | 4     |
| <b>WCDMA<br/>General Settings</b>  | Loopback Mode               | Test Mode 1  |       |       |       |
|                                    | Rel99 RMC                   | 12.2kbps RMC |       |       |       |
|                                    | HSDPA FRC                   | H-Set1       |       |       |       |
|                                    | Power Control Algorithm     | Algorithm2   |       |       |       |
|                                    | $\beta_c$                   | 2/15         | 12/15 | 15/15 | 15/15 |
|                                    | $\beta_d$                   | 15/15        | 15/15 | 8/15  | 4/15  |
|                                    | $\beta_d(\text{SF})$        | 64           |       |       |       |
|                                    | $\beta_c/\beta_d$           | 2/15         | 12/15 | 15/8  | 15/4  |
|                                    | $\beta_{hs}$                | 4/15         | 24/15 | 30/15 | 30/15 |
|                                    | MPR(dB)                     | 0            | 0     | 0.5   | 0.5   |
| <b>HSDPA<br/>Specific Settings</b> | DACK                        | 8            |       |       |       |
|                                    | DNAK                        | 8            |       |       |       |
|                                    | DCQI                        | 8            |       |       |       |
|                                    | Ack-Nack repetition factor  | 3            |       |       |       |
|                                    | CQI Feedback                | 4ms          |       |       |       |
|                                    | CQI Repetition Factor       | 2            |       |       |       |
|                                    | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15        |       |       |       |

**HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                | Mode                             | HSUPA                                                                                                                                      | HSUPA                                                | HSUPA                                                                                                                                      | HSUPA                                                                                                                                      | HSUPA                                                                                                                                      |
|--------------------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|                                | Subset                           | 1                                                                                                                                          | 2                                                    | 3                                                                                                                                          | 4                                                                                                                                          | 5                                                                                                                                          |
| <b>WCDMA General Settings</b>  | Loopback Mode                    | Test Mode 1                                                                                                                                |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | Rel99 RMC                        | 12.2kbps RMC                                                                                                                               |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | HSDPA FRC                        | H-Set1                                                                                                                                     |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | HSUPA Test                       | HSUPA Loopback                                                                                                                             |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | Power Control Algorithm          | Algorithm2                                                                                                                                 |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | $\beta_c$                        | 11/15                                                                                                                                      | 6/15                                                 | 15/15                                                                                                                                      | 2/15                                                                                                                                       | 15/15                                                                                                                                      |
|                                | $\beta_d$                        | 15/15                                                                                                                                      | 15/15                                                | 9/15                                                                                                                                       | 15/15                                                                                                                                      | 0                                                                                                                                          |
|                                | $\beta_{cc}$                     | 209/225                                                                                                                                    | 12/15                                                | 30/15                                                                                                                                      | 2/15                                                                                                                                       | 5/15                                                                                                                                       |
|                                | $\beta_c / \beta_d$              | 11/15                                                                                                                                      | 6/15                                                 | 15/9                                                                                                                                       | 2/15                                                                                                                                       | -                                                                                                                                          |
|                                | $\beta_{hs}$                     | 22/15                                                                                                                                      | 12/15                                                | 30/15                                                                                                                                      | 4/15                                                                                                                                       | 5/15                                                                                                                                       |
|                                | CM(dB)                           | 1.0                                                                                                                                        | 3.0                                                  | 2.0                                                                                                                                        | 3.0                                                                                                                                        | 1.0                                                                                                                                        |
|                                | MPR(dB)                          | 0                                                                                                                                          | 2                                                    | 1                                                                                                                                          | 2                                                                                                                                          | 0                                                                                                                                          |
| <b>HSDPA Specific Settings</b> | DACK                             | 8                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | DNAK                             | 8                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | DCQI                             | 8                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | Ack-Nack repetition factor       | 3                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | CQI Feedback                     | 4ms                                                                                                                                        |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | CQI Repetition Factor            | 2                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
|                                | $A_{hs} = \beta_{hs} / \beta_c$  | 30/15                                                                                                                                      |                                                      |                                                                                                                                            |                                                                                                                                            |                                                                                                                                            |
| <b>HSUPA Specific Settings</b> | DE-DPCCH                         | 6                                                                                                                                          | 8                                                    | 8                                                                                                                                          | 5                                                                                                                                          | 7                                                                                                                                          |
|                                | DHARQ                            | 0                                                                                                                                          | 0                                                    | 0                                                                                                                                          | 0                                                                                                                                          | 0                                                                                                                                          |
|                                | AG Index                         | 20                                                                                                                                         | 12                                                   | 15                                                                                                                                         | 17                                                                                                                                         | 21                                                                                                                                         |
|                                | ETFCI                            | 75                                                                                                                                         | 67                                                   | 92                                                                                                                                         | 71                                                                                                                                         | 81                                                                                                                                         |
|                                | Associated Max UL Data Rate kbps | 242.1                                                                                                                                      | 174.9                                                | 482.8                                                                                                                                      | 205.8                                                                                                                                      | 308.9                                                                                                                                      |
|                                | Reference E_FCI                  | E-TFCI 11<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11<br>E-TFCI PO4<br>E-TFCI 92<br>E-TFCI PO 18 | E-TFCI 11<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |

**DC-HSDPA**

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

| Parameter                                                                                                                                              | Unit      | Value |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
| Nominal Avg. Inf. Bit Rate                                                                                                                             | kbps      | 60    |
| Inter-TTI Distance                                                                                                                                     | TTI's     | 1     |
| Number of HARQ Processes                                                                                                                               | Processes | 6     |
| Information Bit Payload ( $N_{INF}$ )                                                                                                                  | Bits      | 120   |
| Number Code Blocks                                                                                                                                     | Blocks    | 1     |
| Binary Channel Bits Per TTI                                                                                                                            | Bits      | 960   |
| Total Available SML's in UE                                                                                                                            | SML's     | 19200 |
| Number of SML's per HARQ Proc.                                                                                                                         | SML's     | 3200  |
| Coding Rate                                                                                                                                            |           | 0.15  |
| Number of Physical Channel Codes                                                                                                                       | Codes     | 1     |
| Modulation                                                                                                                                             |           | QPSK  |
| Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.               |           |       |
| Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used. |           |       |

**HSPA+**

| Sub-test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $\beta_c$<br>(Note3) | $\beta_d$ | $\beta_{HS}$<br>(Note1) | $\beta_{ec}$ | $\beta_{ed}$<br>(2xSF2)<br>(Note 4)            | $\beta_{ed}$<br>(2xSF4)<br>(Note 4)            | CM<br>(dB)<br>(Note 2) | MPR<br>(dB)<br>(Note 2) | AG<br>Index<br>(Note 4) | E-TFCI<br>(Note 5) | E-TFCI<br>(boost) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------|-------------------------|--------------|------------------------------------------------|------------------------------------------------|------------------------|-------------------------|-------------------------|--------------------|-------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1                    | 0         | 30/15                   | 30/15        | $\beta_{ed1}$ : 30/15<br>$\beta_{ed2}$ : 30/15 | $\beta_{ed3}$ : 24/15<br>$\beta_{ed4}$ : 24/15 | 3.5                    | 2.5                     | 14                      | 105                | 105               |
| Note 1: $\Delta_{ACK}$ , $\Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$ .<br>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).<br>Note 3: DPDCH is not configured, therefore the $\beta_c$ is set to 1 and $\beta_d = 0$ by default.<br>Note 4: $\beta_{ed}$ can not be set directly; it is set by Absolute Grant Value.<br>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm. |                      |           |                         |              |                                                |                                                |                        |                         |                         |                    |                   |

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

**FDD-LTE**

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3**

| Modulation | Channel bandwidth / Transmission bandwidth ( $N_{RB}$ ) |         |       |        |        |        | MPR (dB) |
|------------|---------------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                                 | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                                     | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

| Network Signalling value | Requirements (subclause)      | E-UTRA Band              | Channel bandwidth (MHz) | Resources Blocks ( $N_{RB}$ )                  | A-MPR (dB) |
|--------------------------|-------------------------------|--------------------------|-------------------------|------------------------------------------------|------------|
| NS_01                    | 6.6.2.1.1                     | Table 5.5-1              | 1.4, 3, 5, 10, 15, 20   | Table 5.6-1                                    | N/A        |
| NS_03                    | 6.6.2.2.1                     | 2, 4, 10, 23, 25, 35, 36 | 3                       | >5                                             | ≤ 1        |
|                          |                               |                          | 5                       | >6                                             | ≤ 1        |
|                          |                               |                          | 10                      | >6                                             | ≤ 1        |
|                          |                               |                          | 15                      | >8                                             | ≤ 1        |
|                          |                               |                          | 20                      | >10                                            | ≤ 1        |
| NS_04                    | 6.6.2.2.2                     | 41                       | 5                       | >6                                             | ≤ 1        |
| NS_05                    | 6.6.3.3.1                     | 1                        | 10, 15, 20              | Table 6.2.4-4                                  |            |
| NS_06                    | 6.6.2.2.3                     | 12, 13, 14, 17           | 1.4, 3, 5, 10           | ≥ 50                                           | ≤ 1        |
| NS_07                    | 6.6.2.2.3<br>6.6.3.3.2        | 13                       | 10                      | Table 5.6-1                                    | N/A        |
| NS_08                    | 6.6.3.3.3                     | 19                       | 10, 15                  | Table 6.2.4-2                                  |            |
| NS_09                    | 6.6.3.3.4                     | 21                       | 10, 15                  | > 44                                           | ≤ 3        |
|                          |                               |                          |                         | > 40                                           | ≤ 1        |
|                          |                               |                          |                         | > 55                                           | ≤ 2        |
| NS_10                    |                               | 20                       | 15, 20                  | Table 6.2.4-3                                  |            |
| NS_11                    | 6.6.2.2.1                     | 23                       | 1.4, 3, 5, 10, 15, 20   | Table 6.2.4-5                                  |            |
| NS_12                    | 6.6.3.3.5                     | 26                       | 1.4, 3, 5               | Table 6.2.4-6                                  |            |
| NS_13                    | 6.6.3.3.6                     | 26                       | 5                       | Table 6.2.4-7                                  |            |
| NS_14                    | 6.6.3.3.7                     | 26                       | 10, 15                  | Table 6.2.4-8                                  |            |
| NS_15                    | 6.6.3.3.8                     | 26                       | 1.4, 3, 5, 10, 15       | Table 6.2.4-9<br>Table 6.2.4-10                |            |
| NS_16                    | 6.6.3.3.9                     | 27                       | 3, 5, 10                | Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13 |            |
| NS_17                    | 6.6.3.3.10                    | 28                       | 5, 10                   | Table 5.6-1                                    | N/A        |
| NS_18                    | 6.6.3.3.11                    | 28                       | 5                       | ≥ 2                                            | ≤ 1        |
|                          |                               |                          | 10, 15, 20              | ≥ 1                                            | ≤ 4        |
| NS_19                    | 6.6.3.3.12                    | 44                       | 10, 15, 20              | Table 6.2.4-14                                 |            |
| NS_20                    | 6.2.2<br>6.6.2.2.1<br>6.6.3.2 | 23                       | 5, 10, 15, 20           | Table 6.2.4-15                                 |            |
| ...                      |                               |                          |                         |                                                |            |
| NS_32                    | -                             | -                        | -                       | -                                              | -          |

**TDD-LTE**

3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$                   | $2192 \cdot T_s$               | $2560 \cdot T_s$                 |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $7680 \cdot T_s$                   | $4384 \cdot T_s$               | $5120 \cdot T_s$                 |
| 5                              | $6592 \cdot T_s$                 |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

**Calculated Duty Cycle**

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-point Periodicity | Subframe Number |   |   |   |   |   |   |   |   |   | Calculated Duty Cycle (%) |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|---------------------------|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |                           |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U | 63.33                     |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D | 43.33                     |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D | 23.33                     |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D | 31.67                     |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D | 21.67                     |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D | 11.67                     |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D | 53.33                     |

Calculated Duty Cycle = Extended cyclic prefix in uplink  $\times (T_s) \times \#$  of S +  $\#$  of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

**Maximum Target Output Power**

| <b>Max Target Power(dBm)</b> |                |               |             |
|------------------------------|----------------|---------------|-------------|
| <b>Mode/Band</b>             | <b>Channel</b> |               |             |
|                              | <b>Low</b>     | <b>Middle</b> | <b>High</b> |
| GSM 850 GPRS 1 TX Slot       | 32.3           | 32.3          | 32.3        |
| GSM 850 GPRS 2 TX Slot       | 30.8           | 30.8          | 30.8        |
| GSM 850 GPRS 3 TX Slot       | 29.6           | 29.6          | 29.6        |
| GSM 850 GPRS 4 TX Slot       | 28             | 28            | 28          |
| GSM 850 EDGE 1 TX Slot       | 26.5           | 26.5          | 26.5        |
| GSM 850 EDGE 2 TX Slot       | 24.9           | 24.9          | 24.9        |
| GSM 850 EDGE 3 TX Slot       | 24.1           | 24.1          | 24.1        |
| GSM 850 EDGE 4 TX Slot       | 23.2           | 23.2          | 23.2        |
| PCS 1900 GPRS 1 TX Slot      | 30.2           | 30.2          | 30.2        |
| PCS 1900 GPRS 2 TX Slot      | 28.8           | 28.8          | 28.8        |
| PCS 1900 GPRS 3 TX Slot      | 28.1           | 28.1          | 28.1        |
| PCS 1900 GPRS 4 TX Slot      | 27.3           | 27.3          | 27.3        |
| PCS 1900 EDGE 1 TX Slot      | 24.9           | 24.9          | 24.9        |
| PCS 1900 EDGE 2 TX Slot      | 24.8           | 24.8          | 24.8        |
| PCS 1900 EDGE 3 TX Slot      | 23.7           | 23.7          | 23.7        |
| PCS 1900 EDGE 4 TX Slot      | 22.8           | 22.8          | 22.8        |
| WCDMA Band 2                 | 23.9           | 23.9          | 23.9        |
| HSDPA                        | 22.7           | 22.7          | 22.7        |
| HSUPA                        | 22.2           | 22.2          | 22.2        |
| DC-HSDPA                     | 22.2           | 22.2          | 22.2        |
| HSPA+                        | 22             | 22            | 22          |
| LTE Band 2                   | 23.6           | 23.6          | 23.6        |
| LTE Band 4                   | 23.4           | 23.4          | 23.4        |
| LTE Band 5                   | 23             | 23            | 23          |
| LTE Band 7                   | 23.8           | 23.8          | 23.8        |
| LTE Band 12                  | 23.7           | 23.7          | 23.7        |
| LTE Band 17                  | 22.9           | 22.9          | 22.9        |
| LTE Band 18                  | 23.5           | 23.5          | 23.5        |
| LTE Band 38                  | 23.5           | 23.5          | 23.5        |
| LTE Band 40                  | 23.9           | 23.9          | 23.9        |
| LTE Band 41                  | 24.2           | 24.2          | 24.2        |
| WLAN 2.4G(802.11b)           | 15             | 15            | 15          |
| WLAN 2.4G (802.11g)          | 15             | 15            | 15          |
| WLAN 2.4G (802.11n ht20)     | 15             | 15            | 15          |
| WLAN 2.4G (802.11n ht40)     | 15             | 15            | 15          |

| Max Target Power(dBm)  |         |        |      |
|------------------------|---------|--------|------|
| Mode/Band              | Channel |        |      |
|                        | Low     | Middle | High |
| WLAN 5.2G(802.11a)     | 13.4    | 13.4   | 13.4 |
| WLAN 5.2G(802.11 ht20) | 13.3    | 13.3   | 13.3 |
| WLAN 5.2G(802.11 ht40) | 13      | /      | 13   |
| WLAN 5.2G(802.11 ac20) | 13.2    | 13.2   | 13.2 |
| WLAN 5.2G(802.11 ac40) | 12.9    | /      | 12.9 |
| WLAN 5.8G(802.11a)     | 13.7    | 13.7   | 13.7 |
| WLAN 5.8G(802.11 ht20) | 13.4    | 13.4   | 13.4 |
| WLAN 5.8G(802.11 ht40) | 13.2    | /      | 13.2 |
| WLAN 5.8G(802.11 ac20) | 13.4    | 13.4   | 13.4 |
| WLAN 5.8G(802.11 ac40) | 13.2    | /      | 13.2 |
| Bluetooth BDR/EDR      | 5.5     | 5.5    | 5.5  |
| Bluetooth LE           | -1      | -1     | -1   |

**Test Results:****GPRS:**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |         |         |         |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
|          |             |                 | 1 slot                | 2 slots | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | <b>32.22</b>          | 30.71   | 29.46   | 27.85   |
|          | 190         | 836.6           | 31.96                 | 30.72   | 29.38   | 27.81   |
|          | 251         | 848.8           | 32.04                 | 30.47   | 29.31   | 27.87   |
| PCS 1900 | 512         | 1850.2          | <b>30.12</b>          | 28.67   | 28.01   | 27.14   |
|          | 661         | 1880            | 29.52                 | 28.61   | 27.69   | 27.15   |
|          | 810         | 1909.8          | 29.59                 | 28.64   | 27.97   | 26.98   |

**EDGE:**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |         |         |         |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
|          |             |                 | 1 slot                | 2 slots | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 26.44                 | 24.82   | 23.96   | 23.10   |
|          | 190         | 836.6           | 26.27                 | 24.69   | 23.67   | 22.94   |
|          | 251         | 848.8           | 26.17                 | 24.58   | 23.74   | 22.77   |
| PCS 1900 | 512         | 1850.2          | 24.49                 | 24.28   | 23.47   | 22.45   |
|          | 661         | 1880            | 24.69                 | 24.61   | 23.38   | 22.43   |
|          | 810         | 1909.8          | 24.76                 | 24.69   | 23.63   | 22.65   |

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot                                  | 1     | 2     | 3        | 4     |
|------------------------------------------------------|-------|-------|----------|-------|
| Duty Cycle                                           | 1:8   | 1:4   | 1:2.66   | 1:2   |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor                                         | 8     | 4     | 2.66     | 2     |

#### The time based average power for GPRS

| Band     | Channel No. | Frequency (MHz) | Time based average Power (dBm) |        |              |              |
|----------|-------------|-----------------|--------------------------------|--------|--------------|--------------|
|          |             |                 | 1 slot                         | 2 slot | 3 slots      | 4 slots      |
| GSM 850  | 128         | 824.2           | 23.22                          | 24.71  | <b>25.21</b> | 24.85        |
|          | 190         | 836.6           | 22.96                          | 24.72  | 25.13        | 24.81        |
|          | 251         | 848.8           | 23.04                          | 24.47  | 25.06        | 24.87        |
| PCS 1900 | 512         | 1850.2          | 21.12                          | 22.67  | 23.76        | 24.14        |
|          | 661         | 1880            | 20.52                          | 22.61  | 23.44        | <b>24.15</b> |
|          | 810         | 1909.8          | 20.59                          | 22.64  | 23.72        | 23.98        |

#### The time based average power for EDGE

| Band     | Channel No. | Frequency (MHz) | Time based average Power (dBm) |        |         |         |
|----------|-------------|-----------------|--------------------------------|--------|---------|---------|
|          |             |                 | 1 slot                         | 2 slot | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 17.44                          | 18.82  | 19.71   | 20.10   |
|          | 190         | 836.6           | 17.27                          | 18.69  | 19.42   | 19.94   |
|          | 251         | 848.8           | 17.17                          | 18.58  | 19.49   | 19.77   |
| PCS 1900 | 512         | 1850.2          | 15.49                          | 18.28  | 19.22   | 19.45   |
|          | 661         | 1880            | 15.69                          | 18.61  | 19.13   | 19.43   |
|          | 810         | 1909.8          | 15.76                          | 18.69  | 19.38   | 19.65   |

#### Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
3. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

**WCDMA:****Results (12.2kbps RMC)**

| Band         | Frequency (MHz) | RF Output Power (dBm) |
|--------------|-----------------|-----------------------|
| WCDMA Band 2 | 1852.4          | 23.77                 |
|              | 1880            | 23.70                 |
|              | 1907.6          | 23.65                 |

**Results (HSDPA)**

| Band         | Frequency (MHz) | RF Output Power (dBm) |          |          |          |
|--------------|-----------------|-----------------------|----------|----------|----------|
|              |                 | Subset 1              | Subset 2 | Subset 3 | Subset 4 |
| WCDMA Band 2 | 1852.4          | 22.48                 | 22.50    | 22.43    | 22.58    |
|              | 1880            | 22.46                 | 22.36    | 22.42    | 22.29    |
|              | 1907.6          | 22.53                 | 22.30    | 22.33    | 22.42    |

**Results (HSUPA)**

| Band         | Frequency (MHz) | RF Output Power (dBm) |          |          |          |          |
|--------------|-----------------|-----------------------|----------|----------|----------|----------|
|              |                 | Subset 1              | Subset 2 | Subset 3 | Subset 4 | Subset 5 |
| WCDMA Band 2 | 1852.4          | 21.82                 | 21.82    | 21.82    | 21.95    | 21.79    |
|              | 1880            | 21.81                 | 22.01    | 21.83    | 21.87    | 21.89    |
|              | 1907.6          | 22.12                 | 21.85    | 21.88    | 21.85    | 21.96    |

**Results (DC-HSDPA)**

| Band         | Frequency (MHz) | RF Output Power (dBm) |          |          |          |
|--------------|-----------------|-----------------------|----------|----------|----------|
|              |                 | Subset 1              | Subset 2 | Subset 3 | Subset 4 |
| WCDMA Band 2 | 1852.4          | 21.92                 | 21.68    | 21.77    | 22.00    |
|              | 1880            | 21.95                 | 21.76    | 21.94    | 21.91    |
|              | 1907.6          | 21.90                 | 21.93    | 21.96    | 21.81    |

**Results (HSPA+)**

| Band         | Frequency (MHz) | RF Output Power (dBm) |
|--------------|-----------------|-----------------------|
| WCDMA Band 2 | 1852.4          | 21.69                 |
|              | 1880            | 21.88                 |
|              | 1907.6          | 21.95                 |

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSUPA/HSDPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than  $\frac{1}{4}$  dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.

**LTE Band 2:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.98             | 23.12                | 23.16              |
|                |                 | RB1#3                      | 0          | 0        | 23.03             | 23.18                | 23.22              |
|                |                 | RB1#5                      | 0          | 0        | 23.01             | 23.12                | 23.19              |
|                |                 | RB3#0                      | 1          | 1        | 23.02             | 23.01                | 23.27              |
|                |                 | RB3#3                      | 1          | 1        | 22.92             | 22.94                | 23.27              |
|                |                 | RB6#0                      | 1          | 1        | 21.95             | 21.82                | 22.11              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.20             | 22.18                | 22.84              |
|                |                 | RB1#3                      | 1          | 1        | 22.00             | 22.25                | 22.53              |
|                |                 | RB1#5                      | 2          | 2        | 21.92             | 21.63                | 22.50              |
|                |                 | RB3#0                      | 2          | 2        | 22.11             | 21.82                | 22.21              |
|                |                 | RB3#3                      | 2          | 2        | 22.03             | 21.96                | 22.28              |
|                |                 | RB6#0                      | 2          | 2        | 20.83             | 20.85                | 21.25              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 23.03             | 22.72                | 23.25              |
|                |                 | RB1#8                      | 0          | 0        | 22.82             | 22.71                | 23.25              |
|                |                 | RB1#14                     | 0          | 0        | 22.92             | 22.48                | 23.37              |
|                |                 | RB6#0                      | 1          | 1        | 22.05             | 21.91                | 22.15              |
|                |                 | RB6#9                      | 1          | 1        | 22.05             | 22.01                | 22.05              |
|                |                 | RB15#0                     | 1          | 1        | 22.00             | 21.86                | 22.00              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.35             | 22.32                | 22.49              |
|                |                 | RB1#8                      | 1          | 1        | 22.17             | 22.24                | 22.12              |
|                |                 | RB1#14                     | 1          | 1        | 22.20             | 22.32                | 22.58              |
|                |                 | RB6#0                      | 2          | 2        | 20.79             | 21.00                | 20.93              |
|                |                 | RB6#9                      | 2          | 2        | 20.83             | 20.95                | 21.25              |
|                |                 | RB15#0                     | 2          | 2        | 20.88             | 21.01                | 20.98              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.80             | 22.58                | 23.13              |
|                |                 | RB1#13                     | 0          | 0        | 22.81             | 22.82                | 23.40              |
|                |                 | RB1#24                     | 0          | 0        | 22.75             | 22.61                | 23.25              |
|                |                 | RB15#0                     | 1          | 1        | 22.04             | 21.96                | 22.27              |
|                |                 | RB15#10                    | 1          | 1        | 22.10             | 21.85                | 22.20              |
|                |                 | RB25#0                     | 1          | 1        | 21.89             | 21.99                | 22.15              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.27             | 22.52                | 21.79              |
|                |                 | RB1#13                     | 1          | 1        | 21.61             | 22.48                | 21.87              |
|                |                 | RB1#24                     | 1          | 1        | 21.63             | 22.52                | 21.86              |
|                |                 | RB15#0                     | 2          | 2        | 20.88             | 20.72                | 21.16              |
|                |                 | RB15#10                    | 2          | 2        | 20.86             | 20.71                | 21.12              |
|                |                 | RB25#0                     | 2          | 2        | 20.87             | 20.83                | 21.08              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 23.08             | 22.80                | 23.26              |
|                |                 | RB1#25                     | 0          | 0        | 23.19             | 22.99                | 23.44              |
|                |                 | RB1#49                     | 1          | 1        | 22.96             | 22.63                | <b>23.51</b>       |
|                |                 | RB25#0                     | 1          | 1        | 22.13             | 21.88                | 22.14              |
|                |                 | RB25#25                    | 1          | 1        | 22.01             | 21.97                | 22.11              |
|                |                 | RB50#0                     | 1          | 1        | 22.06             | 21.94                | 22.30              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.09             | 22.79                | 21.98              |
|                |                 | RB1#25                     | 1          | 1        | 23.17             | 22.47                | 22.21              |
|                |                 | RB1#49                     | 1          | 1        | 22.35             | 22.75                | 21.73              |
|                |                 | RB25#0                     | 2          | 2        | 20.85             | 21.22                | 21.19              |
|                |                 | RB25#25                    | 2          | 2        | 21.10             | 20.89                | 21.17              |
|                |                 | RB50#0                     | 2          | 2        | 20.92             | 20.77                | 21.16              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 23.22             | 22.32                | 22.49              |
|                |                 | RB1#38                     | 0          | 0        | 22.20             | 22.25                | 22.13              |
|                |                 | RB1#74                     | 1          | 1        | 22.39             | 22.23                | 22.94              |
|                |                 | RB36#0                     | 1          | 1        | 21.21             | 21.17                | 21.54              |
|                |                 | RB36#39                    | 1          | 1        | 21.22             | 21.13                | 21.26              |
|                |                 | RB75#0                     | 1          | 1        | 21.13             | 21.09                | 21.84              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.19             | 21.42                | 21.69              |
|                |                 | RB1#38                     | 1          | 1        | 21.50             | 21.64                | 21.54              |
|                |                 | RB1#74                     | 2          | 2        | 21.71             | 22.01                | 21.64              |
|                |                 | RB36#0                     | 2          | 2        | 20.78             | 20.65                | 20.79              |
|                |                 | RB36#39                    | 2          | 2        | 20.74             | 20.76                | 20.8               |
|                |                 | RB75#0                     | 2          | 2        | 20.65             | 20.66                | 20.84              |
| 20M            | QPSK            | RB1#0                      | 0          | 0        | 22.93             | 22.96                | 22.75              |
|                |                 | RB1#50                     | 0          | 0        | 23.18             | 23.25                | 23.31              |
|                |                 | RB1#99                     | 0          | 0        | 22.98             | 22.99                | 23.30              |
|                |                 | RB50#0                     | 1          | 1        | 22.74             | 22.83                | 22.90              |
|                |                 | RB50#50                    | 1          | 1        | 22.31             | 22.42                | 22.28              |
|                |                 | RB100#0                    | 1          | 1        | 21.80             | 21.79                | 21.96              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.69             | 21.24                | 21.72              |
|                |                 | RB1#50                     | 1          | 1        | 21.90             | 21.21                | 22.46              |
|                |                 | RB1#99                     | 2          | 2        | 21.77             | 21.21                | 22.52              |
|                |                 | RB50#0                     | 2          | 2        | 20.78             | 20.72                | 21.04              |
|                |                 | RB50#50                    | 2          | 2        | 20.85             | 20.66                | 20.82              |
|                |                 | RB100#0                    | 2          | 2        | 20.84             | 20.67                | 21.01              |

**LTE Band 4:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.67             | 22.20                | 22.46              |
|                |                 | RB1#3                      | 0          | 0        | 22.90             | 22.33                | 22.66              |
|                |                 | RB1#5                      | 0          | 0        | 22.88             | 22.22                | 22.50              |
|                |                 | RB3#0                      | 1          | 1        | 22.78             | 22.34                | 22.61              |
|                |                 | RB3#3                      | 1          | 1        | 22.70             | 22.18                | 22.41              |
|                |                 | RB6#0                      | 1          | 1        | 21.70             | 21.42                | 21.45              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.92             | 22.02                | 21.62              |
|                |                 | RB1#3                      | 1          | 1        | 22.14             | 22.11                | 21.44              |
|                |                 | RB1#5                      | 1          | 1        | 22.19             | 21.97                | 21.45              |
|                |                 | RB3#0                      | 2          | 2        | 21.71             | 21.50                | 21.58              |
|                |                 | RB3#3                      | 2          | 2        | 21.77             | 21.41                | 21.51              |
|                |                 | RB6#0                      | 2          | 2        | 20.59             | 20.60                | 20.50              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 22.52             | 22.35                | 22.17              |
|                |                 | RB1#8                      | 0          | 0        | 22.50             | 22.09                | 22.65              |
|                |                 | RB1#14                     | 1          | 1        | 22.52             | 22.14                | 22.32              |
|                |                 | RB6#0                      | 1          | 1        | 21.64             | 21.45                | 21.93              |
|                |                 | RB6#9                      | 1          | 1        | 21.59             | 21.52                | 21.90              |
|                |                 | RB15#0                     | 1          | 1        | 21.68             | 21.42                | 21.96              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.02             | 21.75                | 21.67              |
|                |                 | RB1#8                      | 1          | 1        | 21.99             | 21.85                | 21.65              |
|                |                 | RB1#14                     | 2          | 2        | 21.88             | 22.05                | 21.75              |
|                |                 | RB6#0                      | 2          | 2        | 20.74             | 20.71                | 20.76              |
|                |                 | RB6#9                      | 2          | 2        | 20.67             | 20.53                | 20.76              |
|                |                 | RB15#0                     | 2          | 2        | 20.80             | 20.54                | 20.94              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.91             | 22.43                | 23.01              |
|                |                 | RB1#13                     | 0          | 0        | 22.70             | 22.53                | 22.94              |
|                |                 | RB1#24                     | 1          | 1        | 22.67             | 22.68                | 22.98              |
|                |                 | RB15#0                     | 1          | 1        | 22.09             | 21.86                | 22.14              |
|                |                 | RB15#10                    | 1          | 1        | 22.04             | 21.99                | 22.03              |
|                |                 | RB25#0                     | 1          | 1        | 22.01             | 21.83                | 22.18              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.63             | 22.22                | 21.82              |
|                |                 | RB1#13                     | 1          | 1        | 21.66             | 22.53                | 21.69              |
|                |                 | RB1#24                     | 1          | 1        | 21.64             | 22.38                | 21.68              |
|                |                 | RB15#0                     | 2          | 2        | 21.03             | 20.71                | 21.13              |
|                |                 | RB15#10                    | 2          | 2        | 21.10             | 20.70                | 21.08              |
|                |                 | RB25#0                     | 2          | 2        | 21.10             | 20.73                | 21.04              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.90             | 22.63                | 23.10              |
|                |                 | RB1#25                     | 0          | 0        | 22.85             | 22.93                | <b>23.33</b>       |
|                |                 | RB1#49                     | 0          | 0        | 22.83             | 22.45                | 22.99              |
|                |                 | RB25#0                     | 1          | 1        | 22.02             | 21.94                | 21.98              |
|                |                 | RB25#25                    | 1          | 1        | 22.12             | 21.82                | 22.07              |
|                |                 | RB50#0                     | 1          | 1        | 22.00             | 21.78                | 22.10              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.22             | 22.39                | 21.73              |
|                |                 | RB1#25                     | 1          | 1        | 22.47             | 22.36                | 22.10              |
|                |                 | RB1#49                     | 2          | 2        | 22.38             | 22.27                | 21.82              |
|                |                 | RB25#0                     | 2          | 2        | 21.19             | 20.97                | 21.18              |
|                |                 | RB25#25                    | 2          | 2        | 20.96             | 21.04                | 21.19              |
|                |                 | RB50#0                     | 2          | 2        | 21.06             | 20.82                | 20.96              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 22.95             | 22.82                | 22.80              |
|                |                 | RB1#38                     | 0          | 0        | 22.89             | 22.71                | 22.77              |
|                |                 | RB1#74                     | 1          | 1        | 22.96             | 22.93                | 22.96              |
|                |                 | RB36#0                     | 1          | 1        | 22.13             | 21.81                | 22.05              |
|                |                 | RB36#39                    | 1          | 1        | 21.98             | 21.90                | 22.06              |
|                |                 | RB75#0                     | 1          | 1        | 22.07             | 21.79                | 22.03              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.59             | 22.53                | 22.26              |
|                |                 | RB1#38                     | 1          | 1        | 22.46             | 22.41                | 22.19              |
|                |                 | RB1#74                     | 2          | 2        | 22.60             | 22.44                | 22.13              |
|                |                 | RB36#0                     | 2          | 2        | 21.16             | 20.73                | 21.06              |
|                |                 | RB36#39                    | 2          | 2        | 20.95             | 20.85                | 21.19              |
|                |                 | RB75#0                     | 2          | 2        | 21.13             | 20.93                | 21.18              |
| 20M            | QPSK            | RB1#0                      | 0          | 0        | 23.18             | 23.23                | 23.14              |
|                |                 | RB1#50                     | 0          | 0        | 23.11             | 22.97                | 22.80              |
|                |                 | RB1#99                     | 1          | 1        | 22.72             | 23.08                | 22.82              |
|                |                 | RB50#0                     | 1          | 1        | 22.80             | 22.87                | 22.69              |
|                |                 | RB50#50                    | 1          | 1        | 22.47             | 22.42                | 22.66              |
|                |                 | RB100#0                    | 1          | 1        | 22.53             | 22.26                | 22.55              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.52             | 22.14                | 22.74              |
|                |                 | RB1#50                     | 1          | 1        | 22.87             | 21.91                | 22.86              |
|                |                 | RB1#99                     | 2          | 2        | 22.62             | 22.07                | 22.70              |
|                |                 | RB50#0                     | 2          | 2        | 21.04             | 20.96                | 21.05              |
|                |                 | RB50#50                    | 2          | 2        | 21.20             | 20.81                | 21.02              |
|                |                 | RB100#0                    | 2          | 2        | 21.19             | 20.93                | 20.99              |

**LTE Band 5:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.64             | 22.54                | 22.87              |
|                |                 | RB1#3                      | 0          | 0        | 22.61             | 22.68                | 22.87              |
|                |                 | RB1#5                      | 0          | 0        | 22.82             | 22.53                | 22.77              |
|                |                 | RB3#0                      | 1          | 1        | 22.84             | 22.64                | 22.77              |
|                |                 | RB3#3                      | 1          | 1        | 22.85             | 22.60                | 22.69              |
|                |                 | RB6#0                      | 1          | 1        | 21.80             | 21.72                | 21.83              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.11             | 22.42                | 21.80              |
|                |                 | RB1#3                      | 1          | 1        | 22.07             | 22.18                | 21.76              |
|                |                 | RB1#5                      | 2          | 2        | 22.10             | 22.35                | 21.71              |
|                |                 | RB3#0                      | 2          | 2        | 21.86             | 21.94                | 22.05              |
|                |                 | RB3#3                      | 2          | 2        | 21.38             | 21.64                | 22.00              |
|                |                 | RB6#0                      | 2          | 2        | 20.77             | 20.91                | 20.94              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 22.59             | 22.46                | 21.88              |
|                |                 | RB1#8                      | 0          | 0        | 22.69             | 22.57                | 22.21              |
|                |                 | RB1#14                     | 1          | 1        | 22.77             | 22.45                | 22.13              |
|                |                 | RB6#0                      | 1          | 1        | 21.80             | 21.62                | 20.84              |
|                |                 | RB6#9                      | 1          | 1        | 21.63             | 21.80                | 20.91              |
|                |                 | RB15#0                     | 1          | 1        | 21.90             | 21.76                | 20.96              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.19             | 20.52                | 21.39              |
|                |                 | RB1#8                      | 1          | 1        | 22.12             | 20.55                | 21.37              |
|                |                 | RB1#14                     | 2          | 2        | 21.93             | 20.49                | 21.59              |
|                |                 | RB6#0                      | 2          | 2        | 20.74             | 20.21                | 19.92              |
|                |                 | RB6#9                      | 2          | 2        | 20.78             | 20.11                | 19.92              |
|                |                 | RB15#0                     | 2          | 2        | 20.85             | 20.13                | 20.01              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 21.99             | 22.24                | 22.50              |
|                |                 | RB1#13                     | 0          | 0        | 21.68             | 22.38                | 22.63              |
|                |                 | RB1#24                     | 0          | 0        | 21.66             | 22.73                | 22.63              |
|                |                 | RB15#0                     | 1          | 1        | 20.95             | 21.53                | 21.76              |
|                |                 | RB15#10                    | 1          | 1        | 21.67             | 21.63                | 21.83              |
|                |                 | RB25#0                     | 1          | 1        | 21.73             | 21.57                | 21.85              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.13             | 21.47                | 21.20              |
|                |                 | RB1#13                     | 1          | 1        | 22.04             | 21.32                | 21.12              |
|                |                 | RB1#24                     | 1          | 1        | 22.26             | 21.37                | 21.40              |
|                |                 | RB15#0                     | 2          | 2        | 20.65             | 20.55                | 20.71              |
|                |                 | RB15#10                    | 2          | 2        | 20.61             | 20.60                | 20.80              |
|                |                 | RB25#0                     | 2          | 2        | 20.59             | 20.64                | 20.68              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.58             | 22.41                | 22.65              |
|                |                 | RB1#25                     | 0          | 0        | 22.76             | 22.82                | <b>22.89</b>       |
|                |                 | RB1#49                     | 1          | 1        | 22.50             | 22.55                | 22.39              |
|                |                 | RB25#0                     | 1          | 1        | 22.26             | 22.36                | 22.30              |
|                |                 | RB25#25                    | 1          | 1        | 22.15             | 22.18                | 22.17              |
|                |                 | RB50#0                     | 1          | 1        | 22.06             | 22.08                | 22.24              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.91             | 22.00                | 21.53              |
|                |                 | RB1#25                     | 1          | 1        | 22.01             | 22.69                | 21.61              |
|                |                 | RB1#49                     | 2          | 2        | 21.86             | 22.08                | 21.52              |
|                |                 | RB25#0                     | 2          | 2        | 20.39             | 20.37                | 20.65              |
|                |                 | RB25#25                    | 2          | 2        | 20.49             | 20.66                | 20.73              |
|                |                 | RB50#0                     | 2          | 2        | 20.63             | 20.33                | 20.47              |

**LTE Band 7:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 21.82             | 22.08                | 22.41              |
|                |                 | RB1#13                     | 0          | 0        | 22.21             | 22.37                | 22.23              |
|                |                 | RB1#24                     | 0          | 0        | 22.42             | 22.19                | 23.08              |
|                |                 | RB15#0                     | 1          | 1        | 21.50             | 21.49                | 22.47              |
|                |                 | RB15#10                    | 1          | 1        | 21.70             | 21.60                | 22.44              |
|                |                 | RB25#0                     | 1          | 1        | 21.58             | 21.62                | 22.40              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.85             | 21.02                | 21.78              |
|                |                 | RB1#13                     | 1          | 1        | 21.18             | 21.12                | 22.11              |
|                |                 | RB1#24                     | 2          | 2        | 21.47             | 21.14                | 21.98              |
|                |                 | RB15#0                     | 2          | 2        | 20.79             | 20.98                | 21.35              |
|                |                 | RB15#10                    | 2          | 2        | 20.99             | 20.87                | 21.28              |
|                |                 | RB25#0                     | 2          | 2        | 20.89             | 20.94                | 21.45              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 21.45             | 22.58                | 23.00              |
|                |                 | RB1#25                     | 0          | 0        | 23.45             | 23.37                | 23.70              |
|                |                 | RB1#49                     | 1          | 1        | 23.70             | 23.09                | 23.05              |
|                |                 | RB25#0                     | 1          | 1        | 22.50             | 22.42                | 22.48              |
|                |                 | RB25#25                    | 1          | 1        | 22.59             | 22.45                | 22.39              |
|                |                 | RB50#0                     | 1          | 1        | 22.53             | 22.22                | 22.48              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.50             | 21.96                | 22.28              |
|                |                 | RB1#25                     | 1          | 1        | 23.32             | 22.93                | 23.11              |
|                |                 | RB1#49                     | 1          | 1        | 23.13             | 22.37                | 22.44              |
|                |                 | RB25#0                     | 2          | 2        | 21.39             | 21.42                | 21.53              |
|                |                 | RB25#25                    | 2          | 2        | 21.59             | 21.12                | 21.58              |
|                |                 | RB50#0                     | 2          | 2        | 21.44             | 21.38                | 21.37              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 22.05             | 23.20                | 23.17              |
|                |                 | RB1#38                     | 0          | 0        | 23.38             | 23.59                | 23.41              |
|                |                 | RB1#74                     | 0          | 0        | 23.38             | 23.30                | 23.20              |
|                |                 | RB36#0                     | 1          | 1        | 22.39             | 22.24                | 22.46              |
|                |                 | RB36#39                    | 1          | 1        | 22.37             | 22.30                | 22.37              |
|                |                 | RB75#0                     | 1          | 1        | 22.59             | 22.22                | 22.49              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.86             | 22.39                | 22.89              |
|                |                 | RB1#38                     | 1          | 1        | 23.21             | 22.94                | 23.02              |
|                |                 | RB1#74                     | 1          | 1        | 23.14             | 22.96                | 22.97              |
|                |                 | RB36#0                     | 2          | 2        | 21.39             | 21.15                | 21.39              |
|                |                 | RB36#39                    | 2          | 2        | 21.32             | 21.25                | 21.46              |
|                |                 | RB75#0                     | 2          | 2        | 21.35             | 21.32                | 21.47              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M            | QPSK            | RB1#0                      | 0          | 0        | 21.83             | 23.18                | 23.22              |
|                |                 | RB1#50                     | 0          | 0        | 23.66             | <b>23.74</b>         | 23.60              |
|                |                 | RB1#99                     | 1          | 1        | 23.16             | 23.73                | 22.98              |
|                |                 | RB50#0                     | 1          | 1        | 23.26             | 23.21                | 23.15              |
|                |                 | RB50#50                    | 1          | 1        | 22.95             | 22.91                | 22.82              |
|                |                 | RB100#0                    | 1          | 1        | 22.88             | 22.88                | 22.93              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.11             | 22.54                | 23.28              |
|                |                 | RB1#50                     | 1          | 1        | 23.23             | 22.53                | 23.54              |
|                |                 | RB1#99                     | 2          | 2        | 22.51             | 22.60                | 22.80              |
|                |                 | RB50#0                     | 2          | 2        | 21.38             | 21.18                | 21.35              |
|                |                 | RB50#50                    | 2          | 2        | 21.33             | 21.29                | 21.22              |
|                |                 | RB100#0                    | 2          | 2        | 21.35             | 21.30                | 21.38              |

**LTE Band 12:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.92             | 23.03                | 23.03              |
|                |                 | RB1#3                      | 0          | 0        | 23.35             | <b>23.56</b>         | 23.40              |
|                |                 | RB1#5                      | 0          | 0        | 23.52             | 23.34                | 23.11              |
|                |                 | RB3#0                      | 1          | 1        | 23.00             | 23.03                | 23.11              |
|                |                 | RB3#3                      | 1          | 1        | 23.37             | 23.22                | 23.15              |
|                |                 | RB6#0                      | 1          | 1        | 22.04             | 22.04                | 21.84              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.44             | 22.34                | 22.23              |
|                |                 | RB1#3                      | 1          | 1        | 22.41             | 22.84                | 22.65              |
|                |                 | RB1#5                      | 2          | 2        | 22.60             | 22.48                | 22.62              |
|                |                 | RB3#0                      | 2          | 2        | 22.14             | 22.09                | 21.71              |
|                |                 | RB3#3                      | 2          | 2        | 22.28             | 22.37                | 21.82              |
|                |                 | RB6#0                      | 2          | 2        | 21.05             | 21.18                | 21.09              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 23.01             | 22.84                | 22.59              |
|                |                 | RB1#8                      | 0          | 0        | 23.26             | 23.21                | 22.96              |
|                |                 | RB1#14                     | 0          | 0        | 23.26             | 23.27                | 23.07              |
|                |                 | RB6#0                      | 1          | 1        | 22.17             | 22.09                | 22.05              |
|                |                 | RB6#9                      | 1          | 1        | 22.29             | 22.14                | 22.15              |
|                |                 | RB15#0                     | 1          | 1        | 22.12             | 22.10                | 21.99              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.53             | 21.99                | 21.95              |
|                |                 | RB1#8                      | 1          | 1        | 22.61             | 23.19                | 22.26              |
|                |                 | RB1#14                     | 1          | 1        | 22.81             | 22.59                | 22.01              |
|                |                 | RB6#0                      | 2          | 2        | 21.08             | 21.13                | 20.85              |
|                |                 | RB6#9                      | 2          | 2        | 21.27             | 21.38                | 20.84              |
|                |                 | RB15#0                     | 2          | 2        | 21.36             | 20.98                | 21.07              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.77             | 22.44                | 22.78              |
|                |                 | RB1#13                     | 0          | 0        | 23.03             | 22.93                | 22.77              |
|                |                 | RB1#24                     | 0          | 0        | 23.03             | 23.05                | 22.99              |
|                |                 | RB15#0                     | 1          | 1        | 22.27             | 22.04                | 21.84              |
|                |                 | RB15#10                    | 1          | 1        | 22.19             | 22.10                | 21.85              |
|                |                 | RB25#0                     | 1          | 1        | 22.08             | 22.01                | 21.94              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.70             | 21.71                | 21.91              |
|                |                 | RB1#13                     | 1          | 1        | 22.04             | 22.69                | 21.38              |
|                |                 | RB1#24                     | 1          | 1        | 21.72             | 22.58                | 22.04              |
|                |                 | RB15#0                     | 2          | 2        | 21.19             | 21.11                | 20.87              |
|                |                 | RB15#10                    | 2          | 2        | 20.94             | 21.06                | 20.79              |
|                |                 | RB25#0                     | 2          | 2        | 21.21             | 21.03                | 20.81              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.86             | 23.00                | 22.01              |
|                |                 | RB1#25                     | 0          | 0        | 23.38             | 23.47                | 23.42              |
|                |                 | RB1#49                     | 1          | 1        | 22.97             | 22.42                | 22.66              |
|                |                 | RB25#0                     | 1          | 1        | 22.51             | 22.48                | 22.50              |
|                |                 | RB25#25                    | 1          | 1        | 22.88             | 22.95                | 22.83              |
|                |                 | RB50#0                     | 1          | 1        | 22.68             | 22.49                | 22.54              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.38             | 22.38                | 21.32              |
|                |                 | RB1#25                     | 1          | 1        | 22.62             | 22.61                | 22.92              |
|                |                 | RB1#49                     | 1          | 1        | 22.56             | 21.61                | 22.10              |
|                |                 | RB25#0                     | 2          | 2        | 21.09             | 21.31                | 21.24              |
|                |                 | RB25#25                    | 2          | 2        | 21.03             | 21.10                | 21.03              |
|                |                 | RB50#0                     | 2          | 2        | 21.11             | 21.11                | 20.76              |

**LTE Band 17:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 21.53             | 21.77                | 21.86              |
|                |                 | RB1#13                     | 0          | 0        | 21.15             | 22.70                | 21.33              |
|                |                 | RB1#24                     | 0          | 0        | 22.25             | 21.45                | 21.77              |
|                |                 | RB15#0                     | 1          | 1        | 21.06             | 21.90                | 21.48              |
|                |                 | RB15#10                    | 1          | 1        | 21.51             | 21.87                | 21.46              |
|                |                 | RB25#0                     | 1          | 1        | 21.27             | 21.86                | 21.41              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.44             | 21.07                | 20.81              |
|                |                 | RB1#13                     | 1          | 1        | 20.44             | 22.01                | 20.58              |
|                |                 | RB1#24                     | 1          | 1        | 21.69             | 20.68                | 20.87              |
|                |                 | RB15#0                     | 2          | 2        | 20.29             | 20.78                | 20.59              |
|                |                 | RB15#10                    | 2          | 2        | 20.80             | 20.90                | 20.51              |
|                |                 | RB25#0                     | 2          | 2        | 20.69             | 20.89                | 20.65              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 20.85             | 20.36                | 20.37              |
|                |                 | RB1#25                     | 0          | 0        | 22.70             | <b>22.83</b>         | 22.75              |
|                |                 | RB1#49                     | 1          | 1        | 20.44             | 20.63                | 20.88              |
|                |                 | RB25#0                     | 1          | 1        | 21.39             | 21.63                | 22.03              |
|                |                 | RB25#25                    | 1          | 1        | 21.89             | 21.53                | 21.27              |
|                |                 | RB50#0                     | 1          | 1        | 21.62             | 21.66                | 21.61              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.48             | 20.14                | 20.06              |
|                |                 | RB1#25                     | 1          | 1        | 22.49             | 22.26                | 21.58              |
|                |                 | RB1#49                     | 1          | 1        | 20.25             | 19.86                | 20.23              |
|                |                 | RB25#0                     | 2          | 2        | 20.70             | 20.86                | 20.96              |
|                |                 | RB25#25                    | 2          | 2        | 21.28             | 20.82                | 20.50              |
|                |                 | RB50#0                     | 2          | 2        | 20.79             | 20.98                | 20.99              |

**LTE Band 18:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 23.17             | 22.78                | 22.93              |
|                |                 | RB1#13                     | 0          | 0        | 22.93             | 23.28                | 23.01              |
|                |                 | RB1#24                     | 0          | 0        | 23.04             | 23.04                | 22.69              |
|                |                 | RB15#0                     | 1          | 1        | 22.02             | 21.94                | 21.97              |
|                |                 | RB15#10                    | 1          | 1        | 22.13             | 21.97                | 22.10              |
|                |                 | RB25#0                     | 1          | 1        | 22.05             | 22.04                | 22.07              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.03             | 21.39                | 22.34              |
|                |                 | RB1#13                     | 1          | 1        | 21.73             | 22.18                | 22.77              |
|                |                 | RB1#24                     | 1          | 1        | 21.81             | 22.21                | 22.46              |
|                |                 | RB15#0                     | 2          | 2        | 20.82             | 20.84                | 21.04              |
|                |                 | RB15#10                    | 2          | 2        | 21.11             | 20.89                | 21.11              |
|                |                 | RB25#0                     | 2          | 2        | 20.88             | 21.04                | 21.16              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.85             | 22.87                | 22.85              |
|                |                 | RB1#25                     | 0          | 0        | 23.11             | 23.05                | <b>23.40</b>       |
|                |                 | RB1#49                     | 1          | 1        | 22.87             | 23.02                | 22.90              |
|                |                 | RB25#0                     | 1          | 1        | 21.87             | 21.91                | 21.89              |
|                |                 | RB25#25                    | 1          | 1        | 22.06             | 22.09                | 22.01              |
|                |                 | RB50#0                     | 1          | 1        | 22.09             | 21.88                | 21.95              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.68             | 22.57                | 22.13              |
|                |                 | RB1#25                     | 1          | 1        | 23.24             | 23.29                | 22.25              |
|                |                 | RB1#49                     | 1          | 1        | 22.37             | 22.56                | 22.13              |
|                |                 | RB25#0                     | 2          | 2        | 20.74             | 21.06                | 20.97              |
|                |                 | RB25#25                    | 2          | 2        | 21.11             | 21.08                | 21.25              |
|                |                 | RB50#0                     | 2          | 2        | 20.91             | 21.19                | 20.81              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | /                 | 22.82                | /                  |
|                |                 | RB1#38                     | 0          | 0        | /                 | 23.25                | /                  |
|                |                 | RB1#74                     | 0          | 0        | /                 | 22.81                | /                  |
|                |                 | RB36#0                     | 1          | 1        | /                 | 22.80                | /                  |
|                |                 | RB36#39                    | 1          | 1        | /                 | 22.37                | /                  |
|                |                 | RB75#0                     | 1          | 1        | /                 | 21.80                | /                  |
|                | 16-QAM          | RB1#0                      | 1          | 1        | /                 | 22.46                | /                  |
|                |                 | RB1#38                     | 1          | 1        | /                 | 23.27                | /                  |
|                |                 | RB1#74                     | 1          | 1        | /                 | 22.54                | /                  |
|                |                 | RB36#0                     | 2          | 2        | /                 | 20.82                | /                  |
|                |                 | RB36#39                    | 2          | 2        | /                 | 21.06                | /                  |
|                |                 | RB75#0                     | 2          | 2        | /                 | 20.72                | /                  |

**LTE Band 38:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.58             | 22.81                | 22.86              |
|                |                 | RB1#13                     | 0          | 0        | 22.56             | 22.75                | 22.99              |
|                |                 | RB1#24                     | 0          | 0        | 22.56             | 22.52                | 22.90              |
|                |                 | RB15#0                     | 1          | 1        | 21.91             | 22.12                | 22.33              |
|                |                 | RB15#10                    | 1          | 1        | 21.67             | 22.03                | 22.23              |
|                |                 | RB25#0                     | 1          | 1        | 21.86             | 22.16                | 22.24              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.95             | 21.82                | 22.06              |
|                |                 | RB1#13                     | 1          | 1        | 22.24             | 21.67                | 22.17              |
|                |                 | RB1#24                     | 2          | 2        | 21.91             | 21.49                | 21.98              |
|                |                 | RB15#0                     | 2          | 2        | 20.81             | 20.95                | 21.03              |
|                |                 | RB15#10                    | 2          | 2        | 20.79             | 20.86                | 21.28              |
|                |                 | RB25#0                     | 2          | 2        | 20.81             | 21.05                | 21.30              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.56             | 22.98                | 23.25              |
|                |                 | RB1#25                     | 0          | 0        | 22.59             | 23.08                | <b>23.44</b>       |
|                |                 | RB1#49                     | 1          | 1        | 22.67             | 23.20                | 23.32              |
|                |                 | RB25#0                     | 1          | 1        | 21.82             | 22.06                | 22.20              |
|                |                 | RB25#25                    | 1          | 1        | 22.06             | 22.02                | 22.24              |
|                |                 | RB50#0                     | 1          | 1        | 21.85             | 22.09                | 22.25              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.45             | 21.55                | 22.83              |
|                |                 | RB1#25                     | 1          | 1        | 22.81             | 21.91                | 23.16              |
|                |                 | RB1#49                     | 1          | 1        | 22.41             | 21.21                | 22.93              |
|                |                 | RB25#0                     | 2          | 2        | 20.88             | 21.11                | 21.24              |
|                |                 | RB25#25                    | 2          | 2        | 21.17             | 21.04                | 21.46              |
|                |                 | RB50#0                     | 2          | 2        | 20.96             | 21.16                | 20.96              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 22.75             | 23.18                | 22.95              |
|                |                 | RB1#38                     | 0          | 0        | 23.02             | 23.16                | 22.91              |
|                |                 | RB1#74                     | 0          | 0        | 22.82             | 23.38                | 23.29              |
|                |                 | RB36#0                     | 1          | 1        | 21.75             | 22.10                | 22.39              |
|                |                 | RB36#39                    | 1          | 1        | 21.93             | 22.16                | 22.28              |
|                |                 | RB75#0                     | 1          | 1        | 21.95             | 21.96                | 22.13              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.37             | 22.57                | 22.19              |
|                |                 | RB1#38                     | 1          | 1        | 21.45             | 22.52                | 22.12              |
|                |                 | RB1#74                     | 1          | 1        | 21.32             | 22.84                | 22.30              |
|                |                 | RB36#0                     | 2          | 2        | 20.69             | 20.74                | 21.41              |
|                |                 | RB36#39                    | 2          | 2        | 20.68             | 21.01                | 21.38              |
|                |                 | RB75#0                     | 2          | 2        | 21.03             | 20.98                | 21.26              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M            | QPSK            | 1#0                        | 0          | 0        | 22.56             | 22.78                | 23.02              |
|                |                 | 1#49                       | 0          | 0        | 22.91             | 23.32                | 23.30              |
|                |                 | 50#0                       | 1          | 1        | 22.70             | 23.04                | 23.36              |
|                |                 | 50#24                      | 1          | 1        | 21.87             | 22.23                | 22.07              |
|                |                 | 50#49                      | 1          | 1        | 21.89             | 22.09                | 22.07              |
|                |                 | 100#0                      | 1          | 1        | 22.03             | 21.95                | 21.98              |
|                | 16-QAM          | 1#0                        | 1          | 1        | 22.06             | 21.72                | 22.54              |
|                |                 | 1#49                       | 1          | 1        | 22.44             | 21.87                | 23.17              |
|                |                 | 50#0                       | 2          | 2        | 22.04             | 21.95                | 22.91              |
|                |                 | 50#24                      | 2          | 2        | 20.96             | 20.84                | 21.05              |
|                |                 | 50#49                      | 2          | 2        | 21.10             | 21.02                | 21.06              |
|                |                 | 100#0                      | 2          | 2        | 20.94             | 20.67                | 21.08              |

**LTE Band 40: (2305-2315MHz)**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 23.41             | <b>23.81</b>         | 23.37              |
|                |                 | RB1#13                     | 0          | 0        | 23.50             | 23.73                | 23.56              |
|                |                 | RB1#24                     | 0          | 0        | 23.29             | 23.59                | 23.60              |
|                |                 | RB15#0                     | 1          | 1        | 22.74             | 22.94                | 22.80              |
|                |                 | RB15#10                    | 1          | 1        | 22.78             | 22.92                | 22.70              |
|                |                 | RB25#0                     | 1          | 1        | 22.90             | 22.82                | 22.95              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.86             | 22.89                | 22.56              |
|                |                 | RB1#13                     | 1          | 1        | 23.25             | 23.04                | 22.50              |
|                |                 | RB1#24                     | 1          | 1        | 23.23             | 22.77                | 22.53              |
|                |                 | RB15#0                     | 2          | 2        | 21.78             | 21.63                | 21.68              |
|                |                 | RB15#10                    | 2          | 2        | 22.01             | 21.77                | 21.68              |
|                |                 | RB25#0                     | 2          | 2        | 21.90             | 21.87                | 21.87              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | /                 | 23.74                | /                  |
|                |                 | RB1#25                     | 0          | 0        | /                 | 23.64                | /                  |
|                |                 | RB1#49                     | 1          | 1        | /                 | 23.67                | /                  |
|                |                 | RB25#0                     | 1          | 1        | /                 | 23.39                | /                  |
|                |                 | RB25#25                    | 1          | 1        | /                 | 23.17                | /                  |
|                |                 | RB50#0                     | 1          | 1        | /                 | 22.82                | /                  |
|                | 16-QAM          | RB1#0                      | 1          | 1        | /                 | 22.43                | /                  |
|                |                 | RB1#25                     | 1          | 1        | /                 | 22.65                | /                  |
|                |                 | RB1#49                     | 1          | 1        | /                 | 22.51                | /                  |
|                |                 | RB25#0                     | 2          | 2        | /                 | 21.59                | /                  |
|                |                 | RB25#25                    | 2          | 2        | /                 | 21.69                | /                  |
|                |                 | RB50#0                     | 2          | 2        | /                 | 21.73                | /                  |

**LTE Band 40(2350-2360MHz):**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 23.26             | 23.12                | 23.22              |
|                |                 | RB1#13                     | 0          | 0        | 23.12             | 23.09                | 23.35              |
|                |                 | RB1#24                     | 0          | 0        | 23.10             | 23.05                | 23.15              |
|                |                 | RB15#0                     | 1          | 1        | 22.48             | 22.42                | 22.34              |
|                |                 | RB15#10                    | 1          | 1        | 22.43             | 22.58                | 22.35              |
|                |                 | RB25#0                     | 1          | 1        | 22.52             | 22.38                | 22.32              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.14             | 22.68                | 22.33              |
|                |                 | RB1#13                     | 1          | 1        | 21.80             | 22.74                | 22.54              |
|                |                 | RB1#24                     | 1          | 1        | 21.75             | 22.46                | 22.55              |
|                |                 | RB15#0                     | 2          | 2        | 21.39             | 21.54                | 21.28              |
|                |                 | RB15#10                    | 2          | 2        | 21.41             | 21.41                | 21.24              |
|                |                 | RB25#0                     | 2          | 2        | 21.60             | 21.45                | 21.37              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | /                 | <b>23.56</b>         | /                  |
|                |                 | RB1#25                     | 0          | 0        | /                 | 23.55                | /                  |
|                |                 | RB1#49                     | 1          | 1        | /                 | 23.39                | /                  |
|                |                 | RB25#0                     | 1          | 1        | /                 | 23.48                | /                  |
|                |                 | RB25#25                    | 1          | 1        | /                 | 23.35                | /                  |
|                |                 | RB50#0                     | 1          | 1        | /                 | 22.38                | /                  |
|                | 16-QAM          | RB1#0                      | 1          | 1        | /                 | 22.15                | /                  |
|                |                 | RB1#25                     | 1          | 1        | /                 | 22.40                | /                  |
|                |                 | RB1#49                     | 1          | 1        | /                 | 22.17                | /                  |
|                |                 | RB25#0                     | 2          | 2        | /                 | 21.38                | /                  |
|                |                 | RB25#25                    | 2          | 2        | /                 | 21.30                | /                  |
|                |                 | RB50#0                     | 2          | 2        | /                 | 21.65                | /                  |

**LTE Band 41:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.01             | 23.66                | 23.80              |
|                |                 | RB1#13                     | 0          | 0        | 22.07             | 23.60                | 23.77              |
|                |                 | RB1#24                     | 0          | 0        | 21.91             | 23.77                | 23.71              |
|                |                 | RB15#0                     | 1          | 1        | 21.7              | 22.85                | 23.23              |
|                |                 | RB15#10                    | 1          | 1        | 21.79             | 22.81                | 23.19              |
|                |                 | RB25#0                     | 1          | 1        | 21.83             | 22.96                | 23.21              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.83             | 23.02                | 22.78              |
|                |                 | RB1#13                     | 1          | 1        | 21.11             | 23.15                | 22.93              |
|                |                 | RB1#24                     | 2          | 2        | 21.33             | 23.07                | 22.77              |
|                |                 | RB15#0                     | 2          | 2        | 21.22             | 21.69                | 22.12              |
|                |                 | RB15#10                    | 2          | 2        | 21.39             | 21.82                | 22.02              |
|                |                 | RB25#0                     | 2          | 2        | 21.11             | 21.71                | 22.08              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 21.21             | 23.99                | 23.80              |
|                |                 | RB1#25                     | 0          | 0        | 22.3              | 24.04                | 23.67              |
|                |                 | RB1#49                     | 1          | 1        | 21.58             | 23.95                | 23.71              |
|                |                 | RB25#0                     | 1          | 1        | 21.76             | 22.76                | 22.91              |
|                |                 | RB25#25                    | 1          | 1        | 21.98             | 22.77                | 23.03              |
|                |                 | RB50#0                     | 1          | 1        | 21.7              | 22.94                | 23.01              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.09             | 23.30                | 22.93              |
|                |                 | RB1#25                     | 1          | 1        | 21.54             | 23.51                | 23.74              |
|                |                 | RB1#49                     | 1          | 1        | 21.21             | 23.43                | 23.04              |
|                |                 | RB25#0                     | 2          | 2        | 21.29             | 21.97                | 22.18              |
|                |                 | RB25#25                    | 2          | 2        | 21.32             | 21.77                | 22.03              |
|                |                 | RB50#0                     | 2          | 2        | 21.15             | 21.76                | 22.01              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 21.27             | 23.87                | 23.83              |
|                |                 | RB1#38                     | 0          | 0        | 22.4              | 23.79                | 23.96              |
|                |                 | RB1#74                     | 0          | 0        | 22.05             | 23.71                | 23.71              |
|                |                 | RB36#0                     | 1          | 1        | 21.67             | 22.85                | 23.04              |
|                |                 | RB36#39                    | 1          | 1        | 22.05             | 22.76                | 23.01              |
|                |                 | RB75#0                     | 1          | 1        | 21.8              | 22.76                | 23.14              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.22             | 23.30                | 22.81              |
|                |                 | RB1#38                     | 1          | 1        | 21.52             | 23.08                | 23.04              |
|                |                 | RB1#74                     | 1          | 1        | 21.3              | 22.84                | 23.00              |
|                |                 | RB36#0                     | 2          | 2        | 21.16             | 21.80                | 22.12              |
|                |                 | RB36#39                    | 2          | 2        | 21.31             | 21.61                | 22.12              |
|                |                 | RB75#0                     | 2          | 2        | 21.25             | 21.66                | 22.02              |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M            | QPSK            | RB1#0                      | 0          | 0        | 23.08             | 23.74                | 23.11              |
|                |                 | RB1#50                     | 0          | 0        | 23.93             | 24.03                | <b>24.08</b>       |
|                |                 | RB1#99                     | 1          | 1        | 23.01             | 23.66                | 23.38              |
|                |                 | RB50#0                     | 1          | 1        | 22.54             | 22.65                | 22.99              |
|                |                 | RB50#50                    | 1          | 1        | 23.29             | 23.67                | 23.59              |
|                |                 | RB100#0                    | 1          | 1        | 22.92             | 22.63                | 22.89              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.21             | 22.68                | 22.31              |
|                |                 | RB1#50                     | 1          | 1        | 21.47             | 22.41                | 23.85              |
|                |                 | RB1#99                     | 2          | 2        | 21.13             | 22.47                | 22.81              |
|                |                 | RB50#0                     | 2          | 2        | 21.15             | 21.91                | 22.18              |
|                |                 | RB50#50                    | 2          | 2        | 21.23             | 21.71                | 21.82              |
|                |                 | RB100#0                    | 2          | 2        | 21.36             | 21.51                | 22.12              |

**WLAN 2.4G:**

| Mode         | Frequency (MHz) | Data Rate | RF Output Power(dBm) |
|--------------|-----------------|-----------|----------------------|
| 802.11b      | 2412            | 1Mbps     | 14.80                |
|              | 2437            |           | <b>14.93</b>         |
|              | 2462            |           | 14.85                |
| 802.11g      | 2412            | 6Mbps     | 14.66                |
|              | 2437            |           | 14.75                |
|              | 2462            |           | 14.71                |
| 802.11n ht20 | 2412            | MCS0      | 14.43                |
|              | 2437            |           | 14.88                |
|              | 2462            |           | 14.81                |
| 802.11n ht40 | 2422            | MCS0      | 14.59                |
|              | 2437            |           | 14.74                |
|              | 2452            |           | 14.66                |

**WLAN 5.2G:**

| Mode         | Channel frequency (MHz) | Data Rate | Conducted Average Output Power(dBm) |
|--------------|-------------------------|-----------|-------------------------------------|
| 802.11a      | 5180                    | 6Mbps     | <b>13.29</b>                        |
|              | 5200                    |           | 13.24                               |
|              | 5240                    |           | 12.18                               |
| 802.11n ht20 | 5180                    | MCS0      | 13.23                               |
|              | 5200                    |           | 12.96                               |
|              | 5240                    |           | 13.20                               |
| 802.11n ht40 | 5190                    | MCS0      | 12.90                               |
|              | 5230                    |           | 12.55                               |
| 802.11 ac20  | 5180                    | MCS0      | 13.13                               |
|              | 5200                    |           | 12.97                               |
|              | 5240                    |           | 12.75                               |
| 802.11 ac40  | 5190                    | MCS0      | 12.76                               |
|              | 5230                    |           | 12.59                               |

**WLAN 5.8G:**

| Mode         | Channel frequency (MHz) | Data Rate | Conducted Average Output Power(dBm) |
|--------------|-------------------------|-----------|-------------------------------------|
| 802.11a      | 5745                    | 6Mbps     | 13.44                               |
|              | 5785                    |           | <b>13.57</b>                        |
|              | 5825                    |           | 13.50                               |
| 802.11n ht20 | 5745                    | MCS0      | 13.04                               |
|              | 5785                    |           | 13.30                               |
|              | 5825                    |           | 13.18                               |
| 802.11n ht40 | 5755                    | MCS0      | 12.96                               |
|              | 5795                    |           | 13.11                               |
| 802.11 ac20  | 5745                    | MCS0      | 12.92                               |
|              | 5785                    |           | 13.33                               |
|              | 5825                    |           | 13.14                               |
| 802.11 ac40  | 5755                    | MCS0      | 13.01                               |
|              | 5795                    |           | 13.08                               |

**Bluetooth:**

| Mode                 | Channel frequency<br>(MHz) | RF Output Power<br>(dBm) |
|----------------------|----------------------------|--------------------------|
| BDR(GFSK)            | 2402                       | 3.72                     |
|                      | 2441                       | 4.05                     |
|                      | 2462                       | <b>5.30</b>              |
|                      | 2480                       | 3.96                     |
| EDR( $\pi/4$ -DQPSK) | 2402                       | 2.70                     |
|                      | 2441                       | 2.93                     |
|                      | 2462                       | 3.04                     |
|                      | 2480                       | 2.75                     |
| EDR(8DPSK)           | 2402                       | 2.55                     |
|                      | 2441                       | 2.81                     |
|                      | 2462                       | 2.97                     |
|                      | 2480                       | 2.64                     |
| BLE                  | 2402                       | -1.13                    |
|                      | 2440                       | <b>-1.05</b>             |
|                      | 2480                       | -1.08                    |

## Standalone SAR test exclusion considerations

### Antenna Location



### Antenna Distance To Edge

| Antenna Distance To Edge(mm) |      |       |      |       |     |        |
|------------------------------|------|-------|------|-------|-----|--------|
| Antenna                      | Back | Front | Left | Right | Top | Bottom |
| WWAN Antenna(GSM/WCDMA/LTE)  | < 5  | < 5   | < 5  | 71    | 9   | 30     |
| WLAN&BT Antenna              | < 5  | < 5   | 9    | 70    | < 5 | 80     |

### Standalone SAR test exclusion considerations

| Mode      | Frequency (MHz) | Pavg (dBm) | Pavg (mW) | Distance (mm) | Calculated value | Threshold (1-g) | SAR Test Exclusion |
|-----------|-----------------|------------|-----------|---------------|------------------|-----------------|--------------------|
| Bluetooth | 2480            | 5.5        | 3.55      | 0             | 1.12             | 3               | YES                |
| WLAN 2.4G | 2462            | 15         | 31.62     | 0             | 9.92             | 3               | NO                 |
| WLAN 5.2G | 5240            | 13.4       | 21.88     | 0             | 10.02            | 3               | NO                 |
| WLAN 5.8G | 5825            | 13.7       | 23.44     | 0             | 11.32            | 3               | NO                 |

**Note:** The WLAN based average power for calculation. and bluetooth based peak output power for calculation.

#### NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### Standalone SAR estimation:

| Mode      | Frequency (MHz) | Pavg (dBm) | Pavg (mW) | Distance (mm) | Estimated 1-g (W/kg) |
|-----------|-----------------|------------|-----------|---------------|----------------------|
| Bluetooth | 2480            | 5.5        | 3.55      | 10            | 0.07                 |

**Note:** The bluetooth based peak output power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[ \left( \frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right) \cdot \sqrt{f(\text{GHz})} \right] \cdot x$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

#### SAR test exclusion for the EUT edge considerations Result(Hotspot Mode)

| Mode         | Back Edge | Front Edge | Left Edge | Right Edge | Top Edge | Bottom Edge |
|--------------|-----------|------------|-----------|------------|----------|-------------|
| GSM 850      | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| PCS 1900     | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WCDMA Band 2 | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 2   | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 4   | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 5   | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 7   | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 12  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 17  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 18  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 38  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 40  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| LTE Band 41  | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WLAN 2.4G    | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WLAN 5.2G    | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WLAN 5.8G    | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |

#### Note:

**Required:** The distance to Edge is less than 25mm, testing is required.

**Exclusion:** The distance to Edge is more than 25 mm, testing is not required.

**SAR test exclusion for the EUT edge considerations Result(Standalone Mode)**

| Mode           | Frequency (MHz) | Pavg (dBm) | Pavg (mW) | Test Exclusion Distance (mm) |
|----------------|-----------------|------------|-----------|------------------------------|
| GSM 850        | 848.8           | 25.21      | 331.89    | 80                           |
| PCS 1900       | 1909.8          | 24.15      | 260.02    | 66                           |
| WCDMA Band 2   | 1907.6          | 23.9       | 245.47    | 64                           |
| LTE Band 2     | 1900            | 23.6       | 229.09    | 63                           |
| LTE Band 4     | 1745            | 23.4       | 218.78    | 61                           |
| LTE Band 5     | 844             | 23         | 199.53    | 57                           |
| LTE Band 7     | 2560            | 23.8       | 239.88    | 65                           |
| LTE Band 12&17 | 711             | 23.7       | 234.42    | 62                           |
| LTE Band 18    | 822.5           | 23.5       | 223.87    | 61                           |
| LTE Band 40    | 2355            | 23.9       | 245.47    | 65                           |
| LTE Band 41&38 | 2645            | 24.2       | 263.03    | 68                           |
| WLAN 2.4G      | 2462            | 15         | 31.62     | 17                           |
| WLAN 5.2G      | 5240            | 13.4       | 21.88     | 17                           |
| WLAN 5.8G      | 5825            | 13.7       | 23.44     | 19                           |

**Note:** The maximum time based average power is used for calculation.

**SAR test exclusion for the EUT edge considerations Result**

| Mode           | Back Edge | Front Edge | Left Edge | Right Edge | Top Edge | Bottom Edge |
|----------------|-----------|------------|-----------|------------|----------|-------------|
| GSM 850        | Required  | Required   | Required  | Required   | Required | Required    |
| PCS 1900       | Required  | Required   | Required  | Exclusion  | Required | Required    |
| WCDMA Band 2   | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 2     | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 4     | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 5     | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 7     | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 12&17 | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 18    | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 40    | Required  | Required   | Required  | Exclusion  | Required | Required    |
| LTE Band 41&38 | Required  | Required   | Required  | Exclusion  | Required | Required    |
| WLAN 2.4G      | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WLAN 5.2G      | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |
| WLAN 5.8G      | Required  | Required   | Required  | Exclusion  | Required | Exclusion   |

**Note:**

Required: The distance is less than **Test Exclusion Distance**, the SAR test is required.

Exclusion: The distance is large than **Test Exclusion Distance**, SAR test is not required.

**SAR test exclusion for the EUT edge considerations detail:****Distance < 50mm (To Edges)**

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.
5. The Time based average Power is used for calculation

**Distance > 50mm (To Edges)**

At 100 MHz to 6 GHz and for *test separation distances*  $> 50$  mm, the SAR test exclusion threshold is determined according to the following:

a)  $[\text{Power allowed at numeric threshold for 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)]$  mW, at 100 MHz to 1500 MHz

b)  $[\text{Power allowed at numeric threshold for 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10]$  mW at  $> 1500$  MHz and  $\leq 6$  GHz.

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

### SAR Test Data

#### Environmental Conditions

|                           |              |              |              |              |
|---------------------------|--------------|--------------|--------------|--------------|
| <b>Temperature:</b>       | 20.2-21.3 °C | 20.5-21.6 °C | 21.1-22.2 °C | 20.3-20.7 °C |
| <b>Relative Humidity:</b> | 49 %         | 50 %         | 44 %         | 41 %         |
| <b>ATM Pressure:</b>      | 102.3 kPa    | 102.6 kPa    | 101.9 kPa    | 102.2 kPa    |
| <b>Test Date:</b>         | 2020/02/14   | 2020/02/15   | 2020/02/16   | 2020/02/17   |
| <b>Temperature:</b>       | 22.5-23.2 °C | 21.9-22.9 °C | 21.4-22.6 °C |              |
| <b>Relative Humidity:</b> | 49 %         | 51 %         | 48 %         |              |
| <b>ATM Pressure:</b>      | 100.6 kPa    | 100.9 kPa    | 101.9 kPa    |              |
| <b>Test Date:</b>         | 2020/05/06   | 2020/05/07   | 2020/05/08   |              |

Testing was performed by Gaochao Gong, Sam Liang, William Ye.

**GSM 850:**

| EUT Position       | Frequency (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot      |
|--------------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|-----------|
|                    |                 |           | Meas.           | Rated |               | Meas.         | Rated       |           |
| Body Back (10mm)   | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | 0.187         | <b>0.20</b> | <b>1#</b> |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Front (10mm)  | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | 0.080         | 0.08        | 2#        |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Left (10mm)   | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | 0.156         | 0.16        | 3#        |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Right (10mm)  | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | <0.01         | 0.01        | /         |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Top (10mm)    | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | 0.082         | 0.09        | 4#        |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Bottom (10mm) | 824.2           | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 836.6           | GPRS      | 29.38           | 29.6  | 1.052         | <0.01         | 0.01        | /         |
|                    | 848.8           | GPRS      | /               | /     | /             | /             | /           | /         |

SAR Scans above were performed on 2020-02-15, except that Body Bottom and Body Right performed on 2020-05-08.

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.

**PCS 1900:**

| EUT Position       | Frequency (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot      |
|--------------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|-----------|
|                    |                 |           | Meas.           | Rated |               | Meas.         | Rated       |           |
| Body Back (10mm)   | 1850.2          | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 1880            | GPRS      | 27.15           | 27.3  | 1.035         | 0.750         | <b>0.78</b> | <b>5#</b> |
|                    | 1909.8          | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Front (10mm)  | 1850.2          | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 1880            | GPRS      | 27.15           | 27.3  | 1.035         | 0.088         | 0.09        | 6#        |
|                    | 1909.8          | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Left (10mm)   | 1850.2          | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 1880            | GPRS      | 27.15           | 27.3  | 1.035         | 0.610         | 0.63        | 7#        |
|                    | 1909.8          | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Top (10mm)    | 1850.2          | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 1880            | GPRS      | 27.15           | 27.3  | 1.035         | 0.156         | 0.16        | 8#        |
|                    | 1909.8          | GPRS      | /               | /     | /             | /             | /           | /         |
| Body Bottom (10mm) | 1850.2          | GPRS      | /               | /     | /             | /             | /           | /         |
|                    | 1880            | GPRS      | 27.15           | 27.3  | 1.035         | 0.029         | 0.03        | 9#        |
|                    | 1909.8          | GPRS      | /               | /     | /             | /             | /           | /         |

SAR Scans above were performed on 2020-02-16, except that Body Bottom performed on 2020-05-06.

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

**WCDMA Band 2:**

| EUT Position       | Frequency (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 1852.4          | RMC       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | RMC       | 23.7            | 23.9  | 1.047         | 0.702         | <b>0.74</b> | <b>10#</b> |
|                    | 1907.6          | RMC       | /               | /     | /             | /             | /           | /          |
| Body Front (10mm)  | 1852.4          | RMC       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | RMC       | 23.7            | 23.9  | 1.047         | 0.083         | 0.09        | 11#        |
|                    | 1907.6          | RMC       | /               | /     | /             | /             | /           | /          |
| Body Left (10mm)   | 1852.4          | RMC       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | RMC       | 23.7            | 23.9  | 1.047         | 0.492         | 0.52        | 12#        |
|                    | 1907.6          | RMC       | /               | /     | /             | /             | /           | /          |
| Body Top (10mm)    | 1852.4          | RMC       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | RMC       | 23.7            | 23.9  | 1.047         | 0.132         | 0.14        | 13#        |
|                    | 1907.6          | RMC       | /               | /     | /             | /             | /           | /          |
| Body Bottom (10mm) | 1852.4          | RMC       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | RMC       | 23.7            | 23.9  | 1.047         | 0.027         | 0.03        | 14#        |
|                    | 1907.6          | RMC       | /               | /     | /             | /             | /           | /          |

SAR Scans above were performed on 2020-02-16, except that Body Bottom performed on 2020-05-06.

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than 7 dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

**LTE Band 2:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 1860            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 1RB       | 23.25           | 23.6  | 1.084         | 0.602         | 0.65        | 15#        |
|                    | 1900            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 50%RB     | 22.83           | 23.6  | 1.194         | 0.557         | 0.67        | 16#        |
| Body Front (10mm)  | 1860            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 1RB       | 23.25           | 23.6  | 1.084         | 0.085         | 0.09        | 17#        |
|                    | 1900            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 50%RB     | 22.83           | 23.6  | 1.194         | 0.066         | 0.08        | 18#        |
| Body Left (10mm)   | 1860            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 1RB       | 23.25           | 23.6  | 1.084         | 0.665         | <b>0.72</b> | <b>19#</b> |
|                    | 1900            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 50%RB     | 22.83           | 23.6  | 1.194         | 0.499         | 0.60        | 20#        |
| Body Top (10mm)    | 1860            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 1RB       | 23.25           | 23.6  | 1.084         | 0.110         | 0.12        | 21#        |
|                    | 1900            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 50%RB     | 22.83           | 23.6  | 1.194         | 0.087         | 0.10        | 22#        |
| Body Bottom (10mm) | 1860            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 1RB       | 23.25           | 23.6  | 1.084         | 0.026         | 0.03        | 23#        |
|                    | 1900            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1880            | 20              | 50%RB     | 22.83           | 23.6  | 1.194         | 0.021         | 0.03        | 24#        |

SAR Scans above were performed on 2020-02-16, except that Body Bottom performed on 2020-05-06.

**LTE Band 4:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 1720            | 20              | 1RB       | 23.18           | 23.4  | 1.052         | 1.19          | <b>1.25</b> | <b>25#</b> |
|                    | 1732.5          | 20              | 1RB       | 23.23           | 23.4  | 1.04          | 0.977         | 1.02        | 26#        |
|                    | 1745            | 20              | 1RB       | 23.14           | 23.4  | 1.062         | 0.965         | 1.02        | 27#        |
|                    | 1720            | 20              | 50%RB     | 22.80           | 23.4  | 1.148         | 0.979         | 1.12        | 28#        |
|                    | 1732.5          | 20              | 50%RB     | 22.87           | 23.4  | 1.13          | 0.859         | 0.97        | 29#        |
|                    | 1745            | 20              | 50%RB     | 22.69           | 23.4  | 1.178         | 0.894         | 1.05        | 30#        |
|                    | 1720            | 20              | 100%RB    | 22.53           | 23.4  | 1.222         | 0.926         | 1.13        | 31#        |
| Body Front (10mm)  | 1720            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 1RB       | 23.23           | 23.4  | 1.040         | 0.150         | 0.16        | 32#        |
|                    | 1745            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 50%RB     | 22.87           | 23.4  | 1.130         | 0.137         | 0.15        | 33#        |
| Body Left (10mm)   | 1720            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 1RB       | 23.23           | 23.4  | 1.040         | 0.478         | 0.50        | 34#        |
|                    | 1745            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 50%RB     | 22.87           | 23.4  | 1.130         | 0.437         | 0.49        | 35#        |
| Body Top (10mm)    | 1720            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 1RB       | 23.23           | 23.4  | 1.040         | 0.114         | 0.12        | 36#        |
|                    | 1745            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 50%RB     | 22.87           | 23.4  | 1.130         | 0.105         | 0.12        | 37#        |
| Body Bottom (10mm) | 1720            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 1RB       | 23.23           | 23.4  | 1.040         | 0.057         | 0.06        | 38#        |
|                    | 1745            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 1732.5          | 20              | 50%RB     | 22.87           | 23.4  | 1.130         | 0.055         | 0.06        | 39#        |

SAR Scans above were performed on 2020-02-16, except that Body Bottom performed on 2020-05-08.

**LTE Band 5:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 829             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 1RB       | 22.82           | 23    | 1.042         | 0.319         | 0.33        | 40#        |
|                    | 844             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 50%RB     | 22.36           | 23    | 1.159         | 0.245         | 0.28        | 41#        |
| Body Front (10mm)  | 829             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 1RB       | 22.82           | 23    | 1.042         | 0.340         | <b>0.35</b> | <b>42#</b> |
|                    | 844             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 50%RB     | 22.36           | 23    | 1.159         | 0.229         | 0.27        | 43#        |
| Body Left (10mm)   | 829             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 1RB       | 22.82           | 23    | 1.042         | 0.261         | 0.27        | 44#        |
|                    | 844             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 50%RB     | 22.36           | 23    | 1.159         | 0.172         | 0.20        | 45#        |
| Body Top (10mm)    | 829             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 1RB       | 22.82           | 23    | 1.042         | 0.188         | 0.20        | 46#        |
|                    | 844             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 50%RB     | 22.36           | 23    | 1.159         | 0.130         | 0.15        | 47#        |
| Body Bottom (10mm) | 829             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 1RB       | 22.82           | 23    | 1.042         | 0.030         | 0.03        | 48#        |
|                    | 844             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 836.5           | 10              | 50%RB     | 22.36           | 23    | 1.159         | 0.025         | 0.03        | 49#        |

SAR Scans above were performed on 2020-02-15, except that Body Bottom performed on 2020-05-08.

**LTE Band 7:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 2510            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 1RB       | 23.74           | 23.8  | 1.014         | 0.310         | 0.31        | 50#        |
|                    | 2560            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 50%RB     | 23.21           | 23.8  | 1.146         | 0.239         | 0.27        | 51#        |
| Body Front (10mm)  | 2510            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 1RB       | 23.74           | 23.8  | 1.014         | 0.158         | 0.16        | 52#        |
|                    | 2560            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 50%RB     | 23.21           | 23.8  | 1.146         | 0.144         | 0.17        | 53#        |
| Body Left (10mm)   | 2510            | 20              | 1RB       | 23.66           | 23.8  | 1.033         | 0.521         | 0.54        | 54#        |
|                    | 2535            | 20              | 1RB       | 23.74           | 23.8  | 1.014         | 0.854         | 0.87        | 55#        |
|                    | 2560            | 20              | 1RB       | 23.6            | 23.8  | 1.047         | 0.842         | <b>0.88</b> | <b>56#</b> |
|                    | 2535            | 20              | 50%RB     | 23.21           | 23.8  | 1.146         | 0.684         | 0.78        | 57#        |
| Body Top (10mm)    | 2510            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 1RB       | 23.74           | 23.8  | 1.014         | 0.144         | 0.15        | 58#        |
|                    | 2560            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 50%RB     | 23.21           | 23.8  | 1.146         | 0.117         | 0.13        | 59#        |
| Body Bottom (10mm) | 2510            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 1RB       | 23.74           | 23.8  | 1.014         | 0.065         | 0.07        | 60#        |
|                    | 2560            | 20              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 2535            | 20              | 50%RB     | 23.21           | 23.8  | 1.146         | 0.054         | 0.06        | 61#        |

SAR Scans above were performed on 2020-02-17, except that Body Bottom performed on 2020-05-07.

**LTE Band 12&17:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 704             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 1RB       | 23.47           | 23.7  | 1.054         | 0.305         | <b>0.32</b> | <b>62#</b> |
|                    | 711             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 50%RB     | 22.95           | 23.7  | 1.189         | 0.256         | 0.30        | 63#        |
| Body Front (10mm)  | 704             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 1RB       | 23.47           | 23.7  | 1.054         | 0.108         | 0.11        | 64#        |
|                    | 711             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 50%RB     | 22.95           | 23.7  | 1.189         | 0.088         | 0.10        | 65#        |
| Body Left (10mm)   | 704             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 1RB       | 23.47           | 23.7  | 1.054         | 0.101         | 0.11        | 66#        |
|                    | 711             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 50%RB     | 22.95           | 23.7  | 1.189         | 0.081         | 0.10        | 67#        |
| Body Top (10mm)    | 704             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 1RB       | 23.47           | 23.7  | 1.054         | 0.061         | 0.06        | 68#        |
|                    | 711             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 50%RB     | 22.95           | 23.7  | 1.189         | 0.048         | 0.06        | 69#        |
| Body Bottom (10mm) | 704             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 1RB       | 23.47           | 23.7  | 1.054         | <0.01         | 0.01        | /          |
|                    | 711             | 10              | 1RB       | /               | /     | /             | /             | /           | /          |
|                    | 707.5           | 10              | 50%RB     | 22.95           | 23.7  | 1.189         | <0.01         | 0.01        | /          |

SAR Scans above were performed on 2020-02-15, except that Body Bottom performed on 2020-05-08.

Note\*: The E-UTRA Operating Band 17 is a subset of band 12, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

**LTE Band 18:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 822.5           | 15              | 1RB       | 23.25           | 23.5  | 1.059         | 0.213         | 0.23        | 70#        |
|                    | 822.5           | 15              | 50%RB     | 22.8            | 23.5  | 1.175         | 0.153         | 0.18        | 71#        |
| Body Front (10mm)  | 822.5           | 15              | 1RB       | 23.25           | 23.5  | 1.059         | 0.217         | <b>0.23</b> | <b>72#</b> |
|                    | 822.5           | 15              | 50%RB     | 22.8            | 23.5  | 1.175         | 0.186         | 0.22        | 73#        |
| Body Left (10mm)   | 822.5           | 15              | 1RB       | 23.25           | 23.5  | 1.059         | 0.191         | 0.20        | 74#        |
|                    | 822.5           | 15              | 50%RB     | 22.8            | 23.5  | 1.175         | 0.140         | 0.16        | 75#        |
| Body Top (10mm)    | 822.5           | 15              | 1RB       | 23.25           | 23.5  | 1.059         | 0.116         | 0.12        | 76#        |
|                    | 822.5           | 15              | 50%RB     | 22.8            | 23.5  | 1.175         | 0.093         | 0.11        | 77#        |
| Body Bottom (10mm) | 822.5           | 15              | 1RB       | 23.25           | 23.5  | 1.059         | 0.019         | 0.02        | 78#        |
|                    | 822.5           | 15              | 50%RB     | 22.8            | 23.5  | 1.175         | 0.017         | 0.02        | 79#        |

SAR Scans above were performed on 2020-02-15, except that Body Bottom performed on 2020-05-08.

**LTE Band 40(2305-2315MHz):**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 2310            | 10              | 1RB       | 23.74           | 23.9  | 1.038         | 0.308         | <b>0.32</b> | <b>80#</b> |
|                    | 2310            | 10              | 50%RB     | 23.39           | 23.9  | 1.125         | 0.270         | 0.30        | 81#        |
| Body Front (10mm)  | 2310            | 10              | 1RB       | 23.74           | 23.9  | 1.038         | 0.035         | 0.04        | 82#        |
|                    | 2310            | 10              | 50%RB     | 23.39           | 23.9  | 1.125         | 0.027         | 0.03        | 83#        |
| Body Left (10mm)   | 2310            | 10              | 1RB       | 23.74           | 23.9  | 1.038         | 0.283         | 0.29        | 84#        |
|                    | 2310            | 10              | 50%RB     | 23.39           | 23.9  | 1.125         | 0.239         | 0.27        | 85#        |
| Body Top (10mm)    | 2310            | 10              | 1RB       | 23.74           | 23.9  | 1.038         | 0.053         | 0.05        | 86#        |
|                    | 2310            | 10              | 50%RB     | 23.39           | 23.9  | 1.125         | 0.042         | 0.05        | 87#        |
| Body Bottom (10mm) | 2310            | 10              | 1RB       | 23.74           | 23.9  | 1.038         | 0.019         | 0.02        | 88#        |
|                    | 2310            | 10              | 50%RB     | 23.39           | 23.9  | 1.125         | 0.015         | 0.02        | 89#        |

SAR Scans above were performed on 2020-02-14, except that Body Bottom performed on 2020-05-08.

**LTE Band 40(2350-2360MHz):**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot       |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |            |
| Body Back (10mm)   | 2355            | 10              | 1RB       | 23.56           | 23.9  | 1.081         | 0.235         | 0.25        | 90#        |
|                    | 2355            | 10              | 50%RB     | 23.48           | 23.9  | 1.102         | 0.188         | 0.21        | 91#        |
| Body Front (10mm)  | 2355            | 10              | 1RB       | 23.56           | 23.9  | 1.081         | 0.041         | 0.04        | 92#        |
|                    | 2355            | 10              | 50%RB     | 23.48           | 23.9  | 1.102         | 0.032         | 0.04        | 93#        |
| Body Left (10mm)   | 2355            | 10              | 1RB       | 23.56           | 23.9  | 1.081         | 0.268         | <b>0.29</b> | <b>94#</b> |
|                    | 2355            | 10              | 50%RB     | 23.48           | 23.9  | 1.102         | 0.211         | 0.23        | 95#        |
| Body Top (10mm)    | 2355            | 10              | 1RB       | 23.56           | 23.9  | 1.081         | 0.056         | 0.06        | 96#        |
|                    | 2355            | 10              | 50%RB     | 23.48           | 23.9  | 1.102         | 0.042         | 0.05        | 97#        |
| Body Bottom (10mm) | 2355            | 10              | 1RB       | 23.56           | 23.9  | 1.081         | 0.021         | 0.02        | 98#        |
|                    | 2355            | 10              | 50%RB     | 23.48           | 23.9  | 1.102         | 0.016         | 0.02        | 99#        |

SAR Scans above were performed on 2020-02-14, except that Body Bottom performed on 2020-05-08.

**LTE Band 41&38:**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max Power (dBm) |       | Scaled Factor | 1g SAR (W/kg) |             | Plot        |
|--------------------|-----------------|-----------------|-----------|-----------------|-------|---------------|---------------|-------------|-------------|
|                    |                 |                 |           | Meas.           | Rated |               | Meas.         | Rated       |             |
| Body Back (10mm)   | 2545            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 1RB       | 24.03           | 24.2  | 1.040         | 0.215         | 0.22        | 100#        |
|                    | 2645            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 50%RB     | 23.67           | 24.2  | 1.130         | 0.178         | 0.20        | 101#        |
| Body Front (10mm)  | 2545            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 1RB       | 24.03           | 24.2  | 1.040         | 0.082         | 0.09        | 102#        |
|                    | 2645            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 50%RB     | 23.67           | 24.2  | 1.130         | 0.070         | 0.08        | 103#        |
| Body Left (10mm)   | 2545            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 1RB       | 24.03           | 24.2  | 1.040         | 0.447         | <b>0.46</b> | <b>104#</b> |
|                    | 2645            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 50%RB     | 23.67           | 24.2  | 1.130         | 0.365         | 0.41        | 105#        |
| Body Top (10mm)    | 2545            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 1RB       | 24.03           | 24.2  | 1.040         | 0.063         | 0.07        | 106#        |
|                    | 2645            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 50%RB     | 23.67           | 24.2  | 1.130         | 0.052         | 0.06        | 107#        |
| Body Bottom (10mm) | 2545            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 1RB       | 24.03           | 24.2  | 1.040         | 0.036         | 0.04        | 108#        |
|                    | 2645            | 20              | 1RB       | /               | /     | /             | /             | /           | /           |
|                    | 2595            | 20              | 50%RB     | 23.67           | 24.2  | 1.130         | 0.030         | 0.03        | 109#        |

SAR Scans above were performed on 2020-02-17, except that Body Bottom performed on 2020-05-07.

Note\*: The E-UTRA Operating Band 38 is a subset of band 41, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 0.5\text{ dB}$  higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45\text{ W/kg}$
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is  $< 1.45\text{ W/kg}$ , tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8\text{ W/kg}$ .
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> 0.5\text{ dB}$  higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45\text{ W/kg}$ .
8. Worst case SAR for 50% RB allocation is selected to be tested.

**WLAN 2.4G:**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |             |             |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-------------|
|                   |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR  | Plot        |
| Body Back (10mm)  | 2412            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
|                   | 2437            | 802.11b   | 14.93                  | 15                     | 1.016         | 0.102     | 0.10        | 110#        |
|                   | 2462            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
| Body Front (10mm) | 2412            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
|                   | 2437            | 802.11b   | 14.93                  | 15                     | 1.016         | 0.106     | 0.11        | 111#        |
|                   | 2462            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
| Body Left (10mm)  | 2412            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
|                   | 2437            | 802.11b   | 14.93                  | 15                     | 1.016         | 0.124     | 0.13        | 112#        |
|                   | 2462            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
| Body Top (10mm)   | 2412            | 802.11b   | /                      | /                      | /             | /         | /           | /           |
|                   | 2437            | 802.11b   | 14.93                  | 15                     | 1.016         | 0.156     | <b>0.16</b> | <b>113#</b> |
|                   | 2462            | 802.11b   | /                      | /                      | /             | /         | /           | /           |

**Note:**

1. When the 1-g SAR is  $\leq 0.8$ W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(802.11g/n) when the highest reported SAR for DSSS(802.11b) is  $\leq 1.2$  W/kg, and the output power for DSSS is not less than that for OFDM.

**WLAN 5.2G:**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |             |             |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-------------|
|                   |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR  | Plot        |
| Body Back (10mm)  | 5180            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5200            | 802.11a   | 13.24                  | 13.4                   | 1.038         | 0.037     | 0.04        | 114#        |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Front (10mm) | 5180            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5200            | 802.11a   | 13.24                  | 13.4                   | 1.038         | 0.026     | 0.03        | 115#        |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Left (10mm)  | 5180            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5200            | 802.11a   | 13.24                  | 13.4                   | 1.038         | 0.036     | 0.04        | 116#        |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Top (10mm)   | 5180            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5200            | 802.11a   | 13.24                  | 13.4                   | 1.038         | 0.085     | <b>0.09</b> | <b>117#</b> |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /         | /           | /           |

**WLAN 5.8G:**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |             |             |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-------------|
|                   |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR  | Plot        |
| Body Back (10mm)  | 5745            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5785            | 802.11a   | 13.57                  | 13.7                   | 1.03          | 0.164     | 0.17        | 118#        |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Front (10mm) | 5745            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5785            | 802.11a   | 13.57                  | 13.7                   | 1.03          | 0.093     | 0.10        | 119#        |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Left (10mm)  | 5745            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5785            | 802.11a   | 13.57                  | 13.7                   | 1.03          | 0.075     | 0.08        | 120#        |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
| Body Top (10mm)   | 5745            | 802.11a   | /                      | /                      | /             | /         | /           | /           |
|                   | 5785            | 802.11a   | 13.57                  | 13.7                   | 1.03          | 0.237     | <b>0.24</b> | <b>121#</b> |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /         | /           | /           |

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

## SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

*Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.*

### The Highest Measured SAR Configuration in Each Frequency Band

#### Body

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) |          | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
|                             |                |            |              | Original         | Repeated |                               |
| 1750MHz (1650~1850MHz)      | LTE Band 4     | 1720       | Body Back    | 1.19             | 1.16     | <b>1.03</b>                   |
| 2450MHz (2400~2550MHz)      | LTE Band 7     | 2535       | Body Left    | 0.854            | 0.832    | 1.03                          |
| 2600MHz (2550~2700MHz)      | LTE Band 7     | 2560       | Body Left    | 0.842            | 0.825    | 1.02                          |

#### Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

## SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### Simultaneous Transmission:

| Description of Simultaneous Transmit Capabilities |               |          |
|---------------------------------------------------|---------------|----------|
| Transmitter Combination                           | Simultaneous? | Hotspot? |
| WWAN(GSM/WCDMA/LTE)+WLAN 2.4G/5G                  | √             | √        |
| WWAN(GSM/WCDMA/LTE)+Bluetooth                     | √             | ×        |
| WLAN 2.4G/5G+Bluetooth                            | ×             | ×        |
| WLAN 2.4G + WLAN 5G                               | ×             | ×        |

### Simultaneous and Hotspot SAR test exclusion considerations:

| Mode(SAR1+SAR2)        | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|------------------------|-------------|--------------------|------|------------------------|
|                        |             | SAR1               | SAR2 |                        |
| GSM 850+Bluetooth      | Body Back   | 0.20               | 0.07 | 0.27                   |
|                        | Body Front  | 0.08               | 0.07 | 0.15                   |
|                        | Body Left   | 0.16               | 0.07 | 0.23                   |
|                        | Body Right  | 0.01               | 0.07 | 0.08                   |
|                        | Body Top    | 0.09               | 0.07 | 0.16                   |
|                        | Body Bottom | 0.01               | 0.07 | 0.08                   |
| PCS1900 +Bluetooth     | Body Back   | 0.78               | 0.07 | 0.85                   |
|                        | Body Front  | 0.09               | 0.07 | 0.16                   |
|                        | Body Left   | 0.63               | 0.07 | 0.70                   |
|                        | Body Top    | 0.16               | 0.07 | 0.23                   |
|                        | Body Bottom | 0.03               | 0.07 | 0.10                   |
| WCDMA Band 2+Bluetooth | Body Back   | 0.74               | 0.07 | 0.81                   |
|                        | Body Front  | 0.09               | 0.07 | 0.16                   |
|                        | Body Left   | 0.52               | 0.07 | 0.59                   |
|                        | Body Top    | 0.14               | 0.07 | 0.21                   |
|                        | Body Bottom | 0.03               | 0.07 | 0.10                   |
| LTE Band 2+Bluetooth   | Body Back   | 0.67               | 0.07 | 0.74                   |
|                        | Body Front  | 0.09               | 0.07 | 0.16                   |
|                        | Body Left   | 0.72               | 0.07 | 0.79                   |
|                        | Body Top    | 0.12               | 0.07 | 0.19                   |
|                        | Body Bottom | 0.03               | 0.07 | 0.10                   |
| LTE Band 4+Bluetooth   | Body Back   | 1.25               | 0.07 | <b>1.32</b>            |
|                        | Body Front  | 0.16               | 0.07 | 0.23                   |
|                        | Body Left   | 0.50               | 0.07 | 0.57                   |
|                        | Body Top    | 0.12               | 0.07 | 0.19                   |
|                        | Body Bottom | 0.06               | 0.07 | 0.13                   |
| LTE Band 5+Bluetooth   | Body Back   | 0.33               | 0.07 | 0.40                   |
|                        | Body Front  | 0.35               | 0.07 | 0.42                   |
|                        | Body Left   | 0.27               | 0.07 | 0.34                   |
|                        | Body Top    | 0.20               | 0.07 | 0.27                   |
|                        | Body Bottom | 0.03               | 0.07 | 0.10                   |

| Mode(SAR1+SAR2)          | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|--------------------------|-------------|--------------------|------|------------------------|
|                          |             | SAR1               | SAR2 |                        |
| LTE Band 7+Bluetooth     | Body Back   | 0.31               | 0.07 | 0.38                   |
|                          | Body Front  | 0.17               | 0.07 | 0.24                   |
|                          | Body Left   | 0.88               | 0.07 | 0.95                   |
|                          | Body Top    | 0.15               | 0.07 | 0.22                   |
|                          | Body Bottom | 0.07               | 0.07 | 0.14                   |
| LTE Band 12&17+Bluetooth | Body Back   | 0.32               | 0.07 | 0.39                   |
|                          | Body Front  | 0.11               | 0.07 | 0.18                   |
|                          | Body Left   | 0.11               | 0.07 | 0.18                   |
|                          | Body Top    | 0.06               | 0.07 | 0.13                   |
|                          | Body Bottom | 0.01               | 0.07 | 0.08                   |
| LTE Band 18+Bluetooth    | Body Back   | 0.23               | 0.07 | 0.30                   |
|                          | Body Front  | 0.23               | 0.07 | 0.30                   |
|                          | Body Left   | 0.20               | 0.07 | 0.27                   |
|                          | Body Top    | 0.12               | 0.07 | 0.19                   |
|                          | Body Bottom | 0.02               | 0.07 | 0.09                   |
| LTE Band 40+Bluetooth    | Body Back   | 0.32               | 0.07 | 0.39                   |
|                          | Body Front  | 0.04               | 0.07 | 0.11                   |
|                          | Body Left   | 0.29               | 0.07 | 0.36                   |
|                          | Body Top    | 0.06               | 0.07 | 0.13                   |
|                          | Body Bottom | 0.02               | 0.07 | 0.09                   |
| LTE Band 41&38+Bluetooth | Body Back   | 0.22               | 0.07 | 0.29                   |
|                          | Body Front  | 0.09               | 0.07 | 0.16                   |
|                          | Body Left   | 0.46               | 0.07 | 0.53                   |
|                          | Body Top    | 0.07               | 0.07 | 0.14                   |
|                          | Body Bottom | 0.04               | 0.07 | 0.11                   |

| Mode(SAR1+SAR2)                       | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|---------------------------------------|-------------|--------------------|------|------------------------|
|                                       |             | SAR1               | SAR2 |                        |
| GSM 850+WLAN 2.4G<br>(Hotspot)        | Body Back   | 0.20               | 0.10 | 0.30                   |
|                                       | Body Front  | 0.08               | 0.11 | 0.19                   |
|                                       | Body Left   | 0.16               | 0.13 | 0.29                   |
|                                       | Body Right  | 0.01               | NA   | NA                     |
|                                       | Body Top    | 0.09               | 0.16 | 0.25                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |
| PCS 1900+WLAN 2.4G<br>(Hotspot)       | Body Back   | 0.78               | 0.10 | 0.88                   |
|                                       | Body Front  | 0.09               | 0.11 | 0.20                   |
|                                       | Body Left   | 0.63               | 0.13 | 0.76                   |
|                                       | Body Top    | 0.16               | 0.16 | 0.32                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| WCDMA Band 2+WLAN 2.4G<br>(Hotspot)   | Body Back   | 0.74               | 0.10 | 0.84                   |
|                                       | Body Front  | 0.09               | 0.11 | 0.20                   |
|                                       | Body Left   | 0.52               | 0.13 | 0.65                   |
|                                       | Body Top    | 0.14               | 0.16 | 0.30                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 2+WLAN 2.4G<br>(Hotspot)     | Body Back   | 0.67               | 0.10 | 0.77                   |
|                                       | Body Front  | 0.09               | 0.11 | 0.20                   |
|                                       | Body Left   | 0.72               | 0.13 | 0.85                   |
|                                       | Body Top    | 0.12               | 0.16 | 0.28                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 4+WLAN 2.4G<br>(Hotspot)     | Body Back   | 1.25               | 0.10 | <b>1.35</b>            |
|                                       | Body Front  | 0.16               | 0.11 | 0.27                   |
|                                       | Body Left   | 0.50               | 0.13 | 0.63                   |
|                                       | Body Top    | 0.12               | 0.16 | 0.28                   |
|                                       | Body Bottom | 0.06               | NA   | NA                     |
| LTE Band 5+WLAN 2.4G<br>(Hotspot)     | Body Back   | 0.33               | 0.10 | 0.43                   |
|                                       | Body Front  | 0.35               | 0.11 | 0.46                   |
|                                       | Body Left   | 0.27               | 0.13 | 0.40                   |
|                                       | Body Top    | 0.20               | 0.16 | 0.36                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 7+WLAN 2.4G<br>(Hotspot)     | Body Back   | 0.31               | 0.10 | 0.41                   |
|                                       | Body Front  | 0.17               | 0.11 | 0.28                   |
|                                       | Body Left   | 0.88               | 0.13 | 1.01                   |
|                                       | Body Top    | 0.15               | 0.16 | 0.31                   |
|                                       | Body Bottom | 0.07               | NA   | NA                     |
| LTE Band 12&17+WLAN 2.4G<br>(Hotspot) | Body Back   | 0.32               | 0.10 | 0.42                   |
|                                       | Body Front  | 0.11               | 0.11 | 0.22                   |
|                                       | Body Left   | 0.11               | 0.13 | 0.24                   |
|                                       | Body Top    | 0.06               | 0.16 | 0.22                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |

| Mode(SAR1+SAR2)                    | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|------------------------------------|-------------|--------------------|------|------------------------|
|                                    |             | SAR1               | SAR2 |                        |
| LTE Band 18+WLAN 2.4G (Hotspot)    | Body Back   | 0.23               | 0.10 | 0.33                   |
|                                    | Body Front  | 0.23               | 0.11 | 0.34                   |
|                                    | Body Left   | 0.20               | 0.13 | 0.33                   |
|                                    | Body Top    | 0.12               | 0.16 | 0.28                   |
|                                    | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 40+WLAN 2.4G (Hotspot)    | Body Back   | 0.32               | 0.10 | 0.42                   |
|                                    | Body Front  | 0.04               | 0.11 | 0.15                   |
|                                    | Body Left   | 0.29               | 0.13 | 0.42                   |
|                                    | Body Top    | 0.06               | 0.16 | 0.22                   |
|                                    | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 41&38+WLAN 2.4G (Hotspot) | Body Back   | 0.22               | 0.10 | 0.32                   |
|                                    | Body Front  | 0.09               | 0.11 | 0.20                   |
|                                    | Body Left   | 0.46               | 0.13 | 0.59                   |
|                                    | Body Top    | 0.07               | 0.16 | 0.23                   |
|                                    | Body Bottom | 0.04               | NA   | NA                     |

| Mode(SAR1+SAR2)                       | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|---------------------------------------|-------------|--------------------|------|------------------------|
|                                       |             | SAR1               | SAR2 |                        |
| GSM 850+WLAN 5.2G<br>(Hotspot)        | Body Back   | 0.20               | 0.04 | 0.24                   |
|                                       | Body Front  | 0.08               | 0.03 | 0.11                   |
|                                       | Body Left   | 0.16               | 0.04 | 0.20                   |
|                                       | Body Right  | 0.01               | NA   | NA                     |
|                                       | Body Top    | 0.09               | 0.09 | 0.18                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |
| PCS 1900+WLAN 5.2G<br>(Hotspot)       | Body Back   | 0.78               | 0.04 | 0.82                   |
|                                       | Body Front  | 0.09               | 0.03 | 0.12                   |
|                                       | Body Left   | 0.63               | 0.04 | 0.67                   |
|                                       | Body Top    | 0.16               | 0.09 | 0.25                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| WCDMA Band 2+WLAN 5.2G<br>(Hotspot)   | Body Back   | 0.74               | 0.04 | 0.78                   |
|                                       | Body Front  | 0.09               | 0.03 | 0.12                   |
|                                       | Body Left   | 0.52               | 0.04 | 0.56                   |
|                                       | Body Top    | 0.14               | 0.09 | 0.23                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 2+WLAN 5.2G<br>(Hotspot)     | Body Back   | 0.67               | 0.04 | 0.71                   |
|                                       | Body Front  | 0.09               | 0.03 | 0.12                   |
|                                       | Body Left   | 0.72               | 0.04 | 0.76                   |
|                                       | Body Top    | 0.12               | 0.09 | 0.21                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 4+WLAN 5.2G<br>(Hotspot)     | Body Back   | 1.25               | 0.04 | <b>1.29</b>            |
|                                       | Body Front  | 0.16               | 0.03 | 0.19                   |
|                                       | Body Left   | 0.50               | 0.04 | 0.54                   |
|                                       | Body Top    | 0.12               | 0.09 | 0.21                   |
|                                       | Body Bottom | 0.06               | NA   | NA                     |
| LTE Band 5+WLAN 5.2G<br>(Hotspot)     | Body Back   | 0.33               | 0.04 | 0.37                   |
|                                       | Body Front  | 0.35               | 0.03 | 0.38                   |
|                                       | Body Left   | 0.27               | 0.04 | 0.31                   |
|                                       | Body Top    | 0.20               | 0.09 | 0.29                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 7+WLAN 5.2G<br>(Hotspot)     | Body Back   | 0.31               | 0.04 | 0.35                   |
|                                       | Body Front  | 0.17               | 0.03 | 0.20                   |
|                                       | Body Left   | 0.88               | 0.04 | 0.92                   |
|                                       | Body Top    | 0.15               | 0.09 | 0.24                   |
|                                       | Body Bottom | 0.07               | NA   | NA                     |
| LTE Band 12&17+WLAN 5.2G<br>(Hotspot) | Body Back   | 0.32               | 0.04 | 0.36                   |
|                                       | Body Front  | 0.11               | 0.03 | 0.14                   |
|                                       | Body Left   | 0.11               | 0.04 | 0.15                   |
|                                       | Body Top    | 0.06               | 0.09 | 0.15                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |

| Mode(SAR1+SAR2)                       | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|---------------------------------------|-------------|--------------------|------|------------------------|
|                                       |             | SAR1               | SAR2 |                        |
| LTE Band 18+WLAN 5.2G<br>(Hotspot)    | Body Back   | 0.23               | 0.04 | 0.27                   |
|                                       | Body Front  | 0.23               | 0.03 | 0.26                   |
|                                       | Body Left   | 0.20               | 0.04 | 0.24                   |
|                                       | Body Top    | 0.12               | 0.09 | 0.21                   |
|                                       | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 40+WLAN 5.2G<br>(Hotspot)    | Body Back   | 0.32               | 0.04 | 0.36                   |
|                                       | Body Front  | 0.04               | 0.03 | 0.07                   |
|                                       | Body Left   | 0.29               | 0.04 | 0.33                   |
|                                       | Body Top    | 0.06               | 0.09 | 0.15                   |
|                                       | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 41&38+WLAN 5.2G<br>(Hotspot) | Body Back   | 0.22               | 0.04 | 0.26                   |
|                                       | Body Front  | 0.09               | 0.03 | 0.12                   |
|                                       | Body Left   | 0.46               | 0.04 | 0.50                   |
|                                       | Body Top    | 0.07               | 0.09 | 0.16                   |
|                                       | Body Bottom | 0.04               | NA   | NA                     |

| Mode(SAR1+SAR2)                       | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|---------------------------------------|-------------|--------------------|------|------------------------|
|                                       |             | SAR1               | SAR2 |                        |
| GSM 850+WLAN 5.8G<br>(Hotspot)        | Body Back   | 0.20               | 0.17 | 0.37                   |
|                                       | Body Front  | 0.08               | 0.10 | 0.18                   |
|                                       | Body Left   | 0.16               | 0.08 | 0.24                   |
|                                       | Body Right  | 0.01               | NA   | NA                     |
|                                       | Body Top    | 0.09               | 0.24 | 0.33                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |
| PCS 1900+WLAN 5.8G<br>(Hotspot)       | Body Back   | 0.78               | 0.17 | 0.95                   |
|                                       | Body Front  | 0.09               | 0.10 | 0.19                   |
|                                       | Body Left   | 0.63               | 0.08 | 0.71                   |
|                                       | Body Top    | 0.16               | 0.24 | 0.40                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| WCDMA Band 2+WLAN 5.8G<br>(Hotspot)   | Body Back   | 0.74               | 0.17 | 0.91                   |
|                                       | Body Front  | 0.09               | 0.10 | 0.19                   |
|                                       | Body Left   | 0.52               | 0.08 | 0.60                   |
|                                       | Body Top    | 0.14               | 0.24 | 0.38                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 2+WLAN 5.8G<br>(Hotspot)     | Body Back   | 0.67               | 0.17 | 0.84                   |
|                                       | Body Front  | 0.09               | 0.10 | 0.19                   |
|                                       | Body Left   | 0.72               | 0.08 | 0.80                   |
|                                       | Body Top    | 0.12               | 0.24 | 0.36                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 4+WLAN 5.8G<br>(Hotspot)     | Body Back   | 1.25               | 0.17 | <b>1.42</b>            |
|                                       | Body Front  | 0.16               | 0.10 | 0.26                   |
|                                       | Body Left   | 0.50               | 0.08 | 0.58                   |
|                                       | Body Top    | 0.12               | 0.24 | 0.36                   |
|                                       | Body Bottom | 0.06               | NA   | NA                     |
| LTE Band 5+WLAN 5.8G<br>(Hotspot)     | Body Back   | 0.33               | 0.17 | 0.50                   |
|                                       | Body Front  | 0.35               | 0.10 | 0.45                   |
|                                       | Body Left   | 0.27               | 0.08 | 0.35                   |
|                                       | Body Top    | 0.20               | 0.24 | 0.44                   |
|                                       | Body Bottom | 0.03               | NA   | NA                     |
| LTE Band 7+WLAN 5.8G<br>(Hotspot)     | Body Back   | 0.31               | 0.17 | 0.48                   |
|                                       | Body Front  | 0.17               | 0.10 | 0.27                   |
|                                       | Body Left   | 0.88               | 0.08 | 0.96                   |
|                                       | Body Top    | 0.15               | 0.24 | 0.39                   |
|                                       | Body Bottom | 0.07               | NA   | NA                     |
| LTE Band 12&17+WLAN 5.8G<br>(Hotspot) | Body Back   | 0.32               | 0.17 | 0.49                   |
|                                       | Body Front  | 0.11               | 0.10 | 0.21                   |
|                                       | Body Left   | 0.11               | 0.08 | 0.19                   |
|                                       | Body Top    | 0.06               | 0.24 | 0.30                   |
|                                       | Body Bottom | 0.01               | NA   | NA                     |

| Mode(SAR1+SAR2)                       | Position    | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|---------------------------------------|-------------|--------------------|------|------------------------|
|                                       |             | SAR1               | SAR2 |                        |
| LTE Band 18+WLAN 5.8G<br>(Hotspot)    | Body Back   | 0.23               | 0.17 | 0.40                   |
|                                       | Body Front  | 0.23               | 0.10 | 0.33                   |
|                                       | Body Left   | 0.20               | 0.08 | 0.28                   |
|                                       | Body Top    | 0.12               | 0.24 | 0.36                   |
|                                       | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 40+WLAN 5.8G<br>(Hotspot)    | Body Back   | 0.32               | 0.17 | 0.49                   |
|                                       | Body Front  | 0.04               | 0.10 | 0.14                   |
|                                       | Body Left   | 0.29               | 0.08 | 0.37                   |
|                                       | Body Top    | 0.06               | 0.24 | 0.30                   |
|                                       | Body Bottom | 0.02               | NA   | NA                     |
| LTE Band 41&38+WLAN 5.8G<br>(Hotspot) | Body Back   | 0.22               | 0.17 | 0.39                   |
|                                       | Body Front  | 0.09               | 0.10 | 0.19                   |
|                                       | Body Left   | 0.46               | 0.08 | 0.54                   |
|                                       | Body Top    | 0.07               | 0.24 | 0.31                   |
|                                       | Body Bottom | 0.04               | NA   | NA                     |

**Note:**

1. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.
2. WLAN 2.4G and WLAN 5G cannot transmit simultaneously.

**Conclusion:**

Sum of SAR:  $\Sigma$ SAR  $\leq$  1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

## SAR Plots

---

**Please Refer to the Attachment.**

## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

**Measurement uncertainty evaluation for IEEE1528-2013 SAR test**

| Source of uncertainty                                   | Tolerance/<br>uncertainty<br>± % | Probability<br>distribution | Divisor    | ci<br>(1 g) | ci<br>(10 g) | Standard<br>uncertainty<br>± %, (1 g) | Standard<br>uncertainty<br>± %, (10 g) |
|---------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------|--------------|---------------------------------------|----------------------------------------|
| <b>Measurement system</b>                               |                                  |                             |            |             |              |                                       |                                        |
| Probe calibration                                       | 6.55                             | N                           | 1          | 1           | 1            | 6.6                                   | 6.6                                    |
| Axial Isotropy                                          | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Hemispherical Isotropy                                  | 9.6                              | R                           | $\sqrt{3}$ | 0           | 0            | 0.0                                   | 0.0                                    |
| Boundary effect                                         | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Linearity                                               | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Detection limits                                        | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Readout electronics                                     | 0.3                              | N                           | 1          | 1           | 1            | 0.3                                   | 0.3                                    |
| Response time                                           | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Integration time                                        | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| RF ambient conditions –<br>noise                        | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| RF ambient<br>conditions–reflections                    | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Probe positioner mech.<br>Restrictions                  | 0.8                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.5                                   | 0.5                                    |
| Probe positioning with<br>respect to phantom shell      | 6.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 3.9                                   | 3.9                                    |
| Post-processing                                         | 2.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 1.2                                   | 1.2                                    |
| <b>Test sample related</b>                              |                                  |                             |            |             |              |                                       |                                        |
| Test sample positioning                                 | 2.8                              | N                           | 1          | 1           | 1            | 2.8                                   | 2.8                                    |
| Device holder uncertainty                               | 6.3                              | N                           | 1          | 1           | 1            | 6.3                                   | 6.3                                    |
| Drift of output power                                   | 5.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.9                                   | 2.9                                    |
| <b>Phantom and set-up</b>                               |                                  |                             |            |             |              |                                       |                                        |
| Phantom uncertainty (shape<br>and thickness tolerances) | 4.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.3                                   | 2.3                                    |
| Liquid conductivity target)                             | 5.0                              | R                           | $\sqrt{3}$ | 0.64        | 0.43         | 1.8                                   | 1.2                                    |
| Liquid conductivity meas.)                              | 2.5                              | N                           | 1          | 0.64        | 0.43         | 1.6                                   | 1.1                                    |
| Liquid permittivity target)                             | 5.0                              | R                           | $\sqrt{3}$ | 0.6         | 0.49         | 1.7                                   | 1.4                                    |
| Liquid permittivity meas.)                              | 2.5                              | N                           | 1          | 0.6         | 0.49         | 1.5                                   | 1.2                                    |
| Combined standard<br>uncertainty                        |                                  | RSS                         |            |             |              | 12.2                                  | 12.0                                   |
| Expanded uncertainty 95 %<br>confidence interval)       |                                  |                             |            |             |              | 24.3                                  | 23.9                                   |

## Measurement uncertainty evaluation for IEC62209-2 SAR test

| Source of uncertainty                                                              | Tolerance/<br>uncertainty<br>± % | Probability<br>distribution | Divisor    | ci<br>(1 g) | ci<br>(10 g) | Standard<br>uncertainty<br>± %, (1 g) | Standard<br>uncertainty<br>± %, (10 g) |
|------------------------------------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------|--------------|---------------------------------------|----------------------------------------|
| <b>Measurement system</b>                                                          |                                  |                             |            |             |              |                                       |                                        |
| Probe calibration                                                                  | 6.55                             | N                           | 1          | 1           | 1            | 6.6                                   | 6.6                                    |
| Axial Isotropy                                                                     | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Hemispherical Isotropy                                                             | 9.6                              | R                           | $\sqrt{3}$ | 0           | 0            | 0.0                                   | 0.0                                    |
| Linearity                                                                          | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Modulation Response                                                                | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Detection limits                                                                   | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Boundary effect                                                                    | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Readout electronics                                                                | 0.3                              | N                           | 1          | 1           | 1            | 0.3                                   | 0.3                                    |
| Response time                                                                      | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Integration time                                                                   | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| RF ambient conditions –<br>noise                                                   | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| RF ambient<br>conditions–reflections                                               | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Probe positioner mech.<br>Restrictions                                             | 0.8                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.5                                   | 0.5                                    |
| Probe positioning with<br>respect to phantom shell                                 | 6.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 3.9                                   | 3.9                                    |
| Post-processing                                                                    | 2.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 1.2                                   | 1.2                                    |
| <b>Test sample related</b>                                                         |                                  |                             |            |             |              |                                       |                                        |
| Device holder Uncertainty                                                          | 6.3                              | N                           | 1          | 1           | 1            | 6.3                                   | 6.3                                    |
| Test sample positioning                                                            | 2.8                              | N                           | 1          | 1           | 1            | 2.8                                   | 2.8                                    |
| Power scaling                                                                      | 4.5                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.6                                   | 2.6                                    |
| Drift of output power                                                              | 5.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.9                                   | 2.9                                    |
| <b>Phantom and set-up</b>                                                          |                                  |                             |            |             |              |                                       |                                        |
| Phantom uncertainty (shape<br>and thickness tolerances)                            | 4.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.3                                   | 2.3                                    |
| Algorithm for correcting SAR<br>for deviations in permittivity<br>and conductivity | 1.9                              | N                           | 1          | 1           | 0.84         | 1.1                                   | 0.9                                    |
| Liquid conductivity (meas.)                                                        | 2.5                              | N                           | 1          | 0.64        | 0.43         | 1.6                                   | 1.1                                    |
| Liquid permittivity (meas.)                                                        | 2.5                              | N                           | 1          | 0.6         | 0.49         | 1.5                                   | 1.2                                    |
| Temp. unc. - Conductivity                                                          | 1.7                              | R                           | $\sqrt{3}$ | 0.78        | 0.71         | 0.8                                   | 0.7                                    |
| Temp. unc. - Permittivity                                                          | 0.3                              | R                           | $\sqrt{3}$ | 0.23        | 0.26         | 0.0                                   | 0.0                                    |
| Combined standard<br>uncertainty                                                   |                                  | RSS                         |            |             |              | 12.2                                  | 12.1                                   |
| Expanded uncertainty 95 %<br>confidence interval)                                  |                                  |                             |            |             |              | 24.5                                  | 24.2                                   |

## APPENDIX B EUT TEST POSITION PHOTOS

---

**Please Refer to the Attachment.**

## APPENDIX C CALIBRATION CERTIFICATES

---

**Please Refer to the Attachment.**

### Declarations

1. BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “Δ”. Customer model name, addresses, names, trademarks etc. are not considered data.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This [report](#) cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
7. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.
8. This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★” .

\*\*\*\*\* **END OF REPORT** \*\*\*\*\*