

FCC Radio Test Report

FCC ID: 2AMJV-1

Original Grant

Report No. : TB-FCC155401
Applicant : California Labs Inc.
Equipment Under Test (EUT)
EUT Name : Loop
Model No. : Loop-1
Serial Model No. : P9701NYR00001
Brand Name : Loop
Receipt Date : 2017-06-23
Test Date : 2017-06-24 to 2017-07-05
Issue Date : 2017-07-06
Standards : FCC Part 15, Subpart E (15.407:2016)
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC and IC requirements


Test/Witness Engineer :

IVAN SU

**Approved &
Authorized**

:

Ray



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units	7
1.5 Description of Test Mode.....	8
1.6 Description of Test Software Setting	9
1.7 Test Facility.....	11
2. TEST SUMMARY	12
3. TEST EQUIPMENT.....	13
4. CONDUCTED EMISSION TEST	14
4.1 Test Standard and Limit.....	14
4.2 Test Setup.....	14
4.3 Test Procedure.....	15
4.4 EUT Operating Mode	15
4.5 Test Data.....	15
5. RADIATED EMISSION TEST	20
5.1 Test Standard and Limit.....	20
5.2 Test Setup.....	21
5.3 Test Procedure.....	22
5.4 EUT Operating Condition	23
5.5 Test Data.....	23
6. BAND EDGE EMISSIONS	146
6.1 Test Standard and Limit.....	146
6.2 Test Setup.....	146
6.3 Test Procedure.....	147
6.4 EUT Operating Condition	147
6.5 Test Data.....	147
7. BANDWIDTH TEST.....	233
7.1 Test Standard and Limit.....	233
7.2 Test Setup.....	233
7.3 Test Procedure.....	233
7.4 EUT Operating Condition	234
7.5 Test Data.....	234
8. OUTPUT POWER TEST.....	280
8.1 Test Standard and Limit.....	280
8.2 Test Setup.....	280
8.3 Test Procedure.....	280

8.4 EUT Operating Condition	280
8.5 Test Date.....	281
9. POWER SPECTRAL DENSITY TEST	298
9.1 Test Standard and Limit.....	298
9.2 Test Setup.....	298
9.3 Test Procedure.....	298
9.4 EUT Operating Condition	299
9.5 Test Data.....	300
10. FREQUENCY STABILITY MEASUREMENT	328
10.1 Test Standard and Limit	328
10.2 Test Setup.....	328
10.3 Test Procedure.....	328
10.4 EUT Operating Condition	328
10.5 Test Data.....	329
11. ANTENNA REQUIREMENT.....	333
11.1 Standard Requirement.....	333
11.2 Antenna Connected Construction	333
11.3 Result.....	333

1. General Information about EUT

1.1 Client Information

Applicant : California Labs Inc.
Address : 1540 Market St., Ste. 100, San Francisco, CA 94102
Manufacturer : Shenzhen Zowee Technology Co.,Ltd
Address : Floor 6, Block 5, Science&Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, P.R.C

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Loop	
Models No.	:	Loop-1, P9701NYR00001	
Model Difference	:	All these models are identical in the same PCB layout and electrical circuit, the only difference is model name for commercial.	
Product Description	:	Operation Frequency: U-NII-1: 5180MHz~5240MHz U-NII-2A: 5260MHz~5320MHz U-NII-2C: 5500MHz~5700MHz U-NII-3: 5745MHz~5825MHz	
		RF Output Power:	U-NII-1: 802.11a: 6.98dBm 802.11n(HT20): 6.92dBm 802.11n(HT40): 6.81dBm 802.11ac(20): 6.86dBm 802.11ac(40): 6.80dBm 802.11ac(80): 6.81dBm U-NII-2A: 802.11a: 6.96dBm 802.11n(HT20): 6.86dBm 802.11n(HT40): 6.08dBm 802.11ac(20): 6.73dBm 802.11ac(40): 6.77dBm 802.11ac(80): 6.61dBm U-NII-2C: 802.11a: 6.37dBm 802.11n(HT20): 6.11dBm 802.11n(HT40): 6.26dBm 802.11ac(20): 6.47dBm 802.11ac(40): 6.33dBm 802.11ac(80): 6.26dBm

		U-NII-3: 802.11a: 6.32dBm 802.11n(HT20): 6.46dBm 802.11n(HT40): 6.29dBm 802.11ac(20): 6.30dBm 802.11ac(40): 6.16dBm 802.11ac(80): 6.35dBm
		Antenna Gain: see note(3)
		Modulation Type: 802.11a: OFDM (QPSK, BPSK, 16QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM)
		Bit Rate of Transmitter: 802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 150Mbps 802.11ac: at most 433.3 Mbps
Power Supply	:	DC Voltage Supplied by Adapter. DC Supply by the Battery.
Power Rating	:	Adapter(10FA3-05200U): Input: AC 100-240, 50/60Hz, 0.5-0.3A. Output: DC 5.0V, 2.0A. DC 3.7 V by 4500mAh Li-Lion Battery.
Connecting I/O Port(S)	:	Please refer to the User's Manual
Note: More detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

Note:

- (1) This Test Report is FCC Part 15, Subpart E(15.407) for 802.11a/n/ac, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V01r04.
- (2) Channel List:

5G Band 5150~5250 MHz (U-NII-1)				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		
Remark: For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46. For 80 MHz Bandwidth, use channel 42.				


5G Band 5260~5320 MHz (U-NII-2A)				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5260~5320 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310MHz
	56	5280MHz	64	5320 MHz
	58	5290MHz		
Remark: For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62. For 80 MHz Bandwidth, use channel 58.				
5G Band 5500~5700 MHz (U-NII-2C)				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5500~5700 MHz Band 3	100	5500 MHz	122	5610 MHz
	102	5510 MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	106	5530 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	110	5550 MHz	134	5670 MHz
	112	5560 MHz	136	5680 MHz
	116	5580 MHz	138	5690 MHz
	118	5590 MHz	140	5700 MHz
	120	5600 MHz		
Remark: For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140 For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134 For 80 MHz Bandwidth, use channel 106, 122, 138.				
5G Band 5745~5825 MHz(U-NII-3)				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5745~5825 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz
Remark: For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159. For 80 MHz Bandwidth, use channel 155.				

(3) Antenna information:


Ant.	Model Name	Antenna Type	BAND(MHz)	Gain (dBi)
1	N/A	PIFA Ant.	5150-5825	6.5

1.3 Block Diagram Showing the Configuration of System Tested

USB Charging Mode

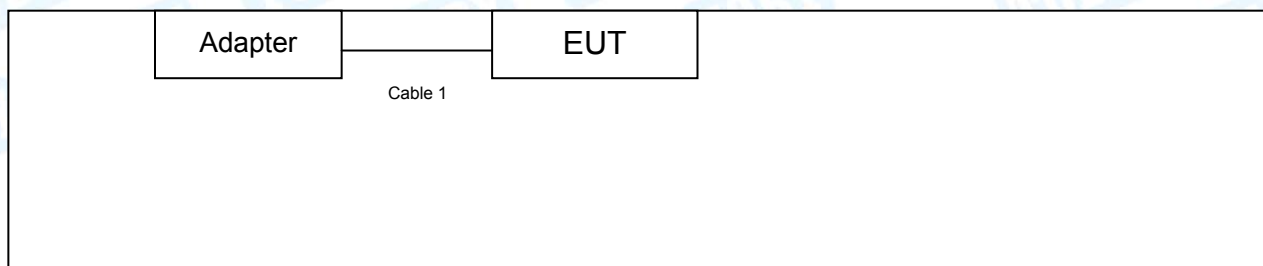

TX Mode

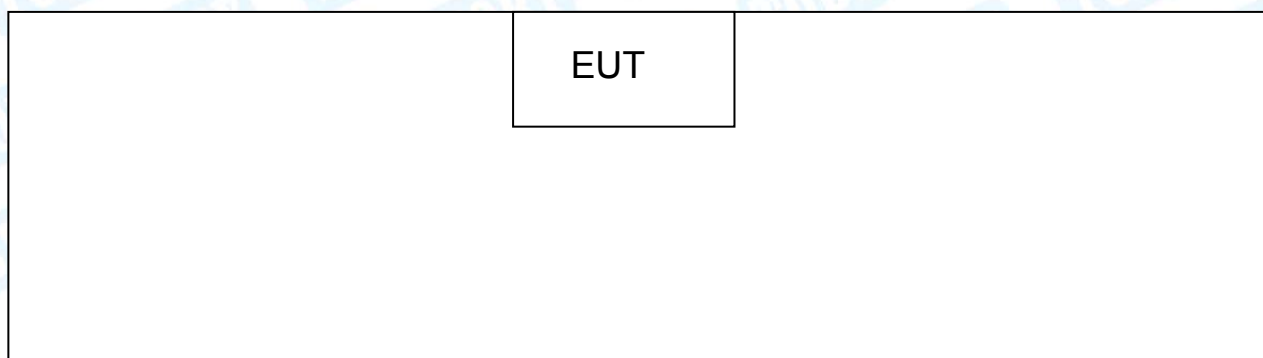

1.4 Description of Support Units

The EUT has been test as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode		Description
Mode 1		TX 802.11a Mode
For Radiated Test		
Test Band	Final Test Mode	Description
U-NII-1	Mode 2	TX Mode 802.11a Mode Channel 36/40/48
	Mode 3	TX Mode 802.11n(HT20) Mode Channel 36/40/48
	Mode 4	TX Mode 802.11n(HT40) Mode Channel 38/46
	Mode 5	TX Mode 802.11ac(20) Mode Channel 36/40/48
	Mode 6	TX Mode 802.11ac(40) Mode Channel 38/46
	Mode 7	TX Mode 802.11ac(80) Mode Channel 42
U-NII-2A	Mode 8	TX Mode 802.11a Mode Channel 52/56/64
	Mode 9	TX Mode 802.11n(HT20) Mode Channel 52/56/64
	Mode 10	TX Mode 802.11n(HT40) Mode Channel 54/62
	Mode 11	TX Mode 802.11ac(20) Mode Channel 52/56/64
	Mode 12	TX Mode 802.11ac(40) Mode Channel 54/62
	Mode 13	TX Mode 802.11ac(80) Mode Channel 58
U-NII-2C	Mode 14	TX Mode 802.11a Mode Channel 100/120/140
	Mode 15	TX Mode 802.11n(HT20) Mode Channel 100/120/140
	Mode 16	TX Mode 802.11n(HT40) Mode Channel 102/118/134
	Mode 17	TX Mode 802.11ac(20) Mode Channel 100/120/140
	Mode 18	TX Mode 802.11ac(40) Mode Channel 102/118/134
	Mode 19	TX Mode 802.11ac(80) Mode Channel 106/122/138
U-NII-3	Mode 20	TX Mode 802.11a Mode Channel 149/157/165
	Mode 21	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 22	TX Mode 802.11n(HT40) Mode Channel 151/159
	Mode 23	TX Mode 802.11ac(20) Mode Channel 149/157/165
	Mode 24	TX Mode 802.11ac(40) Mode Channel 151/159
	Mode 25	TX Mode 802.11ac(80) Mode Channel 155

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

802.11a Mode: OFDM (6 Mbps)

802.11n (HT20) Mode: MCS 8

802.11n (HT40) Mode: MCS 8

802.11a(20) Mode: MCS 1/Nss2

802.11a(40) Mode: MCS 1/Nss2

802.11a(80) Mode: MCS 1/Nss2

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software Version	Ampak RF Test Tool		
U-NII-1			
Mode:	5180MHz	5200MHz	5240MHz
IEEE 802.11a	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
IEEE 802.11ac (20)	DEF	DEF	DEF
Mode:	5190MHz	5230MHz	
IEEE 802.11n (HT40)	DEF	DEF	
IEEE 802.11ac (40)	DEF	DEF	
Mode:	5210MHz		
IEEE 802.11ac (80)	DEF		

U-NII-2A			
Mode:	5260MHz	5280MHz	5320MHz
IEEE 802.11a	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
IEEE 802.11ac (20)	DEF	DEF	DEF
Mode:	5270MHz	5310MHz	
IEEE 802.11n (HT40)	DEF	DEF	
IEEE 802.11ac (40)	DEF	DEF	
Mode:	5290MHz		
IEEE 802.11ac (80)	DEF		
U-NII-2C			
Mode:	5500MHz	5600MHz	5700MHz
IEEE 802.11a	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
IEEE 802.11ac (20)	DEF	DEF	DEF
Mode:	5510MHz	5590MHz	5670MHz
IEEE 802.11n (HT40)	DEF	DEF	DEF
IEEE 802.11ac (40)	DEF	DEF	DEF
Mode:	5530MHz	5610MHz	5690MHz
IEEE 802.11ac (80)	DEF	DEF	DEF
U-NII-3			
Mode:	5745MHz	5785MHz	5825MHz
IEEE 802.11a	DEF	DEF	DEF
IEEE 802.11n (HT20)	DEF	DEF	DEF
IEEE 802.11ac (20)	DEF	DEF	DEF
Mode:	5755MHz	5795MHz	
IEEE 802.11n (HT40)	DEF	DEF	
IEEE 802.11ac (40)	DEF	DEF	
Mode:	5775MHz		
IEEE 802.11ac (80)	DEF		

1.7 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

May 22, 2014 certificated by TUV Rheinland(China) Co., Ltd. with TUV certificate No.: UA 50282953 0001 and report No.: 17026822 002. The certificate is valid until the next scheduled audit or up to 18 months, at the discretion of TUV Rhineland.

2. Test Summary

FCC Part 15 Subpart E(15.407)/RSS-210: 2010				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	N/A
15.407(b)	RSS-GEN 7.2.2	Band Edge Emissions	PASS	N/A
15.407(a)	RSS-24 A.9.2	26dB Bandwidth&99% Bandwidth	PASS	N/A
15.407(e)	RSS-210 A.9.2	6dB Bandwidth(only for UNII-3)	PASS	N/A
15.407(a)	RSS-210 A.9.2	Peak Output Power	PASS	N/A
15.407(a)	RSS-210 A.9.2	Power Spectral Density	PASS	N/A
15.407(b)	RSS-210 A.9.2	Transmitter Radiated Spurious Emission	PASS	N/A
15.407(a)	RSS-210 A.9.2	Peak Excursion	PASS	N/A
15.407(g)	RSS-210 A.9.2	Frequency Stability	PASS	N/A
Note: “/” for no requirement for this test item. N/A is an abbreviation for Not Applicable.				

3. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 22, 2016	Jul. 21, 2017
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 22, 2016	Jul. 21, 2017
LISN	Rohde & Schwarz	ENV216	101131	Jul. 22, 2016	Jul. 21, 2017
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 22, 2016	Jul. 21, 2017
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 25, 2017	Mar. 24, 2018
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Mar. 25, 2017	Mar. 24, 2018
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 24, 2017	Mar. 23, 2018
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar. 24, 2017	Mar. 23, 2018
Loop Antenna	Laplace instrument	RF300	0701	Mar. 25, 2017	Mar. 24, 2018
Pre-amplifier	Sonoma	310N	185903	Mar. 24, 2017	Mar. 23, 2018
Pre-amplifier	HP	8449B	3008A00849	Mar. 29, 2017	Mar. 28, 2018
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 29, 2017	Mar. 28, 2018
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 22, 2016	Jul. 21, 2017
Power Meter	Anritsu	ML2495A	25406005	Jul. 22, 2016	Jul. 21, 2017
Power Sensor	Anritsu	ML2411B	25406005	Jul. 22, 2016	Jul. 21, 2017

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard
FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

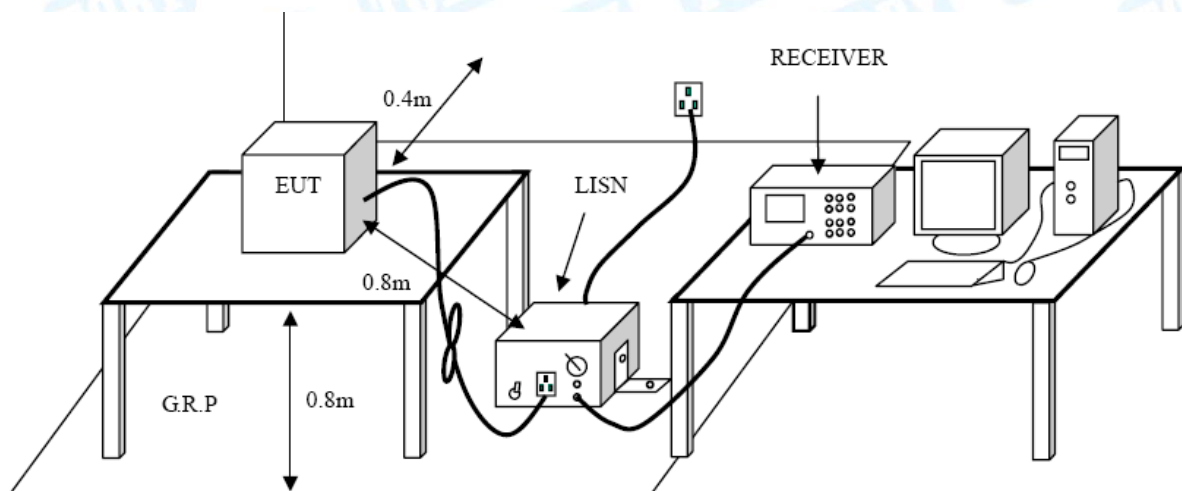

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Please see the next page.

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX 802.11a Mode CH36		
Remark:	Only worse case is reported		

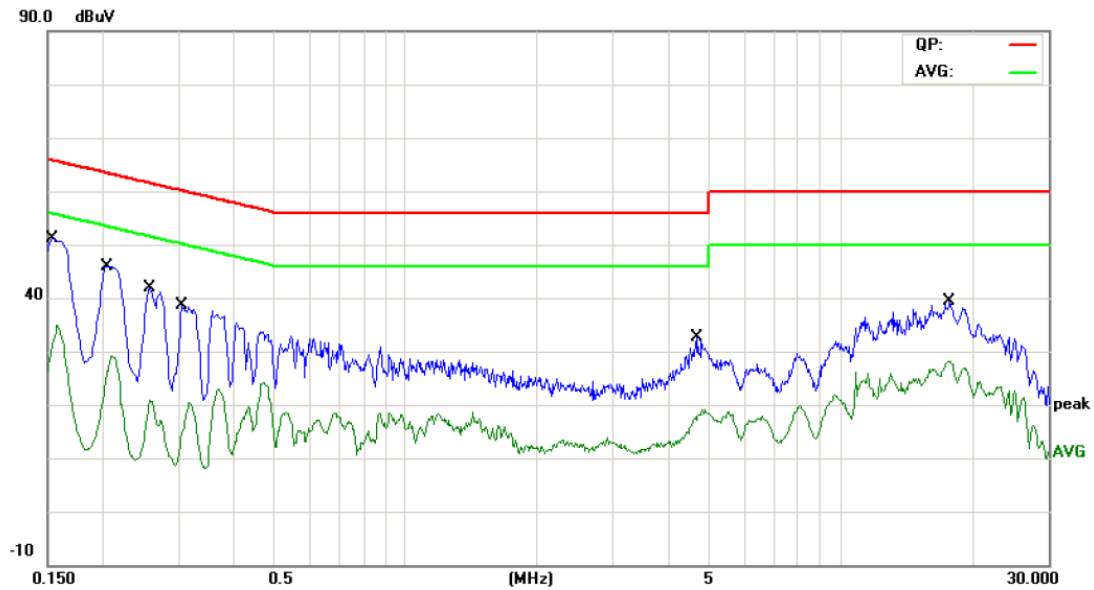


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1539	39.46	9.58	49.04	65.78	-16.74	QP
2		0.1539	22.07	9.58	31.65	55.78	-24.13	AVG
3		0.2060	33.79	9.58	43.37	63.36	-19.99	QP
4		0.2060	17.25	9.58	26.83	53.36	-26.53	AVG
5		0.2580	28.52	9.59	38.11	61.49	-23.38	QP
6		0.2580	11.03	9.59	20.62	51.49	-30.87	AVG
7		0.3060	23.94	9.59	33.53	60.08	-26.55	QP
8		0.3060	5.54	9.59	15.13	50.08	-34.95	AVG
9		4.6940	14.98	9.72	24.70	56.00	-31.30	QP
10		4.6940	7.94	9.72	17.66	46.00	-28.34	AVG
11		17.8180	22.96	10.50	33.46	60.00	-26.54	QP
12		17.8180	16.74	10.50	27.24	50.00	-22.76	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX 802.11a Mode CH36		
Remark:	Only worse case is reported		

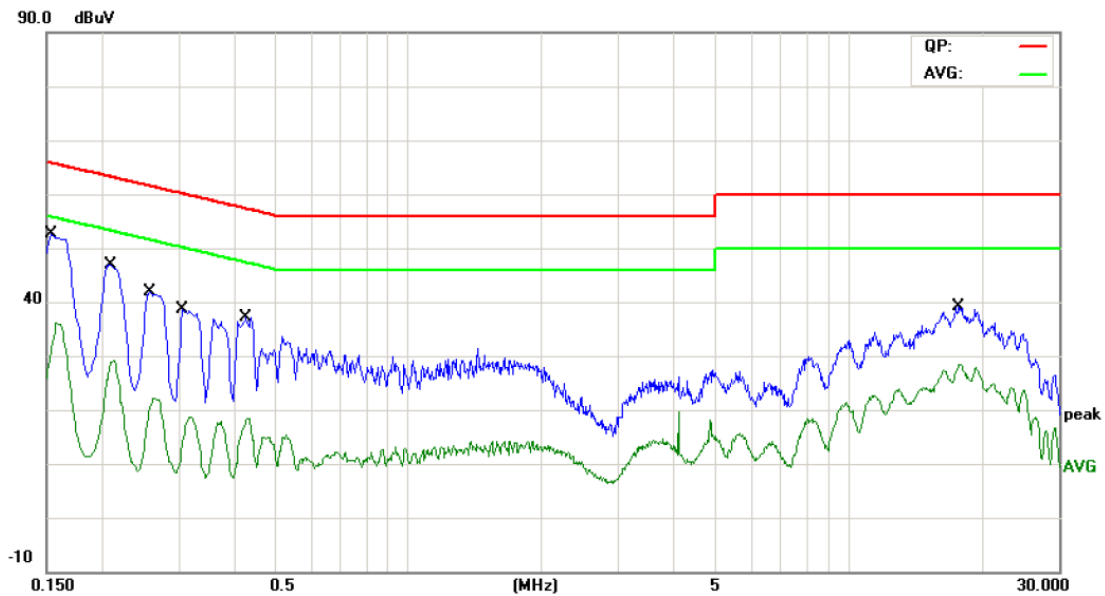


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1539	39.80	9.58	49.38	65.78	-16.40	QP
2		0.1539	22.18	9.58	31.76	55.78	-24.02	AVG
3		0.2100	34.55	9.58	44.13	63.20	-19.07	QP
4		0.2100	18.26	9.58	27.84	53.20	-25.36	AVG
5		0.2580	28.23	9.59	37.82	61.49	-23.67	QP
6		0.2580	9.59	9.59	19.18	51.49	-32.31	AVG
7		0.3067	24.30	9.59	33.89	60.06	-26.17	QP
8		0.3067	4.63	9.59	14.22	50.06	-35.84	AVG
9		0.4260	22.44	9.60	32.04	57.33	-25.29	QP
10		0.4260	7.39	9.60	16.99	47.33	-30.34	AVG
11		17.7740	22.99	10.50	33.49	60.00	-26.51	QP
12		17.7740	17.01	10.50	27.51	50.00	-22.49	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX 802.11a Mode CH36		
Remark:	Only worse case is reported		

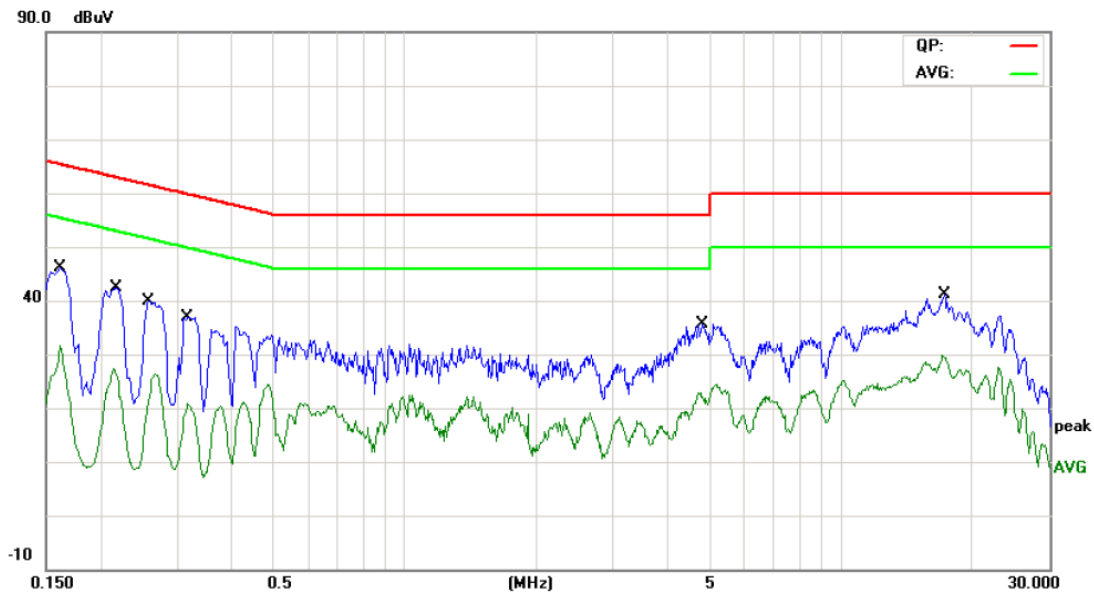


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	33.87	9.58	43.45	65.36	-21.91	QP
2		0.1620	19.39	9.58	28.97	55.36	-26.39	AVG
3		0.2180	29.01	9.58	38.59	62.89	-24.30	QP
4		0.2180	14.87	9.58	24.45	52.89	-28.44	AVG
5		0.2580	25.48	9.59	35.07	61.49	-26.42	QP
6		0.2580	12.20	9.59	21.79	51.49	-29.70	AVG
7		0.3180	23.25	9.59	32.84	59.76	-26.92	QP
8		0.3180	10.26	9.59	19.85	49.76	-29.91	AVG
9		4.8140	19.73	9.73	29.46	56.00	-26.54	QP
10		4.8140	12.43	9.73	22.16	46.00	-23.84	AVG
11		17.2620	24.44	10.49	34.93	60.00	-25.07	QP
12	*	17.2620	17.65	10.49	28.14	50.00	-21.86	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX 802.11a Mode CH36		
Remark:	Only worse case is reported		

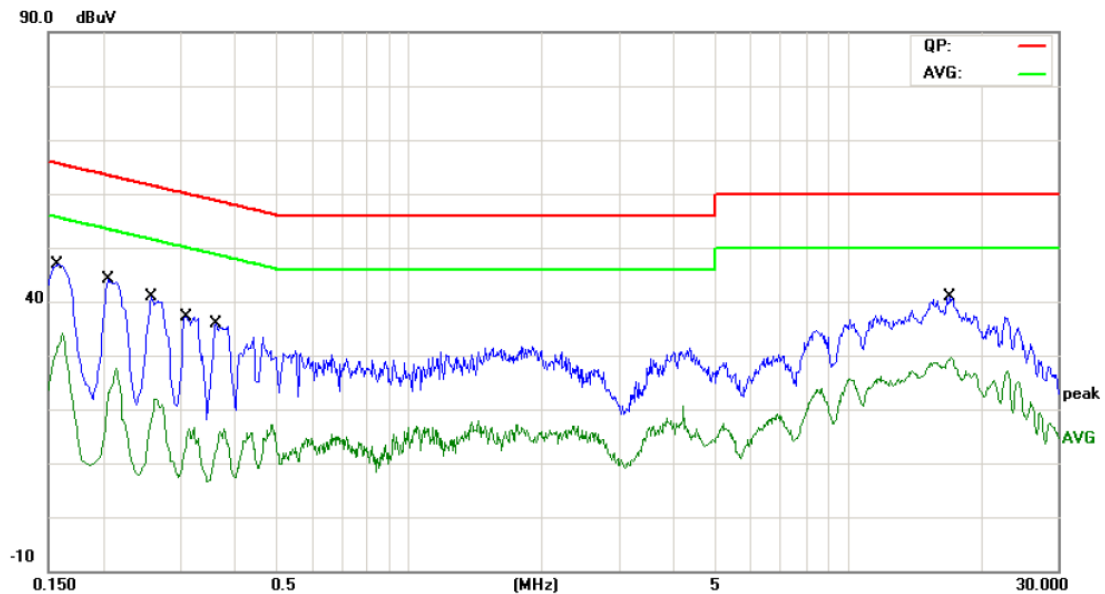

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	34.45	9.58	44.03	65.56	-21.53	QP
2		0.1580	23.01	9.58	32.59	55.56	-22.97	AVG
3		0.2060	29.06	9.58	38.64	63.36	-24.72	QP
4		0.2060	12.67	9.58	22.25	53.36	-31.11	AVG
5		0.2580	25.95	9.59	35.54	61.49	-25.95	QP
6		0.2580	8.92	9.59	18.51	51.49	-32.98	AVG
7		0.3100	22.53	9.59	32.12	59.97	-27.85	QP
8		0.3100	3.73	9.59	13.32	49.97	-36.65	AVG
9		0.3620	20.26	9.60	29.86	58.68	-28.82	QP
10		0.3620	2.47	9.60	12.07	48.68	-36.61	AVG
11		17.0780	24.53	10.49	35.02	60.00	-24.98	QP
12	*	17.0780	18.05	10.49	28.54	50.00	-21.46	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3


NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


5.2 Test Setup

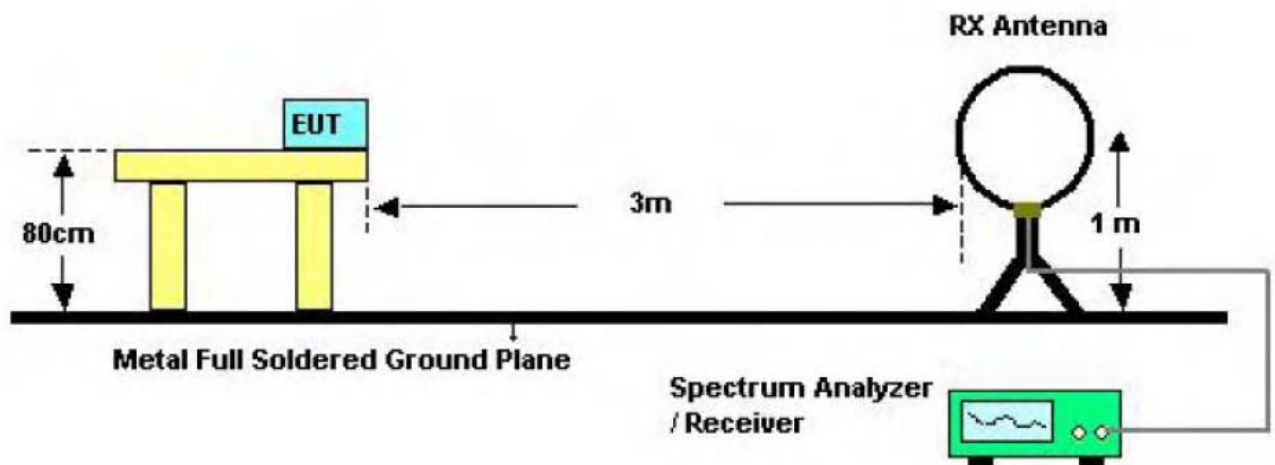

Below 30MHz Test Setup

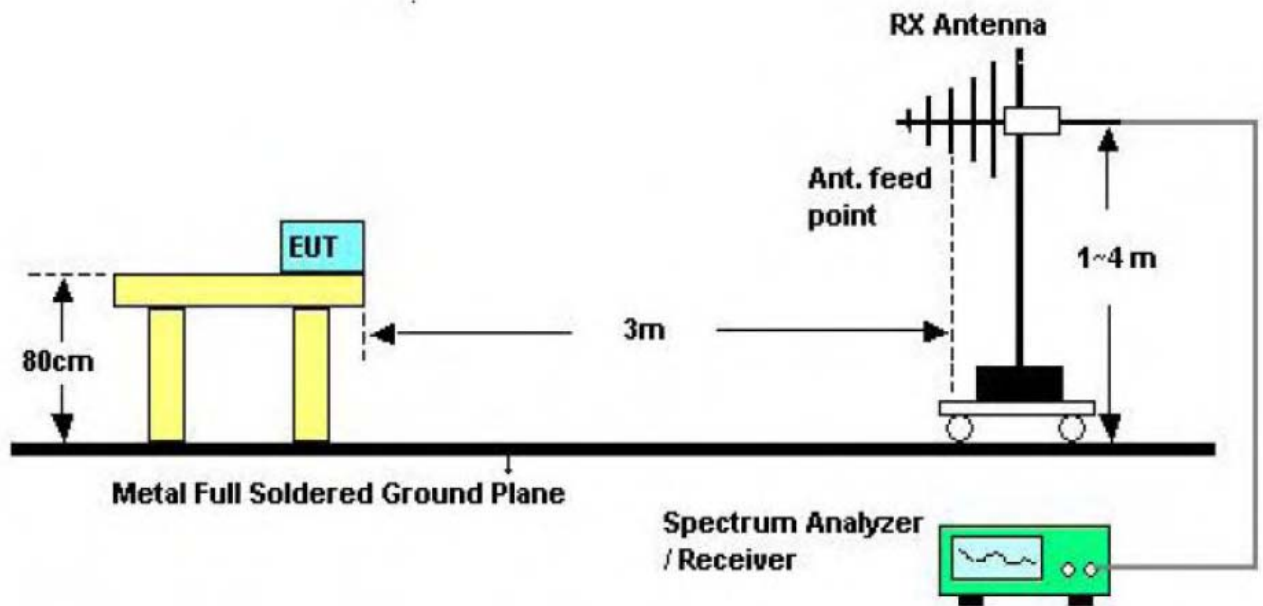

Below 1000MHz Test Setup

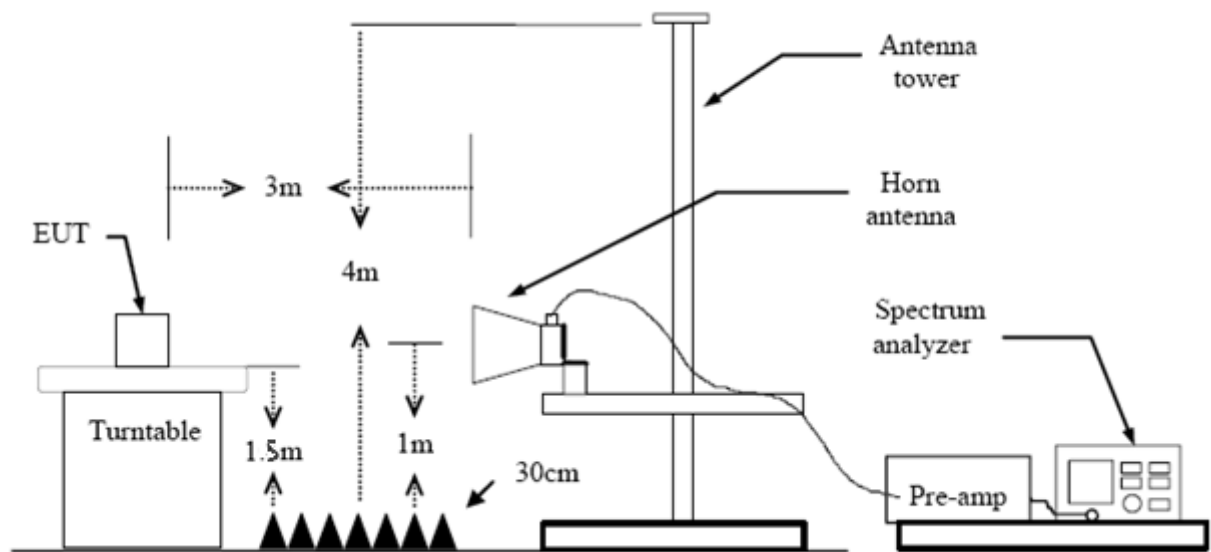

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by

3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		
Remark:	Only worse case is reported		

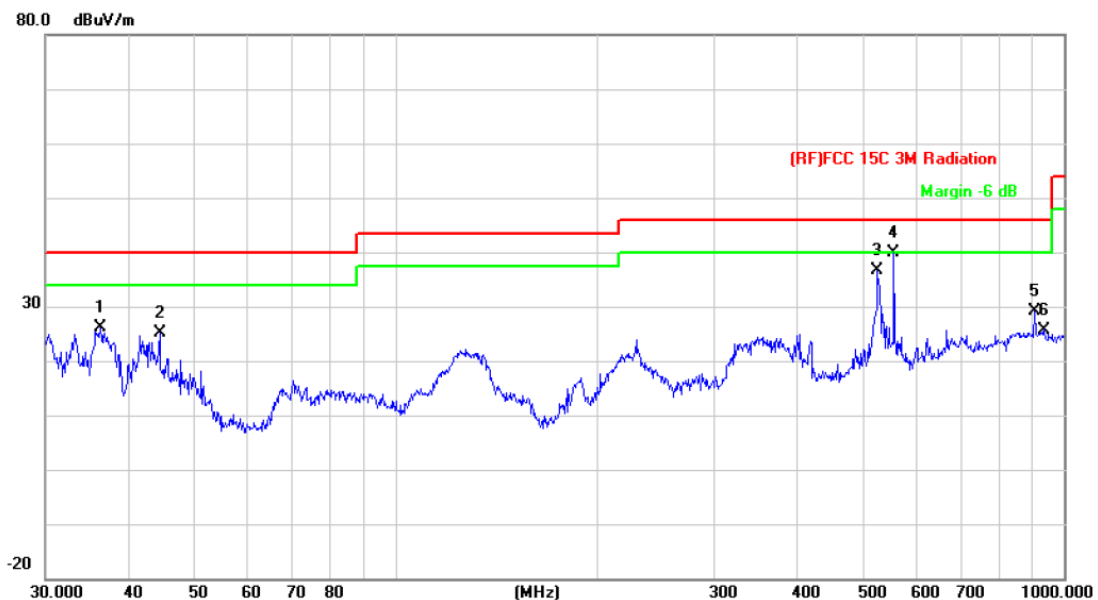


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.2541	43.79	-17.60	26.19	40.00	-13.81	peak
2		44.4308	46.81	-21.75	25.06	40.00	-14.94	peak
3		526.3967	45.86	-9.30	36.56	46.00	-9.44	peak
4	*	556.7744	49.01	-9.25	39.76	46.00	-6.24	peak
5		903.3094	32.88	-3.71	29.17	46.00	-16.83	peak
6		932.2715	29.21	-3.46	25.75	46.00	-20.25	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		
Remark:	Only worse case is reported		

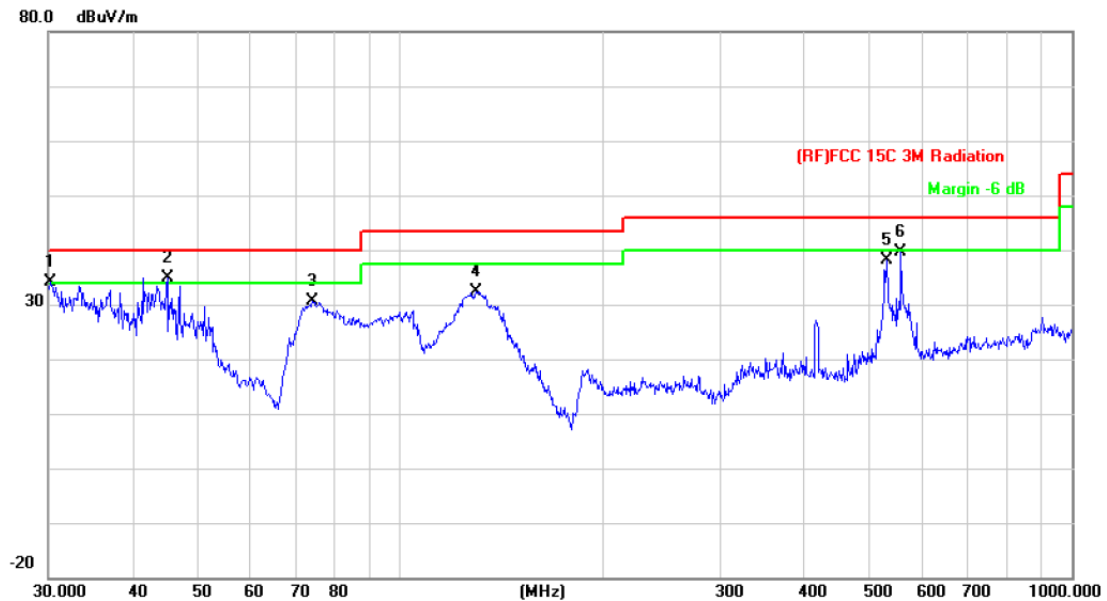


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	!	30.2111	48.06	-13.91	34.15	40.00	-5.85	peak
2	*	45.0583	56.88	-22.01	34.87	40.00	-5.13	peak
3		74.1351	53.74	-23.13	30.61	40.00	-9.39	peak
4		129.9226	54.12	-21.74	32.38	43.50	-11.12	peak
5		530.1014	47.35	-9.30	38.05	46.00	-7.95	peak
6		556.7744	48.95	-9.25	39.70	46.00	-6.30	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

5180MHz-5250MHz(U-NII-1)


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

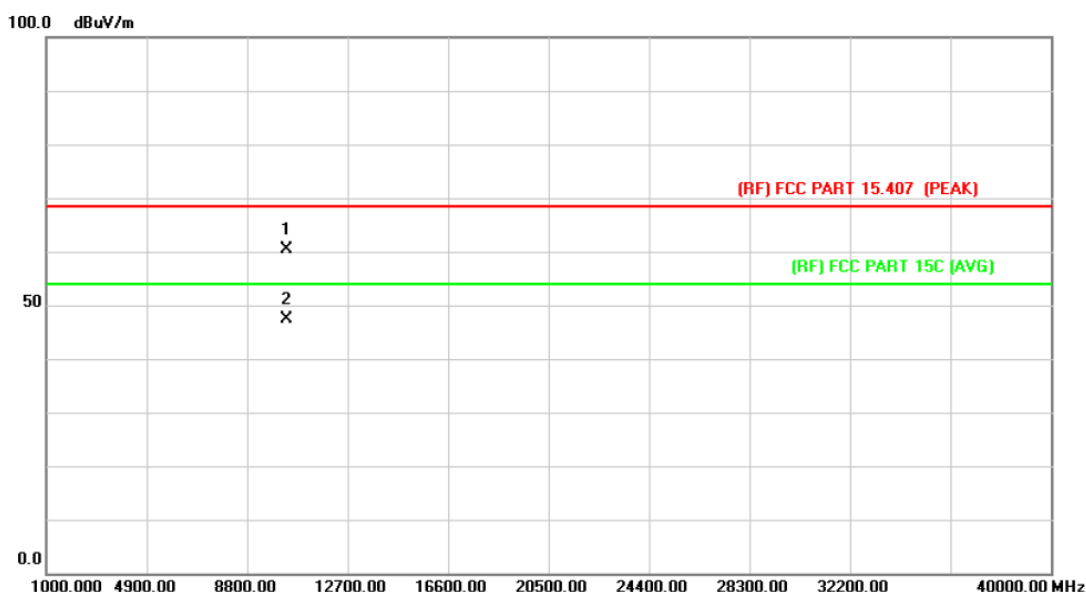

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10358.950	44.80	15.57	60.37	68.30	-7.93	peak
2	*	10359.962	31.68	15.58	47.26	54.00	-6.74	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

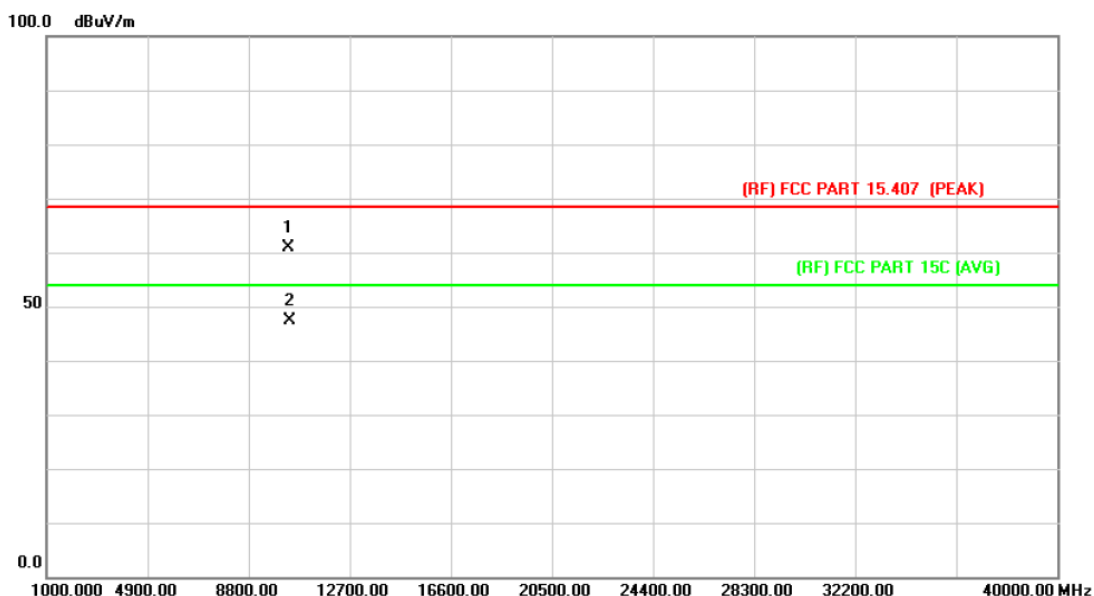

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10359.450	45.33	15.58	60.91	68.30	-7.39	peak
2	*	10364.700	31.72	15.60	47.32	54.00	-6.68	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

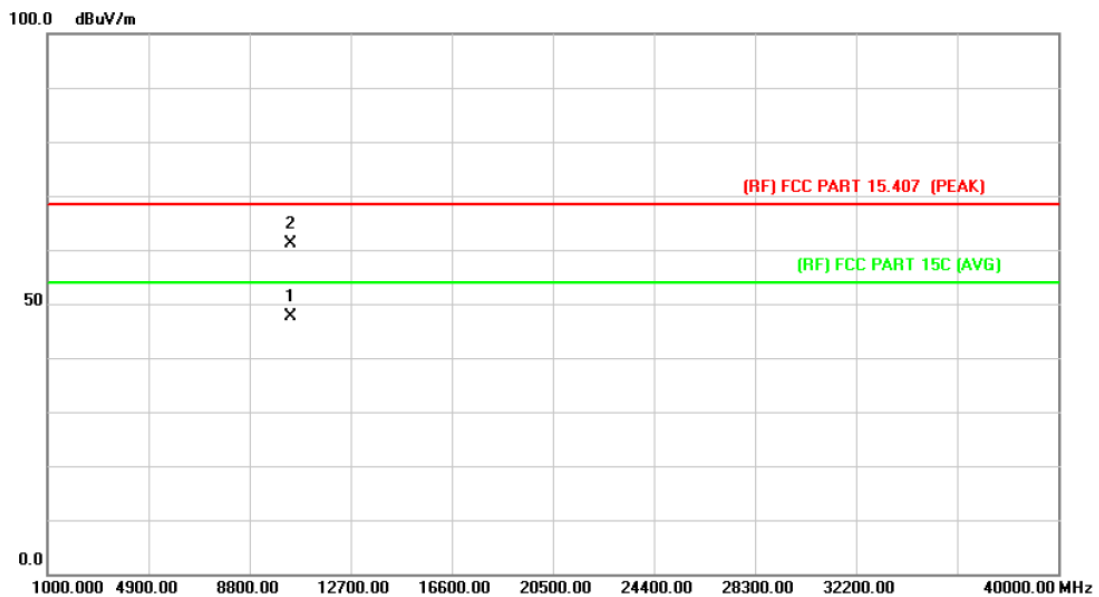

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10400.225	31.89	15.66	47.55	54.00	-6.45	AVG
2		10400.325	45.35	15.66	61.01	68.30	-7.29	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

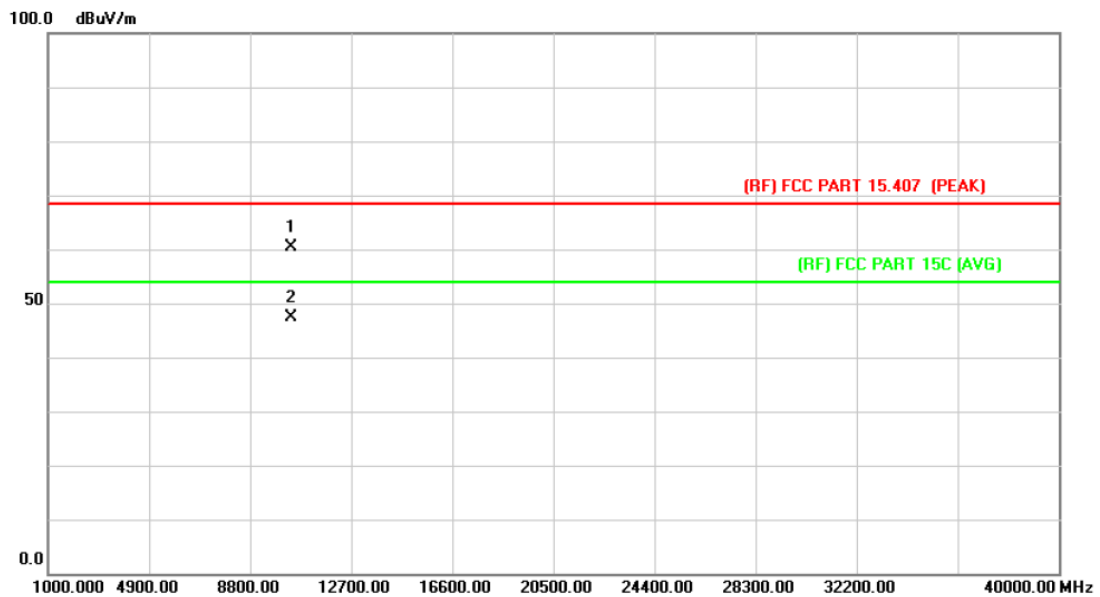

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10400.675	44.72	15.66	60.38	68.30	-7.92	peak
2	*	10401.175	31.84	15.66	47.50	54.00	-6.50	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

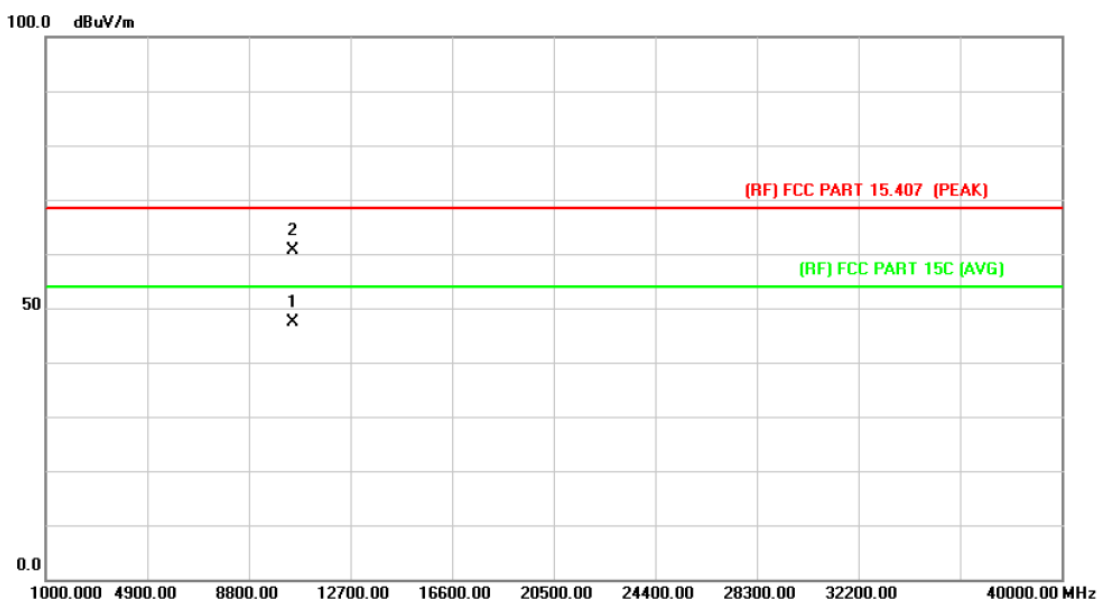

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10479.800	31.64	15.79	47.43	54.00	-6.57	AVG
2		10480.750	44.77	15.79	60.56	68.30	-7.74	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

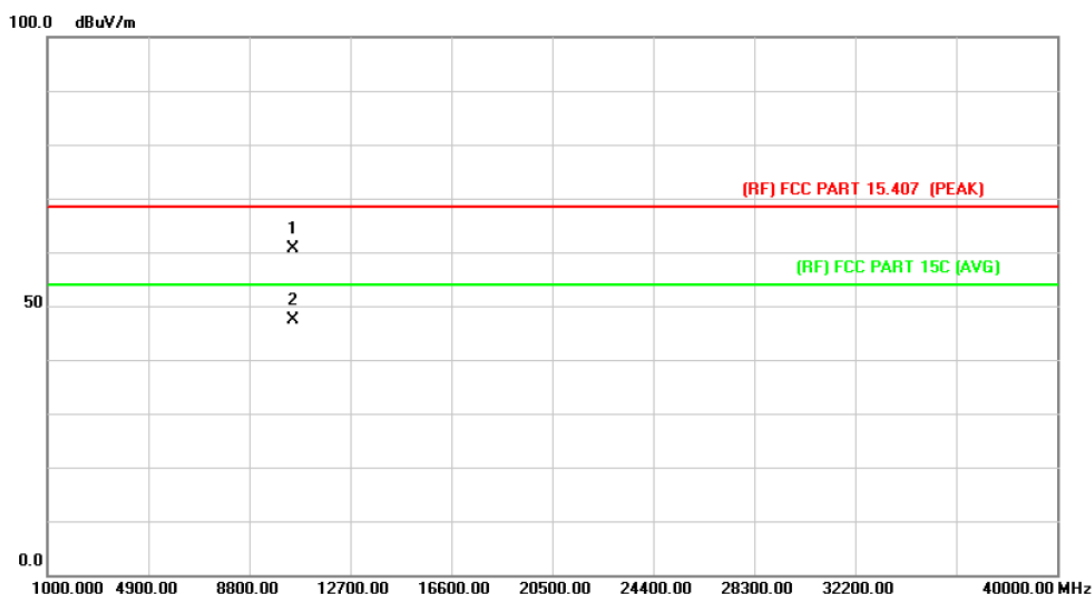

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10477.225	44.85	15.79	60.64	68.30	-7.66	peak
2	*	10479.600	31.70	15.79	47.49	54.00	-6.51	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

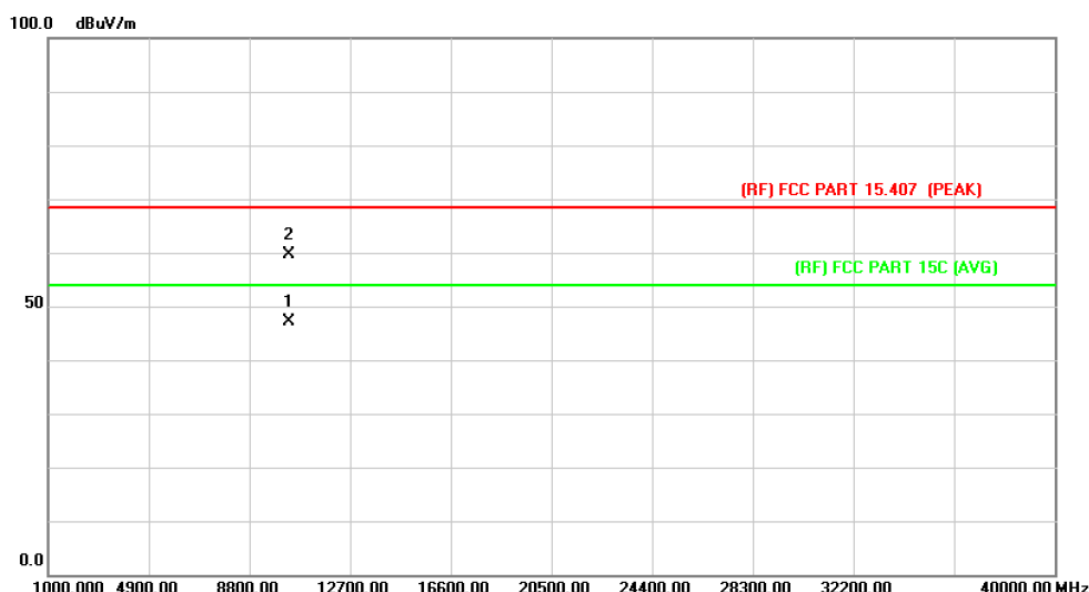

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10358.476	31.58	15.57	47.15	54.00	-6.85	AVG
2		10359.928	44.10	15.58	59.68	68.30	-8.62	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

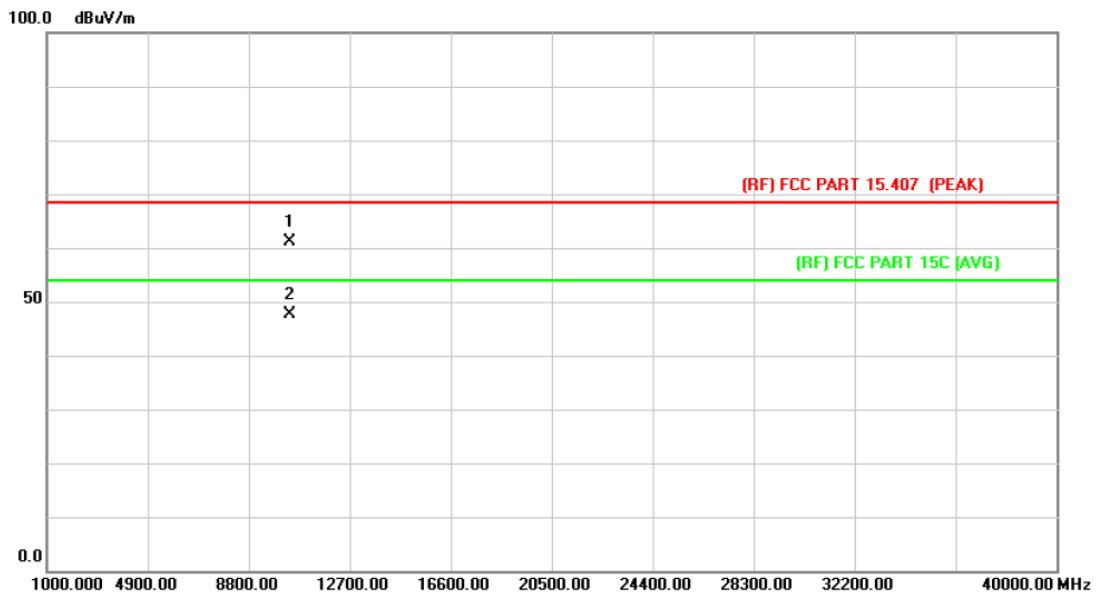

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10361.289	45.63	15.60	61.23	68.30	-7.07	peak
2	*	10365.486	31.98	15.60	47.58	54.00	-6.42	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

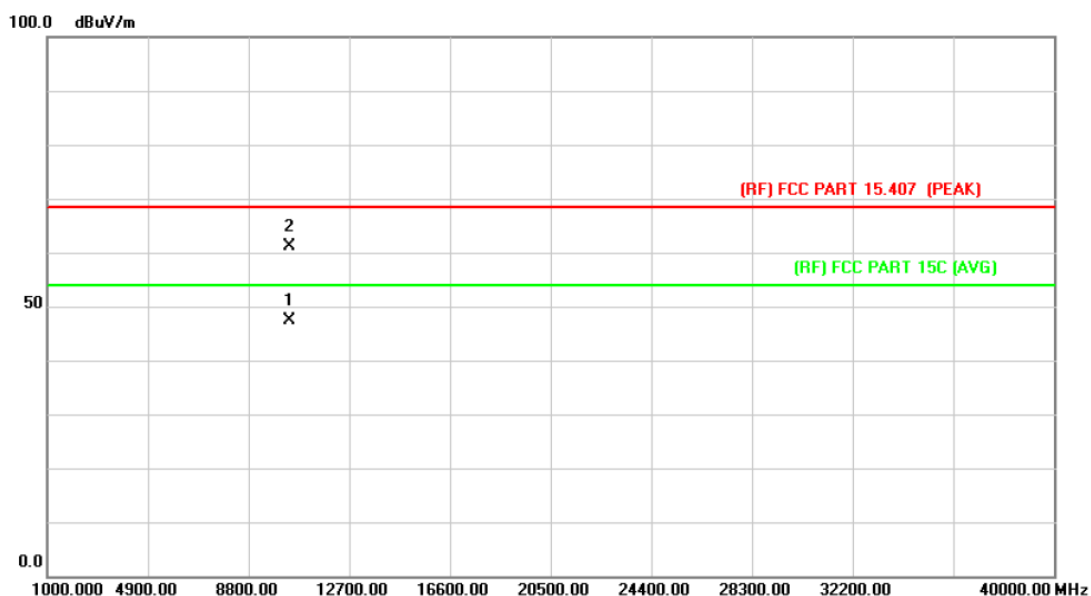

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10400.875	31.80	15.66	47.46	54.00	-6.54	AVG
2		10401.321	45.58	15.66	61.24	68.30	-7.06	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

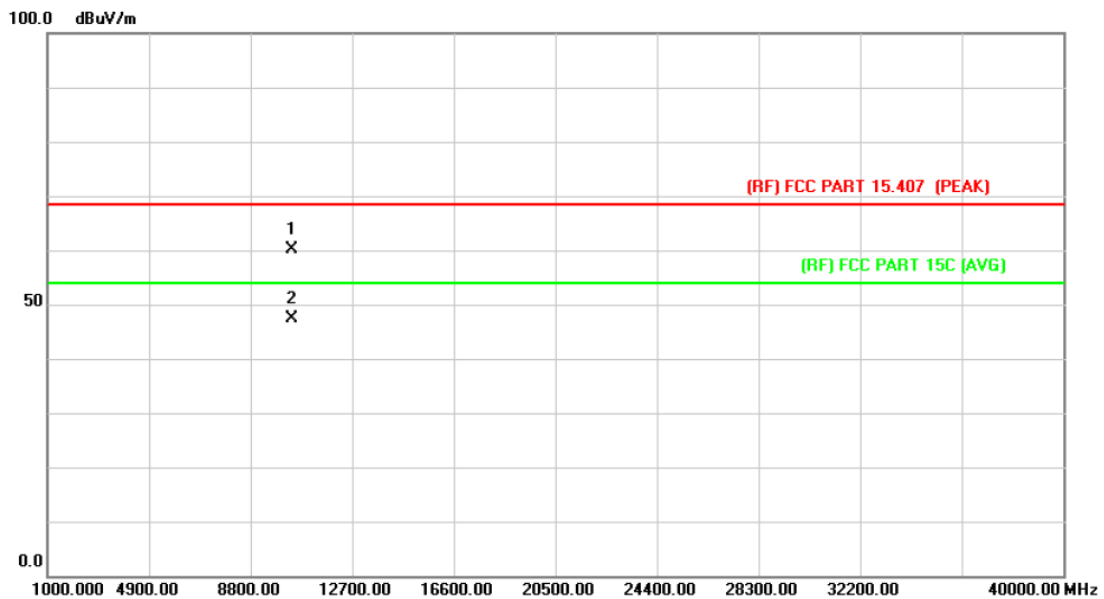

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10400.615	44.50	15.66	60.16	68.30	-8.14	peak
2	*	10402.238	31.61	15.66	47.27	54.00	-6.73	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

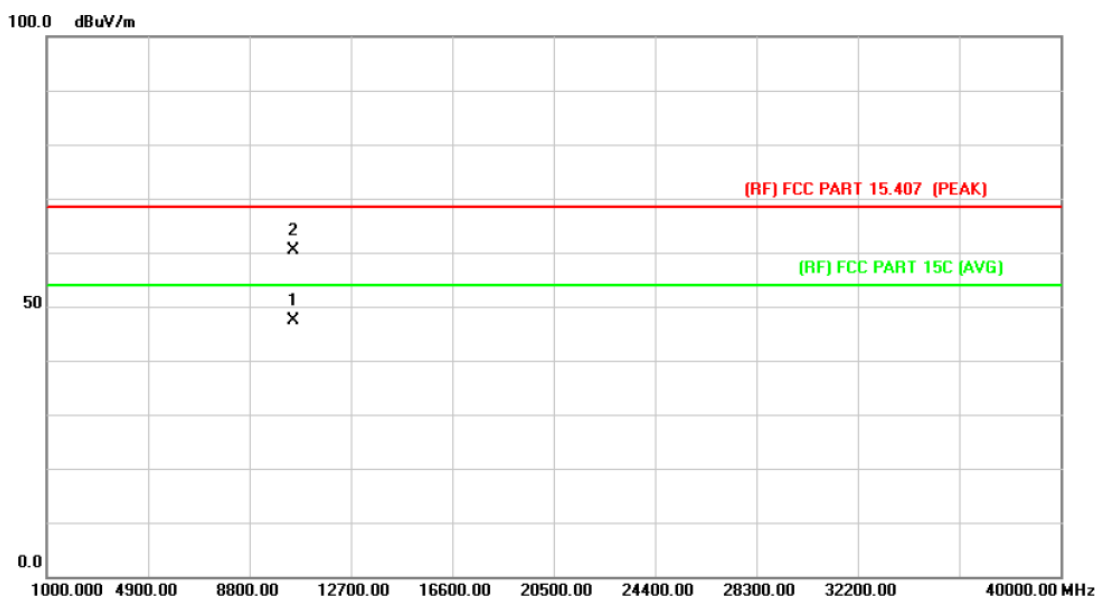

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10478.364	31.71	15.79	47.50	54.00	-6.50	AVG
2		10481.378	44.57	15.79	60.36	68.30	-7.94	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

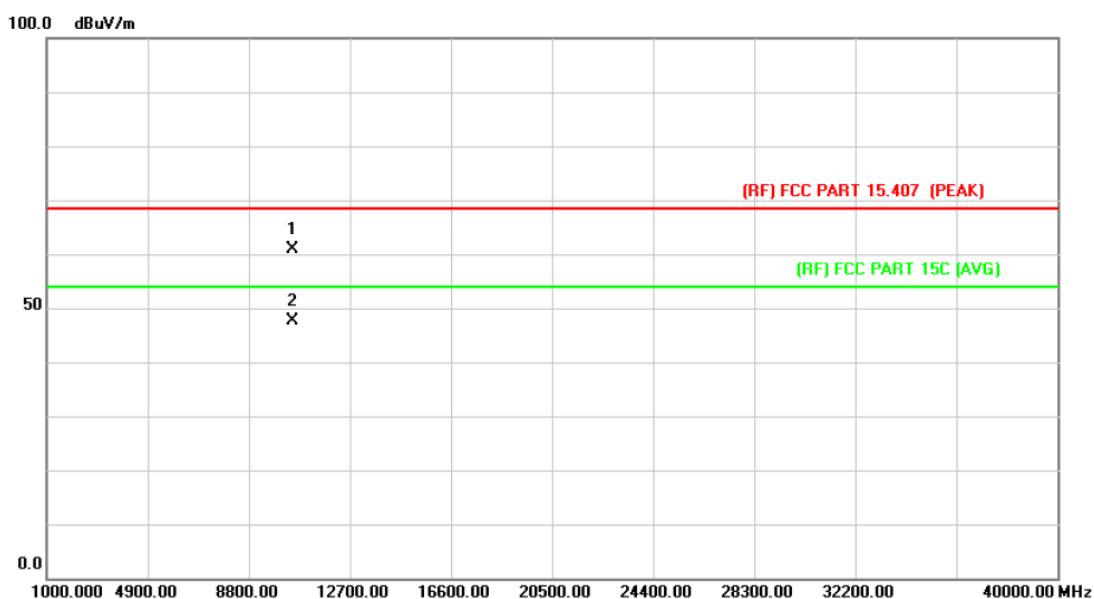

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10478.463	45.10	15.79	60.89	68.30	-7.41	peak
2	*	10480.635	31.86	15.79	47.65	54.00	-6.35	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

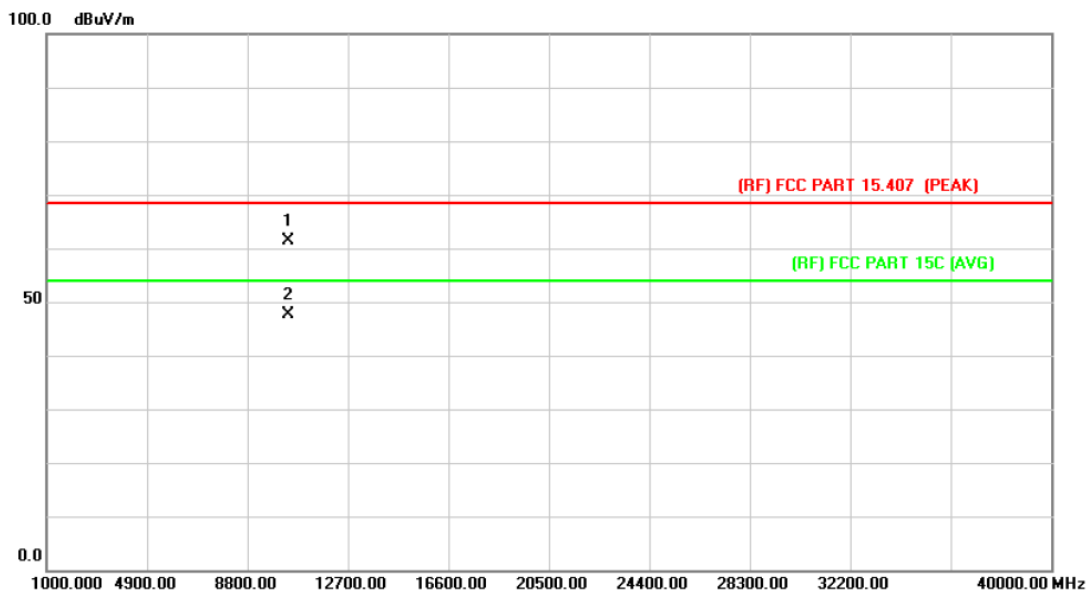

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10361.264	45.73	15.60	61.33	68.30	-6.97	peak
2	*	10364.458	32.02	15.60	47.62	54.00	-6.38	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5180MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

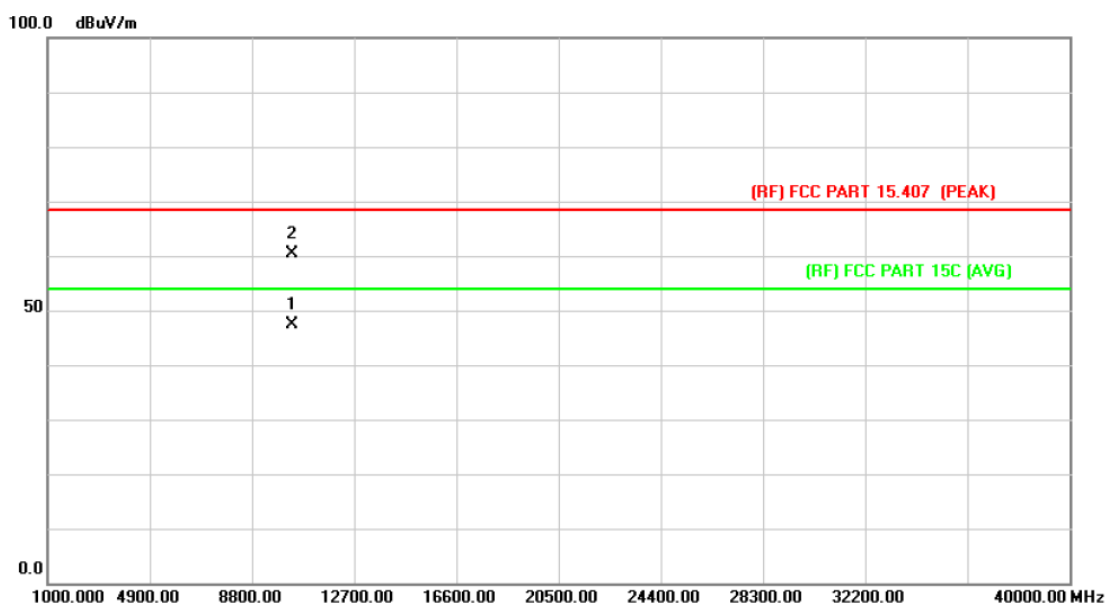

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10358.662	31.80	15.57	47.37	54.00	-6.63	AVG
2		10359.855	44.81	15.58	60.39	68.30	-7.91	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

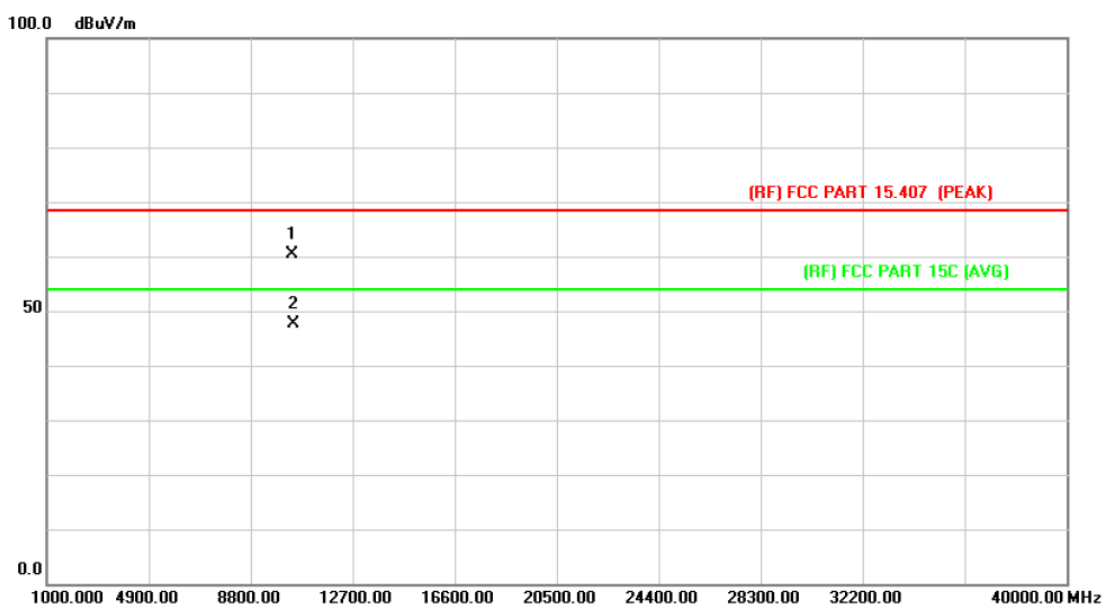

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10401.364	44.66	15.66	60.32	68.30	-7.98	peak
2	*	10442.207	31.83	15.73	47.56	54.00	-6.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5200MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

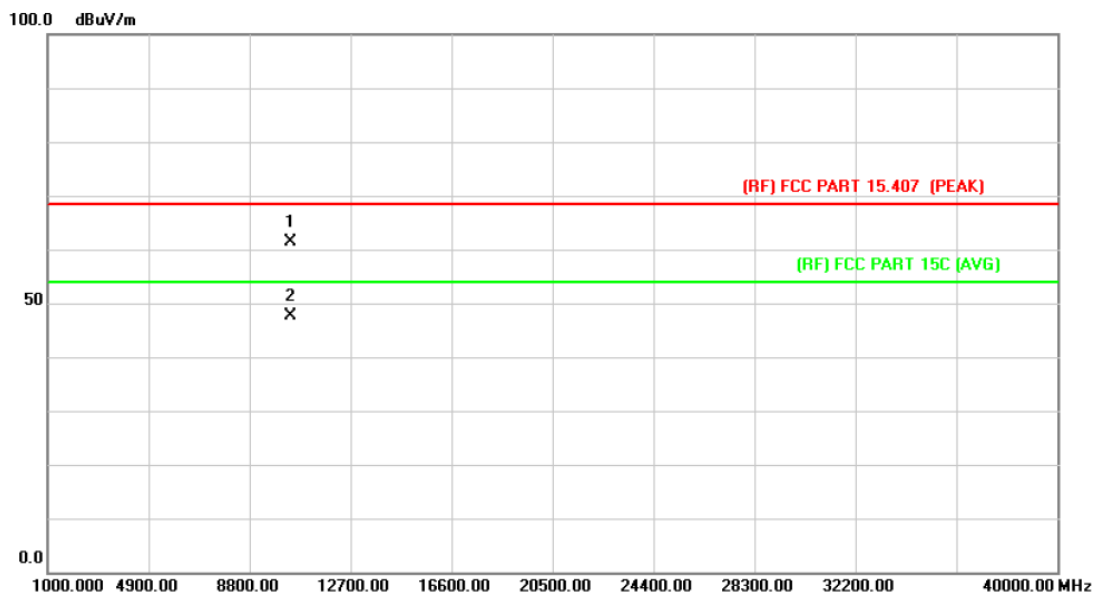

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10400.388	45.68	15.66	61.34	68.30	-6.96	peak
2	*	10401.813	32.02	15.66	47.68	54.00	-6.32	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

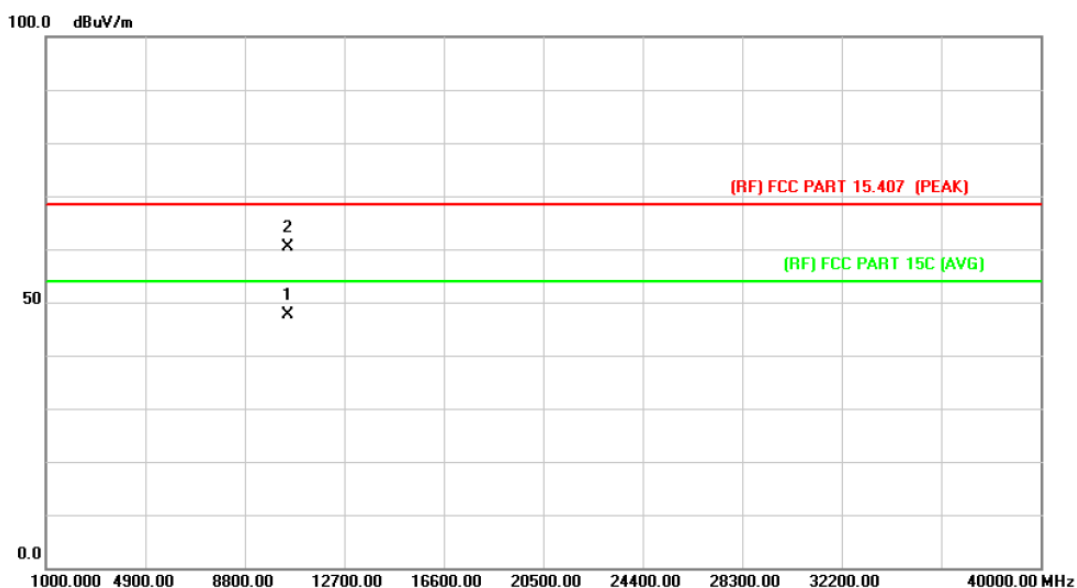

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10479.448	31.87	15.79	47.66	54.00	-6.34	AVG
2		10481.175	44.49	15.79	60.28	68.30	-8.02	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5240MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

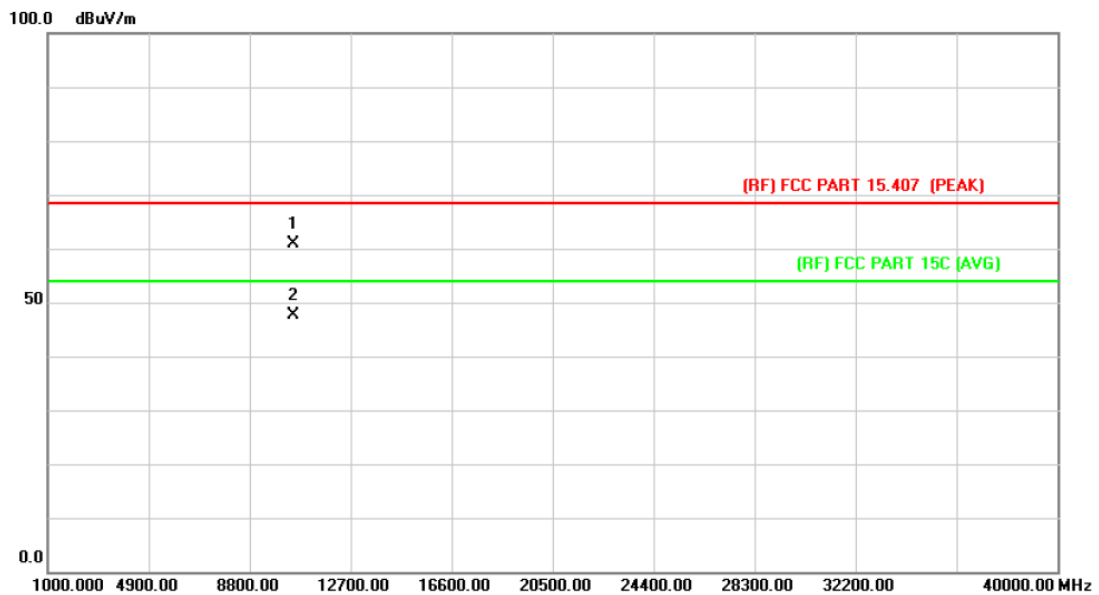

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10478.534	44.99	15.79	60.78	68.30	-7.52	peak
2	*	10481.228	31.81	15.79	47.60	54.00	-6.40	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5190MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

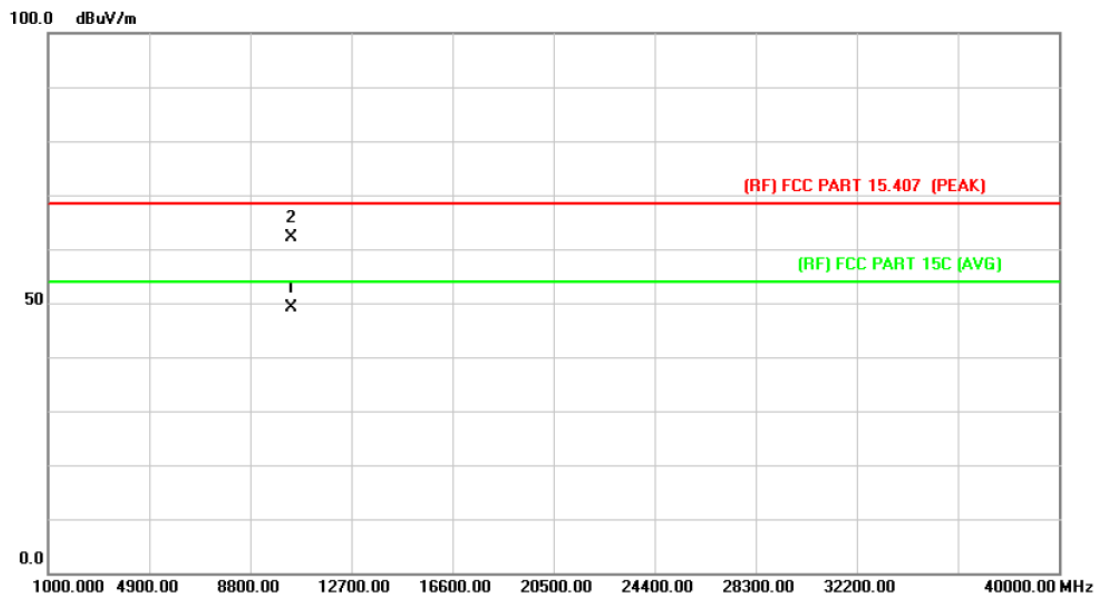

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10379.550	33.62	15.61	49.23	54.00	-4.77	AVG
2		10382.350	46.44	15.62	62.06	68.30	-6.24	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5190MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

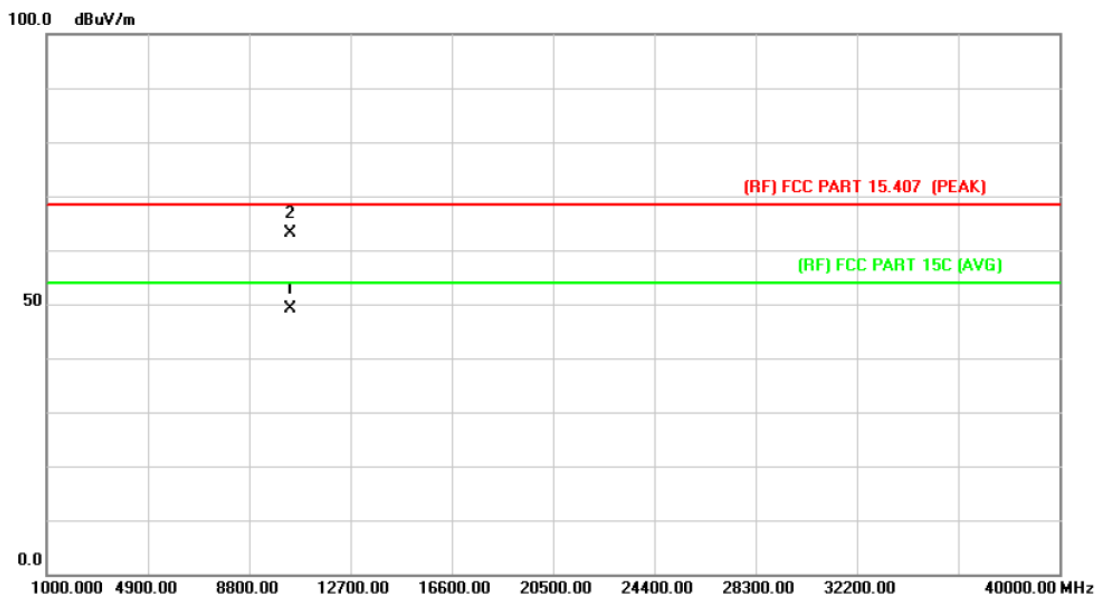

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10377.225	33.60	15.61	49.21	54.00	-4.79	AVG
2		10383.700	47.59	15.62	63.21	68.30	-5.09	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5230MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

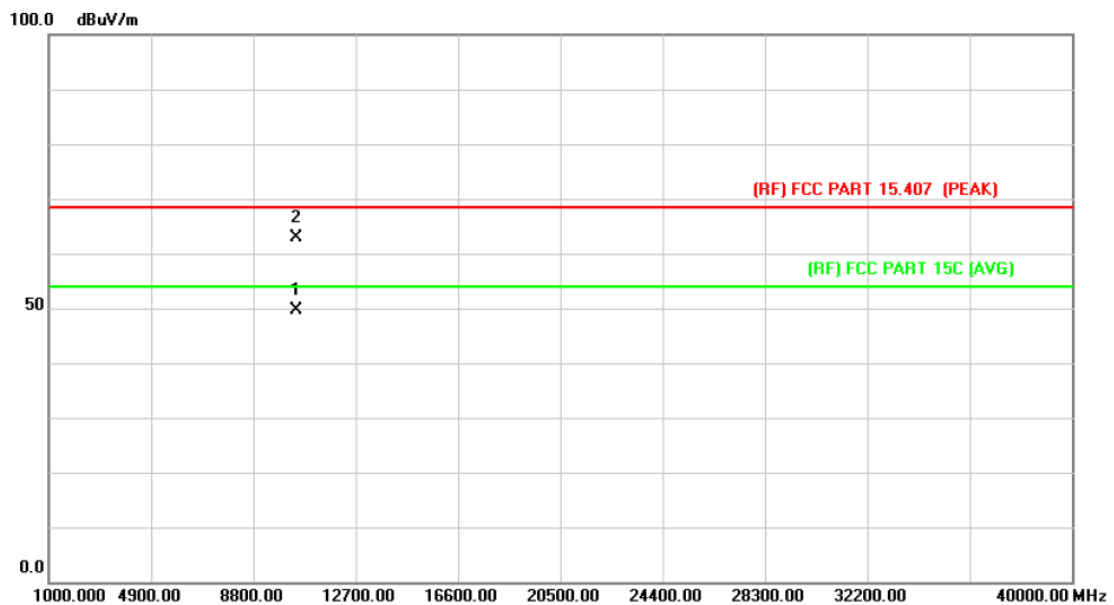

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10455.200	33.86	15.75	49.61	54.00	-4.39	AVG
2		10460.800	47.15	15.76	62.91	68.30	-5.39	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5230MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

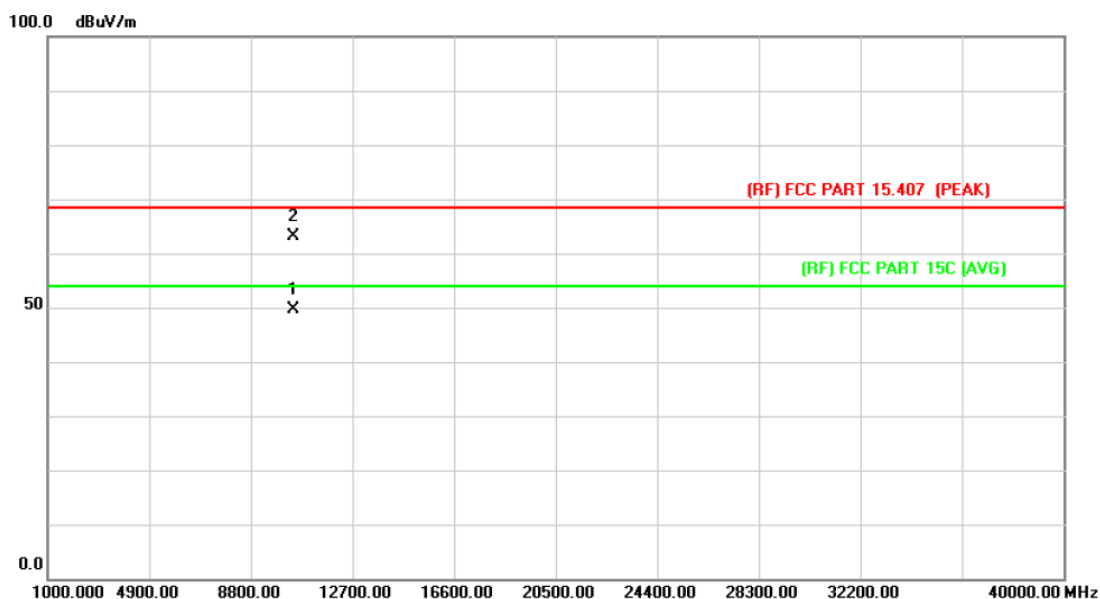

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10459.275	33.88	15.76	49.64	54.00	-4.36	AVG
2		10461.100	47.26	15.76	63.02	68.30	-5.28	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5190MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

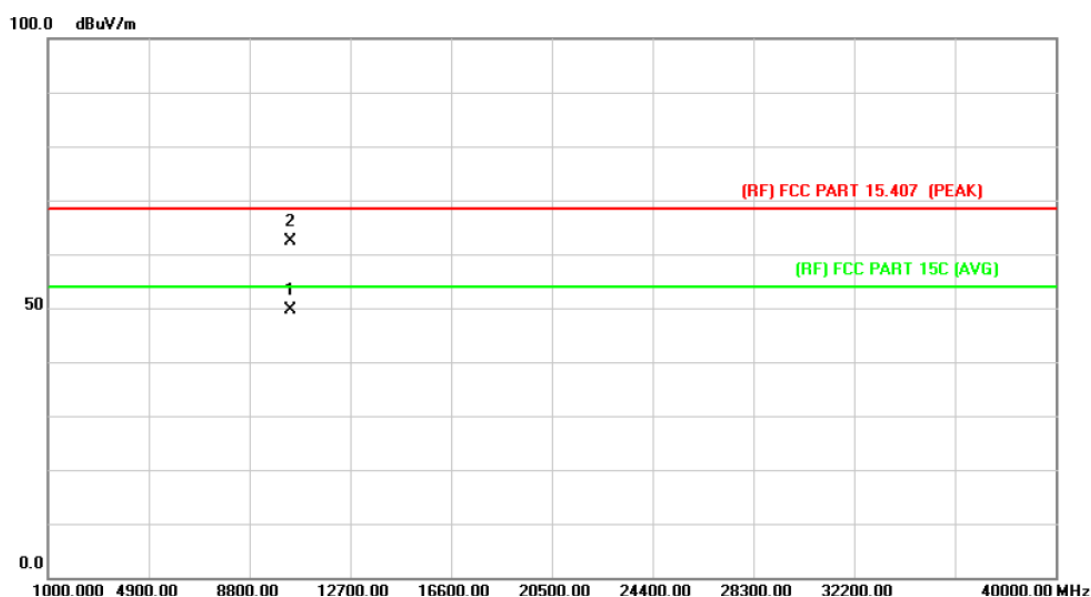

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10379.547	34.07	15.61	49.68	54.00	-4.32	AVG
2		10382.369	46.74	15.62	62.36	68.30	-5.94	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5190MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

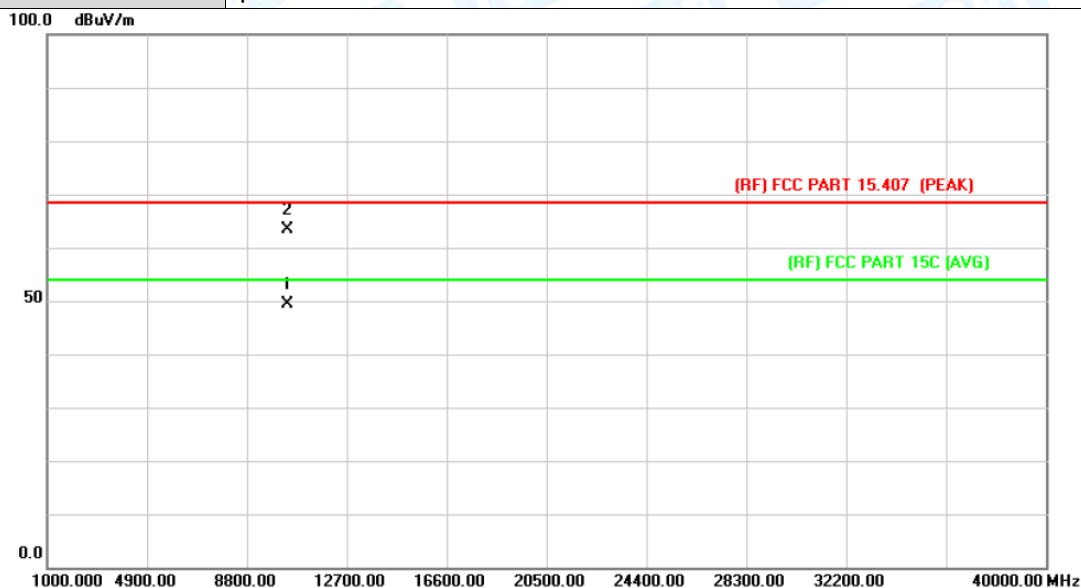

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10379.286	33.75	15.61	49.36	54.00	-4.64	AVG
2		10383.745	47.84	15.62	63.46	68.30	-4.84	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5230MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

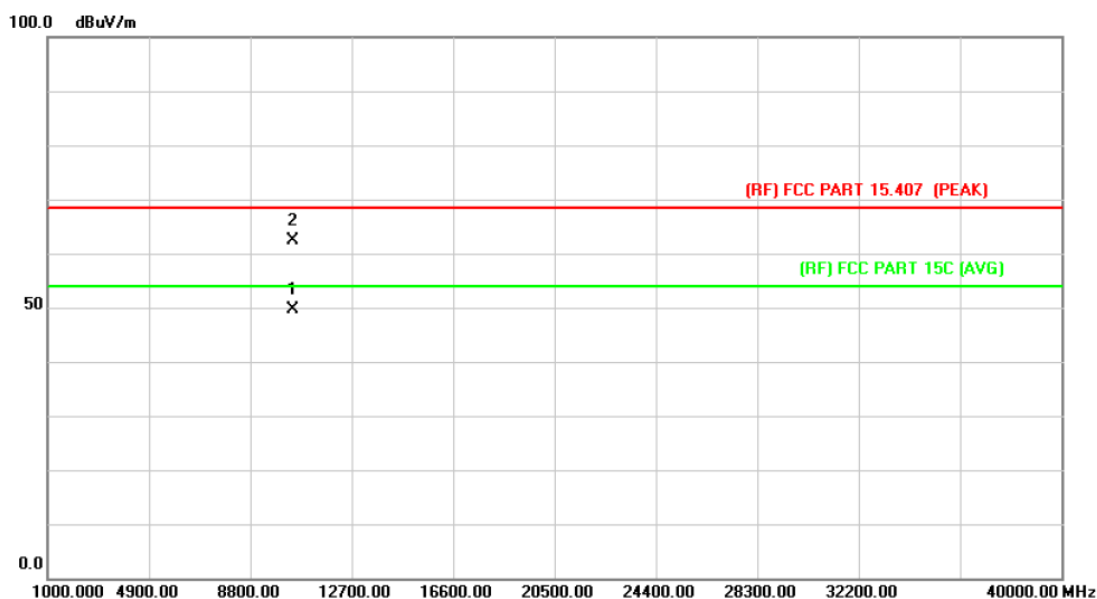

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10457.118	33.98	15.76	49.74	54.00	-4.26	AVG
2		10461.334	46.62	15.76	62.38	68.30	-5.92	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5230MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

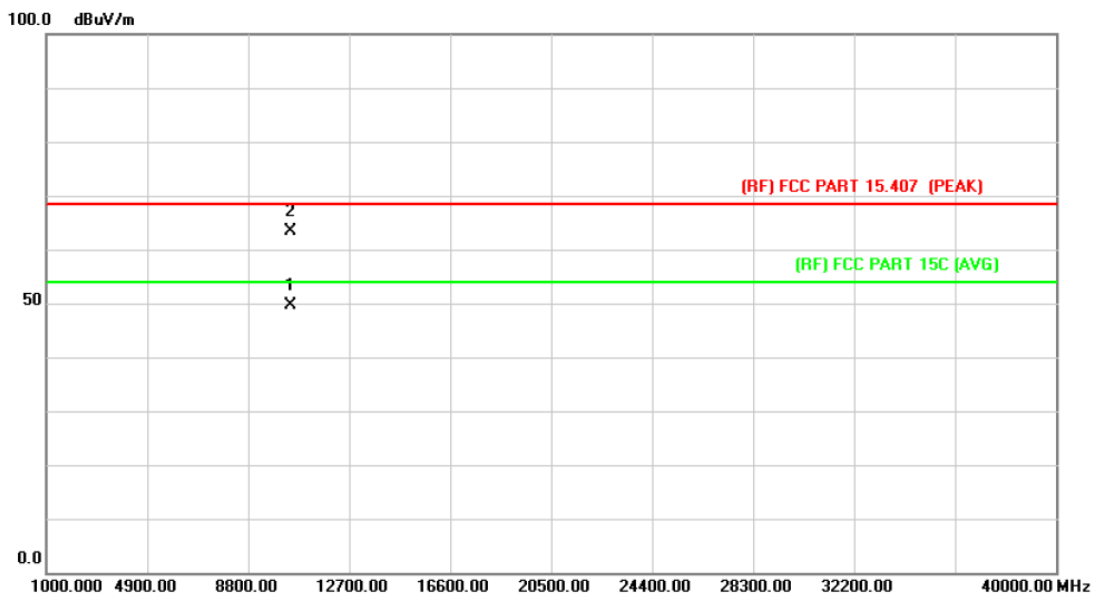

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10459.862	33.99	15.76	49.75	54.00	-4.25	AVG
2		10461.420	47.51	15.76	63.27	68.30	-5.03	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (80) Mode 5210MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

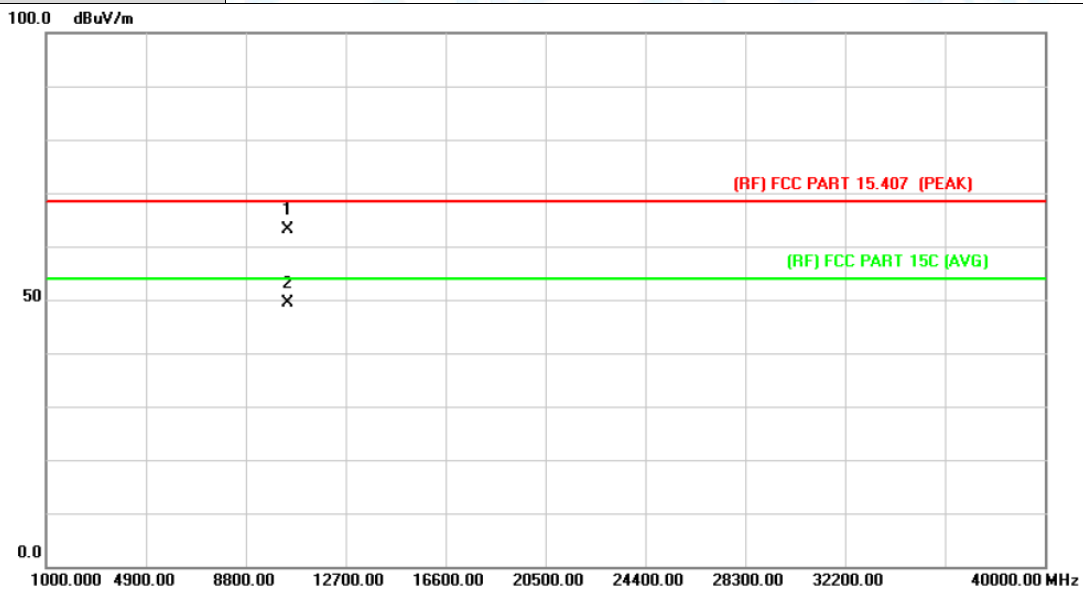

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10417.375	47.33	15.68	63.01	68.30	-5.29	peak
2	*	10424.475	33.64	15.70	49.34	54.00	-4.66	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (80) Mode 5210MHz (U-NII-1)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

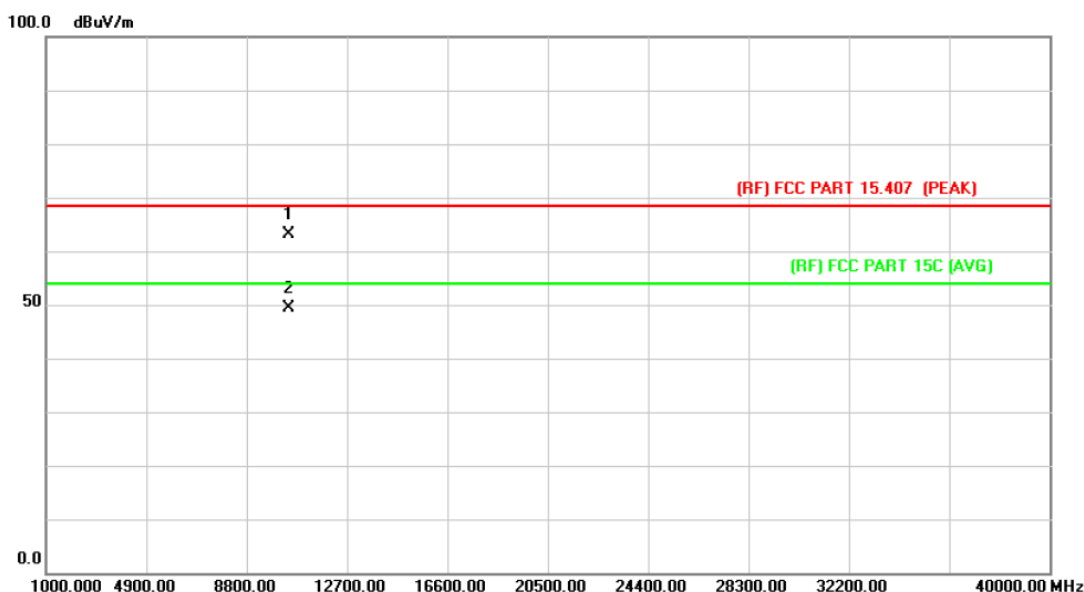


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10418.075	47.55	15.68	63.23	68.30	-5.07	peak
2	*	10420.950	33.70	15.69	49.39	54.00	-4.61	AVG

Emission Level= Read Level+ Correct Factor

5260-5320MHz(U-NII-2A)


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

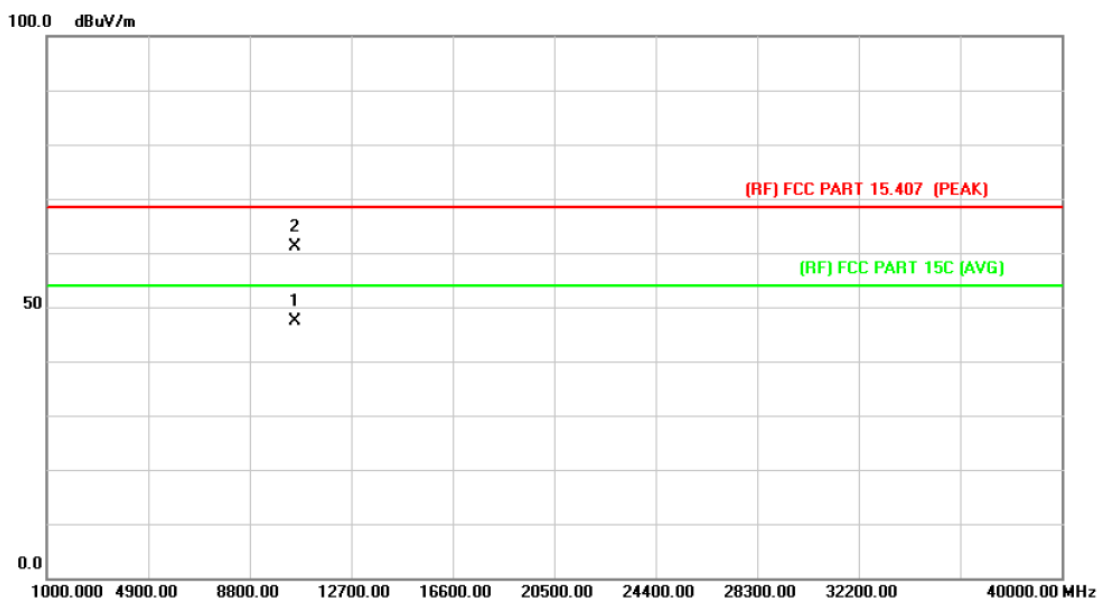

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10519.600	31.49	15.86	47.35	54.00	-6.65	AVG
2		10524.075	45.25	15.87	61.12	68.30	-7.18	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

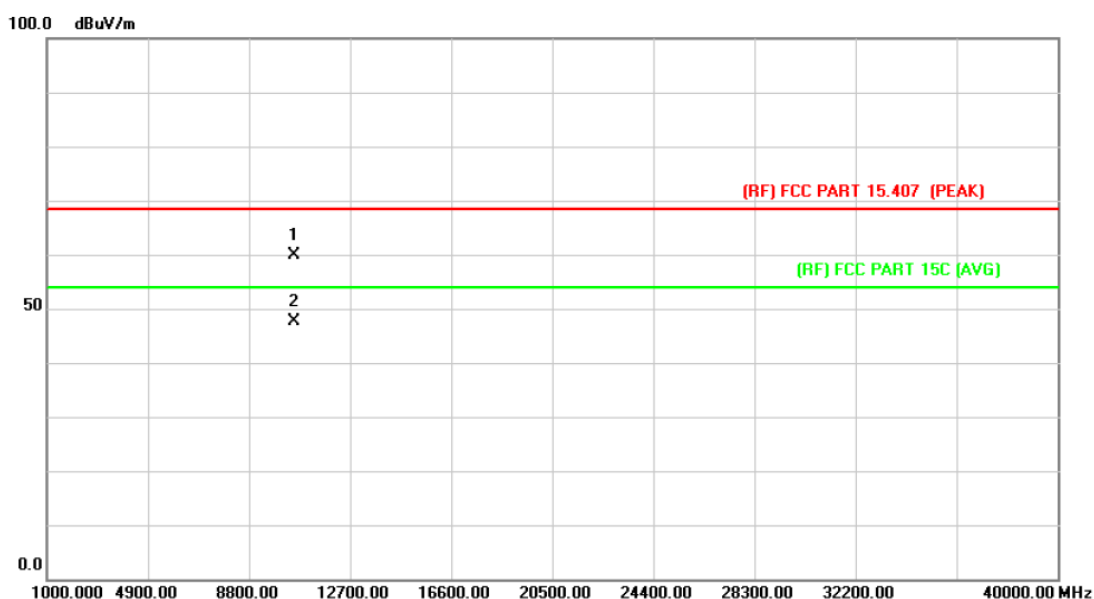

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10516.400	43.93	15.85	59.78	68.30	-8.52	peak
2	*	10519.300	31.79	15.86	47.65	54.00	-6.35	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

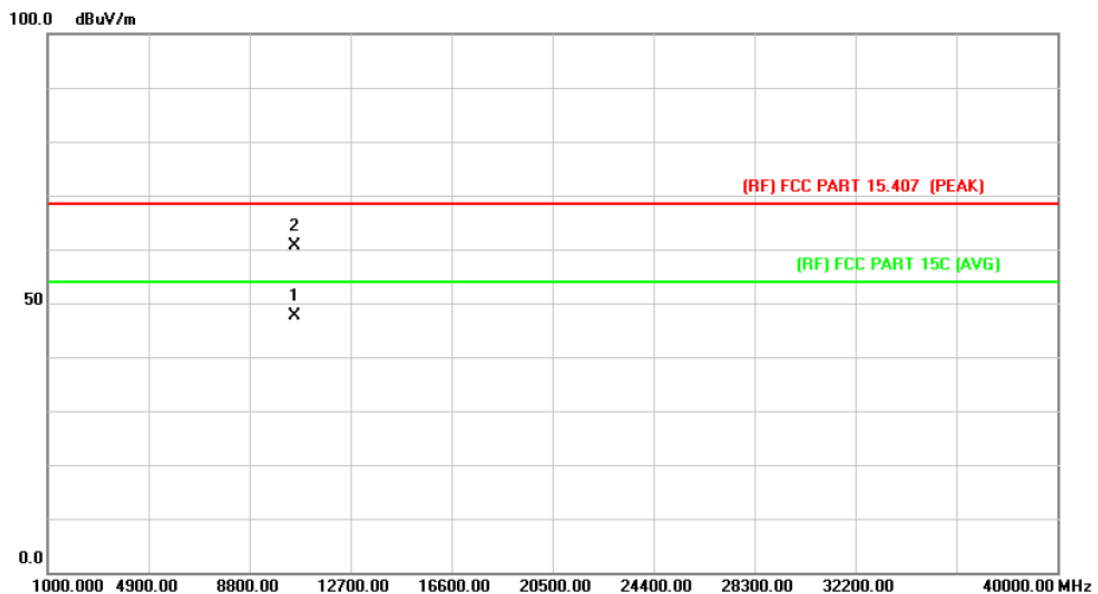

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10560.250	31.80	15.92	47.72	54.00	-6.28	AVG
2		10563.600	44.71	15.93	60.64	68.30	-7.66	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

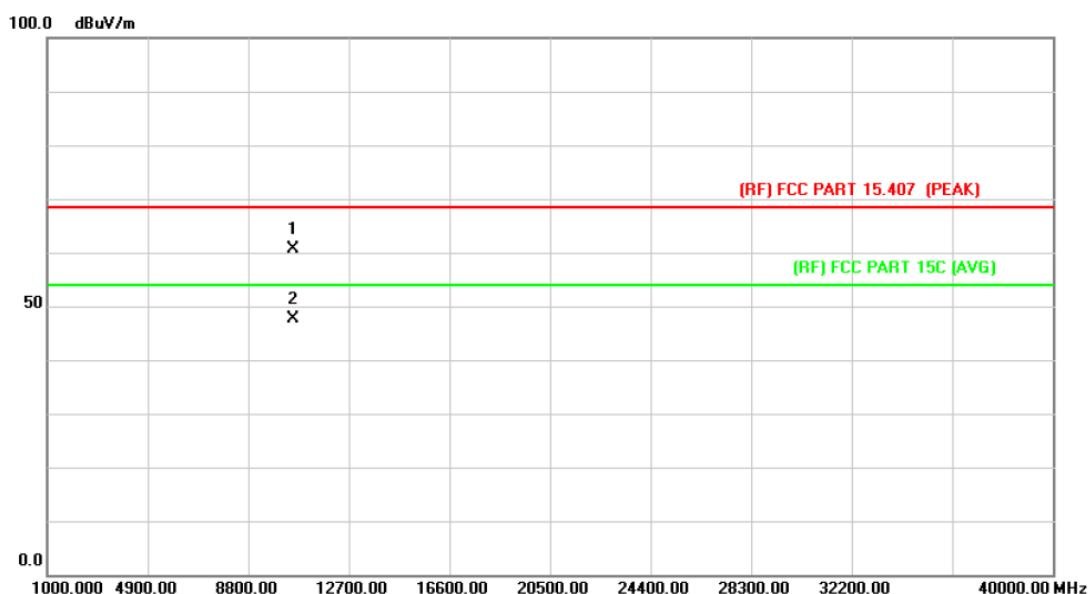

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10556.825	44.73	15.92	60.65	68.30	-7.65	peak
2	*	10559.825	31.62	15.92	47.54	54.00	-6.46	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

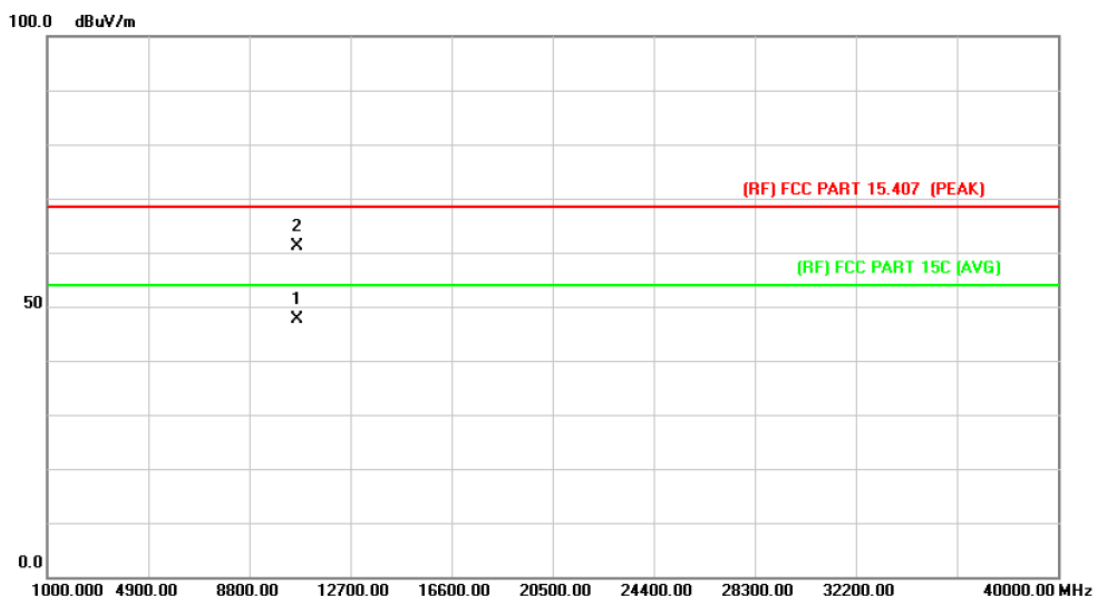

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10641.300	31.65	16.05	47.70	54.00	-6.30	AVG
2		10643.350	44.99	16.06	61.05	68.30	-7.25	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

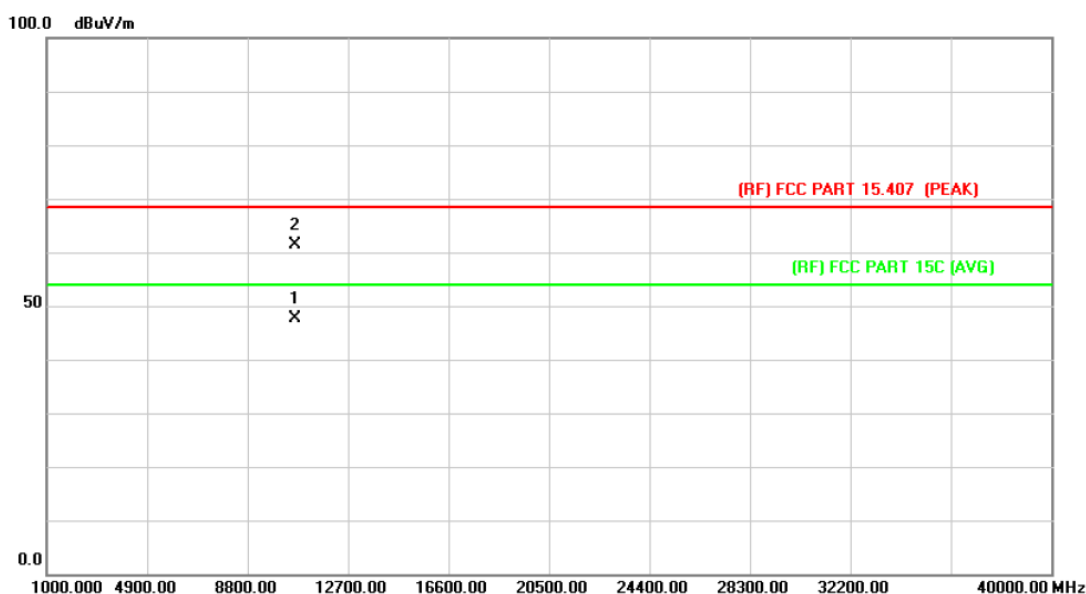

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	10639.025	31.55	16.04	47.59	54.00	-6.41	AVG
2		10641.925	45.41	16.05	61.46	68.30	-6.84	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

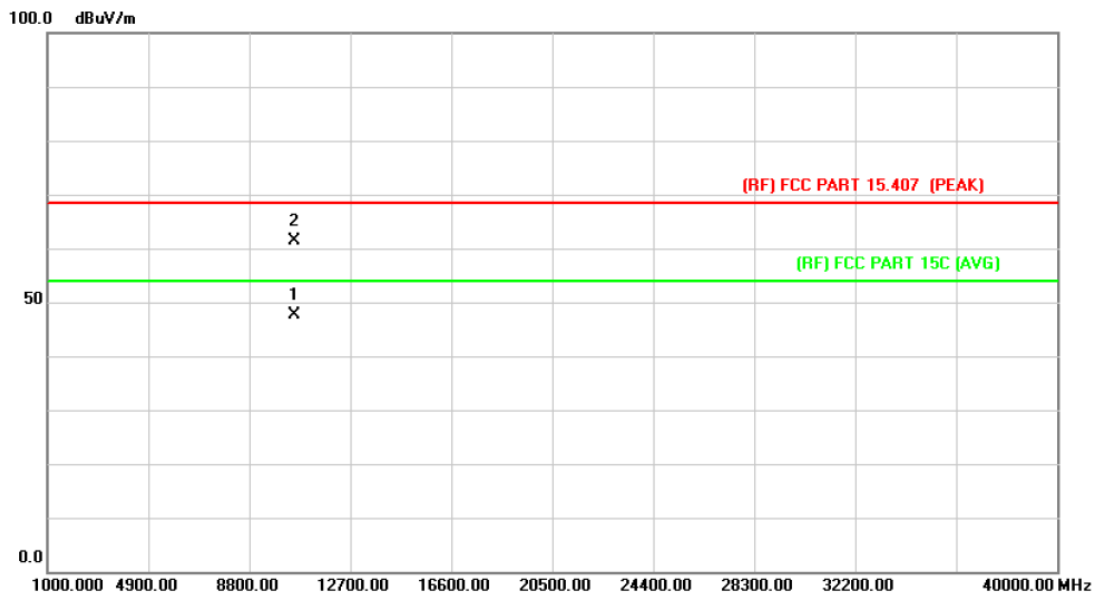

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10520.964	31.77	15.87	47.64	54.00	-6.36	AVG
2		10523.446	45.47	15.87	61.34	68.30	-6.96	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

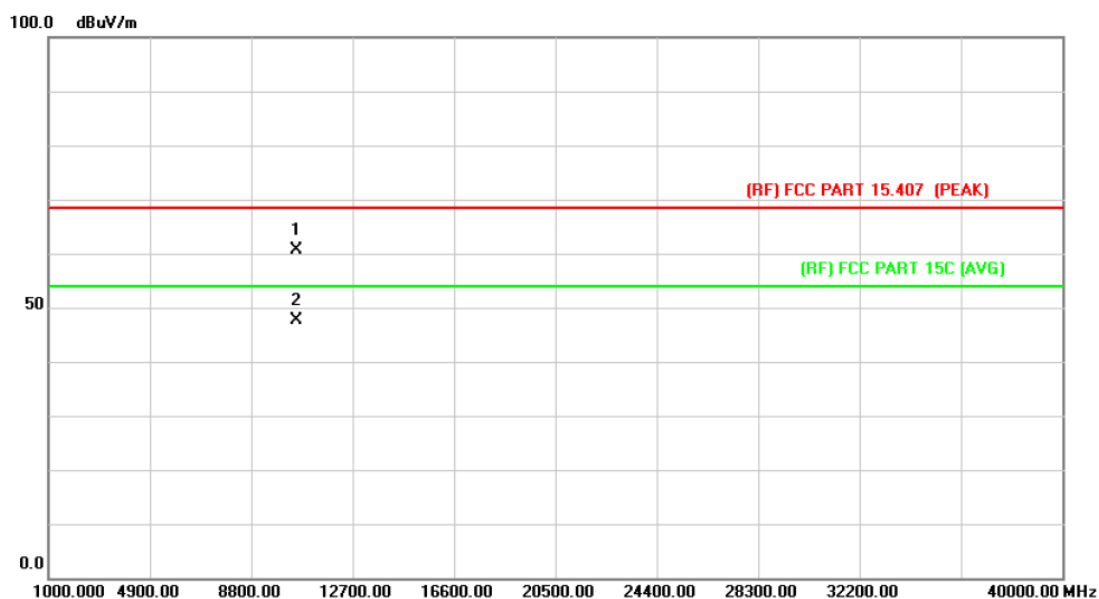

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10517.349	44.71	15.86	60.57	68.30	-7.73	peak
2	*	10519.558	31.88	15.86	47.74	54.00	-6.26	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

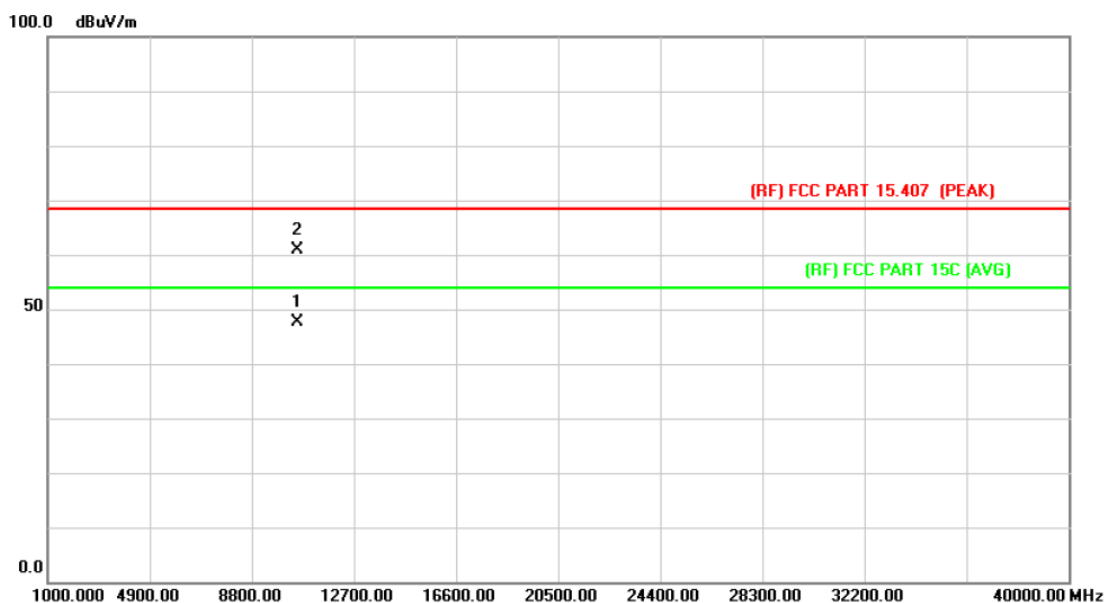

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10561.243	31.77	15.92	47.69	54.00	-6.31	AVG
2		10562.488	44.95	15.92	60.87	68.30	-7.43	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

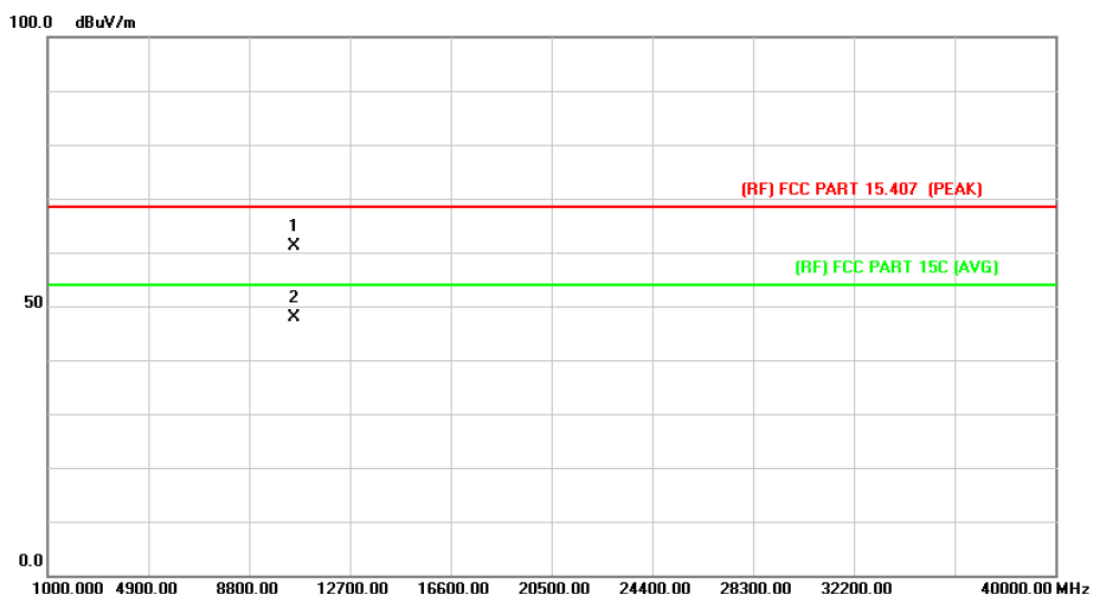

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10557.479	45.13	15.92	61.05	68.30	-7.25	peak
2	*	10559.447	31.96	15.92	47.88	54.00	-6.12	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

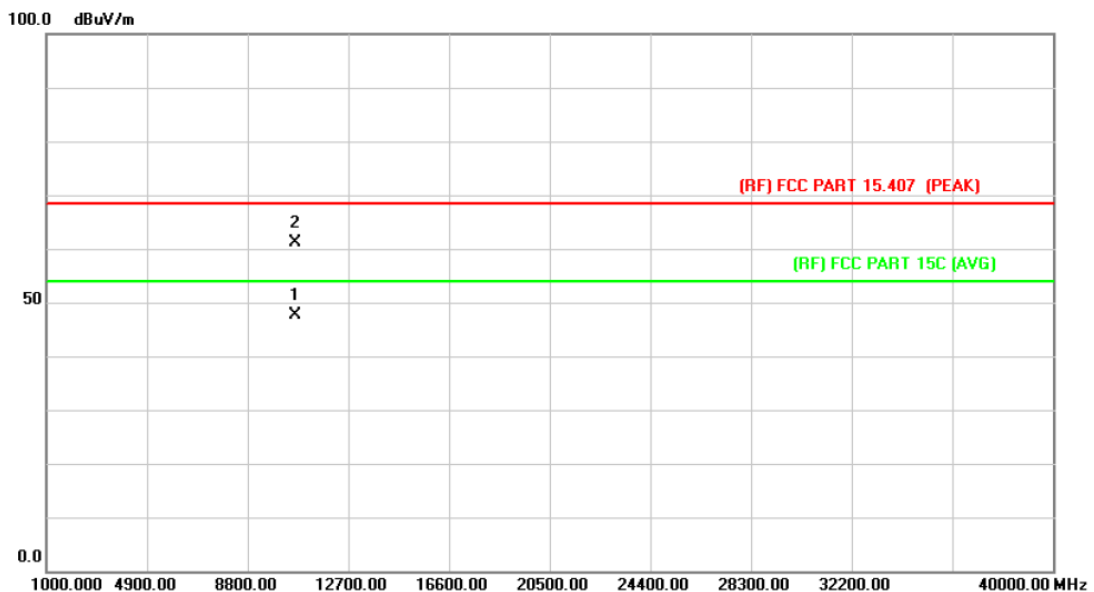

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10642.432	31.50	16.06	47.56	54.00	-6.44	AVG
2		10643.148	45.16	16.06	61.22	68.30	-7.08	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

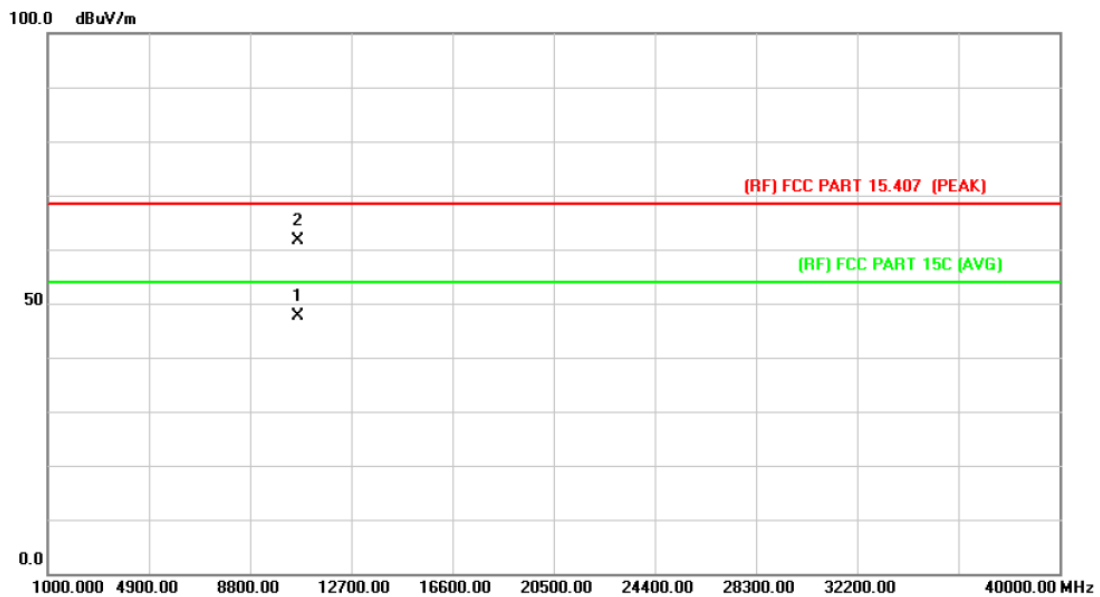

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	10639.885	31.66	16.04	47.70	54.00	-6.30	AVG
2		10642.326	45.60	16.06	61.66	68.30	-6.64	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

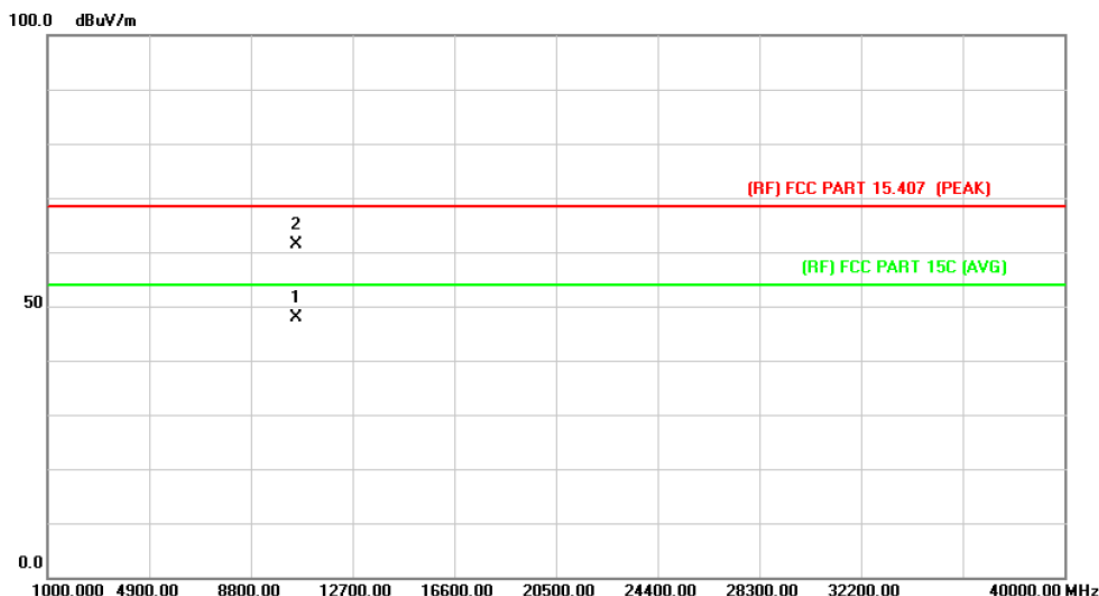

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10521.663	31.93	15.87	47.80	54.00	-6.20	AVG
2		10522.454	45.61	15.87	61.48	68.30	-6.82	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5260MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

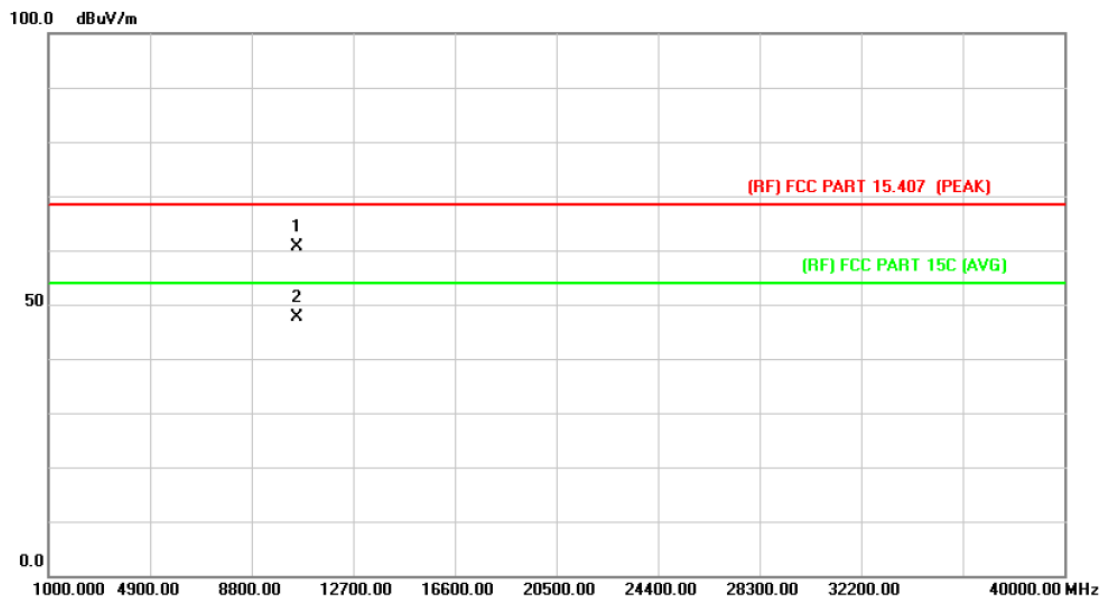

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10518.526	44.82	15.86	60.68	68.30	-7.62	peak
2	*	10519.695	31.69	15.86	47.55	54.00	-6.45	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

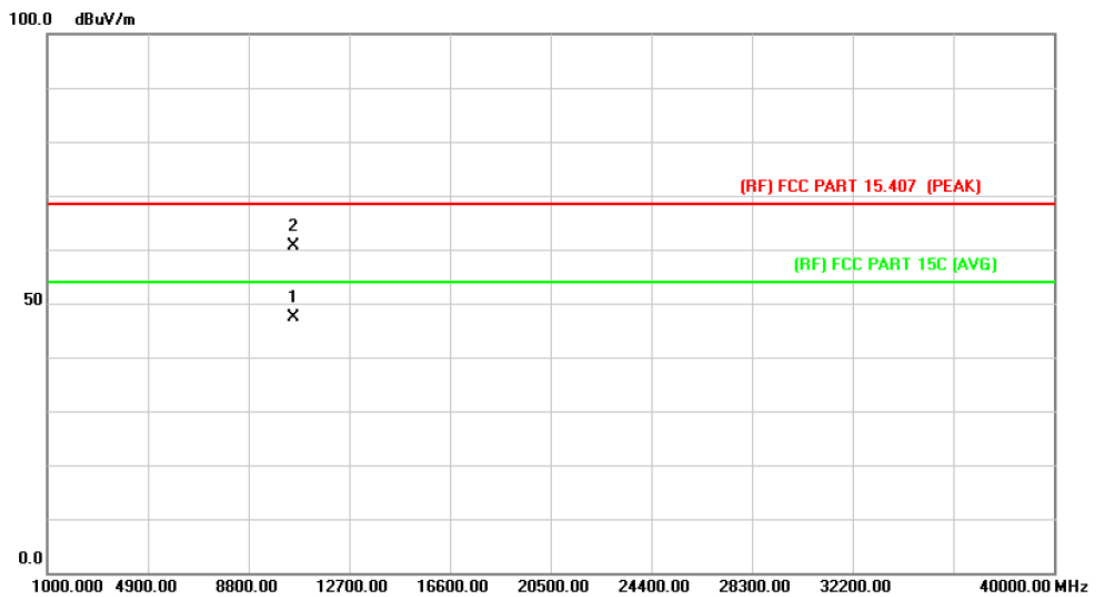

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10561.332	31.36	15.92	47.28	54.00	-6.72	AVG
2		10562.405	44.74	15.92	60.66	68.30	-7.64	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5280MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

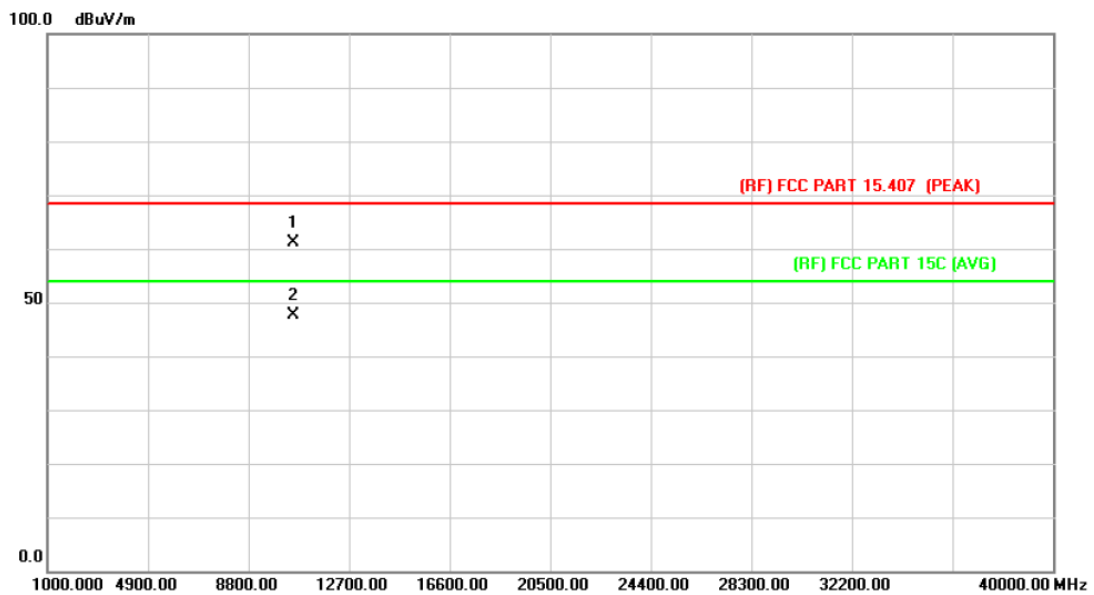

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10558.472	45.31	15.92	61.23	68.30	-7.07	peak
2	*	10559.684	31.74	15.92	47.66	54.00	-6.34	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

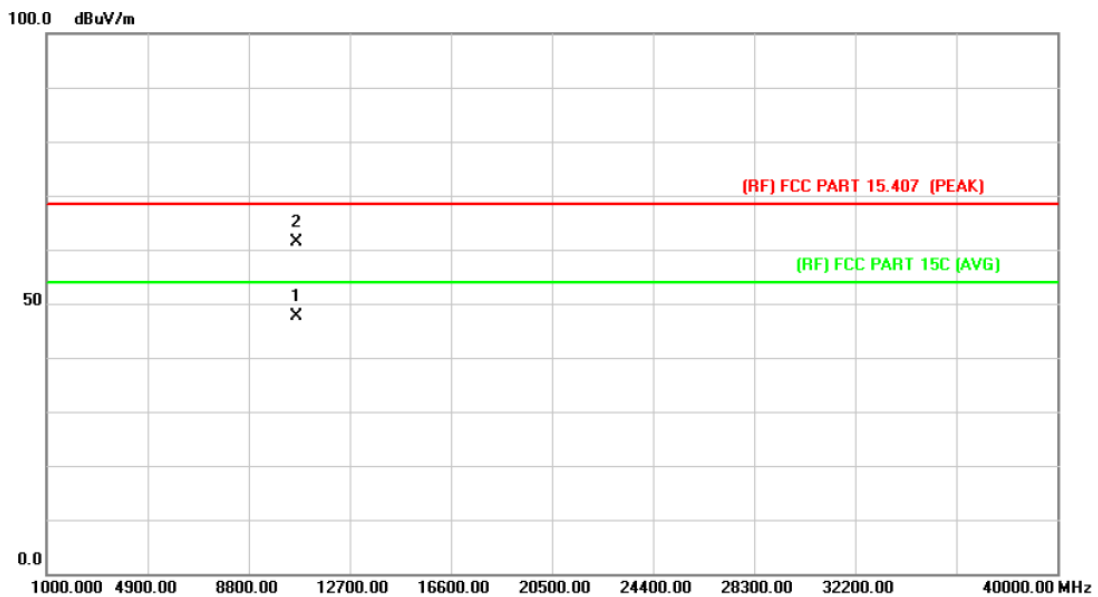

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10642.228	31.53	16.06	47.59	54.00	-6.41	AVG
2		10643.756	45.32	16.06	61.38	68.30	-6.92	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5320MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

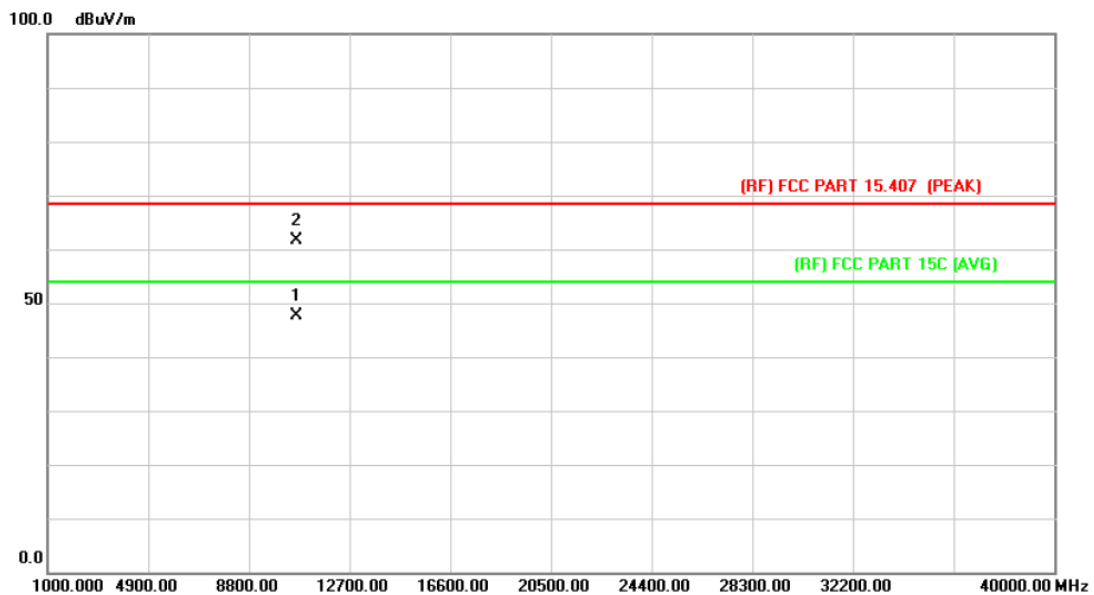

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10639.720	31.52	16.04	47.56	54.00	-6.44	AVG
2		10642.665	45.61	16.06	61.67	68.30	-6.63	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5270MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

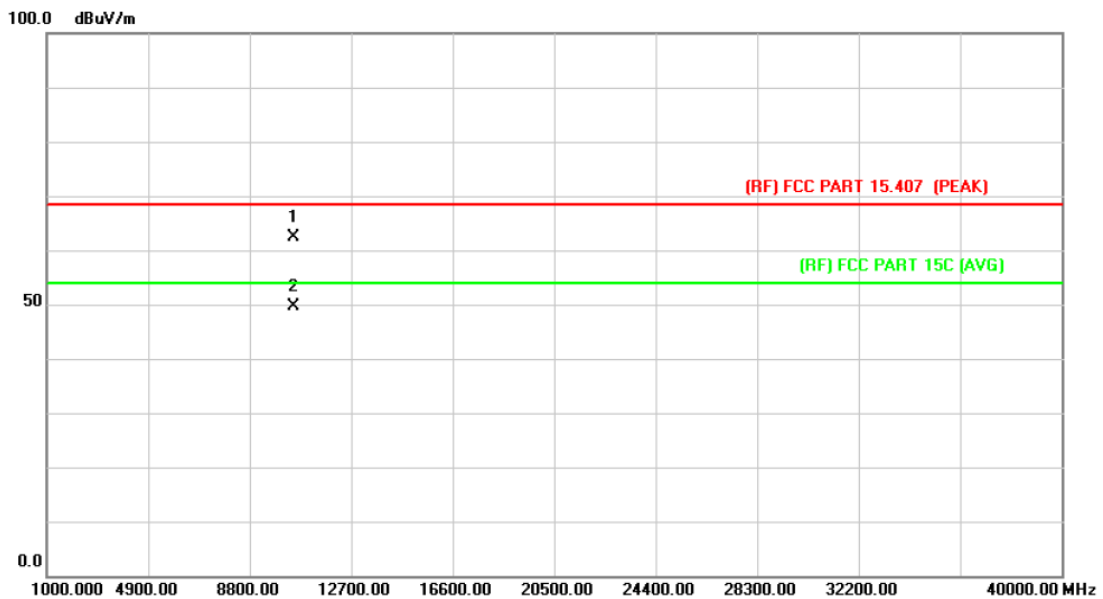

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10486.950	46.63	15.81	62.44	68.30	-5.86	peak
2	*	10492.925	33.83	15.81	49.64	54.00	-4.36	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5270MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

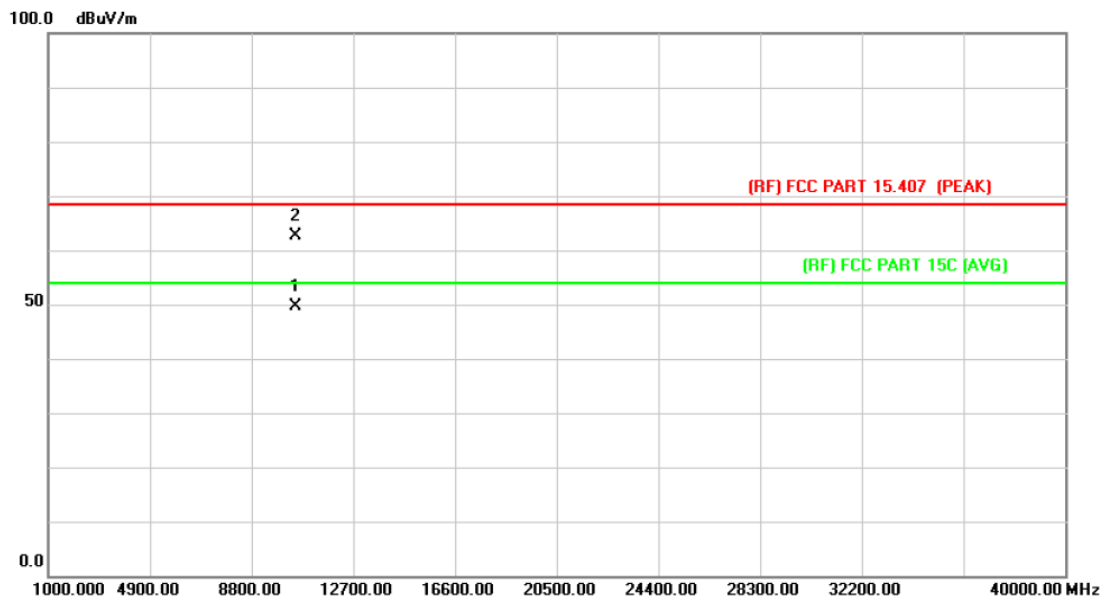

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10489.075	33.75	15.81	49.56	54.00	-4.44	AVG
2		10492.975	46.87	15.81	62.68	68.30	-5.62	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n (40) Mode 5310MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

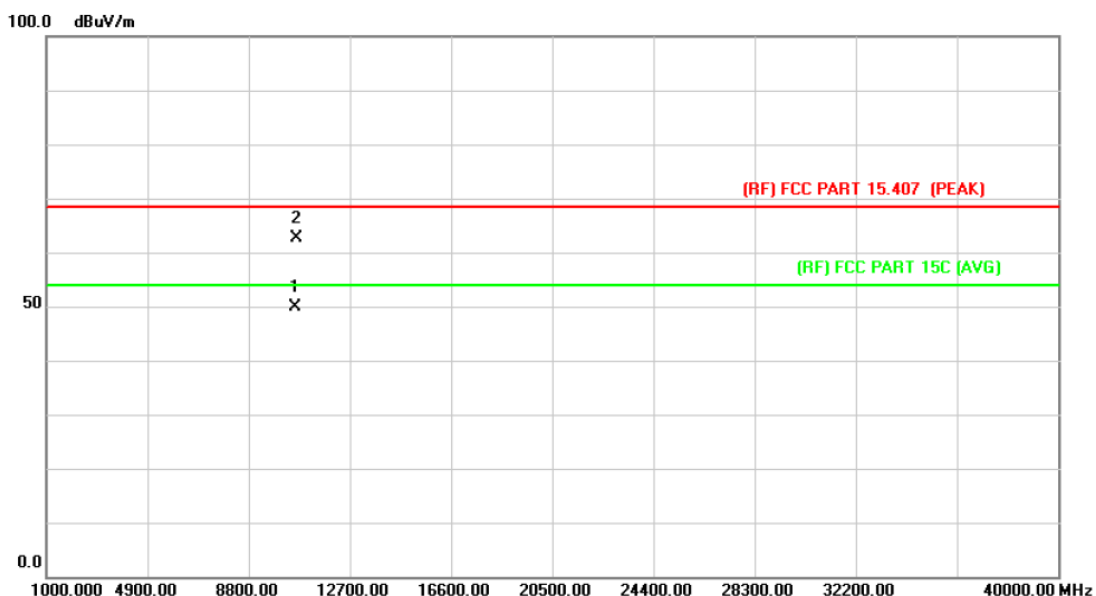

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10619.175	33.86	16.01	49.87	54.00	-4.13	AVG
2		10622.300	46.70	16.02	62.72	68.30	-5.58	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n (40) Mode 5310MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

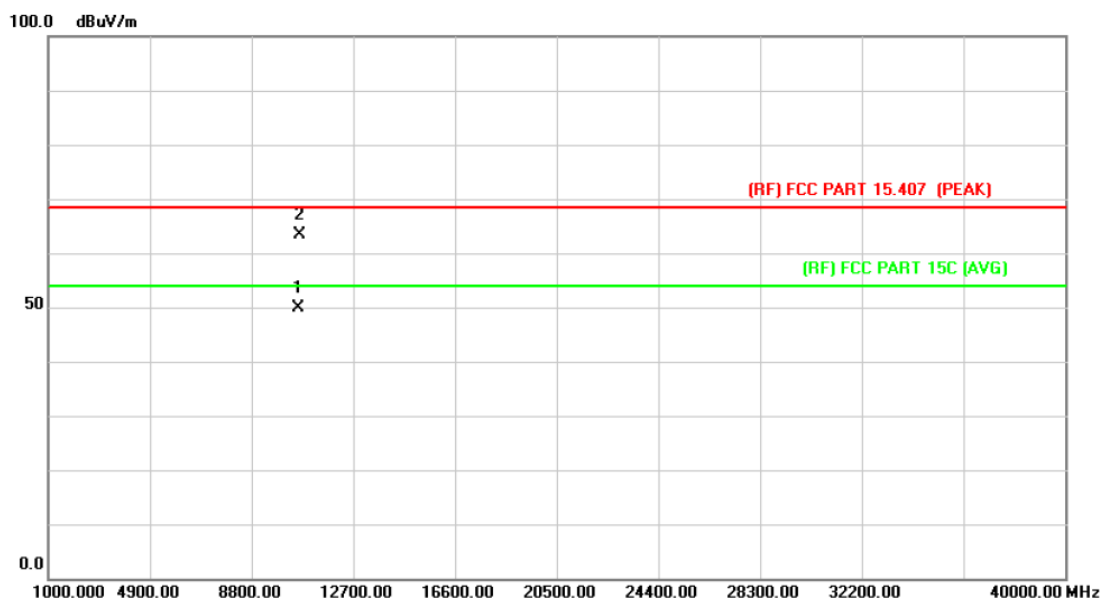

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	10617.150	33.97	16.01	49.98	54.00	-4.02	AVG
2		10624.925	47.26	16.02	63.28	68.30	-5.02	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5270MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

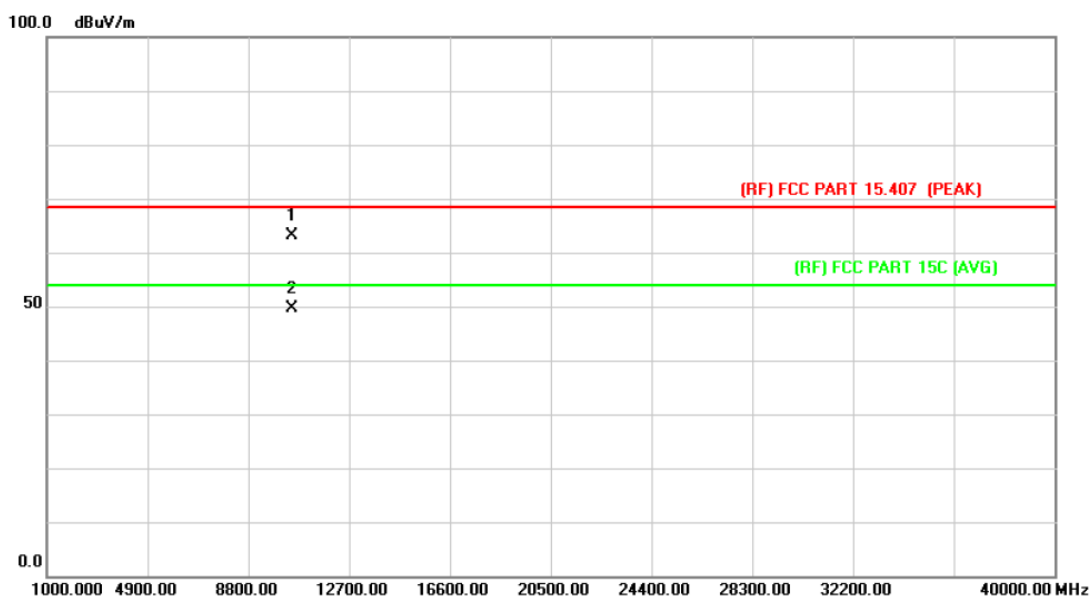

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10487.886	47.37	15.81	63.18	68.30	-5.12	peak
2	*	10492.913	33.92	15.81	49.73	54.00	-4.27	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5270MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

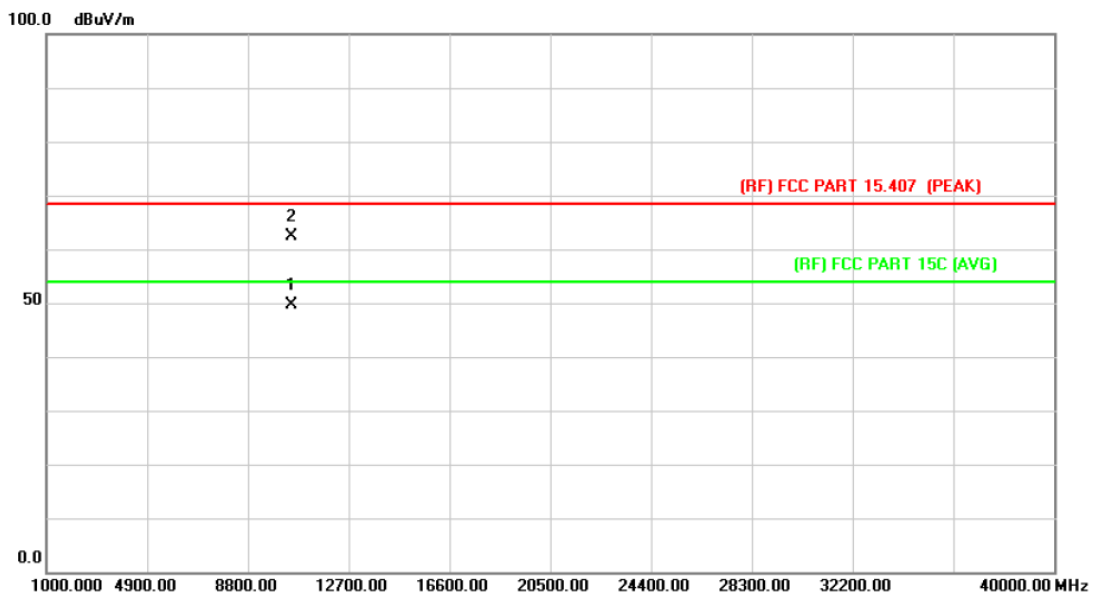

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10489.746	33.91	15.81	49.72	54.00	-4.28	AVG
2		10492.932	46.57	15.81	62.38	68.30	-5.92	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (40) Mode 5310MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

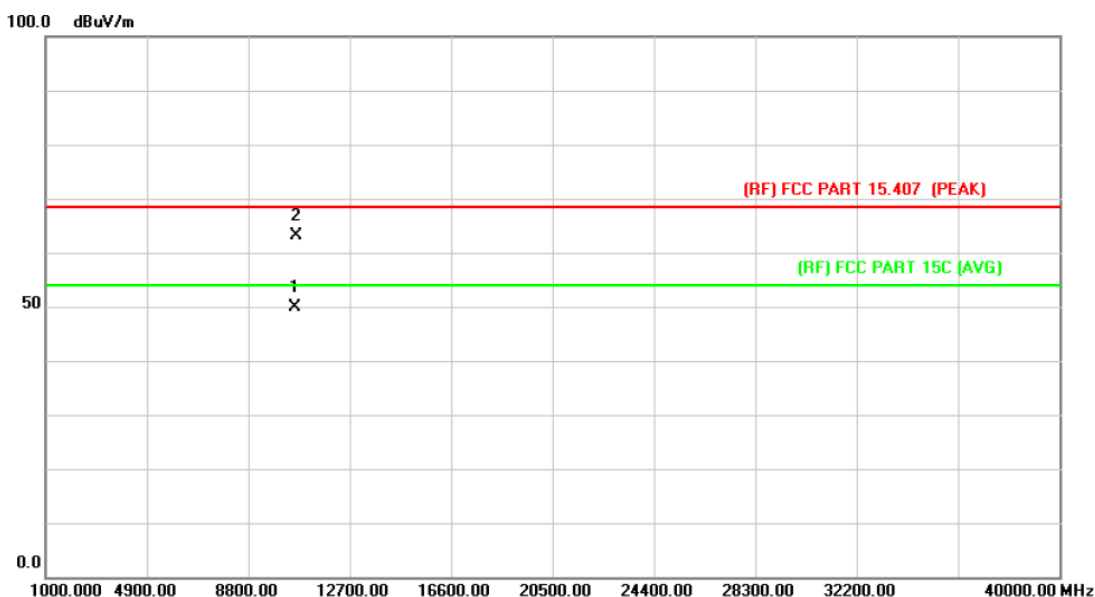

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10619.720	33.93	16.02	49.95	54.00	-4.05	AVG
2		10622.146	47.09	16.02	63.11	68.30	-5.19	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (40) Mode 5310MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

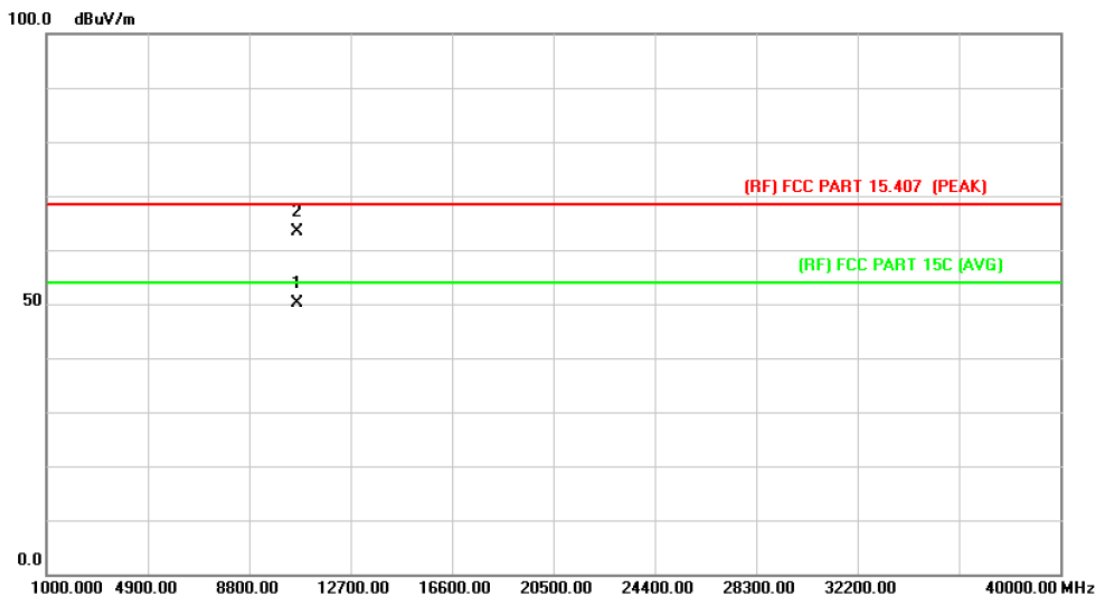

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10621.743	34.03	16.02	50.05	54.00	-3.95	AVG
2		10624.876	47.40	16.02	63.42	68.30	-4.88	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac (80) Mode 5290MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

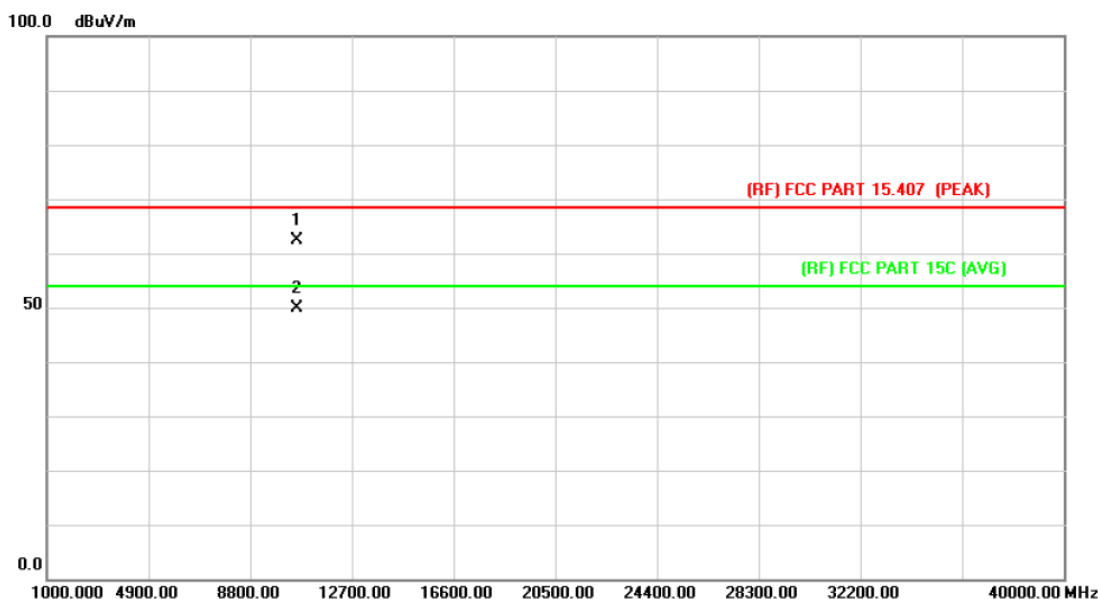

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10577.400	46.43	15.95	62.38	68.30	-5.92	peak
2	*	10584.525	33.83	15.96	49.79	54.00	-4.21	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac (80) Mode 5290MHz (U-NII-2A)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

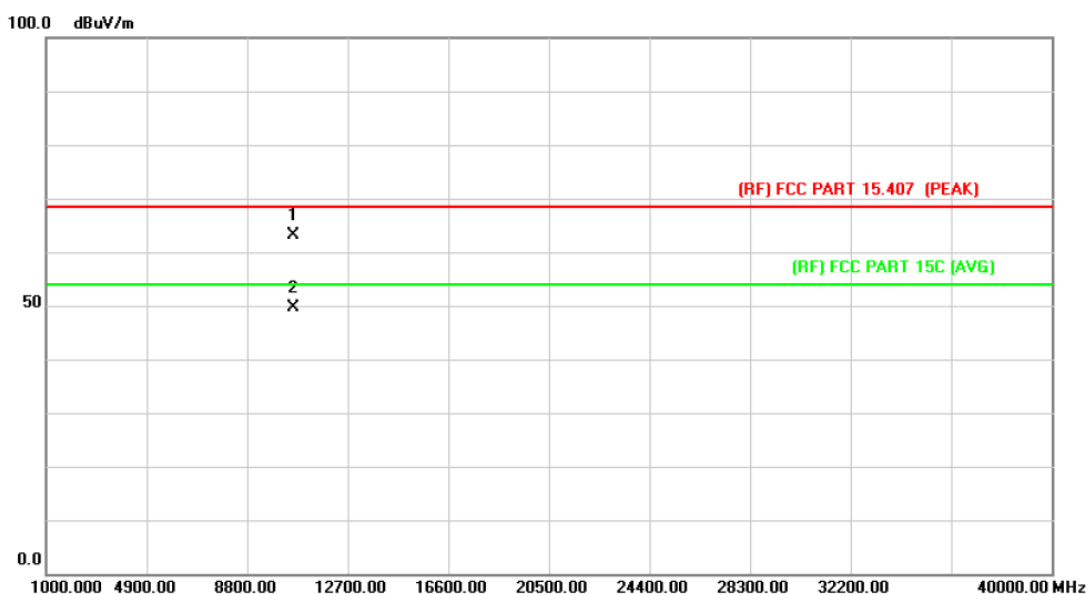


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10575.475	47.08	15.95	63.03	68.30	-5.27	peak
2	*	10581.900	33.65	15.96	49.61	54.00	-4.39	AVG

Emission Level= Read Level+ Correct Factor

5500MHz-5700MHz(U-NII-2C)


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

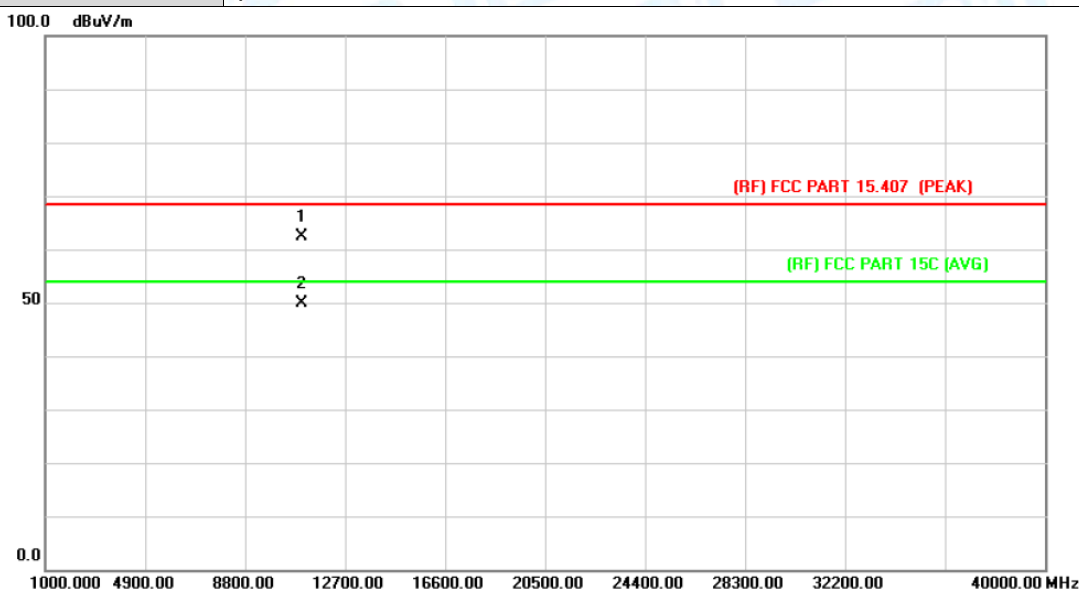

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10995.200	46.15	16.21	62.36	68.30	-5.94	peak
2	*	11004.125	33.55	16.22	49.77	54.00	-4.23	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

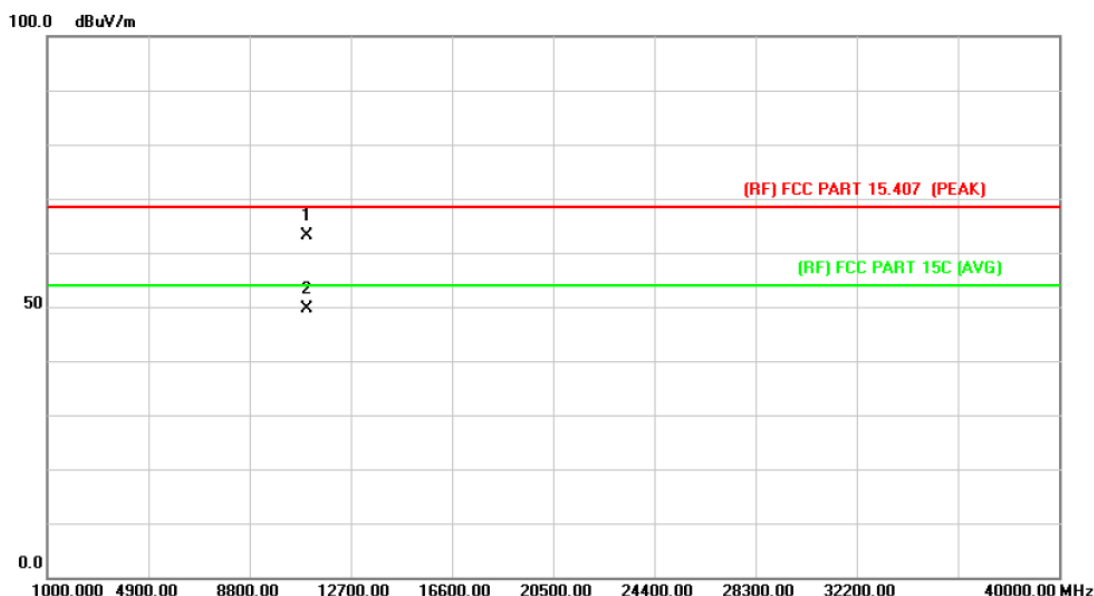

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11000.825	46.98	16.22	63.20	68.30	-5.10	peak
2	*	11003.075	33.52	16.22	49.74	54.00	-4.26	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

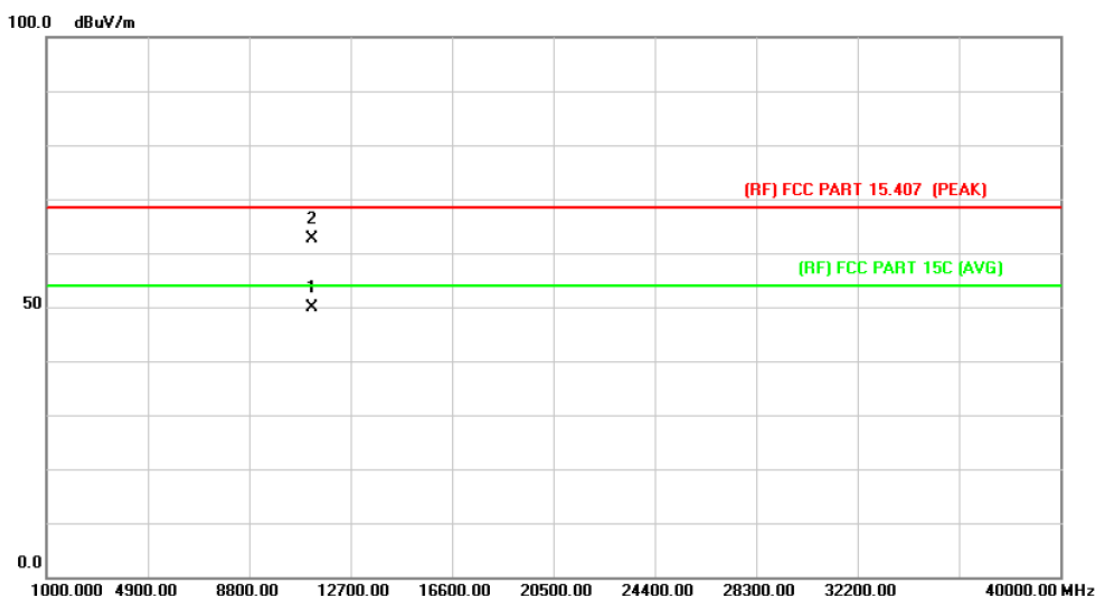

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11200.850	33.44	16.37	49.81	54.00	-4.19	AVG
2		11201.450	46.15	16.37	62.52	68.30	-5.78	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

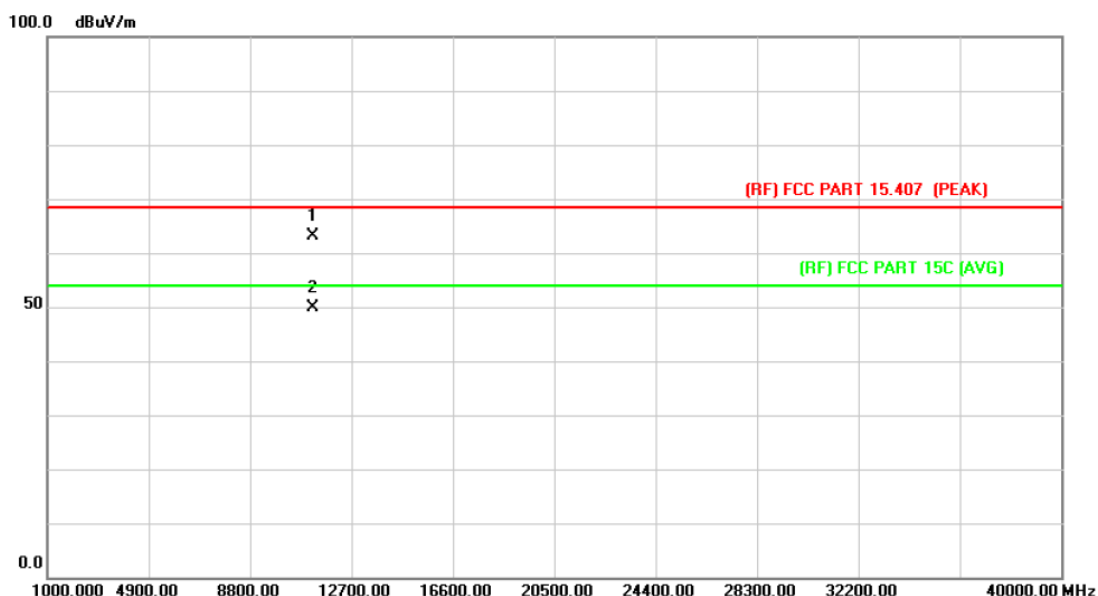

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11201.075	46.65	16.37	63.02	68.30	-5.28	peak
2	*	11201.900	33.39	16.37	49.76	54.00	-4.24	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

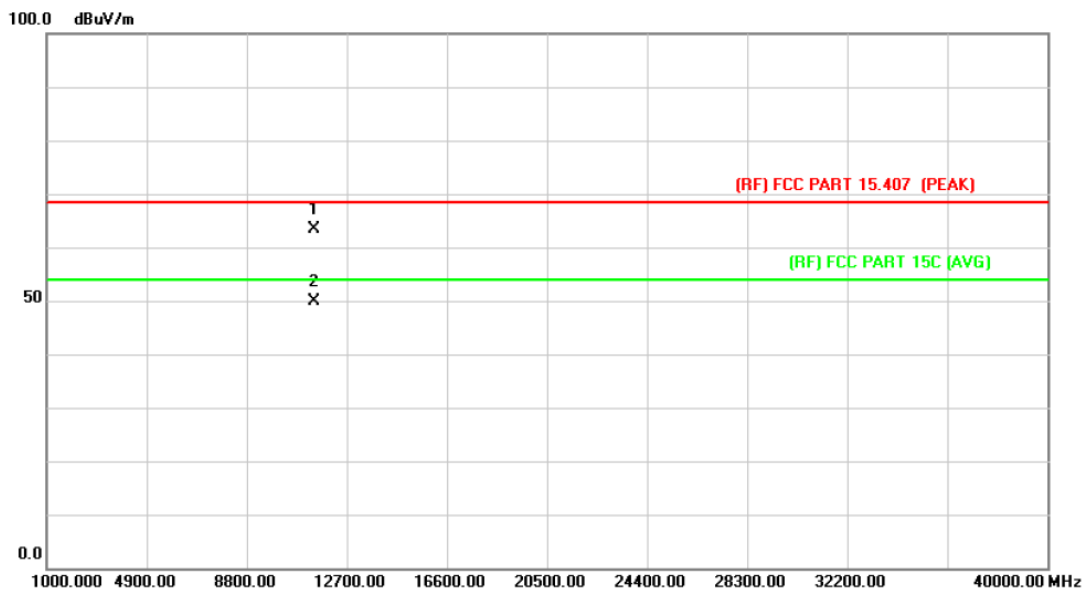

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11400.950	46.71	16.56	63.27	68.30	-5.03	peak
2	*	11401.225	33.20	16.56	49.76	54.00	-4.24	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

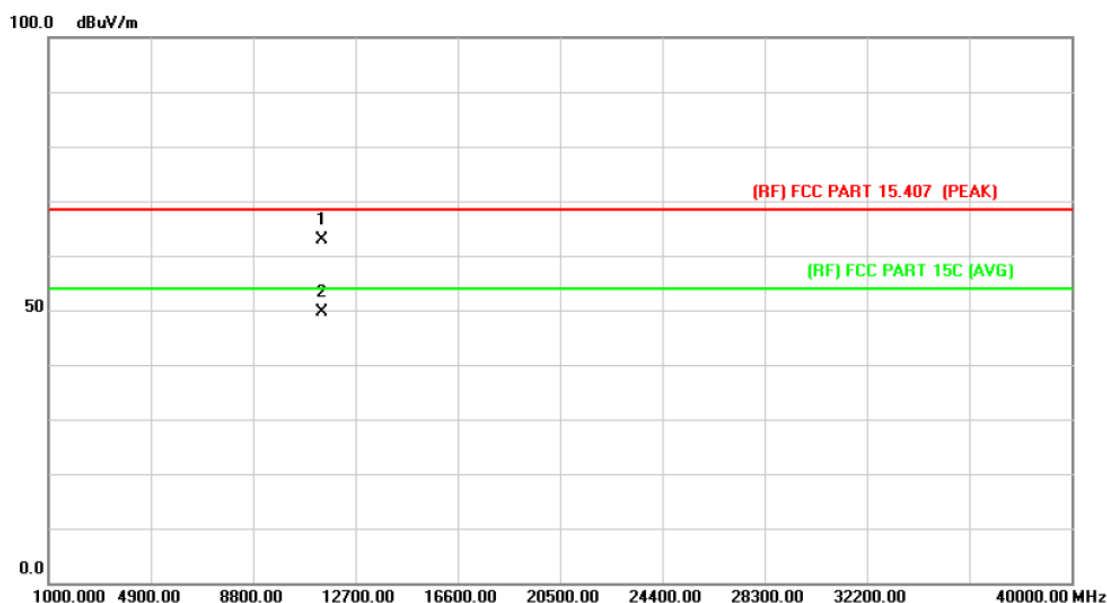

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11400.325	46.28	16.56	62.84	68.30	-5.46	peak
2	*	11400.700	33.19	16.56	49.75	54.00	-4.25	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(20) Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

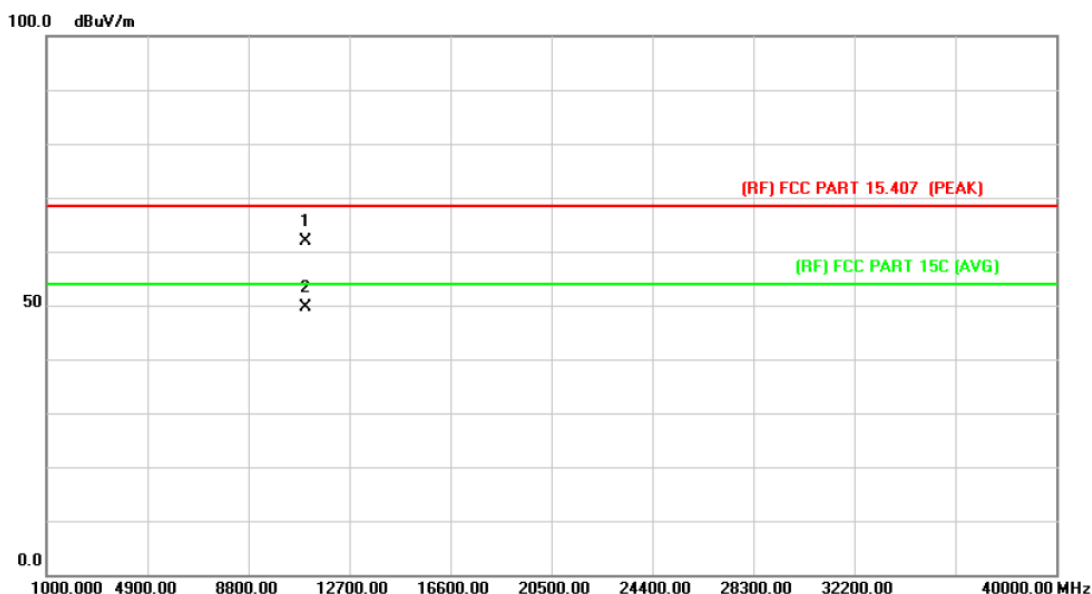

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10997.278	45.55	16.21	61.76	68.30	-6.54	peak
2	*	11004.103	33.46	16.22	49.68	54.00	-4.32	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(20) Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

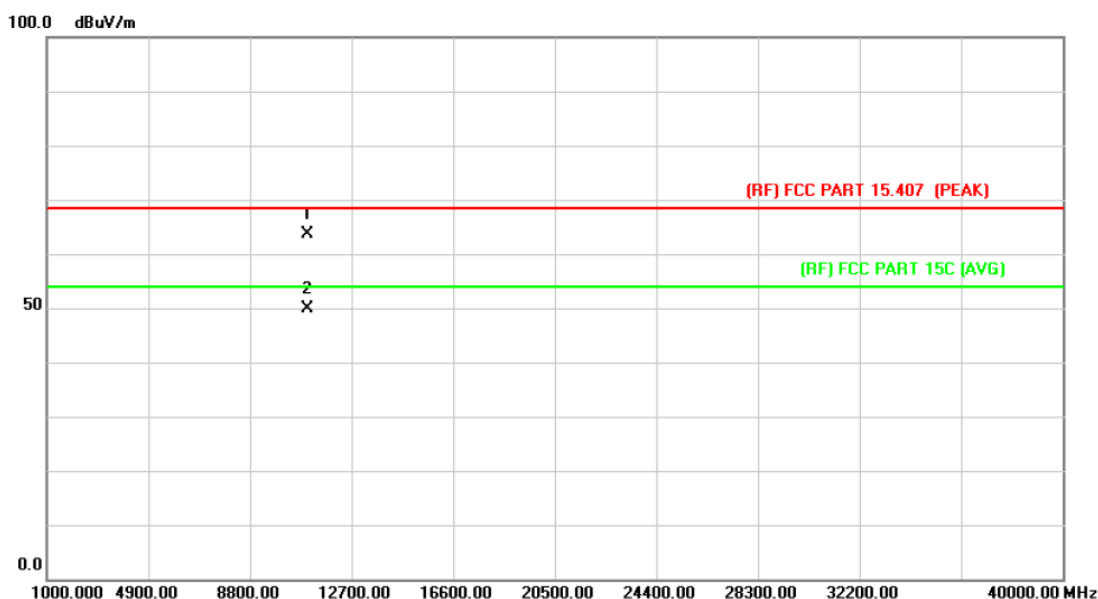

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11000.335	47.36	16.22	63.58	68.30	-4.72	peak
2	*	11002.147	33.55	16.22	49.77	54.00	-4.23	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(20) Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

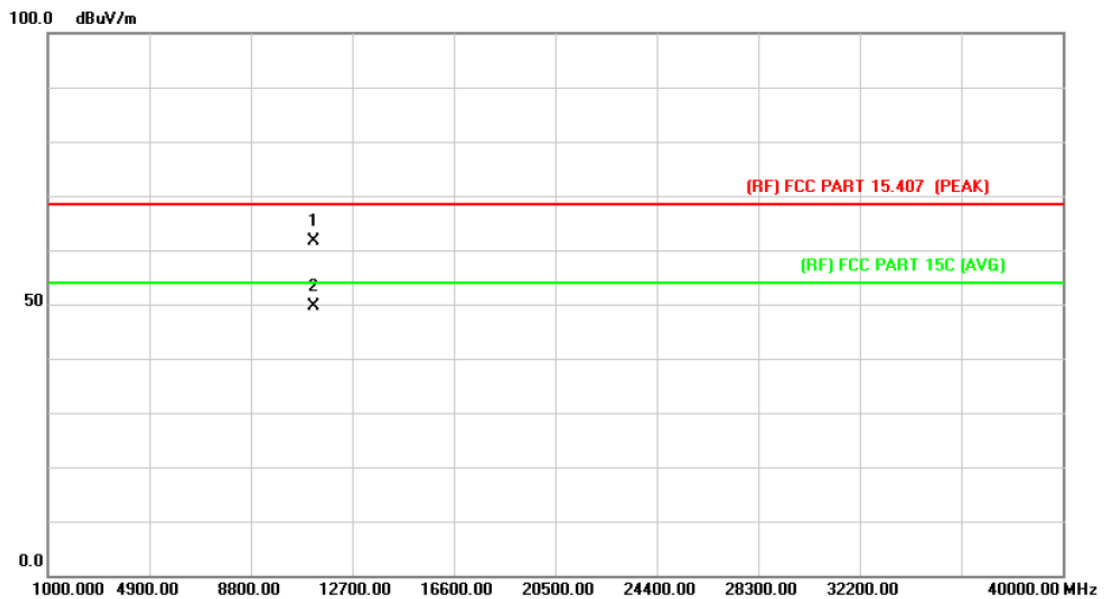

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11200.458	45.15	16.37	61.52	68.30	-6.78	peak
2	*	11202.547	33.26	16.37	49.63	54.00	-4.37	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(20) Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

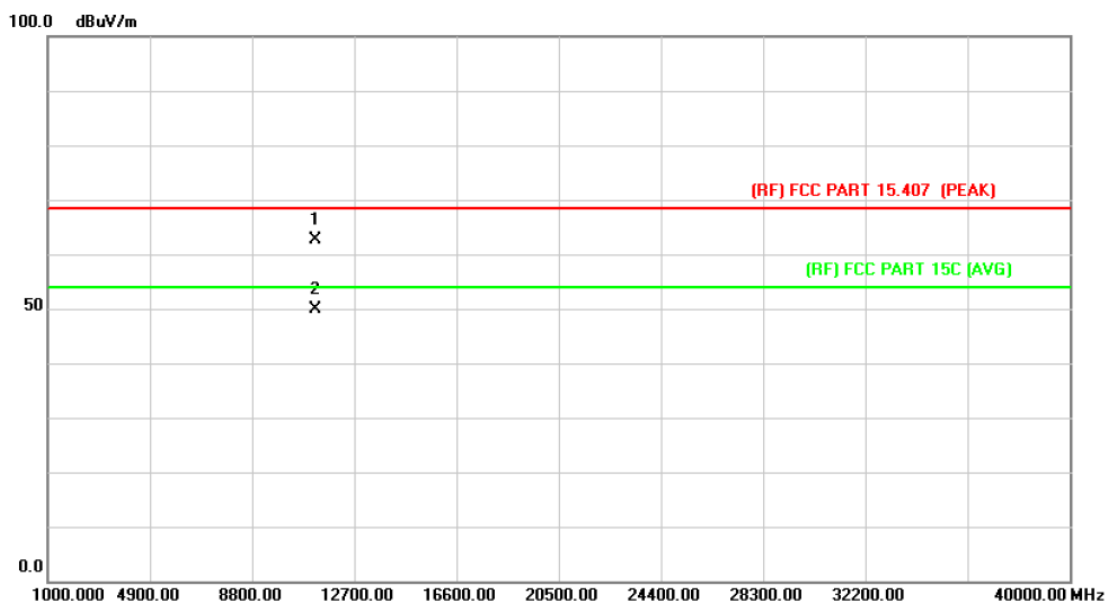

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11201.863	46.32	16.37	62.69	68.30	-5.61	peak
2	*	11202.485	33.43	16.37	49.80	54.00	-4.20	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(20) Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

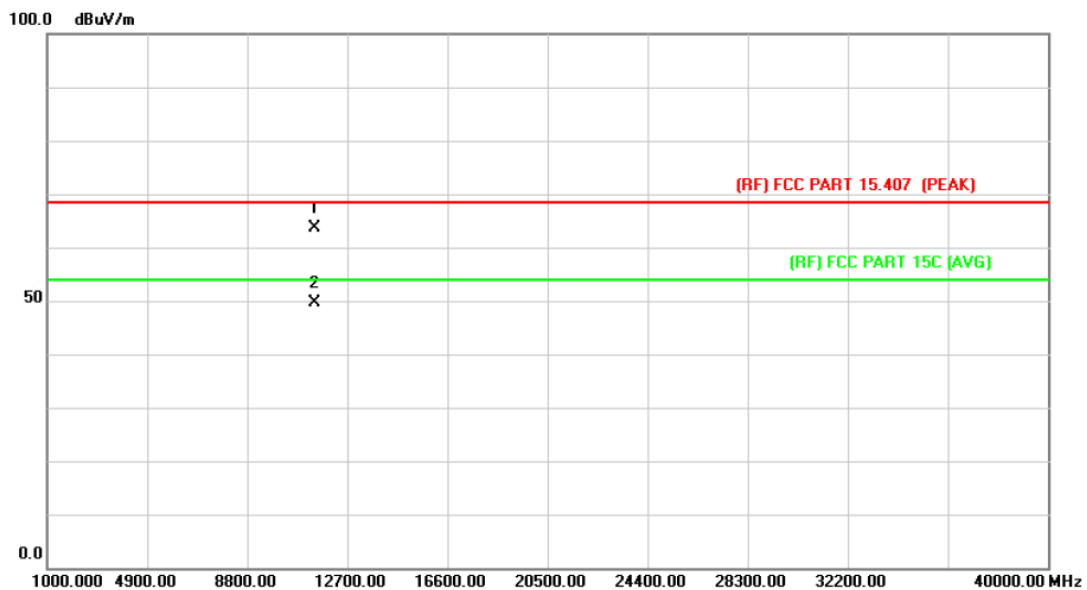

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11401.462	47.10	16.56	63.66	68.30	-4.64	peak
2	*	11401.785	33.11	16.56	49.67	54.00	-4.33	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

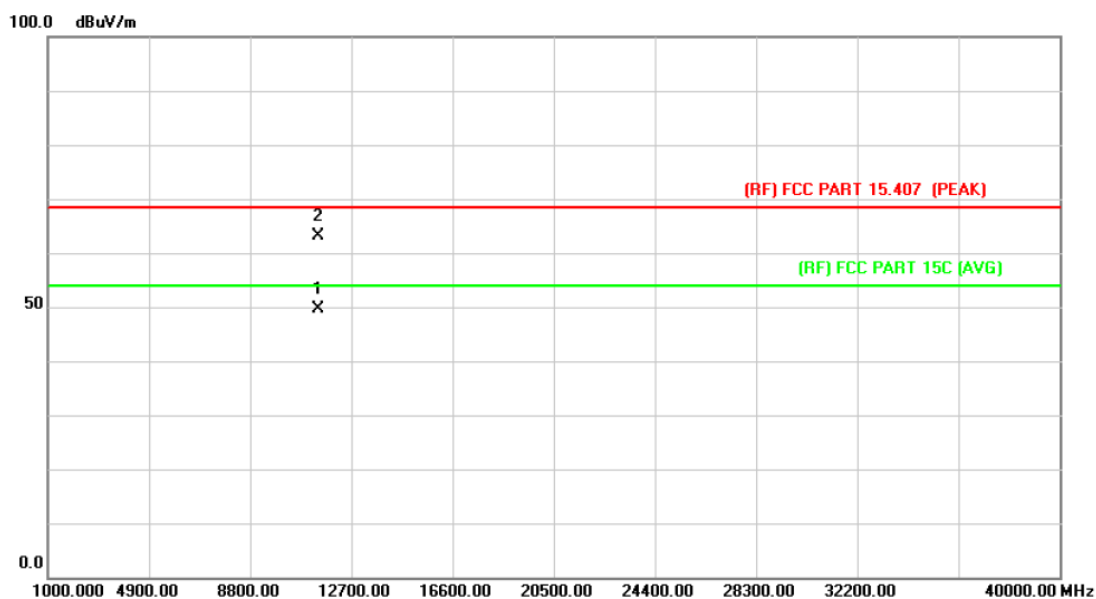

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11400.706	33.13	16.56	49.69	54.00	-4.31	AVG
2		11401.378	46.56	16.56	63.12	68.30	-5.18	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(20) Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

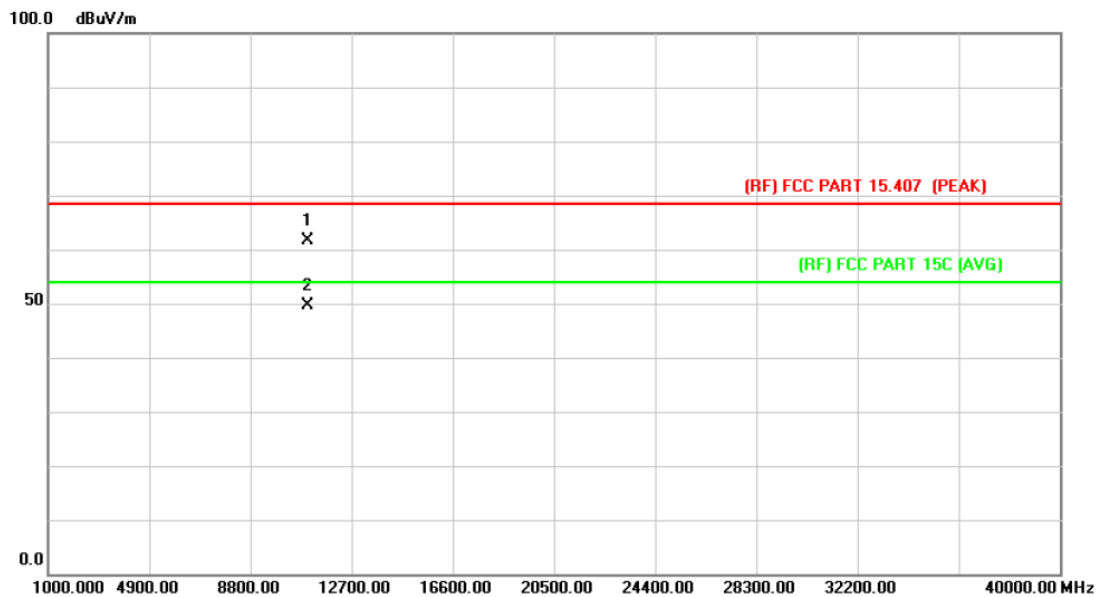

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10998.743	45.46	16.21	61.67	68.30	-6.63	peak
2	*	11003.616	33.50	16.22	49.72	54.00	-4.28	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(20) Mode 5500MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

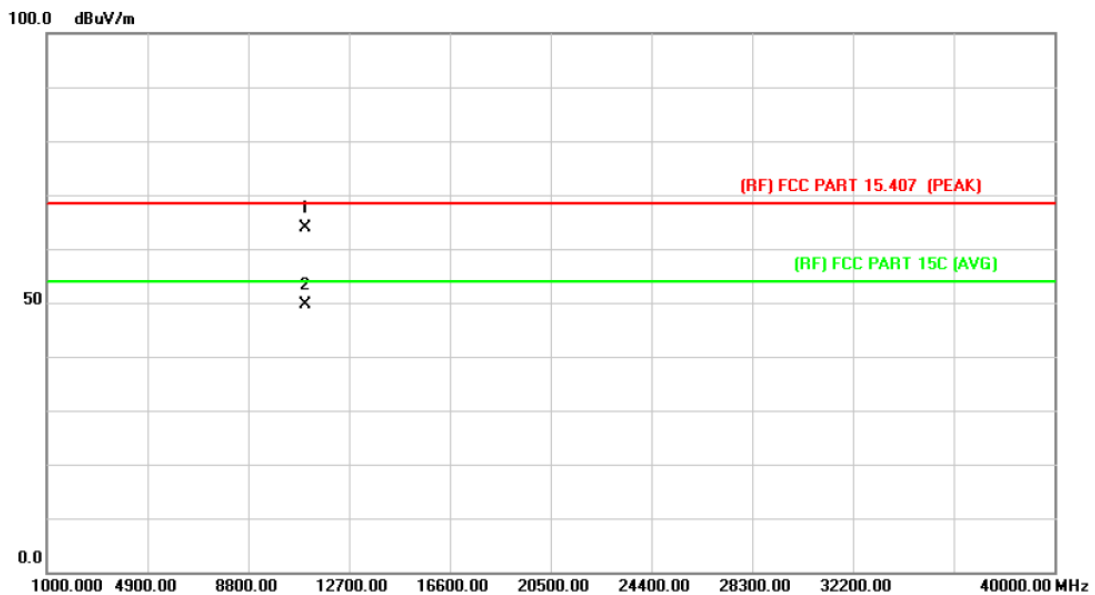

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11001.228	47.66	16.22	63.88	68.30	-4.42	peak
2	*	11002.324	33.53	16.22	49.75	54.00	-4.25	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(20) Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

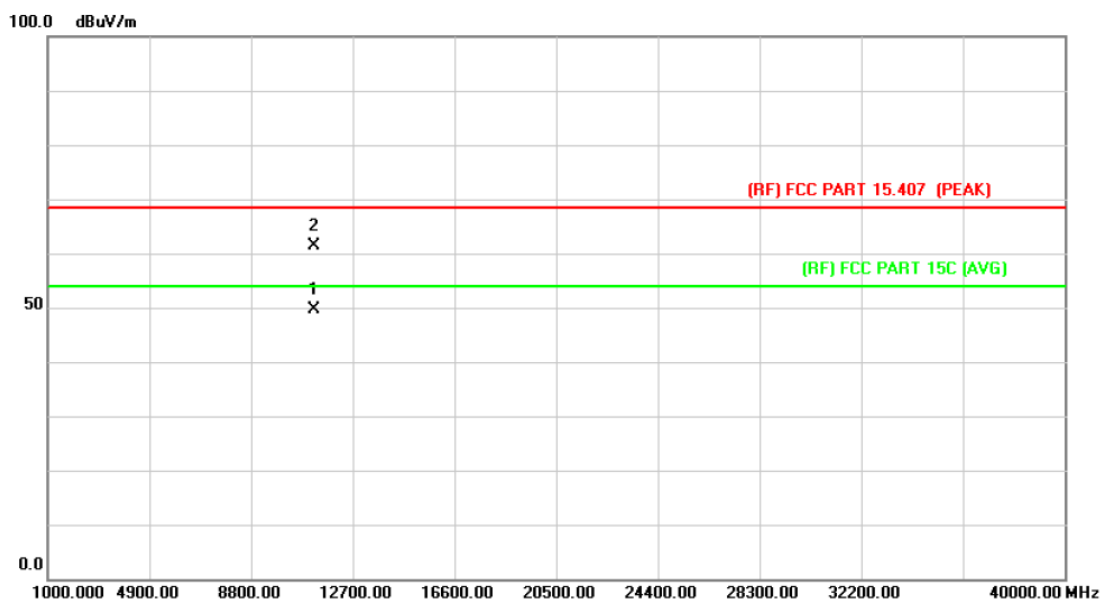

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11200.385	33.29	16.37	49.66	54.00	-4.34	AVG
2		11201.675	45.10	16.37	61.47	68.30	-6.83	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(20) Mode 5600MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

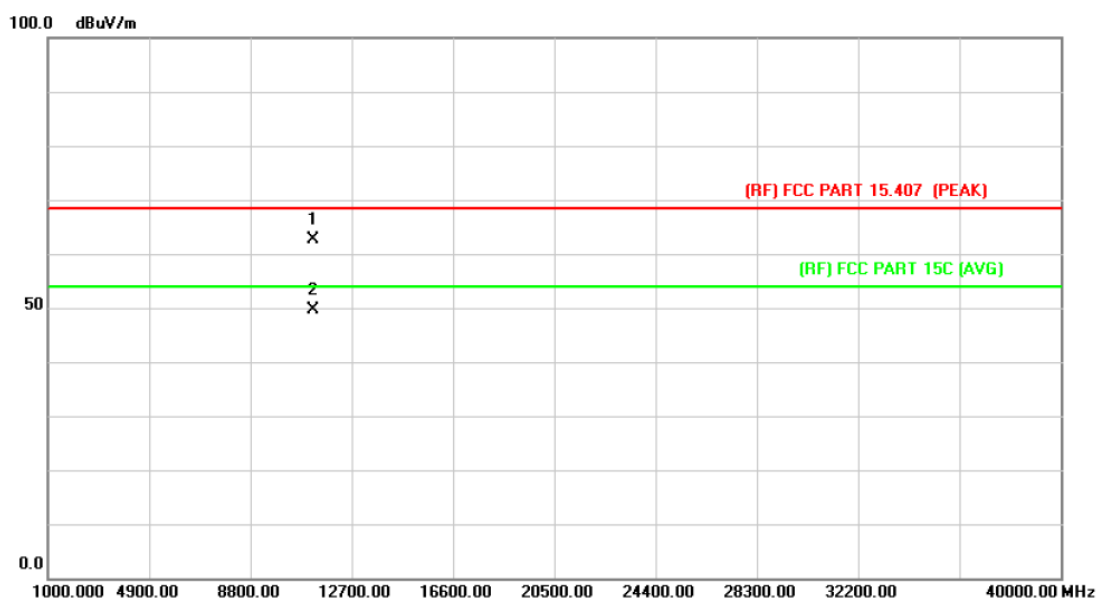

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11201.650	46.21	16.37	62.58	68.30	-5.72	peak
2	*	11202.478	33.21	16.37	49.58	54.00	-4.42	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(20) Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

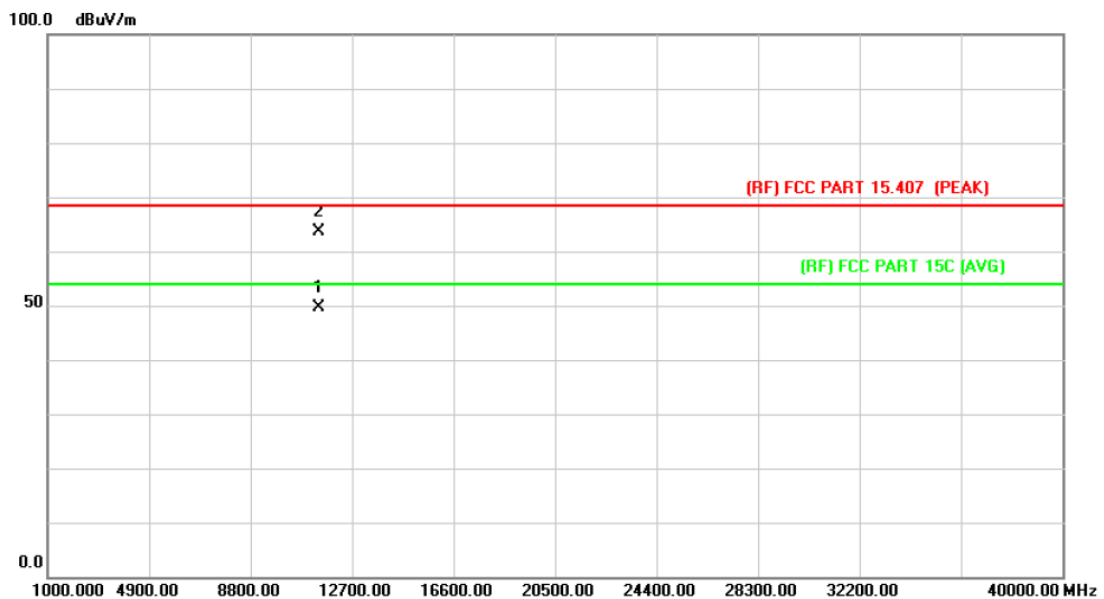

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11401.240	33.03	16.56	49.59	54.00	-4.41	AVG
2		11402.862	47.02	16.56	63.58	68.30	-4.72	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5700MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

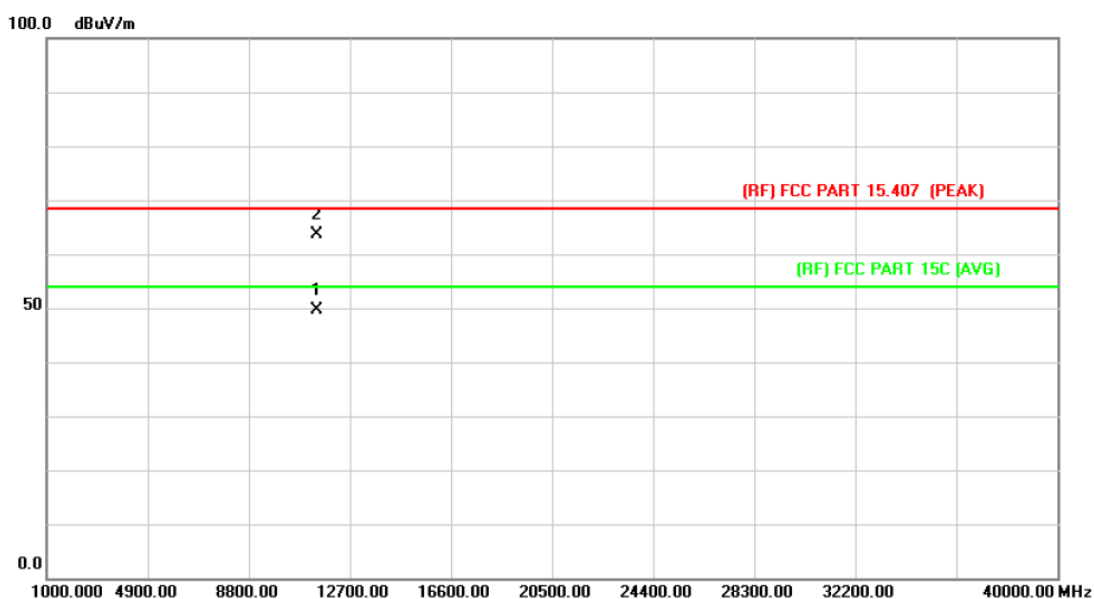

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11400.558	33.16	16.56	49.72	54.00	-4.28	AVG
2		11401.543	47.02	16.56	63.58	68.30	-4.72	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(40) Mode 5510MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

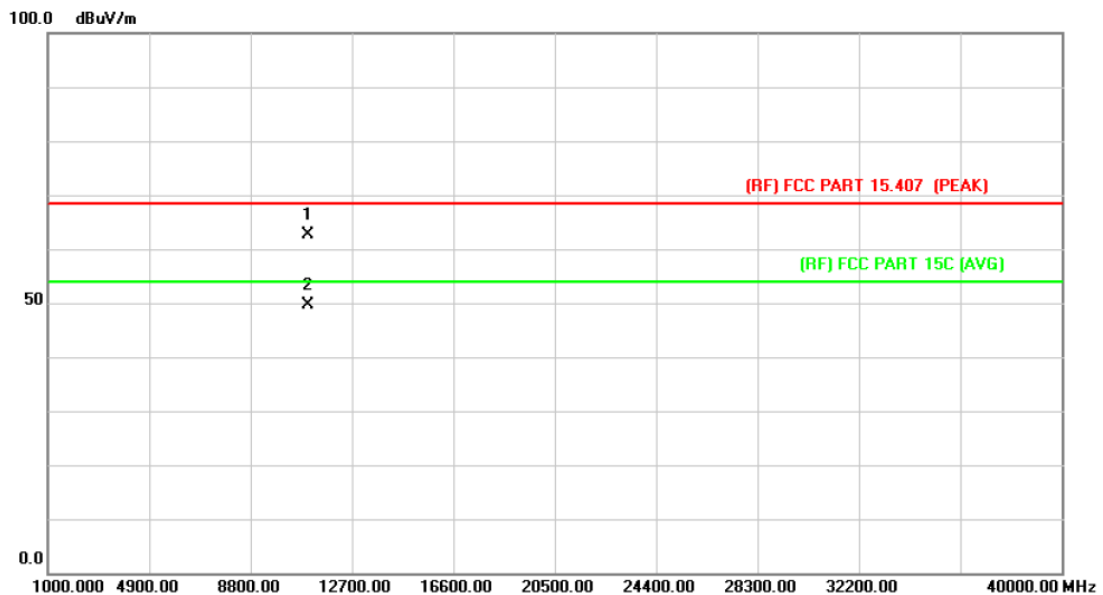

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11020.550	46.36	16.23	62.59	68.30	-5.71	peak
2	*	11020.800	33.34	16.23	49.57	54.00	-4.43	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(40) Mode 5510MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

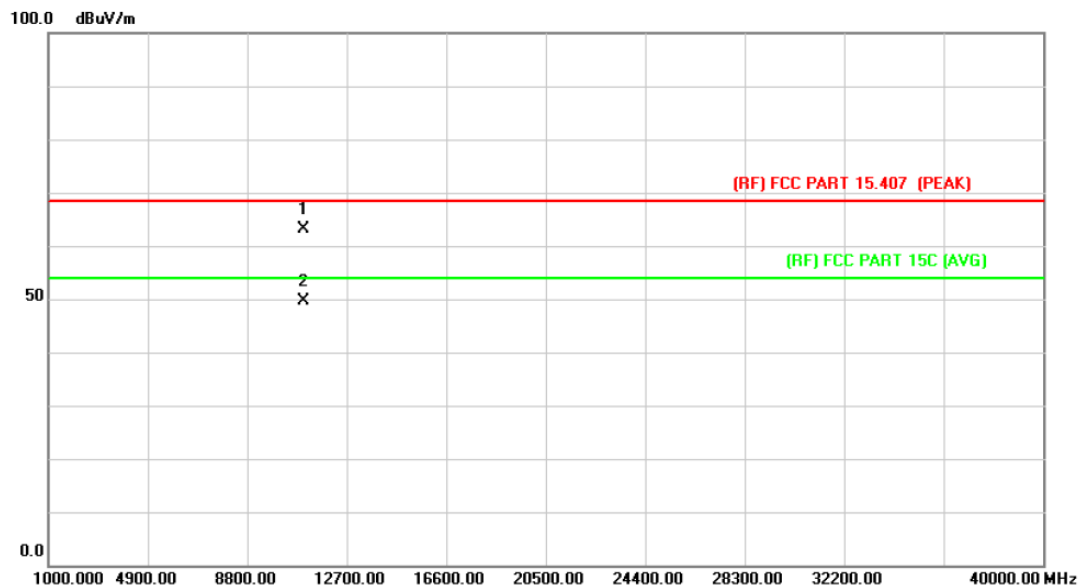

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11018.625	46.91	16.23	63.14	68.30	-5.16	peak
2	*	11023.350	33.46	16.23	49.69	54.00	-4.31	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(40) Mode 5590MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

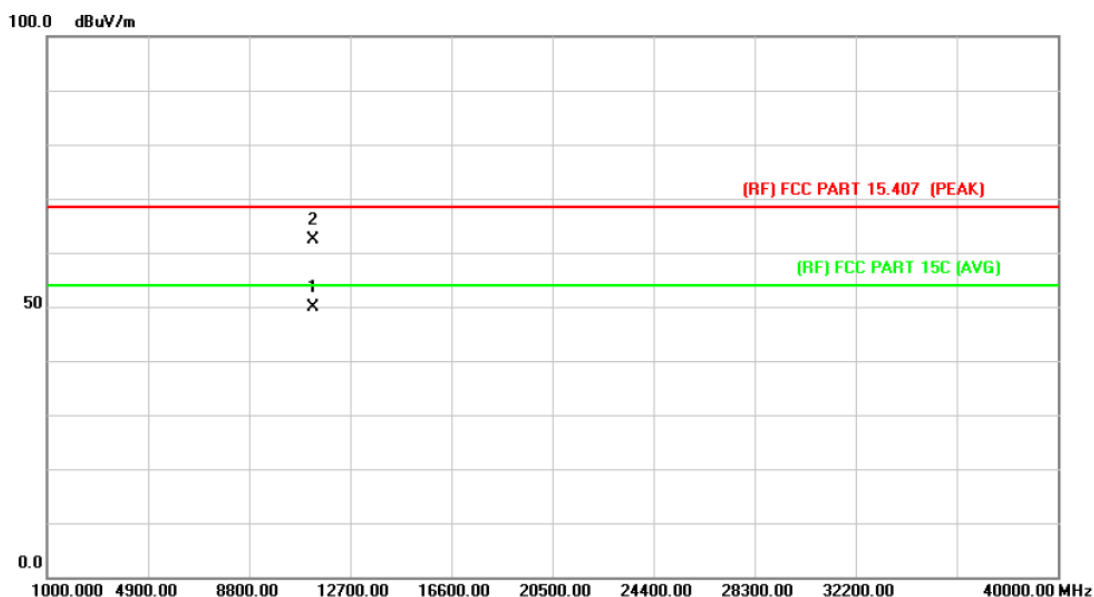

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11180.584	33.39	16.41	49.80	54.00	-4.20	AVG
2		11181.364	45.97	16.42	62.39	68.30	-5.91	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 n(40) Mode 5590MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

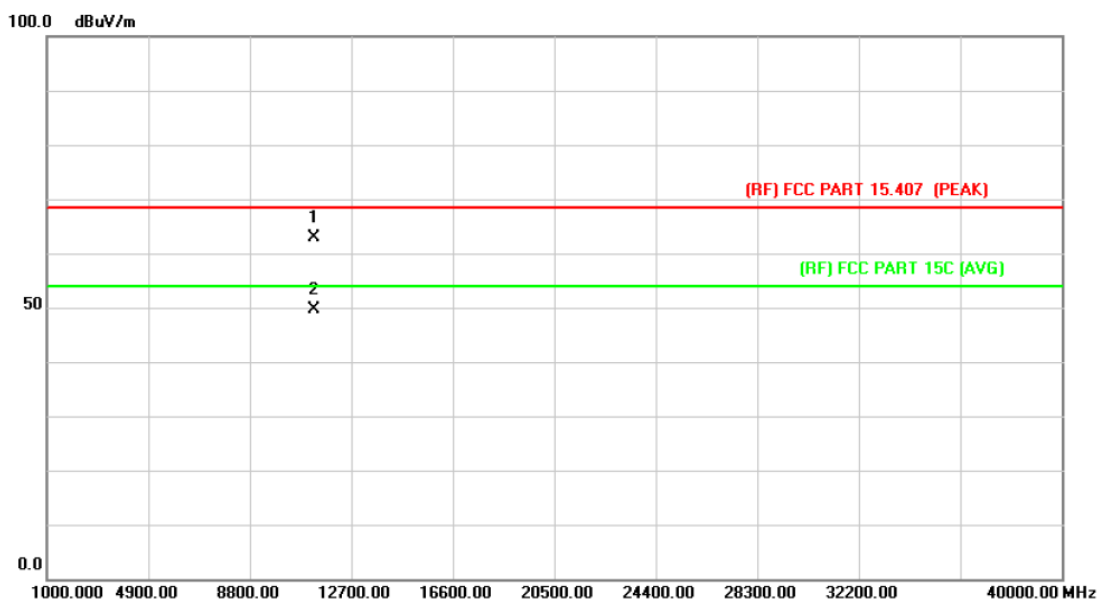

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11189.576	46.38	16.41	62.79	68.30	-5.51	peak
2	*	11181.334	33.33	16.41	49.74	54.00	-4.26	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 n(40) Mode 5670MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

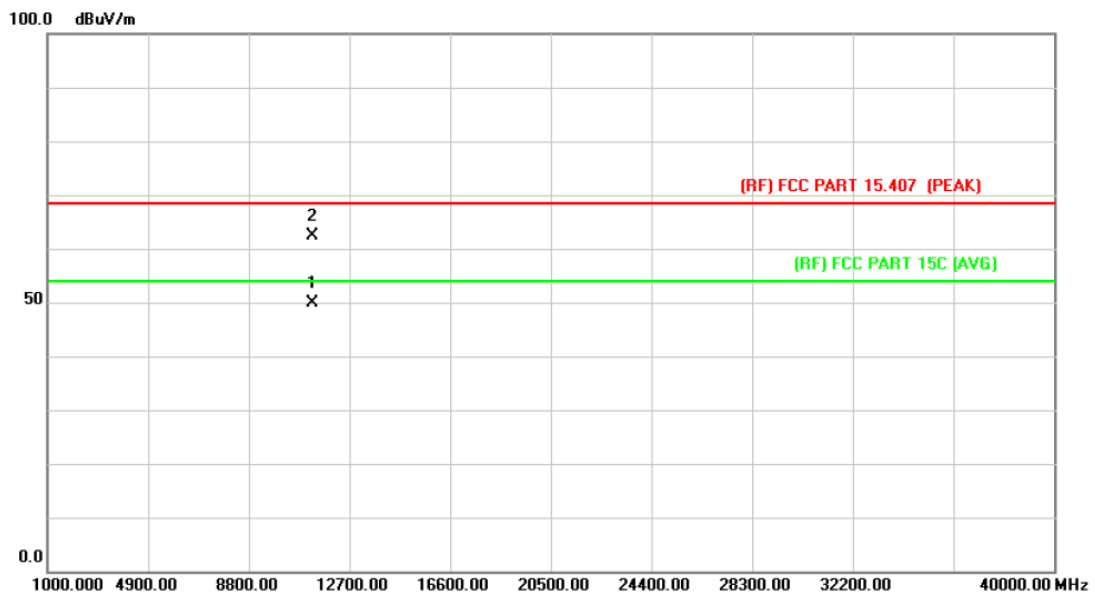

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11380.584	33.39	16.41	49.80	54.00	-4.20	AVG
2		11381.364	45.97	16.42	62.39	68.30	-5.91	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5670MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

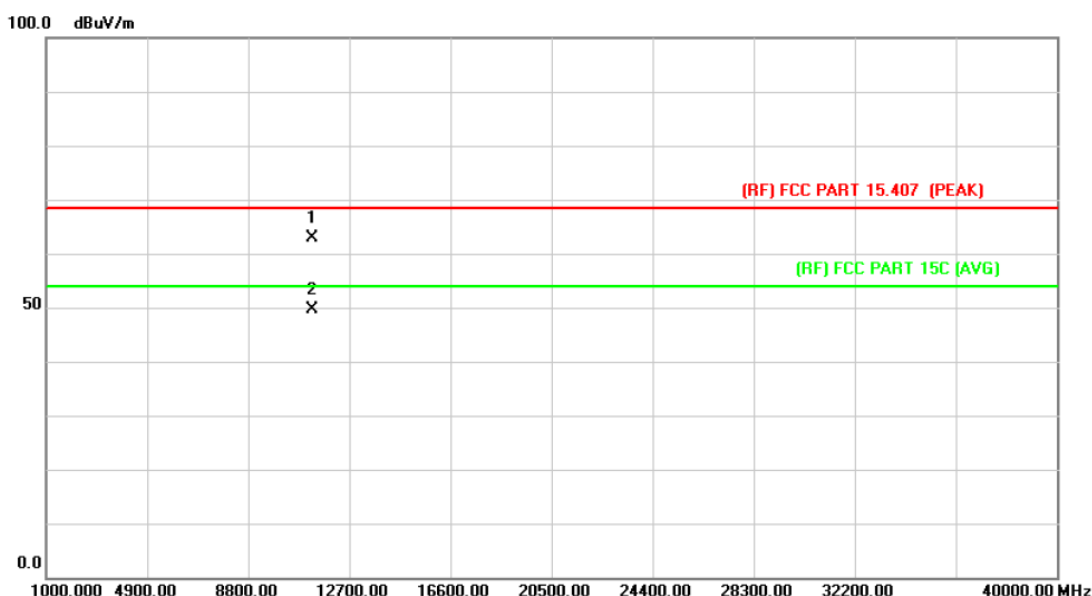

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11389.576	46.38	16.41	62.79	68.30	-5.51	peak
2	*	11381.334	33.33	16.41	49.74	54.00	-4.26	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(40) Mode 5510MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

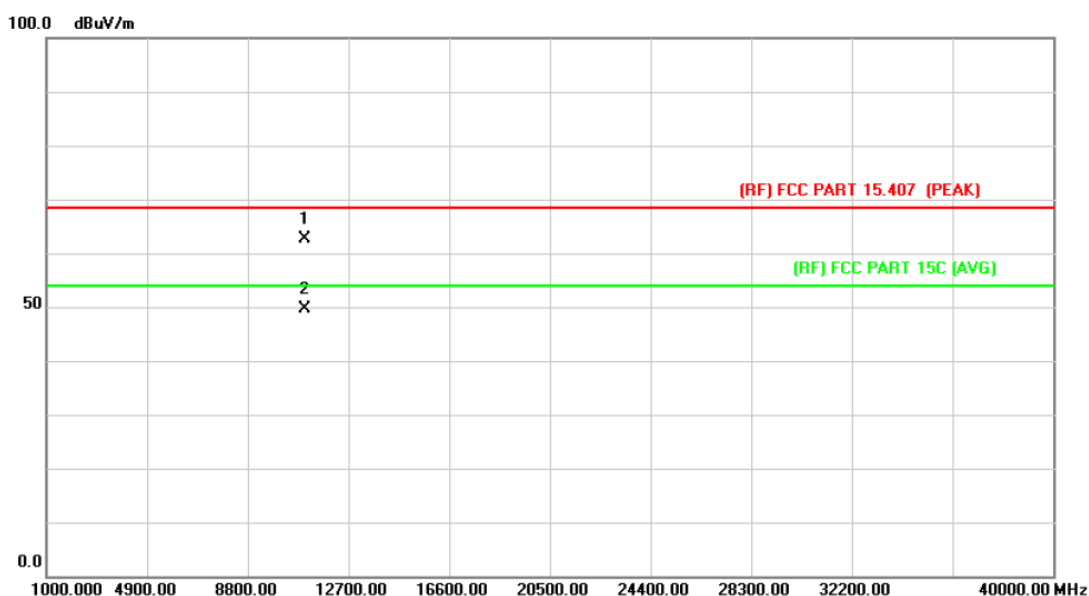

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11021.116	46.40	16.23	62.63	68.30	-5.67	peak
2	*	11021.274	33.39	16.23	49.62	54.00	-4.38	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(40) Mode 5510MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

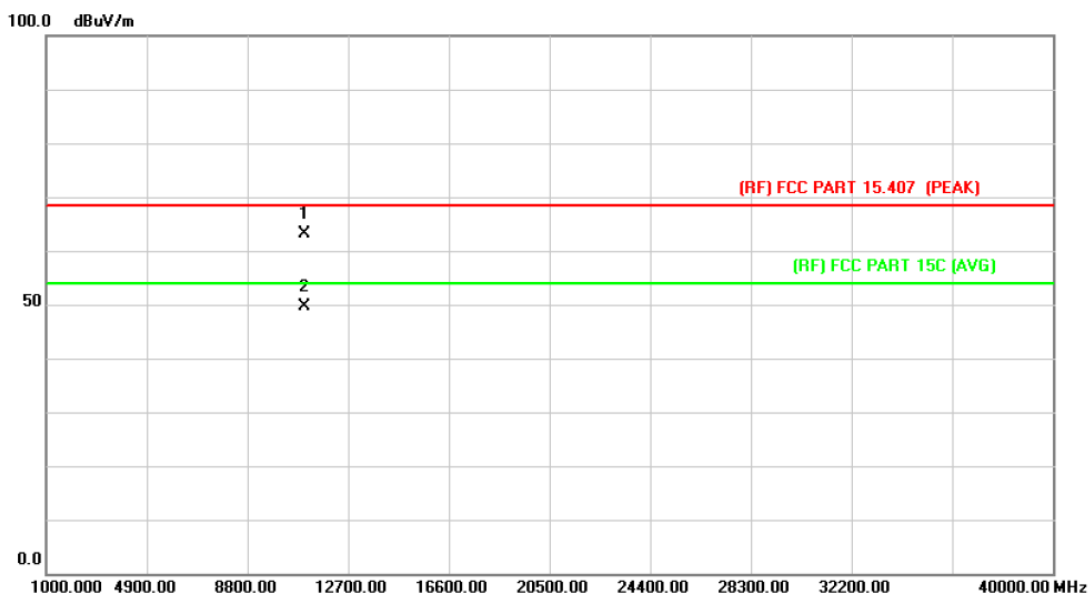

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11019.628	46.99	16.23	63.22	68.30	-5.08	peak
2	*	11021.357	33.52	16.23	49.75	54.00	-4.25	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(40) Mode 5590MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

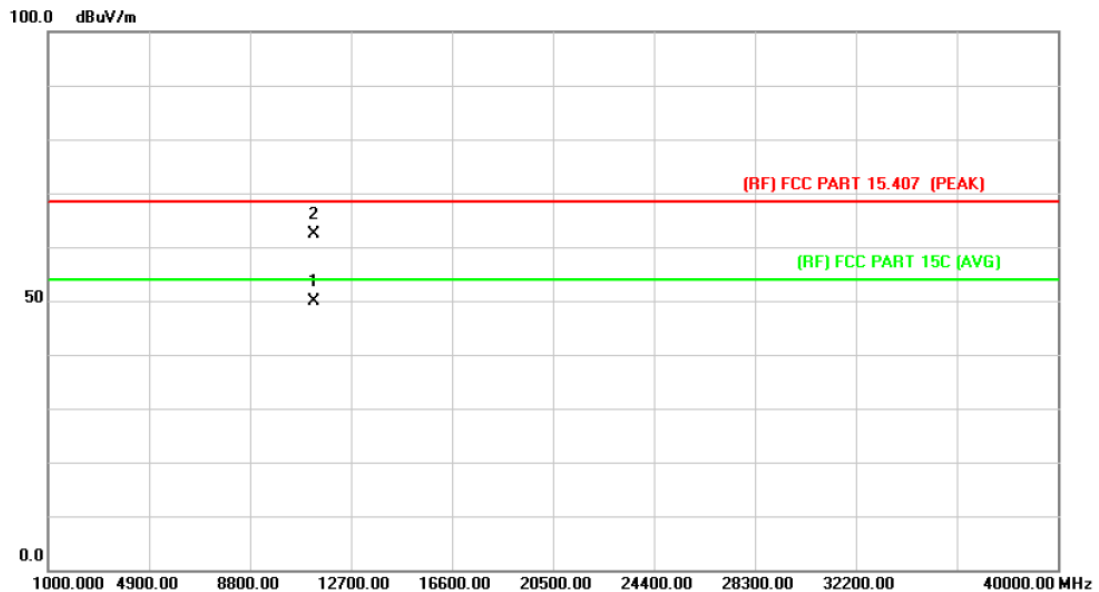

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11181.508	33.45	16.42	49.87	54.00	-4.13	AVG
2		11182.332	45.93	16.42	62.35	68.30	-5.95	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(40) Mode 5590MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

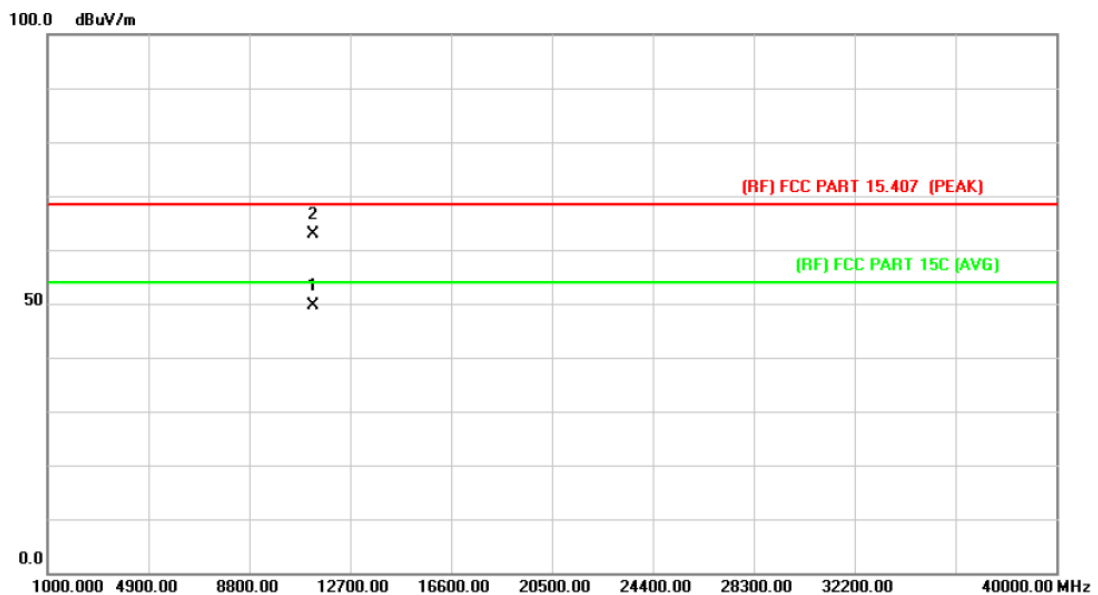

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11181.472	33.25	16.42	49.67	54.00	-4.33	AVG
2		11182.235	46.39	16.42	62.81	68.30	-5.49	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(40) Mode 5670MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

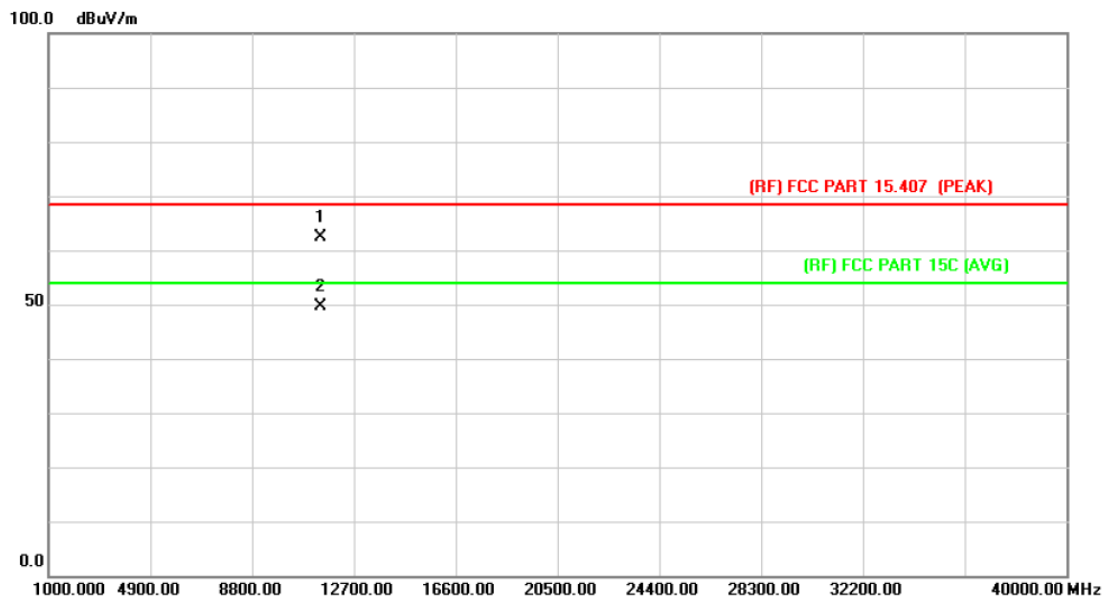

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11388.462	45.89	16.56	62.45	68.30	-5.85	peak
2	*	11389.638	33.06	16.56	49.62	54.00	-4.38	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5670MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

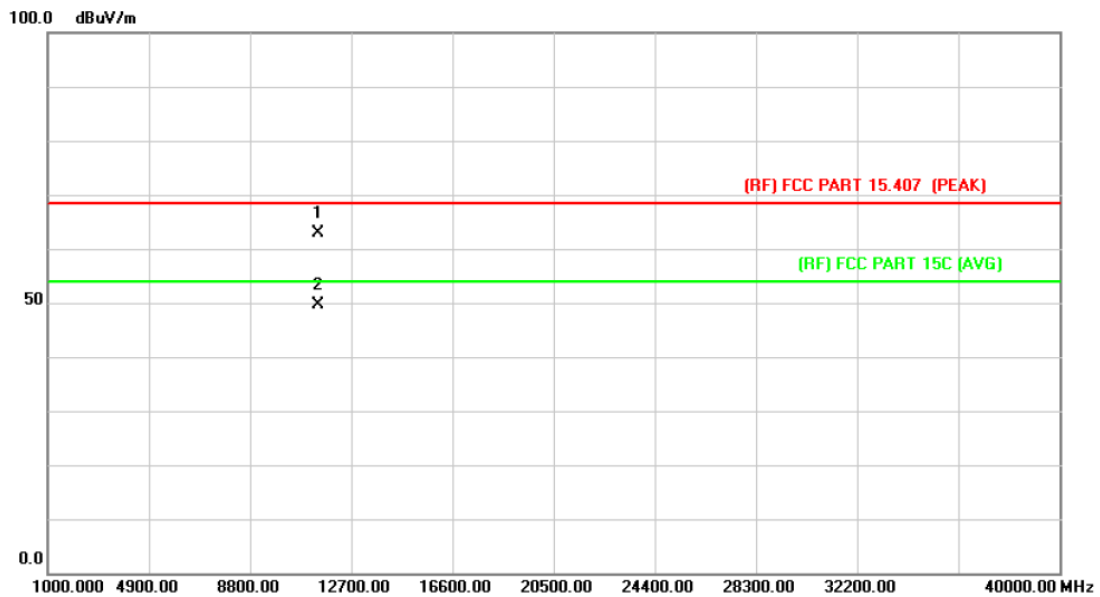

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11381.685	46.21	16.57	62.78	68.30	-5.52	peak
2	*	11382.368	33.01	16.57	49.58	54.00	-4.42	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5530MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

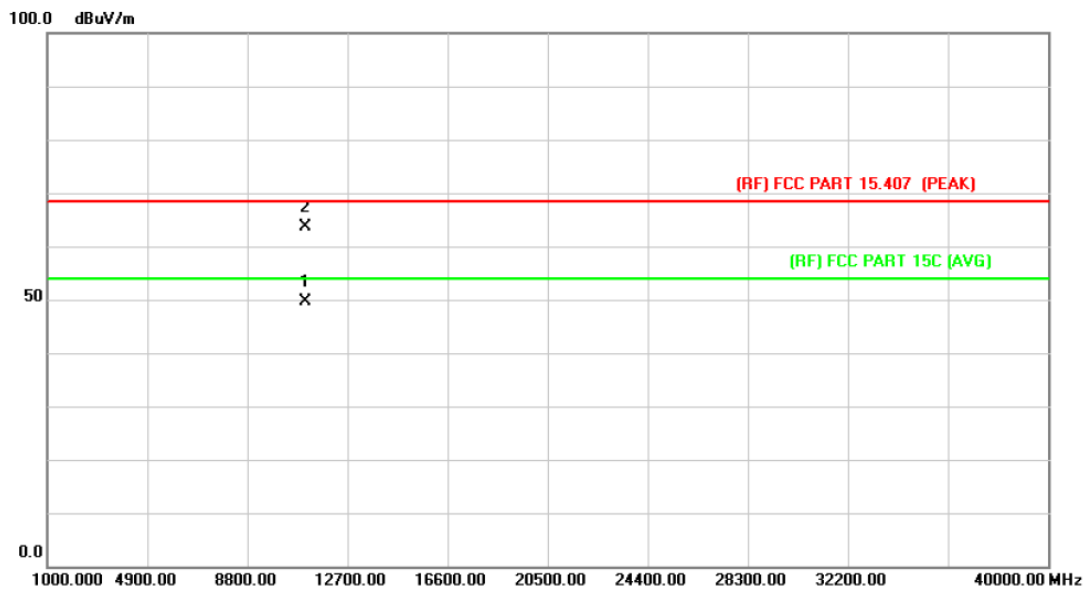

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11059.325	33.38	16.27	49.65	54.00	-4.35	AVG
2		11061.700	47.39	16.27	63.66	68.30	-4.64	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode 5530MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

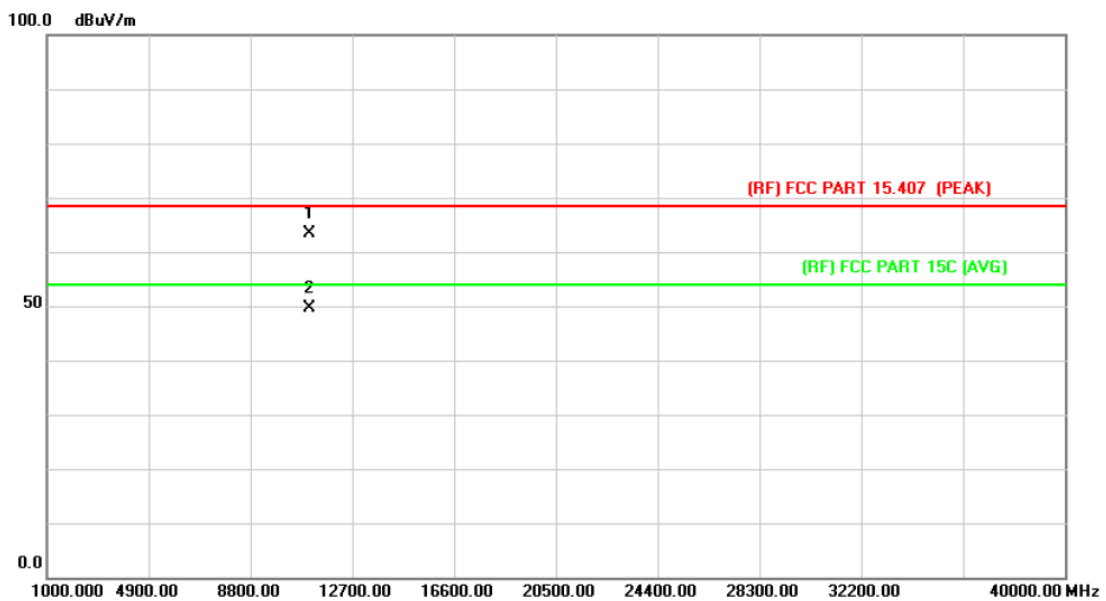

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11058.850	46.99	16.27	63.26	68.30	-5.04	peak
2	*	11063.325	33.47	16.27	49.74	54.00	-4.26	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5610MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

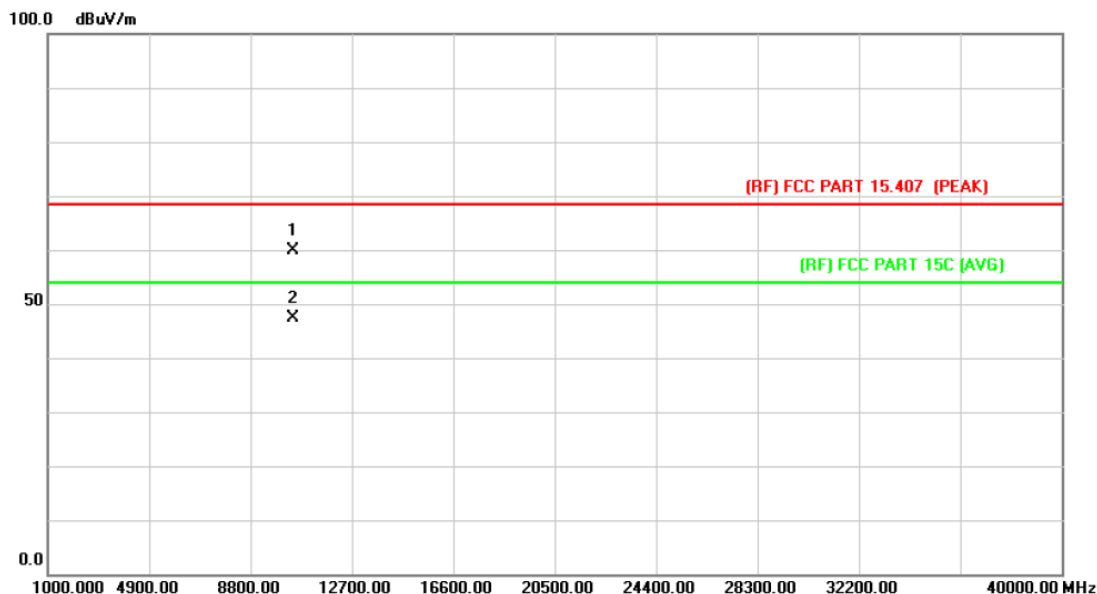

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10419.843	44.14	15.69	59.83	68.30	-8.47	peak
2	*	10420.278	31.69	15.69	47.38	54.00	-6.62	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode 5610MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

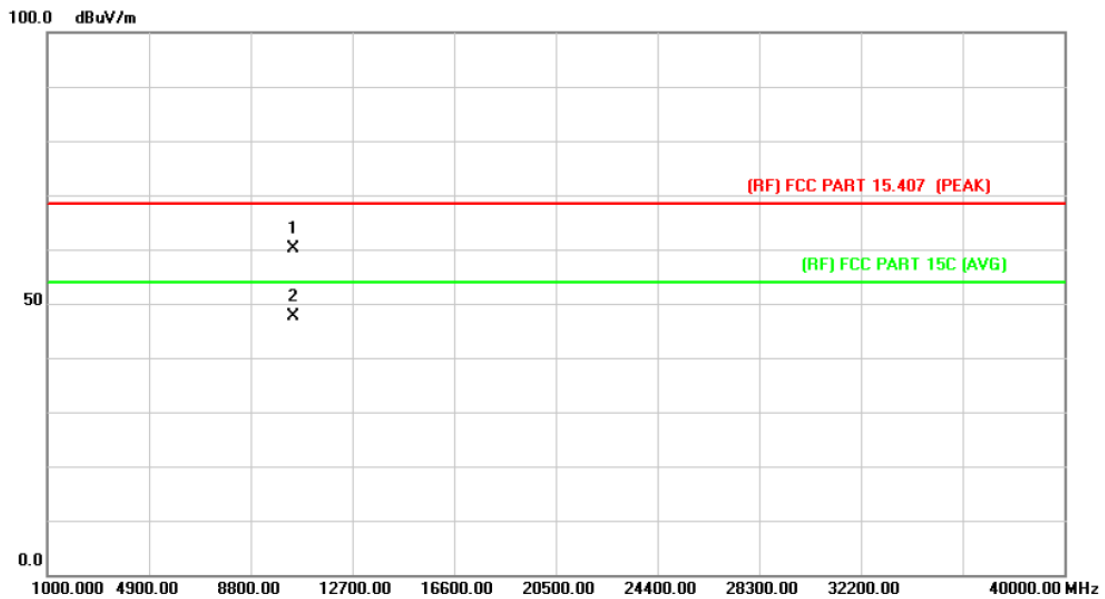

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		10419.528	44.48	15.69	60.17	68.30	-8.13	peak
2	*	10420.705	31.88	15.69	47.57	54.00	-6.43	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(80) Mode 5690MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

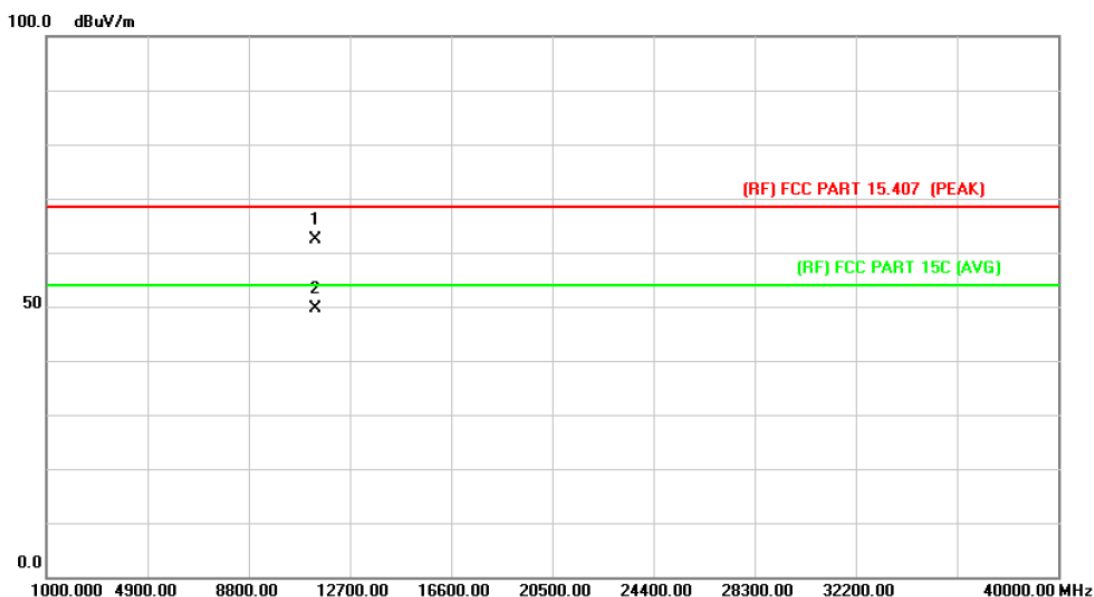

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11376.625	45.87	16.54	62.41	68.30	-5.89	peak
2	*	11377.700	33.00	16.54	49.54	54.00	-4.46	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode 5690MHz (U-NII-2C)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

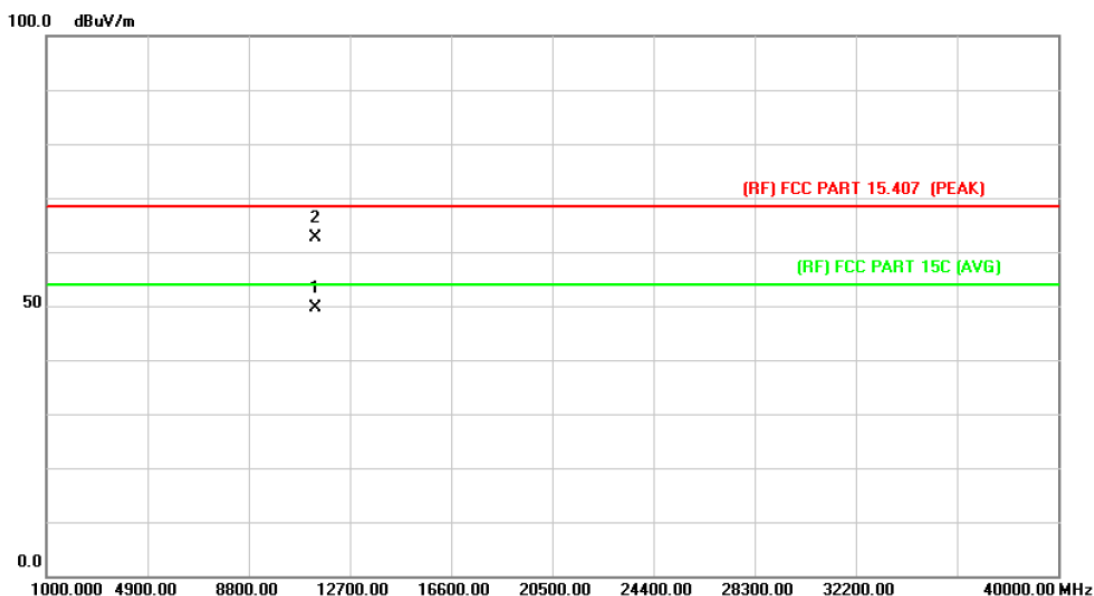


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11378.400	32.98	16.54	49.52	54.00	-4.48	AVG
2		11382.900	46.18	16.54	62.72	68.30	-5.58	peak

Emission Level= Read Level+ Correct Factor

5745MHz-5825MHz(U-NII-3)


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

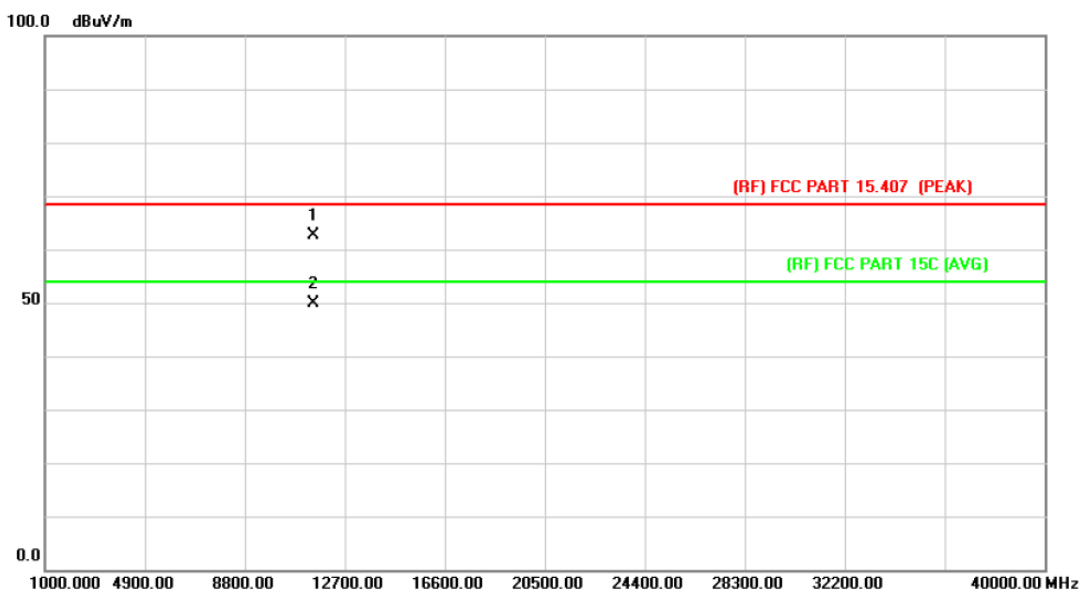

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11489.950	45.94	16.64	62.58	68.30	-5.72	peak
2	*	11490.300	33.22	16.64	49.86	54.00	-4.14	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

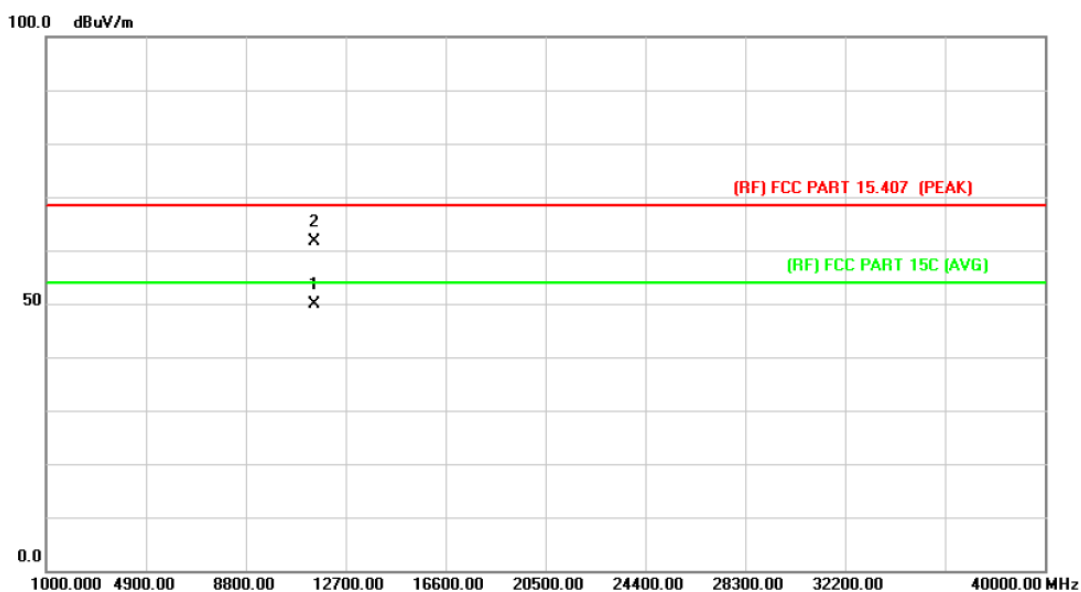

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11486.775	33.18	16.63	49.81	54.00	-4.19	AVG
2		11489.650	45.05	16.64	61.69	68.30	-6.61	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

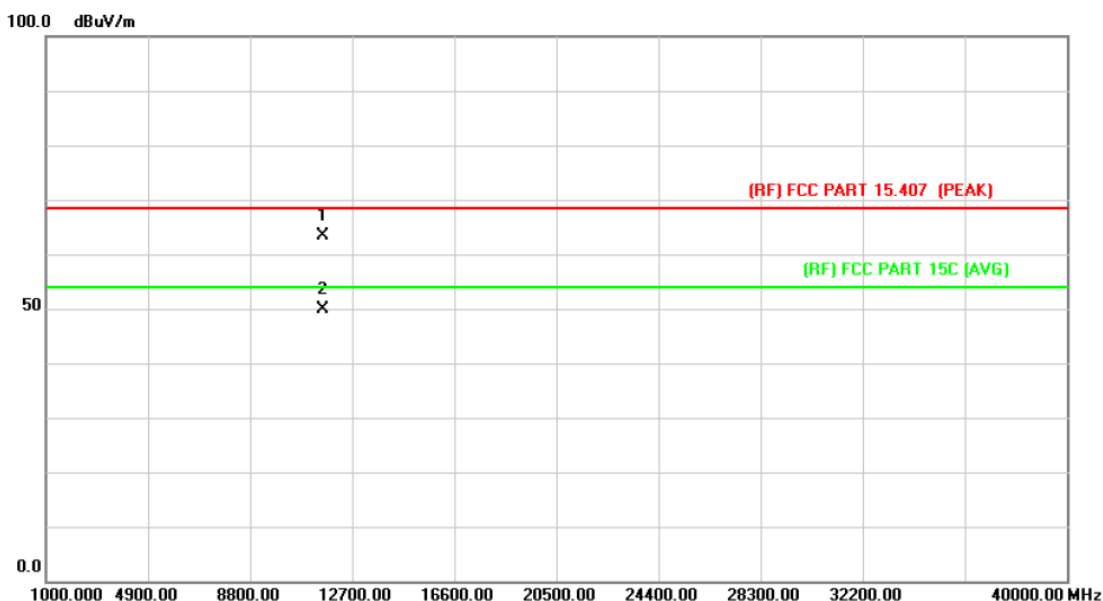

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11565.950	46.69	16.79	63.48	68.30	-4.82	peak
2	*	11568.175	33.20	16.80	50.00	54.00	-4.00	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

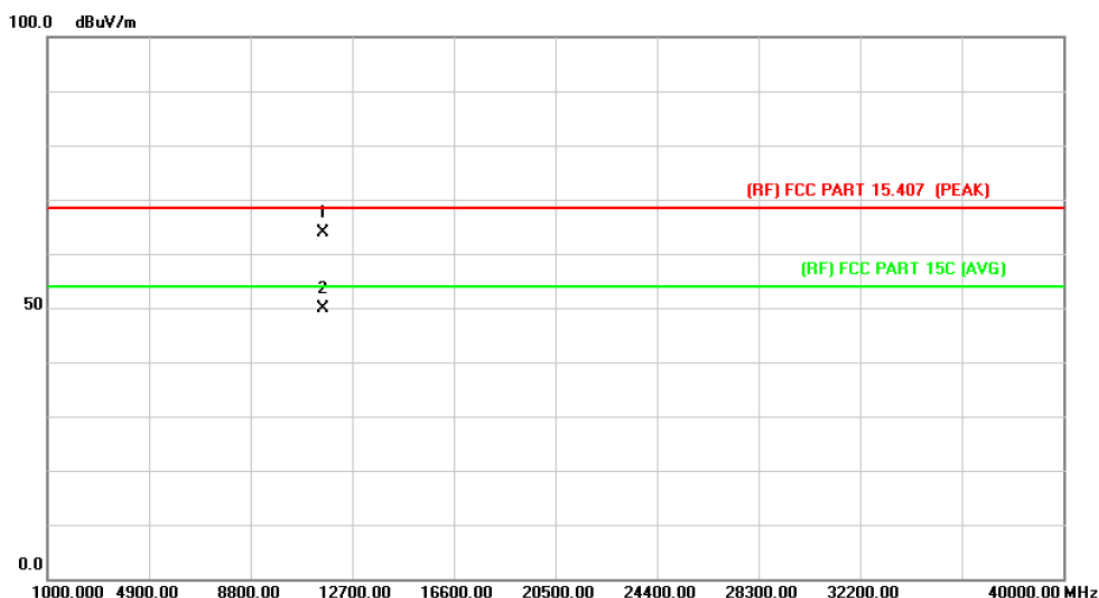

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11566.750	46.98	16.80	63.78	68.30	-4.52	peak
2	*	11570.625	33.07	16.80	49.87	54.00	-4.13	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

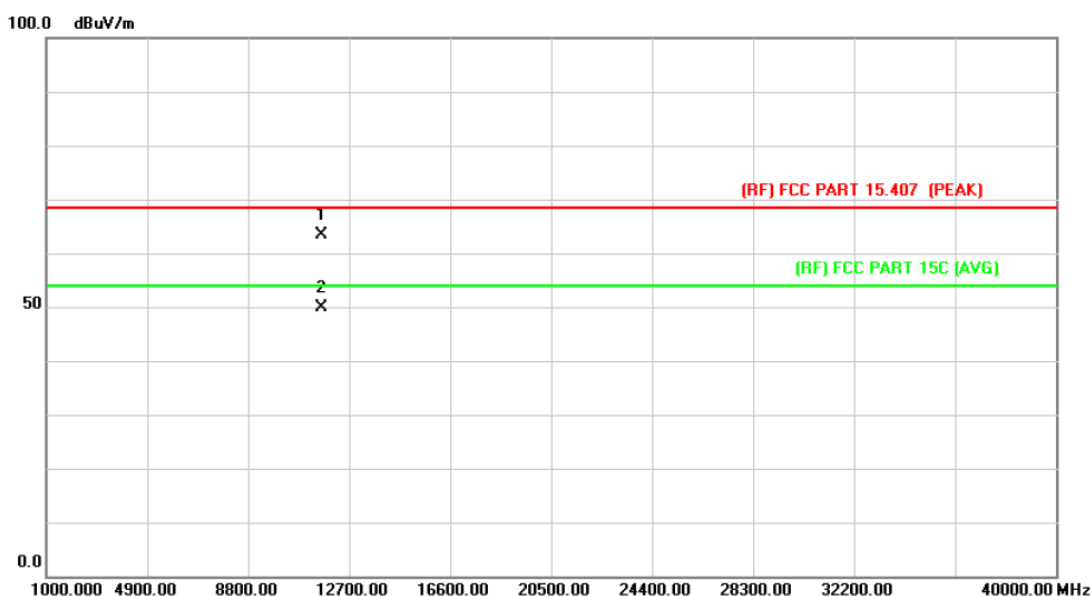

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11648.925	46.44	16.98	63.42	68.30	-4.88	peak
2	*	11652.150	33.01	16.99	50.00	54.00	-4.00	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

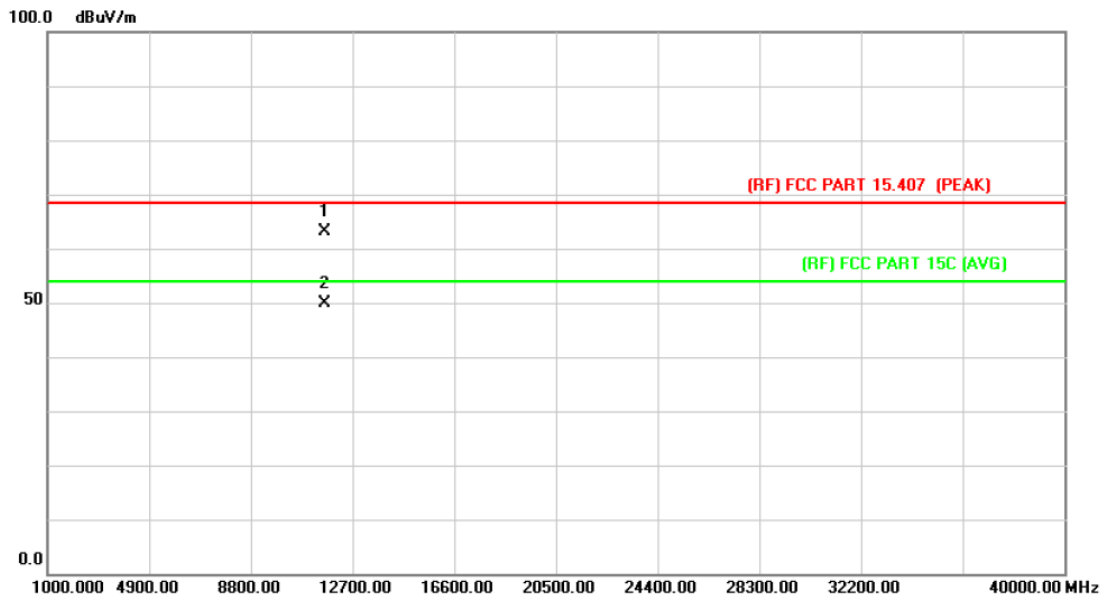

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11650.550	46.26	16.99	63.25	68.30	-5.05	peak
2	*	11651.925	32.96	16.99	49.95	54.00	-4.05	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

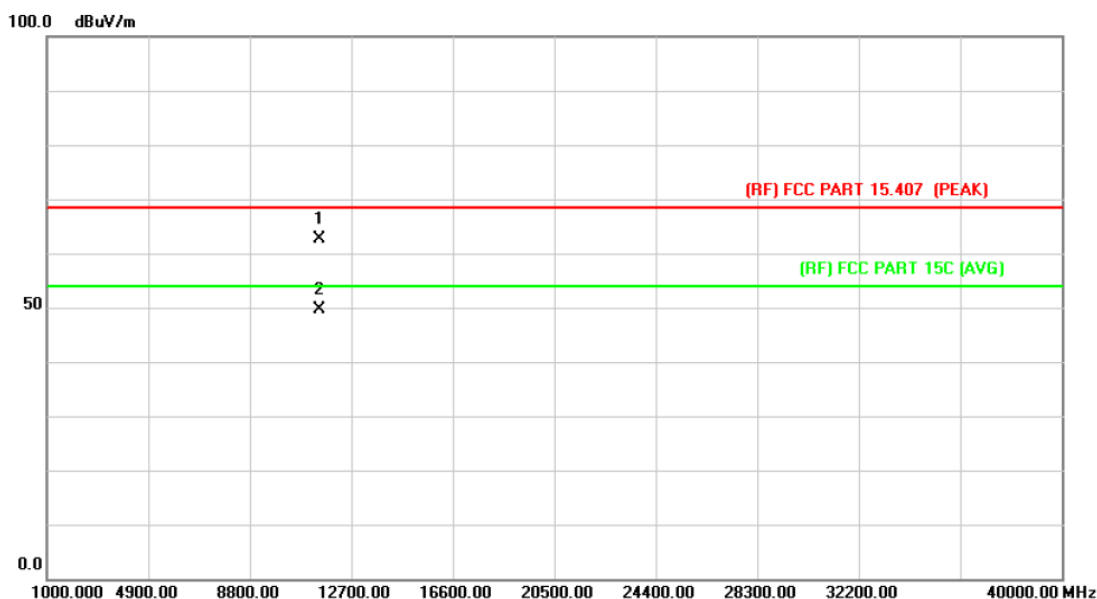

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11489.936	46.01	16.64	62.65	68.30	-5.65	peak
2	*	11493.542	32.93	16.64	49.57	54.00	-4.43	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

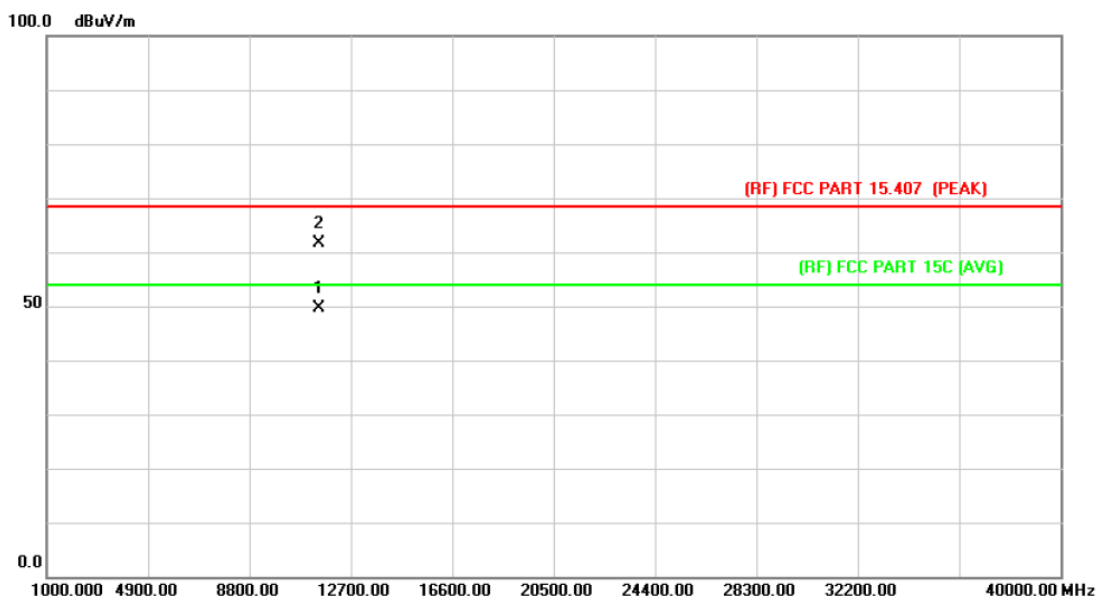

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11488.258	33.06	16.63	49.69	54.00	-4.31	AVG
2		11492.617	45.08	16.64	61.72	68.30	-6.58	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

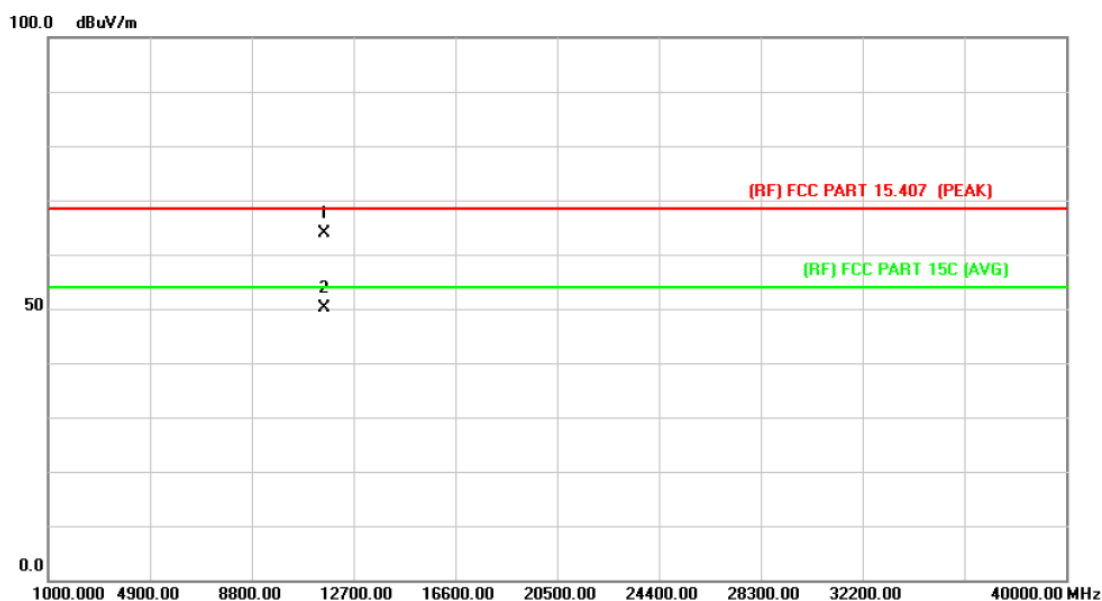

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11568.947	47.07	16.80	63.87	68.30	-4.43	peak
2	*	11571.155	33.35	16.80	50.15	54.00	-3.85	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

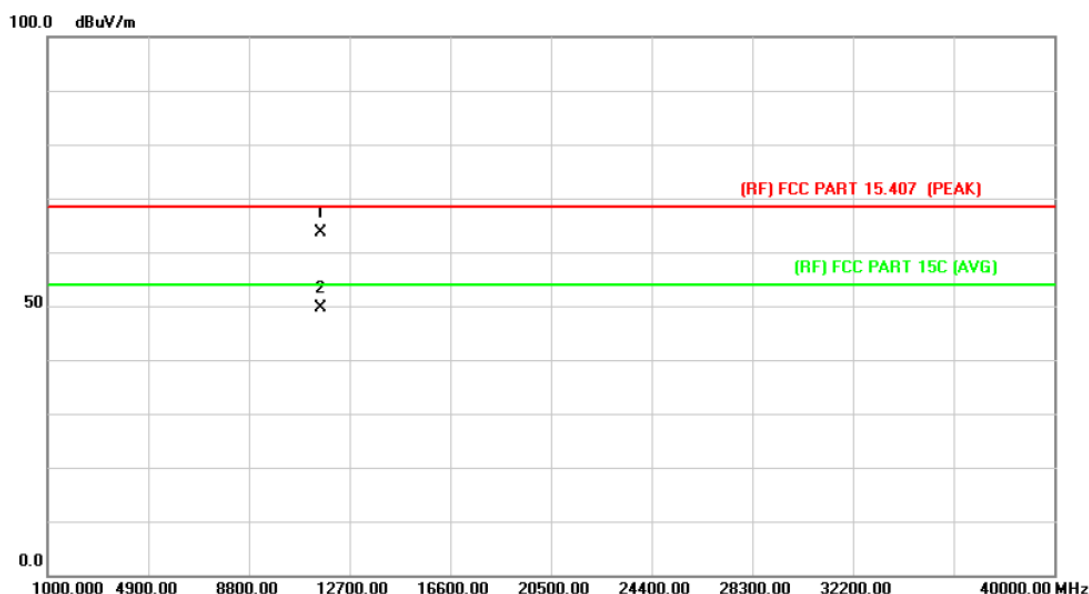

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11568.744	46.89	16.80	63.69	68.30	-4.61	peak
2	*	11571.671	32.88	16.80	49.68	54.00	-4.32	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

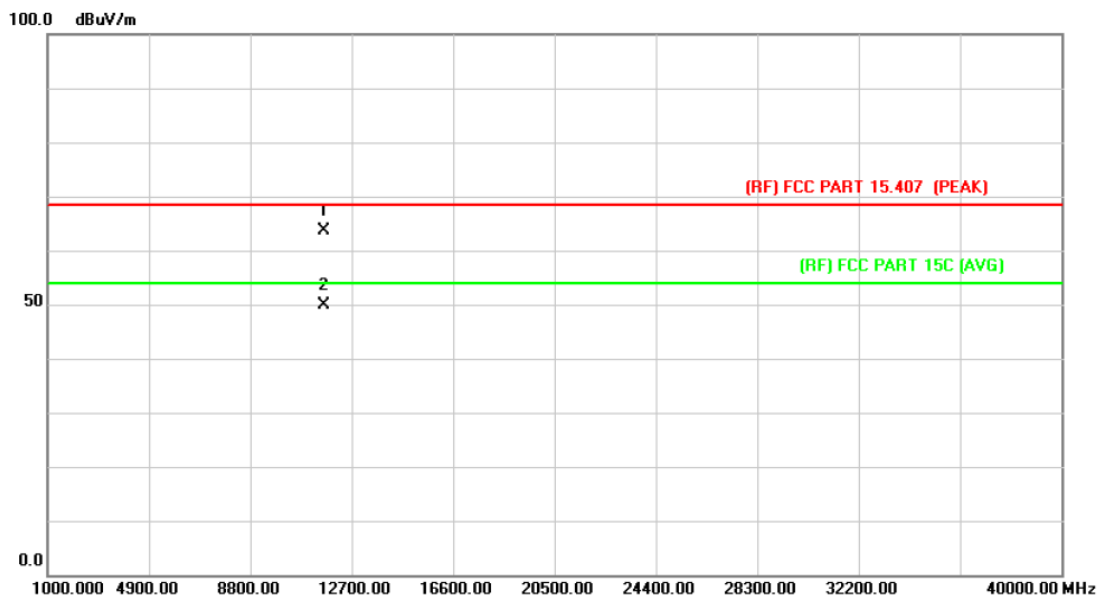

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11649.665	46.65	16.99	63.64	68.30	-4.66	peak
2	*	11652.264	32.89	16.99	49.88	54.00	-4.12	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

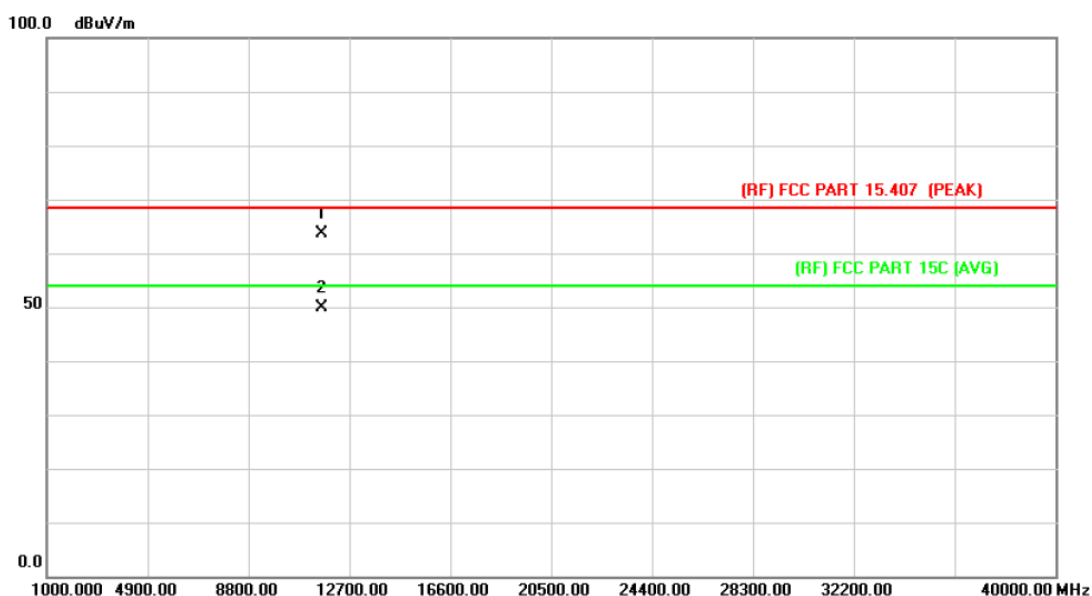

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11649.517	46.58	16.99	63.57	68.30	-4.73	peak
2	*	11652.486	32.99	16.99	49.98	54.00	-4.02	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

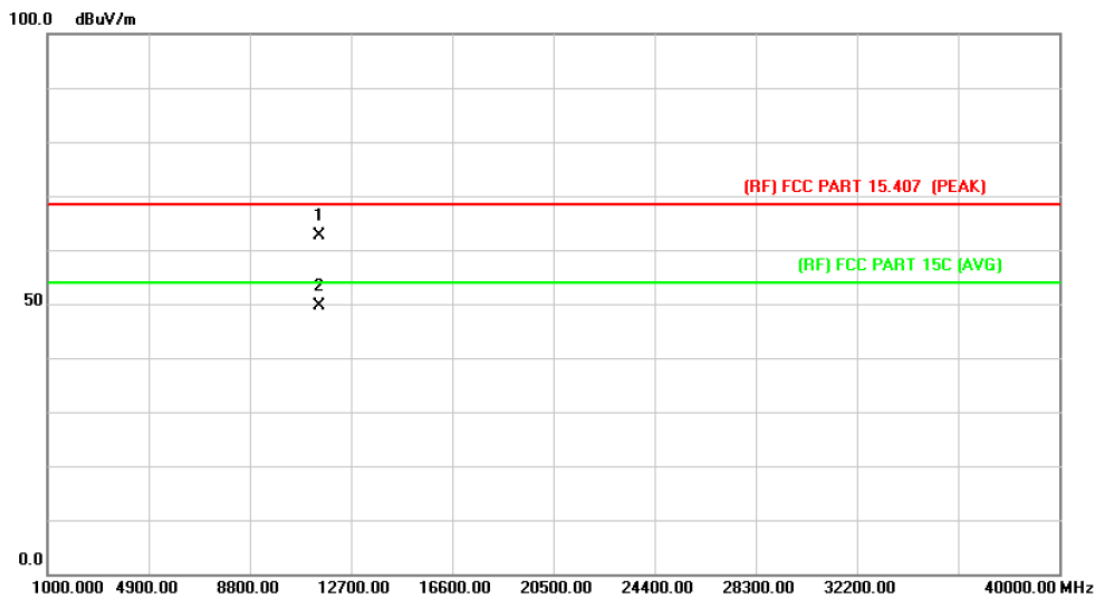

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11489.918	46.04	16.64	62.68	68.30	-5.62	peak
2	*	11493.662	32.98	16.64	49.62	54.00	-4.38	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5745MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

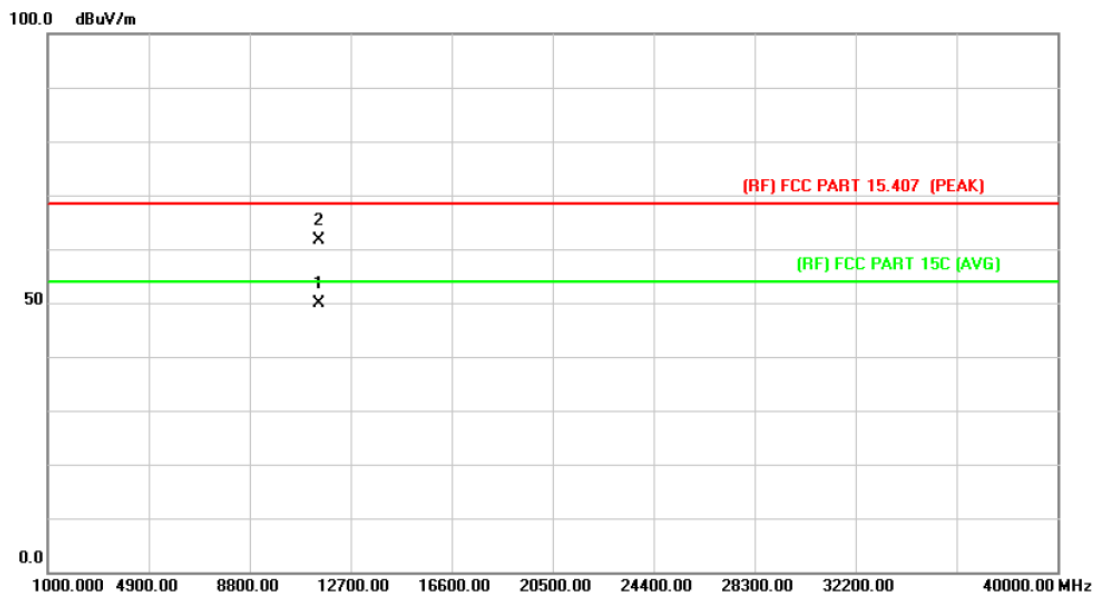

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11488.752	33.12	16.64	49.76	54.00	-4.24	AVG
2		11491.658	45.02	16.64	61.66	68.30	-6.64	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

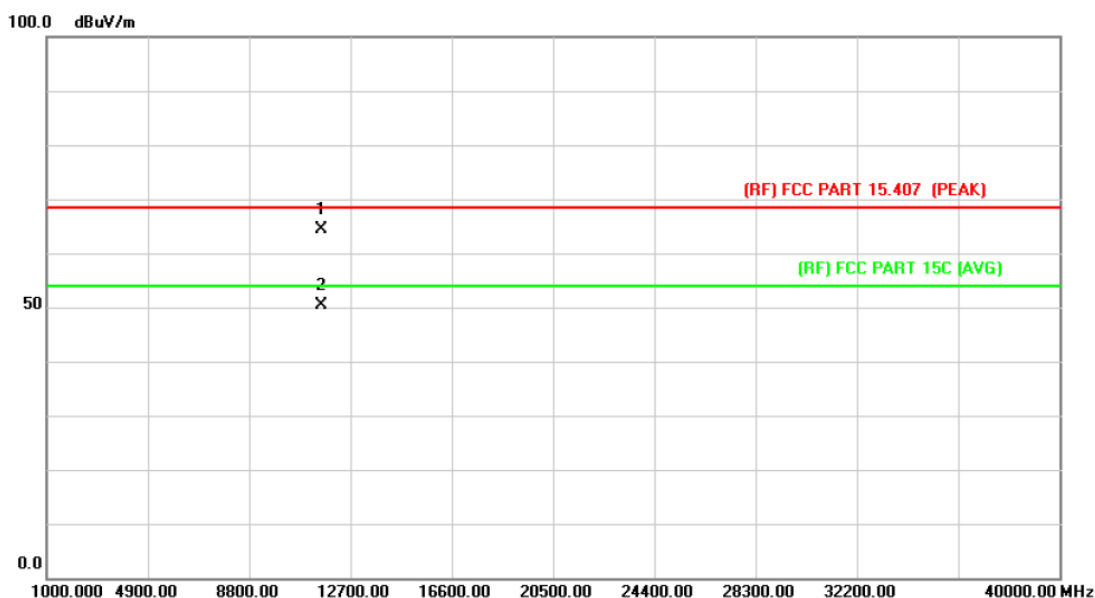

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11568.932	47.47	16.80	64.27	68.30	-4.03	peak
2	*	11571.648	33.56	16.80	50.36	54.00	-3.64	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5785MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

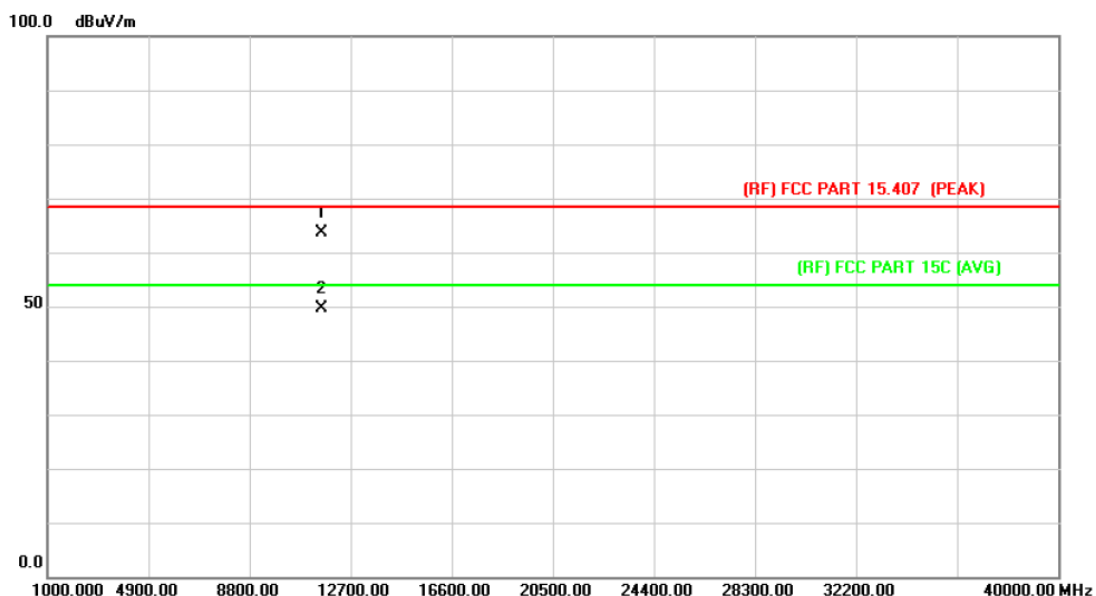

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11569.710	46.78	16.80	63.58	68.30	-4.72	peak
2	*	11571.826	32.93	16.80	49.73	54.00	-4.27	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

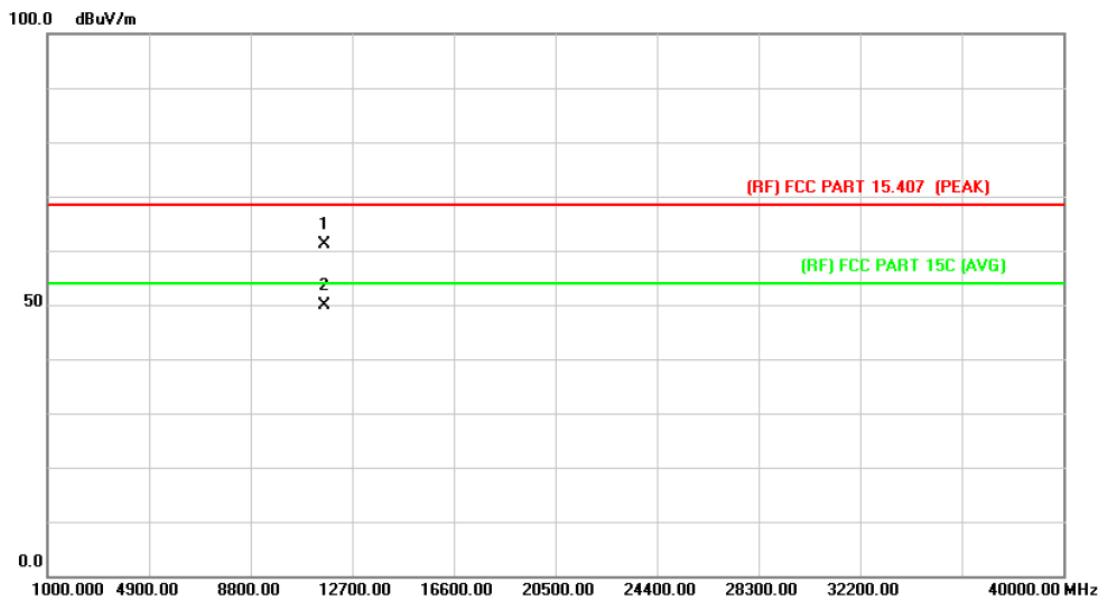

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11649.775	44.14	16.99	61.13	68.30	-7.17	peak
2	*	11652.255	32.80	16.99	49.79	54.00	-4.21	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode 5825MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

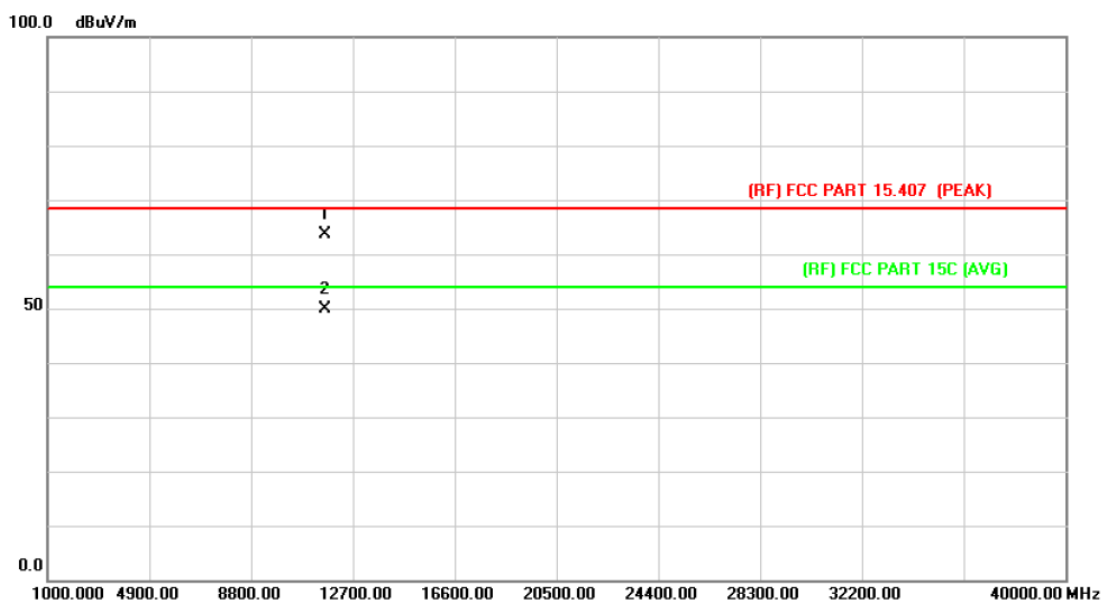

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11649.864	46.69	16.99	63.68	68.30	-4.62	peak
2	*	11652.522	32.88	16.99	49.87	54.00	-4.13	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

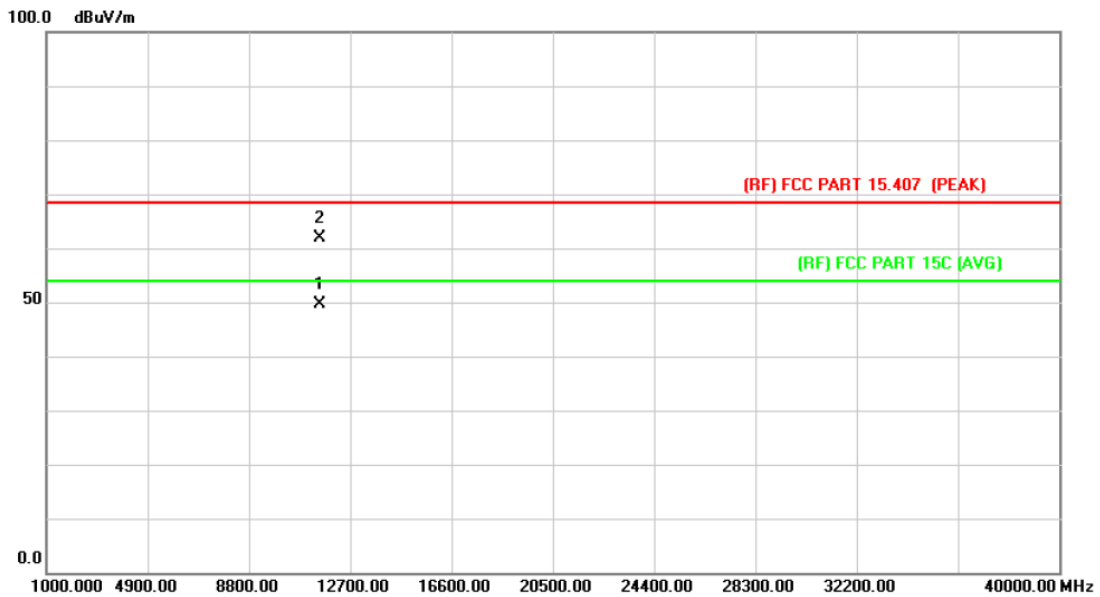

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11511.875	33.06	16.68	49.74	54.00	-4.26	AVG
2		11514.550	45.30	16.68	61.98	68.30	-6.32	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5755MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

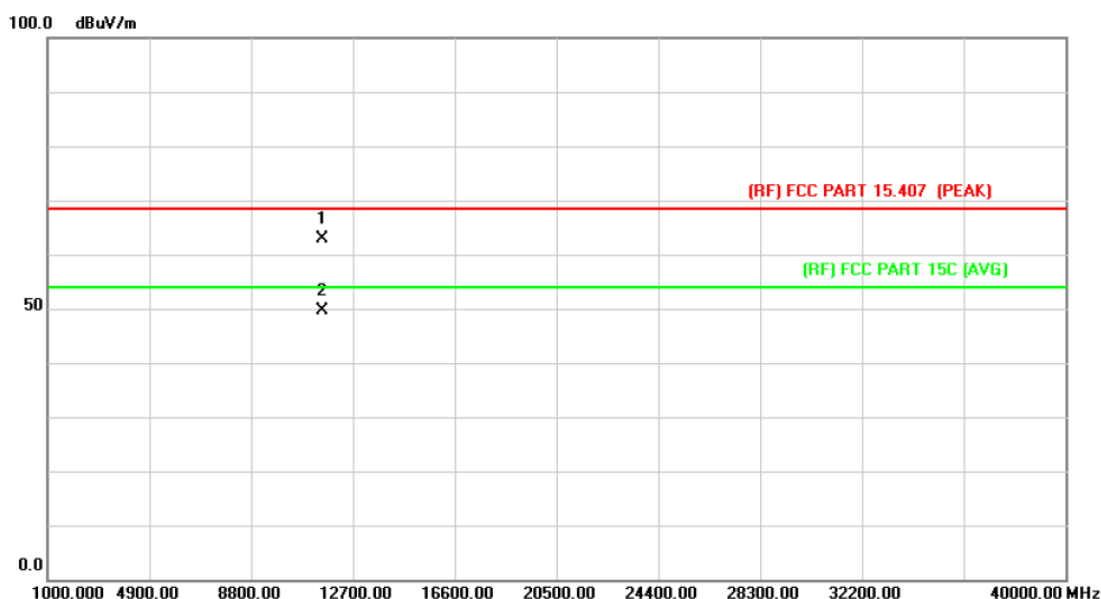

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11508.325	46.24	16.66	62.90	68.30	-5.40	peak
2	*	11514.550	33.05	16.68	49.73	54.00	-4.27	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

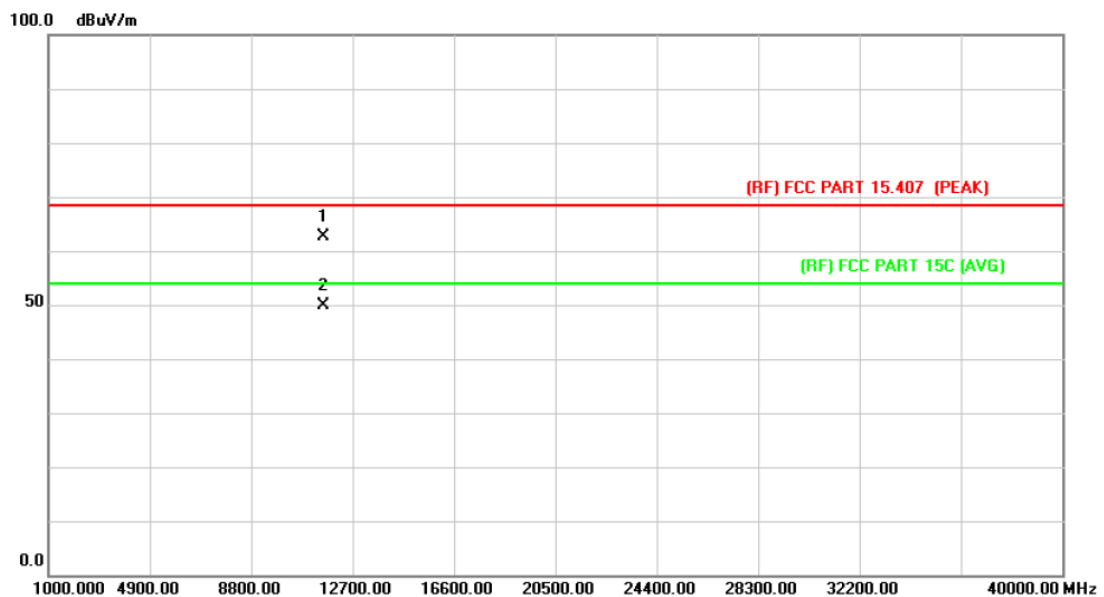

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11589.900	45.66	16.85	62.51	68.30	-5.79	peak
2	*	11591.050	33.01	16.85	49.86	54.00	-4.14	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

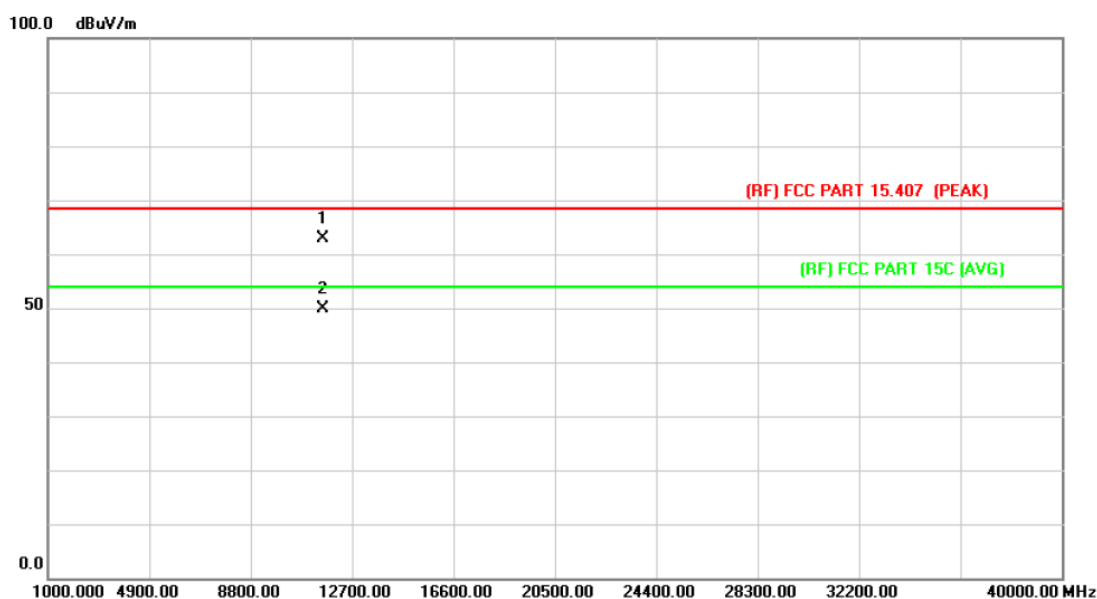

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11588.725	46.12	16.85	62.97	68.30	-5.33	peak
2	*	11590.825	33.07	16.85	49.92	54.00	-4.08	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5755MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

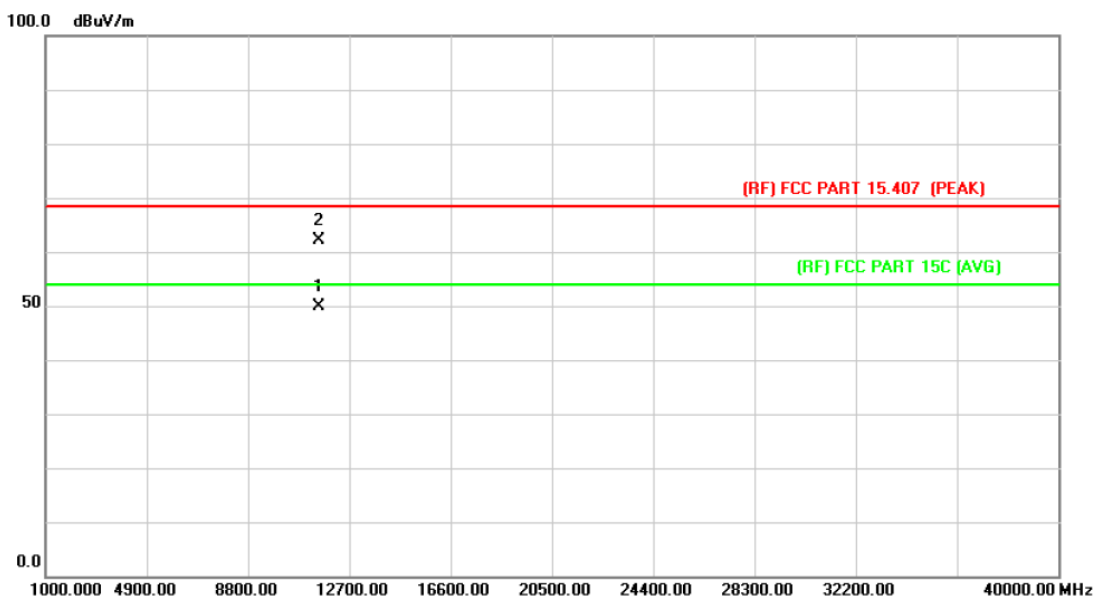

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11512.384	33.14	16.68	49.82	54.00	-4.18	AVG
2		11513.622	45.40	16.68	62.08	68.30	-6.22	peak

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5755MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

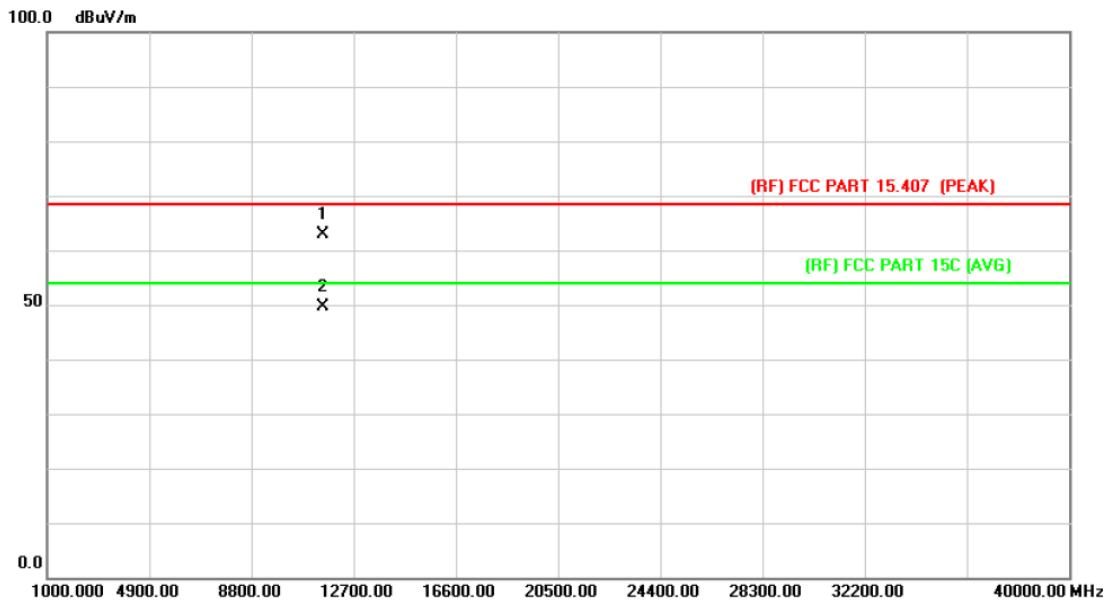

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11509.325	46.12	16.66	62.78	68.30	-5.52	peak
2	*	11513.322	33.04	16.68	49.72	54.00	-4.28	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

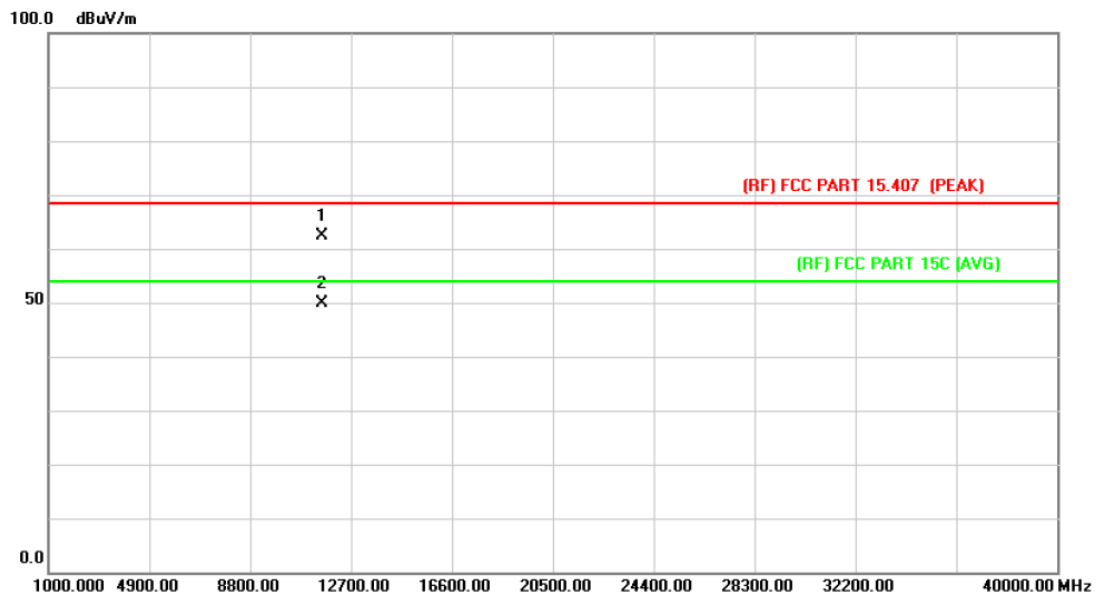

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11589.876	45.51	16.85	62.36	68.30	-5.94	peak
2	*	11591.145	33.03	16.85	49.88	54.00	-4.12	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

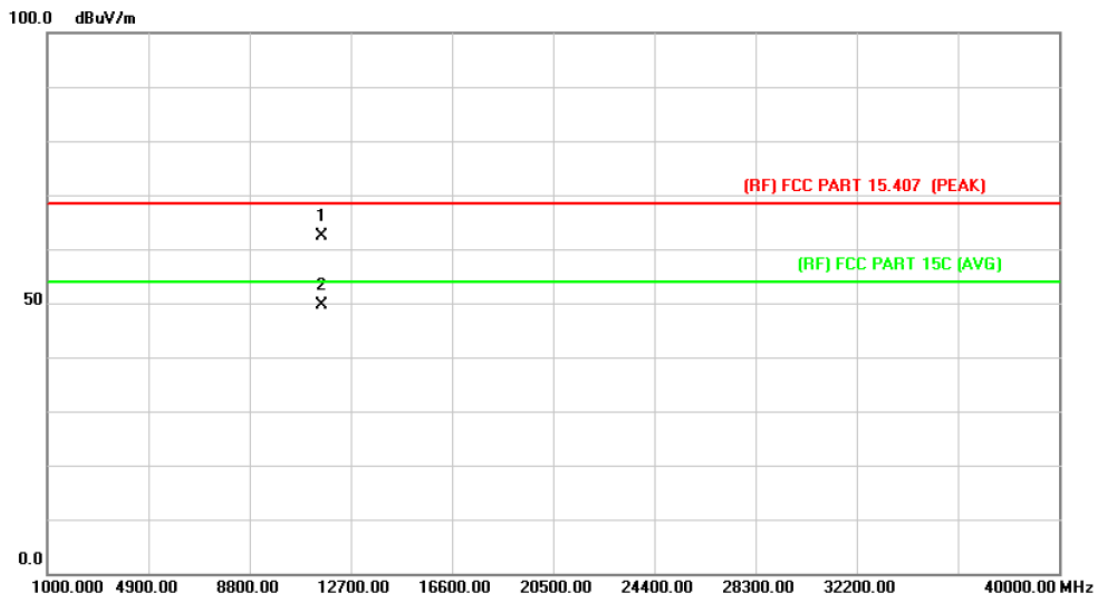

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11587.869	45.53	16.85	62.38	68.30	-5.92	peak
2	*	11591.225	32.76	16.85	49.61	54.00	-4.39	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

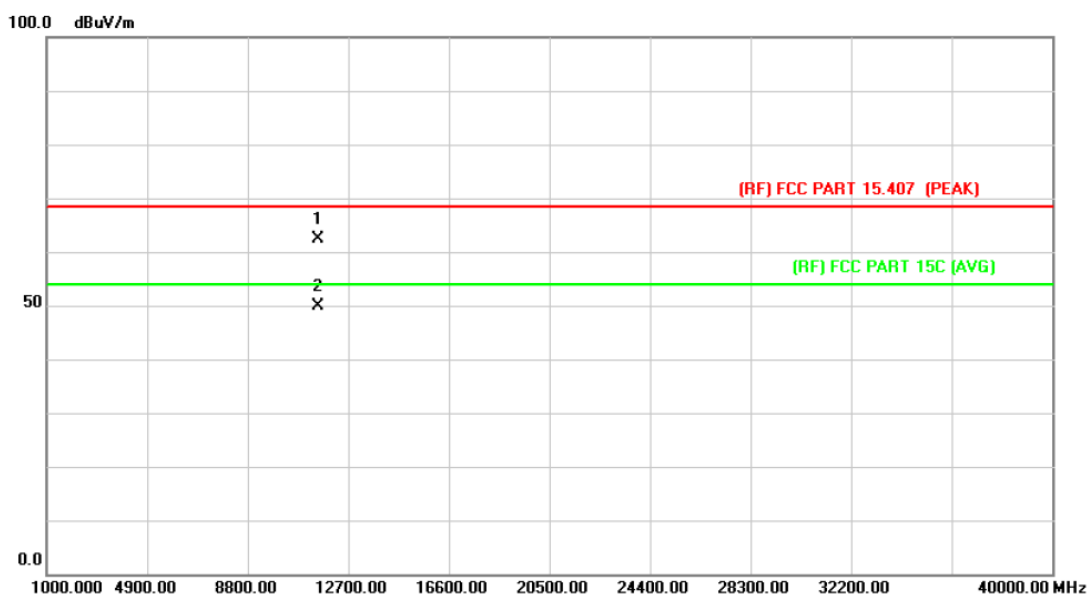

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		11549.825	45.73	16.75	62.48	68.30	-5.82	peak
2	*	11552.125	33.12	16.75	49.87	54.00	-4.13	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Loop	Model Name :	Loop-1
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

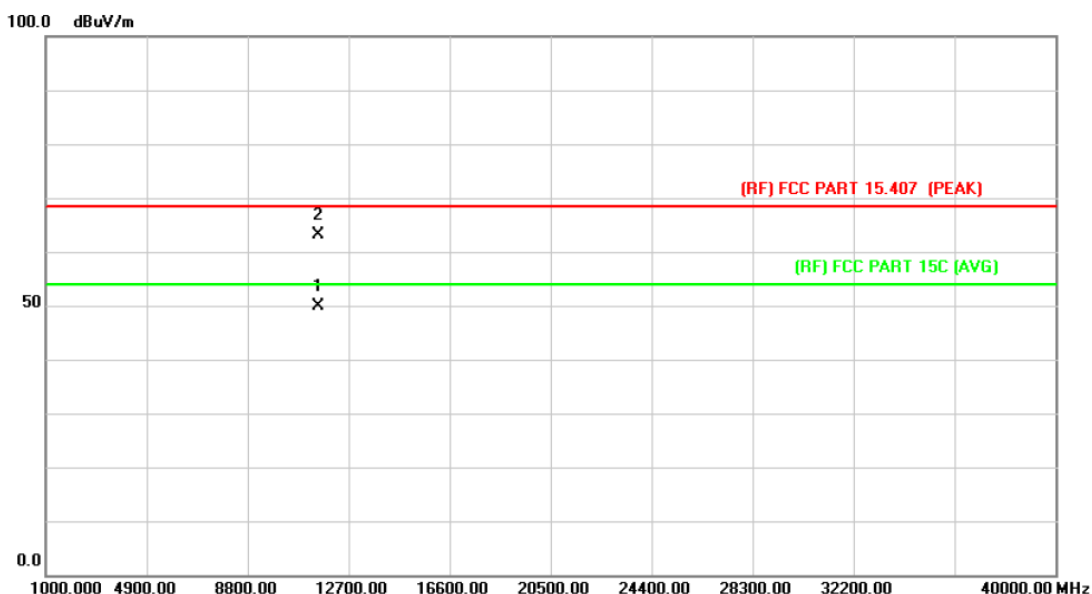

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	11545.325	33.09	16.75	49.84	54.00	-4.16	AVG
2		11553.250	46.26	16.76	63.02	68.30	-5.28	peak

Emission Level= Read Level+ Correct Factor