




# TEST REPORT

<p><b>KCTL Inc.</b>                  65, Sinwon-ro, Yeongtong-gu,                  Suwon-si, Gyeonggi-do, 16677, Korea                  TEL: 82-31-285-0894 FAX: 82-505-299-8311  <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.:                  KR18-SRF0124-B                  Page (1) of (113)</p>	
--	---	---

**1. Client**

- Name : RainUs Co., Ltd.
- Address : 173-36, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
- Date of Receipt : 2018-07-30

**2. Use of Report** : -

**3. Name of Product and Model** : Gateway / G2000

**4. Manufacturer and Country of Origin** : RainUs Co., Ltd. / Korea

**5. FCC ID** : 2AMKA-G2000

**6. Date of Test** : 2018-10-05 to 2018-10-09

**7. Test Standards** : FCC Part 15 Subpart C, 15.247

**8. Test Results** : Refer to the test result in the test report

<p>Affirmation</p>	<p>Tested by                  Name : Seonjun Yun (Signature)</p>	<p>Technical Manager                  Name : Jongha Choi (Signature)</p>
--------------------	--	--

2019-02-08

## KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

**REPORT REVISION HISTORY**

Date	Revision	Page No
2018-10-24	Originally issued	-
2019-02-07	Updated	6, 9
2019-02-08	Updated	13,14

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.*



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (3) of (113)

**KCTL**

## [ Contents ]

<b>1. Client information</b> .....	<b>4</b>
<b>2. Laboratory information</b> .....	<b>5</b>
<b>3. Description of E.U.T.</b> .....	<b>6</b>
3.1 Basic description.....	6
3.2 General description.....	6
3.3 Ambient Conditions.....	7
3.4 Test frequency.....	7
3.5 Test Voltage.....	7
<b>4. Summary of test results</b> .....	<b>8</b>
4.1 Standards & results.....	8
4.2 Measurement Uncertainty.....	8
<b>5. Test results</b> .....	<b>9</b>
5.1 Antenna Requirement.....	9
5.2 Maximum Peak Output Power .....	10
5.3 Peak Power Spectral Density .....	15
5.4 6 dB Bandwidth(DTS Channel Bandwidth).....	30
5.5 Spurious Emission, Band Edge, and Restricted bands .....	57
5.6 Conducted Emission.....	110
<b>6. Test equipment used for test</b> .....	<b>113</b>

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (4) of (113)

**KCTL****1. Client information**

**Applicant:** RainUs Co., Ltd.  
**Address:** 173-36, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,  
Korea  
**Telephone number:** +82 31 326 6783  
**Contact person:** Taehoon Kim / thkim@rainus.co.kr

**Manufacturer:** RainUs Co., Ltd.  
**Address:** 173-36, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,  
Korea

**KCTL**

## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (5) of (113)

# KCTL

## 2. Laboratory information

### Address

#### **KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: +82 31 285 0894

Facsimile Number: +82 505 299 8311


FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**

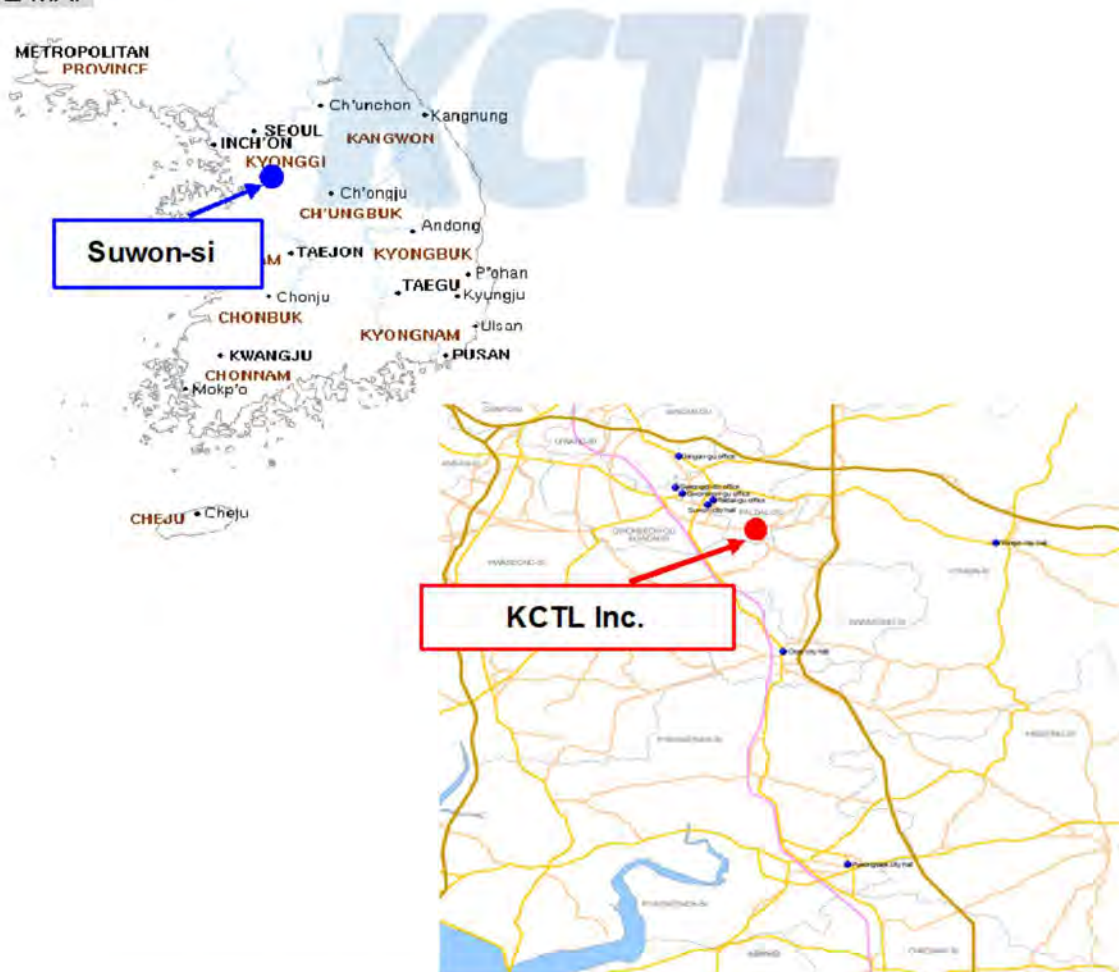

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (6) of (113)



### 3. Description of E.U.T.

#### 3.1 Basic description

Applicant	RainUs Co., Ltd.
Address of Applicant	173-36, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
Manufacturer	RainUs Co., Ltd.
Address of Manufacturer	173-36, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
Type of equipment	Gateway
Basic Model	G2000
Serial number	N/A

#### 3.2 General description

Frequency Range	2 405 MHz ~ 2 480 MHz (Zigbee)
Type of Modulation	DSSS
The number of channels	16 ch
Type of Antenna	Dipole Antenna
Antenna Gain	Ant 0: 5.69 dBi Ant 1: 6.13 dBi Ant 2: 5.87 dBi Ant 3: 5.97 dBi
Transmit Power	2.04 dBm
Power supply	AC 110 V (AC adapter) , DC 48 V (PoE)
Product SW/HW version	V3.6.3 / V1.1
Radio SW/HW version	V3.6.3 / V1.1
Test SW Version	Tera Term v4.91
RF power setting in TEST SW	0

Note : The above EUT information was declared by the manufacturer.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (7) of (113)



### 3.3 Ambient Conditions

	Temperature [°C]	Relative humidity [%]
Ambient Conditions	21	65

### 3.4 Test frequency

	Zigbee
Lowest frequency	2 405 MHz
Middle frequency	2 440 MHz
Highest frequency	2 480 MHz

### 3.5 Test Voltage

Mode	Voltage
Nominal Voltage	AC 110 V (AC adapter) , DC 48 V (PoE)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (8) of (113)

**KCTL**

## 4. Summary of test results

### 4.1 Standards & results

FCC Rule Reference	Parameter	Report Section	Test Result
15.203, 15.247(b)(4)	Antenna Requirement	5.1	C
15.247(b)(3)	Maximum Peak Output Power	5.2	C
15.247(e)	Peak Power Spectral Density	5.3	C
15.247(a)(2)	6 dB Channel Bandwidth	5.4	C
-	Occupied Bandwidth	5.4	C
15.247(d), 15.205(a), 15.209(a)	Spurious Emission, Band Edge and Restricted bands	5.5	C
15.207(a)	Conducted Emissions	5.6	C

Note<sub>1)</sub>: C = Complies, NC = Not Complies, NT = Not Tested, NA = Not Applicable

### 4.2 Measurement Uncertainty

Measurement Item	Expanded Uncertainty $U = kU_c (k = 2)$	
Conducted RF power	1.44 dB	
Conducted Spurious Emissions	1.52 dB	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+4.94 dB, -5.06 dB
		+4.93 dB, -5.05 dB
	300 MHz ~ 1 000 MHz:	+4.97 dB, -5.08 dB
		+4.84 dB, -4.96 dB
	1 GHz ~ 25 GHz:	+6.03 dB, -6.05 dB
Conducted Emissions	9 kHz ~ 150 kHz:	3.75 dB
	150 kHz ~ 30 MHz:	3.36 dB

This test report shall not be reproduced, except in full, without the written approval



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (9) of (113)



## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.1.2 Result

-Complied

The transmitter has 4 Dipole antennas with unique antenna connector (RP-SMA).

## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (10) of (113)



## 5.2 Maximum Peak Output Power

### 5.2.1 Regulation

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2.2 Measurement Procedure

These test measurement settings are specified in section 9.0 of 558074 D01 DTS Meas Guidance.

#### 5.2.2.1 PKPM1 Peak-reading power meter method

##### 5.2.2.1.1 General

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

#### 5.2.2.1.2 Measurement using a spectrum analyzer (SA)

##### 5.2.2.1.2.1 Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each sweep)

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (12) of (113)



5.2.2.1.2.2 Method AVGSA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction)

- a) Measure the duty cycle,  $x$ , of the transmitter output signal as described in 6.0.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to "free run".
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25 %.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (13) of (113)



### 5.2.3 Test Result

- Complied

#### AC 110 V (AC adapter)

##### -Ant 0

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	1.94	30.00	28.06	-2.21
Middle	2 440	1.74	30.00	28.26	-2.36
Highest	2 480	1.64	30.00	28.36	-2.55

##### -Ant 1

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	2.04	29.87	27.83	-2.07
Middle	2 440	1.94	29.87	27.93	-2.19
Highest	2 480	1.84	29.87	28.03	-2.35

##### -Ant 2

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	0.86	30.00	29.14	-3.06
Middle	2 440	0.76	30.00	29.24	-3.16
Highest	2 480	0.66	30.00	29.34	-3.26

##### -Ant 3

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	0.96	30.00	29.04	-2.96
Middle	2 440	0.96	30.00	29.04	-3.01
Highest	2 480	0.86	30.00	29.14	-3.05

NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (14) of (113)

**KCTL****DC 48 V (PoE)****-Ant 0**

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	1.66	30.00	28.34	-2.46
Middle	2 440	1.56	30.00	28.44	-2.53
Highest	2 480	1.36	30.00	28.64	-2.67

**-Ant 1**

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	2.04	29.87	27.83	-2.07
Middle	2 440	1.94	29.87	27.93	-2.19
Highest	2 480	1.84	29.87	28.03	-2.35

**-Ant 2**

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	0.76	30.00	29.24	-3.19
Middle	2 440	0.66	30.00	29.34	-3.28
Highest	2 480	0.66	30.00	29.34	-3.35

**-Ant 3**

Channel	Frequency [MHz]	Result [dBm]	Limit [dBm]	Margin [dB]	Average Power [dBm]
Lowest	2 405	0.96	30.00	29.04	-2.95
Middle	2 440	0.96	30.00	29.04	-3.05
Highest	2 480	0.86	30.00	29.14	-3.08

## NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

## 5.3 Peak Power Spectral Density

### 5.3.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.3.2 Measurement Procedure

These test measurement settings are specified in section 10.0 of 558074 D01 DTS Meas Guidance.

#### 5.3.2.1 Method PKPSD (peak PSD)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- 4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (16) of (113)

**KCTL****5.3.3 Test Result**

- Complied

**AC 110 V (AC adapter)****-Ant 0**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-13.43	8.00	21.43
Middle	2 440	-14.45	8.00	22.45
Highest	2 480	-13.57	8.00	21.57

**-Ant 1**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-14.15	8.00	22.15
Middle	2 440	-15.03	8.00	23.03
Highest	2 480	-14.32	8.00	22.32

**-Ant 2**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-11.59	8.00	19.59
Middle	2 440	-12.08	8.00	20.08
Highest	2 480	-12.20	8.00	20.20

**-Ant 3**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-11.98	8.00	19.98
Middle	2 440	-12.19	8.00	20.19
Highest	2 480	-12.25	8.00	20.25

## NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (17) of (113)

**KCTL****DC 48 V (PoE)****-Ant 0**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-13.69	8.00	21.69
Middle	2 440	-13.62	8.00	21.62
Highest	2 480	-14.31	8.00	22.31

**-Ant 1**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-12.89	8.00	20.89
Middle	2 440	-13.41	8.00	21.41
Highest	2 480	-13.20	8.00	21.20

**-Ant 2**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-11.81	8.00	19.81
Middle	2 440	-12.22	8.00	20.22
Highest	2 480	-12.47	8.00	20.47

**-Ant 3**

Channel	Frequency [MHz]	Result (RBW=3 kHz) [dB m]	Limit [dBm/3 kHz]	Margin [dB]
Lowest	2 405	-11.51	8.00	19.51
Middle	2 440	-12.08	8.00	20.08
Highest	2 480	-11.96	8.00	19.96

## NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.


### 5.3.4 Test Plot

Figure 1. Plot of the Power Density


**AC 110 V (AC adapter)**

**-Ant 0**

Lowest Channel (2 405 MHz)

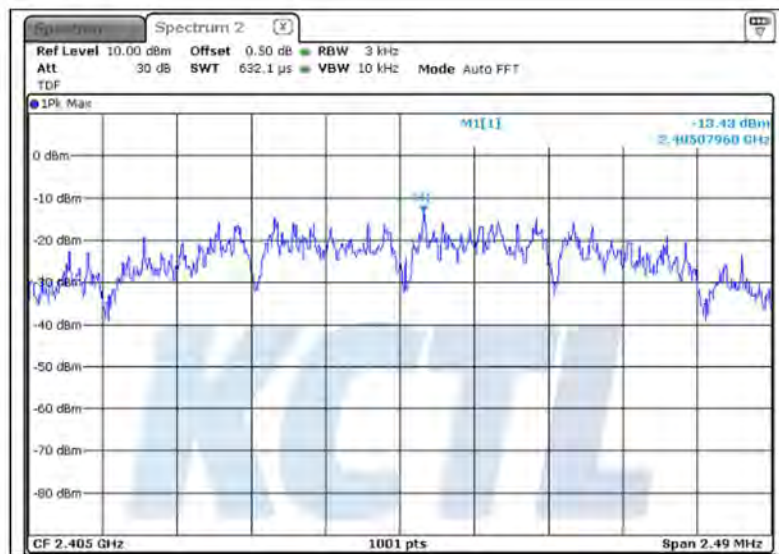

Middle Channel (2 440 MHz)

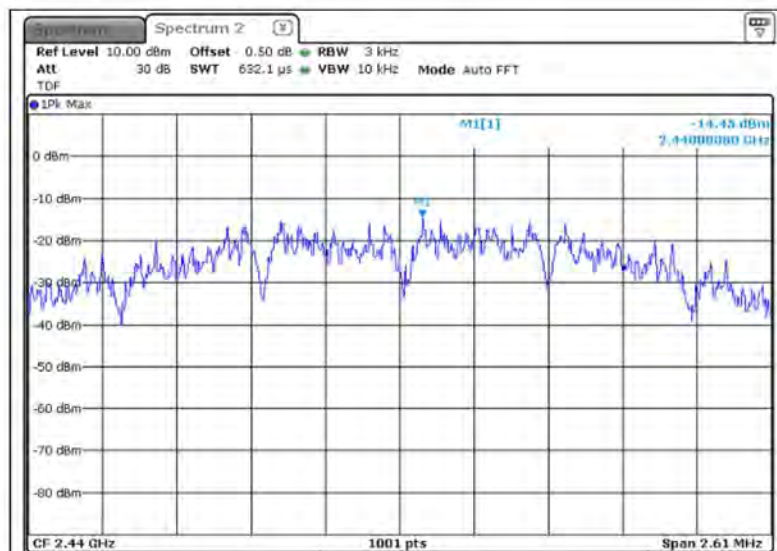


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (19) of (113)




## Highest Channel (2 480 MHz)

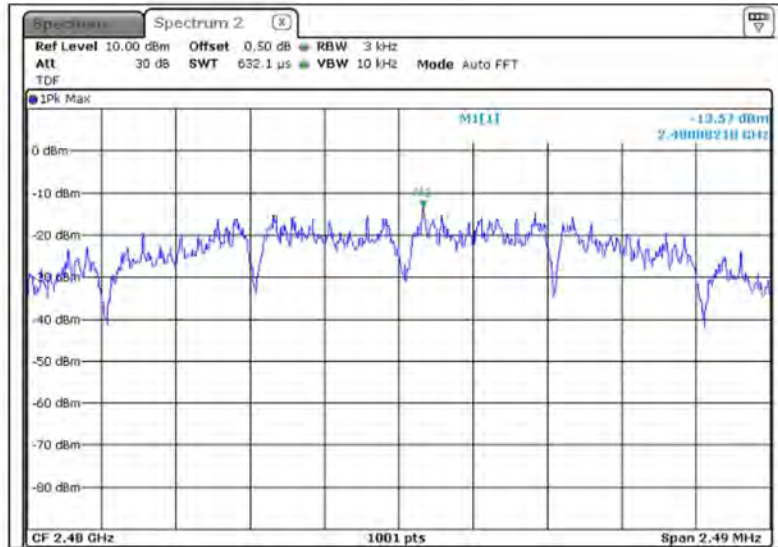

## -Ant 1

## Lowest Channel (2 405 MHz)

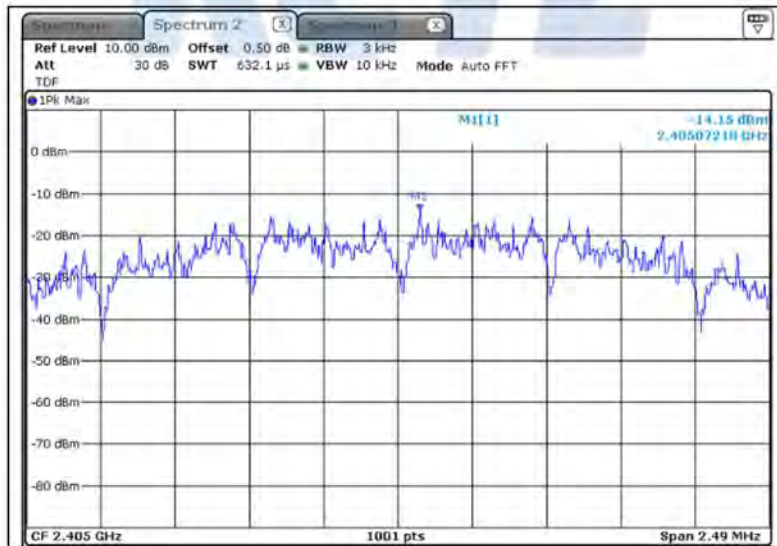


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (20) of (113)



## Middle Channel (2 440 MHz)

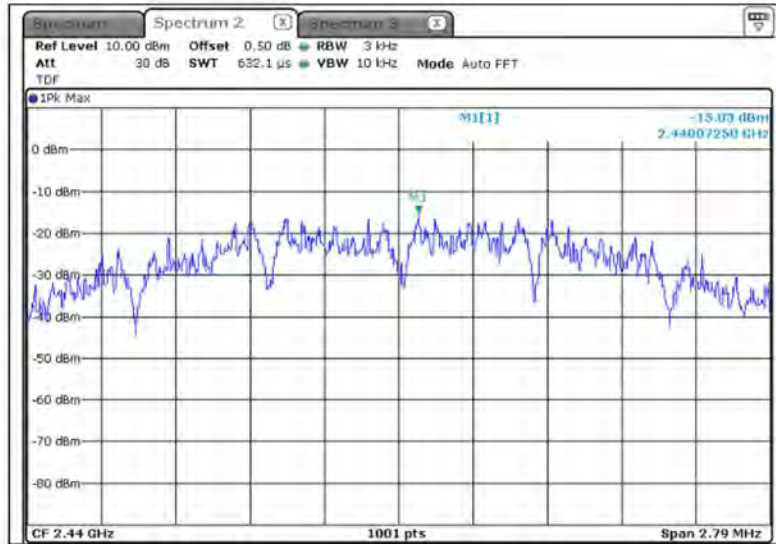

## Highest Channel (2 480 MHz)

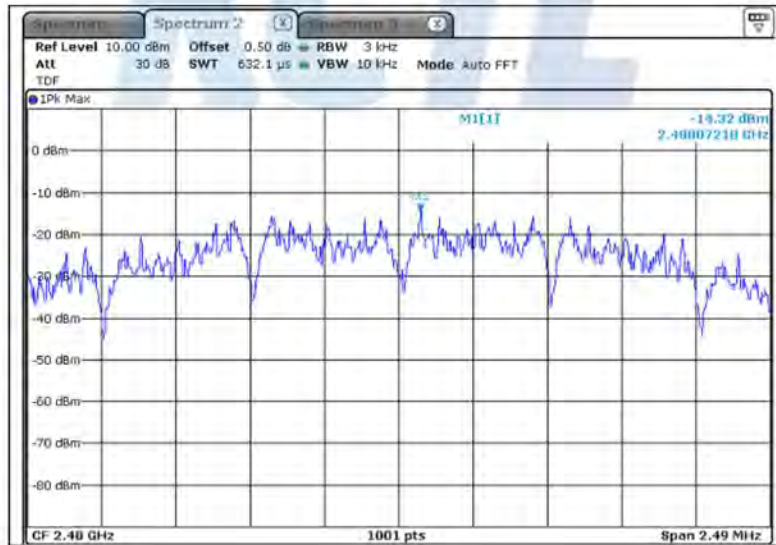

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (21) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

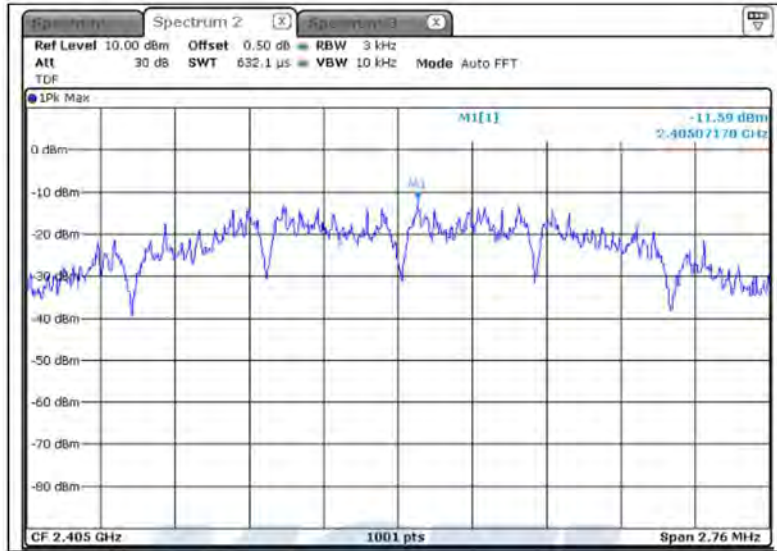

Middle Channel (2 440 MHz)

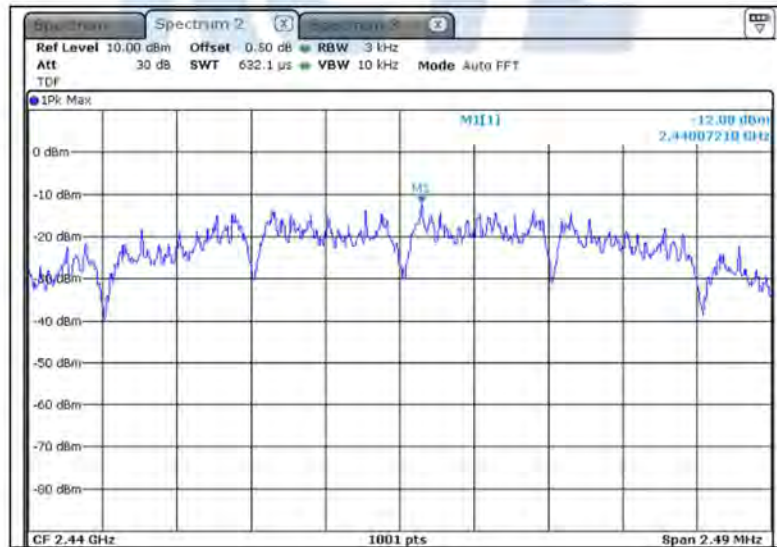


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (22) of (113)




## Highest Channel (2 480 MHz)

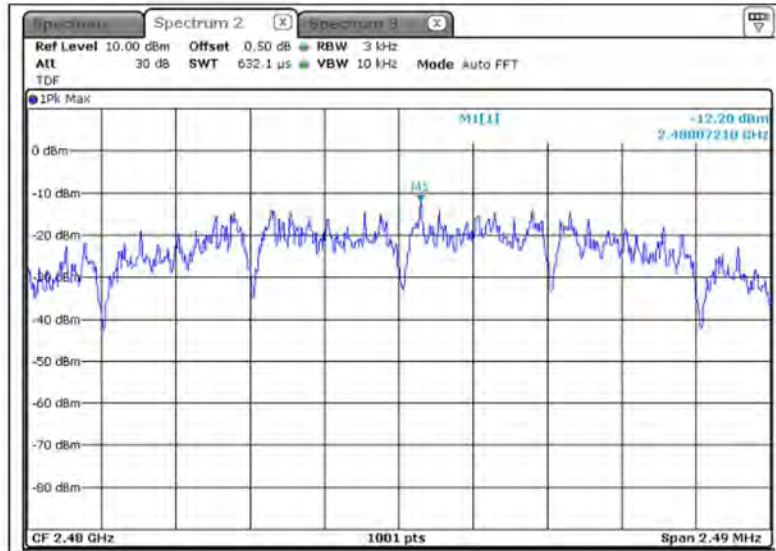

## -Ant 3

## Lowest Channel (2 405 MHz)

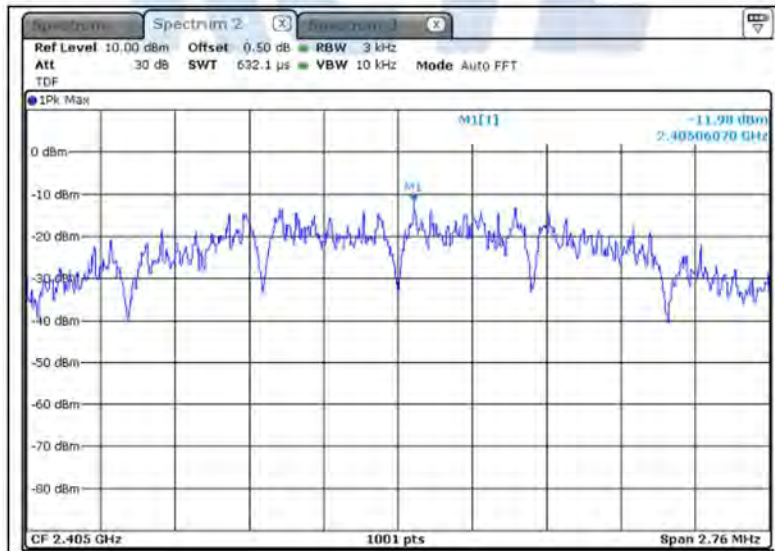

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A


Page (23) of (113)



## Middle Channel (2 440 MHz)

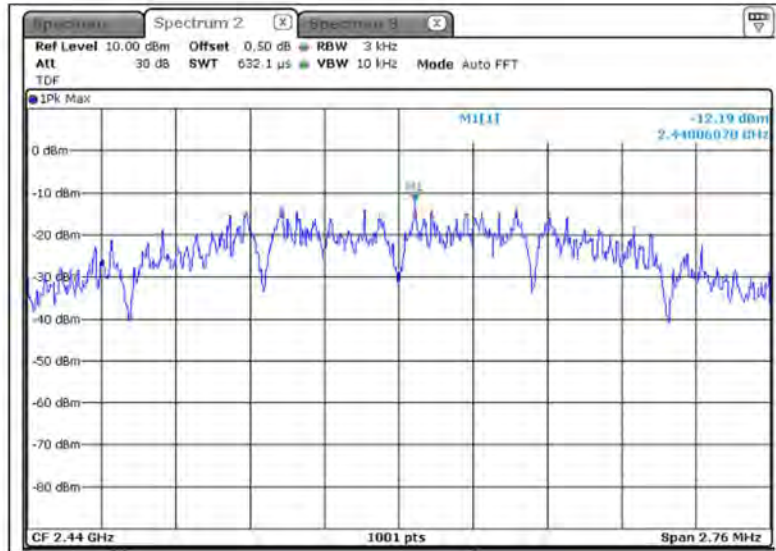

## Highest Channel (2 480 MHz)

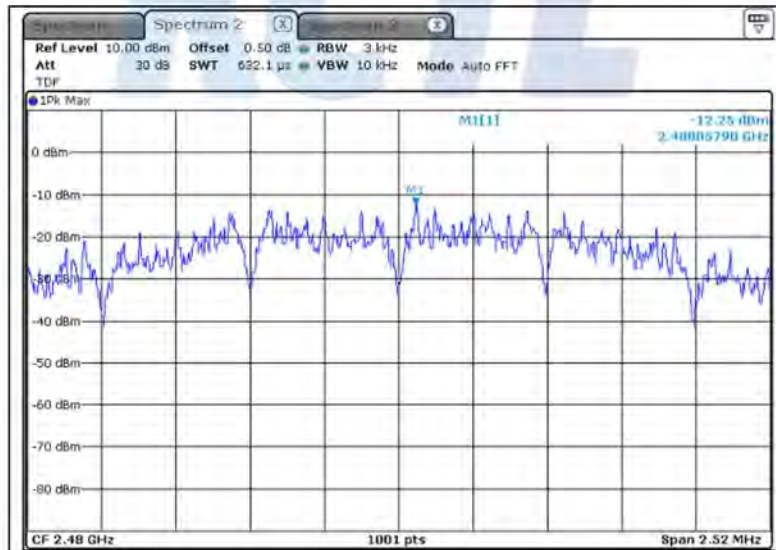

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A


Page (24) of (113)




## DC 48 V (PoE)

-Ant 0

Lowest Channel (2 405 MHz)

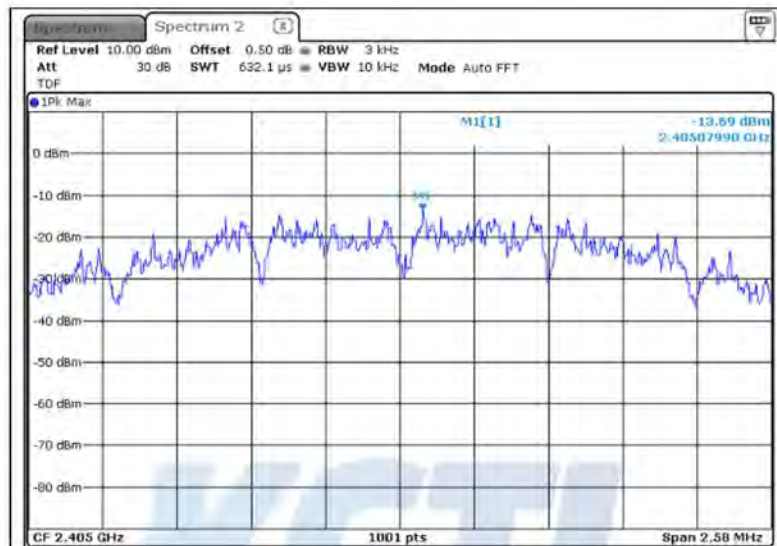

Middle Channel (2 440 MHz)

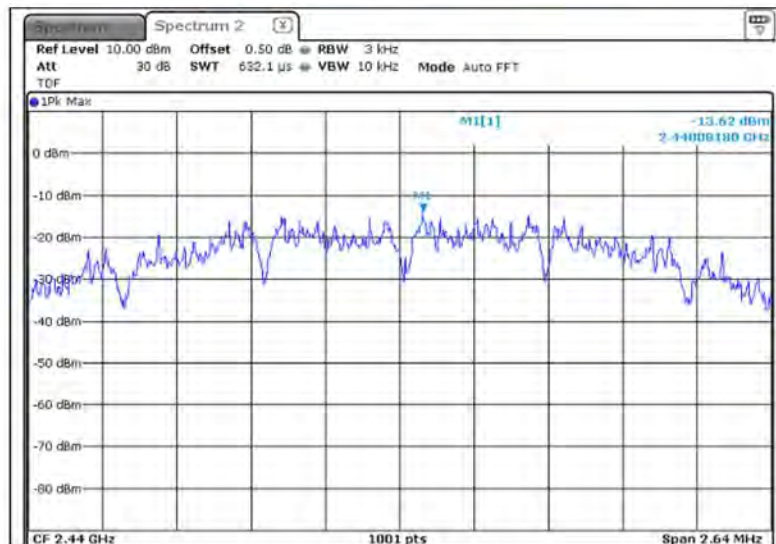




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (25) of (113)




## Highest Channel (2 480 MHz)

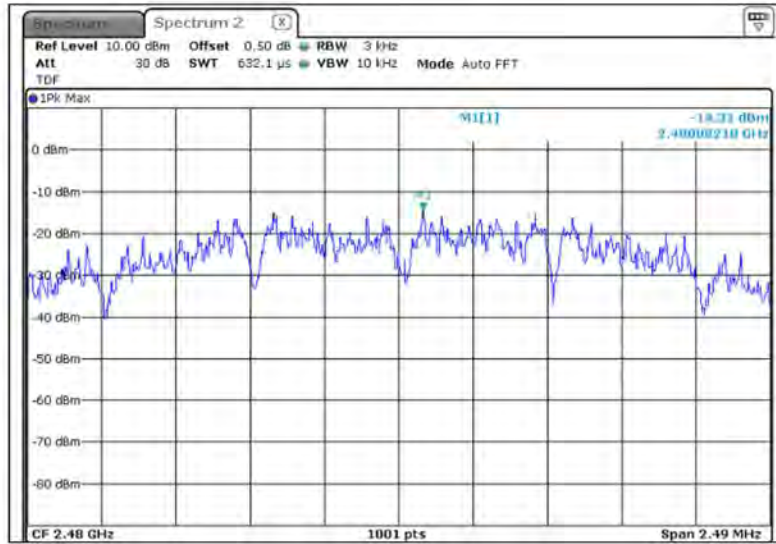

## -Ant 1

## Lowest Channel (2 405 MHz)

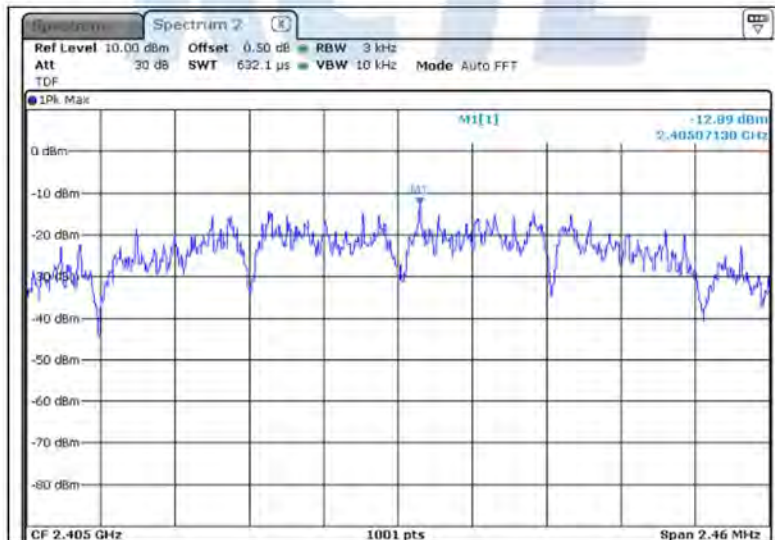


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (26) of (113)



## Middle Channel (2 440 MHz)

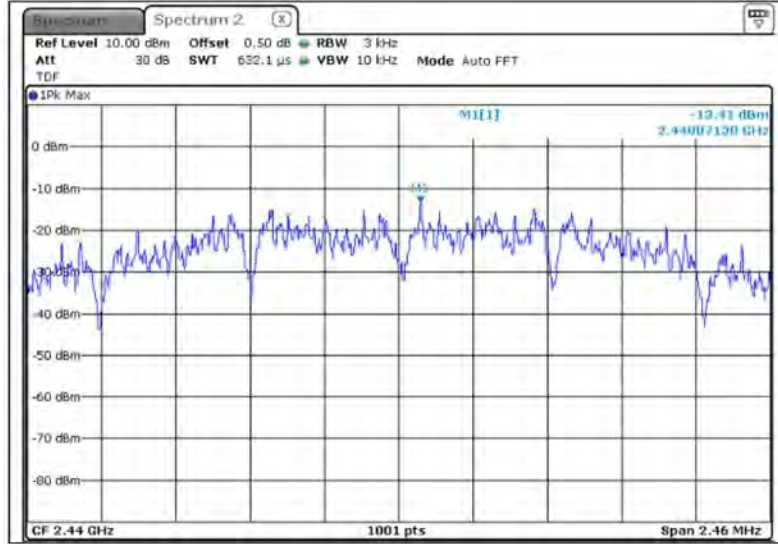

## Highest Channel (2 480 MHz)

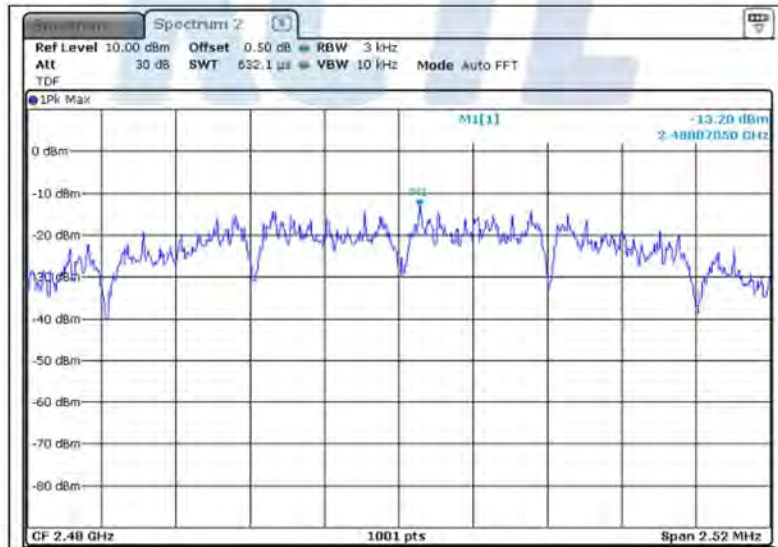

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (27) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

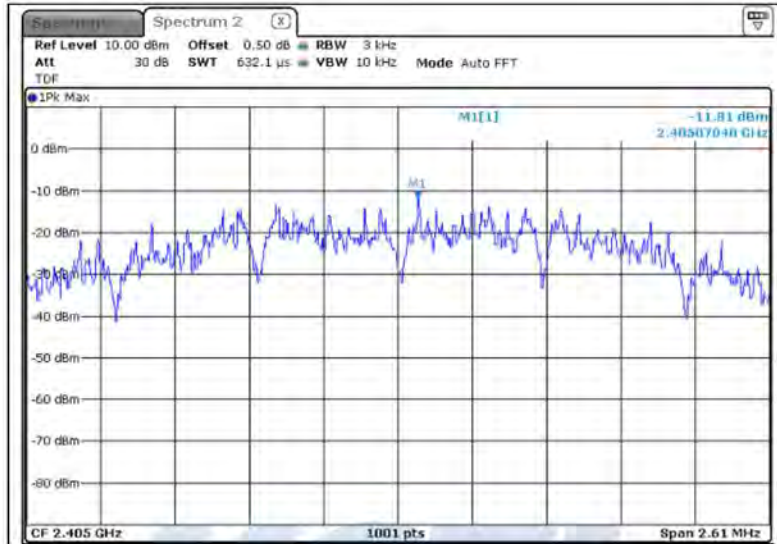

Middle Channel (2 440 MHz)

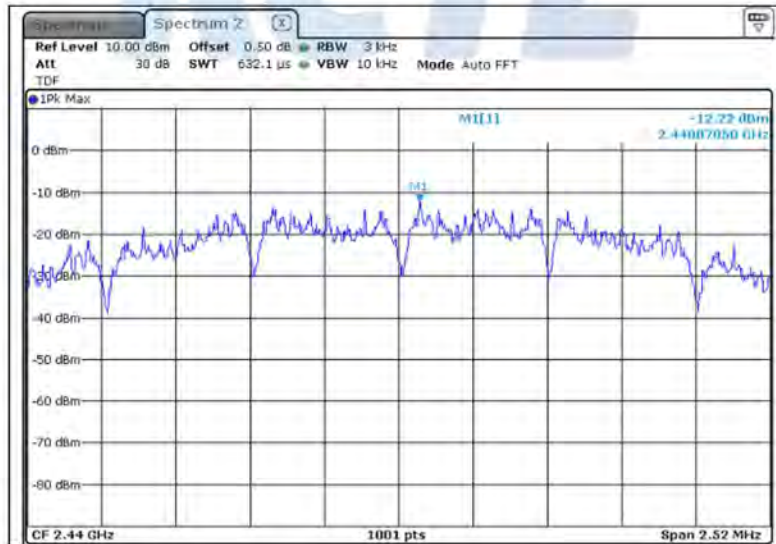


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (28) of (113)




## Highest Channel (2 480 MHz)

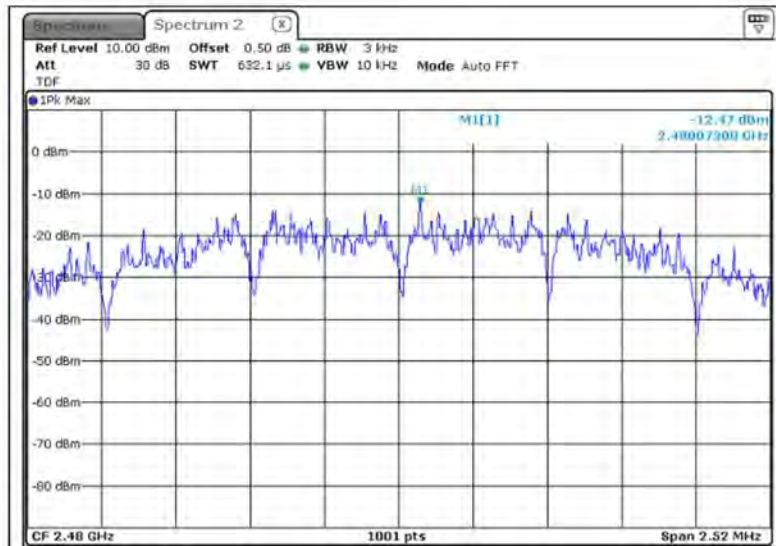

## -Ant 3

## Lowest Channel (2 405 MHz)

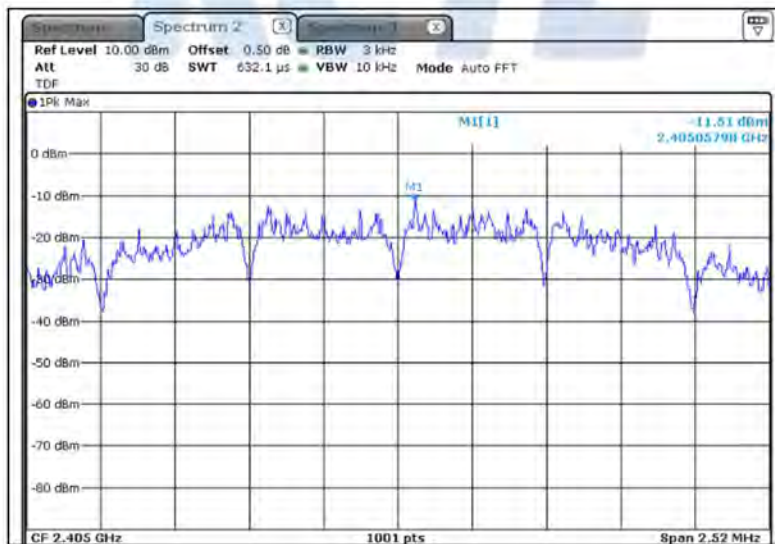


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (29) of (113)



## Middle Channel (2 440 MHz)

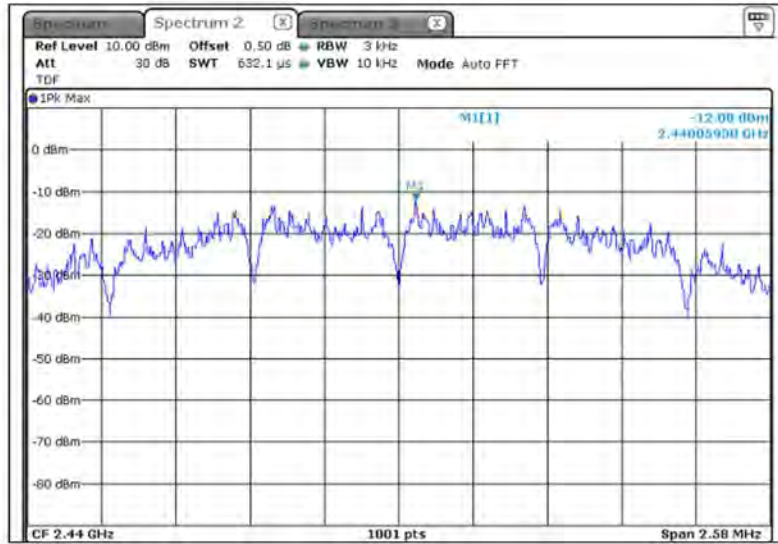

## Highest Channel (2 480 MHz)

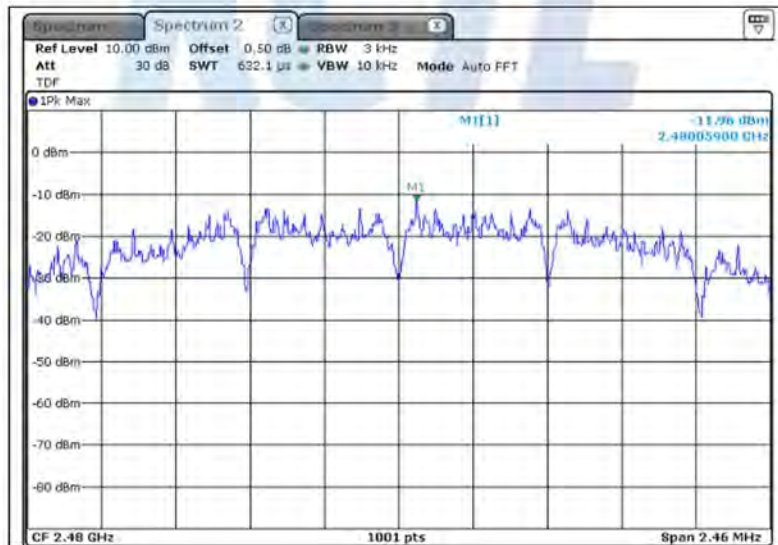

## 5.4 6 dB Bandwidth(DTS Channel Bandwidth)

### 5.4.1 Regulation

According to §15.247(a)(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.4.2 Measurement Procedure

These test measurement settings are specified in section 8.0 of 558074 D01 DTS Meas Guidance.

#### 5.4.2.1 DTS Channel Bandwidth-Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 5.4.2.2 DTS Channel Bandwidth Measurement Procedure-Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector with maximum hold) is implemented by the instrumentation function.

When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (31) of (113)

**KCTL****5.4.3 Test Result**

- Complied

**AC 110 V (AC adapter)****-Ant 0**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.66	0.50	2.94
Middle	2 440	1.74	0.50	2.96
Highest	2 480	1.66	0.50	2.90

**-Ant 1**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.66	0.50	2.94
Middle	2 440	1.86	0.50	2.88
Highest	2 480	1.66	0.50	2.92

**-Ant 2**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.84	0.50	2.96
Middle	2 440	1.66	0.50	2.88
Highest	2 480	1.66	0.50	2.84

**-Ant 3**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.84	0.50	2.94
Middle	2 440	1.84	0.50	2.92
Highest	2 480	1.68	0.50	2.88

**NOTE:**

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (32) of (113)

**KCTL****DC 48 V (PoE)****-Ant 0**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.72	0.50	2.94
Middle	2 440	1.76	0.50	2.88
Highest	2 480	1.66	0.50	2.88

**-Ant 1**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.64	0.50	2.88
Middle	2 440	1.64	0.50	2.86
Highest	2 480	1.68	0.50	2.86

**-Ant 2**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.74	0.50	2.92
Middle	2 440	1.68	0.50	2.86
Highest	2 480	1.68	0.50	2.88

**-Ant 3**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Min. Limit [MHz]	Occupied Bandwidth (99 % BW) [MHz]
Lowest	2 405	1.68	0.50	2.94
Middle	2 440	1.72	0.50	2.90
Highest	2 480	1.64	0.50	2.88

## NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.



### 5.4.4 Test Plot

Figure 2. Plot of the 6 dB Bandwidth &amp; Occupied Bandwidth

#### - 6 dB Bandwidth


#### AC 110 V (AC adapter)

#### -Ant 0

Lowest Channel (2 405 MHz)



Middle Channel (2 440 MHz)

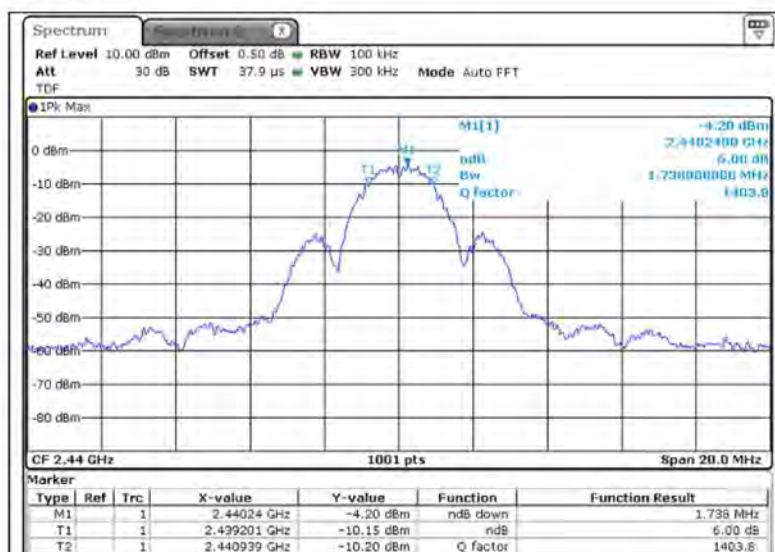


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (34) of (113)




## Highest Channel (2 480 MHz)

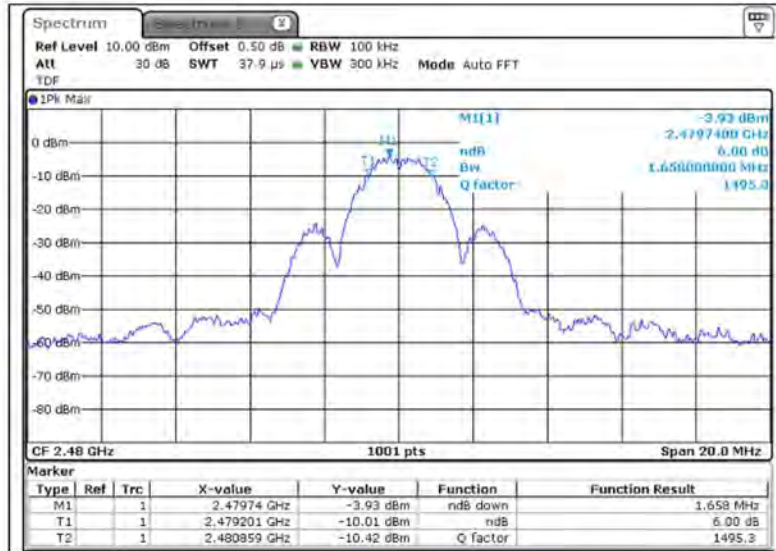

## -Ant 1

## Lowest Channel (2 405 MHz)

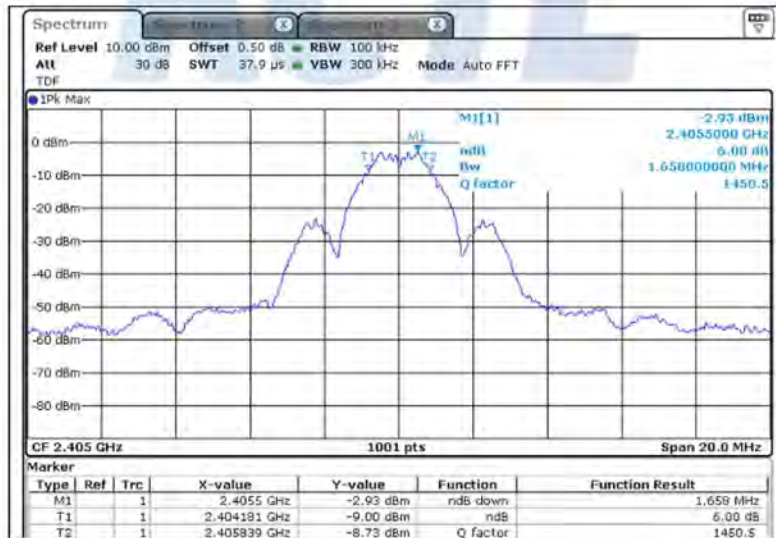


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (35) of (113)



## Middle Channel (2 440 Mhz)

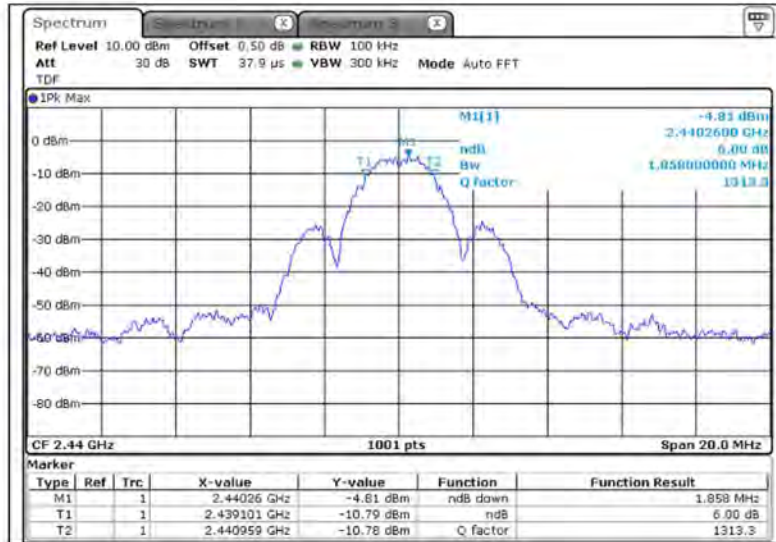

## Highest Channel (2 480 Mhz)

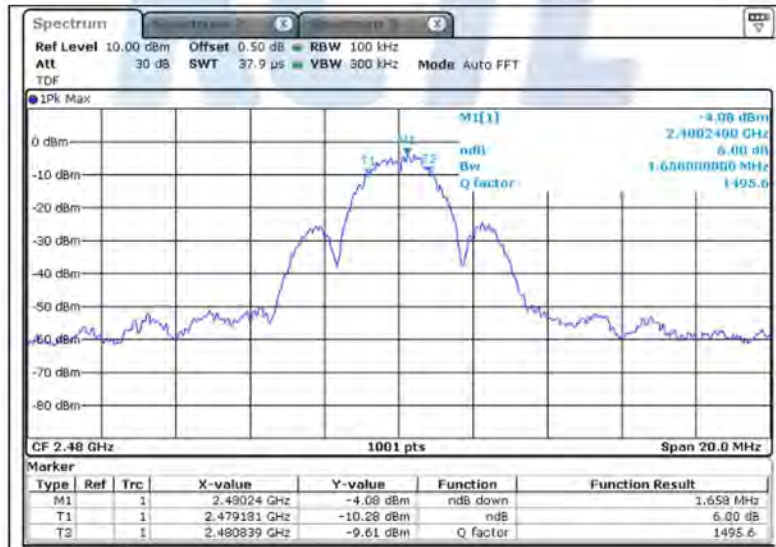

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (36) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

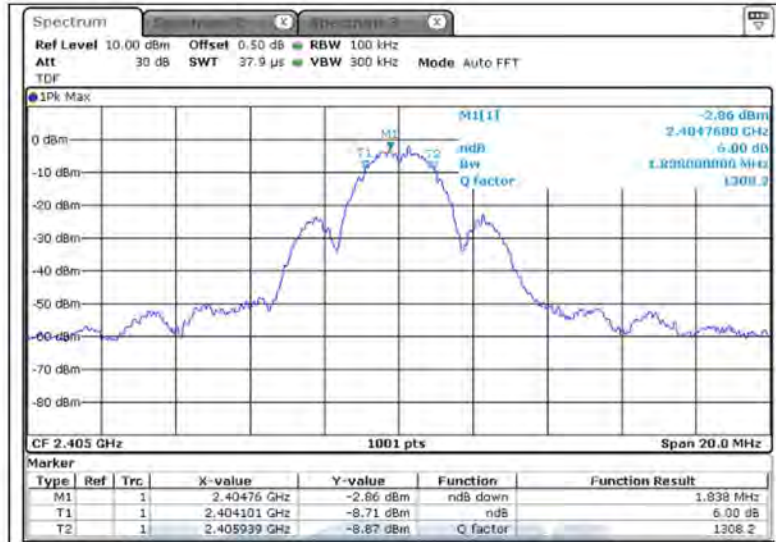

Middle Channel (2 440 MHz)

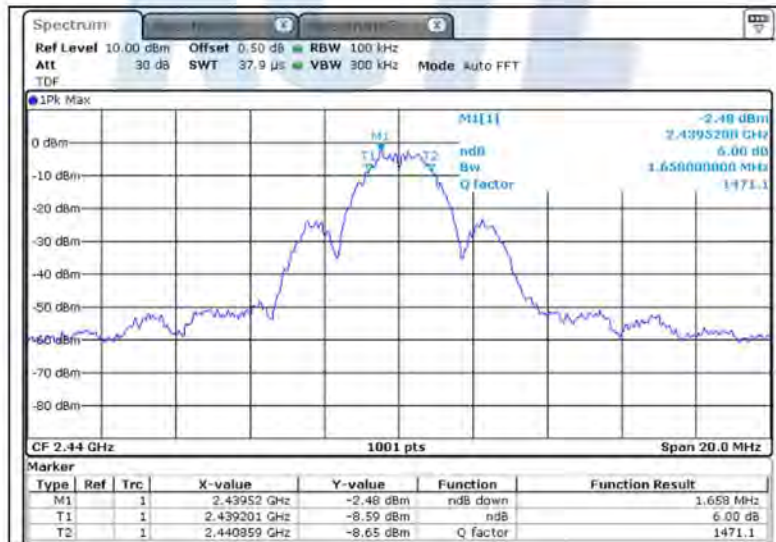


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (37) of (113)




## Highest Channel (2 480 Mhz)

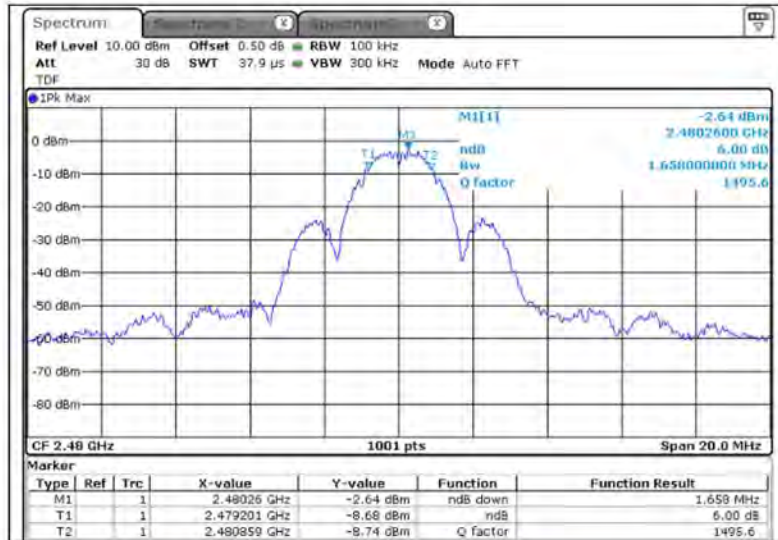

## -Ant 3

## Lowest Channel (2 405 Mhz)

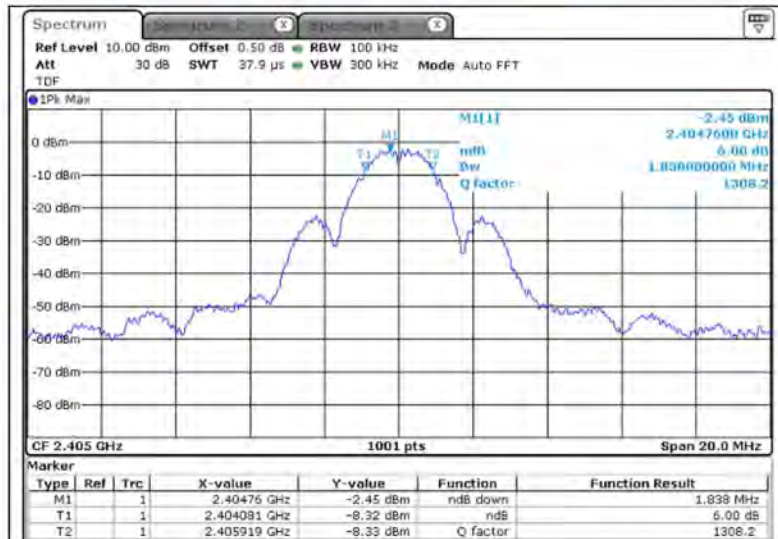


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (38) of (113)



## Middle Channel (2 440 MHz)

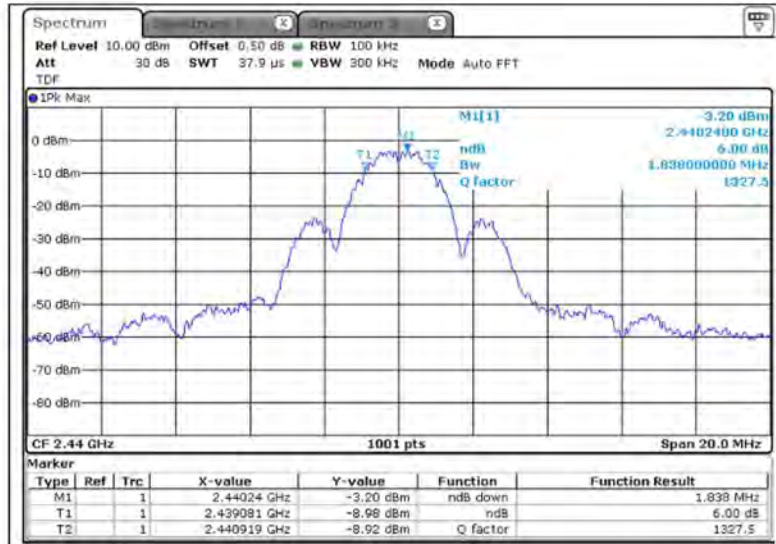

## Highest Channel (2 480 MHz)

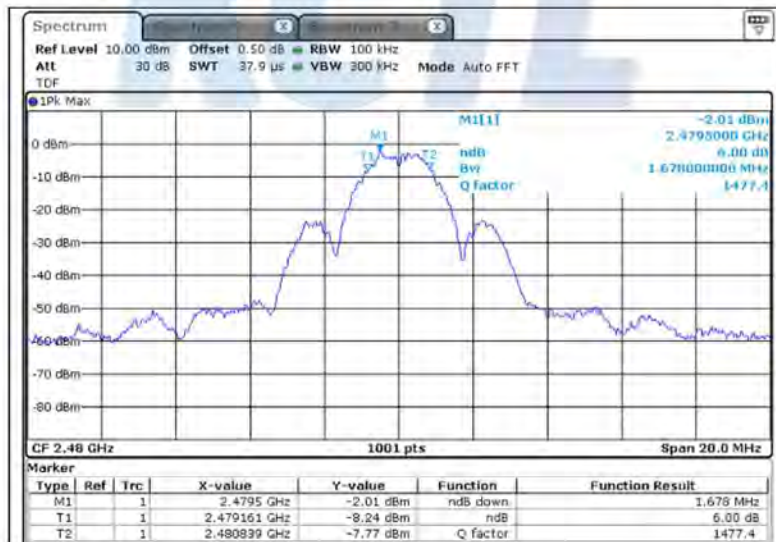

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (39) of (113)



## DC 48 V (PoE)

### -Ant 0

#### Lowest Channel (2 405 MHz)



#### Middle Channel (2 440 MHz)



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (40) of (113)




## Highest Channel (2 480 MHz)



## -Ant 1

## Lowest Channel (2 405 MHz)

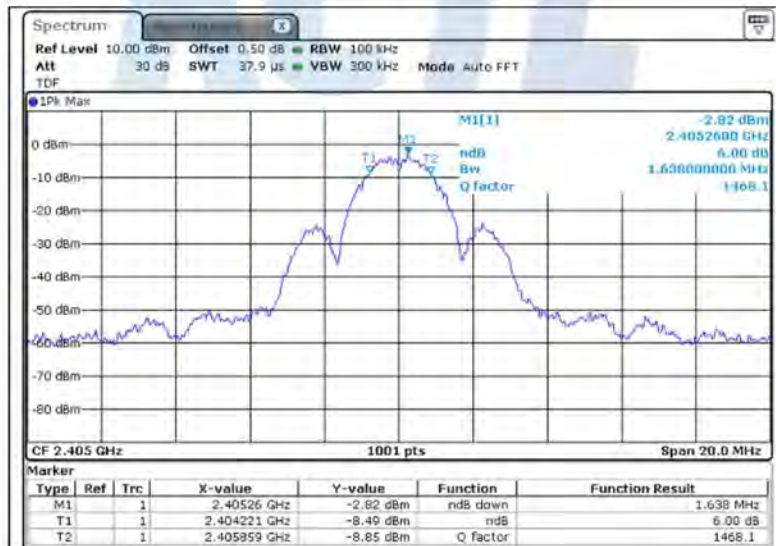




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (41) of (113)



## Middle Channel (2 440 MHz)

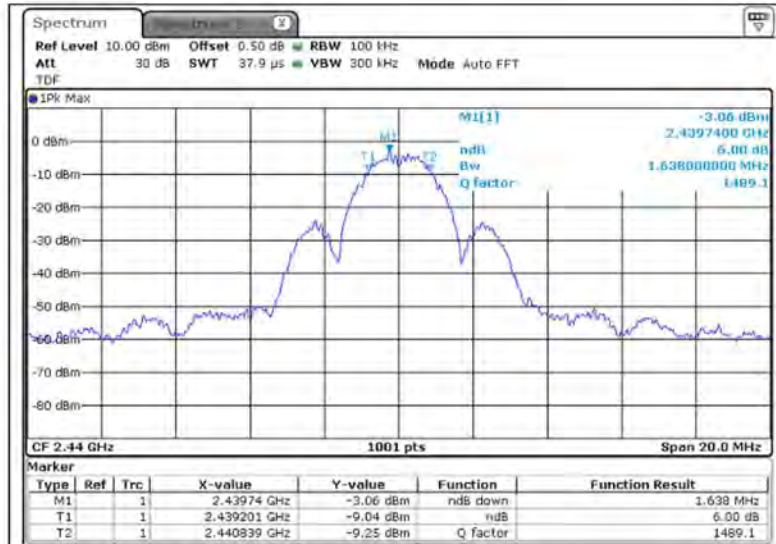

## Highest Channel (2 480 MHz)

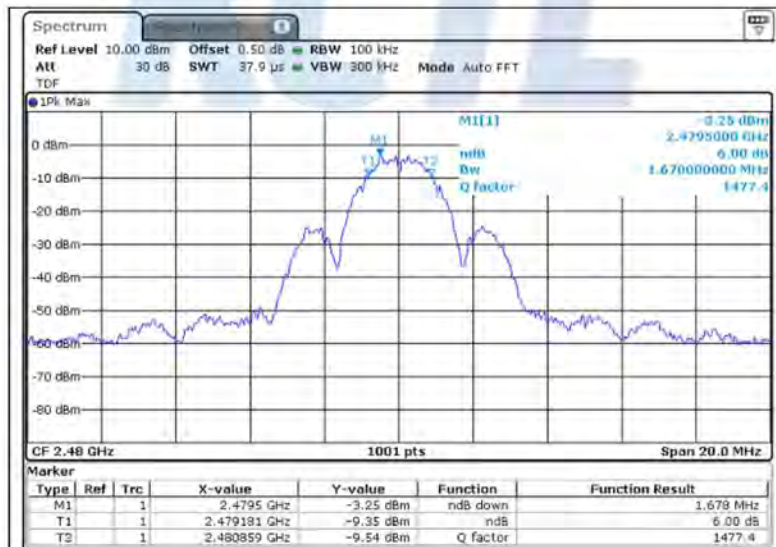

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (42) of (113)




## -Ant 2

### Lowest Channel (2 405 MHz)



### Middle Channel (2 440 MHz)

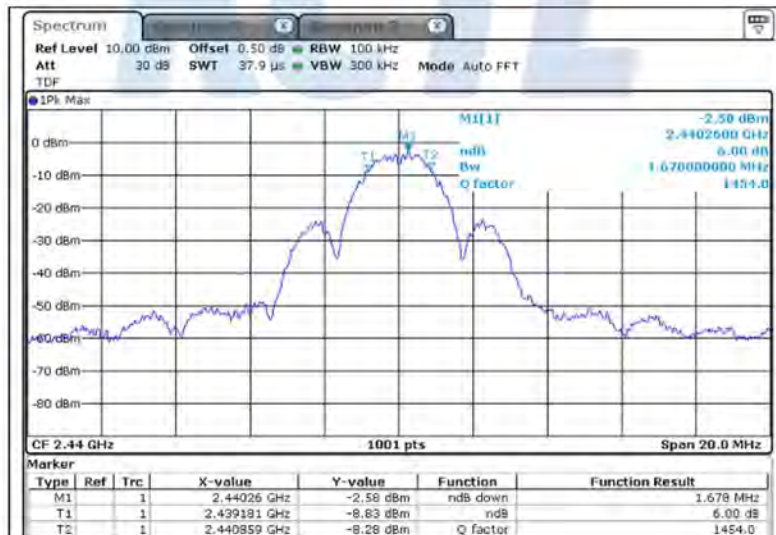

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (43) of (113)


# KCTL

## Highest Channel (2 480 MHz)

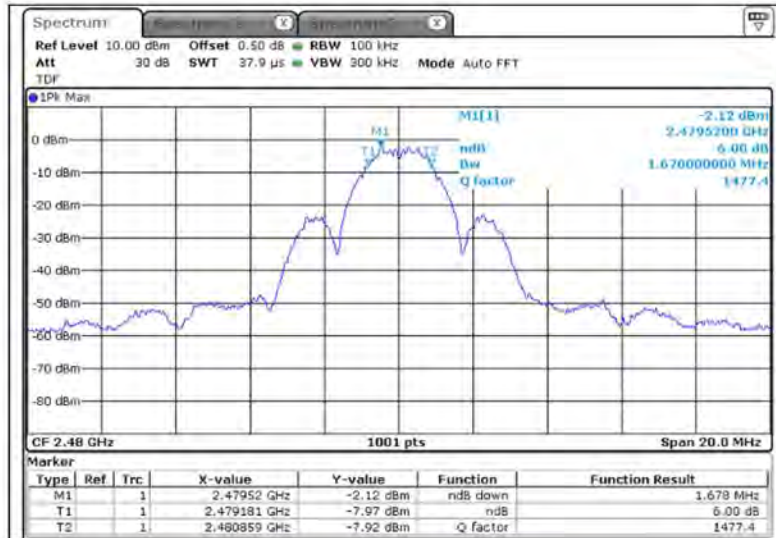

## -Ant 3

## Lowest Channel (2 405 MHz)

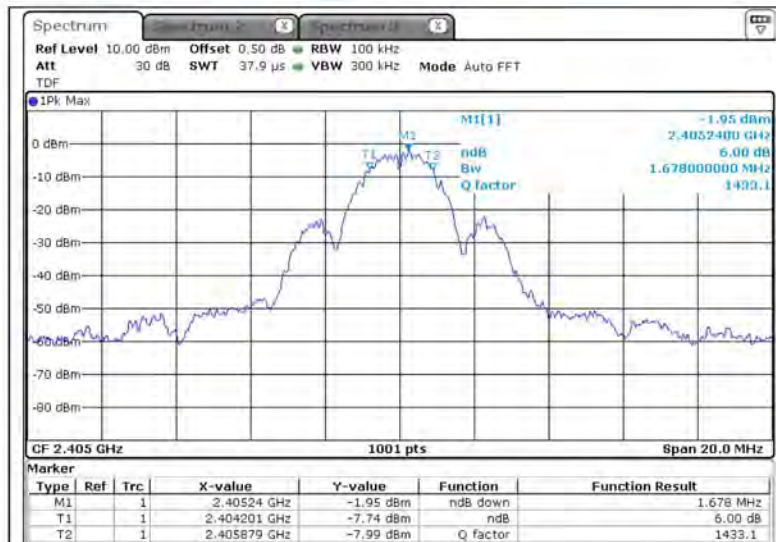

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A


Page (44) of (113)

# KCTL

## Middle Channel (2 440 MHz)

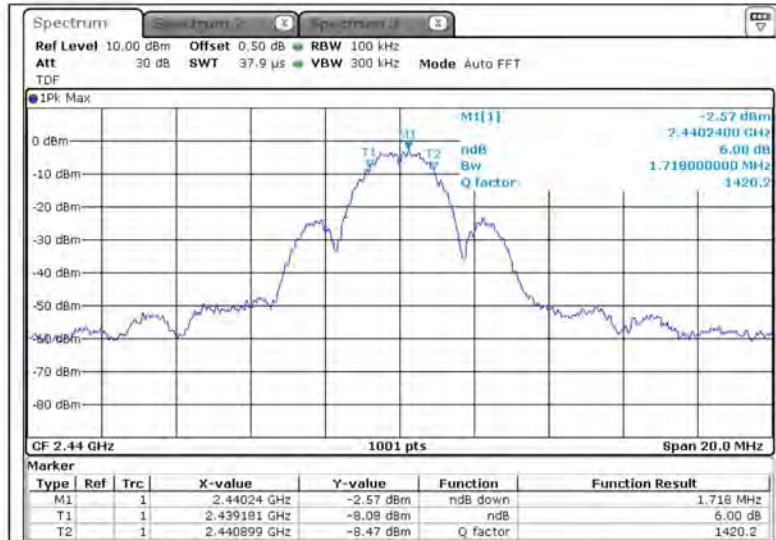

## Highest Channel (2 480 MHz)

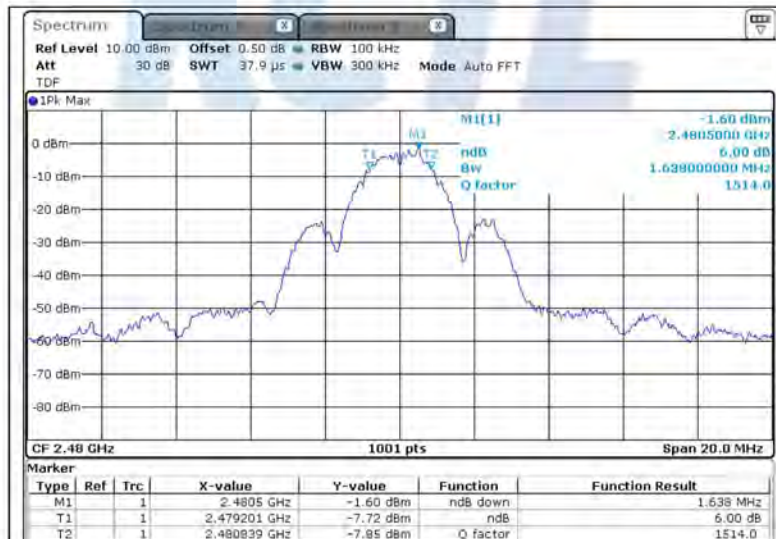

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (45) of (113)



## - Occupied Bandwidth


AC 110 V (AC adapter)

-Ant 0

Lowest Channel (2 405 MHz)



Middle Channel (2 440 MHz)

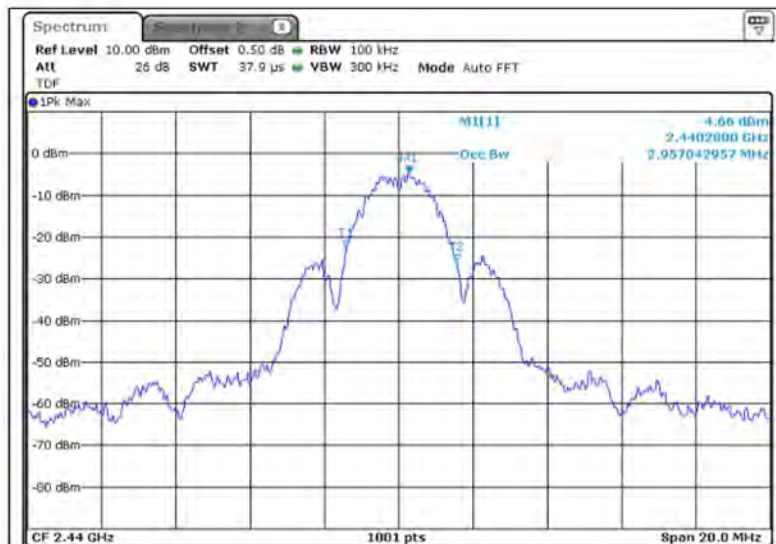


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (46) of (113)




## Highest Channel (2 480 MHz)

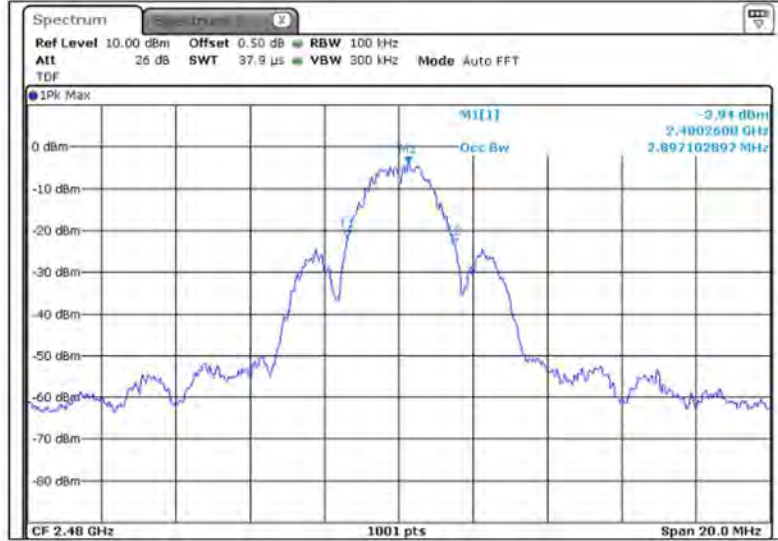

## -Ant 1

## Lowest Channel (2 405 MHz)

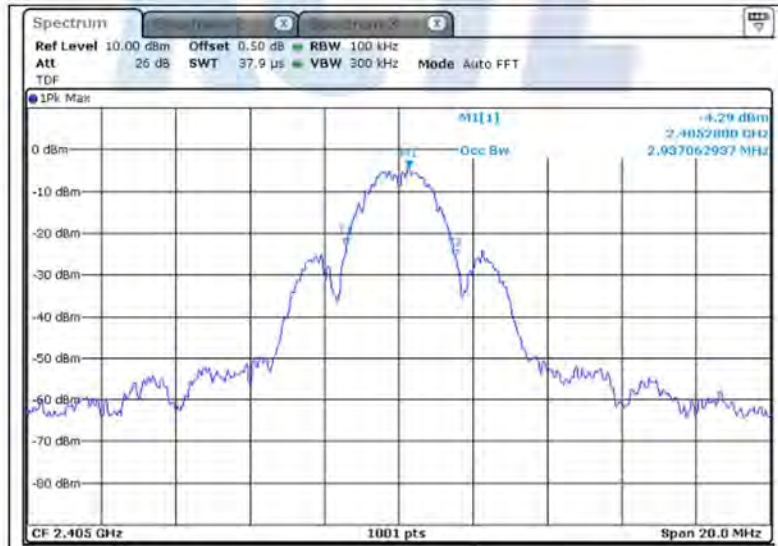


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (47) of (113)



## Middle Channel (2 440 MHz)

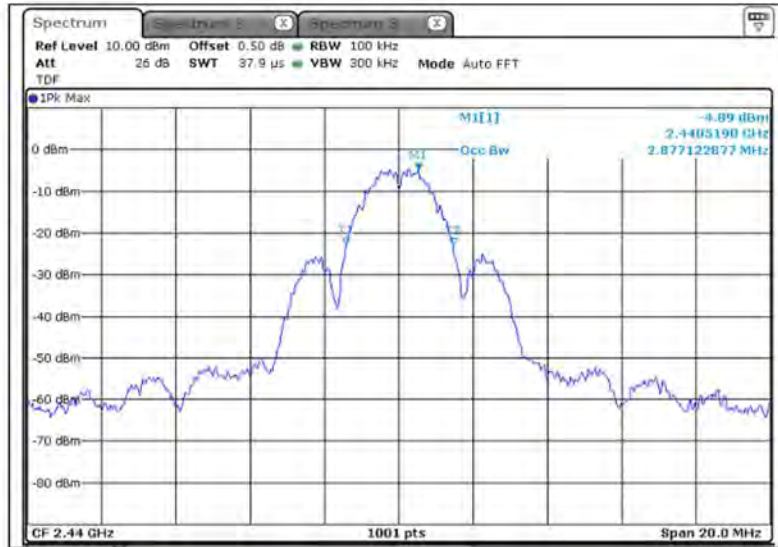

## Highest Channel (2 480 MHz)

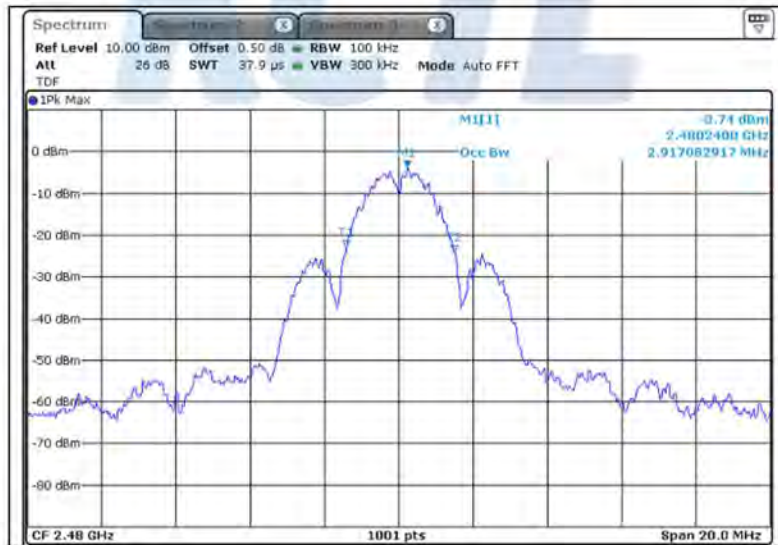

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (48) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

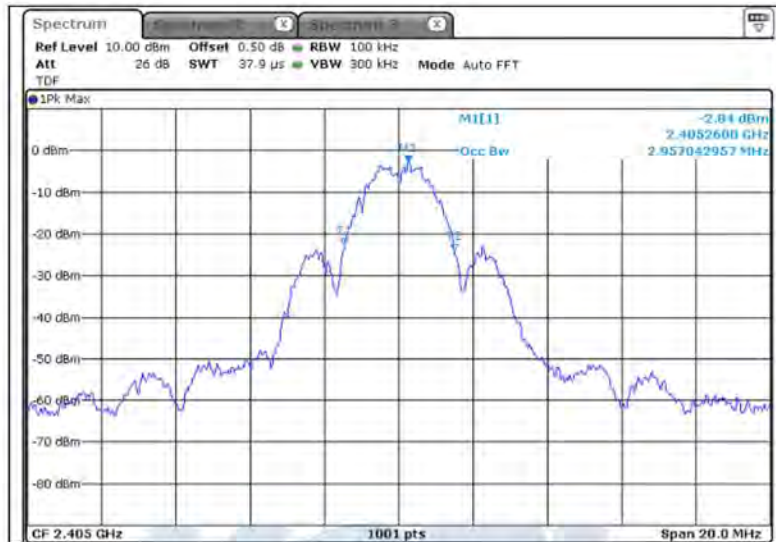

Middle Channel (2 440 MHz)

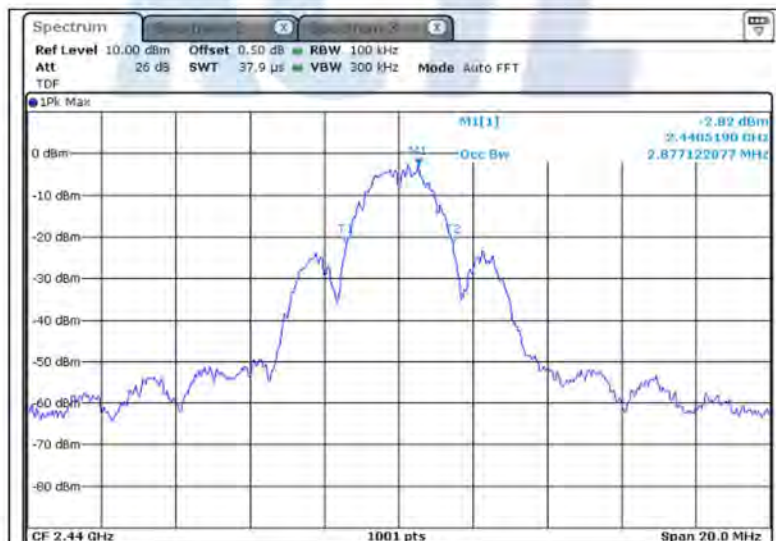




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (49) of (113)




## Highest Channel (2 480 MHz)

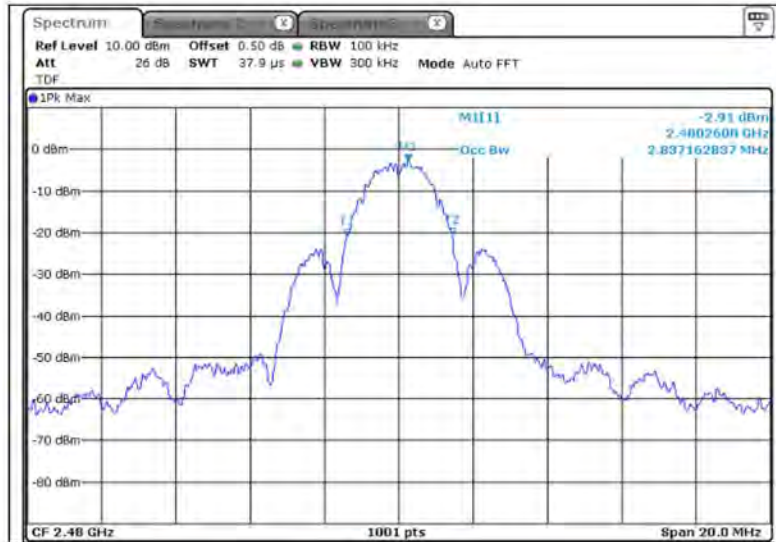

## -Ant 3

## Lowest Channel (2 405 MHz)

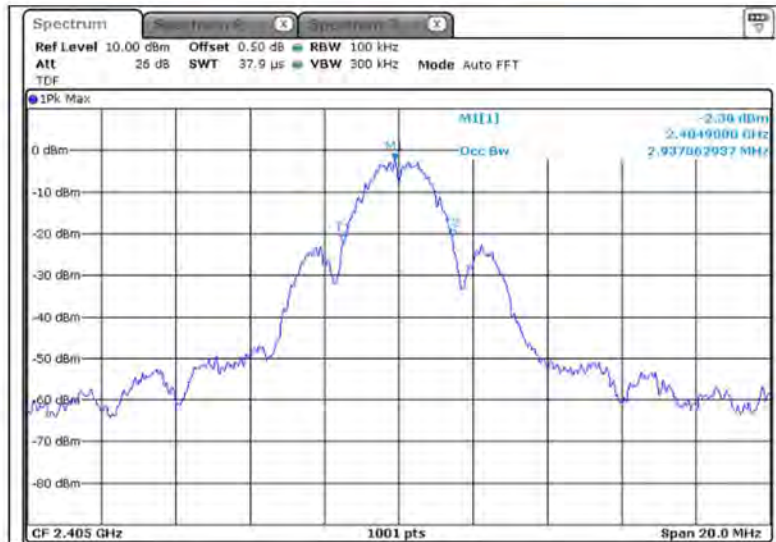


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (50) of (113)



## Middle Channel (2 440 MHz)

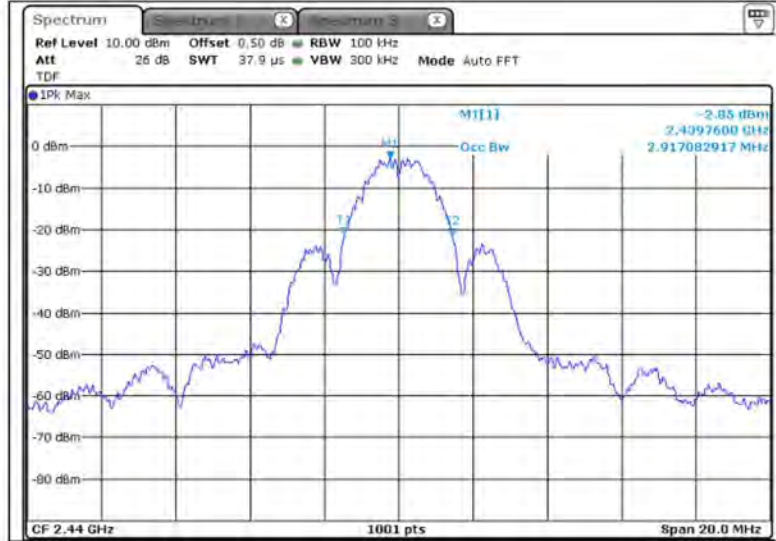

## Highest Channel (2 480 MHz)

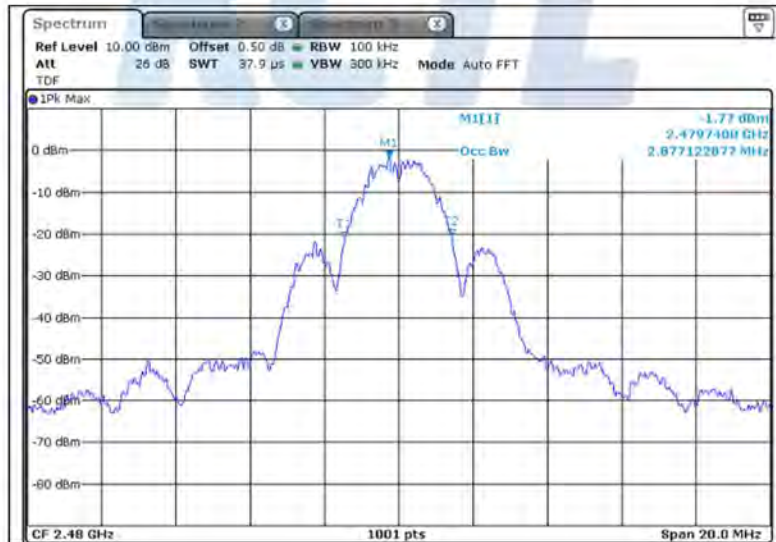

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (51) of (113)




## DC 48 V (PoE)

-Ant 0

Lowest Channel (2 405 MHz)



Middle Channel (2 440 MHz)

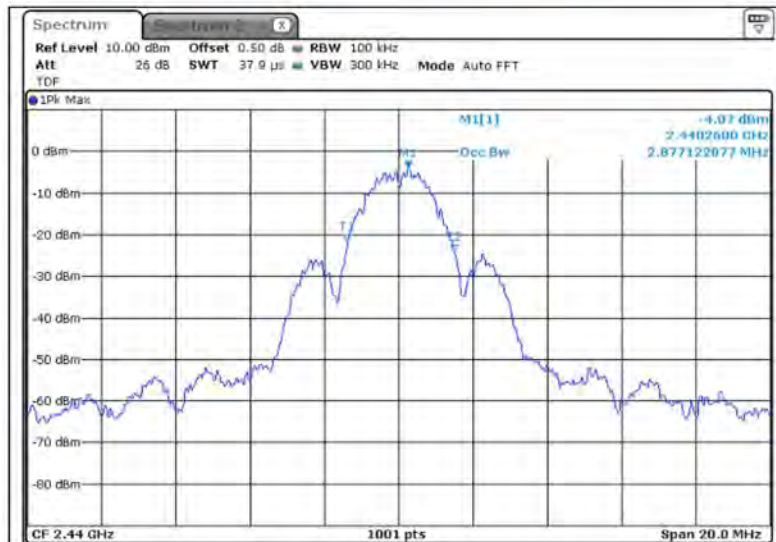


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (52) of (113)




## Highest Channel (2 480 MHz)

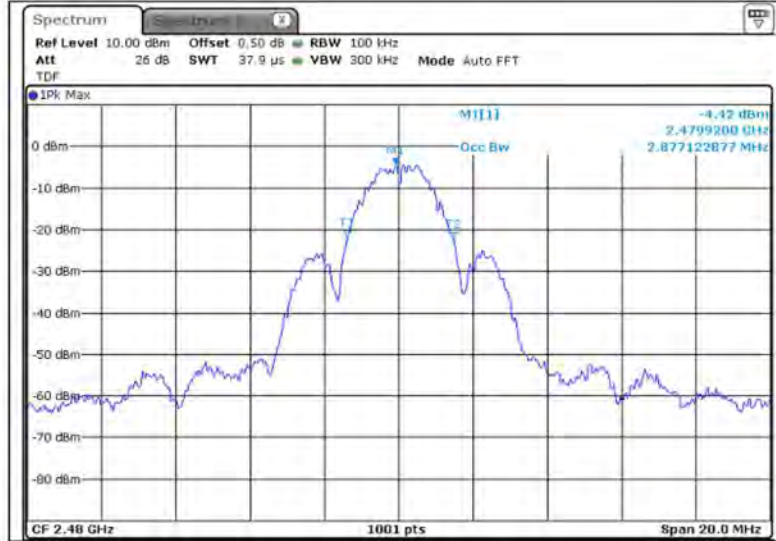

## -Ant 1

## Lowest Channel (2 405 MHz)

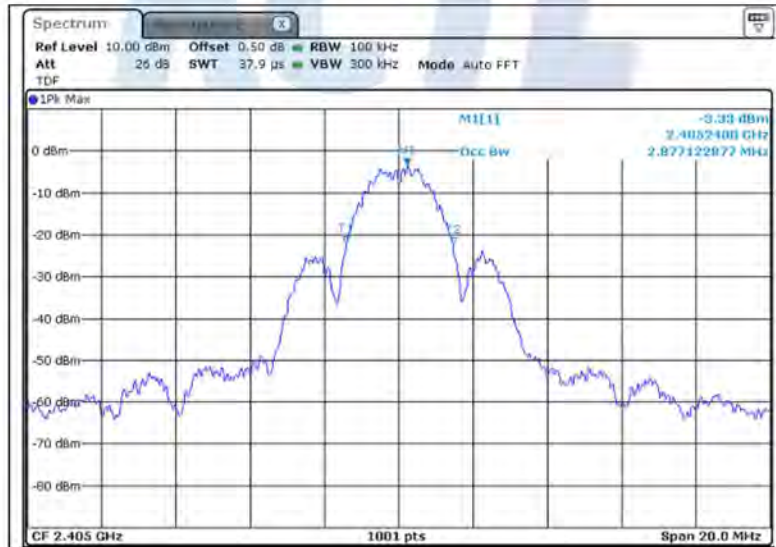


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR18-SRF0124-A  
Page (53) of (113)



## Middle Channel (2 440 MHz)

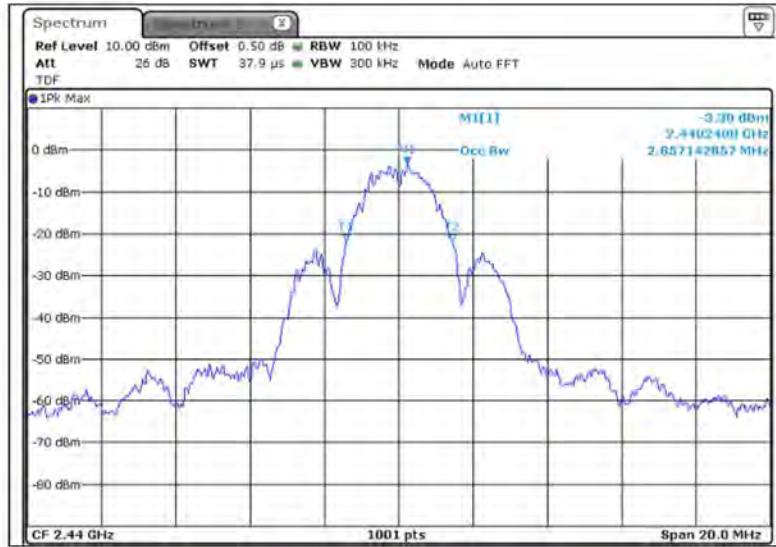

## Highest Channel (2 480 MHz)

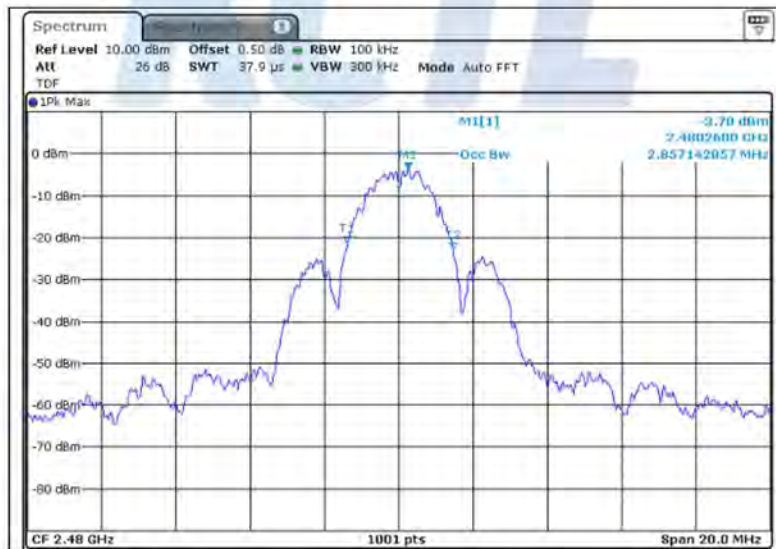

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (54) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

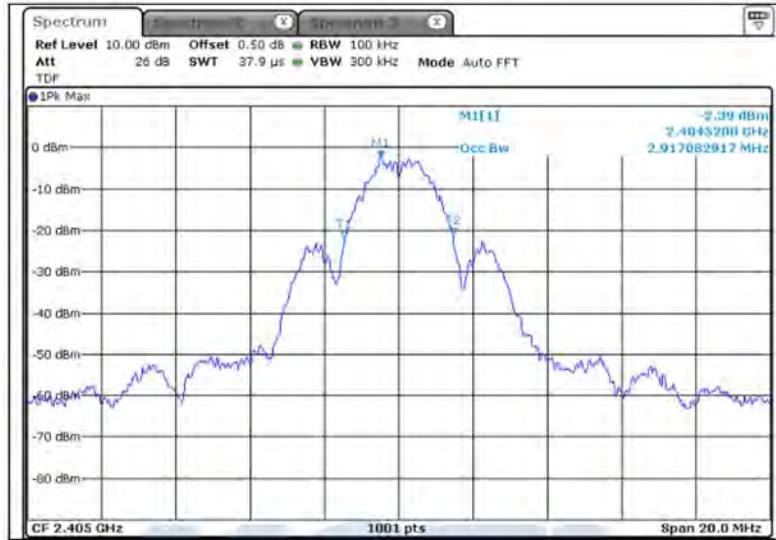

Middle Channel (2 440 MHz)

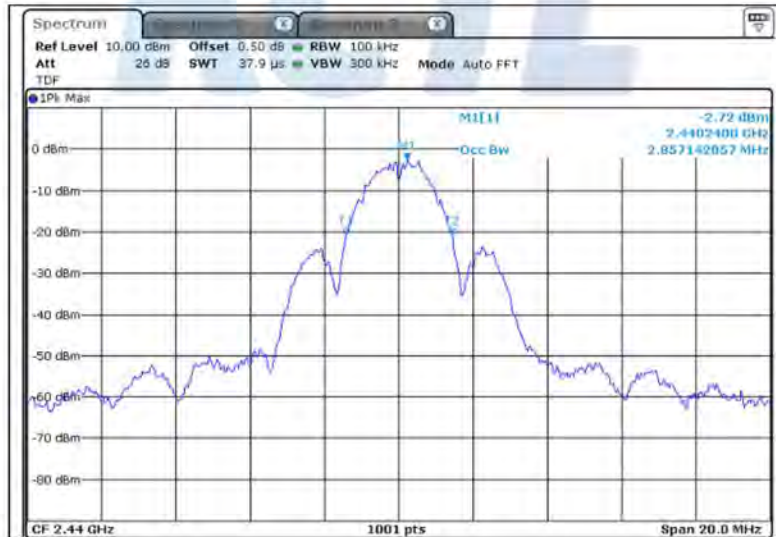


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (55) of (113)




## Highest Channel (2 480 MHz)

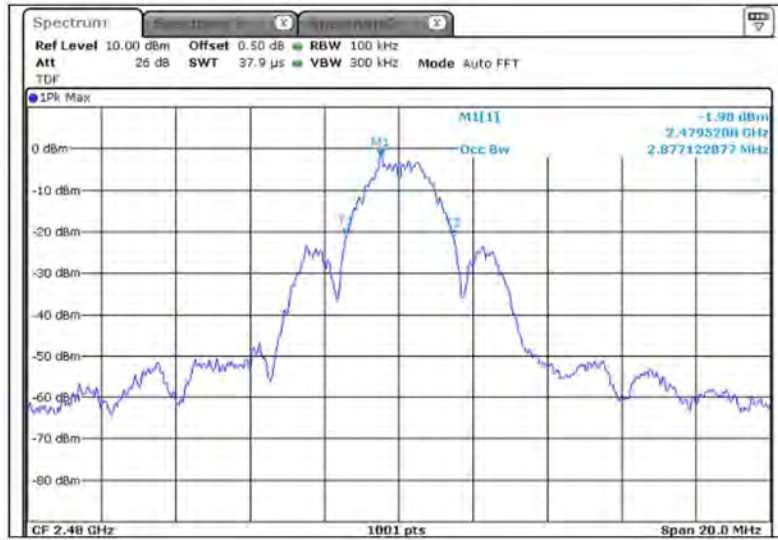

## -Ant 3

## Lowest Channel (2 405 MHz)

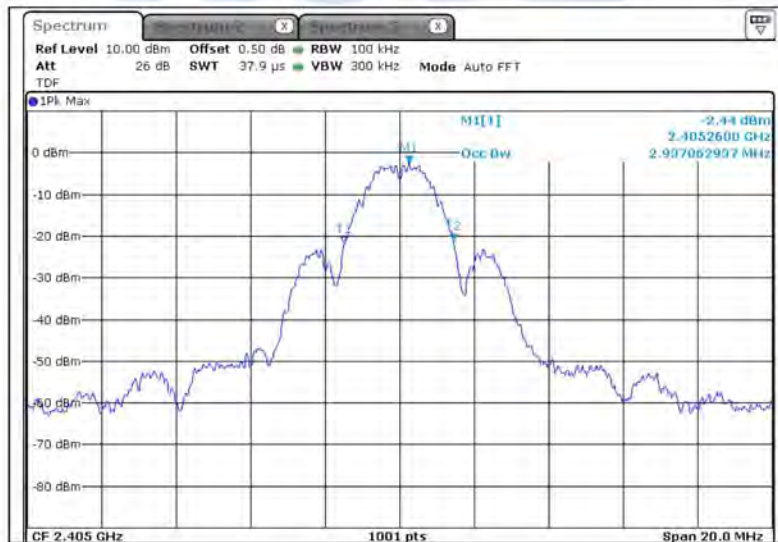

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A


Page (56) of (113)

# KCTL

## Middle Channel (2 440 MHz)

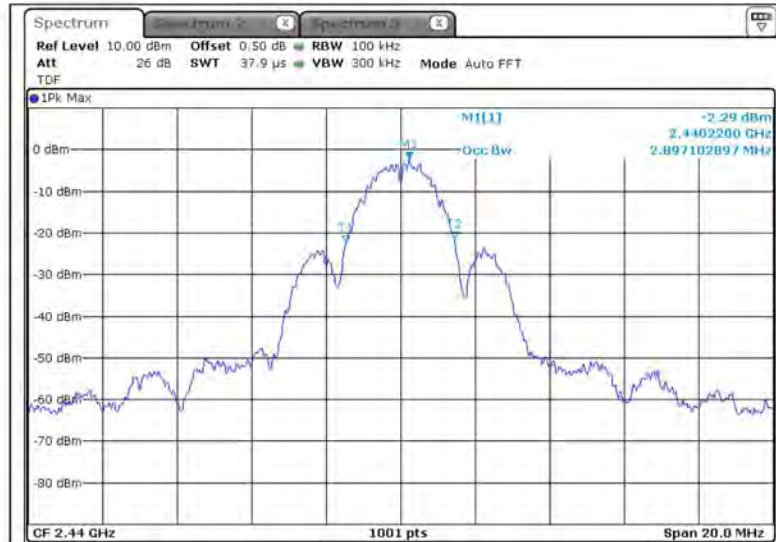

## Highest Channel (2 480 MHz)

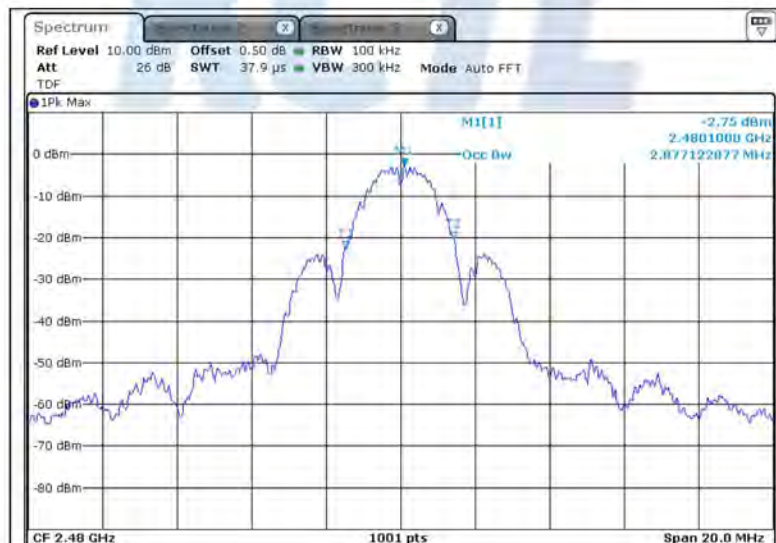



## 5.5 Spurious Emission, Band Edge, and Restricted bands

### 5.5.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz.

However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (58) of (113)



According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 5.5.2 Measurement Procedure

### 5.5.2.1 Band-edge Compliance of RF Conducted Emissions

#### 5.5.2.1.1 Reference Level Measurement

Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- 3) Set the RBW = 100 kHz.
- 4) Set the VBW  $\geq 3 \times$  RBW.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum PSD level.

#### 5.5.2.1.2 Emissions Level Measurement

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz.
- 3) Set the VBW  $\geq 3 \times$  RBW.
- 4) Detector = peak.
- 5) Ensure that the number of measurement points  $\geq$  span/RBW
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (60) of (113)

**KCTL**

### 5.5.2.2 Conducted Spurious Emissions

Set the spectrum analyzer as follows:

- 1) Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.

Typically, several plots are required to cover this entire span.

- 2) RBW = 100 kHz
- 3) VBW  $\geq$  RBW
- 4) Sweep = auto
- 5) Detector function = peak
- 6) Trace = max hold
- 7) Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 8) Each frequency found during preliminary measurements was re-examined and investigated.  
The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

**KCTL**

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (61) of (113)



### 5.5.2.3 Radiated Spurious Emissions

- 1) The preliminary and final radiated measurements were performed to determine the frequency producing the maximum emissions in at a 10m anechoic chamber. The EUT was tested at a distance 3 meters.
- 2) The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
- 3) The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1 000 MHz using the TRILOG broadband antenna, and from 1 000 MHz to 26 500 MHz using the horn antenna.
- 4) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
- 5) The 0.8m height is for below 1 G testing, and 1.5m is for above 1G testing.

#### Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1 GHz. (Detector = RMS, Averaging type = power)  
In case of duty cycle less than 98%, a duty cycle correction factor has to be added to the measurement result.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (62) of (113)



### 5.5.3 Test Result

#### - Complied

1. Band edge & Conducted Spurious Emissions was shown in figure 3 & 4.  
Note: We took the insertion loss of the cable into consideration within the measuring instrument.
2. Measured value of the Field strength of spurious Emissions (Radiated)
3. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

※ Noise was not measured. (Margin was more than 20 dB)

#### - Below 1 GHz data (worst-case)

##### AC 110 V (AC adapter)

##### -Ant 0

##### Lowest channel (2 405 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
45.64	120	V	36.40	1.38	-29.37	16.09	-11.90	24.50	40.00	15.50
75.11	120	H	23.40	1.82	-29.03	12.81	-14.40	9.00	40.00	31.00
130.52	120	H	28.00	2.47	-31.24	17.77	-11.00	17.00	43.50	26.50
140.94	120	V	27.90	2.57	-29.81	17.24	-10.00	17.90	43.50	25.60
213.09	120	V	28.20	3.22	-31.78	16.06	-12.50	15.70	43.50	27.80
348.52	120	V	19.30	4.21	-30.92	20.41	-6.30	13.00	46.00	33.00

##### -Ant 1

##### Lowest channel (2 405 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
43.22	120	V	49.10	1.33	-31.56	17.43	-12.80	36.30	40.00	3.70
44.67	120	V	48.50	1.36	-30.65	16.59	-12.70	35.80	40.00	4.20
54.13	120	V	44.80	1.52	-27.52	13.3	-12.70	32.10	40.00	7.90
152.10	120	H	32.00	2.69	-29.56	16.57	-10.30	21.70	43.50	21.80
311.79	120	H	47.40	3.96	-31.35	19.49	-7.90	39.50	46.00	6.50
416.55	120	H	35.70	4.66	-30.92	21.96	-4.30	31.40	46.00	14.60

This test report shall not be reproduced, except in full, without the written approval

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (63) of (113)

**-Ant 2****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
43.10	120	V	49.50	1.33	-31.63	17.50	-12.80	36.70	40.00	3.30
44.67	120	V	49.60	1.36	-30.65	16.59	-12.70	36.90	40.00	3.10
90.02	120	V	36.40	2.00	-33.30	14.80	-16.50	19.90	43.50	23.60
279.29	120	H	45.40	3.73	-31.52	18.79	-9.00	36.40	46.00	9.60
314.21	120	H	46.20	3.98	-31.34	19.56	-7.80	38.40	46.00	7.60
608.12	120	H	35.70	5.76	-29.29	24.63	1.10	36.80	46.00	9.20

**-Ant 3****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
43.22	120	V	49.20	1.33	-31.56	17.43	-12.80	36.40	40.00	3.60
44.55	120	V	48.90	1.36	-30.72	16.66	-12.70	36.20	40.00	3.80
143.85	120	V	42.70	2.60	-30.17	17.07	-10.50	32.20	43.50	11.30
292.99	120	H	45.20	3.83	-31.49	19.06	-8.60	36.60	46.00	9.40
308.75	120	H	46.30	3.94	-31.36	19.42	-8.00	38.30	46.00	7.70
479.96	120	H	35.20	5.02	-30.50	22.98	-2.50	32.70	46.00	13.30

NOTE 1. Factor = Cable loss + Amplifier gain + Antenna factor

NOTE 2. Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (64) of (113)

**KCTL****DC 48 V (PoE)****Lowest channel (2 405 MHz)****-Ant 0****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
45.64	120	V	41.10	1.38	-29.37	16.09	-11.90	29.20	40.00	10.80
142.64	120	V	29.30	2.59	-29.53	17.14	-9.80	19.50	43.50	24.00
200.72	120	V	28.40	3.12	-30.96	15.34	-12.50	15.90	43.50	27.60
249.95	120	H	32.40	3.51	-31.71	18.20	-10.00	22.40	46.00	23.60
375.08	120	H	29.30	4.39	-30.67	21.08	-5.20	24.10	46.00	21.90
875.11	120	H	25.30	6.91	-27.01	26.30	6.20	31.50	46.00	14.50

**-Ant 1****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
35.94	120	V	41.40	1.20	-36.75	21.65	-13.90	27.50	40.00	12.50
38.85	120	V	49.90	1.25	-34.42	19.97	-13.20	36.70	40.00	3.30
51.46	120	V	40.50	1.48	-27.93	13.75	-12.70	27.80	40.00	12.20
131.97	120	H	30.80	2.48	-31.78	17.70	-11.60	19.20	43.50	24.30
143.98	120	H	29.70	2.60	-30.16	17.06	-10.50	19.20	43.50	24.30
875.11	120	H	21.80	6.91	-27.11	26.30	6.10	27.90	46.00	18.10



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (65) of (113)

**-Ant 2****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
38.25	120	V	50.10	1.24	-34.86	20.32	-13.30	36.80	40.00	3.20
38.85	120	V	49.50	1.25	-34.42	19.97	-13.20	36.30	40.00	3.70
52.80	120	V	41.30	1.50	-27.72	13.52	-12.70	28.60	40.00	11.40
131.85	120	H	34.60	2.48	-31.79	17.71	-11.60	23.00	43.50	20.50
249.95	120	H	33.50	3.51	-32.31	18.20	-10.60	22.90	46.00	23.10
375.08	120	H	35.10	4.39	-31.17	21.08	-5.70	29.40	46.00	16.60

**-Ant 3****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB( $\mu$ V)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB( $\mu$ V/m)]	Limit [dB( $\mu$ V/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>										
Not detected										
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>										
38.85	120	V	49.50	1.25	-34.42	19.97	-13.20	36.30	40.00	3.70
40.31	120	V	49.10	1.28	-33.40	19.12	-13.00	36.10	40.00	3.90
42.13	120	V	48.20	1.31	-32.28	18.07	-12.90	35.30	40.00	4.70
250.07	120	H	35.70	3.51	-32.31	18.20	-10.60	25.10	46.00	20.90
480.08	120	H	34.80	5.02	-30.50	22.98	-2.50	32.30	46.00	13.70
875.11	120	H	21.40	6.91	-27.11	26.30	6.10	27.50	46.00	18.50

NOTE 1. Factor = Cable loss + Amplifier gain + Antenna factor

NOTE 2. Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (66) of (113)

**KCTL****- Above 1 GHz data****AC 110 V (AC adapter)****-Ant 0****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 267.19	1 000	V	70.14	2.72	-61.10	24.87	-	-33.51	36.63	74.00	37.37
2 387.58 <sup>1,2)</sup>	1 000	V	70.97	3.70	-60.25	28.54	-	-28.01	42.96	74.00	31.04
3 084.53	1 000	V	70.56	4.19	-60.05	29.93	-	-25.93	44.63	74.00	29.37
5 997.63	1 000	H	64.28	6.10	-61.61	34.40	-	-21.11	43.18	74.00	30.82
16 787.89	1 000	V	59.39	10.36	-57.49	39.71	-	-7.42	51.97	74.00	22.03
21 674.92	1 000	V	47.24	12.00	-49.21	45.00	-	7.79	55.03	74.00	18.97
24 020.92	1 000	H	47.67	12.80	-42.58	45.00	-	15.22	62.89	74.00	11.11
<b>Average DATA. Emissions above 1 GHz</b>											
2 387.58 <sup>1,2)</sup>	1 000	V	58.72	3.70	-60.25	28.54	-	-28.01	30.71	54.00	23.29

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 288.98	1 000	V	68.01	2.74	-61.08	24.96	-	-33.38	34.63	74.00	39.37
3 028.05	1 000	V	69.20	4.16	-59.71	29.78	-	-25.77	43.42	74.00	30.58
5 659.14	1 000	V	64.81	5.89	-60.83	33.89	-	-21.05	43.76	74.00	30.24
16 598.48	1 000	V	59.85	10.30	-57.13	39.18	-	-7.65	52.20	74.00	21.80
21 575.05	1 000	H	46.88	12.00	-49.15	45.00	-	7.85	54.73	74.00	19.27
24 075.38	1 000	H	47.80	12.80	-42.77	45.10	-	15.13	62.93	74.00	11.07
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

This test report shall not be reproduced, except in full, without the written approval

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (67) of (113)

**KCTL****Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 265.78	1 000	V	69.62	2.72	-61.09	24.86	-	-33.51	36.10	74.00	37.90
2 484.50 <sup>1,2)</sup>	1 000	H	78.31	3.77	-60.11	28.72	-	-27.62	50.70	74.00	23.30
3 111.88	1 000	V	70.50	4.23	-60.26	30.08	-	-25.95	44.55	74.00	29.45
5 989.92	1 000	V	63.24	6.09	-61.60	34.38	-	-21.13	42.11	74.00	31.89
16 404.55	1 000	V	59.49	10.25	-56.89	38.63	-	-8.01	51.49	74.00	22.51
21 536.53	1 000	V	47.50	12.00	-49.12	45.00	-	7.88	55.38	74.00	18.62
24 440.08	1 000	H	47.46	12.80	-43.37	45.10	-	14.53	61.99	74.00	12.01
<b>Average DATA. Emissions above 1 GHz</b>											
2 484.50 <sup>1,2)</sup>	1 000	V	66.79	3.77	-60.11	28.72	-	-27.62	39.17	54.00	14.83

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**-Ant 1****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 282.50	1 000	V	68.86	2.74	-61.09	24.93	-	-33.42	35.44	74.00	38.56
2 386.64 <sup>1,2)</sup>	1 000	V	68.92	3.70	-60.25	28.53	-	-28.02	40.91	74.00	33.09
3 058.67	1 000	H	69.76	4.18	-59.90	29.86	-	-25.86	43.90	74.00	30.10
5 651.89	1 000	H	64.72	5.88	-60.96	33.88	-	-21.20	43.52	74.00	30.48
16 797.86	1 000	V	58.56	10.36	-57.49	39.73	-	-7.40	51.15	74.00	22.85
21 539.72	1 000	H	47.70	12.00	-49.12	45.00	-	7.88	55.57	74.00	18.43
24 010.30	1 000	H	46.99	12.80	-42.56	45.00	-	15.24	62.23	74.00	11.77
<b>Average DATA. Emissions above 1 GHz</b>											
2 386.64 <sup>1,2)</sup>	1 000	V	58.37	3.70	-60.25	28.53	-	-28.02	30.35	54.00	23.65

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (68) of (113)

**KCTL****Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 269.61	1 000	H	68.11	2.72	-61.09	24.88	-	-33.49	34.62	74.00	39.38
3 041.09	1 000	H	70.93	4.16	-59.78	29.81	-	-25.81	45.12	74.00	28.88
5 815.47	1 000	V	63.45	5.98	-61.20	34.12	-	-21.10	42.35	74.00	31.65
16 823.69	1 000	H	59.54	10.37	-57.55	39.81	-	-7.37	52.17	74.00	21.83
21 811.45	1 000	V	47.63	12.10	-49.40	45.00	-	7.70	55.33	74.00	18.67
24 974.78	1 000	V	46.22	12.80	-44.36	45.20	-	13.64	59.86	74.00	14.14
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

**Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 296.41	1 000	V	69.25	2.75	-61.08	24.99	-	-33.34	35.91	74.00	38.09
2 483.50 <sup>1,2)</sup>	1 000	V	77.47	3.77	-60.10	28.72	-	-27.61	49.86	74.00	24.14
3 080.39	1 000	V	69.54	4.19	-60.03	29.92	-	-25.92	43.63	74.00	30.37
6 013.48	1 000	H	64.52	6.11	-61.58	34.42	-	-21.05	43.47	74.00	30.53
16 781.55	1 000	H	59.74	10.36	-57.47	39.69	-	-7.42	52.32	74.00	21.68
21 710.25	1 000	H	48.61	12.00	-49.23	45.00	-	7.77	56.38	74.00	17.62
24 026.50	1 000	V	47.93	12.80	-42.59	45.00	-	15.21	63.14	74.00	10.86
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.50 <sup>1,2)</sup>	1 000	V	67.99	3.77	-60.10	28.72	-	-27.61	40.38	54.00	13.62

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (69) of (113)

**KCTL****-Ant 2****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 273.05	1 000	V	69.59	2.73	-61.09	24.89	-	-33.47	36.12	74.00	37.88
2 388.59 <sup>1)</sup>	1 000	H	68.50	3.70	-60.25	28.54	-	-28.01	40.49	74.00	33.51
3 082.97	1 000	H	69.82	4.19	-60.04	29.92	-	-25.93	43.90	74.00	30.10
6 345.17	1 000	H	63.53	6.28	-60.93	34.85	-	-19.80	43.72	74.00	30.28
14 829.03	1 000	H	60.51	9.73	-59.38	40.42	-	-9.23	51.28	74.00	22.72
21 806.41	1 000	V	47.46	12.10	-49.40	45.00	-	7.70	55.16	74.00	18.84
25 302.03	1 000	H	46.02	13.10	-44.25	45.30	-	14.15	60.17	74.00	13.83
<b>Average DATA. Emissions above 1 GHz</b>											
2 388.59 <sup>1)</sup>	1 000	H	58.99	3.70	-60.25	28.54	-	-28.01	30.98	54.00	23.02

<sup>1)</sup> Restricted band

**Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 270.86	1 000	V	70.35	2.73	-61.10	24.88	-	-33.49	36.87	74.00	37.13
3 020.78	1 000	V	68.45	4.15	-59.66	29.76	-	-25.75	42.70	74.00	31.30
5 812.75	1 000	V	63.67	5.98	-61.19	34.12	-	-21.09	42.58	74.00	31.42
16 990.89	1 000	V	59.95	10.42	-57.85	40.27	-	-7.16	52.79	74.00	21.21
21 538.66	1 000	V	47.96	12.00	-49.12	45.00	-	7.88	55.84	74.00	18.16
26 012.84	1 000	V	45.73	13.70	-43.98	45.70	-	15.42	61.15	74.00	12.85
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

This test report shall not be reproduced, except in full, without the written approval

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (70) of (113)

**KCTL****Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 290.47	1 000	H	69.93	2.74	-61.07	24.96	-	-33.37	36.56	74.00	37.44
2 485.16 <sup>1,2)</sup>	1 000	V	78.60	3.77	-60.10	28.72	-	-27.61	50.99	74.00	23.01
3 078.28	1 000	V	69.21	4.19	-60.01	29.91	-	-25.91	43.29	74.00	30.71
5 649.17	1 000	H	64.18	5.88	-61.01	33.87	-	-21.26	42.92	74.00	31.08
14 841.72	1 000	V	59.94	9.73	-59.34	40.41	-	-9.20	50.75	74.00	23.25
21 571.59	1 000	V	47.87	12.00	-49.15	45.00	-	7.85	55.73	74.00	18.27
24 105.66	1 000	V	48.04	12.80	-42.82	45.10	-	15.08	63.12	74.00	10.88
<b>Average DATA. Emissions above 1 GHz</b>											
2 485.16 <sup>1,2)</sup>	1 000	V	58.99	3.77	-60.10	28.72	-	-27.61	31.38	54.00	22.62

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**-Ant 3****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 261.88	1 000	H	69.38	2.72	-61.11	24.85	-	-33.54	35.84	74.00	38.16
2 384.92 <sup>1,2)</sup>	1 000	V	69.19	3.70	-60.26	28.53	-	-28.03	41.16	74.00	32.84
3 181.56	1 000	V	69.94	4.25	-60.35	30.16	-	-25.94	44.01	74.00	29.99
5 797.34	1 000	V	63.62	5.97	-61.09	34.10	-	-21.02	42.60	74.00	31.40
16 612.98	1 000	H	59.18	10.31	-57.16	39.22	-	-7.63	51.54	74.00	22.46
21 837.75	1 000	V	48.22	12.10	-49.42	45.00	-	7.68	55.91	74.00	18.09
25 609.63	1 000	V	46.92	13.30	-44.10	45.50	-	14.70	61.62	74.00	12.38
<b>Average DATA. Emissions above 1 GHz</b>											
2 384.92 <sup>1,2)</sup>	1 000	V	57.86	3.70	-60.26	28.53	-	-28.03	29.83	54.00	24.17

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (71) of (113)

**KCTL****Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 262.97	1 000	H	68.73	2.72	-61.10	24.85	-	-33.53	35.20	74.00	38.80
3 216.88	1 000	V	69.49	4.28	-60.51	30.29	-	-25.94	43.56	74.00	30.44
5 800.97	1 000	H	63.60	5.97	-61.11	34.10	-	-21.04	42.56	74.00	31.44
16 617.06	1 000	V	58.86	10.31	-57.17	39.23	-	-7.63	51.23	74.00	22.77
21 730.97	1 000	H	47.62	12.00	-49.25	45.00	-	7.75	55.37	74.00	18.63
25 636.98	1 000	V	46.85	13.40	-44.15	45.50	-	14.75	61.60	74.00	12.40
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

**Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 291.64	1 000	V	68.71	2.75	-61.09	24.97	-	-33.37	35.35	74.00	38.65
2 483.51 <sup>1,2)</sup>	1 000	V	75.94	3.77	-60.11	28.72	-	-27.62	48.32	74.00	25.68
3 099.53	1 000	H	69.78	4.20	-60.14	29.97	-	-25.97	43.81	74.00	30.19
5 815.92	1 000	V	63.96	5.98	-61.20	34.12	-	-21.10	42.87	74.00	31.13
16 031.63	1 000	V	58.96	10.14	-56.65	37.59	-	-8.92	50.04	74.00	23.96
21 717.16	1 000	V	47.91	12.00	-49.24	45.00	-	7.76	55.67	74.00	18.33
24 049.08	1 000	V	47.71	12.80	-42.63	45.00	-	15.17	62.88	74.00	11.12
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.51 <sup>1,2)</sup>	1 000	V	67.09	3.77	-60.11	28.72	-	-27.62	39.47	54.00	14.53

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (72) of (113)

**KCTL****DC 48 V (PoE)****-Ant 0****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 266.48	1 000	H	69.91	2.72	-61.10	24.87	-	-33.51	36.40	74.00	37.60
2 385.00 <sup>1,2)</sup>	1 000	H	69.09	3.70	-60.26	28.53	-	-28.03	41.07	74.00	32.93
3 016.17	1 000	H	69.62	4.15	-59.63	29.74	-	-25.74	43.89	74.00	30.11
6 018.92	1 000	H	63.66	6.11	-61.56	34.42	-	-21.03	42.63	74.00	31.37
16 787.89	1 000	H	59.34	10.36	-57.49	39.71	-	-7.42	51.92	74.00	22.08
21 464.02	1 000	V	47.09	11.90	-48.88	44.90	-	7.92	55.02	74.00	18.98
24 117.08	1 000	V	47.70	12.80	-42.84	45.10	-	15.06	62.76	74.00	11.24
<b>Average DATA. Emissions above 1 GHz</b>											
2 385.00 <sup>1,2)</sup>	1 000	H	58.56	3.70	-60.26	28.53	-	-28.03	30.53	54.00	23.47

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 278.91	1 000	V	68.94	2.73	-61.09	24.92	-	-33.44	35.50	74.00	38.50
3 073.05	1 000	V	70.71	4.18	-59.98	29.90	-	-25.90	44.82	74.00	29.18
5 994.91	1 000	H	64.91	6.10	-61.61	34.39	-	-21.12	43.79	74.00	30.21
16 762.06	1 000	V	59.18	10.35	-57.43	39.63	-	-7.45	51.74	74.00	22.26
21 491.38	1 000	V	48.24	11.90	-48.99	45.00	-	7.91	56.15	74.00	17.85
24 027.56	1 000	V	47.83	12.80	-42.59	45.00	-	15.21	63.04	74.00	10.96
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

This test report shall not be reproduced, except in full, without the written approval



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (73) of (113)

**KCTL****Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 286.17	1 000	V	67.53	2.74	-61.08	24.94	-	-33.40	34.14	74.00	39.86
2 483.91 <sup>1,2)</sup>	1 000	V	86.10	3.77	-60.11	28.72	-	-27.62	58.48	74.00	15.52
3 067.27	1 000	V	70.92	4.18	-59.94	29.88	-	-25.88	45.04	74.00	28.96
5 989.02	1 000	V	63.80	6.09	-61.61	34.38	-	-21.14	42.67	74.00	31.33
16 829.13	1 000	V	59.33	10.37	-57.55	39.82	-	-7.36	51.97	74.00	22.03
21 506.52	1 000	H	48.65	11.90	-49.00	45.00	-	7.90	56.55	74.00	17.45
24 411.66	1 000	V	46.37	12.80	-43.33	45.10	-	14.57	60.94	74.00	13.06
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.91 <sup>1,2)</sup>	1 000	V	71.26	3.77	-60.11	28.72	-	-27.62	43.64	54.00	10.36

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**-Ant 1****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 272.11	1 000	V	69.84	2.73	-61.10	24.89	-	-33.48	36.37	74.00	37.63
2 385.47 <sup>1,2)</sup>	1 000	H	69.86	3.70	-60.25	28.53	-	-28.02	41.84	74.00	32.16
3 013.13	1 000	H	69.61	4.15	-59.62	29.74	-	-25.73	43.88	74.00	30.12
5 990.83	1 000	H	63.41	6.09	-61.61	34.39	-	-21.13	42.28	74.00	31.72
16 954.19	1 000	V	59.17	10.41	-57.79	40.17	-	-7.21	51.96	74.00	22.04
21 511.56	1 000	H	47.49	11.90	-49.01	45.00	-	7.89	55.38	74.00	18.62
26 024.27	1 000	V	44.93	13.70	-43.97	45.70	-	15.43	60.37	74.00	13.63
<b>Average DATA. Emissions above 1 GHz</b>											
2 385.47 <sup>1,2)</sup>	1 000	H	59.17	3.70	-60.25	28.53	-	-28.02	31.15	54.00	22.85

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (74) of (113)

**KCTL****Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 290.78	1 000	V	68.81	2.75	-61.08	24.96	-	-33.37	35.44	74.00	38.56
3 111.95	1 000	V	66.73	4.21	-60.18	30.00	-	-25.97	40.76	74.00	33.24
5 799.61	1 000	V	63.67	5.97	-61.11	34.10	-	-21.04	42.64	74.00	31.36
17 037.11	1 000	H	58.95	10.44	-58.18	40.52	-	-7.22	51.73	74.00	22.27
21 494.03	1 000	H	47.78	11.90	-49.00	45.00	-	7.90	55.68	74.00	18.32
25 206.14	1 000	V	45.85	13.00	-44.33	45.30	-	13.97	59.82	74.00	14.18
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

**Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 266.56	1 000	H	69.02	2.72	-61.10	24.87	-	-33.51	35.51	74.00	38.49
2 483.50 <sup>1,2)</sup>	1 000	V	78.21	3.77	-60.11	28.72	-	-27.62	50.60	74.00	23.40
3 007.03	1 000	V	70.54	4.14	-59.57	29.72	-	-25.71	44.83	74.00	29.17
5 959.11	1 000	V	62.80	6.07	-61.64	34.34	-	-21.23	41.57	74.00	32.43
16 760.70	1 000	H	58.85	10.35	-57.43	39.63	-	-7.45	51.40	74.00	22.60
21 928.59	1 000	H	46.93	12.10	-49.47	45.00	-	7.63	54.55	74.00	19.45
25 639.64	1 000	V	43.92	13.40	-44.15	45.50	-	14.75	58.68	74.00	15.32
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.50 <sup>1,2)</sup>	1 000	V	70.37	3.77	-60.11	28.72	-	-27.62	42.75	54.00	11.25

1) Restricted band

2) Bandedge

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (75) of (113)

**KCTL****-Ant 2****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 286.41	1 000	V	69.25	2.74	-61.09	24.95	-	-33.40	35.86	74.00	38.14
2 385.55 <sup>1,2)</sup>	1 000	V	70.09	3.70	-60.25	28.53	-	-28.02	42.07	74.00	31.93
3 029.84	1 000	V	68.84	4.16	-59.72	29.78	-	-25.78	43.06	74.00	30.94
6 165.73	1 000	V	64.15	6.19	-61.29	34.62	-	-20.48	43.67	74.00	30.33
16 760.70	1 000	H	60.33	10.35	-57.43	39.63	-	-7.45	52.88	74.00	21.12
21 804.28	1 000	V	47.51	12.10	-49.39	45.00	-	7.71	55.22	74.00	18.78
25 644.16	1 000	H	44.98	13.40	-44.14	45.50	-	14.76	59.74	74.00	14.26
<b>Average DATA. Emissions above 1 GHz</b>											
2 385.55 <sup>1,2)</sup>	1 000	V	59.22	3.70	-60.25	28.53	-	-28.02	31.20	54.00	22.80

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 289.06	1 000	V	69.66	2.74	-61.08	24.96	-	-33.38	36.28	74.00	37.72
3 015.78	1 000	V	69.00	4.15	-59.63	29.74	-	-25.74	43.26	74.00	30.74
5 673.64	1 000	V	63.24	5.90	-60.64	33.91	-	-20.83	42.41	74.00	31.59
17 043.00	1 000	V	58.74	10.44	-59.71	40.56	-	-8.71	50.02	74.00	23.98
21 699.36	1 000	V	47.26	12.00	-49.23	45.00	-	7.77	55.03	74.00	18.97
24 010.56	1 000	H	47.80	12.80	-42.56	45.00	-	15.24	63.04	74.00	10.96
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (76) of (113)

**KCTL****Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 277.19	1 000	H	69.76	2.73	-61.09	24.91	-	-33.45	36.32	74.00	37.68
2 483.51 <sup>1,2)</sup>	1 000	V	83.69	3.77	-60.10	28.72	-	-27.61	56.08	74.00	17.92
3 064.22	1 000	V	69.68	4.18	-59.92	29.87	-	-25.87	43.80	74.00	30.20
5 752.94	1 000	V	64.23	5.94	-60.94	34.03	-	-20.97	43.26	74.00	30.74
16 857.22	1 000	V	59.40	10.38	-59.09	39.90	-	-8.81	50.59	74.00	23.41
21 553.80	1 000	H	47.77	12.00	-49.13	45.00	-	7.87	55.63	74.00	18.37
25 237.48	1 000	V	45.24	13.00	-44.27	45.30	-	14.03	59.27	74.00	14.73
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.51 <sup>1,2)</sup>	1 000	V	73.61	3.77	-60.10	28.72	-	-27.61	46.00	54.00	8.00

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

**-Ant 3****Lowest channel (2 405 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 270.55	1 000	V	69.77	2.73	-61.10	24.88	-	-33.49	36.28	74.00	37.72
2 387.19 <sup>1,2)</sup>	1 000	V	69.73	3.70	-60.25	28.54	-	-28.01	41.72	74.00	32.28
3 064.69	1 000	V	70.02	4.18	-59.93	29.87	-	-25.88	44.14	74.00	29.86
5 767.89	1 000	V	63.59	5.95	-61.16	34.05	-	-21.16	42.43	74.00	31.57
17 079.70	1 000	V	59.38	10.46	-59.97	40.78	-	-8.73	50.65	74.00	23.35
21 434.53	1 000	H	48.13	11.90	-48.86	44.90	-	7.94	56.08	74.00	17.92
25 204.28	1 000	V	45.49	13.00	-44.33	45.30	-	13.97	59.46	74.00	14.54
<b>Average DATA. Emissions above 1 GHz</b>											
2 387.19 <sup>1,2)</sup>	1 000	V	59.21	3.70	-60.25	28.54	-	-28.01	31.20	54.00	22.80

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A

Page (77) of (113)

**KCTL****Middle channel (2 440 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 284.14	1 000	V	69.55	2.74	-61.09	24.94	-	-33.41	36.14	74.00	37.86
3 050.31	1 000	V	70.41	4.17	-59.84	29.84	-	-25.83	44.57	74.00	29.43
5 712.61	1 000	V	64.15	5.92	-60.36	33.97	-	-20.47	43.68	74.00	30.32
17 069.28	1 000	H	59.24	10.45	-59.89	40.72	-	-8.72	50.52	74.00	23.48
21 638.00	1 000	V	48.77	12.00	-49.19	45.00	-	7.81	56.58	74.00	17.42
24 106.98	1 000	H	47.47	12.80	-42.82	45.10	-	15.08	62.55	74.00	11.45
<b>Average DATA. Emissions above 1 GHz</b>											
Not Detected											

**Highest channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	DCCF [dB]	Factor [dB]	Result dB(μV/m)	Limit dB(μV/m)	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>											
1 286.88	1 000	V	69.07	2.74	-61.08	24.95	-	-33.39	35.68	74.00	38.32
2 483.52 <sup>1,2)</sup>	1 000	V	81.73	3.77	-60.09	28.72	-	-27.60	54.13	74.00	19.87
3 008.20	1 000	V	69.44	4.14	-59.58	29.72	-	-25.72	43.72	74.00	30.28
6 656.92	1 000	H	63.14	6.44	-62.01	35.25	-	-20.32	42.82	74.00	31.18
16 119.53	1 000	H	58.79	10.16	-56.71	37.83	-	-8.72	50.07	74.00	23.93
21 532.28	1 000	V	47.26	12.00	-49.12	45.00	-	7.88	55.14	74.00	18.86
24 061.30	1 000	H	47.45	12.80	-42.65	45.00	-	15.15	62.60	74.00	11.40
<b>Average DATA. Emissions above 1 GHz</b>											
2 483.52 <sup>1,2)</sup>	1 000	V	70.32	3.77	-60.09	28.72	-	-27.60	42.72	54.00	11.28

<sup>1)</sup> Restricted band

<sup>2)</sup> Bandedge

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

### 5.7.4 Test Plot


Figure 3. Plot of the Band-edge & Conducted Spurious Emissions

AC 110 V (AC adapter)


-Ant 0

Lowest Channel (2 405 MHz)

#### Reference

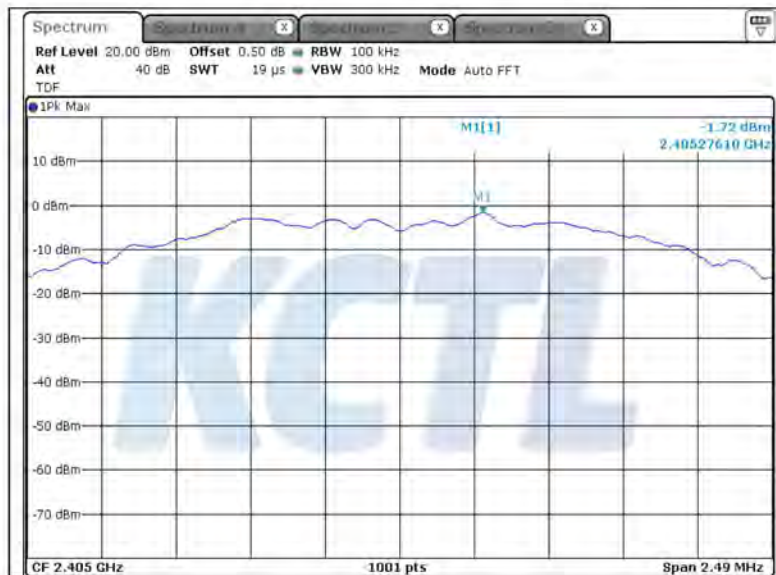

#### Band-edge

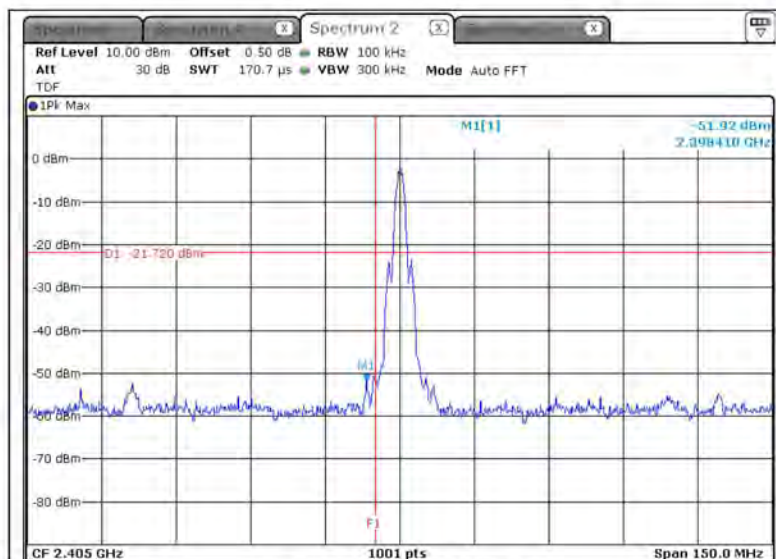

- Result of 2 400.0 MHz


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (79) of (113)




## Conducted Spurious Emissions

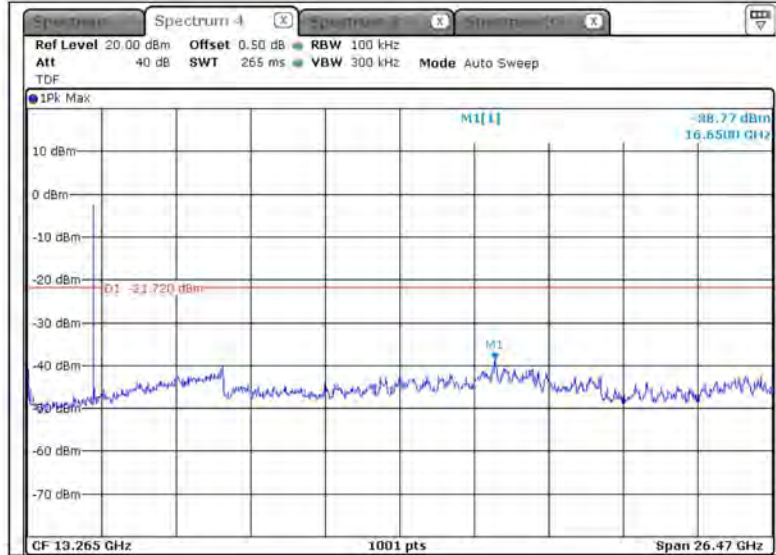

Middle Channel (2 440 MHz)

## Reference

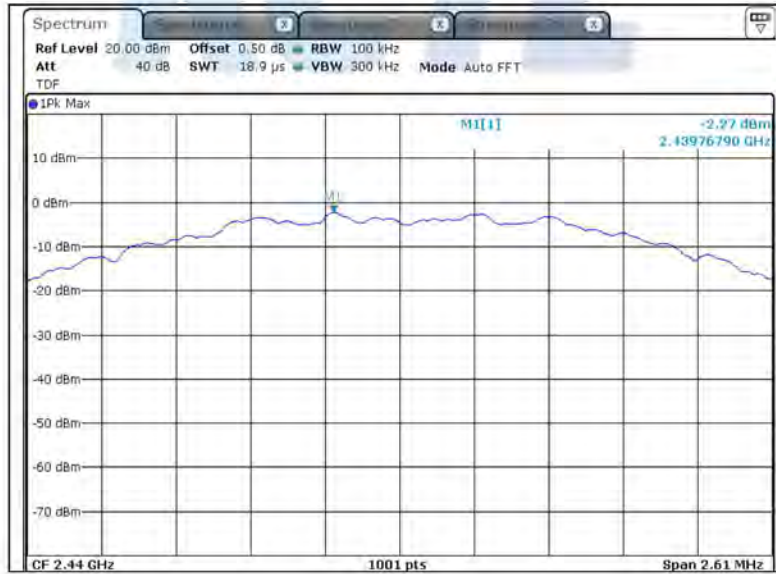


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (80) of (113)




## Conducted Spurious Emissions

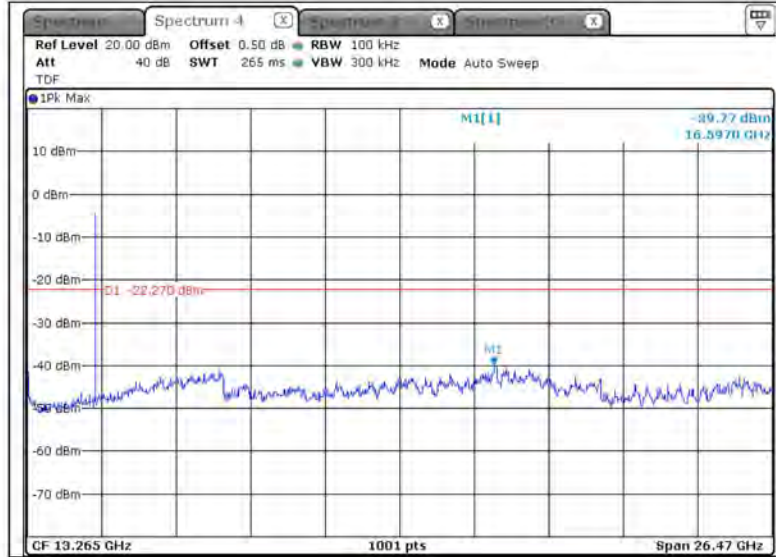

Highest Channel (2 480 MHz)

## Reference

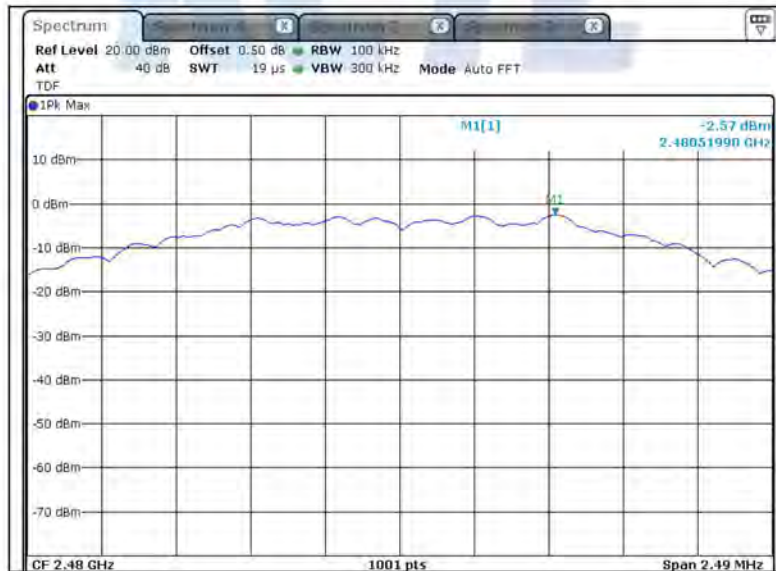




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (81) of (113)




## Band-edge

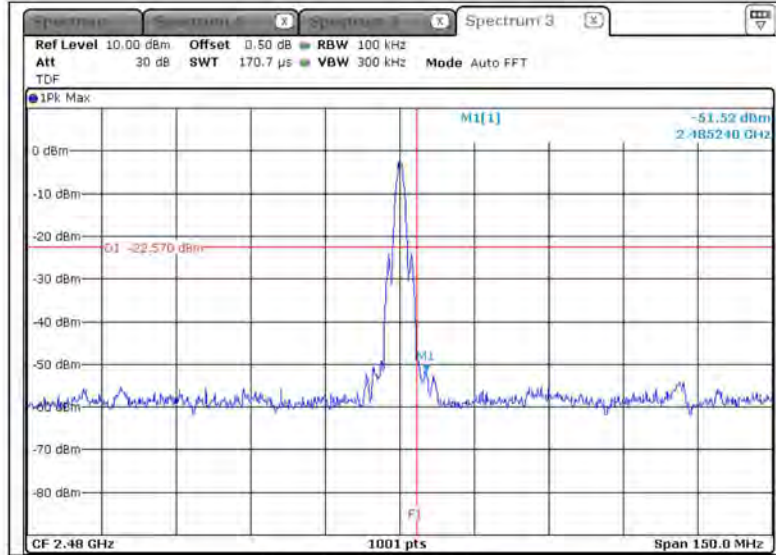

- Result of 2 483.5 MHz

## Conducted Spurious Emissions

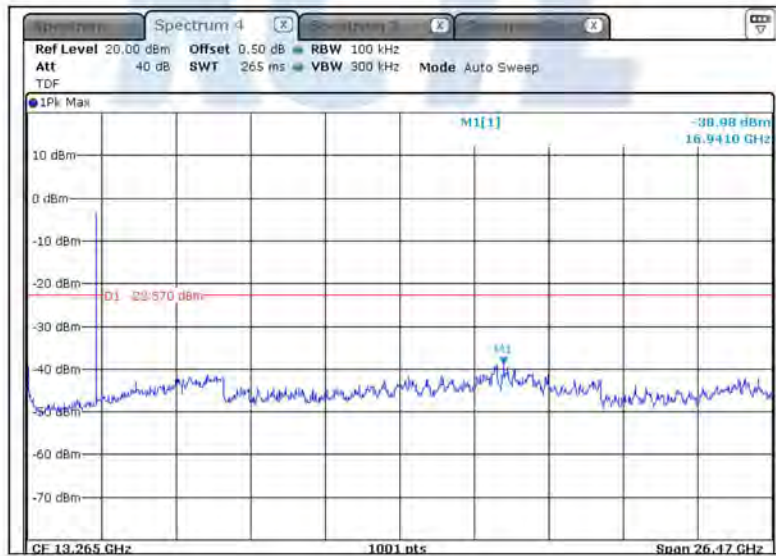

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (82) of (113)




## -Ant 1

Lowest Channel (2 405 MHz)

### Reference



### Band-edge

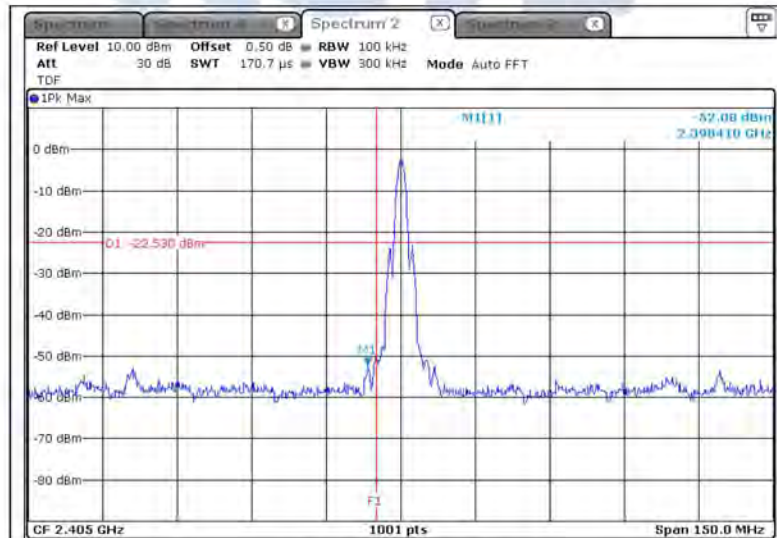

- Result of 2 400.0 MHz


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (83) of (113)




## Conducted Spurious Emissions

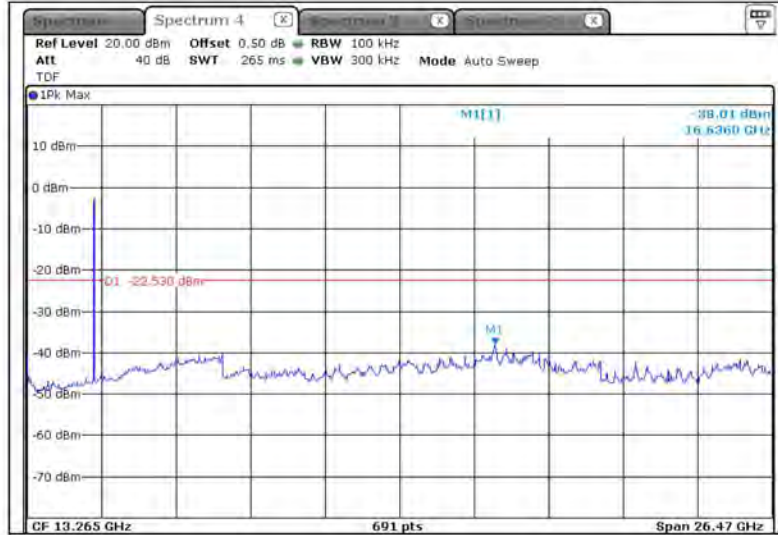

Middle Channel (2 440 MHz)

## Reference

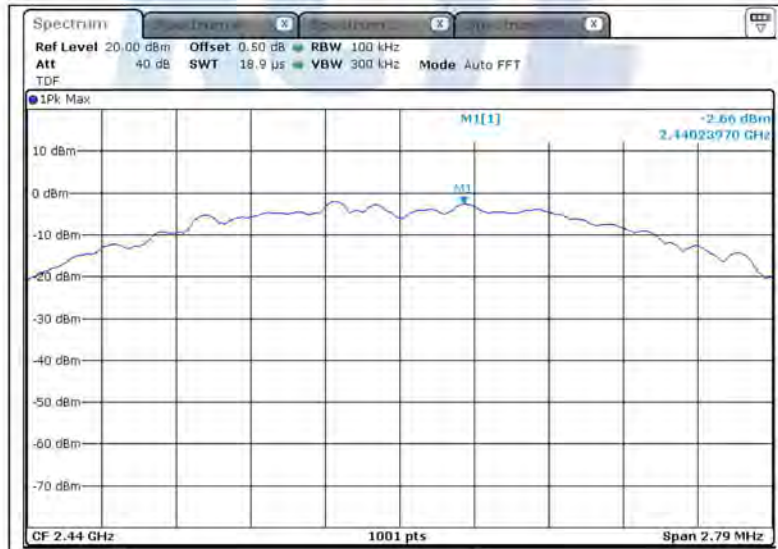


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (84) of (113)




## Conducted Spurious Emissions

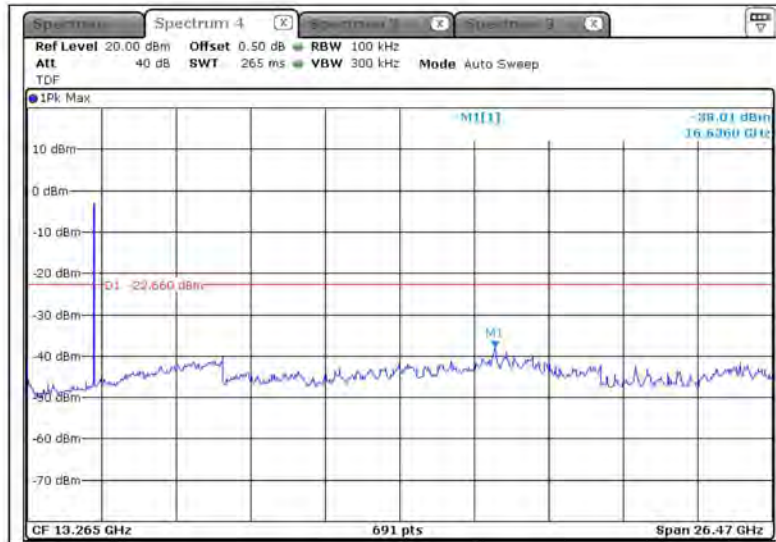

Highest Channel (2 480 MHz)

## Reference

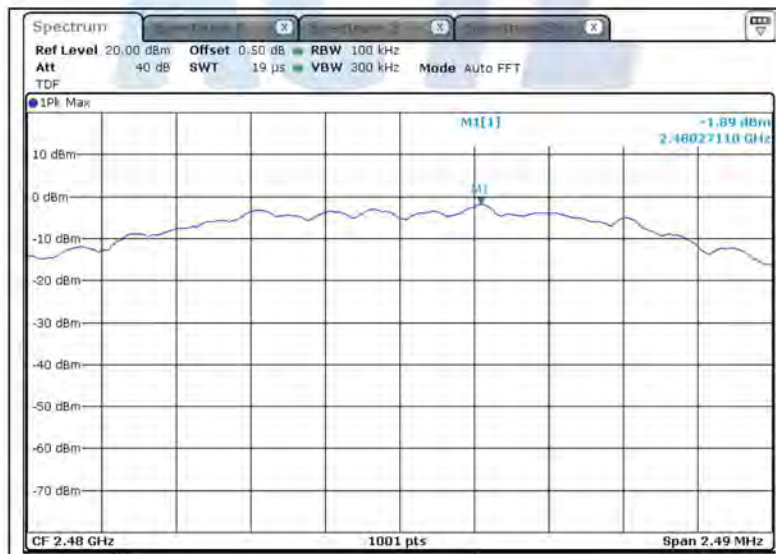


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (85) of (113)




## Band-edge

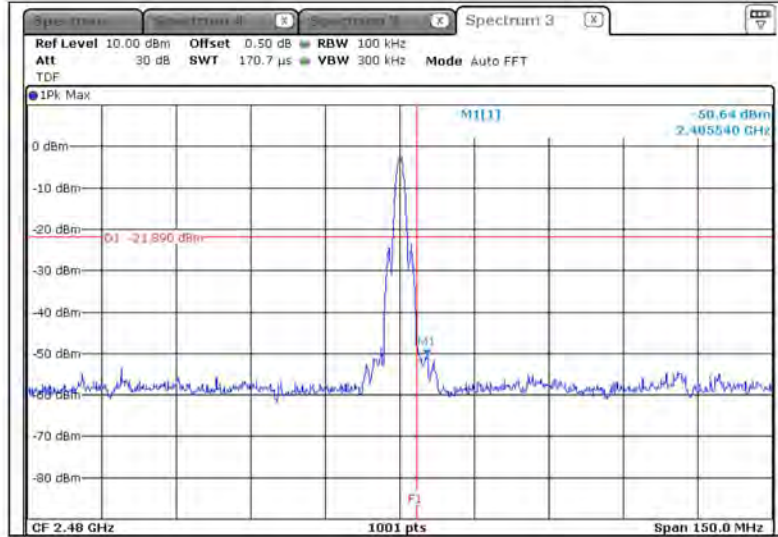

- Result of 2 483.5 Mhz

## Conducted Spurious Emissions

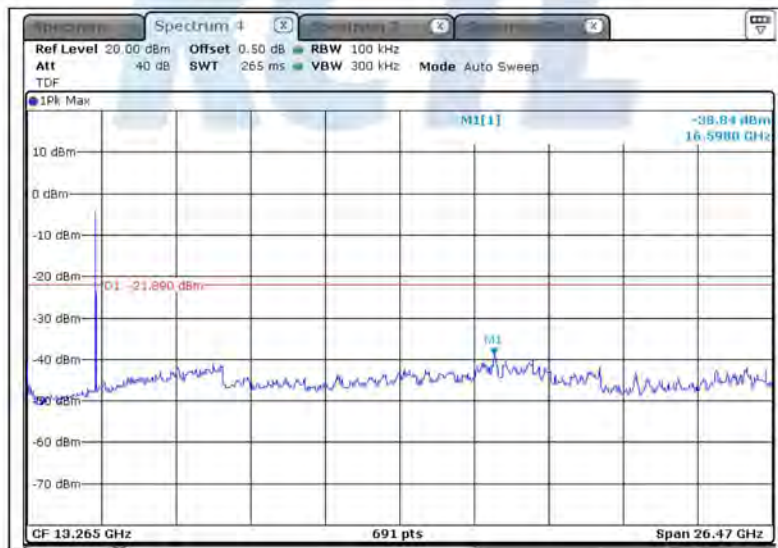

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (86) of (113)




## -Ant 2

Lowest Channel (2 405 MHz)

### Reference



### Band-edge

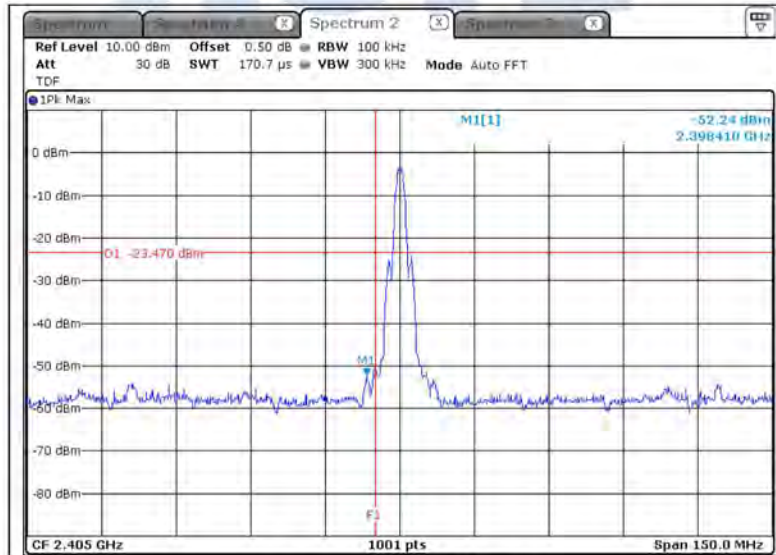

- Result of 2 400.0 MHz


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (87) of (113)




## Conducted Spurious Emissions

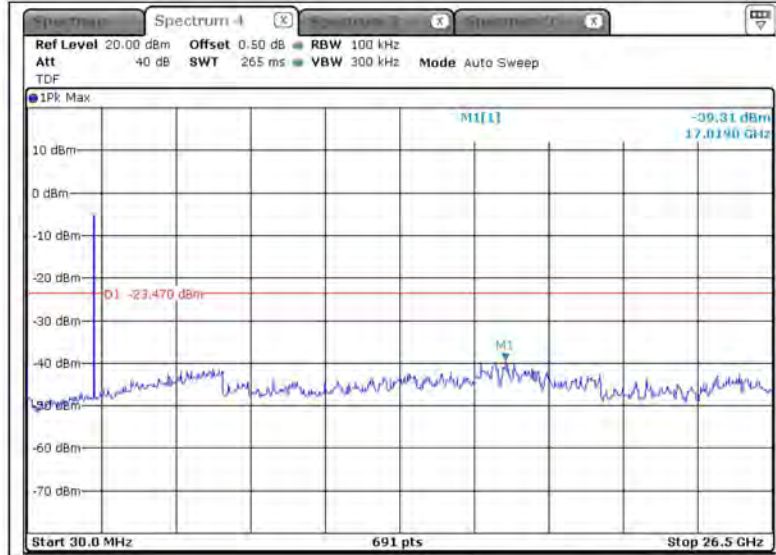

Middle Channel (2 440 MHz)

## Reference

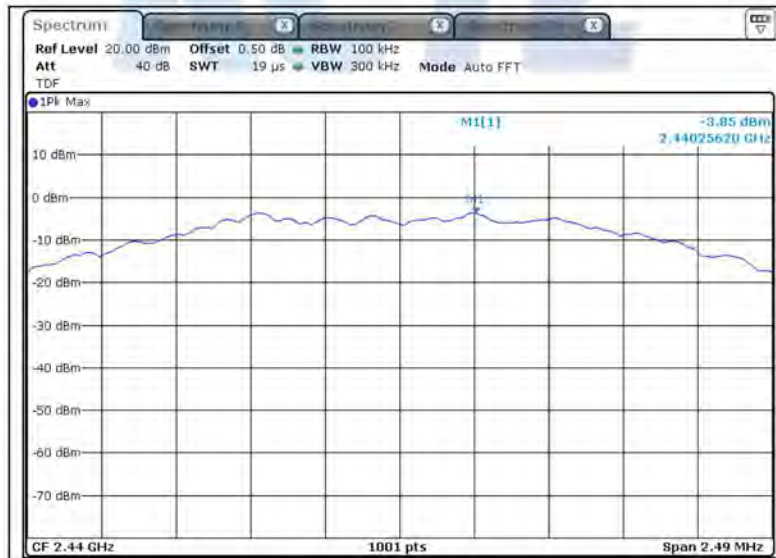


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (88) of (113)




## Conducted Spurious Emissions

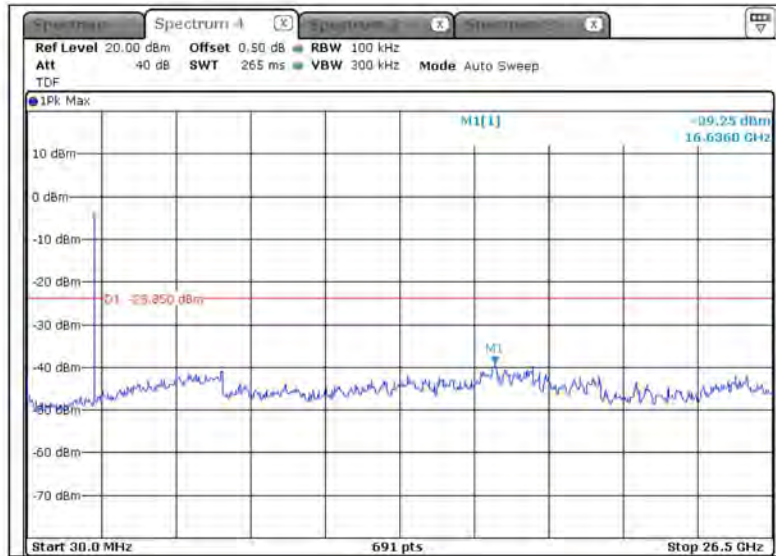

Highest Channel (2 480 MHz)

## Reference

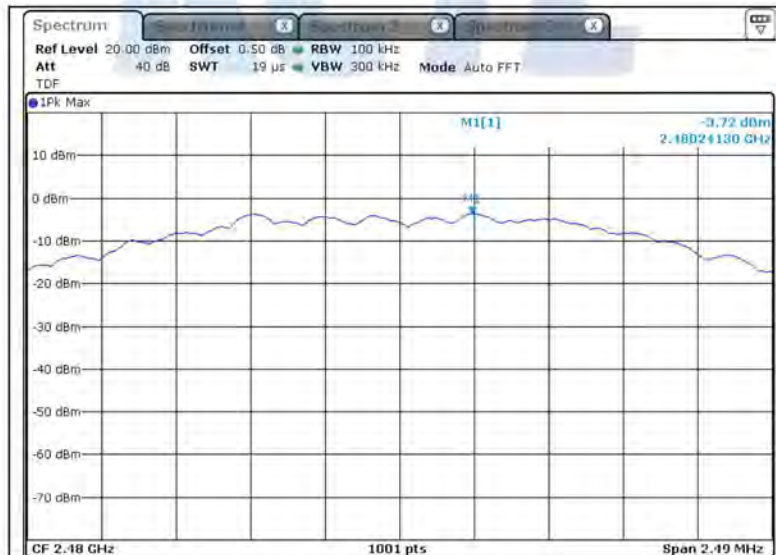




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR18-SRF0124-A  
Page (89) of (113)



## Band-edge

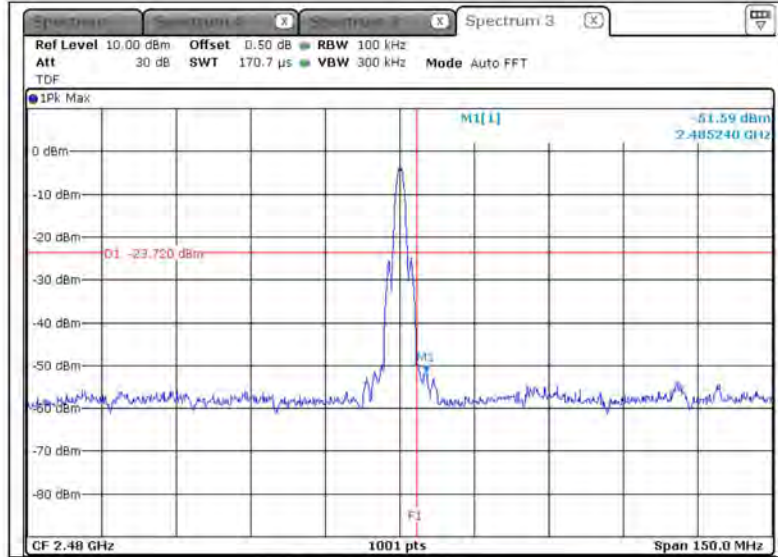

- Result of 2 483.5 Mhz

## Conducted Spurious Emissions

