

FCC Part 15C

Measurement and Test Report

For

SHEN ZHEN UYESEE TECHNOLOGY CO.,LTD

FCC ID: 2AMKM4ZONE

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>4 ZONE STREAMER</u>
Tested Model:	<u>M400</u>
Report No.:	<u>BSL180284959A0005Y-ER-7</u>
Tested Date:	<u>February 5~25, 2018</u>
Issued Date:	<u>February 23,2018</u>
Tested By:	<u>Lisa. Li / Engineer</u>
Reviewed By:	<u>arno. Liu / EMC Manager</u>
Approved & Authorized By:	<u>Mike mo / PSQ Manager</u>
Prepared By:	<u>Mike mo</u>

Lisa . Li
arno. Liu
Mike mo

BSL Testing Co.,LTD.
NO. 24, ZH Park, Nantou, Shenzhen, 518000 China
Tel: 86- 755-26508703 Fax: 86- 755-26508703

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION.....	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE.....	10
5.2 TEST PROCEDURE.....	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	36
6.1 STANDARD APPLICABLE.....	36
6.2 TEST PROCEDURE.....	36
6.3 ENVIRONMENTAL CONDITIONS	36
6.4 SUMMARY OF TEST RESULTS/PLOTS	36
7. RF OUTPUT POWER	63
7.1 STANDARD APPLICABLE.....	63
7.2 TEST PROCEDURE.....	63
7.3 ENVIRONMENTAL CONDITIONS	63
7.4 SUMMARY OF TEST RESULTS/PLOTS	64
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	82
8.1 MEASUREMENT UNCERTAINTY	82
8.2 STANDARD APPLICABLE.....	82
8.3 TEST PROCEDURE.....	82
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	84
8.5 ENVIRONMENTAL CONDITIONS	84
8.6 SUMMARY OF TEST RESULTS/PLOTS	84
9. OUT OF BAND EMISSIONS.....	94
9.1 STANDARD APPLICABLE.....	94
9.2 TEST PROCEDURE.....	94
9.3 ENVIRONMENTAL CONDITIONS	95
9.4 SUMMARY OF TEST RESULTS/PLOTS	95
10. CONDUCTED EMISSIONS	100
10.1 MEASUREMENT UNCERTAINTY	100
10.2 TEST PROCEDURE.....	100
10.3 BASIC TEST SETUP BLOCK DIAGRAM.....	100
10.4 ENVIRONMENTAL CONDITIONS	100
10.5 TEST RECEIVER SETUP	101
10.6 SUMMARY OF TEST RESULTS/PLOTS	101
10.7 CONDUCTED EMISSIONS TEST DATA.....	101

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHEN ZHEN UYESEE TECHNOLOGY CO.,LTD
 Address of applicant: 201C, C6 Building, HengFeng Industry Park, Hezhou,
 518126, Baoan District, Shenzhen, China

Manufacturer: SHEN ZHEN UYESEE TECHNOLOGY CO.,LTD
 Address of manufacturer: 201C, C6 Building, HengFeng Industry Park, Hezhou,
 518126, Baoan District, Shenzhen, China

General Description of EUT	
Product Name:	4 ZONE STREAMER
Trade Name:	iEAST
Model No.:	M400
Adding Model(s):	M800, AMP400, AMP800
Rated Voltage:	Input: AC 120V, 60Hz
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model M400, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	WIFI 1/WIFI2/WIFI3/WIFI4: 802.11b, 802.11g, 802.11n
Frequency Range:	WIFI 1/WIFI2/WIFI3/WIFI4: 2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	WIFI1: 12.84dBm (Conducted) WIFI2:12.92dBm(Conducted) WIFI3: 13.69dBm (Conducted) WIFI4:13.97dBm(Conducted)
Type of Modulation:	WIFI 1/WIFI2/WIFI3/WIFI4: CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	WIFI 1/WIFI2/WIFI3/WIFI4: 1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	WIFI 1/WIFI2/WIFI3/WIFI4: 11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	WIFI 1/WIFI2/WIFI3/WIFI4: 5MHz
Type of Antenna:	WIFI 1/WIFI2/WIFI3/WIFI4: internal
Antenna Gain:	WIFI 1/WIFI2/WIFI3/WIFI4: 1.5dBi
Lowest Internal Frequency	11.2896MHz

1.2 Test Standards

The following report is prepared on behalf of the SHEN ZHEN UYESEE TECHNOLOGY CO.,LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V04 for digital transmission systems and KDB 662911 D01 Multiple Transmitter Output v02r01 shall be performed also.

1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035

Tel: 86- 755-26508703

Fax: 86- 755-26508703

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty			
Parameter	Conditions	Uncertainty	
RF Output Power	Conducted	± 0.42dB	
Occupied Bandwidth	Conducted	± 1.5%	
Power Spectral Density	Conducted	± 1.8dB	
Conducted Spurious Emission	Conducted	± 2.17dB	
Conducted Emissions	Conducted	± 2.88dB	
Transmitter Spurious Emissions	Radiated	± 5.1dB	

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRI CS	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)*6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has internal antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 V04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions

Temperature:	26°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


5.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz				Limit dBm/3kHz
		WIFI 1	WIFI 2	WIFI 3	WIFI 4	
802.11b	2412	-9.5	-8.51	-10.53	-7.53	8
	2437	-10.18	-9.15	-8.16	-8.10	8
	2462	-10.42	-9.44	-9.47	-10.46	8
802.11g	2412	-8.38	-10.48	-10.38	-11.13	8
	2437	-11.44	-11.57	-13.81	-13.70	8
	2462	-14.40	-14.96	-14.54	-13.90	8
802.11n HT20	2412	-10.19	-12.45	-14.61	-12.84	8
	2437	-12.57	-11.12	-14.84	-13.16	8
	2462	-15.01	-13.88	-13.12	-13.80	8
802.11n HT40	2422	-9.97	-10.60	-10.27	-11.59	8
	2437	-16.77	-16.30	-16.23	-14.21	8
	2452	-18.06	-17.74	-16.81	-16.37	8


Please refer to the following test plots:

WIFI 1:


802.11b-Low Channel

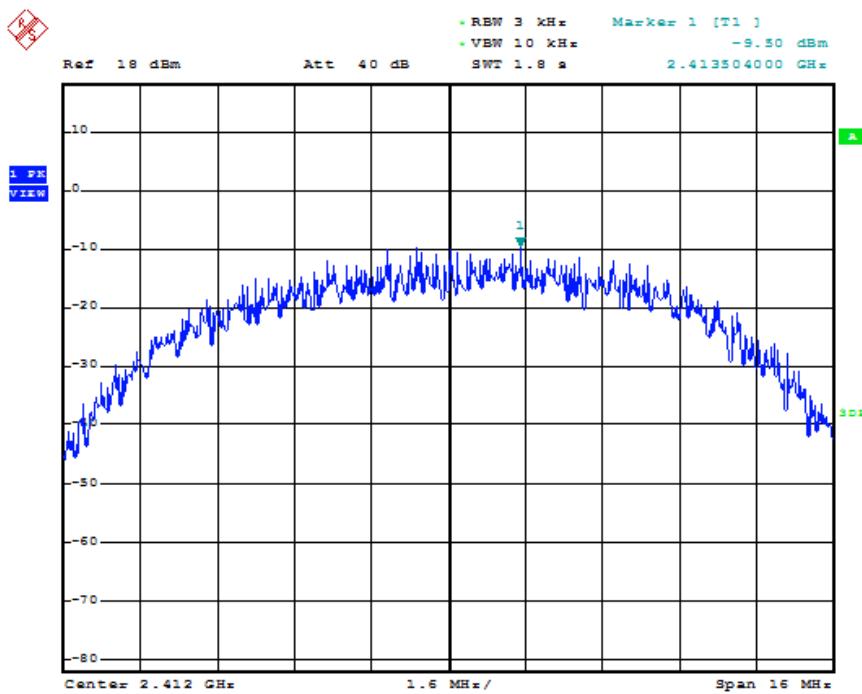


802.11b-Middle Channel

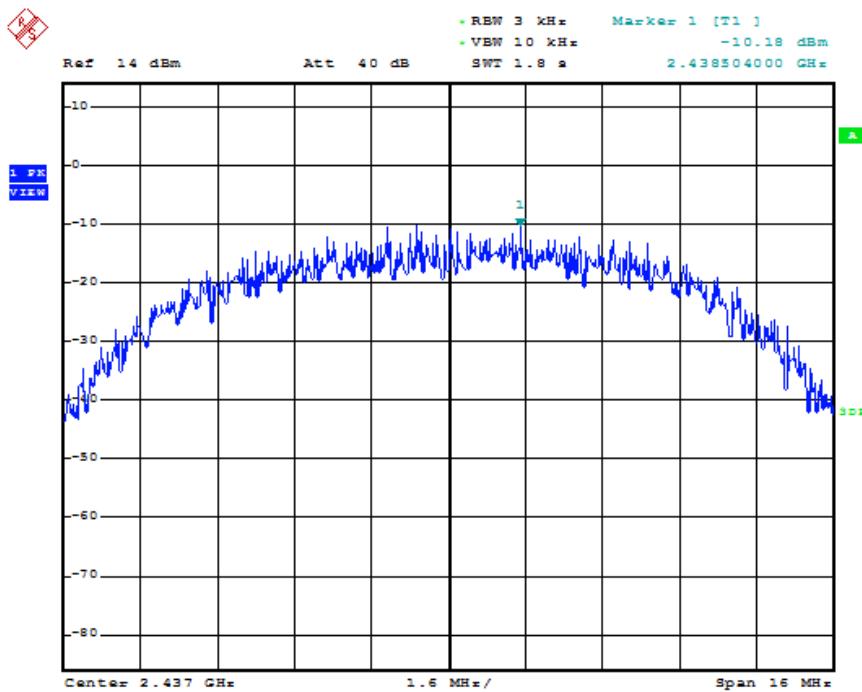


802.11b-High Channel

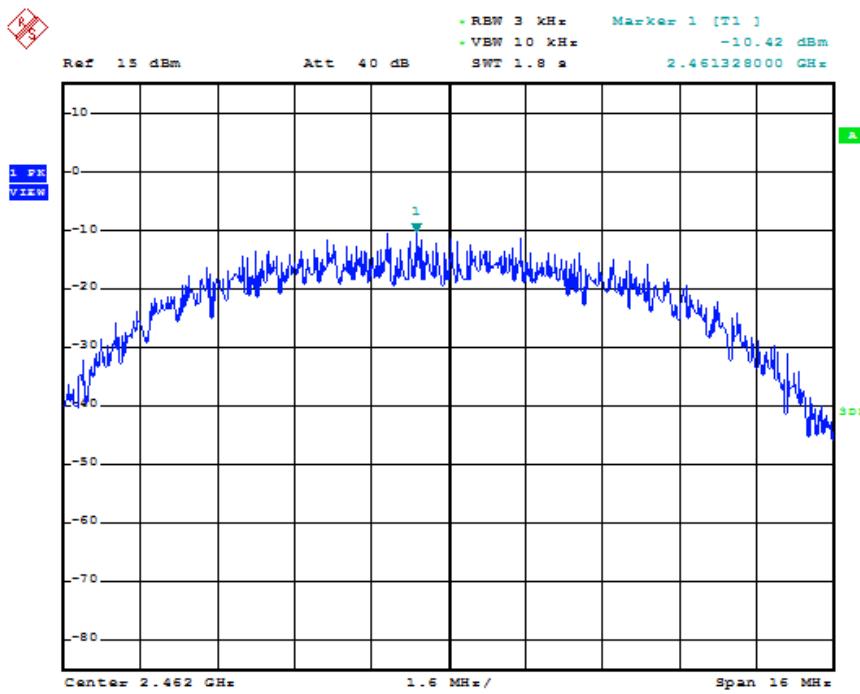


802.11g-Low Channel

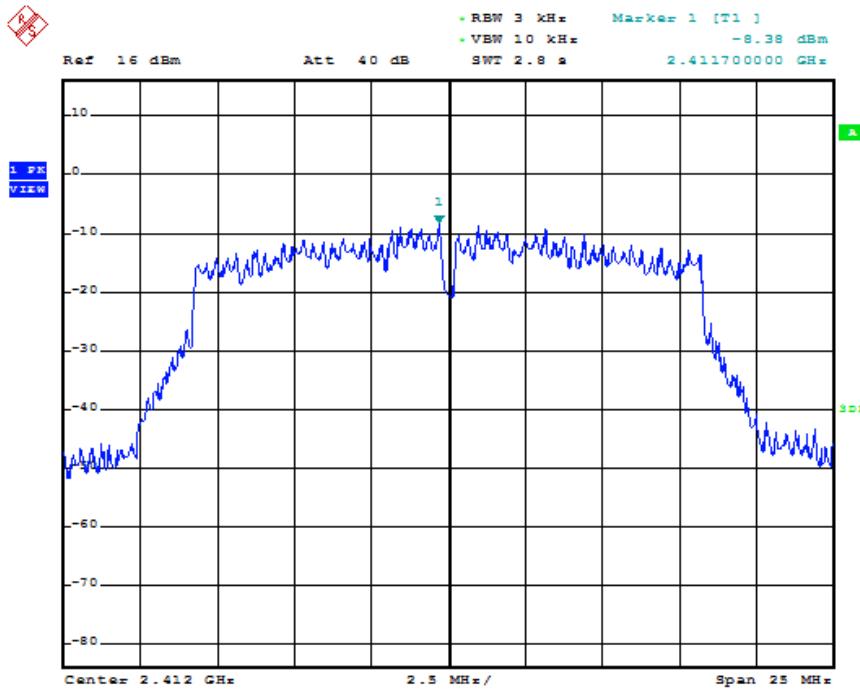


802.11g-Middle Channel

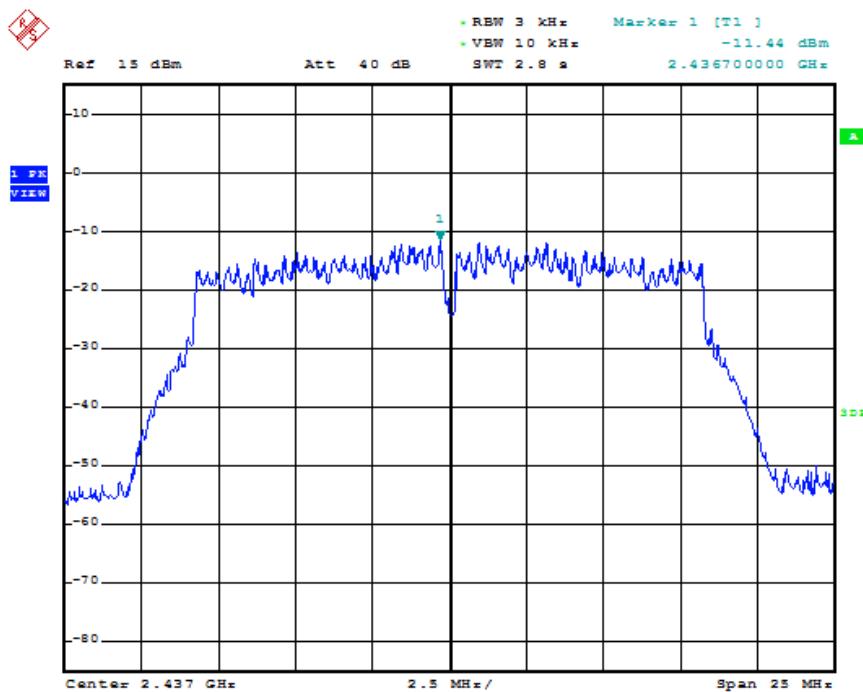


802.11g-High Channel

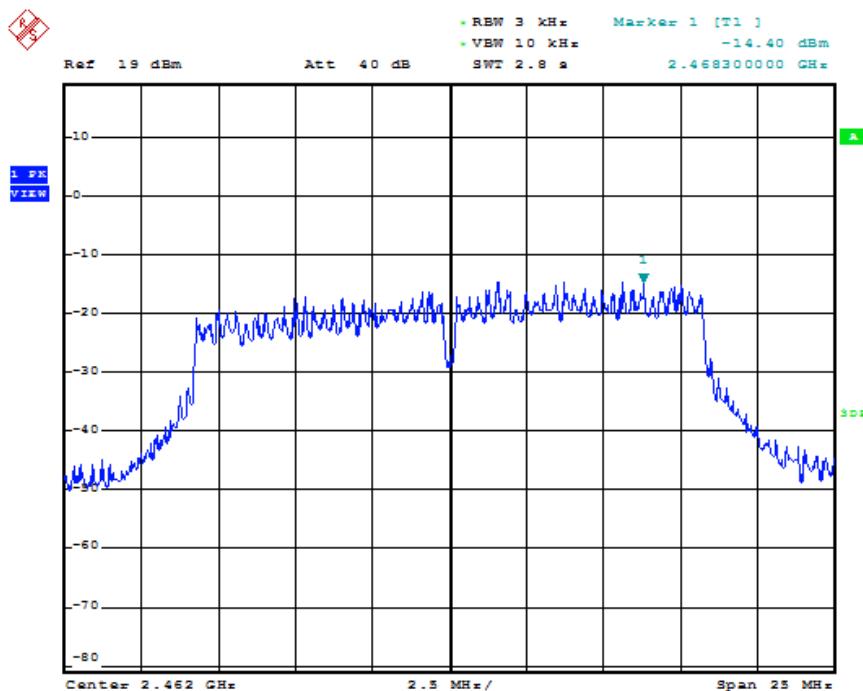


802.11n-HT20-Low Channel

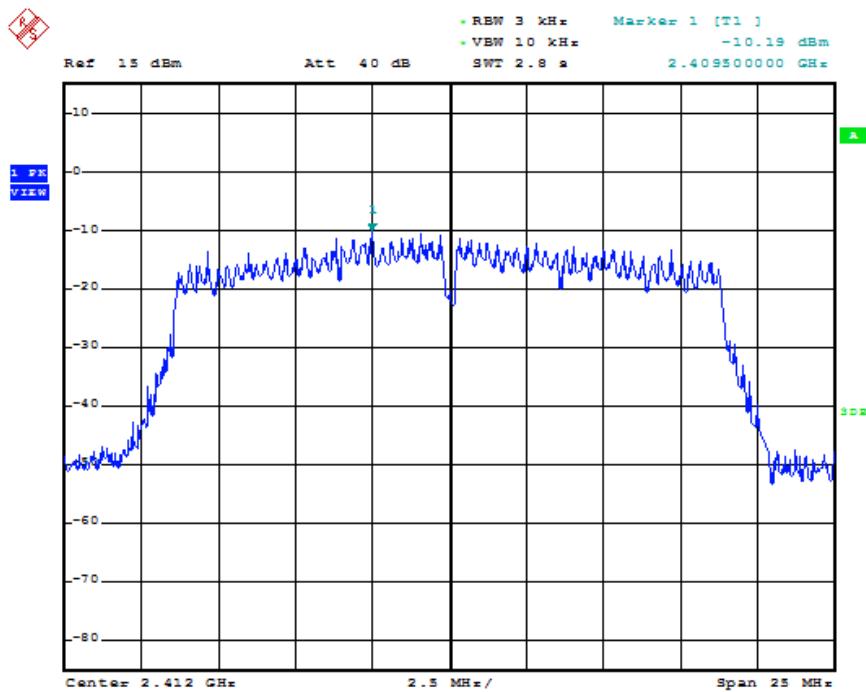


802.11n-HT20-Middle Channel

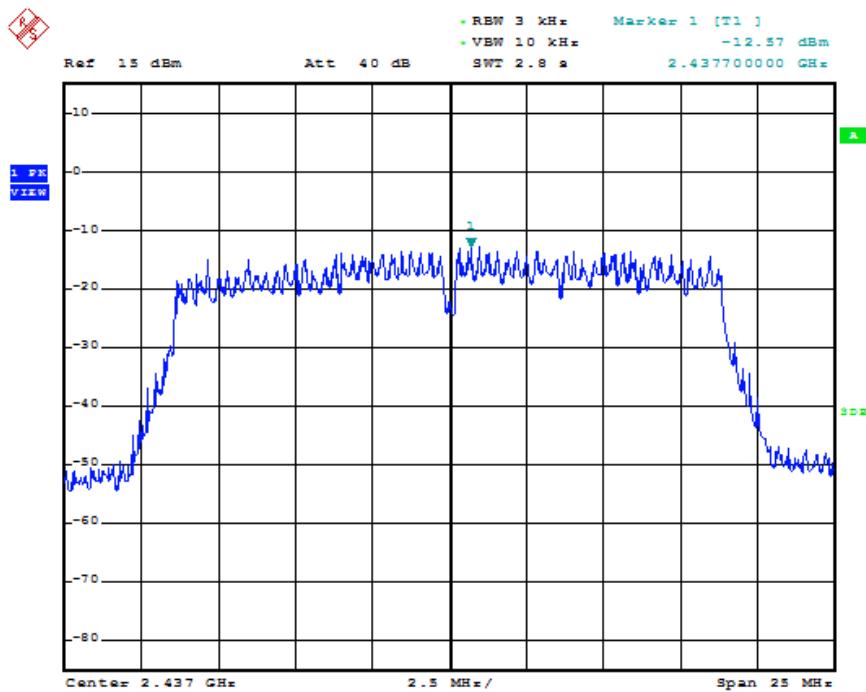


802.11n-HT20-High Channel

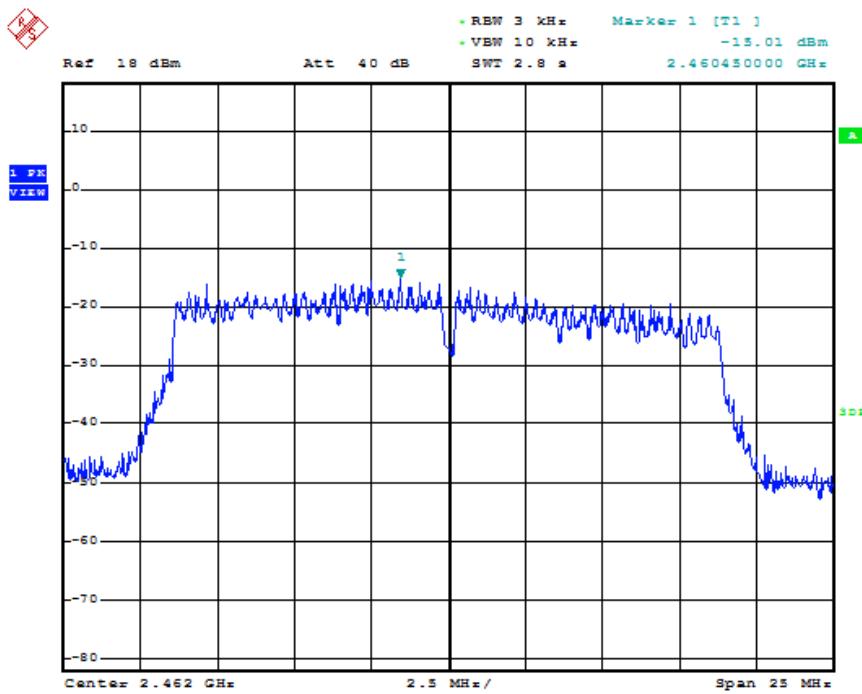


802.11n-HT40-Low Channel

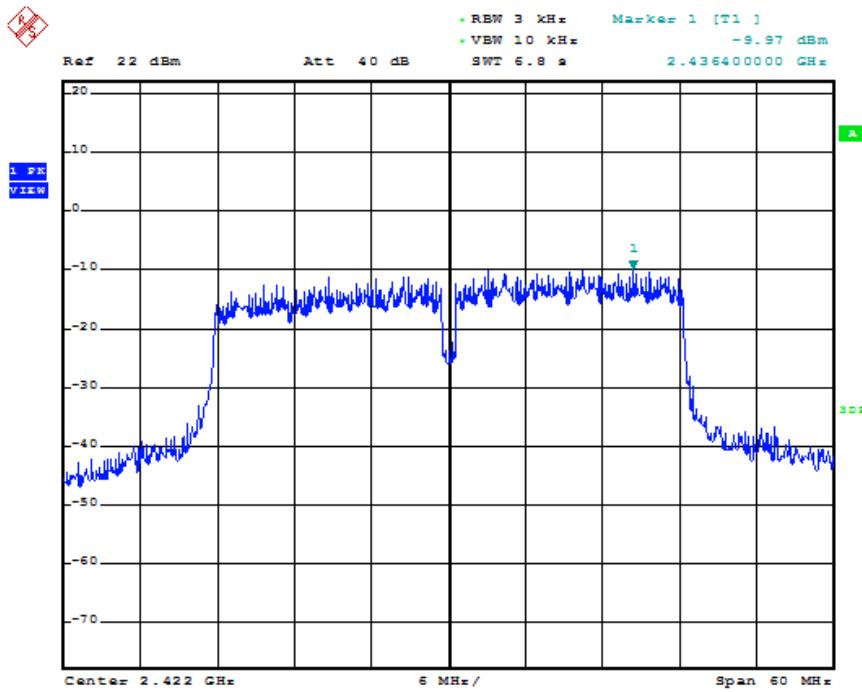

802.11n-HT40-Middle Channel

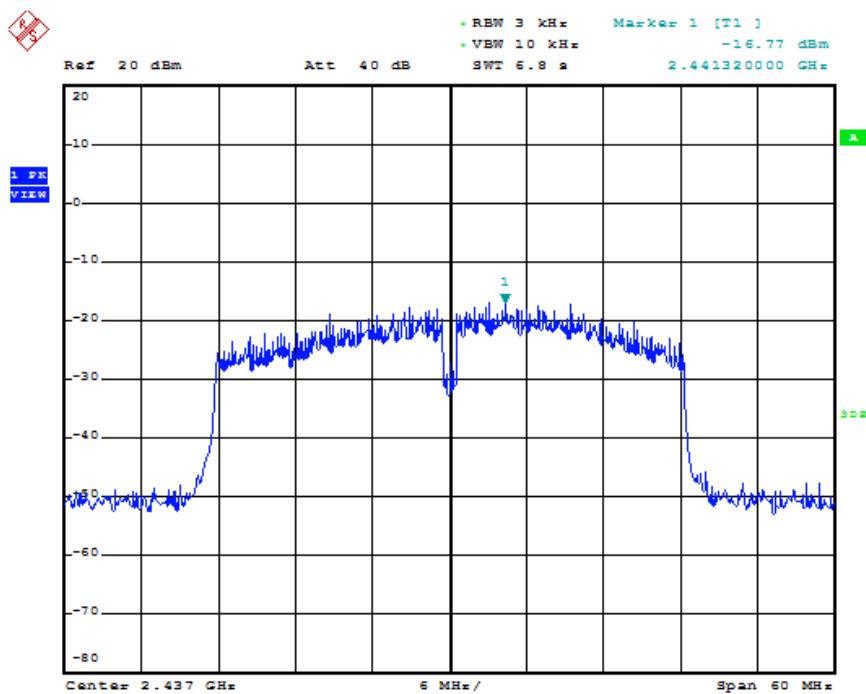


802.11n-HT40-High Channel

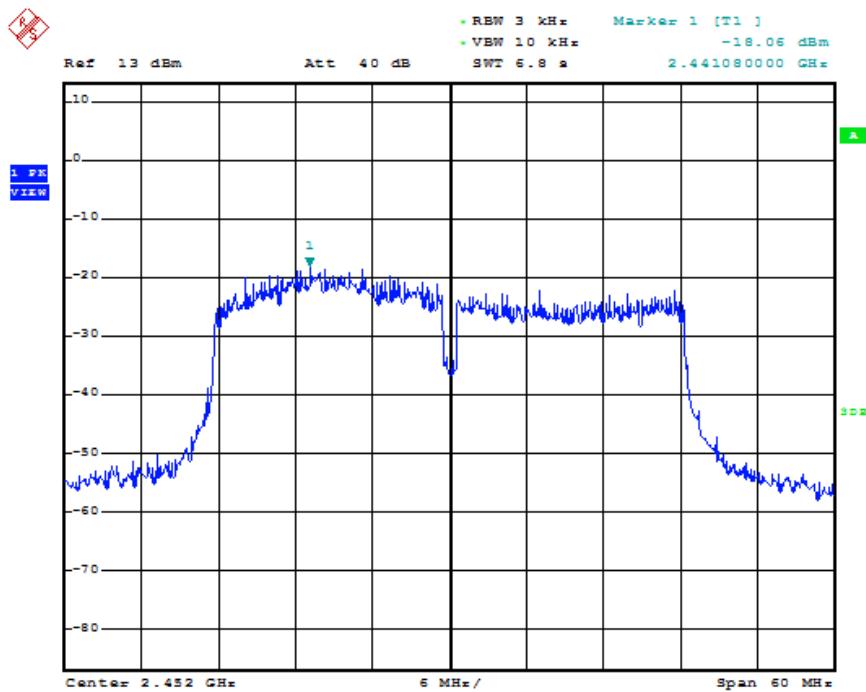


WIFI 2


802.11b-Low Channel

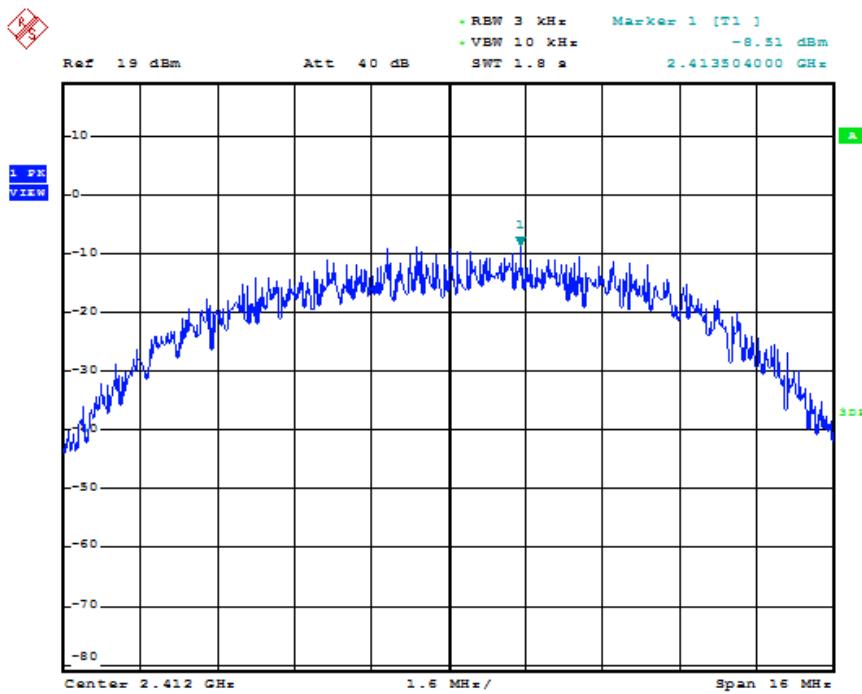


802.11b-Middle Channel

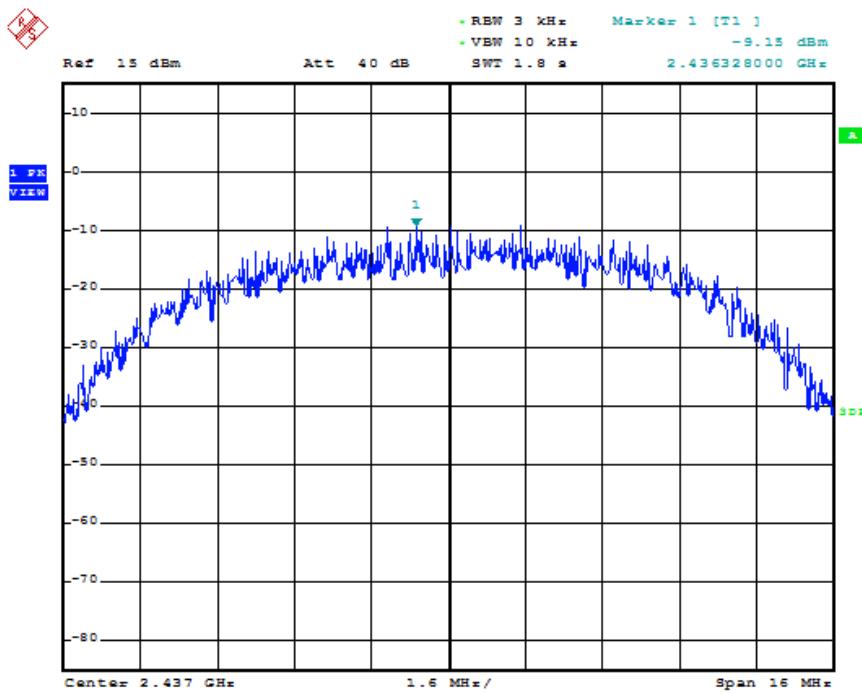


802.11b-High Channel

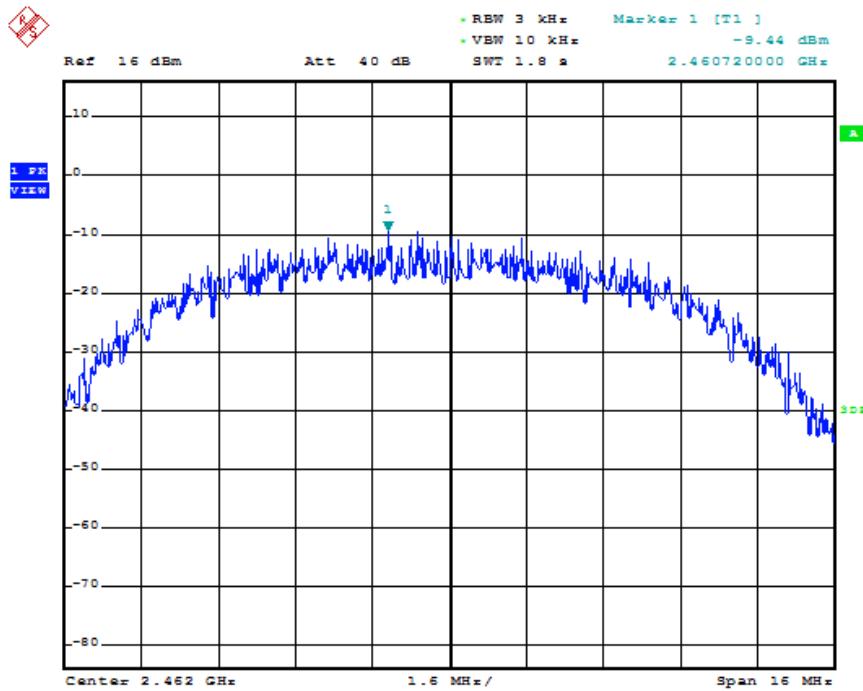


802.11g-Low Channel

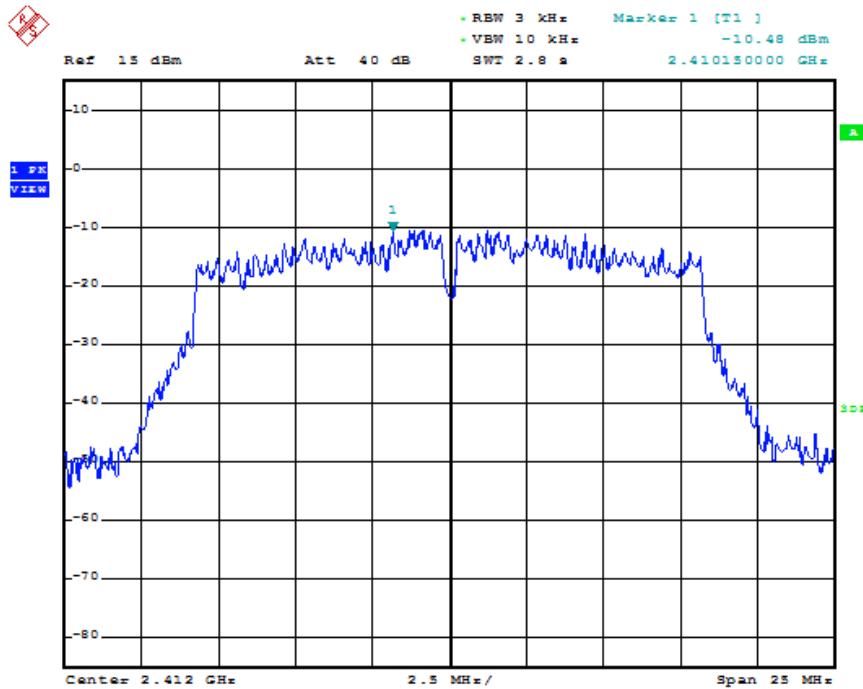


802.11g-Middle Channel

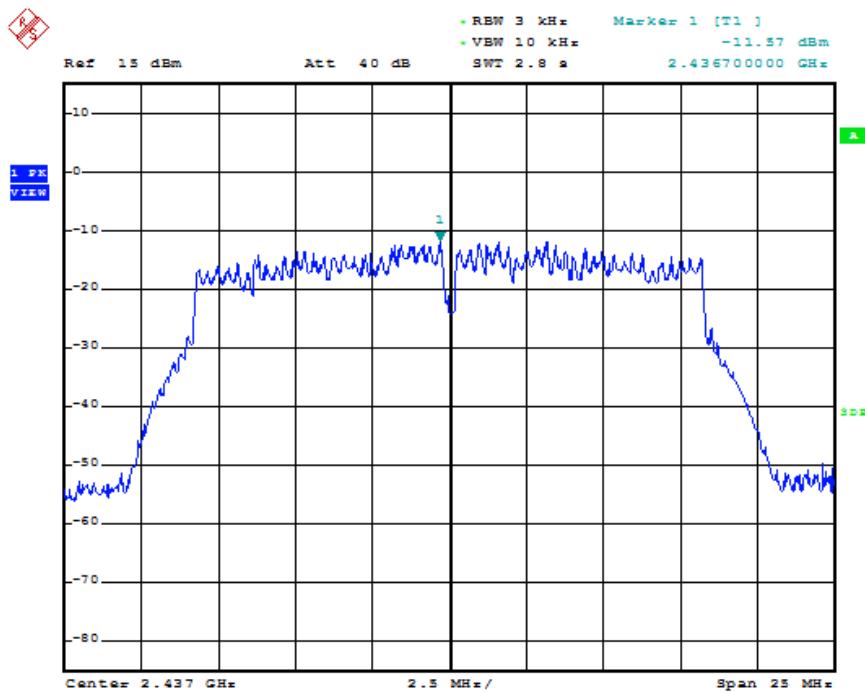


802.11g-High Channel

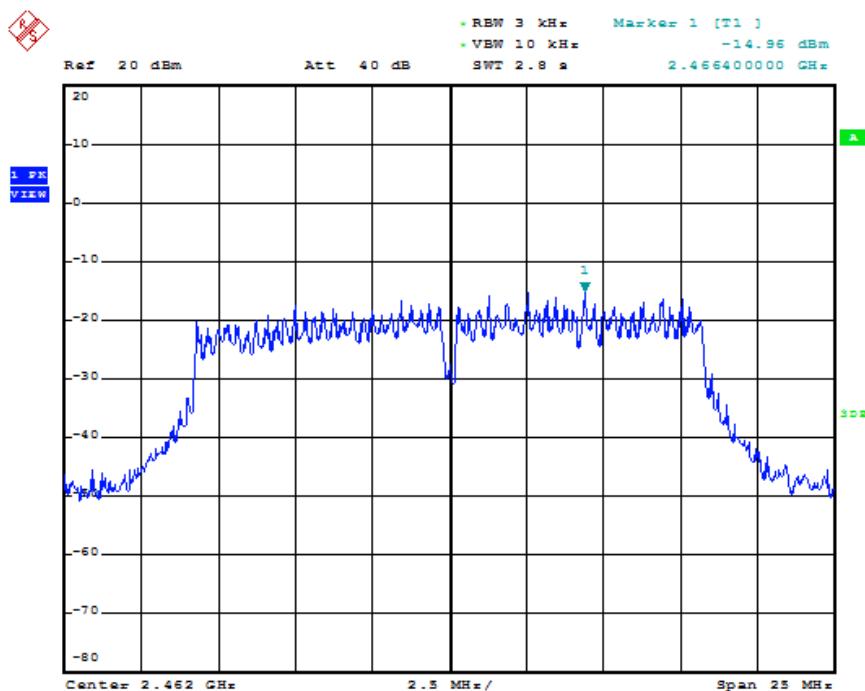


802.11n-HT20-Low Channel

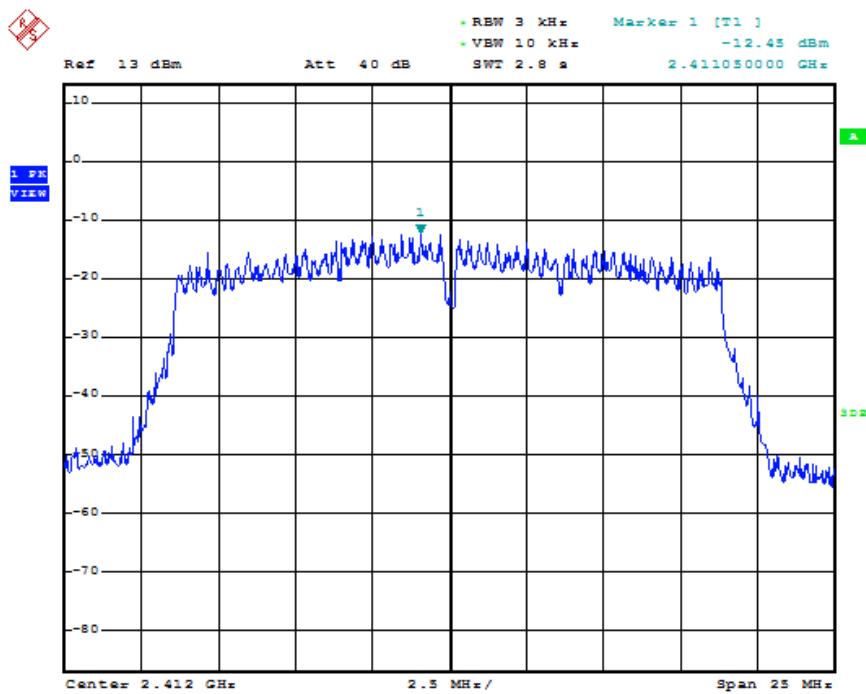


802.11n-HT20-Middle Channel

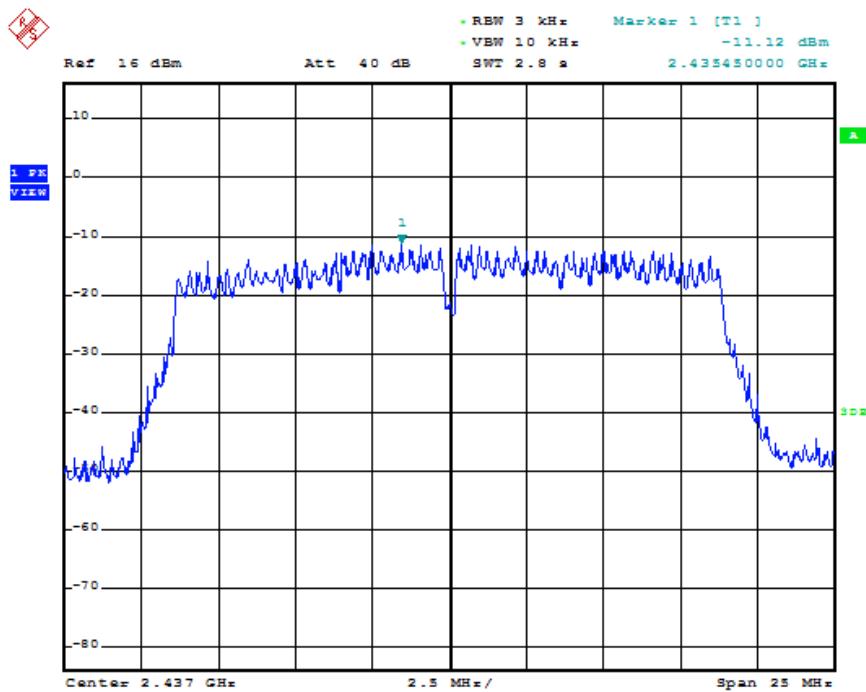


802.11n-HT20-High Channel

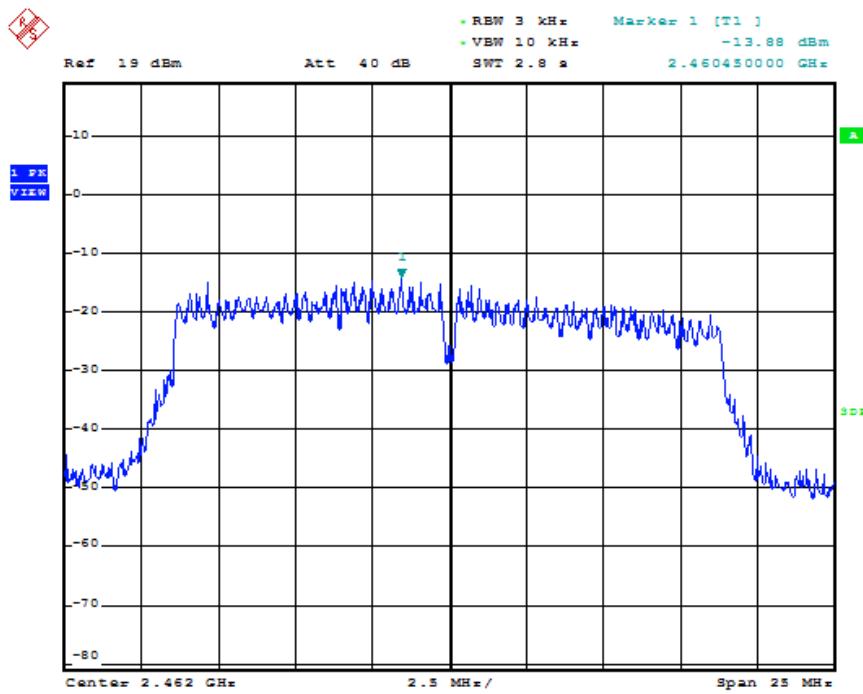


802.11n-HT40-Low Channel

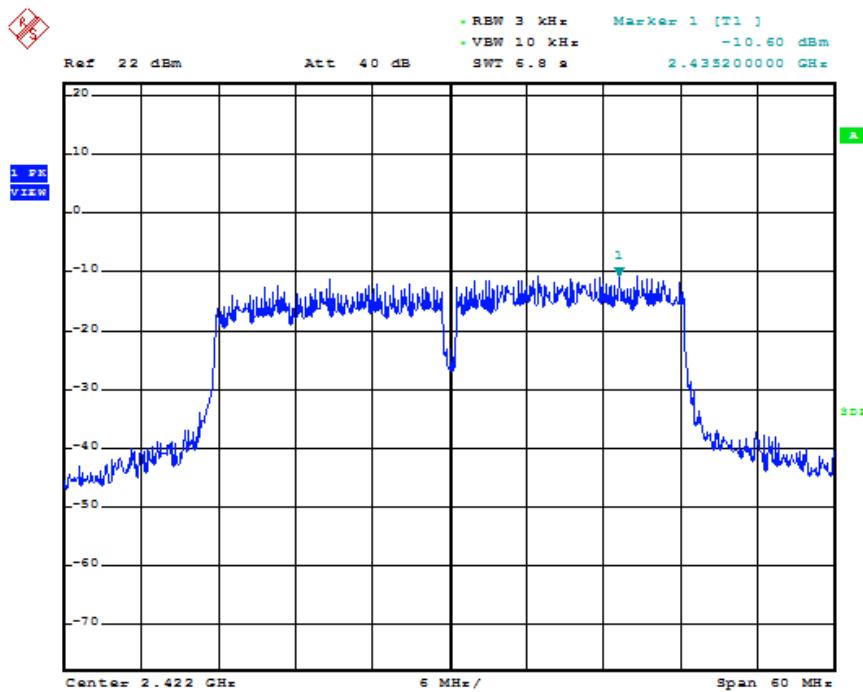

802.11n-HT40-Middle Channel

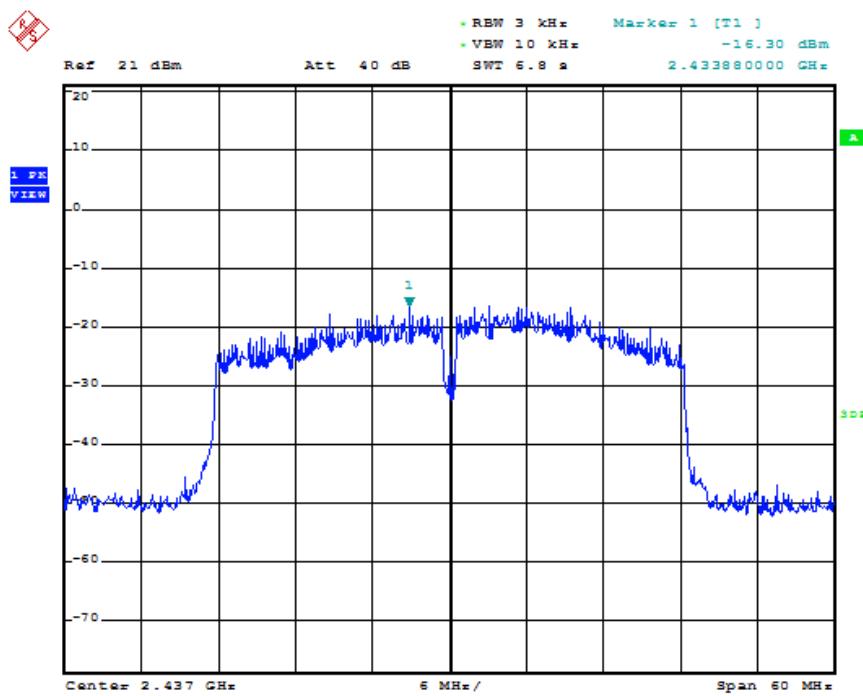


802.11n-HT40-High Channel

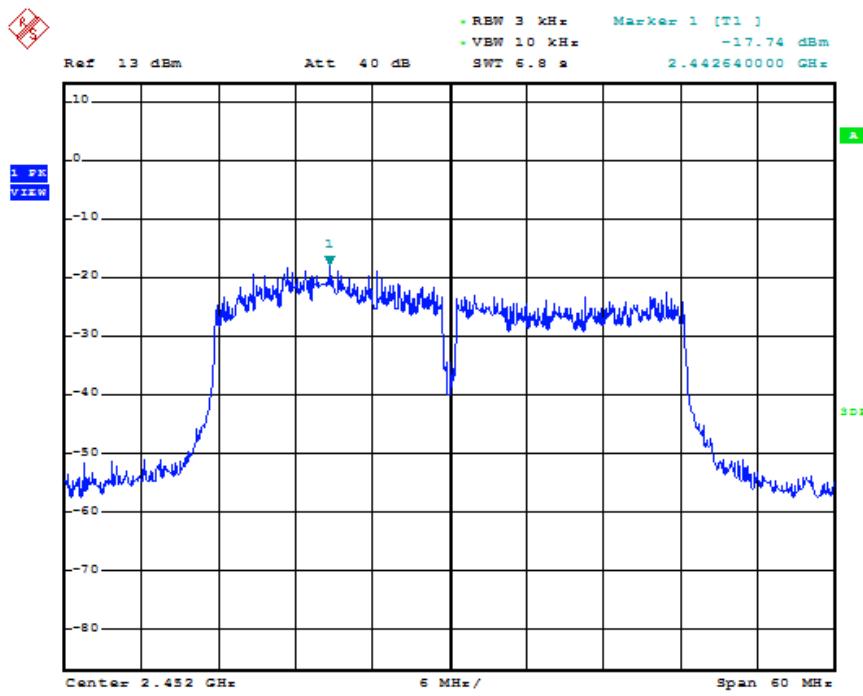


WIFI 3


802.11b-Low Channel

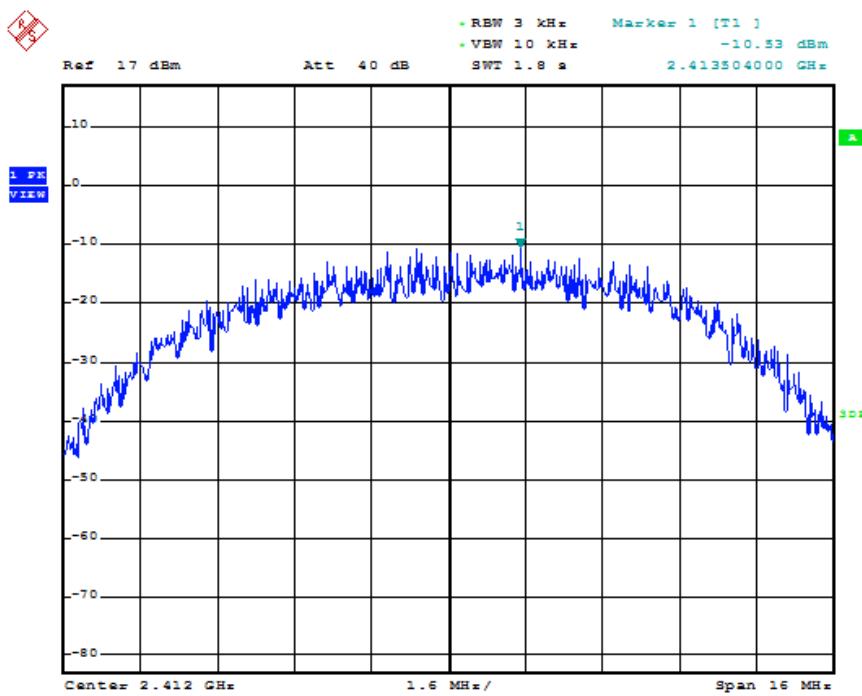


802.11b-Middle Channel

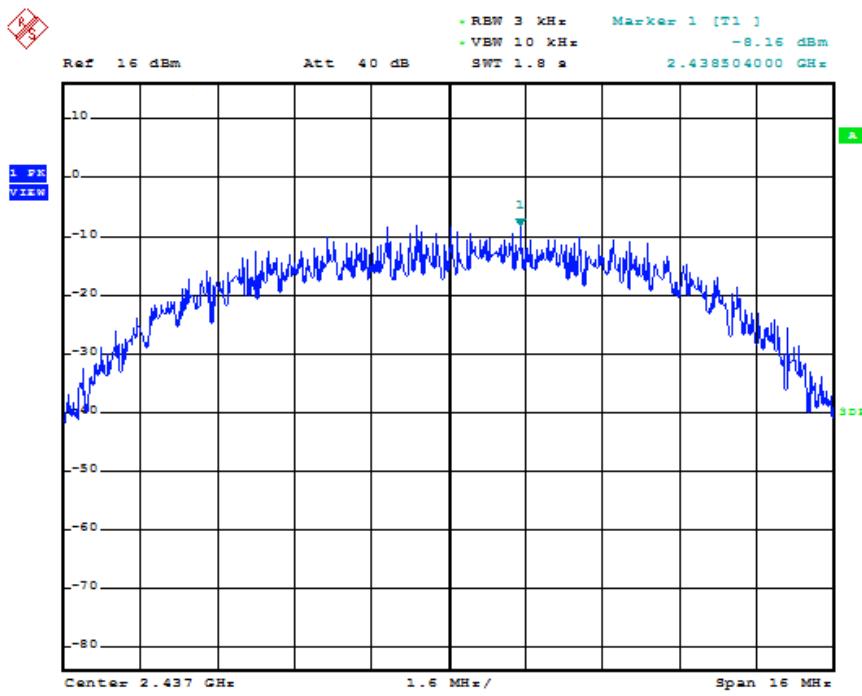


802.11b-High Channel

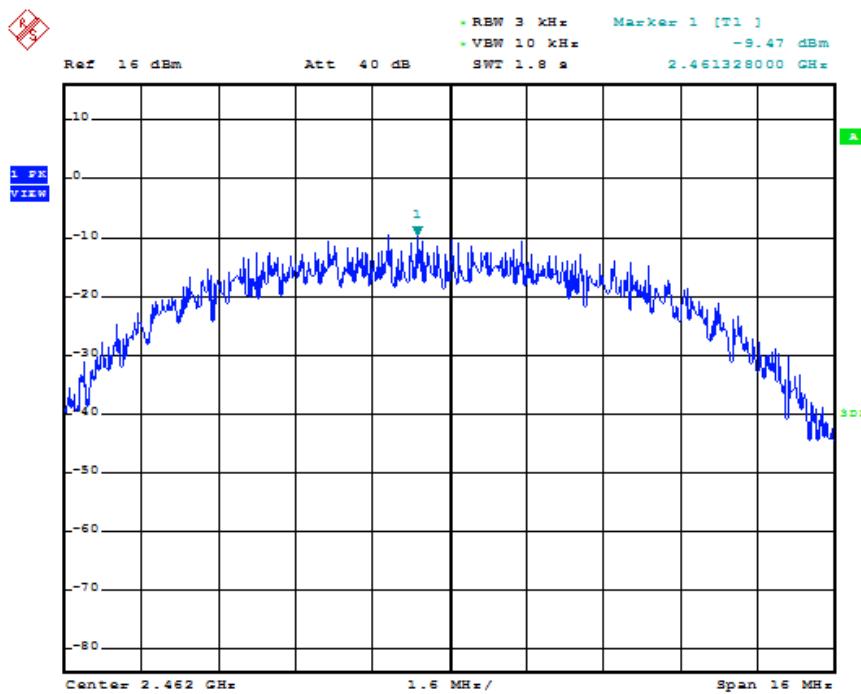


802.11g-Low Channel

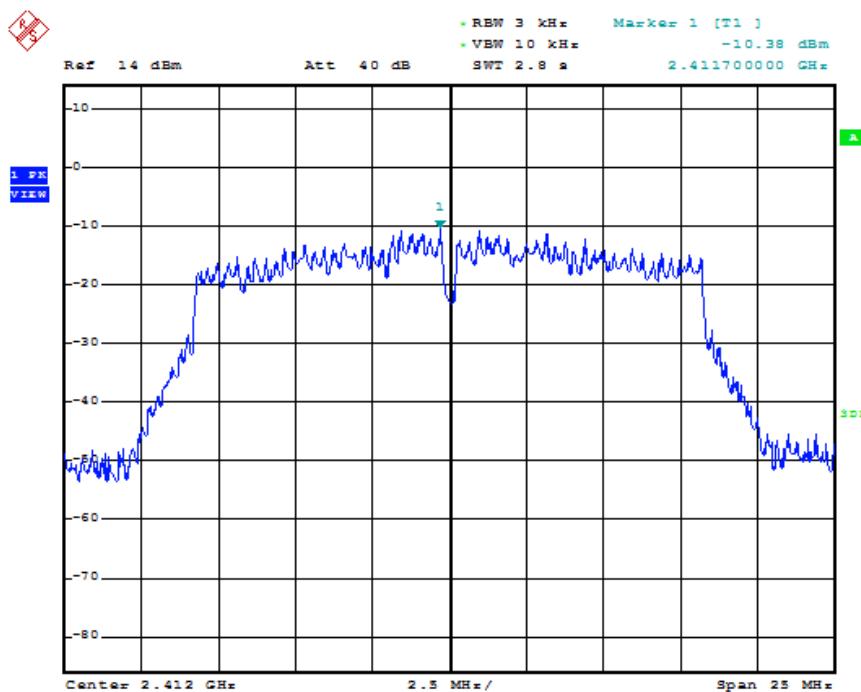


802.11g-Middle Channel

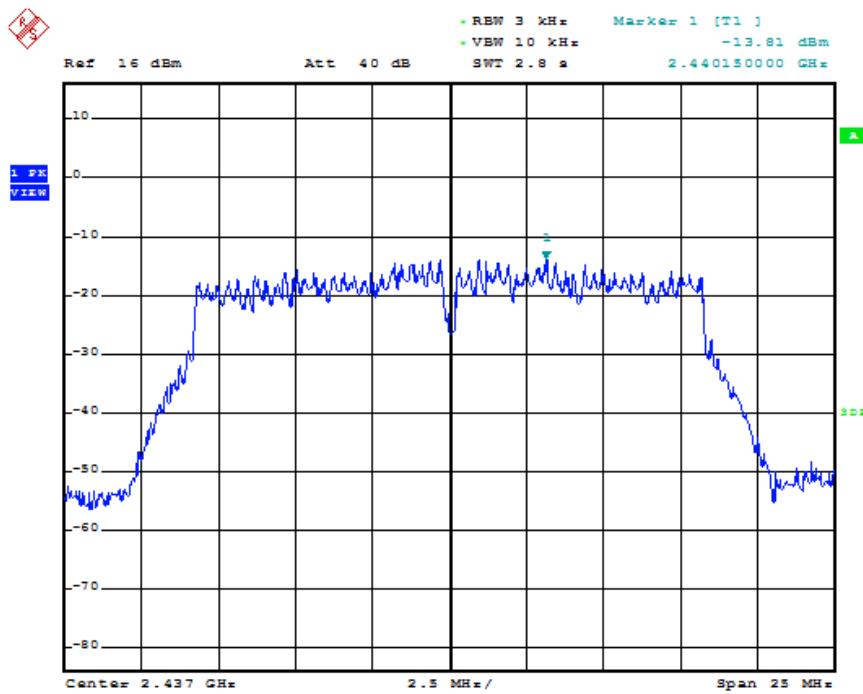


802.11g-High Channel

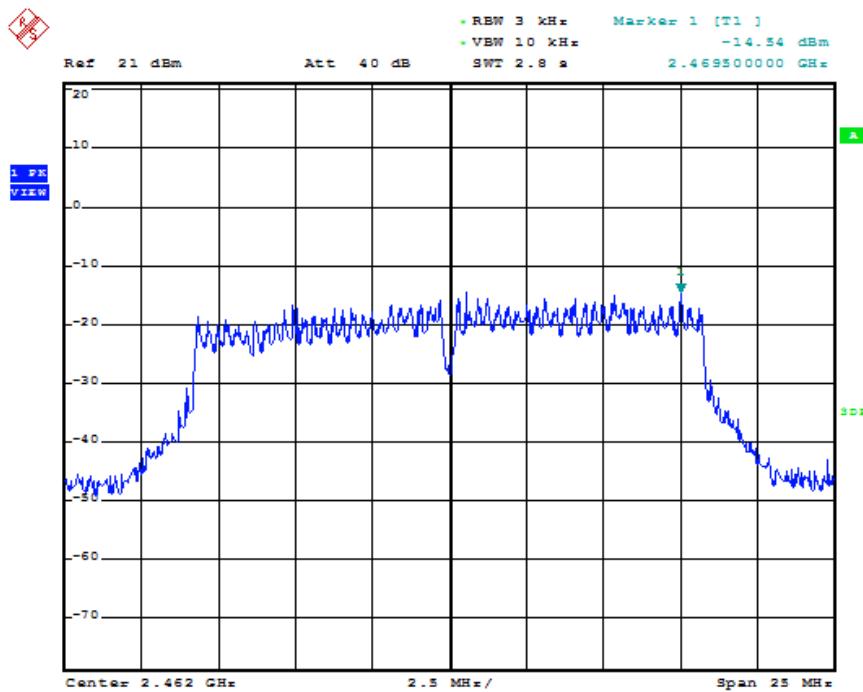


802.11n-HT20-Low Channel

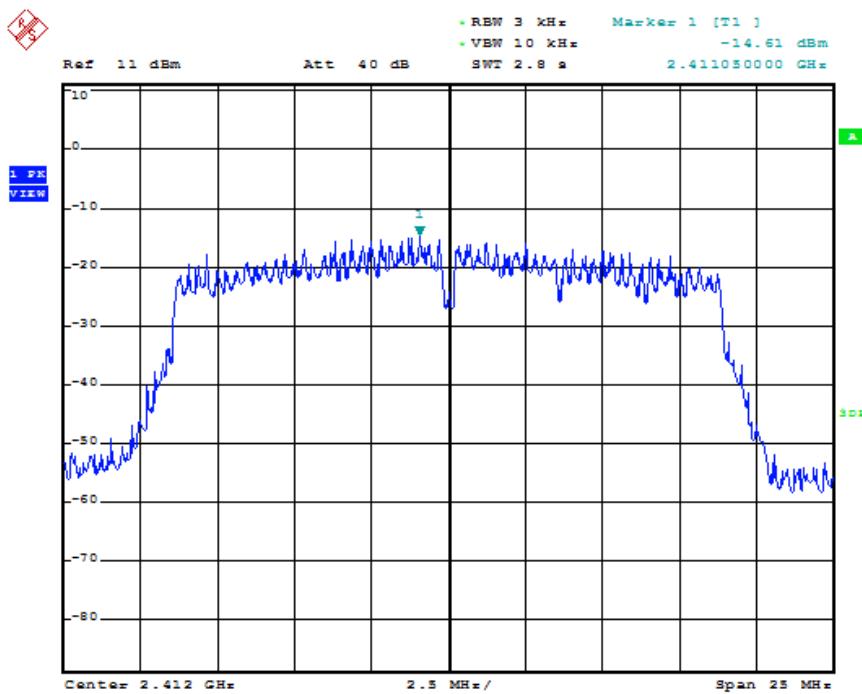


802.11n-HT20-Middle Channel

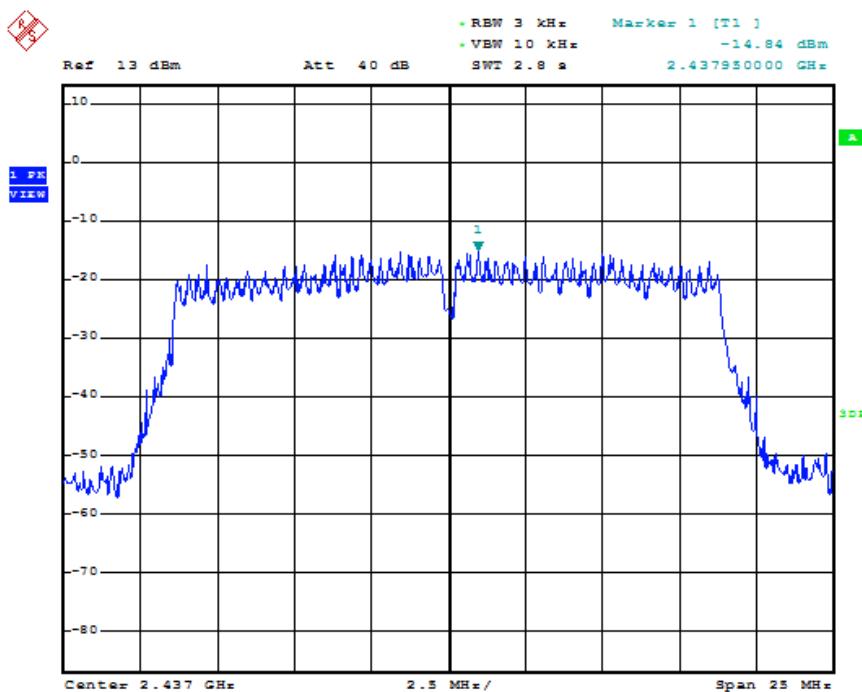


802.11n-HT20-High Channel

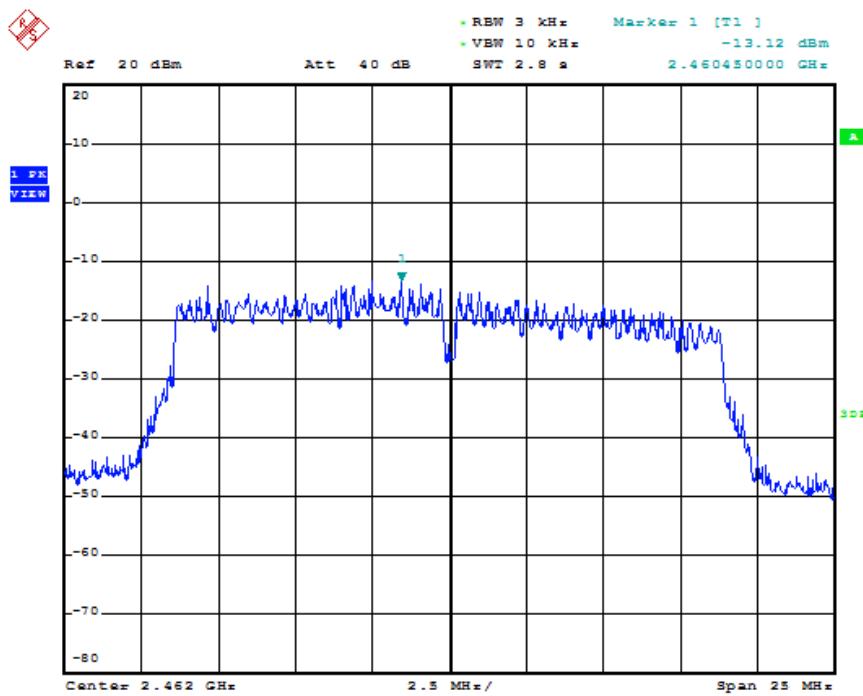


802.11n-HT40-Low Channel

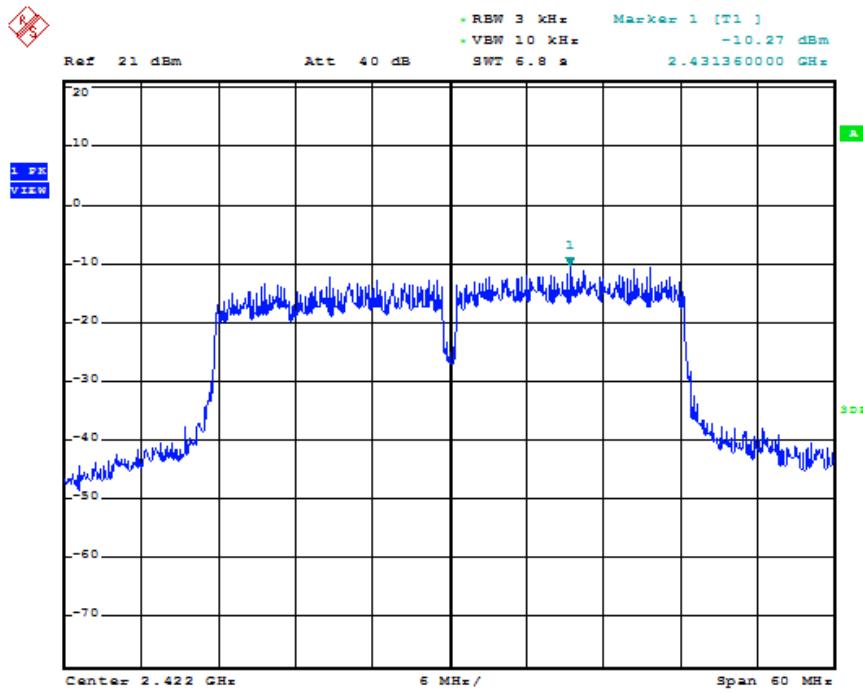

802.11n-HT40-Middle Channel

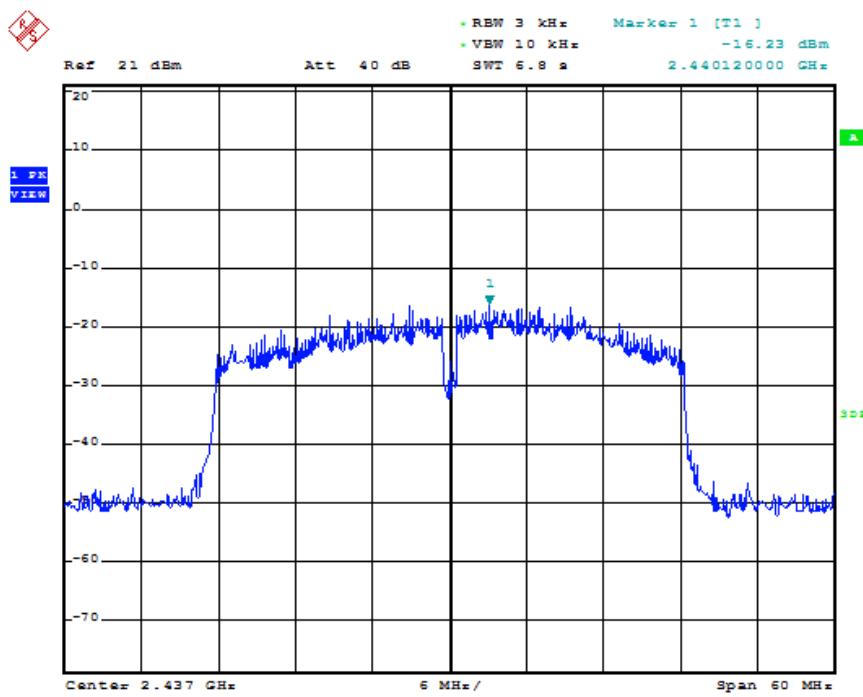


802.11n-HT40-High Channel

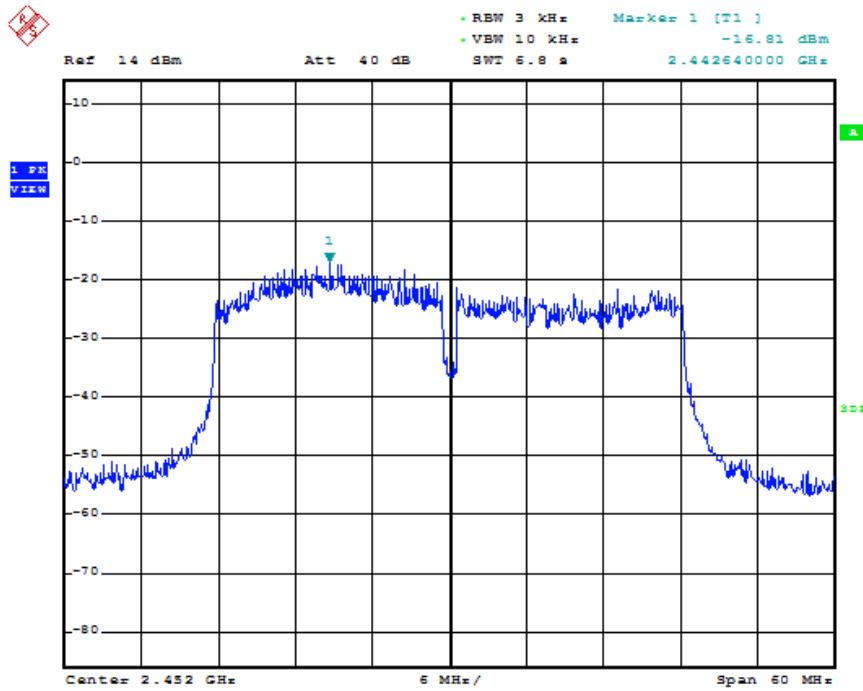


WIFI 4


802.11b-Low Channel

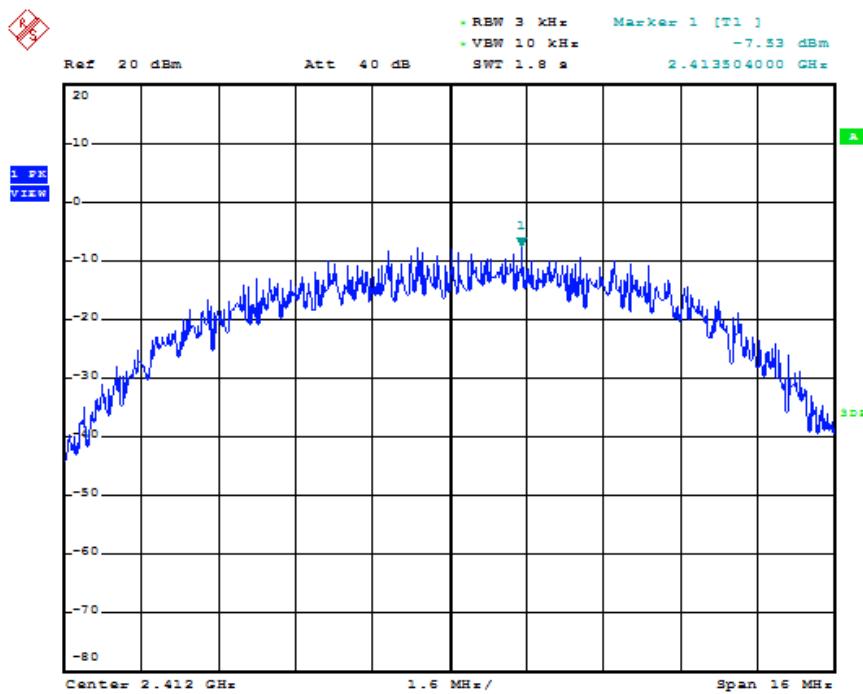


802.11b-Middle Channel

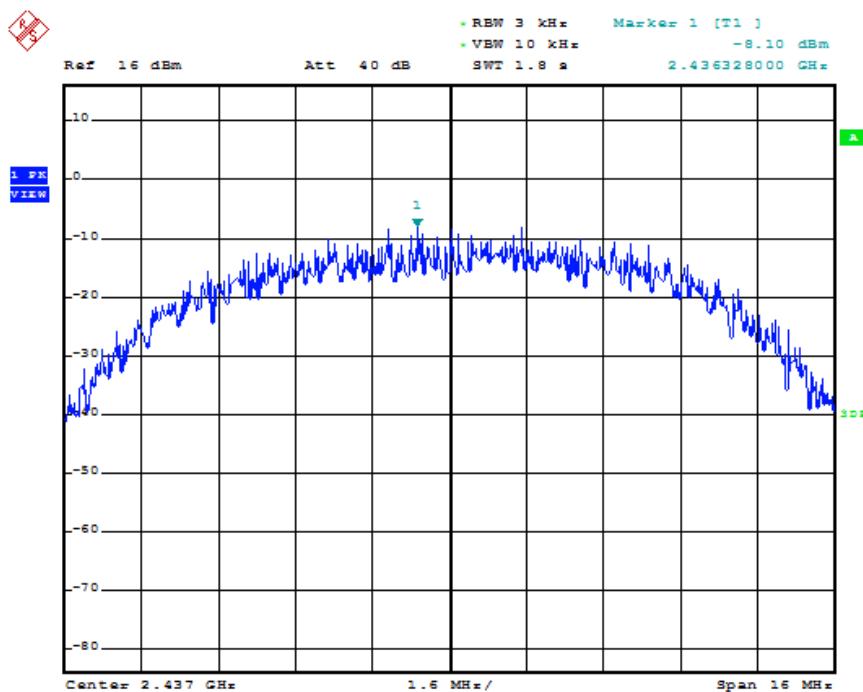


802.11b-High Channel

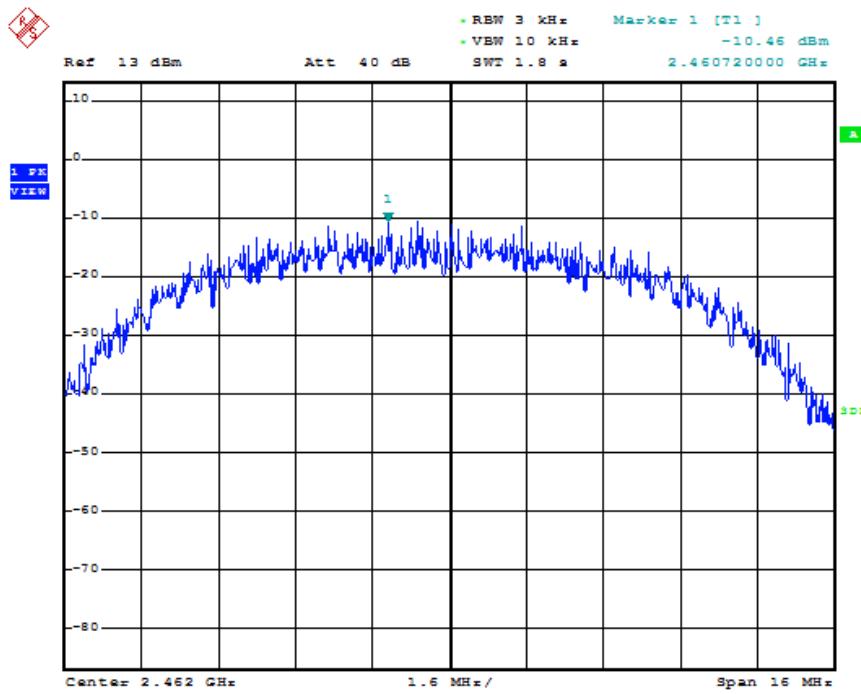


802.11g-Low Channel

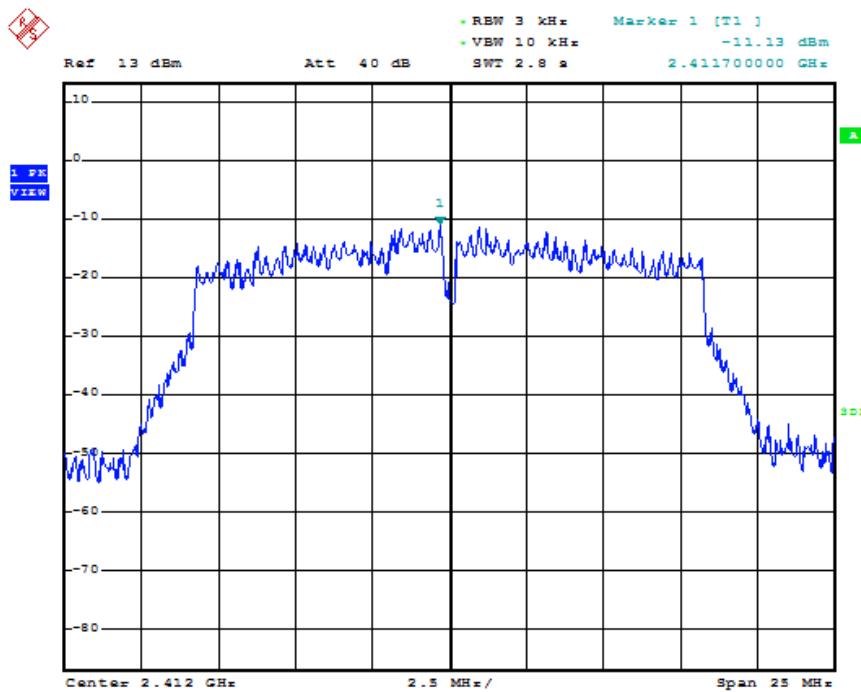


802.11g-Middle Channel

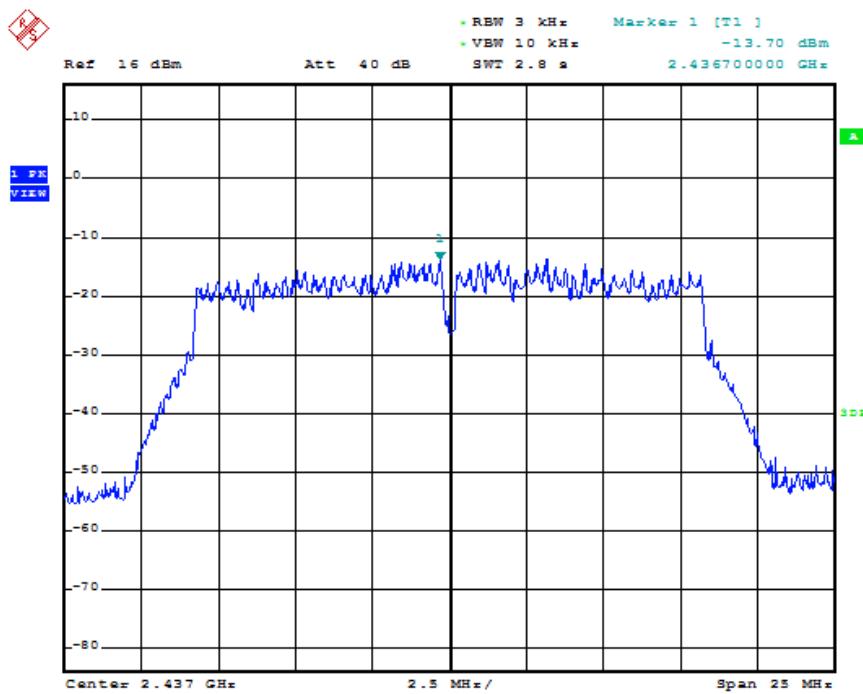


802.11g-High Channel

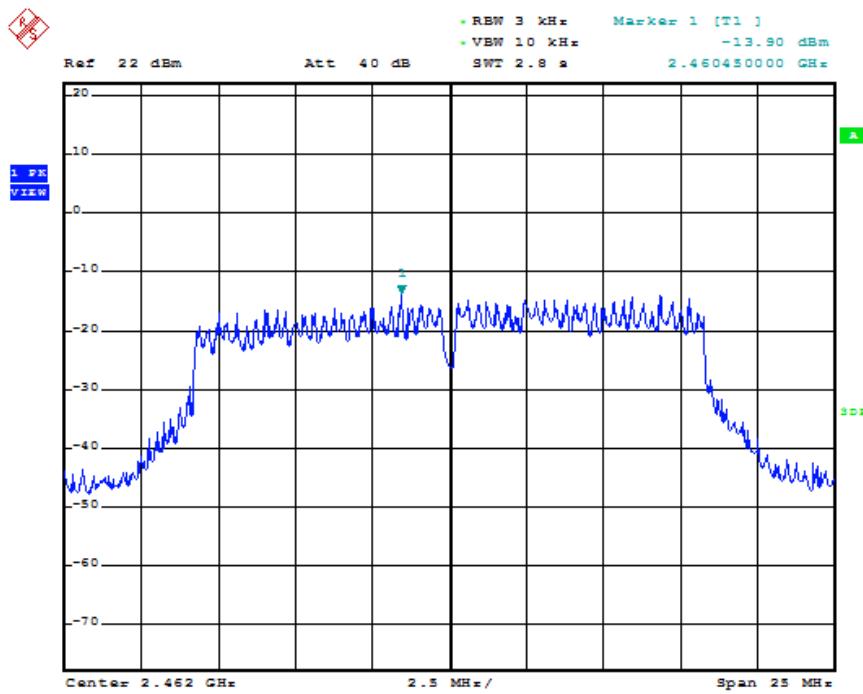


802.11n-HT20-Low Channel

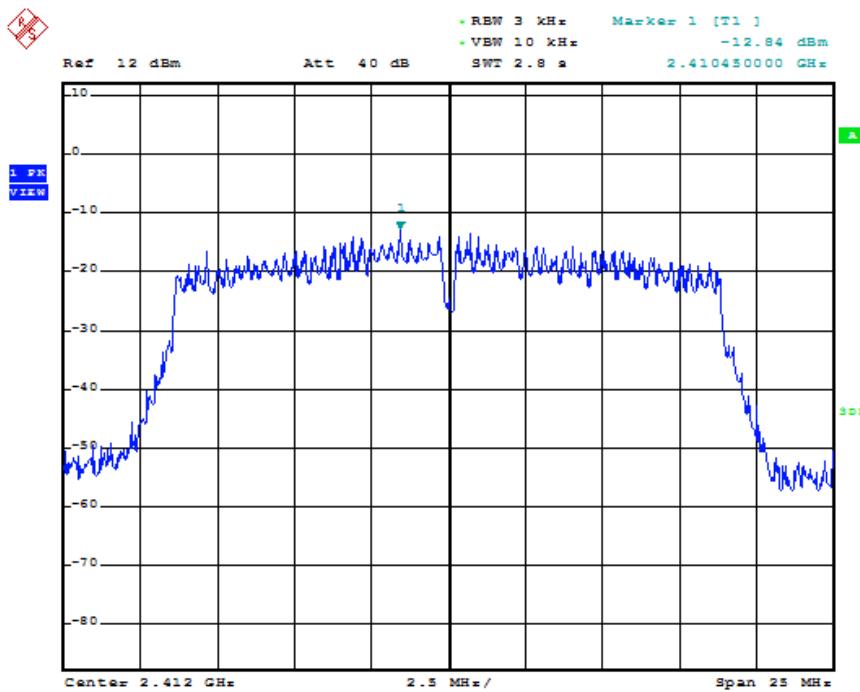


802.11n-HT20-Middle Channel

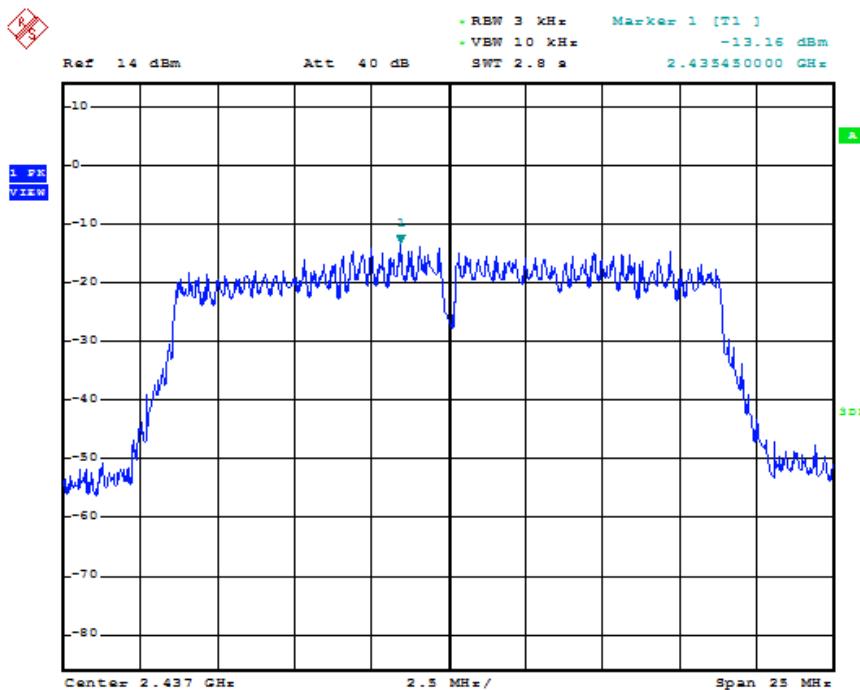


802.11n-HT20-High Channel

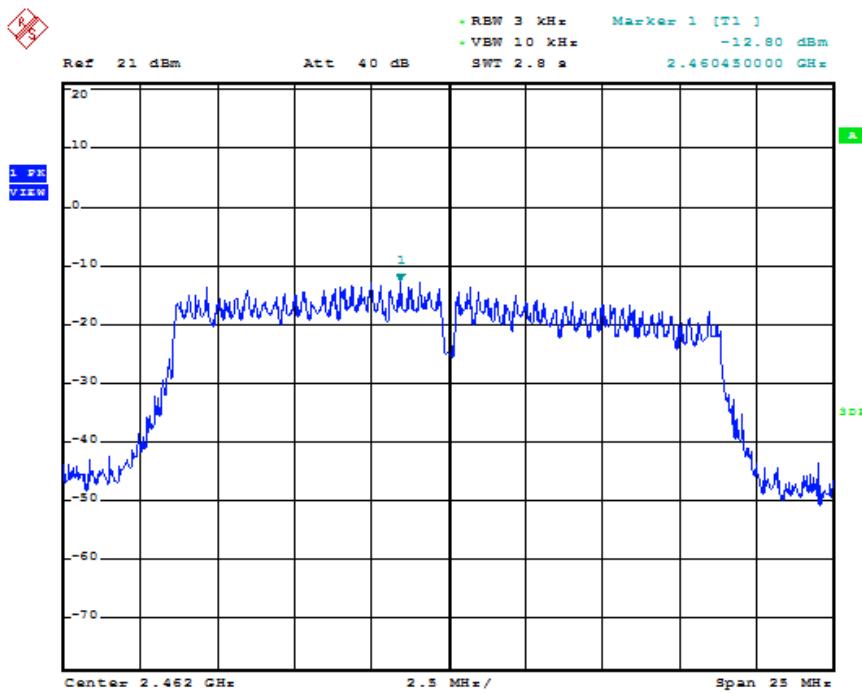


802.11n-HT40-Low Channel

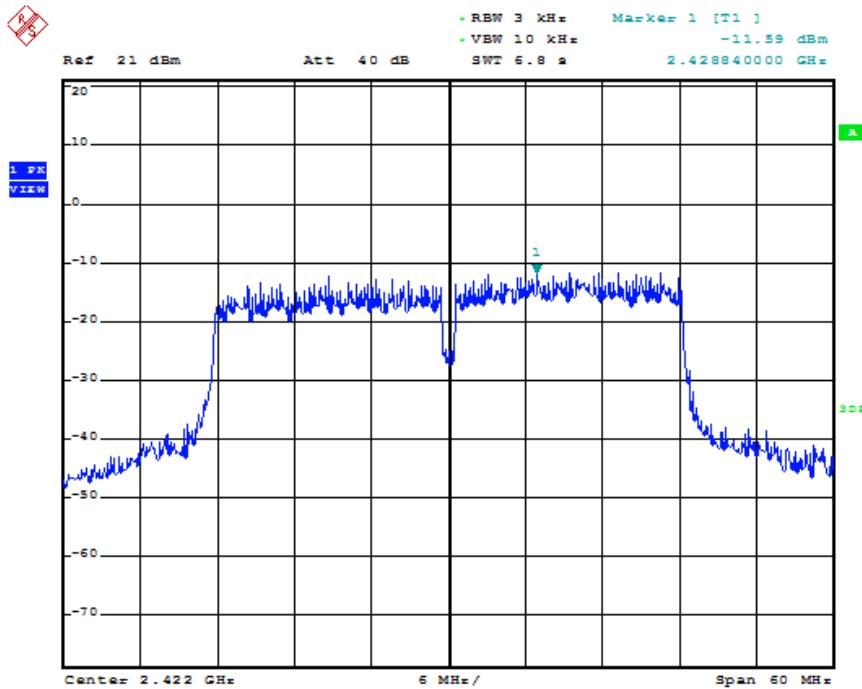

802.11n-HT40-Middle Channel

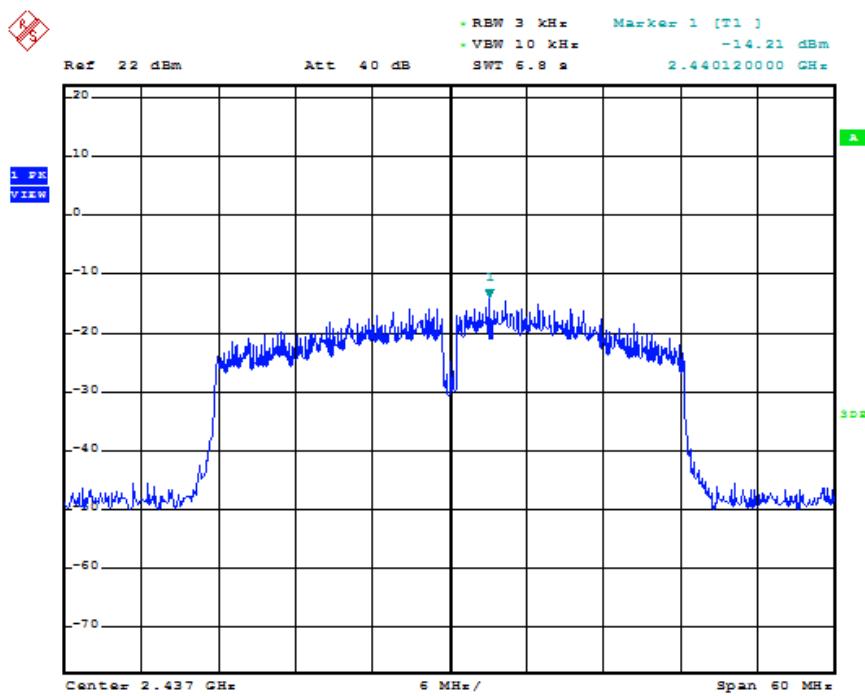

802.11n-HT40-High Channel

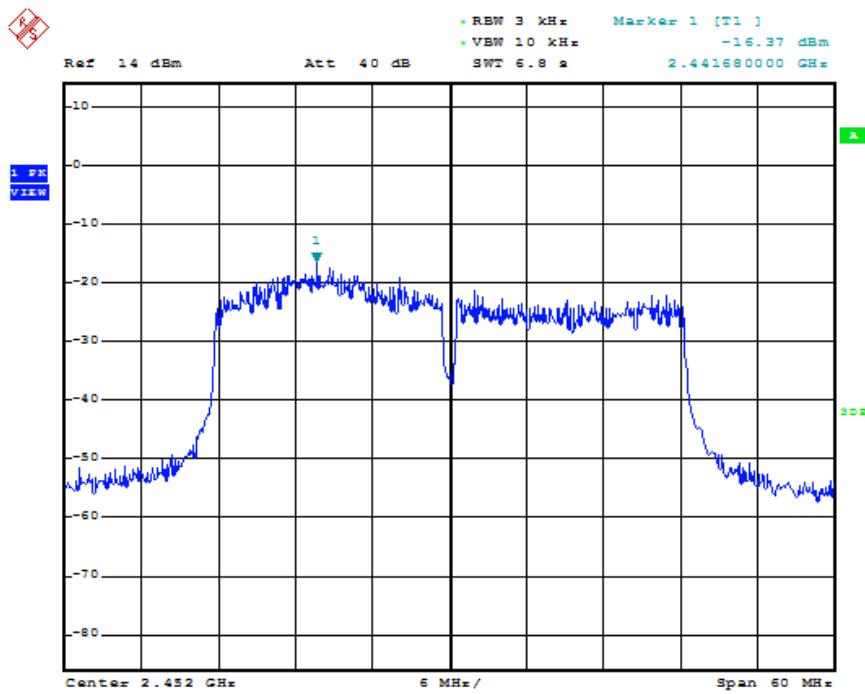

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

WIFI 1:

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	9.48	≥500
	2437	9.92	≥500
	2462	9.32	≥500
802.11g	2412	16.56	≥500
	2437	16.56	≥500
	2462	16.56	≥500
802.11n-HT20	2412	17.76	≥500
	2437	17.70	≥500
	2462	17.76	≥500
802.11n-HT40	2422	36.71	≥500
	2437	36.52	≥500
	2452	36.41	≥500

WIFI 2:

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	9.48	≥500
	2437	9.92	≥500
	2462	9.28	≥500
802.11g	2412	16.56	≥500
	2437	16.56	≥500
	2462	16.56	≥500
802.11n-HT20	2412	17.76	≥500
	2437	17.70	≥500
	2462	17.76	≥500
802.11n-HT40	2422	36.71	≥500
	2437	36.52	≥500
	2452	36.41	≥500

WIFI 3:

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	9.40	≥500
	2437	9.96	≥500
	2462	9.20	≥500
802.11g	2412	16.56	≥500
	2437	16.56	≥500
	2462	16.56	≥500
802.11n-HT20	2412	17.76	≥500
	2437	17.70	≥500
	2462	17.76	≥500
802.11n-HT40	2422	36.71	≥500
	2437	36.52	≥500
	2452	36.41	≥500


WIFI 4:

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	9.48	≥500
	2437	9.96	≥500
	2462	9.32	≥500
802.11g	2412	16.56	≥500
	2437	16.56	≥500
	2462	16.62	≥500
802.11n-HT20	2412	17.76	≥500
	2437	17.70	≥500
	2462	17.76	≥500
802.11n-HT40	2422	36.71	≥500
	2437	36.52	≥500
	2452	36.41	≥500


Please refer to the following test plots:

WIFI 1


802.11b-Low Channel

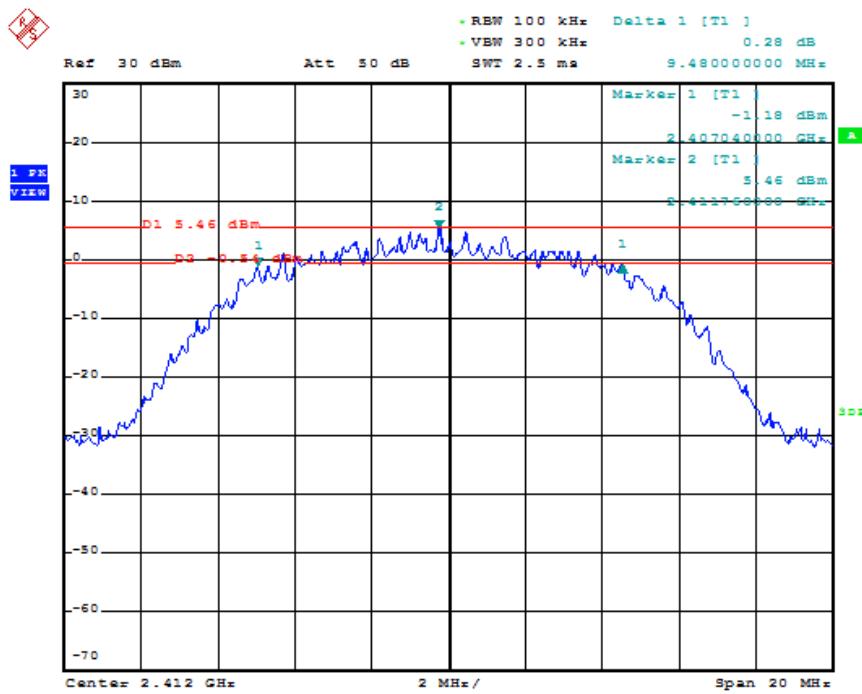


802.11b-Middle Channel

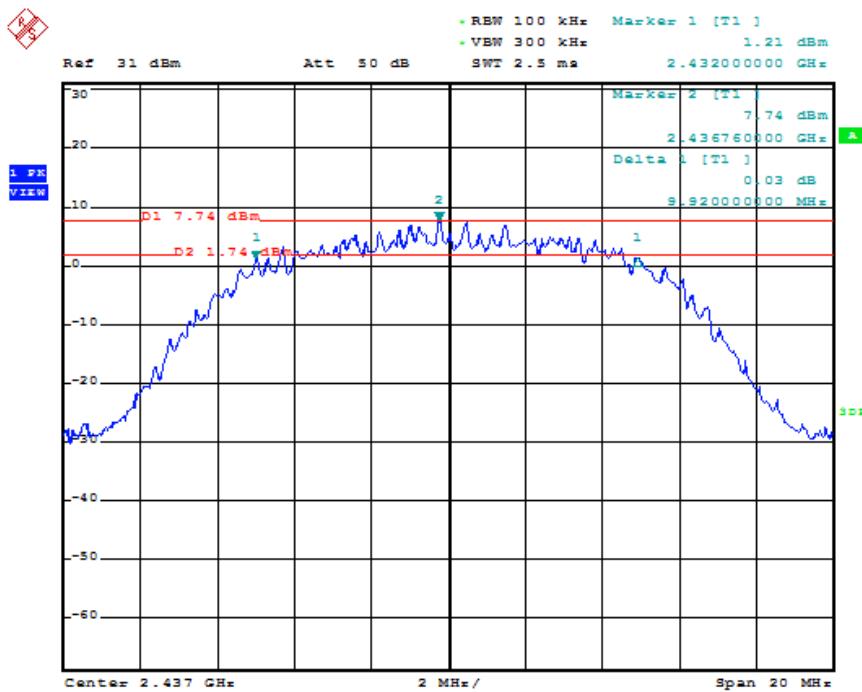


802.11b-High Channel

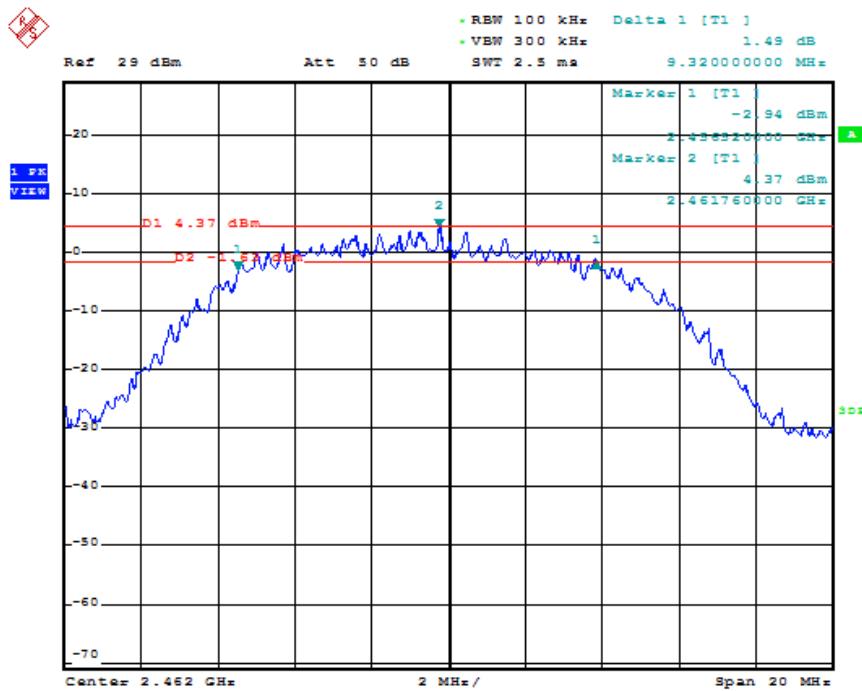


802.11g-Low Channel

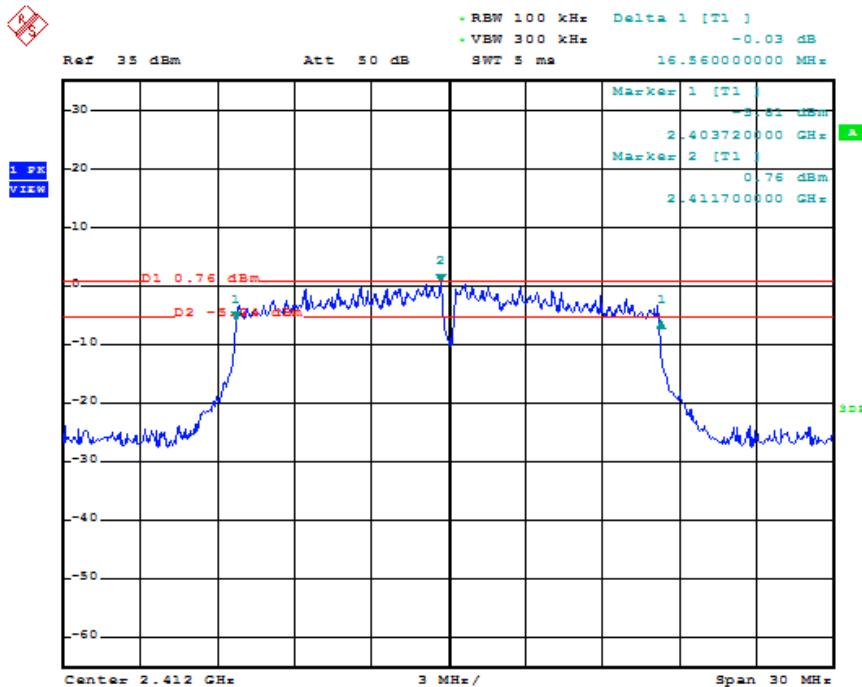


802.11g-Middle Channel

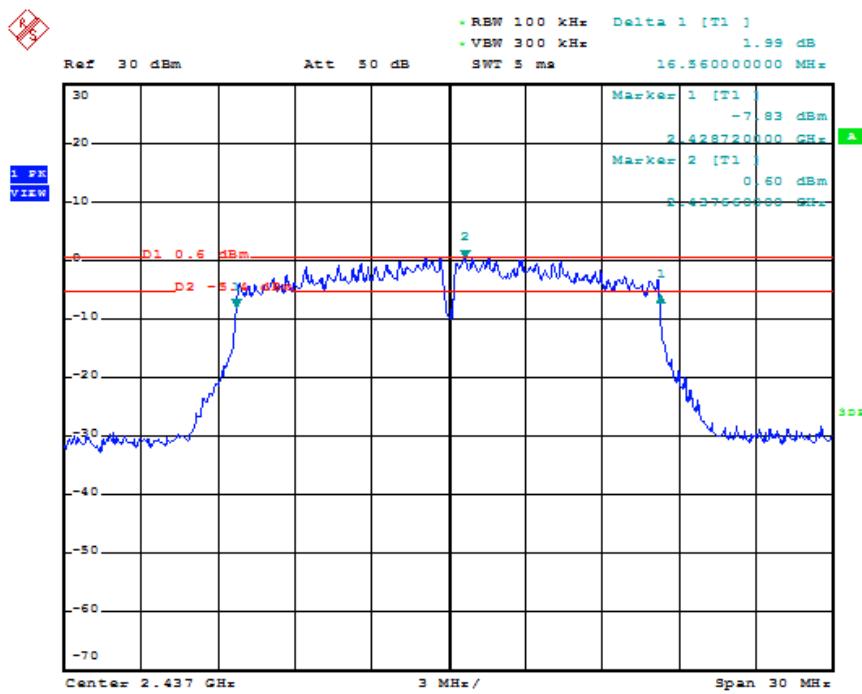


802.11g-High Channel

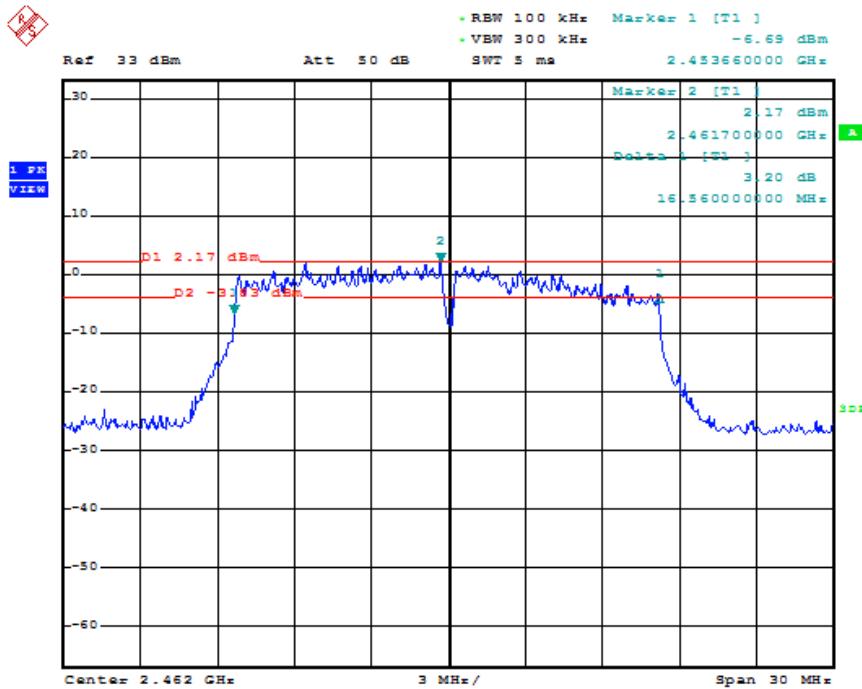


802.11n-HT20-Low Channel

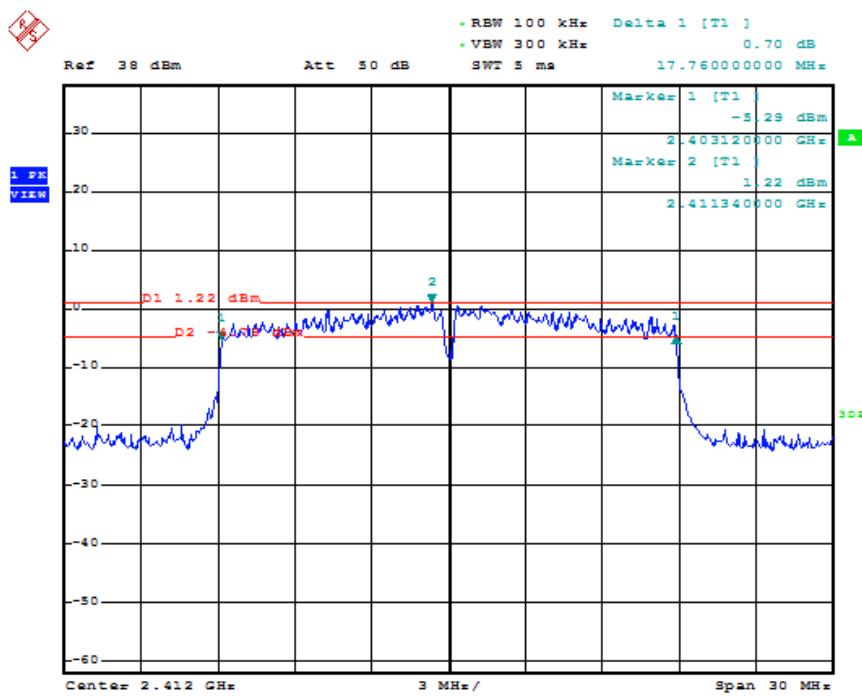


802.11n-HT20-Middle Channel

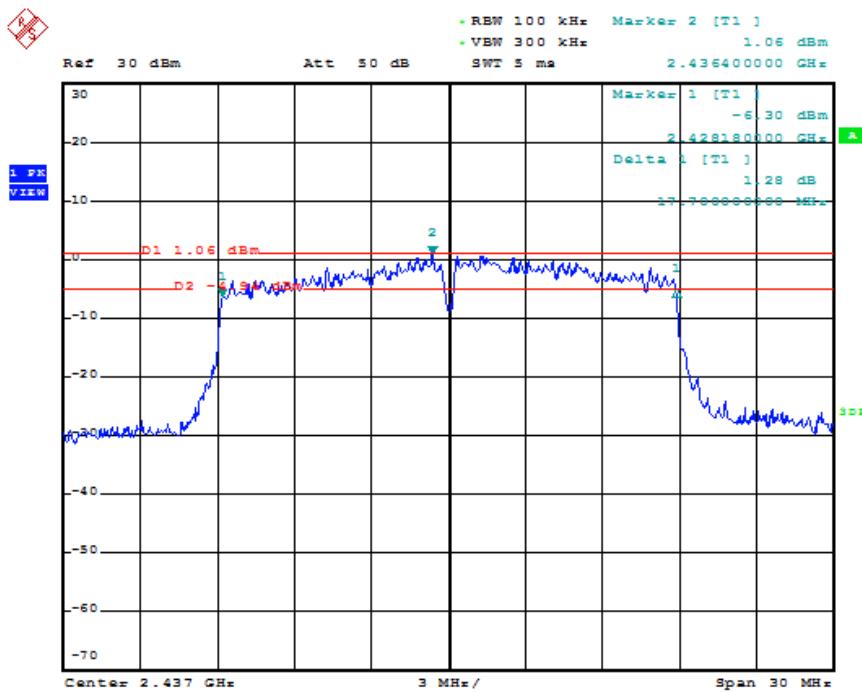


802.11n-HT20-High Channel

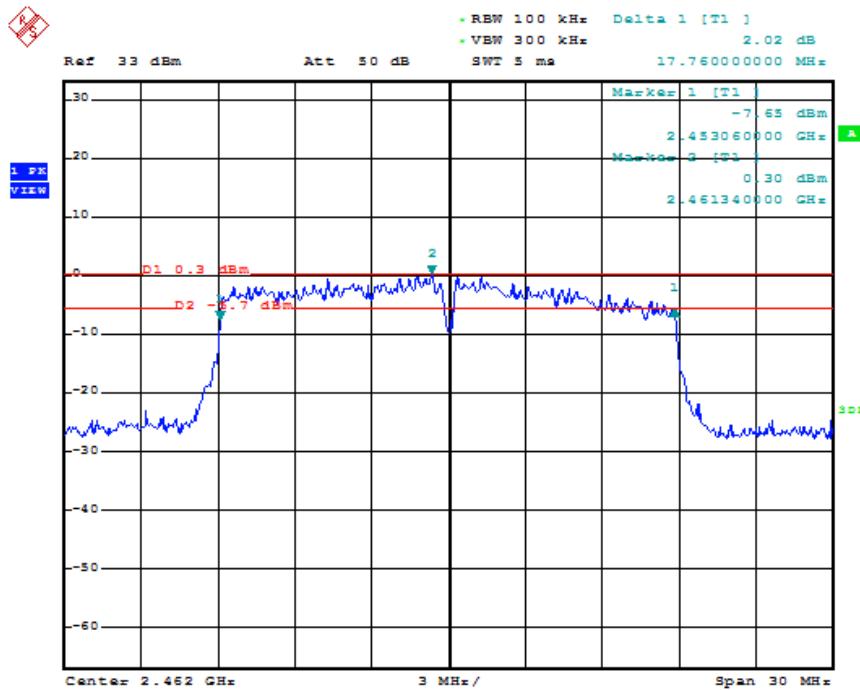


802.11n-HT40-Low Channel

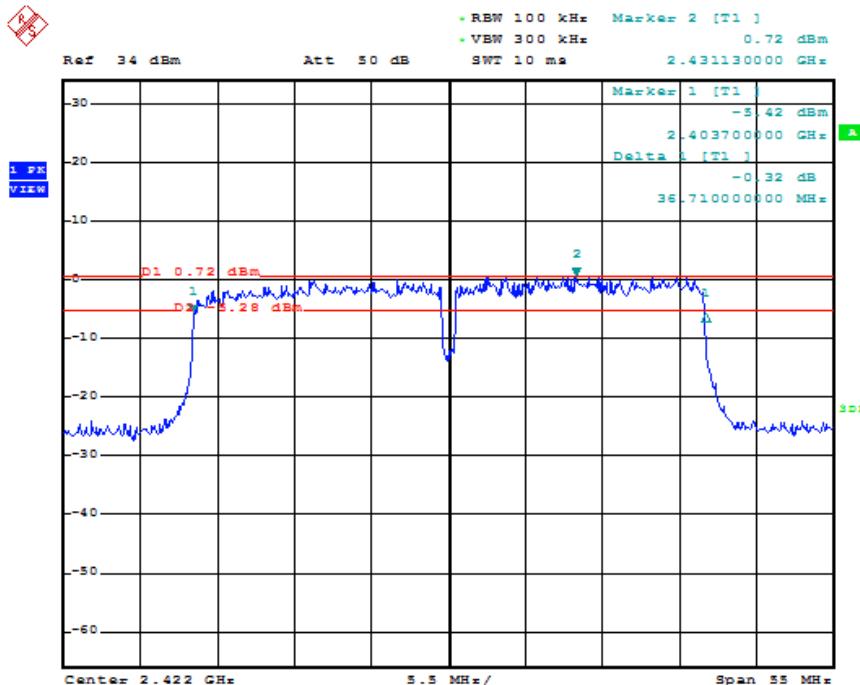

802.11n-HT40-Middle Channel

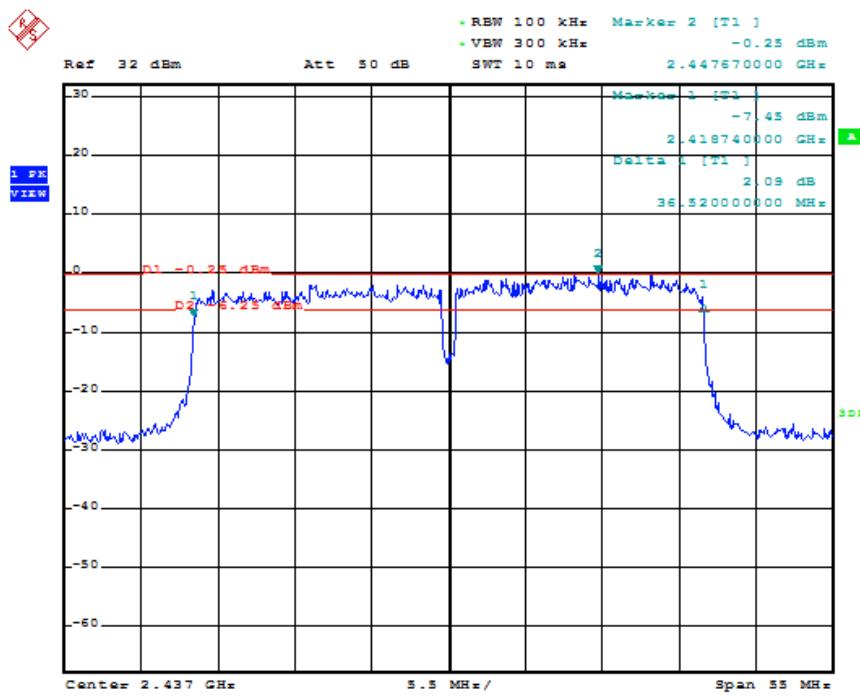


802.11n-HT40-High Channel

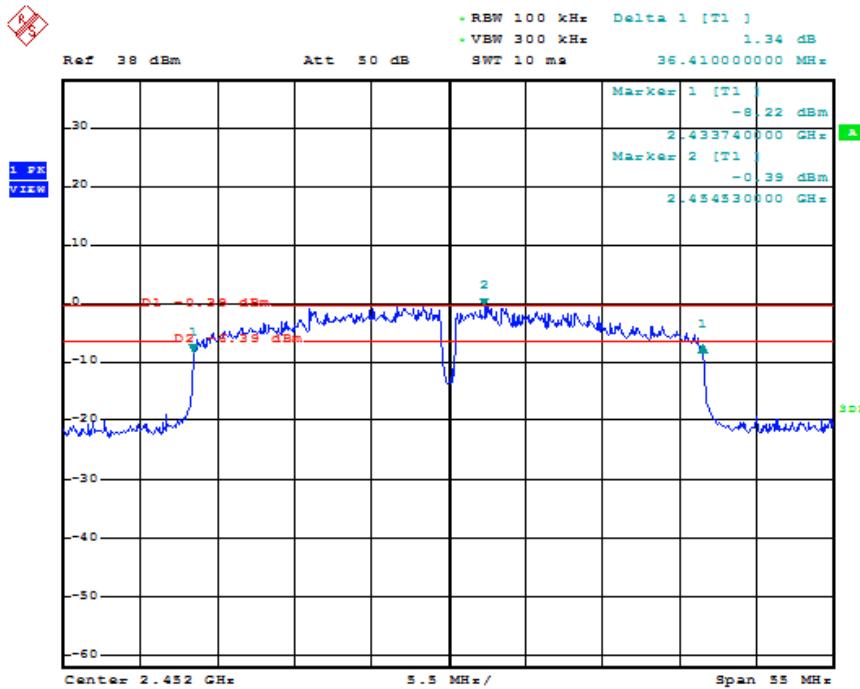


WIFI 2


802.11b-Low Channel

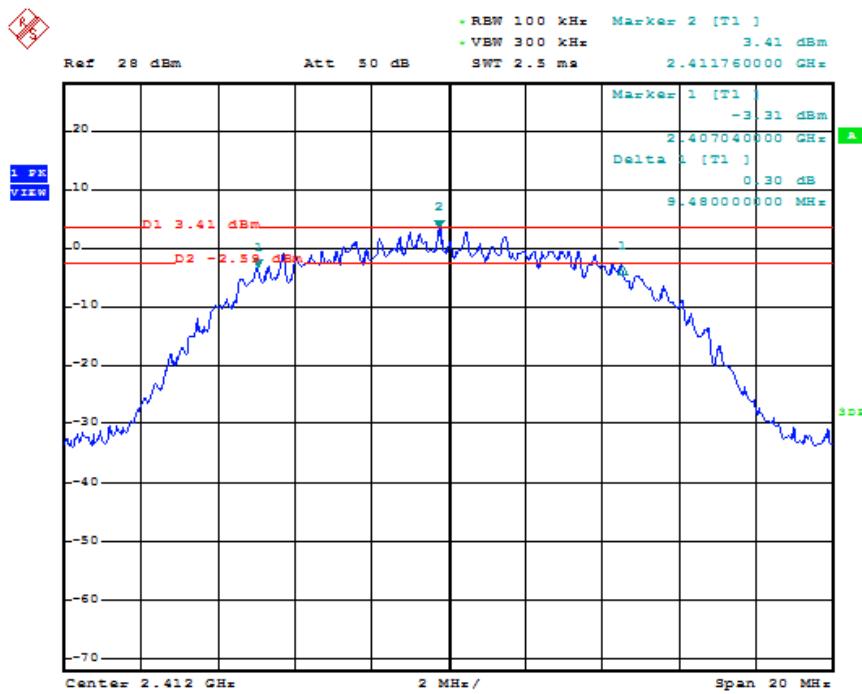


802.11b-Middle Channel

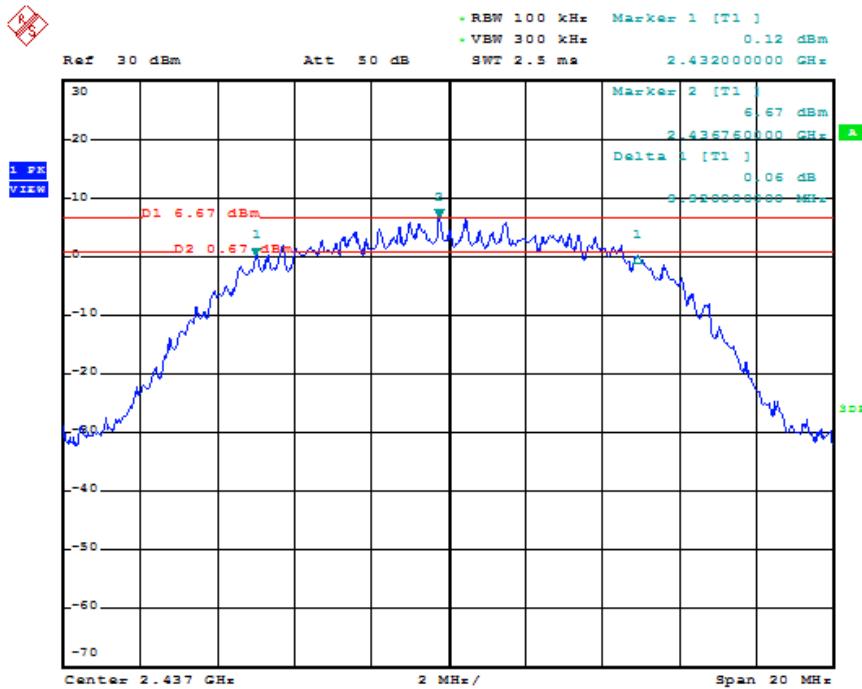


802.11b-High Channel

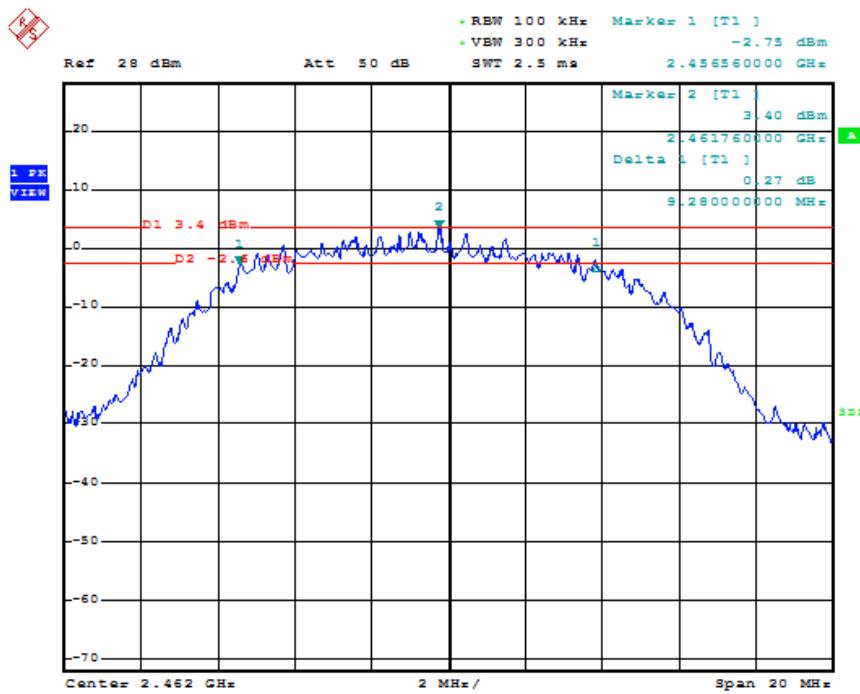


802.11g-Low Channel

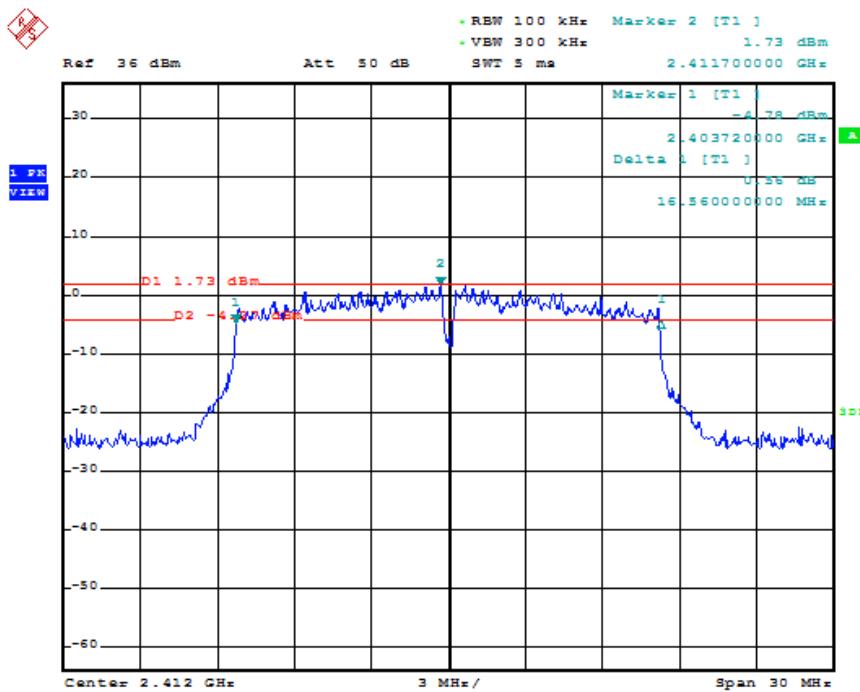


802.11g-Middle Channel

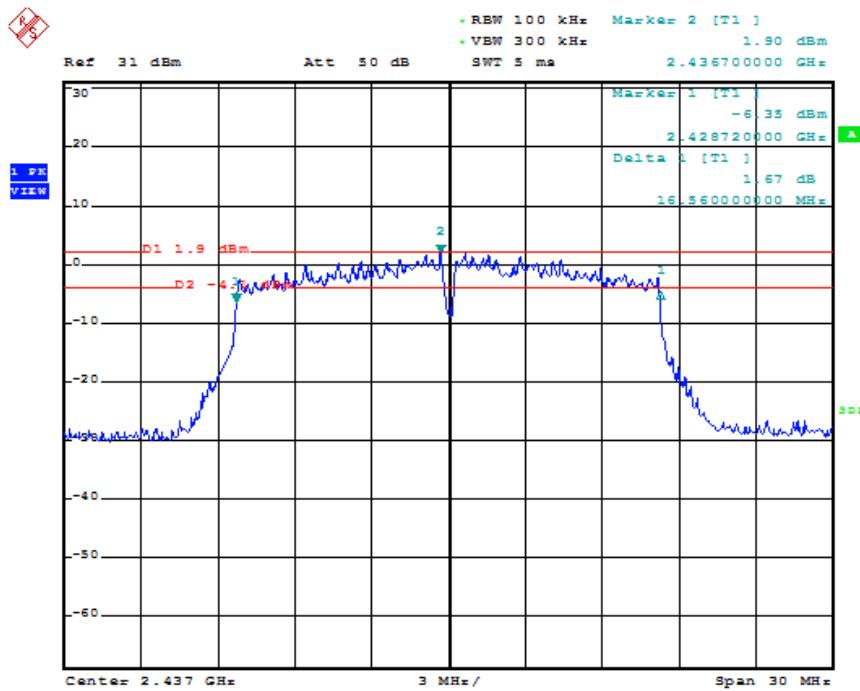


802.11g-High Channel

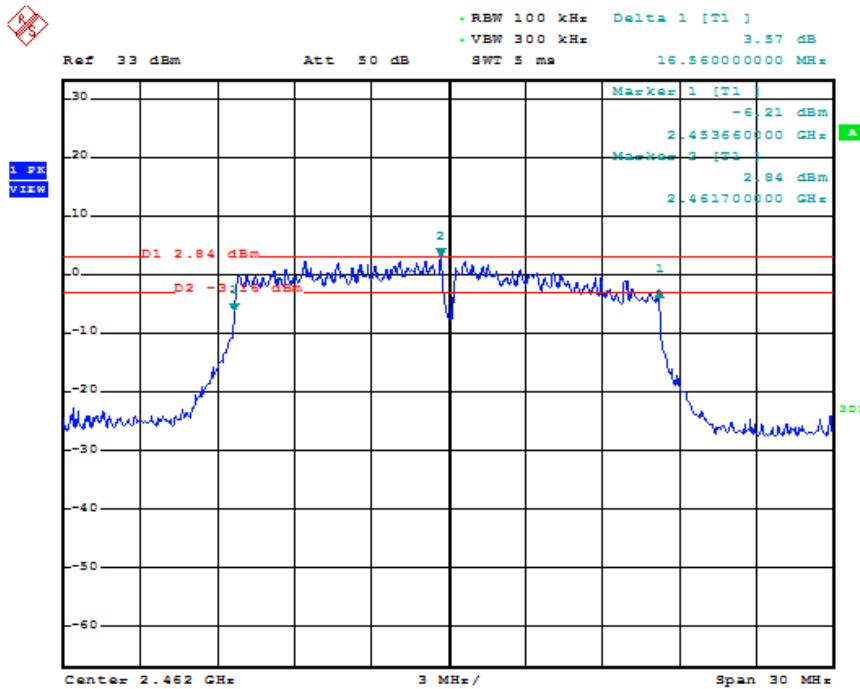


802.11n-HT20-Low Channel

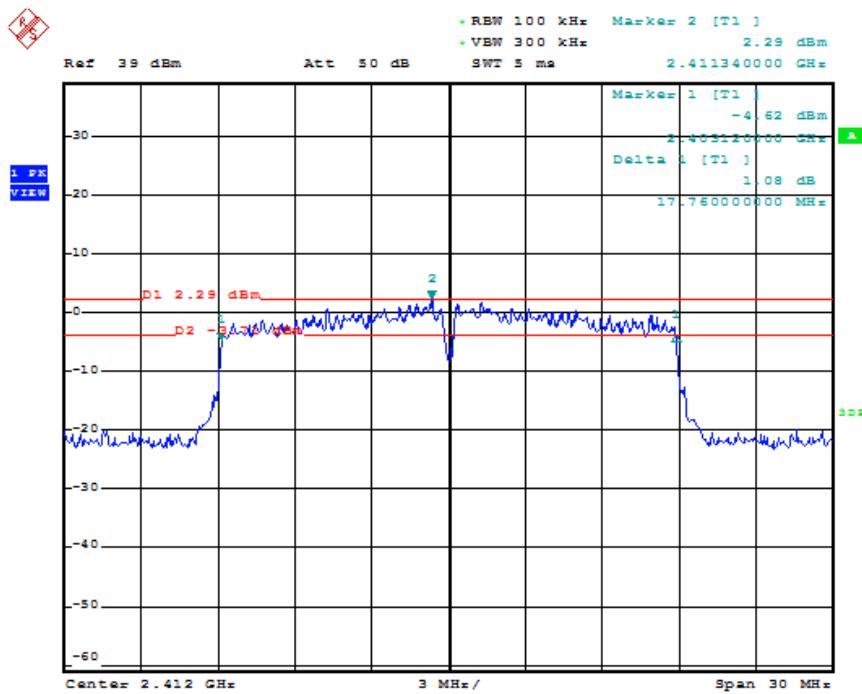


802.11n-HT20-Middle Channel

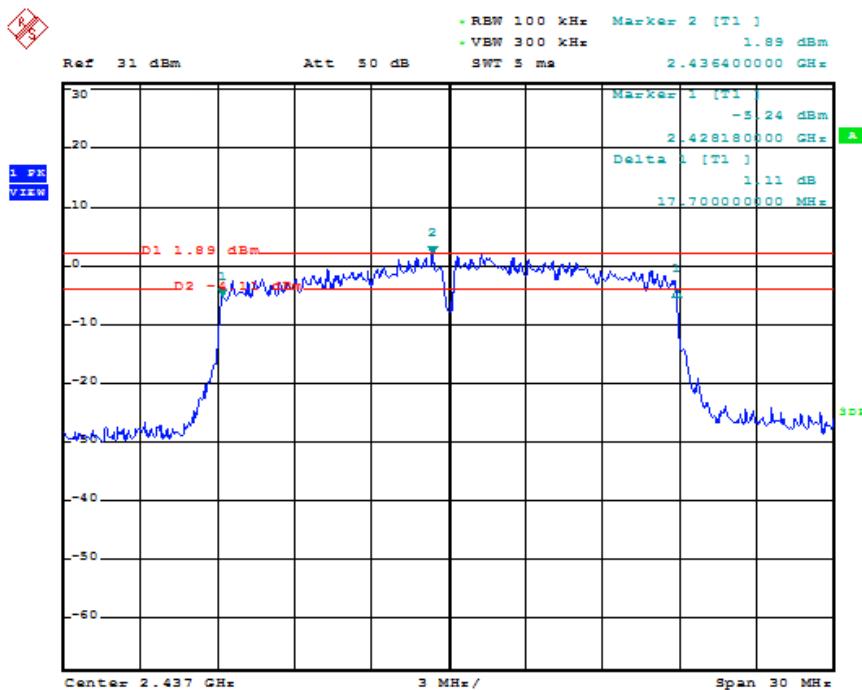


802.11n-HT20-High Channel

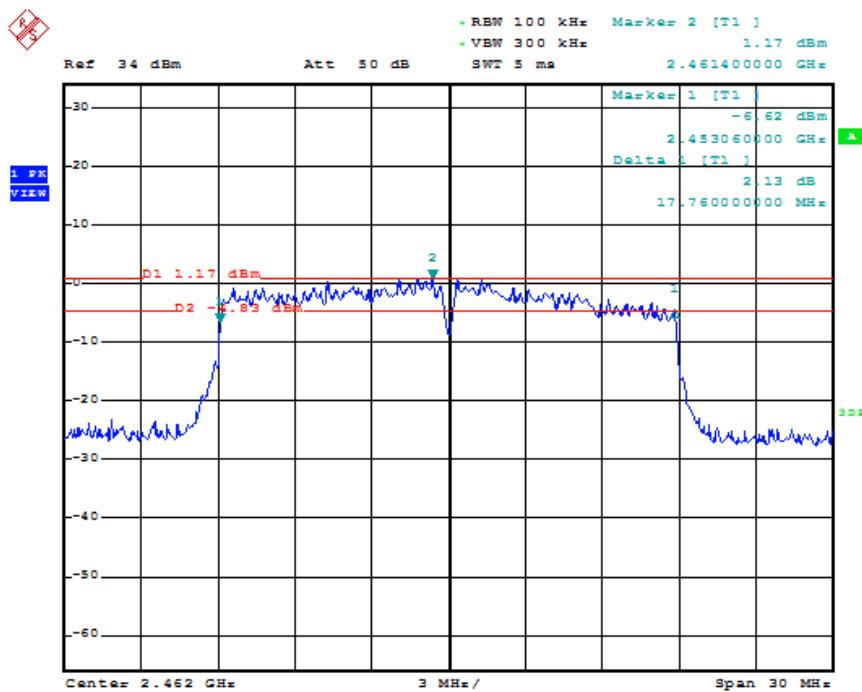


802.11n-HT40-Low Channel

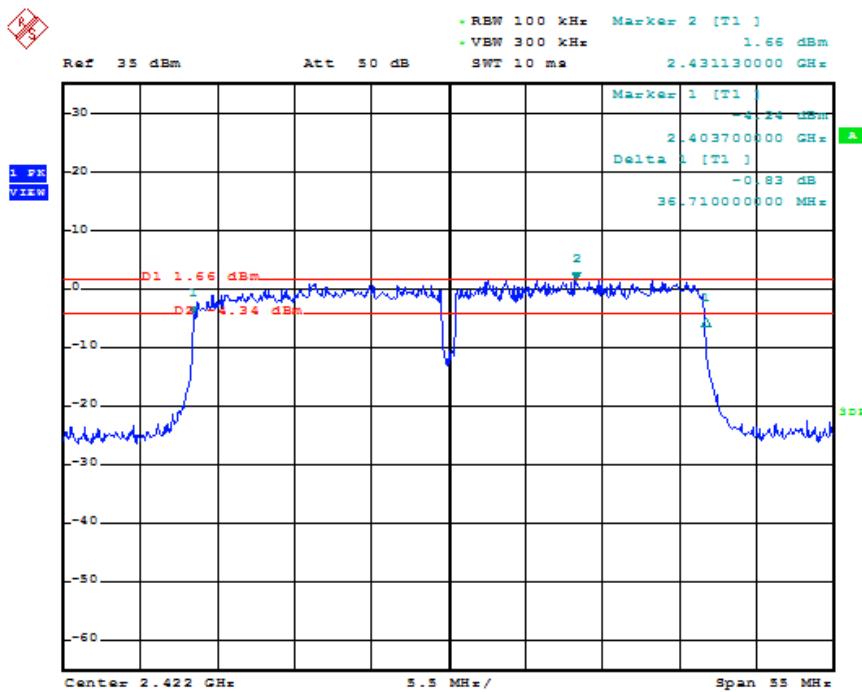

802.11n-HT40-Middle Channel

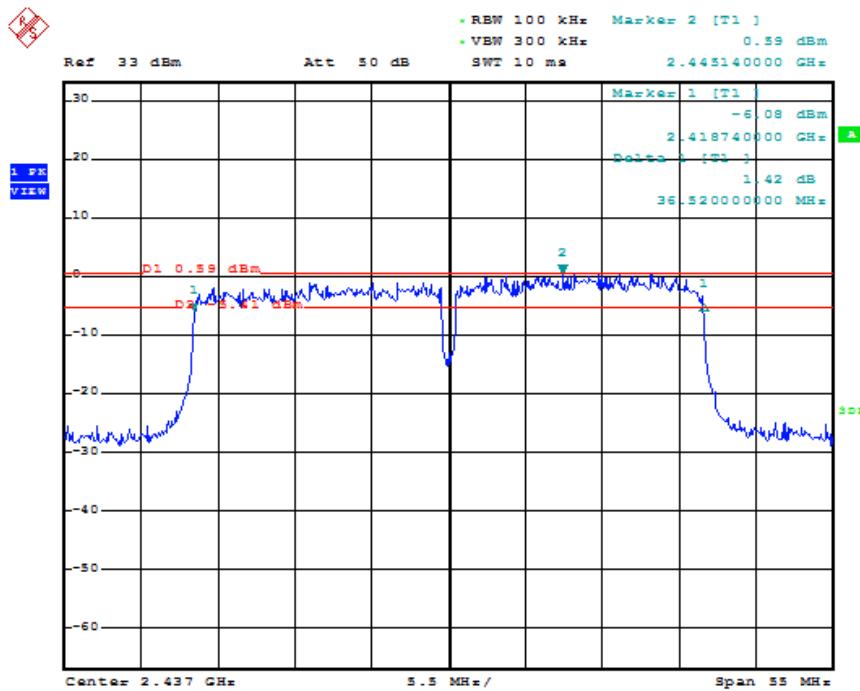


802.11n-HT40-High Channel

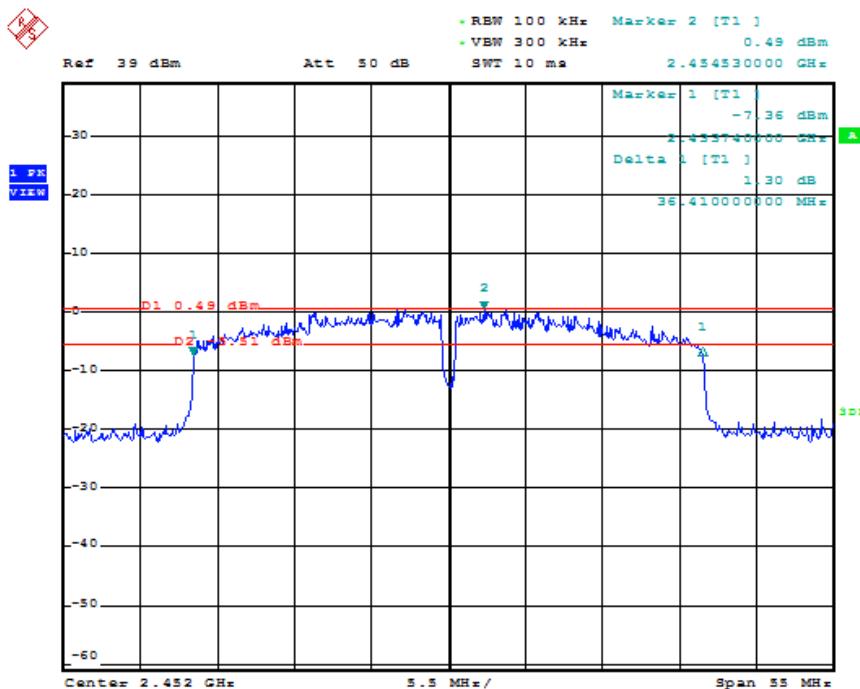


WIFI 3


802.11b-Low Channel

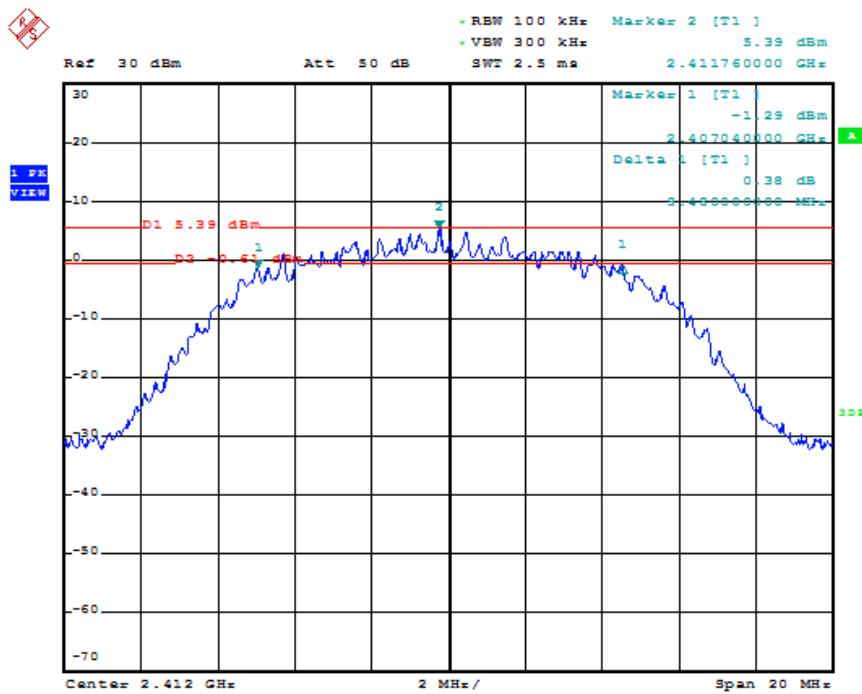


802.11b-Middle Channel

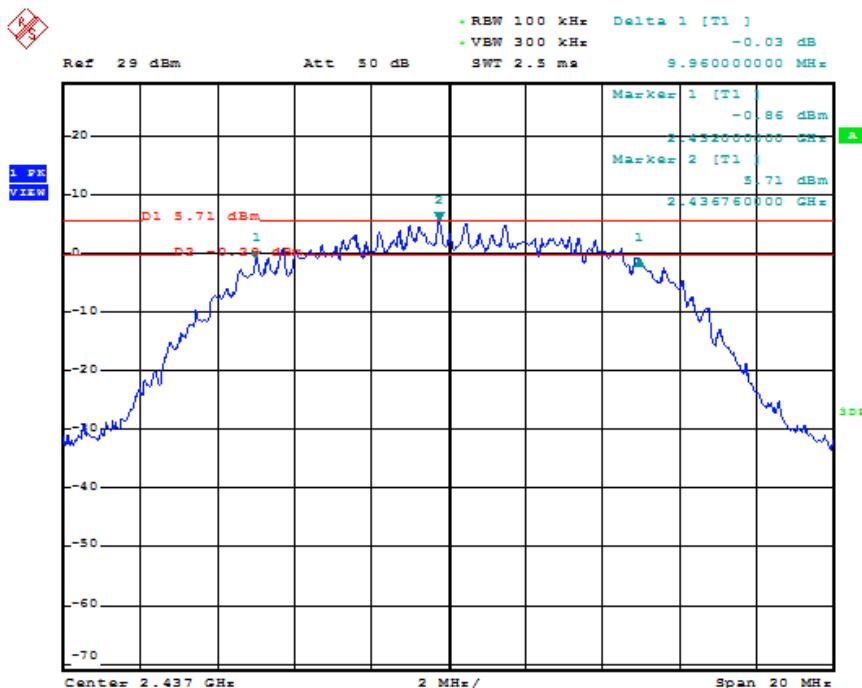


802.11b-High Channel

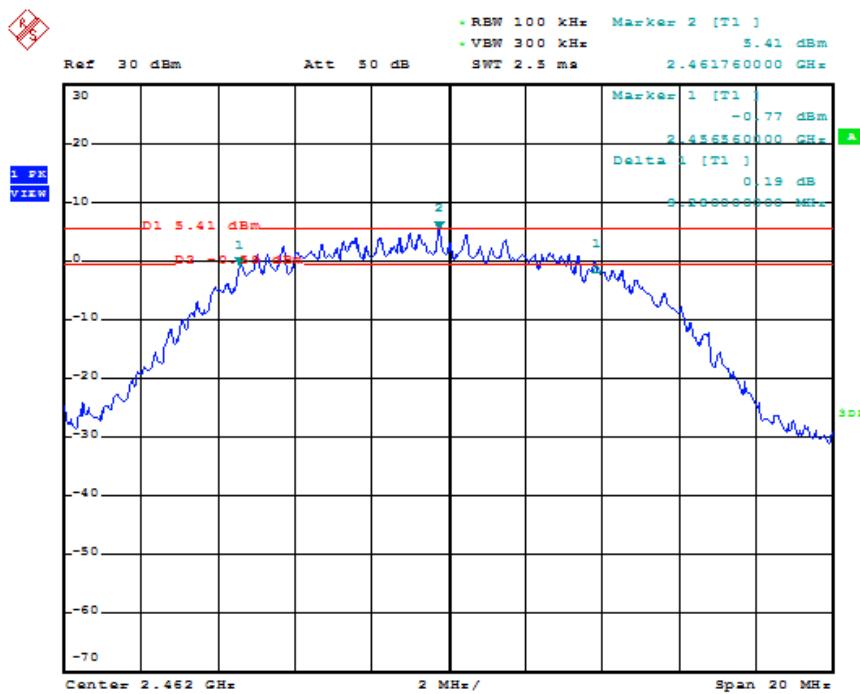


802.11g-Low Channel

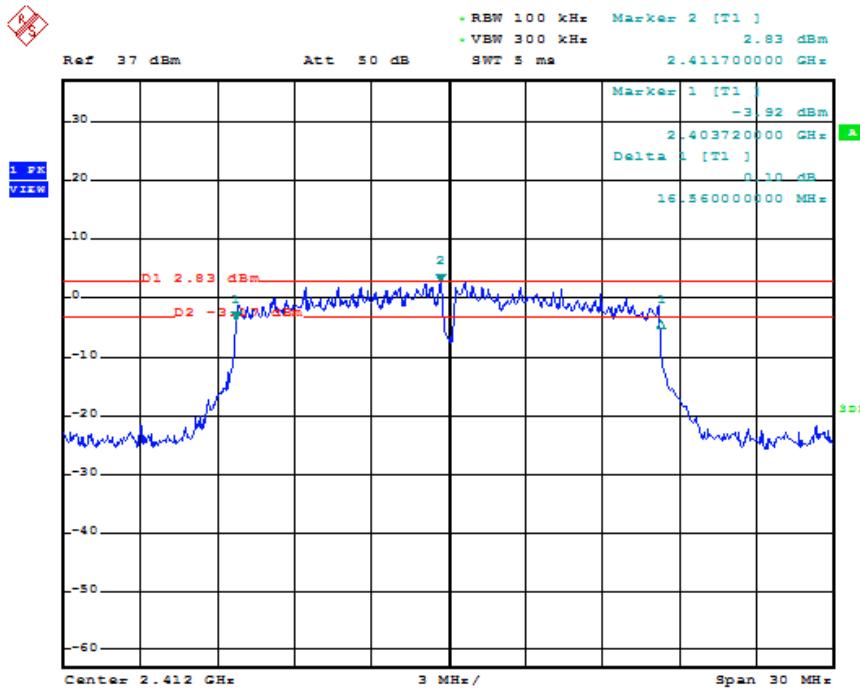


802.11g-Middle Channel

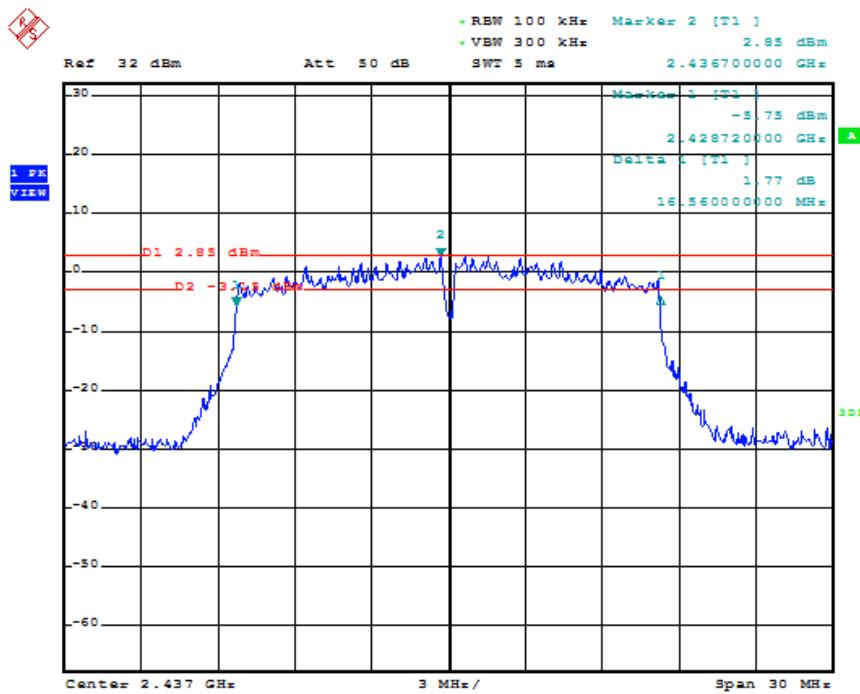


802.11g-High Channel

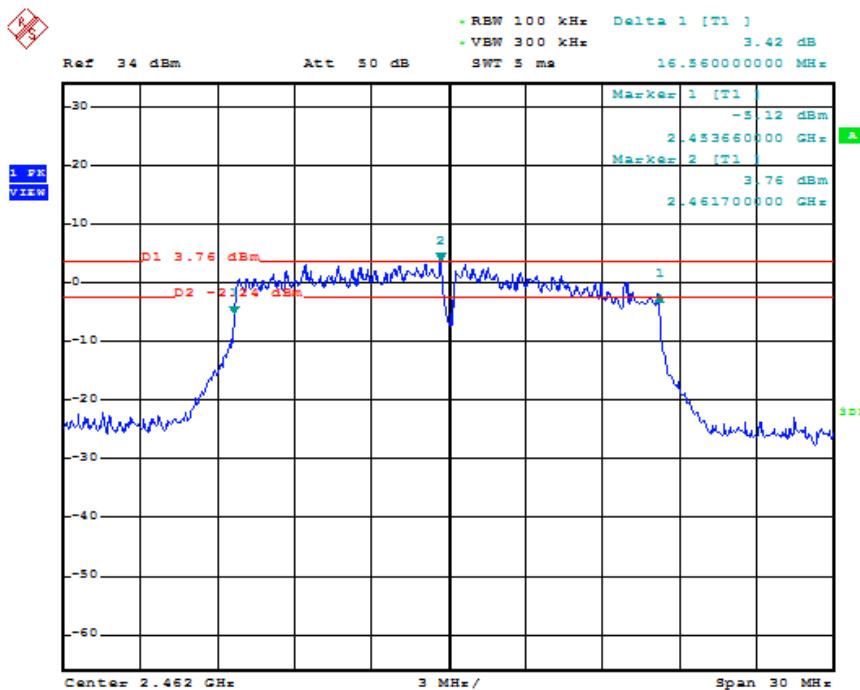


802.11n-HT20-Low Channel

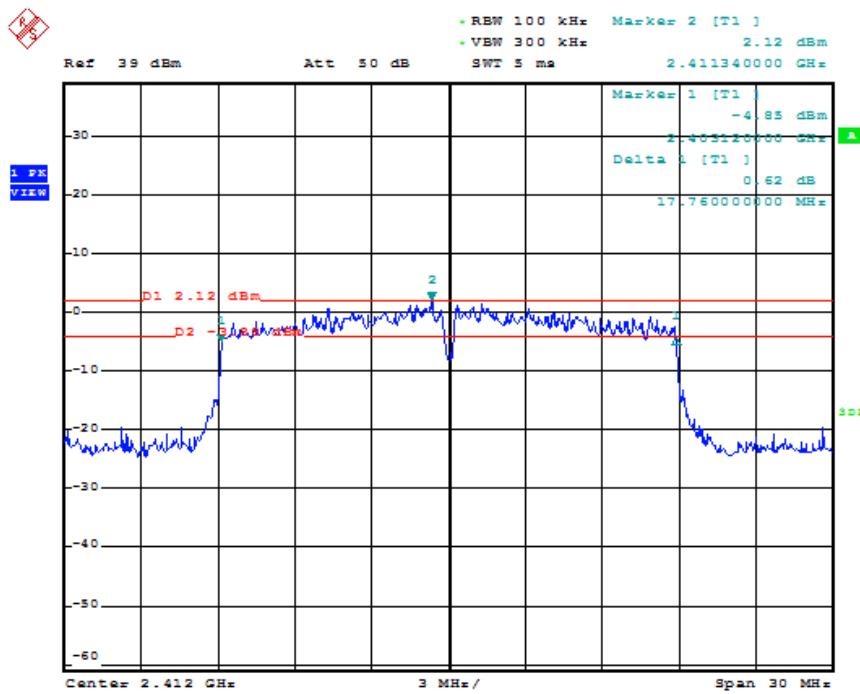


802.11n-HT20-Middle Channel

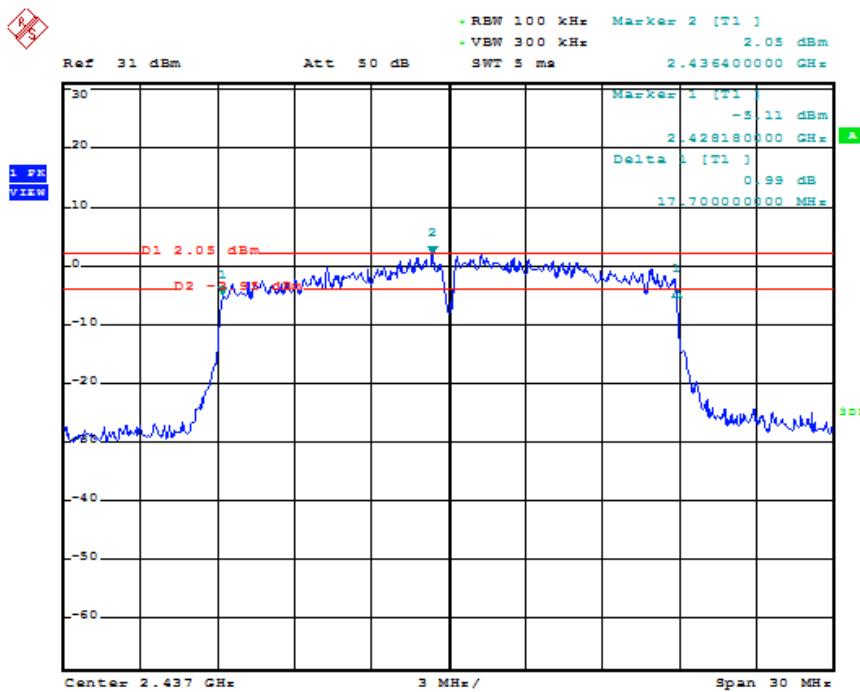


802.11n-HT20-High Channel

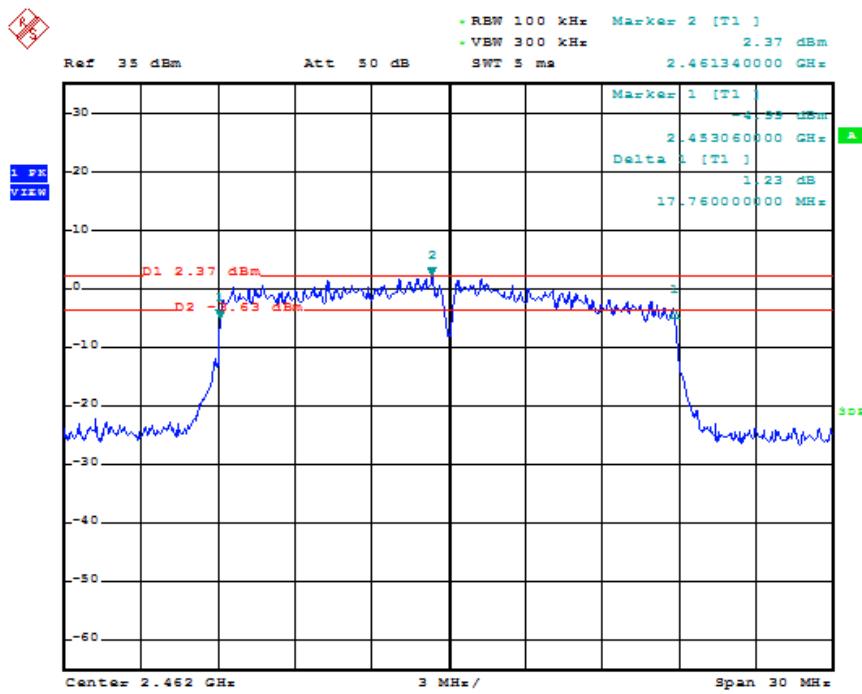


802.11n-HT40-Low Channel

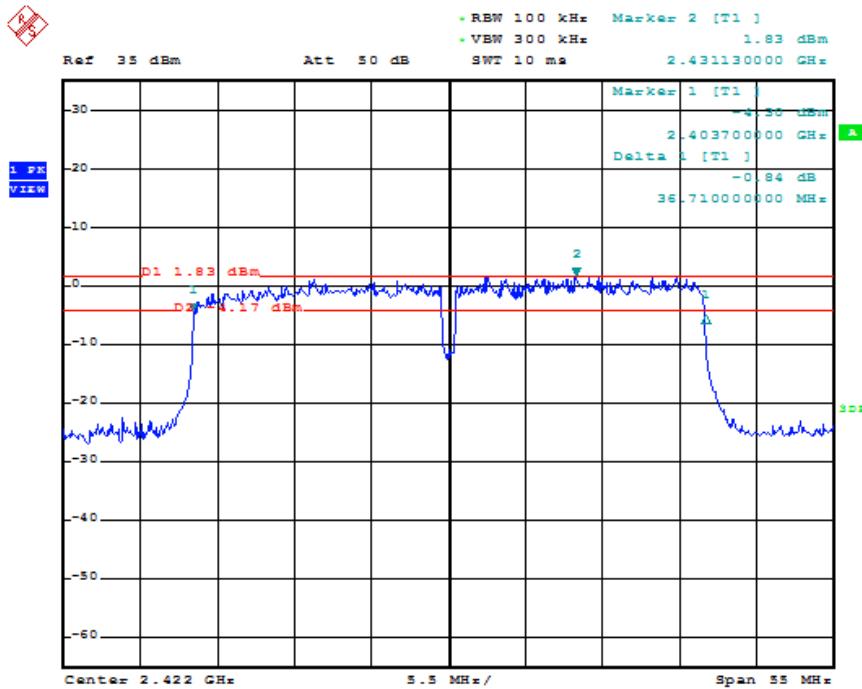

802.11n-HT40-Middle Channel

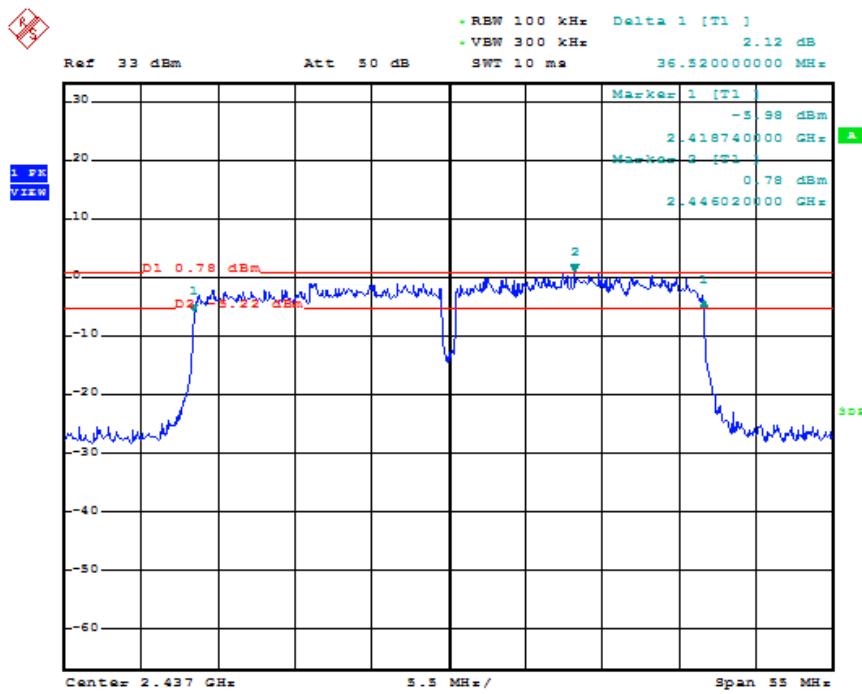


802.11n-HT40-High Channel

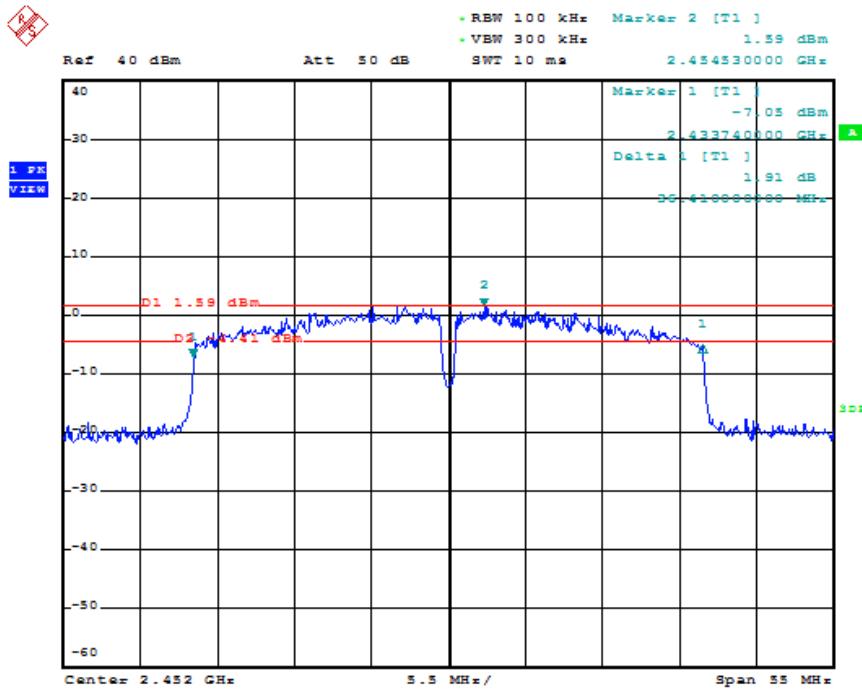


WIFI 4


802.11b-Low Channel

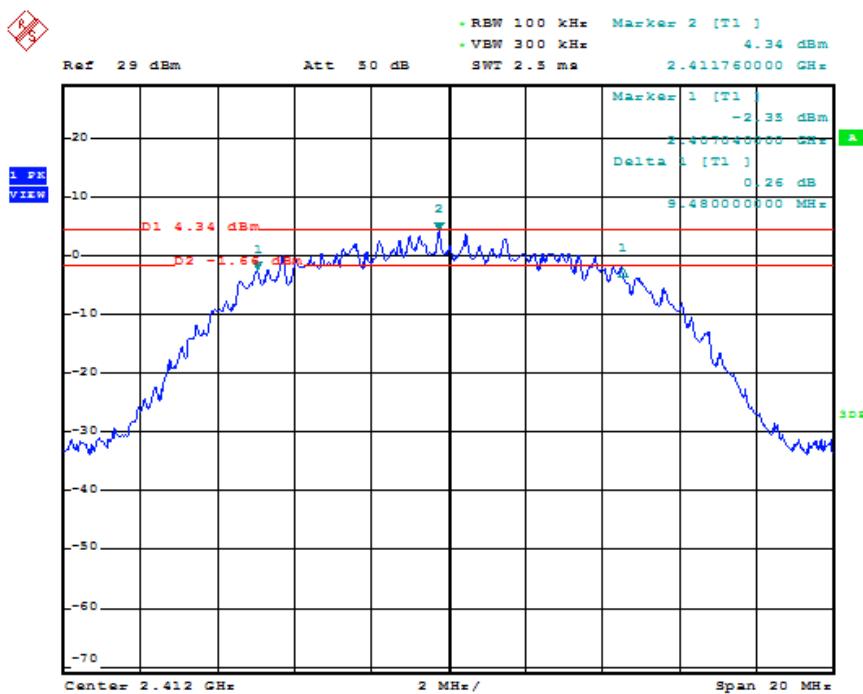


802.11b-Middle Channel

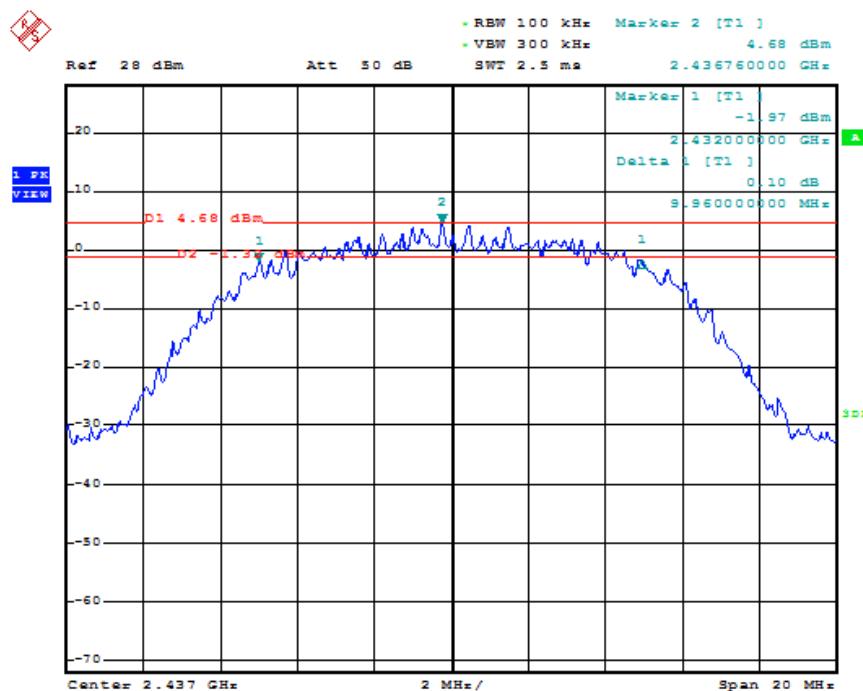


802.11b-High Channel

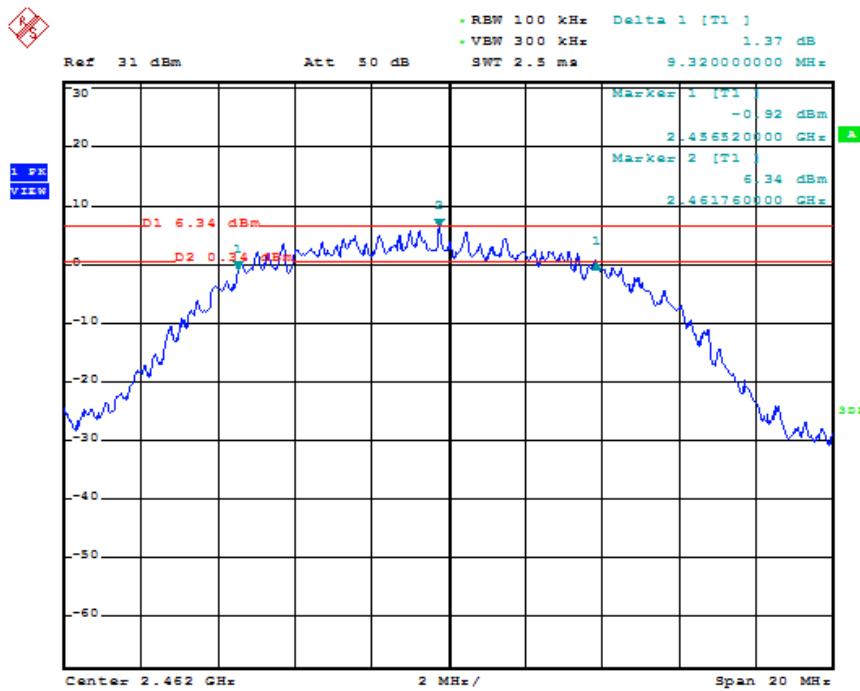


802.11g-Low Channel

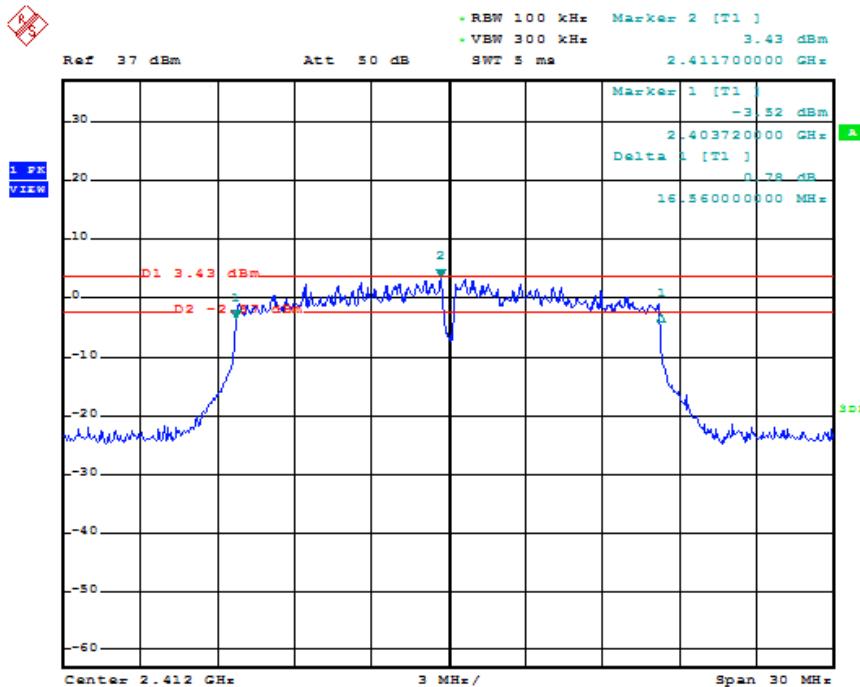


802.11g-Middle Channel

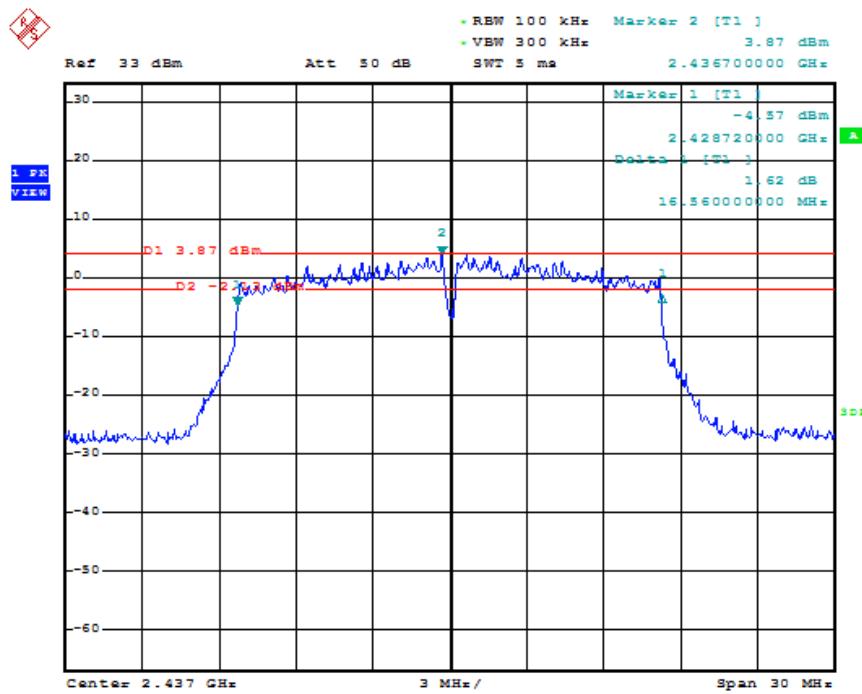


802.11g-High Channel

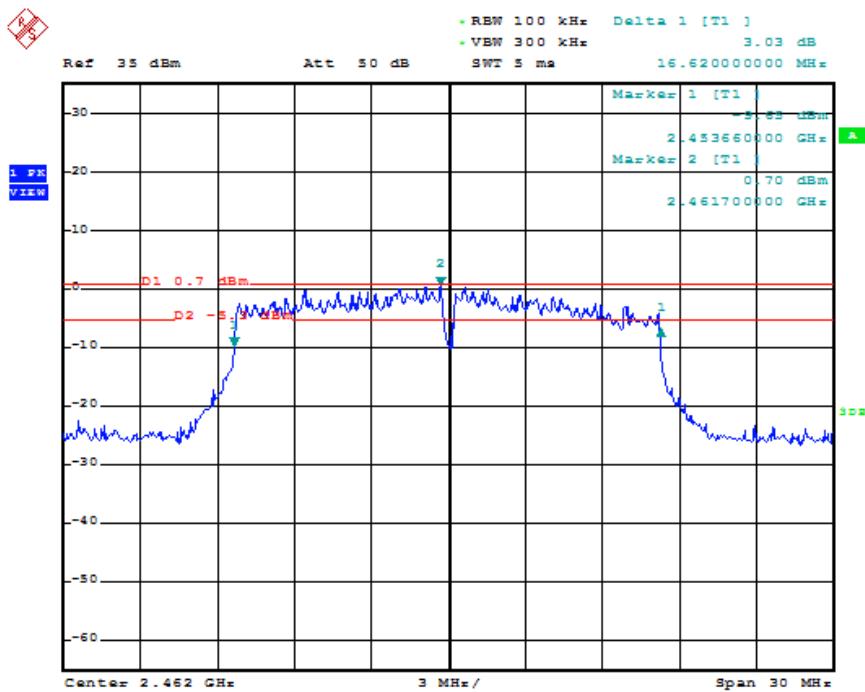


802.11n-HT20-Low Channel

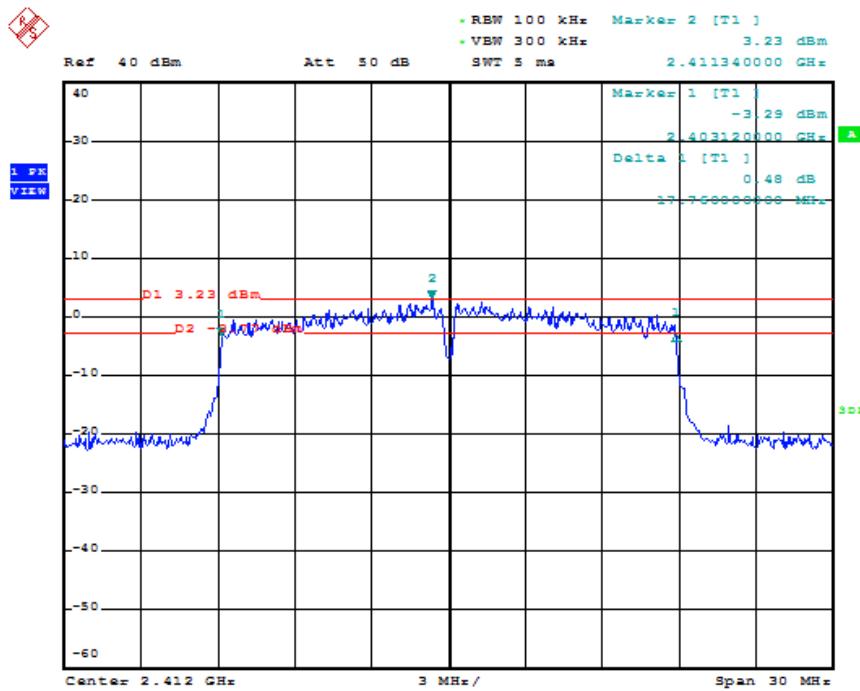


802.11n-HT20-Middle Channel

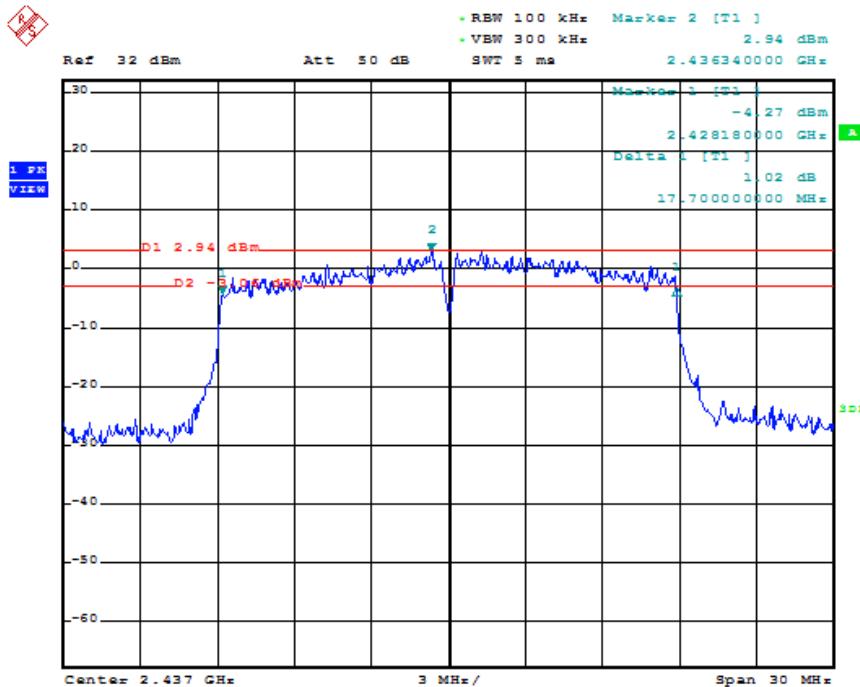


802.11n-HT20-High Channel

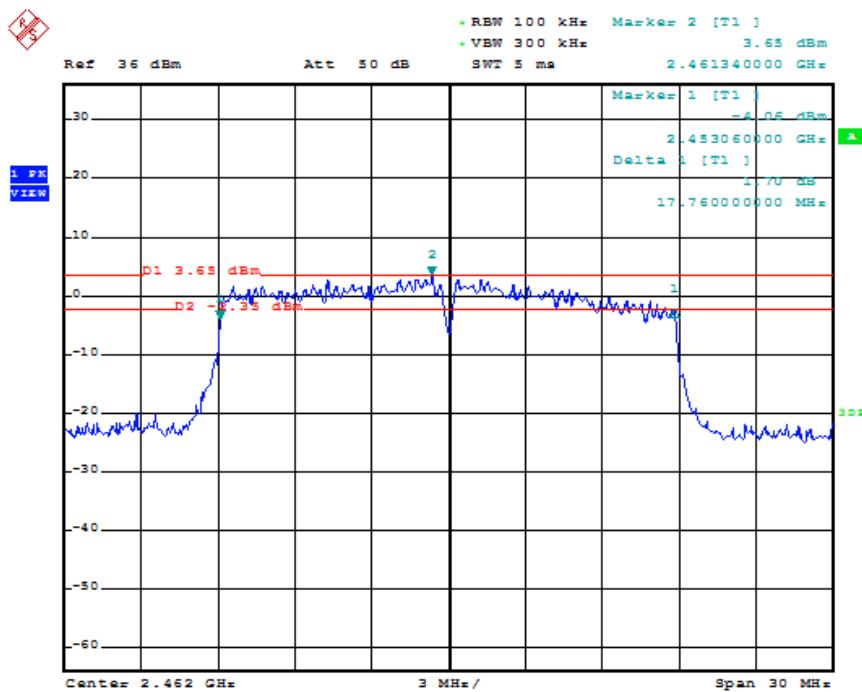


802.11n-HT40-Low Channel

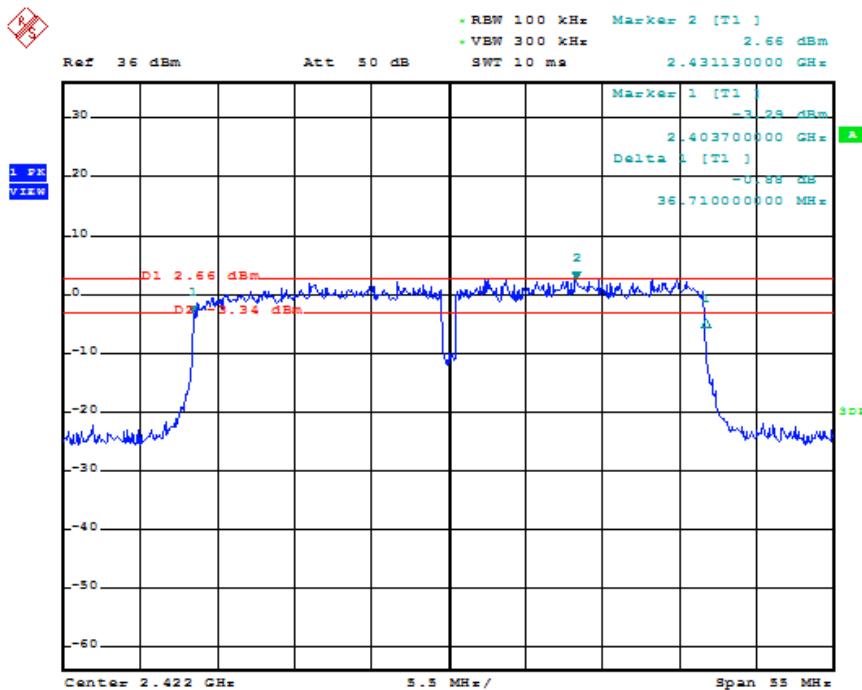

802.11n-HT40-Middle Channel

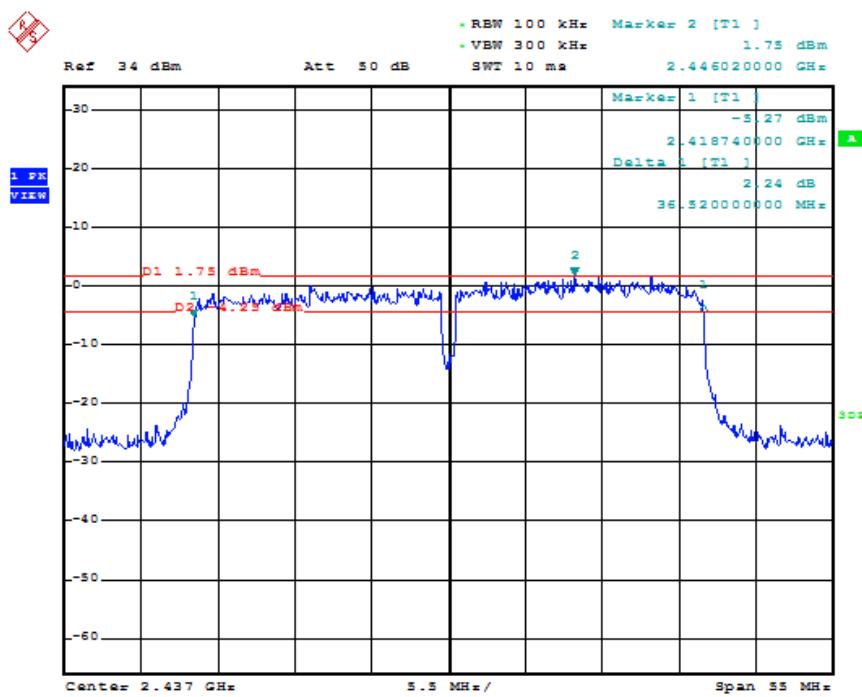

802.11n-HT40-High Channel

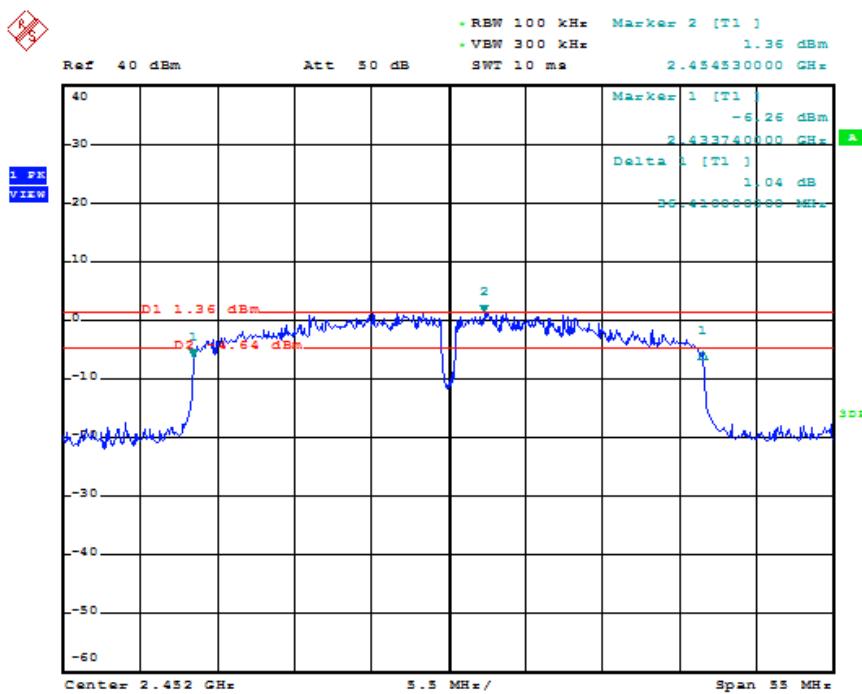

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to KDB-558074 D01 V04, (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26°C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

WIFI 1:

Test Mode	Frequency MHz	Power dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	12.84	19.23	1000
	2437	12.44	17.54	1000
	2462	12.01	15.89	1000
802.11g_54Mbps	2412	11.80	15.14	1000
	2437	12.27	16.87	1000
	2462	12.51	17.82	1000
802.11n HT20_MCS7	2412	12.46	17.62	1000
	2437	12.46	17.62	1000
	2462	11.75	14.96	1000
802.11n HT40_MCS7	2422	12.62	18.28	1000
	2437	12.11	16.26	1000
	2452	11.56	14.32	1000

WIFI 2:

Test Mode	Frequency MHz	Power dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	12.70	18.62	1000
	2437	12.48	17.70	1000
	2462	12.04	16.00	1000
802.11g_54Mbps	2412	11.87	15.38	1000
	2437	12.36	17.22	1000
	2462	12.70	18.62	1000
802.11n HT20_MCS7	2412	12.73	18.75	1000
	2437	12.60	18.20	1000
	2462	11.90	15.49	1000
802.11n HT40_MCS7	2422	12.92	19.59	1000
	2437	12.37	17.26	1000
	2452	11.87	15.38	1000

WIFI 3:

Test Mode	Frequency MHz	Power dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	13.69	23.39	1000
	2437	13.43	22.03	1000
	2462	12.99	19.91	1000
802.11g_54Mbps	2412	12.72	18.71	1000
	2437	13.16	20.70	1000
	2462	13.47	22.23	1000
802.11n HT20_MCS7	2412	13.49	22.34	1000
	2437	13.42	21.98	1000
	2462	12.61	18.24	1000
802.11n HT40_MCS7	2422	13.71	23.50	1000
	2437	13.10	20.42	1000
	2452	12.50	17.78	1000


WIFI 4:

Test Mode	Frequency MHz	Power dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	13.73	23.60	1000
	2437	13.47	22.23	1000
	2462	13.03	20.09	1000
802.11g_54Mbps	2412	12.88	19.41	1000
	2437	13.36	21.68	1000
	2462	13.70	23.44	1000
802.11n HT20_MCS7	2412	13.69	23.39	1000
	2437	13.61	22.96	1000
	2462	12.90	19.50	1000
802.11n HT40_MCS7	2422	13.97	24.95	1000
	2437	13.31	21.43	1000
	2452	13.52	22.49	1000


Please refer to the following test plots:

WIFI 1


802.11b-11Mbps-Low Channel

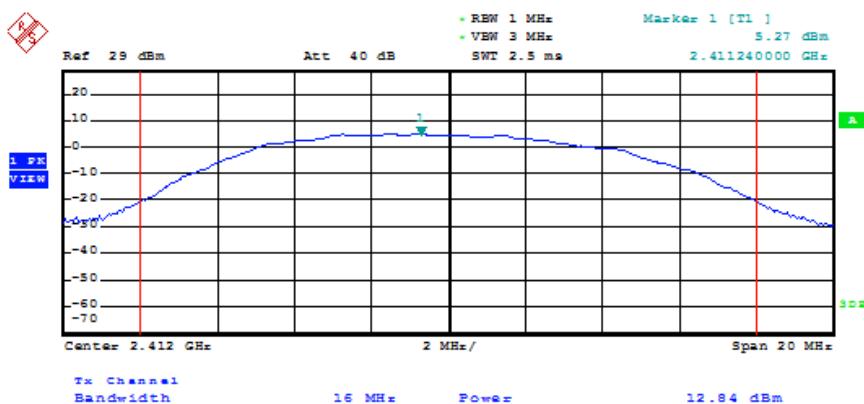


802.11b -11Mbps-Middle Channel

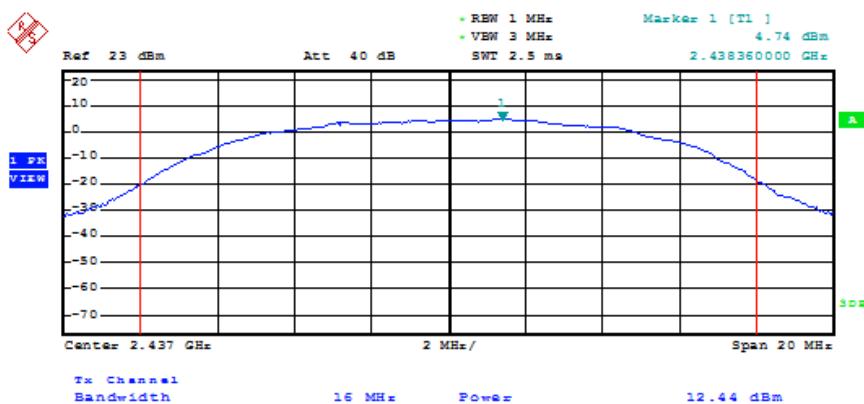


802.11b -11Mbps-High Channel

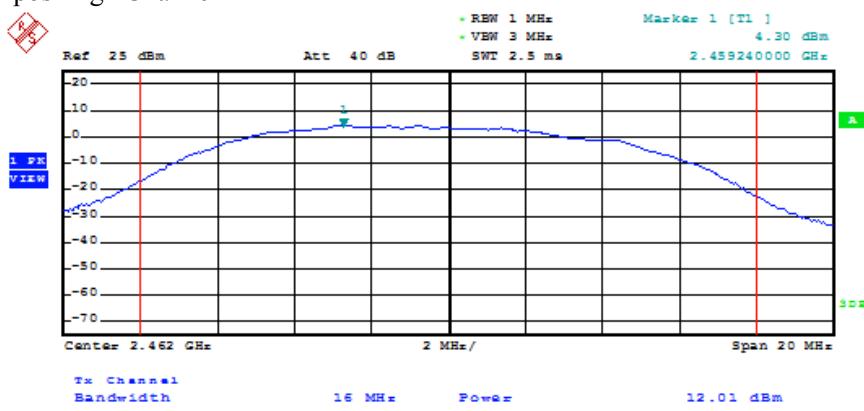


802.11g-54Mbps-Low Channel

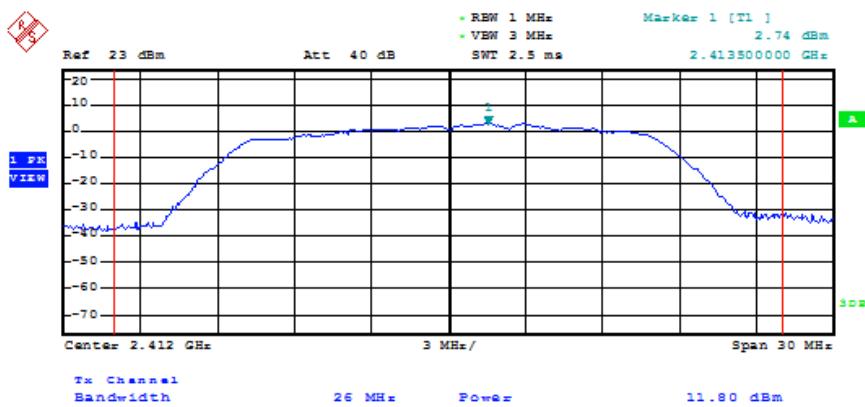


802.11g-54Mbps-Middle Channel

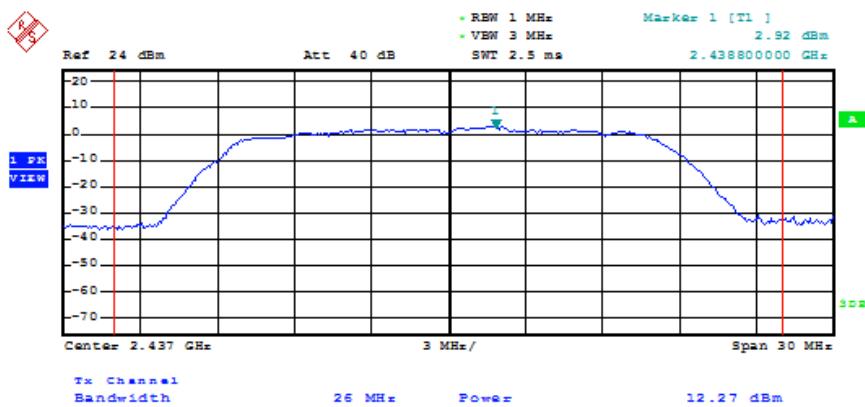


802.11g-54Mbps-High Channel

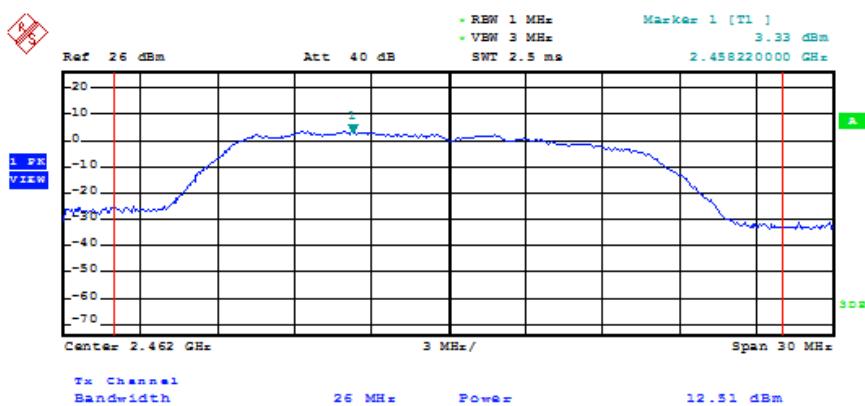


802.11n-HT20-MCS7-Low Channel

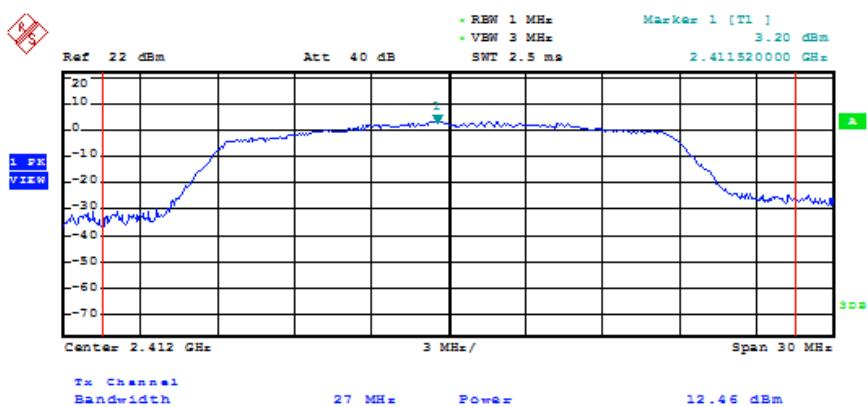


802.11n-HT20-MCS7-Middle Channel

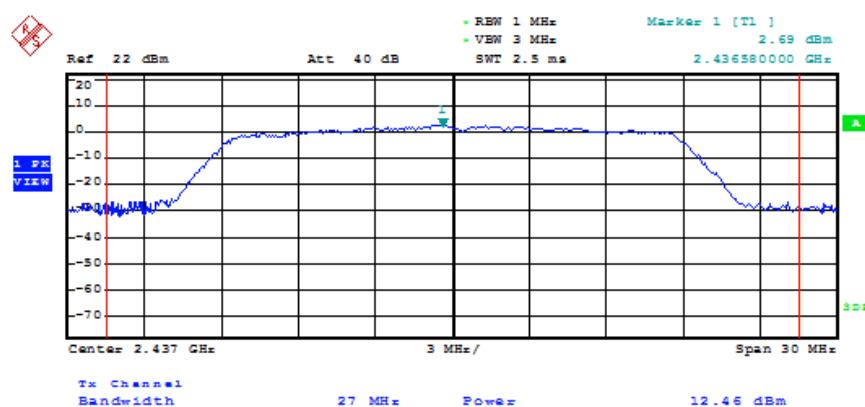


802.11n-HT20-MCS7-High Channel

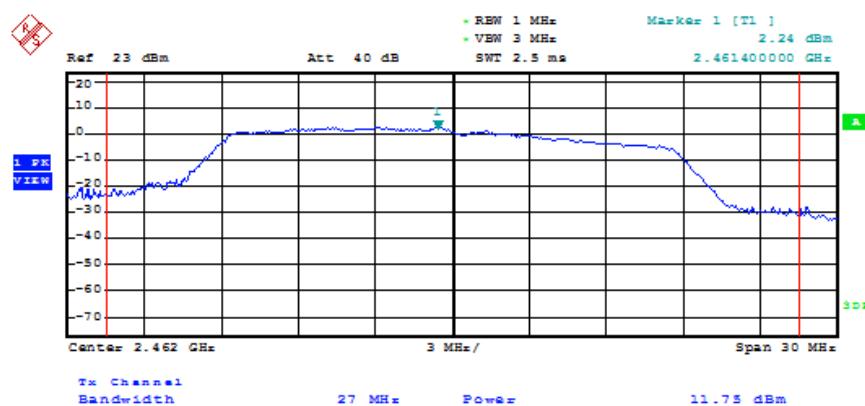


802.11n-HT40-MCS7-Low Channel

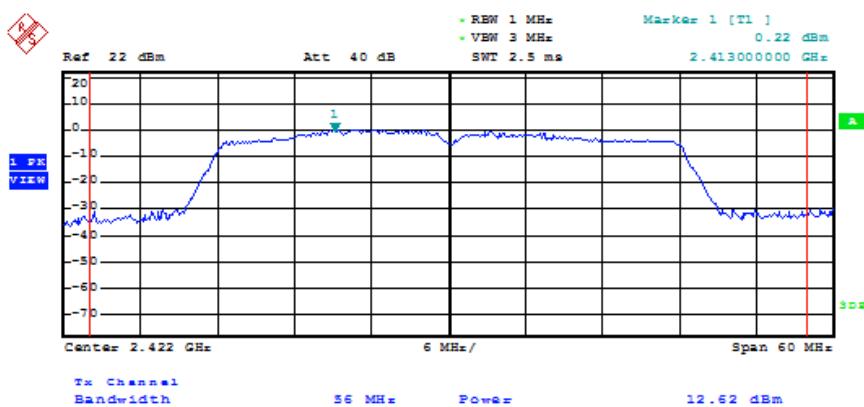

802.11n-HT40-MCS7-Middle Channel

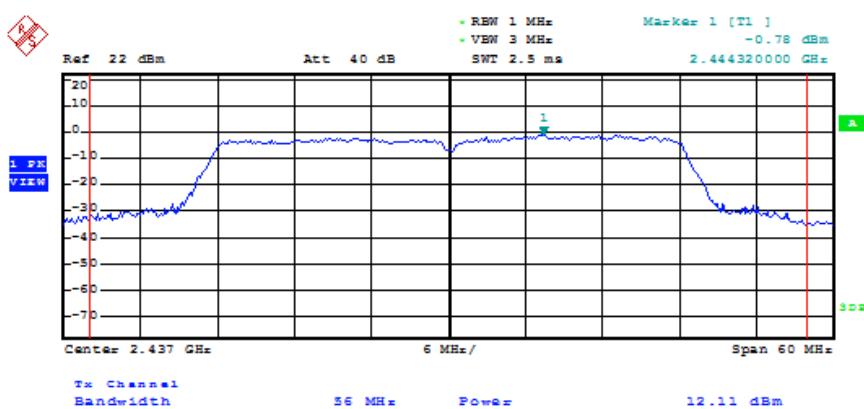


802.11n-HT40-MCS7-High Channel

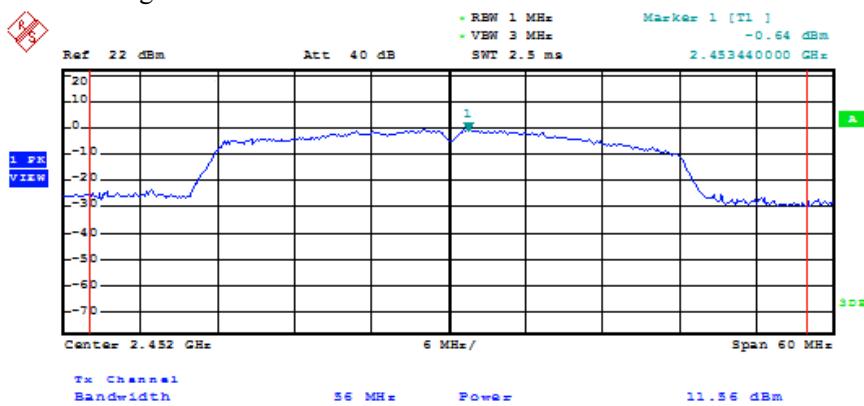


WIFI 2


802.11b-11Mbps-Low Channel

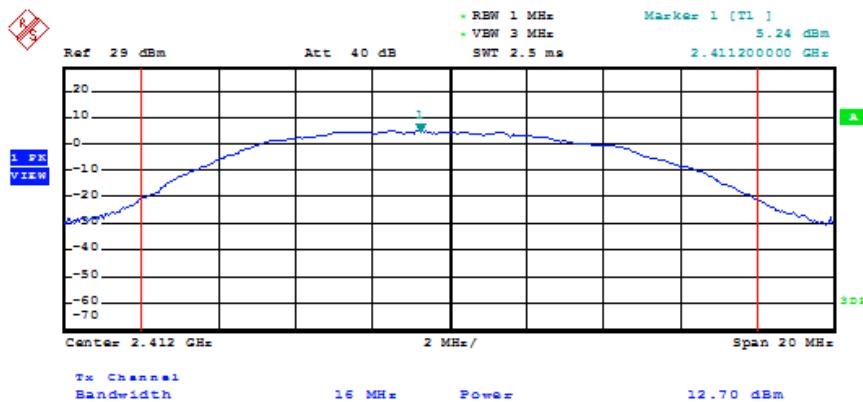


802.11b -11Mbps-Middle Channel

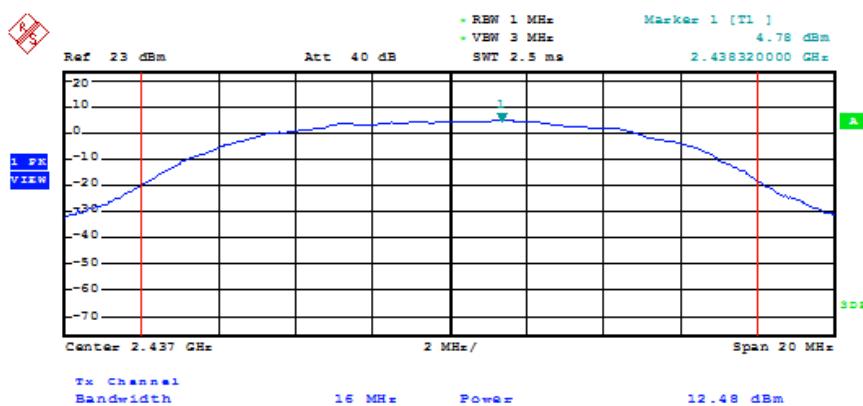


802.11b -11Mbps-High Channel

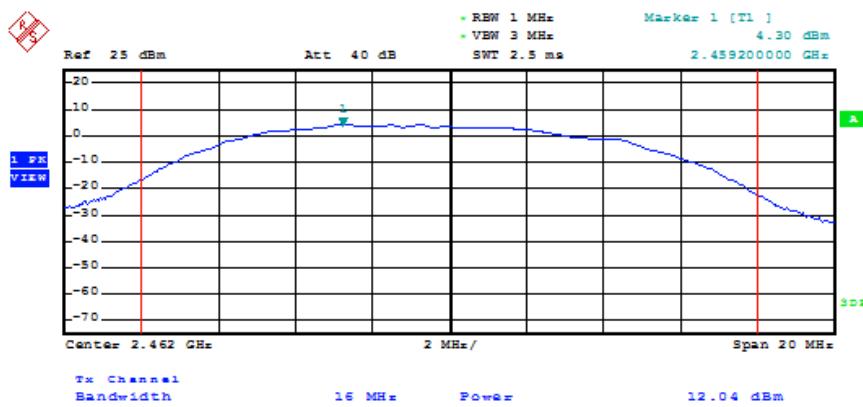


802.11g-54Mbps-Low Channel

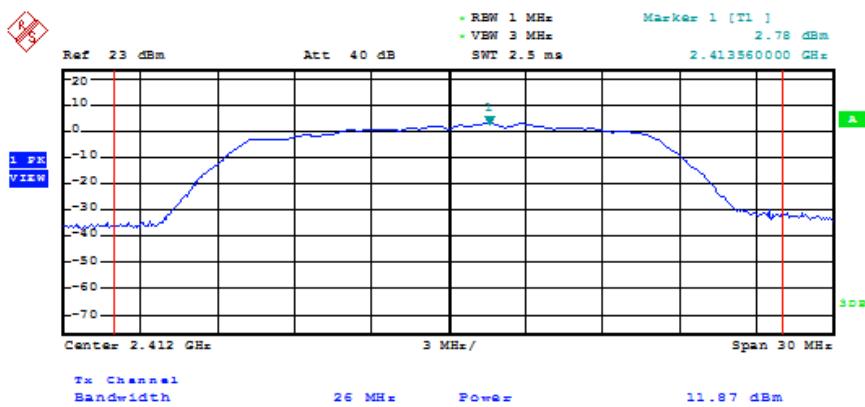


802.11g-54Mbps-Middle Channel

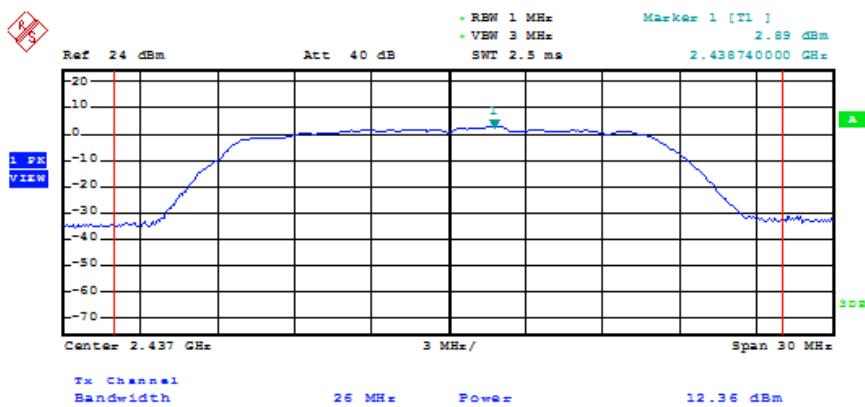


802.11g-54Mbps-High Channel

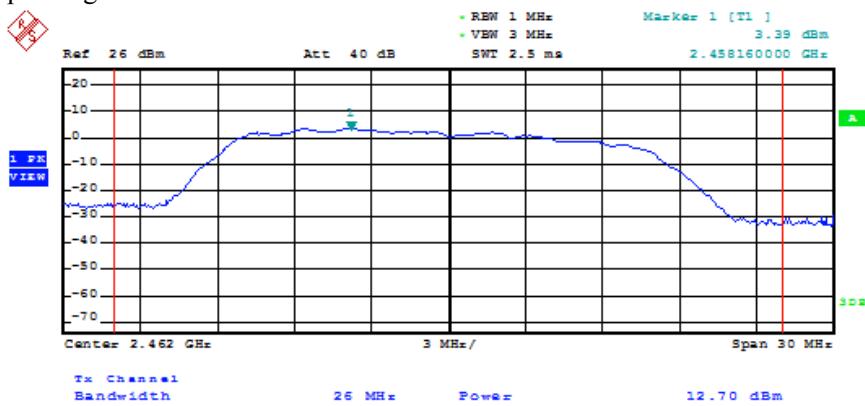


802.11n-HT20-MCS7-Low Channel

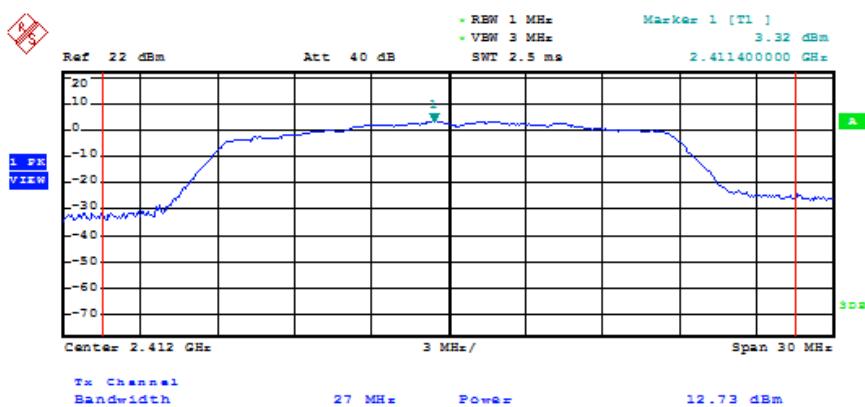


802.11n-HT20-MCS7-Middle Channel

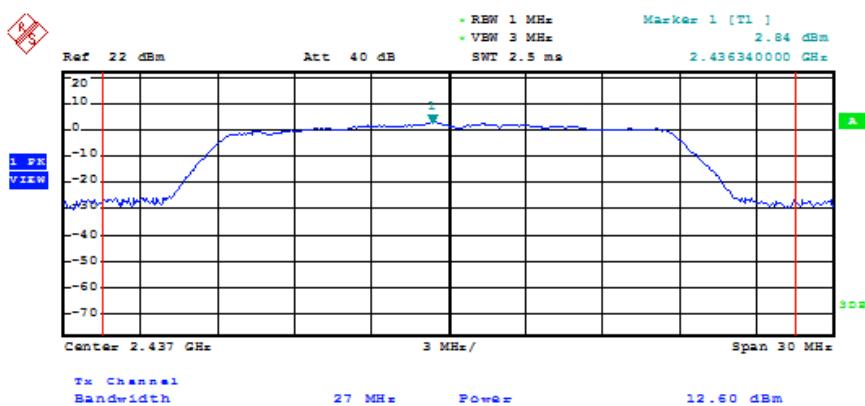


802.11n-HT20-MCS7-High Channel

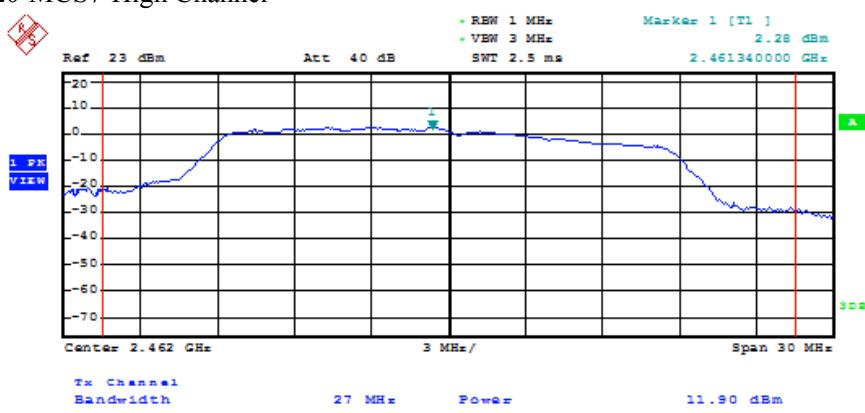


802.11n-HT40-MCS7-Low Channel

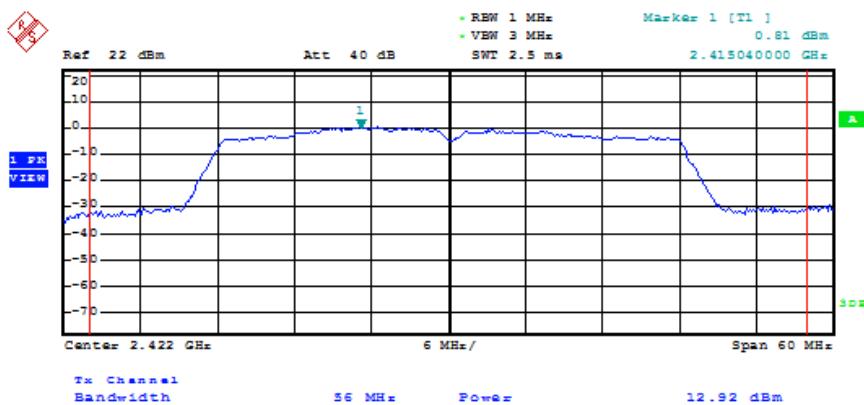

802.11n-HT40-MCS7-Middle Channel

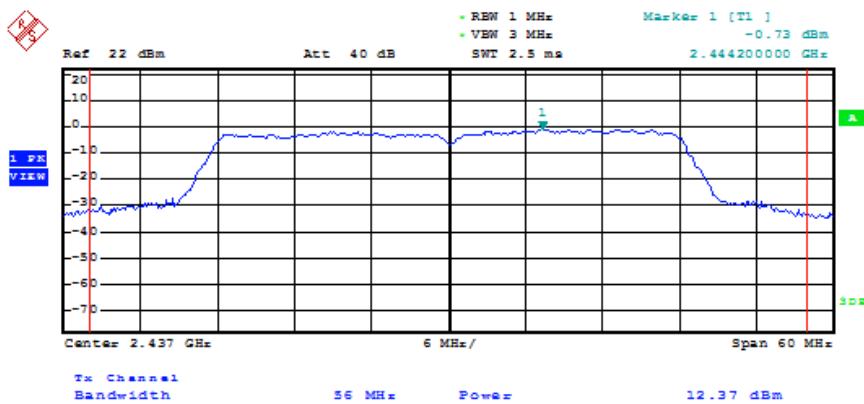


802.11n-HT40-MCS7-High Channel

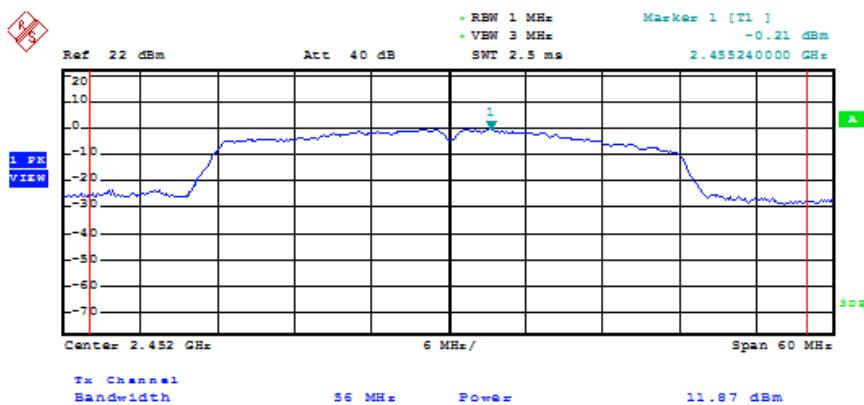


WIFI 3


802.11b-11Mbps-Low Channel

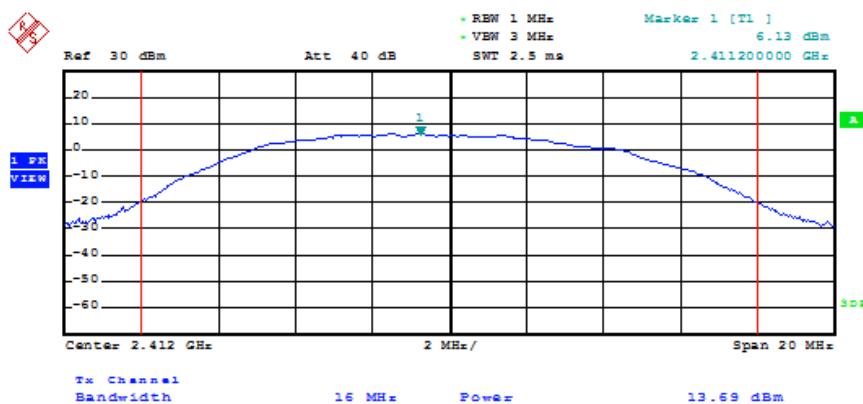


802.11b -11Mbps-Middle Channel

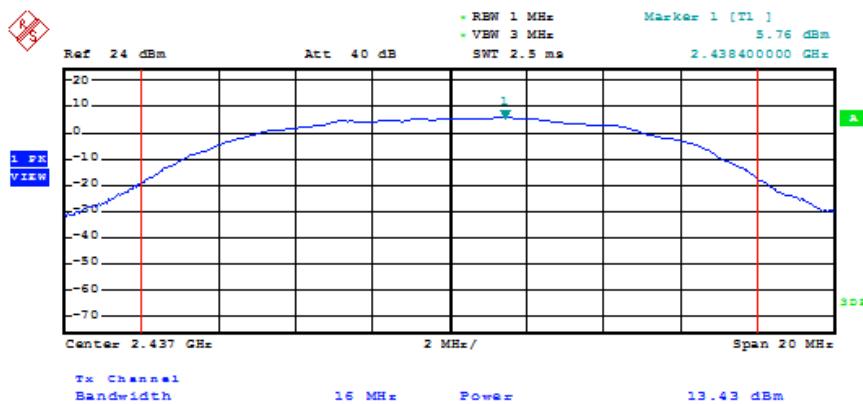


802.11b -11Mbps-High Channel

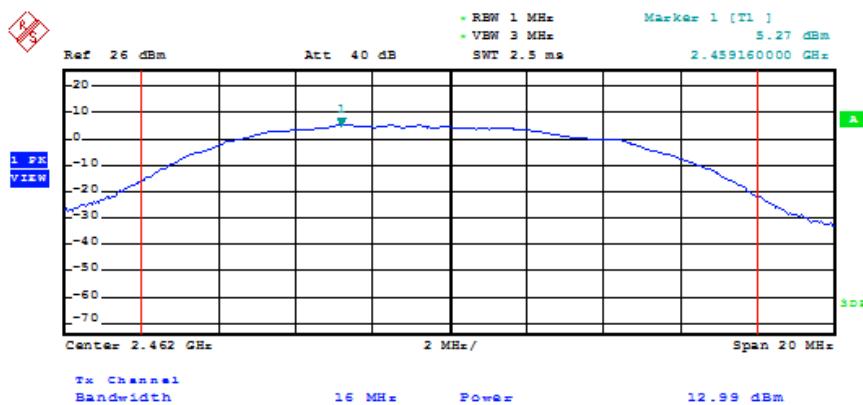


802.11g-54Mbps-Low Channel

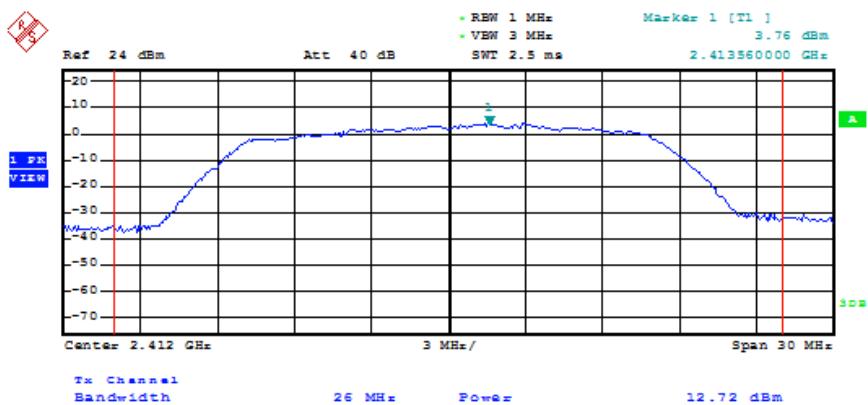


802.11g-54Mbps-Middle Channel

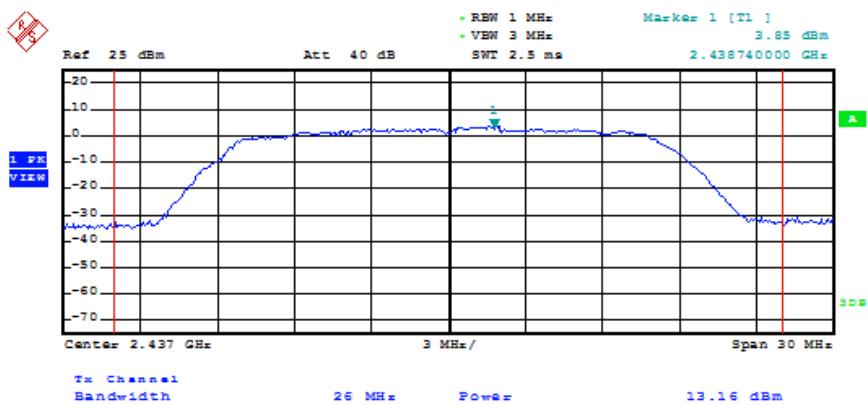


802.11g-54Mbps-High Channel

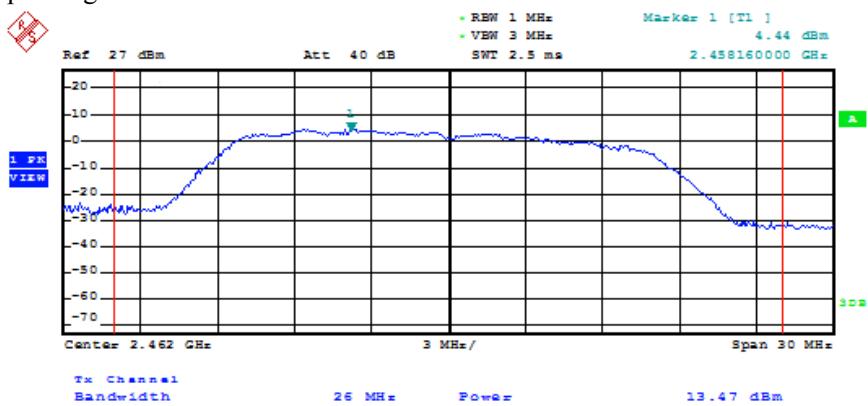


802.11n-HT20-MCS7-Low Channel

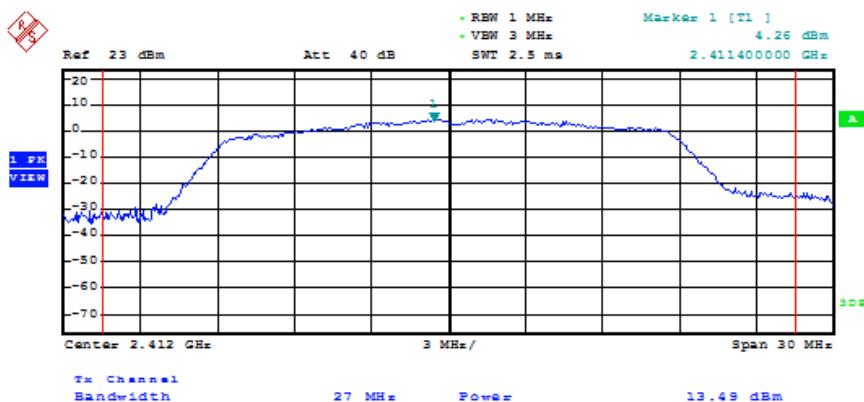


802.11n-HT20-MCS7-Middle Channel

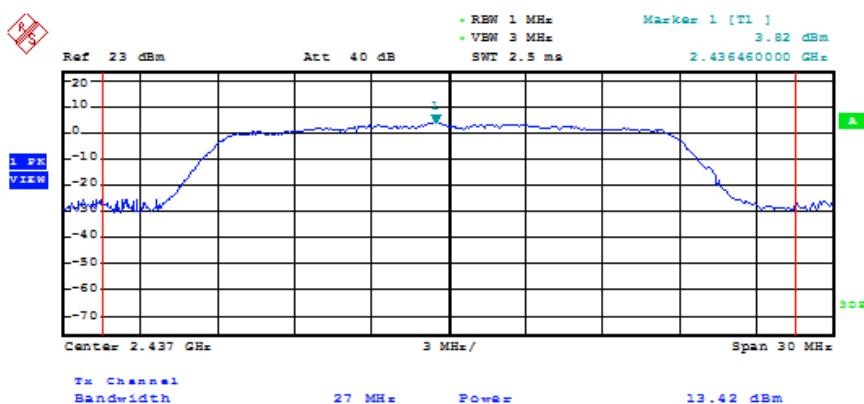


802.11n-HT20-MCS7-High Channel

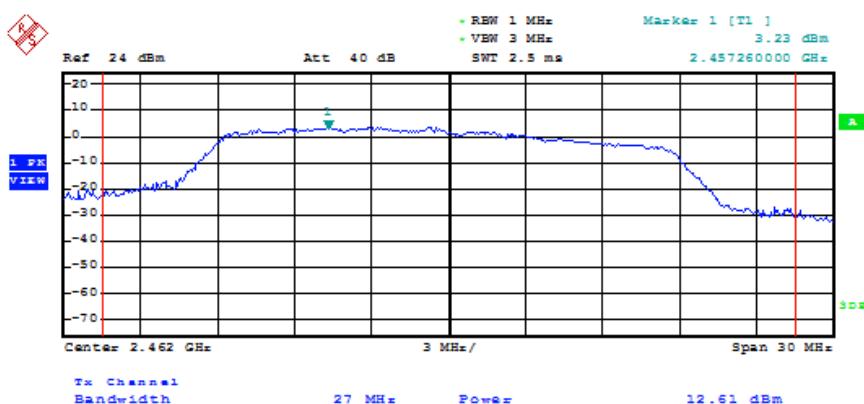


802.11n-HT40-MCS7-Low Channel

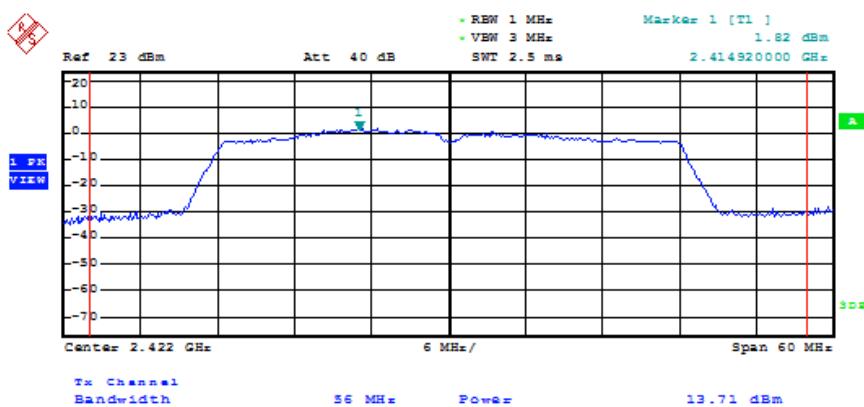

802.11n-HT40-MCS7-Middle Channel

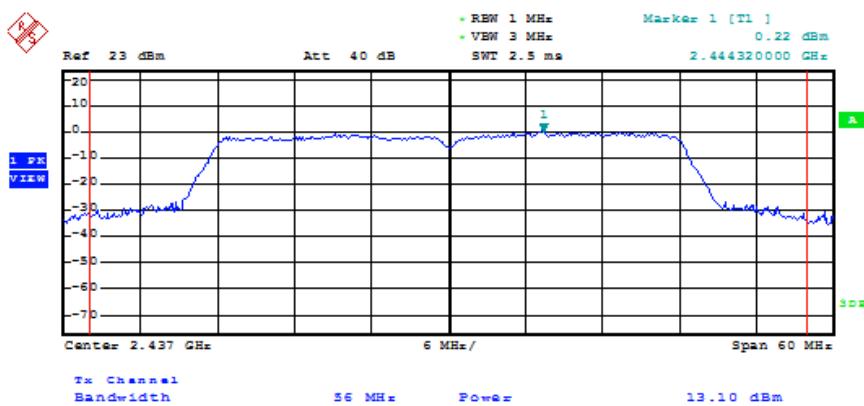


802.11n-HT40-MCS7-High Channel

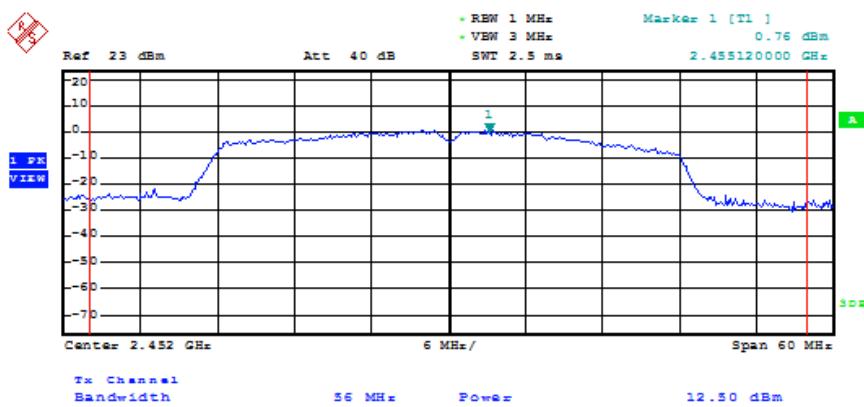


WIFI 4


802.11b-11Mbps-Low Channel

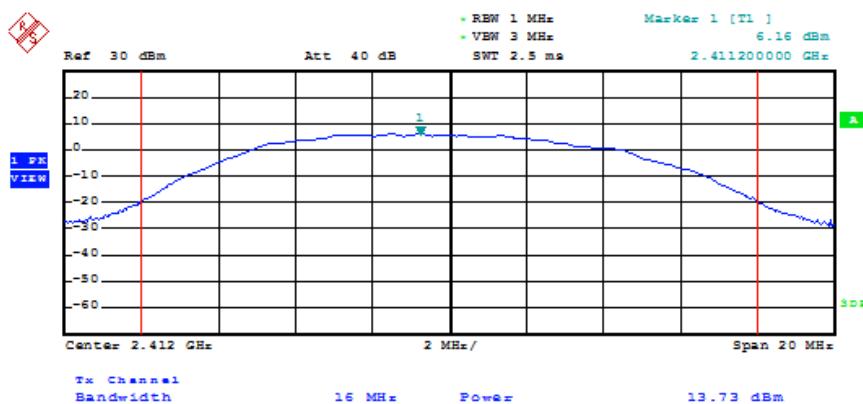


802.11b -11Mbps-Middle Channel

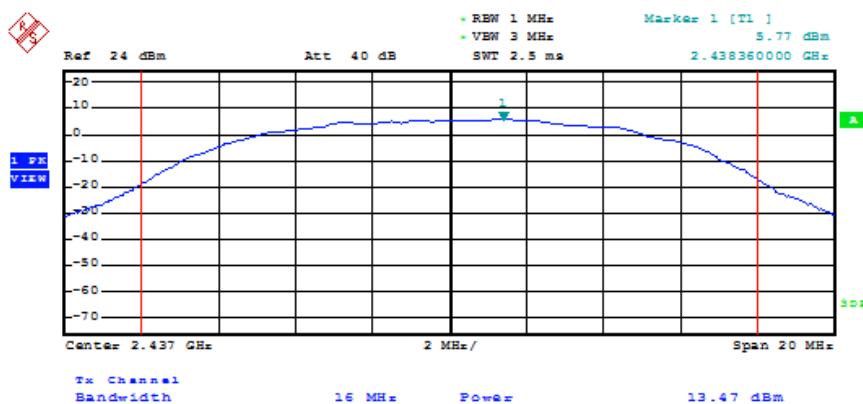


802.11b -11Mbps-High Channel

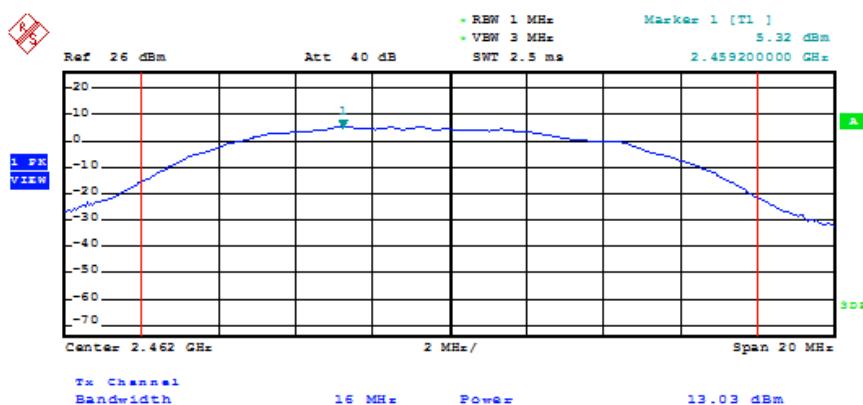


802.11g-54Mbps-Low Channel

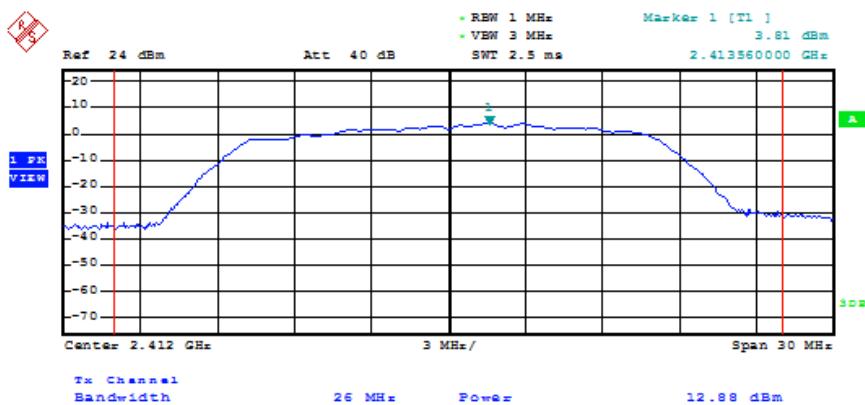


802.11g-54Mbps-Middle Channel

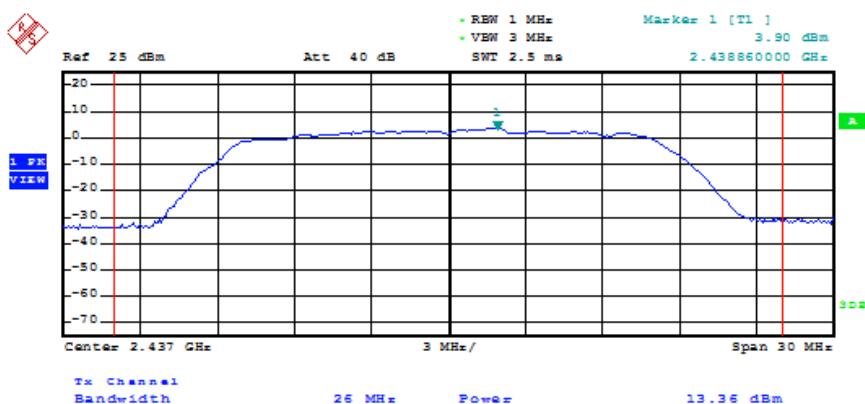


802.11g-54Mbps-High Channel

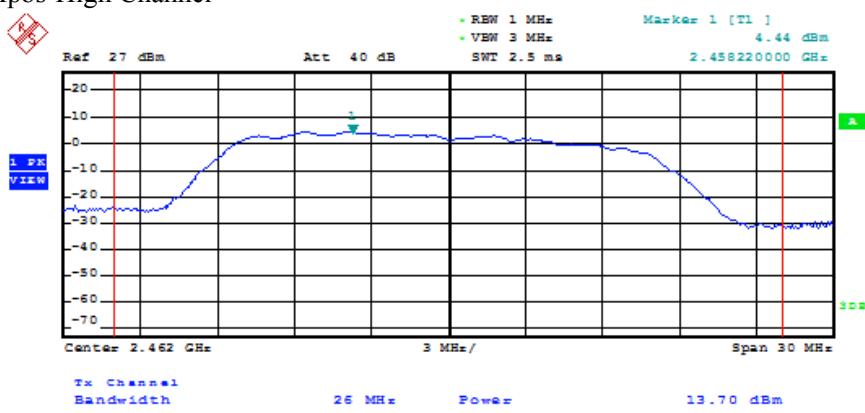


802.11n-HT20-MCS7-Low Channel

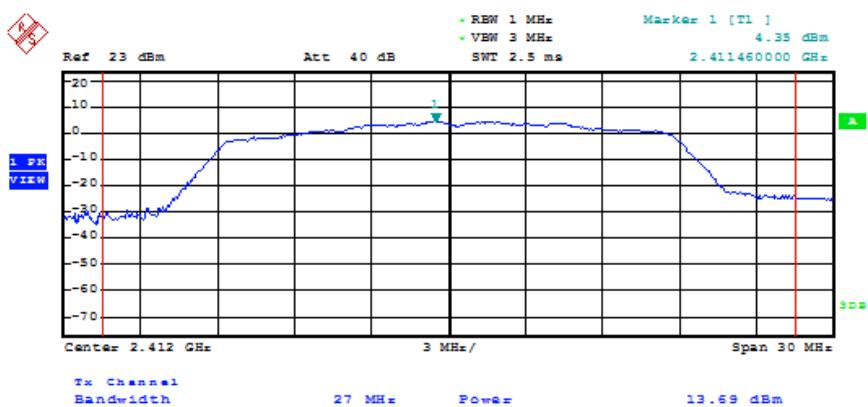


802.11n-HT20-MCS7-Middle Channel

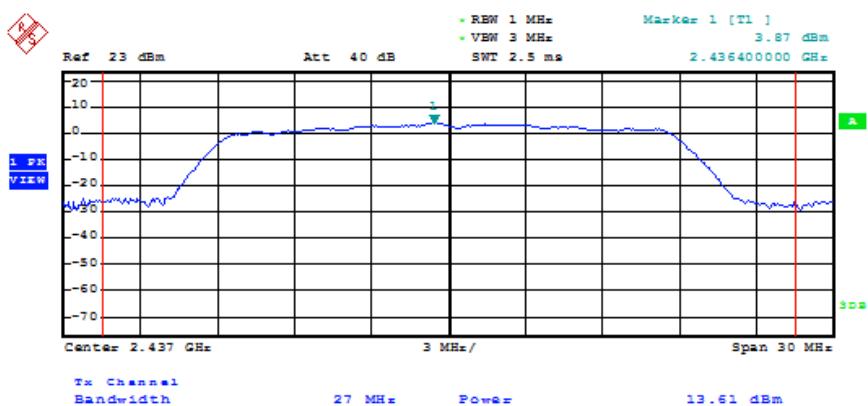


802.11n-HT20-MCS7-High Channel

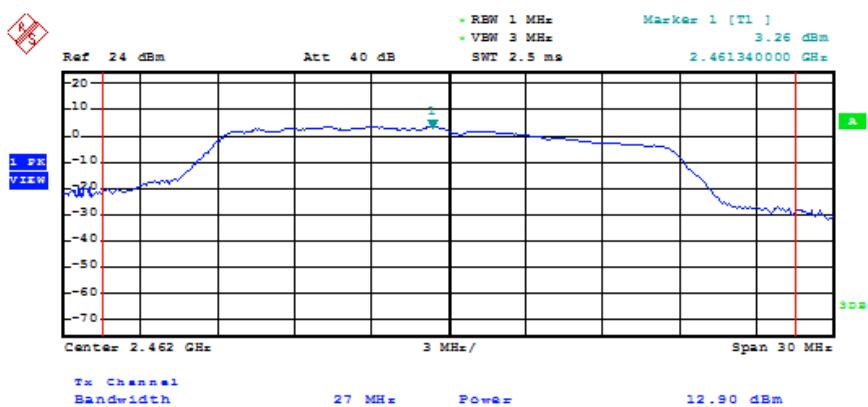


802.11n-HT40-MCS7-Low Channel

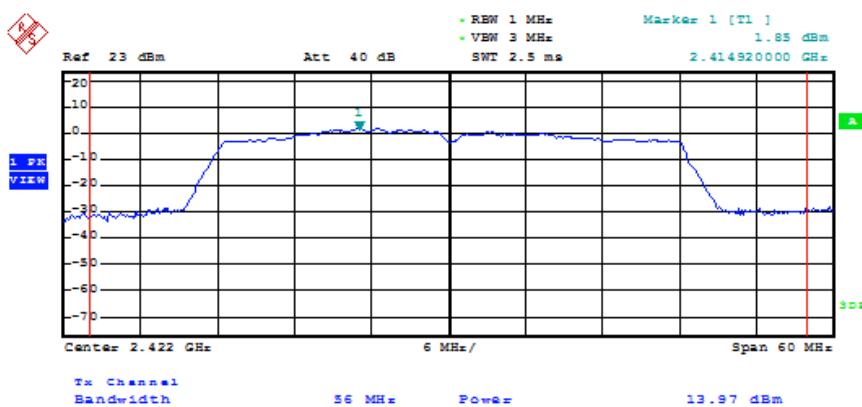

802.11n-HT40-MCS7-Middle Channel

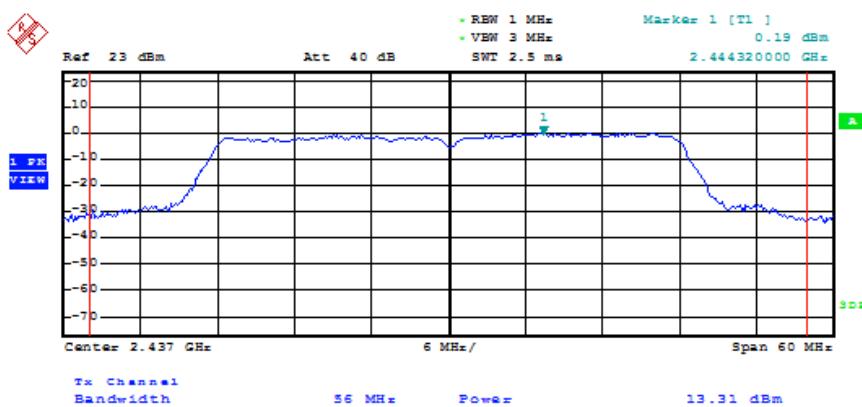

802.11n-HT40-MCS7-High Channel

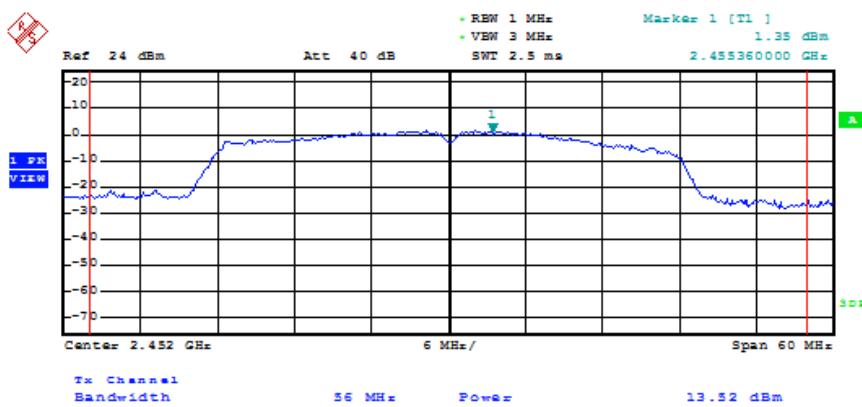

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±5.10 dB.

8.2 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

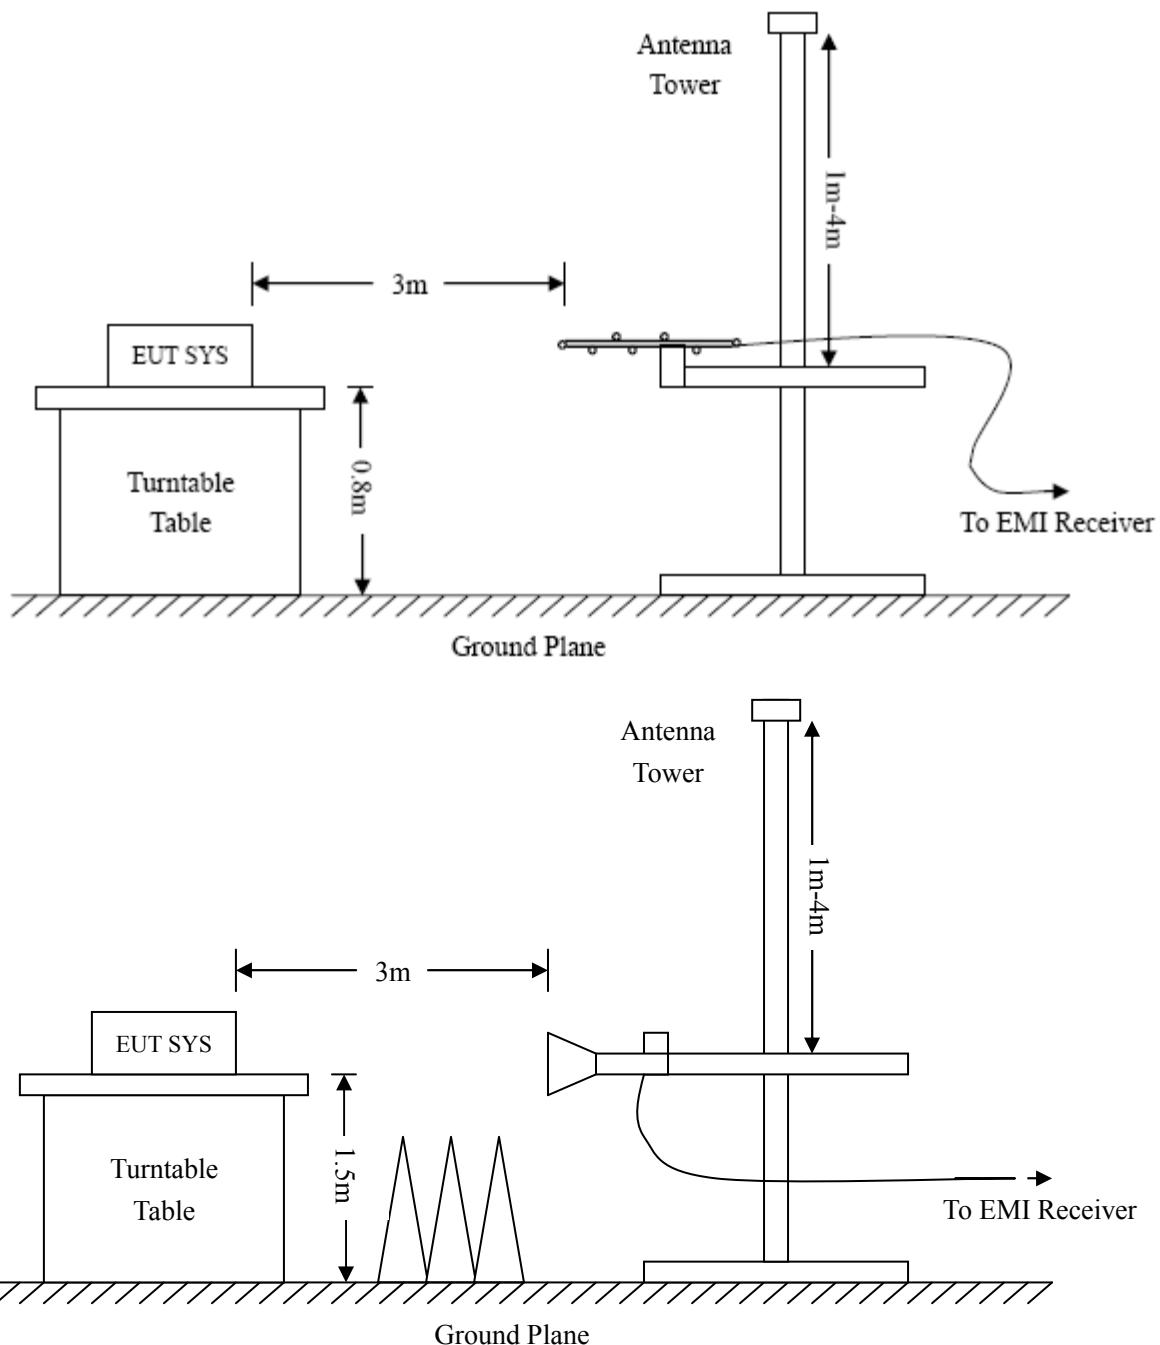

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:


Note:

1. *Worst-case radiated emission below 1GHz is 802.11b (CH Low) of WIFI 1 mode.*
2. *Worst-case radiated emission above 1GHz is 802.11g (CH Low, Middle, High) of WIFI 3 mode.*

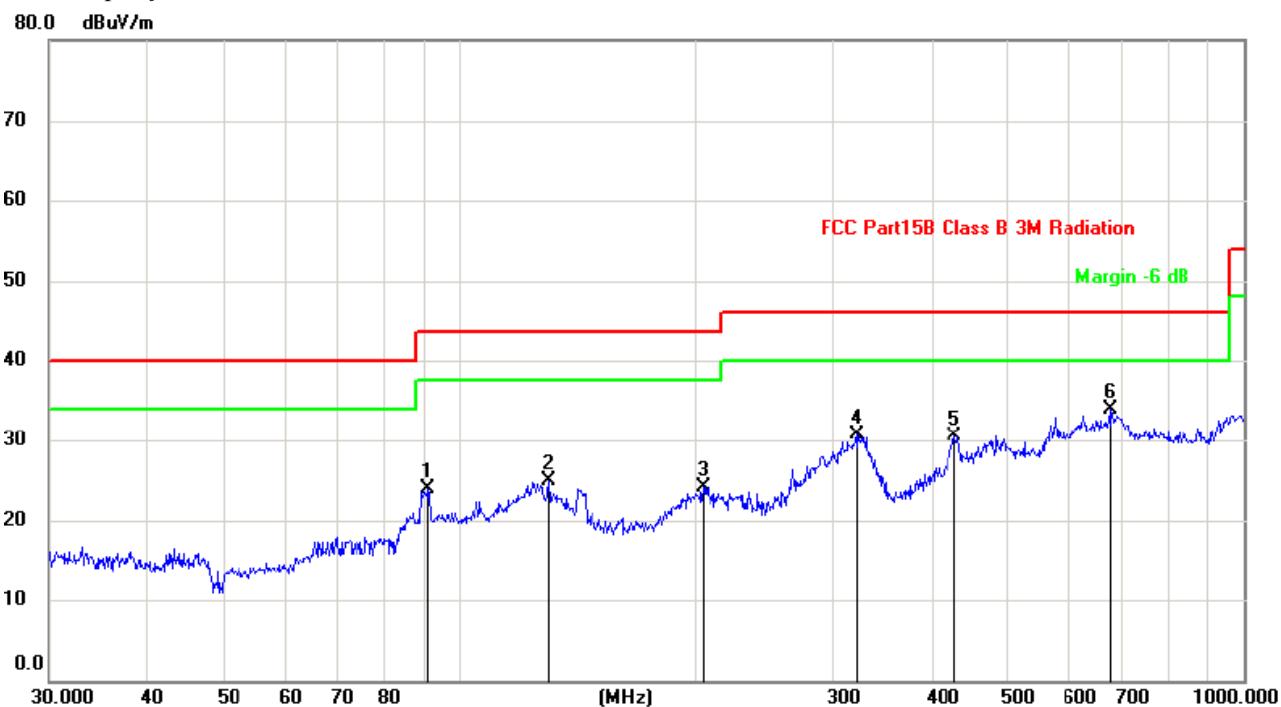Plot of Radiated Emissions Test Data (30MHz to 1GHz): 802.11b (CH Low) of WIFI 1*Test Specification: Horizontal*

No.	Mk.	Measure- ment		Limit	Over	Antenna Height	Table Degree		
		MHz	dB _{uV/m}				Detector	cm	degree
1		91.1746	23.83	43.50	-19.67	QP			
2		129.9226	24.87	43.50	-18.63	QP			
3		204.2377	24.15	43.50	-19.35	QP			
4		321.0608	30.69	46.00	-15.31	QP			
5		428.0193	30.47	46.00	-15.53	QP			
6	*	675.2080	33.87	46.00	-12.13	QP			

Test Specification: Vertical

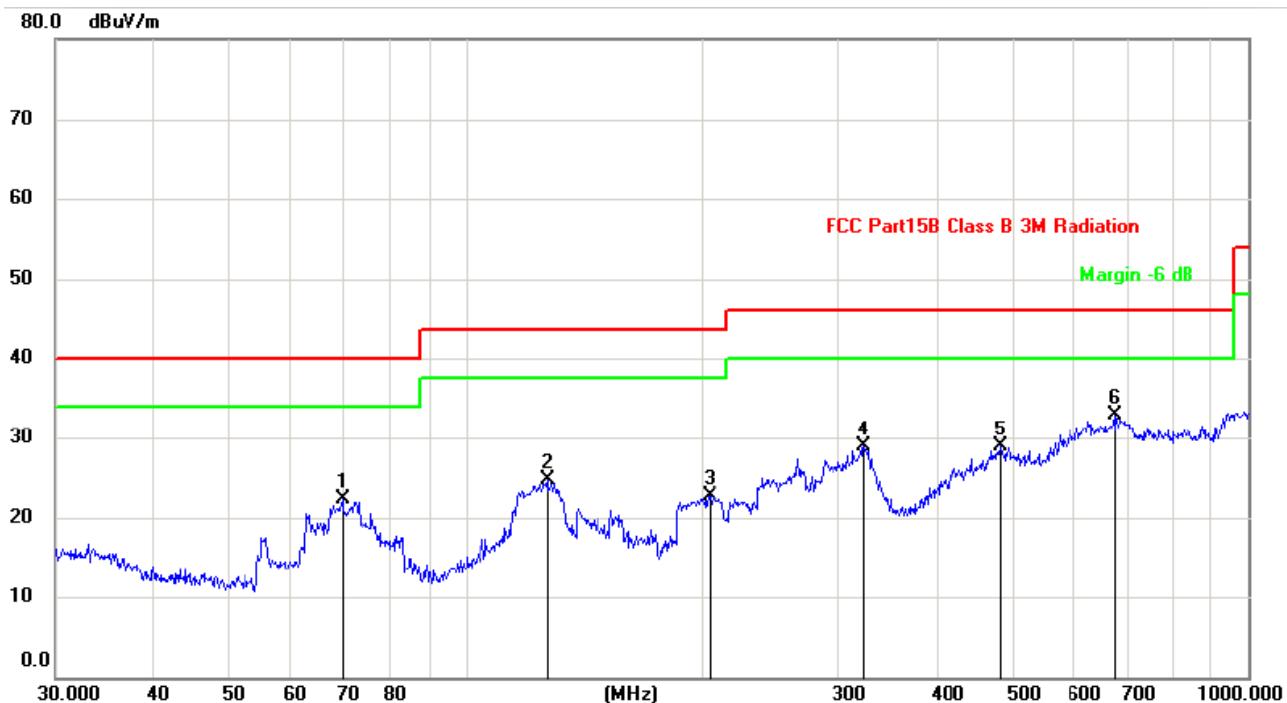

No.	Mk.	Measure- ment		Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
		Freq. MHz	dBuV/m						
1	69.6005	22.38	40.00	-17.62	QP				
2	127.2176	24.70	43.50	-18.80	QP				
3	205.6751	22.67	43.50	-20.83	QP				
4	323.3204	28.82	46.00	-17.18	QP				
5	483.9094	28.99	46.00	-17.01	QP				
6	*	675.2080	32.87	46.00	-13.13	QP			

Spurious Emissions Above 1GHz

Test Mode: 802.11g of WIFI 3:

Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low channel-2412MHz					
4824.000	51.39	74	-22.61	H	PK
4824.000	38.12	54	-15.88	H	AV
7236.000	49.27	74	-24.73	H	PK
7236.000	35.25	54	-18.75	H	AV
4824.000	51.88	74	-22.12	V	PK
4824.000	38.54	54	-15.46	V	AV
7236.000	50.07	74	-23.93	V	PK
7236.000	36.39	54	-17.61	V	AV
Middle channel-2437MHz					
4874.000	51.11	74	-22.89	H	PK
4874.000	39.29	54	-14.71	H	AV
7311.000	48.6	74	-25.4	H	PK
7311.000	36.49	54	-17.51	H	AV
4874.000	53.08	74	-20.92	V	PK
4874.000	39.87	54	-14.13	V	AV
7311.000	49.62	74	-24.38	V	PK
7311.000	36.55	54	-17.45	V	AV
High channel-2462MHz					
4924.000	50.16	74	-23.84	H	PK
4924.000	36.91	54	-17.09	H	AV
7386.000	48.72	74	-25.28	H	PK
7386.000	36.27	54	-17.73	H	AV
4924.000	52.27	74	-21.73	V	PK
4924.000	38.85	54	-15.15	V	AV
7386.000	50.12	74	-23.88	V	PK
7386.000	37.49	54	-16.51	V	AV

Note:


1. Calculation of result is: Result (dBm) = Reading (dBm) + Correction Factor (dB).
2. Correction Factor (dB)=Ant. Factor + Cable Loss – Ampl. Gain.
3. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The worst data of spurious (Conducted)


Note: We pre-scan all WIFI module, the worst data is WIFI 3.

802.11b-Lowest


Lowest

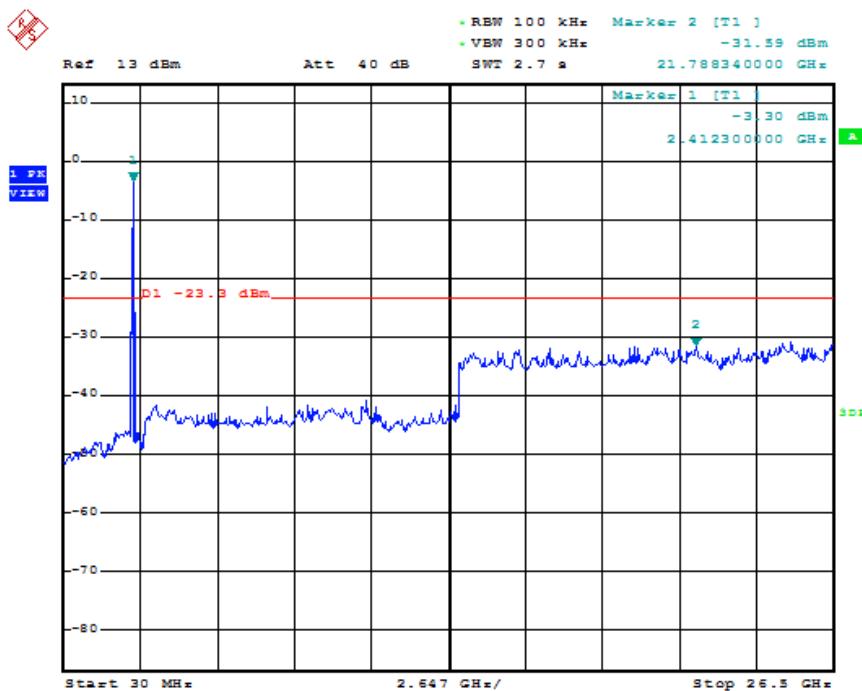

Middle

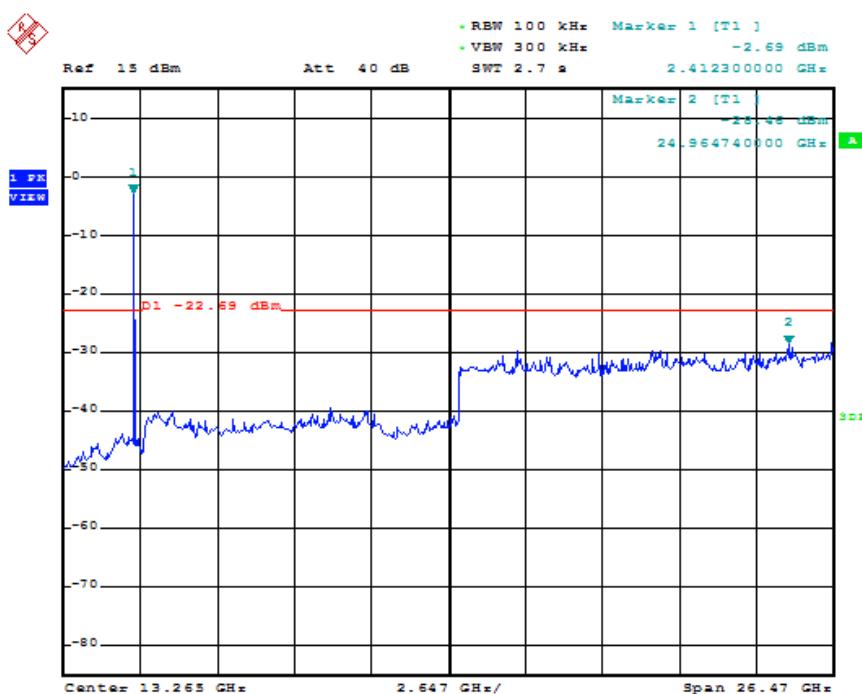


Highest

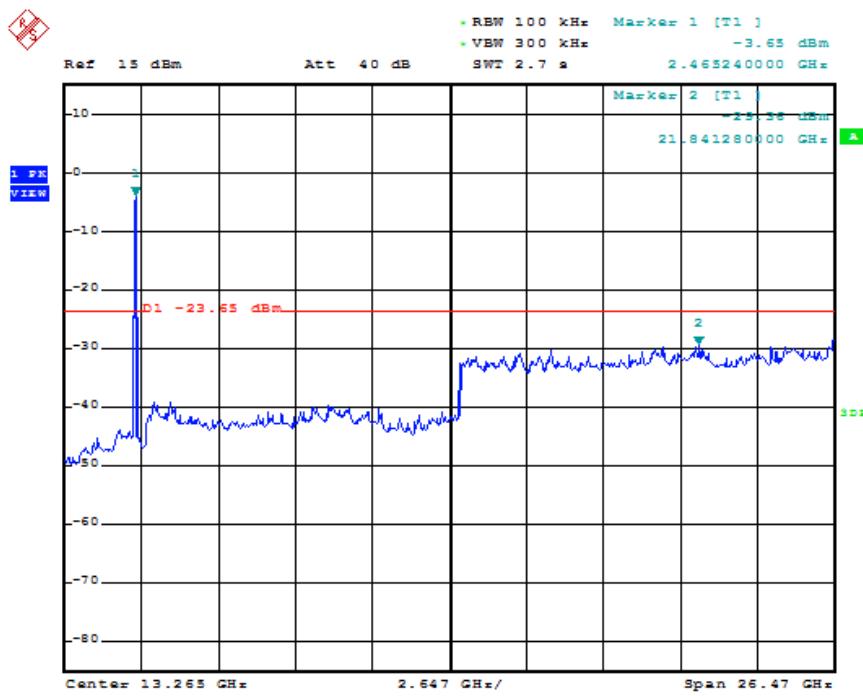


802.11g-Lowest


Lowest

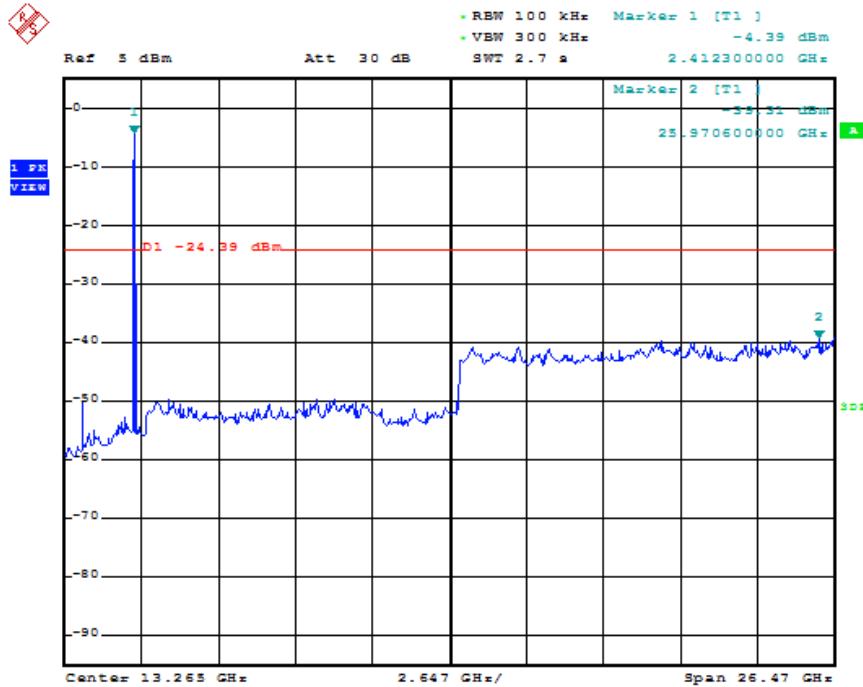

Middle

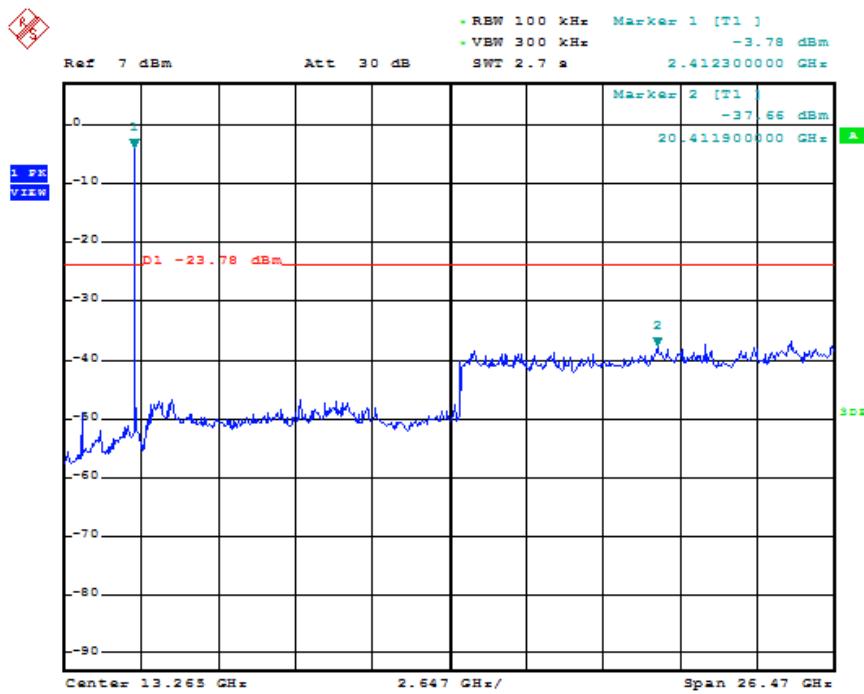


Highest

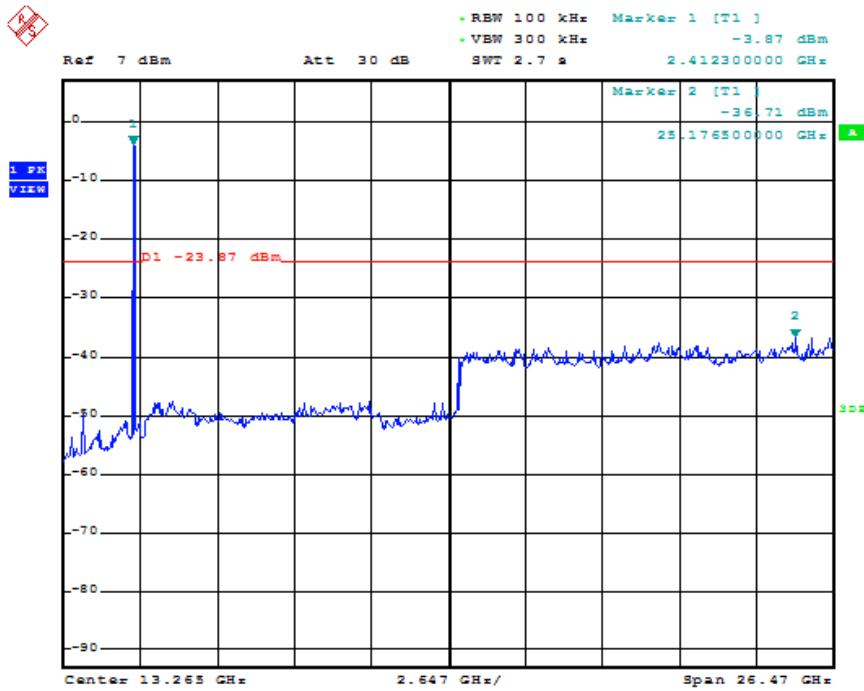


802.11n-HT20-Lowest


Lowest

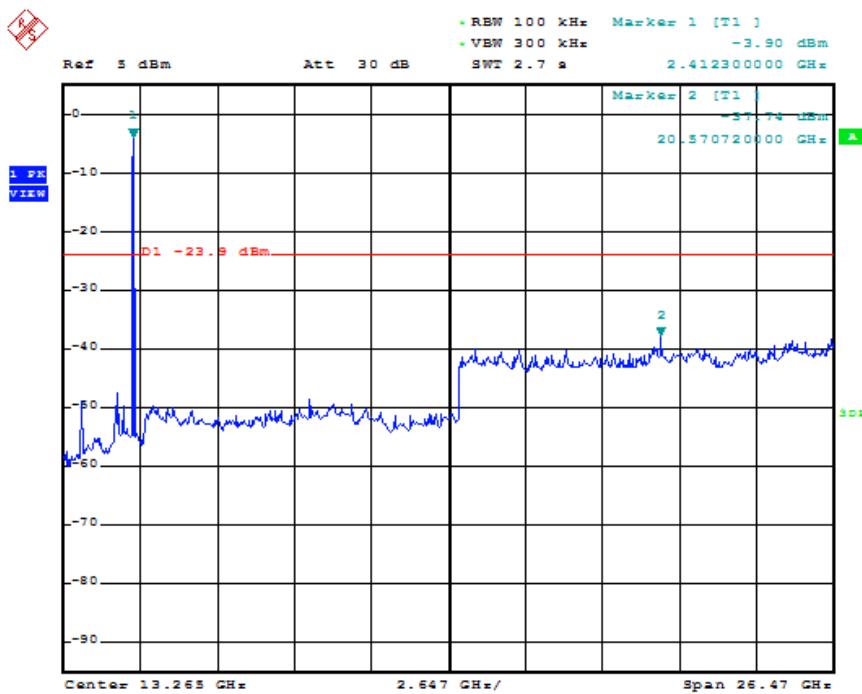

Middle

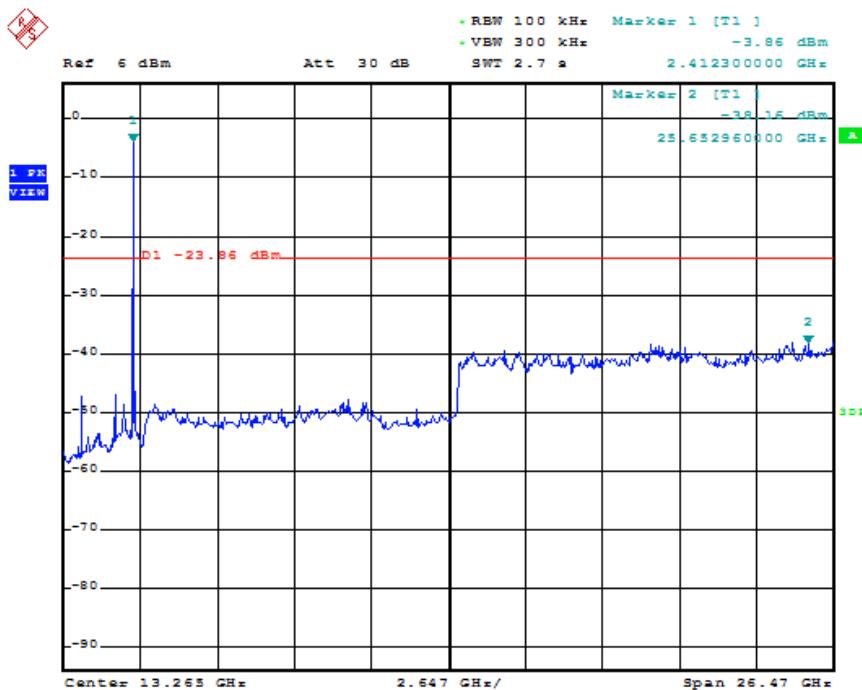


Highest

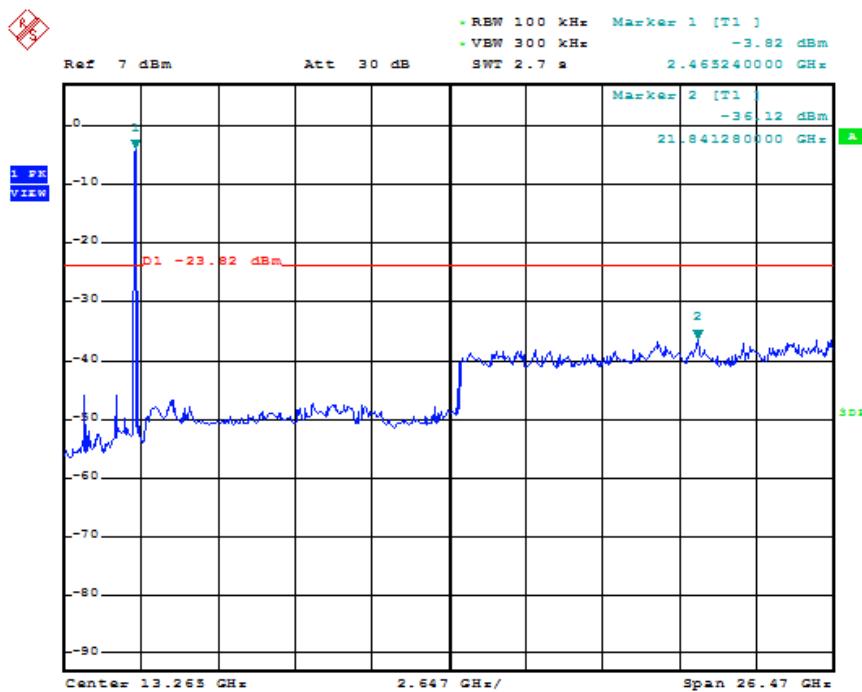


802.11n-HT40-Lowest


Lowest

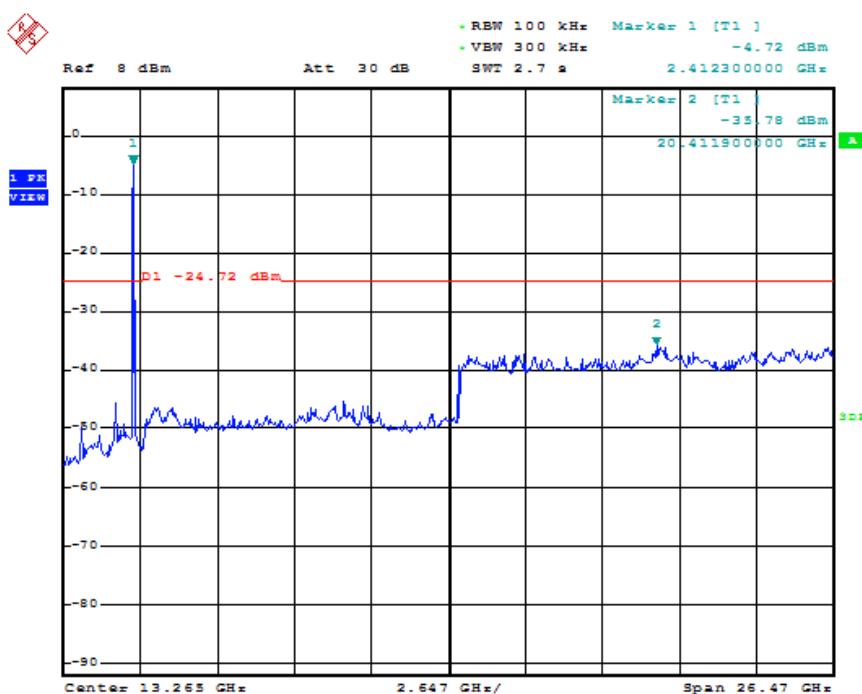

Middle

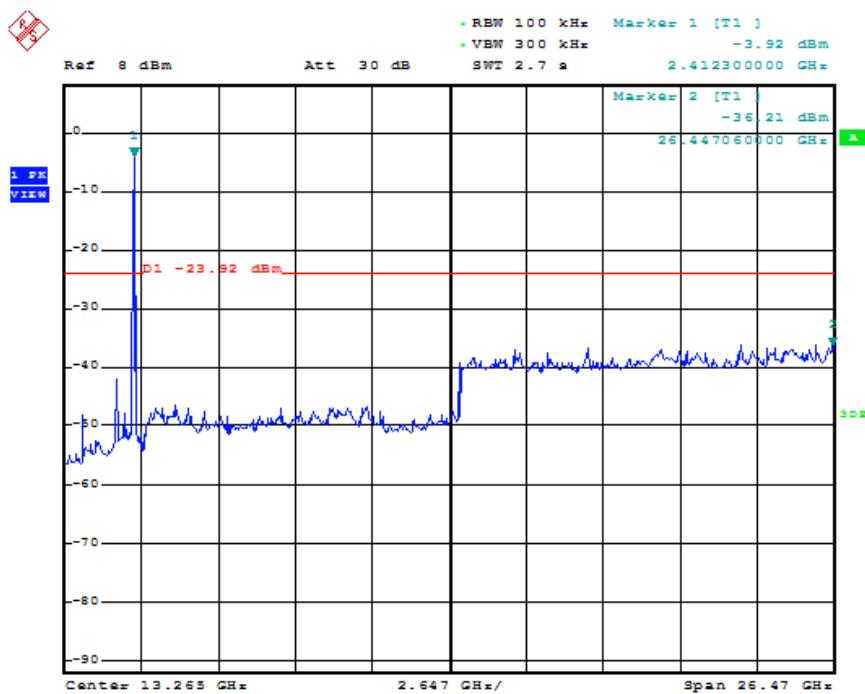

Highest

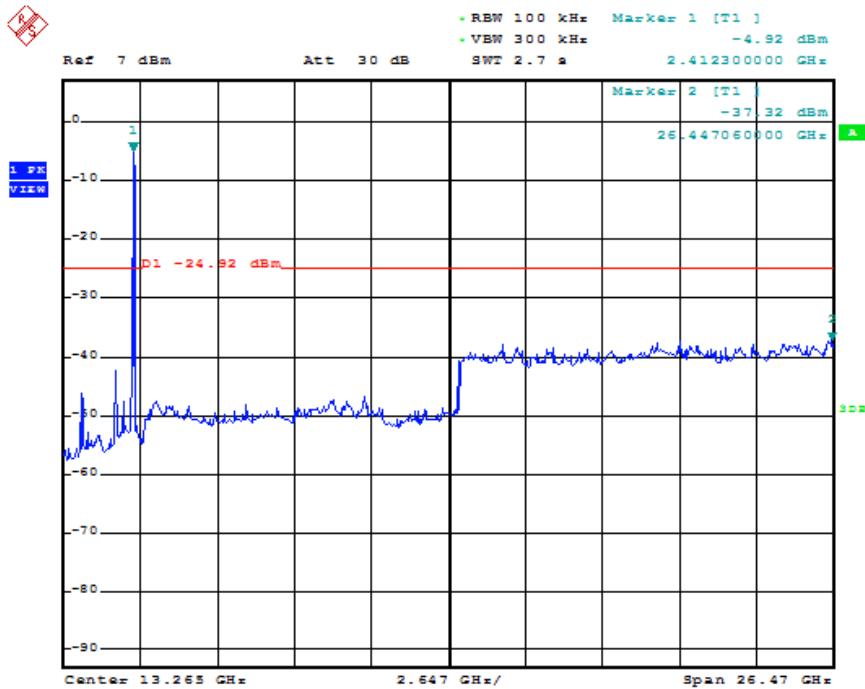

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

802.11b- Bandedge (Radiated)

Note: we pre-scan all modes, the worst data is 802.11b mode of WIFI 2.


Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2400	54.08	74	-19.92	Peak
LOW	2400	37.92	54	-16.08	Average
	2483.5	50.97	74	-23.03	Peak
HIGH	2483.5	37.05	54	-16.95	Average

Bandedge (Conducted)


Note: we pre-scan all WIFI modules, the worst data is WIFI 2.

802.11b-Lowest


Lowest

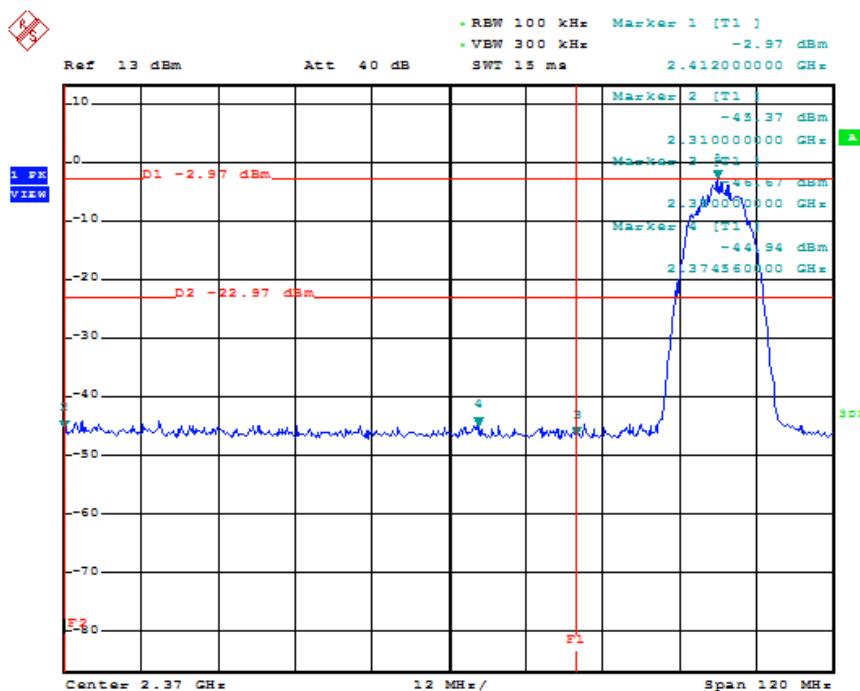


Highest

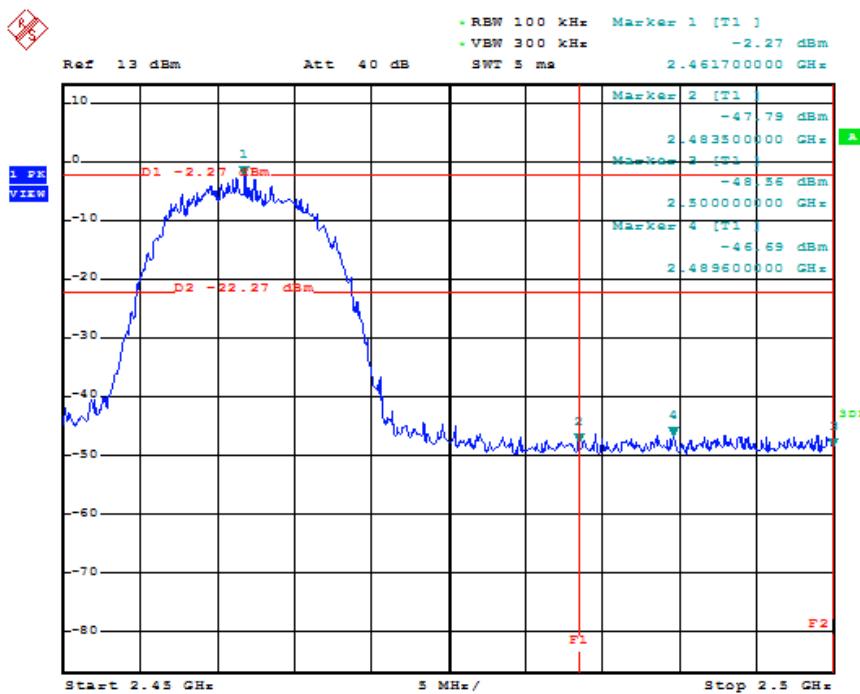

802.11g-Lowest

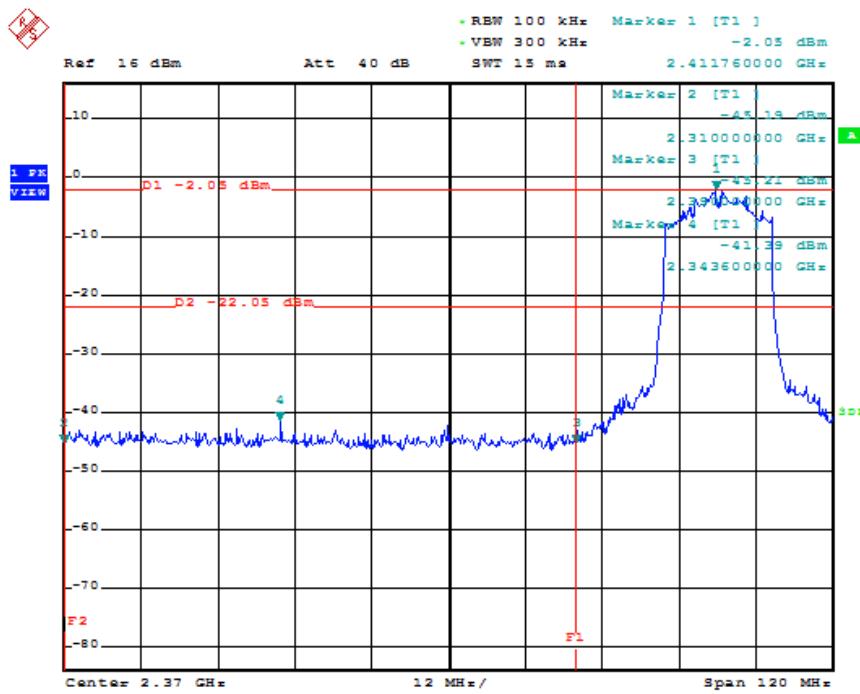


Highest

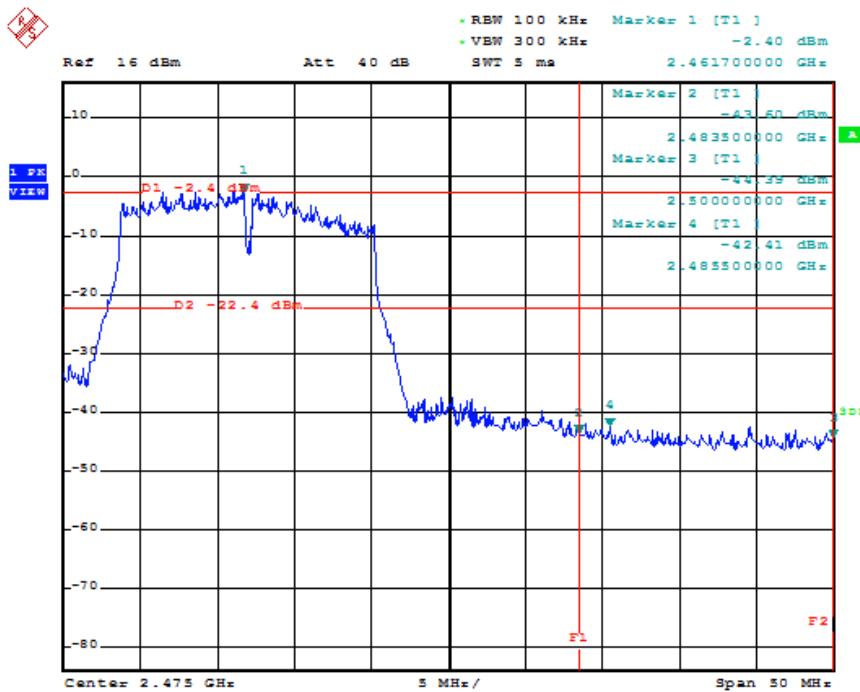


802.11n-HT20-Lowest


Lowest

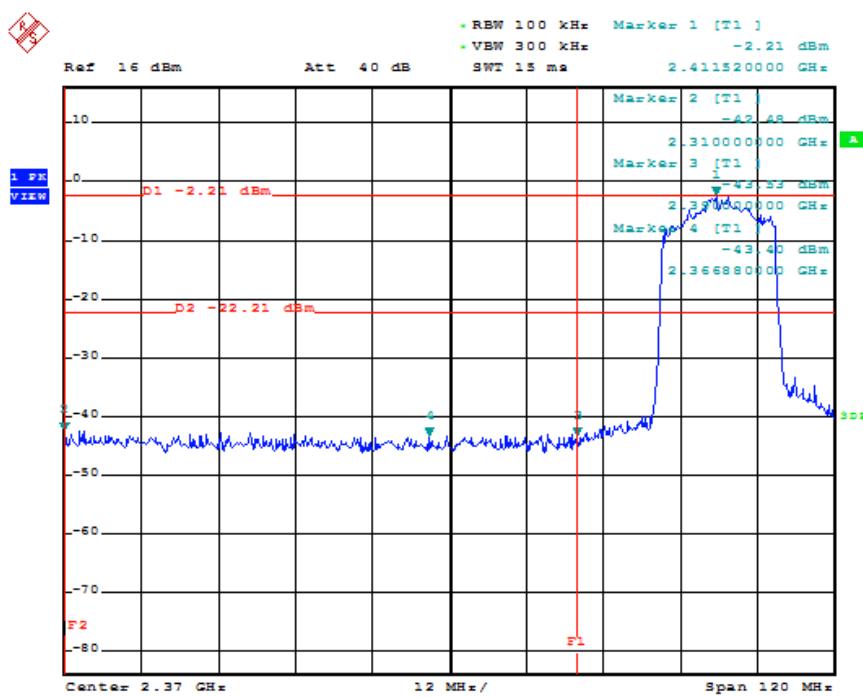


Highest

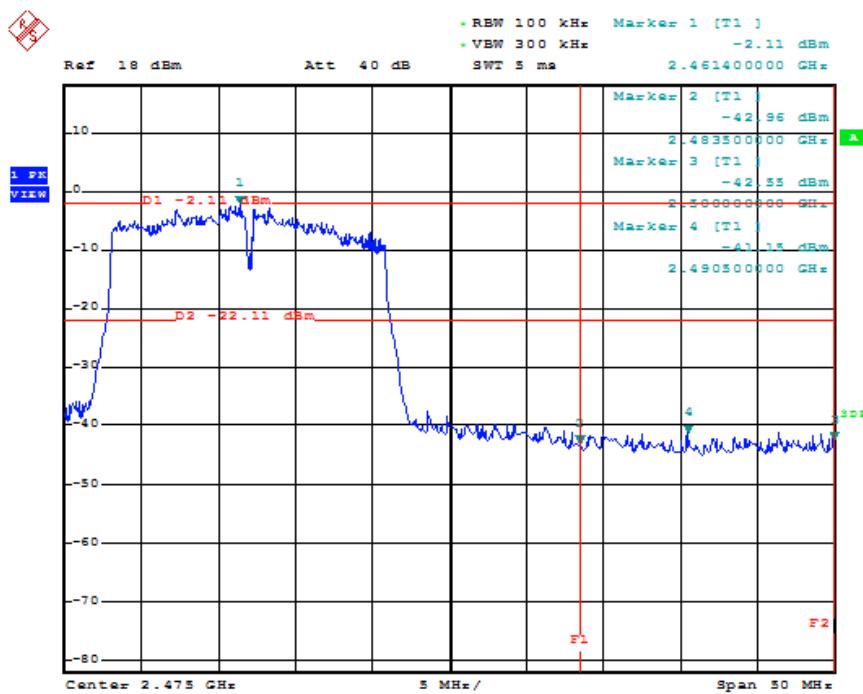

802.11n-HT40-Lowest

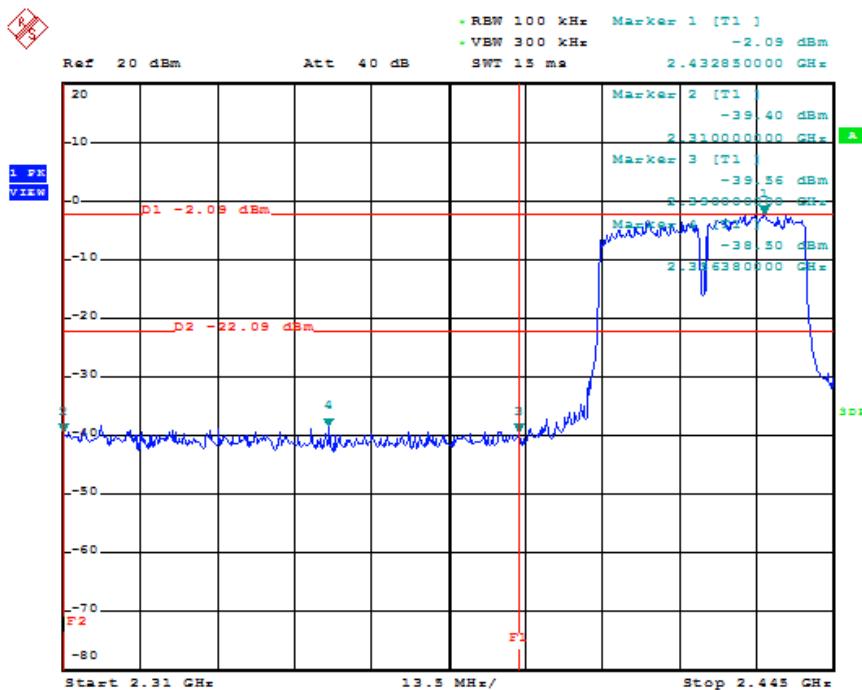

Highest

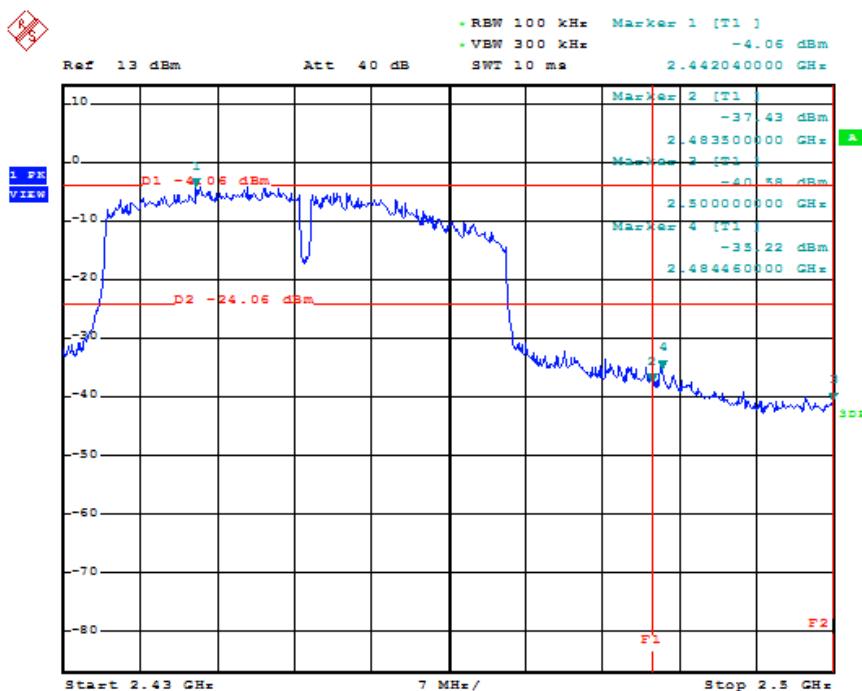

10. Conducted Emissions

10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.3 Basic Test Setup Block Diagram

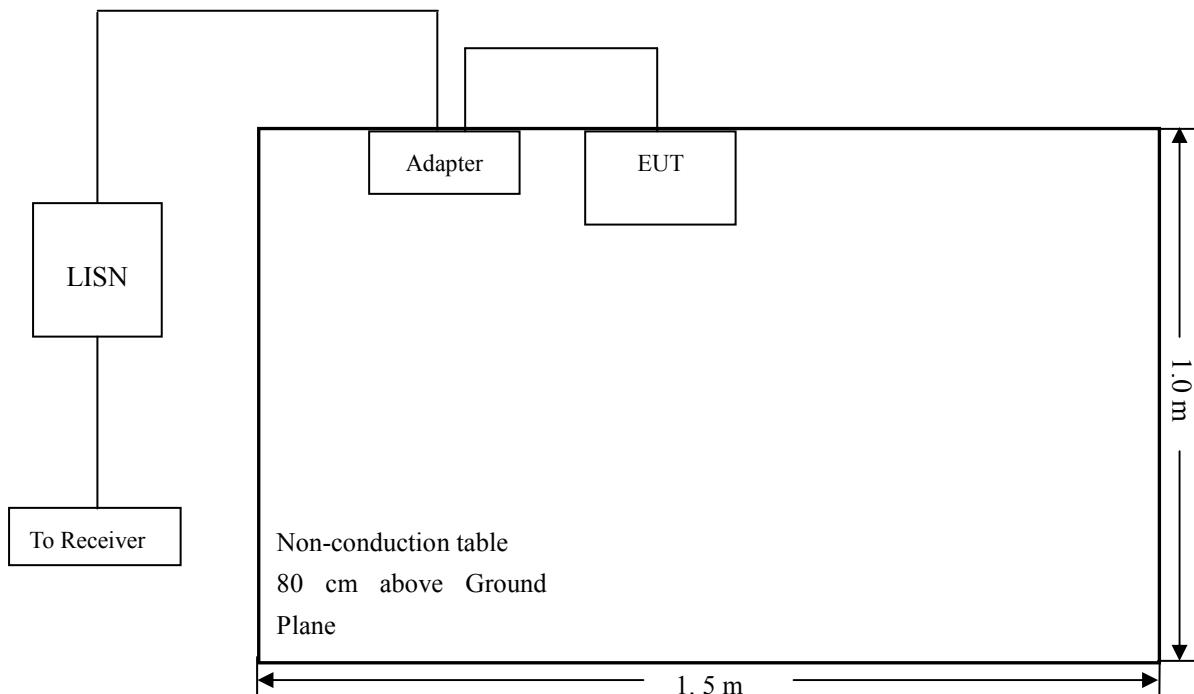

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

10.6 Summary of Test Results/Plots


According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device

Note: we are pre-scan all modes, the worst data is 802.11n HT20(Low) mode of WIFI 1.

10.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

Test Specification: Neutral

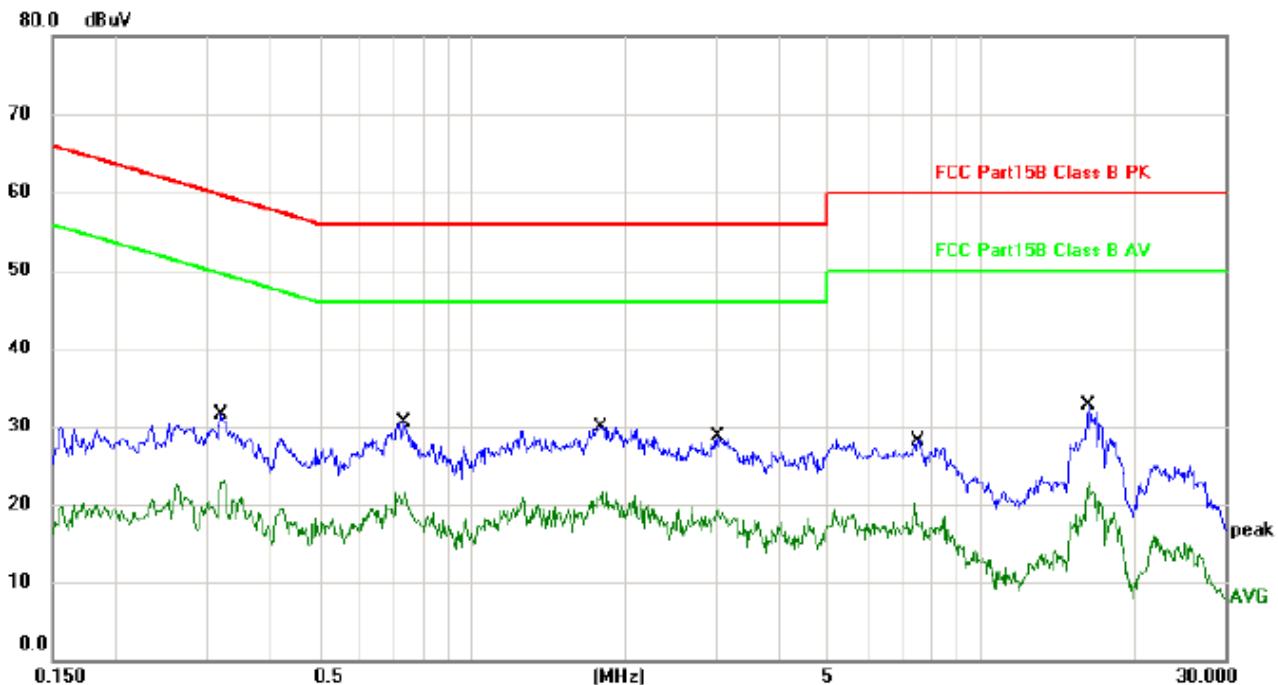

No.	Mk.	Freq. MHz	Measure- ment dBuV	Limit dBuV	Over dB	Over	
						Detector	Comment
1		0.3200	31.59	59.70	-28.11	QP	
2		0.3200	20.12	49.70	-29.58	AVG	
3	*	0.7340	30.56	56.00	-25.44	QP	
4		0.7340	18.55	46.00	-27.45	AVG	
5		1.7860	29.90	56.00	-26.10	QP	
6		1.7860	20.55	46.00	-25.45	AVG	
7		3.0300	28.74	56.00	-27.26	QP	
8		3.0300	18.22	46.00	-27.78	AVG	
9		7.4899	28.11	60.00	-31.89	QP	
10		7.4899	16.27	50.00	-33.73	AVG	
11		16.1779	32.70	60.00	-27.30	QP	
12		16.1779	12.98	50.00	-37.02	AVG	

Test Specification: Line



No.	Mk.	Freq. MHz	Measure- ment dBuV	Limit dBuV	Over dB	Over	
						Detector	Comment
1		0.2979	35.62	60.30	-24.68	QP	
2		0.2979	23.24	50.30	-27.06	AVG	
3		0.3659	35.51	58.59	-23.08	QP	
4		0.3659	19.73	48.59	-28.86	AVG	
5	*	1.5900	33.80	56.00	-22.20	QP	
6		1.5900	22.41	46.00	-23.59	AVG	
7		7.0698	31.20	60.00	-28.80	QP	
8		7.0698	17.49	50.00	-32.51	AVG	
9		10.4859	27.98	60.00	-32.02	QP	
10		10.4859	16.32	50.00	-33.68	AVG	
11		25.8580	31.81	60.00	-28.19	QP	
12		25.8580	16.42	50.00	-33.58	AVG	

***** END OF REPORT *****