



# TEST REPORT

**APPLICANT** : Shenzhen Jimi IoT Co., Ltd.  
**PRODUCT NAME** : Smart 4G Employee ID Card  
**MODEL NAME** : PL200  
**BRAND NAME** : JimiIoT  
**FCC ID** : 2AMLF-PL200  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**RECEIPT DATE** : 2023-09-27  
**TEST DATE** : 2023-10-08 to 2023-10-30  
**ISSUE DATE** : 2023-11-16



Edited by: Peng Mi  
Peng-Mi (Rapporteur)  
Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Summary of Test Result ..... 4
  - 1.1. Testing Applied Standards ..... 5
  - 1.2. Test Equipment List ..... 6
  - 1.3. Measurement Uncertainty ..... 8
  - 1.4. Testing Laboratory ..... 8
- 2. General Description ..... 9
  - 2.1. Information of Applicant and Manufacturer ..... 9
  - 2.2. Information of EUT ..... 9
  - 2.3. Channel List of EUT ..... 10
  - 2.4. Test Configuration of EUT ..... 11
  - 2.5. Test Conditions ..... 11
  - 2.6. Test Setup Layout Diagram ..... 11
- 3. Test Results ..... 14
  - 3.1. Antenna Requirement ..... 14
  - 3.2. Hopping Mechanism ..... 14
  - 3.3. Number of Hopping Frequency ..... 15
  - 3.4. Duty Cycle of Test Signal ..... 16
  - 3.5. Maximum Peak Conducted Output Power ..... 17
  - 3.6. Maximum Average Conducted Output Power ..... 18
  - 3.7. 20 dB Bandwidth ..... 19
  - 3.8. Carried Frequency Separation ..... 20
  - 3.9. Time of Occupancy (Dwell time) ..... 21
  - 3.10. Conducted Spurious Emissions and Band Edge ..... 22
  - 3.11. Conducted Emission ..... 23
  - 3.12. Restricted Frequency Bands ..... 24
  - 3.13. Radiated Emission ..... 25



**Annex A Test Data and Result .....27**

Change History		
Version	Date	Reason for change
1.0	2023-11-16	First edition



# 1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Oct. 08, 2023	Zhong Yanshan	PASS	No deviation
11	15.207	Conducted Emission	Oct. 08, 2023	Wang Deyong	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Oct. 30, 2023	Yang Lian	PASS	No deviation
13	15.209,	Radiated	Oct. 30, 2023	Yang Lian	PASS	No deviation



	15.247(d)	Emission				
--	-----------	----------	--	--	--	--

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



## 1.2. Test Equipment List

### 1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

### 1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

### 1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



### 1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

### 1.4. Testing Laboratory

<b>Laboratory Name</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone</b>	+86 755 36698555
<b>Facsimile</b>	+86 755 36698525
<b>FCC Designation Number</b>	CN1192
<b>FCC Test Firm Registration Number</b>	226174





## 2. General Description

### 2.1. Information of Applicant and Manufacturer

<b>Applicant</b>	Shenzhen Jimi IoT Co., Ltd.
<b>Applicant Address</b>	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China
<b>Manufacturer</b>	Shenzhen Jimi IoT Co., Ltd.
<b>Manufacturer Address</b>	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

### 2.2. Information of EUT

<b>Product Name:</b>	Smart 4G Employee ID Card	
<b>Sample No.:</b>	1#	
<b>Hardware Version:</b>	PL200_MB_V1.0	
<b>Software Version:</b>	PL200_PL200_AAHB_ENGLISH_V1.1.0_231110.1900	
<b>Equipment Type:</b>	Bluetooth classic	
<b>Bluetooth Version:</b>	5.0	
<b>Modulation Type:</b>	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
<b>Operating Frequency Range:</b>	2402MHz-2480MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	0.71dBi	
<b>Accessory Information:</b>	Battery	
	Brand Name:	N/A
	Model No.:	PL 605252
	Serial No.:	N/A
	Capacity:	2000mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2V
	Manufacturer:	Huizhou city of KM-Chi Technology Co. Ltd

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	<b>2402</b>	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	<b>78</b>	<b>2480</b>
19	2421	<b>39</b>	<b>2441</b>	59	2461		

**Note 1:** The black bold channels were selected for test.

## 2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

## 2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

## 2.6. Test Setup Layout Diagram

### 2.6.1. Conducted Measurement

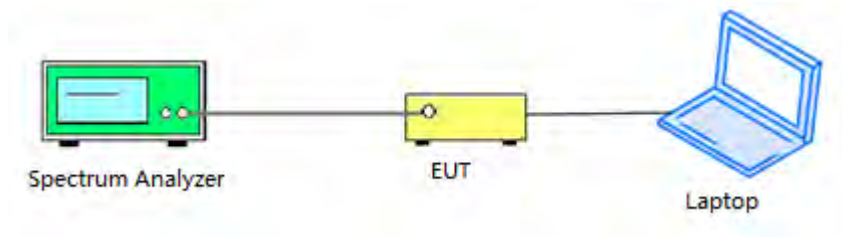


### 2.6.2. Conducted Emission Measurement

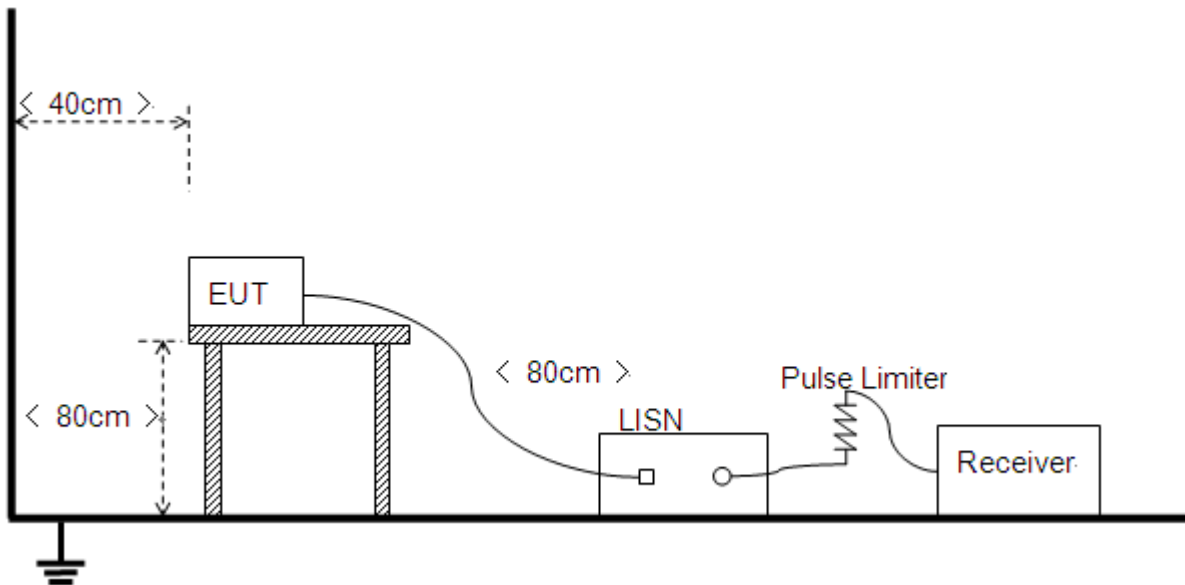


### 2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

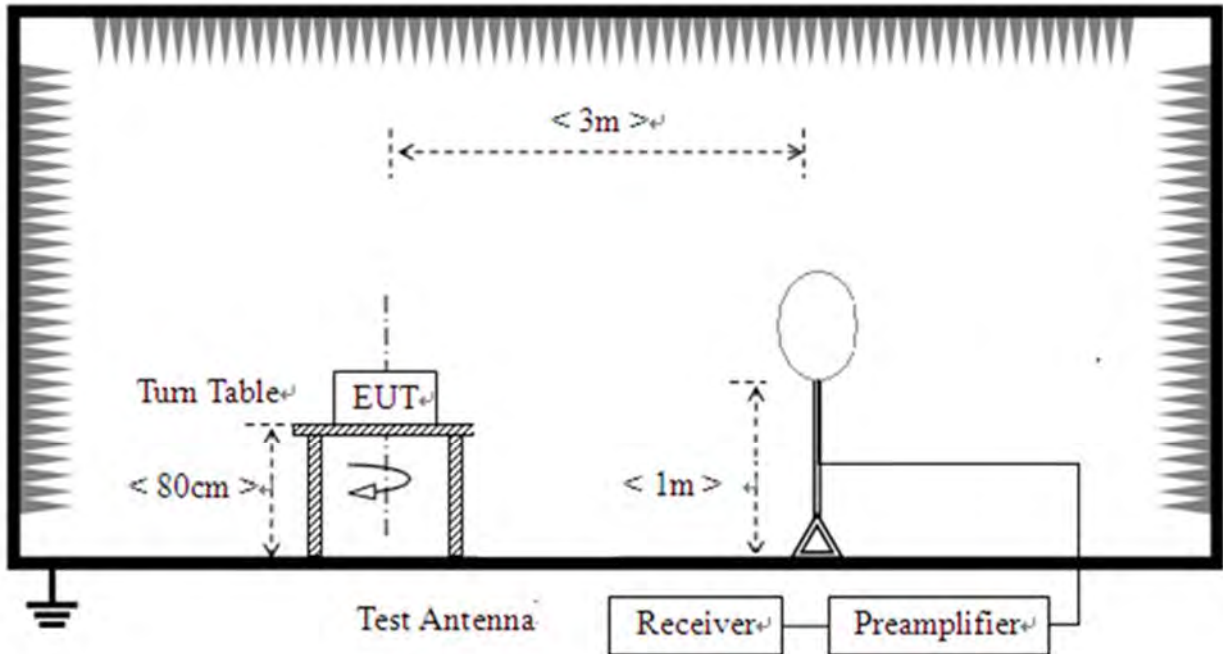

2) For radiated emissions from 30MHz to 1GHz

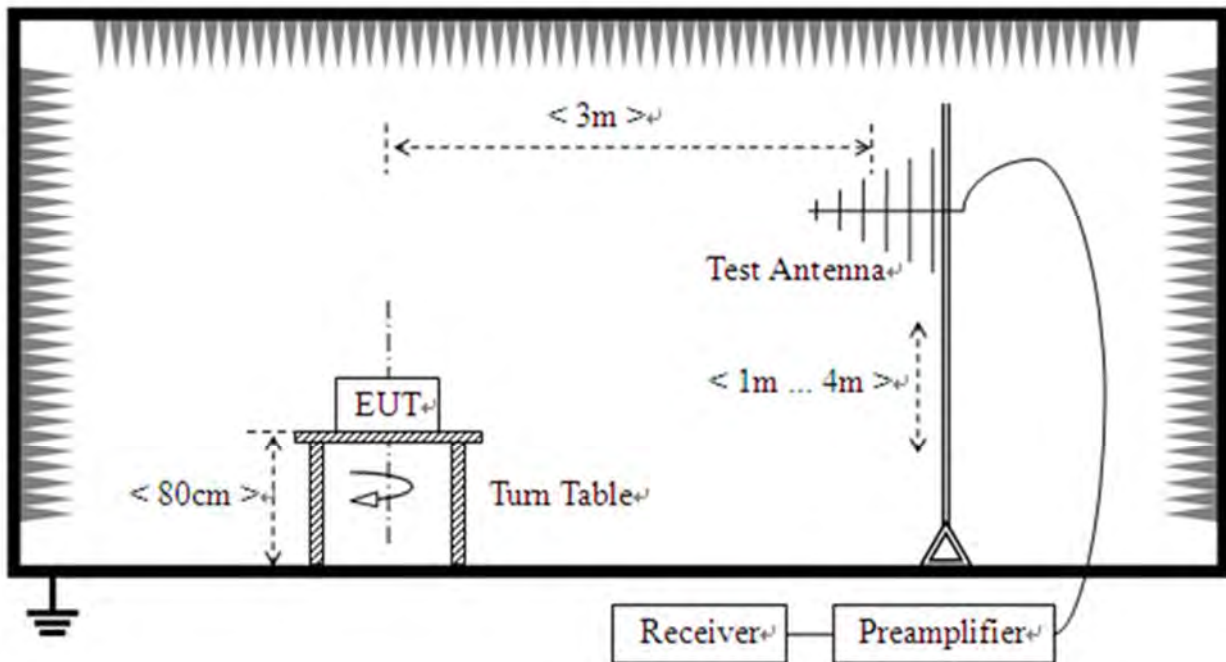

3) For radiated emissions above 1GHz

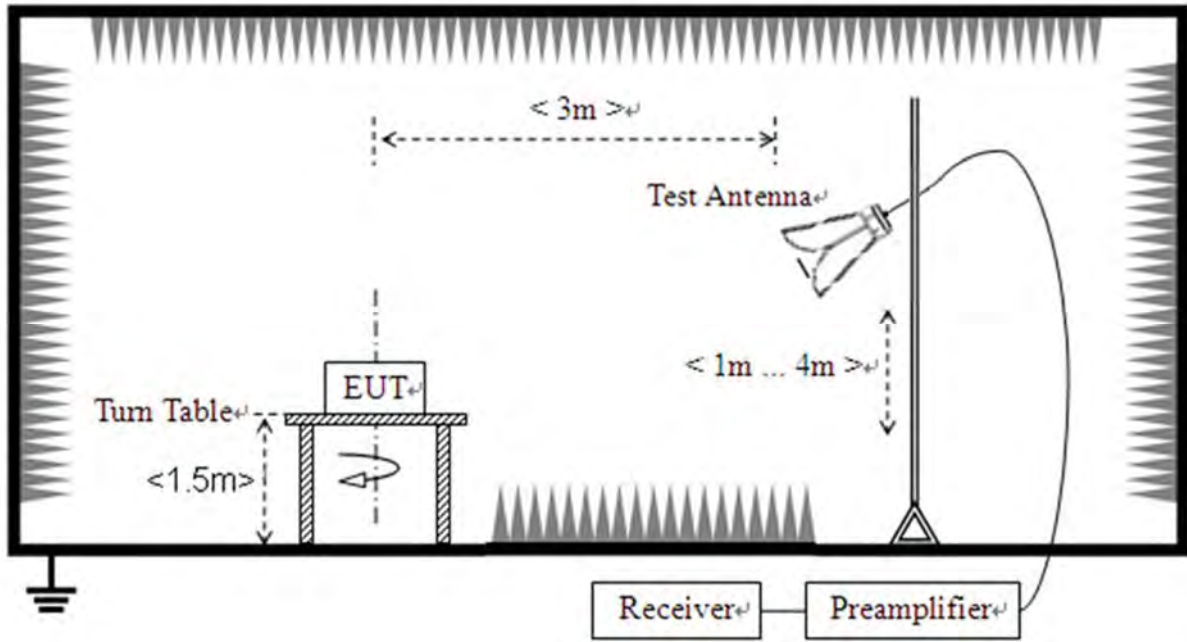



## 3. Test Results

### 3.1. Antenna Requirement

#### 3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.

### 3.2. Hopping Mechanism

#### 3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".



### 3.3. Number of Hopping Frequency

#### 3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

#### 3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

#### 3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.3.4. Test Result

Refer to Annex A.1 in this report.



## 3.4. Duty Cycle of Test Signal

### 3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration ( $T$ ) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed  $T$  at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle ( $D$ ). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be non constant.

### 3.4.2. Test Result

Refer to Annex A.2 in this report.





## **3.5. Maximum Peak Conducted Output Power**

### **3.5.1. Requirement**

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### **3.5.2. Test Procedures**

KDB 558074 Section 8.3.1 was used in order to prove compliance.

### **3.5.3. Test Setup Layout**

Refer to chapter 2.6.1 in this report.

### **3.5.4. Test Result**

Refer to Annex A.3 in this report.



## **3.6. Maximum Average Conducted Output Power**

### **3.6.1. Requirement**

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### **3.6.2. Test Procedures**

KDB 558074 Section 8.3.2 was used in order to prove compliance.

### **3.6.3. Test Setup Layout**

Refer to chapter 2.6.1 in this report.

### **3.6.4. Test Result**

Refer to Annex A.4 in this report.



## 3.7.20 dB Bandwidth

### 3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ( $10 \cdot \log 1\% = 20 \text{ dB}$ ) taking the total RF output power.

### 3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW  $\geq 3 \times$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.7.3.Test Result

Refer to Annex A.5 in this report.



## 3.8. Carried Frequency Separation

### 3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.8.4. Test Result

Refer to Annex A.6 in this report.



## 3.9. Time of Occupancy (Dwell time)

### 3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) \* (1600 / 2 / 79) \* 31.6 Millisecond  
DH3: Dwell time equal to Pulse time (ms) \* (1600 / 4 / 79) \* 31.6 Millisecond  
DH5: Dwell time equal to Pulse Time (ms) \* (1600 / 6 / 79) \* 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) \* (800 / 2 / 20) \* (0.4 \* 20) Millisecond  
DH3: Dwell time equal to Pulse time (ms) \* (800 / 4 / 20) \* (0.4 \* 20) Millisecond  
DH5: Dwell time equal to Pulse Time (ms) \* (800 / 6 / 20) \* (0.4 \* 20) Millisecond.

### 3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.9.4. Test Result

Refer to Annex A.7 in this report.



## 3.10. Conducted Spurious Emissions and Band Edge

### 3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.

Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.



### 3.11. Conducted Emission

#### 3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

#### 3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

#### 3.11.4.Test Result

Refer to Annex A.10 in this report.



## 3.12. Restricted Frequency Bands

### 3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

### 3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.12.4.Test Result

Refer to Annex A.11 in this report.





### 3.13. Radiated Emission

#### 3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



### 3.13.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

### 3.13.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.13.4. Test Result

Refer to Annex A.12 in this report.



## Annex A Test Data and Result


### A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

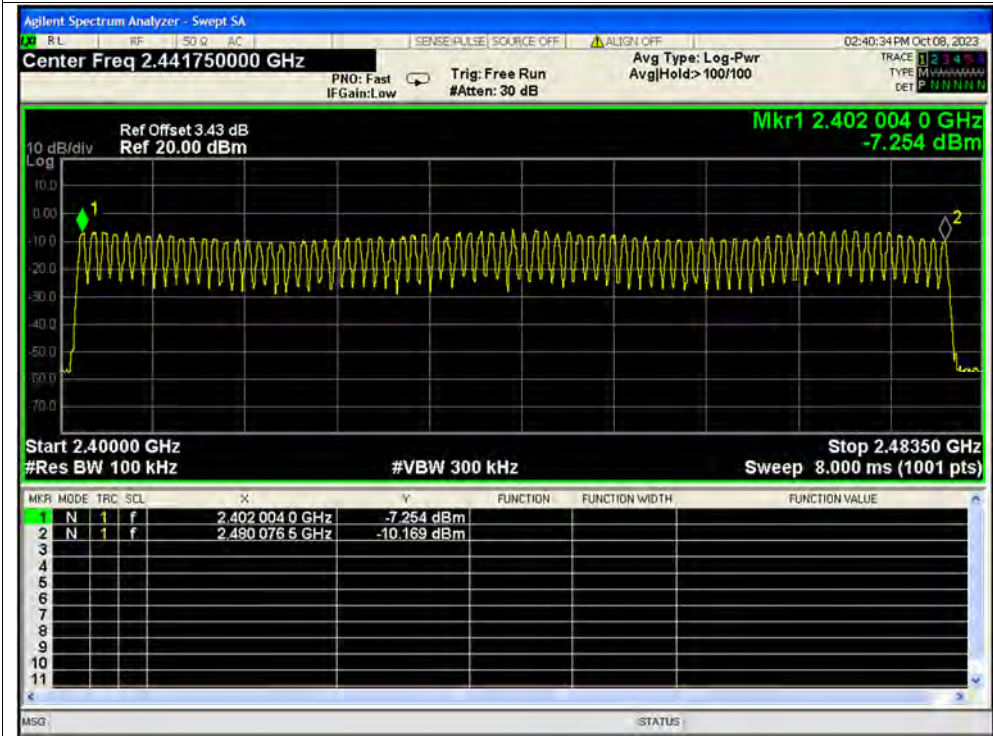


Hopping No. NVNT 2-DH5 2402MHz Ant1

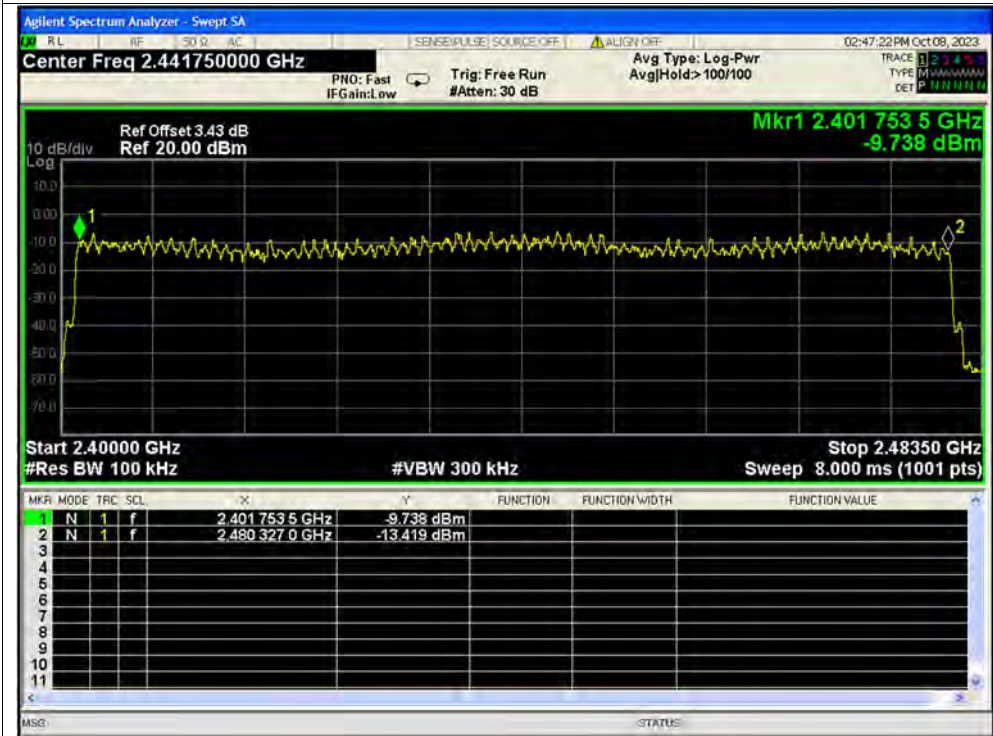



Hopping No. NVNT 3-DH5 2402MHz Ant1

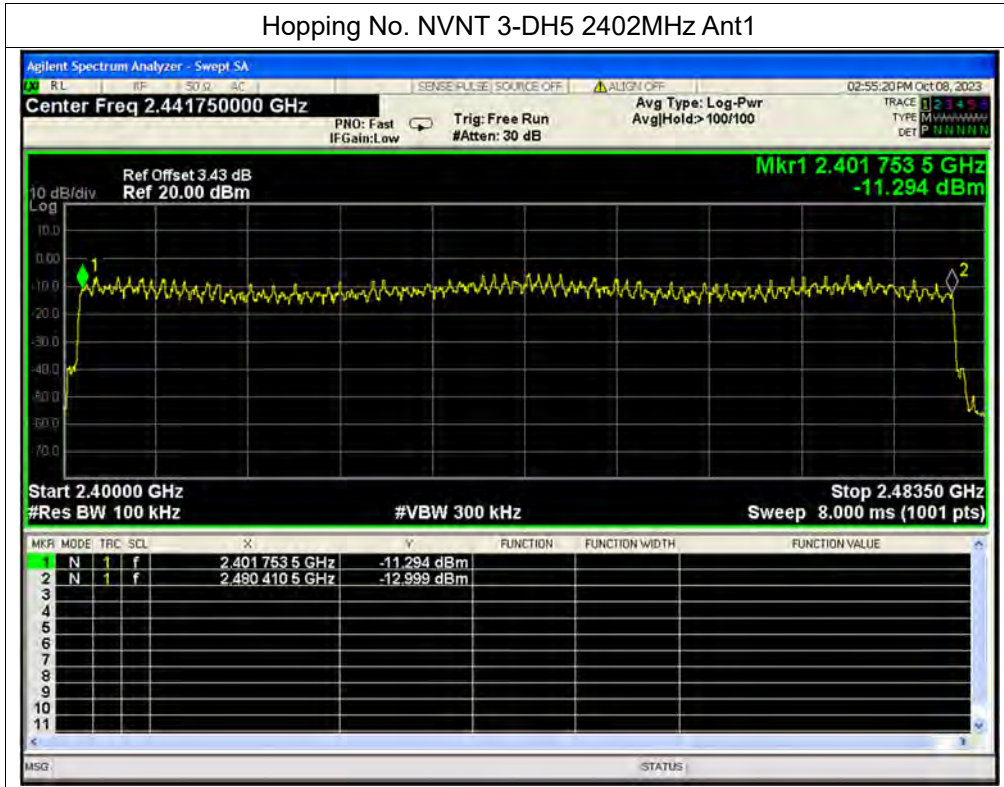


**A.2. Duty Cycle of Test Signal**

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	46.59	3.32	0.34
NVNT	1-DH5	2441	Ant1	46.59	3.32	0.34
NVNT	1-DH5	2480	Ant1	46.53	3.32	0.34
NVNT	2-DH5	2402	Ant1	77.71	1.1	0.34
NVNT	2-DH5	2441	Ant1	77.76	1.09	0.34
NVNT	2-DH5	2480	Ant1	81.82	0.87	55.56
NVNT	3-DH5	2402	Ant1	77.76	1.09	0.34
NVNT	3-DH5	2441	Ant1	77.81	1.09	0.34
NVNT	3-DH5	2480	Ant1	86.67	0.62	38.46




Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

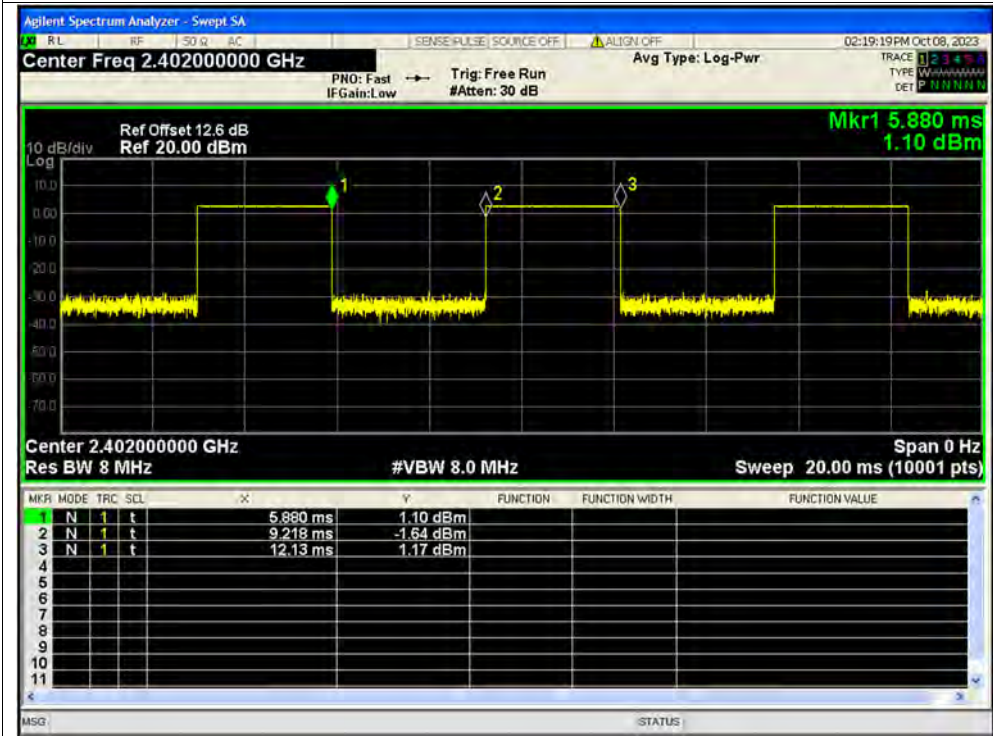


Duty Cycle NVNT 1-DH5 2441MHz Ant1

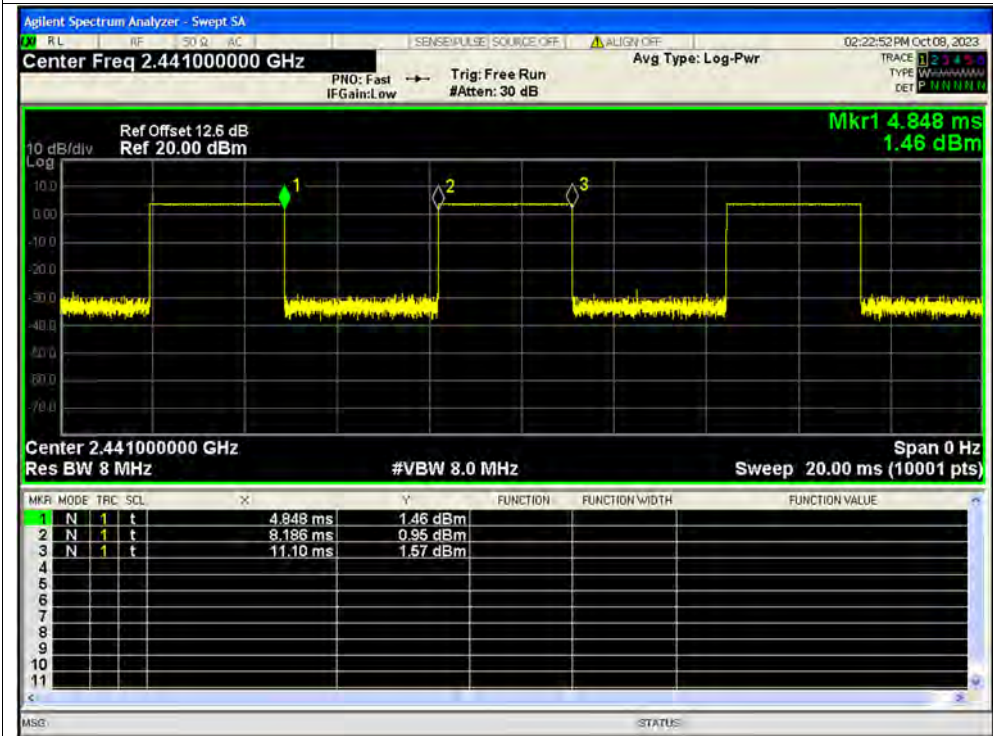




Duty Cycle NVNT 1-DH5 2480MHz Ant1

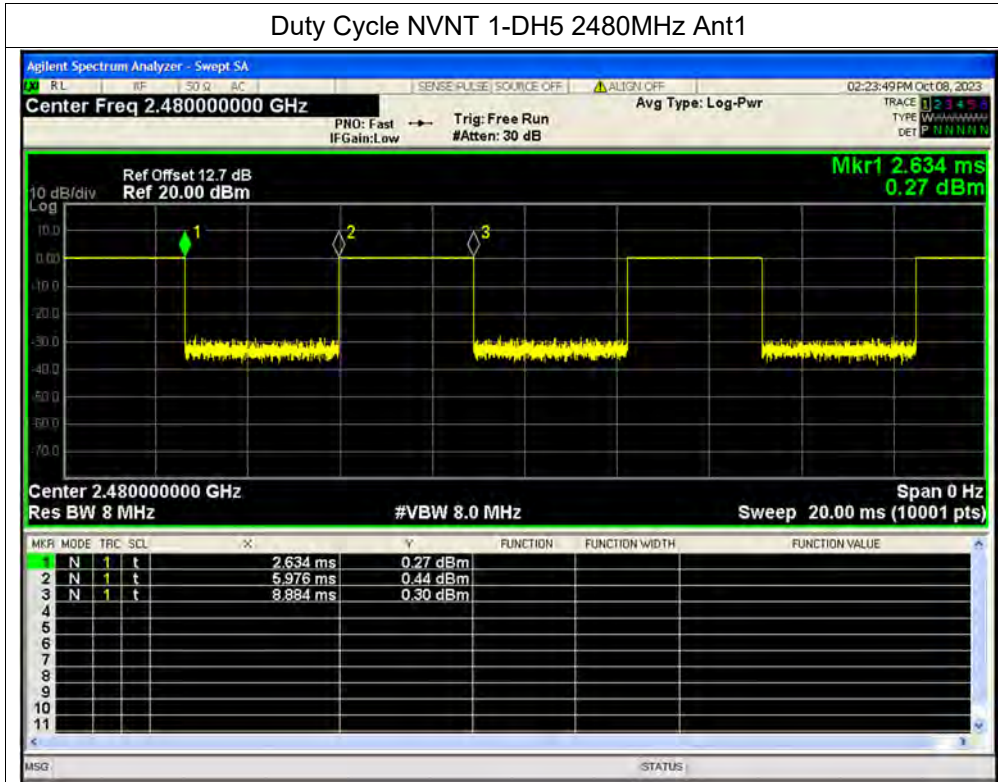


Duty Cycle NVNT 2-DH5 2402MHz Ant1

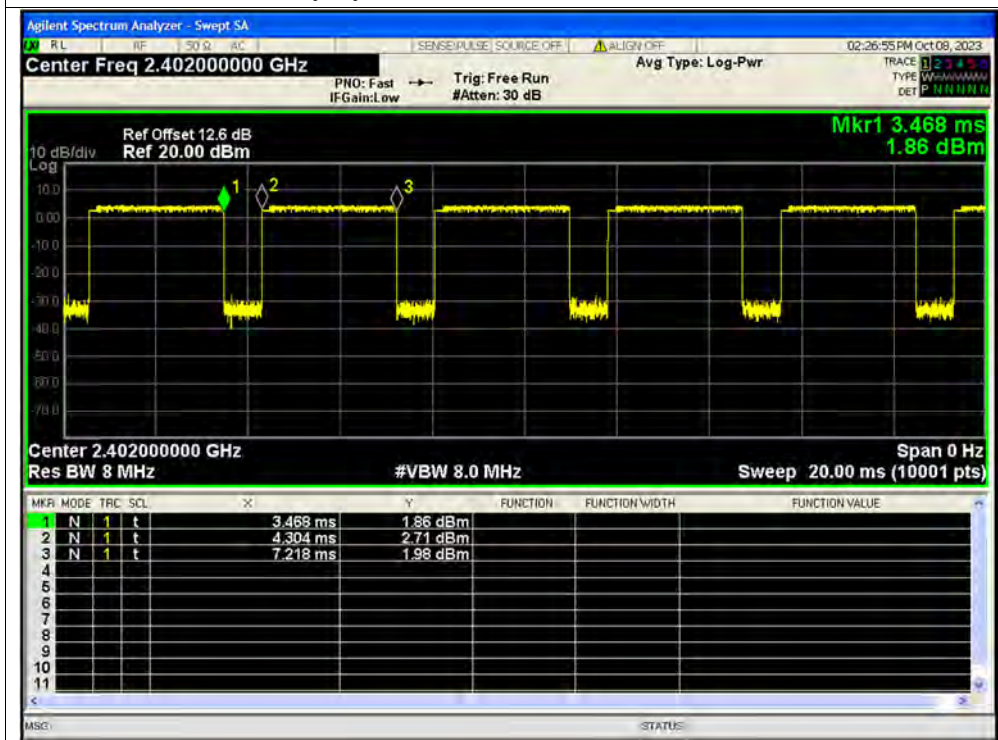






Duty Cycle NVNT 2-DH5 2441MHz Ant1

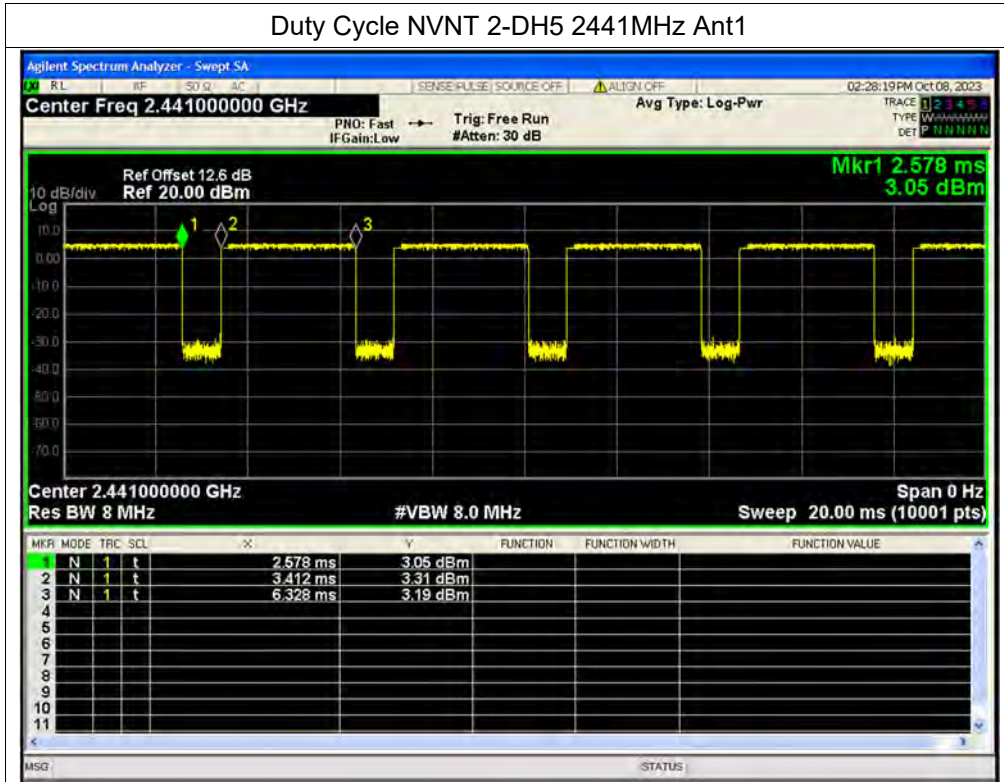


Duty Cycle NVNT 2-DH5 2480MHz Ant1

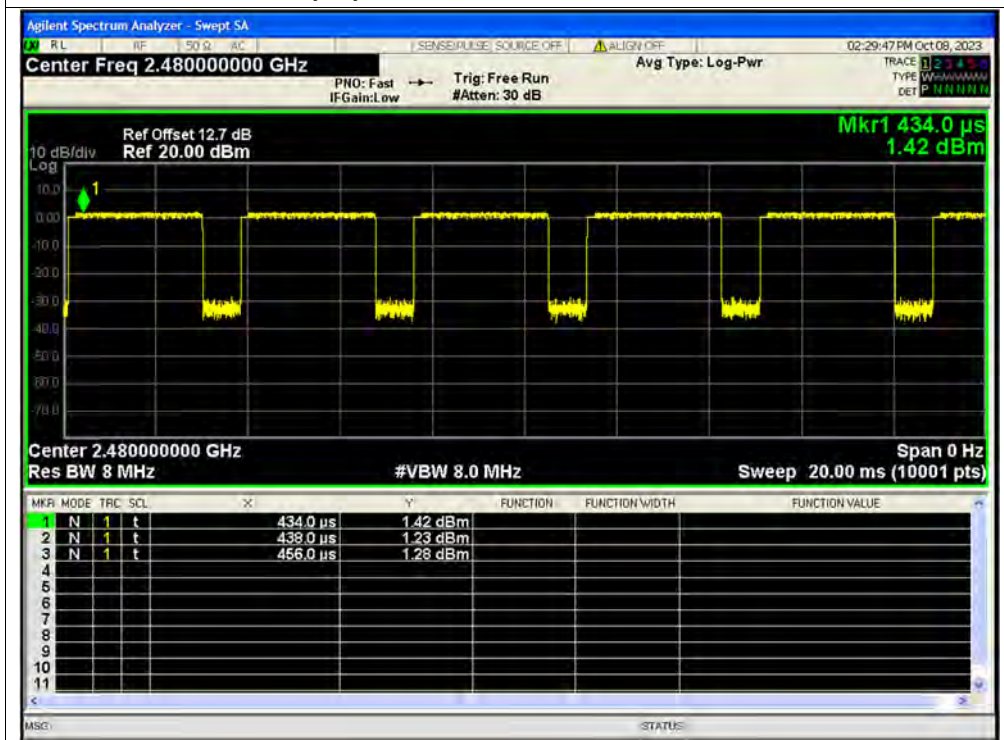




Duty Cycle NVNT 3-DH5 2402MHz Ant1

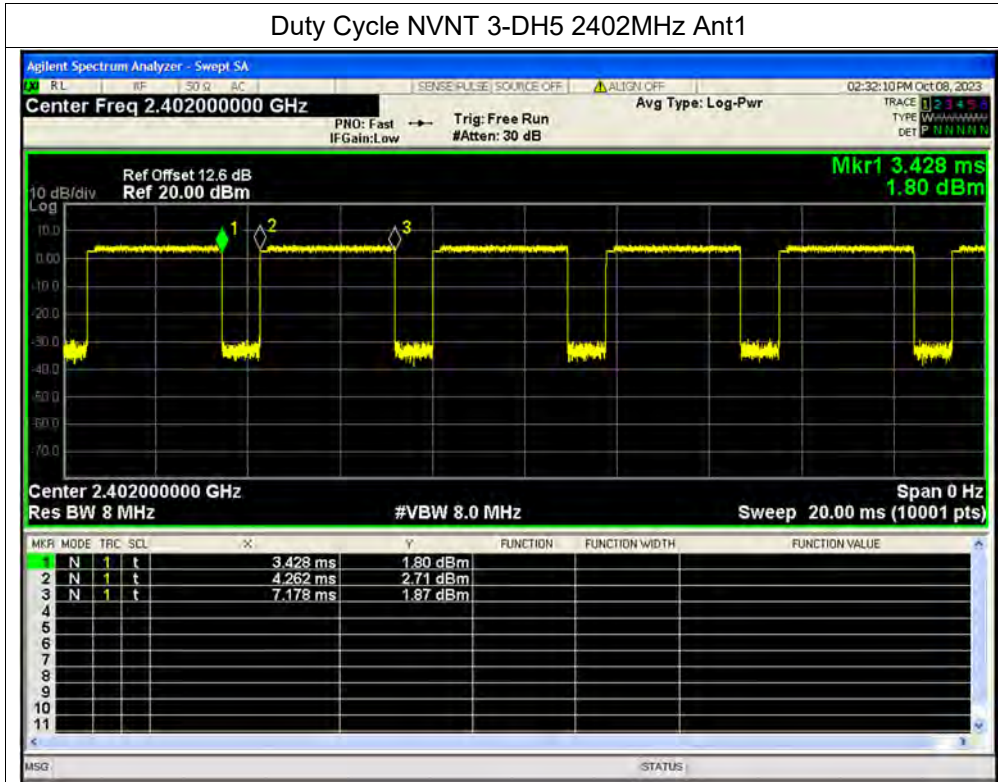


Duty Cycle NVNT 3-DH5 2441MHz Ant1

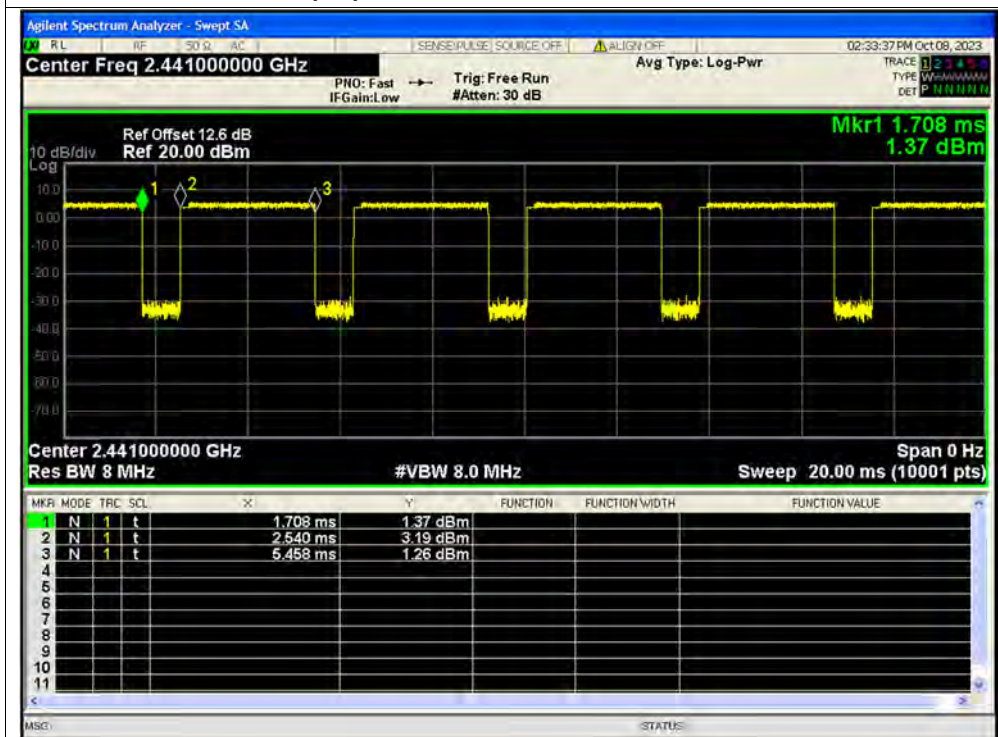



Duty Cycle NVNT 3-DH5 2480MHz Ant1

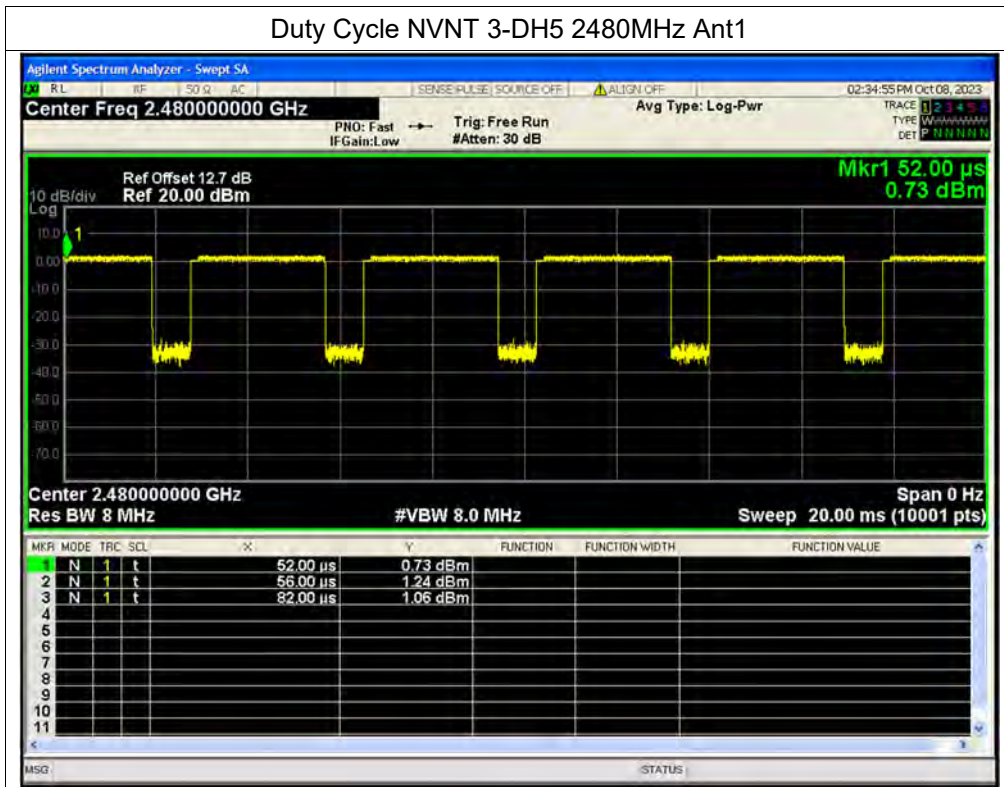



**A.3. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	2.84	0	2.84	0.00192	30	Pass
NVNT	1-DH5	2441	Ant1	3.92	0	3.92	0.00247	30	Pass
NVNT	1-DH5	2480	Ant1	0.51	0	0.51	0.00112	30	Pass
NVNT	2-DH5	2402	Ant1	4.45	0	4.45	0.00279	30	Pass
NVNT	2-DH5	2441	Ant1	5.4	0	5.4	0.00347	30	Pass
NVNT	2-DH5	2480	Ant1	1.97	0	1.97	0.00157	30	Pass
NVNT	3-DH5	2402	Ant1	4.79	0	4.79	0.00301	30	Pass
NVNT	3-DH5	2441	Ant1	5.61	0	5.61	0.00364	30	Pass
NVNT	3-DH5	2480	Ant1	2.18	0	2.18	0.00165	30	Pass



Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1



Peak Power NVNT 1-DH5 2441MHz Ant1





Peak Power NVNT 1-DH5 2480MHz Ant1



Peak Power NVNT 2-DH5 2402MHz Ant1



Peak Power NVNT 2-DH5 2441MHz Ant1



Peak Power NVNT 2-DH5 2480MHz Ant1





Peak Power NVNT 3-DH5 2402MHz Ant1



Peak Power NVNT 3-DH5 2441MHz Ant1







Peak Power NVNT 3-DH5 2480MHz Ant1



**A.4. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-0.62	3.32	2.7	0.00186	30	Pass
NVNT	1-DH5	2441	Ant1	0.46	3.32	3.78	0.00239	30	Pass
NVNT	1-DH5	2480	Ant1	-2.69	3.32	0.63	0.00116	30	Pass
NVNT	2-DH5	2402	Ant1	0.6	1.1	1.7	0.00148	30	Pass
NVNT	2-DH5	2441	Ant1	1.54	1.09	2.63	0.00183	30	Pass
NVNT	2-DH5	2480	Ant1	-1.93	0.87	-1.06	0.00078	30	Pass
NVNT	3-DH5	2402	Ant1	0.33	1.09	1.42	0.00139	30	Pass
NVNT	3-DH5	2441	Ant1	1.55	1.09	2.64	0.00184	30	Pass
NVNT	3-DH5	2480	Ant1	-1.89	0.62	-1.27	0.00075	30	Pass



Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1






Average Power NVNT 1-DH5 2480MHz Ant1

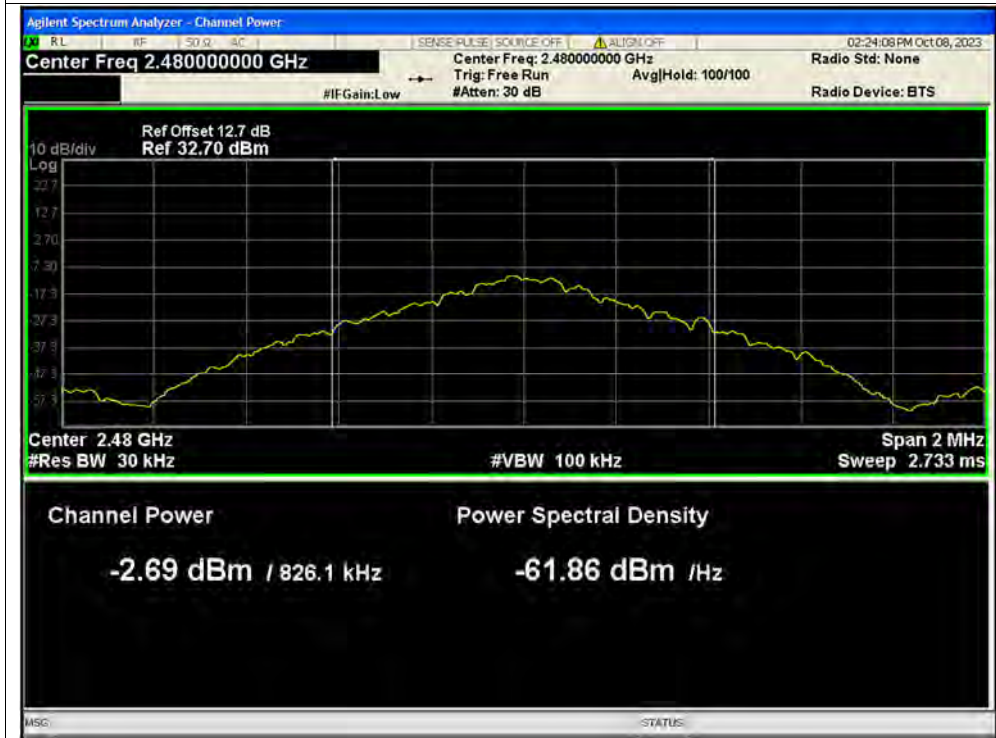


Average Power NVNT 2-DH5 2402MHz Ant1

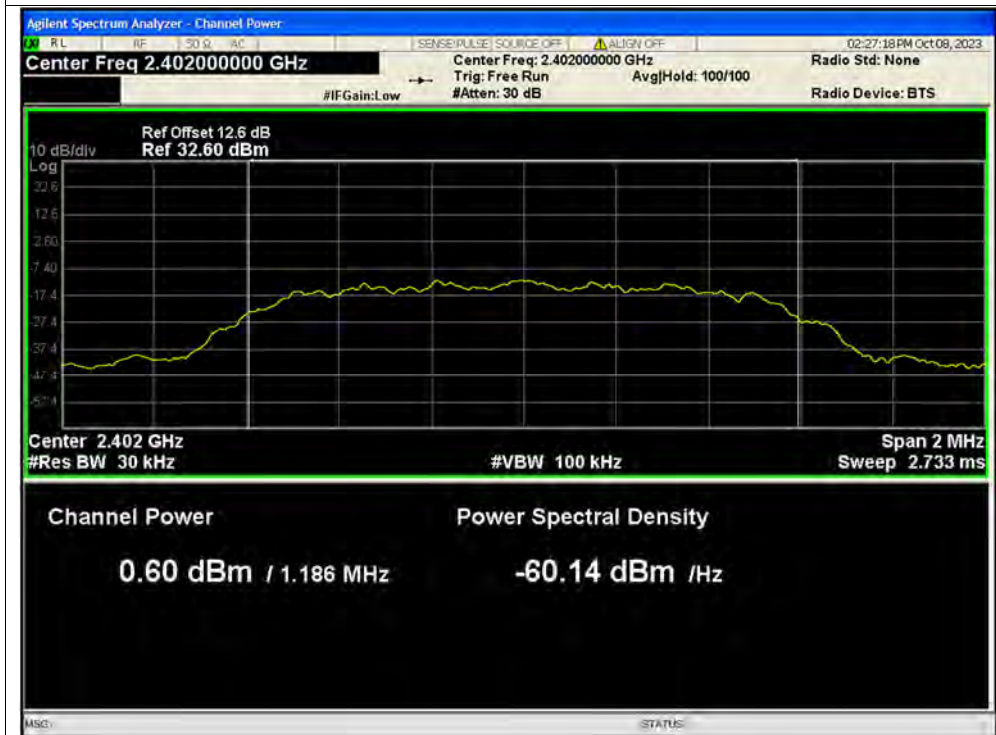




Average Power NVNT 2-DH5 2441MHz Ant1

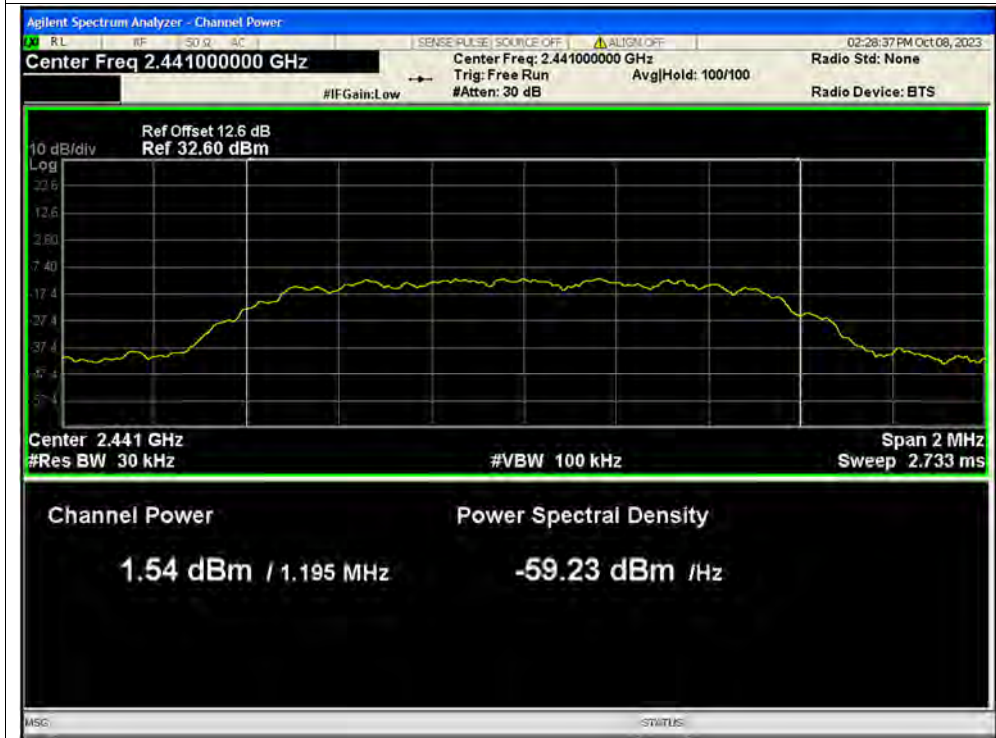


Average Power NVNT 2-DH5 2480MHz Ant1

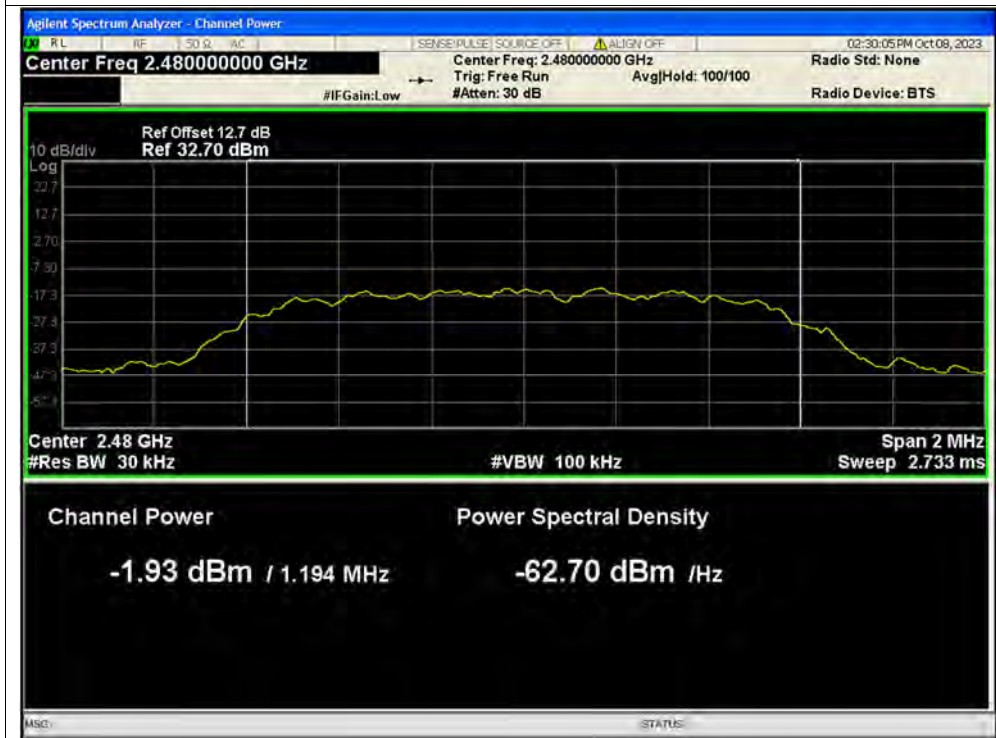





Average Power NVNT 3-DH5 2402MHz Ant1

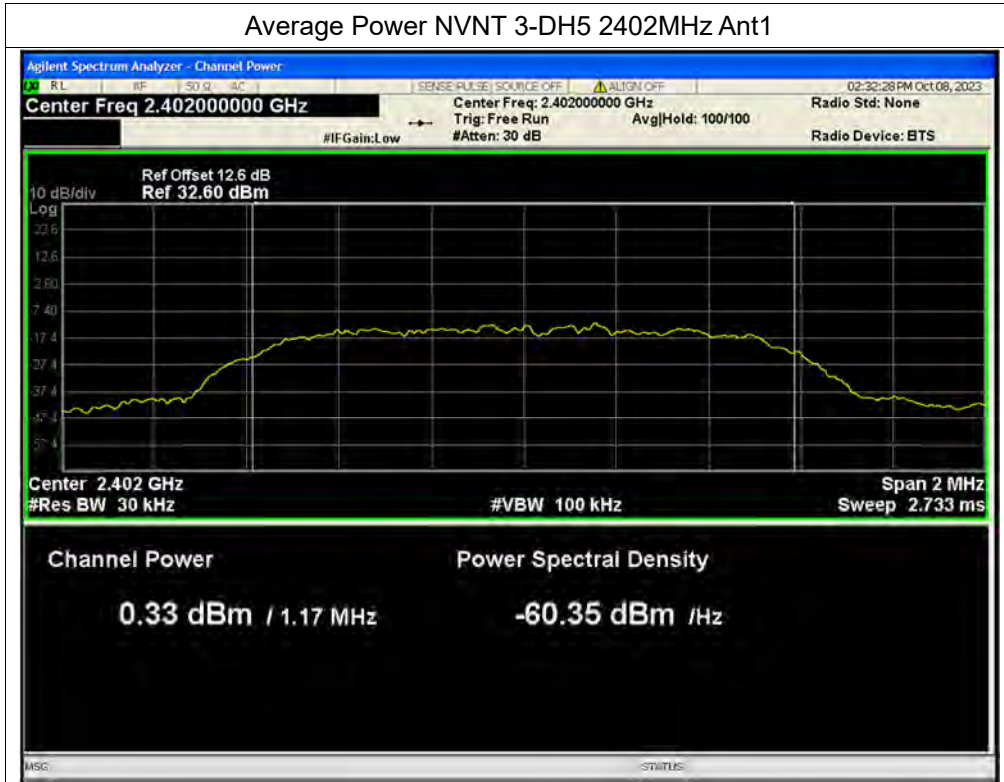

Average Power NVNT 3-DH5 2441MHz Ant1

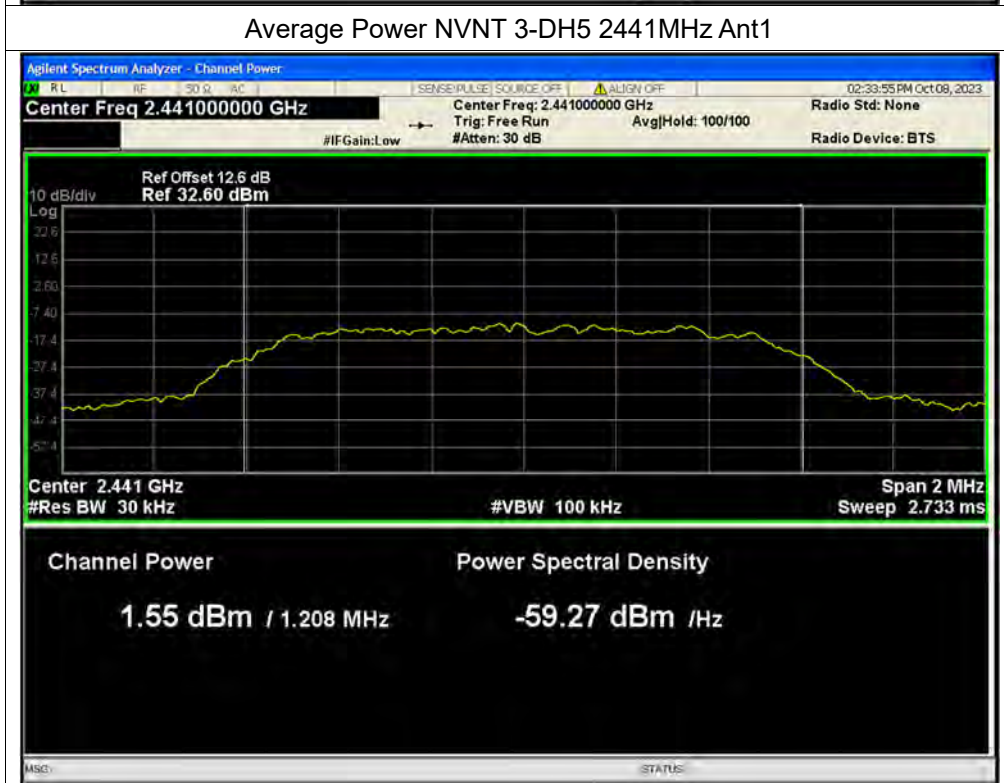

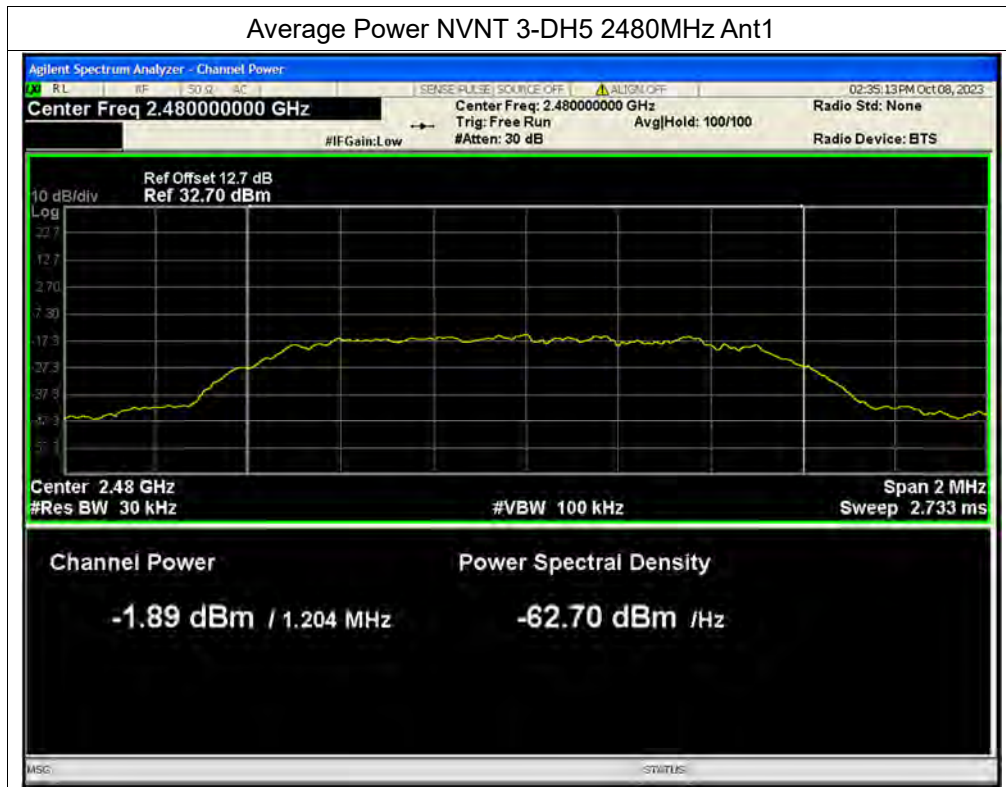



**A.5. 20 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.933
NVNT	1-DH5	2441	Ant1	0.942
NVNT	1-DH5	2480	Ant1	0.938
NVNT	2-DH5	2402	Ant1	1.194
NVNT	2-DH5	2441	Ant1	1.222
NVNT	2-DH5	2480	Ant1	1.202
NVNT	3-DH5	2402	Ant1	1.283
NVNT	3-DH5	2441	Ant1	1.248
NVNT	3-DH5	2480	Ant1	1.248





Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

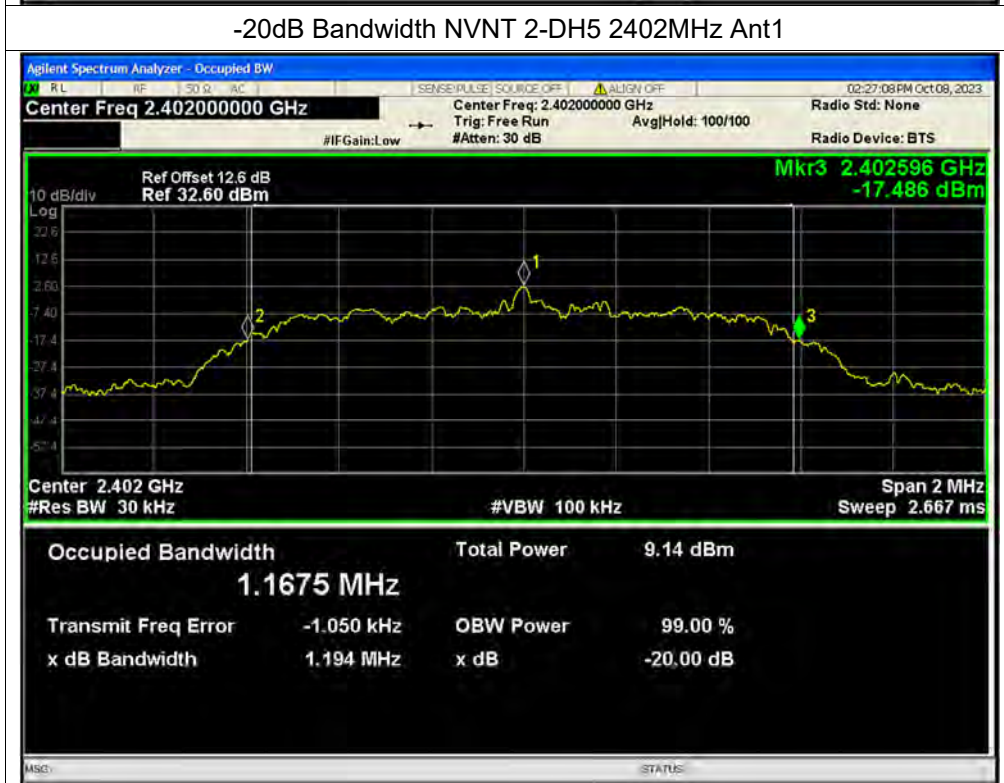



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1






-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

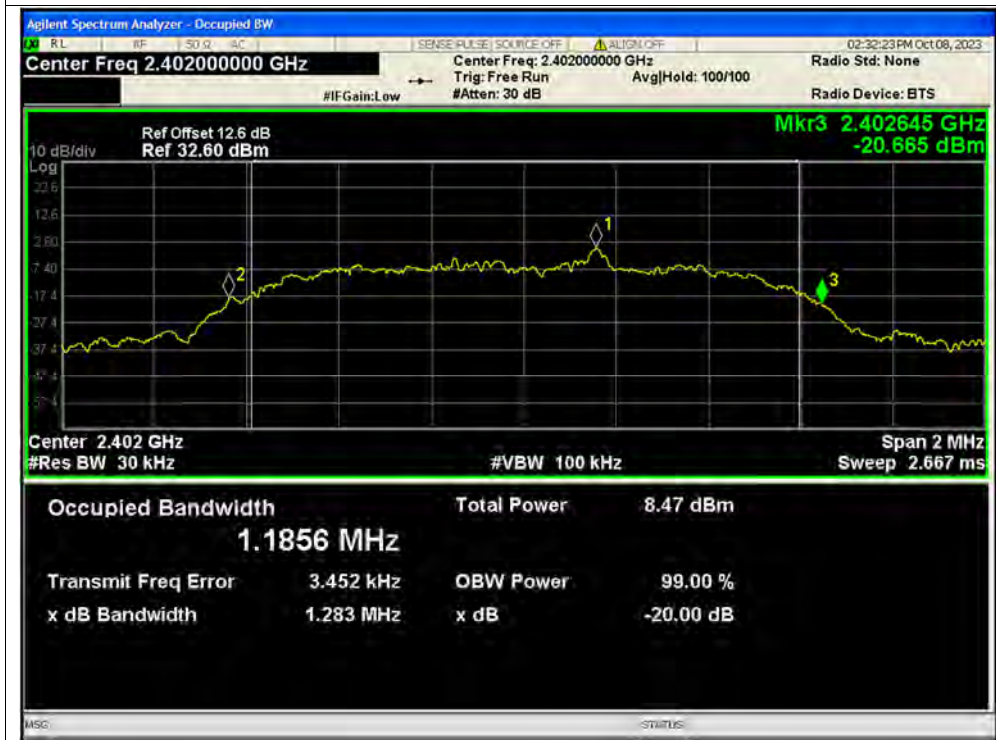

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1




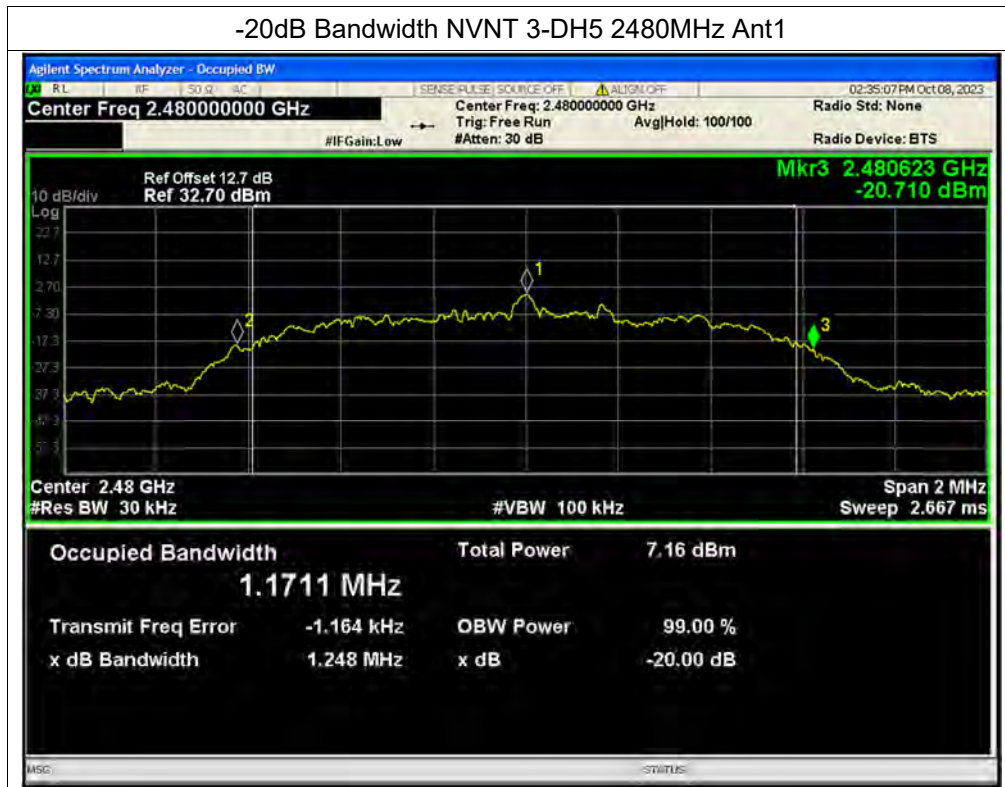




**A.6. Carried Frequency Separation**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.978	2402.996	1.018	0.622	Pass
NVNT	2-DH5	Ant1	2402.158	2403.158	1	0.796	Pass
NVNT	3-DH5	Ant1	2402	2403.154	1.154	0.855	Pass

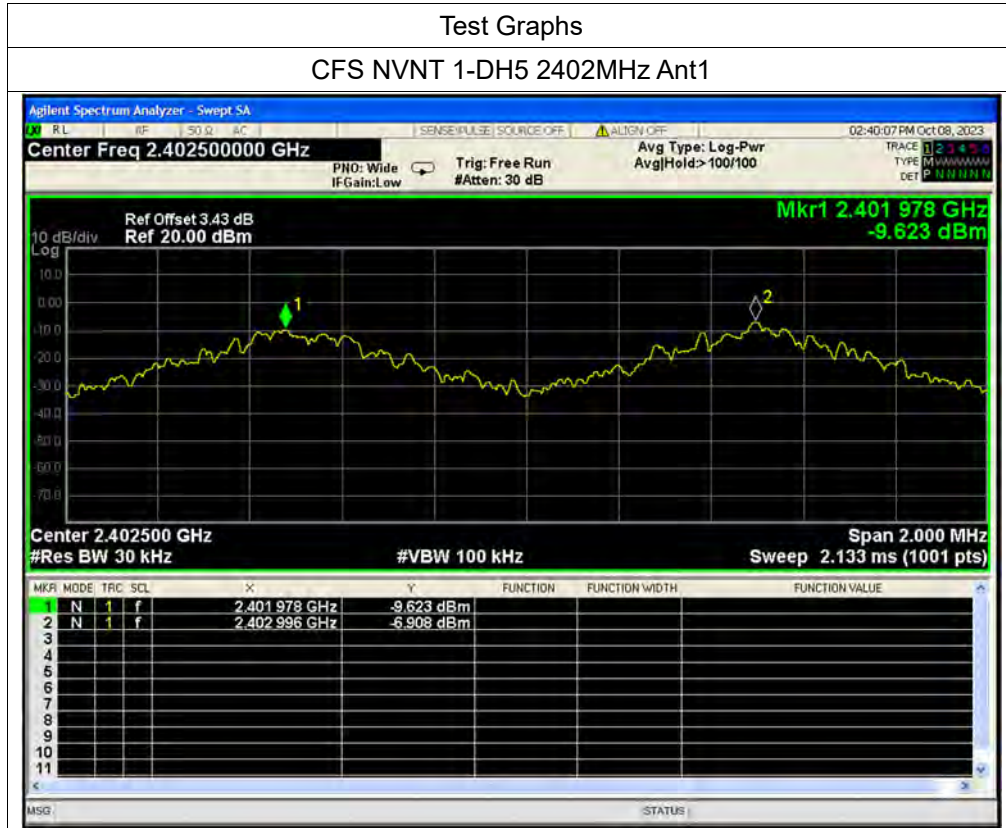




CFS NVNT 2-DH5 2402MHz Ant1

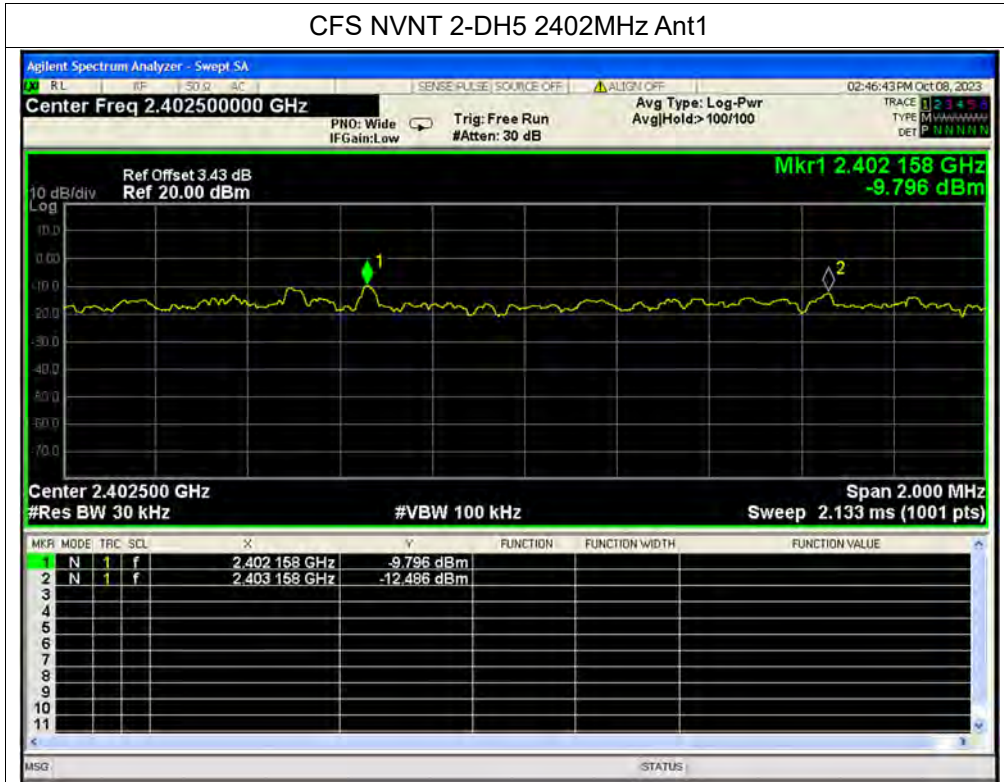

CFS NVNT 3-DH5 2402MHz Ant1

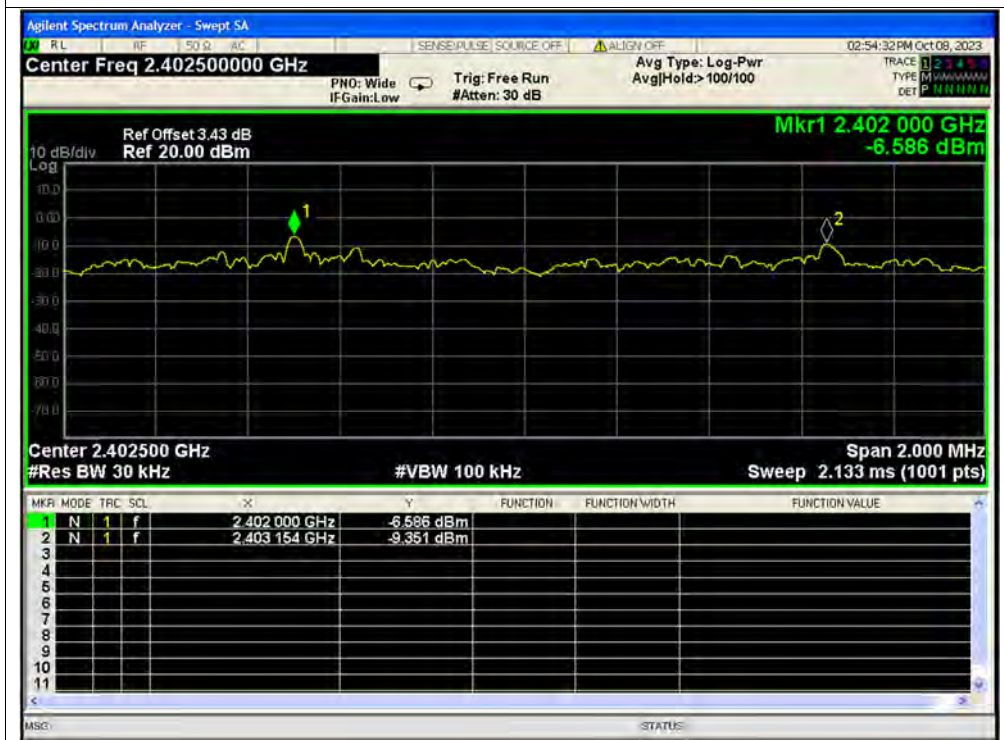



**A.7. Time of Occupancy (Dwell time)**


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.408	129.744	318	31600	400	Pass
NVNT	1-DH3	2402	Ant1	1.664	184.704	111	31600	400	Pass
NVNT	1-DH5	2402	Ant1	2.912	174.72	60	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.418	132.506	317	31600	400	Pass
NVNT	2-DH3	2402	Ant1	1.664	259.584	156	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.917	326.704	112	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.418	132.924	318	31600	400	Pass
NVNT	3-DH3	2402	Ant1	1.668	251.868	151	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.919	297.738	102	31600	400	Pass






Test Graphs

Dwell NVLT 1-DH1 2402MHz Ant1 One Burst

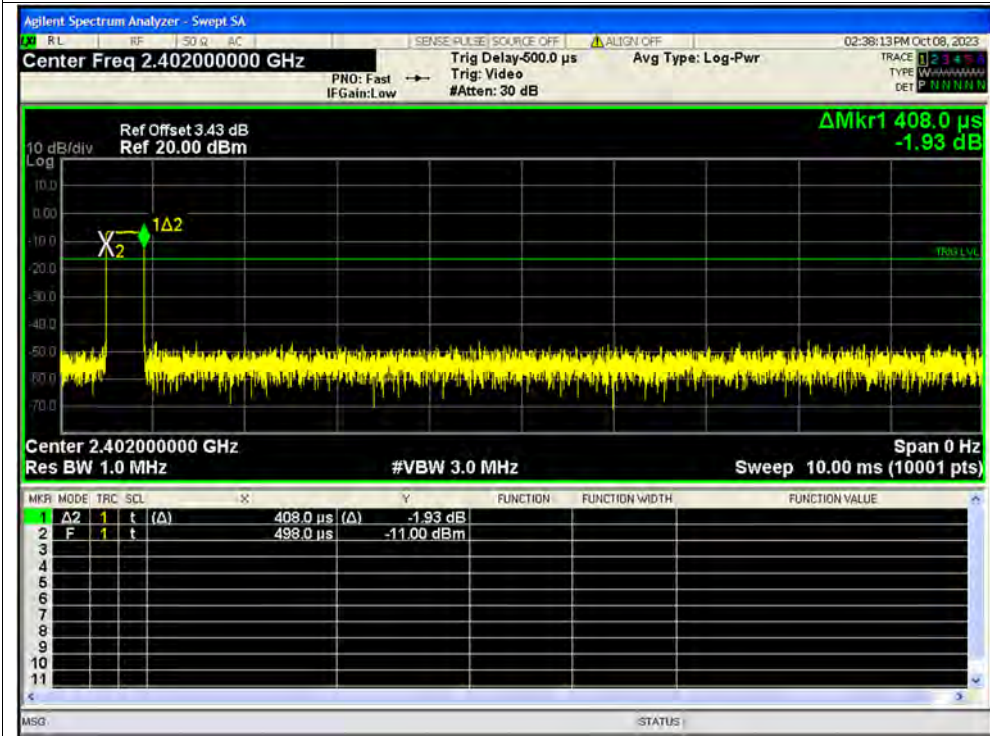


Dwell NVLT 1-DH1 2402MHz Ant1 Accumulated

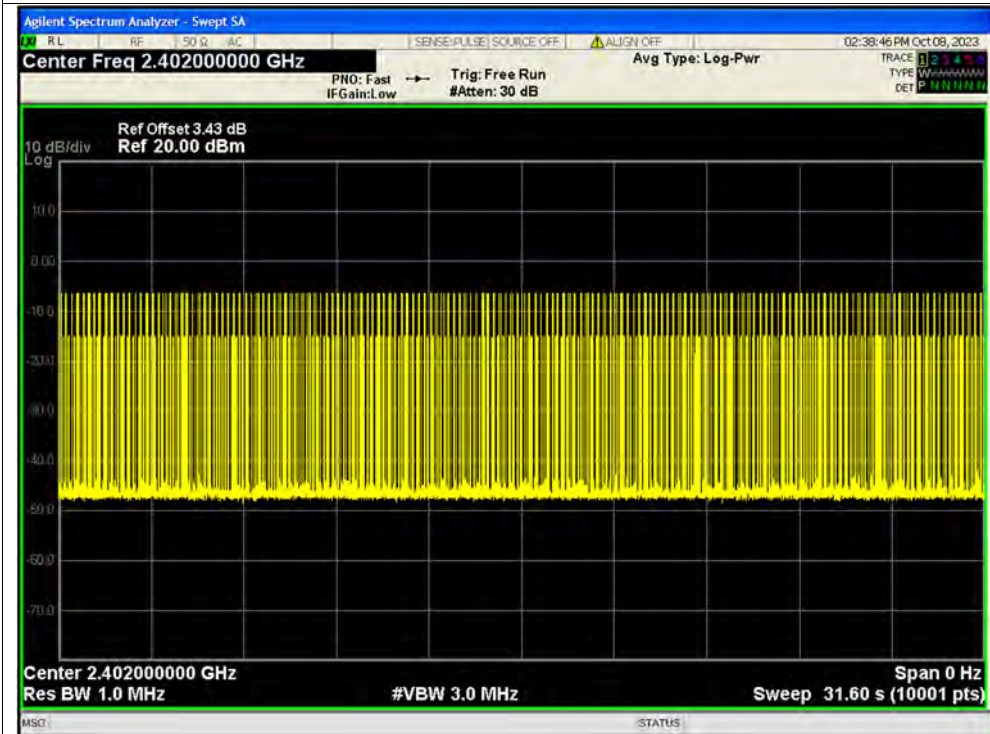




Dwell NVLT 1-DH3 2402MHz Ant1 One Burst

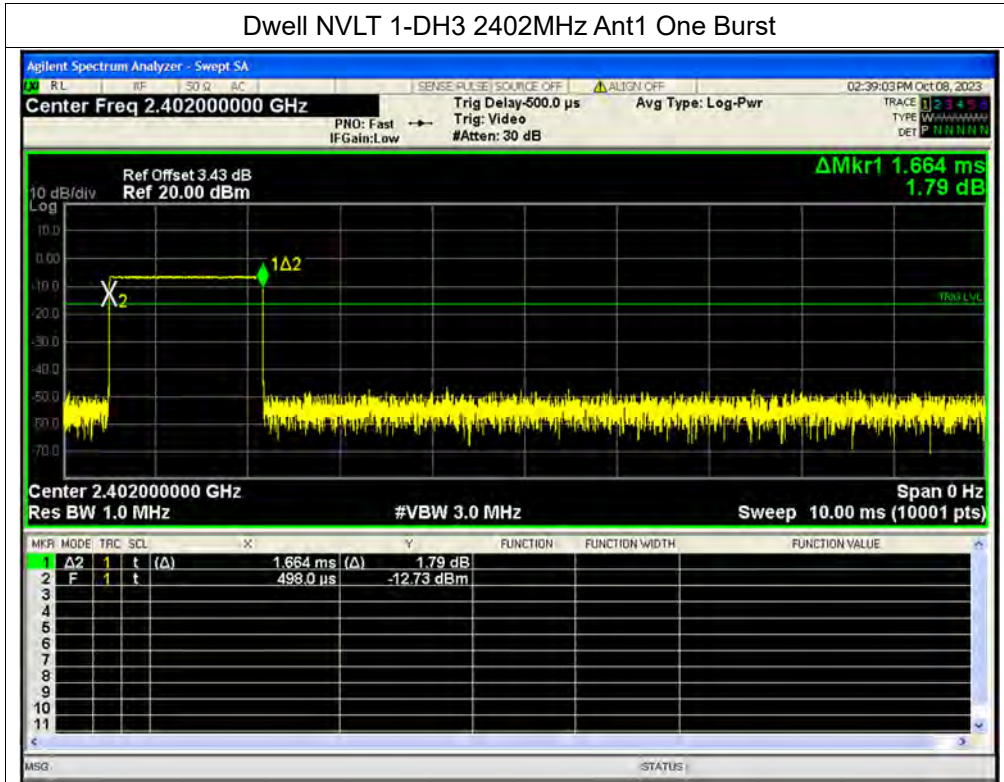


Dwell NVLT 1-DH3 2402MHz Ant1 Accumulated

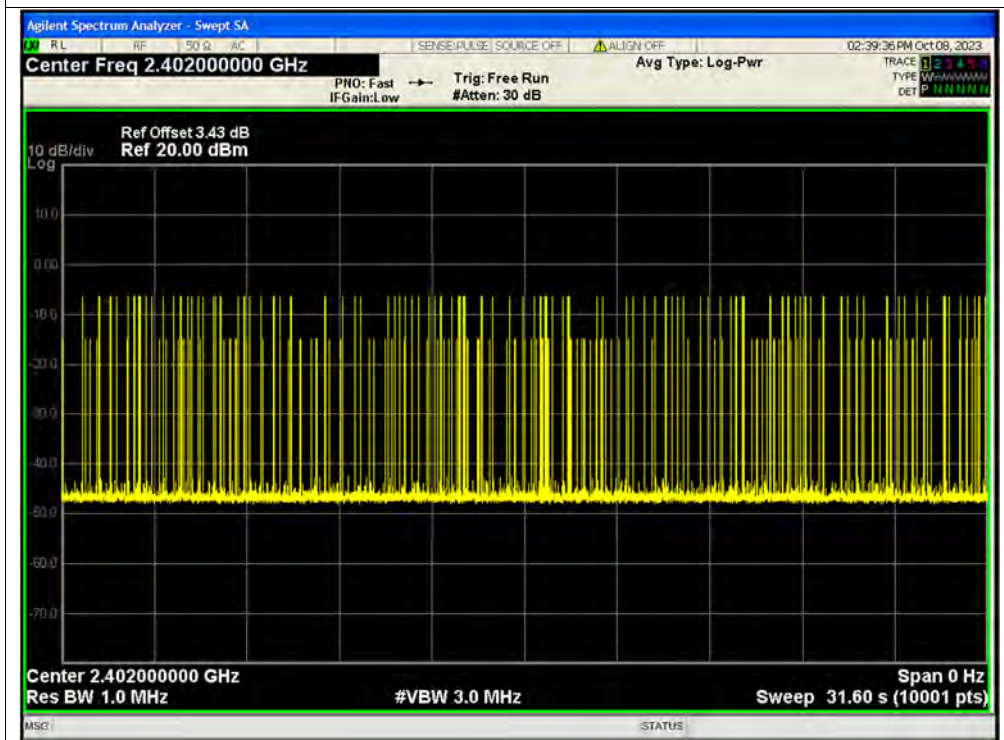




Dwell NVLT 1-DH5 2402MHz Ant1 One Burst

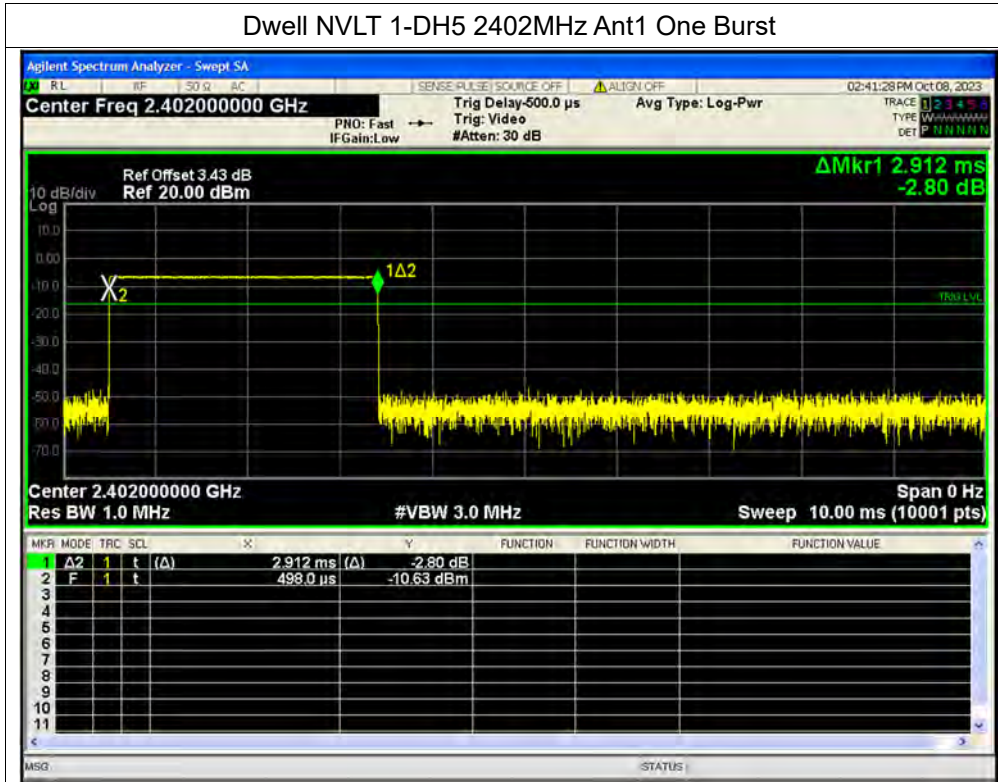


Dwell NVLT 1-DH5 2402MHz Ant1 Accumulated

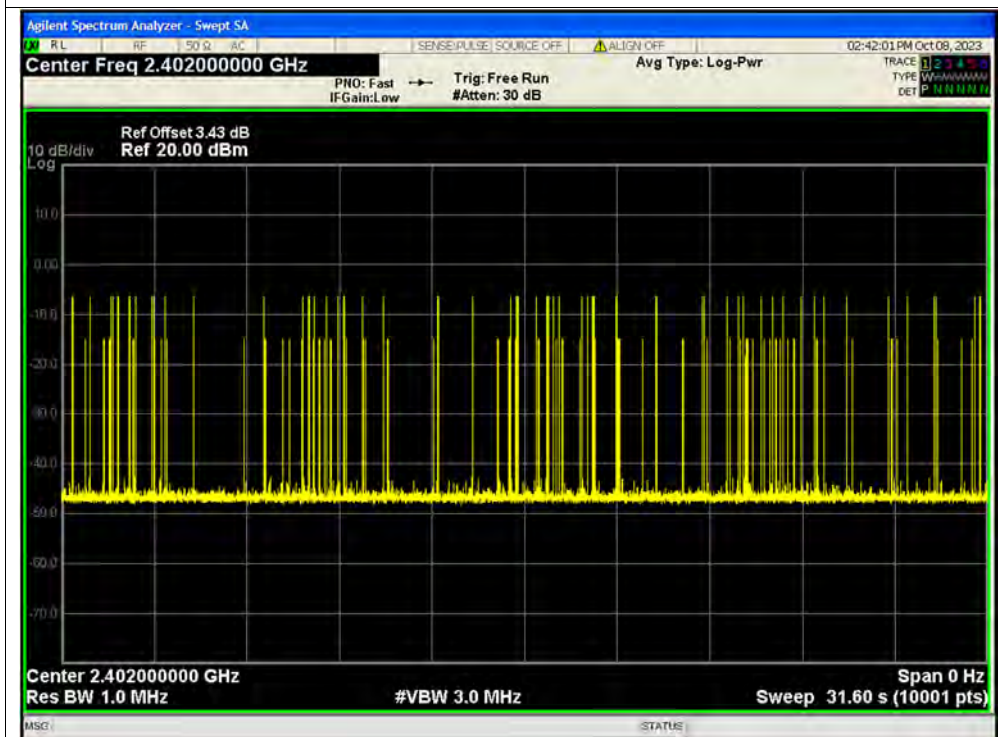




Dwell NVLT 2-DH1 2402MHz Ant1 One Burst

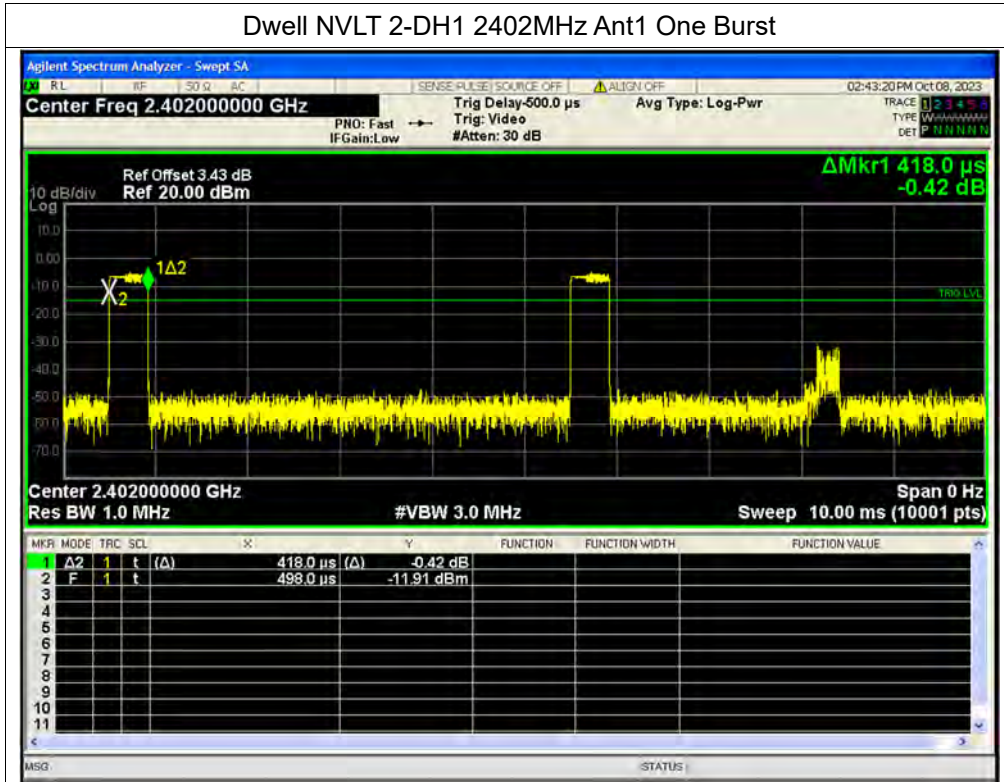


Dwell NVLT 2-DH1 2402MHz Ant1 Accumulated

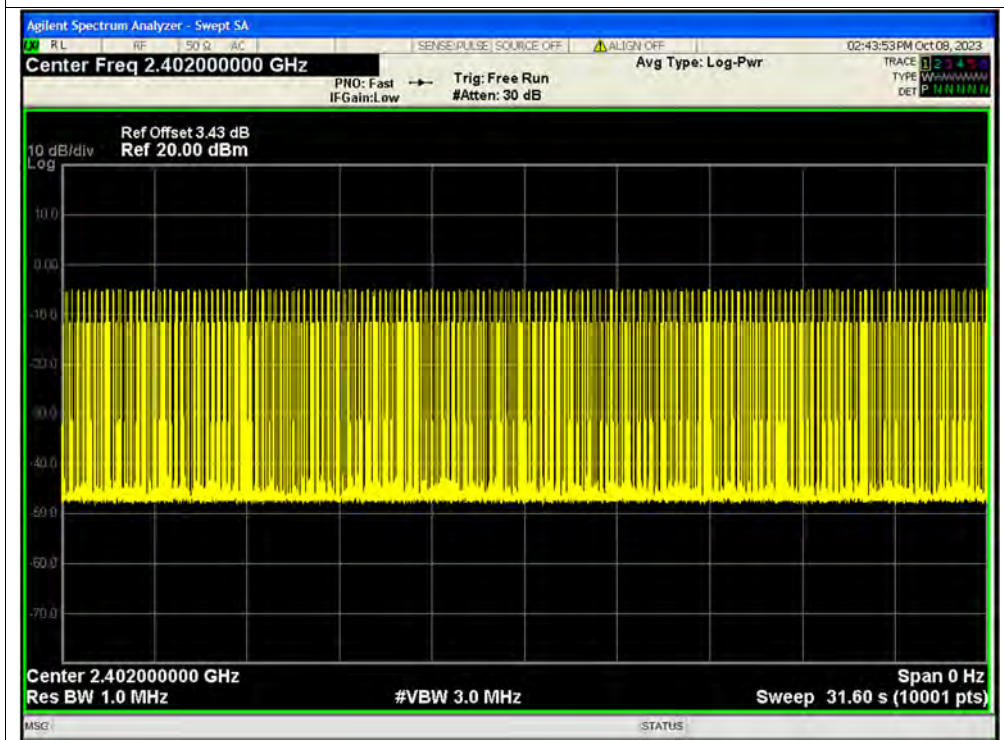




Dwell NVLT 2-DH3 2402MHz Ant1 One Burst

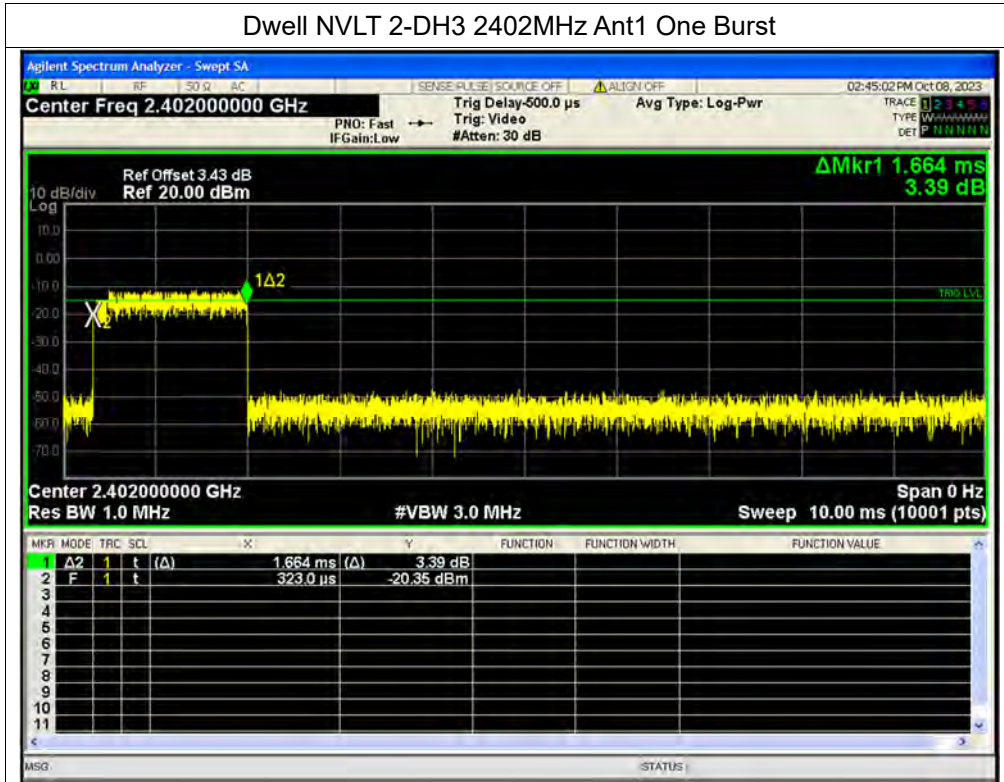


Dwell NVLT 2-DH3 2402MHz Ant1 Accumulated

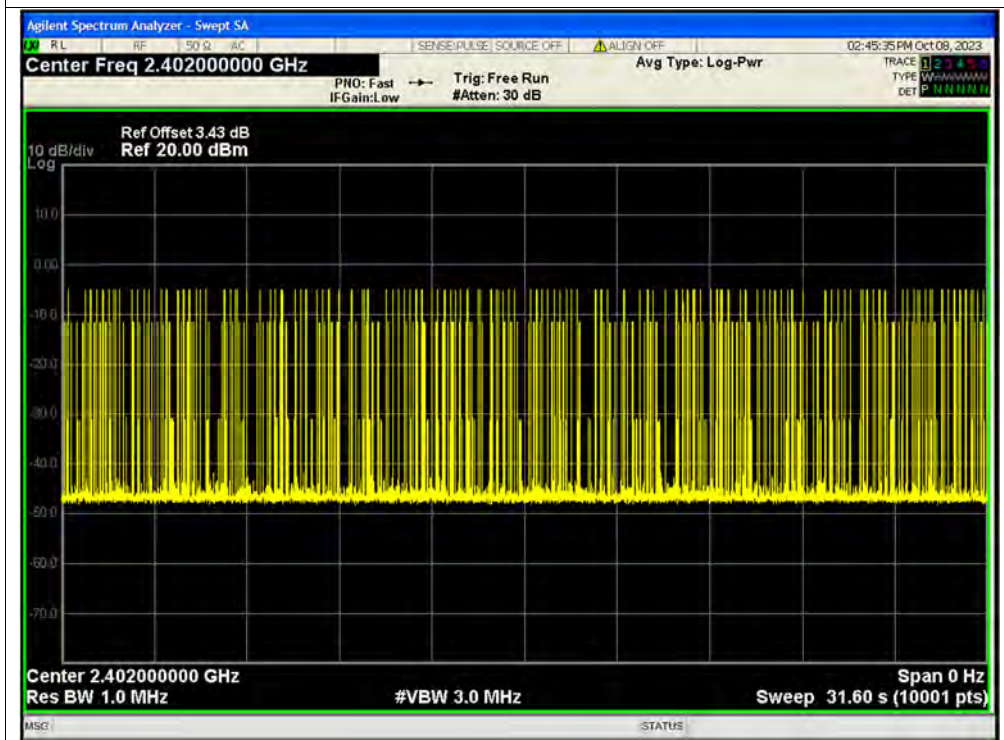




Dwell NVLT 2-DH5 2402MHz Ant1 One Burst

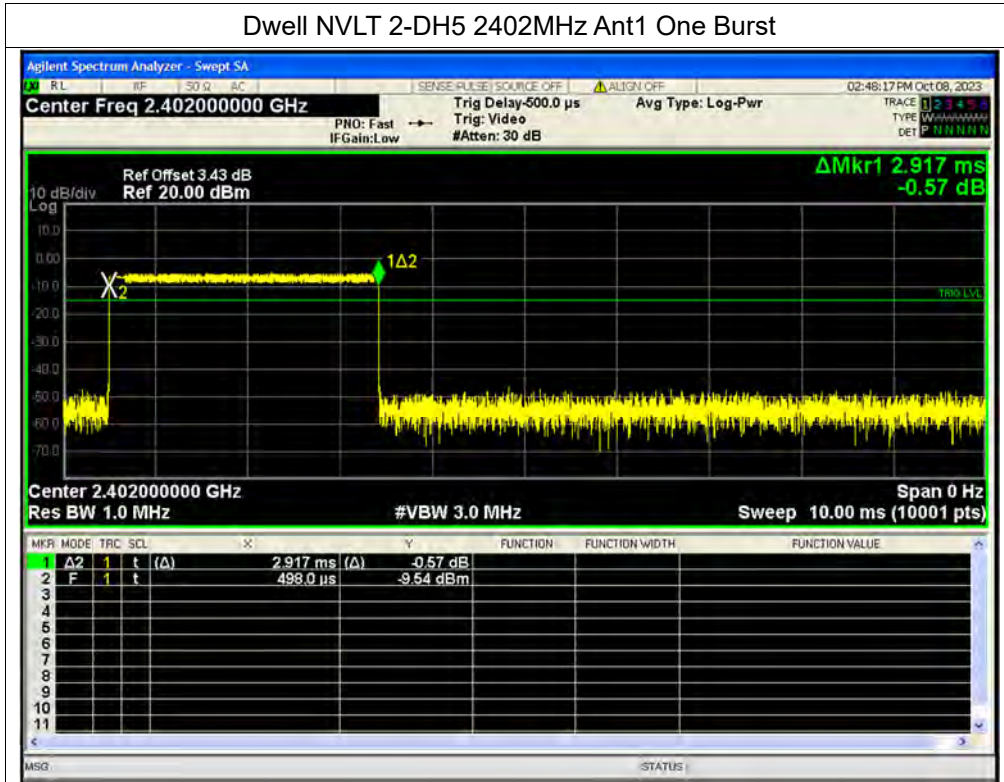


Dwell NVLT 2-DH5 2402MHz Ant1 Accumulated

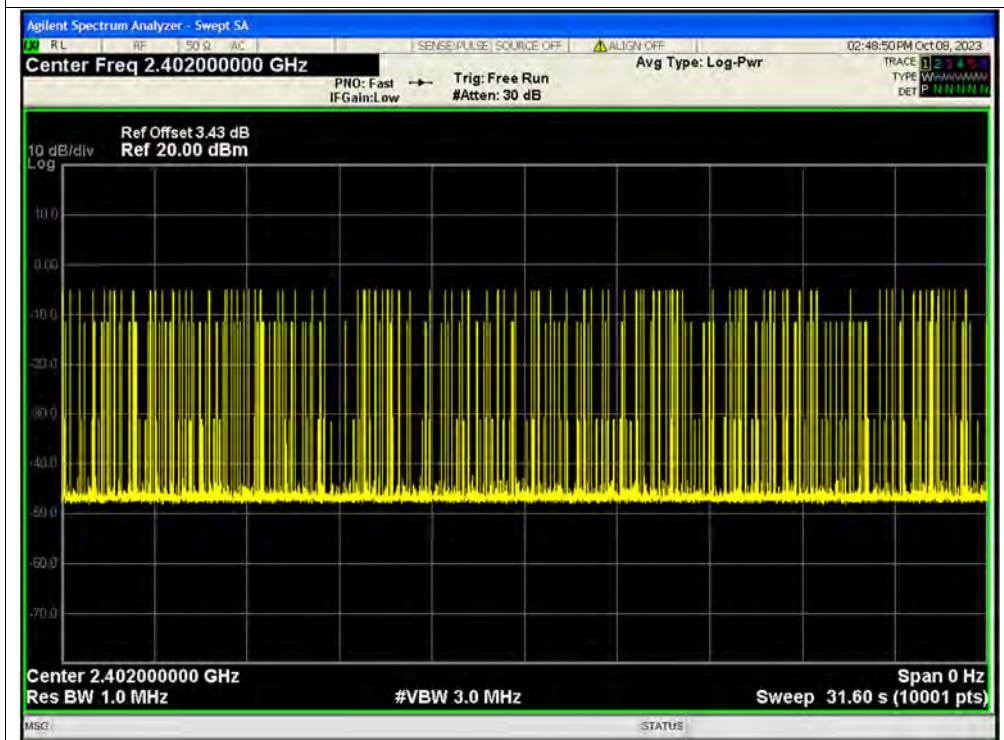




Dwell NVLT 3-DH1 2402MHz Ant1 One Burst

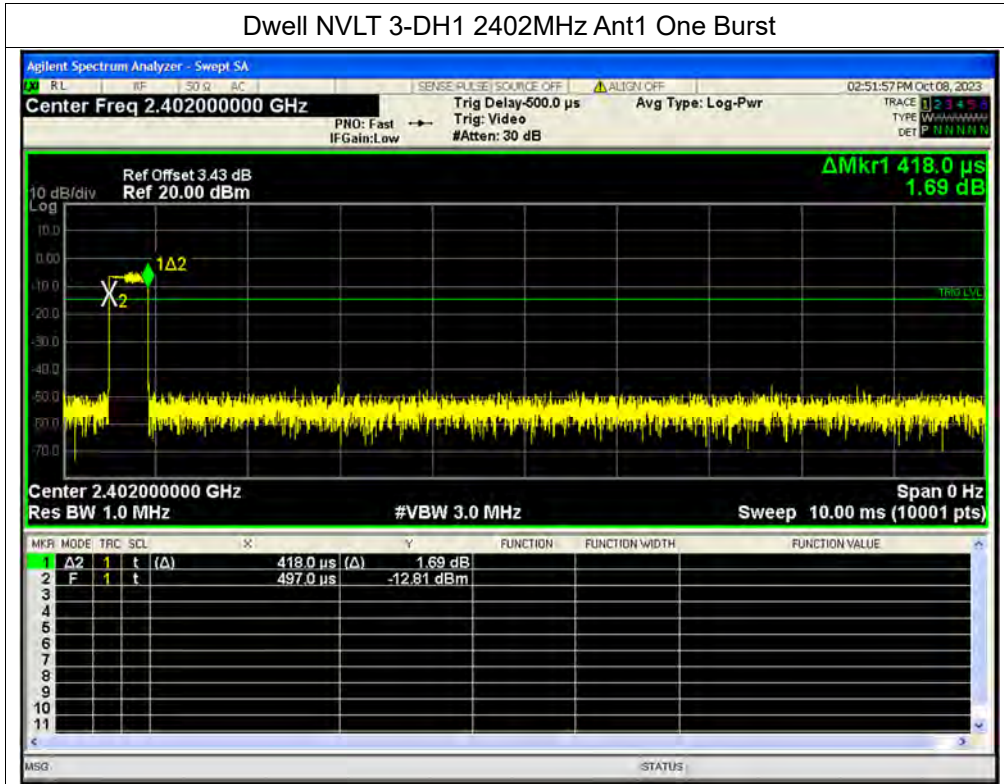


Dwell NVLT 3-DH1 2402MHz Ant1 Accumulated

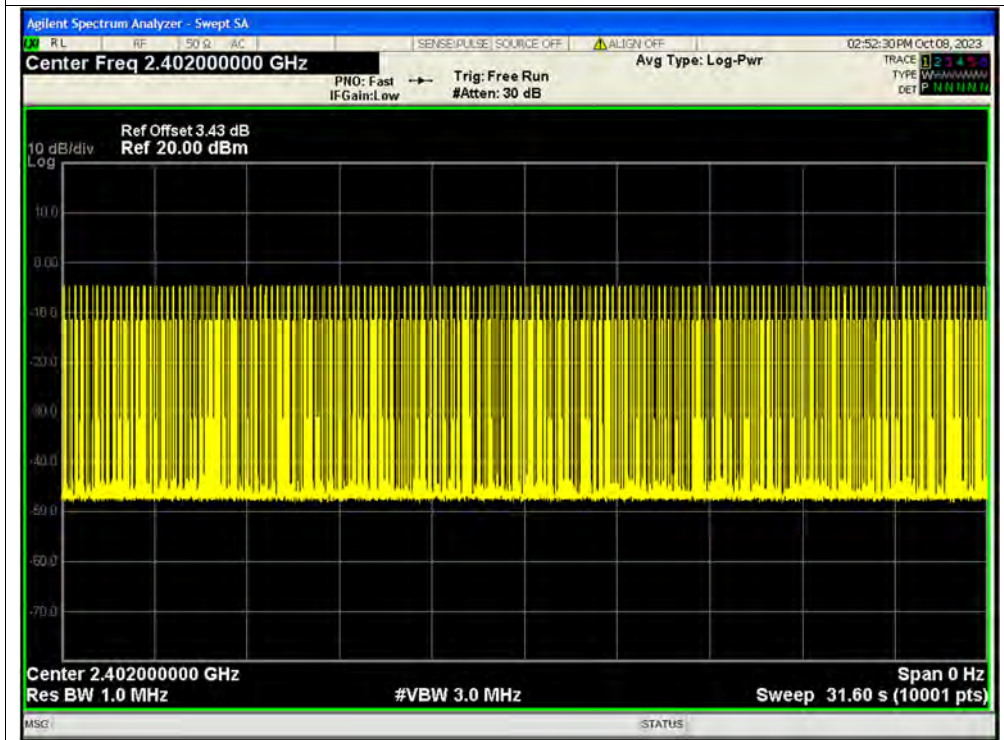




Dwell NVLT 3-DH3 2402MHz Ant1 One Burst

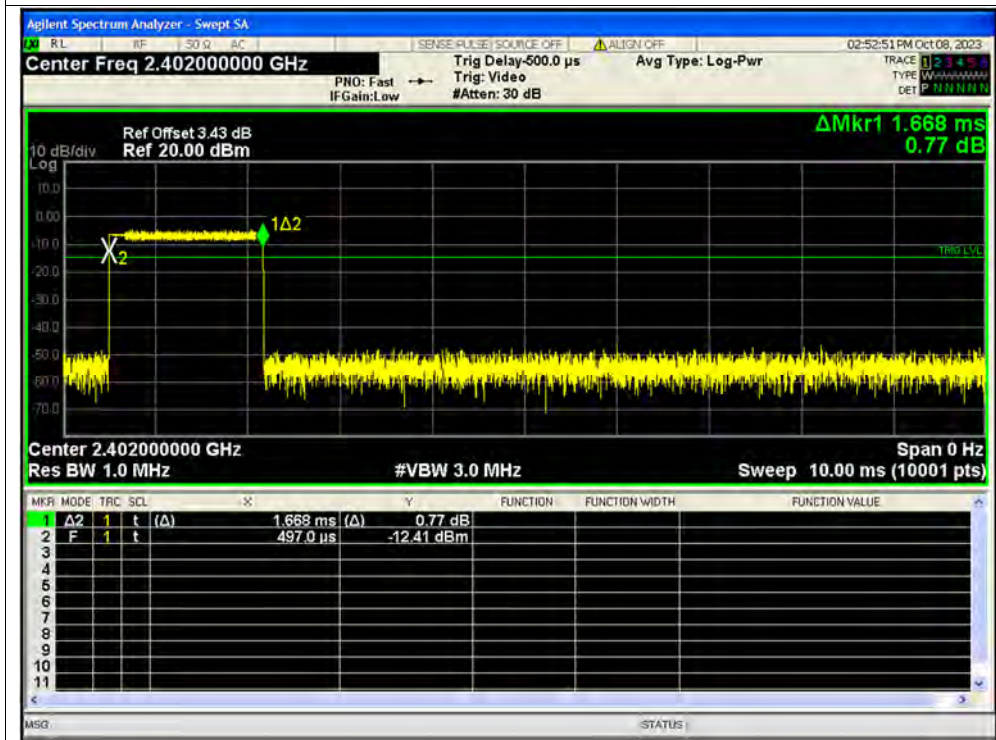


Dwell NVLT 3-DH3 2402MHz Ant1 Accumulated

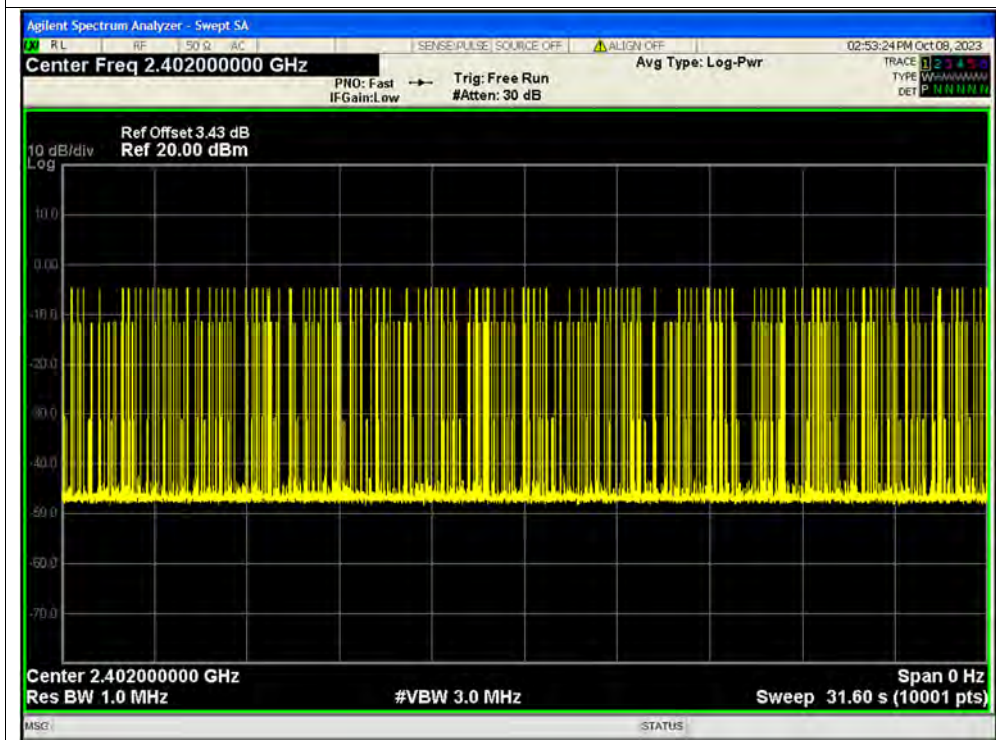






Dwell NVLT 3-DH5 2402MHz Ant1 One Burst

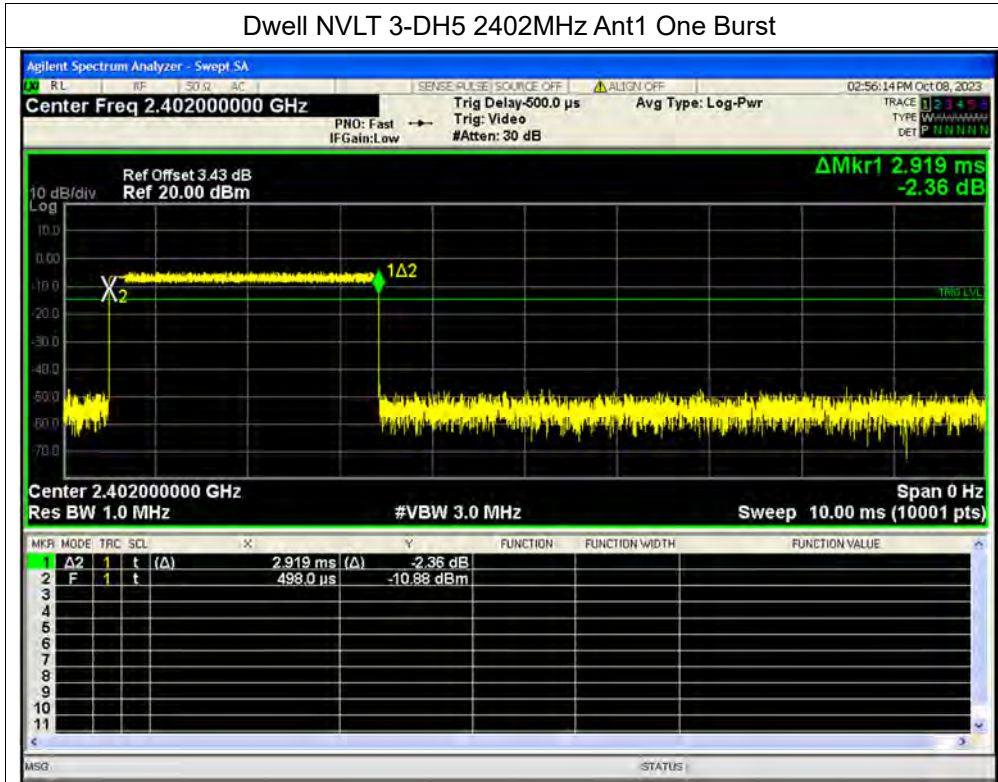

Dwell NVLT 3-DH5 2402MHz Ant1 Accumulated

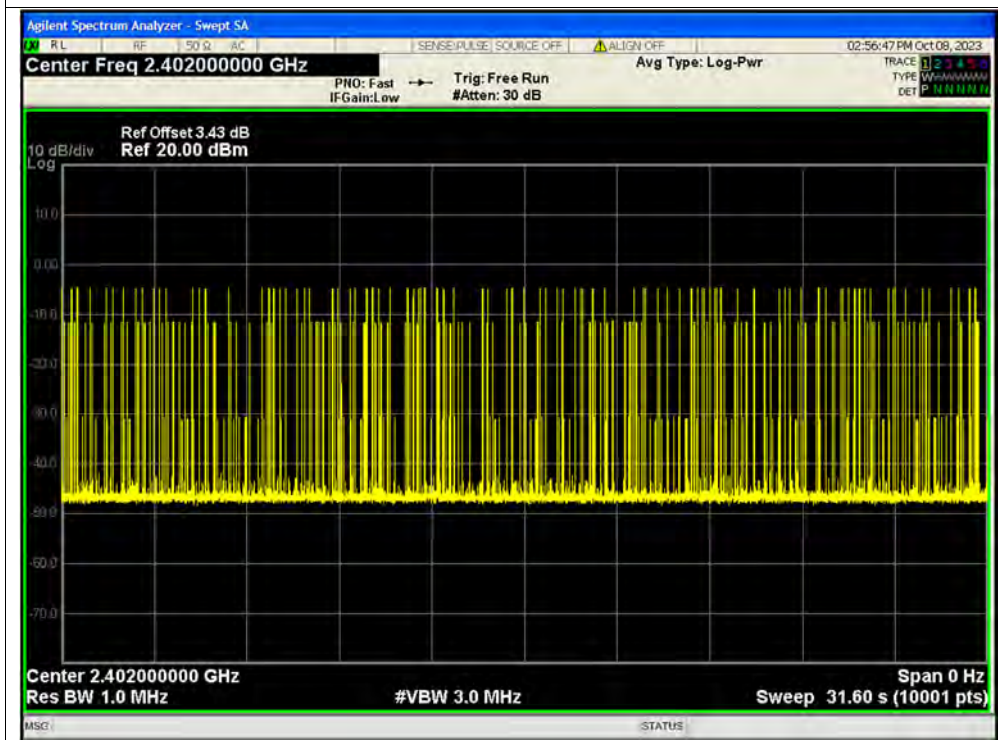

**A.8. Conducted Spurious Emissions**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-41.02	-20	Pass
NVNT	1-DH5	2441	Ant1	-42.56	-20	Pass
NVNT	1-DH5	2480	Ant1	-38.15	-20	Pass
NVNT	2-DH5	2402	Ant1	-41.56	-20	Pass
NVNT	2-DH5	2441	Ant1	-42.57	-20	Pass
NVNT	2-DH5	2480	Ant1	-39.07	-20	Pass
NVNT	3-DH5	2402	Ant1	-41.77	-20	Pass
NVNT	3-DH5	2441	Ant1	-43.08	-20	Pass
NVNT	3-DH5	2480	Ant1	-38.89	-20	Pass




Test Graphs

Tx. Spurious NVLT 1-DH5 2402MHz Ant1 Ref




Tx. Spurious NVLT 1-DH5 2402MHz Ant1 Emission

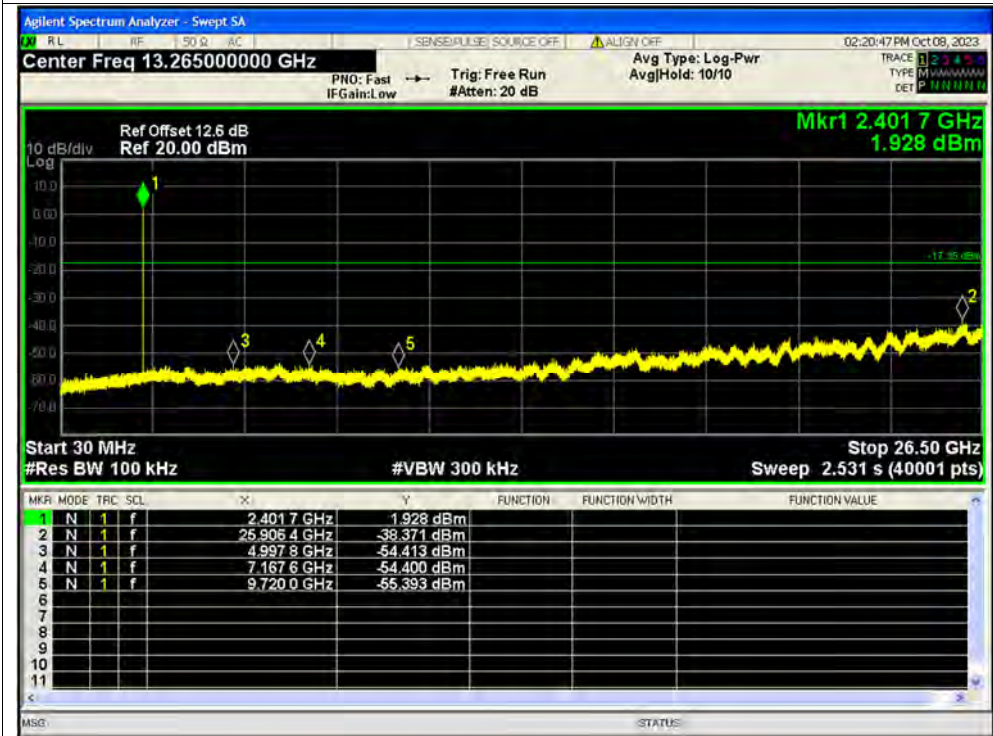




Tx. Spurious NVLT 1-DH5 2441MHz Ant1 Ref

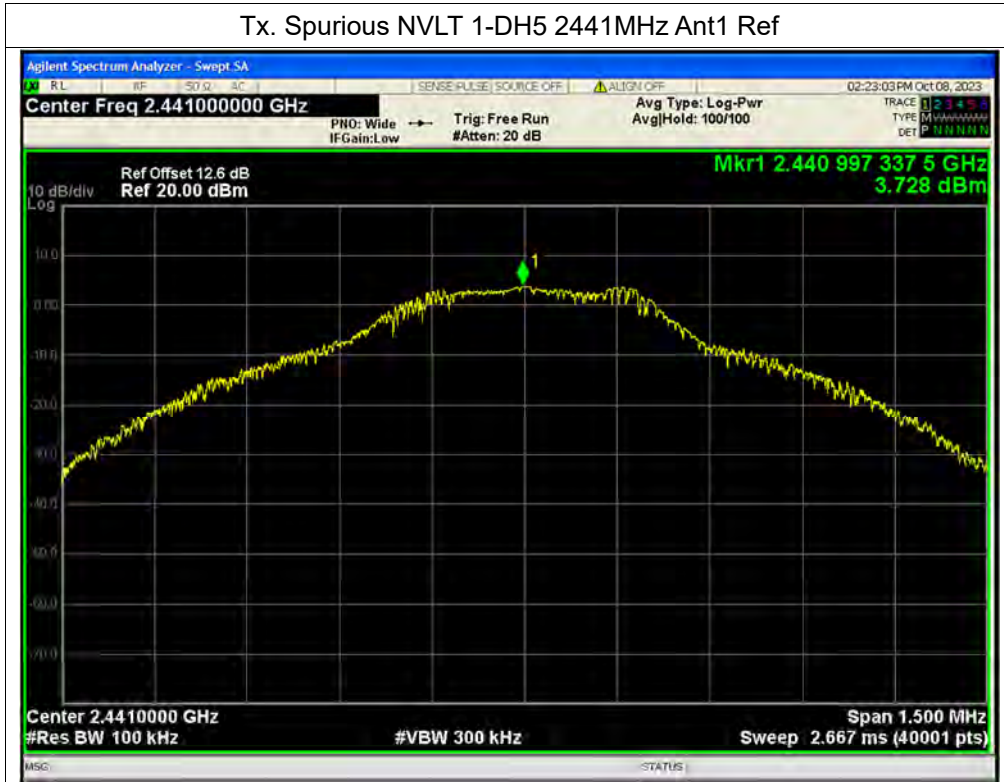

Tx. Spurious NVLT 1-DH5 2441MHz Ant1 Emission

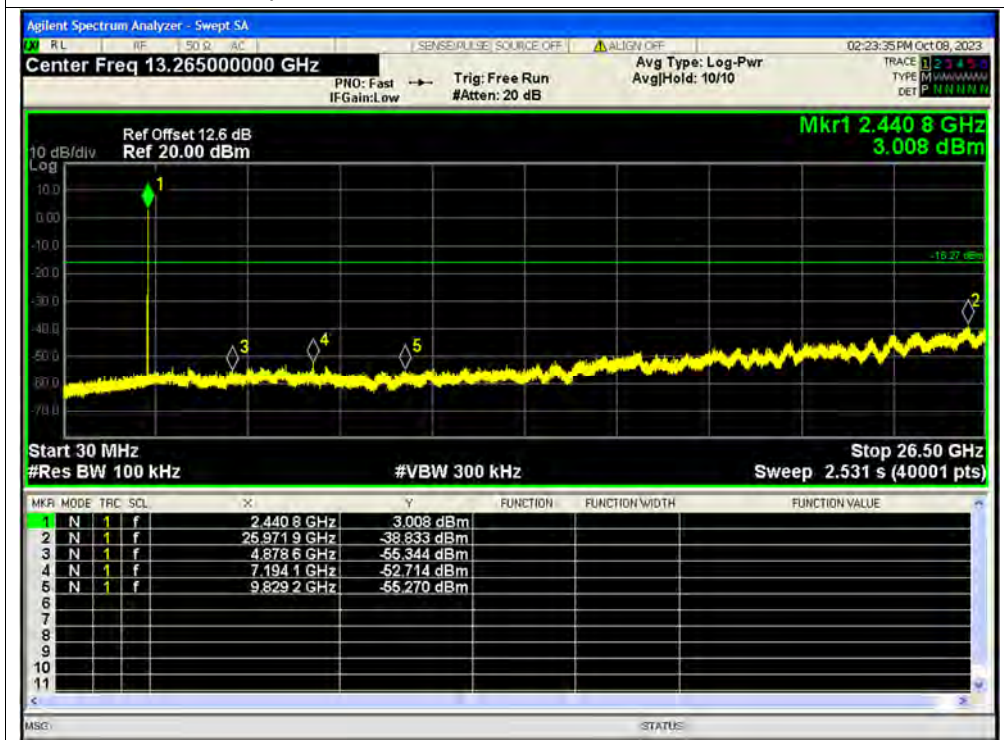




Tx. Spurious NVLT 1-DH5 2480MHz Ant1 Ref




Tx. Spurious NVLT 1-DH5 2480MHz Ant1 Emission

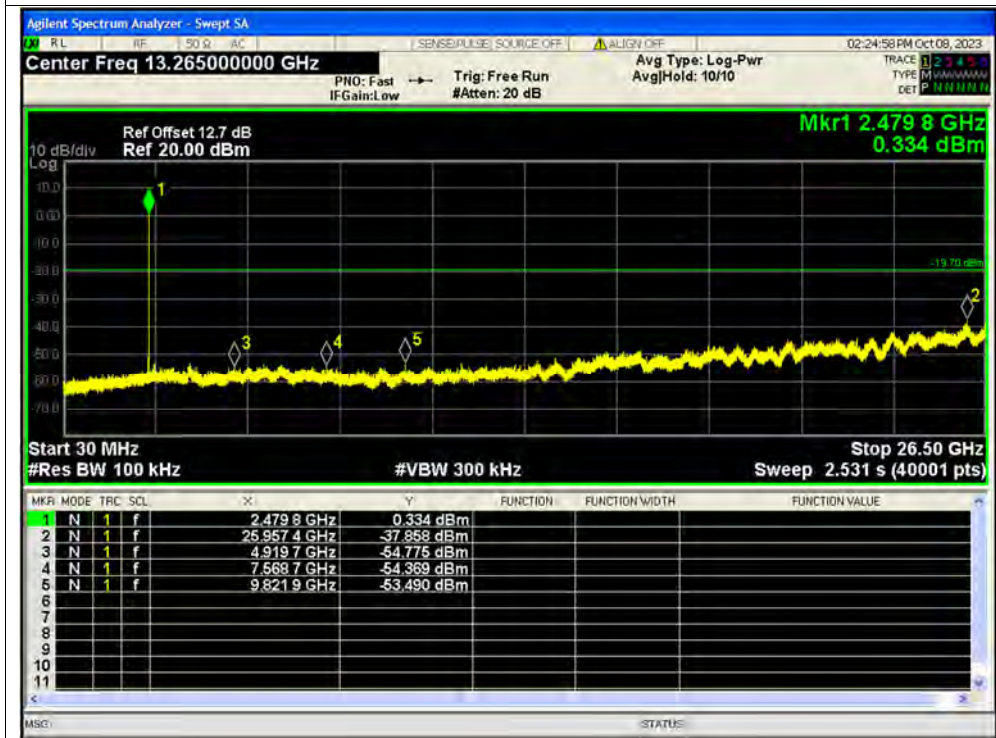

Tx. Spurious NVLT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVLT 2-DH5 2402MHz Ant1 Emission

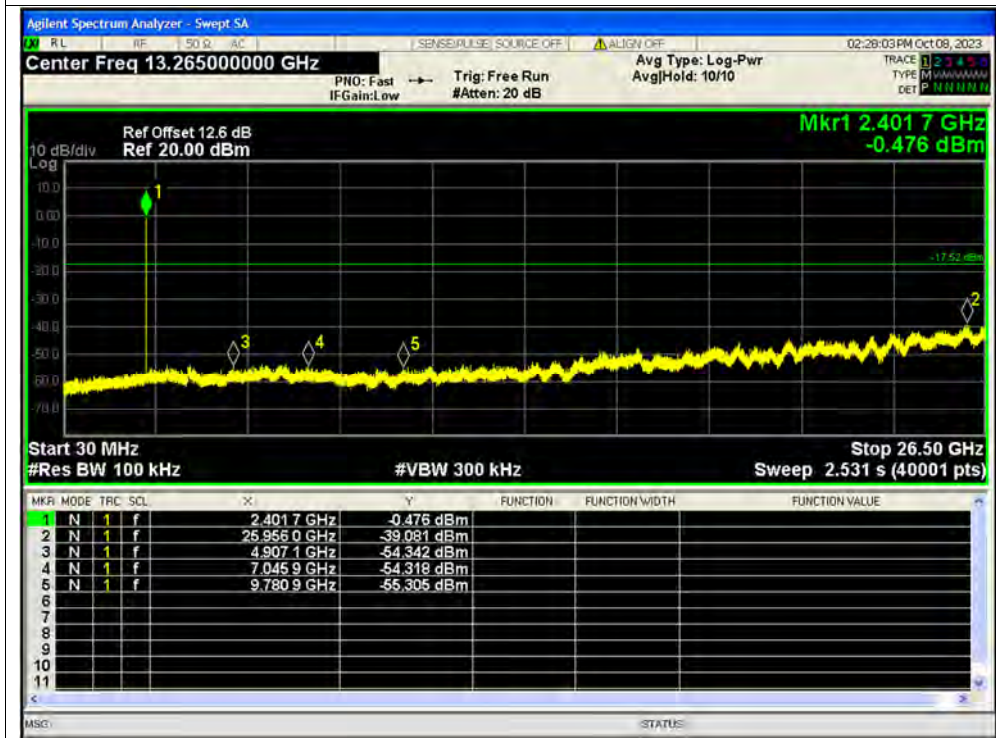

Tx. Spurious NVLT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVLT 2-DH5 2441MHz Ant1 Emission

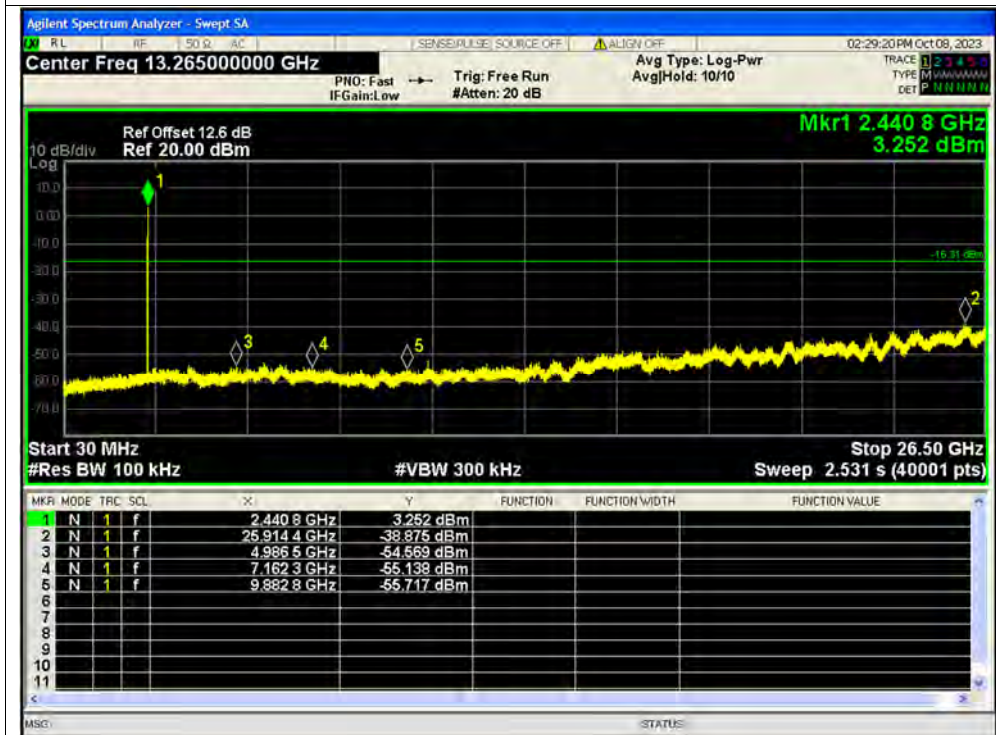




Tx. Spurious NVLT 2-DH5 2480MHz Ant1 Ref

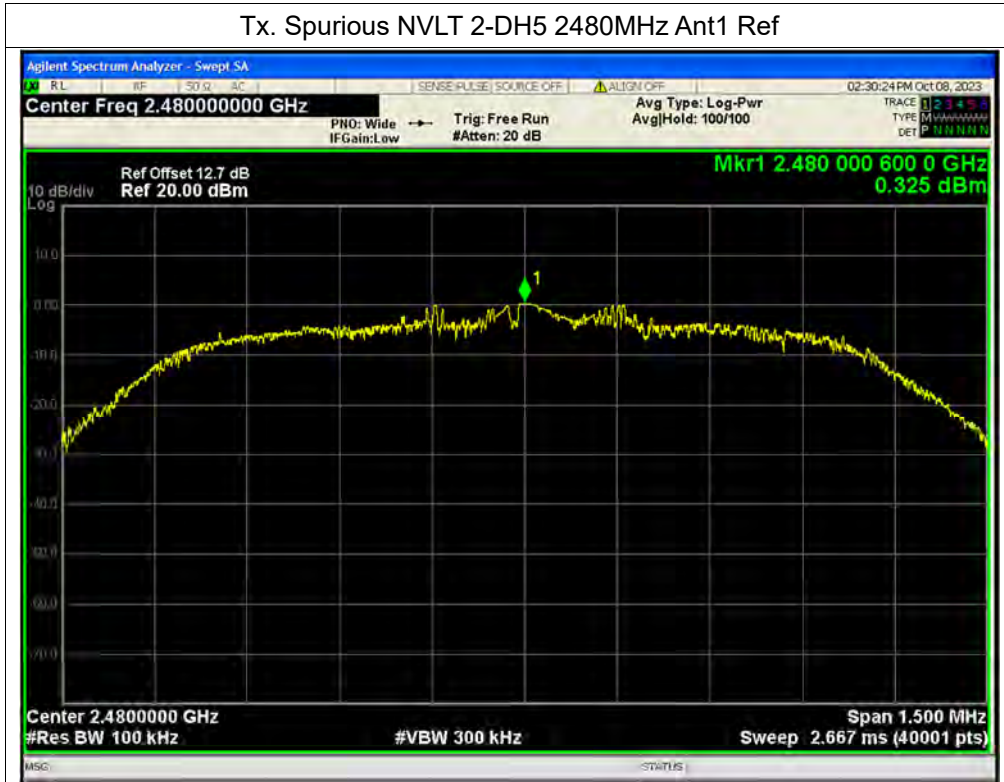

Tx. Spurious NVLT 2-DH5 2480MHz Ant1 Emission

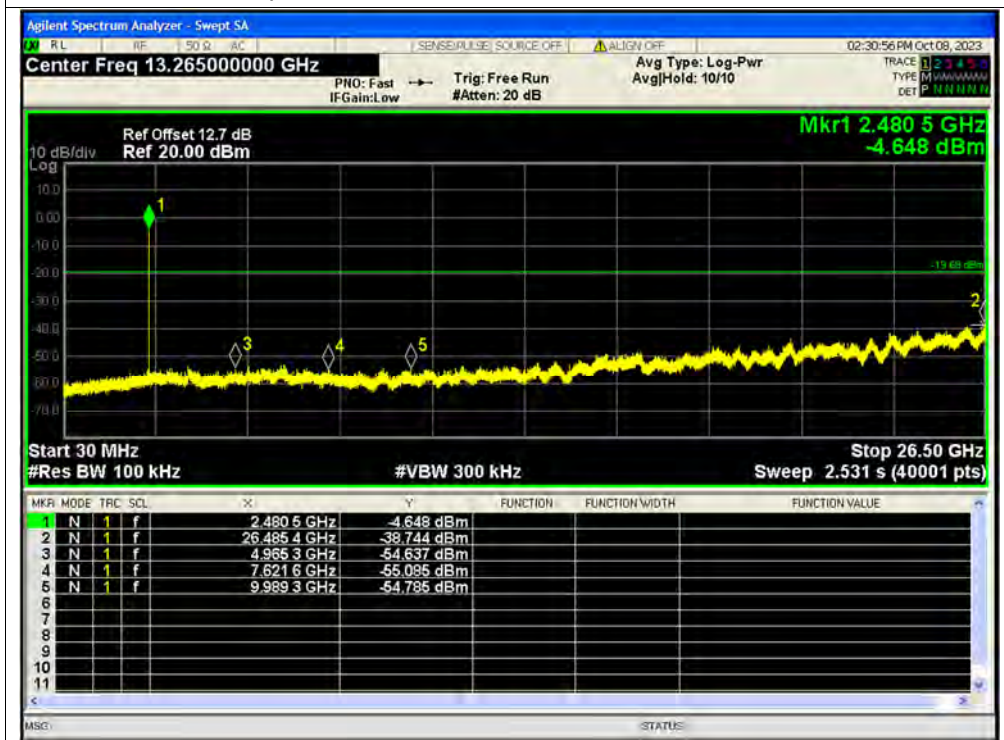






Tx. Spurious NVLT 3-DH5 2402MHz Ant1 Ref



Tx. Spurious NVLT 3-DH5 2402MHz Ant1 Emission

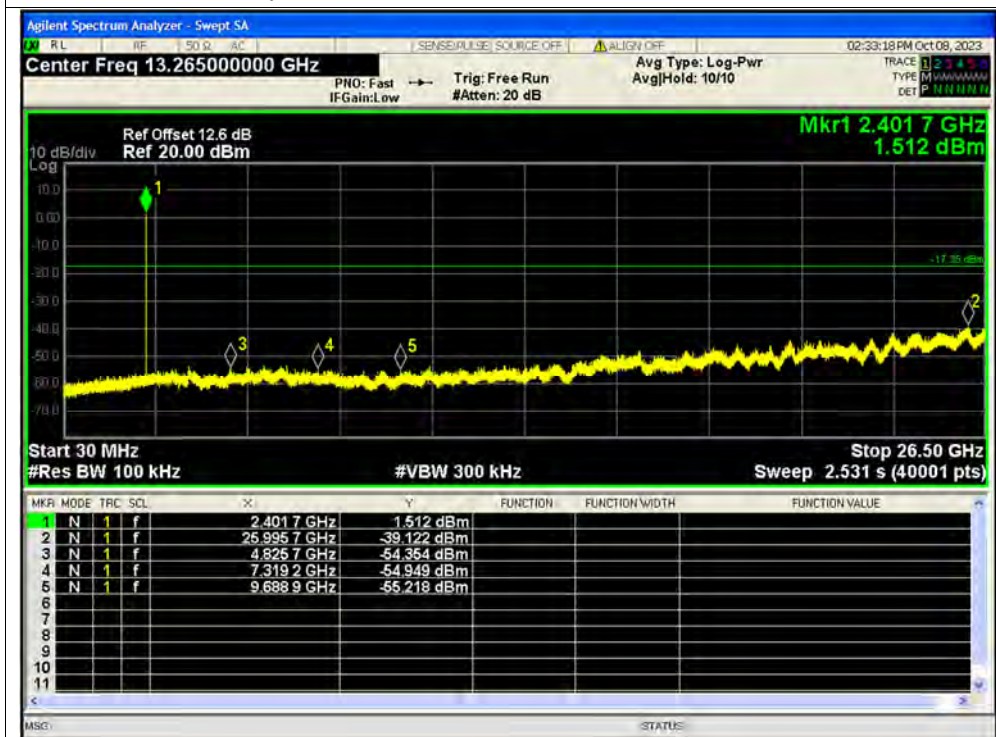




Tx. Spurious NVLT 3-DH5 2441MHz Ant1 Ref



Tx. Spurious NVLT 3-DH5 2441MHz Ant1 Emission

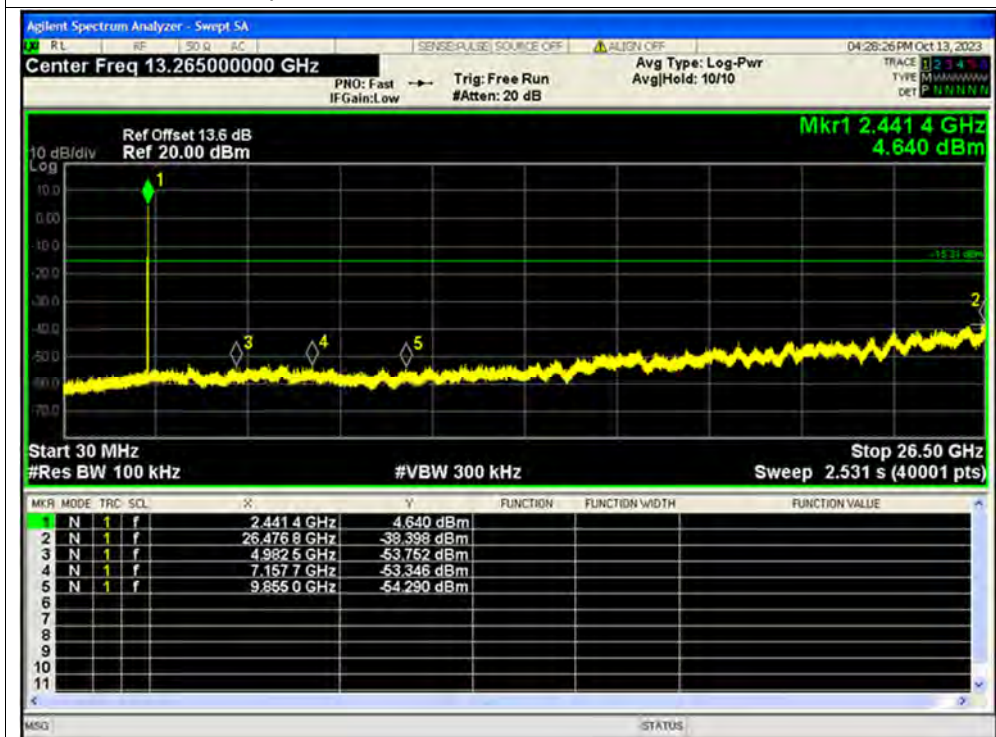




Tx. Spurious NVLT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVLT 3-DH5 2480MHz Ant1 Emission

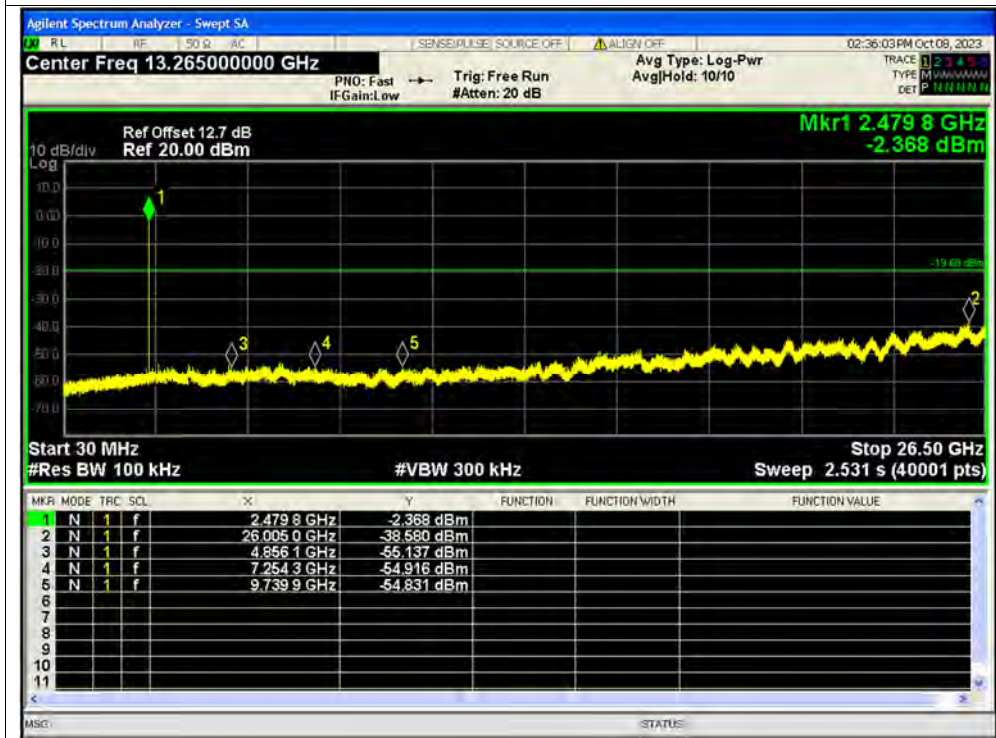


**A.9. Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-48.82	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-46.27	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-44.79	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-46.48	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-44.23	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-45.63	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-48.45	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-46.06	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-47.99	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-46.06	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-47.62	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-45.48	-20	Pass




Test Graphs

Band Edge NVLT 1-DH5 2402MHz Ant1 No-Hopping Ref

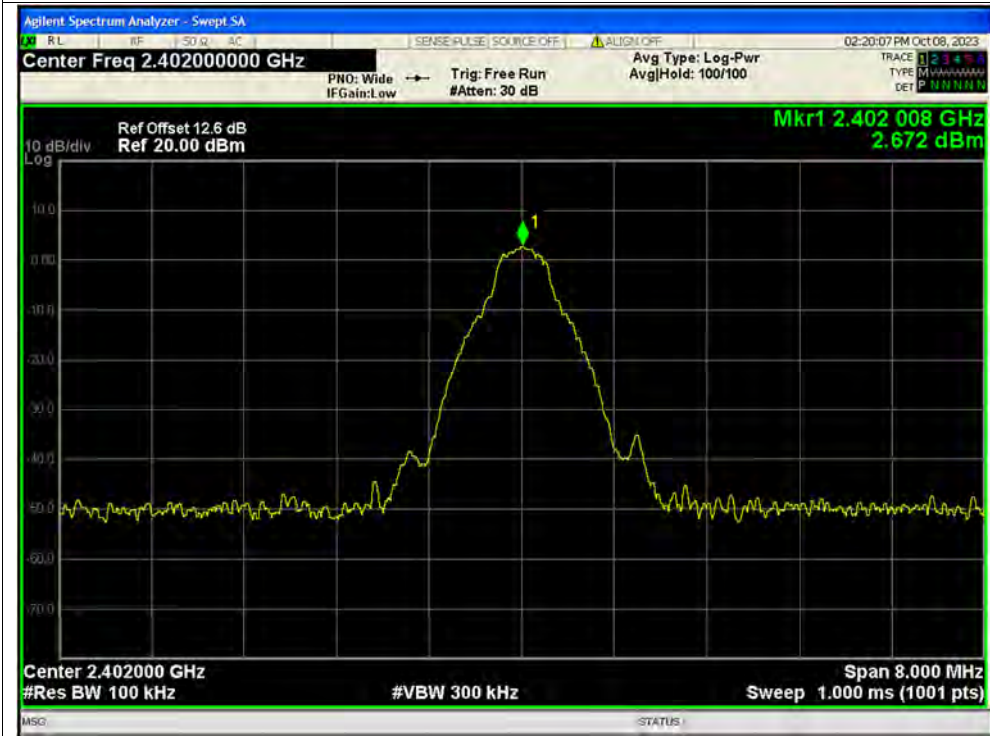


Band Edge NVLT 1-DH5 2402MHz Ant1 No-Hopping Emission

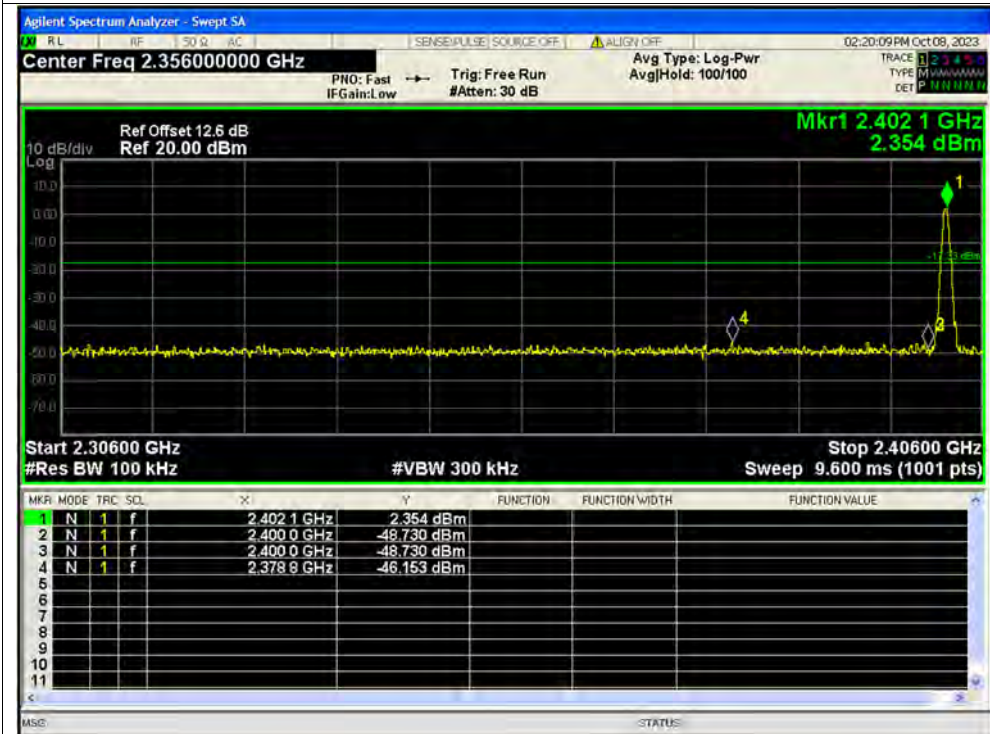




Band Edge NVLT 1-DH5 2480MHz Ant1 No-Hopping Ref

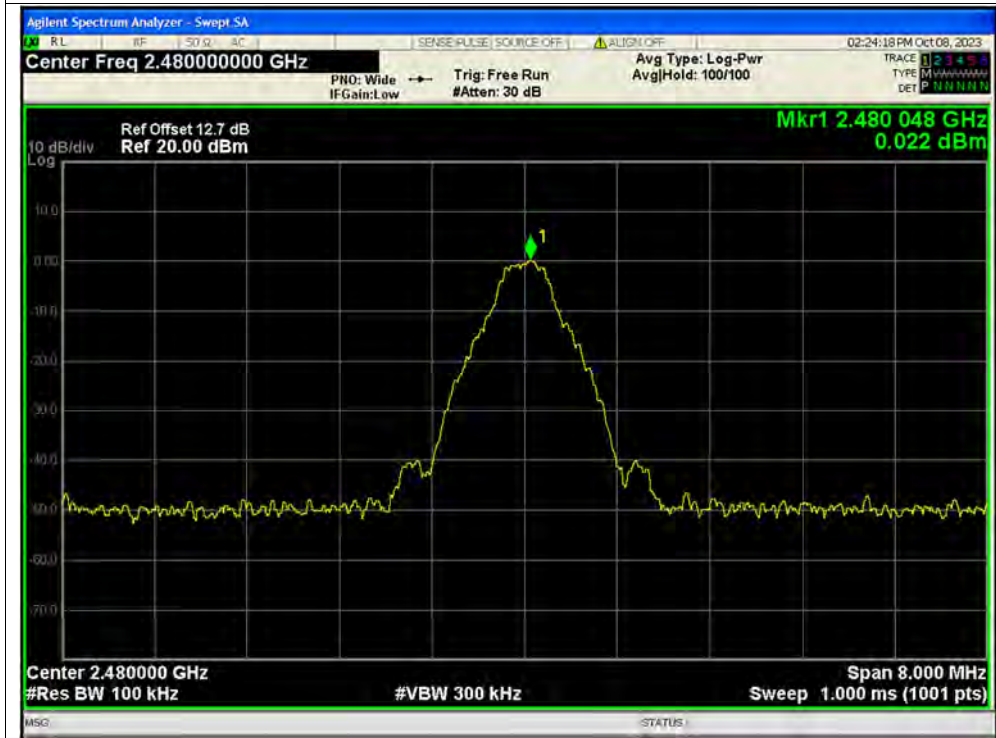

Band Edge NVLT 1-DH5 2480MHz Ant1 No-Hopping Emission

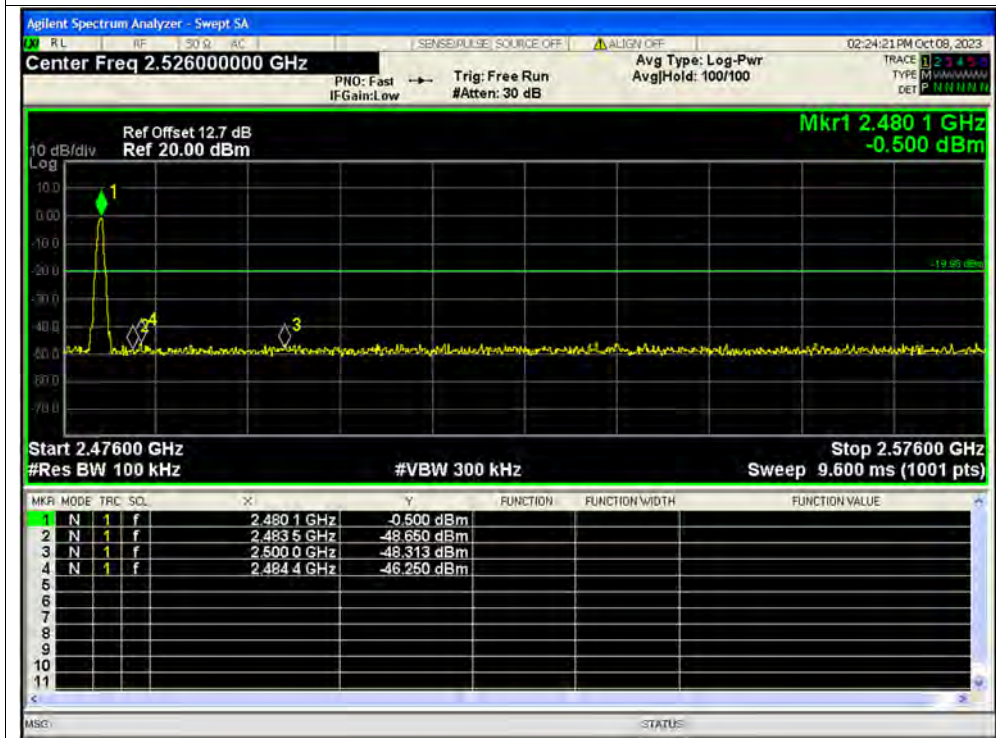




Band Edge NVLT 2-DH5 2402MHz Ant1 No-Hopping Ref



Band Edge NVLT 2-DH5 2402MHz Ant1 No-Hopping Emission

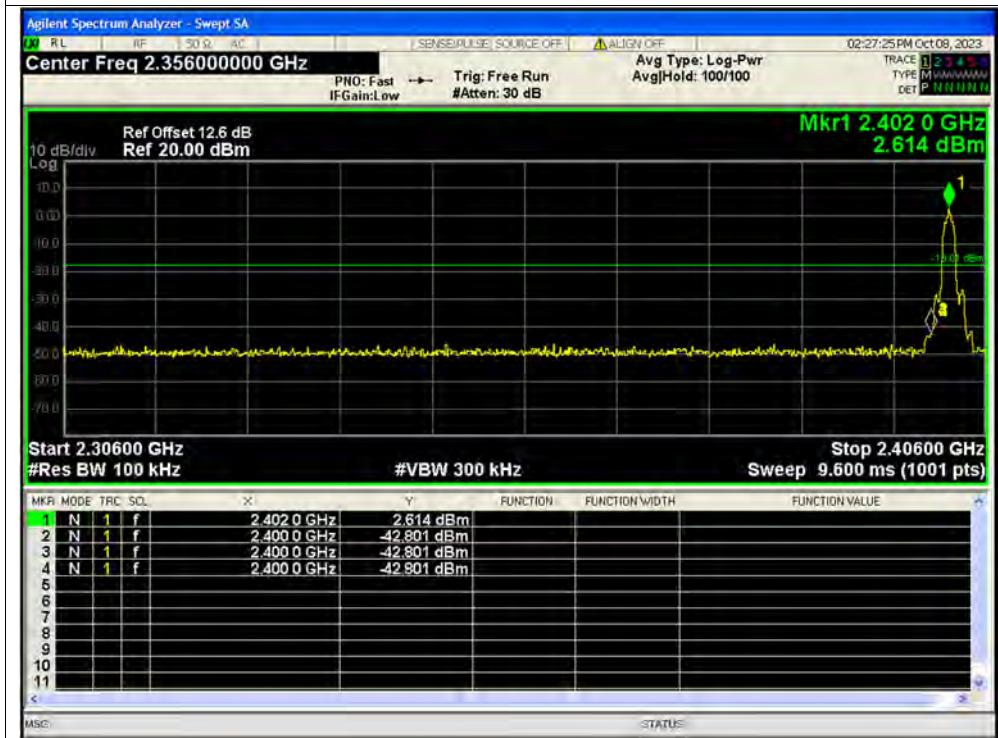




Band Edge NVLT 2-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVLT 2-DH5 2480MHz Ant1 No-Hopping Emission

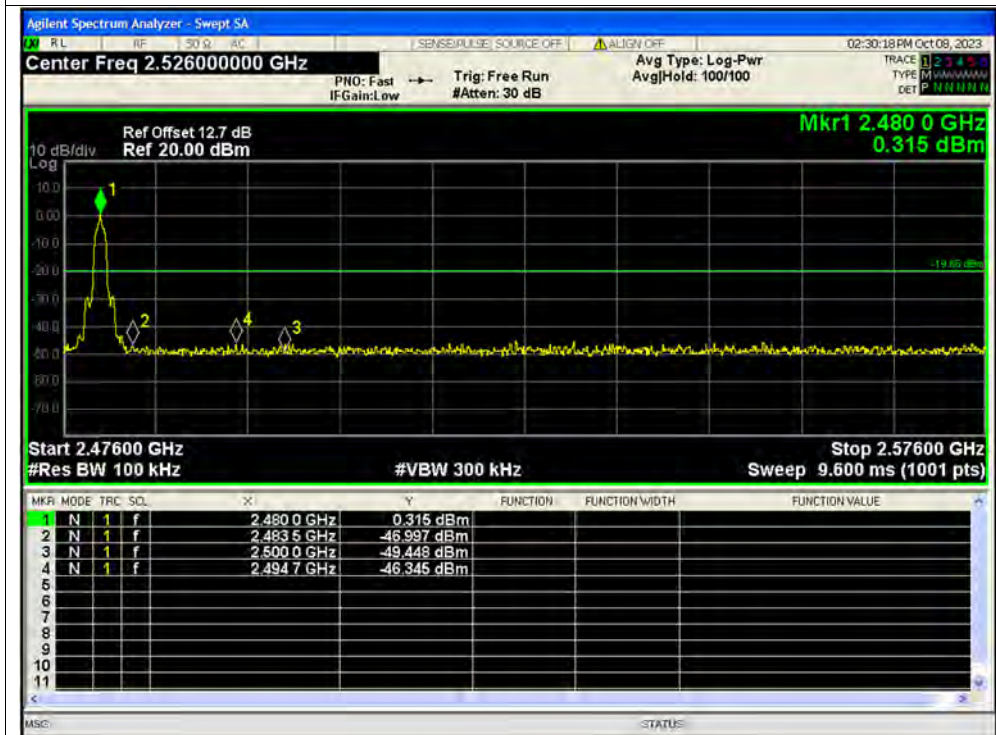






Band Edge NVLT 3-DH5 2402MHz Ant1 No-Hopping Ref



Band Edge NVLT 3-DH5 2402MHz Ant1 No-Hopping Emission

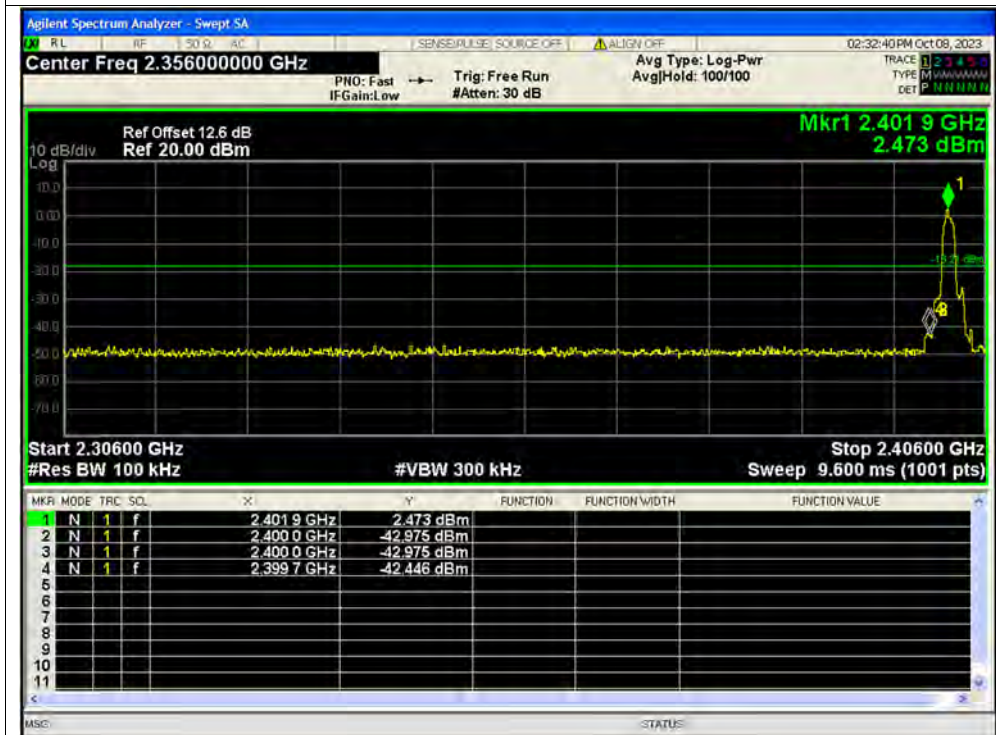




Band Edge NVLT 3-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVLT 3-DH5 2480MHz Ant1 No-Hopping Emission

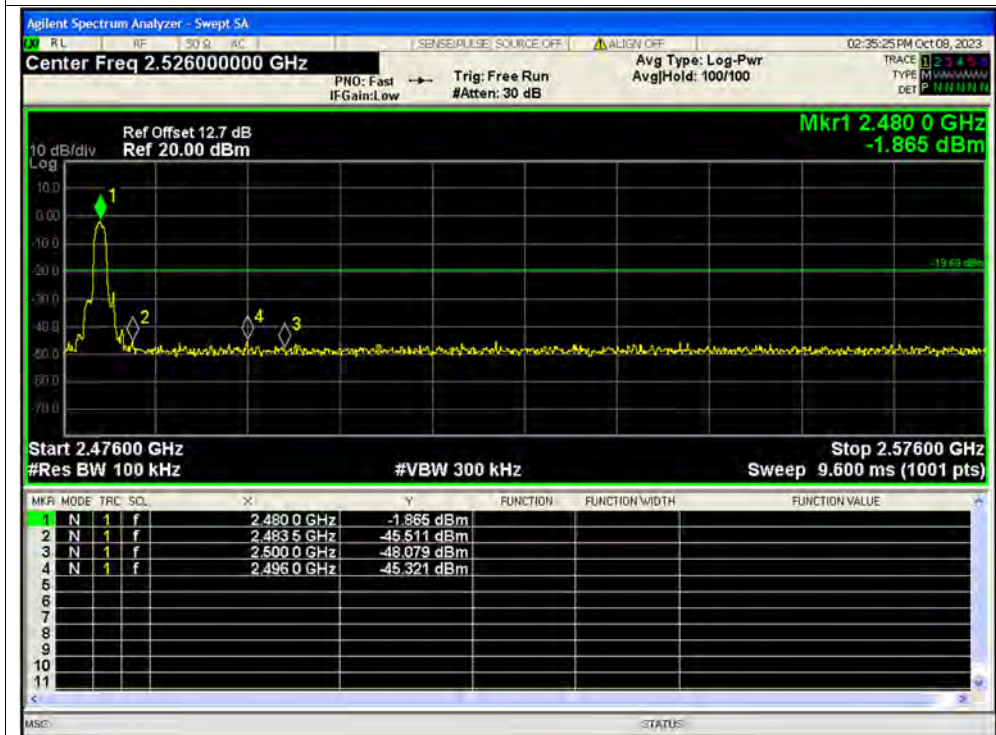




Test Graphs

Band Edge(Hopping) NVLT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 1-DH5 2402MHz Ant1 Hopping Emission

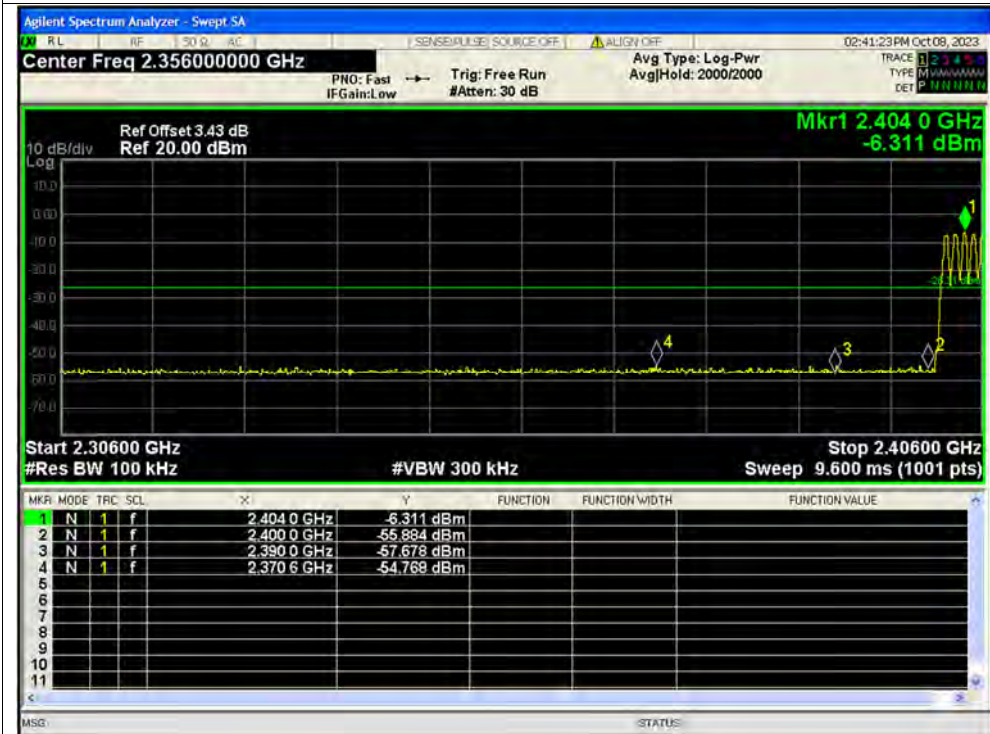




Band Edge(Hopping) NVLT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 1-DH5 2480MHz Ant1 Hopping Emission

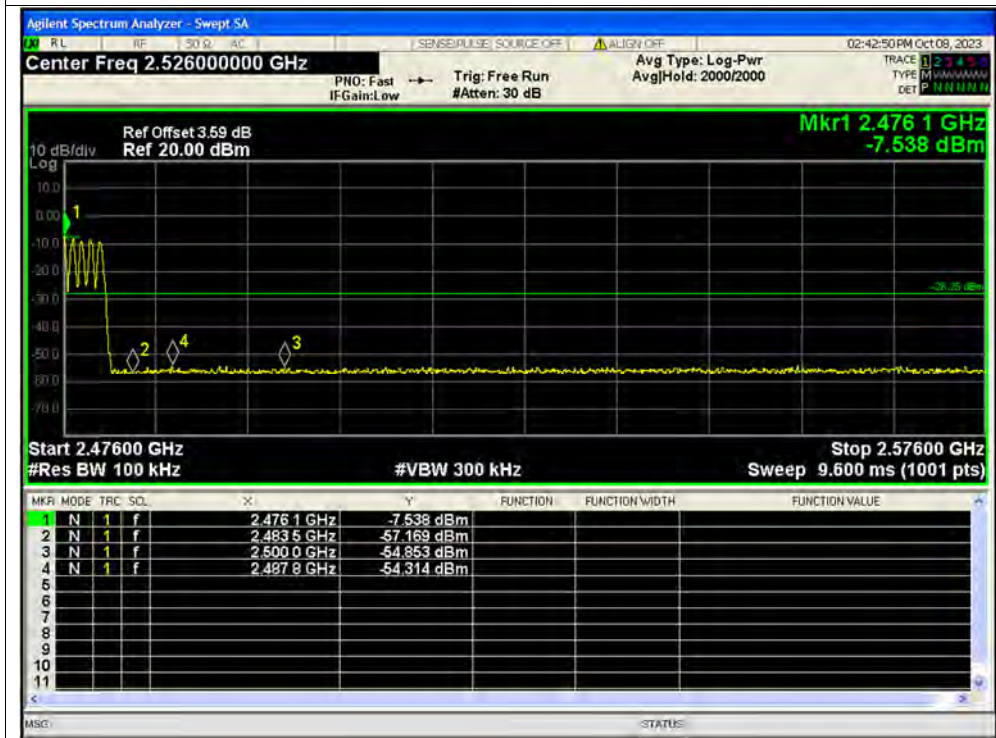




Band Edge(Hopping) NVLT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 2-DH5 2402MHz Ant1 Hopping Emission

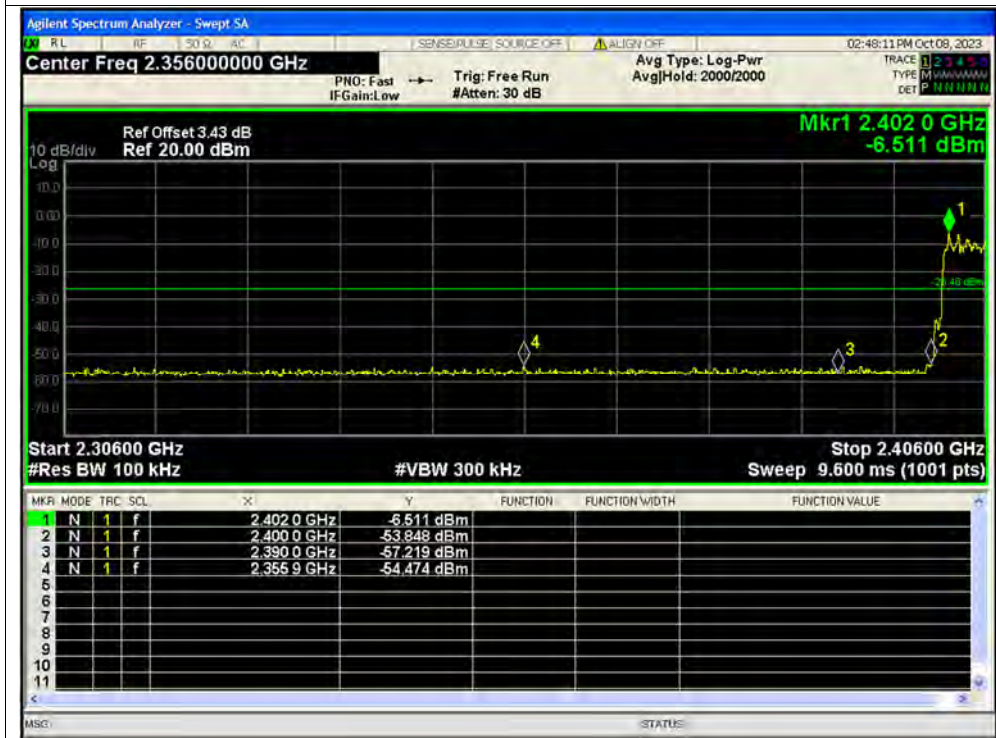




Band Edge(Hopping) NVLT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 2-DH5 2480MHz Ant1 Hopping Emission

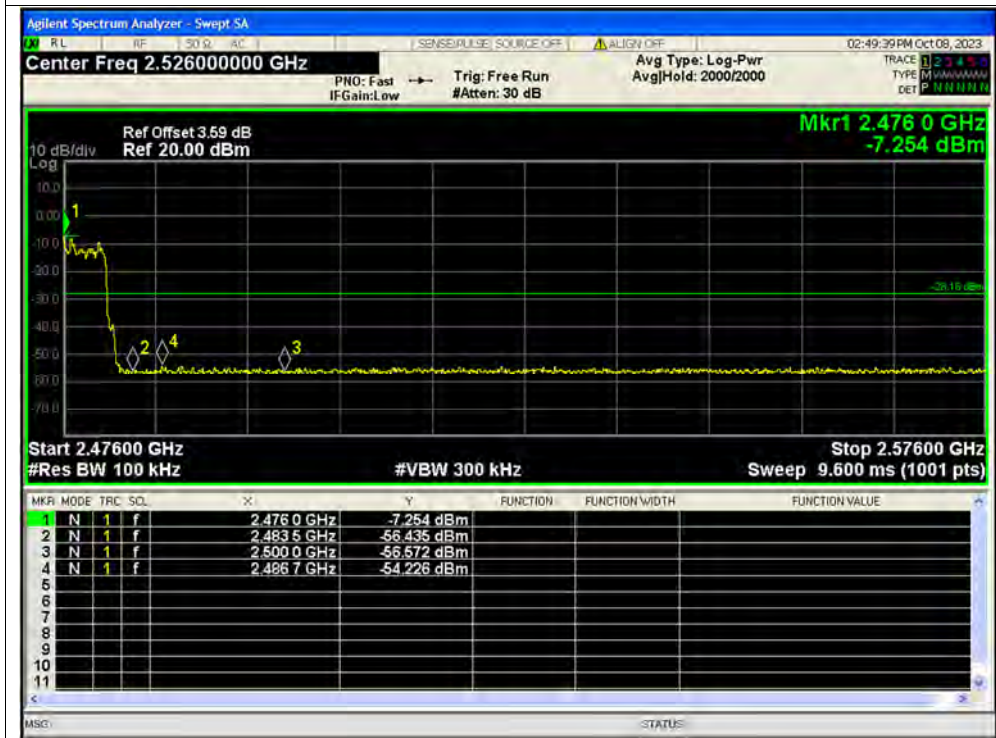




Band Edge(Hopping) NVLT 3-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 3-DH5 2402MHz Ant1 Hopping Emission

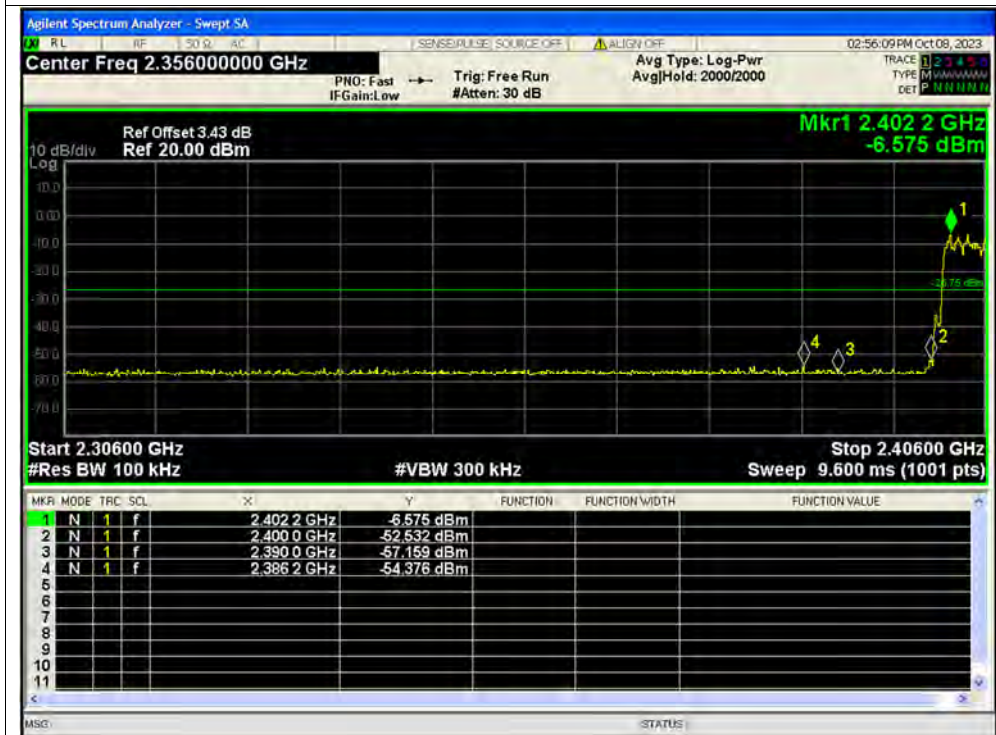




Band Edge(Hopping) NVLT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 3-DH5 2480MHz Ant1 Hopping Emission

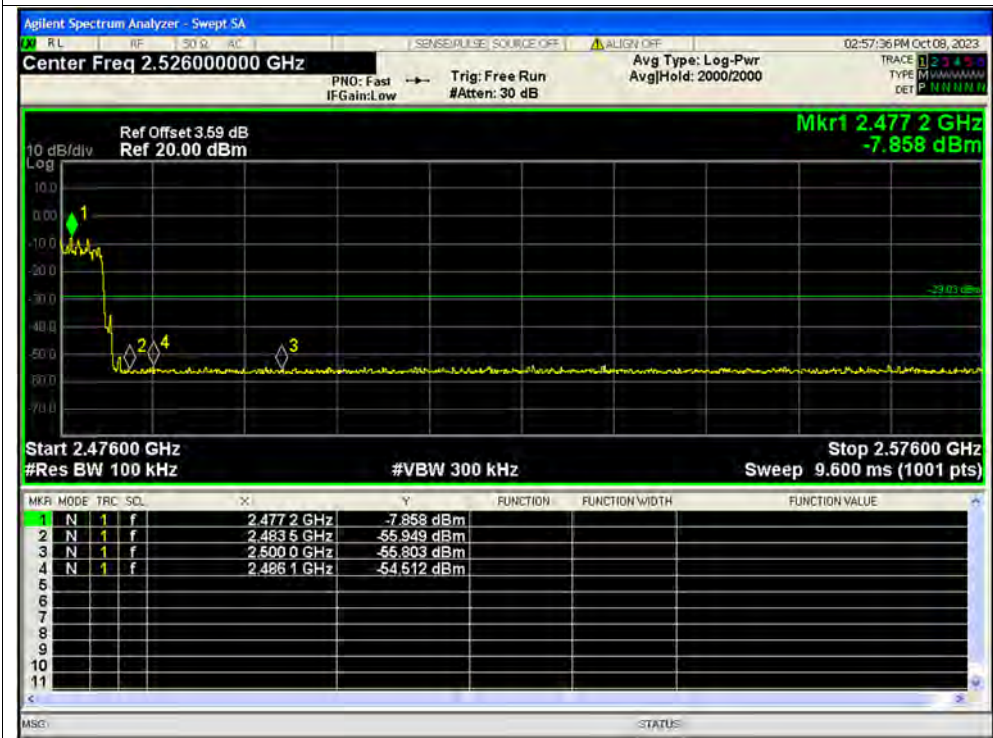





### A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+ PC Adapter + PC + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

**B. Test Plot:**

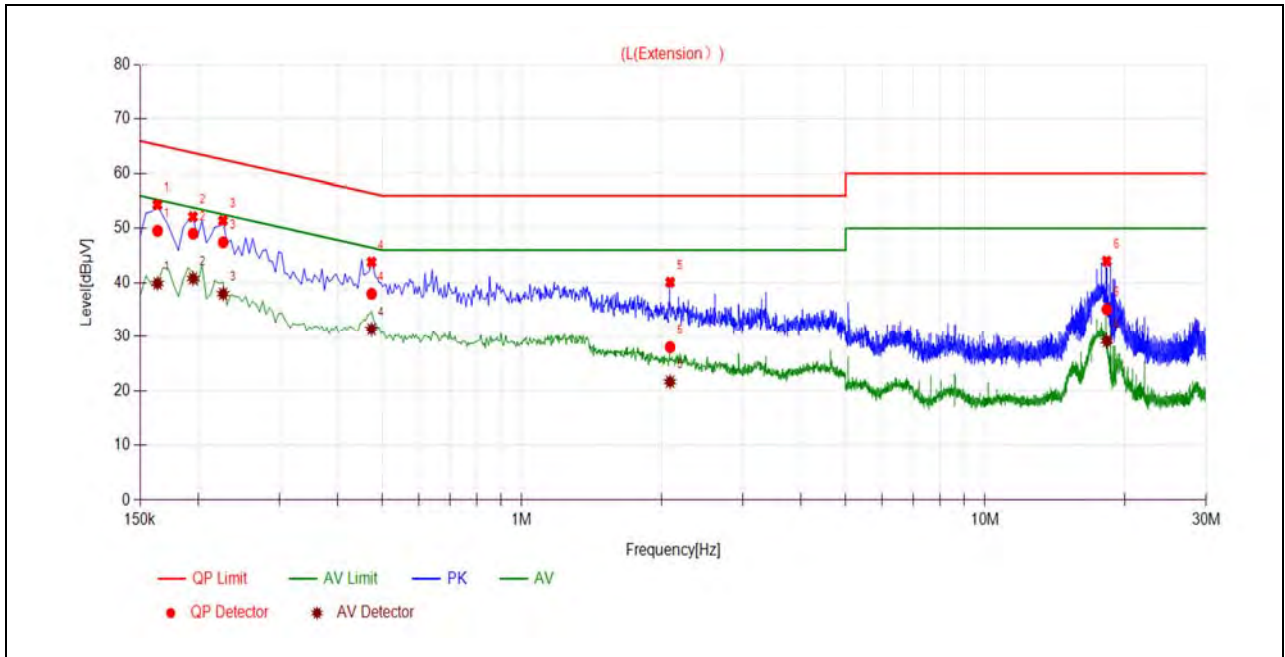

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1636	49.56	39.88	65.28	55.28	Line	PASS
2	0.1952	49.03	40.80	63.81	53.81		PASS
3	0.2267	47.45	37.96	62.57	52.57		PASS
4	0.4739	37.95	31.37	56.44	46.44		PASS
5	2.0893	28.00	21.63	56.00	46.00		PASS
6	18.3080	35.10	29.13	60.00	50.00		PASS

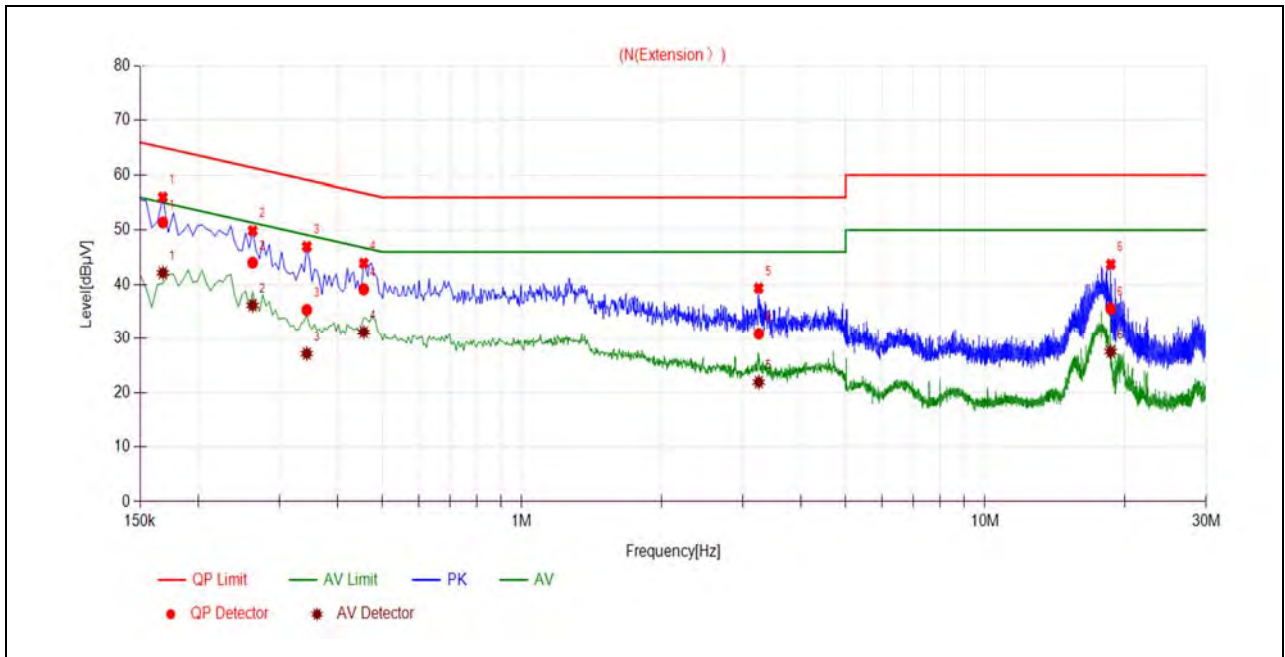

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1680	51.41	42.16	65.06	55.06	Neutral	PASS
2	0.2625	44.03	36.19	61.35	51.35		PASS
3	0.3435	35.34	27.15	59.12	49.12		PASS
4	0.4559	39.14	31.20	56.77	46.77		PASS
5	3.2472	30.89	21.90	56.00	46.00		PASS
6	18.6594	35.58	27.53	60.00	50.00		PASS

**A.11. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading


$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

**GFSK Mode**

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
0	2369.58	PK	22.15	6.74	27.20	56.09	74	PASS
0	2377.69	AV	0.85	6.74	27.20	34.79	54	PASS
78	2483.76	PK	22.14	6.74	27.20	56.08	74	PASS
78	2483.50	AV	1.28	6.74	27.20	35.22	54	PASS

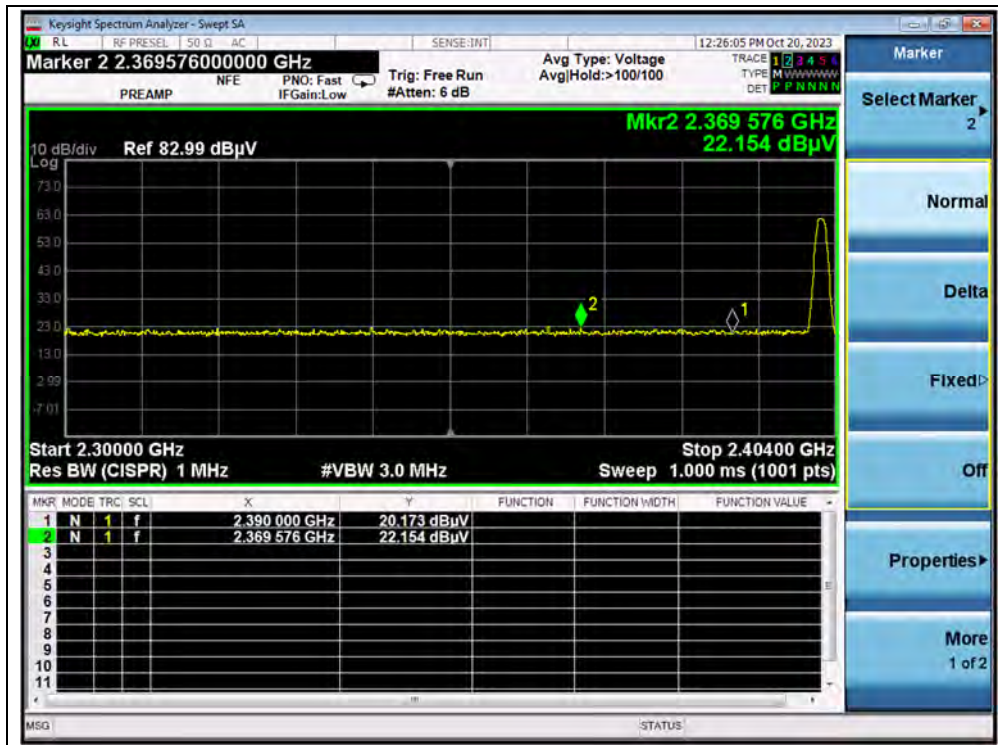


(PEAK, Channel 0, GFSK)

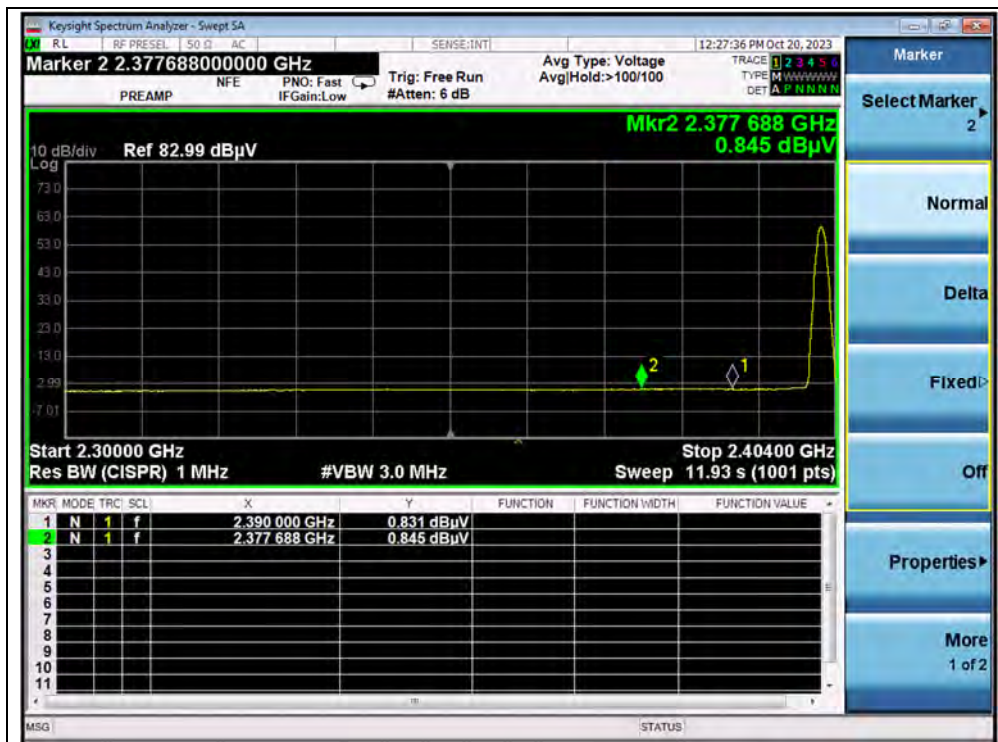

(AVERAGE, Channel 0, GFSK)



(PEAK, Channel 78, GFSK)

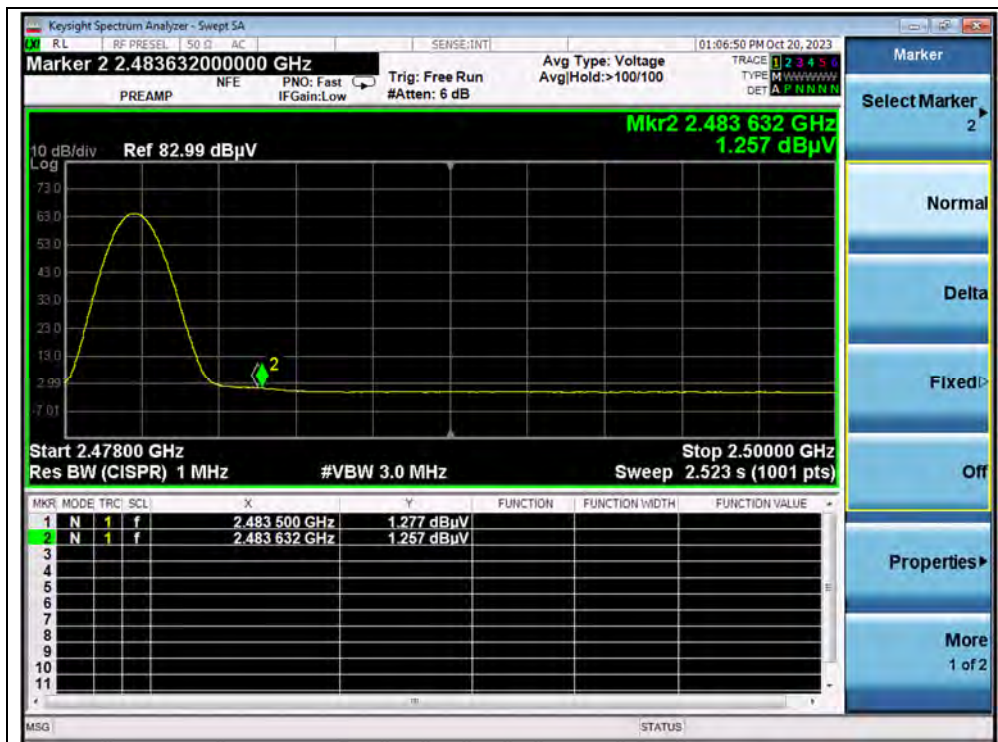


(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)					
0	2356.99	PK	22.39	6.74	27.20	56.33	74	PASS
0	2390.00	AV	0.99	6.74	27.20	34.93	54	PASS
78	2483.50	PK	25.99	6.74	27.20	59.93	74	PASS
78	2483.50	AV	8.43	6.74	27.20	42.37	54	PASS

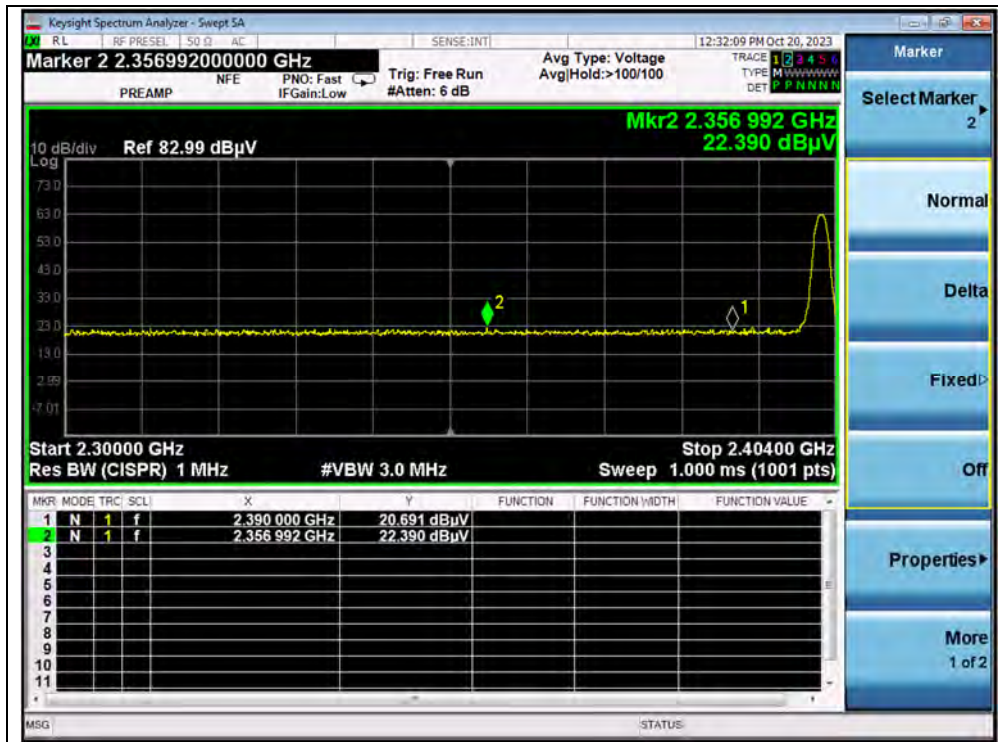

(PEAK, Channel 0,  $\pi/4$ -DQPSK)

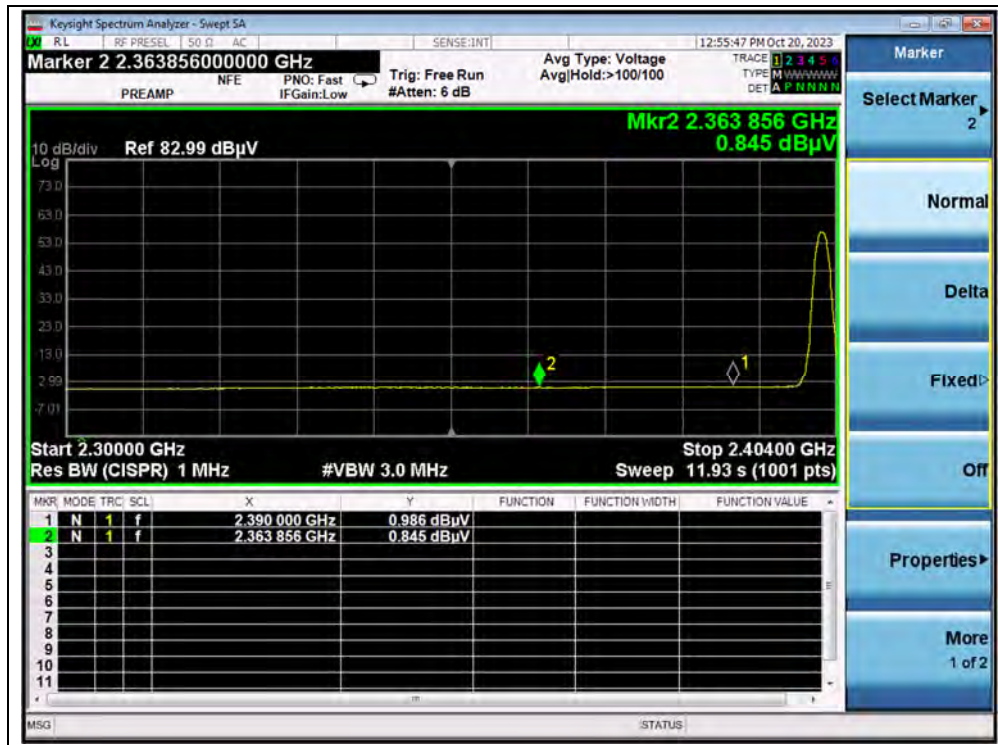

(AVERAGE, Channel 0,  $\pi/4$ -DQPSK)

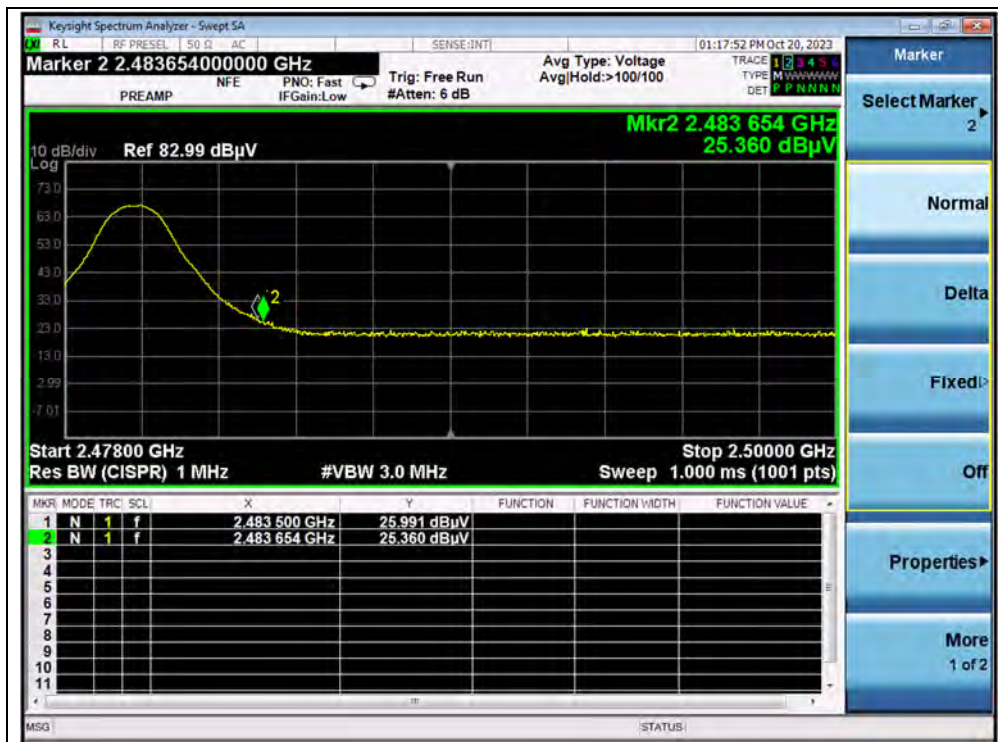

(PEAK, Channel 78,  $\pi/4$ -DQPSK)






(AVERAGE, Channel 78, π/4-DQPSK)




**8-DPSK Mode**


Channel	Frequency (MHz)	Detector	Receiver Reading U <sub>R</sub> (dBμV)	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2378.62	PK	22.26	6.74	27.20	56.20	74	PASS
0	2378.62	AV	1.22	6.74	27.20	35.16	54	PASS
78	2483.50	PK	27.18	6.74	27.20	61.12	74	PASS
78	2483.50	AV	8.19	6.74	27.20	42.13	54	PASS

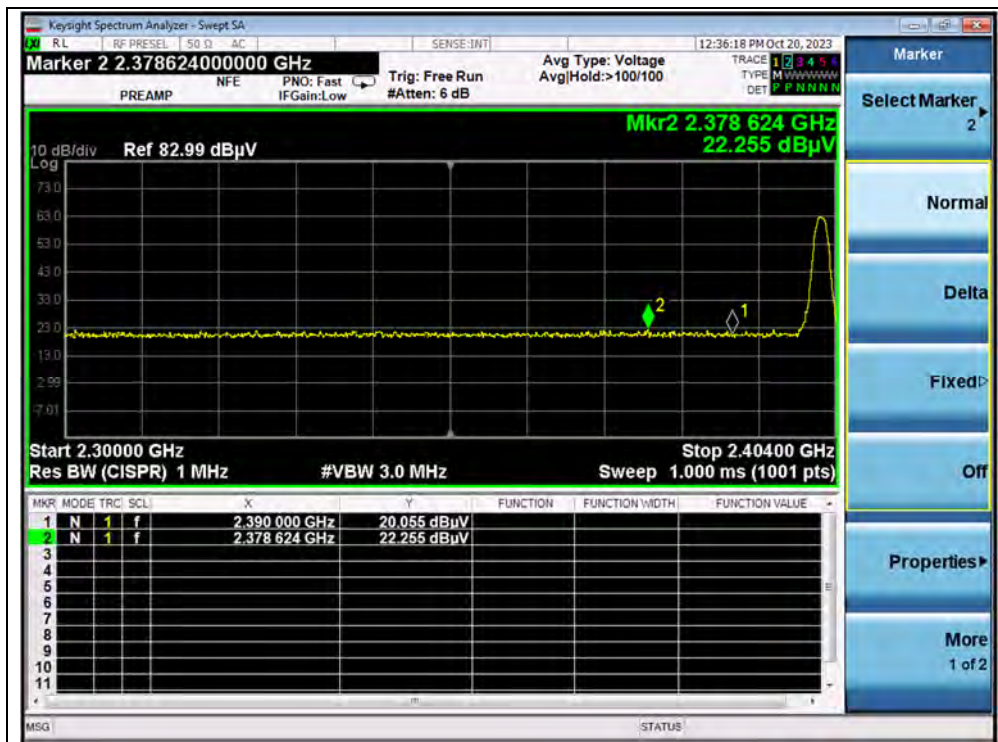

(PEAK, Channel 0, 8-DPSK)

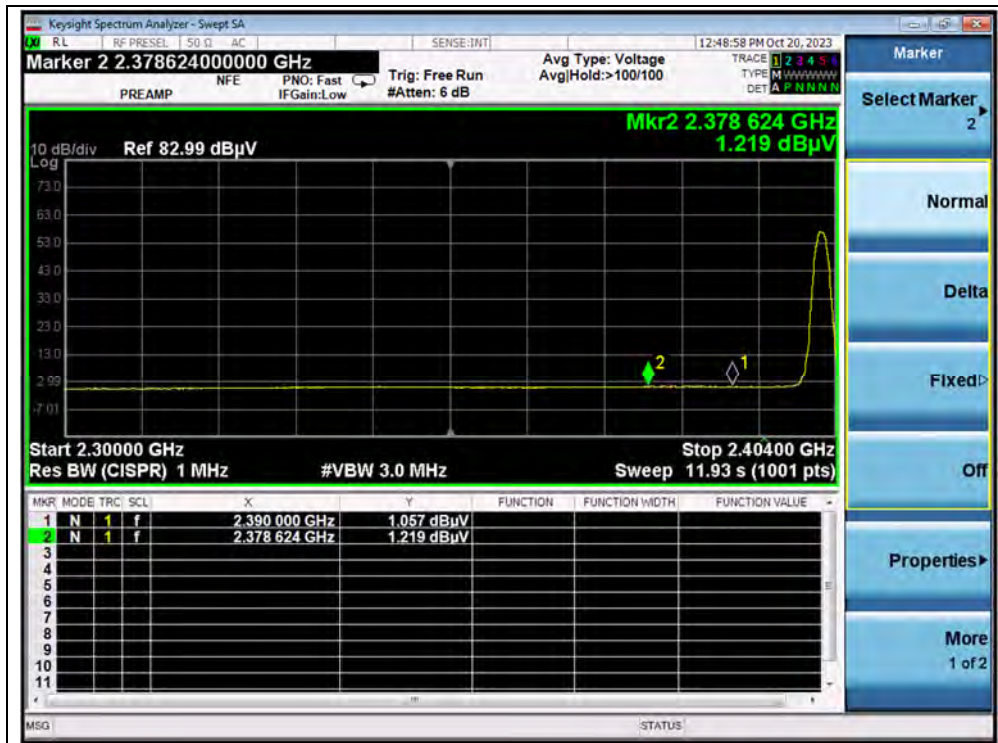

(AVERAGE, Channel 0, 8-DPSK)

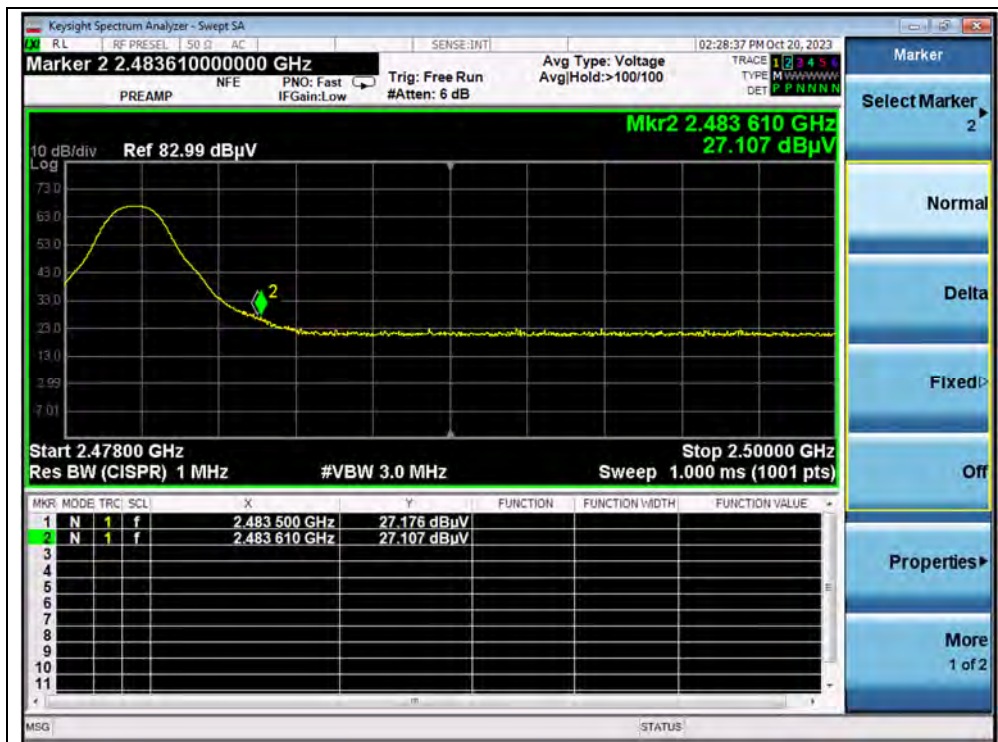

(PEAK, Channel 78, 8-DPSK)



(AVERAGE, Channel 78, 8-DPSK)



## A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




**GFSK Mode**


Plots for Channel 0

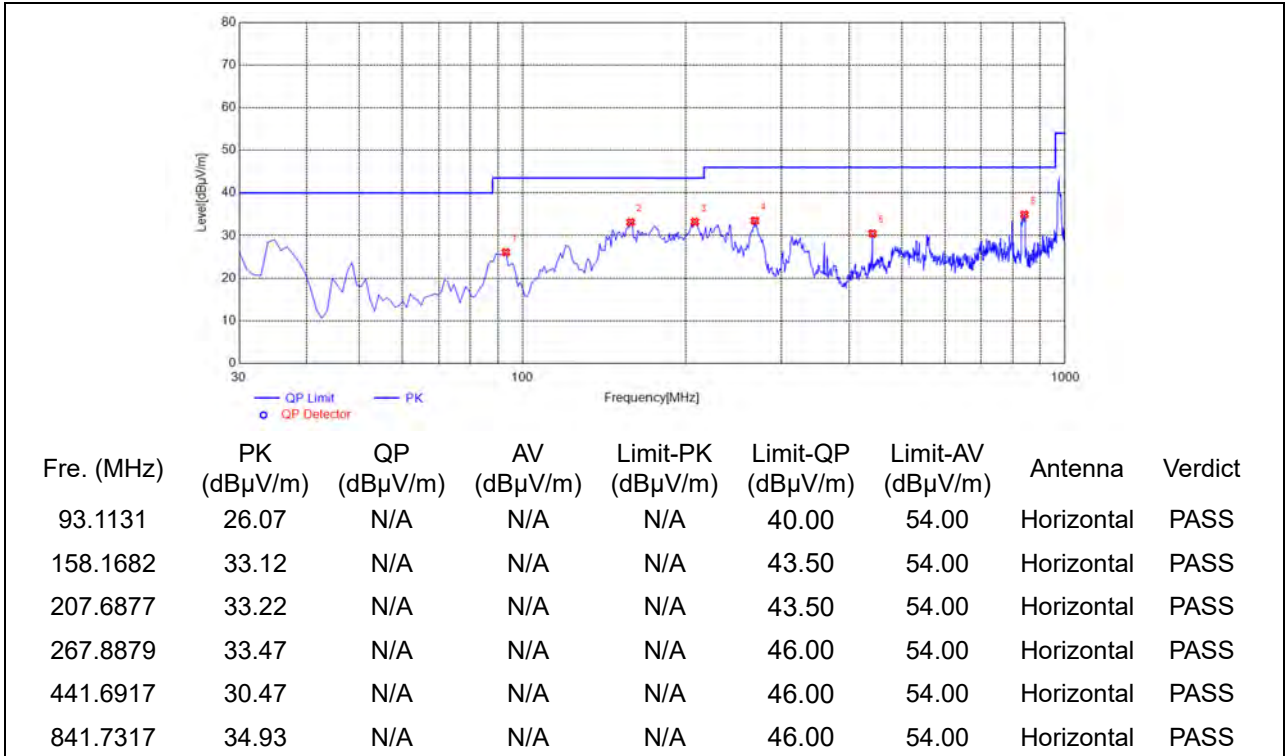

(Antenna Horizontal, 30MHz to 1GHz)

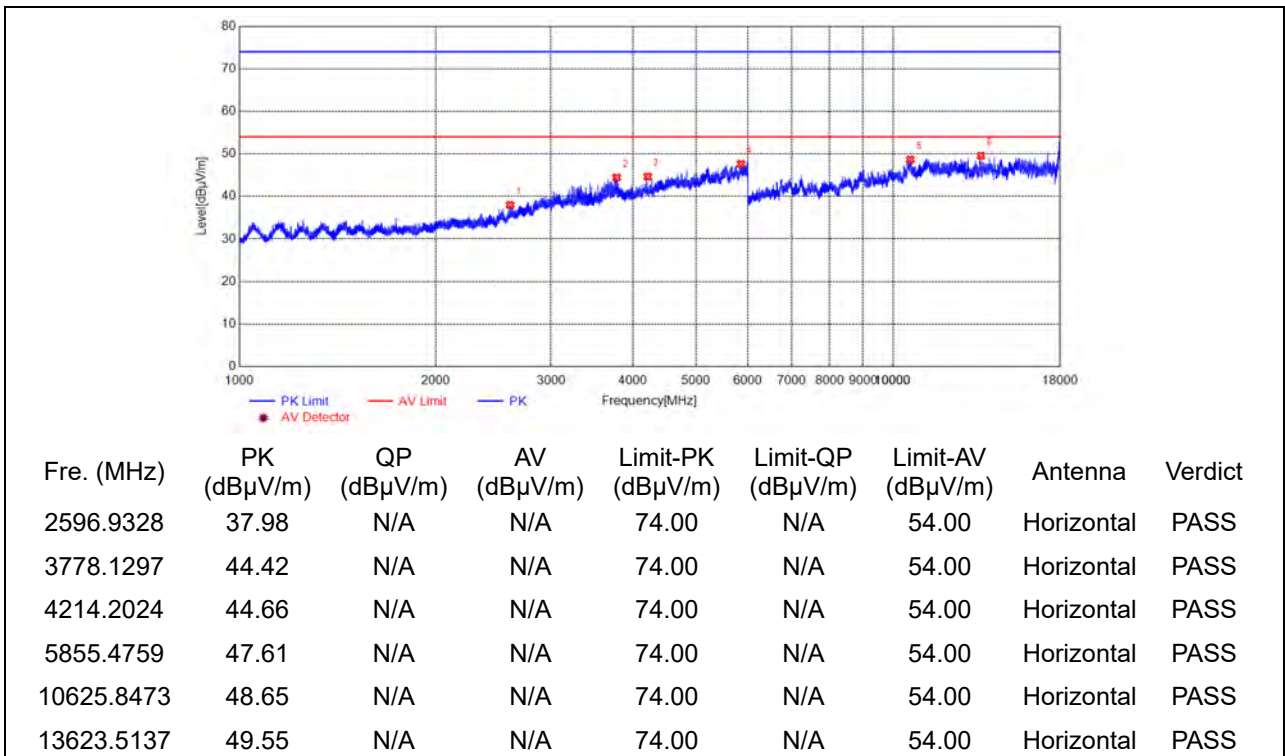


(Antenna Horizontal, 1GHz to 18GHz)

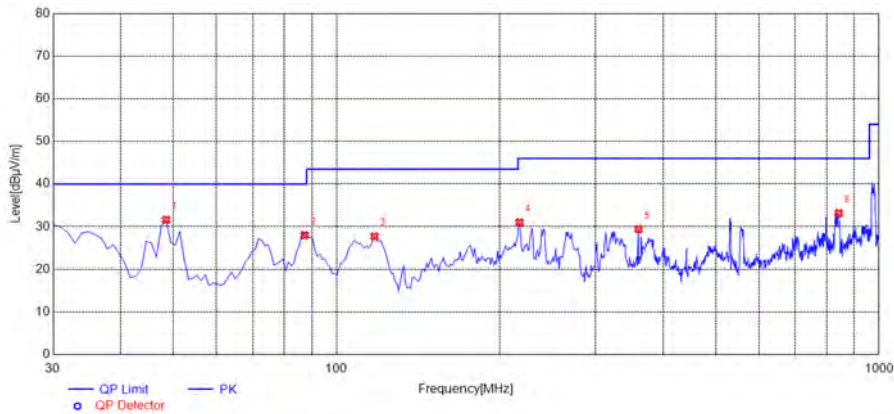

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	31.59	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
87.2873	27.98	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
117.3874	27.72	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
217.3974	30.97	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
360.1301	29.44	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
842.7027	33.17	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

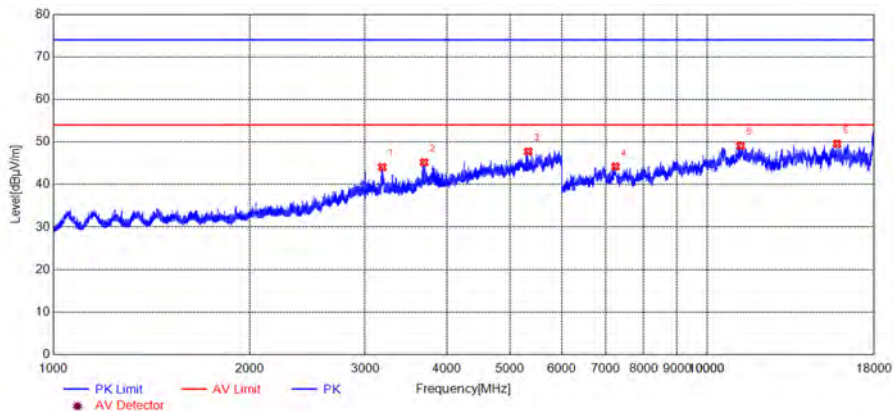

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3187.0312	44.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3690.6151	45.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5325.8876	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7242.8048	44.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11253.9171	49.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15805.0895	49.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 39

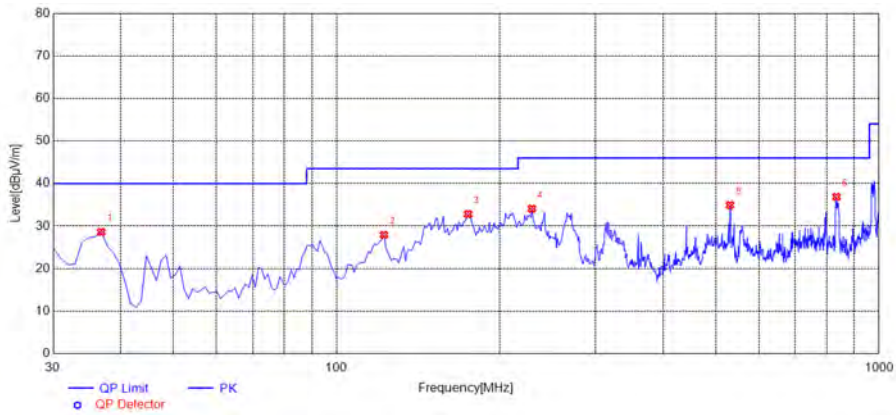

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
36.7968	28.61	N/A	N/A	N/A	40.00	54.00	Horizontal	PASS
122.2422	27.91	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
174.6747	32.82	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
229.0490	34.08	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
531.0210	34.92	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
834.9349	36.88	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 1GHz)

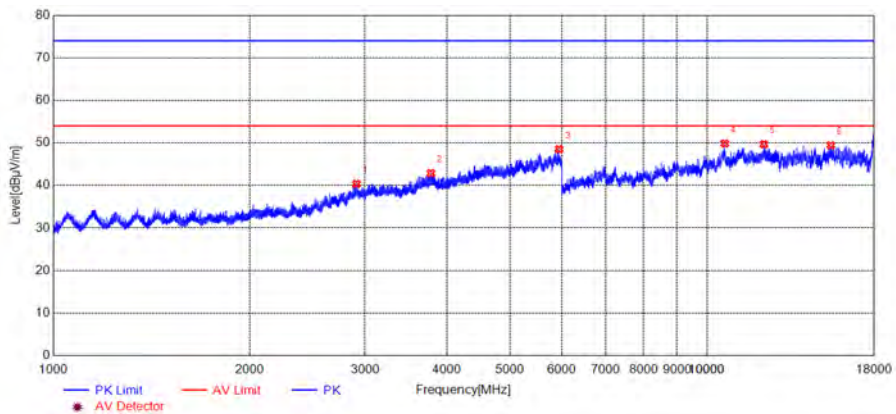

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
2910.3184	40.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3781.6303	42.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5939.4899	48.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10645.8495	49.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12212.6903	49.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15461.0512	49.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 1GHz to 18GHz)



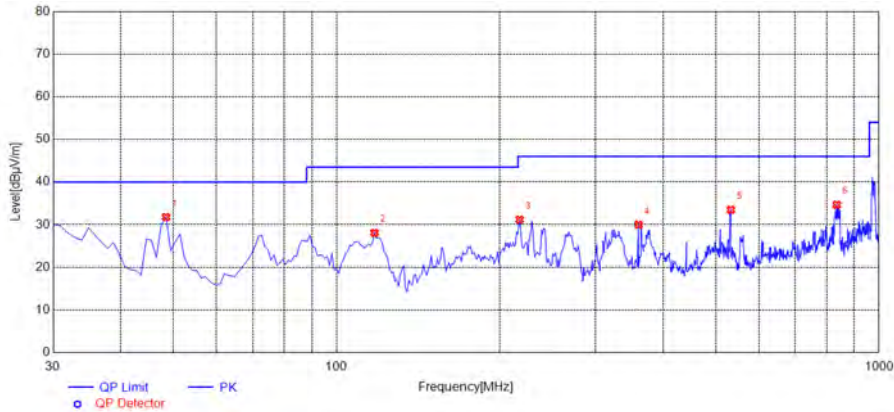

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	31.79	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
117.3874	28.08	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
217.3974	31.19	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
360.1301	30.02	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
532.9630	33.48	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
835.9059	34.66	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

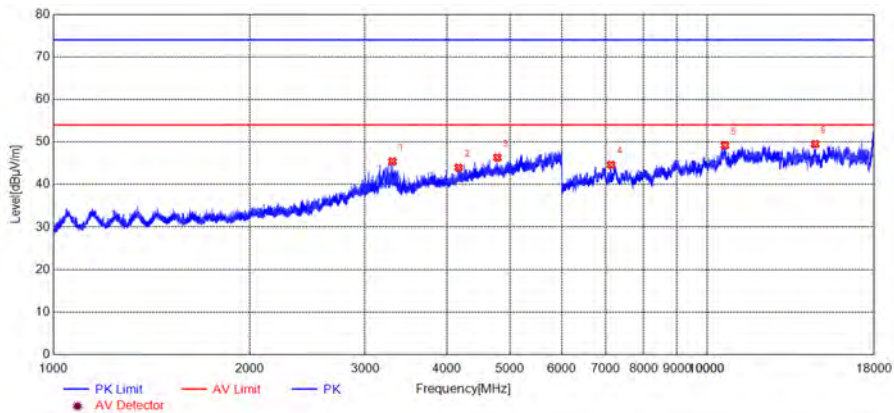

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3302.5504	45.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4168.1947	43.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4778.7965	46.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7133.4593	44.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10649.8500	49.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14627.6253	49.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


Plot for Channel 78

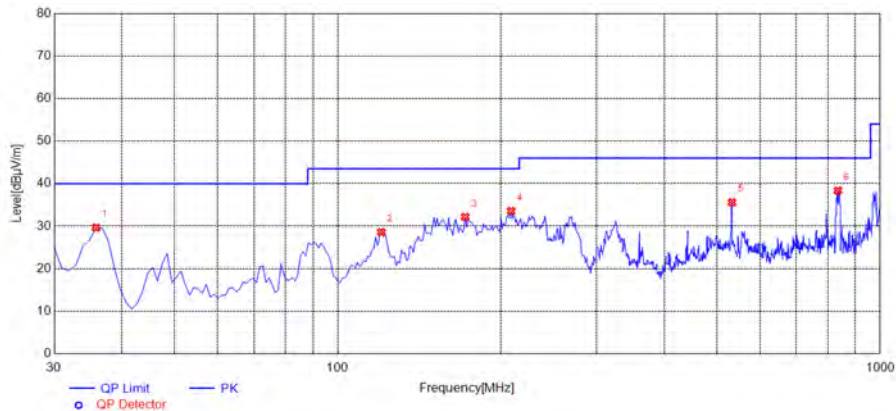

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
35.8258	29.65	N/A	N/A	N/A	40.00	54.00	Horizontal	PASS
120.3003	28.57	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
171.7618	32.15	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
208.6587	33.56	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
532.9630	35.58	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
835.9059	38.38	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS


B.

(Antenna Horizontal, 30MHz to 1GHz)

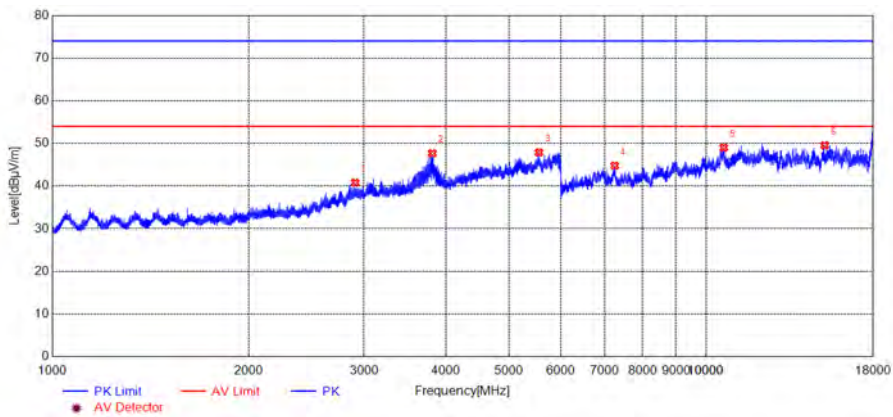


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
2906.3177	40.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3813.1355	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5551.4252	47.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7249.4722	44.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10641.8491	49.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15183.6871	49.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

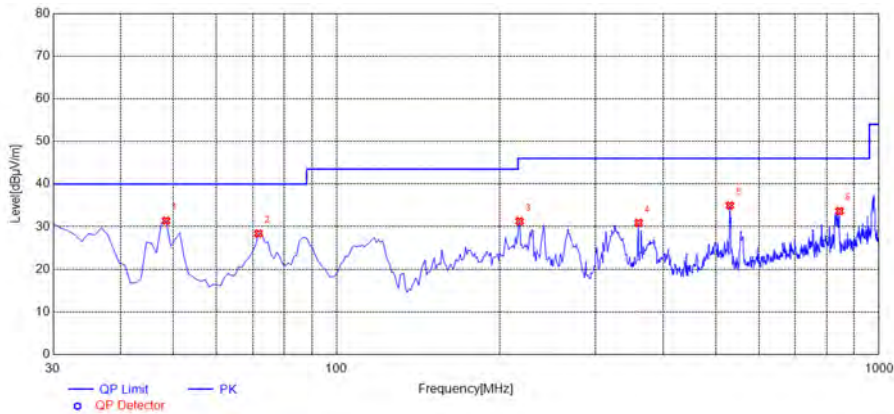

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	31.38	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
71.7518	28.40	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
217.3974	31.26	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
360.1301	30.88	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	34.98	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
845.6156	33.64	N/A	N/A	N/A	46.00	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

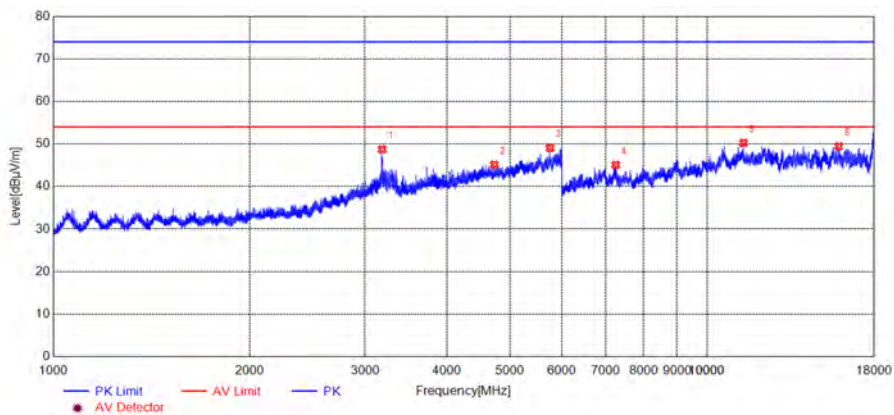


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3185.5309	48.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4727.7880	45.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5751.9587	49.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7249.4722	45.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11363.2626	50.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15893.0992	49.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




**$\pi/4$ -DQPSK Mode**

Plots for Channel 0

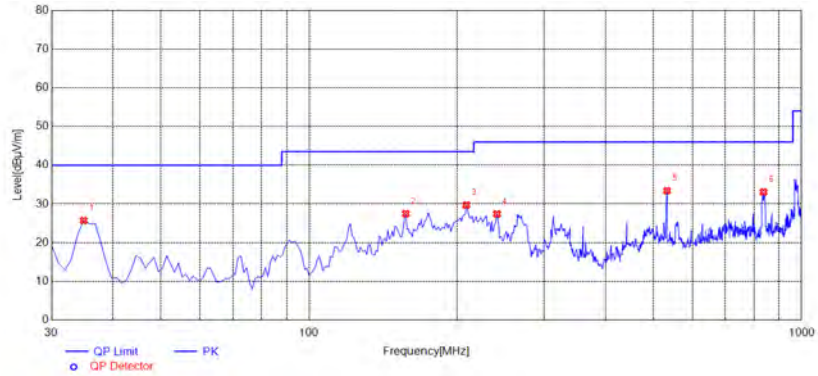


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
34.8549	25.71	N/A	N/A	N/A	40.00	54.00	Horizontal	PASS
157.1972	27.46	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
208.6587	29.69	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
240.7007	27.40	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
532.9630	33.41	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
836.8769	33.07	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

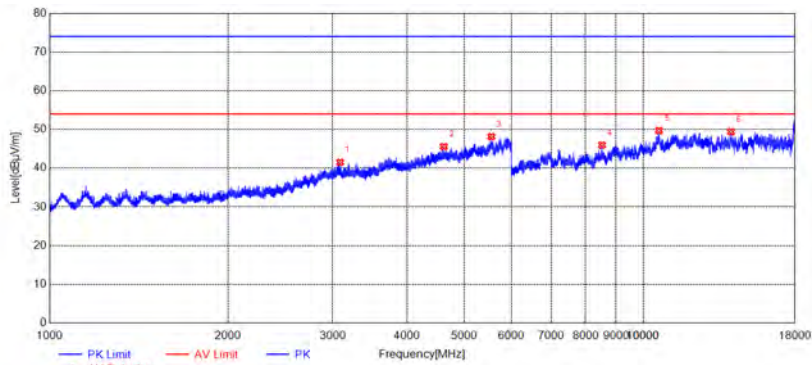


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3085.5143	41.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4613.7690	45.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5546.9245	48.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8516.2796	45.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10628.5143	49.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14051.5613	49.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

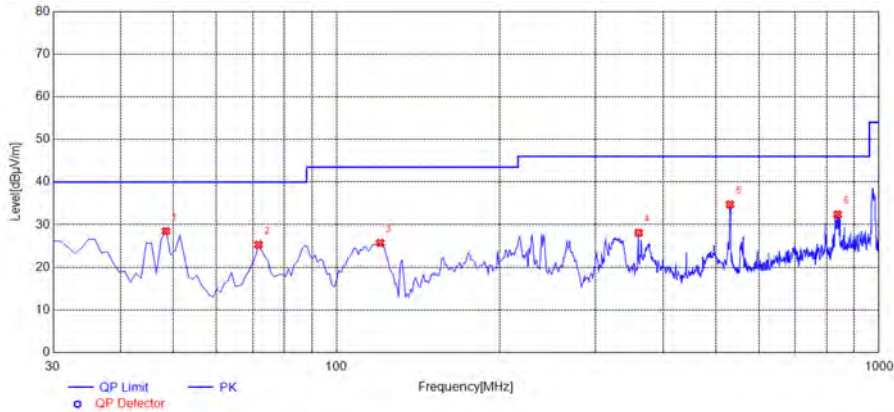

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	28.46	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
71.7518	25.28	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
120.3003	25.72	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
360.1301	28.08	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	34.73	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
838.8188	32.39	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

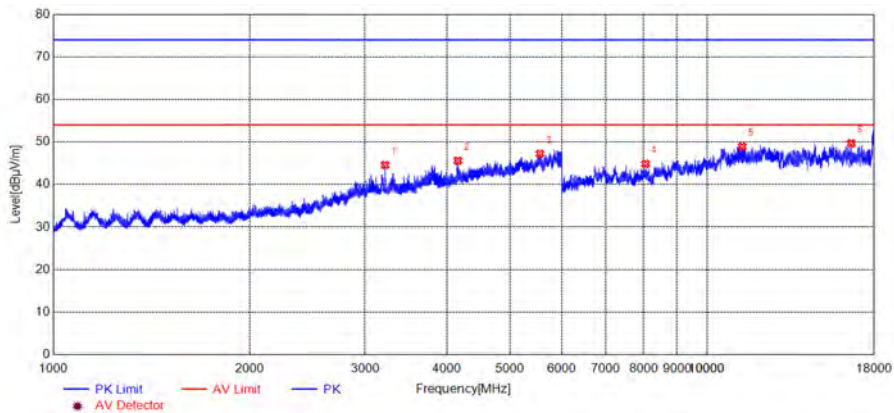

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3219.5366	44.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4158.1930	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5552.4254	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8052.2280	44.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11313.9238	48.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16611.8458	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 39

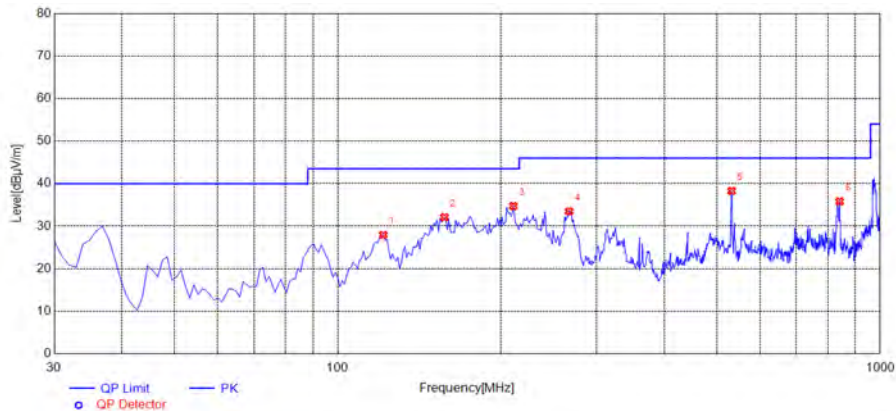


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
121.2713	27.91	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
157.1972	32.10	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
210.6006	34.72	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
266.9169	33.48	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
531.9920	38.29	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
841.7317	35.82	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

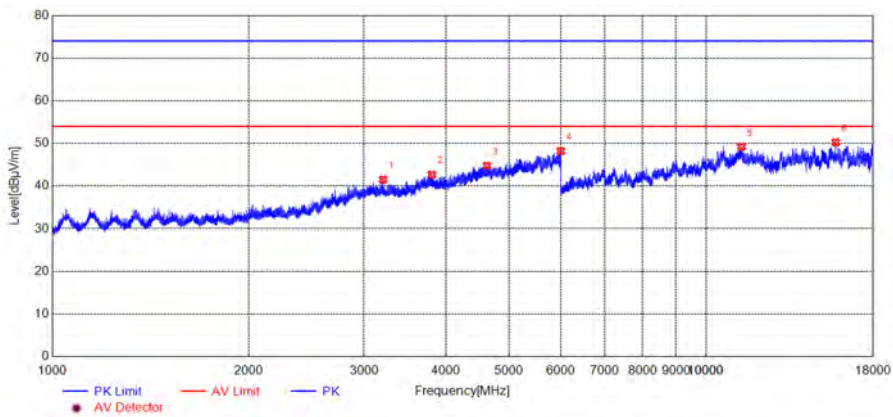


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3207.0345	41.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3808.1347	42.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4623.2705	44.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5993.9990	48.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11327.2586	49.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15790.4212	50.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

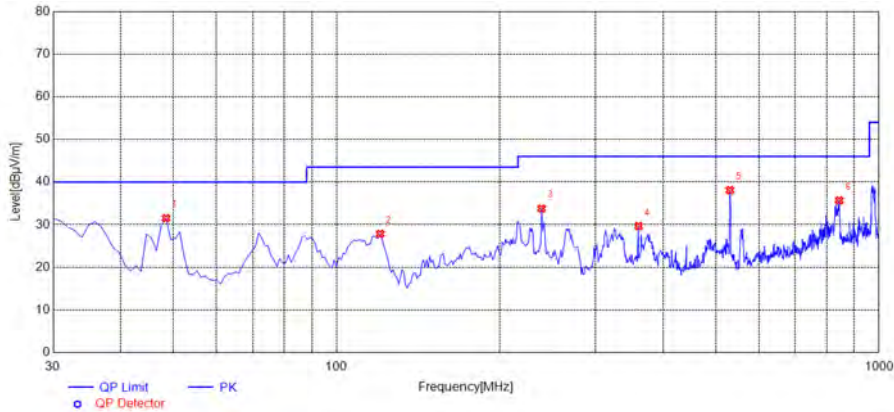

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	31.50	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
120.3003	27.84	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
238.7588	33.79	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
360.1301	29.66	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	38.10	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
844.6446	35.70	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

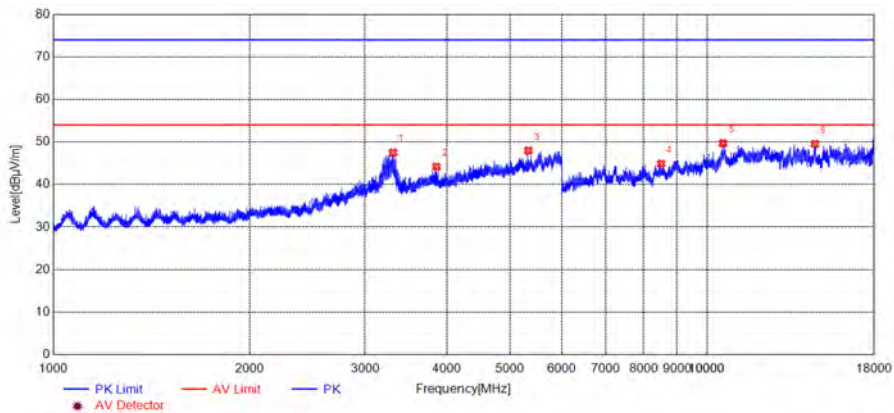

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3309.5516	47.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3856.1427	44.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5328.8881	47.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8506.9452	44.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10573.8415	49.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14615.6240	49.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 78

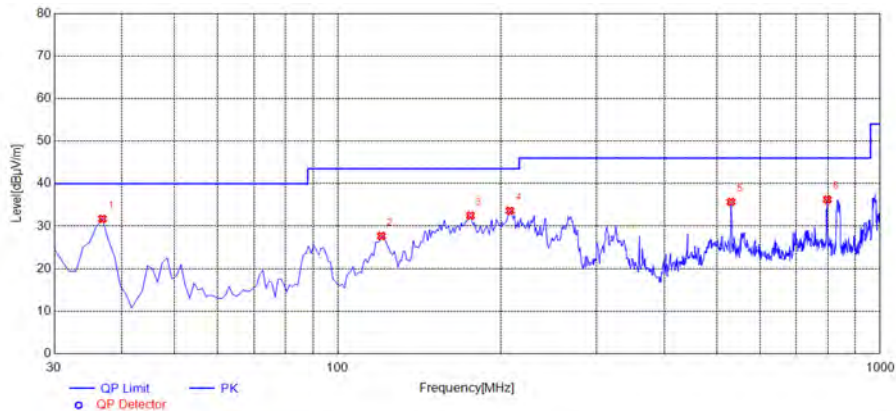

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
36.7968	31.72	N/A	N/A	N/A	40.00	54.00	Horizontal	PASS
120.3003	27.68	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
175.6456	32.47	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
207.6877	33.62	N/A	N/A	N/A	43.50	54.00	Horizontal	PASS
531.0210	35.71	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS
799.0090	36.26	N/A	N/A	N/A	46.00	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 1GHz)

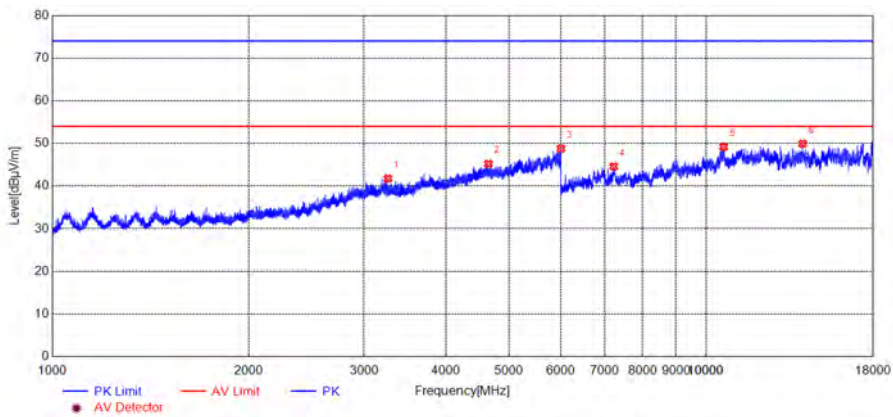

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3262.0437	41.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4646.2744	45.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5998.9998	48.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7222.8025	44.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10637.8487	49.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14047.5608	49.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 1GHz to 18GHz)



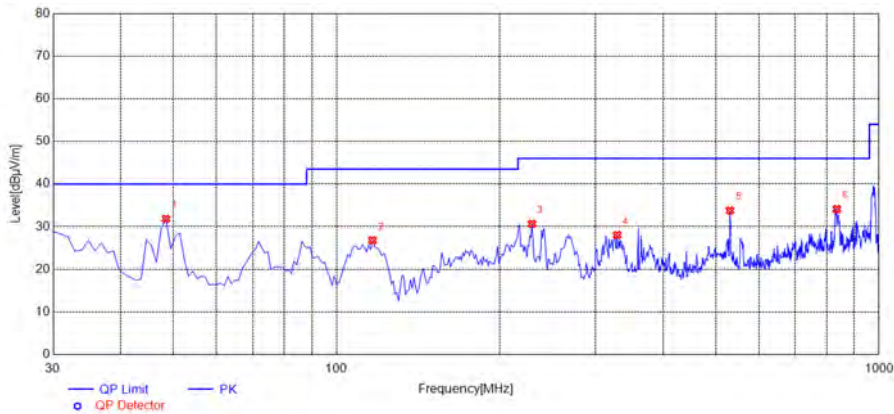

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	31.84	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
116.4164	26.77	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
229.0490	30.66	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
329.0591	28.05	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	33.79	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
835.9059	34.13	N/A	N/A	N/A	46.00	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

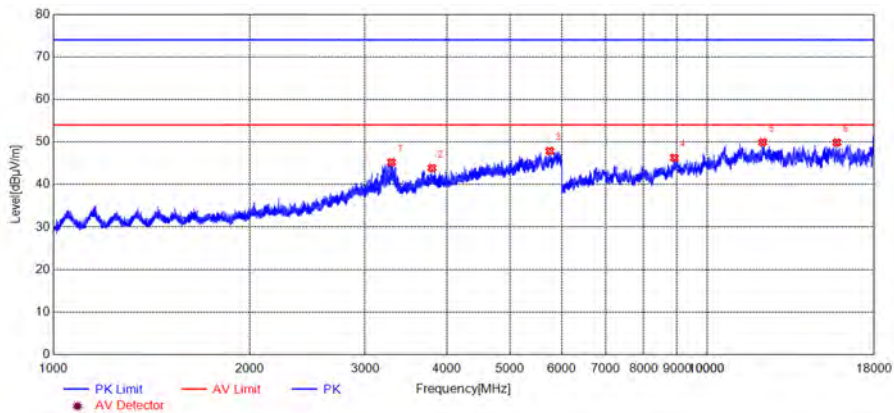


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3293.0488	45.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3796.6328	43.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5747.4579	47.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8910.9901	46.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12162.0180	49.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15794.4216	49.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




**8-DPSK Mode**


Plots for Channel 0

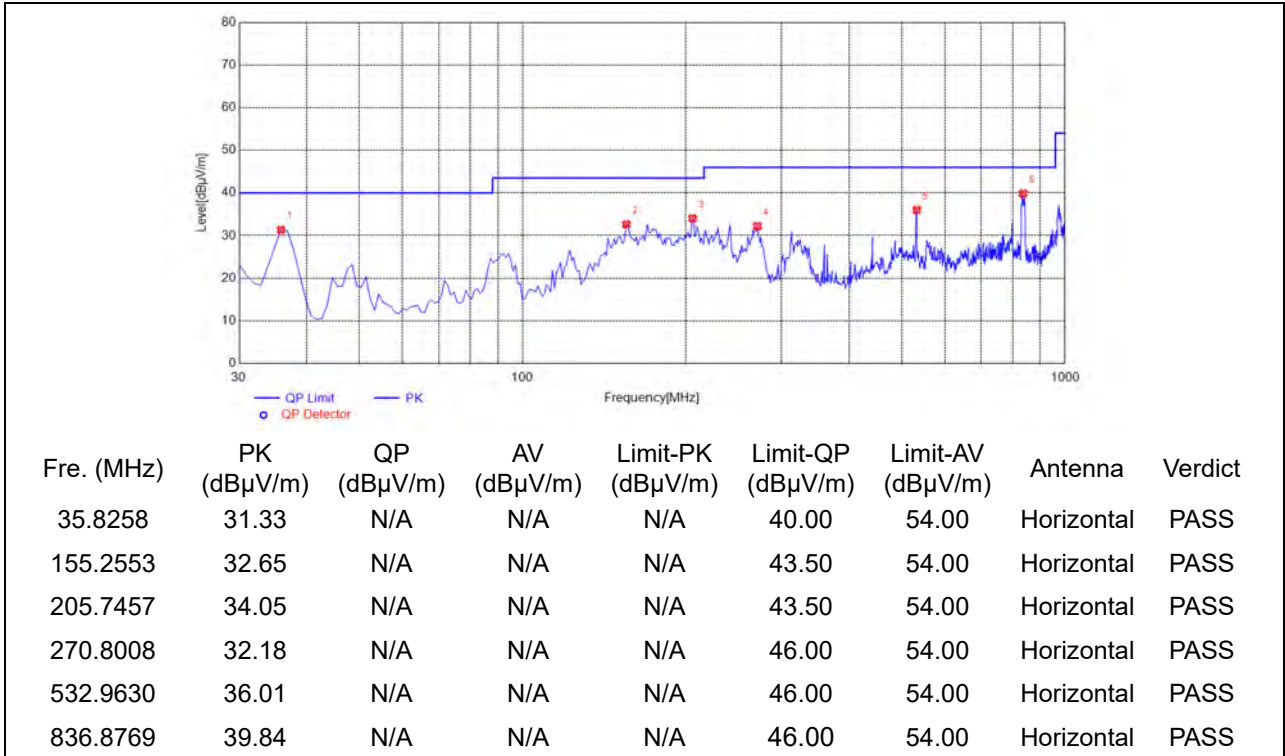

(Antenna Horizontal, 30MHz to 1GHz)

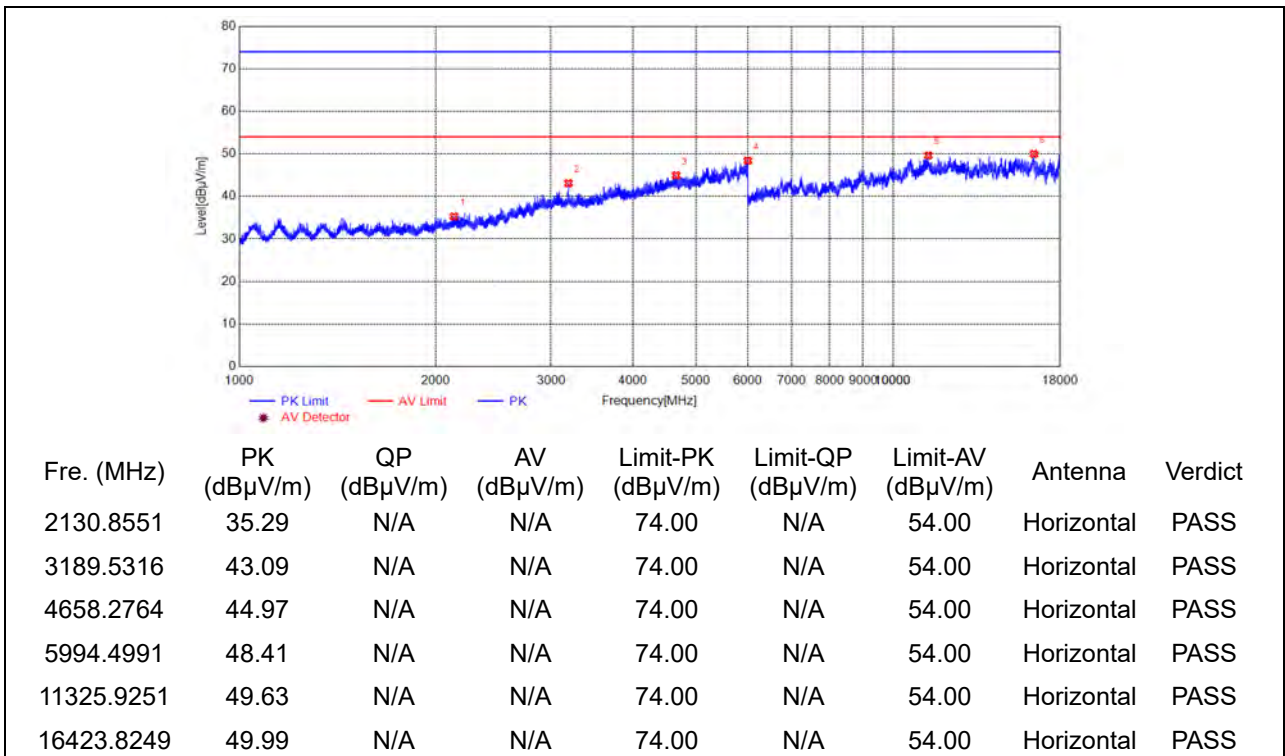


(Antenna Horizontal, 1GHz to 18GHz)

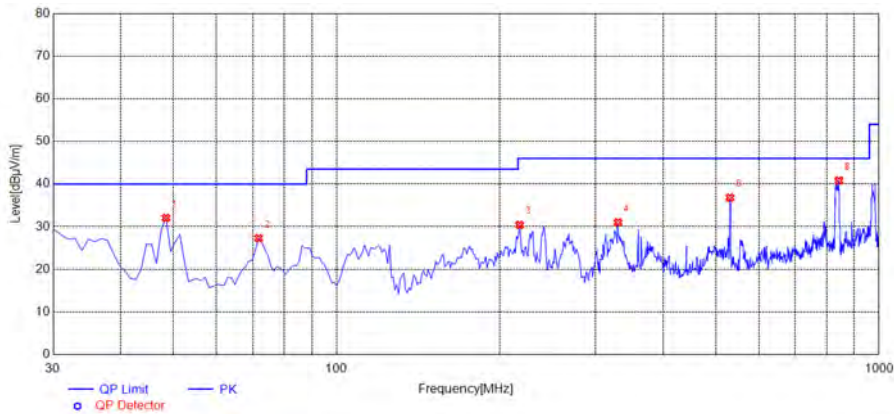

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	32.05	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
71.7518	27.30	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
217.3974	30.39	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
330.0300	30.99	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	36.82	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
843.6737	40.85	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
843.6737	40.85	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

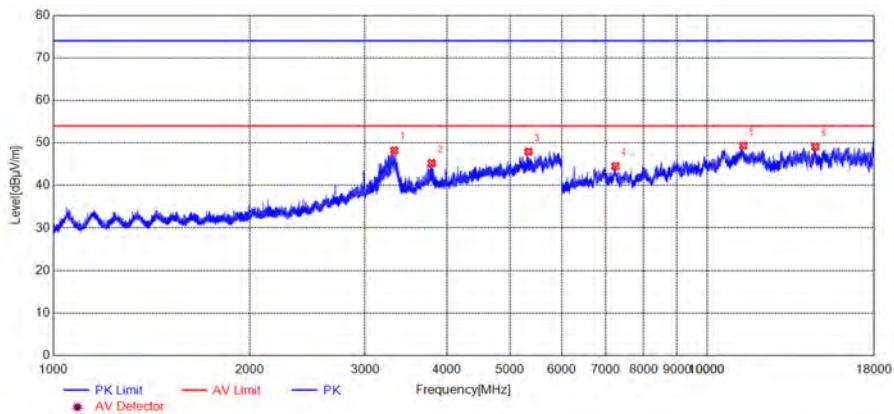


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3323.5539	48.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3792.1320	45.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5329.8883	47.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7242.8048	44.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11352.5947	49.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14638.2931	49.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


Plot for Channel 39

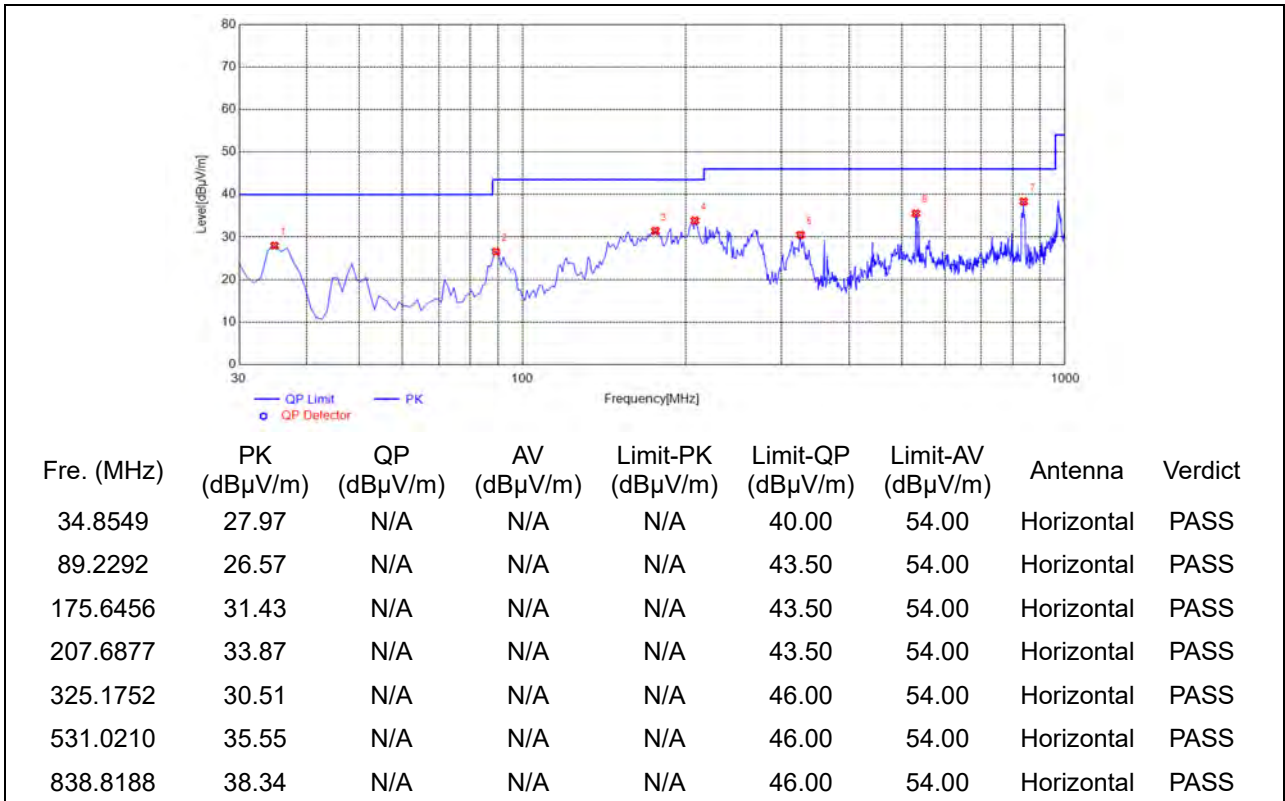

(Antenna Horizontal, 30MHz to 1GHz)

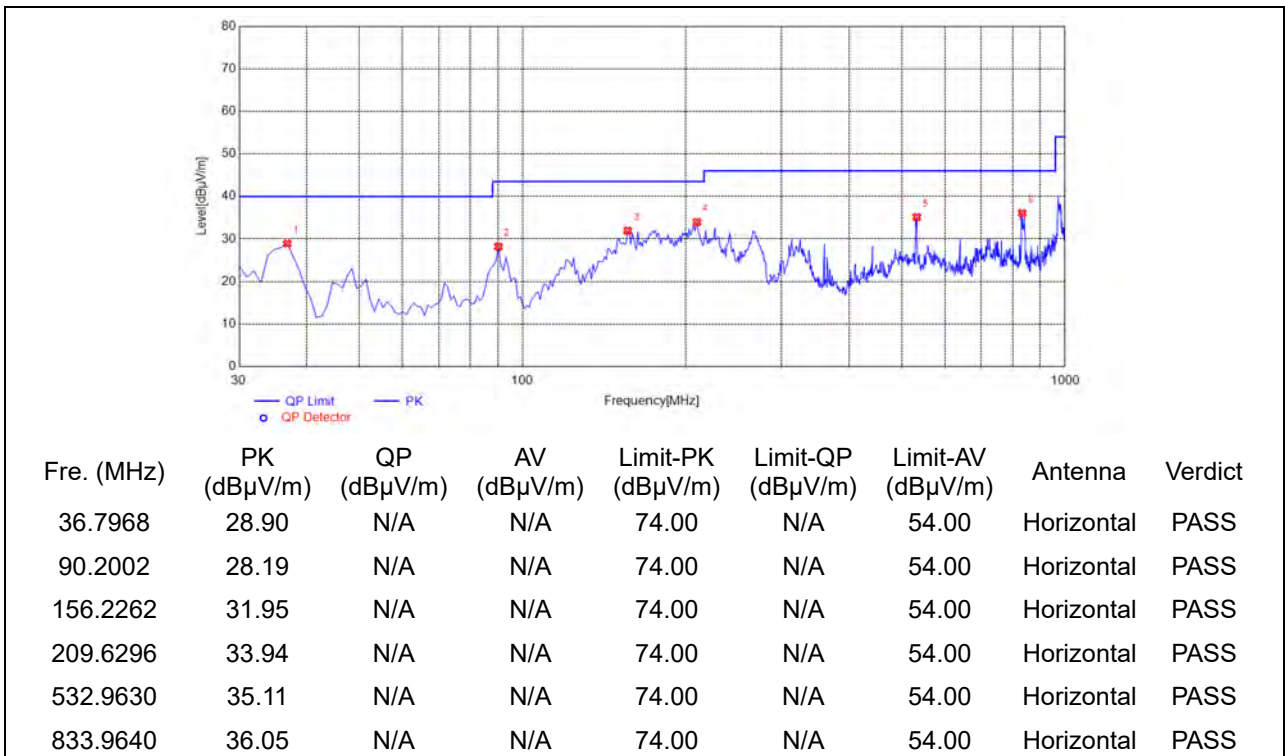


(Antenna Horizontal, 1GHz to 18GHz)

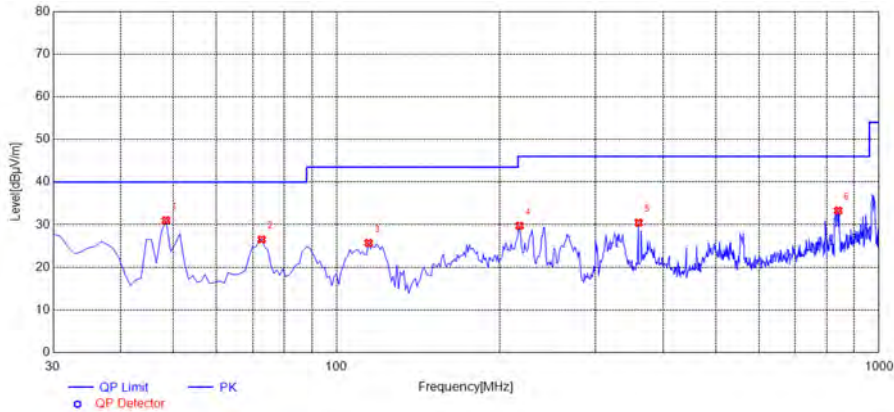

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	30.99	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
72.7227	26.53	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
114.4745	25.72	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
217.3974	29.74	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
360.1301	30.45	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
840.7608	33.30	N/A	N/A	N/A	46.00	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

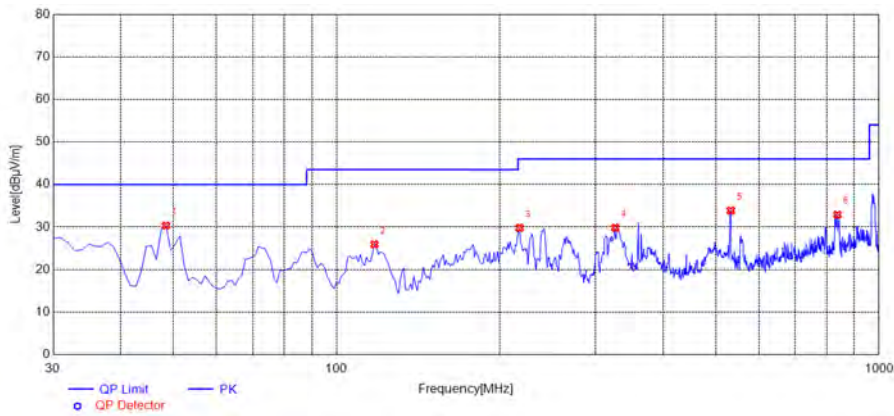


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	30.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
117.3874	25.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
217.3974	29.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
326.1461	29.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
532.9630	33.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
837.8478	32.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


Plot for Channel 78

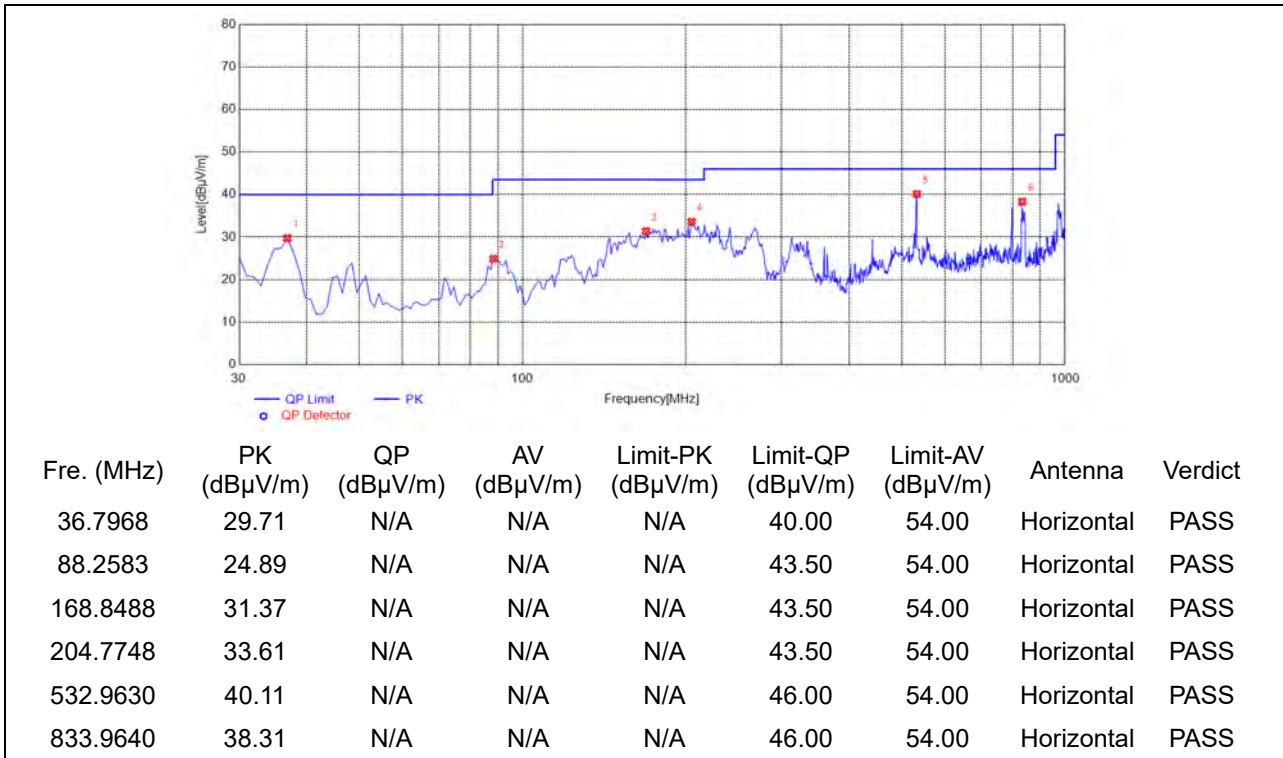

(Antenna Horizontal, 30MHz to 1GHz)

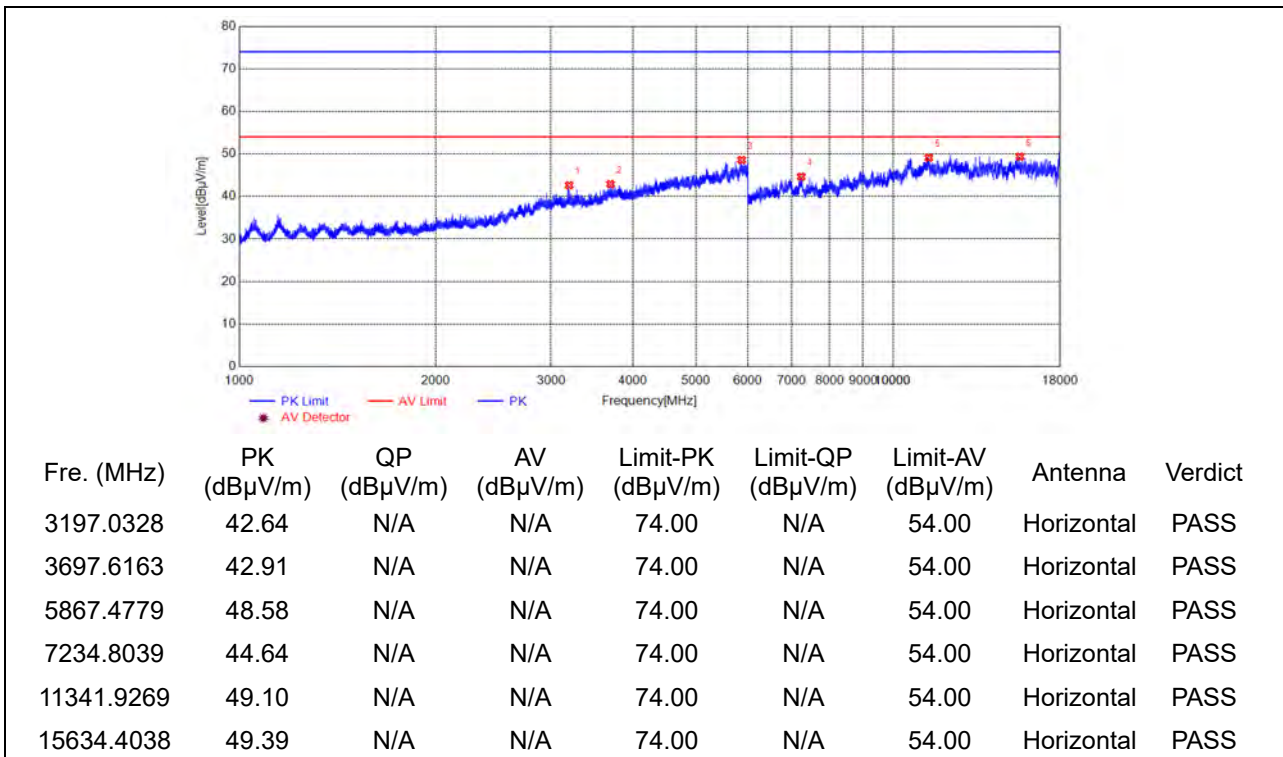


(Antenna Horizontal, 1GHz to 18GHz)

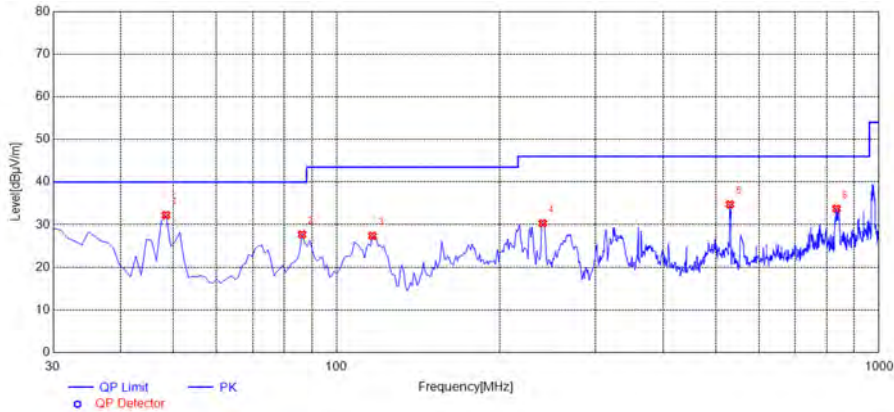

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.4484	32.24	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
86.3163	27.70	N/A	N/A	N/A	40.00	54.00	Vertical	PASS
116.4164	27.36	N/A	N/A	N/A	43.50	54.00	Vertical	PASS
239.7297	30.33	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
531.0210	34.77	N/A	N/A	N/A	46.00	54.00	Vertical	PASS
834.9349	33.75	N/A	N/A	N/A	46.00	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

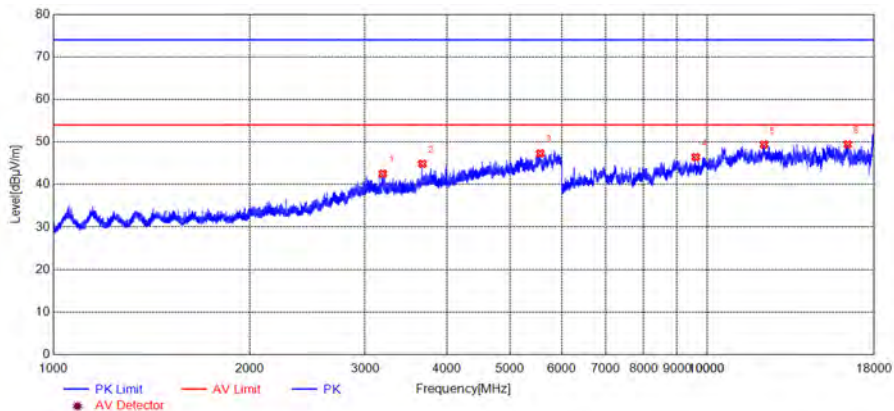

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
3192.5321	42.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3670.1117	44.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5556.4261	47.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9608.4009	46.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12216.6907	49.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16405.1561	49.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)

END OF REPORT