


55 X 440 MM 80g 超白哑粉纸 黑白双面印刷 风琴折

前面

55




zigbee V1.3A

Quick Guide

Remote Mode	
Single Press	On/Off
Long Press >3s	Set color
Rotate	Dimming
Press and Rotate	Set the color temperature
Remote control operate may vary depends on different model of smart light	

Scene Mode	
Single Press	Setting in APP
Double Clicks	Setting in APP
Long Press	Setting in APP
Rotate to left	Setting in APP
Rotate to right	Setting in APP

1 Dimension




2 Specification

Power supply: Battery CR2032 3V DC
Communication: Zigbee 3.0*

Control distance: 25m open area
Dimensions: 40 X 40 X 29mm
Operating temperature: -10 °C~45 °C
Working Humidity: <90%RH
Life of battery: 1 year (General use)


*Available for selected model

3 Install the battery

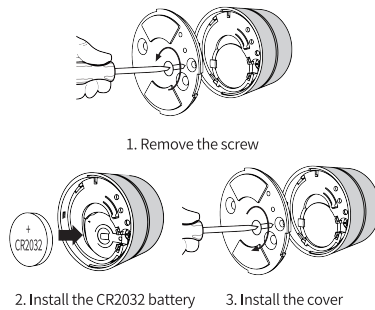


4 Remote mode

Scan the QR code to download APP




Gateway required to connect the device

5 Reset / Pairing



1. Hold "RESET" 6s
2. LED will start flashing


5.1 Add Device




55

后面

5.2 Remote mode (Default operate mode)



5.3 Remote mode

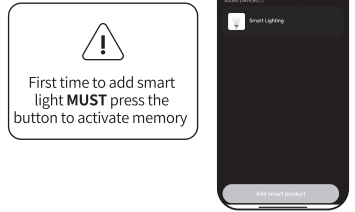


5.4 Remote mode

Control description under remote control mode

Single Press On/Off	Rotate Dimming
Press and Rotate Set the color temperature	Long Press >3s Set color


Note: The operates may different depending on the smart lights

5.5 Mode swap




Remote mode ↔ Scene mode


5.6 Scene mode



5.7 Scene mode



5.8 Scene mode



5.9 Scene mode

