

FCC Part 15C

Measurement and Test Report


For

Gleen Company Limited

Unit 1911, Block C, Wah Lok Ind. Ctr., 31-35 Shan Mei Street,

Shatin, NT, HK.

FCC ID: 2AMMH24GPOMTX2

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>Peace of Mind transmitter</u>
Tested Model:	<u>POM Wireless Converter (Wetting)</u>
Report No.:	<u>STR18048268I</u>
Sample Receipt Date:	<u>2018-04-26</u>
Tested Date:	<u>2018-04-27 to 2018-04-28</u>
Issued Date:	<u>2018-04-28</u>
Tested By:	<u>Ray Yang/ Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS	11
4.5 SUMMARY OF TEST RESULTS/PLOTS	11
5. OUT OF BAND EMISSIONS.....	20
5.1 STANDARD APPLICABLE.....	20
5.2 TEST PROCEDURE.....	20
5.3 ENVIRONMENTAL CONDITIONS	20
5.4 SUMMARY OF TEST RESULTS/PLOTS	20
6. EMISSION BANDWIDTH.....	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST PROCEDURE.....	23
6.3 ENVIRONMENTAL CONDITIONS	23
6.4 SUMMARY OF TEST RESULTS/PLOTS	23

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Gleen Company Limited
Address of applicant: Unit 1911, Block C, Wah Lok Ind. Ctr., 31-35 Shan Mei Street, Shatin, NT, HK.

Manufacturer: Hopstech Industries LTD.
Address of manufacturer: Room 1411, Block A, 14/F, Hoi Luen Industrial Center, 55 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong

General Description of EUT	
Product Name:	Peace of Mind transmitter
Trade Name:	 
Model No.:	POM Wireless Converter (Wetting)
Adding Model(s):	POM Wireless Converter, POM Emergency Button
Product No:	TR3S TX2 NO / GLN2031, TR3TX2 NC / GLN2041, TR3TX2 EB / GLN2051
Rated Voltage:	DC 3V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model POM WIRELESS CONVERTER (Wetting), but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2405MHz-2478MHz
Max. Field Strength:	95.42dBuV/m (3m)
Data Rate:	2Mbps
Modulation:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	2dBi
Lowest Internal Frequency of EUT:	32.768kHz



Center Frequency of Each of Channel

Channel	Frequency	Channel	Frequency
1	2405	17	2442
2	2406	18	2443
3	2407	19	2444
4	2408	20	2445
5	2409	21	2468
6	2410	22	2469
7	2411	23	2470
8	2412	24	2471
9	2434	25	2472
10	2435	26	2473
11	2436	27	2474
12	2437	28	2475
13	2438	29	2476
14	2439	30	2477
15	2440	31	2478
16	2441	/	/

1.2 Test Standards

The following report is prepared on behalf of the Gleen Company Limited in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2405MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2478MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2017-08-15	2018-08-14
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2017-08-15	2018-08-14
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2017-06-12	2018-06-11
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18



2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant



3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

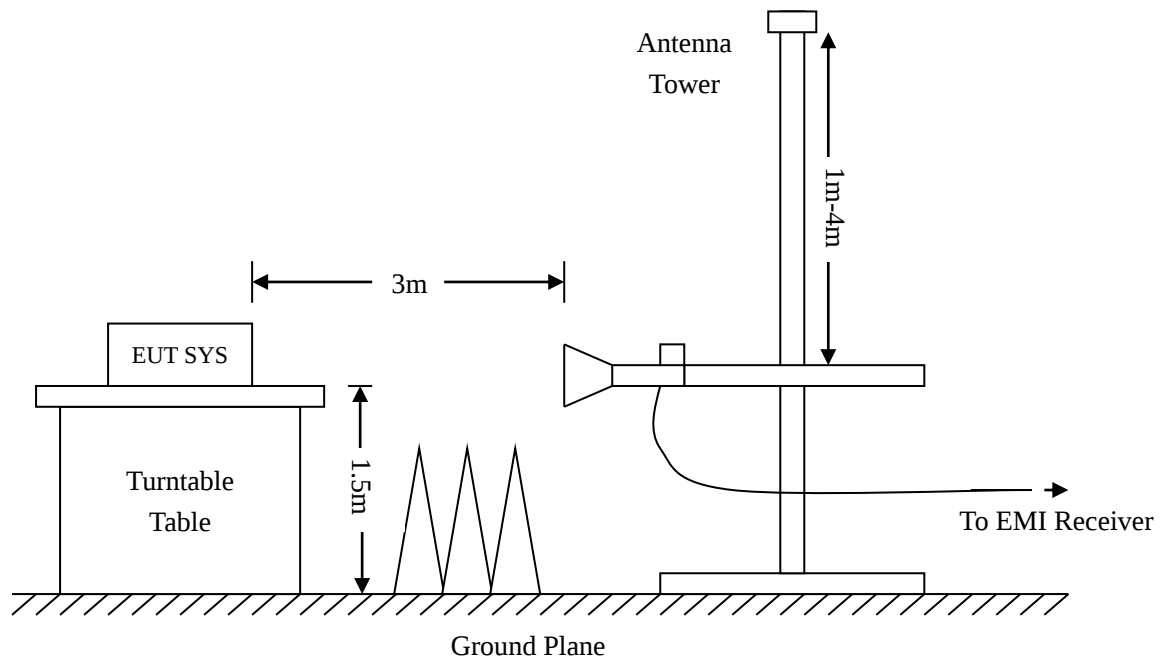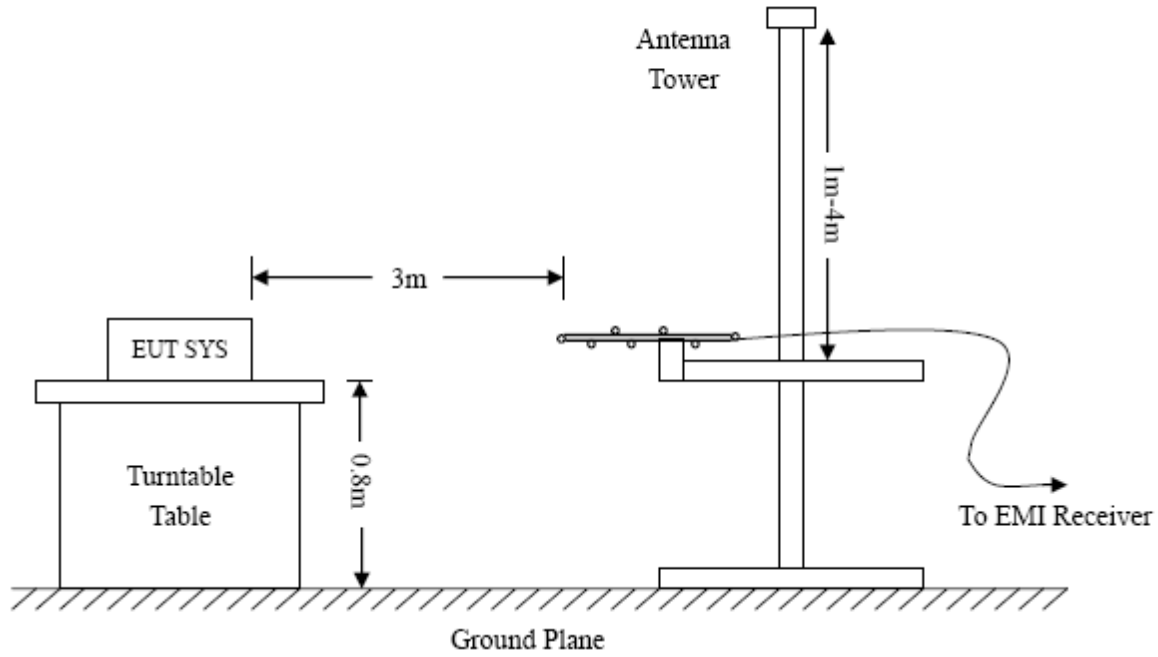

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


-11.39 dB at 42.61MHz in the Horizontal polarization, Low Channel, 9 kHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Peace of Mind transmitter*
 Tested Model: *POM Wireless Converter (Wetting)*
 Operating Condition: *Transmitting Low Channel (2405MHz)*
 Comment: *DC 3V*

Test Specification: *Horizontal*

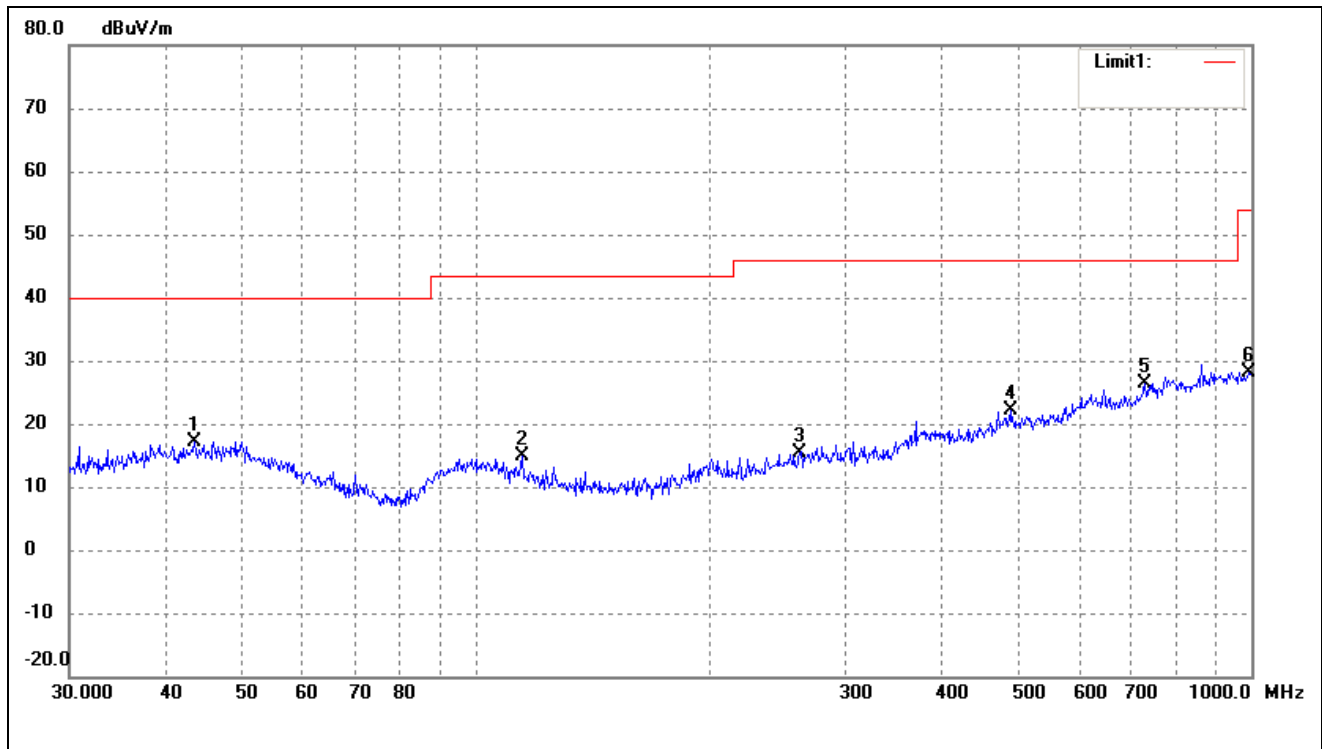

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.5057	27.72	-10.54	17.18	40.00	-22.82	247	100	peak
2	114.9169	27.90	-13.11	14.79	43.50	-28.71	99	100	peak
3	261.9753	25.50	-10.02	15.48	46.00	-30.52	258	100	peak
4	490.7447	27.87	-5.80	22.07	46.00	-23.93	105	100	peak
5	729.3583	28.10	-1.70	26.40	46.00	-19.60	229	100	peak
6	993.0114	25.79	2.43	28.22	54.00	-25.78	187	100	peak

Test Specification: Vertical

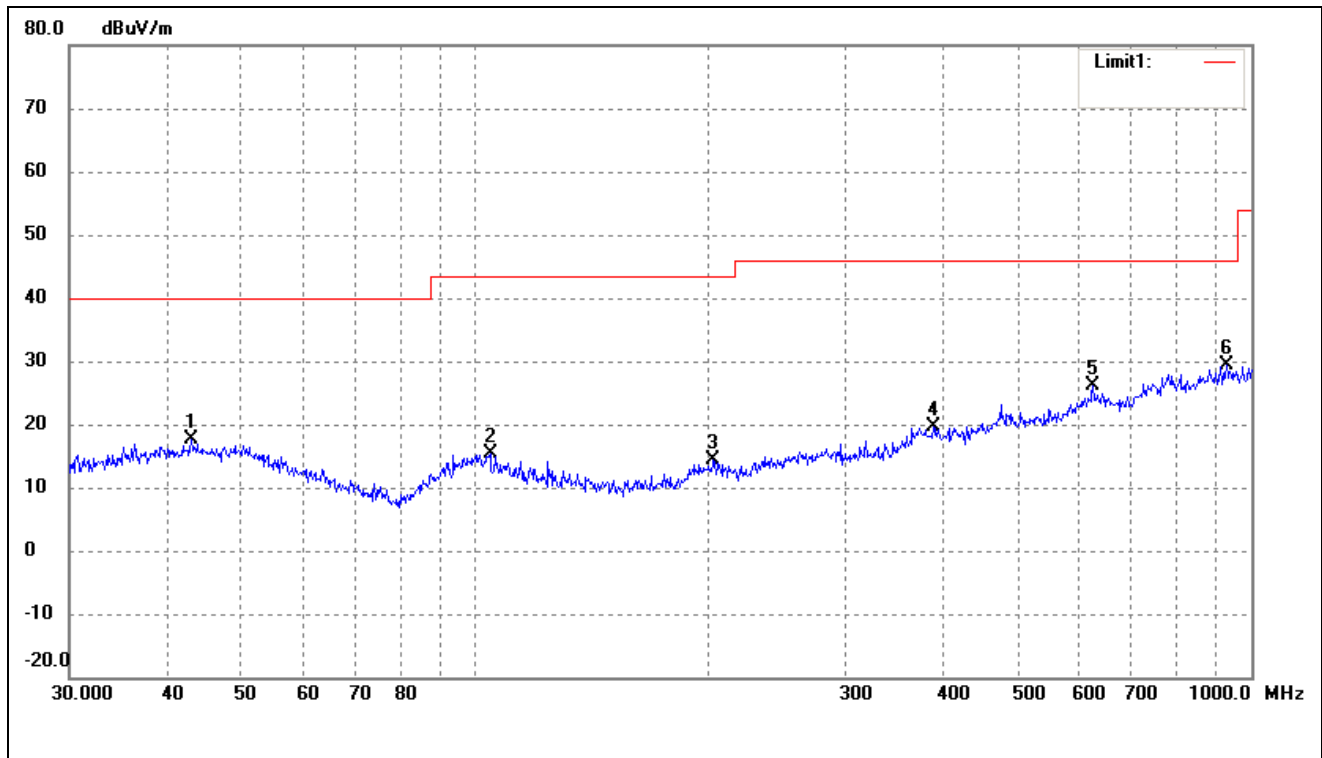


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.0505	28.00	-10.43	17.57	40.00	-22.43	251	100	peak
2	104.5361	27.26	-11.92	15.34	43.50	-28.16	97	100	peak
3	202.8104	25.99	-11.72	14.27	43.50	-29.23	263	100	peak
4	389.3549	26.94	-7.28	19.66	46.00	-26.34	114	100	peak
5	625.0780	28.93	-2.90	26.03	46.00	-19.97	294	100	peak
6	929.0082	27.43	2.00	29.43	46.00	-16.57	134	100	peak

Operating Condition: Transmitting Middle Channel (2441MHz)


Comment: DC 3V

Test Specification: Horizontal

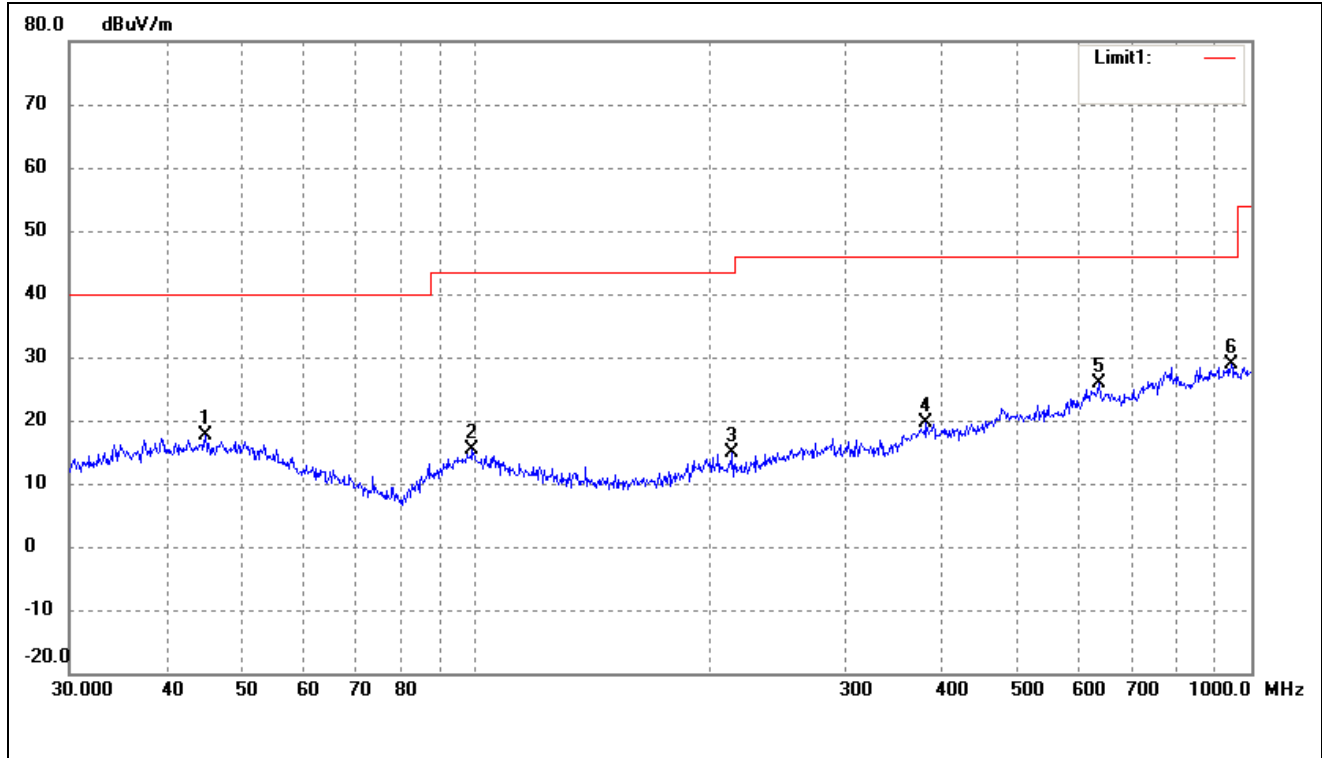

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	44.9006	28.22	-10.59	17.63	40.00	-22.37	243	100	peak
2	99.1797	27.01	-11.58	15.43	43.50	-28.07	286	100	peak
3	214.5143	27.06	-12.24	14.82	43.50	-28.68	77	100	peak
4	381.2487	26.75	-7.04	19.71	46.00	-26.29	176	100	peak
5	636.1340	28.93	-3.12	25.81	46.00	-20.19	229	100	peak
6	942.1305	26.76	2.21	28.97	46.00	-17.03	271	100	peak

Test Specification: Vertical

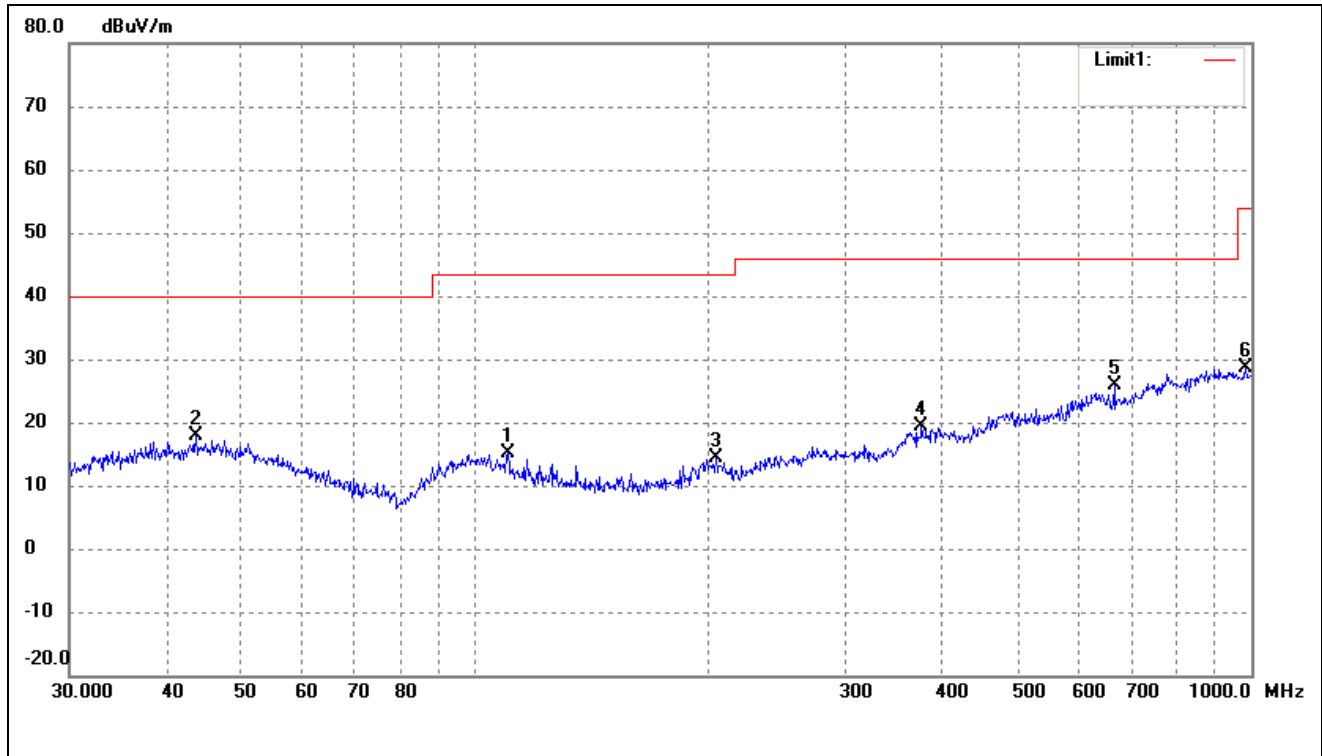


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	110.1816	27.68	-12.57	15.11	43.50	-28.39	67	100	peak
2	43.6585	28.37	-10.44	17.93	40.00	-22.07	273	100	peak
3	204.2377	26.13	-11.78	14.35	43.50	-29.15	54	100	peak
4	375.9385	26.50	-7.18	19.32	46.00	-26.68	320	100	peak
5	665.8035	29.64	-3.64	26.00	46.00	-20.00	171	100	peak
6	982.6200	26.59	2.09	28.68	54.00	-25.32	95	100	peak

Operating Condition: Transmitting High Channel (2478MHz)


Comment: DC 3V

Test Specification: Horizontal

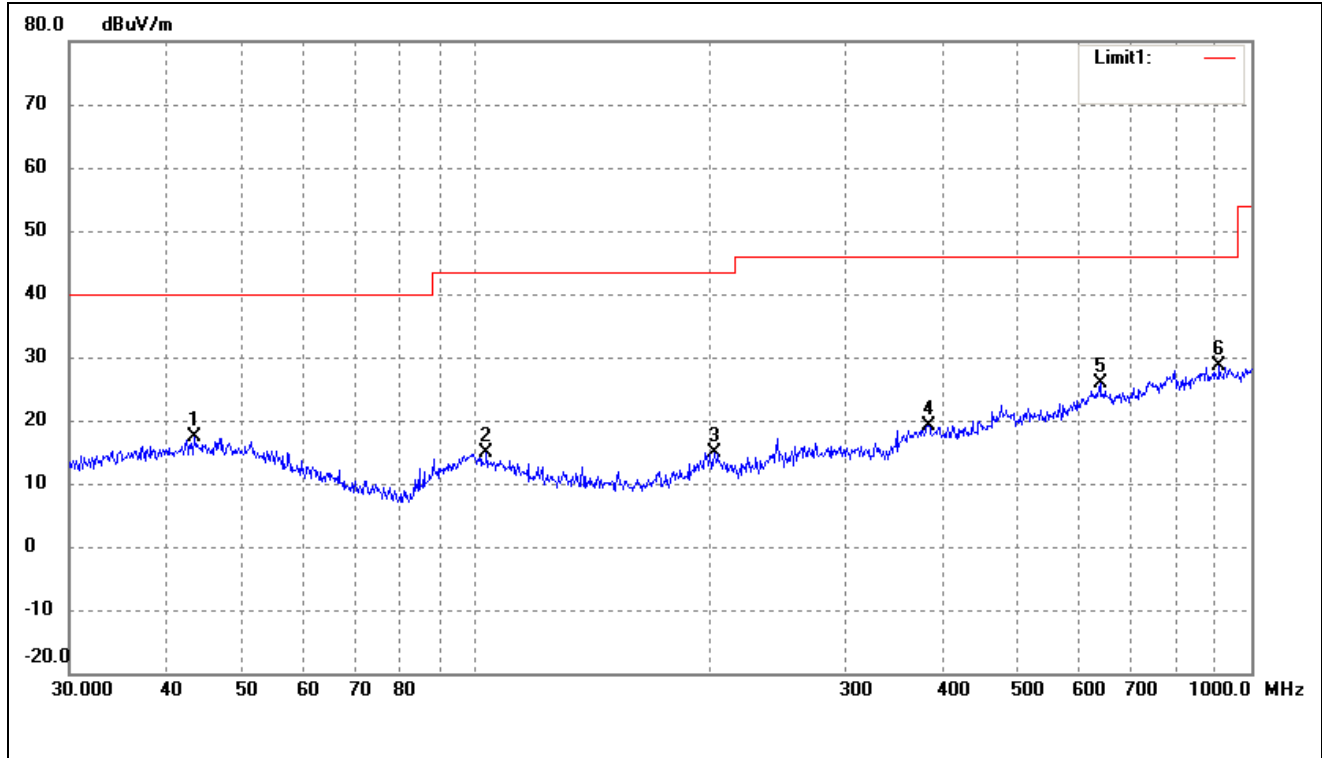

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	43.5057	27.94	-10.54	17.40	40.00	-22.60	27	100	peak
2	103.4421	26.77	-11.80	14.97	43.50	-28.53	127	100	peak
3	203.5228	26.68	-11.76	14.92	43.50	-28.58	91	100	peak
4	383.9318	26.34	-7.12	19.22	46.00	-26.78	90	100	peak
5	638.3686	29.00	-3.16	25.84	46.00	-20.16	161	100	peak
6	909.6667	27.00	1.57	28.57	46.00	-17.43	263	100	peak

Test Specification: Vertical

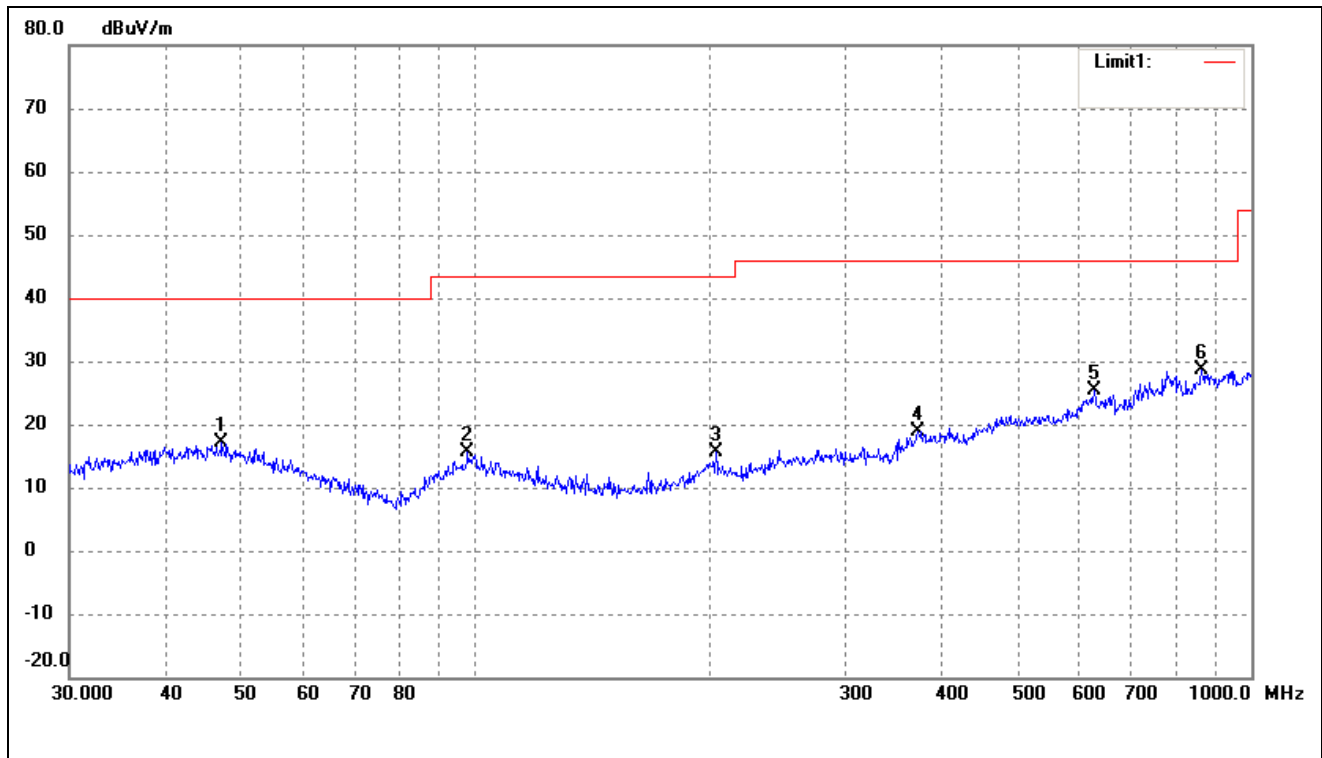

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	47.1599	27.57	-10.43	17.14	40.00	-22.86	70	100	peak
2	97.7983	27.49	-11.88	15.61	43.50	-27.89	159	100	peak
3	204.2377	27.29	-11.78	15.51	43.50	-27.99	121	100	peak
4	372.0045	26.34	-7.36	18.98	46.00	-27.02	114	100	peak
5	627.2738	28.22	-2.95	25.27	46.00	-20.73	81	100	peak
6	863.0562	27.57	1.13	28.70	46.00	-17.30	183	100	peak

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2405MHz							
2405	99.01	-3.59	95.42	114	-18.58	H	PK
2405	83.65	-3.59	80.06	94	-13.94	H	AV
4810	49.97	-3.59	46.38	74	-27.62	H	PK
4810	46.20	-3.59	42.61	54	-11.39	H	AV
7215	39.83	-0.52	39.31	74	-34.69	H	PK
7215	36.72	-0.52	36.20	54	-17.80	H	AV
2405	92.22	-3.59	88.63	114	-25.37	V	PK
2405	75.91	-3.59	72.32	94	-21.68	V	AV
4810	48.59	-3.59	45.00	74	-29.00	V	PK
4810	44.89	-3.59	41.30	54	-12.70	V	AV
7215	41.90	-0.52	41.38	74	-32.62	V	PK
7215	37.72	-0.52	37.20	54	-16.80	V	AV
Middle Channel-2441MHz							
2441	98.36	-3.59	94.77	114	-19.23	H	PK
2441	83.50	-3.59	79.91	94	-14.09	H	AV
4882	43.61	-3.49	40.12	74	-33.88	H	PK
4882	40.72	-3.49	37.23	54	-16.77	H	AV
7323	37.72	-0.47	37.25	74	-36.75	H	PK
7323	33.08	-0.47	32.61	54	-21.39	H	AV
2441	91.00	-3.59	87.41	114	-26.59	V	PK
2441	74.65	-3.59	71.06	94	-22.94	V	AV
4882	43.72	-3.49	40.23	74	-33.77	V	PK
4882	39.91	-3.49	36.42	54	-17.58	V	AV
7323	40.84	-0.47	40.37	74	-33.63	V	PK
7323	35.88	-0.47	35.41	54	-18.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2478MHz							
2478	98.41	-3.59	94.82	114	-19.18	H	PK
2478	83.70	-3.59	80.11	94	-13.89	H	AV
4956	46.02	-3.41	42.61	74	-31.39	H	PK
4956	40.55	-3.41	37.14	54	-16.86	H	AV
7434	43.44	-0.42	43.02	74	-30.98	H	PK
7434	39.40	-0.42	38.98	54	-15.02	H	AV
2478	91.34	-3.59	87.75	114	-26.25	V	PK
2478	75.96	-3.59	72.37	94	-21.63	V	AV
4956	47.77	-3.41	44.36	74	-29.64	V	PK
4956	43.13	-3.41	39.72	54	-14.28	V	AV
7434	40.72	-0.42	40.30	74	-33.70	V	PK
7434	36.83	-0.42	36.41	54	-17.59	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2477.675	<54 dBuV	Pass
	2483.500	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge
Horizontal (Worst case)

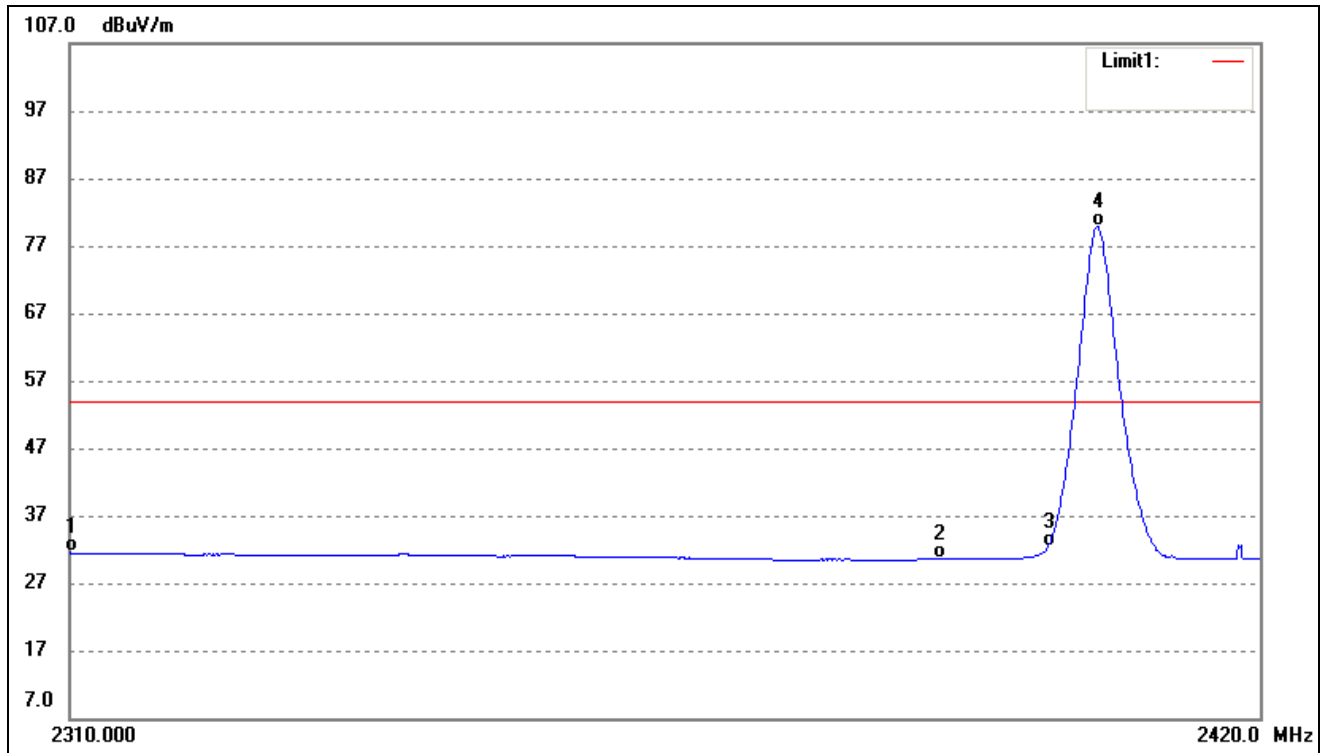

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.89	-6.38	31.51	54.00	-22.49	Ave Detector
	2310.000	52.52	-6.38	46.14	74.00	-27.86	Peak Detector
2	2390.000	37.84	-7.26	30.58	54.00	-23.42	Ave Detector
	2390.000	66.84	-7.26	59.58	74.00	-14.42	Peak Detector
3	2400.000	39.74	-7.37	32.37	54.00	-21.63	Ave Detector
	2400.000	77.19	-7.37	69.82	74.00	-4.18	Peak Detector
4	2404.738	87.37	-7.42	79.95	/	/	Ave Detector
	2404.514	102.77	-7.41	95.36	/	/	Peak Detector

Highest Bandedge
Horizontal (Worst case)

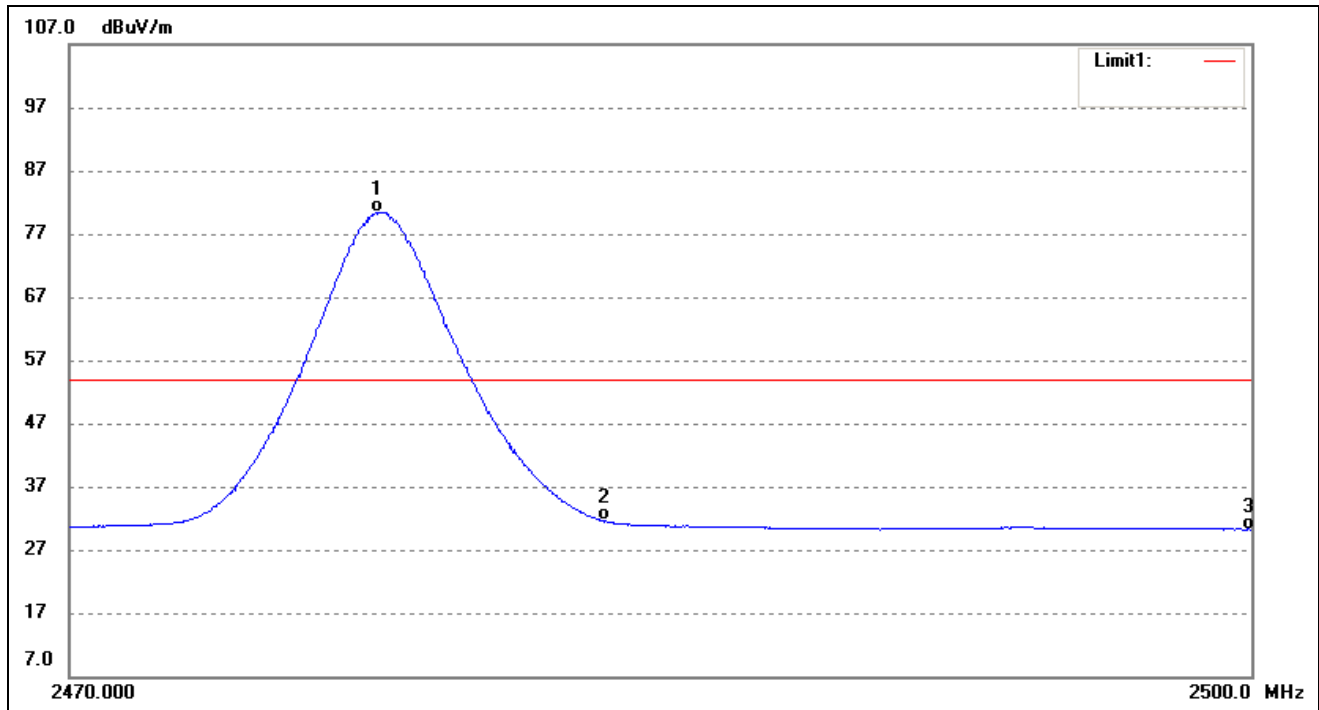

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2477.765	87.78	-7.29	80.49	/	/	Ave Detector
	2477.675	102.13	-7.29	94.84	/	/	Peak Detector
2	2483.500	38.91	-7.28	31.63	54.00	-22.37	Ave Detector
	2483.500	74.16	-7.28	66.88	74.00	-7.12	Peak Detector
6	2500.000	37.50	-7.25	30.25	54.00	-23.75	Ave Detector
	2500.000	62.12	-7.25	54.87	74.00	-19.13	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


6.4 Summary of Test Results/Plots

Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2405	1098	/
Middle Channel	2447	852	/
High Channel	2478	1242	/

Please refer to the following test plots




Low Channel:

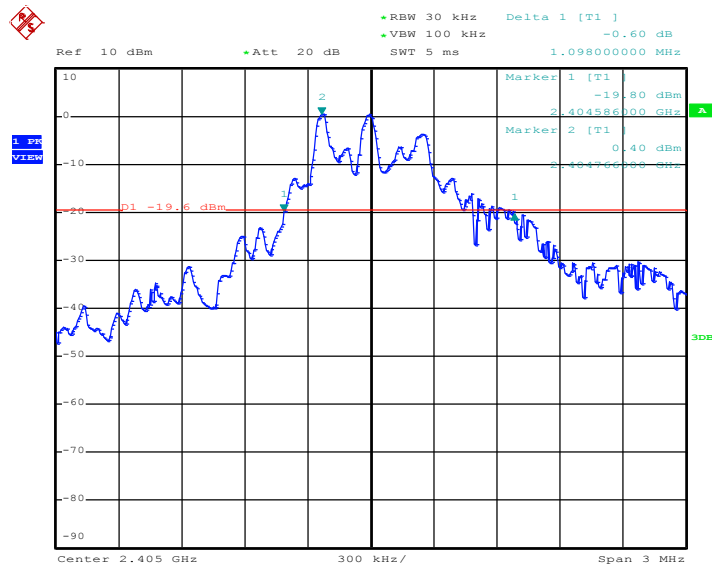

Date: 28.APR.2018 12:02:01


Middle Channel:

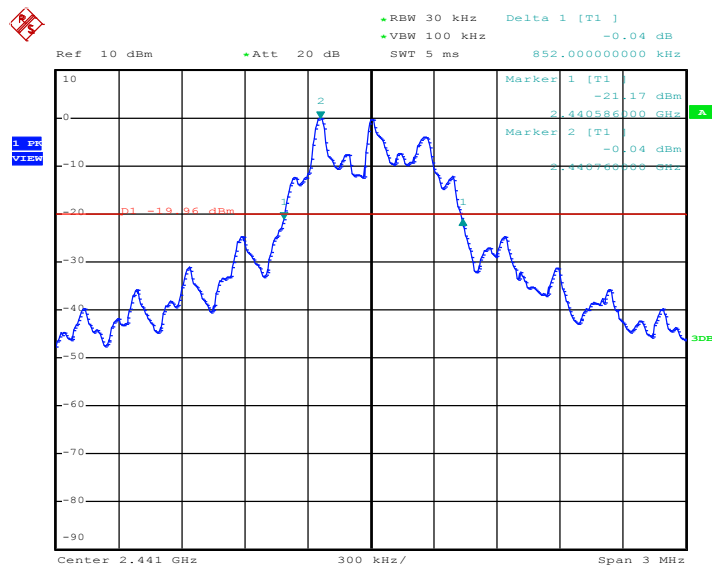

Date: 28.APR.2018 12:11:15



High Channel:

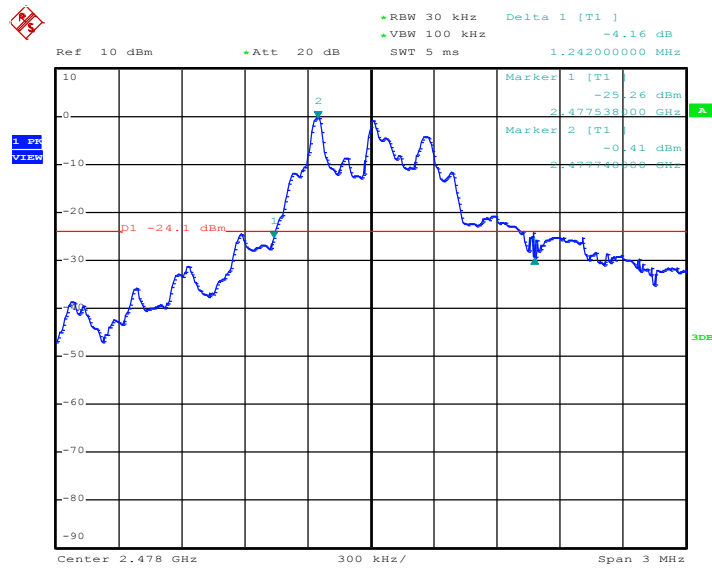

Date: 28.APR.2018 12:09:11

***** END OF REPORT *****