


FCC Test Report

FCC ID : 2AMMKIMGA6
Equipment : Bluetooth Conference Speakerphone
Model No. : iMage A6_SPK_01
Brand Name : iMage
Applicant : iMageTech Co.,Ltd
Address : 5F.,No.16,Ln.15,Sec.6,Minquan,Taipei City 114, Taiwan
Standard : 47 CFR FCC Part 15.247
Received Date : Aug. 20, 2021
Tested Date : Sep. 28 ~ Oct. 01, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	18
3.4	Power Spectral Density	20
3.5	Emissions in Restricted Frequency Bands	24
3.6	Emissions in non-restricted Frequency Bands	34
4	TEST LABORATORY INFORMATION	37

Release Record

Report No.	Version	Description	Issued Date
FR0N1603-01AE	Rev. 01	Initial issue	Nov. 10, 2021

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.456MHz 43.03 (Margin -13.73dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4880.00MHz 50.16 (Margin -3.84dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 6.81	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0 LE	2402-2480	0-39 [40]	1 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	ANTENOVA	A5839H	chip	Build-in	2.1

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.7Vdc from battery
-------------------	---------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	USB Cable	1.8m non-shielded with one core
2	Battery	Brand: RPC Model: IP684765P Rating: 3.7Vdc
3	Wireless Speakerphone System	Brand: iMage Model: M6
4	Core	Brand: iMage Model: CU0530B-LF

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	BlueSuite, Version: 2.6.7	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
BT-LE(1Mbps)	69.58%	1.57


1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT-LE(1Mbps)	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	UNIFIVE	UBX305-0510	---	Provided by applicant.
2	Audio Cable	---	---	---	Provided by applicant.

1.3 Test Setup Chart

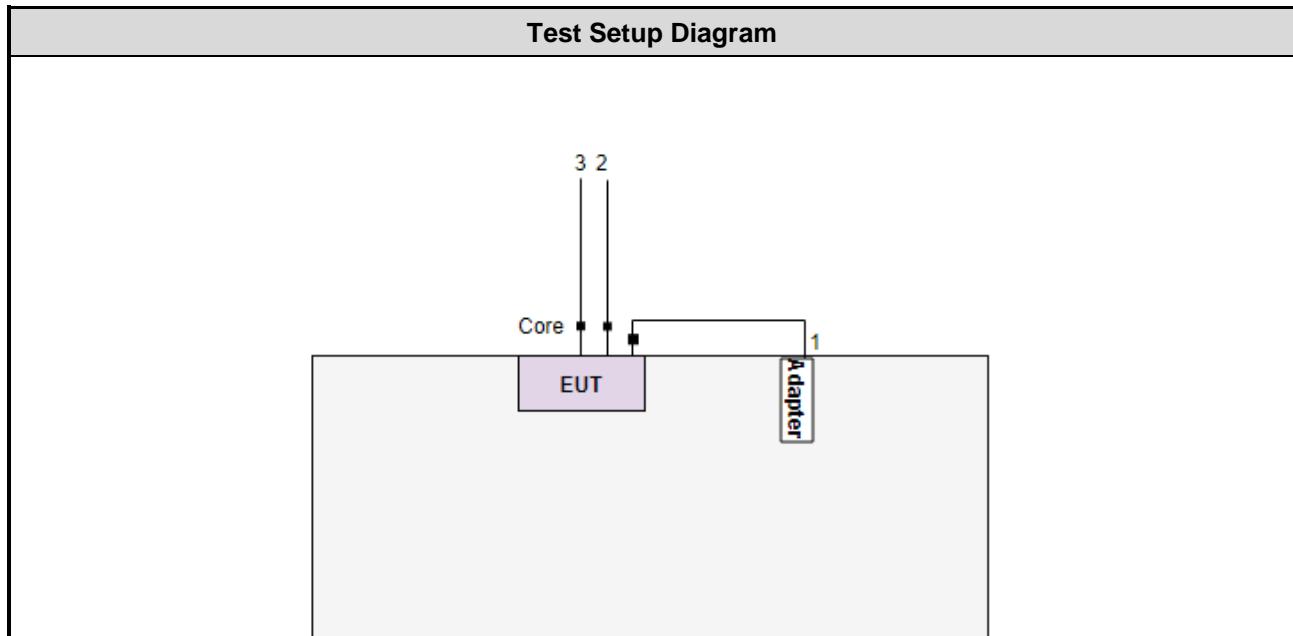

No.	Signal cable / Length (m)
1	USB, 1.8m non-shielded with one core
2	Audio, 1.48m non-shielded with one core
3	Audio, 1.48m non-shielded with one core

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Sep. 30, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Sep. 28 ~ Sep. 29, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Dec. 31, 2020	Dec. 30, 2021
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY53270014	Jul. 27, 2021	Jul. 26, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Oct. 01, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	---
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	1Mbps	---
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	---

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

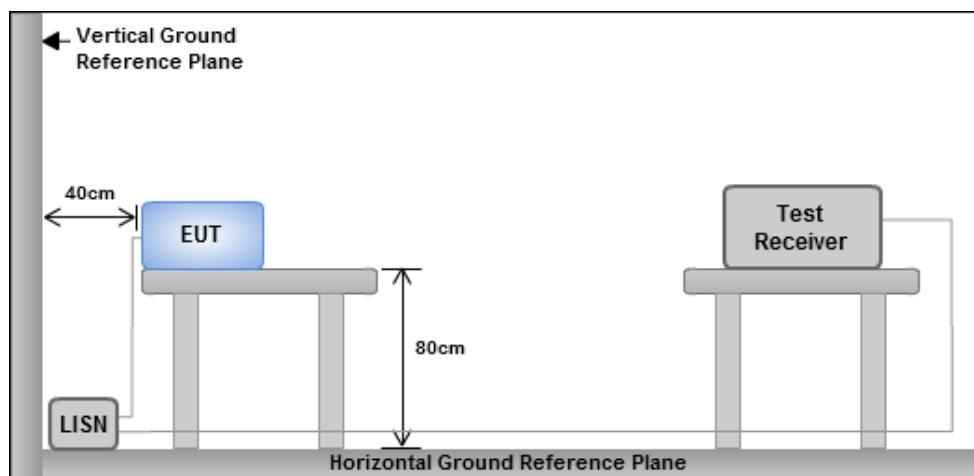

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

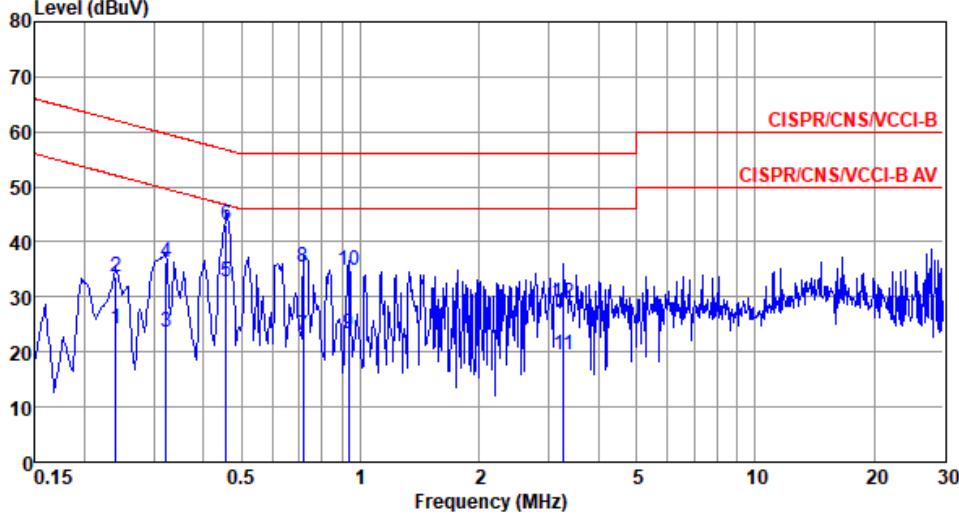Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2402																																																																																																																
Power Phase	Line																																																																																																																		
Test by	: Joe Liao	Temperature: 22°C	Humidity: 63%																																																																																																																
																																																																																																																			
<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Cable</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>dB</th> <th>loss</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.240</td><td>24.12</td><td>52.08</td><td>-27.96</td><td>14.20</td><td>9.85</td><td>0.07 Average</td></tr> <tr><td>2</td><td>0.240</td><td>33.55</td><td>62.08</td><td>-28.53</td><td>23.63</td><td>9.85</td><td>0.07 QP</td></tr> <tr><td>3</td><td>0.322</td><td>23.55</td><td>49.66</td><td>-26.11</td><td>13.61</td><td>9.87</td><td>0.07 Average</td></tr> <tr><td>4</td><td>0.322</td><td>36.18</td><td>59.66</td><td>-23.48</td><td>26.24</td><td>9.87</td><td>0.07 QP</td></tr> <tr><td>5</td><td>0.456</td><td>32.67</td><td>46.76</td><td>-14.09</td><td>22.68</td><td>9.90</td><td>0.09 Average</td></tr> <tr><td>6*</td><td>0.456</td><td>43.03</td><td>56.76</td><td>-13.73</td><td>33.04</td><td>9.90</td><td>0.09 QP</td></tr> <tr><td>7</td><td>0.716</td><td>23.15</td><td>46.00</td><td>-22.85</td><td>13.09</td><td>9.95</td><td>0.11 Average</td></tr> <tr><td>8</td><td>0.716</td><td>35.54</td><td>56.00</td><td>-20.46</td><td>25.48</td><td>9.95</td><td>0.11 QP</td></tr> <tr><td>9</td><td>0.933</td><td>23.32</td><td>46.00</td><td>-22.68</td><td>13.22</td><td>9.98</td><td>0.12 Average</td></tr> <tr><td>10</td><td>0.933</td><td>34.95</td><td>56.00</td><td>-21.05</td><td>24.85</td><td>9.98</td><td>0.12 QP</td></tr> <tr><td>11</td><td>3.276</td><td>19.54</td><td>46.00</td><td>-26.46</td><td>9.25</td><td>10.03</td><td>0.26 Average</td></tr> <tr><td>12</td><td>3.276</td><td>28.82</td><td>56.00</td><td>-27.18</td><td>18.53</td><td>10.03</td><td>0.26 QP</td></tr> </tbody> </table>				Freq	Level	Limit	Over	Read	Factor	Cable		MHz	dBuV	Line	Limit	Level	dB	loss	Remark	1	0.240	24.12	52.08	-27.96	14.20	9.85	0.07 Average	2	0.240	33.55	62.08	-28.53	23.63	9.85	0.07 QP	3	0.322	23.55	49.66	-26.11	13.61	9.87	0.07 Average	4	0.322	36.18	59.66	-23.48	26.24	9.87	0.07 QP	5	0.456	32.67	46.76	-14.09	22.68	9.90	0.09 Average	6*	0.456	43.03	56.76	-13.73	33.04	9.90	0.09 QP	7	0.716	23.15	46.00	-22.85	13.09	9.95	0.11 Average	8	0.716	35.54	56.00	-20.46	25.48	9.95	0.11 QP	9	0.933	23.32	46.00	-22.68	13.22	9.98	0.12 Average	10	0.933	34.95	56.00	-21.05	24.85	9.98	0.12 QP	11	3.276	19.54	46.00	-26.46	9.25	10.03	0.26 Average	12	3.276	28.82	56.00	-27.18	18.53	10.03	0.26 QP
Freq	Level	Limit	Over	Read	Factor	Cable																																																																																																													
MHz	dBuV	Line	Limit	Level	dB	loss	Remark																																																																																																												
1	0.240	24.12	52.08	-27.96	14.20	9.85	0.07 Average																																																																																																												
2	0.240	33.55	62.08	-28.53	23.63	9.85	0.07 QP																																																																																																												
3	0.322	23.55	49.66	-26.11	13.61	9.87	0.07 Average																																																																																																												
4	0.322	36.18	59.66	-23.48	26.24	9.87	0.07 QP																																																																																																												
5	0.456	32.67	46.76	-14.09	22.68	9.90	0.09 Average																																																																																																												
6*	0.456	43.03	56.76	-13.73	33.04	9.90	0.09 QP																																																																																																												
7	0.716	23.15	46.00	-22.85	13.09	9.95	0.11 Average																																																																																																												
8	0.716	35.54	56.00	-20.46	25.48	9.95	0.11 QP																																																																																																												
9	0.933	23.32	46.00	-22.68	13.22	9.98	0.12 Average																																																																																																												
10	0.933	34.95	56.00	-21.05	24.85	9.98	0.12 QP																																																																																																												
11	3.276	19.54	46.00	-26.46	9.25	10.03	0.26 Average																																																																																																												
12	3.276	28.82	56.00	-27.18	18.53	10.03	0.26 QP																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																			

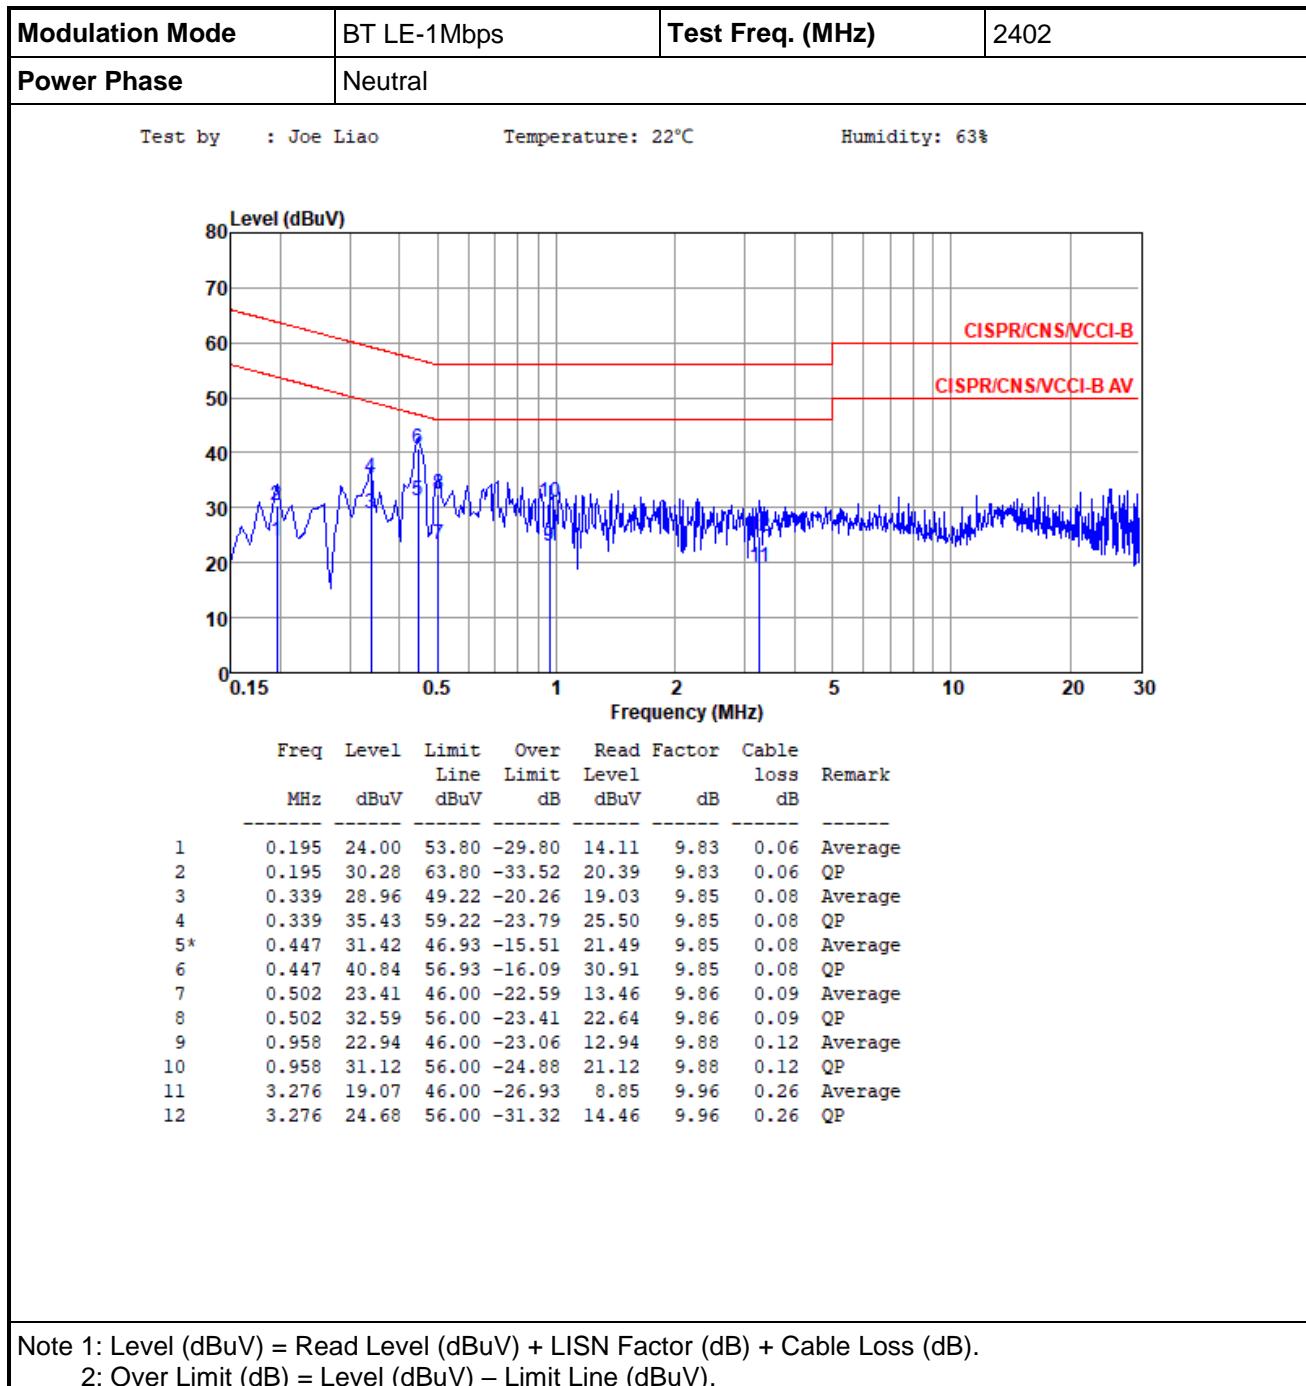

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup

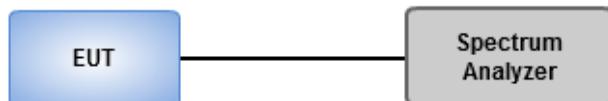

3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	23°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	688.406k	1.02M	1M02F1D	681.159k	1.017M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	688.406k	1.02M
2440MHz	Pass	500k	681.159k	1.017M
2480MHz	Pass	500k	688.406k	1.017M

Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

BT-LE(1Mbps)


2402MHz

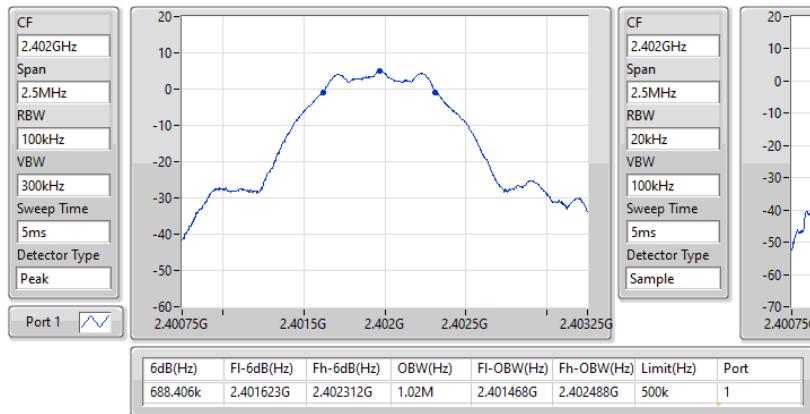


EBW-DTS

BT-LE(1Mbps)

2440MHz

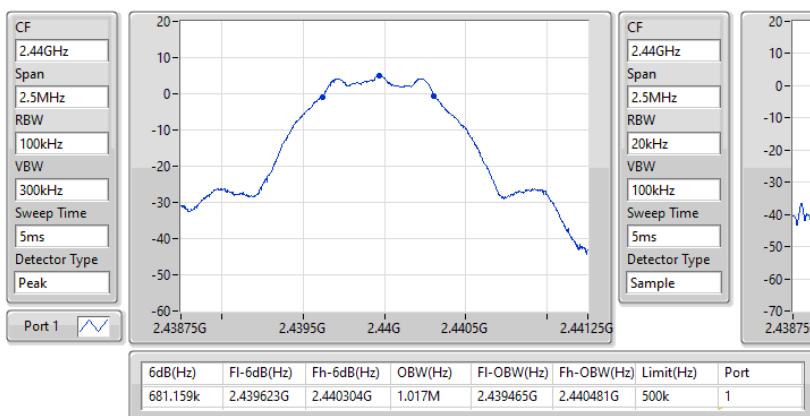

EBW-DTS

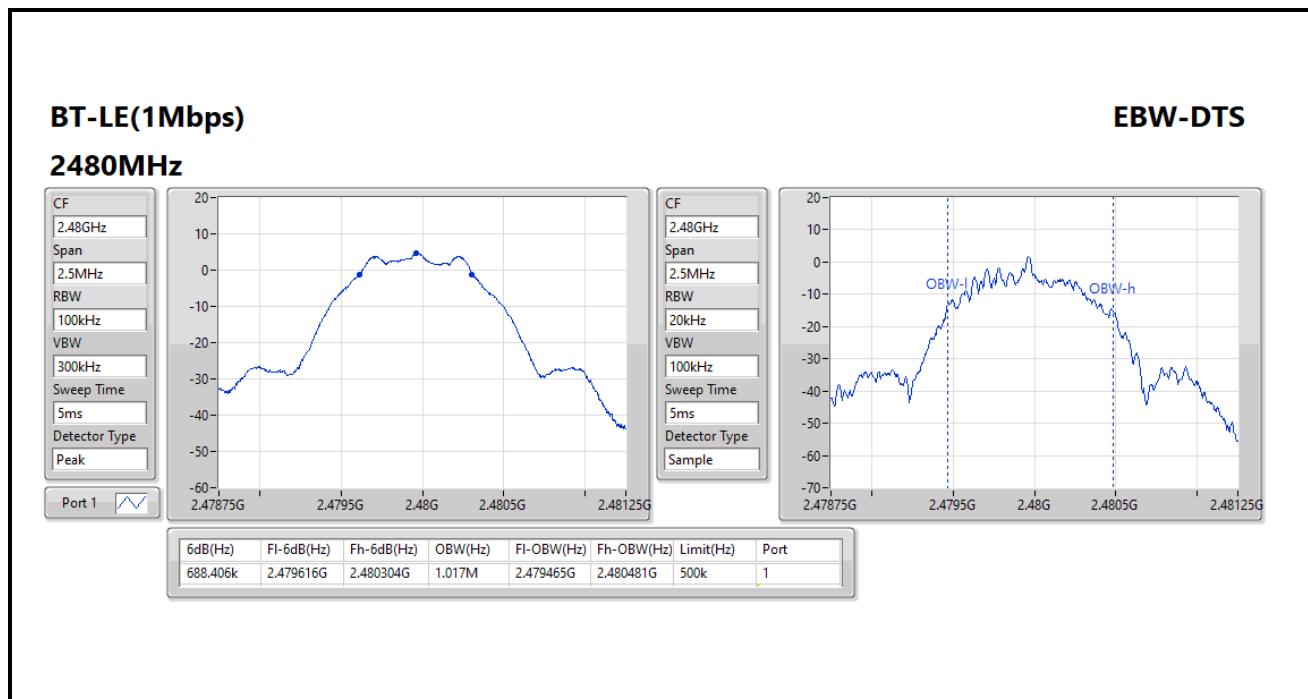

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1 Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Ambient Condition	23°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.81	0.00480

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.10	6.81	30.00
2440MHz	Pass	2.10	6.71	30.00
2480MHz	Pass	2.10	6.68	30.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.49	0.00446

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.10	6.49	-
2440MHz	Pass	2.10	6.37	-
2480MHz	Pass	2.10	6.36	-

Note: Average power is for reference only.

3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log (1/x)$, where x is the duty cycle.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Ambient Condition	23°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Summary


Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-10.49

Result

Mode	Result	Antenna Gain (dBi)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.10	-10.58	8.00
2440MHz	Pass	2.10	-10.49	8.00
2480MHz	Pass	2.10	-10.96	8.00


BT-LE(1Mbps)


2402MHz

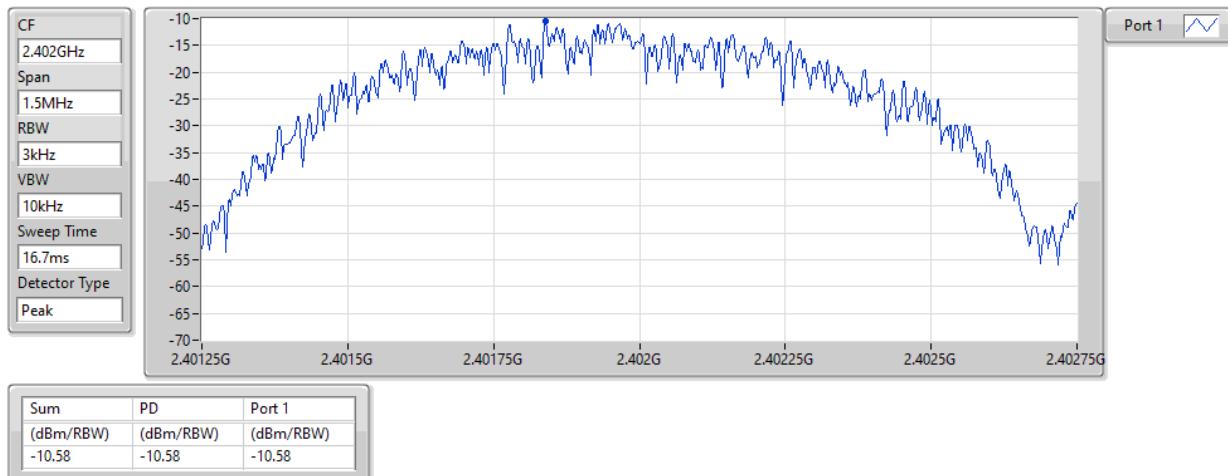

BT-LE(1Mbps)

2440MHz

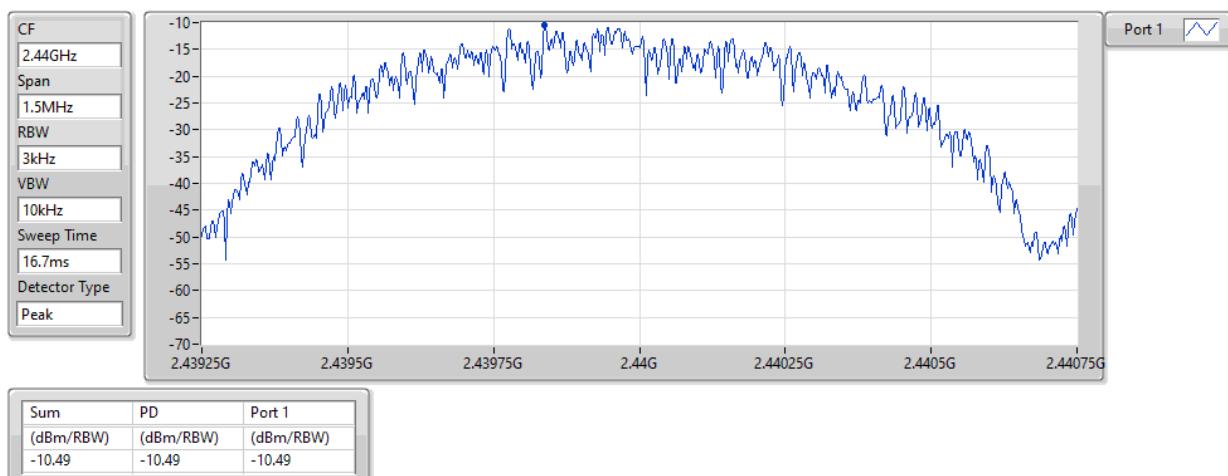

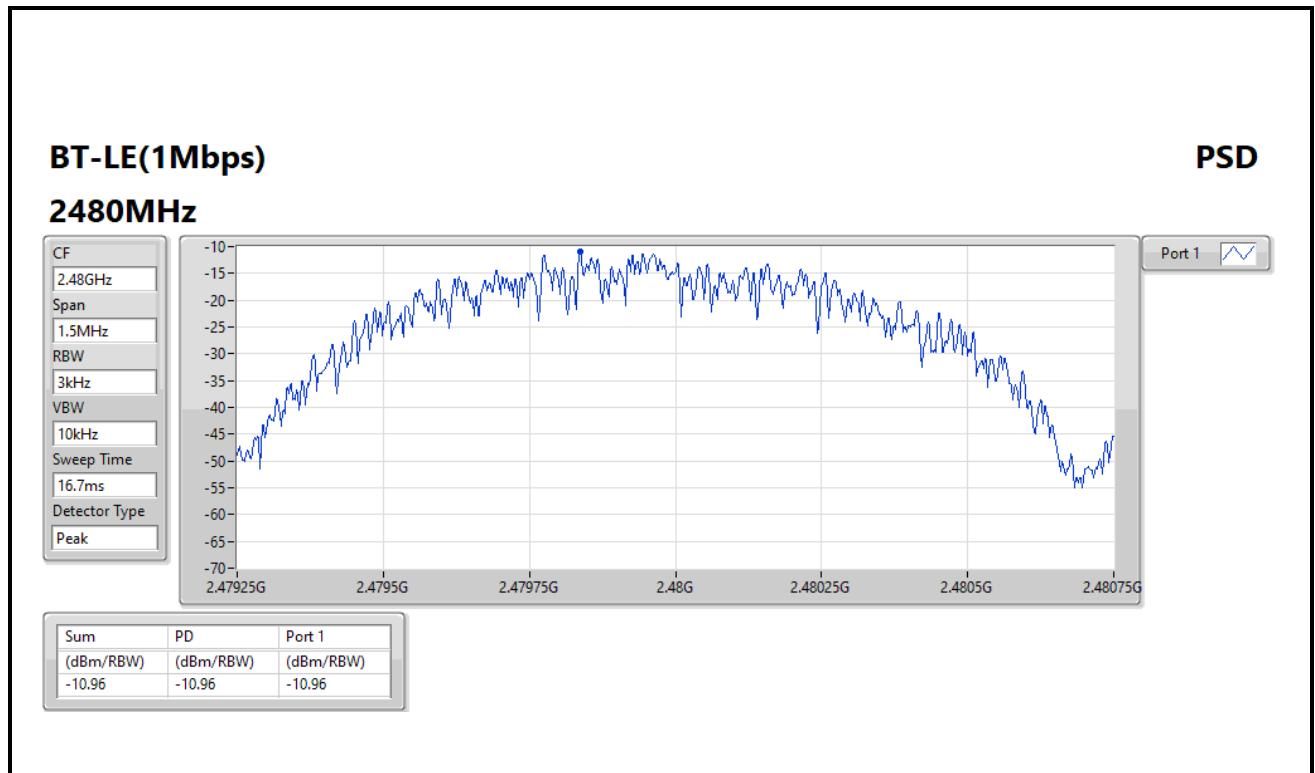

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

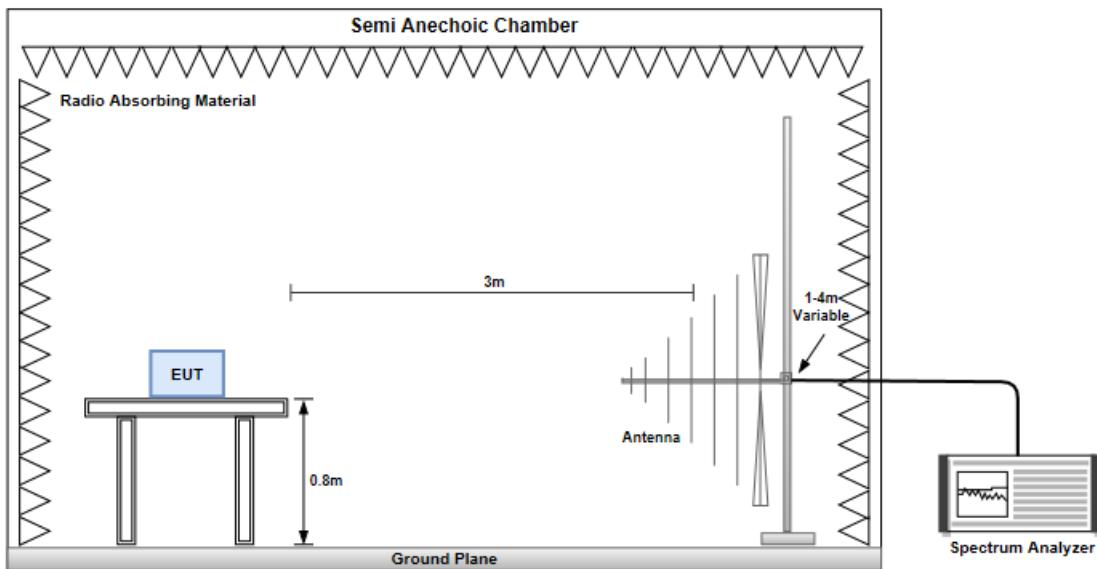


Radiated Emissions above 1 GHz

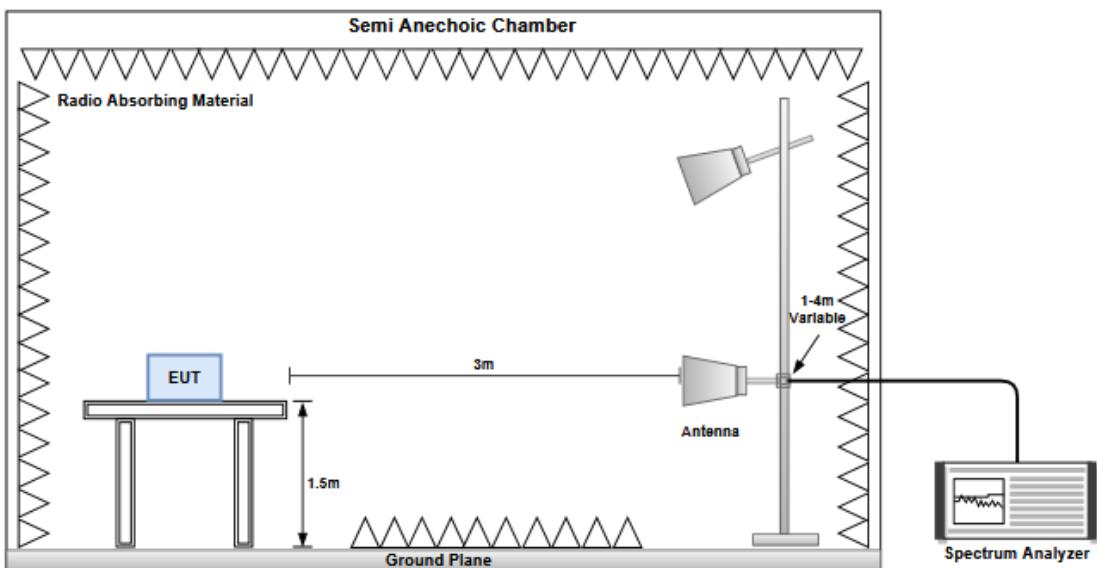



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

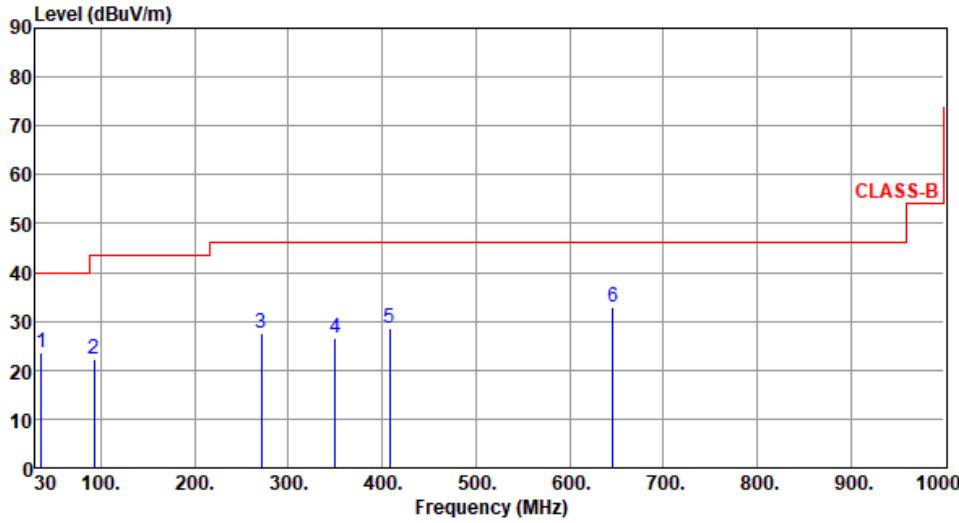
Modulation	BT LE-1Mbps	Test Freq. (MHz)	2402																																																																						
Polarization	Horizontal																																																																								
Test By	Roger Lu	Temperature (°C)	24																																																																						
Humidity (%) : 63																																																																									
																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. (MHz)</th> <th>Emission level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>SA reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Remark</th> <th>ANT High (cm)</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>36.79</td> <td>23.57</td> <td>40.00</td> <td>-16.43</td> <td>32.75</td> <td>-9.18</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>93.05</td> <td>22.38</td> <td>43.50</td> <td>-21.12</td> <td>36.92</td> <td>-14.54</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>271.53</td> <td>27.59</td> <td>46.00</td> <td>-18.41</td> <td>36.72</td> <td>-9.13</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>350.10</td> <td>26.52</td> <td>46.00</td> <td>-19.48</td> <td>33.72</td> <td>-7.20</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>408.30</td> <td>28.40</td> <td>46.00</td> <td>-17.60</td> <td>34.07</td> <td>-5.67</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>645.95</td> <td>32.88</td> <td>46.00</td> <td>-13.12</td> <td>33.34</td> <td>-0.46</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg	1	36.79	23.57	40.00	-16.43	32.75	-9.18	Peak	---	---	2	93.05	22.38	43.50	-21.12	36.92	-14.54	Peak	---	---	3	271.53	27.59	46.00	-18.41	36.72	-9.13	Peak	---	---	4	350.10	26.52	46.00	-19.48	33.72	-7.20	Peak	---	---	5	408.30	28.40	46.00	-17.60	34.07	-5.67	Peak	---	---	6	645.95	32.88	46.00	-13.12	33.34	-0.46	Peak	---	---
	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg																																																																
1	36.79	23.57	40.00	-16.43	32.75	-9.18	Peak	---	---																																																																
2	93.05	22.38	43.50	-21.12	36.92	-14.54	Peak	---	---																																																																
3	271.53	27.59	46.00	-18.41	36.72	-9.13	Peak	---	---																																																																
4	350.10	26.52	46.00	-19.48	33.72	-7.20	Peak	---	---																																																																
5	408.30	28.40	46.00	-17.60	34.07	-5.67	Peak	---	---																																																																
6	645.95	32.88	46.00	-13.12	33.34	-0.46	Peak	---	---																																																																
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)</p> <p>*Factor includes antenna factor , cable loss and amplifier gain</p> <p>Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p> <p>Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																									

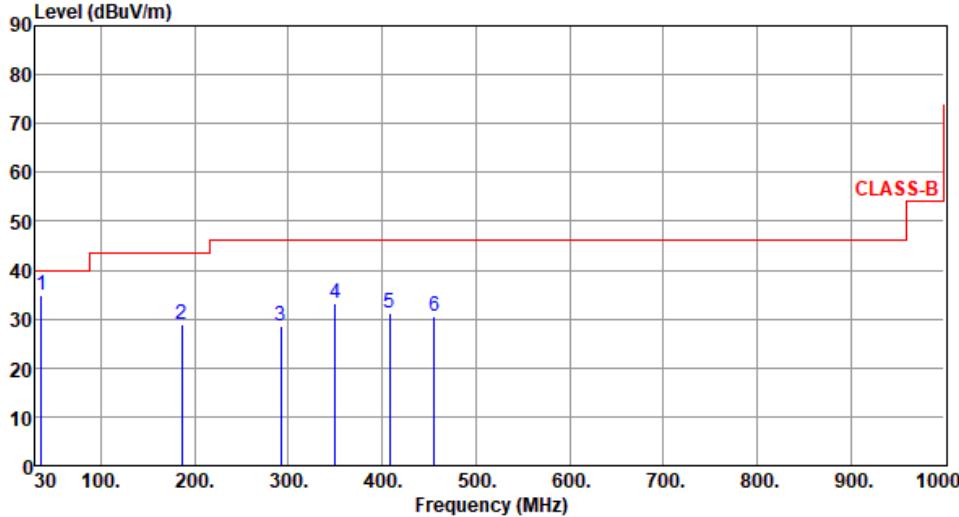
Modulation	BT LE-1Mbps	Test Freq. (MHz)	2402																																																															
Polarization	Vertical																																																																	
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):63																																																															
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																		
 <p>The graph shows the spectral emissions of the device. The Y-axis is 'Level (dBuV/m)' ranging from 0 to 90. The X-axis is 'Frequency (MHz)' ranging from 30 to 1000. A red line represents the emission spectrum, which is relatively flat at approximately 45 dBuV/m between 100MHz and 900MHz, then rises to about 75 dBuV/m at 1000MHz. Six specific frequency points are marked with vertical blue lines and labeled 1 through 6. Point 1 is at ~36.79MHz, point 2 at ~186.17MHz, point 3 at ~291.90MHz, point 4 at ~350.10MHz, point 5 at ~408.30MHz, and point 6 at ~455.83MHz. The emission spectrum is well below the 40 dBuV/m limit line (also shown in red) across the entire frequency range.</p>																																																																		
<table border="1"> <thead> <tr> <th></th> <th>Freq.</th> <th>Emission level MHz</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>36.79</td> <td>34.78</td> <td>40.00</td> <td>-5.22</td> <td>43.96</td> <td>-9.18</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>186.17</td> <td>28.91</td> <td>43.50</td> <td>-14.59</td> <td>39.89</td> <td>-10.98</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>291.90</td> <td>28.50</td> <td>46.00</td> <td>-17.50</td> <td>36.89</td> <td>-8.39</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>350.10</td> <td>33.29</td> <td>46.00</td> <td>-12.71</td> <td>40.49</td> <td>-7.20</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>408.30</td> <td>31.24</td> <td>46.00</td> <td>-14.76</td> <td>36.91</td> <td>-5.67</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>455.83</td> <td>30.63</td> <td>46.00</td> <td>-15.37</td> <td>34.81</td> <td>-4.18</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>					Freq.	Emission level MHz	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	36.79	34.78	40.00	-5.22	43.96	-9.18	Peak	---	2	186.17	28.91	43.50	-14.59	39.89	-10.98	Peak	---	3	291.90	28.50	46.00	-17.50	36.89	-8.39	Peak	---	4	350.10	33.29	46.00	-12.71	40.49	-7.20	Peak	---	5	408.30	31.24	46.00	-14.76	36.91	-5.67	Peak	---	6	455.83	30.63	46.00	-15.37	34.81	-4.18	Peak	---
	Freq.	Emission level MHz	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																										
1	36.79	34.78	40.00	-5.22	43.96	-9.18	Peak	---																																																										
2	186.17	28.91	43.50	-14.59	39.89	-10.98	Peak	---																																																										
3	291.90	28.50	46.00	-17.50	36.89	-8.39	Peak	---																																																										
4	350.10	33.29	46.00	-12.71	40.49	-7.20	Peak	---																																																										
5	408.30	31.24	46.00	-14.76	36.91	-5.67	Peak	---																																																										
6	455.83	30.63	46.00	-15.37	34.81	-4.18	Peak	---																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																		

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

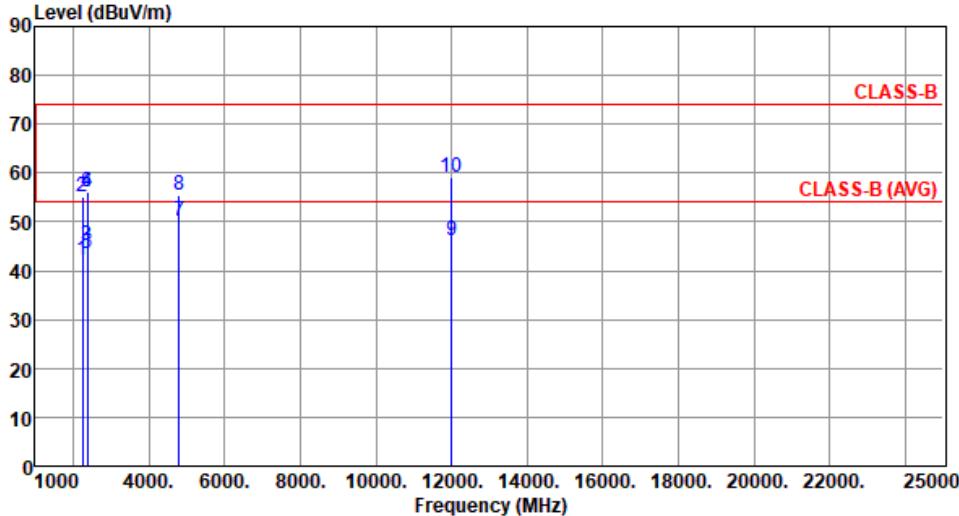
Modulation	BT LE-1Mbps	Test Freq. (MHz)	2402																																																																																								
Polarization	Horizontal																																																																																										
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																								
																																																																																											
<table border="1"> <thead> <tr> <th>Freq. (MHz)</th> <th>Emission level (dBuV/m)</th> <th>Margin (dB)</th> <th>SA reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Remark</th> <th>ANT High (cm)</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr><td>2246.00</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>42.47</td><td>-0.30</td><td>Average</td><td>266 158</td></tr> <tr><td>2246.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>55.48</td><td>-0.30</td><td>Peak</td><td>266 158</td></tr> <tr><td>2386.00</td><td>45.24</td><td>54.00</td><td>-8.76</td><td>45.85</td><td>-0.61</td><td>Average</td><td>258 187</td></tr> <tr><td>2386.00</td><td>56.26</td><td>74.00</td><td>-17.74</td><td>56.87</td><td>-0.61</td><td>Peak</td><td>258 187</td></tr> <tr><td>2390.00</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>43.99</td><td>-0.62</td><td>Average</td><td>258 187</td></tr> <tr><td>2390.00</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>56.78</td><td>-0.62</td><td>Peak</td><td>258 187</td></tr> <tr><td>4804.00</td><td>50.04</td><td>54.00</td><td>-3.96</td><td>44.44</td><td>5.60</td><td>Average</td><td>289 192</td></tr> <tr><td>4804.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>49.98</td><td>5.60</td><td>Peak</td><td>289 192</td></tr> <tr><td>12010.00</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>30.47</td><td>15.67</td><td>Average</td><td>100 280</td></tr> <tr><td>12010.00</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>43.40</td><td>15.67</td><td>Peak</td><td>100 280</td></tr> </tbody> </table>				Freq. (MHz)	Emission level (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg	2246.00	42.17	54.00	-11.83	42.47	-0.30	Average	266 158	2246.00	55.18	74.00	-18.82	55.48	-0.30	Peak	266 158	2386.00	45.24	54.00	-8.76	45.85	-0.61	Average	258 187	2386.00	56.26	74.00	-17.74	56.87	-0.61	Peak	258 187	2390.00	43.37	54.00	-10.63	43.99	-0.62	Average	258 187	2390.00	56.16	74.00	-17.84	56.78	-0.62	Peak	258 187	4804.00	50.04	54.00	-3.96	44.44	5.60	Average	289 192	4804.00	55.58	74.00	-18.42	49.98	5.60	Peak	289 192	12010.00	46.14	54.00	-7.86	30.47	15.67	Average	100 280	12010.00	59.07	74.00	-14.93	43.40	15.67	Peak	100 280
Freq. (MHz)	Emission level (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg																																																																																				
2246.00	42.17	54.00	-11.83	42.47	-0.30	Average	266 158																																																																																				
2246.00	55.18	74.00	-18.82	55.48	-0.30	Peak	266 158																																																																																				
2386.00	45.24	54.00	-8.76	45.85	-0.61	Average	258 187																																																																																				
2386.00	56.26	74.00	-17.74	56.87	-0.61	Peak	258 187																																																																																				
2390.00	43.37	54.00	-10.63	43.99	-0.62	Average	258 187																																																																																				
2390.00	56.16	74.00	-17.84	56.78	-0.62	Peak	258 187																																																																																				
4804.00	50.04	54.00	-3.96	44.44	5.60	Average	289 192																																																																																				
4804.00	55.58	74.00	-18.42	49.98	5.60	Peak	289 192																																																																																				
12010.00	46.14	54.00	-7.86	30.47	15.67	Average	100 280																																																																																				
12010.00	59.07	74.00	-14.93	43.40	15.67	Peak	100 280																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																											

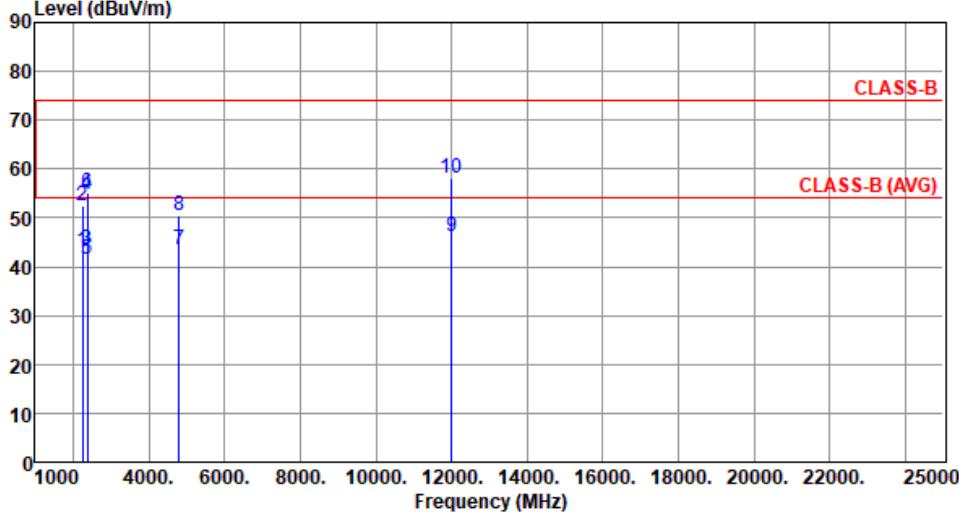Modulation	BT LE-1Mbps	Test Freq. (MHz)	2402																																																																																																														
Polarization	Vertical																																																																																																																
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																																														
																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>Freq. (MHz)</th> <th>Emission level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>SA reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Remark</th> <th>ANT High (cm)</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2246.00</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>43.36</td> <td>-0.30</td> <td>Average</td> <td>100</td> <td>138</td> </tr> <tr> <td>2</td> <td>2246.00</td> <td>52.36</td> <td>74.00</td> <td>-21.64</td> <td>52.66</td> <td>-0.30</td> <td>Peak</td> <td>100</td> <td>138</td> </tr> <tr> <td>3</td> <td>2386.00</td> <td>43.38</td> <td>54.00</td> <td>-10.62</td> <td>43.99</td> <td>-0.61</td> <td>Average</td> <td>228</td> <td>147</td> </tr> <tr> <td>4</td> <td>2386.00</td> <td>54.83</td> <td>74.00</td> <td>-19.17</td> <td>55.44</td> <td>-0.61</td> <td>Peak</td> <td>228</td> <td>147</td> </tr> <tr> <td>5</td> <td>2390.00</td> <td>41.53</td> <td>54.00</td> <td>-12.47</td> <td>42.15</td> <td>-0.62</td> <td>Average</td> <td>228</td> <td>147</td> </tr> <tr> <td>6</td> <td>2390.00</td> <td>54.98</td> <td>74.00</td> <td>-19.02</td> <td>55.60</td> <td>-0.62</td> <td>Peak</td> <td>228</td> <td>147</td> </tr> <tr> <td>7</td> <td>4804.00</td> <td>43.35</td> <td>54.00</td> <td>-10.65</td> <td>37.75</td> <td>5.60</td> <td>Average</td> <td>103</td> <td>56</td> </tr> <tr> <td>8</td> <td>4804.00</td> <td>50.45</td> <td>74.00</td> <td>-23.55</td> <td>44.85</td> <td>5.60</td> <td>Peak</td> <td>103</td> <td>56</td> </tr> <tr> <td>9</td> <td>12010.00</td> <td>46.11</td> <td>54.00</td> <td>-7.89</td> <td>30.44</td> <td>15.67</td> <td>Average</td> <td>100</td> <td>50</td> </tr> <tr> <td>10</td> <td>12010.00</td> <td>58.27</td> <td>74.00</td> <td>-15.73</td> <td>42.60</td> <td>15.67</td> <td>Peak</td> <td>100</td> <td>50</td> </tr> </tbody> </table>					Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg	1	2246.00	43.06	54.00	-10.94	43.36	-0.30	Average	100	138	2	2246.00	52.36	74.00	-21.64	52.66	-0.30	Peak	100	138	3	2386.00	43.38	54.00	-10.62	43.99	-0.61	Average	228	147	4	2386.00	54.83	74.00	-19.17	55.44	-0.61	Peak	228	147	5	2390.00	41.53	54.00	-12.47	42.15	-0.62	Average	228	147	6	2390.00	54.98	74.00	-19.02	55.60	-0.62	Peak	228	147	7	4804.00	43.35	54.00	-10.65	37.75	5.60	Average	103	56	8	4804.00	50.45	74.00	-23.55	44.85	5.60	Peak	103	56	9	12010.00	46.11	54.00	-7.89	30.44	15.67	Average	100	50	10	12010.00	58.27	74.00	-15.73	42.60	15.67	Peak	100	50
	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB/m)	Remark	ANT High (cm)	Turn Table deg																																																																																																								
1	2246.00	43.06	54.00	-10.94	43.36	-0.30	Average	100	138																																																																																																								
2	2246.00	52.36	74.00	-21.64	52.66	-0.30	Peak	100	138																																																																																																								
3	2386.00	43.38	54.00	-10.62	43.99	-0.61	Average	228	147																																																																																																								
4	2386.00	54.83	74.00	-19.17	55.44	-0.61	Peak	228	147																																																																																																								
5	2390.00	41.53	54.00	-12.47	42.15	-0.62	Average	228	147																																																																																																								
6	2390.00	54.98	74.00	-19.02	55.60	-0.62	Peak	228	147																																																																																																								
7	4804.00	43.35	54.00	-10.65	37.75	5.60	Average	103	56																																																																																																								
8	4804.00	50.45	74.00	-23.55	44.85	5.60	Peak	103	56																																																																																																								
9	12010.00	46.11	54.00	-7.89	30.44	15.67	Average	100	50																																																																																																								
10	12010.00	58.27	74.00	-15.73	42.60	15.67	Peak	100	50																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

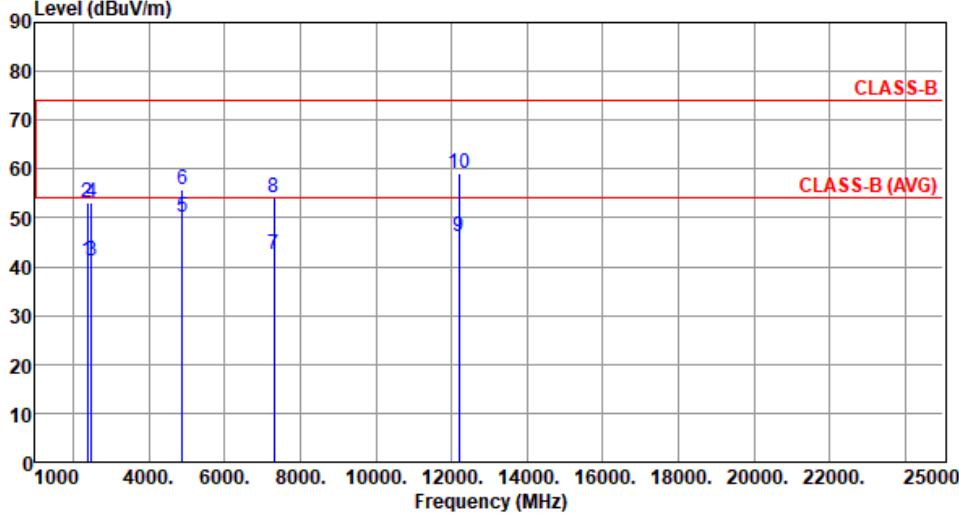Modulation	BT LE-1Mbps	Test Freq. (MHz)	2440																																																																																																														
Polarization	Horizontal																																																																																																																
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																																														
																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>Freq.</th> <th>Emission level MHz</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>41.15</td> <td>54.00</td> <td>-12.85</td> <td>41.77</td> <td>-0.62</td> <td>Average</td> <td>274</td> <td>186</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>53.14</td> <td>74.00</td> <td>-20.86</td> <td>53.76</td> <td>-0.62</td> <td>Peak</td> <td>274</td> <td>186</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>41.17</td> <td>54.00</td> <td>-12.83</td> <td>41.76</td> <td>-0.59</td> <td>Average</td> <td>274</td> <td>186</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>53.11</td> <td>74.00</td> <td>-20.89</td> <td>53.70</td> <td>-0.59</td> <td>Peak</td> <td>274</td> <td>186</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>44.59</td> <td>5.57</td> <td>Average</td> <td>143</td> <td>105</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>55.76</td> <td>74.00</td> <td>-18.24</td> <td>50.19</td> <td>5.57</td> <td>Peak</td> <td>143</td> <td>105</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>42.55</td> <td>54.00</td> <td>-11.45</td> <td>31.94</td> <td>10.61</td> <td>Average</td> <td>103</td> <td>80</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>43.39</td> <td>10.61</td> <td>Peak</td> <td>103</td> <td>80</td> </tr> <tr> <td>9</td> <td>12200.00</td> <td>46.21</td> <td>54.00</td> <td>-7.79</td> <td>30.44</td> <td>15.77</td> <td>Average</td> <td>100</td> <td>276</td> </tr> <tr> <td>10</td> <td>12200.00</td> <td>59.13</td> <td>74.00</td> <td>-14.87</td> <td>43.36</td> <td>15.77</td> <td>Peak</td> <td>100</td> <td>276</td> </tr> </tbody> </table>					Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	41.15	54.00	-12.85	41.77	-0.62	Average	274	186	2	2390.00	53.14	74.00	-20.86	53.76	-0.62	Peak	274	186	3	2483.50	41.17	54.00	-12.83	41.76	-0.59	Average	274	186	4	2483.50	53.11	74.00	-20.89	53.70	-0.59	Peak	274	186	5	4880.00	50.16	54.00	-3.84	44.59	5.57	Average	143	105	6	4880.00	55.76	74.00	-18.24	50.19	5.57	Peak	143	105	7	7320.00	42.55	54.00	-11.45	31.94	10.61	Average	103	80	8	7320.00	54.00	74.00	-20.00	43.39	10.61	Peak	103	80	9	12200.00	46.21	54.00	-7.79	30.44	15.77	Average	100	276	10	12200.00	59.13	74.00	-14.87	43.36	15.77	Peak	100	276
	Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	2390.00	41.15	54.00	-12.85	41.77	-0.62	Average	274	186																																																																																																								
2	2390.00	53.14	74.00	-20.86	53.76	-0.62	Peak	274	186																																																																																																								
3	2483.50	41.17	54.00	-12.83	41.76	-0.59	Average	274	186																																																																																																								
4	2483.50	53.11	74.00	-20.89	53.70	-0.59	Peak	274	186																																																																																																								
5	4880.00	50.16	54.00	-3.84	44.59	5.57	Average	143	105																																																																																																								
6	4880.00	55.76	74.00	-18.24	50.19	5.57	Peak	143	105																																																																																																								
7	7320.00	42.55	54.00	-11.45	31.94	10.61	Average	103	80																																																																																																								
8	7320.00	54.00	74.00	-20.00	43.39	10.61	Peak	103	80																																																																																																								
9	12200.00	46.21	54.00	-7.79	30.44	15.77	Average	100	276																																																																																																								
10	12200.00	59.13	74.00	-14.87	43.36	15.77	Peak	100	276																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

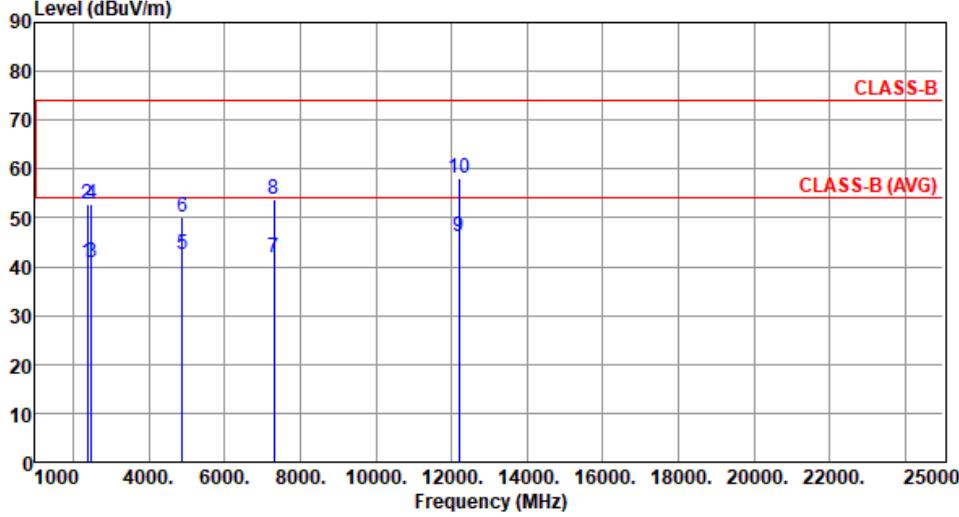Modulation	BT LE-1Mbps	Test Freq. (MHz)	2440																																																																																																														
Polarization	Vertical																																																																																																																
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																																														
																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>Freq.</th> <th>Emission level MHz</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>40.71</td> <td>54.00</td> <td>-13.29</td> <td>41.33</td> <td>-0.62</td> <td>Average</td> <td>206</td> <td>164</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>52.83</td> <td>74.00</td> <td>-21.17</td> <td>53.45</td> <td>-0.62</td> <td>Peak</td> <td>206</td> <td>164</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>40.79</td> <td>54.00</td> <td>-13.21</td> <td>41.38</td> <td>-0.59</td> <td>Average</td> <td>206</td> <td>164</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>53.40</td> <td>-0.59</td> <td>Peak</td> <td>206</td> <td>164</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>42.49</td> <td>54.00</td> <td>-11.51</td> <td>36.92</td> <td>5.57</td> <td>Average</td> <td>100</td> <td>37</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>50.23</td> <td>74.00</td> <td>-23.77</td> <td>44.66</td> <td>5.57</td> <td>Peak</td> <td>100</td> <td>37</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>41.95</td> <td>54.00</td> <td>-12.05</td> <td>31.34</td> <td>10.61</td> <td>Average</td> <td>226</td> <td>32</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>53.85</td> <td>74.00</td> <td>-20.15</td> <td>43.24</td> <td>10.61</td> <td>Peak</td> <td>226</td> <td>32</td> </tr> <tr> <td>9</td> <td>12200.00</td> <td>46.16</td> <td>54.00</td> <td>-7.84</td> <td>30.39</td> <td>15.77</td> <td>Average</td> <td>100</td> <td>45</td> </tr> <tr> <td>10</td> <td>12200.00</td> <td>58.24</td> <td>74.00</td> <td>-15.76</td> <td>42.47</td> <td>15.77</td> <td>Peak</td> <td>100</td> <td>45</td> </tr> </tbody> </table>					Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	40.71	54.00	-13.29	41.33	-0.62	Average	206	164	2	2390.00	52.83	74.00	-21.17	53.45	-0.62	Peak	206	164	3	2483.50	40.79	54.00	-13.21	41.38	-0.59	Average	206	164	4	2483.50	52.81	74.00	-21.19	53.40	-0.59	Peak	206	164	5	4880.00	42.49	54.00	-11.51	36.92	5.57	Average	100	37	6	4880.00	50.23	74.00	-23.77	44.66	5.57	Peak	100	37	7	7320.00	41.95	54.00	-12.05	31.34	10.61	Average	226	32	8	7320.00	53.85	74.00	-20.15	43.24	10.61	Peak	226	32	9	12200.00	46.16	54.00	-7.84	30.39	15.77	Average	100	45	10	12200.00	58.24	74.00	-15.76	42.47	15.77	Peak	100	45
	Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	2390.00	40.71	54.00	-13.29	41.33	-0.62	Average	206	164																																																																																																								
2	2390.00	52.83	74.00	-21.17	53.45	-0.62	Peak	206	164																																																																																																								
3	2483.50	40.79	54.00	-13.21	41.38	-0.59	Average	206	164																																																																																																								
4	2483.50	52.81	74.00	-21.19	53.40	-0.59	Peak	206	164																																																																																																								
5	4880.00	42.49	54.00	-11.51	36.92	5.57	Average	100	37																																																																																																								
6	4880.00	50.23	74.00	-23.77	44.66	5.57	Peak	100	37																																																																																																								
7	7320.00	41.95	54.00	-12.05	31.34	10.61	Average	226	32																																																																																																								
8	7320.00	53.85	74.00	-20.15	43.24	10.61	Peak	226	32																																																																																																								
9	12200.00	46.16	54.00	-7.84	30.39	15.77	Average	100	45																																																																																																								
10	12200.00	58.24	74.00	-15.76	42.47	15.77	Peak	100	45																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

Modulation	BT LE-1Mbps	Test Freq. (MHz)	2480																																																																																										
Polarization	Horizontal																																																																																												
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																										
<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>44.29</td> <td>54.00</td> <td>-9.71</td> <td>44.88</td> <td>-0.59</td> <td>Average</td> <td>159</td> <td>191</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>56.30</td> <td>74.00</td> <td>-17.70</td> <td>56.89</td> <td>-0.59</td> <td>Peak</td> <td>159</td> <td>191</td> </tr> <tr> <td>3</td> <td>2495.00</td> <td>46.36</td> <td>54.00</td> <td>-7.64</td> <td>46.95</td> <td>-0.59</td> <td>Average</td> <td>159</td> <td>191</td> </tr> <tr> <td>4</td> <td>2495.00</td> <td>54.29</td> <td>74.00</td> <td>-19.71</td> <td>54.88</td> <td>-0.59</td> <td>Peak</td> <td>159</td> <td>191</td> </tr> <tr> <td>5</td> <td>4960.00</td> <td>48.48</td> <td>54.00</td> <td>-5.52</td> <td>42.70</td> <td>5.78</td> <td>Average</td> <td>187</td> <td>126</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>55.77</td> <td>74.00</td> <td>-18.23</td> <td>49.99</td> <td>5.78</td> <td>Peak</td> <td>187</td> <td>126</td> </tr> <tr> <td>7</td> <td>7440.00</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>31.88</td> <td>10.56</td> <td>Average</td> <td>100</td> <td>77</td> </tr> <tr> <td>8</td> <td>7440.00</td> <td>54.06</td> <td>74.00</td> <td>-19.94</td> <td>43.50</td> <td>10.56</td> <td>Peak</td> <td>100</td> <td>77</td> </tr> </tbody> </table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2483.50	44.29	54.00	-9.71	44.88	-0.59	Average	159	191	2	2483.50	56.30	74.00	-17.70	56.89	-0.59	Peak	159	191	3	2495.00	46.36	54.00	-7.64	46.95	-0.59	Average	159	191	4	2495.00	54.29	74.00	-19.71	54.88	-0.59	Peak	159	191	5	4960.00	48.48	54.00	-5.52	42.70	5.78	Average	187	126	6	4960.00	55.77	74.00	-18.23	49.99	5.78	Peak	187	126	7	7440.00	42.44	54.00	-11.56	31.88	10.56	Average	100	77	8	7440.00	54.06	74.00	-19.94	43.50	10.56	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	2483.50	44.29	54.00	-9.71	44.88	-0.59	Average	159	191																																																																																				
2	2483.50	56.30	74.00	-17.70	56.89	-0.59	Peak	159	191																																																																																				
3	2495.00	46.36	54.00	-7.64	46.95	-0.59	Average	159	191																																																																																				
4	2495.00	54.29	74.00	-19.71	54.88	-0.59	Peak	159	191																																																																																				
5	4960.00	48.48	54.00	-5.52	42.70	5.78	Average	187	126																																																																																				
6	4960.00	55.77	74.00	-18.23	49.99	5.78	Peak	187	126																																																																																				
7	7440.00	42.44	54.00	-11.56	31.88	10.56	Average	100	77																																																																																				
8	7440.00	54.06	74.00	-19.94	43.50	10.56	Peak	100	77																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

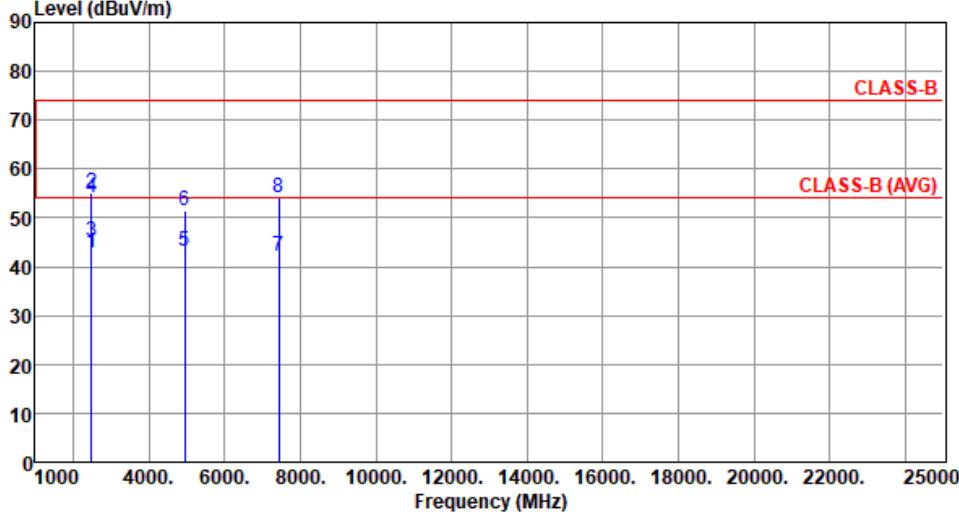Modulation	BT LE-1Mbps	Test Freq. (MHz)	2480																																																																																																								
Polarization	Vertical																																																																																																										
Test By	:Akun Chung	Temperature(°C):26	Humidity(%):68																																																																																																								
																																																																																																											
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>level</th> <th>level</th> <th>Margin</th> <th>reading</th> <th>Factor</th> <th></th> <th>High</th> <th>Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>42.75</td> <td>54.00</td> <td>-11.25</td> <td>43.34</td> <td>-0.59</td> <td>Average</td> <td>198</td> <td>173</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>55.08</td> <td>74.00</td> <td>-18.92</td> <td>55.67</td> <td>-0.59</td> <td>Peak</td> <td>198</td> <td>173</td> </tr> <tr> <td>3</td> <td>2495.00</td> <td>45.23</td> <td>54.00</td> <td>-8.77</td> <td>45.82</td> <td>-0.59</td> <td>Average</td> <td>200</td> <td>175</td> </tr> <tr> <td>4</td> <td>2495.00</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>54.70</td> <td>-0.59</td> <td>Peak</td> <td>200</td> <td>175</td> </tr> <tr> <td>5</td> <td>4960.00</td> <td>43.33</td> <td>54.00</td> <td>-10.67</td> <td>37.55</td> <td>5.78</td> <td>Average</td> <td>102</td> <td>42</td> </tr> <tr> <td>6</td> <td>4960.00</td> <td>51.32</td> <td>74.00</td> <td>-22.68</td> <td>45.54</td> <td>5.78</td> <td>Peak</td> <td>102</td> <td>42</td> </tr> <tr> <td>7</td> <td>7440.00</td> <td>42.26</td> <td>54.00</td> <td>-11.74</td> <td>31.70</td> <td>10.56</td> <td>Average</td> <td>239</td> <td>39</td> </tr> <tr> <td>8</td> <td>7440.00</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>43.44</td> <td>10.56</td> <td>Peak</td> <td>239</td> <td>39</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	level	level	Margin	reading	Factor		High	Table	MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg	1	2483.50	42.75	54.00	-11.25	43.34	-0.59	Average	198	173	2	2483.50	55.08	74.00	-18.92	55.67	-0.59	Peak	198	173	3	2495.00	45.23	54.00	-8.77	45.82	-0.59	Average	200	175	4	2495.00	54.11	74.00	-19.89	54.70	-0.59	Peak	200	175	5	4960.00	43.33	54.00	-10.67	37.55	5.78	Average	102	42	6	4960.00	51.32	74.00	-22.68	45.54	5.78	Peak	102	42	7	7440.00	42.26	54.00	-11.74	31.70	10.56	Average	239	39	8	7440.00	54.00	74.00	-20.00	43.44	10.56	Peak	239	39
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																				
level	level	Margin	reading	Factor		High	Table																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg																																																																																																				
1	2483.50	42.75	54.00	-11.25	43.34	-0.59	Average	198	173																																																																																																		
2	2483.50	55.08	74.00	-18.92	55.67	-0.59	Peak	198	173																																																																																																		
3	2495.00	45.23	54.00	-8.77	45.82	-0.59	Average	200	175																																																																																																		
4	2495.00	54.11	74.00	-19.89	54.70	-0.59	Peak	200	175																																																																																																		
5	4960.00	43.33	54.00	-10.67	37.55	5.78	Average	102	42																																																																																																		
6	4960.00	51.32	74.00	-22.68	45.54	5.78	Peak	102	42																																																																																																		
7	7440.00	42.26	54.00	-11.74	31.70	10.56	Average	239	39																																																																																																		
8	7440.00	54.00	74.00	-20.00	43.44	10.56	Peak	239	39																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																											

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup




3.6.4 Test Result of Emissions in non-restricted Frequency Bands

Ambient Condition	23°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

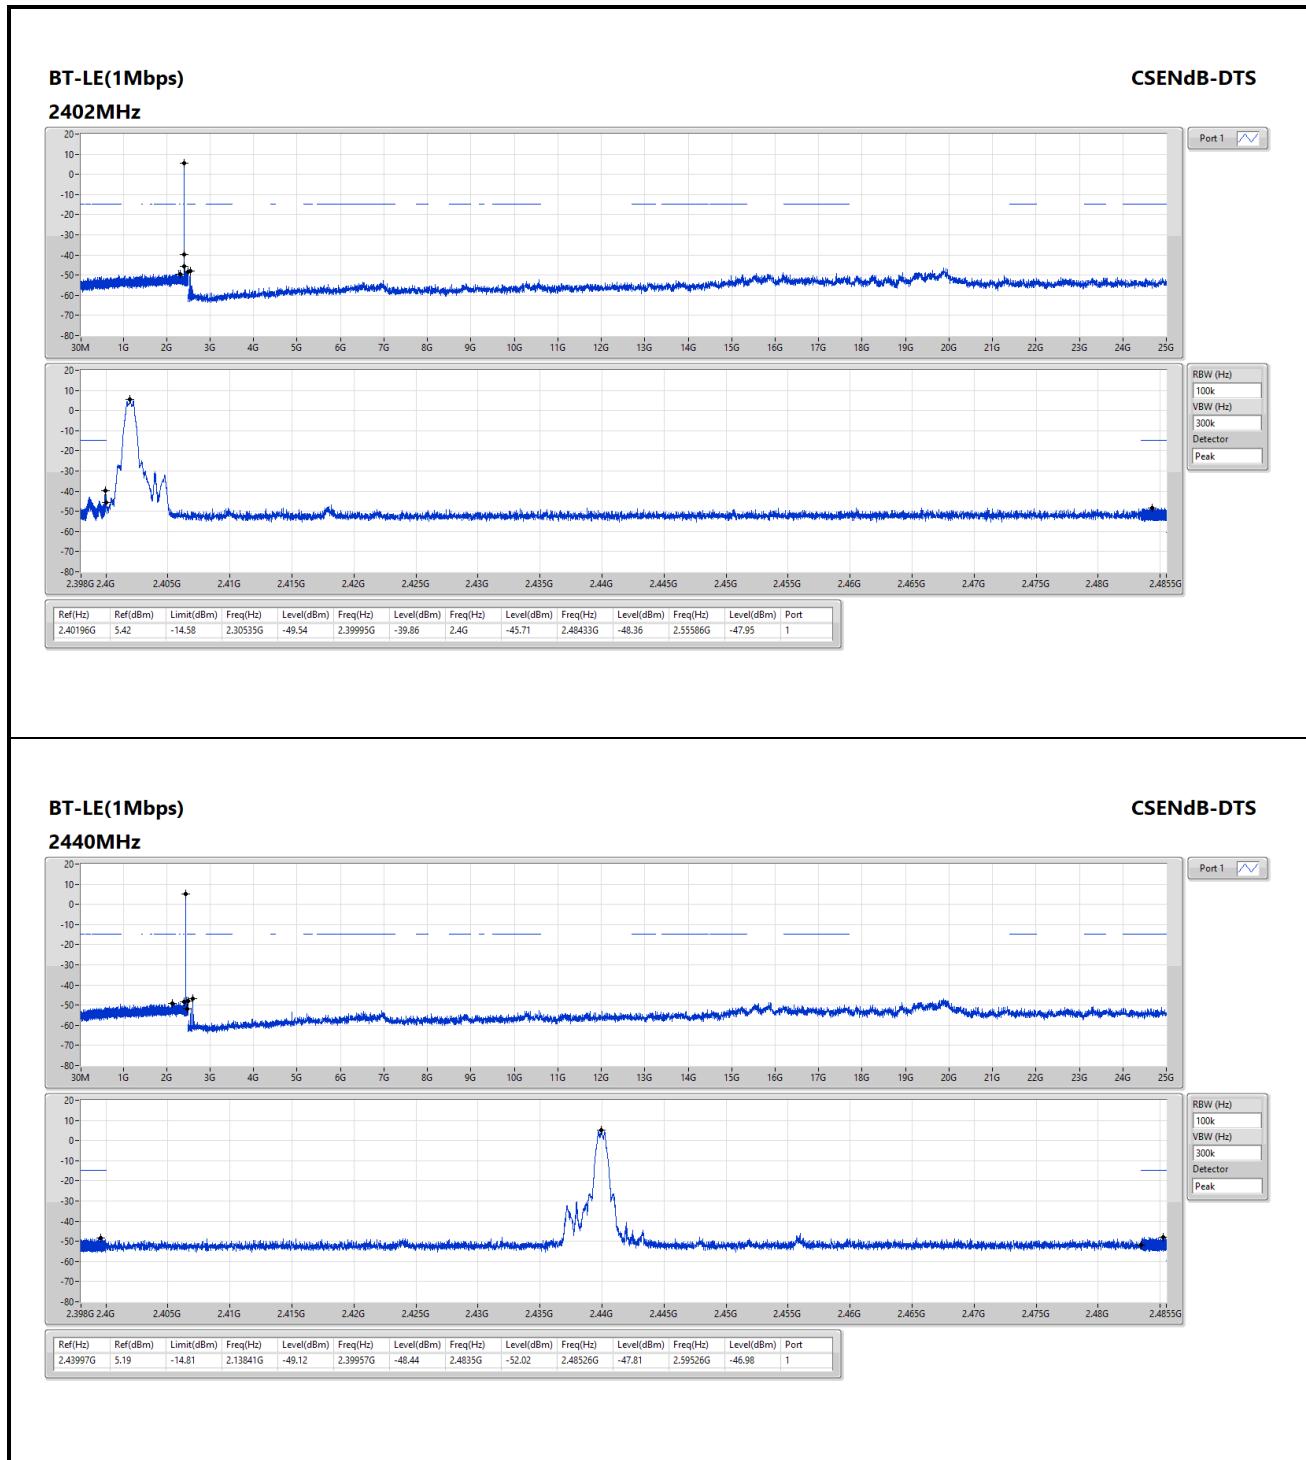

BT-LE(1Mbps)

2480MHz

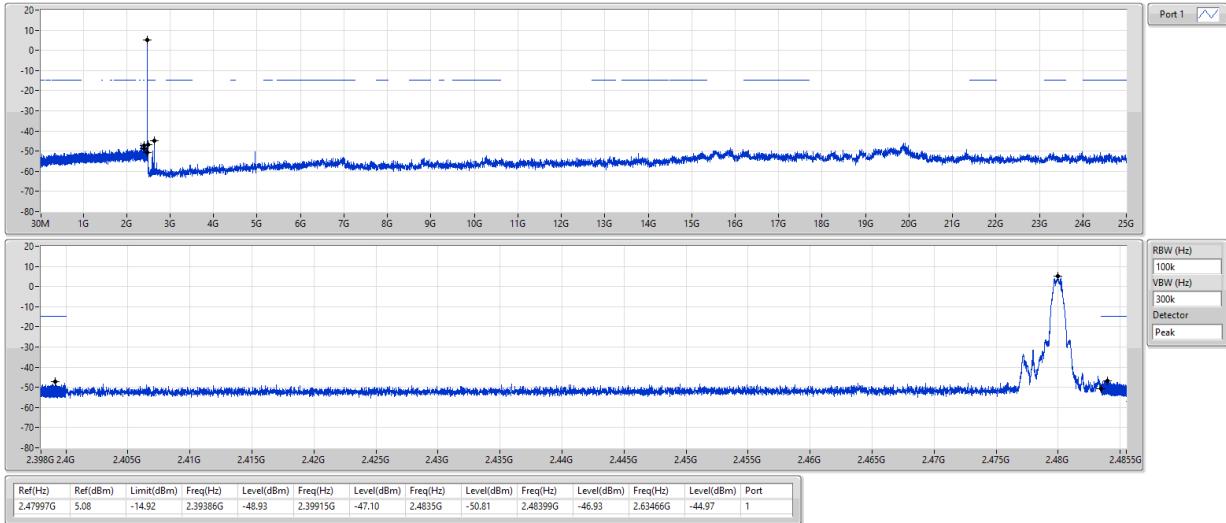

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640
No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640
No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666
Fax: 886-3-318-0345
Email: ICC_Service@icertifi.com.tw

—END—