

FCC TEST REPORT
FOR
Optelec Nederland BV
Compact 6 HD
Model No.: Compact 6 HD
Additional No.: /

Prepared for : Optelec Nederland BV
Address : Breslau 4, 2993 LT Barendrecht, the Netherlands

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 20, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : June 20, 2017~July 08, 2017
Date of Report : July 08, 2017

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247): 2016****Report Reference No.** : **LCS170620034AE**

Date of Issue : July 08, 2017

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : **Optelec Nederland BV**

Address : Breslau 4, 2993 LT Barendrecht, the Netherlands

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **Compact 6 HD**

Trade Mark : Optelec

Model/ Type reference : Compact 6 HD

Ratings : DC 3.7V by Lithium ion polymer battery (3200mAh)

Recharge Voltage: DC 5V/2500mA

Result : **Positive****Compiled by:**

Aking Jin/ File administrators

Supervised by:

Dick Su/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS170620034AE	<u>July 08, 2017</u> Date of issue
---	---------------------------------------

Type / Model.....	: Compact 6 HD
EUT.....	: Compact 6 HD
Applicant.....	: Optelec Nederland BV
Address.....	: Breslau 4, 2993 LT Barendrecht, the Netherlands
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Sochip Technology
Address.....	: RM18F, 27/F, Ho King Comm CTR, 2-16 Fayuen ST, Mongkok Kowloon, Hong Kong
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Junjia Technology
Address.....	: Guiyue Road 334-A2, Long hua New District, Shenzhen, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	July 08, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	6
1.3 External I/O Cable	6
1.4 Description of Test Facility	7
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	7
1.7 Description of Test Modes	7
1.8. Frequency of Channels	8
2. TEST METHODOLOGY	9
2.1 EUT Configuration	9
2.2 EUT Exercise	9
2.3 General Test Procedures	9
3. SYSTEM TEST CONFIGURATION	10
3.1 Justification	10
3.2 EUT Exercise Software	10
3.3 Special Accessories	10
3.4 Block Diagram/Schematics	10
3.5 Equipment Modifications	10
3.6 Test Setup	10
4. SUMMARY OF TEST RESULTS	11
5. SUMMARY OF TEST EQUIPMENT	12
6. MEASUREMENT RESULTS	13
6.1 Peak Power	13
6.2 Frequency Separation and 20 dB Bandwidth	17
6.3 Number of Hopping Frequency	23
6.4 Time of Occupancy (Dwell Time)	25
6.5 Conducted Spurious Emissions and Band Edges Test	29
6.6 Restricted Band Emission Limit	35
6.7. AC Power line conducted emissions	45
6.8. Band-edge measurements for radiated emissions	48
6.9. Pseudorandom frequency hopping sequence	53
6.10. ANTENNA REQUIREMENT	54
7. TEST SETUP PHOTOGRAPHS OF EUT	56
8. EXTERIOR PHOTOGRAPHS OF THE EUT	56
9. INTERIOR PHOTOGRAPHS OF THE EUT	56

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: Compact 6 HD
Model Number	: Compact 6 HD
Model Declaration	: /
Test Model	: Compact 6 HD
Hardware version	: V03
Software version	: N/A
Power Supply	: DC 3.7V by Lithium ion polymer battery (3200mAh) Recharge Voltage: DC 5V/2500mA
Bluetooth	: Supported BT 4.0
Operation frequency	: 2402MHz-2480MHz
Channel Spacing	: 1MHz for Bluetooth 4.0(DSS); 2MHz for Bluetooth 4.0(DTS);
Modulation Type	: GFSK, $\pi/4$ DQPSK, 8DPSK for Bluetooth 4.0(DSS); GFSK for Bluetooth 4.0(DTS)
Bluetooth Version	: 4.0
Channel Number	: 79 Channels for Bluetooth 4.0(DSS); 40 Channels for Bluetooth 4.0(DTS)
WLAN	: Supported 802.11b/802.11g/802.11n
Operation frequency	: IEEE 802.11b: 2412-2462MHz IEEE 802.11g: 2412-2462MHz IEEE 802.11n HT20: 2412-2462MHz
Modulation Type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Channel Number	: 11 Channels for 2412.00-2462.00MHz(802.11b/g/n-HT20)
Antenna Type	: PIFA Antenna
Antenna Gain	: 3.32dBi (Max.) For WIFI/BT
Extreme temp. Tolerance	: -10°C to +50°C
Extreme vol. Limits	: 3.3VDC to 4.1VDC (nominal: 3.7VDC)

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	AC Adapter	MX15Z-0502500VU	--	CE

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C	1	1.0m, unshielded

1.4 Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With basic data rate feature, the data rates can be up to 1 Mb/s by modulating the RF carrier using GFSK techniques. The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
BT V 4.0	2402	1/2/3
	2441	1/2/3
	2480	1/2/3
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps-Low Channel).

Pre-test AC conducted emission at both power adapter and charge from PC mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worst case.

1.8. Frequency of Channels

Bluetooth V4.0 (DSS)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2402	41	2442
2	2403	---	---
3	2404	---	---
---	---	77	2478
---	---	78	2479
39	2440	79	2480
40	2441		

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is directly placed on the ground. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turntable, which is directly placed on the ground. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition.

3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (Installed into the tablet PC) provided by application.

3.3 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	PC	B470	--	DOC
Lenovo	AC/DC ADAPTER	ADP-90DDB	--	DOC

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(1)	Maximum Conducted Output Power	Compliant
§15.247(c)	Frequency Separation And 20 dB Bandwidth	Compliant
§15.247(a)(1)(ii)	Number Of Hopping Frequency	Compliant
§15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	Compliant
§15.209, §15.205	Conducted Spurious Emissions and Band Edges Test	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant


5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Sensor	R&S	NRV-Z51	100458	2017-06-17	2018-06-16
2	Power Sensor	R&S	NRV-Z32	10057	2017-06-17	2018-06-16
3	Power Meter	R&S	NRVS	100444	2017-06-17	2018-06-16
4	DC Filter	MPE	23872C	N/A	2017-06-17	2018-06-16
5	RF Cable	Harbour Industries	1452	N/A	2017-06-17	2018-06-16
6	SMA Connector	Harbour Industries	9625	N/A	2017-06-17	2018-06-16
7	Spectrum Analyzer	Agilent	N9020A	MY50510140	2016-10-27	2017-10-26
8	Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	2017-06-17	2018-06-16
9	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2017-06-17	2018-06-16
10	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17	2018-06-16
11	Amplifier	SCHAFFNER	COA9231A	18667	2017-06-17	2018-06-16
12	Amplifier	Agilent	8449B	3008A02120	2017-06-17	2018-06-16
13	Amplifier	MITEQ	AMF-6F-260400	9121372	2017-06-17	2018-06-16
14	Loop Antenna	R&S	HFH2-Z2	860004/001	2017-06-17	2018-06-16
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2017-06-09	2018-06-08
16	Horn Antenna	EMCO	3115	6741	2017-06-09	2018-06-08
17	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	2017-06-09	2018-06-08
18	RF Cable-R03m	Jye Bao	RG142	CB021	2017-06-17	2018-06-16
19	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2017-06-17	2018-06-16
20	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2017-06-17	2018-06-16
21	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2017-06-17	2018-06-16
22	EMI Test Software	AUDIX	E3	N/A	2017-06-17	2018-06-16

6. MEASUREMENT RESULTS

6.1 Peak Power

6.1.1 Block Diagram of Test Setup

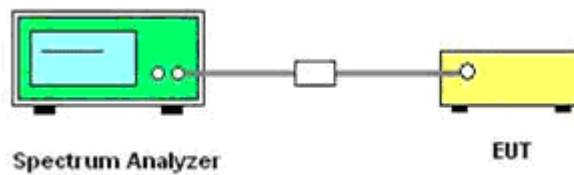

6.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

6.1.3 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

According to ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices; this is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW ≥ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.1.4 Test Results



Test Mode	Channel	Frequency (MHz)	Measured Maximum Peak Power (dBm)	Limits (dBm)	Verdict
GFSK	0	2402	-0.497	30	PASS
	39	2441	-0.295		
	78	2480	0.120		
π/4DQPSK	0	2402	-1.223	21	PASS
	39	2441	-0.632		
	78	2480	-0.615		
8DPSK	0	2402	-1.073	21	PASS
	39	2441	-0.622		
	78	2480	-0.825		

Remark:

- 1. Test results including cable loss;*
- 2. please refer to following plots;*
- 3. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.*
- 4. Worst case data at DH5 for GFSK, $\pi/4$ DQPSK, 8DPSK modulation type;*



Maximum Peak Output Power

GFSK

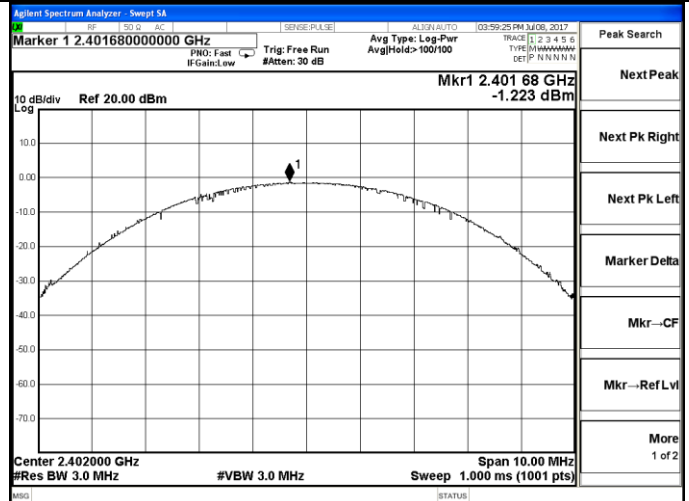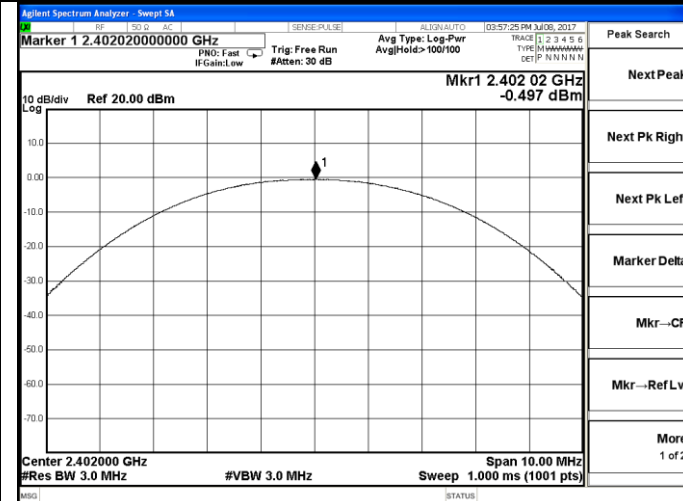 $\pi/4$ DQPSK



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

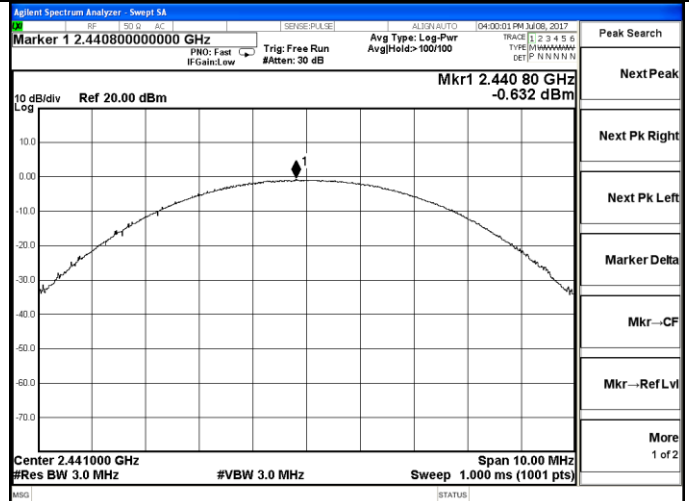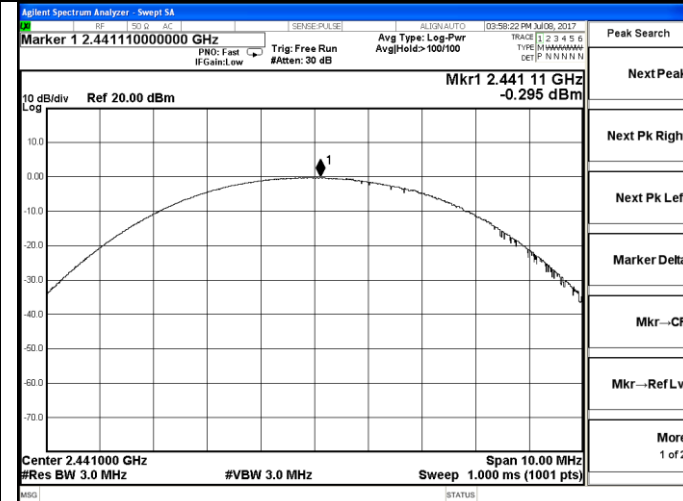

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

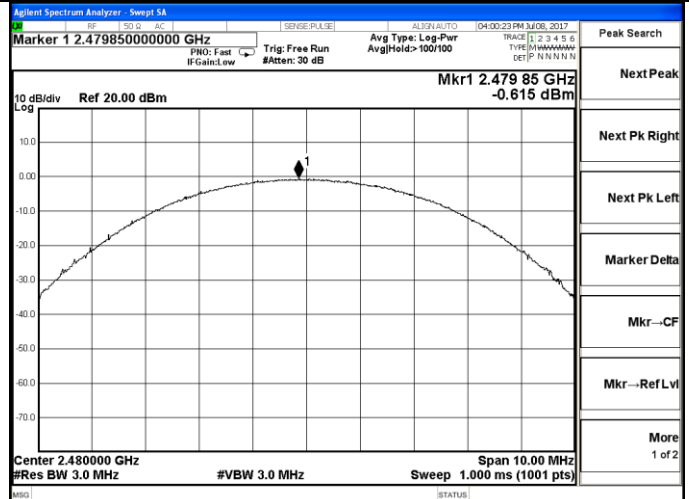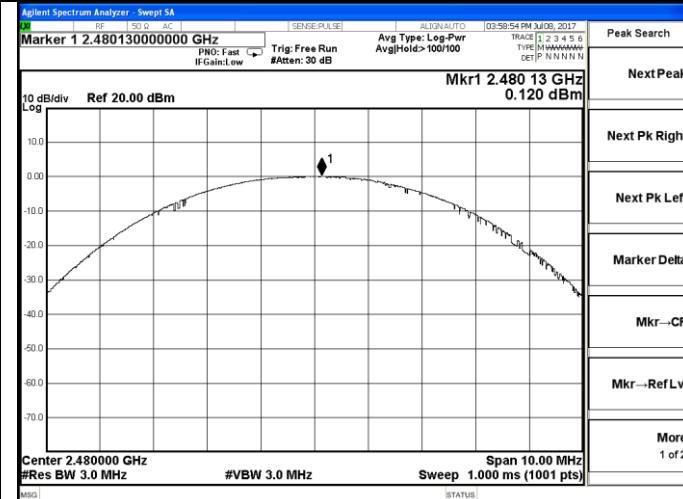

Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

6.2 Frequency Separation and 20 dB Bandwidth

6.2.1 Limit

According to §15.247(c) or A8.1(a), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.2.2 Block Diagram of Test Setup

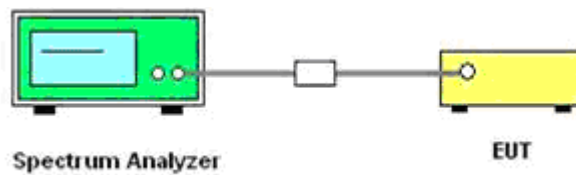

6.2.3 Test Procedure

Frequency separation test procedure :

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = middle of hopping channel.
- 4). Set the Spectrum Analyzer as RBW = 100 kHz, VBW = 300 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- 5). Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure :

- 1). Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 2). RBW $\geq 1\%$ of the 20 dB bandwidth, VBW $\geq$ RBW.
- 3). Detector function = peak.
- 4). Trace = max hold.

6.2.4 Test Results



The Measurement Result With 1Mbps For GFSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	900.7	1.000	900.7	Pass
Middle	900.7		900.7	Pass
High	899.7		899.7	Pass
The Measurement Result With 2Mbps For $\pi/4$ -DQPSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	1127.0	1.000	751.33	Pass
Middle	1124.0		749.33	Pass
High	1126.0		750.67	Pass
The Measurement Result With 3Mbps For 8-DPSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	1155.0	1.000	770.00	Pass
Middle	1157.0		771.33	Pass
High	1155.0		770.00	Pass

Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type;



Frequency Separation

GFSK

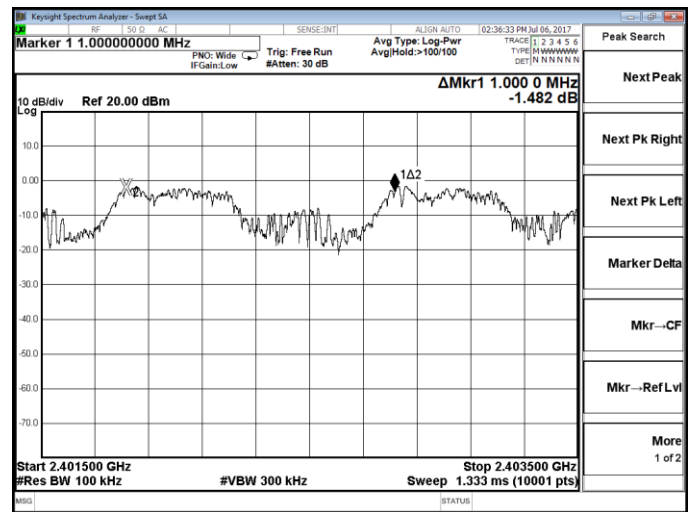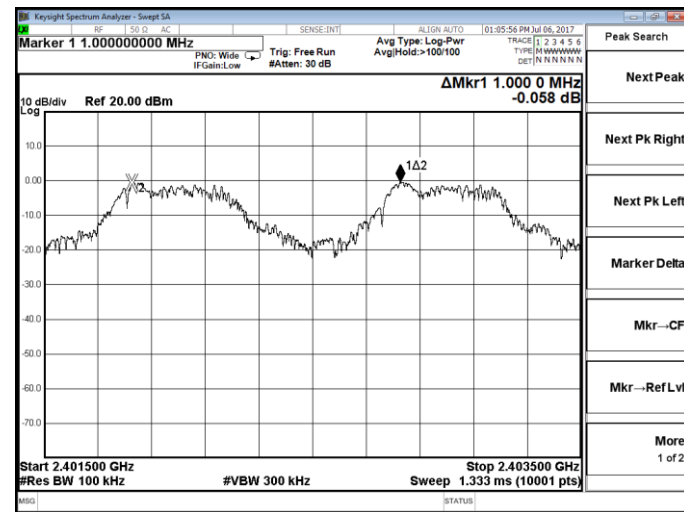 $\pi/4$ -DQPSK



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

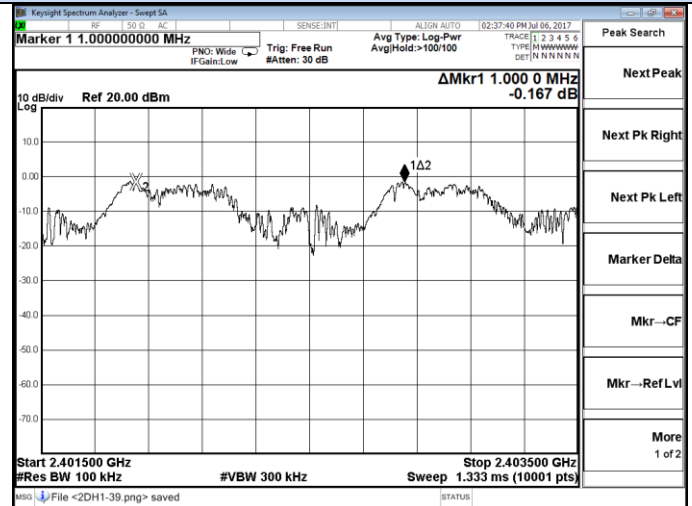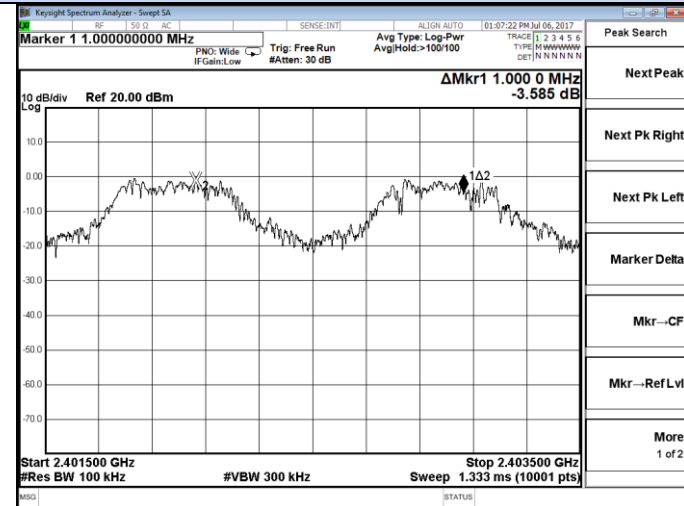

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

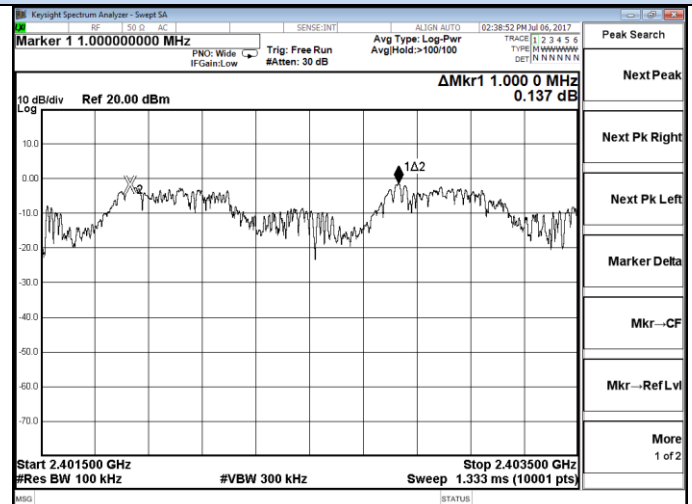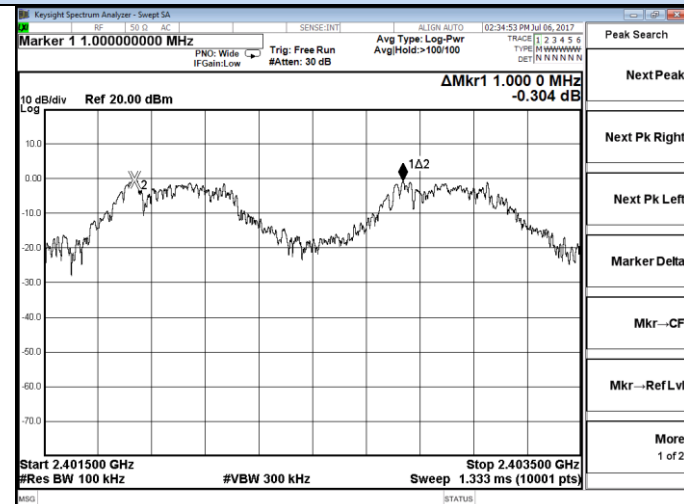


Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

Frequency Separation


8DPSK

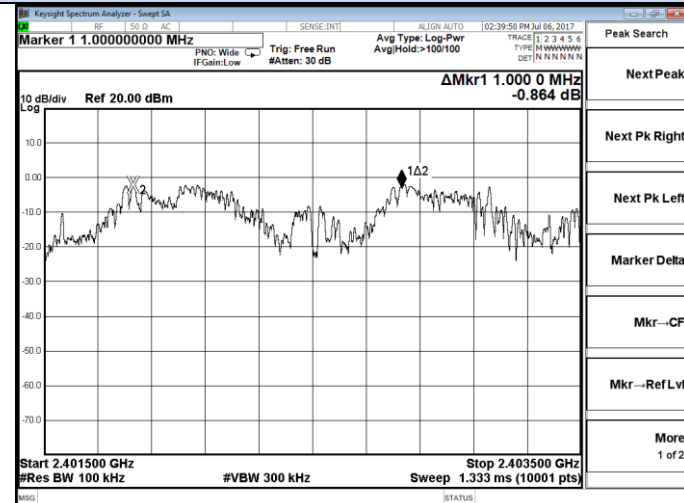

Channel 0 / 2402 MHz

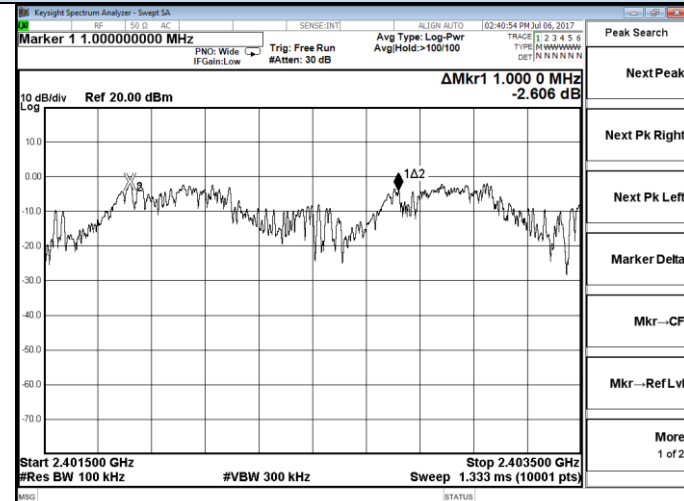



Channel 39 / 2441 MHz

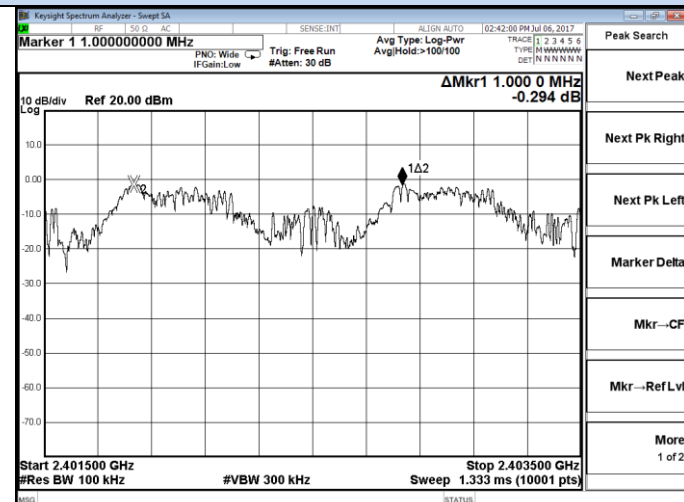

Channel 78 / 2480 MHz



20dB Bandwidth

GFSK

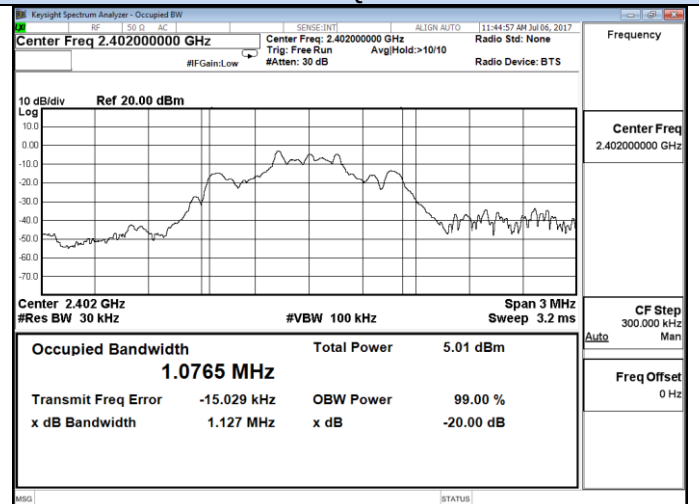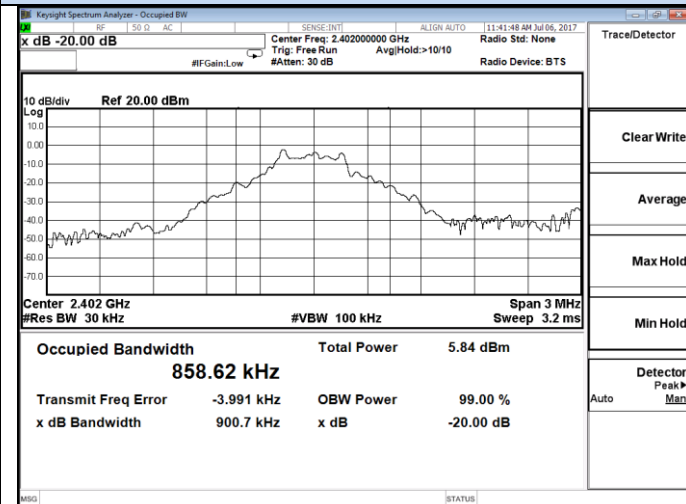 $\pi/4$ -DQPSK



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

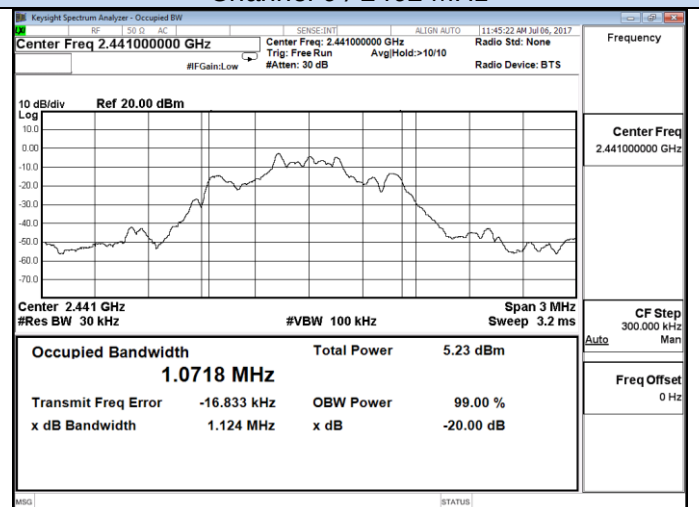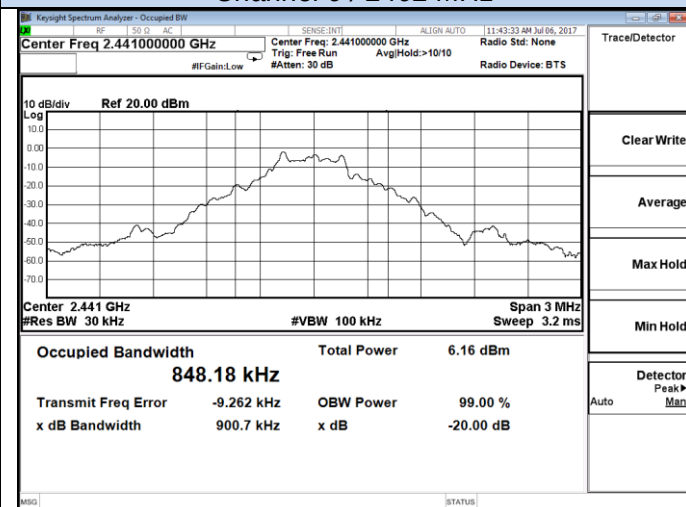

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

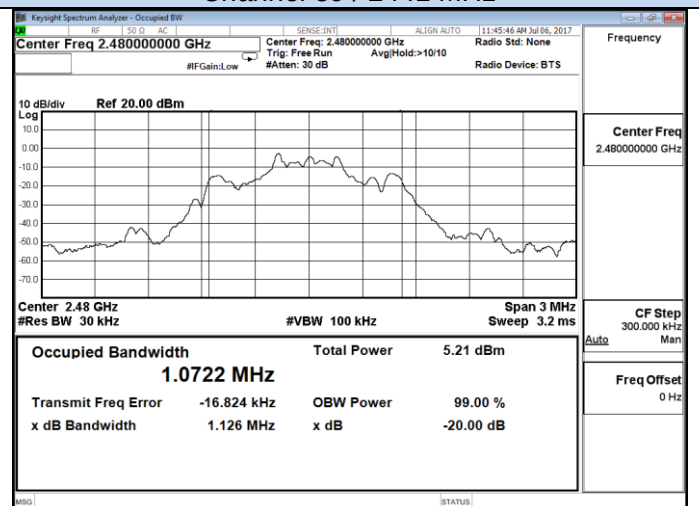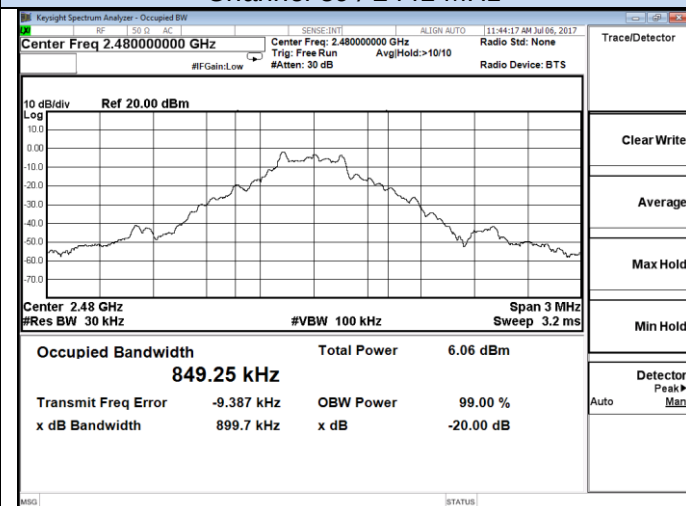


Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

Test Plot of Test Result


8DPSK

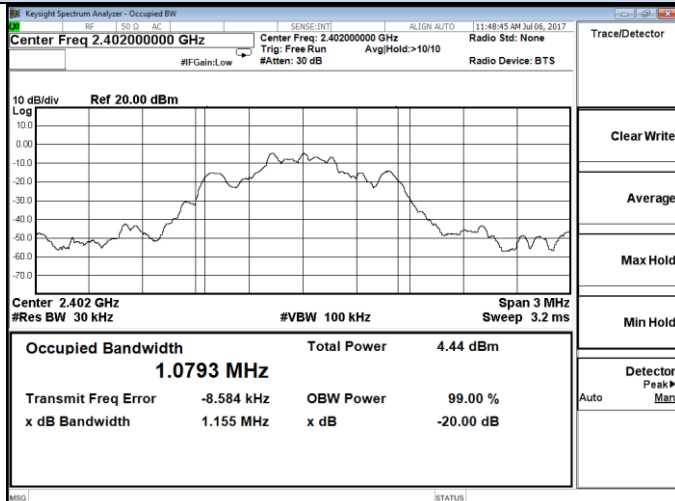

Channel 0 / 2402 MHz

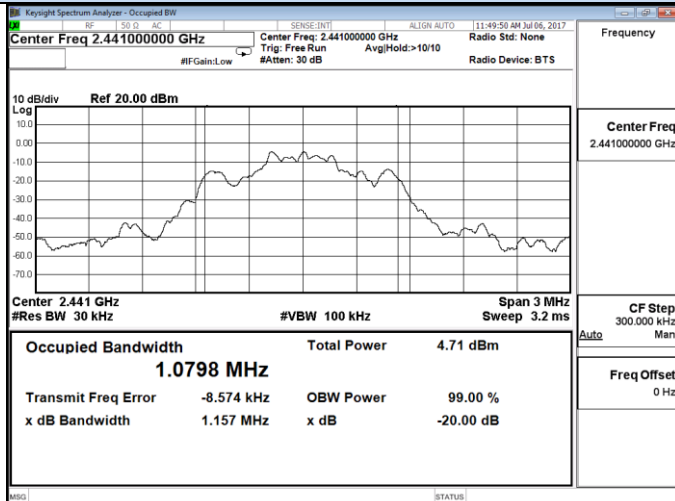

Channel 39 / 2441 MHz

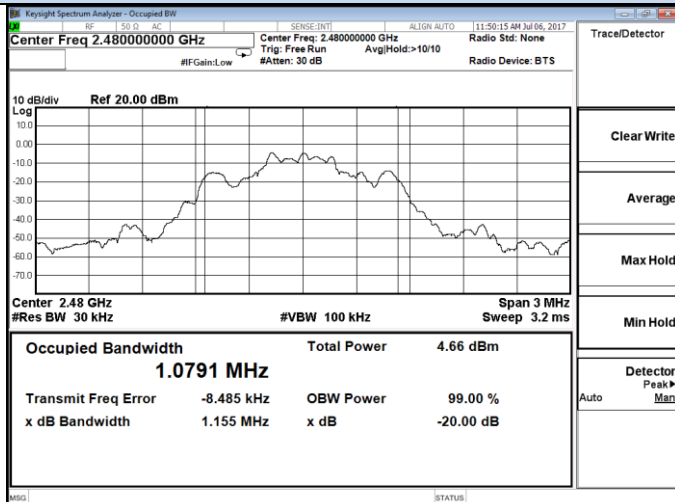


Channel 78 / 2480 MHz

6.3 Number of Hopping Frequency

6.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

6.3.2 Block Diagram of Test Setup

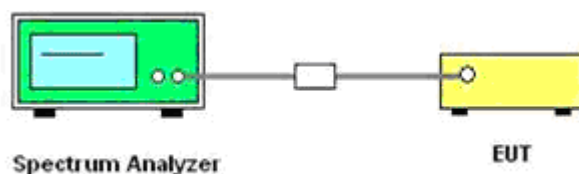

6.3.3 Test Procedure


- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz.
- 5). Max hold, view and count how many channel in the band.

6.3.4 Test Results

The Measurement Result With The Worst Case of 1Mbps For GFSK Modulation			
Total No. of Hopping Channel	Measurement Result (No. of Ch)	Limit (MHz)	Result
	79	≥15	Pass

Note: The test data refer to the following page.

Number Of Hopping Frequency

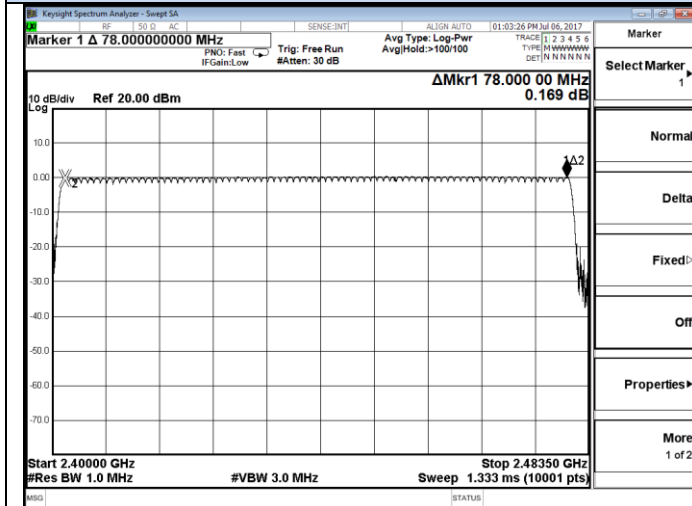


GFSK

6.4 Time of Occupancy (Dwell Time)

6.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

6.4.2 Block Diagram of Test Setup

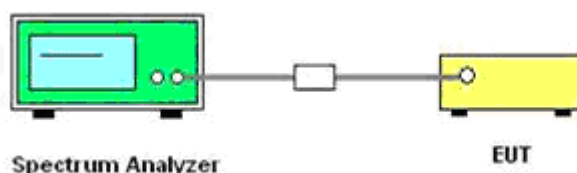

6.4.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = operating frequency.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5). Repeat above procedures until all frequency measured was complete.

6.4.4 Test Results

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \cdot \text{ch}]$;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6=266.67 [\text{ch} \cdot \text{hop/s}]$

The hops per second on one channel: $266.67 [\text{ch} \cdot \text{hops/s}] / 79 [\text{ch}] = 3.38 [\text{hop/s}]$;

The total hops for all channels within the dwell time calculation duration: $3.38 [\text{hop/s}] \times 31.6[s \cdot \text{ch}] = 106.67 [\text{hop} \cdot \text{ch}]$;

The dwell time for all channels hopping: $106.67 [\text{hop} \cdot \text{ch}] \times \text{Burst Width} [\text{ms/hop/ch}]$.



Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Verdict
GFSK	2441	DH1	0.364	0.1165	0.4	PASS
		DH3	1.616	0.2586		
		DH5	2.848	0.3038		
$\pi/4$ -DQPSK	2441	2DH1	0.368	0.1178	0.4	PASS
		2DH3	1.624	0.2598		
		2DH5	2.880	0.3072		
8DPSK	2441	3DH1	0.376	0.1203	0.4	PASS
		3DH3	1.632	0.2611		
		3DH5	2.880	0.3072		

Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type;
5. Dwell Time Calculate formula:
DH1: Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second
DH3: Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second
DH5: Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second
6. Measured at low, middle and high channel, recorded worst at middle channel;



Dwell time

GFSK

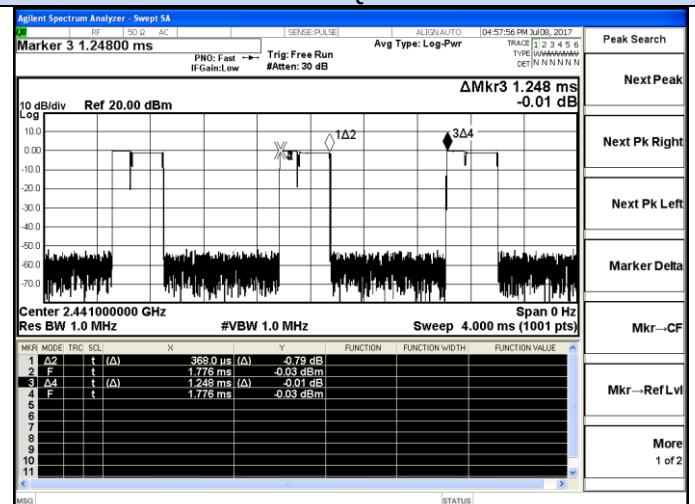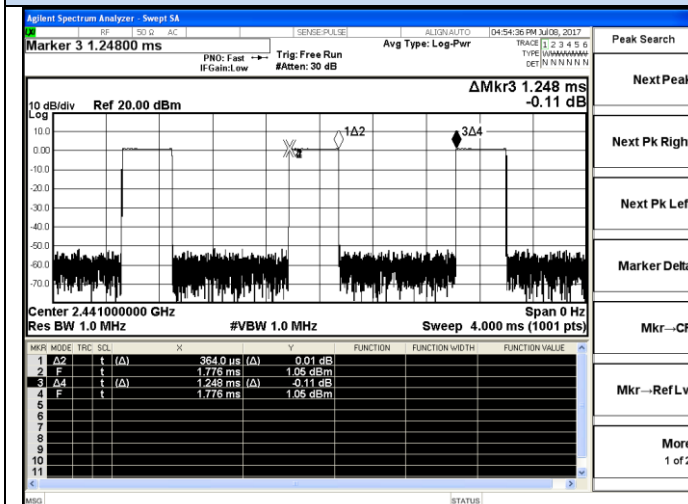 $\pi/4$ -DQPSK



Channel 39 / 2441 MHz - DH1

Channel 39 / 2441 MHz - 2DH1

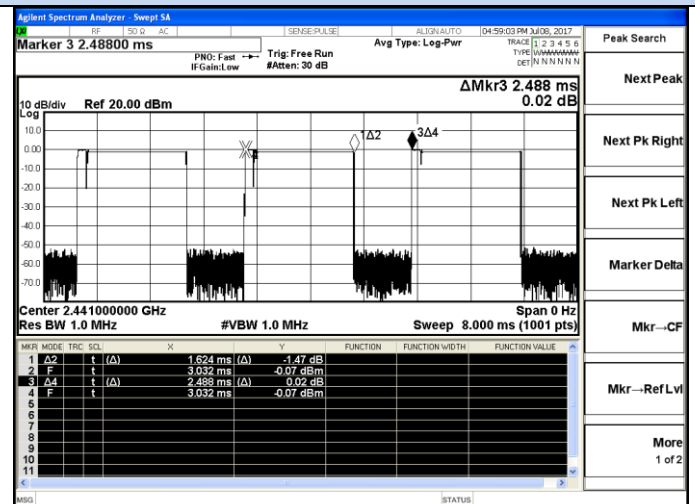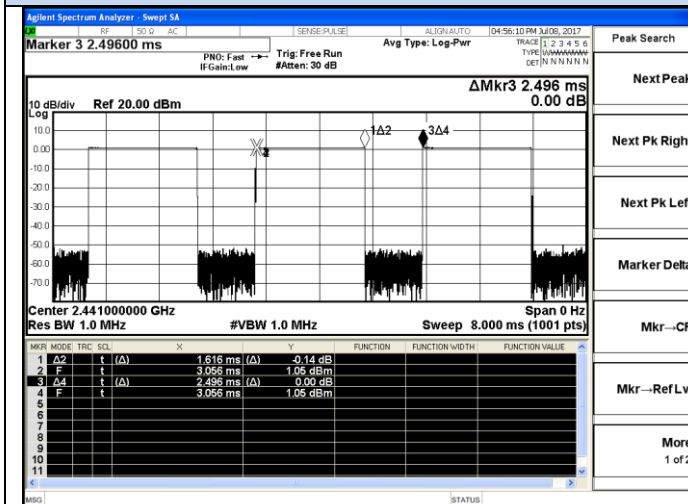

Channel 39 / 2441 MHz - DH3

Channel 39 / 2441 MHz - 2DH3

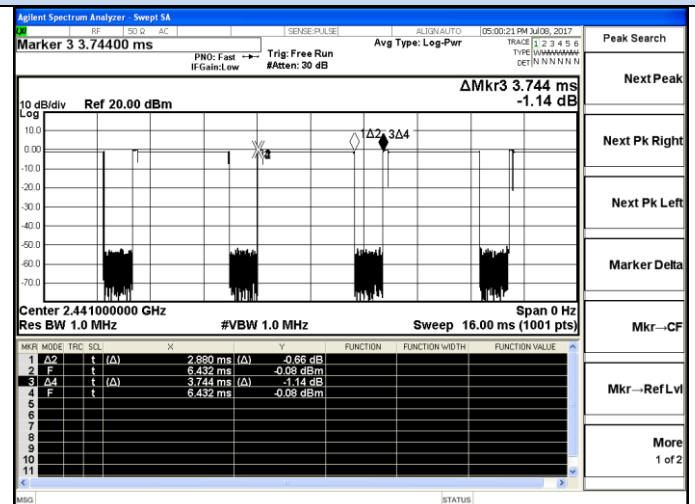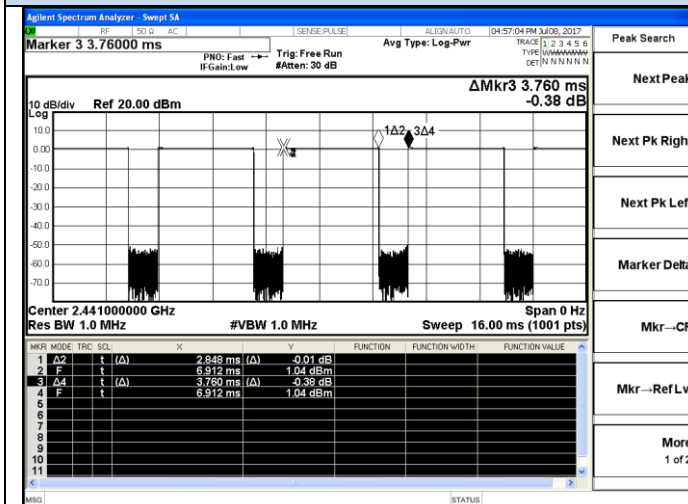


Channel 39 / 2441 MHz - DH5

Channel 39 / 2441 MHz - 2DH5

Dwell time

8DPSK

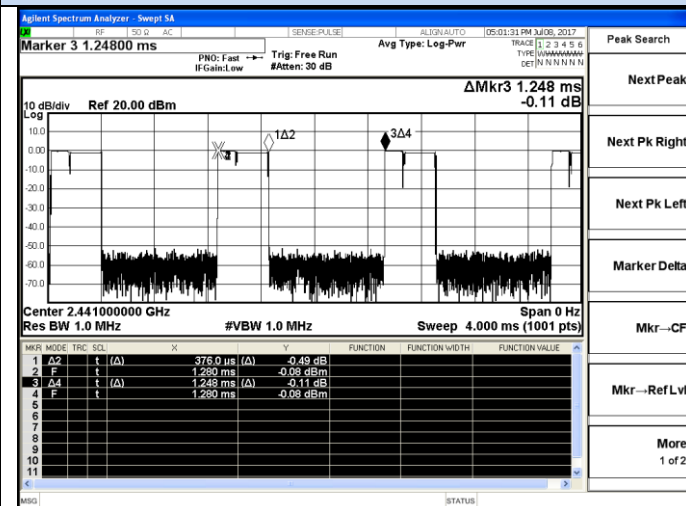

Next Peak

Next Pk Right

Next Pk Left

Marker Delta


Mkr→CF

Mkr→Ref Lvl

More

1 of 2

Channel 39 / 2441 MHz - 3DH1

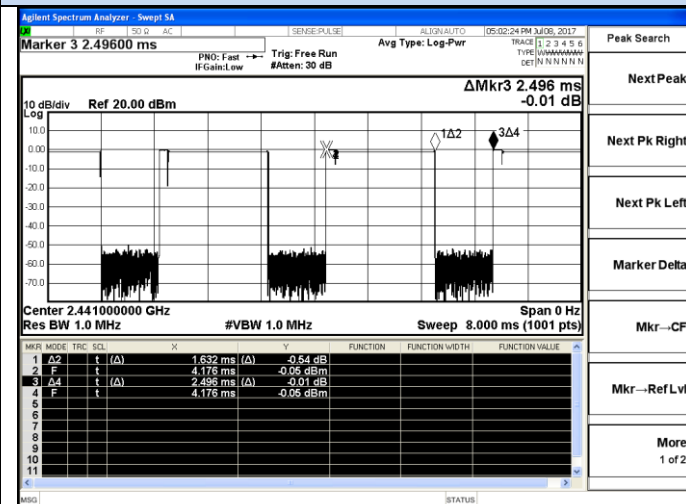

Next Peak

Next Pk Right

Next Pk Left

Marker Delta


Mkr→CF

Mkr→Ref Lvl

More

1 of 2

Channel 39 / 2441 MHz - 3DH3

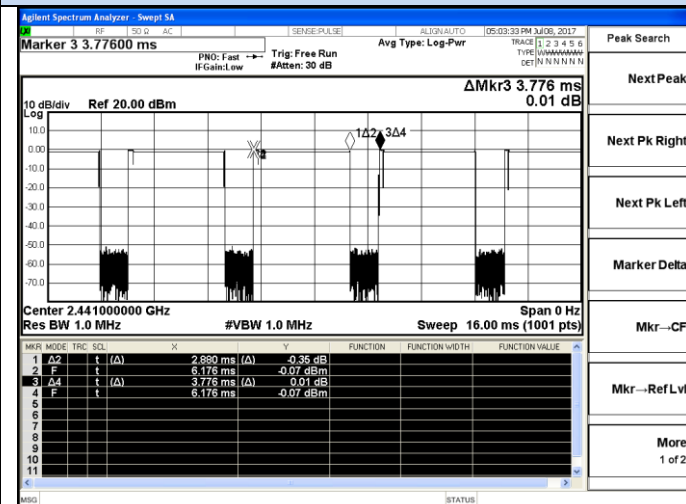

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF

Mkr→Ref Lvl

More

1 of 2


Channel 39 / 2441 MHz - 3DH5

6.5 Conducted Spurious Emissions and Band Edges Test

6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

6.5.2 Block Diagram of Test Setup

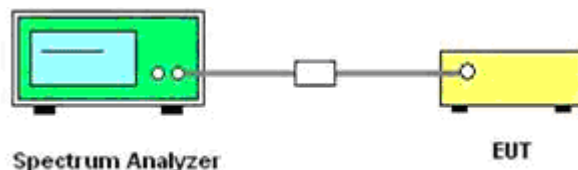

6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9 kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

6.5.4 Test Results of Conducted Spurious Emissions

No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.


Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
GFSK	0	2402	<-20	-20	PASS
	39	2441	<-20		
	78	2480	<-20		
$\pi/4$ -DQPSK	0	2402	<-20	-20	PASS
	39	2441	<-20		
	78	2480	<-20		
8DPSK	0	2402	<-20	-20	PASS
	39	2441	<-20		
	78	2480	<-20		

Remark:


1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type;

RF Conducted Spurious Emissions

GFSK – Channel 0 / 2402 MHz

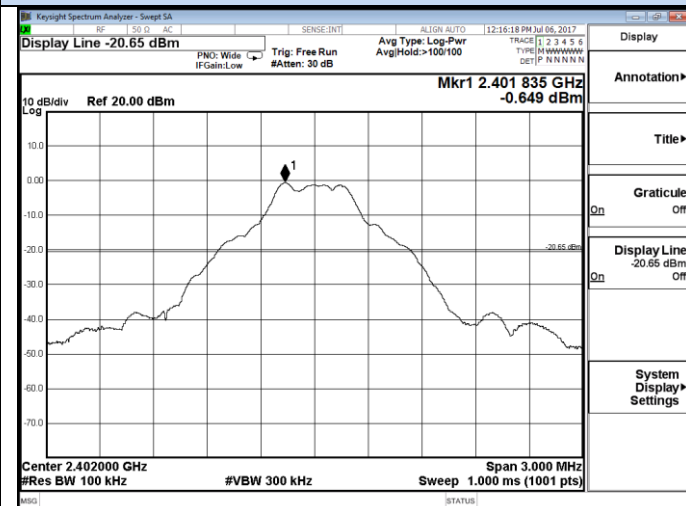


2399.5 – 2404.5 MHz

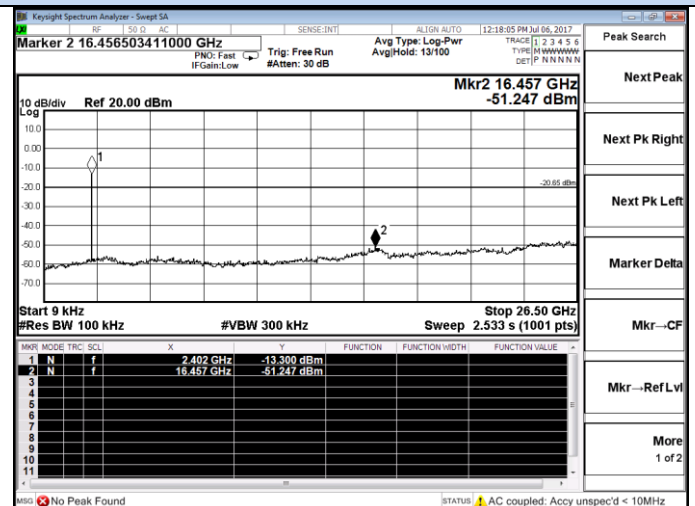


9 KHz – 26.5 GHz

GFSK – Channel 39 / 2441 MHz

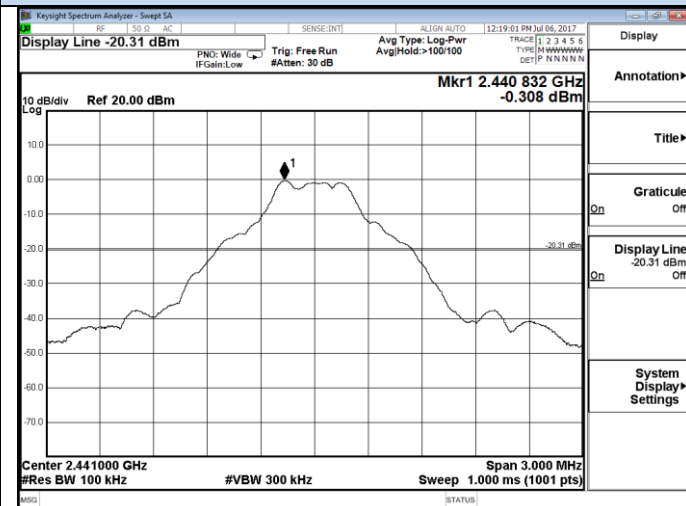


2438.5 – 2443.5 MHz

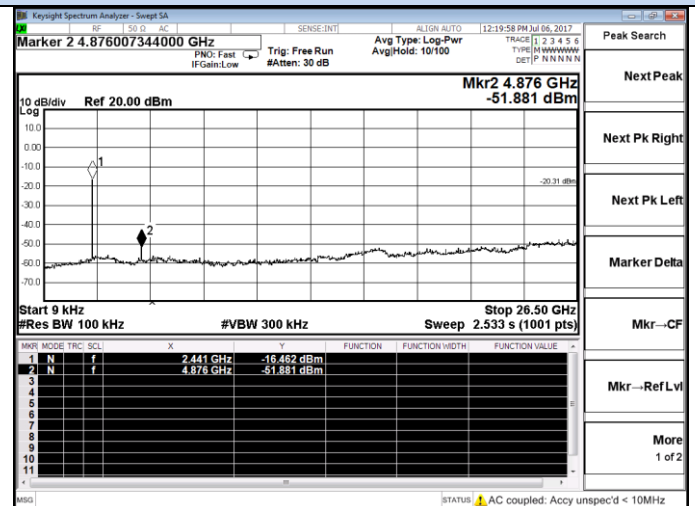


9 KHz – 26.5 GHz

GFSK – Channel 78 / 2480 MHz

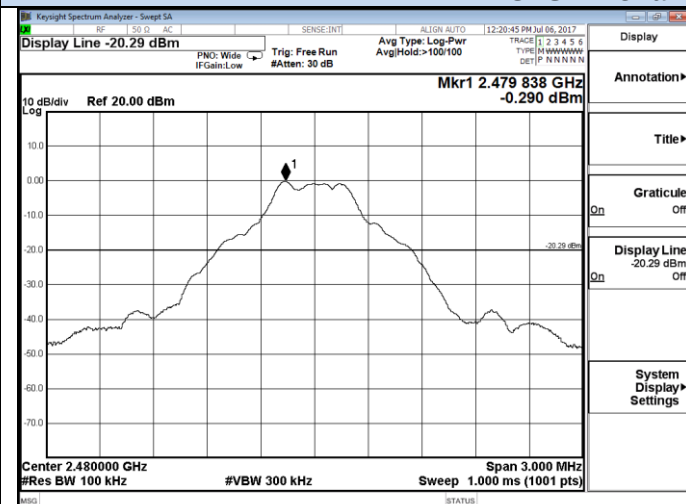


2477.5 – 2482.5 MHz

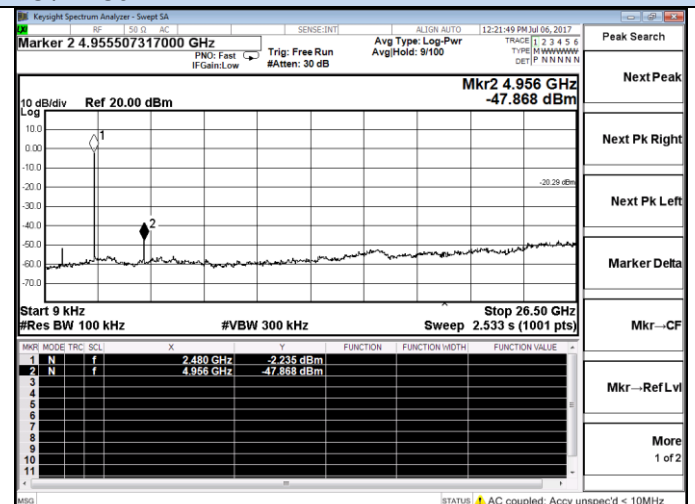


9 KHz – 26.5 GHz


RF Conducted Spurious Emissions

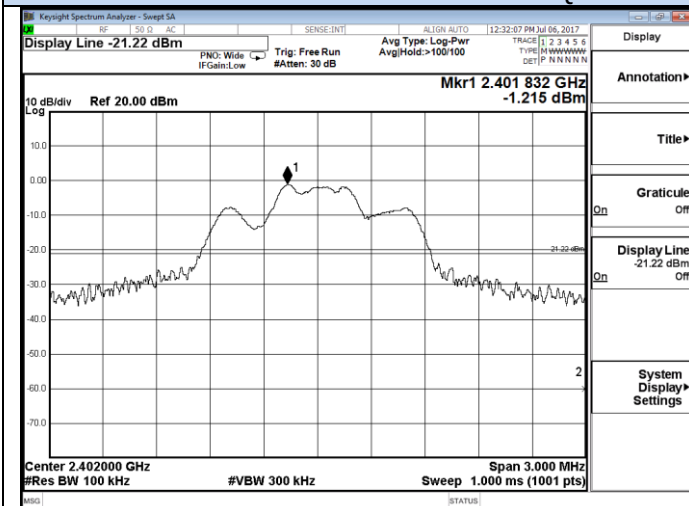 $\pi/4$ -DQPSK - Channel 0 / 2402 MHz


2399.5 – 2404.5 MHz

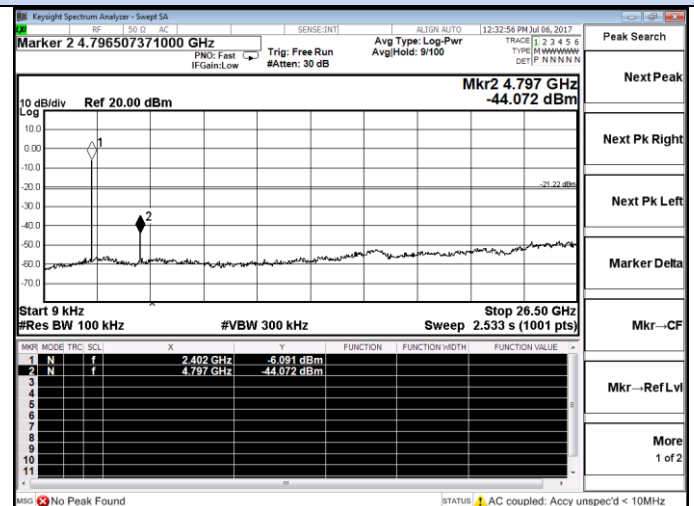


9 KHz – 26.5 GHz

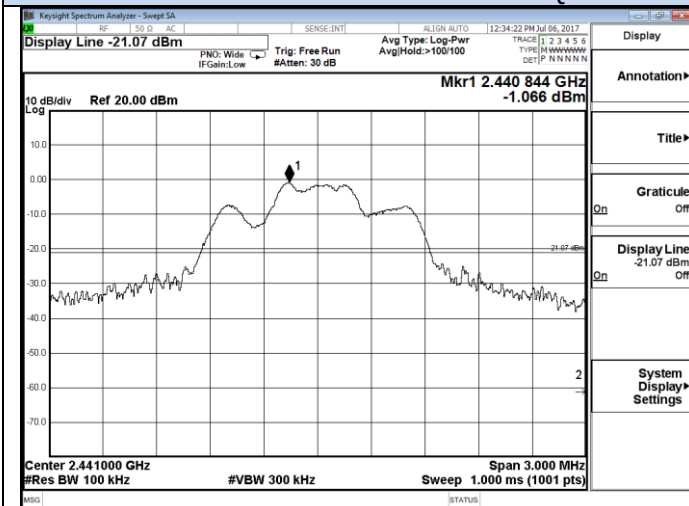 $\pi/4$ -DQPSK - Channel 39 / 2441 MHz


2438.5 – 2443.5 MHz

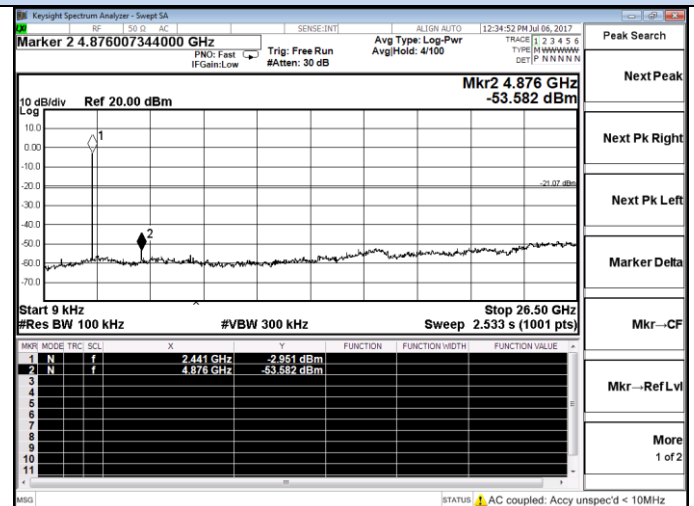

9 KHz – 26.5 GHz

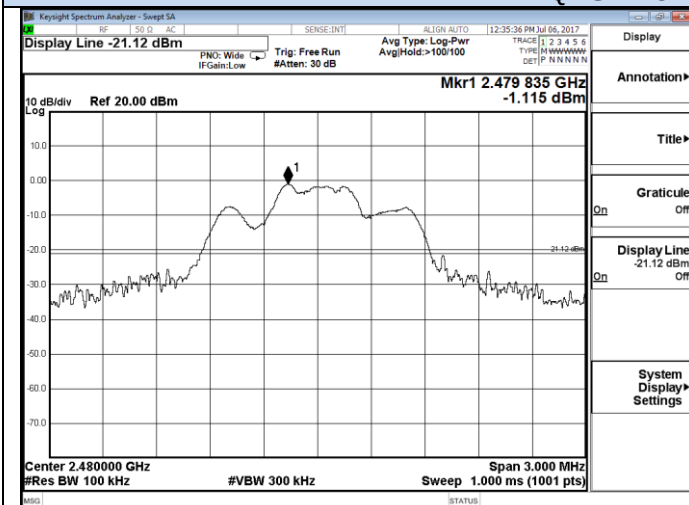 $\pi/4$ -DQPSK - Channel 78 / 2480 MHz

2477.5 – 2482.5 MHz

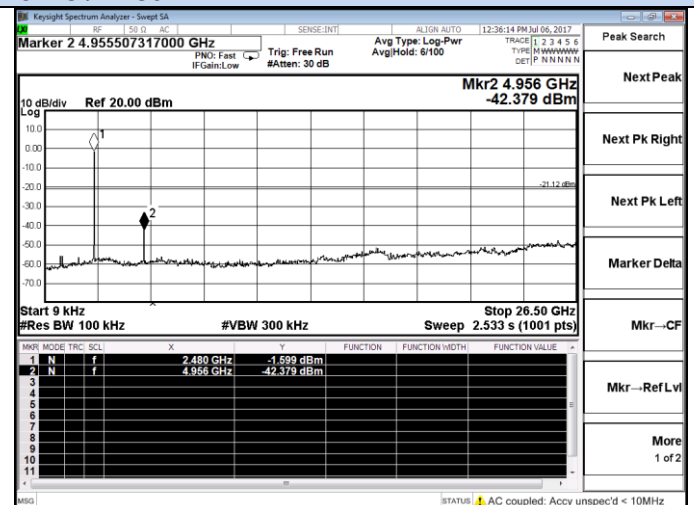

9 KHz – 26.5 GHz