



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Chasing-Innovation Technology Co.,Ltd.

FCC: ROOM 506 XITA BUILDING, DIGITAL CULTURE INDUSTRY BASE, SHENLAN
AVENUE 10128, NANSHAN DISTRICT, Shenzhen, China

IC: 506 Xita in Digital Cultural Industry Base of Shennan 10128 Nanshan, Nantou Street,
Nanshan District, Shenzhen, Guangdong 51800, China

FCC ID:2AMOD-CHASINGM2
IC:22933-CHASINGM2

Report Type: Original Report	Product Name: CHASING underwater drone
Report Number: RDG200522003-00A	
Report Date: 2020-06-23	
Reviewed By:	Ivan Cao 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	10
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	11
APPLICABLE STANDARD	11
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.209, §15.205 & §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS.....	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D - MAXIMUM PEAK CONDUCTED OUTPUT POWER	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	40
FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41

TEST DATA	42
FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	CHASING underwater drone
EUT Model:	CHASING M2
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20), 2422-2452 MHz(802.11n ht40)
Maximum Peak Output Power (Conducted):	17.33 dBm
Modulation Type:	DSSS, OFDM
Rated Input Voltage:	DC11.1V from battery
Serial Number:	RDG200522003-RF-S2
EUT Received Date:	2020.05.25
EUT Received Status:	Good

Objective

This report is prepared on behalf of **Chasing-Innovation Technology Co.,Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part15E NII submissions with FCC ID: 2AMOD-CHASINGM2
RSS-247 LE-LAN submissions with IC: 22933-CHASINGM2

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1, 6, 11.

For 802.11n ht40 modes were test with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, 2TX mode was the worst mode and reported for 802.11n modes.

EUT Exercise Software


Software " ubuntu10.04 " was used during test, which was provided by manufacturer, the maximum power was configured as below:

Mode	Channel	Frequency (MHz)	Data Rate	Power level Setting	
				Chain 0	Chain 1
802.11 b	Low	2412	1Mbps	15	15
	Middle	2437	1Mbps	15	15
	High	2462	1Mbps	15	15
802.11 g	Low	2412	6Mbps	12	12
	Middle	2437	6Mbps	12	12
	High	2462	6Mbps	12	12
802.11n ht20	Low	2412	MCS8	11	11
	Middle	2437	MCS8	11	11
	High	2462	MCS8	11	11
802.11n ht40	Low	2422	MCS8	10	10
	Middle	2437	MCS8	10	10
	High	2452	MCS8	10	10

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	2.053	2.140	95.93
802.11n ht20	1.921	1.987	96.68
802.11n ht40	0.943	1.010	93.37

802.11b

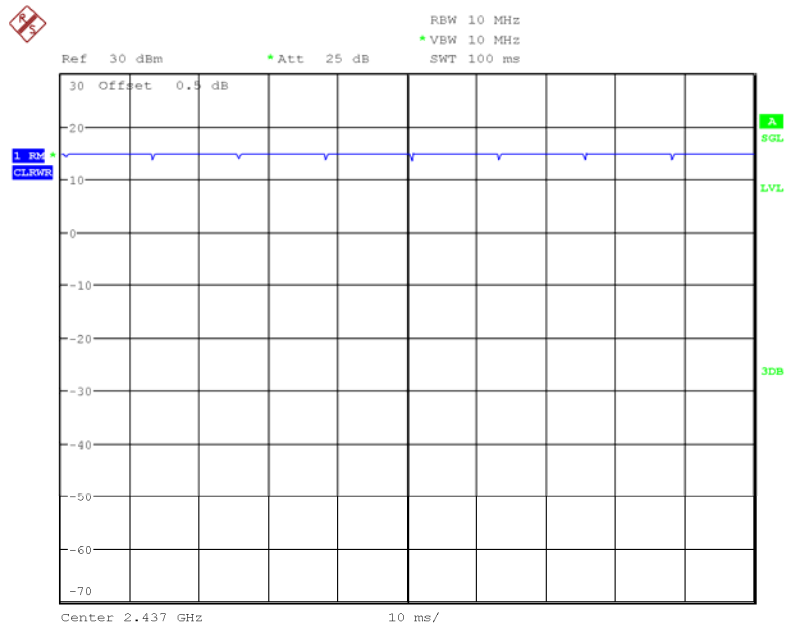


Date: 29.MAY.2020 01:22:40

802.11g

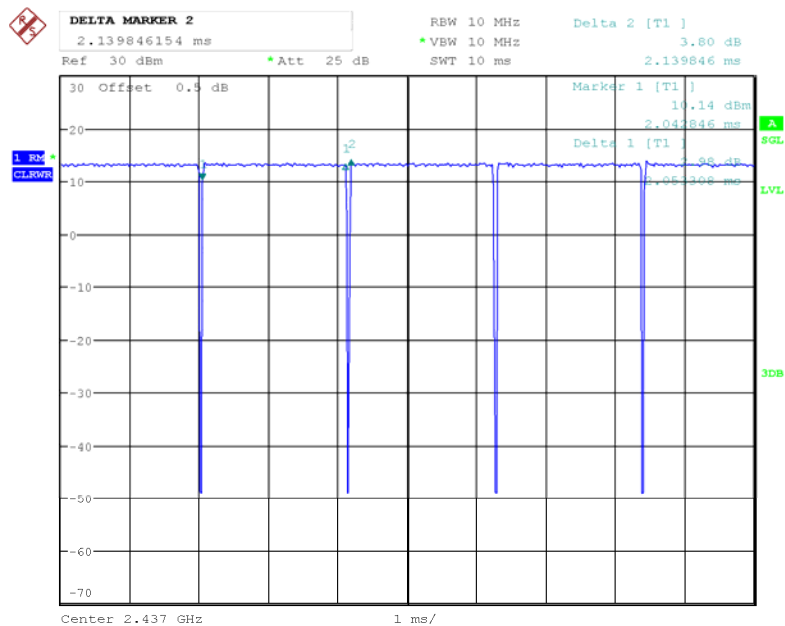


Date: 29.MAY.2020 01:21:47

802.11n ht20

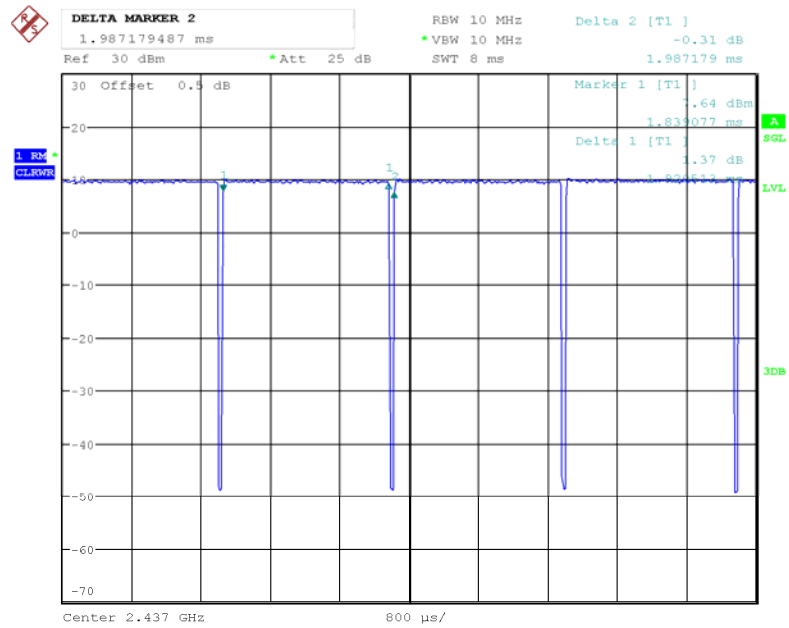

Date: 29.MAY.2020 01:23:42

802.11n ht40

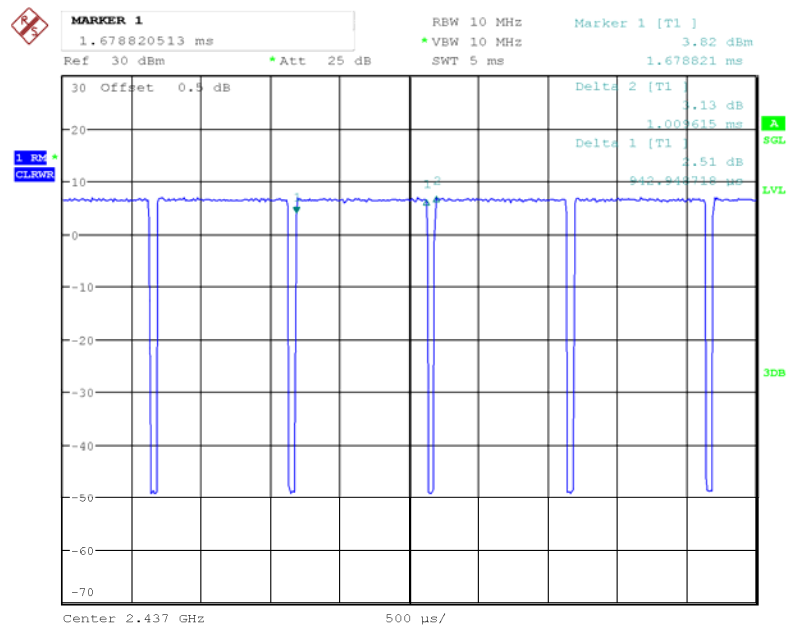

Date: 29.MAY.2020 01:24:48

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Monitor	U3011t	CN-OPH5NY-74445-16T-290L
Chasing-Innovation Technology Co.,Ltd.	ROV	CHASING M2	RDG200522003-RF-S5
Chasing-Innovation Technology Co.,Ltd.	Winder	CHASING M2	RDG200522003-RF-S3

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
HDMI Cable	Yes	Yes	1.2	EUT	Monitor
Signal Cable	Yes	No	100	ROV	EUT
Signal Cable	Yes	No	3	EUT	Winder

Block Diagram of Test Setup

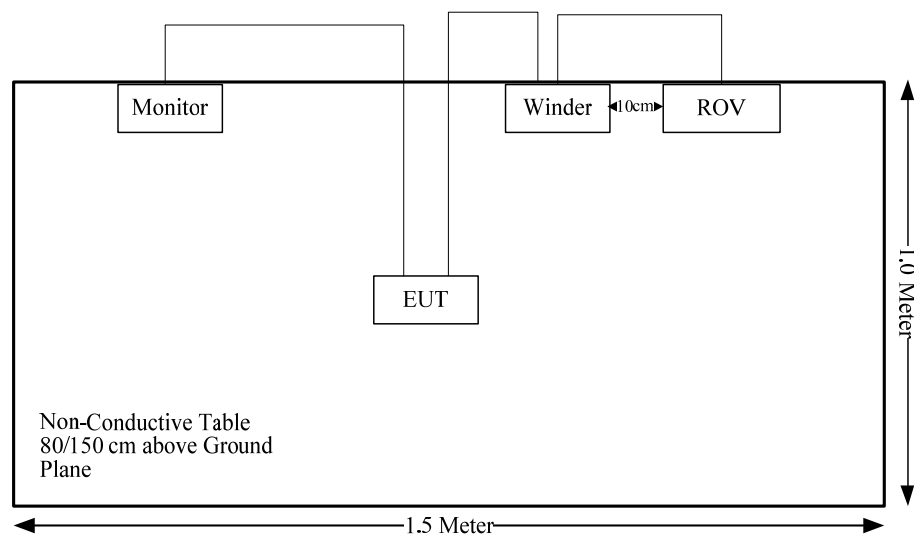

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093 RSS-102 Clause 4	RF Exposure	Compliance
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC §15.207 (a); RSS-Gen Clause 8.8	AC Line Conducted Emissions	Not Applicable
FCC §15.205, §15.209, §15.247(d); RSS-247 Clause 5.5 RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(2); RSS-247 Clause 5.2 a) RSS-Gen Clause 6.7	6 dB Bandwidth and 99% Occupied Bandwidth	Compliance
FCC §15.247(b)(3); RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
FCC §15.247(d); RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e) RSS-247 Clause 5.2 b)	Power Spectral Density	Compliance

Note: the device was powered by battery when operating.

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Measurement Result

Compliant, please refer to the SAR report: RDG200522003-20.

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Chain	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
0	FPC	50	1.8 dBi/2.4~2.5GHz 2.0 dBi/5.15-5.85GHz
1	FPC	50	1.8 dBi/2.4~2.5GHz 2.0 dBi/5.15-5.85GHz

Result: Compliance.


FCC §15.209, §15.205 & §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.

EUT Setup

Below 1GHz:

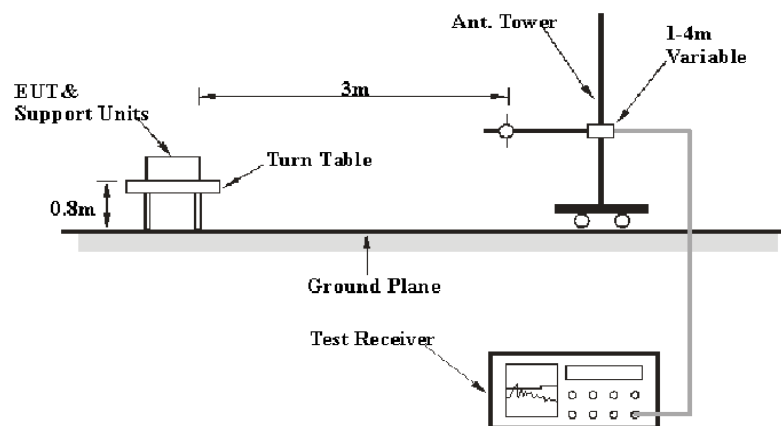

Above 1GHz:

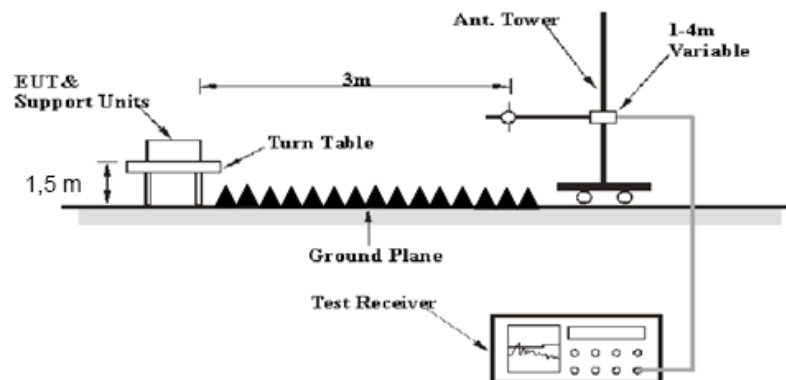

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	24.7 °C	25 °C
Relative Humidity:	51%	51 %
ATM Pressure:	101.7 kPa	100.4 kPa
Tester:	Michael Zhang	Bond Qin
Test Date:	2020-06-17	2020-05-29

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

1) 30MHz-1GHz(802.11b_Chain 0 Low channel was the worst)

Horizontal:

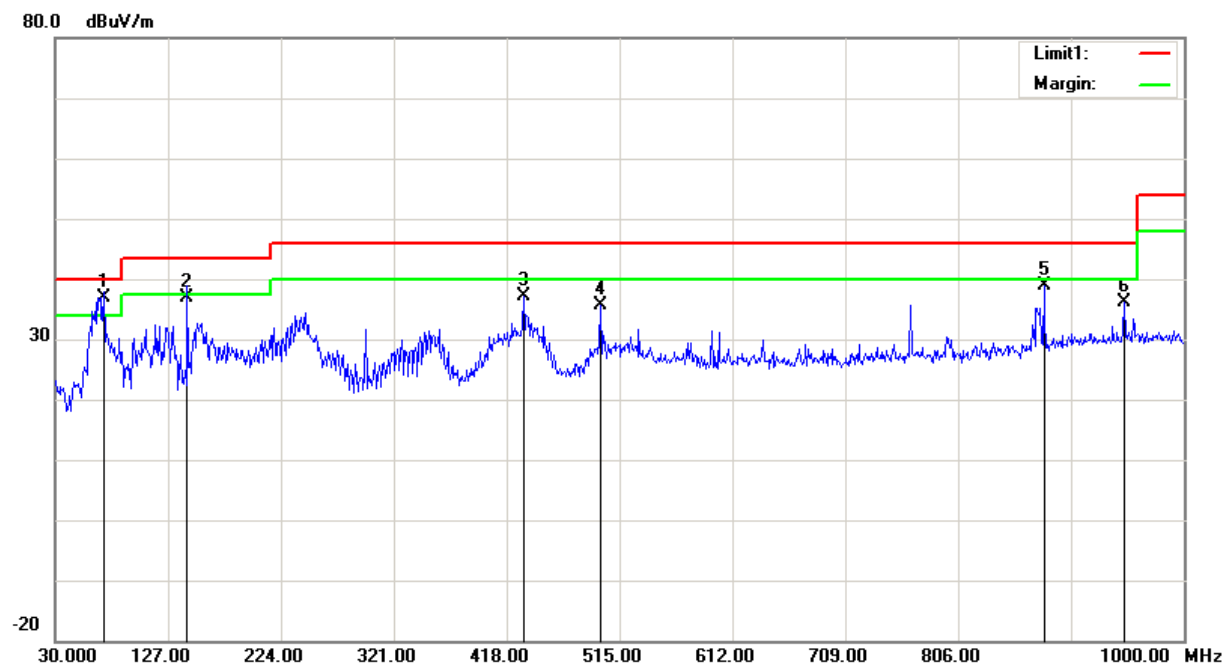

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
71.7100	53.45	QP	-16.45	37.00	40.00	3.00
143.4900	46.07	QP	-9.17	36.90	43.50	6.60
432.5500	41.74	peak	-4.59	37.15	46.00	8.85
498.5100	39.16	peak	-3.48	35.68	46.00	10.32
879.7200	36.01	peak	2.99	39.00	46.00	7.00
948.5900	31.34	peak	4.77	36.11	46.00	9.89

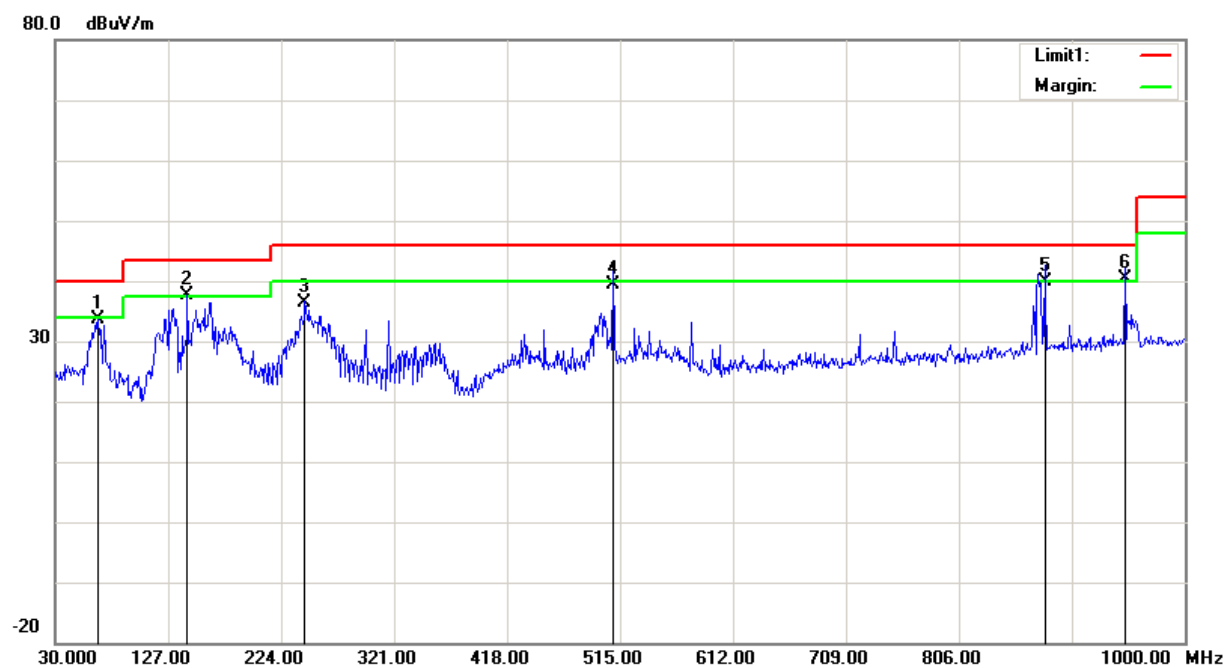Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
66.8600	50.15	peak	-16.61	33.54	40.00	6.46
143.4900	46.77	QP	-9.17	37.60	43.50	5.90
244.3700	46.42	peak	-9.92	36.50	46.00	9.50
509.1800	42.54	QP	-3.04	39.50	46.00	6.50
879.7200	37.01	QP	2.99	40.00	46.00	6.00
948.5900	35.53	QP	4.77	40.30	46.00	5.70

2) 1-25GHz:**802.11b Mode, Chain 0:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	26.45	PK	H	28.08	1.80	0.00	56.33	74.00	17.67
2390.00	16.27	AV	H	28.08	1.80	0.00	46.15	54.00	7.85
4824.00	43.91	PK	H	32.95	3.19	25.62	54.43	74.00	19.57
4824.00	40.58	AV	H	32.95	3.19	25.62	51.10	54.00	2.90
7236.00	42.69	PK	H	35.81	4.77	25.64	57.63	74.00	16.37
7236.00	36.01	AV	H	35.81	4.77	25.64	50.95	54.00	3.05
Middle Channel: 2437 MHz									
4874.00	41.84	PK	H	33.05	3.26	25.65	52.50	74.00	21.50
4874.00	37.44	AV	H	33.05	3.26	25.65	48.10	54.00	5.90
7311.00	36.44	PK	H	36.01	4.64	25.71	51.38	74.00	22.62
7311.00	22.88	AV	H	36.01	4.64	25.71	37.82	54.00	16.18
High Channel: 2462 MHz									
2483.50	27.29	PK	H	28.27	1.84	0.00	57.40	74.00	16.60
2483.50	14.20	AV	H	28.27	1.84	0.00	44.31	54.00	9.69
4924.00	39.58	PK	H	33.15	3.27	25.65	50.35	74.00	23.65
4924.00	33.49	AV	H	33.15	3.27	25.65	44.26	54.00	9.74
7386.00	36.24	PK	H	36.20	4.51	25.79	51.16	74.00	22.84
7386.00	23.58	AV	H	36.20	4.51	25.79	38.50	54.00	15.50

802.11b Mode, Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	26.75	PK	H	28.08	1.80	0.00	56.63	74.00	17.37
2390.00	13.39	AV	H	28.08	1.80	0.00	43.27	54.00	10.73
4824.00	43.15	PK	H	32.95	3.19	25.62	53.67	74.00	20.33
4824.00	39.67	AV	H	32.95	3.19	25.62	50.19	54.00	3.81
7236.00	36.75	PK	H	35.81	4.77	25.64	51.69	74.00	22.31
7236.00	24.52	AV	H	35.81	4.77	25.64	39.46	54.00	14.54
Middle Channel: 2437 MHz									
4874.00	44.27	PK	H	33.05	3.26	25.65	54.93	74.00	19.07
4874.00	39.67	AV	H	33.05	3.26	25.65	50.33	54.00	3.67
7311.00	36.87	PK	H	36.01	4.64	25.71	51.81	74.00	22.19
7311.00	24.52	AV	H	36.01	4.64	25.71	39.46	54.00	14.54
High Channel: 2462 MHz									
2483.50	26.54	PK	H	28.27	1.84	0.00	56.65	74.00	17.35
2483.50	13.97	AV	H	28.27	1.84	0.00	44.08	54.00	9.92
4924.00	37.65	PK	H	33.15	3.27	25.65	48.42	74.00	25.58
4924.00	24.56	AV	H	33.15	3.27	25.65	35.33	54.00	18.67
7386.00	36.89	PK	H	36.20	4.51	25.79	51.81	74.00	22.19
7386.00	24.58	AV	H	36.20	4.51	25.79	39.50	54.00	14.50

802.11g Mode(Chain 0):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	37.97	PK	H	28.08	1.80	0.00	67.85	74.00	6.15
2390.00	22.05	AV	H	28.08	1.80	0.00	51.93	54.00	2.07
4824.00	42.33	PK	H	32.95	3.19	25.62	52.85	74.00	21.15
4824.00	29.20	AV	H	32.95	3.19	25.62	39.72	54.00	14.28
7236.00	44.31	PK	H	35.81	4.77	25.64	59.25	74.00	14.75
7236.00	30.10	AV	H	35.81	4.77	25.64	45.04	54.00	8.96
Middle Channel: 2437 MHz									
4874.00	38.71	PK	H	33.05	3.26	25.65	49.37	74.00	24.63
4874.00	25.26	AV	H	33.05	3.26	25.65	35.92	54.00	18.08
7311.00	38.43	PK	H	36.01	4.64	25.71	53.37	74.00	20.63
7311.00	26.21	AV	H	36.01	4.64	25.71	41.15	54.00	12.85
High Channel: 2462 MHz									
2483.50	35.81	PK	H	28.27	1.84	0.00	65.92	74.00	8.08
2483.50	18.45	AV	H	28.27	1.84	0.00	48.56	54.00	5.44
4924.00	35.24	PK	H	33.15	3.27	25.65	46.01	74.00	27.99
4924.00	23.12	AV	H	33.15	3.27	25.65	33.89	54.00	20.11
7386.00	35.65	PK	H	36.20	4.51	25.79	50.57	74.00	23.43
7386.00	23.42	AV	H	36.20	4.51	25.79	38.34	54.00	15.66

802.11g Mode(Chain 1):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	26.54	PK	H	28.08	1.80	0.00	56.42	74.00	17.58
2390.00	13.83	AV	H	28.08	1.80	0.00	43.71	54.00	10.29
4824.00	43.02	PK	H	32.95	3.19	25.62	53.54	74.00	20.46
4824.00	30.01	AV	H	32.95	3.19	25.62	40.53	54.00	13.47
7236.00	42.85	PK	H	35.81	4.77	25.64	57.79	74.00	16.21
7236.00	29.79	AV	H	35.81	4.77	25.64	44.73	54.00	9.27
Middle Channel: 2437 MHz									
4874.00	37.56	PK	H	33.05	3.26	25.65	48.22	74.00	25.78
4874.00	25.41	AV	H	33.05	3.26	25.65	36.07	54.00	17.93
7311.00	37.21	PK	H	36.01	4.64	25.71	52.15	74.00	21.85
7311.00	24.85	AV	H	36.01	4.64	25.71	39.79	54.00	14.21
High Channel: 2462 MHz									
2483.50	27.56	PK	H	28.27	1.84	0.00	57.67	74.00	16.33
2483.50	14.12	AV	H	28.27	1.84	0.00	44.23	54.00	9.77
4924.00	35.87	PK	H	33.15	3.27	25.65	46.64	74.00	27.36
4924.00	23.45	AV	H	33.15	3.27	25.65	34.22	54.00	19.78
7386.00	35.79	PK	H	36.20	4.51	25.79	50.71	74.00	23.29
7386.00	23.44	AV	H	36.20	4.51	25.79	38.36	54.00	15.64

802.11n ht20 Mode(MIMO was the worst):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2390.00	43.01	PK	H	28.08	1.80	0.00	72.89	74.00	1.11
2390.00	19.01	AV	H	28.08	1.80	0.00	48.89	54.00	5.11
4824.00	41.99	PK	H	32.95	3.19	25.62	52.51	74.00	21.49
4824.00	28.42	AV	H	32.95	3.19	25.62	38.94	54.00	15.06
7236.00	41.41	PK	H	35.81	4.77	25.64	56.35	74.00	17.65
7236.00	28.32	AV	H	35.81	4.77	25.64	43.26	54.00	10.74
Middle Channel: 2437 MHz									
4874.00	40.39	PK	H	33.05	3.26	25.65	51.05	74.00	22.95
4874.00	28.02	AV	H	33.05	3.26	25.65	38.68	54.00	15.32
7311.00	40.21	PK	H	36.01	4.64	25.71	55.15	74.00	18.85
7311.00	27.85	AV	H	36.01	4.64	25.71	42.79	54.00	11.21
High Channel: 2462 MHz									
2483.50	39.18	PK	H	28.27	1.84	0.00	69.29	74.00	4.71
2483.50	21.73	AV	H	28.27	1.84	0.00	51.84	54.00	2.16
4924.00	35.89	PK	H	33.15	3.27	25.65	46.66	74.00	27.34
4924.00	22.78	AV	H	33.15	3.27	25.65	33.55	54.00	20.45
7386.00	34.95	PK	H	36.20	4.51	25.79	49.87	74.00	24.13
7386.00	22.45	AV	H	36.20	4.51	25.79	37.37	54.00	16.63

802.11n ht40(MIMO was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2390.00	36.85	PK	H	28.08	1.80	0.00	66.73	74.00	7.27
2390.00	20.92	AV	H	28.08	1.80	0.00	50.80	54.00	3.20
4844.00	37.09	PK	H	32.99	3.22	25.63	47.67	74.00	26.33
4844.00	23.98	AV	H	32.99	3.22	25.63	34.56	54.00	19.44
7266.00	36.58	PK	H	35.89	4.72	25.67	51.52	74.00	22.48
7266.00	23.87	AV	H	35.89	4.72	25.67	38.81	54.00	15.19
Middle Channel: 2437 MHz									
4874.00	37.45	PK	H	33.05	3.26	25.65	48.11	74.00	25.89
4874.00	24.87	AV	H	33.05	3.26	25.65	35.53	54.00	18.47
7311.00	37.52	PK	H	36.01	4.64	25.71	52.46	74.00	21.54
7311.00	24.77	AV	H	36.01	4.64	25.71	39.71	54.00	14.29
High Channel: 2452 MHz									
2483.50	36.86	PK	H	28.27	1.84	0.00	66.97	74.00	7.03
2483.50	23.23	AV	H	28.27	1.84	0.00	53.34	54.00	0.66
4904.00	37.05	PK	H	33.11	3.30	25.67	47.79	74.00	26.21
4904.00	25.40	AV	H	33.11	3.30	25.67	36.14	54.00	17.86
7356.00	36.89	PK	H	36.13	4.56	25.76	51.82	74.00	22.18
7356.00	24.21	AV	H	36.13	4.56	25.76	39.14	54.00	14.86




Test plots(802.11b Chain 0 Low channel was the worst)
Horizontal:

Fundamental
 Test with Band
 Rejection Filter

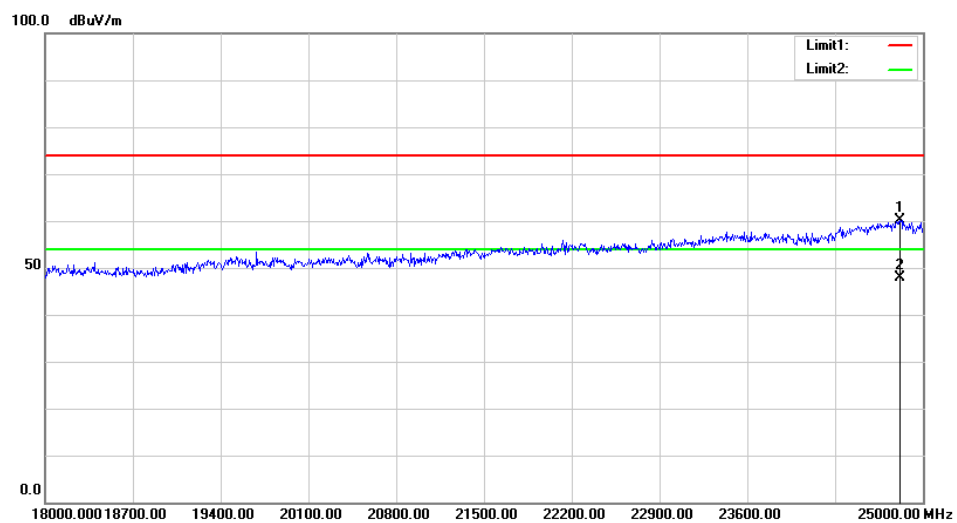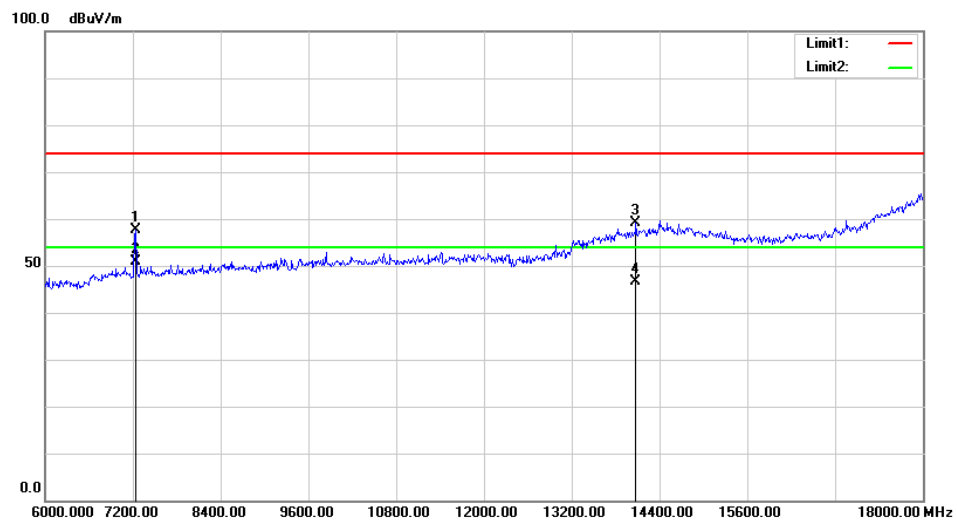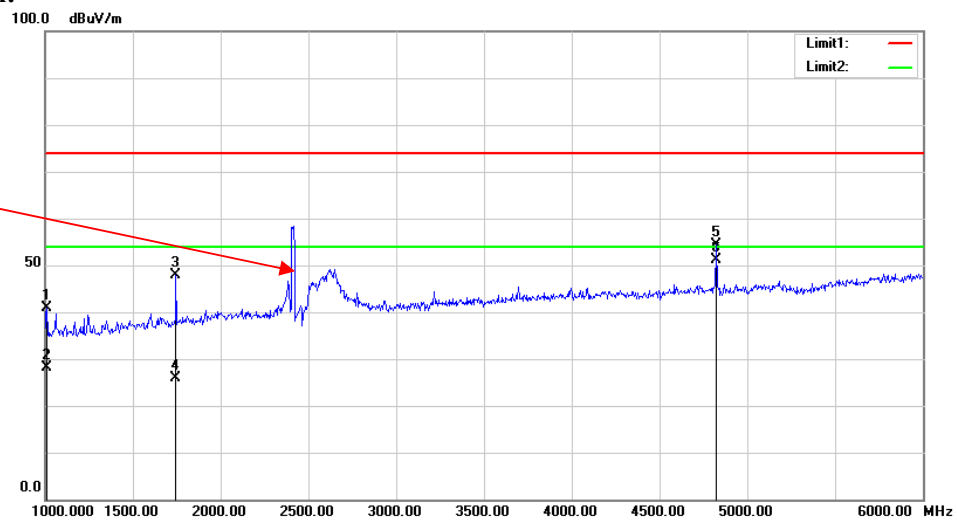

Vertical:

Fundamental
Test with Band
Rejection Filter

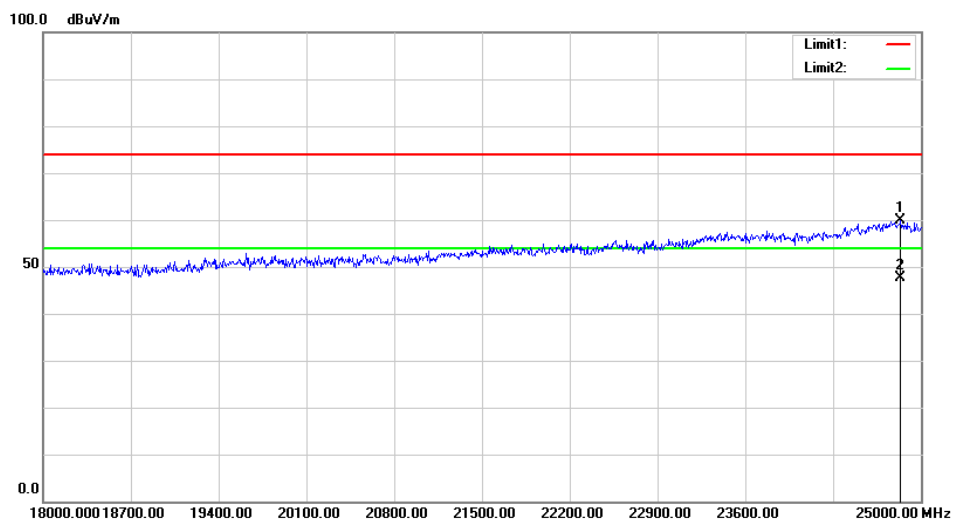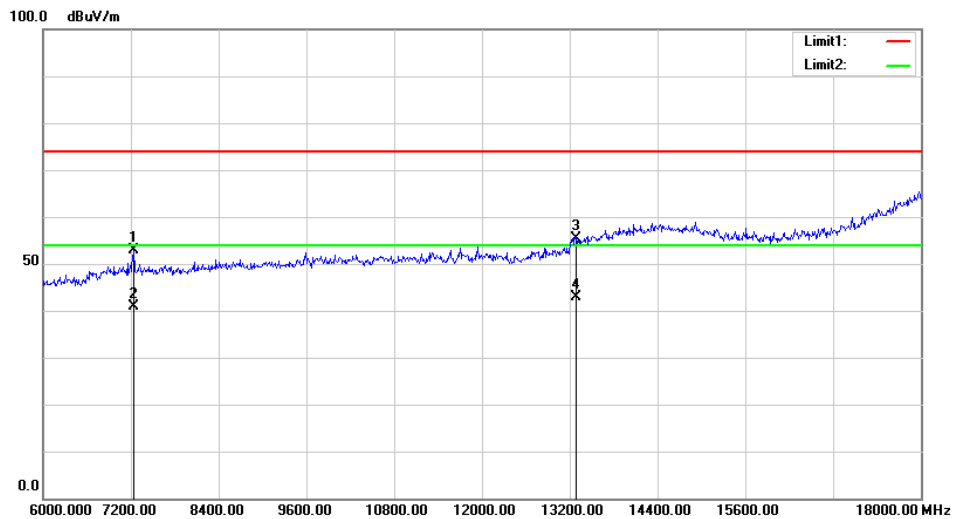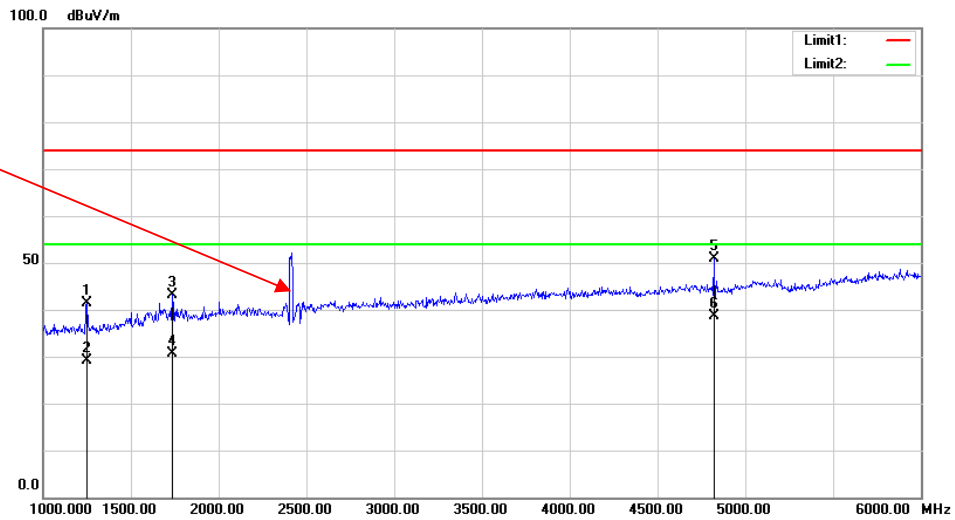

FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) & RSS-GEN CLAUSE 6.7 – 6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH**Applicable Standard**

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 clause 5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- h) set as RSS-Gen clause 6.7 to test 99% Occupied bandwidth.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24~24.2°C
Relative Humidity:	51~52%
ATM Pressure:	100.3~100.6kPa
Test by:	Severn Zhu
Test Date:	2020-05-27~2020-05-28


Test Mode: Transmitting

Test Result: Compliance. Test only was performed at chain 0, please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Limit (MHz)	99% Occupied Bandwidth (MHz)
802.11b	Low	2412	9.920	≥ 0.5	14.720
	Middle	2437	10.160	≥ 0.5	15.120
	High	2462	10.160	≥ 0.5	15.920
802.11g	Low	2412	16.400	≥ 0.5	18.560
	Middle	2437	16.400	≥ 0.5	20.080
	High	2462	16.400	≥ 0.5	22.400
802.11n ht20	Low	2412	17.440	≥ 0.5	18.400
	Middle	2437	17.520	≥ 0.5	18.880
	High	2462	17.520	≥ 0.5	20.400
802.11n ht40	Low	2422	36.160	≥ 0.5	37.440
	Middle	2437	36.480	≥ 0.5	37.760
	High	2452	36.000	≥ 0.5	38.240

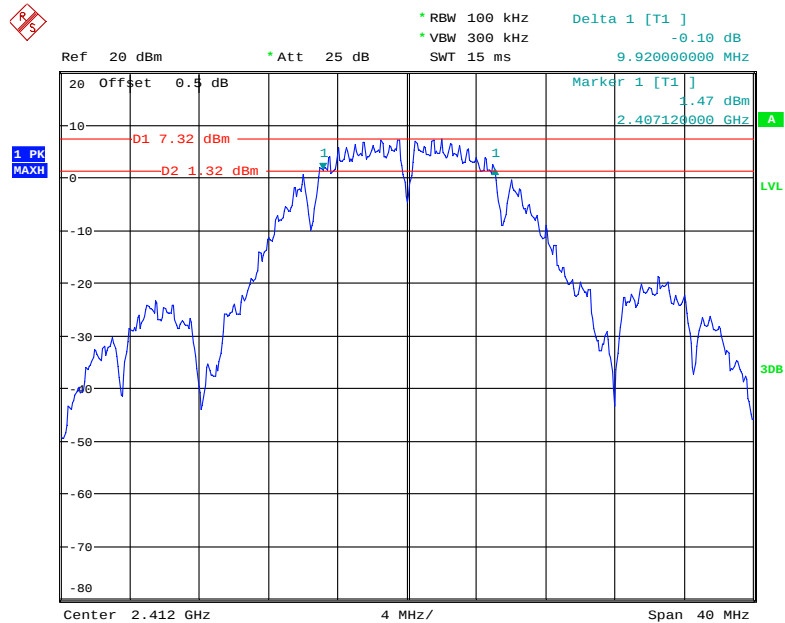
6dB Emission Bandwidth:**802.11b Low Channel**

Date: 27.MAY.2020 22:39:21

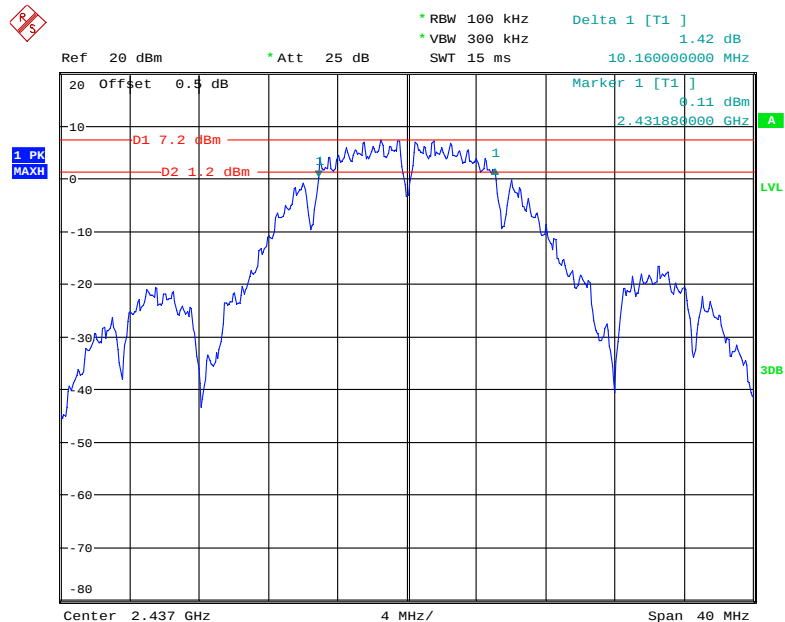802.11b Middle Channel


Date: 27.MAY.2020 22:42:39

802.11b High Channel

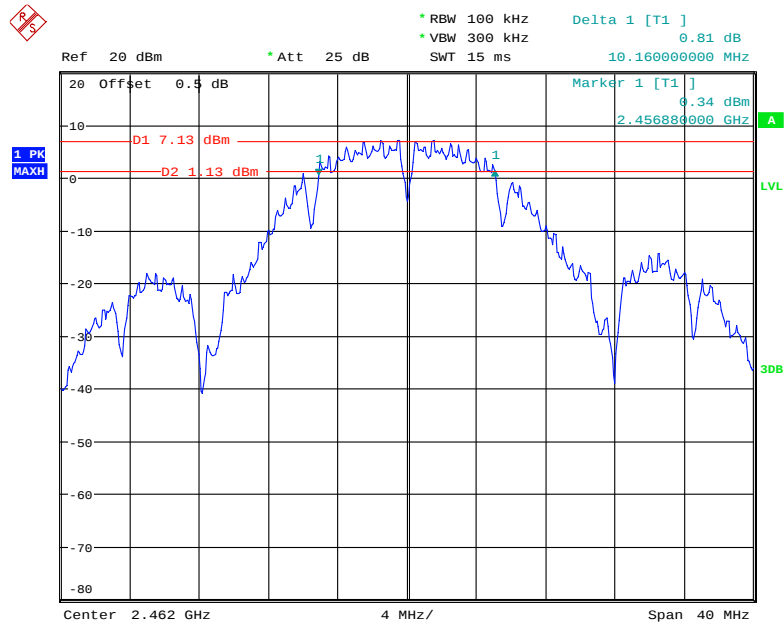


Date: 27.MAY.2020 22:41:12

802.11g Low Channel

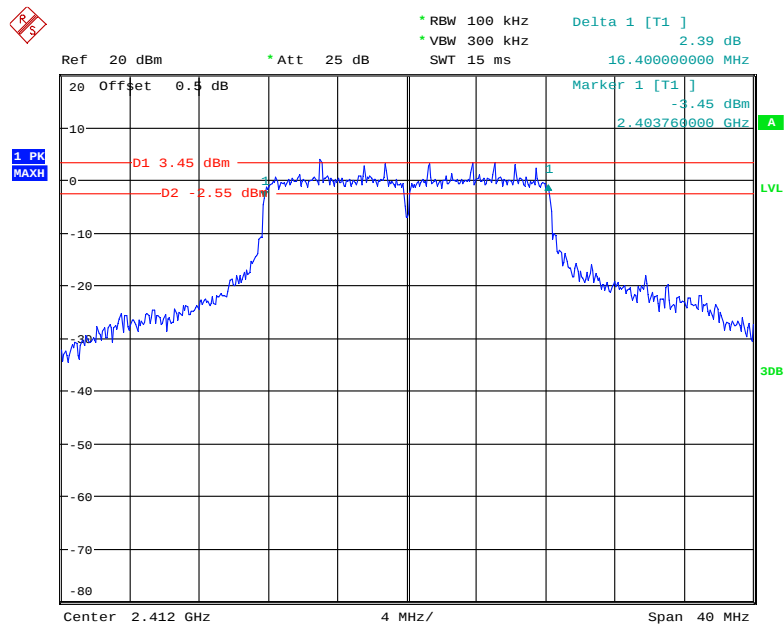


Date: 27.MAY.2020 22:44:28

802.11g Middle Channel

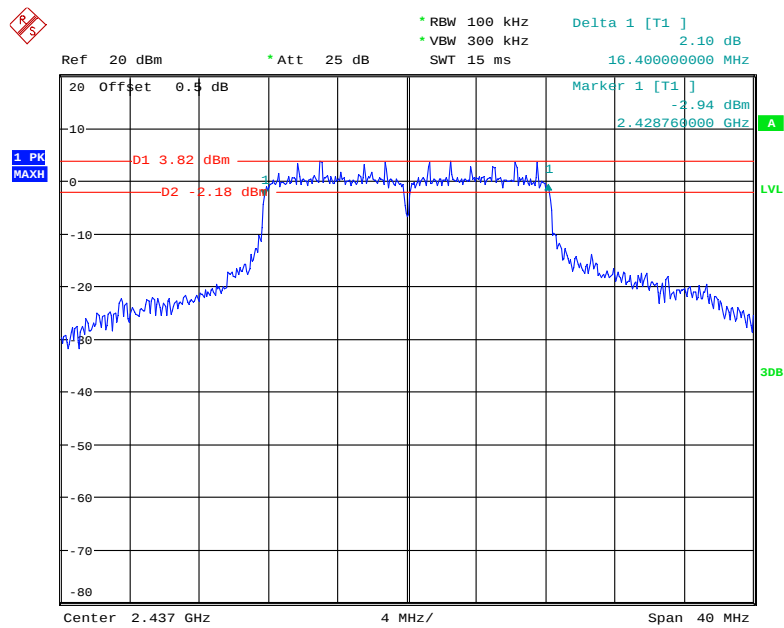


Date: 27.MAY.2020 22:47:42

802.11g High Channel

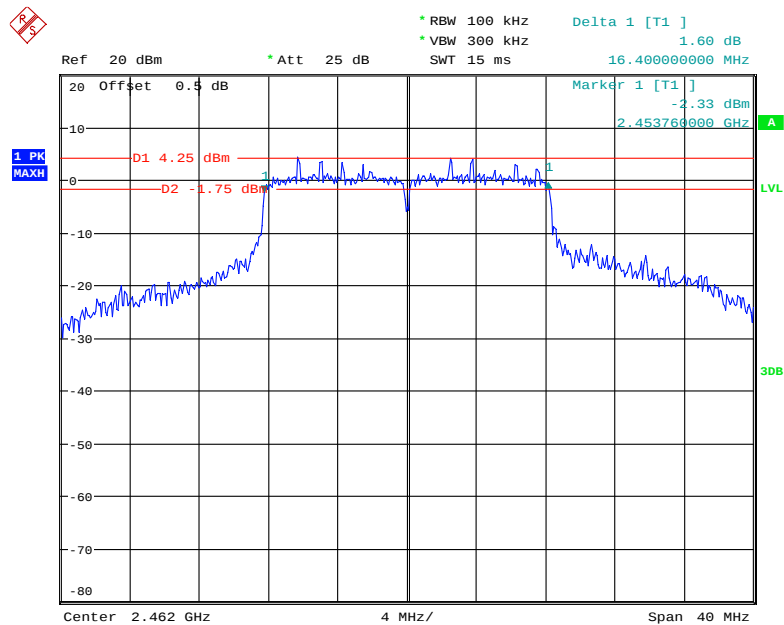


Date: 27.MAY.2020 22:45:59

802.11n ht20 Low Channel

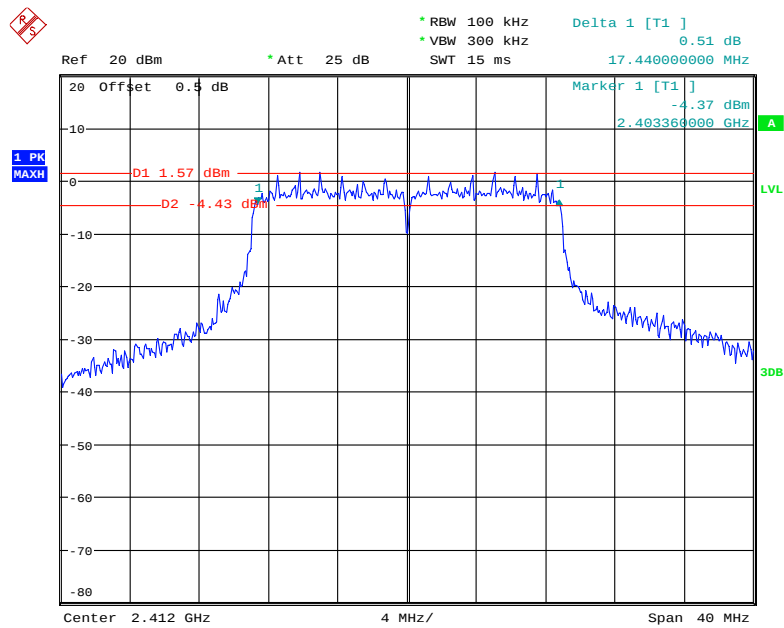


Date: 27.MAY.2020 22:56:39

802.11n ht20 Middle Channel

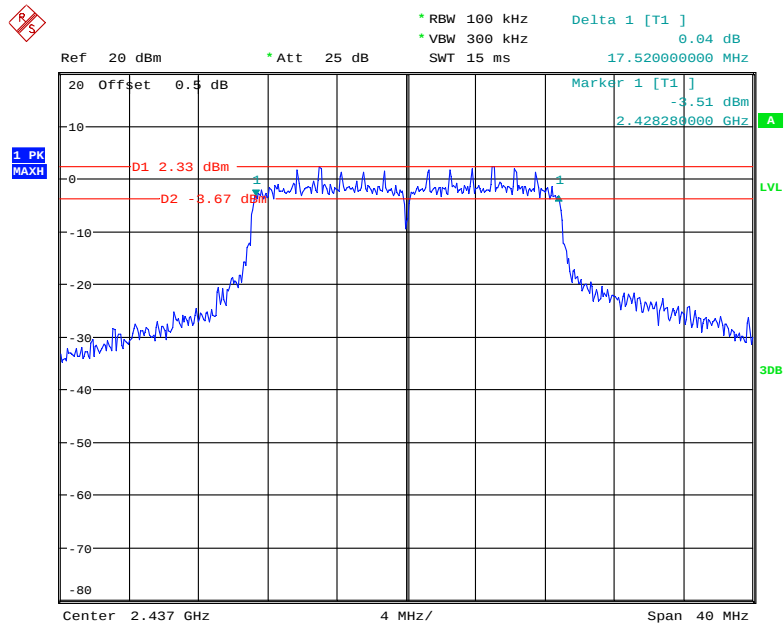


Date: 27.MAY.2020 22:59:46

802.11n ht20 High Channel

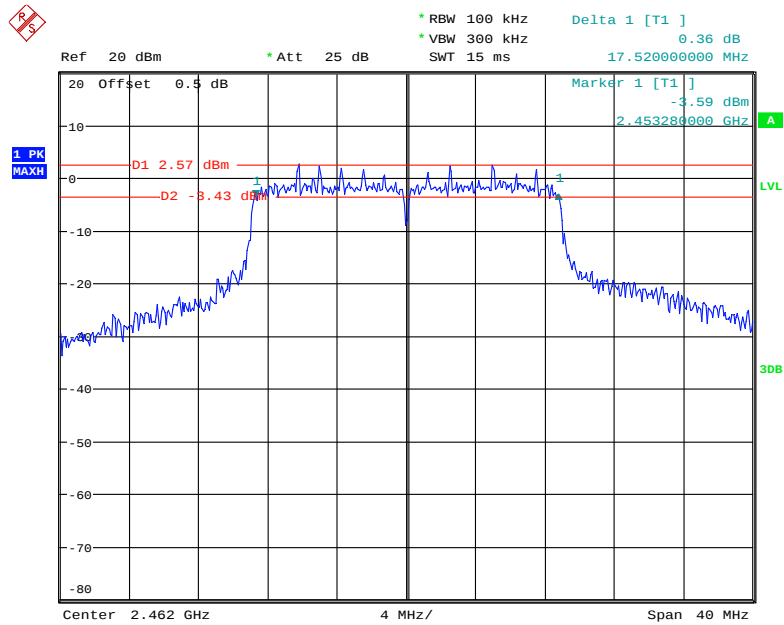


Date: 27.MAY.2020 22:58:15

802.11n ht40 Low Channel

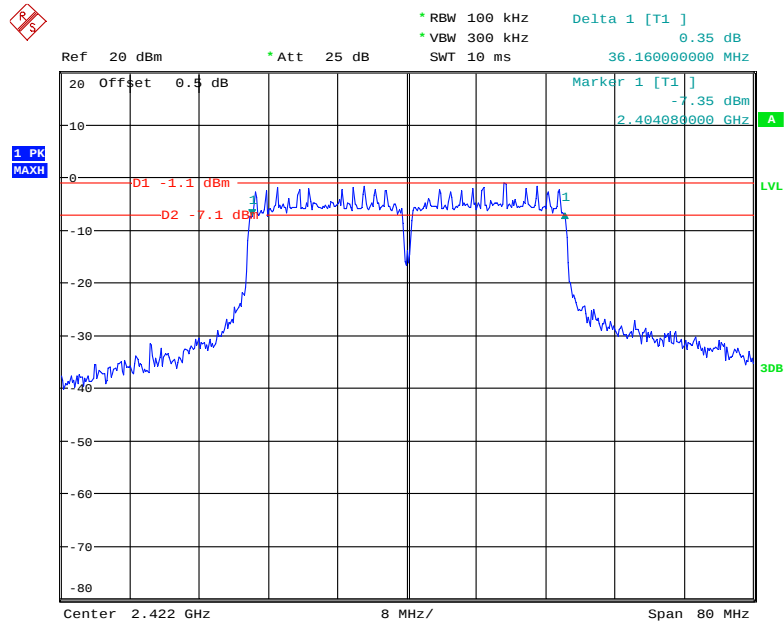


Date: 27.MAY.2020 23:05:20

802.11n ht40 Middle Channel

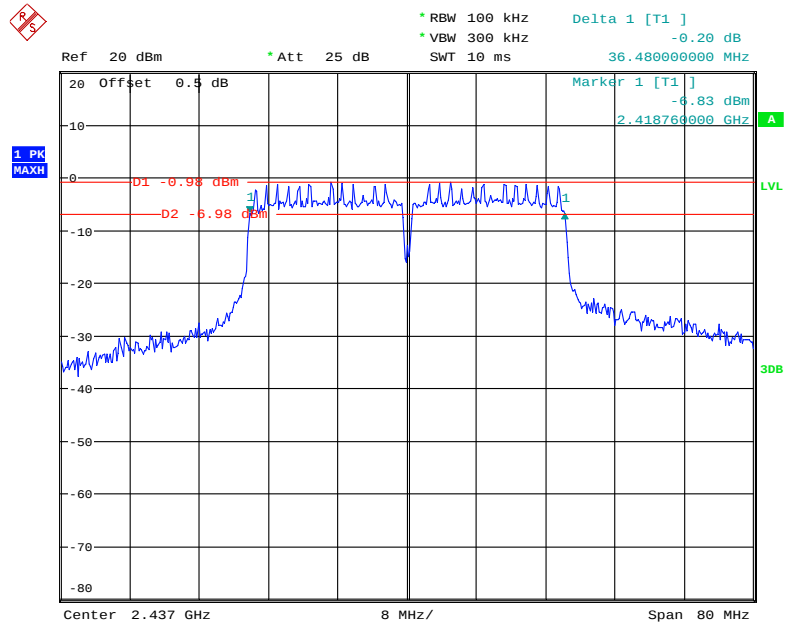


Date: 27.MAY.2020 23:03:25


802.11n ht40 High Channel

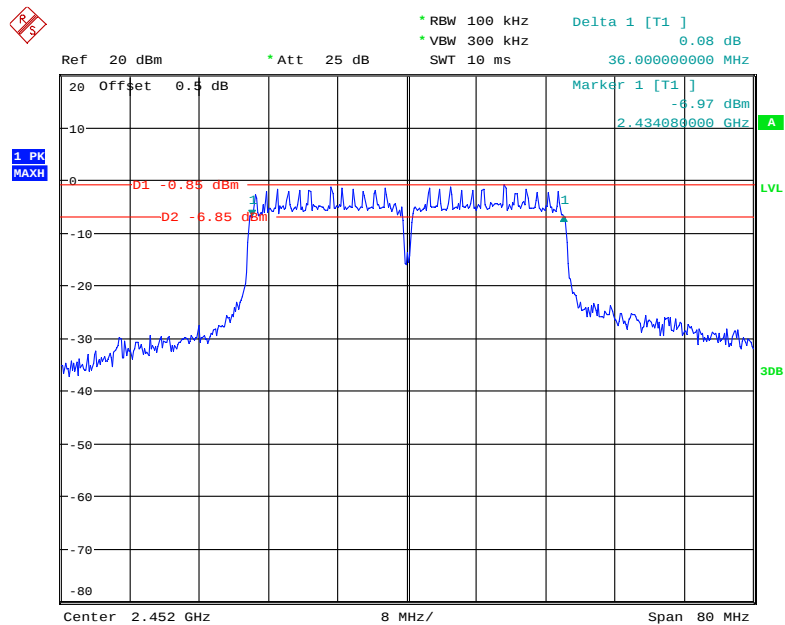

Date: 27.MAY.2020 23:07:25

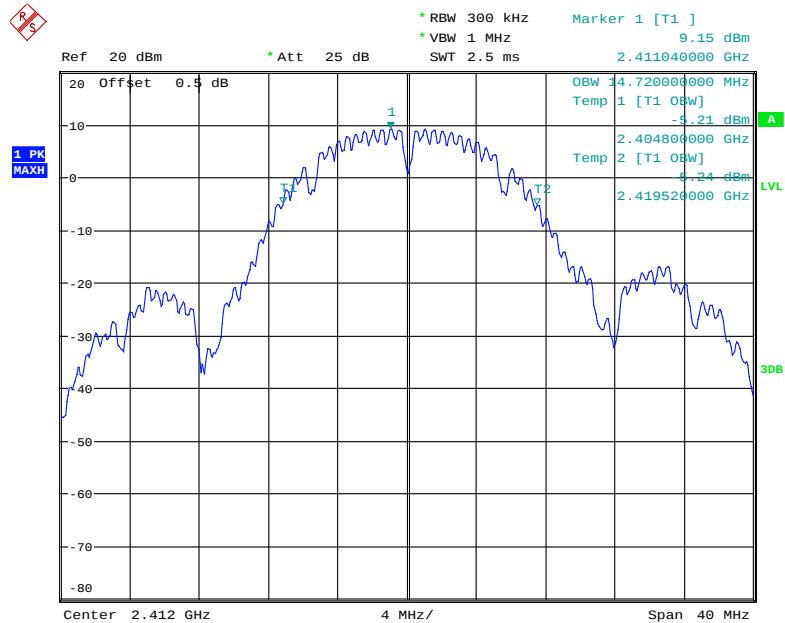
99% Occupied Bandwidth:**802.11b Low Channel**

Date: 27.MAY.2020 22:39:31

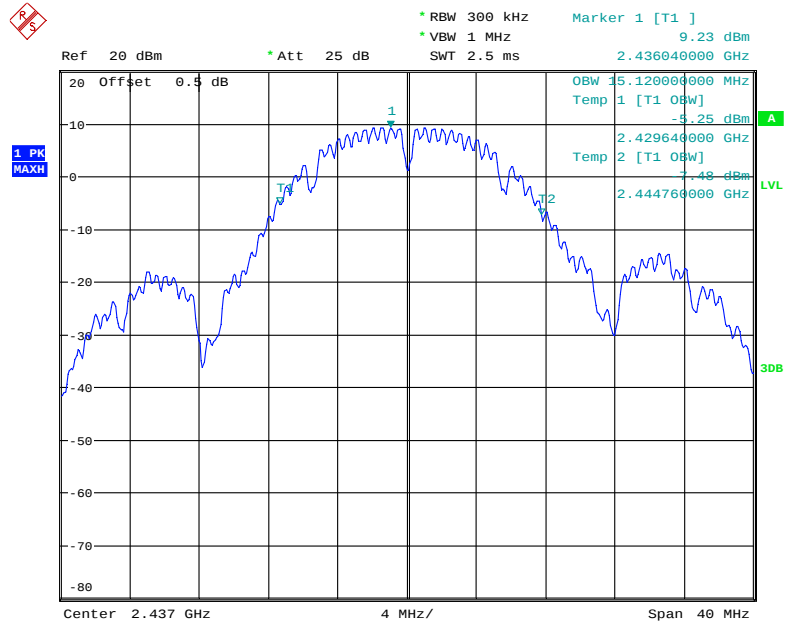802.11b Middle Channel


Date: 27.MAY.2020 22:42:49

802.11b High Channel

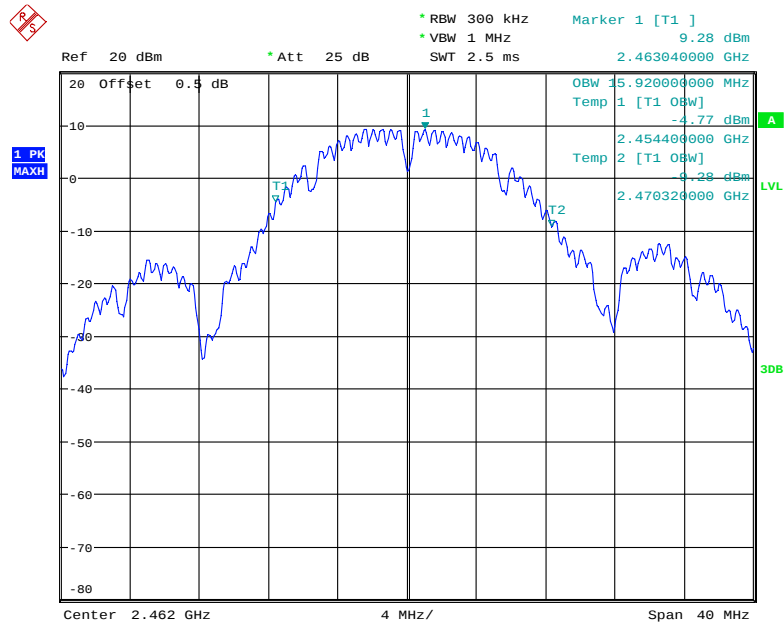


Date: 27.MAY.2020 22:41:22


802.11g Low Channel

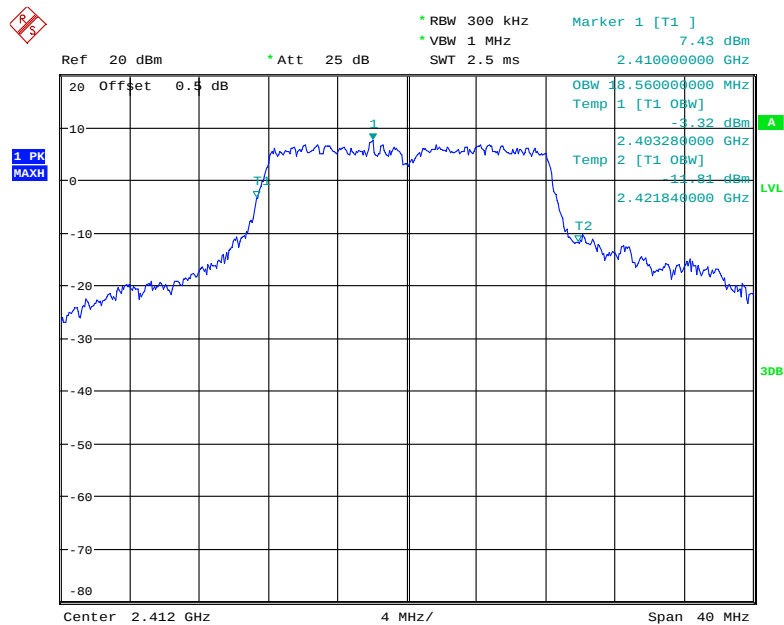

Date: 27.MAY.2020 22:44:40

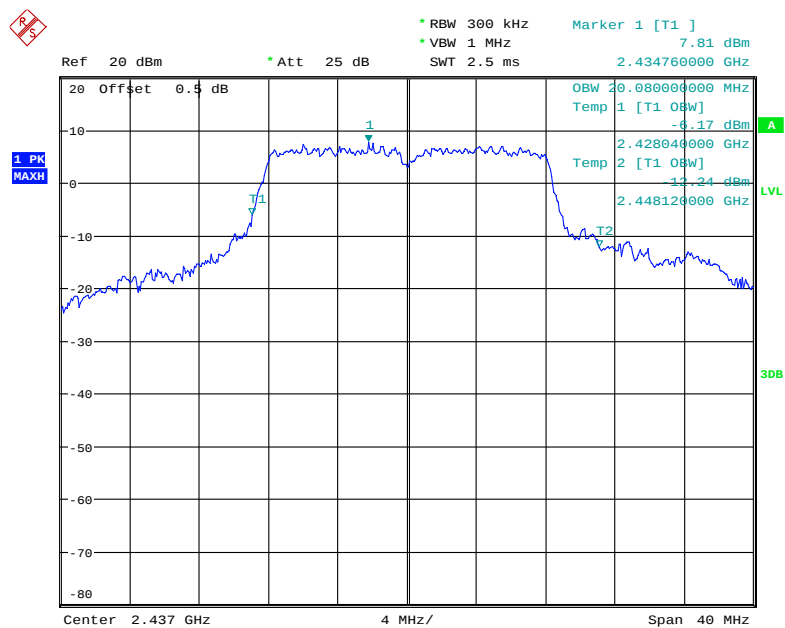
802.11g Middle Channel

Date: 27.MAY.2020 22:47:54

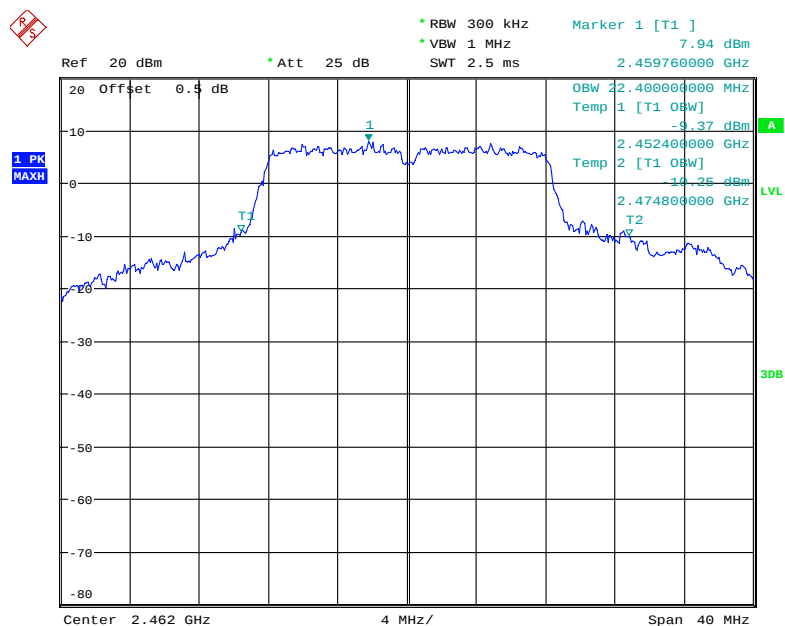802.11g High Channel


Date: 27.MAY.2020 22:46:12

802.11n ht20 Low Channel

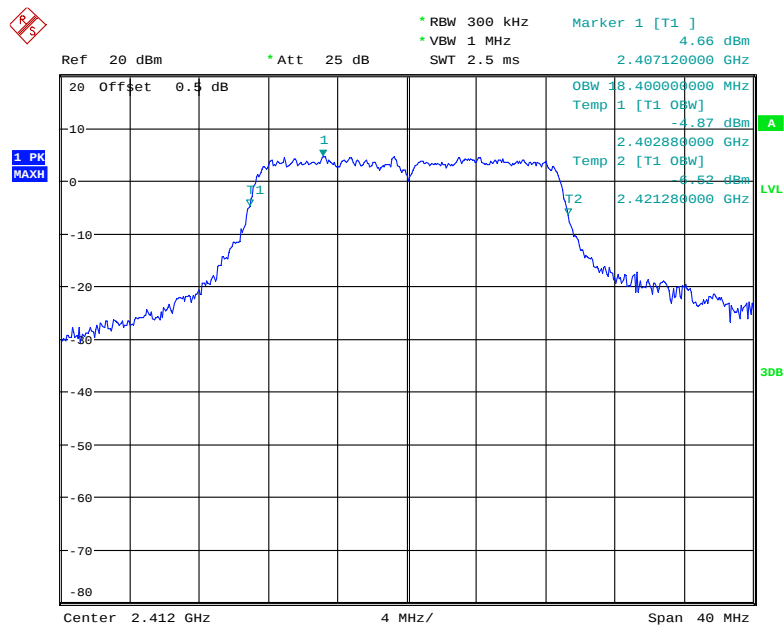


Date: 27.MAY.2020 22:56:55

802.11n ht20 Middle Channel

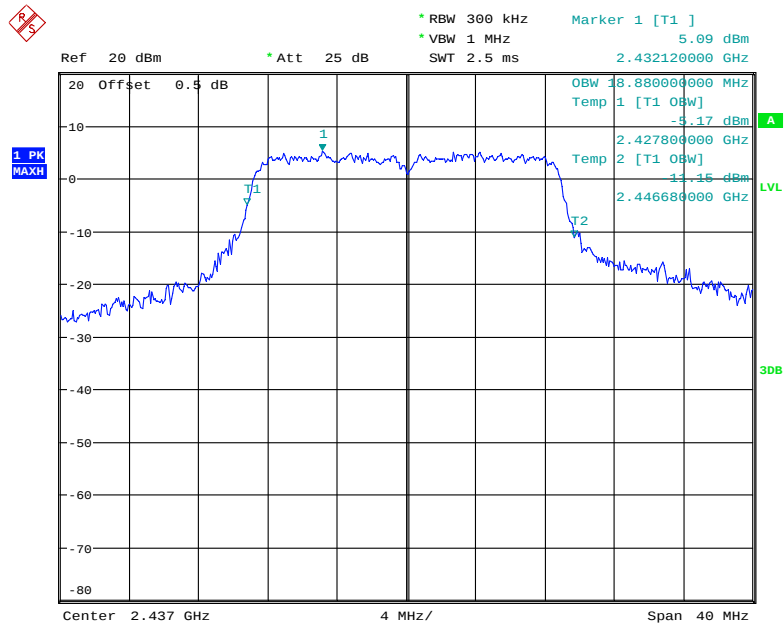


Date: 27.MAY.2020 22:59:59

802.11n ht20 High Channel

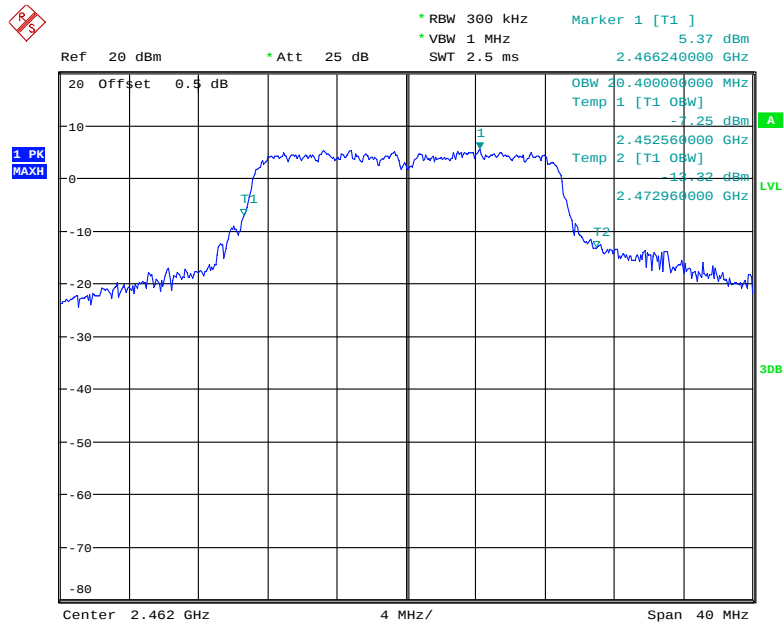


Date: 27.MAY.2020 22:58:28

802.11n ht40 Low Channel

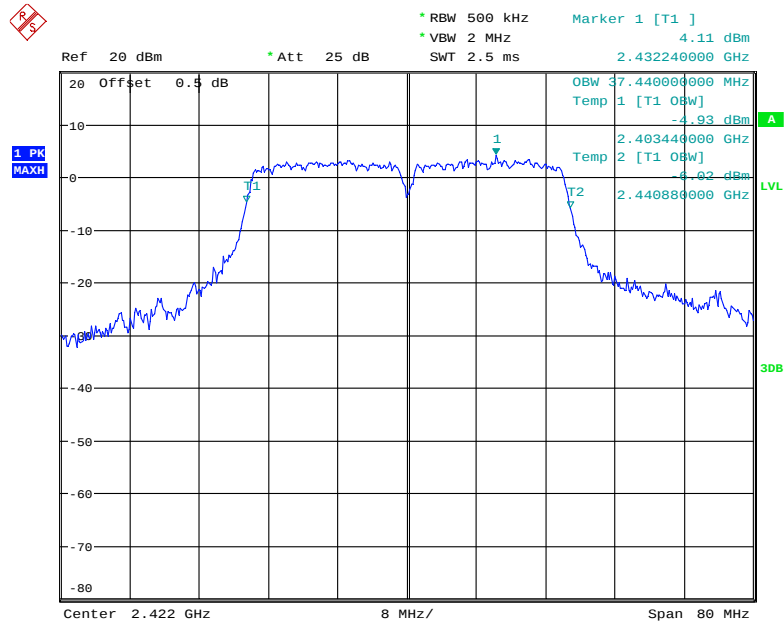


Date: 27.MAY.2020 23:05:33

802.11n ht40 Middle Channel

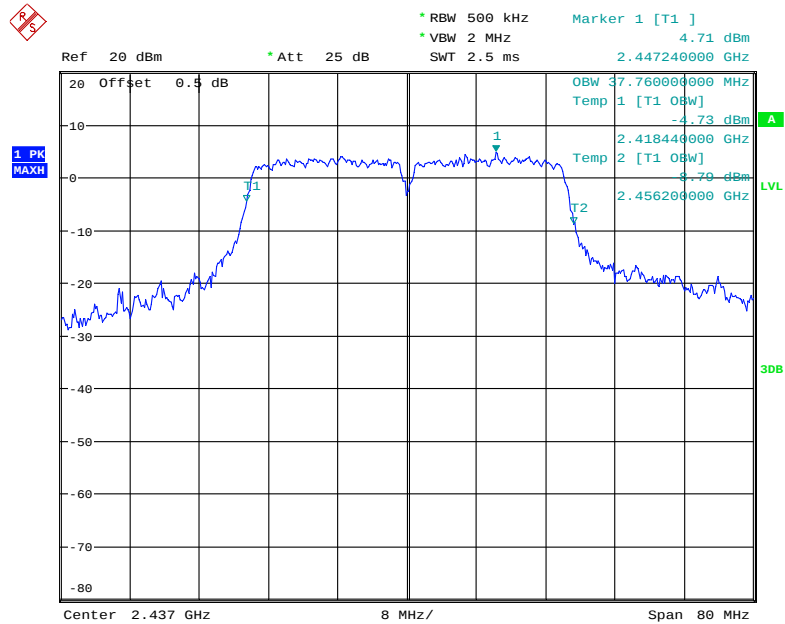

Date: 27.MAY.2020 23:03:38

802.11n ht40 High Channel

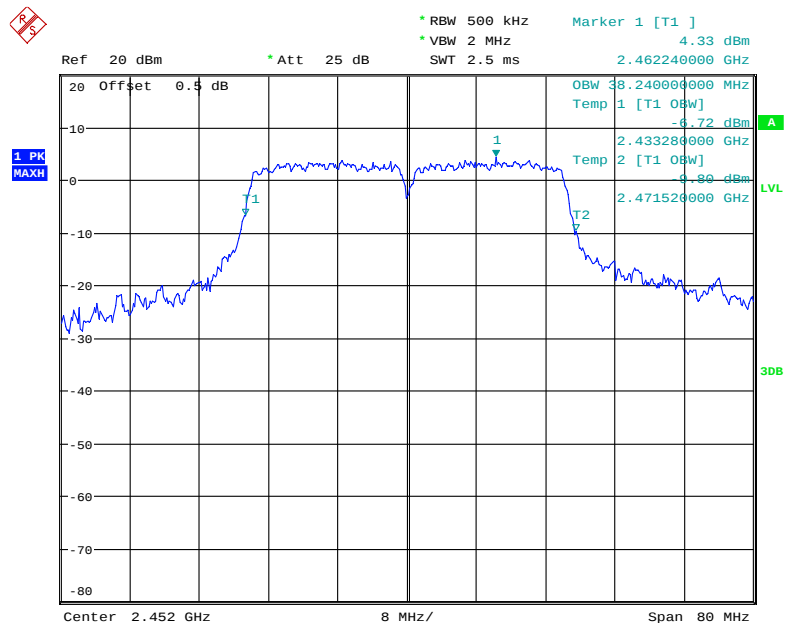

Date: 27.MAY.2020 23:07:38

FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2020-05-09	2021-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.2°C
Relative Humidity:	51%
ATM Pressure:	100.6kPa
Test by:	Severn Zhu
Test Date:	2020-05-28

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
802.11 b	Low	2412	13.75	13.19	/	30
	Middle	2437	13.21	13.05	/	30
	High	2462	13.09	12.97	/	30
802.11 g	Low	2412	16.36	15.97	/	30
	Middle	2437	16.26	15.78	/	30
	High	2462	15.93	15.09	/	30
802.11n ht20	Low	2412	14.49	14.14	17.33	30
	Middle	2437	14.17	14.24	17.22	30
	High	2462	14.32	13.74	17.05	30
802.11n ht40	Low	2422	14.73	13.82	17.31	30
	Middle	2437	14.65	13.78	17.25	30
	High	2452	14.76	13.74	17.29	30

Mode	Channel	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
802.11 b	Low	2412	11.62	11.07	/	30
	Middle	2437	11.41	10.92	/	30
	High	2462	11.07	10.66	/	30
802.11 g	Low	2412	8.85	8.43	/	30
	Middle	2437	8.79	8.39	/	30
	High	2462	8.76	8.34	/	30
802.11n ht20	Low	2412	7.73	7.46	10.61	30
	Middle	2437	7.66	7.43	10.56	30
	High	2462	7.40	7.19	10.31	30
802.11n ht40	Low	2422	6.35	6.17	9.27	30
	Middle	2437	6.29	6.07	9.19	30
	High	2452	6.62	6.23	9.44	30

Note:

The maximum antenna gain is 1.8dBi in 2.4GHz band, meets the EIRP limit of RSS-247. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = 1.8 dBi

FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24~24.2°C
Relative Humidity:	51~52%
ATM Pressure:	100.3~100.6kPa
Test by:	Severn Zhu
Test Date:	2020-05-27~2020-05-28

Test mode: Transmitting

Test Result: Compliance. Please refer to following plots.


Chain 0:

802.11b: Band Edge, Left Side

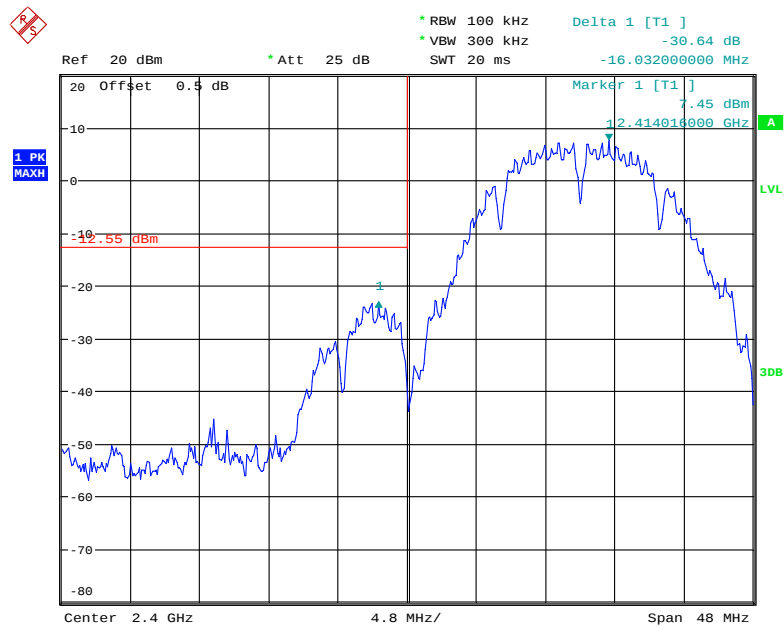


Date: 27.MAY.2020 22:39:51

802.11b: Band Edge, Right Side

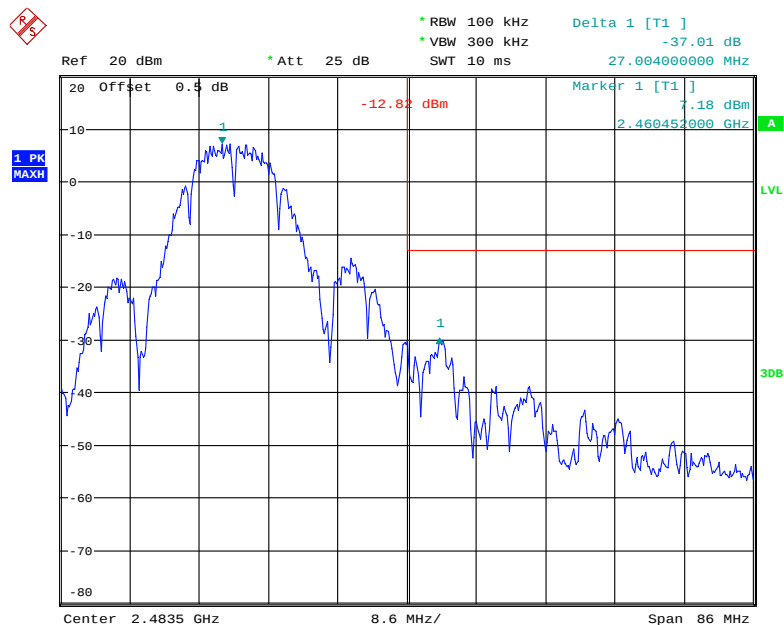


Date: 27.MAY.2020 22:41:48

802.11g: Band Edge, Left Side

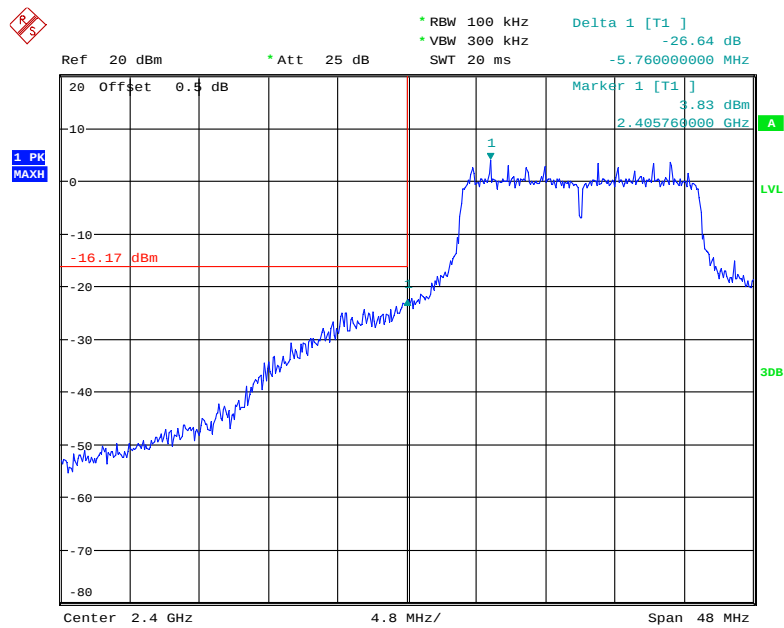


Date: 27.MAY.2020 22:45:17

802.11g: Band Edge, Right Side

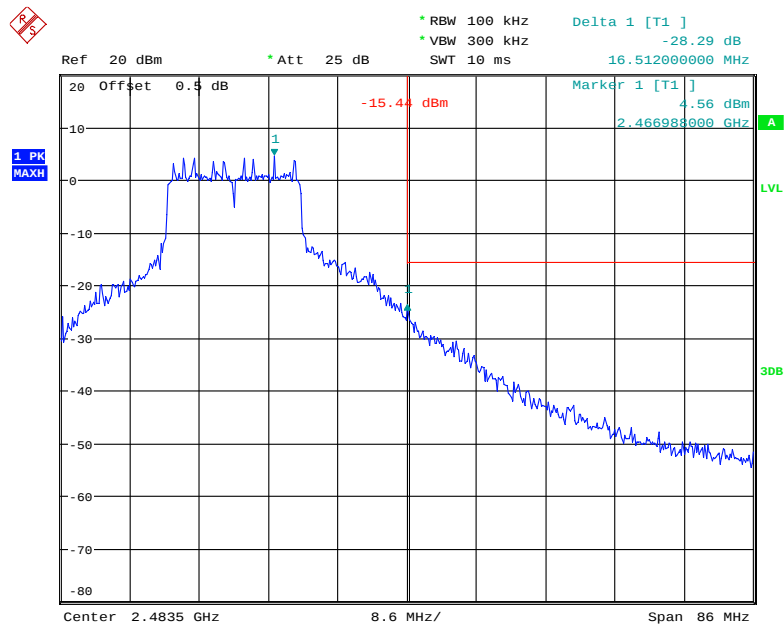


Date: 27.MAY.2020 22:46:58

802.11n ht20 Band Edge, Left Side

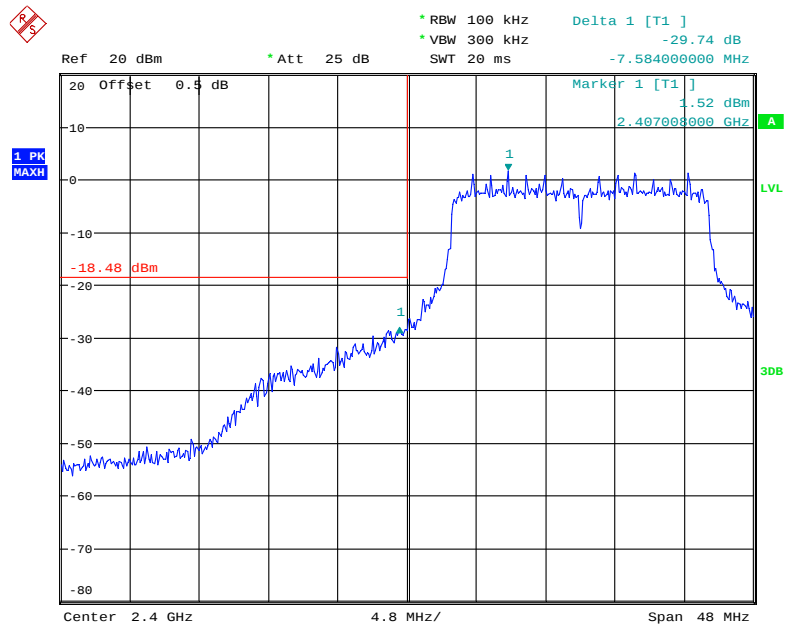


Date: 27.MAY.2020 22:57:33

802.11n ht20 Band Edge, Right Side

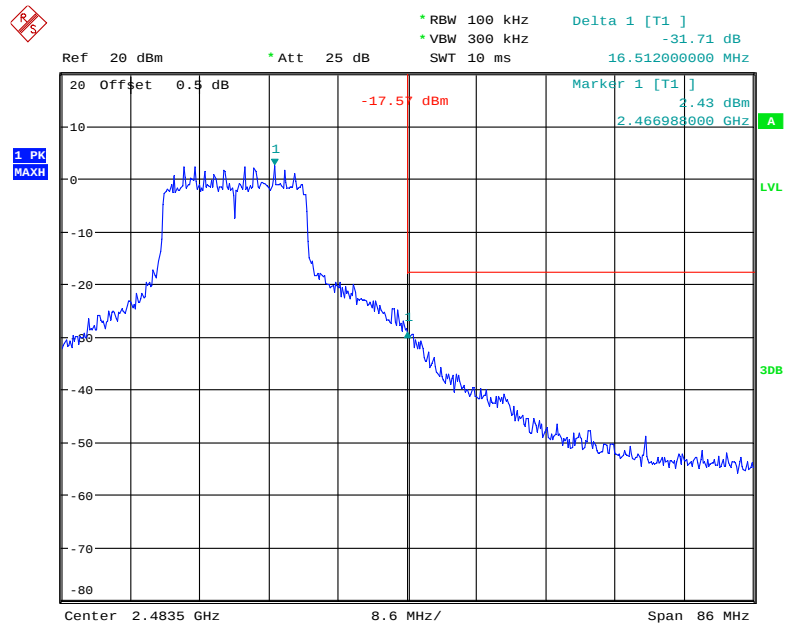


Date: 27.MAY.2020 22:59:09

802.11n ht40 Band Edge, Left Side

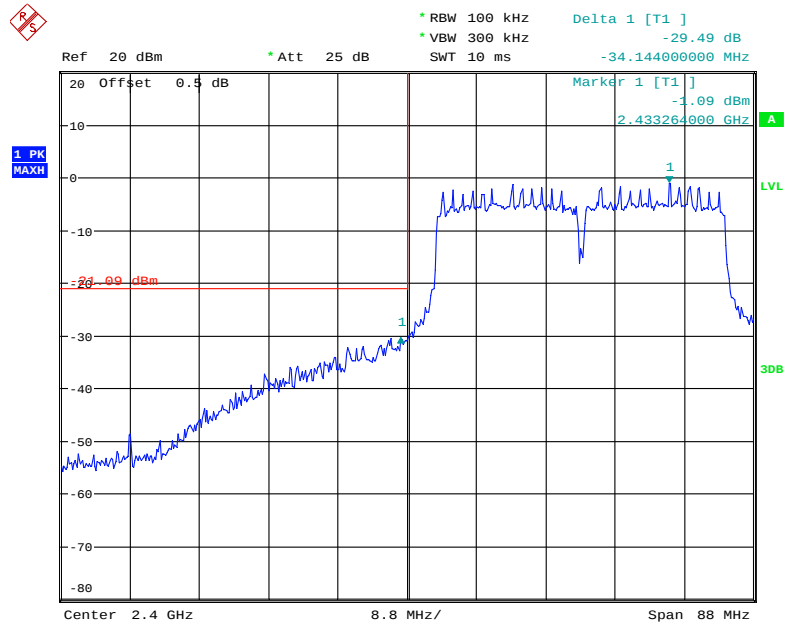

Date: 27.MAY.2020 23:06:53


802.11n ht40 Band Edge, Right Side

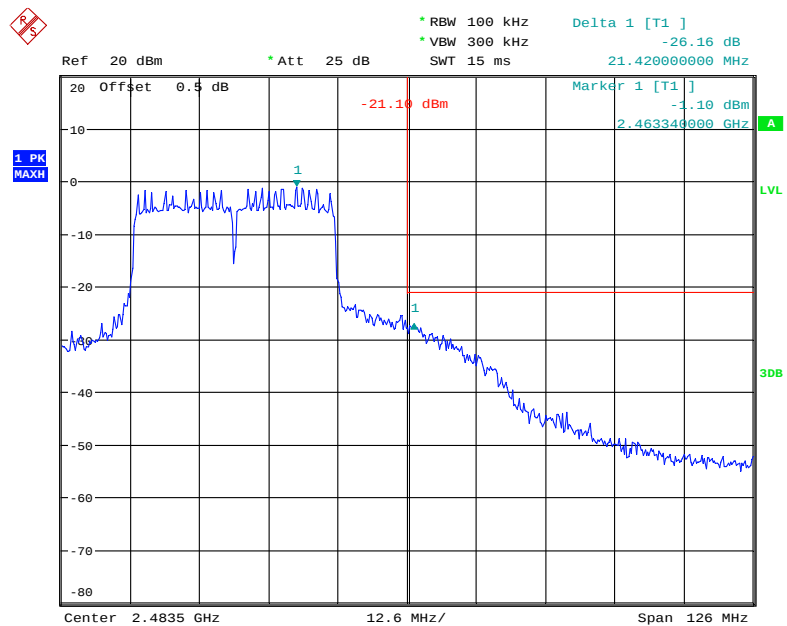

Date: 27.MAY.2020 23:08:55


Chain 1:

802.11b: Band Edge, Left Side

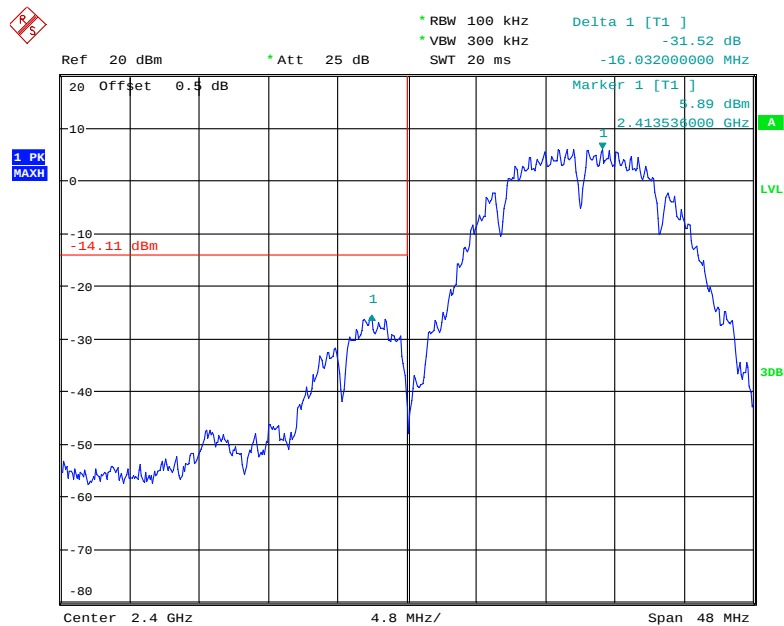


Date: 28.MAY.2020 00:20:45

802.11b: Band Edge, Right Side

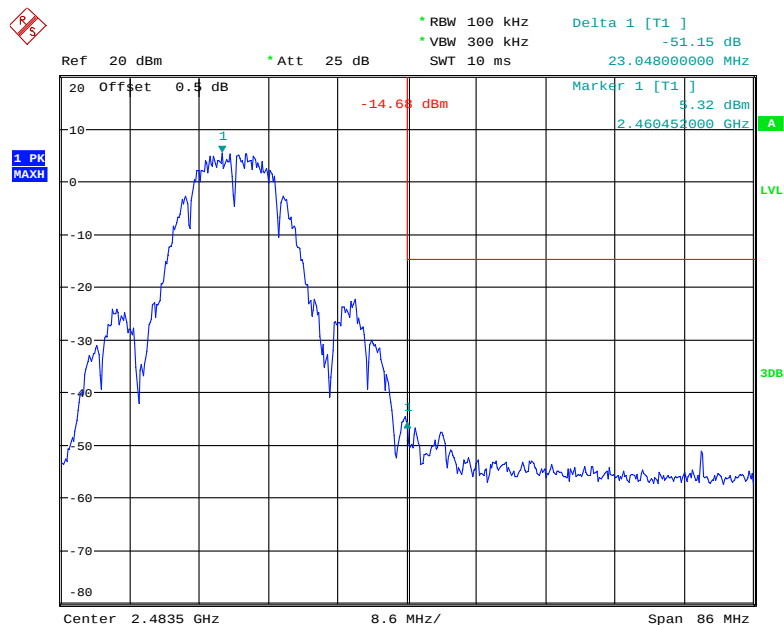


Date: 28.MAY.2020 00:22:07

802.11g: Band Edge, Left Side

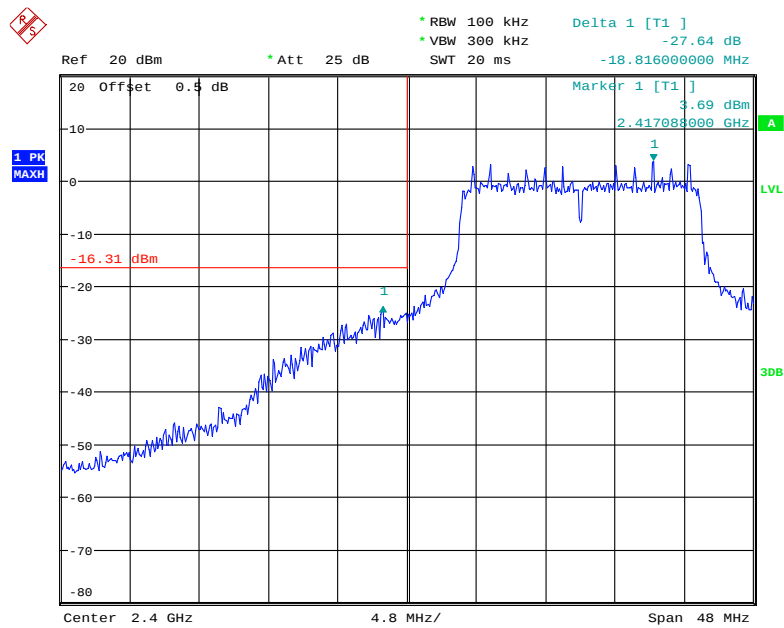


Date: 28.MAY.2020 00:14:14

802.11g: Band Edge, Right Side

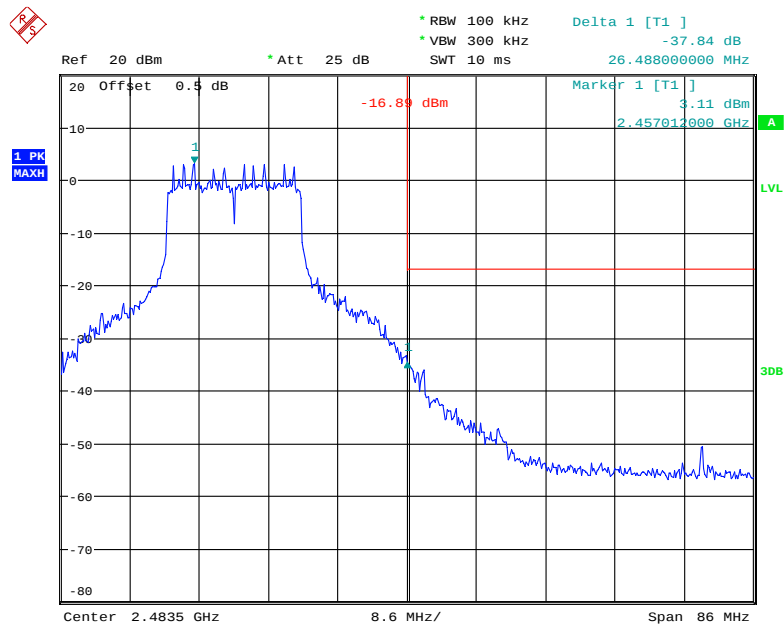


Date: 28.MAY.2020 00:15:28

802.11n ht20 Band Edge, Left Side


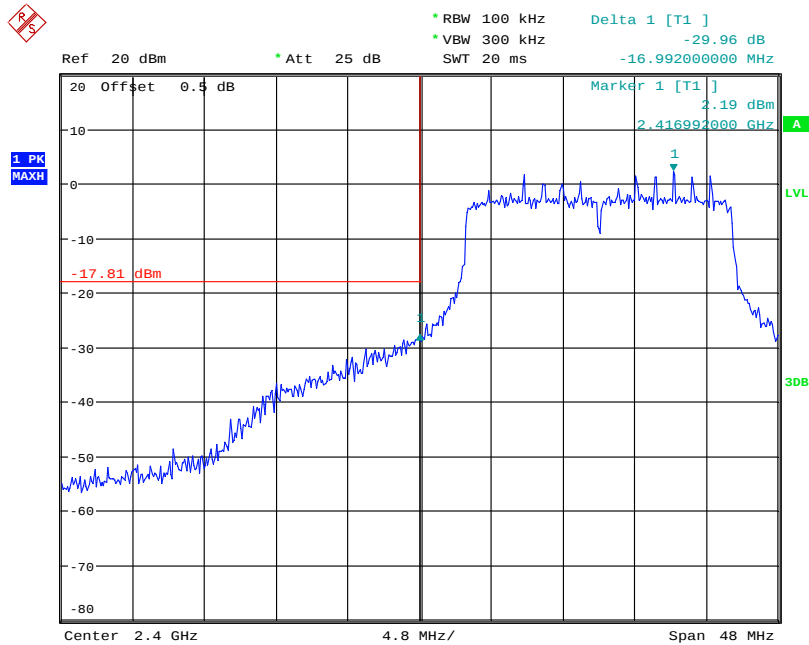


Date: 28.MAY.2020 00:10:11

802.11n ht20 Band Edge, Right Side

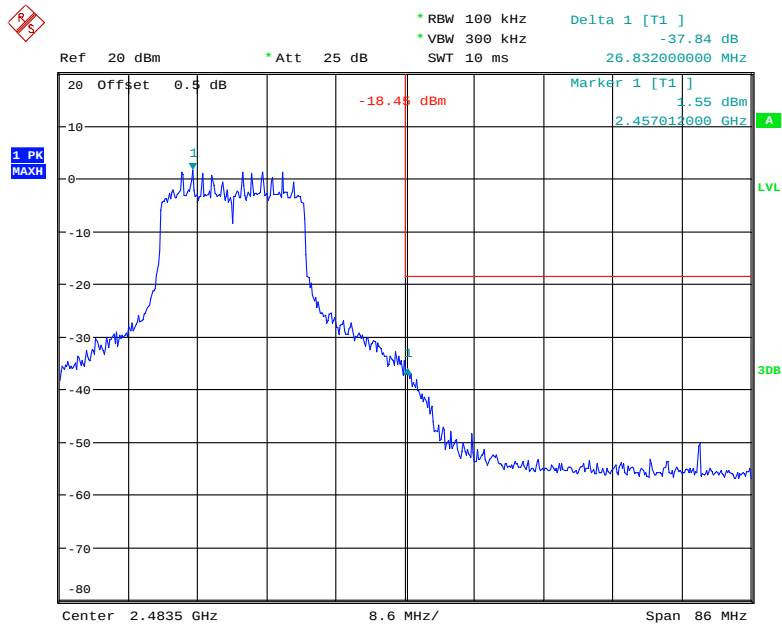

Date: 28.MAY.2020 00:11:54



FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	51%
ATM Pressure:	100.5kPa
Test by:	Severn Zhu
Test Date:	2020-06-01

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	-15.68	-14.94	/	≤8
	Middle	2437	-16.09	-14.84	/	≤8
	High	2462	-14.94	-15.19	/	≤8
802.11g	Low	2412	-19.74	-17.52	/	≤8
	Middle	2437	-18.55	-16.99	/	≤8
	High	2462	-18.3	-16.78	/	≤8
802.11n ht20	Low	2412	-20.81	-17.95	-16.14	≤8
	Middle	2437	-20.1	-16.57	-14.98	≤8
	High	2462	-19.81	-19.11	-16.44	≤8
802.11n ht40	Low	2422	-24.13	-22.34	-20.13	≤8
	Middle	2437	-22.81	-22.08	-19.42	≤8
	High	2452	-23.13	-22.73	-19.92	≤8

Note 1: The maximum antenna gain is 1.8dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:


$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 1.8 + 10 \log(2/1) = 4.8 \text{ dBi}$$


Chain 0:

Power Spectral Density, 802.11b Low Channel

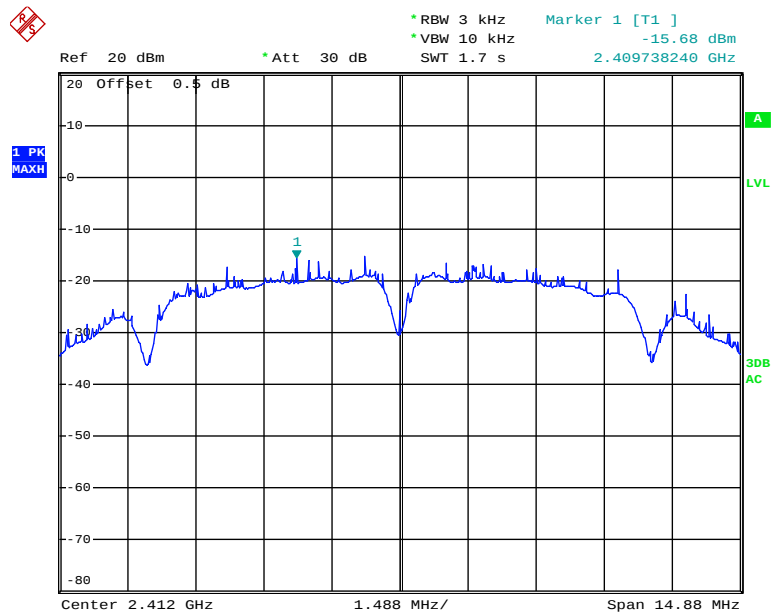


Date: 1.JUN.2020 15:19:40

Power Spectral Density, 802.11b Middle Channel

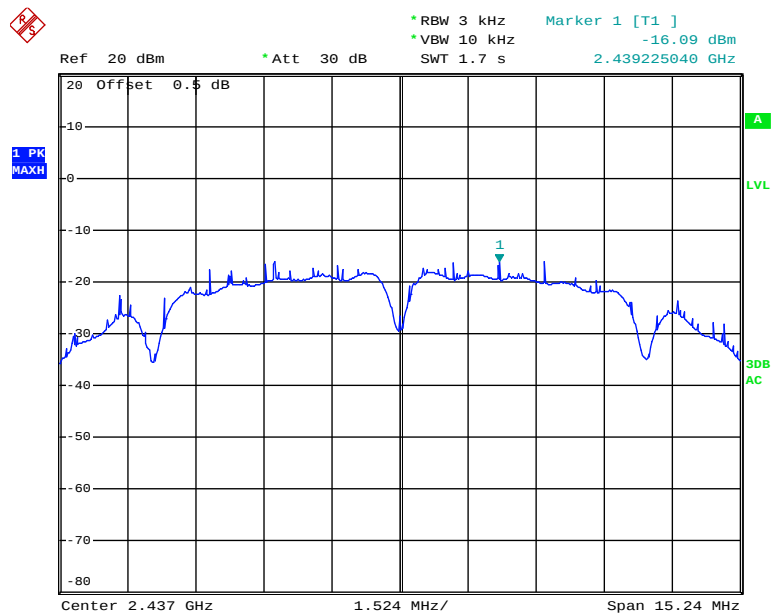


Date: 1.JUN.2020 15:20:43

Power Spectral Density, 802.11b High Channel

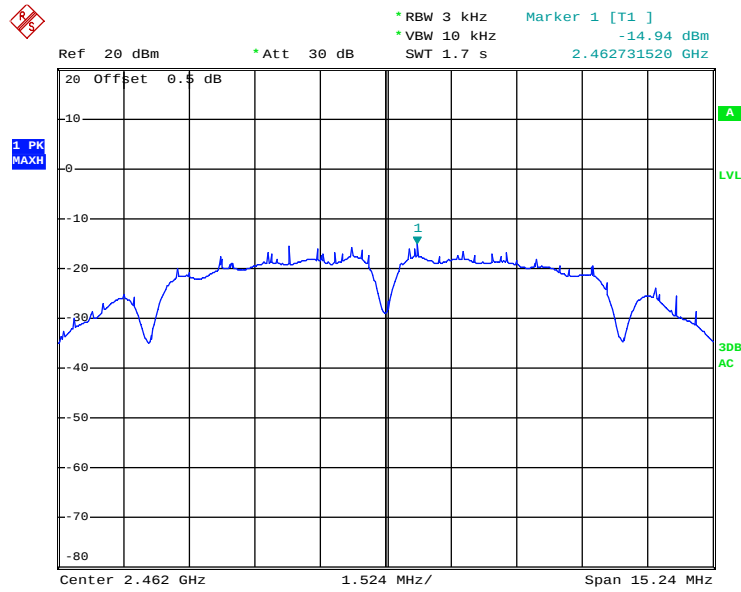


Date: 1.JUN.2020 15:22:13

Power Spectral Density, 802.11g Low Channel

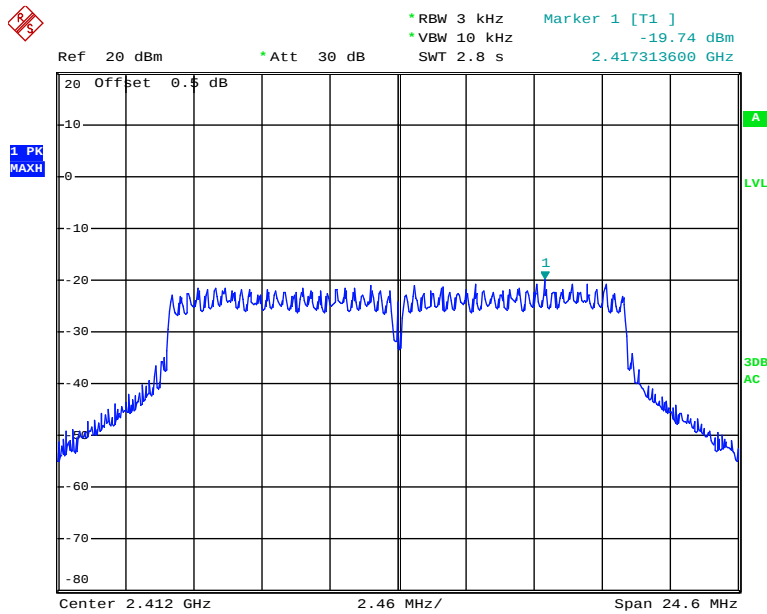


Date: 1.JUN.2020 15:30:05

Power Spectral Density, 802.11g Middle Channel

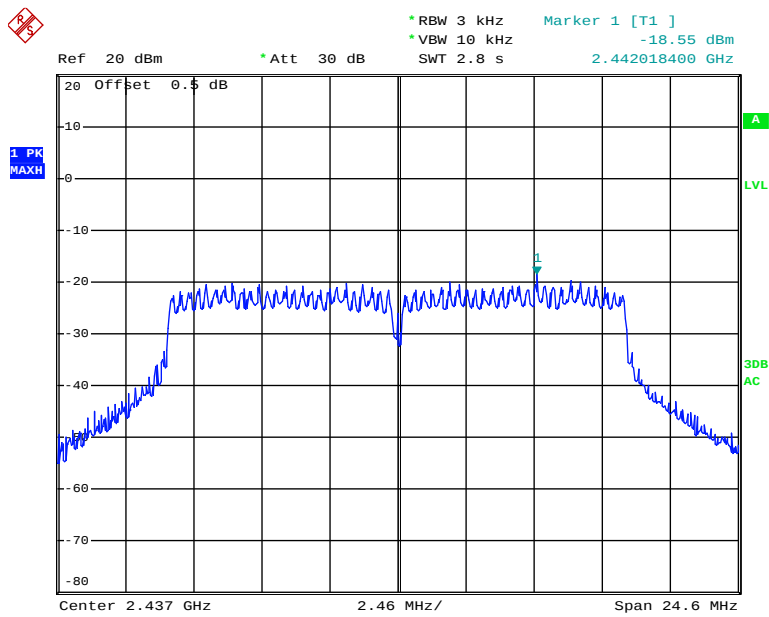


Date: 1.JUN.2020 15:24:54

Power Spectral Density, 802.11g High Channel

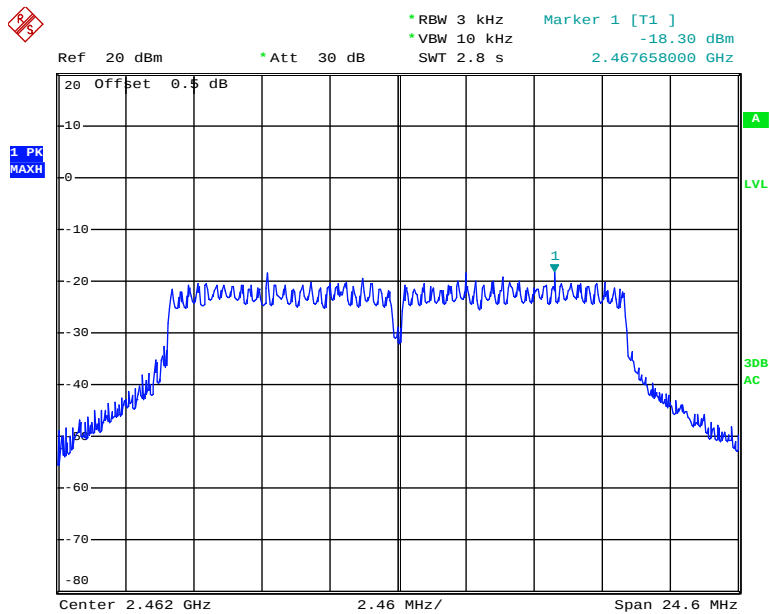


Date: 1.JUN.2020 15:28:56

Power Spectral Density, 802.11n ht20 Low Channel

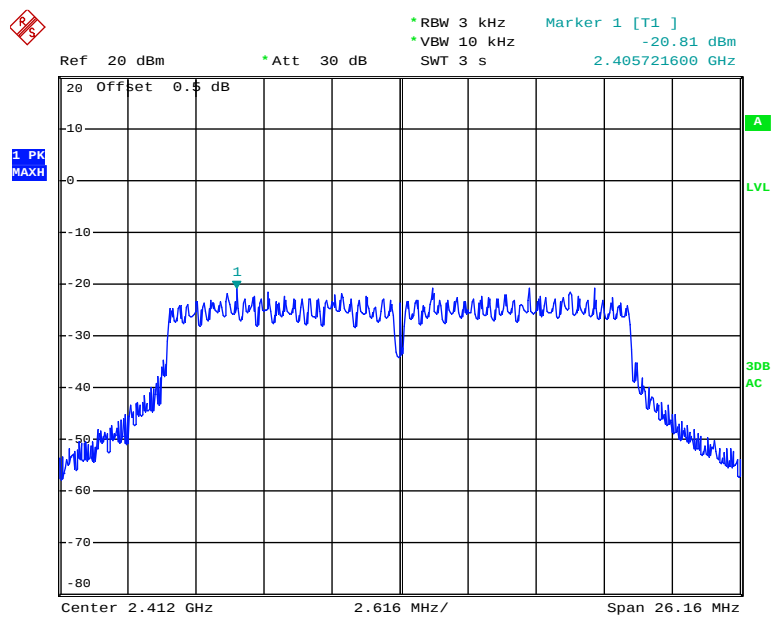


Date: 1.JUN.2020 15:31:13

Power Spectral Density, 802.11n ht20 Middle Channel

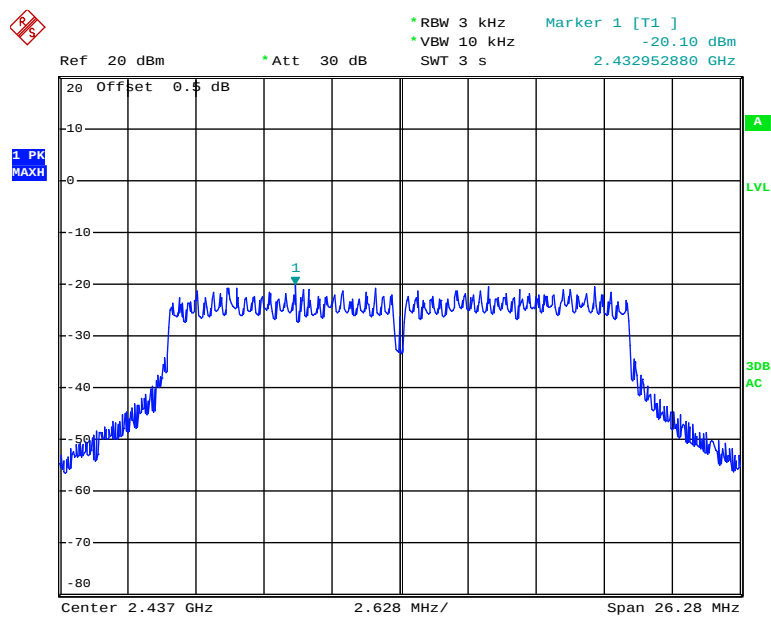


Date: 1.JUN.2020 15:32:09

Power Spectral Density, 802.11n ht20 High Channel

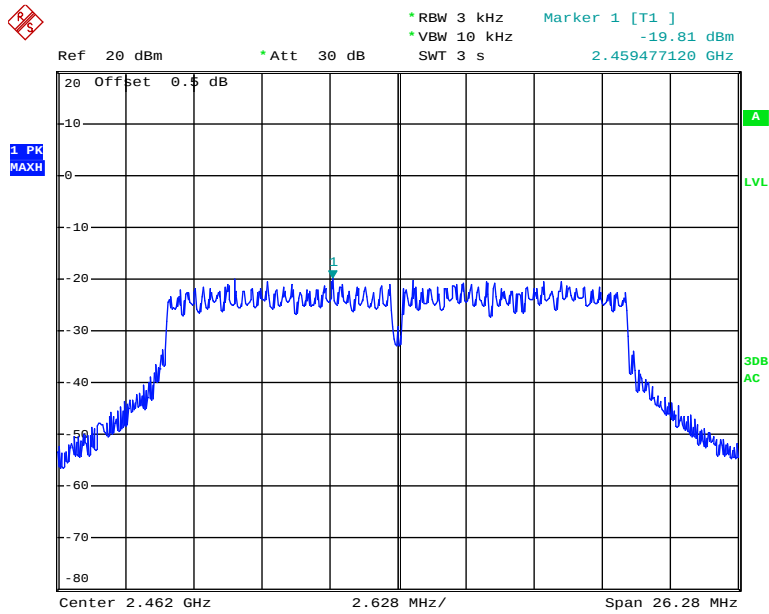


Date: 1.JUN.2020 15:38:54


Power Spectral Density, 802.11n ht40 Low Channel

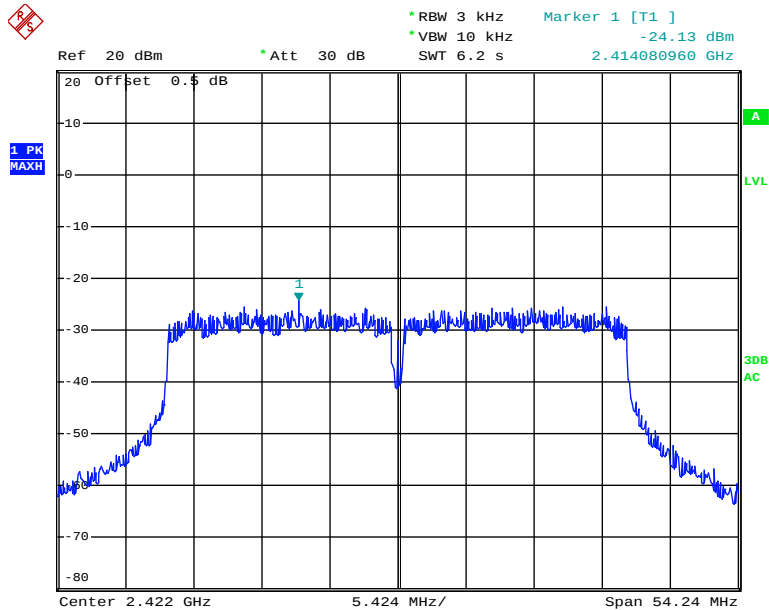

Date: 1.JUN.2020 15:46:40

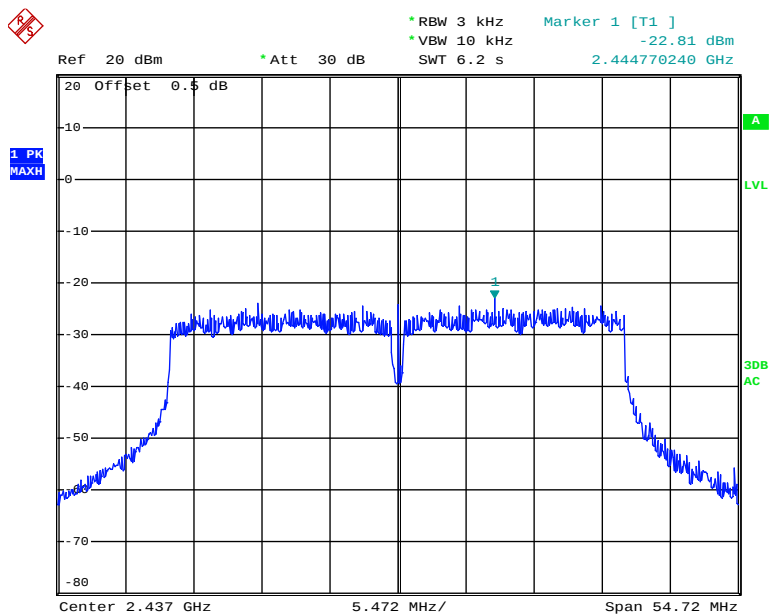Power Spectral Density, 802.11n ht40 Middle Channel


Date: 1.JUN.2020 15:43:13

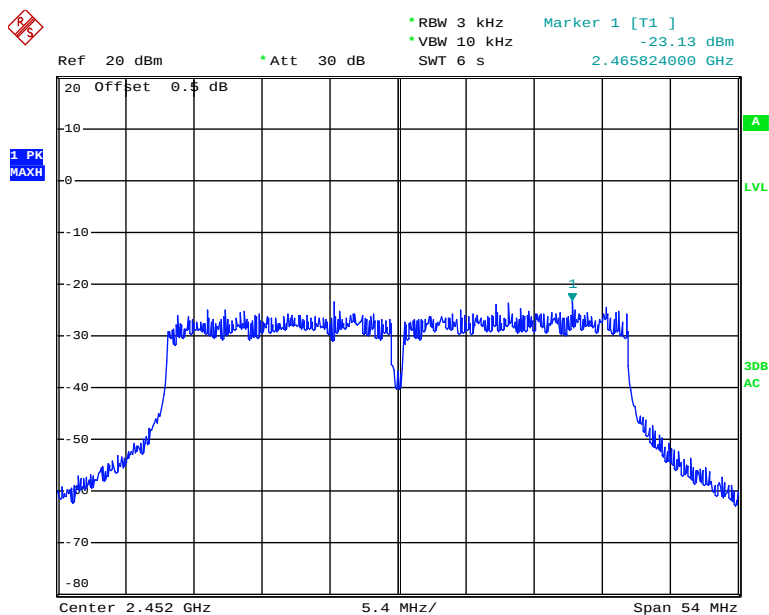Power Spectral Density, 802.11n ht40 High Channel

Date: 1.JUN.2020 15:45:39


Chain 1:

Power Spectral Density, 802.11b Low Channel

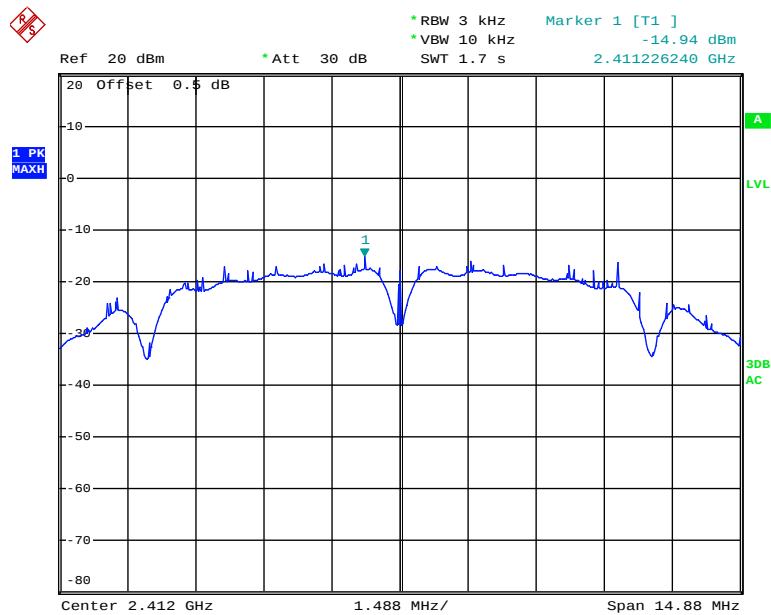


Date: 1.JUN.2020 16:31:54

Power Spectral Density, 802.11b Middle Channel

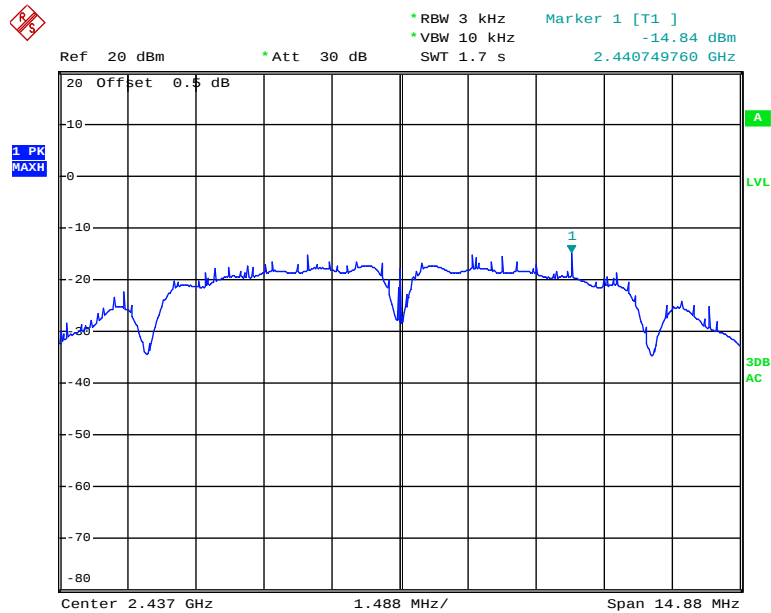


Date: 1.JUN.2020 16:35:29

Power Spectral Density, 802.11b High Channel

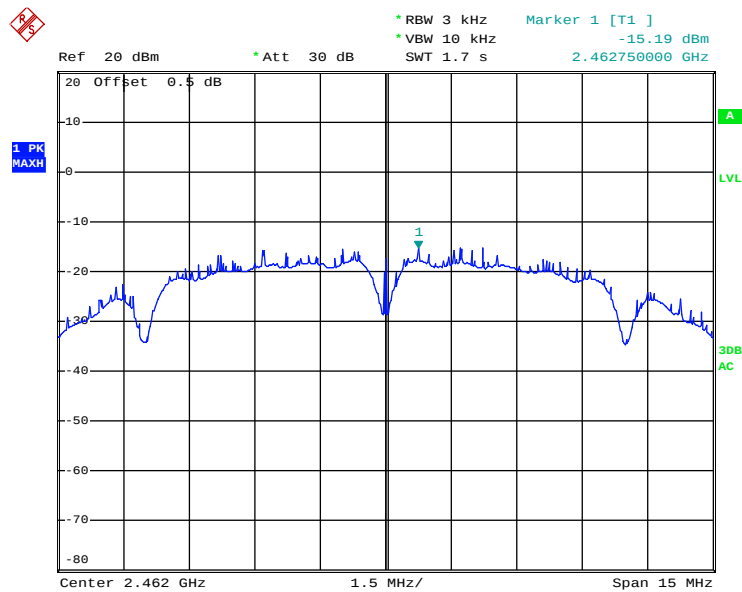


Date: 1.JUN.2020 16:37:13

Power Spectral Density, 802.11g Low Channel

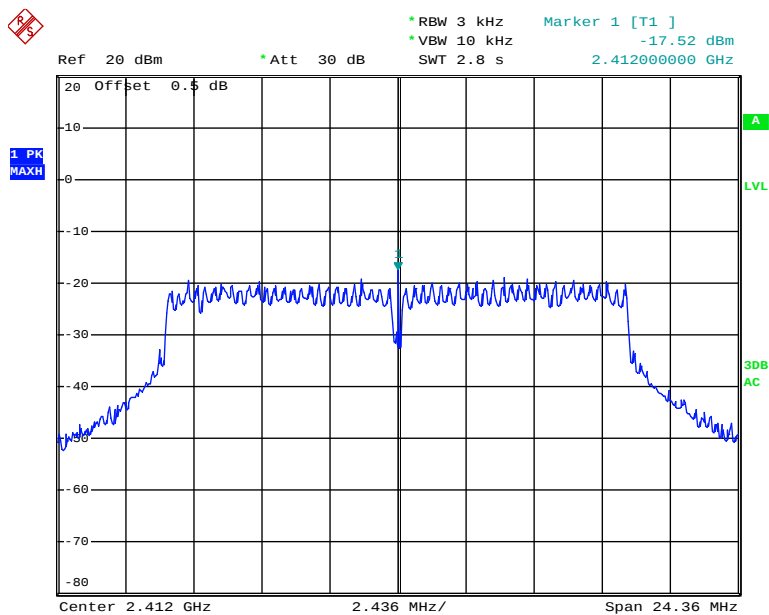


Date: 1.JUN.2020 16:18:48

Power Spectral Density, 802.11g Middle Channel

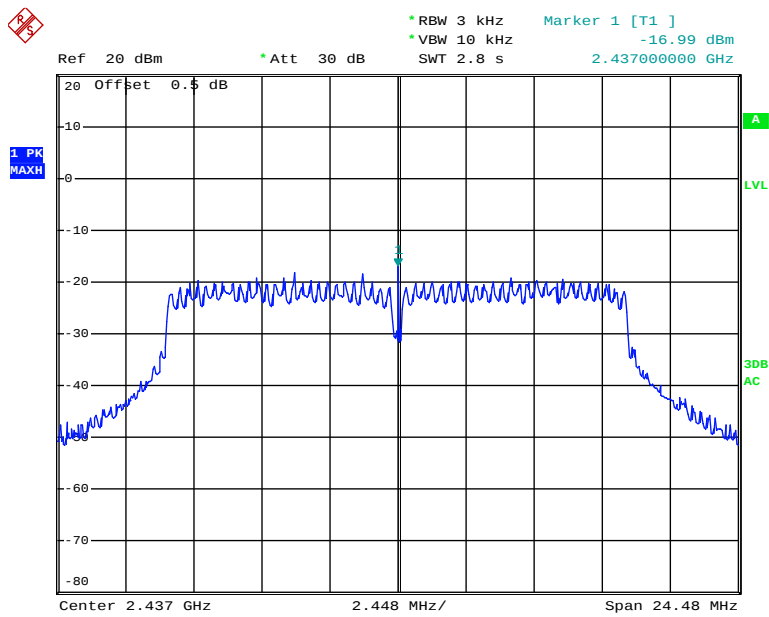


Date: 1.JUN.2020 16:21:56

Power Spectral Density, 802.11g High Channel

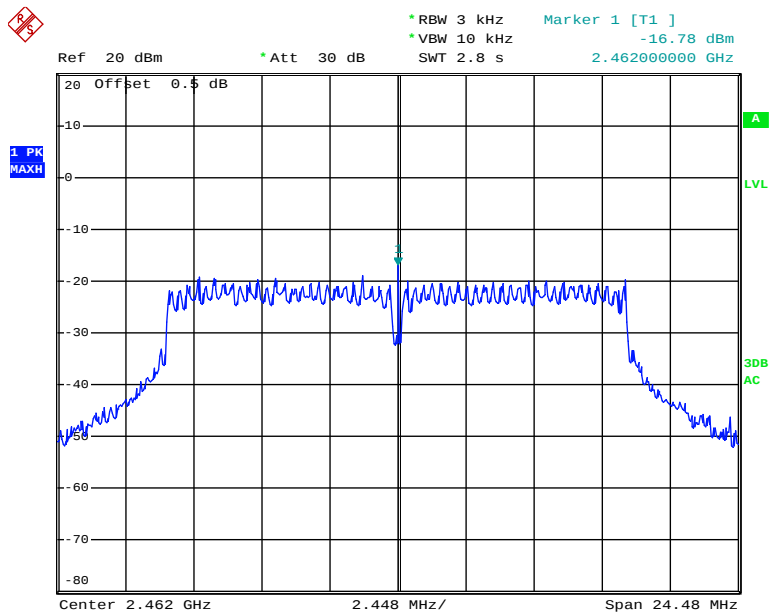


Date: 1.JUN.2020 16:22:41

Power Spectral Density, 802.11n ht20 Low Channel

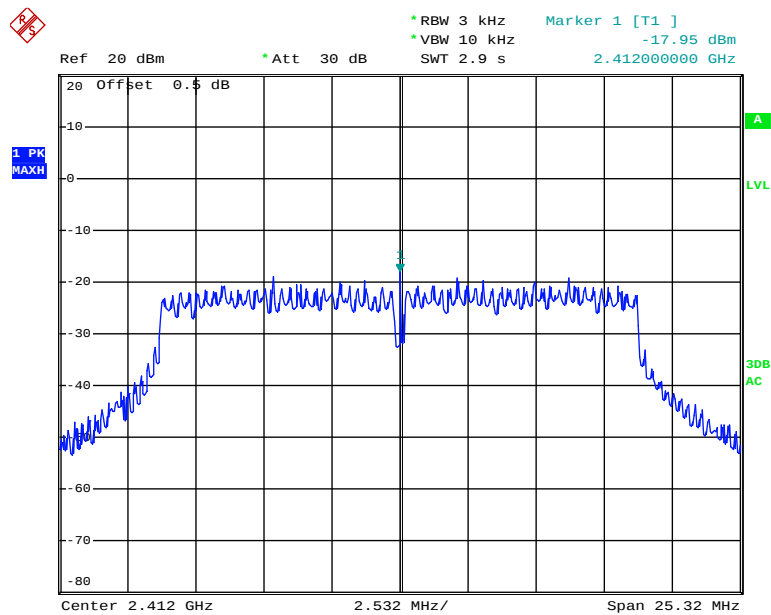


Date: 1.JUN.2020 16:24:46


Power Spectral Density, 802.11n ht20 Middle Channel

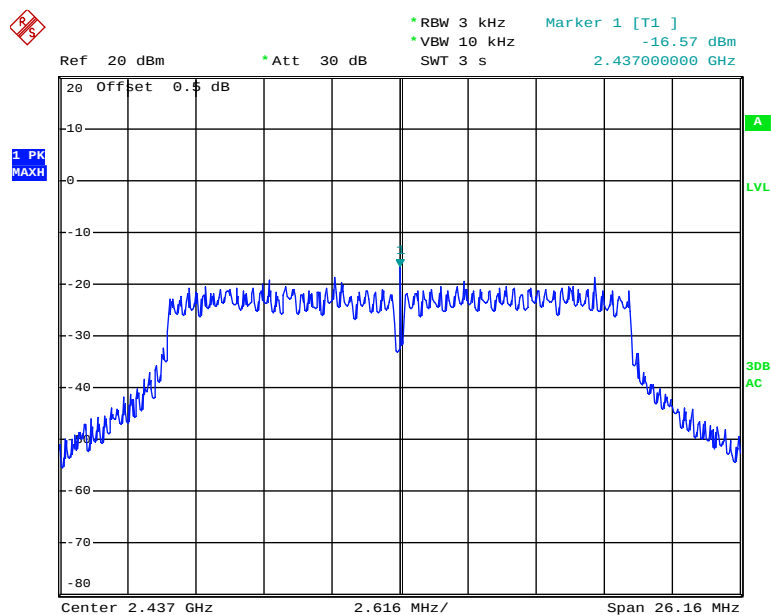

Date: 1.JUN.2020 16:30:40

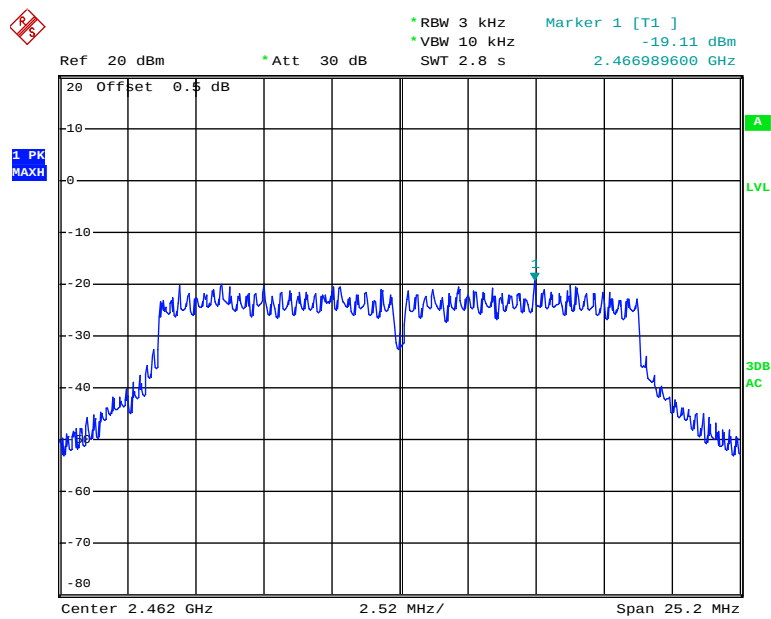
Power Spectral Density, 802.11n ht20 High Channel

Date: 1.JUN.2020 16:28:36

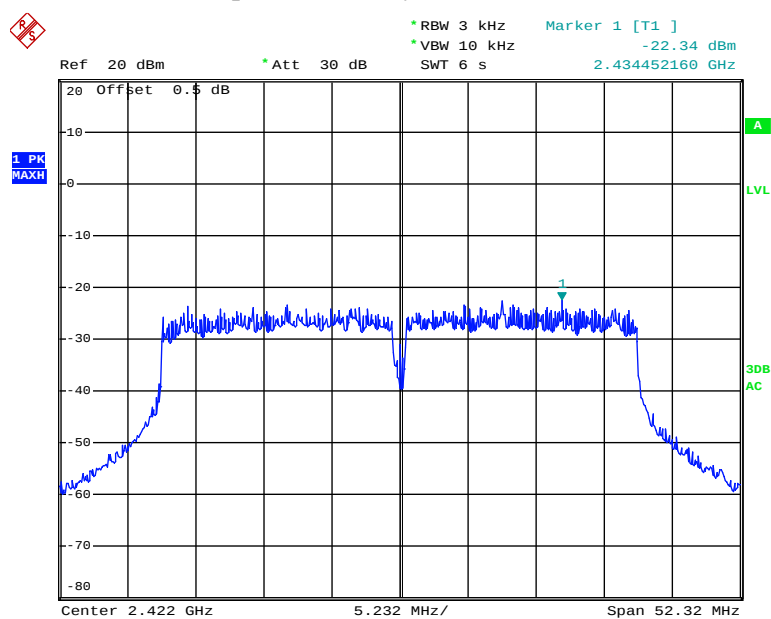Power Spectral Density, 802.11n ht40 Low Channel


Date: 1.JUN.2020 15:48:38

Power Spectral Density, 802.11n ht40 Middle Channel

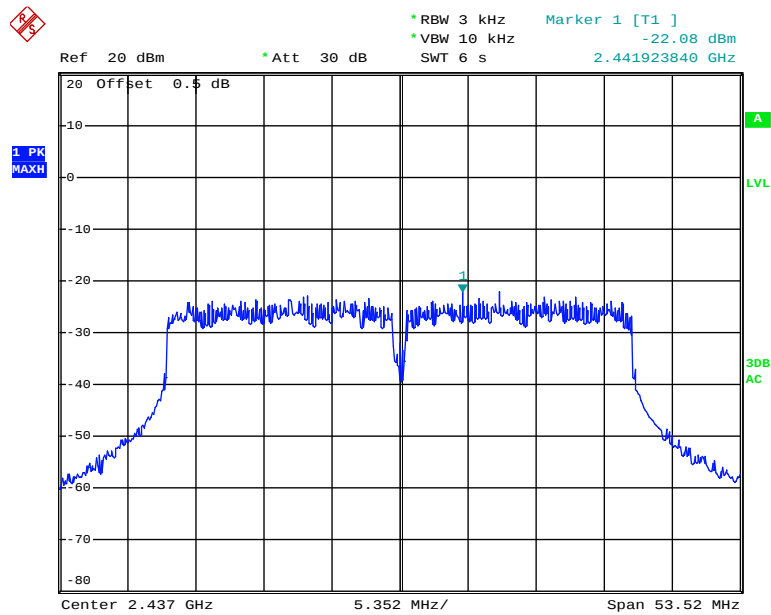

Date: 1.JUN.2020 15:50:20

Power Spectral Density, 802.11n ht40 High Channel

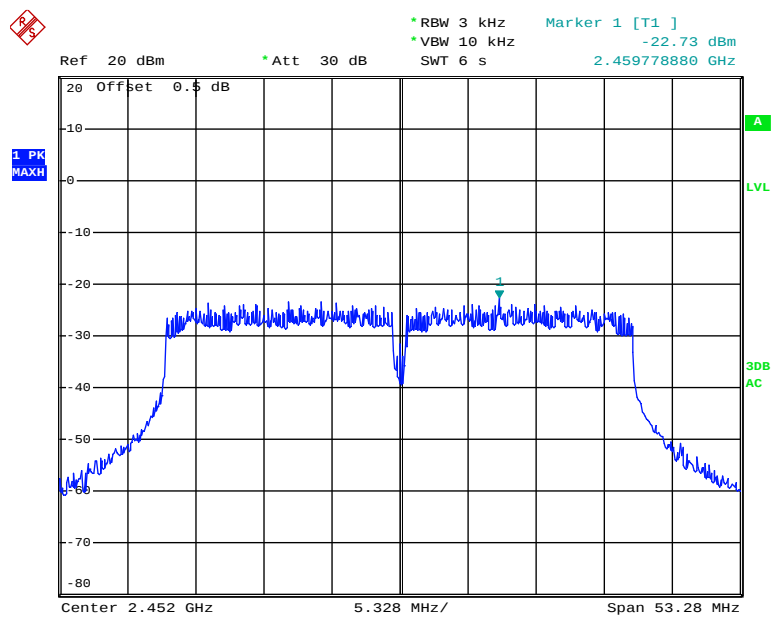

Date: 1.JUN.2020 15:51:22

***** END OF REPORT *****