

TEST REPORT

of

FCC Part 15 Subpart C AND CANADA RSS-247

New Application; Class I PC; Class II PC

Product : Bluetooth V4.1 Module
Brand: Sunrise
Model: FB00000BT
Model Difference: N/A
FCC ID: 2AMPPFB00000BT
IC: 11471A-FB00000BT
FCC Rule Part: §15.247, Cat: DSS
IC Rule Part: RSS-247 issue 2: 2017
RSS-Gen issue 5: 2019
Applicant: Sunrise Technology Co., Ltd
Address: No.28, Longshan St., Xitun Dist., Taichung
City 407, Taiwan

Test Performed by:
International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4;

*Address:

No. 120, Lane 180, Hsin Ho Rd.,
Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-20LR351FCDSS

Issue Date : 2020/11/12



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

The uncertainty of the measurement does not include in consideration of the test result unless the customer required the determination of uncertainty via the agreement, regulation or standard document specification. This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.


VERIFICATION OF COMPLIANCE

Applicant: Sunrise Technology Co., Ltd
Product Description: Bluetooth V4.1 Module
Brand Name: Sunrise
Model No.: FB00000BT
Model Difference: N/A
FCC ID: 2AMPPFB00000BT
IC: 11471A-FB00000BT
Date of test: 2020/10/22 ~ 2020/11/10
Date of EUT Received: 2020/10/21

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.


The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:  **Date:** 2020/11/12

Jason Chao / Senior Engineer

Prepared By:  **Date:** 2020/11/12

Elisa Chen / Senior Engineer

Approved By:  **Date:** 2020/11/12

Jerry Liu / Technical Manager

Version

Version No.	Date	Description
00	2020/11/12	Initial creation of document

Uncertainty of Measurement

ISO/IEC 17025 requires that an estimate of measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	≤ 30MHz: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

Table of Contents

1. General Information	6
1.1. Product Description	6
1.2. Related Submittal(s) / Grant (s)	7
1.3. Test Methodology	7
1.4. Test Facility	7
1.5. Special Accessories	7
1.6. Equipment Modifications	7
1.1. Reference	7
2. System Test Configuration	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 Test Procedure	8
2.4 Configuration of Tested System	9
3. Summary of Test Results	10
4. Description of Test Modes	10
5. Conduced Emission Test	11
5.1 Standard Applicable:	11
5.2 Measurement Equipment Used:	11
5.3 EUT Setup:	11
5.4 Measurement Procedure:	12
5.5 Measurement Result:	12
6. Peak Output Power Measurement	15
6.1 Standard Applicable:	15
6.2 Measurement Equipment Used:	15
6.3 Test Set-up:	16
6.4 Measurement Procedure:	16
6.5 Measurement Result:	17
7. Spurious Emission Test	18
7.1 Standard Applicable:	18
7.2 Measurement Equipment Used:	18
7.3 Test SET-UP:	18
7.4 Measurement Procedure:	19
7.5 Field Strength Calculation	19
7.6 Measurement Result:	19
8. 100kHz Bandwidth of Band Edges Measurement	26
7.1 Standard Applicable:	26
7.2 Measurement Equipment Used:	27
7.3 Test SET-UP:	28
7.4 Measurement Procedure:	29
7.5 Field Strength Calculation	29
7.6 Measurement Result:	29

9. Frequency Separation.....	46
9.1 Standard Applicable:	46
9.2 Measurement Equipment Used:	46
9.3 Test Set-up:	46
9.4 Measurement Procedure:	46
9.5 Measurement Result:	46
10. Number of Hopping Frequency	49
10.1 Standard Applicable:	49
10.2 Measurement Equipment Used:	49
10.3 Test Set-up:	49
10.4 Measurement Procedure:	49
10.5 Measurement Result:	49
11. Time of Occupancy (Dwell Time).....	51
11.1 Standard Applicable:	51
11.2 Measurement Equipment Used:	51
11.3 Test Set-up:	51
11.4 Measurement Procedure:	51
11.5 Measurement Result:	52
12. 20dB Bandwidth & 99% Bandwidth	58
12.1 Standard Applicable:	58
12.2 Measurement Equipment Used:	58
12.3 Test Set-up:	58
12.4 Measurement Procedure:	58
12.5 Measurement Result:	59
13. Antenna Requirement	70
13.1 Standard Applicable:	70
13.2 Antenna Connected Construction:	70

1. General Information

1.1. Product Description

General:

Product Name:	Bluetooth V4.1 Module
Brand Name:	Sunrise
Model Name:	FB00000BT
Model Difference:	N/A
Power Supply:	5Vdc from adaptor (JIG)
USB port:	1 (JIG)
Testing Sample ID:	20170824 REV:10

IC RSS-Gen:

Product SW/HW version	V1.0
Radio SW/HW version	V1.0
PMN (Product Marketing Name)	FB00000BT
HVIN (Hardware Version Identification Number)	FB00000BT
FVIN (Firmware Version Identification Number)	N/A
Test SoftWare Version	Ampak RFTestTool Ver.5.6
RF power setting:	default

BT:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0
Channel number:	79 channels, 1MHz step
Modulation type	GFSK + $\pi/4$ DQPSK + 8DPSK
Tune-up power	-9.95 dBm
Power Tolerance:	+/- 0.5 dBm
Dwell Time:	N/A
Antenna Designation:	PCB Antennas, 2dBi

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AMPPFB00000BT** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 11471A-FB00000BT** filing to comply with Industry Canada RSS-247 issue 2.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory Corp.**<LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

1.1. Reference

KDB Document: 558074 D01 15.247 Meas Guidance v05r02.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was tested with a test program to fix the TX/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013 and RSS-Gen issue 5: 2019. Con-ducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8/1.5 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” Is still within the 3dB illumination BW of the measurement antenna. According to the requirements in Section 8 and 13 and Sub-clause 8.3.1.2 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)

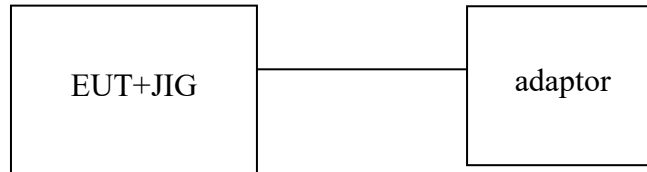


Table 1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	JIG	NA	NA	NA	Non-Shielded	Non-Shielded
2	adaptor	NA	PA005A-05010CN	NA	NA	Non-Shielded

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207(a)/ RSS-Gen §8.8	AC Power line Conducted Emission	Compliant
§15.247(b)(1)/ RSS-247 issue 2, §A5.4(b)	Peak Output Power	Compliant
§15.247(d) RSS-247 issue 2, §5.5	100 kHz Bandwidth of Frequency Band Edges	Compliant
§15.247(c) RSS-247 issue 2, §5.5	Spurious Emission	Compliant
§15.247(a)(1)/ RSS-247 issue 2, §A5.1(b)	Frequency Separation	Compliant
§15.247(a)(1)(iii)/ RSS-247 issue 2, §A5.1(d)	Number of hopping frequency	Compliant
§15.247(a)(1)(ii)/ RSS-247 issue 2, §A5.1(d)	Time of Occupancy	Compliant
§15.247(a)(1) RSS-Gen §6.6 RSS-247 issue 2, §5.1(a)	20dB Bandwidth & 99% Power Bandwidth	Compliant
§15.203, §15.247(c) RSS-GEN 8.3	Antenna Requirement	Compliant

4. Description of Test Modes

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) 、mid (2441MHz) and high (2480MHz) with each modulation were chosen for full testing.

All mode has been pre-scanned, and only the cast of the worst is presented in the report.

The worst case BDR mode was reported for Radiated Emission.

5. Conduced Emission Test

5.1 Standard Applicable:

According to §15.207 and RSS-Gen §8.8, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction 02	LISN 03	R&S	ESH3-Z5	828874/010	11/05/2020	11/05/2021
Conduction 02	LISN 21	R&S	ENV216	101476	07/21/2020	07/21/2021
Conduction 02	Conduction 02-1 Cable	WOKEN	CFD 300-NL	Conduction 02 -1	09/18/2020	09/18/2021
Conduction 02	EMI Receiver 14	ROHDE&SCHWARZ	ESCI	101034	05/22/2020	05/22/2021
Conduction 02	ISN T4 07	Teseq GmbH	ISN T400A	49913	08/02/2020	08/02/2021
Conduction 02	ISN T8 10	Teseq GmbH	ISN T800	42773	08/02/2020	08/02/2021

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10-2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operation	Test Date:	2020/11/03
-----------------	------------------	------------	------------



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718


Conducted Emission Measurement

Date: 2020/11/3

operator: Jeff Chou

Temperature: 26 °C

Humidity: 60 %

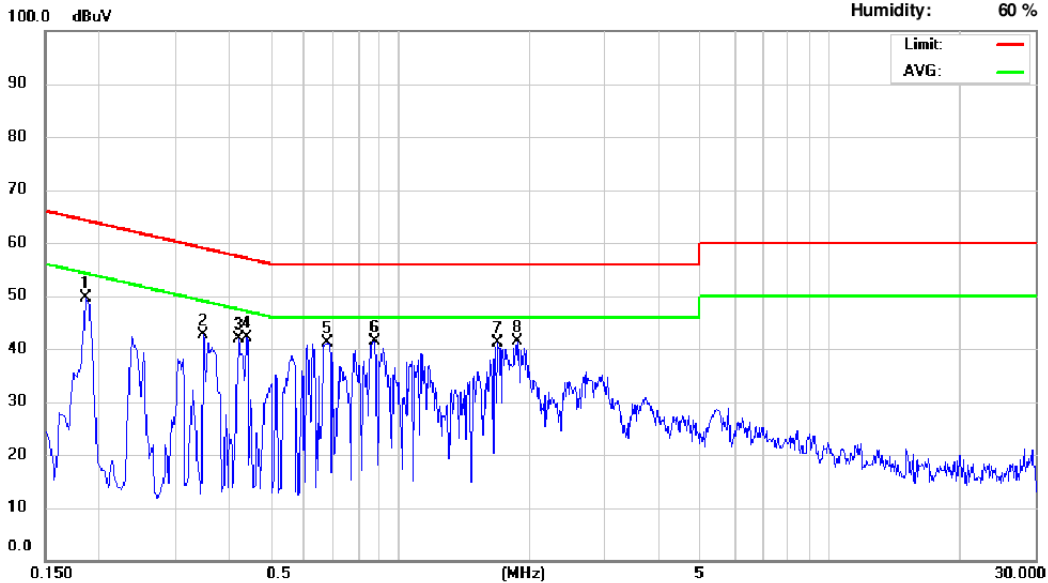

Site: Conduction 02

Phase: L1

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.186	37.34	27.06	9.68	47.02	64.21	-17.19	36.74	54.21	-17.47
2	0.350	22.91	1.18	9.69	32.60	58.96	-26.36	10.87	48.96	-38.09
3	0.422	31.52	21.25	9.69	41.21	57.41	-16.20	30.94	47.41	-16.47
4	0.442	32.18	17.28	9.69	41.87	57.02	-15.15	26.97	47.02	-20.05
5	0.678	29.83	18.98	9.70	39.53	56.00	-16.47	28.68	46.00	-17.32
6	0.870	30.24	15.97	9.70	39.94	56.00	-16.06	25.67	46.00	-20.33
7	1.686	29.04	13.42	9.74	38.78	56.00	-17.22	23.16	46.00	-22.84
8	1.874	29.01	14.06	9.75	38.76	56.00	-17.24	23.81	46.00	-22.19



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718


Conducted Emission Measurement

Date: 2020/11/3

operator: Jeff Chou

Temperature: 26 °C

Humidity: 60 %

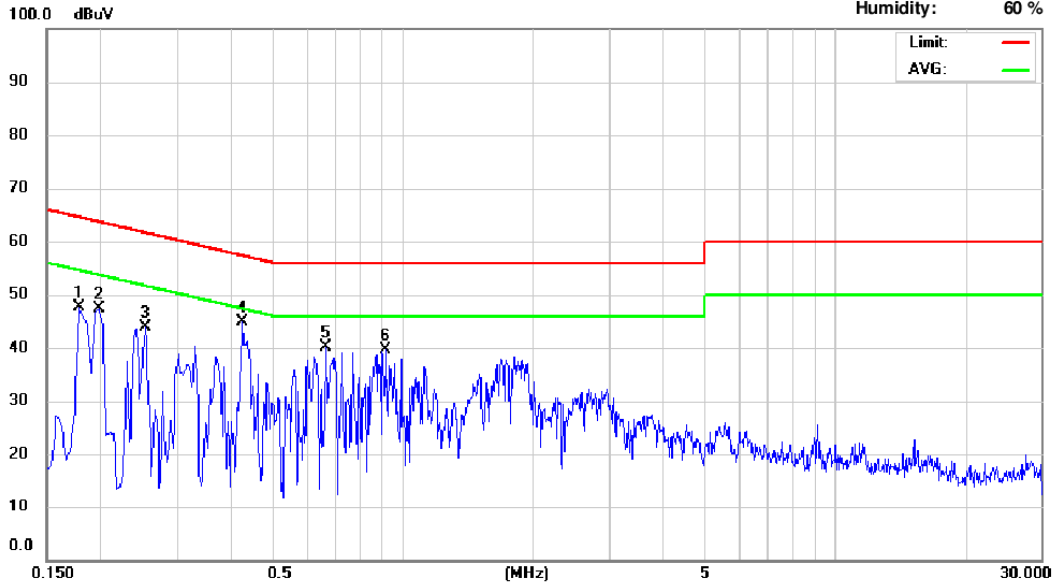

Site: Conduction 02

Phase: N

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.178	35.67	18.19	9.68	45.35	64.58	-19.23	27.87	54.58	-26.71
2	0.198	30.43	7.38	9.68	40.11	63.69	-23.58	17.06	53.69	-36.63
3	0.254	30.37	10.06	9.68	40.05	61.63	-21.58	19.74	51.63	-31.89
4	0.426	27.93	16.33	9.68	37.61	57.33	-19.72	26.01	47.33	-21.32
5	0.662	24.85	8.37	9.69	34.54	56.00	-21.46	18.06	46.00	-27.94
6	0.914	19.74	8.35	9.70	29.44	56.00	-26.56	18.05	46.00	-27.95

6. Peak Output Power Measurement

6.1 Standard Applicable:


According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

According to RSS-247 issue 2, §A5.4(b), For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

6.2 Measurement Equipment Used:

Location Conducted	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conducted	Power Meter	Anritsu	ML2495A	1116010	09/25/2020	09/25/2021
Conducted	Power Sensor	Anritsu	MA2411B	34NKF50	09/25/2020	09/25/2021
Conducted	Power Sensor	DARE	RPR3006W	13I00030SNO33	01/03/2020	01/03/2021
Conducted	Power Sensor	DARE	RPR3006W	13I00030SNO34	01/09/2020	01/09/2021
Conducted	Power Sensor	DARE	RPR3006W	14I00889SNO35	06/29/2020	06/29/2021
Conducted	Power Sensor	DARE	RPR3006W	14I00889SNO36	06/29/2020	06/29/2021
Conducted	Temperature Chamber	KSON	THS-B4H100	2287	03/11/2020	03/11/2021
Conducted	DC Power supply	ABM	8185D	N/A	01/03/2020	01/03/2021
Conducted	AC Power supply	EXTECH	CFC105W	NA	N/A	N/A
Conducted	Spectrum analyzer	Keysight	N9010A	MY56070257	09/23/2020	09/23/2021
Conducted	Spectrum analyzer	R&S	FSP40	100116	01/10/2020	01/10/2021
Conducted	Test Software	DARE	Radiation Ver:2013.1.23	NA	NA	NA

6.3 Test Set-up:

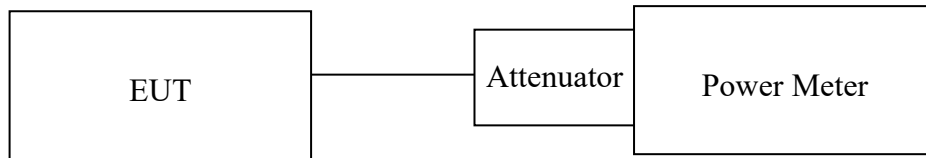

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

BDR Mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	-9.95	0.00010	1
Mid	-11.24	0.00008	1
High	-13.03	0.00005	1

EDR 2M Mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	-10.42	0.00009	0.125
Mid	-11.99	0.00006	0.125
High	-13.65	0.00004	0.125

EDR 3M Mode

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	-10.53	0.00009	0.125
Mid	-12.18	0.00006	0.125
High	-13.86	0.00004	0.125

Offset: 2dB

7. Spurious Emission Test

7.1 Standard Applicable:

According to §15.247(d), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-247 issue 2, §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

7.2.2. Radiated emission:

Refer to section 7.2 for details.

7.3 Test SET-UP:

The test item only performed radiated mode

Refer to section 7.3 for details.

7.4 Measurement Procedure:

1. According 414788 section 2, Either OATS or chamber for radiated emission below 30MHz, the test was done at 966 chamber, the test site was evaluated with OATS and the Chamber has test signals level greater than OATS's .
2. The EUT was placed on a turn table which is 0.8m/1.5m above ground plane in 966 chamber.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Repeat above procedures until all frequency measured were complete.

7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result: (below 1GHz) (Worst case: BDR)

Operation Mode TX CH Low Test Date 2020/11/18
 Fundamental Frequency 2402MHz
 Temperature 24°C Humidity 64%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	35.82	32.36	-6.15	26.21	40.00	-13.79	Peak	VERTICAL
2	60.07	31.29	-5.92	25.37	40.00	-14.63	Peak	VERTICAL
3	208.48	44.96	-7.23	37.73	43.50	-5.77	Peak	VERTICAL
4	292.87	31.70	-4.02	27.68	46.00	-18.32	Peak	VERTICAL
5	576.11	32.06	1.05	33.11	46.00	-12.89	Peak	VERTICAL
6	838.01	29.10	5.17	34.27	46.00	-11.73	Peak	VERTICAL
1	127.00	35.05	-7.11	27.94	43.50	-15.56	Peak	HORIZONTAL
2	137.67	33.15	-5.73	27.42	43.50	-16.08	Peak	HORIZONTAL
3	208.48	44.44	-7.23	37.21	43.50	-6.29	Peak	HORIZONTAL
4	283.17	33.91	-4.26	29.65	46.00	-16.35	Peak	HORIZONTAL
5	576.11	39.18	1.05	40.23	46.00	-5.77	Peak	HORIZONTAL
6	864.20	28.97	5.42	34.39	46.00	-11.61	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Mid Test Date 2020/11/18
 Fundamental Frequency 2441MHz
 Temperature 24°C Humidity 64%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	35.82	33.60	-6.15	27.45	40.00	-12.55	Peak	VERTICAL
2	125.06	32.16	-7.31	24.85	43.50	-18.65	Peak	VERTICAL
3	208.48	45.13	-7.23	37.90	43.50	-5.60	Peak	VERTICAL
4	576.11	32.97	1.05	34.02	46.00	-11.98	Peak	VERTICAL
5	656.62	29.32	2.31	31.63	46.00	-14.37	Peak	VERTICAL
6	857.41	28.41	5.47	33.88	46.00	-12.12	Peak	VERTICAL
1	125.06	35.16	-7.31	27.85	43.50	-15.65	Peak	HORIZONTAL
2	208.48	43.87	-7.23	36.64	43.50	-6.86	Peak	HORIZONTAL
3	273.47	33.11	-4.64	28.47	46.00	-17.53	Peak	HORIZONTAL
4	292.87	32.63	-4.02	28.61	46.00	-17.39	Peak	HORIZONTAL
5	576.11	38.83	1.05	39.88	46.00	-6.12	Peak	HORIZONTAL
6	822.49	28.39	5.09	33.48	46.00	-12.52	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH High Test Date 2020/11/18
 Fundamental Frequency 2480MHz
 Temperature 24°C Humidity 64%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	35.82	32.82	-6.15	26.67	40.00	-13.33	Peak	VERTICAL
2	125.06	33.37	-7.31	26.06	43.50	-17.44	Peak	VERTICAL
3	208.48	44.89	-7.23	37.66	43.50	-5.84	Peak	VERTICAL
4	480.08	30.86	-0.78	30.08	46.00	-15.92	Peak	VERTICAL
5	576.11	31.33	1.05	32.38	46.00	-13.62	Peak	VERTICAL
6	794.36	28.26	4.65	32.91	46.00	-13.09	Peak	VERTICAL
1	123.12	35.10	-7.43	27.67	43.50	-15.83	Peak	HORIZONTAL
2	208.48	43.20	-7.23	35.97	43.50	-7.53	Peak	HORIZONTAL
3	283.17	34.44	-4.26	30.18	46.00	-15.82	Peak	HORIZONTAL
4	302.57	33.19	-3.86	29.33	46.00	-16.67	Peak	HORIZONTAL
5	576.11	38.27	1.05	39.32	46.00	-6.68	Peak	HORIZONTAL
6	882.63	28.85	5.80	34.65	46.00	-11.35	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	2020/11/18
Fundamental Frequency	2402 MHz		
Temperature	24°C	Humidity	64%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4804.00	46.91	-6.73	40.18	74.00	-33.82	Peak	VERTICAL
2	7206.00	47.20	-2.89	44.31	74.00	-29.69	Peak	VERTICAL
3	7587.00	47.96	-2.53	45.43	74.00	-28.57	Peak	VERTICAL
1	4804.00	48.31	-6.73	41.58	74.00	-32.42	Peak	HORIZONTAL
2	7206.00	46.56	-2.89	43.67	74.00	-30.33	Peak	HORIZONTAL
3	7881.00	47.69	-1.99	45.70	74.00	-28.30	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	2020/11/18
Fundamental Frequency	2441 MHz		
Temperature	24°C	Humidity	64%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4882.00	47.34	-6.61	40.73	74.00	-33.27	Peak	VERTICAL
2	7323.00	46.21	-2.86	43.35	74.00	-30.65	Peak	VERTICAL
3	7811.00	47.79	-2.08	45.71	74.00	-28.29	Peak	VERTICAL
1	4882.00	46.47	-6.61	39.86	74.00	-34.14	Peak	HORIZONTAL
2	7323.00	46.69	-2.86	43.83	74.00	-30.17	Peak	HORIZONTAL
3	7538.00	47.96	-2.66	45.30	74.00	-28.70	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	2020/11/18
Fundamental Frequency	2480 MHz	Humidity	64%
Temperature	24°C		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4960.00	46.89	-6.45	40.44	74.00	-33.56	Peak	VERTICAL
2	7440.00	46.51	-2.83	43.68	74.00	-30.32	Peak	VERTICAL
3	7678.00	48.58	-2.31	46.27	74.00	-27.73	Peak	VERTICAL
1	4960.00	46.65	-6.45	40.20	74.00	-33.80	Peak	HORIZONTAL
2	6852.00	48.70	-2.86	45.84	74.00	-28.16	Peak	HORIZONTAL
3	7440.00	46.22	-2.83	43.39	74.00	-30.61	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

8. 100kHz Bandwidth of Band Edges Measurement

7.1 Standard Applicable:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

According to RSS-247 issue 2, §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.


7.2.2. Radiated emission:

Location Conducted	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Chamber 19	Spectrum analyzer	R&S	FSV40	101919	08/13/2020	08/13/2021
Chamber 19	EMI Receiver	R&S	ESR3	102461	05/05/2020	05/05/2021
Chamber 19	Loop Antenna	EM	EM-6879	271	05/21/2020	05/21/2021
Chamber 19	Bilog Antenna (30MHz-1GHz)	Schwarzbeck	VULB9168 w 5dB Att.	736	02/11/2020	02/11/2021
Chamber 19	Horn antenna (1GHz-18GHz)	ETS LIND-GREN	3117	00218718	09/25/2020	09/25/2021
Chamber 19	Horn antenna (18GHz-26GHz)	Com-power	AH-826	081001	11/25/2019	11/25/2020
Chamber 19	Horn antenna (26GHz-40GHz)	Com-power	AH-640	100A	03/13/2020	03/13/2021
Chamber 19	Preamplifier (9kHz-1GHz)	HP	8447F	3113A04621	06/19/2020	06/19/2021
Chamber 19	Preamplifier (1GHz-26GHz)	EM	EM01M26G	060681	05/04/2020	05/04/2021
Chamber 19	Preamplifier (26GHz-40GHz)	MITEQ	JS4-26004000-27-5A	818471	05/04/2020	05/04/2021
Chamber 19	RF Cable (9kHz-18GHz)	HUBER HNER SU-	Sucoflex 104A	MY1397/4A	01/10/2020	01/10/2021
Chamber 19	RF Cable (18GHz-40GHz)	HUBER HNER SU-	Sucoflex 102	27963/2&37421/2	11/21/2019	11/21/2020
Chamber 19	Signal Generator	Anritsu	MG3692A	20311	01/06/2020	01/06/2021
Chamber 19	Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


7.3 Test SET-UP:

The test item only performed radiated mode

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

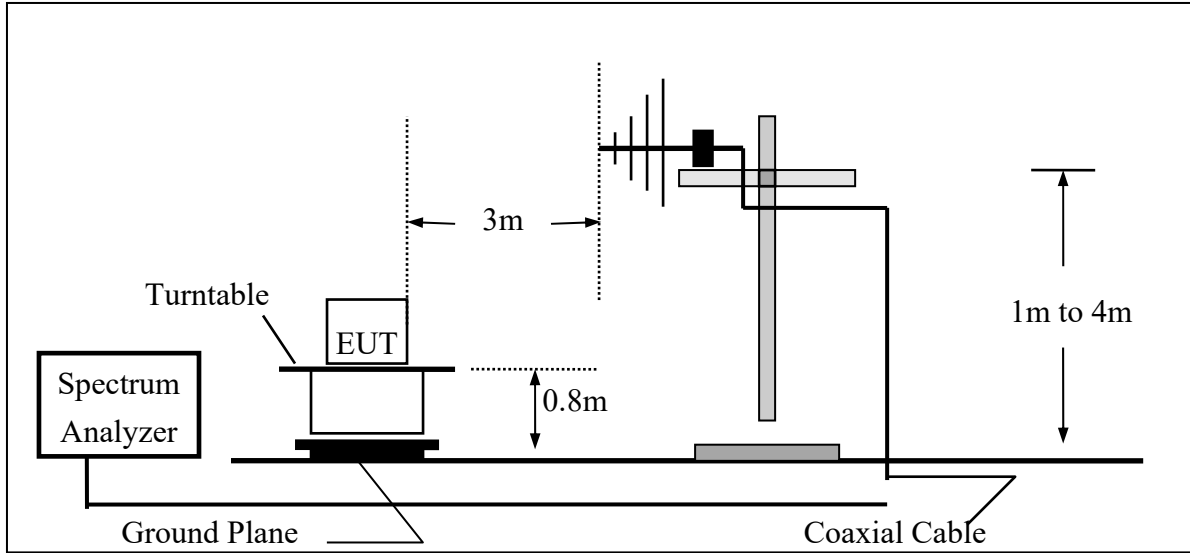

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

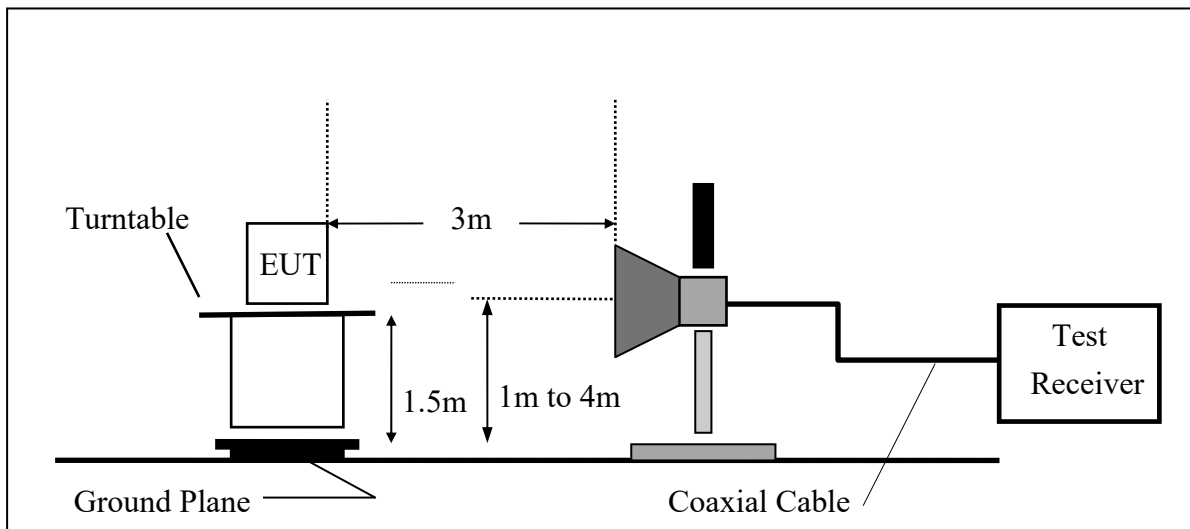

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


7.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Emission: (BDR mode)

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 24°C

Test Date 2020/11/18
Humidity 64%

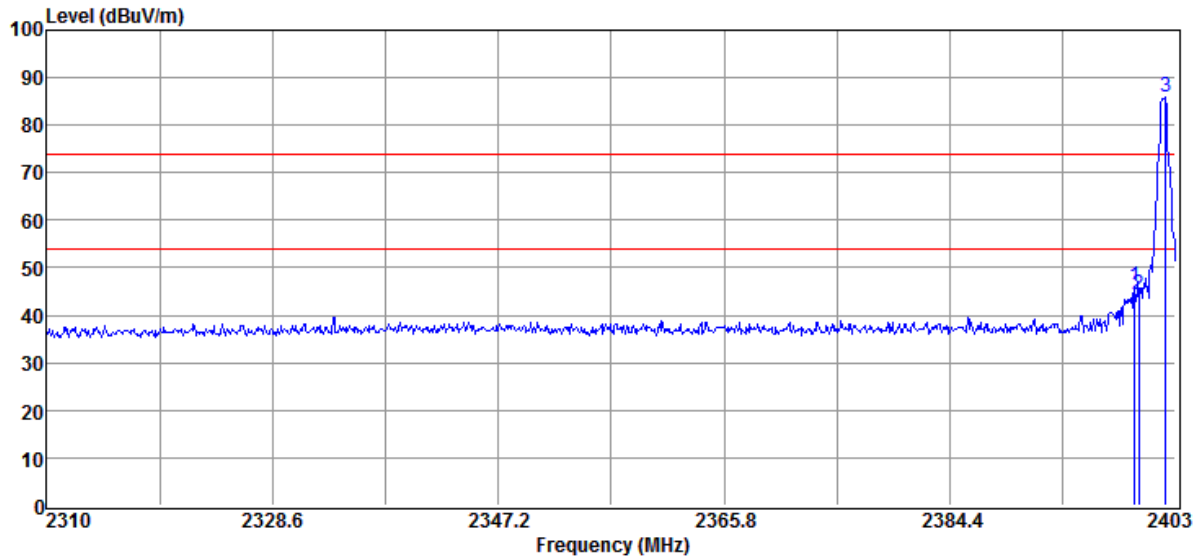


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	49.20	-11.43	37.77	74.00	-36.23	Peak	VERTICAL
2	2399.65	57.39	-11.42	45.97	74.00	-28.03	Peak	VERTICAL
3	2400.00	55.92	-11.42	44.50	66.01	-21.51	Peak	VERTICAL
4	2402.16	97.42	-11.41	86.01	F	-	Peak	VERTICAL

Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

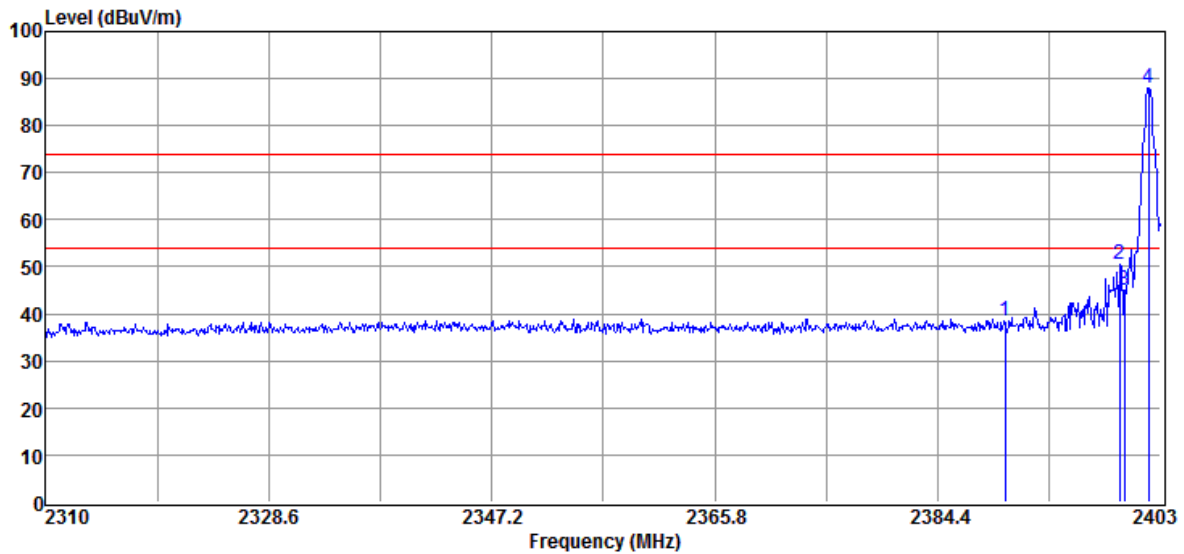

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	49.91	-11.43	38.48	74.00	-35.52	Peak	HORIZONTAL
2	2399.56	62.06	-11.42	50.64	74.00	-23.36	Peak	HORIZONTAL
3	2400.00	56.36	-11.42	44.94	68.11	-23.17	Peak	HORIZONTAL
4	2401.98	99.52	-11.41	88.11	F	-	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 24°C

Test Date 2020/11/18
Humidity 64%

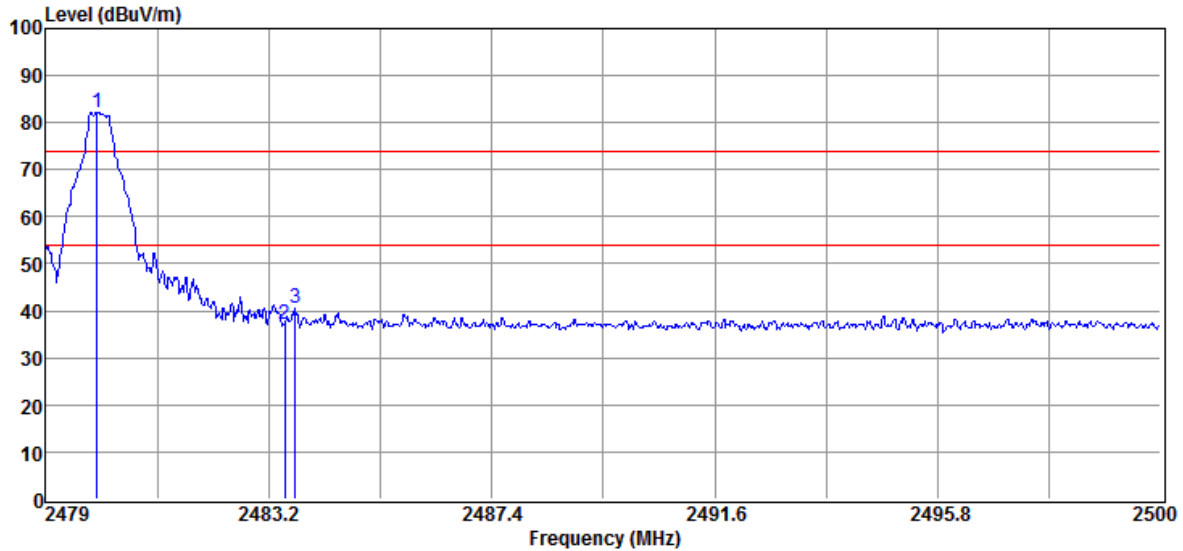


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2479.97	93.56	-11.30	82.26	F	-	Peak	VERTICAL
2	2483.50	48.27	-11.29	36.98	74.00	-37.02	Peak	VERTICAL
3	2483.70	51.95	-11.29	40.66	74.00	-33.34	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

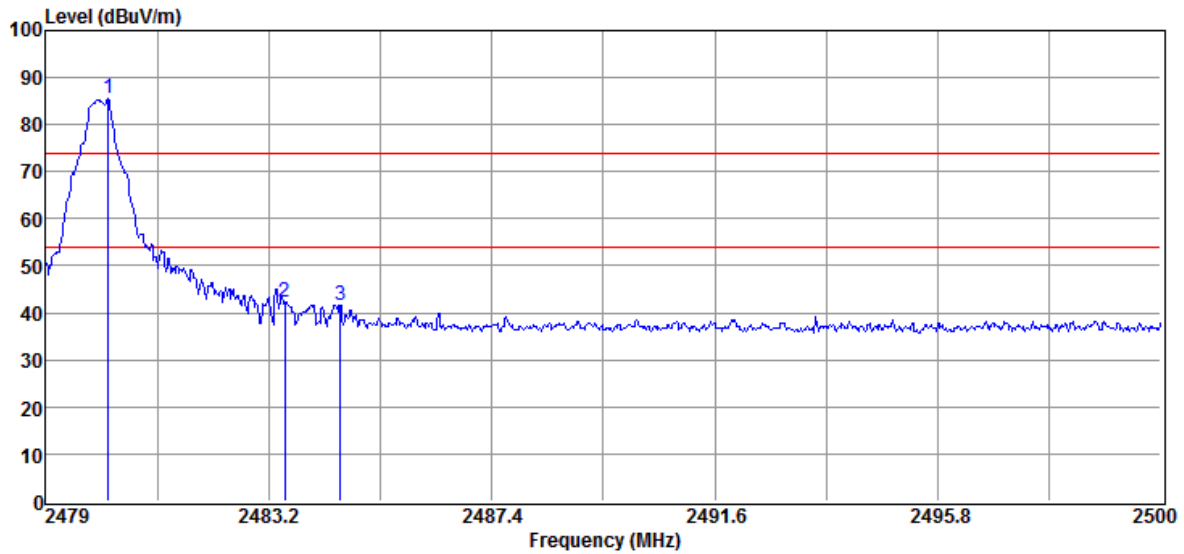

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.18	96.71	-11.30	85.41	F	-	Peak	HORIZONTAL
2	2483.50	53.42	-11.29	42.13	74.00	-31.87	Peak	HORIZONTAL
3	2484.54	53.03	-11.29	41.74	74.00	-32.26	Peak	HORIZONTAL

Remark:


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Radiated Emission (EDR 2M mode):

Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 24°C

Test Date 2020/11/18
 Humidity 64%

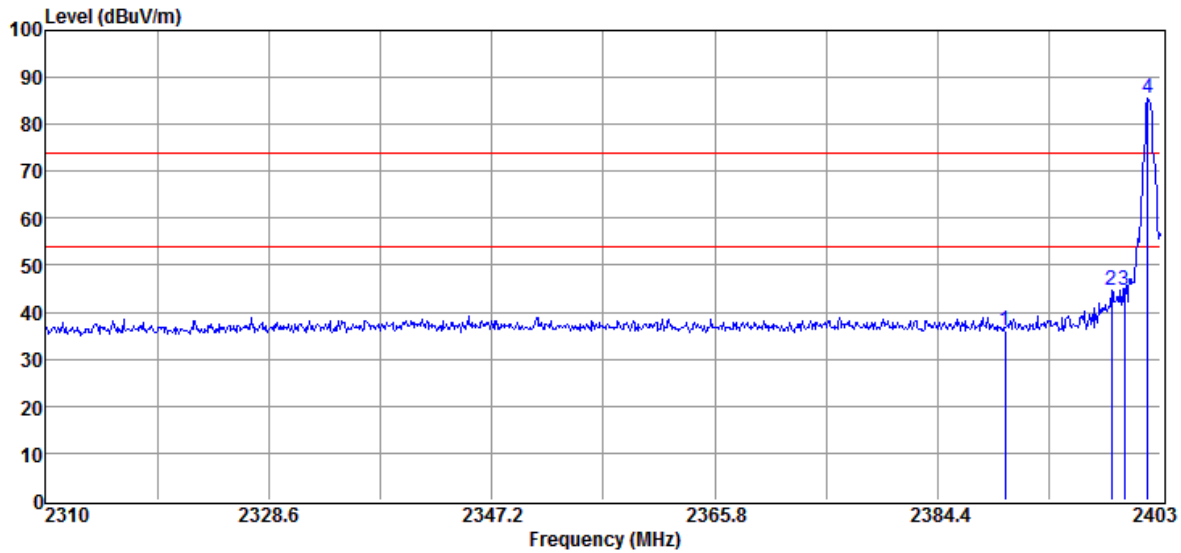


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	47.53	-11.43	36.10	74.00	-37.90	Peak	VERTICAL
2	2398.91	56.12	-11.42	44.70	74.00	-29.30	Peak	VERTICAL
3	2400.00	56.25	-11.42	44.83	65.49	-20.66	Peak	VERTICAL
4	2401.88	96.90	-11.41	85.49	F	-	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

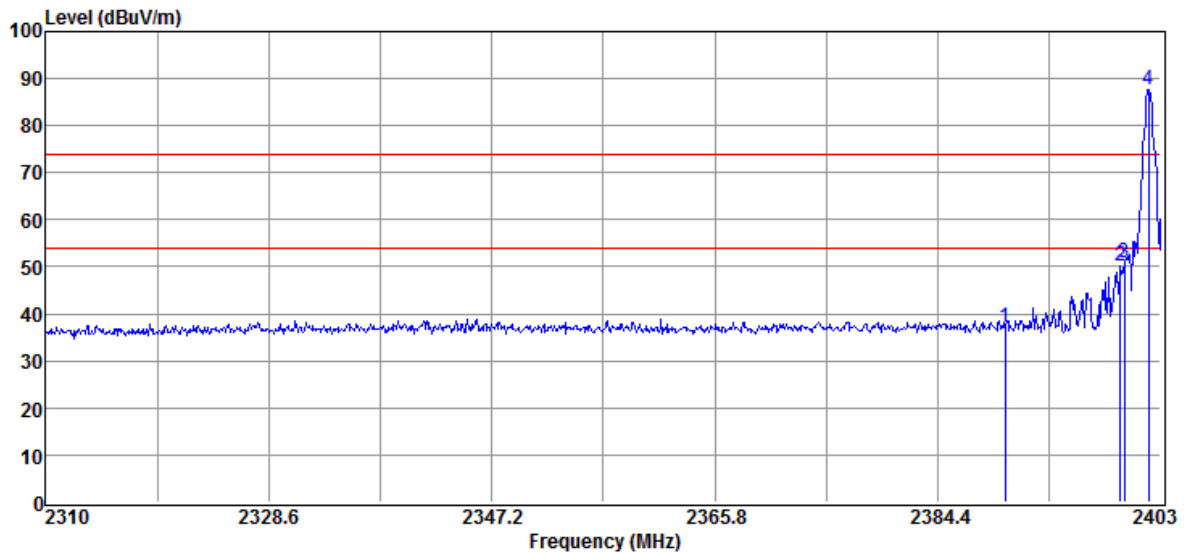

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	48.58	-11.43	37.15	74.00	-36.85	Peak	HORIZONTAL
2	2399.65	61.49	-11.42	50.07	74.00	-23.93	Peak	HORIZONTAL
3	2400.00	62.26	-11.42	50.84	67.65	-16.81	Peak	HORIZONTAL
4	2401.98	99.06	-11.41	87.65	F	-	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 24°C

Test Date 2020/11/18
Humidity 64%

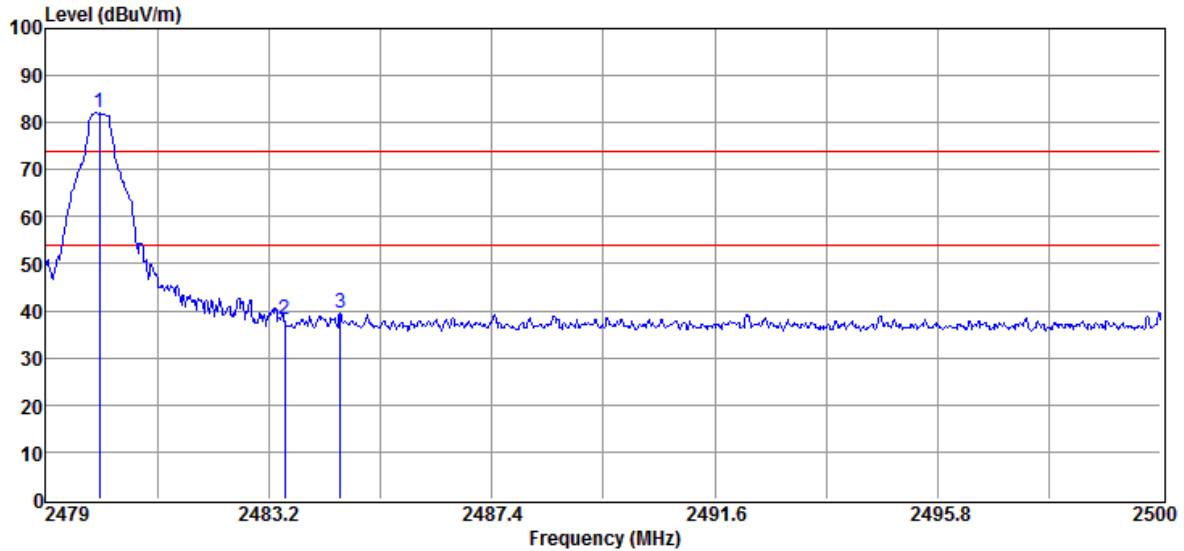


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.01	93.42	-11.30	82.12	F	-	Peak	VERTICAL
2	2483.50	49.39	-11.29	38.10	74.00	-35.90	Peak	VERTICAL
3	2484.54	50.66	-11.29	39.37	74.00	-34.63	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

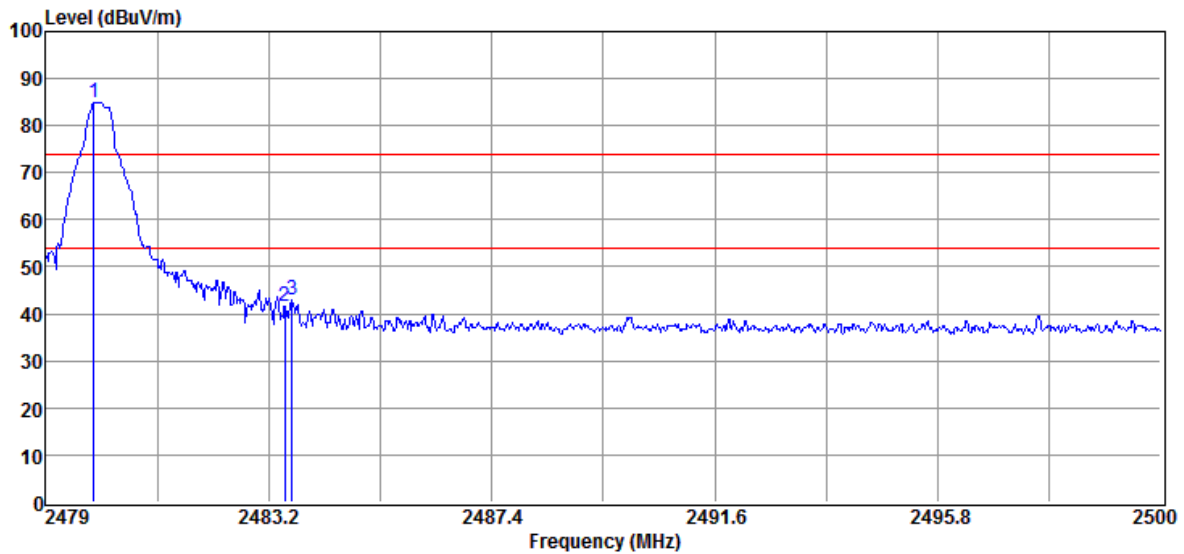

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2479.90	96.26	-11.30	84.96	F	-	Peak	HORIZONTAL
2	2483.50	52.75	-11.29	41.46	74.00	-32.54	Peak	HORIZONTAL
3	2483.64	54.34	-11.29	43.05	74.00	-30.95	Peak	HORIZONTAL

Remark:


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Radiated Emission (EDR 3M mode):

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 24°C

Test Date 2020/11/18
Humidity 64%

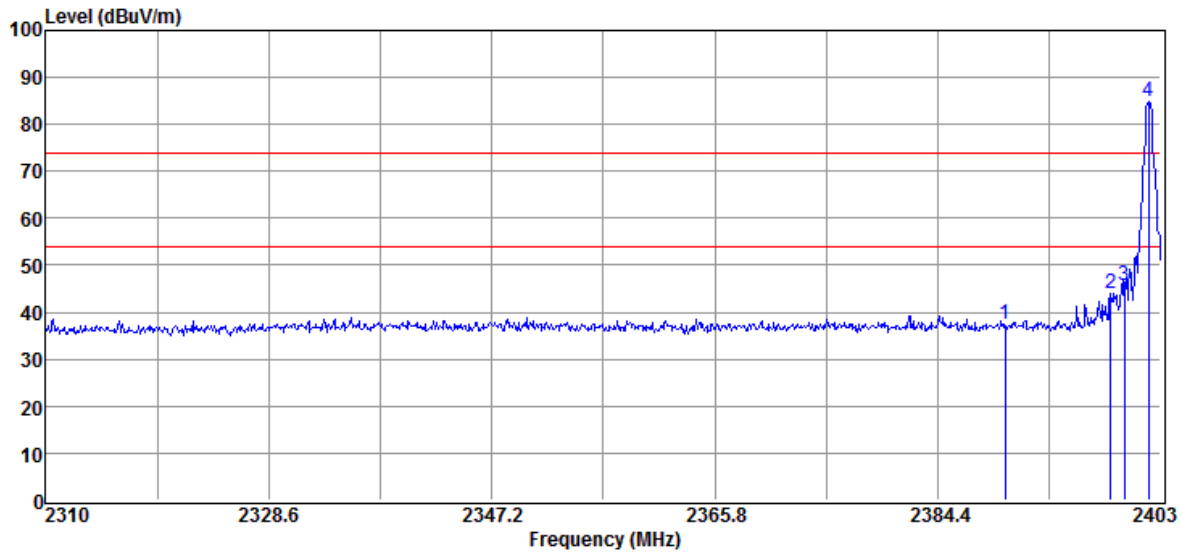


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	49.06	-11.43	37.63	74.00	-36.37	Peak	VERTICAL
2	2398.82	55.33	-11.42	43.91	74.00	-30.09	Peak	VERTICAL
3	2400.00	57.14	-11.42	45.72	64.89	-19.17	Peak	VERTICAL
4	2401.98	96.30	-11.41	84.89	F	-	Peak	VERTICAL

Remark:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

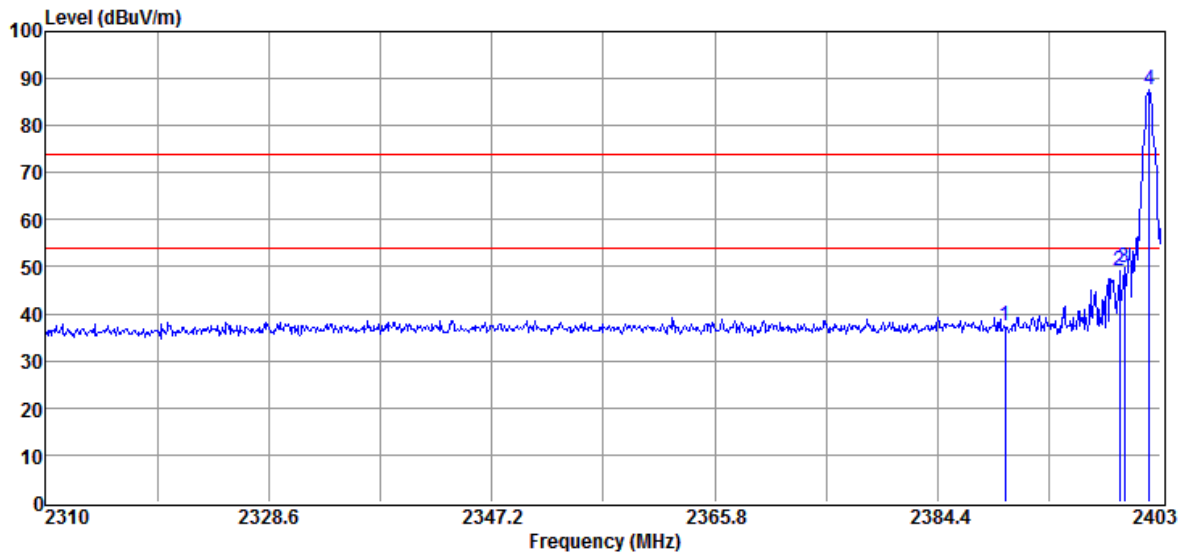

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	48.73	-11.43	37.30	74.00	-36.70	Peak	HORIZONTAL
2	2399.56	60.69	-11.42	49.27	74.00	-24.73	Peak	HORIZONTAL
3	2400.00	61.32	-11.42	49.90	67.46	-17.56	Peak	HORIZONTAL
4	2402.07	98.87	-11.41	87.46	F	-	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
 Fundamental Frequency 2480 MHz
 Temperature 24°C

Test Date 2020/11/18
 Humidity 64%

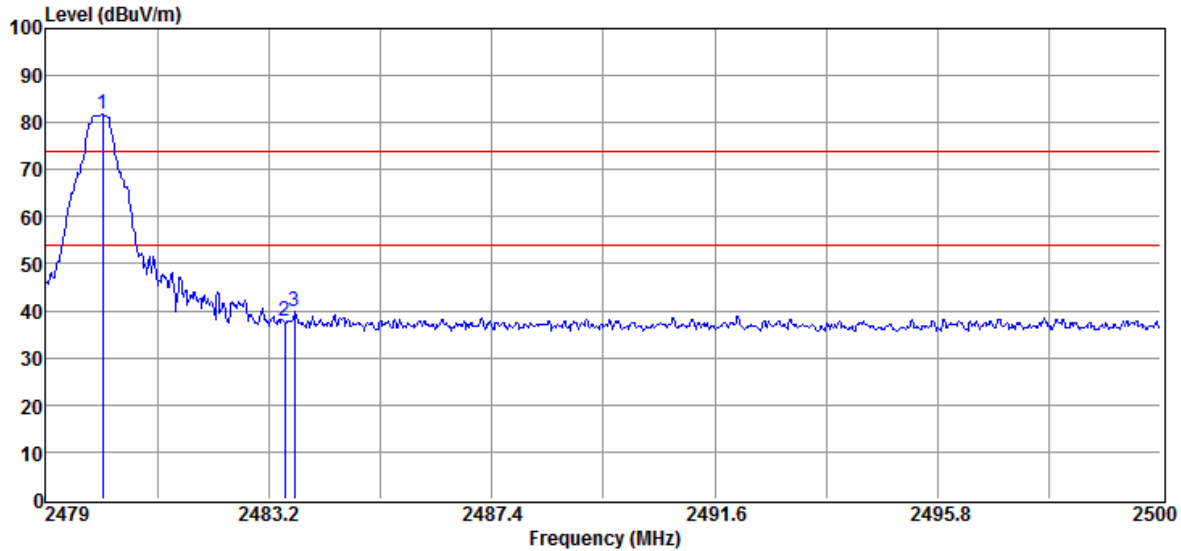


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.07	93.07	-11.30	81.77	F	-	Peak	VERTICAL
2	2483.50	48.92	-11.29	37.63	74.00	-36.37	Peak	VERTICAL
3	2483.68	51.00	-11.29	39.71	74.00	-34.29	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

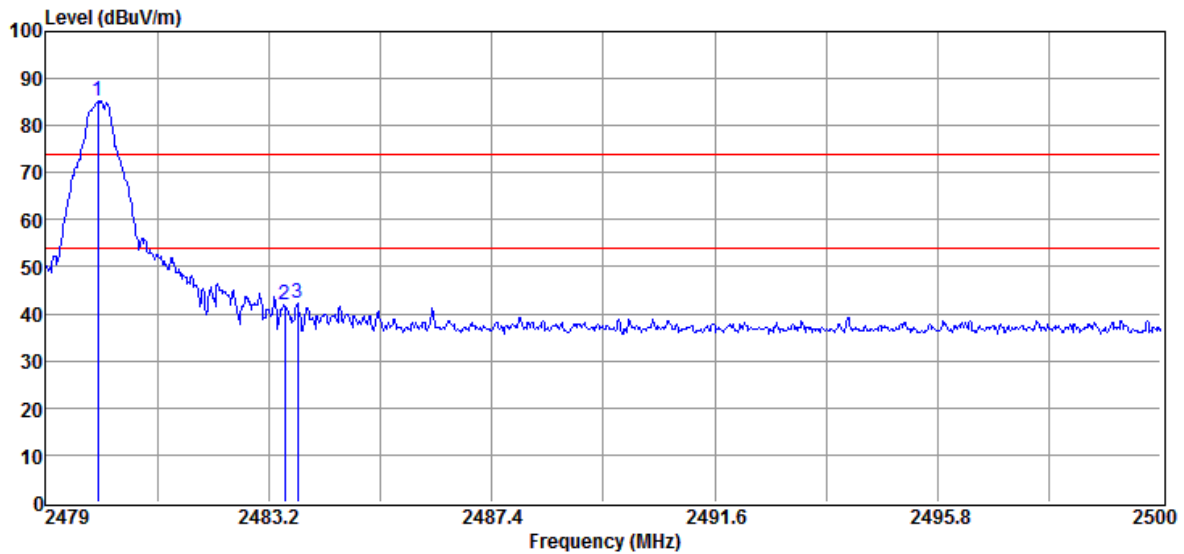

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2479.99	96.38	-11.30	85.08	F	-	Peak	HORIZONTAL
2	2483.50	53.10	-11.29	41.81	74.00	-32.19	Peak	HORIZONTAL
3	2483.75	53.54	-11.29	42.25	74.00	-31.75	Peak	HORIZONTAL

Remark:


- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Radiated Emission (Hopping mode):

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 24°C

Test Date 2020/11/18
Humidity 64%

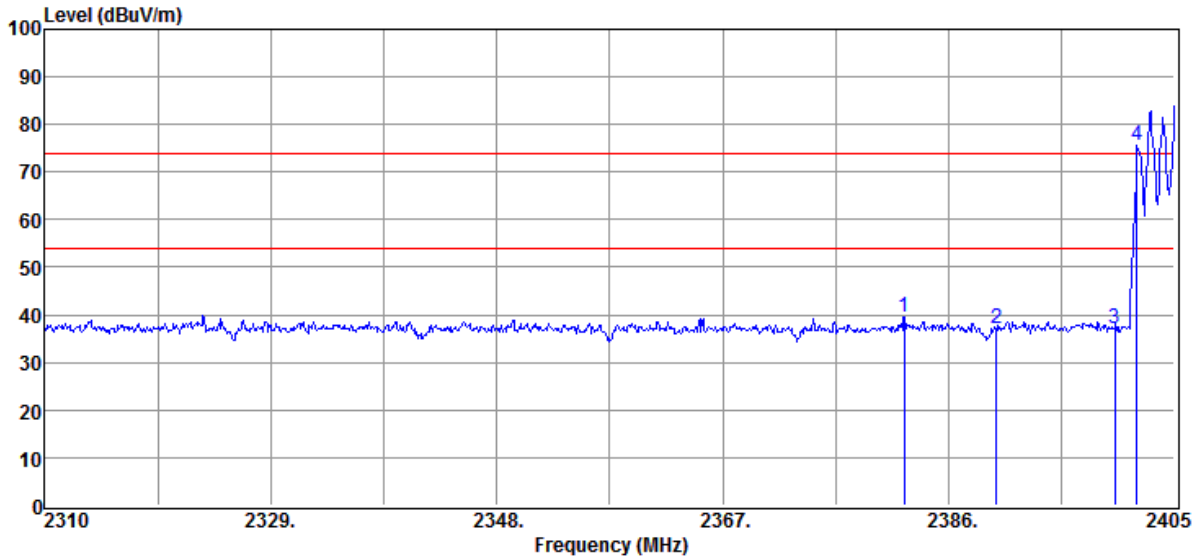


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2382.30	50.85	-11.43	39.42	74.00	-34.58	Peak	VERTICAL
2	2390.00	48.50	-11.43	37.07	74.00	-36.93	Peak	VERTICAL
3	2400.00	48.56	-11.42	37.14	55.77	-18.63	Peak	VERTICAL
4	2401.87	87.18	-11.41	75.77	F	-	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

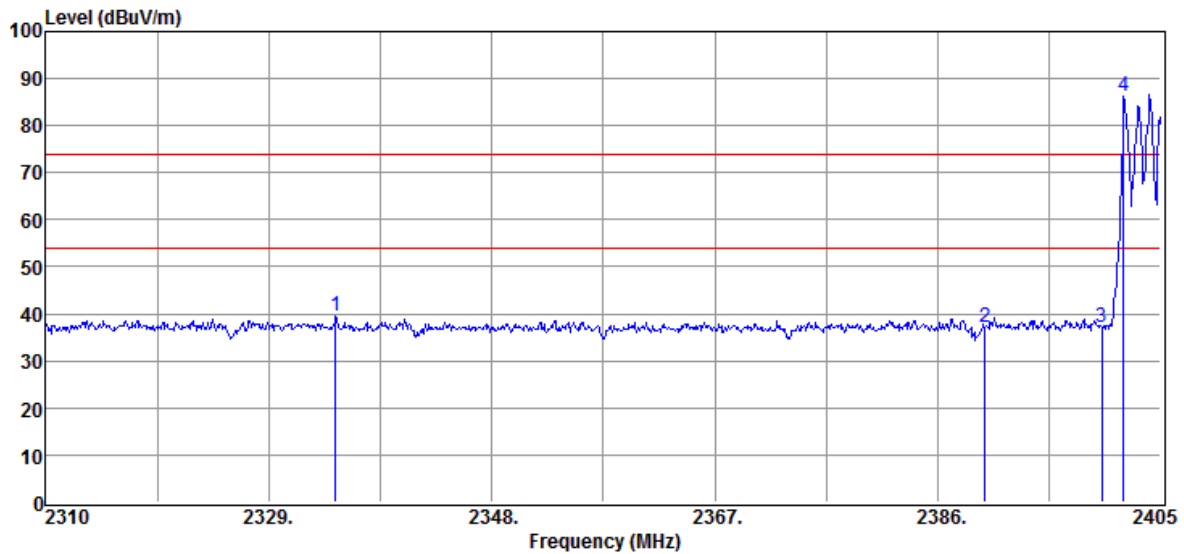

No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2334.70	50.98	-11.58	39.40	74.00	-34.60	Peak	HORIZONTAL
2	2390.00	48.53	-11.43	37.10	74.00	-36.90	Peak	HORIZONTAL
3	2400.00	48.45	-11.42	37.03	66.09	-29.06	Peak	HORIZONTAL
4	2401.87	97.50	-11.41	86.09	F	-	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
 Fundamental Frequency 2480 MHz
 Temperature 24°C

Test Date 2020/11/18
 Humidity 64%

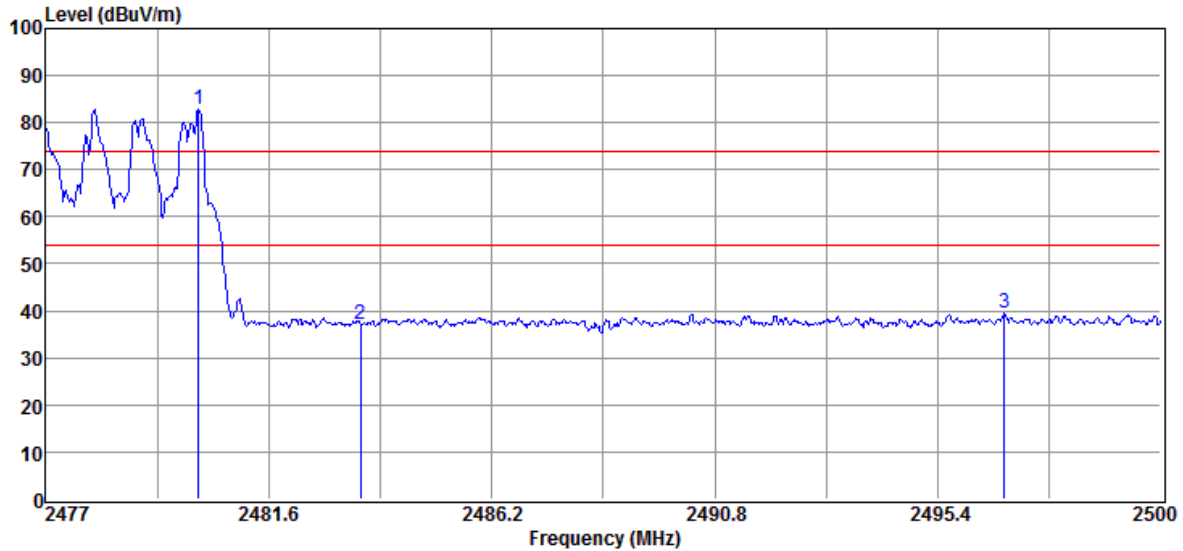


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2480.15	94.06	-11.30	82.76	F	--	Peak	VERTICAL
2	2483.50	48.35	-11.29	37.06	74.00	-36.94	Peak	VERTICAL
3	2496.78	50.66	-11.26	39.40	74.00	-34.60	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

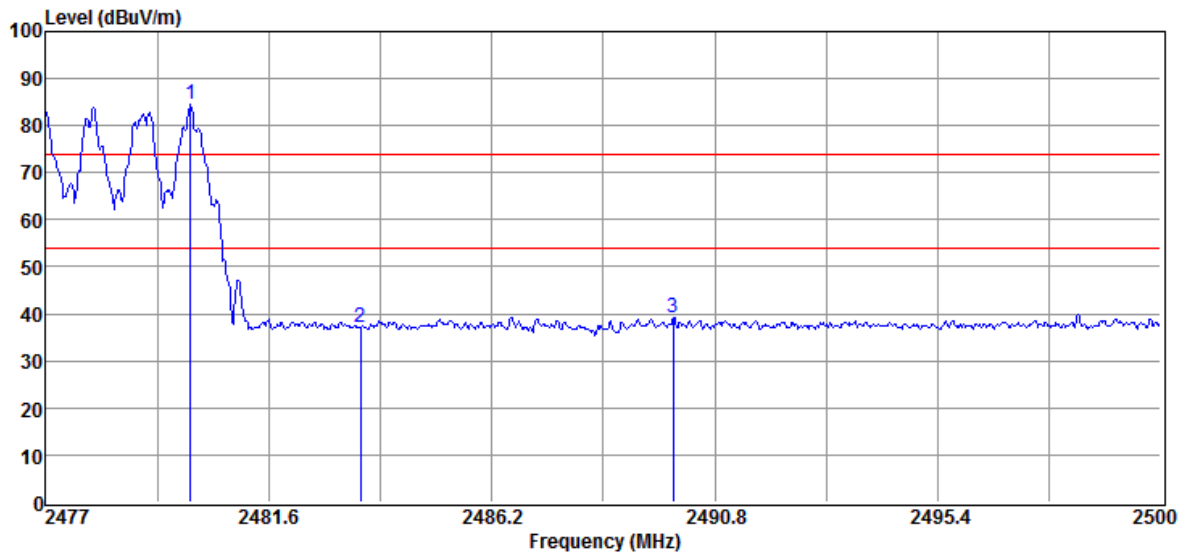

No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	2479.99	95.68	-11.30	84.38	F	--	Peak	HORIZONTAL
2	2483.50	48.57	-11.29	37.28	74.00	-36.72	Peak	HORIZONTAL
3	2489.95	50.61	-11.28	39.33	74.00	-34.67	Peak	HORIZONTAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

9. Frequency Separation

9.1 Standard Applicable:


According to FCC 15.247 (a)(1) & RSS-247 5.1(b) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Measurement Equipment Used:

Refer to section 6.2 for details.

9.3 Test Set-up:

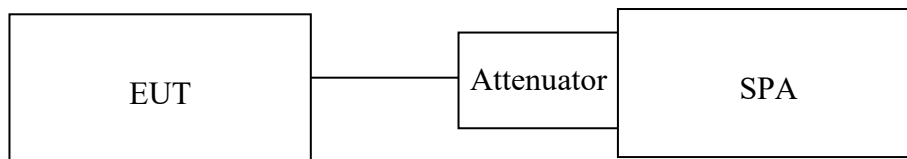

9.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel .
4. Set the spectrum analyzer as RBW,VBW=100kHz, Adjust Span to 3 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

9.5 Measurement Result:

Channel separation (MHz)	Limit	Result
1	\geq 25kHz or 2/3 of the 20dB bandwidth (whichever is greater)	PASS

Note: Refer to next page for plots.

Frequency Separation Test Data Low



Mid



High



10. Number of Hopping Frequency

10.1 Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS 247 issue 2, §5.4(b), For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 9.3 for details.


10.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz
5. Max hold, view and count how many channel in the band.


10.5 Measurement Result:

Note: Refer to next page for plots.

Channel Number
2.4 GHz – 2.441.5GHz

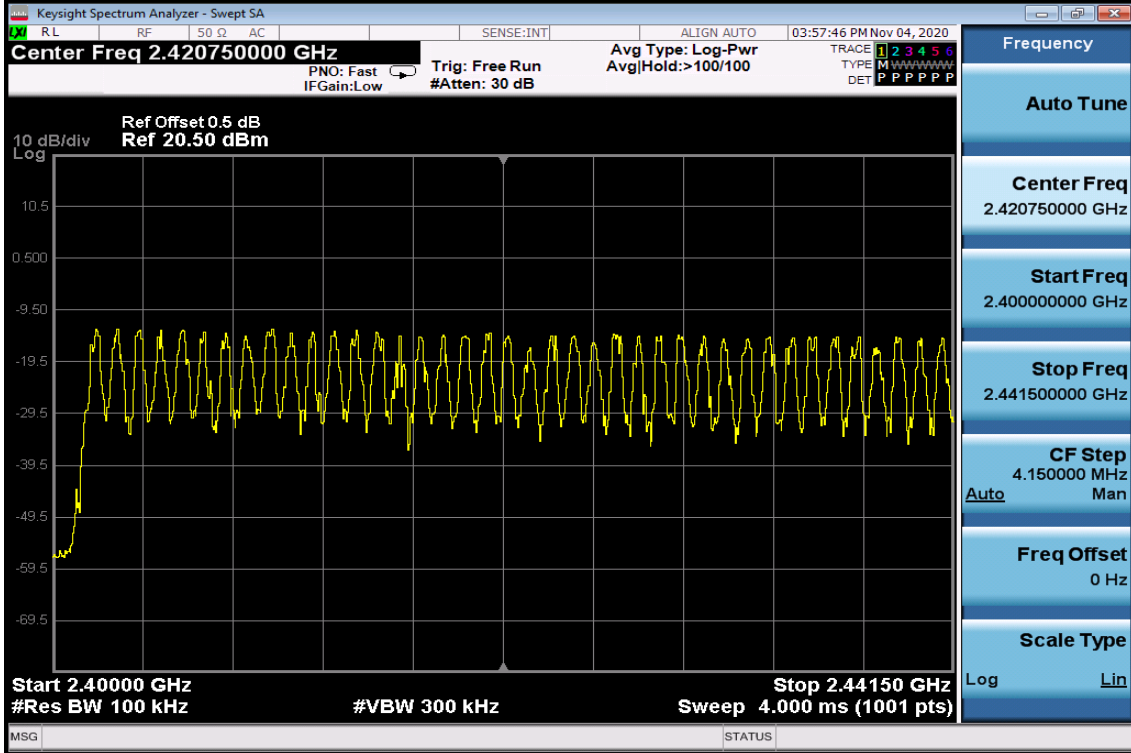

2.441.5 GHz – 2.4835GHz

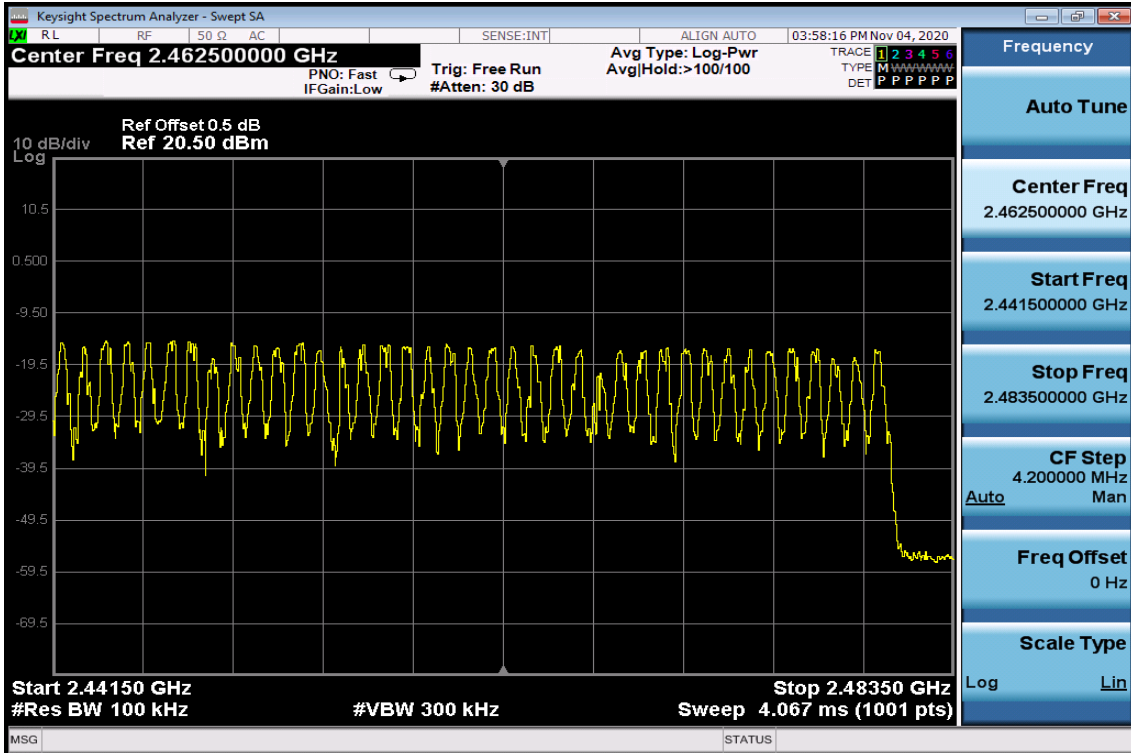

11. Time of Occupancy (Dwell Time)

11.1 Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

According to RSS 247 issue 2, §5.1(d), FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

11.2 Measurement Equipment Used:

Refer to section 6.2 for details.

11.3 Test Set-up:

Refer to section 9.3 for details.

11.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW / VBW = 1MHz, Span = 0Hz , Adjust Sweep = 2.5ms.
5. Repeat above procedures until all frequency measured were complete.

11.5 Measurement Result:

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low	DH1 time slot	=	0.344 (ms)	*	(1600/2/79)	*	31.6 =	110.08	(ms)
	DH3 time slot	=	1.800 (ms)	*	(1600/4/79)	*	31.6 =	288.00	(ms)
	DH5 time slot	=	3.020 (ms)	*	(1600/6/79)	*	31.6 =	322.13	(ms)


CH Mid	DH1 time slot	=	0.344 (ms)	*	(1600/2/79)	*	31.6 =	110.08	(ms)
	DH3 time slot	=	1.790 (ms)	*	(1600/4/79)	*	31.6 =	286.40	(ms)
	DH5 time slot	=	3.040 (ms)	*	(1600/6/79)	*	31.6 =	324.27	(ms)

CH High	DH1 time slot	=	0.344 (ms)	*	(1600/2/79)	*	31.6 =	110.08	(ms)
	DH3 time slot	=	1.790 (ms)	*	(1600/4/79)	*	31.6 =	286.40	(ms)
	DH5 time slot	=	3.040 (ms)	*	(1600/6/79)	*	31.6 =	324.27	(ms)


Note: Refer to next page for plots.

Low Channel


DH1

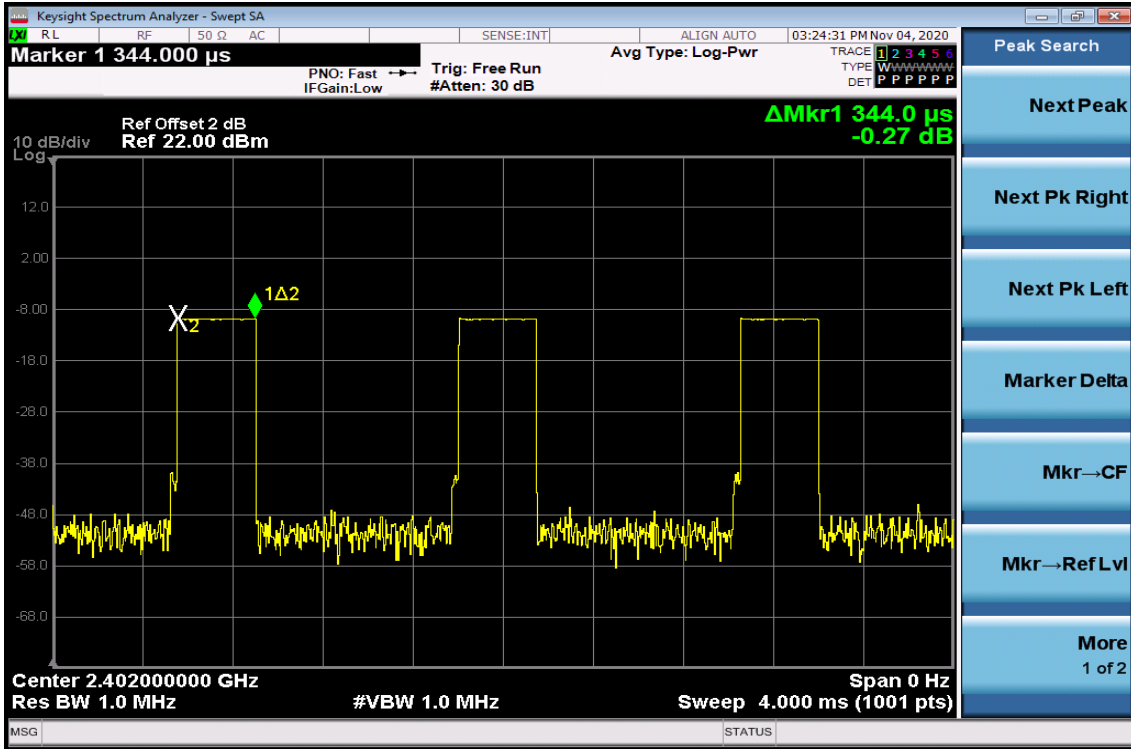

DH3

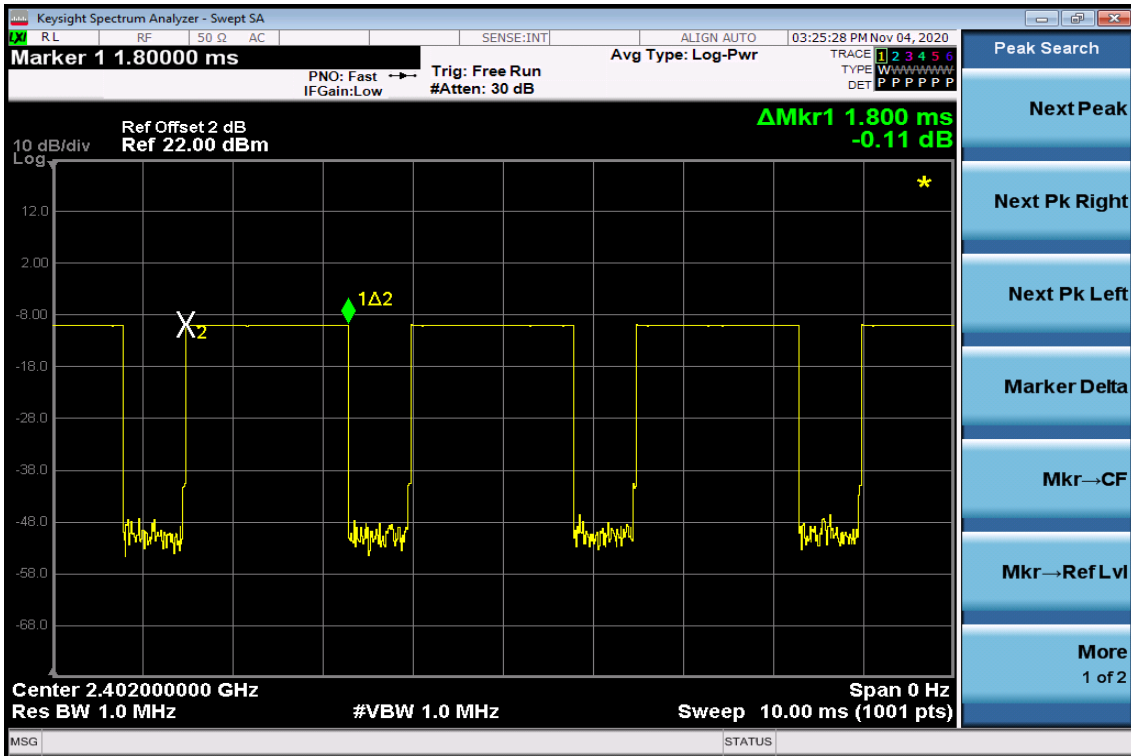


DH5

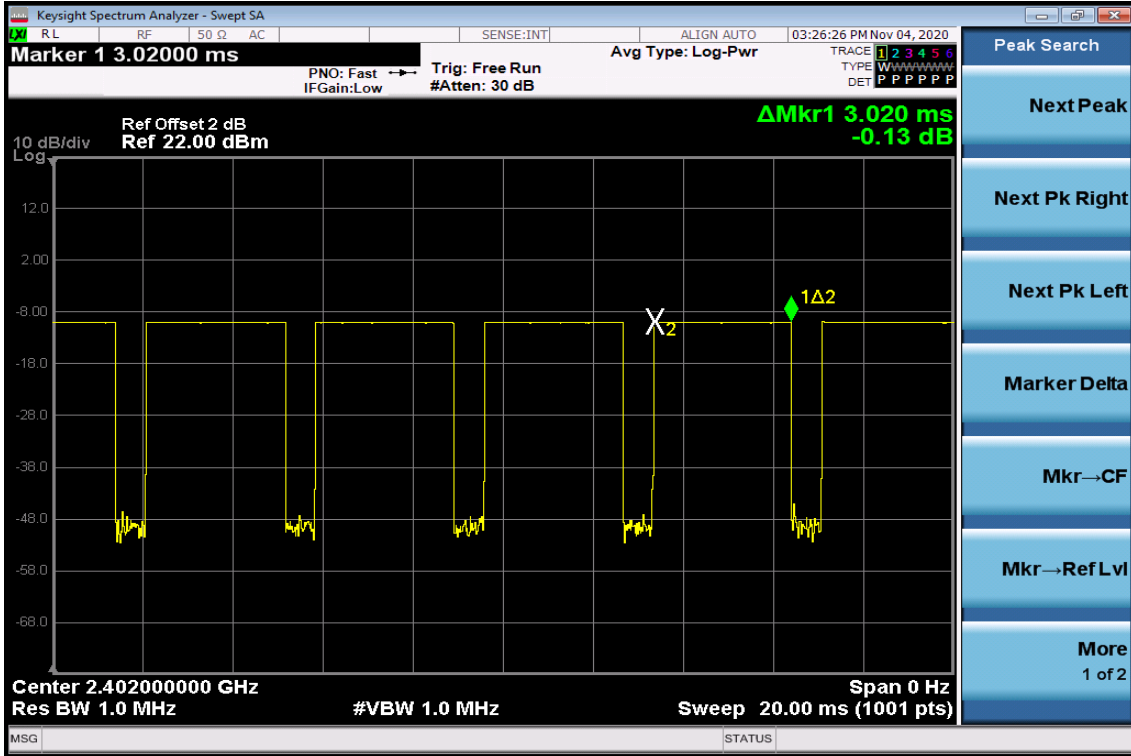


Mid Channel


DH1

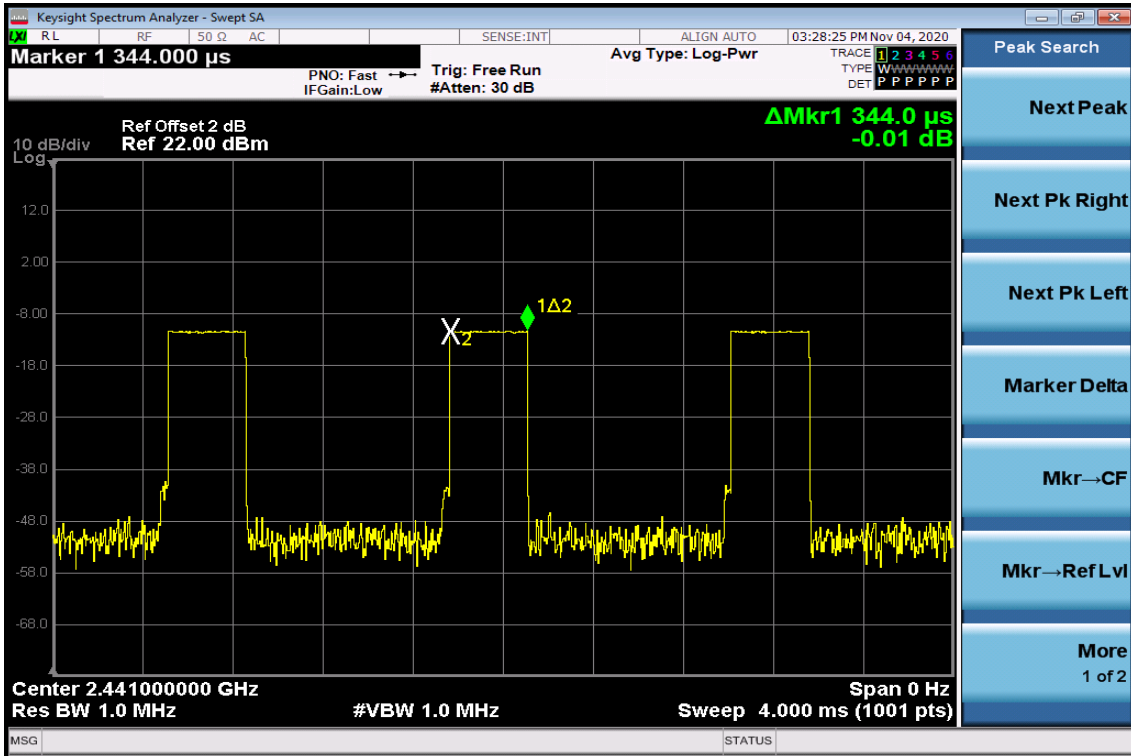

DH3

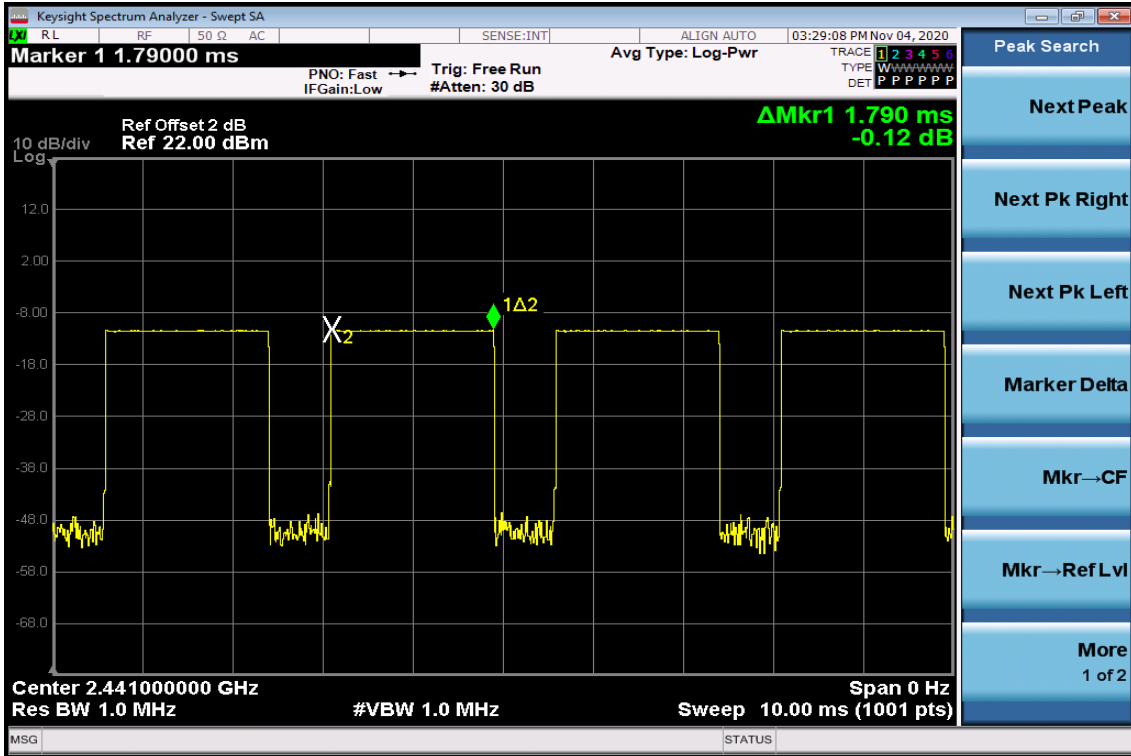


DH5

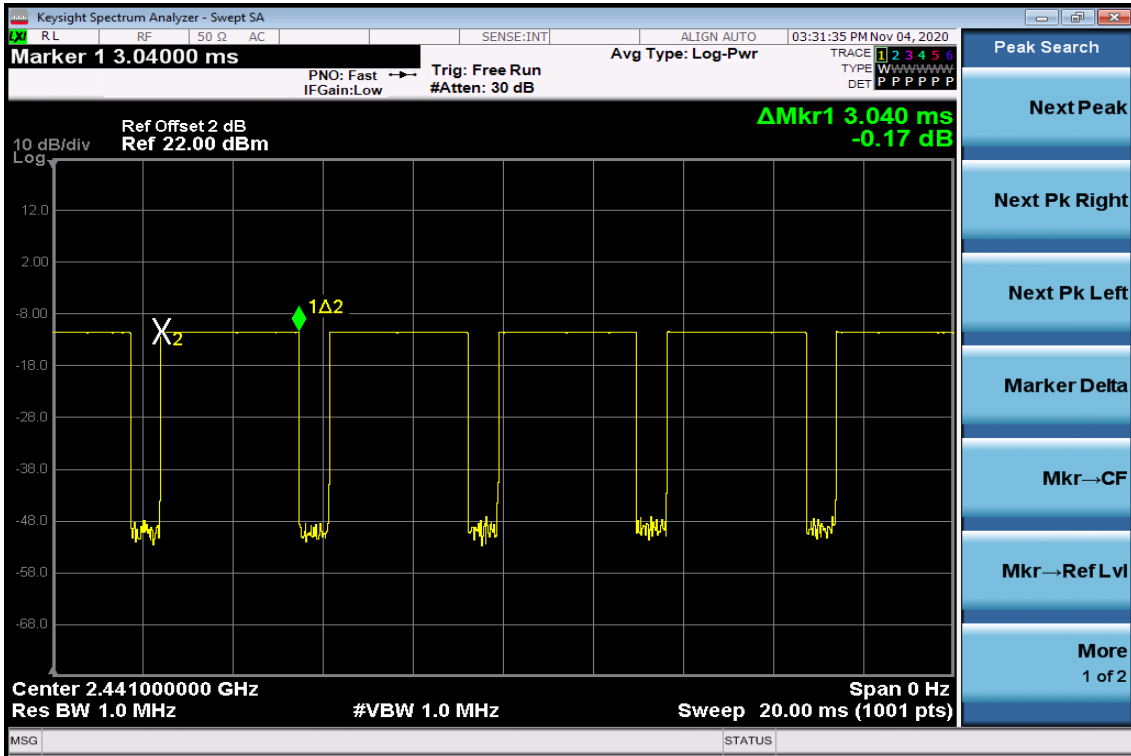


High Channel


DH1

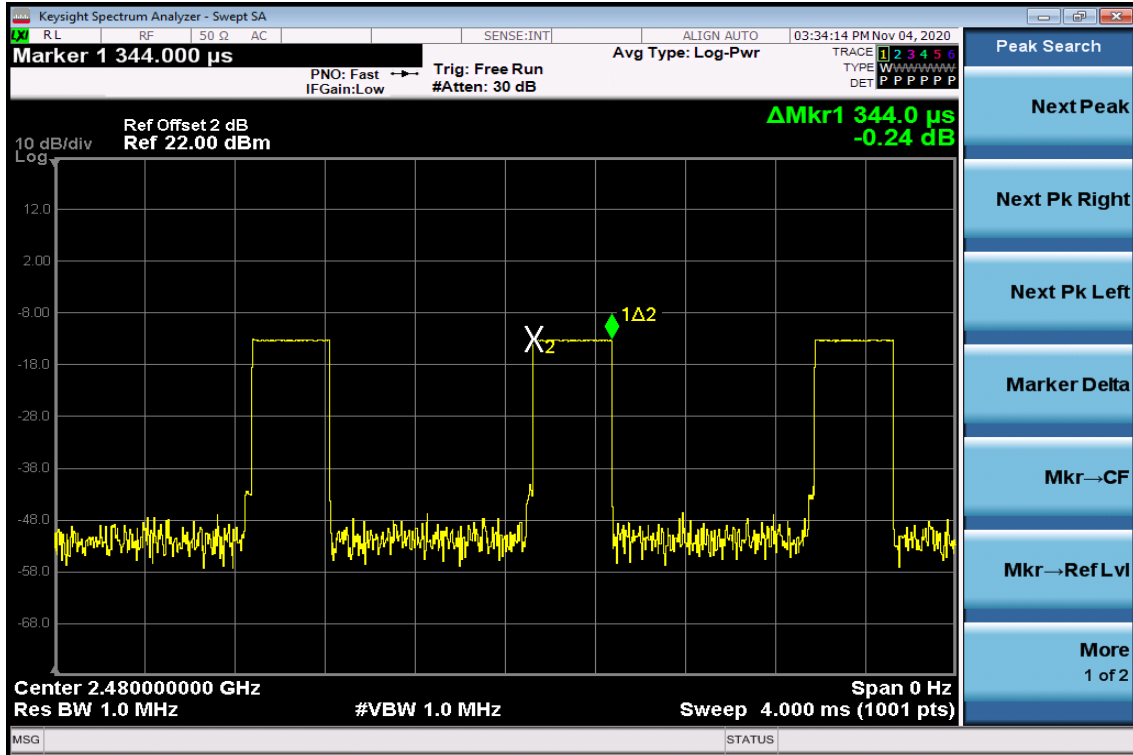

DH3

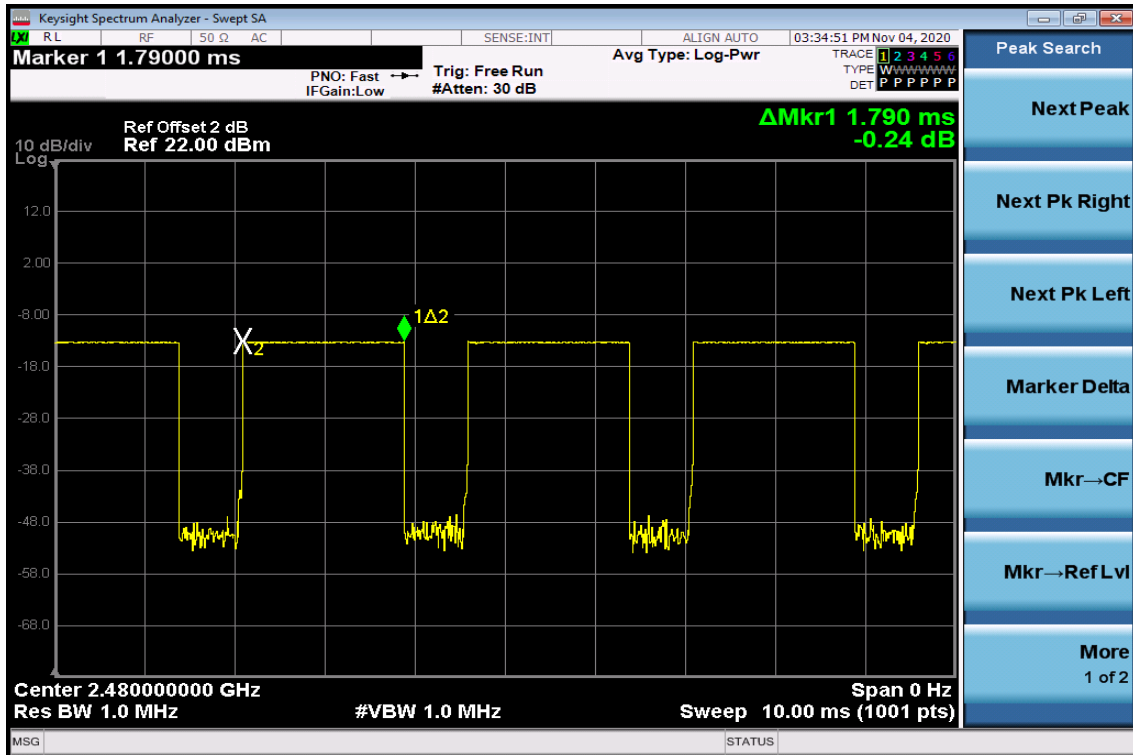

DH5

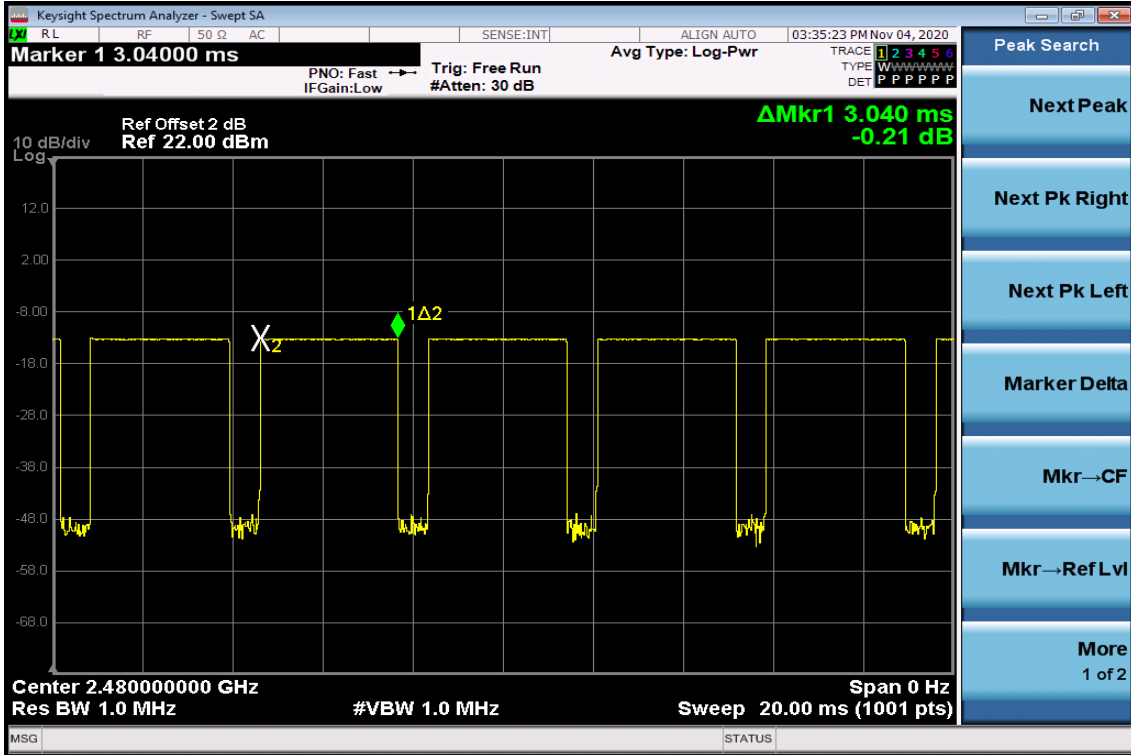

12. 20dB Bandwidth & 99% Bandwidth

12.1 Standard Applicable:

According to §15.247(a)(1),and RSS210 A8.1(b) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

According to RSS-247 issue 2, §5.1 (a), the bandwidth of a frequency hopping channel is the 20 dB emission bandwidth.

12.2 Measurement Equipment Used:

Refer to section 6.2 for details.

12.3 Test Set-up:

Refer to section 9.3 for details.

12.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW= 1 % - 5% of Bandwidth., Span= 3MHz, Sweep=auto
4. Mark the peak frequency and -20dB (upper and lower) frequency and 99%.
5. Repeat above procedures until all frequency measured were complete.

12.5 Measurement Result:

BDR Mode

CH	20dB Bandwidth	99% Bandwidth
	(MHz)	
Low	0.938	0.901
Mid	0.924	0.902
High	0.938	0.904

EDR 2M Mode

CH	20dB Bandwidth	2/3* 20dB Bandwidth	99% Bandwidth
	(MHz)		
Lower	0.973	0.649	0.921
Mid	1.011	0.674	0.923
Higher	1.014	0.676	0.927


EDR 3M Mode

CH	20dB Bandwidth	2/3* 20dB Bandwidth	99% Bandwidth
	(MHz)		
Lower	1.005	0.670	0.923
Mid	1.013	0.675	0.924
Higher	1.002	0.668	0.927


Note: Refer to next page for plots.

BDR Mode


20dB Bandwidth Test Data CH-Low

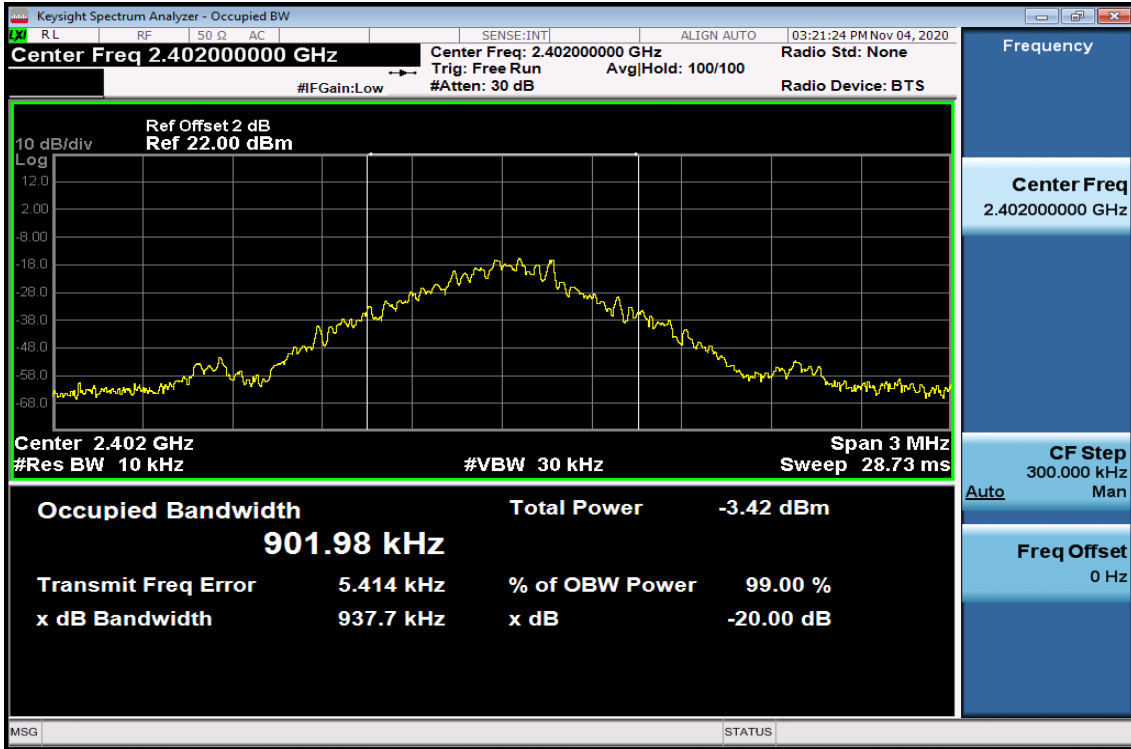

20dB Bandwidth Test Data CH-Mid

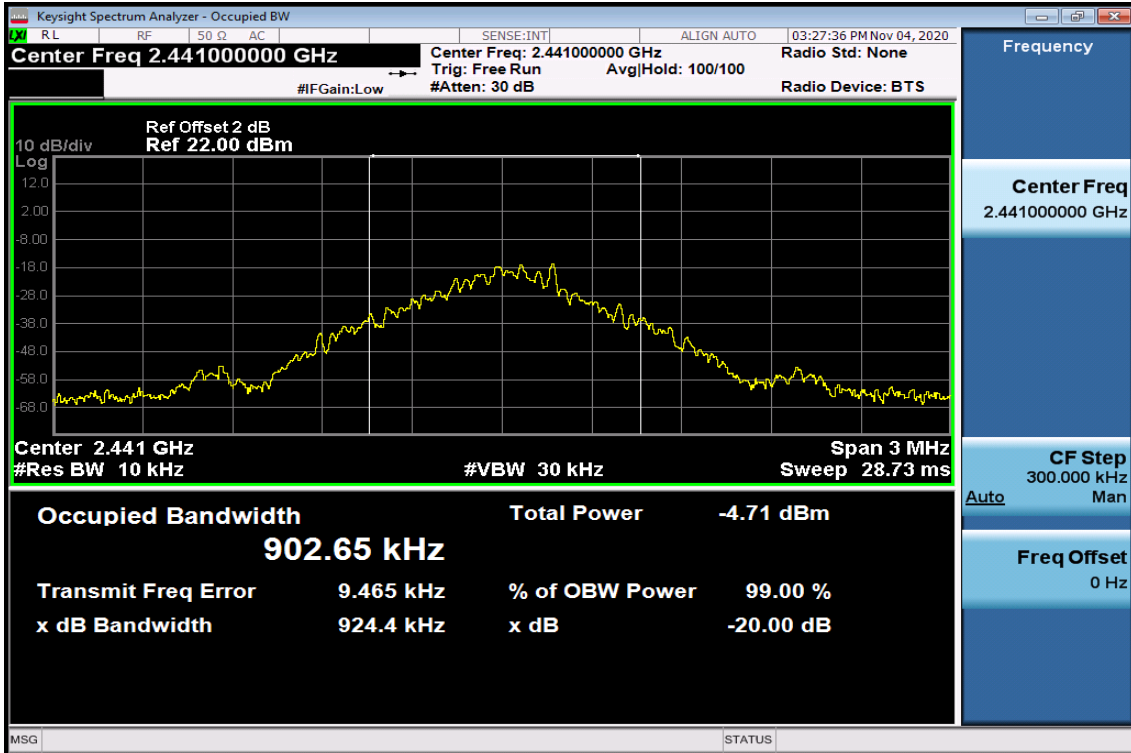


20dB Bandwidth Test Data CH-High

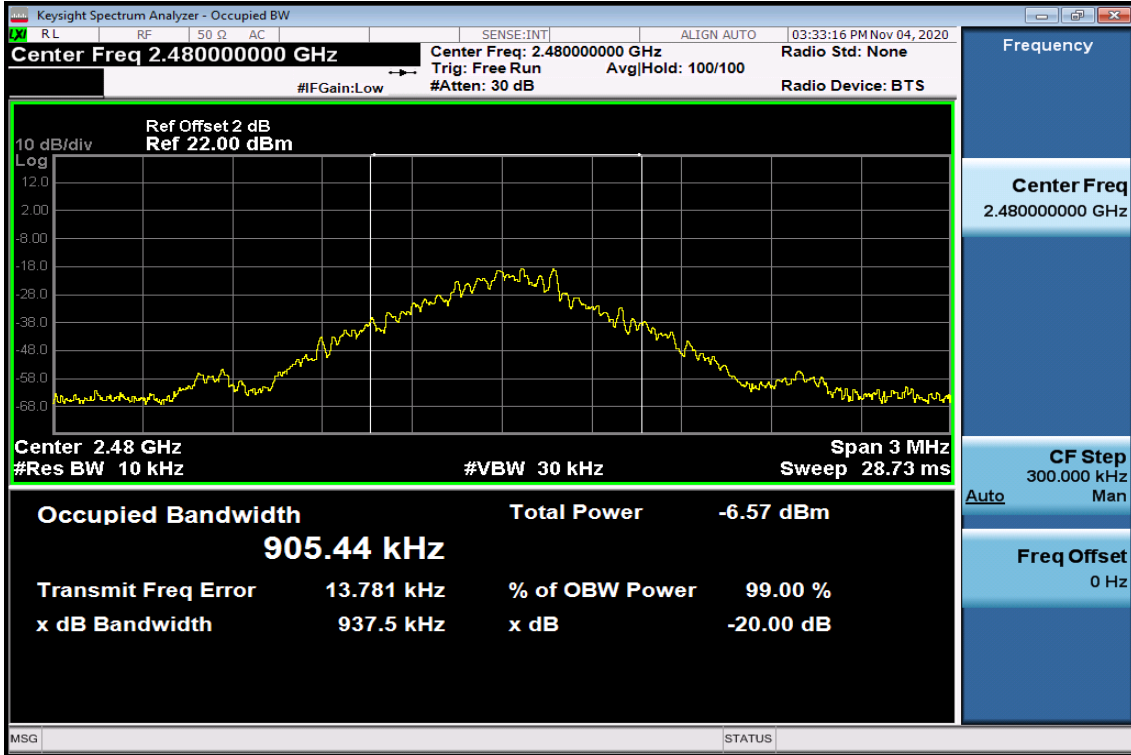


EDR 2M Mode


20dB Bandwidth Test Data CH-Low

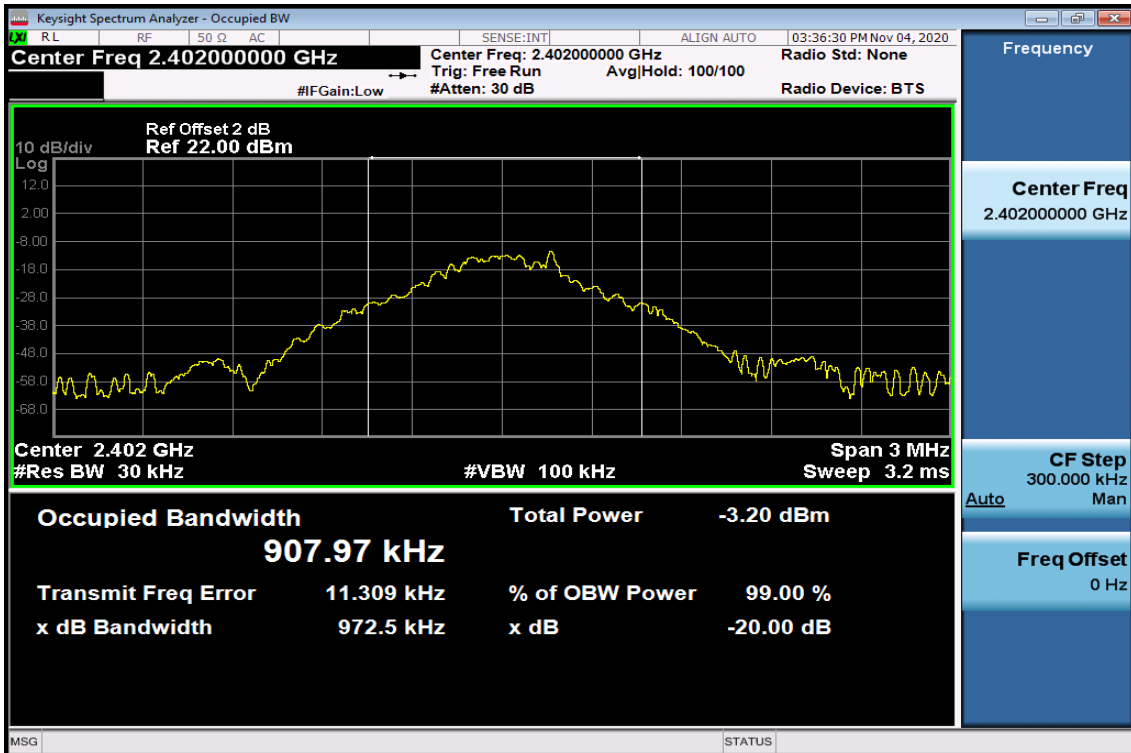

20dB Bandwidth Test Data CH-Mid

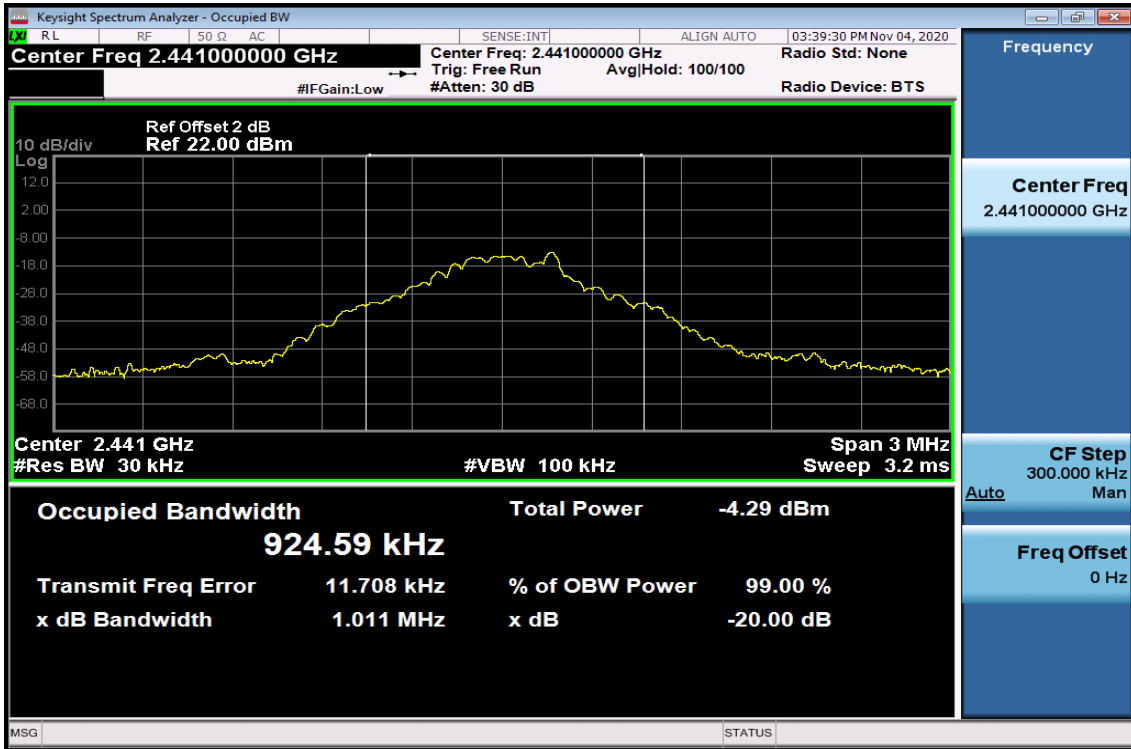


20dB Bandwidth Test Data CH-High

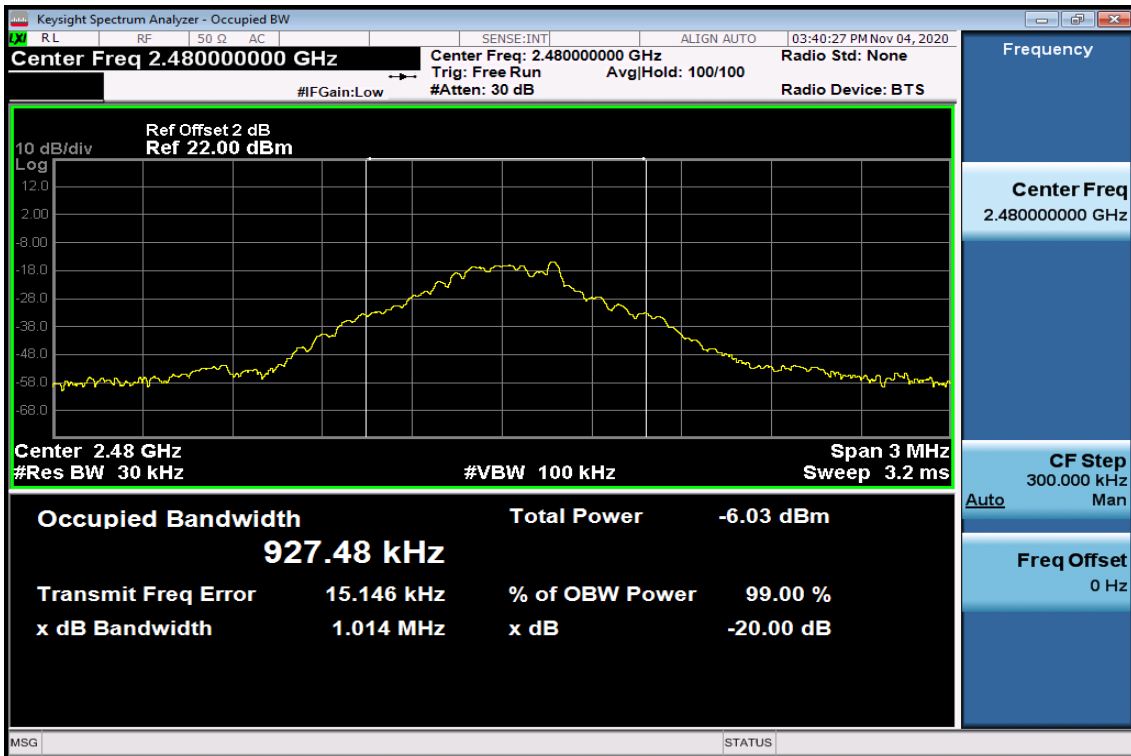


EDR 3M Mode


20dB Bandwidth Test Data CH-Low

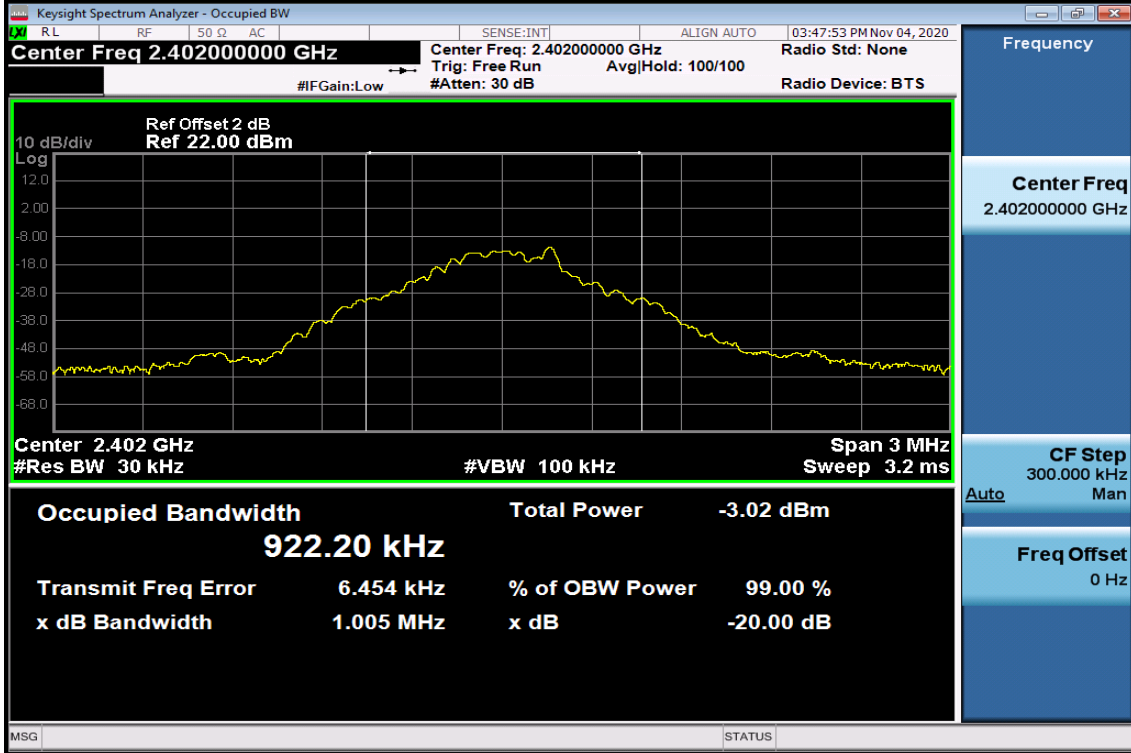

20dB Bandwidth Test Data CH-Mid

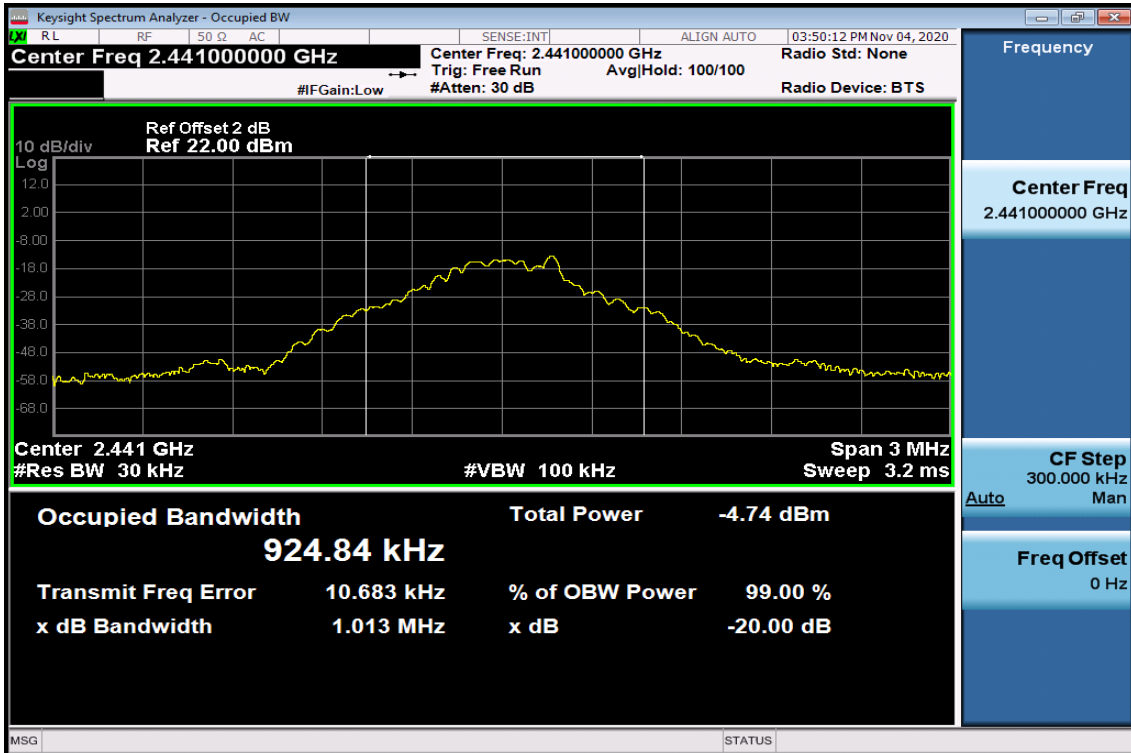


20dB Bandwidth Test Data CH-High

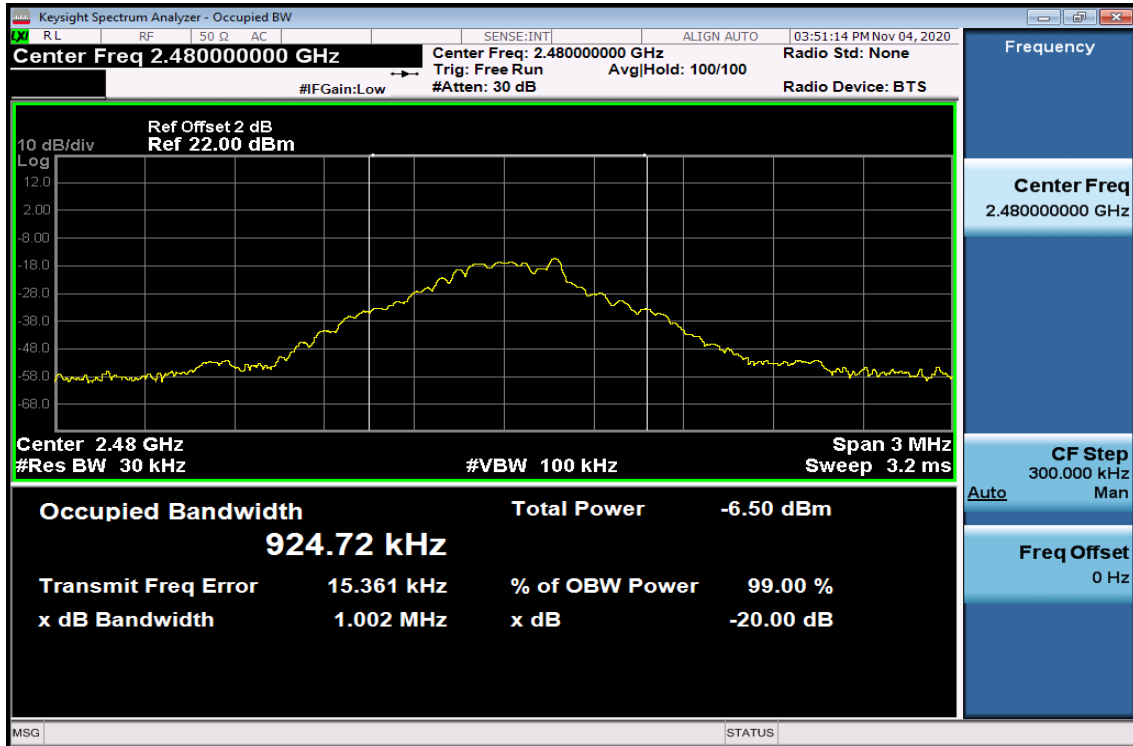


BDR Mode


99% Bandwidth Test Data CH-Low

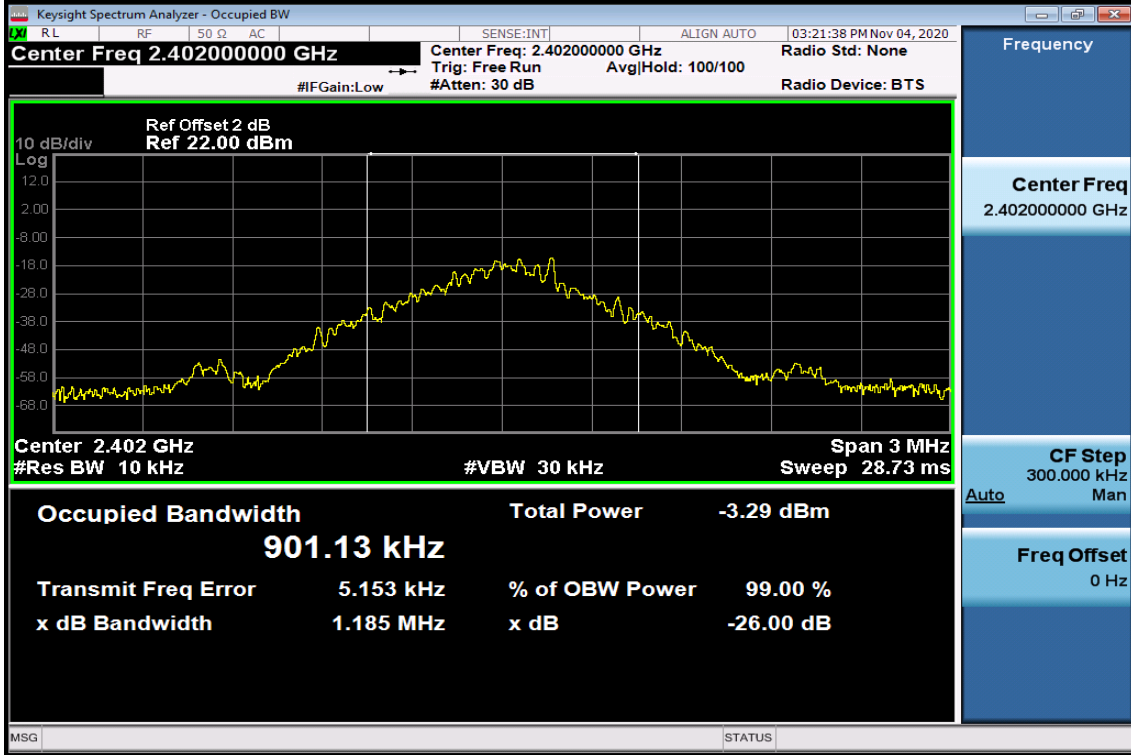

99% Bandwidth Test Data CH-Mid

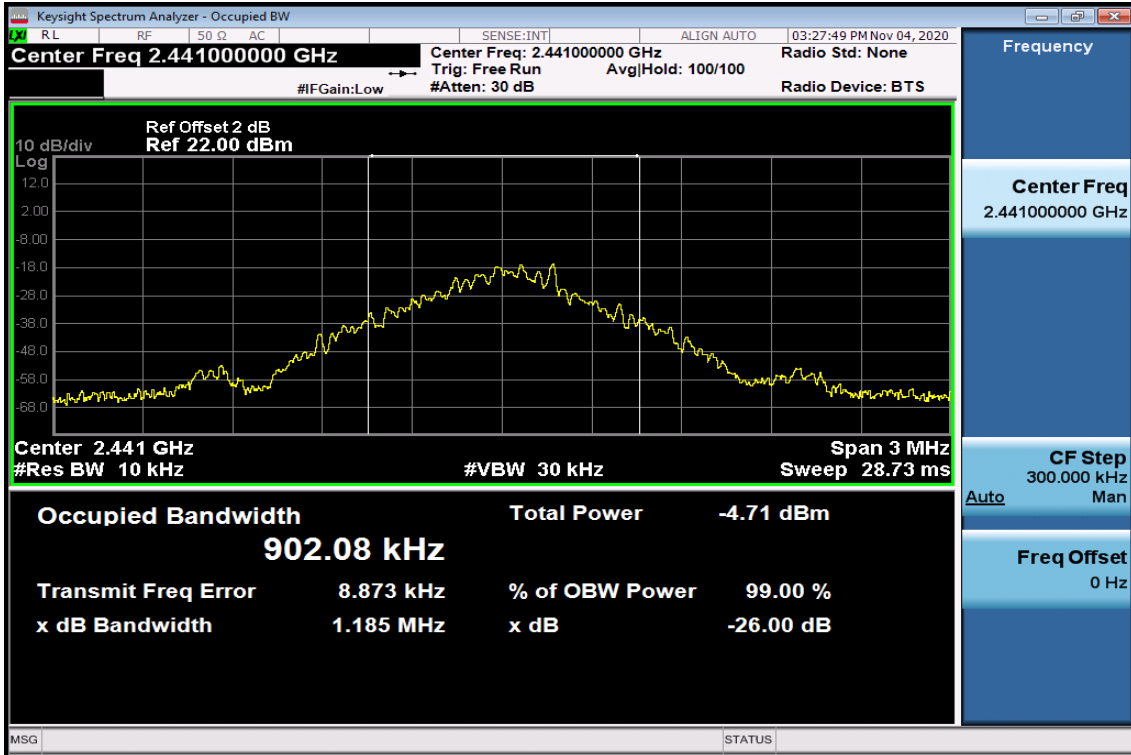


99% Bandwidth Test Data CH-High

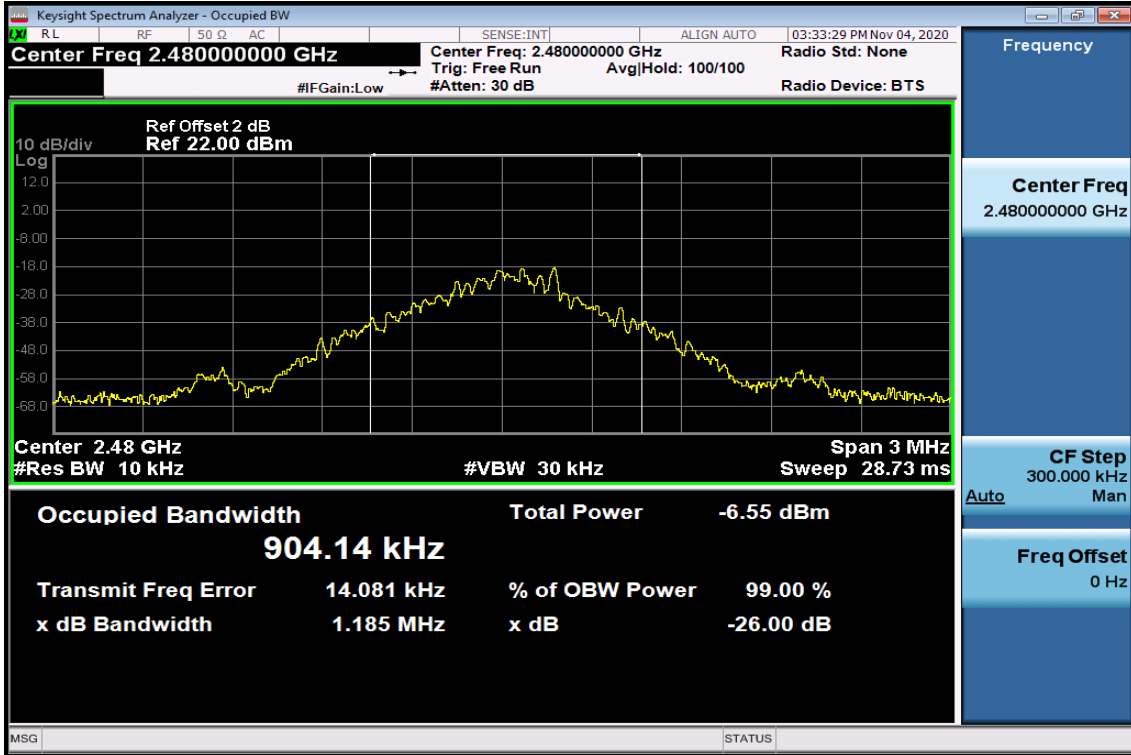


EDR 2M Mode


99% Bandwidth Test Data CH-Low

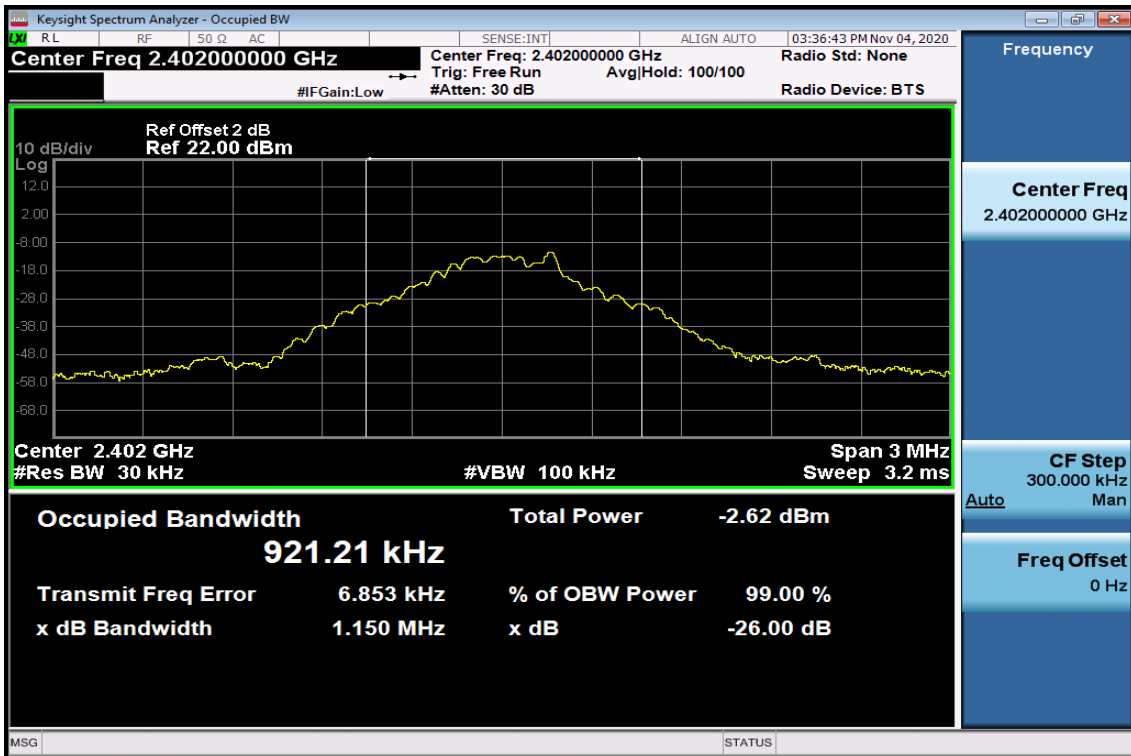

99% Bandwidth Test Data CH-Mid

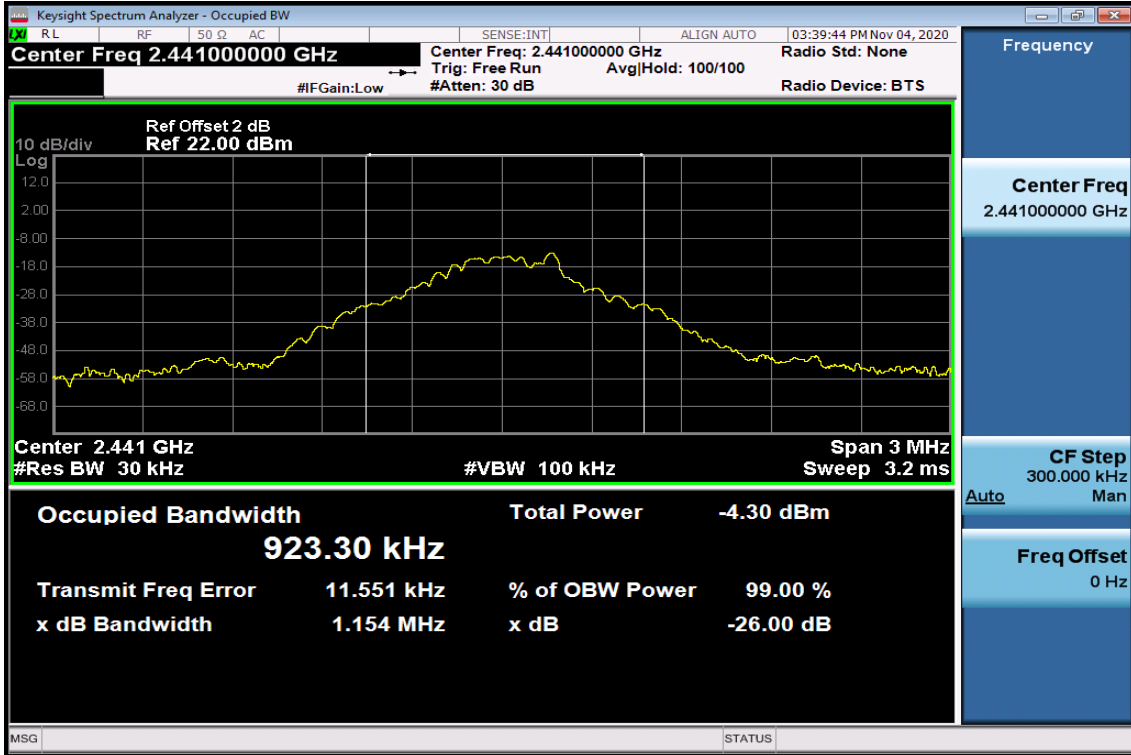


99% Bandwidth Test Data CH-High

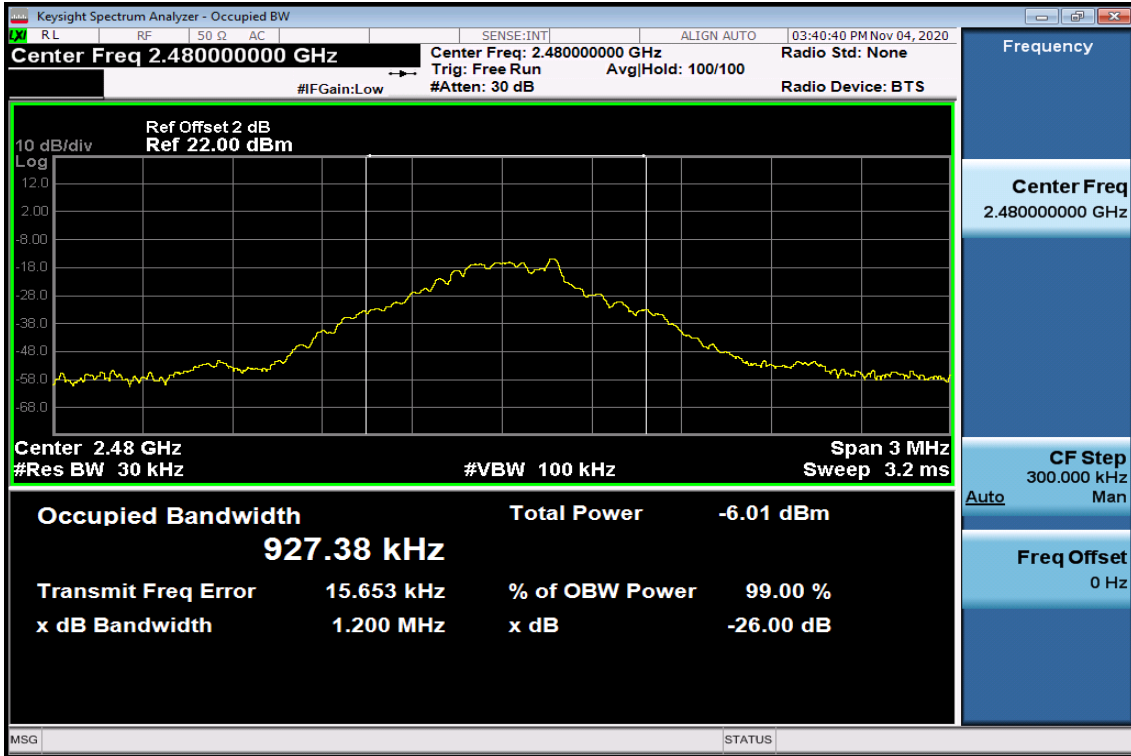


EDR 3M Mode


99% Bandwidth Test Data CH-Low

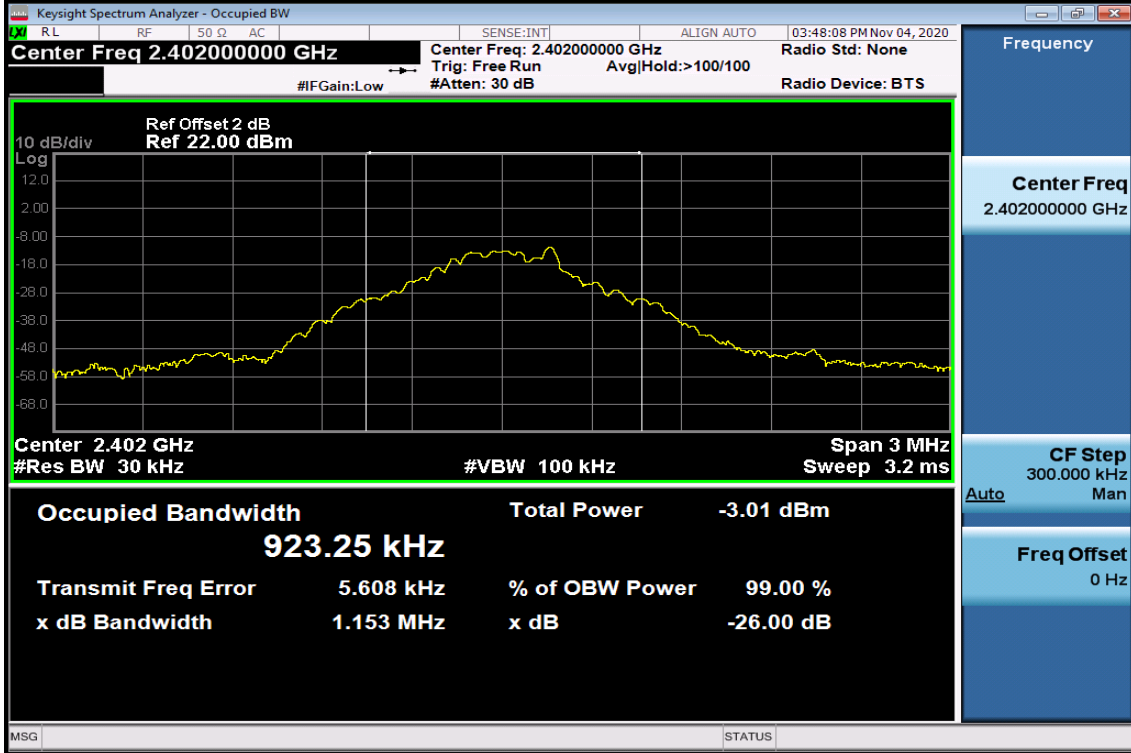

99% Bandwidth Test Data CH-Mid

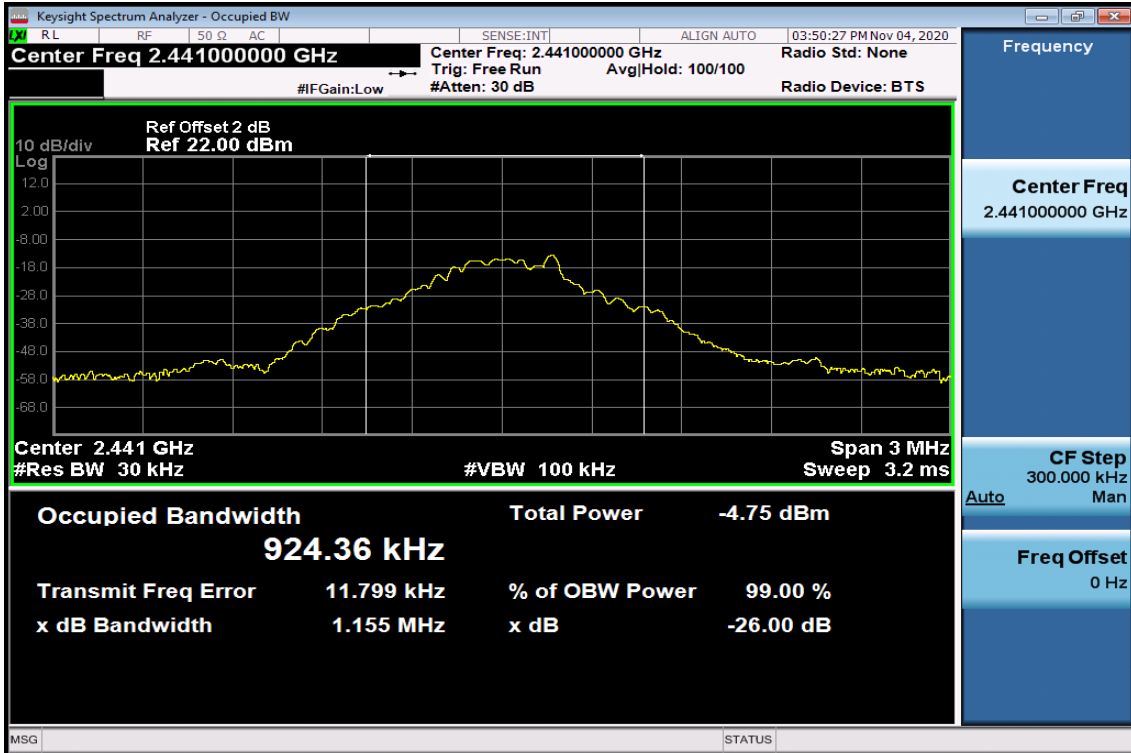

99% Bandwidth Test Data CH-High

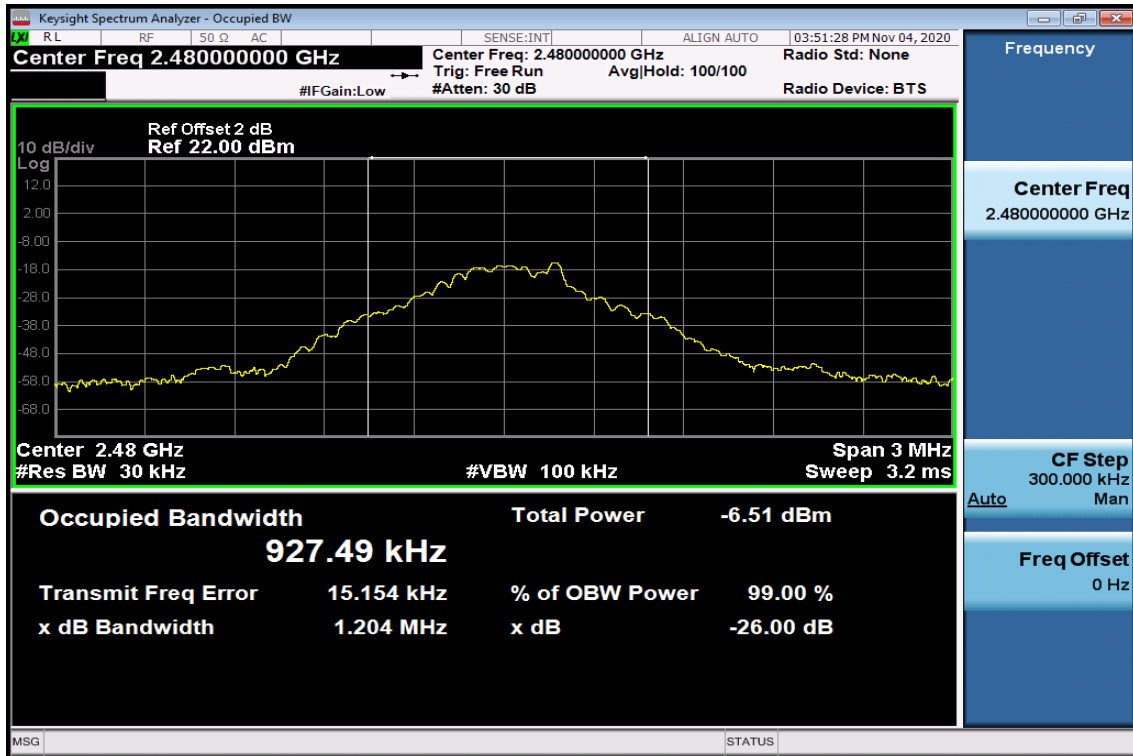

13. Antenna Requirement

13.1 Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(c), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 8.3, the applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

13.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2 dBi and the antenna type is PCB antenna which is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.