

FCC Report (Bluetooth)

Product Name : Haylou Wireless Earbuds
Trade mark : Haylou
Model No. : GT3
FCC ID : 2AMQ6-GT3
Report Number : BLA-EMC-202007-A21-03
Date of sample receipt : 2020/7/8
Date of Test : 2020/7/8 - 2020/7/15
Date of Issue : 2020/7/24
Test standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test result : PASS

Prepared for:

Dongguan Liesheng Electronic Co., Ltd.
13/F, Project Phrase 2 of GaoshengTech Tower, No.5, Longxi Road, Nancheng, Dongguan, Guangdong, China.

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
TEL: +86-755-28682673
FAX: +86-755-28682673

Compile by: <i>Eason</i>	Review by: <i>Brand-wei</i>
Approved by: <i>Emen-li</i>	Date: 2020/7/24



2 Version

Version No.	Date	Description
00	2020/7/24	Original

BlueAsia

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
6 TEST INSTRUMENTS LIST.....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT.....	10
7.2 CONDUCTED EMISSIONS.....	11
7.3 CONDUCTED OUTPUT POWER.....	14
7.4 CHANNEL BANDWIDTH.....	15
7.5 POWER SPECTRAL DENSITY.....	16
7.6 BAND EDGES.....	17
7.6.1 Conducted Emission Method.....	17
7.6.2 Radiated Emission Method.....	18
7.7 SPURIOUS EMISSION.....	23
7.7.1 Conducted Emission Method.....	23
7.7.2 Radiated Emission Method.....	24
8 TEST SETUP PHOTO.....	35
9 EUT CONSTRUCTIONAL DETAILS.....	36
10 APPENDIX.....	37

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Haylou Wireless Earbuds
Model No.:	GT3
Test Model No.:	GT3
Serial No.:	N/A
Sample(s) Status	Engineer sample
Hardware:	V1.0
Software:	V1.0
Operation Frequency:	2402MHz-2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Internal Antenna
Antenna Gain:	1.1dBi
Power Supply:	DC 3.7V
Remark:The Antenna Gain is supplied by the customer.BlueAsia is not responsible for this data	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode with modulation
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. Full battery is used during all test except ac conducted emission</i>	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
UGREEN	Adapter	CD112	20358
Lenovo	Notebook computer	E470C	PF-10FB5C

5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> FCC — Designation No.: CN1252 <i>BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252. ISED — CAB identifier No.: CN0028 <i>BlueAsia of Technical Services(Shenzhen) Co., Ltd</i> has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.5 Test Location

<p>All tests were performed at:</p>
<p>All tests were performed at: BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673 No tests were sub-contracted.</p>

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-13-2019	07-12-2020
					07-13-2020	07-12-2021
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-13-2019	07-12-2020
					07-13-2020	07-12-2021
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Pre-amplifier	SKET	N/A	N/A	07-13-2019	07-12-2020
					07-13-2020	07-12-2021
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	07-13-2019	07-12-2020
					07-13-2020	07-12-2021
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	07-13-2019	07-12-2020
					07-13-2020	07-12-2021
8	Controller	SKET	N/A	N/A	N/A	N/A
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2020	05-23-2021
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2020	05-23-2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2020	06-09-2021
2	LISN	CHASE	MN2050D	1447	06-10-2020	06-09-2021
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	06-10-2020	06-09-2021
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2021	07-18-2020
					07-19-2020	07-18-2021


RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2020	05-23-2021
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2020	05-23-2021
3	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2020	05-23-2021
4	Signal Generator	Agilent	E8257D	MY44320250	05-24-2020	05-23-2021
5	Power Sensor	D.A.R.E	RPR3006W	17100015SNO27	05-24-2020	05-23-2021
6	Power Sensor	D.A.R.E	RPR3006W	17100015SNO28	05-24-2020	05-23-2021
7	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2021	07-18-2020
					07-19-2020	07-18-2021
8	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2021	07-18-2020
					07-19-2020	07-18-2021

7 Test results and Measurement Data

7.1 Antenna requirement

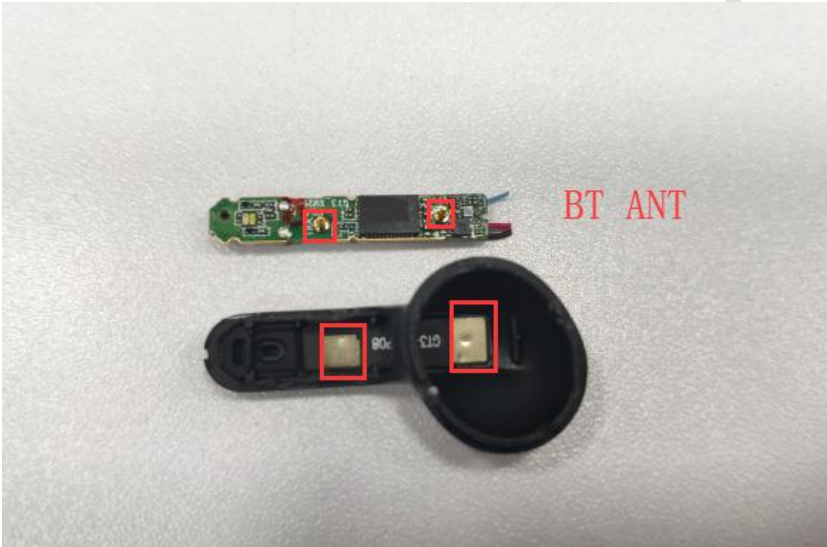Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p>E.U.T Antenna: <i>The antenna is Internal antenna, the best case gain of the antenna is 1.1dBi</i></p>	
	


7.2 Conducted Emissions

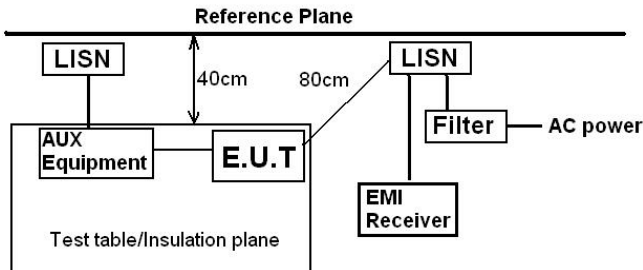Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	 <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

Measurement data

Line:


EUT:	Haylou Wireless Earbuds	Probe:	L1
Model:	GT3	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%H):	26°C/60%RH		

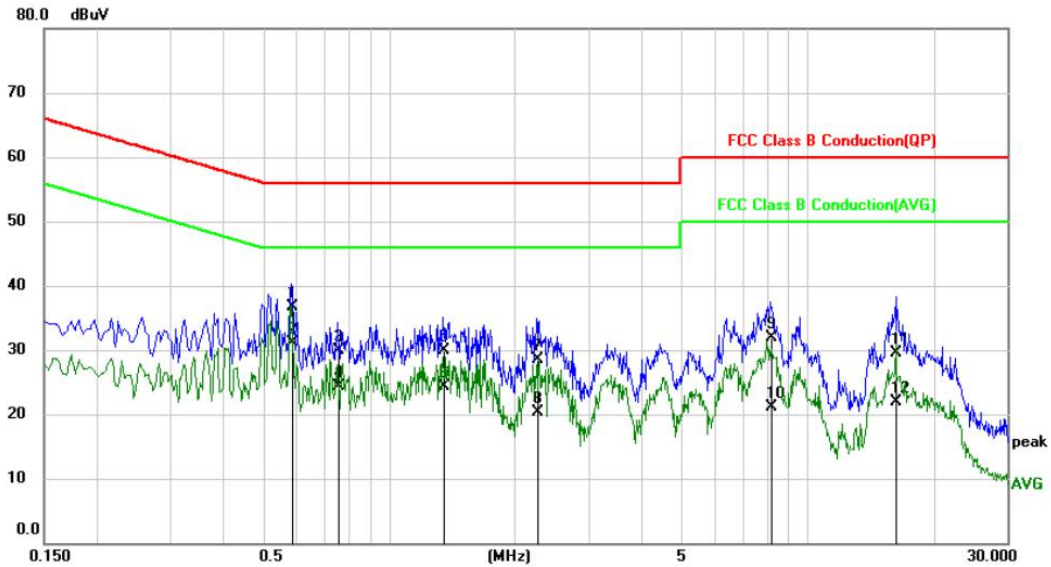

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.5860	26.99	9.74	36.73	56.00	-19.27	QP
2	*	0.5860	21.31	9.74	31.05	46.00	-14.95	AVG
3		0.7580	20.18	9.70	29.88	56.00	-26.12	QP
4		0.7580	14.60	9.70	24.30	46.00	-21.70	AVG
5		1.3460	20.18	9.82	30.00	56.00	-26.00	QP
6		1.3460	14.48	9.82	24.30	46.00	-21.70	AVG
7		2.2500	18.72	9.81	28.53	56.00	-27.47	QP
8		2.2500	10.57	9.81	20.38	46.00	-25.62	AVG
9		8.1620	22.01	9.88	31.89	60.00	-28.11	QP
10		8.1620	11.13	9.88	21.01	50.00	-28.99	AVG
11		16.2300	19.60	9.96	29.56	60.00	-30.44	QP
12		16.2300	11.92	9.96	21.88	50.00	-28.12	AVG

Neutral:

EUT:	Haylou Wireless Earbuds	Probe:	N
Model:	GT3	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		

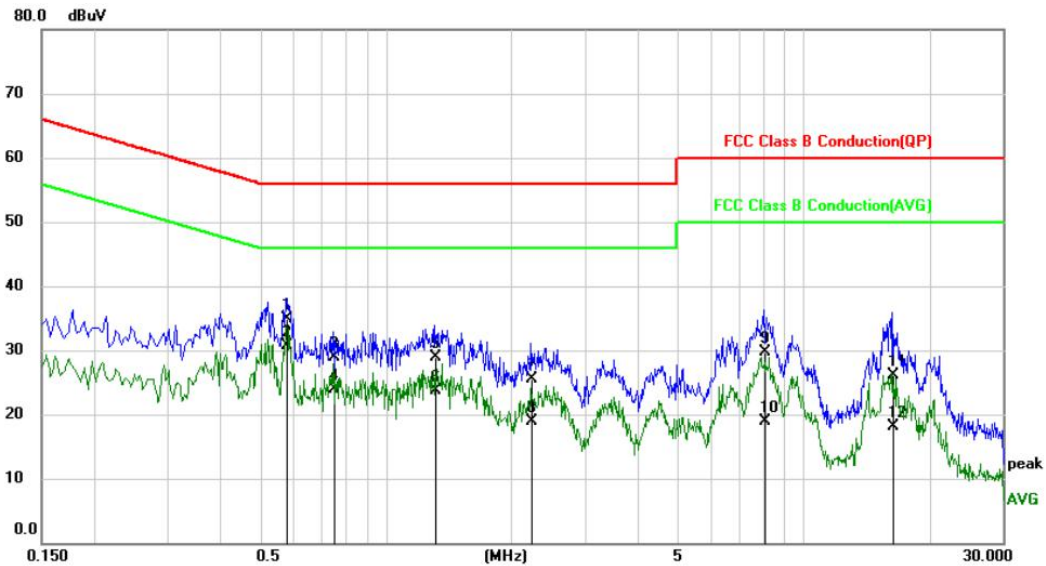


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.5780	25.10	9.74	34.84	56.00	-21.16	QP
2	*	0.5780	20.95	9.74	30.69	46.00	-15.31	AVG
3		0.7500	19.16	9.74	28.90	56.00	-27.10	QP
4		0.7500	14.09	9.74	23.83	46.00	-22.17	AVG
5		1.3099	19.12	9.83	28.95	56.00	-27.05	QP
6		1.3099	13.79	9.83	23.62	46.00	-22.38	AVG
7		2.2300	15.68	9.86	25.54	56.00	-30.46	QP
8		2.2300	9.08	9.86	18.94	46.00	-27.06	AVG
9		8.0420	19.85	9.87	29.72	60.00	-30.28	QP
10		8.0420	8.95	9.87	18.82	50.00	-31.18	AVG
11		16.3420	16.07	10.01	26.08	60.00	-33.92	QP
12		16.3420	8.07	10.01	18.08	50.00	-31.92	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. *Final Level = Receiver Read level + Correct factor*
4. *Correct factor = LISN Factor + Cable Loss*
5. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*


7.3 Conducted Output Power

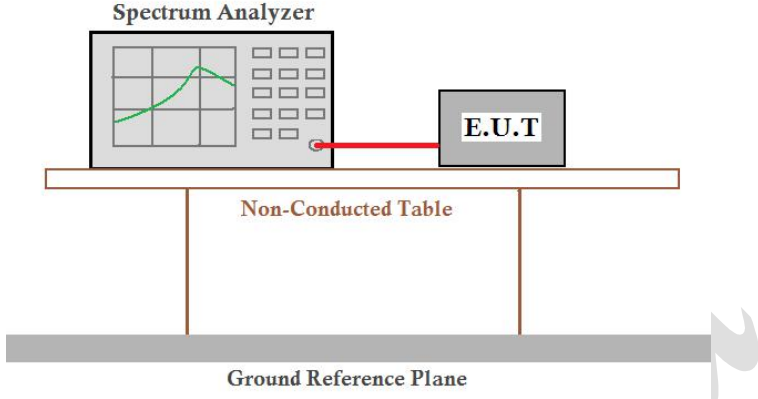Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

AppendixC: Maximum conducted output power

7.4 Channel Bandwidth

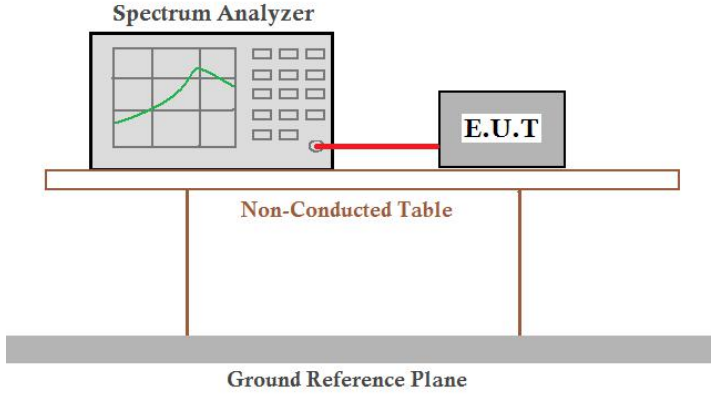
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

AppendixA: DTS Bandwidth

AppendixB: Occupied Channel Bandwidth

7.5 Power Spectral Density

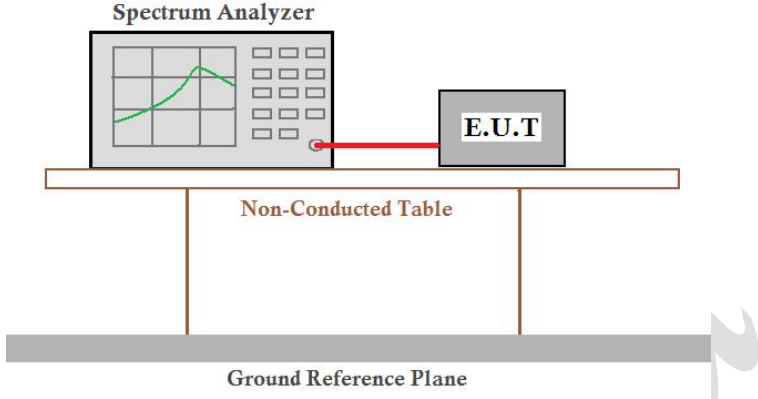
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

AppendixD: Maximum power spectral density

7.6 Band edges


7.6.1 Conducted Emission Method

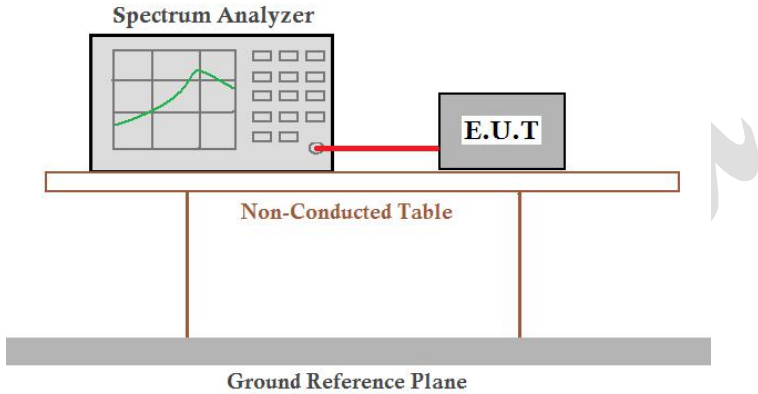Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

AppendixE:Band edge measurements

7.6.2 Radiated Emission Method

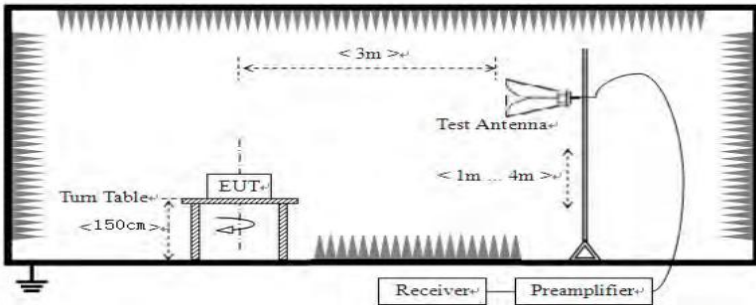Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2390MHz, 2483.5MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	Above 1GHz	54.00		Average	
		74.00		Peak	
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:


Remark:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

2. During the test, pre-scan the 1Mbps, 2 Mbps rate, and found the 2Mbps rate which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

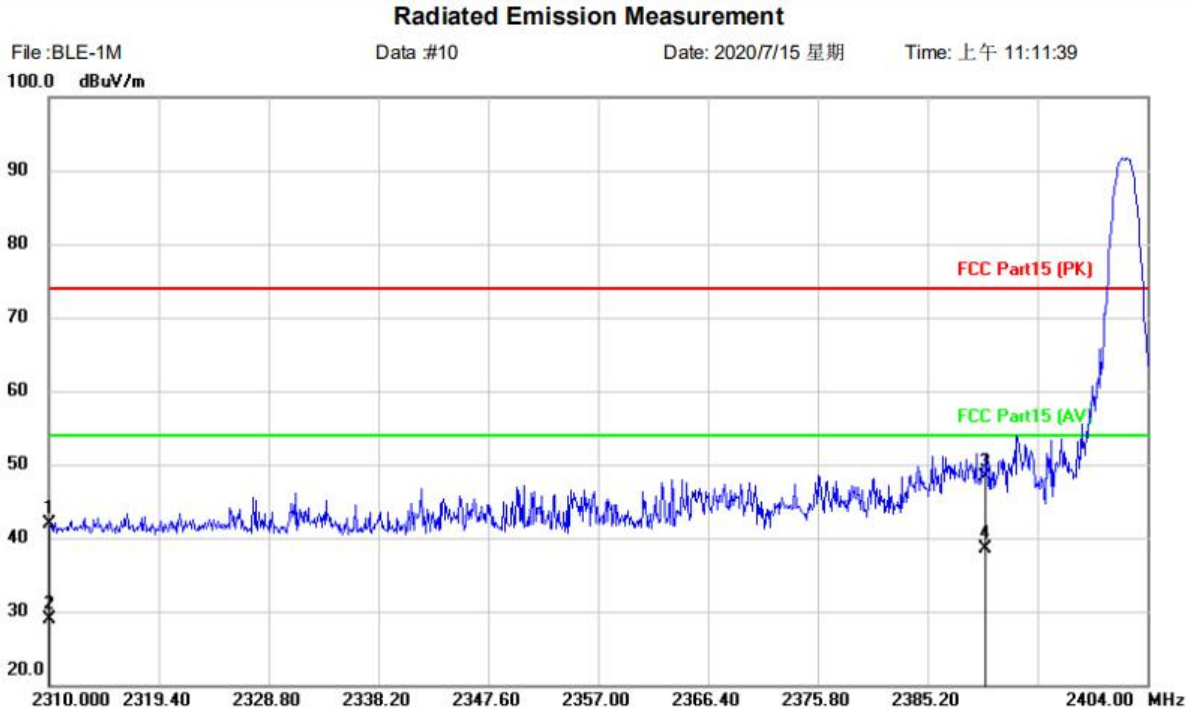


Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Haylou Wireless Earbuds	Distance: 3m	
M/N: GT3		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	55.83	-14.01	41.82	74.00	-32.18			peak
2		2310.000	42.97	-14.01	28.96	54.00	-25.04			AVG
3		2390.000	61.94	-13.62	48.32	74.00	-25.68			peak
4	*	2390.000	52.14	-13.62	38.52	54.00	-15.48			AVG

Radiated Emission Measurement

File :BLE-1M Data :#9 Date: 2020/7/15 星期 Time: 上午 11:04:00

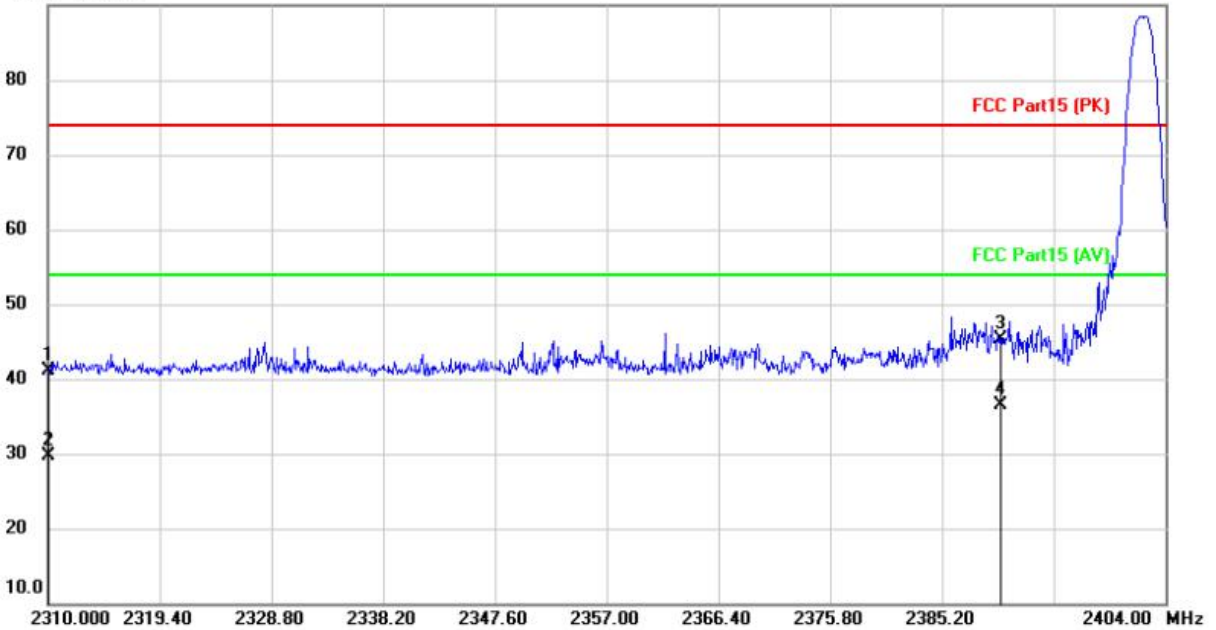


Site: Polarization: **Vertical** Temperature: Humidity: %
 Limit: FCC Part15 (PK) Power: Distance: 3m
 EUT: Haylou Wireless Earbuds
 M/N: GT3
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2310.000	55.46	-14.30	41.16	74.00	-32.84	peak		
2		2310.000	43.94	-14.30	29.64	54.00	-24.36	AVG		
3		2390.000	59.17	-13.95	45.22	74.00	-28.78	peak		
4	*	2390.000	50.44	-13.95	36.49	54.00	-17.51	AVG		

Test channel:	Highest
---------------	---------

Peak value:


Radiated Emission Measurement

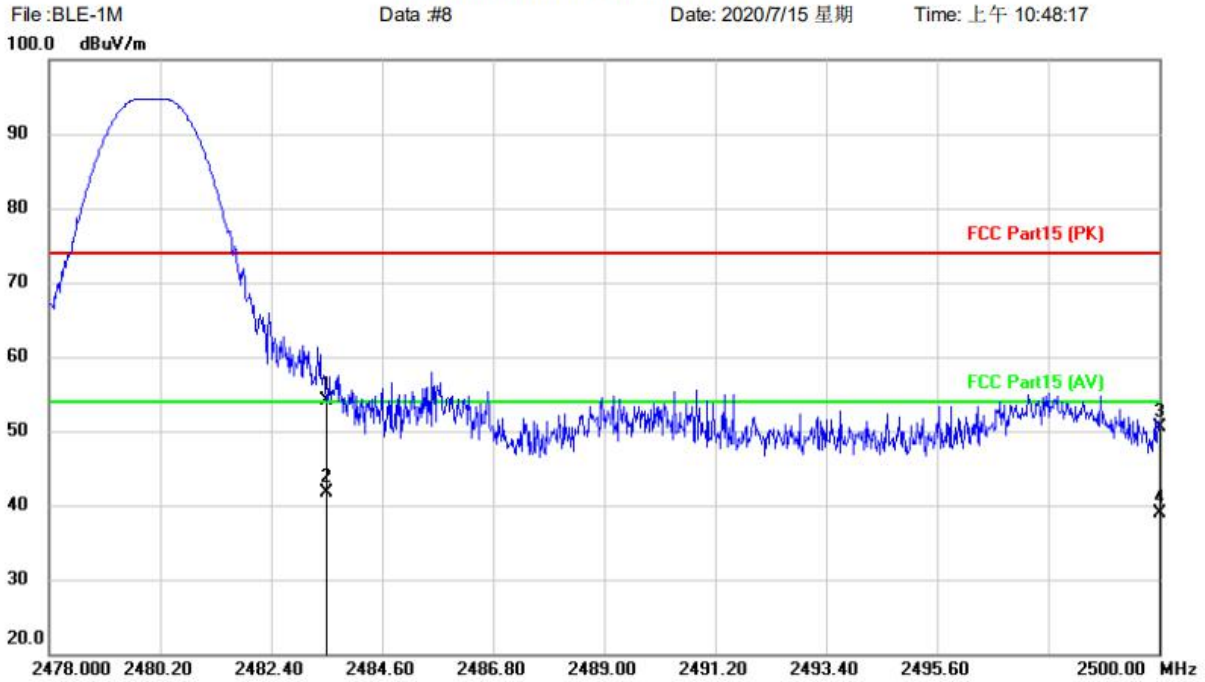

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Haylou Wireless Earbuds	Distance: 3m	
M/N: GT3		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	67.22	-13.11	54.11	74.00	-19.89			peak
2	*	2483.500	54.80	-13.11	41.69	54.00	-12.31			AVG
3		2500.000	63.62	-13.02	50.60	74.00	-23.40			peak
4		2500.000	51.86	-13.02	38.84	54.00	-15.16			AVG

Radiated Emission Measurement

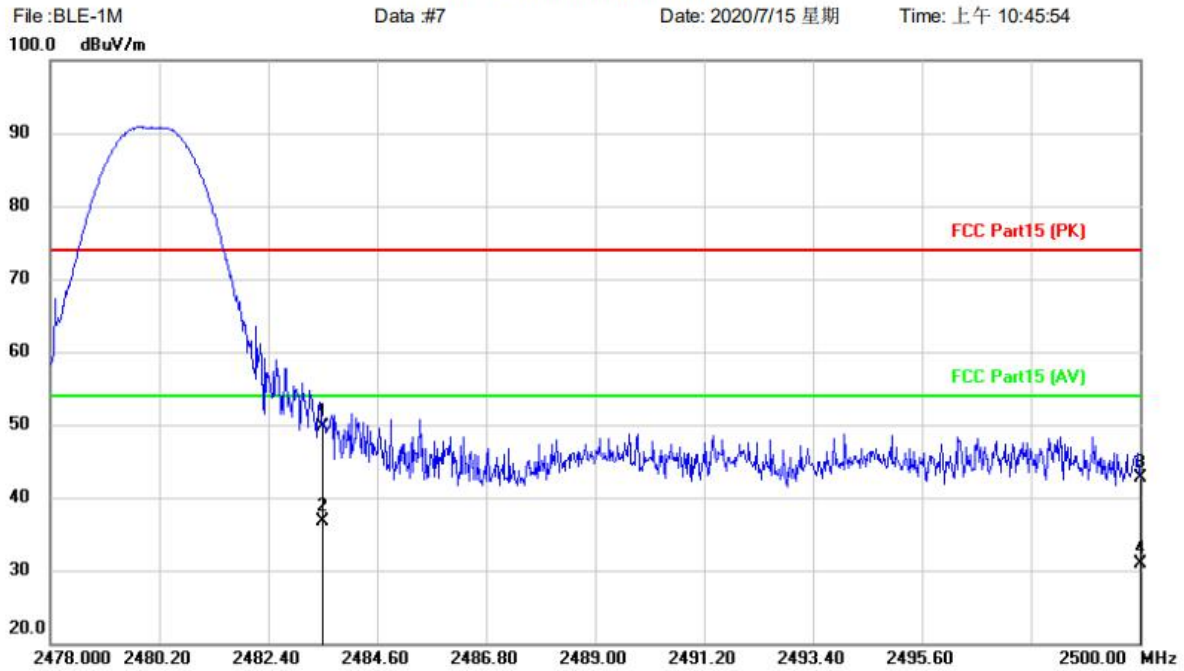

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Haylou Wireless Earbuds	Distance: 3m	
M/N: GT3		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	63.14	-13.50	49.64	74.00	-24.36			peak
2	*	2483.500	50.22	-13.50	36.72	54.00	-17.28			AVG
3		2500.000	56.19	-13.42	42.77	74.00	-31.23			peak
4		2500.000	44.29	-13.42	30.87	54.00	-23.13			AVG

Remark:

1. Final Level = Receiver Read level + Correct factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Correct factor = Antenna Factor + Cable Loss - Preamplifier Factor

7.7 Spurious Emission

7.7.1 Conducted Emission Method



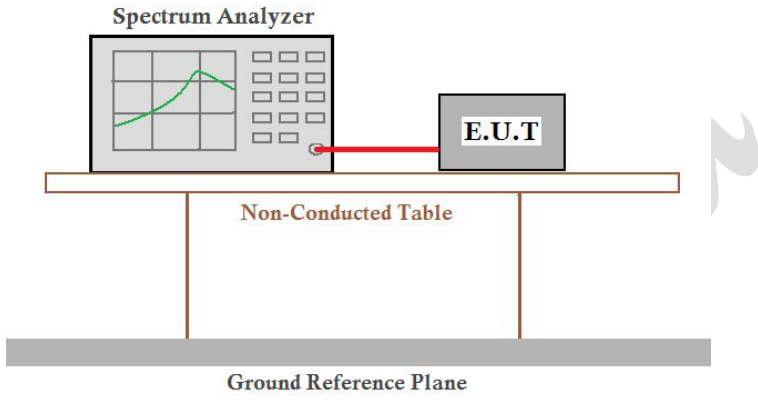
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

AppendixF:Conducted SpuriousEmission

7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
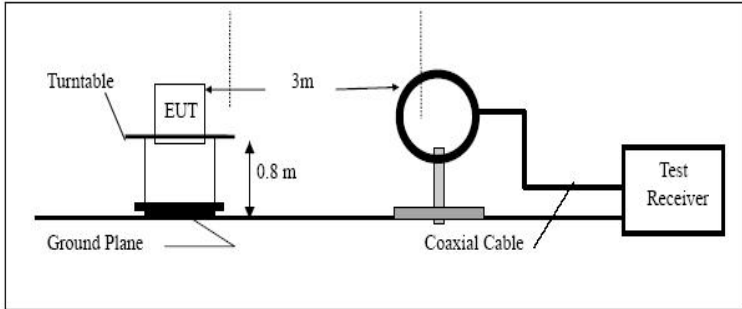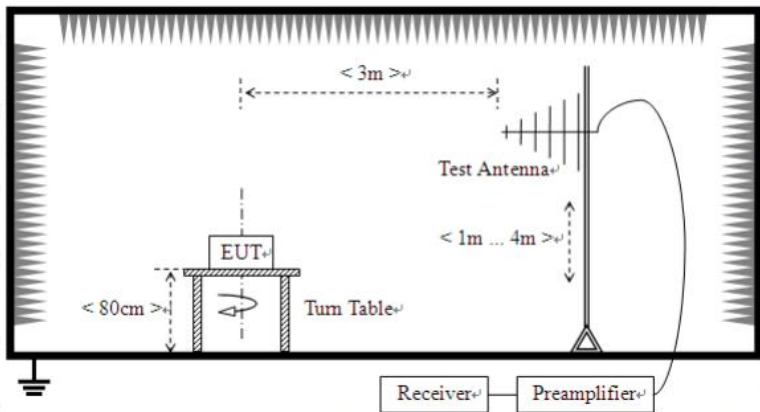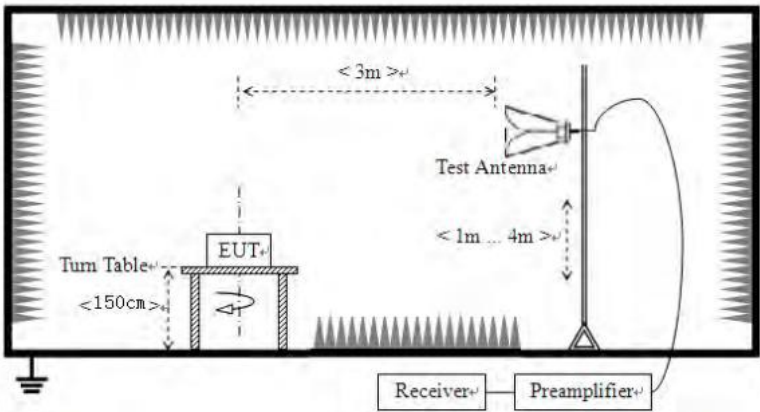
<p>Test setup:</p>	<p>Below 30MHz</p>  <p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. During the test, pre-scan the 1Mbps, 2 Mbps rate, and found the 2Mbps rate which it is worse case.
3. no emission found above 13G,so only show plots below13G

Measurement Data


■ **9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Horizontal:


EUT:	Haylou Wireless Earbuds	Polarization:	Horizontal
Model:	GT3	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		
Note:			

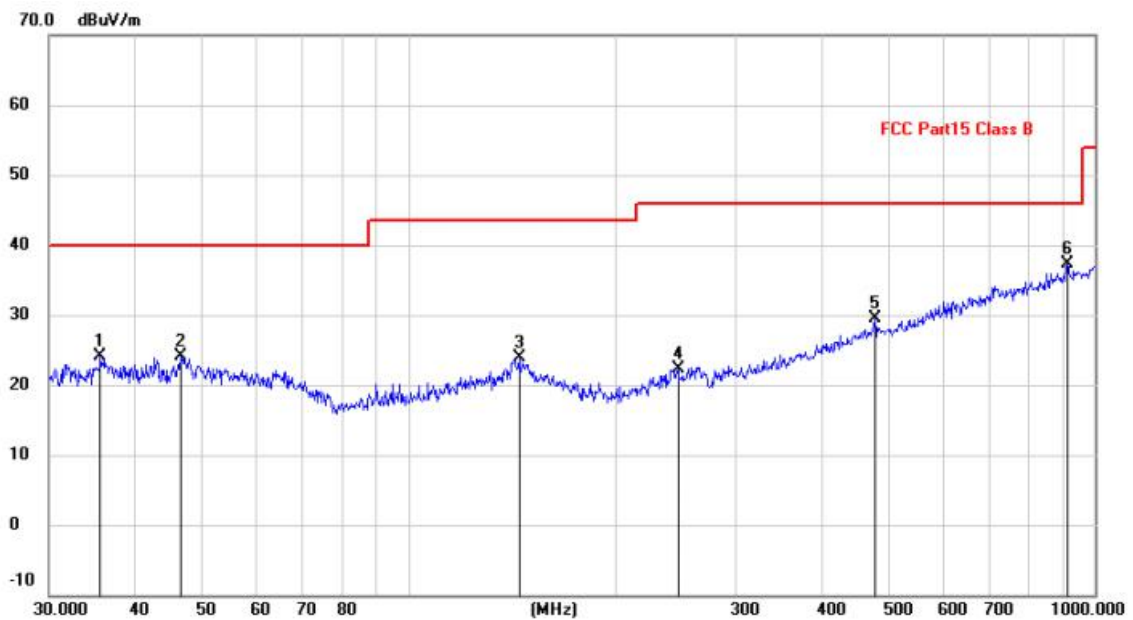

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		35.6300	1.07	22.97	24.04	40.00	-15.96	QP
2		46.6869	-0.14	24.19	24.05	40.00	-15.95	QP
3		145.0701	0.88	23.07	23.95	43.50	-19.55	QP
4		247.3360	-0.66	22.92	22.26	46.00	-23.74	QP
5		478.4927	1.05	28.54	29.59	46.00	-16.41	QP
6	*	912.7786	1.71	35.54	37.25	46.00	-8.75	QP

Vertical:

EUT:	Haylou Wireless Earbuds	Polarziation:	Vertical
Model:	GT3	Power Source:	AC120V/60Hz
Mode:	BLE mode	Test by:	Eason
Temp./Hum.(%RH):	26°C/60%RH		
Note:			

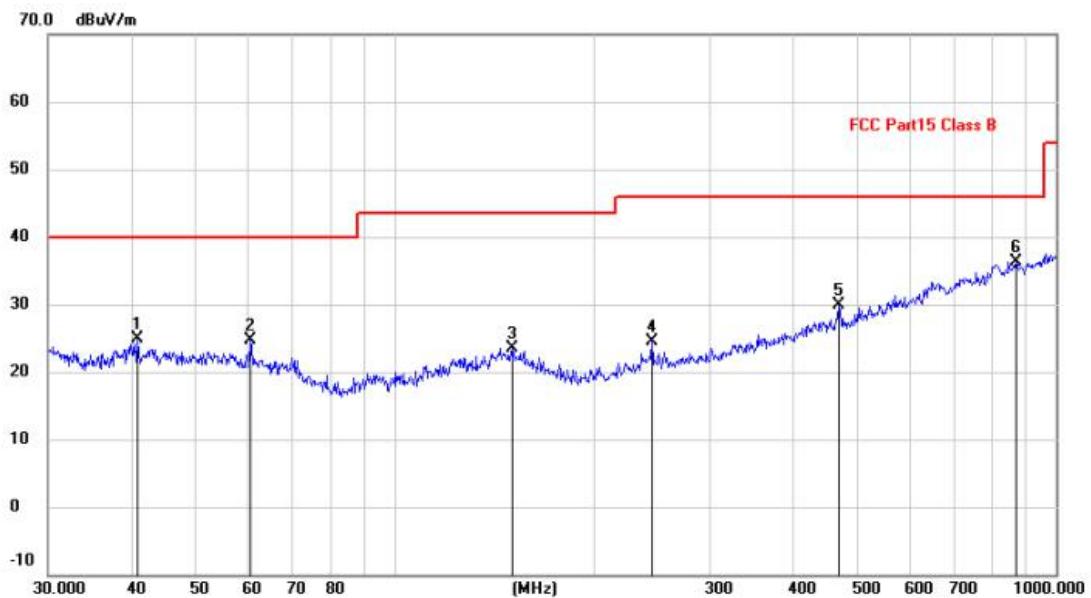


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		40.8445	0.90	24.06	24.96	40.00	-15.04	QP
2		60.7043	1.79	23.01	24.80	40.00	-15.20	QP
3		151.0665	0.45	23.05	23.50	43.50	-20.00	QP
4		245.0900	1.67	22.93	24.60	46.00	-21.40	QP
5		468.8761	1.57	28.37	29.94	46.00	-16.06	QP
6	*	869.1301	1.12	35.14	36.26	46.00	-9.74	QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

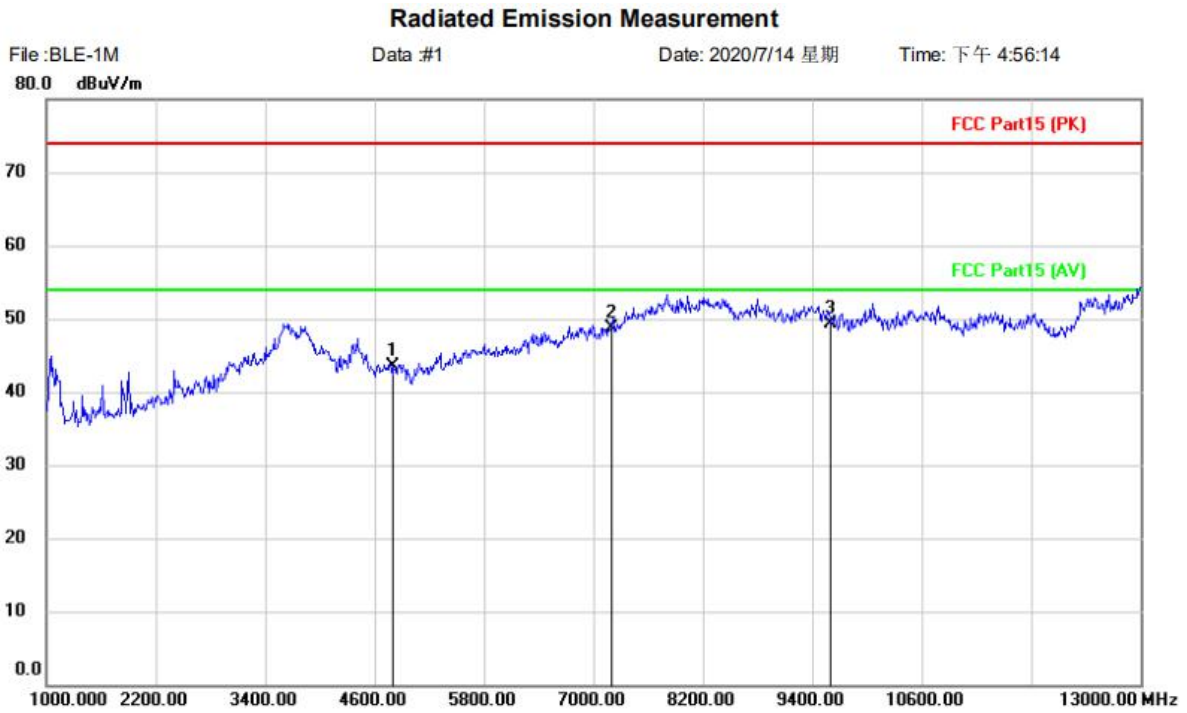


Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Haylou Wireless Earbuds	Distance: 3m	
M/N: GT3		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4804.000	49.89	-6.35	43.54	74.00	-30.46			peak
2		7204.000	49.50	-0.72	48.78	74.00	-25.22			peak
3	*	9604.000	46.95	2.43	49.38	74.00	-24.62			peak

Radiated Emission Measurement

File :BLE-1M Data :#2 Date: 2020/7/14 星期 Time: 下午 4:57:41

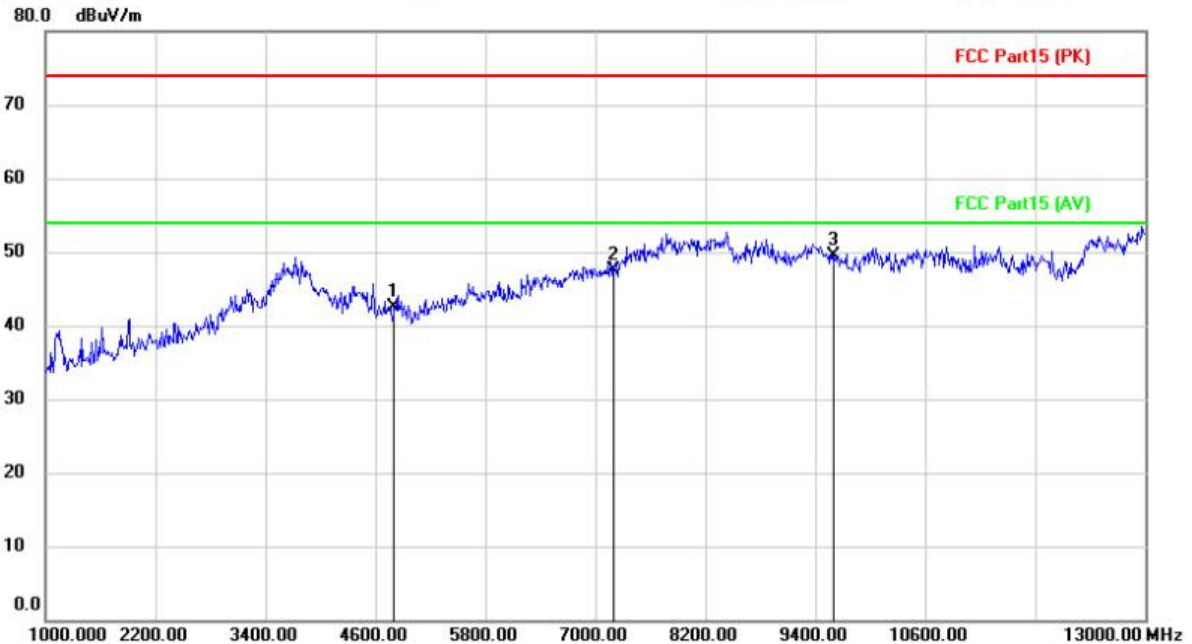

Site Polarization: **Vertical** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: Haylou Wireless Earbuds Distance: 3m
 M/N: GT3
 Mode: TX-L
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		4804.000	48.85	-6.35	42.50	74.00	-31.50	peak	
2		7204.000	47.88	-0.47	47.41	74.00	-26.59	peak	
3	*	9604.000	47.27	2.23	49.50	74.00	-24.50	peak	

Remark:

- Final Level = Receiver Read level + Correct factor
- "*", means this data is the too weak instrument of signal is unable to test.
- Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Factor

Test channel: Middle

Peak value:

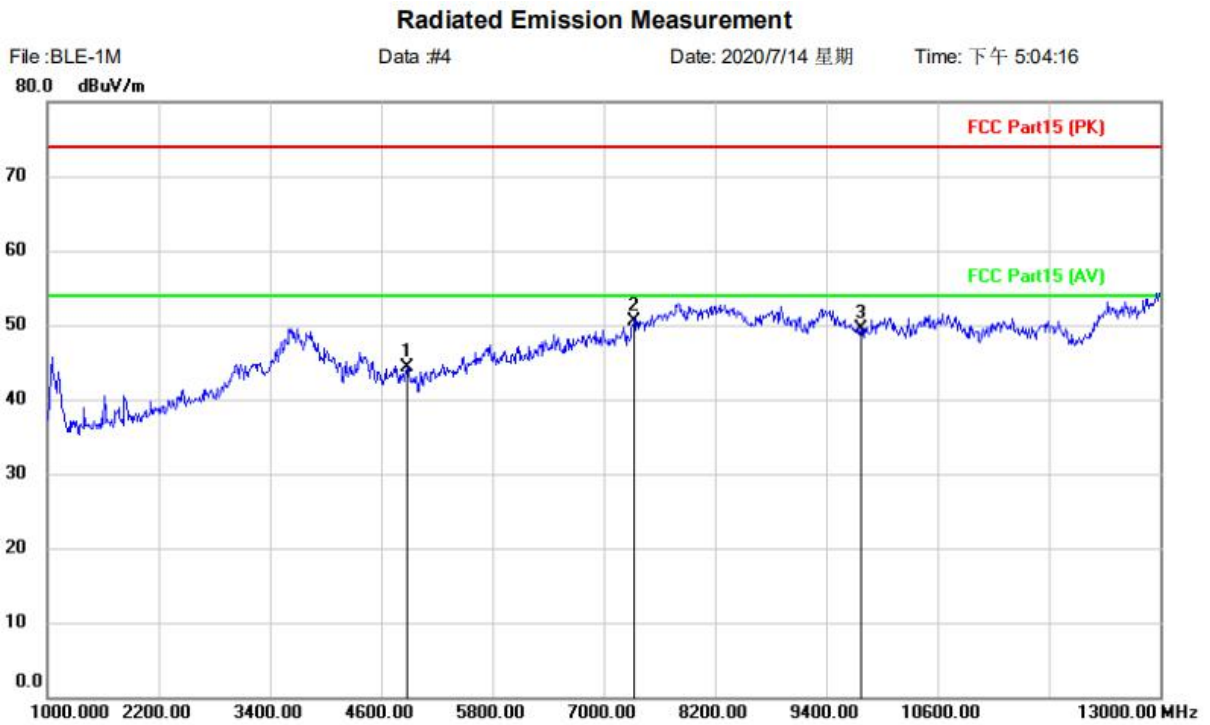


Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Haylou Wireless Earbuds	Distance: 3m	
M/N: GT3		
Mode: TX-M		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4876.000	50.83	-6.51	44.32	74.00	-29.68			peak
2	*	7324.000	50.30	0.12	50.42	74.00	-23.58			peak
3		9772.000	46.96	2.56	49.52	74.00	-24.48			peak

Radiated Emission Measurement

File : BLE-1M Data : #3 Date : 2020/7/14 星期 Time : 下午 5:01:46
 80.0 dBuV/m

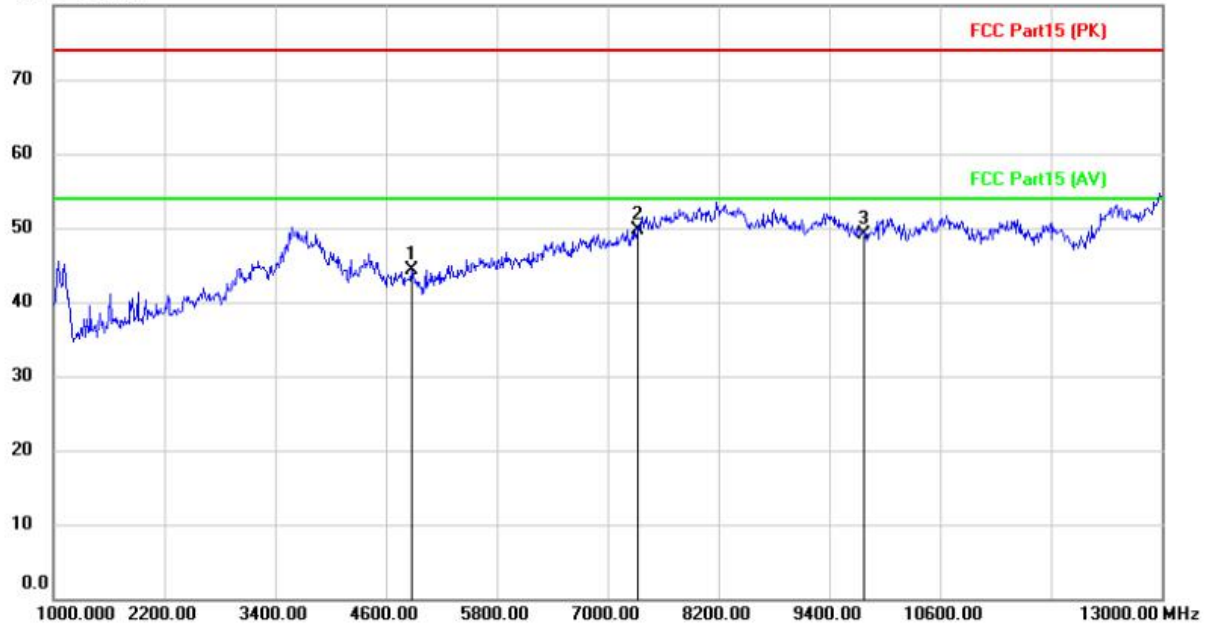

Site Polarization: **Vertical** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: Haylou Wireless Earbuds Distance: 3m
 M/N: GT3
 Mode: TX-M
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4876.000	50.73	-6.51	44.22	74.00	-29.78	peak			
2	*	7324.000	49.68	-0.02	49.66	74.00	-24.34	peak			
3		9772.000	46.67	2.53	49.20	74.00	-24.80	peak			

Remark:

1. Final Level = Receiver Read level + Correct factor
2. "*", means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss - Preamplifier Factor


Test channel: Highest

Peak value:

Radiated Emission Measurement

File :BLE-1M Data #5 Date: 2020/7/14 星期 Time: 下午 5:09:56

80.0 dBuV/m

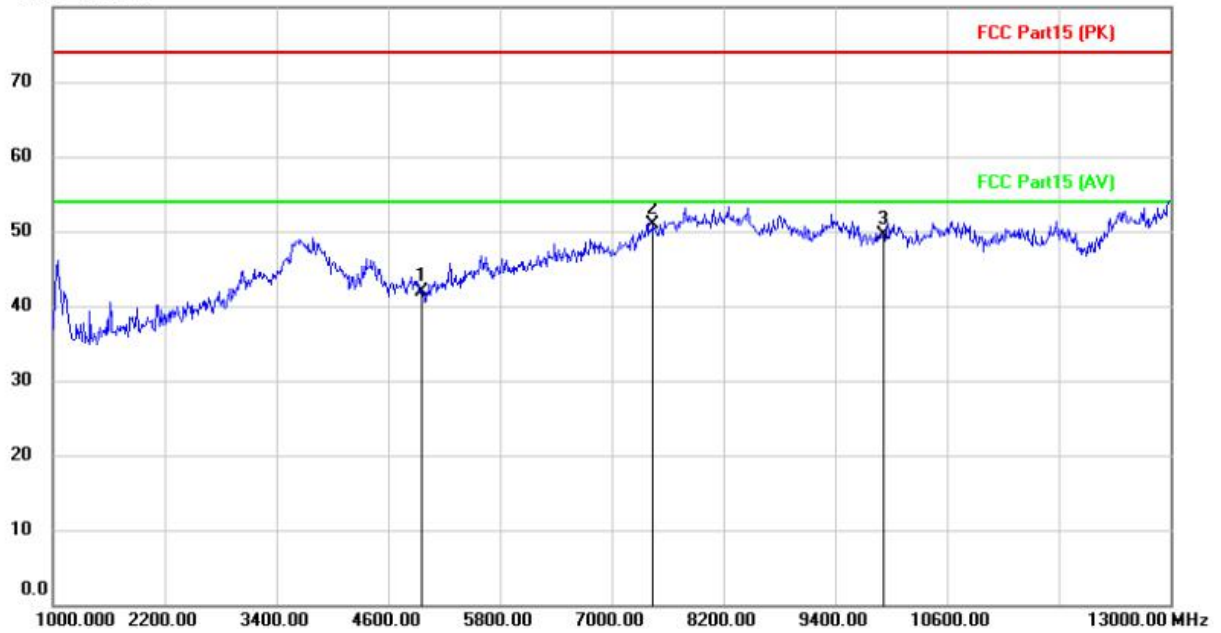


Site Polarization: **Horizontal** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: Haylou Wireless Earbuds Distance: 3m
 M/N: GT3
 Mode: TX-H
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4960.000	48.63	-6.80	41.83	74.00	-32.17	peak		
2	*	7444.000	49.96	0.89	50.85	74.00	-23.15	peak		
3		9916.000	46.39	3.09	49.48	74.00	-24.52	peak		

Radiated Emission Measurement

File: BLE-1M Data: #6 Date: 2020/7/14 星期 Time: 下午 5:11:47
 80.0 dBuV/m

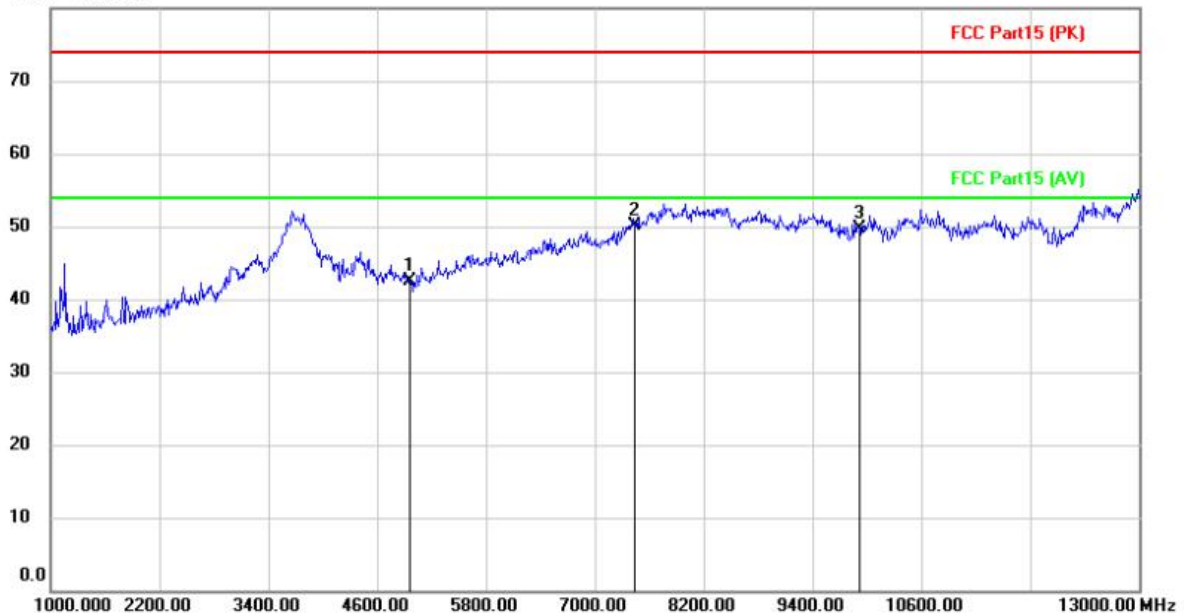

Site: Polarization: **Vertical** Temperature:
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: Haylou Wireless Earbuds Distance: 3m
 M/N: GT3
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4960.000	49.22	-6.80	42.42	74.00	-31.58	peak			
2	*	7444.000	49.67	0.36	50.03	74.00	-23.97	peak			
3		9916.000	46.45	3.20	49.65	74.00	-24.35	peak			

Remark:

1. Final Level = Receiver Read level + Correct factor.
2. "*", means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor.

8 Test Setup Photo

Reference to the test report No. BLA-EMC-201812-A35-01

BlueAsia

9 EUT Constructional Details

Reference to the test report No. BLA-EMC-201812-A35-01

BlueAsia

10 Appendix

Refer to the following attachments.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia