

# TEST REPORT

**Product Name** : Haylou Wireless Earbuds  
**Brand Mark** : Haylou  
**Model No** : Haylou-GT5  
**FCC ID** : 2AMQ6-GT5  
**Report Number** : BLA-EMC-202005-A70-03  
**Date of Sample Receipt** : 2020/5/27  
**Date of Test** : 2020/5/28 to 2020/6/2  
**Date of Issue** : 2020/6/2  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**Dongguan Liesheng Electronic Co., Ltd.**  
13/F,Project Phrase 2 of GaoshengTechTower,No.5,Longxi  
Road,Nancheng,Dongguan,Guangdong,China

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**IOT Test Centre of BlueAsia**

**No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,China**

**TEL: +86-755-28682673**

**FAX: +86-755-28682673**

Compiled by:

*Ben Zang*

Review by:

*Sweet. Liang*

Approved by:

*Jamen Li*

Date:

2020/6/2



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2020/6/2	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>6</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>7</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>7</b>
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>8</b>
<b>5</b>	<b>TEST MODE .....</b>	<b>8</b>
<b>6</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>7</b>	<b>DESCRIPTION OF SUPPORT UNIT.....</b>	<b>9</b>
<b>8</b>	<b>LABORATORY LOCATION.....</b>	<b>9</b>
<b>9</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>10</b>
<b>1</b>	<b>CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....</b>	<b>14</b>
1.1	LIMITS .....	14
1.2	BLOCK DIAGRAM OF TEST SETUP .....	14
1.3	PROCEDURE .....	14
1.4	TEST DATA .....	16
<b>2</b>	<b>CONDUCTED BAND EDGES MEASUREMENT.....</b>	<b>18</b>
2.1	LIMITS .....	18
2.2	BLOCK DIAGRAM OF TEST SETUP .....	18
2.3	TEST DATA .....	18
<b>3</b>	<b>RADIATED SPURIOUS EMISSIONS.....</b>	<b>19</b>
3.1	LIMITS .....	19
3.2	BLOCK DIAGRAM OF TEST SETUP .....	20
3.3	PROCEDURE .....	20
3.4	TEST DATA .....	22
<b>4</b>	<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>27</b>
4.1	LIMITS .....	27
4.2	BLOCK DIAGRAM OF TEST SETUP .....	27
4.3	TEST DATA .....	27
<b>5</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....</b>	<b>28</b>
5.1	LIMITS .....	28
5.2	BLOCK DIAGRAM OF TEST SETUP .....	29

5.3	PROCEDURE .....	29
5.4	TEST DATA .....	31
<b>6</b>	<b>POWER SPECTRUM DENSITY.....</b>	<b>32</b>
6.1	LIMITS .....	32
6.2	BLOCK DIAGRAM OF TEST SETUP .....	32
6.3	TEST DATA .....	32
<b>7</b>	<b>CONDUCTED PEAK OUTPUT POWER .....</b>	<b>33</b>
7.1	LIMITS .....	33
7.2	BLOCK DIAGRAM OF TEST SETUP .....	33
7.3	TEST DATA .....	33
<b>8</b>	<b>MINIMUM 6DB BANDWIDTH .....</b>	<b>34</b>
8.1	LIMITS .....	34
8.2	BLOCK DIAGRAM OF TEST SETUP .....	34
8.3	TEST DATA .....	34
<b>9</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>13</b>
9.1	CONCLUSION .....	13
<b>10</b>	<b>APPENDIX.....</b>	<b>35</b>
10.1	APPENDIX: DTS BANDWIDTH.....	35
	<i>Test Result</i> .....	35
	<i>Test Graphs</i> .....	35
10.2	APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER .....	37
	<i>Test Result</i> .....	37
	<i>Test Graphs</i> .....	37
10.3	APPENDIX: MAXIMUM POWER SPECTRAL DENSITY .....	39
	<i>Test Result</i> .....	39
	<i>Test Graphs</i> .....	39
10.4	APPENDIX: BAND EDGE MEASUREMENTS.....	41
	<i>Test Result</i> .....	41
	<i>Test Graphs</i> .....	41
10.5	APPENDIX: CONDUCTED SPURIOUS EMISSION .....	43
	<i>Test Result</i> .....	43
	<i>Test Graphs</i> .....	43
	<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>45</b>

BlueAsia

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

## 2 GENERAL INFORMATION

<b>Applicant</b>	Dongguan Liesheng Electronic Co., Ltd.
<b>Address</b>	13/F,Project Phrase 2 of GaoshengTechTower,No.5,Longxi Road,Nancheng,Dongguan,Guangdong,China
<b>Manufacturer</b>	Dongguan Liesheng Electronic Co., Ltd.
<b>Address</b>	13/F,Project Phrase 2 of GaoshengTechTower,No.5,Longxi Road,Nancheng,Dongguan,Guangdong,China
<b>Factory</b>	N/A
<b>Address</b>	N/A
<b>Product Name</b>	Haylou Wireless Earbuds
<b>Test Model No.</b>	Haylou-GT5

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V1.0
<b>Software Version</b>	V1.0
<b>Operation Frequency:</b>	2402MHz~2480MHz
<b>Modulation Type:</b>	GFSK
<b>Channel Spacing:</b>	2MHz
<b>Number of Channels:</b>	40
<b>Antenna Type:</b>	PCB Antenna
<b>Antenna Gain:</b>	0.38 dBi

#### 4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25 °C	3.7Vdc

#### 5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report.

#### 6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission	±4.34dB
Radiated Emission	±4.24dB
Radiated Emission	±4.68dB
AC Power Line Conducted Emission	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB



## 7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

## 8 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
IOT Test Centre of BlueAsia  
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.

## 9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	6/10/2018	6/9/2021
Receiver	R&S	ESPI3	101082	4/20/2020	4/19/2021
LISN	R&S	ENV216	3560.6550.15	7/4/2019	7/3/2020
LISN	AT	AT166-2	AKK1806000003	12/17/2019	12/16/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	4/20/2020	4/19/2021
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020

Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2022
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	4/20/2020	4/19/2021
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2022
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Power Spectrum Density**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

**Test Equipment Of Conducted Peak Output Power**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

**Test Equipment Of Minimum 6dB Bandwidth**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

## 1 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


### 1.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.38dBi.

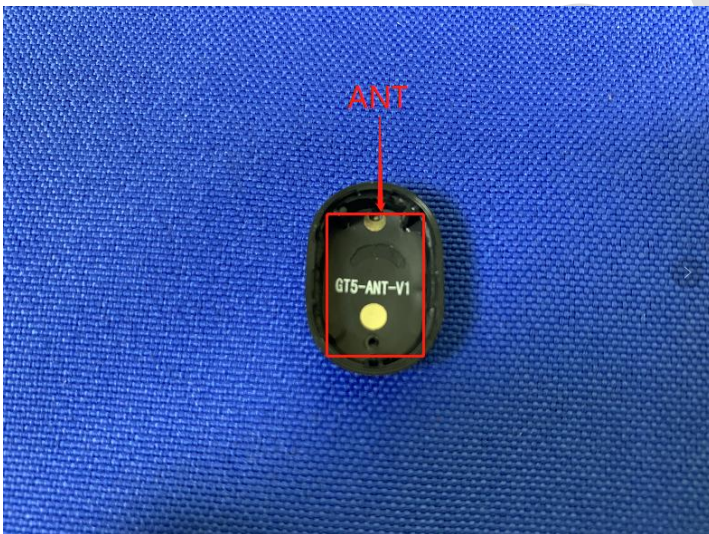

## 2 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	Normal Working
Test Mode (Final Test)	Normal Working
Tester	Ben
Temperature	25°C
Humidity	55%

### 2.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 2.2 BLOCK DIAGRAM OF TEST SETUP

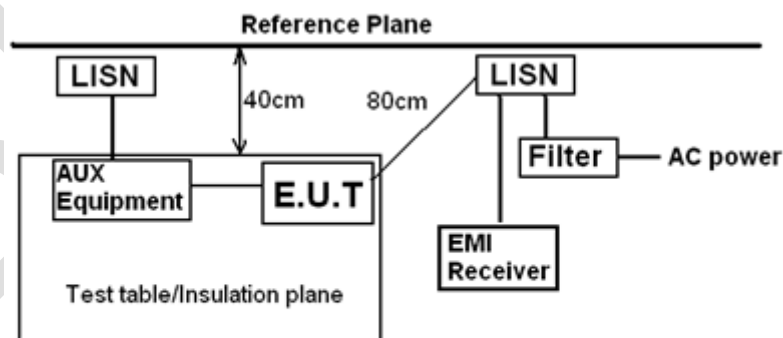

Remark  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

### 2.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50?H + 5ohm linear impedance. The power cables of all other units of the EUT

were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,


4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

## 2.4 TEST DATA

[TestMode: Normal Working]; [Line: Line]

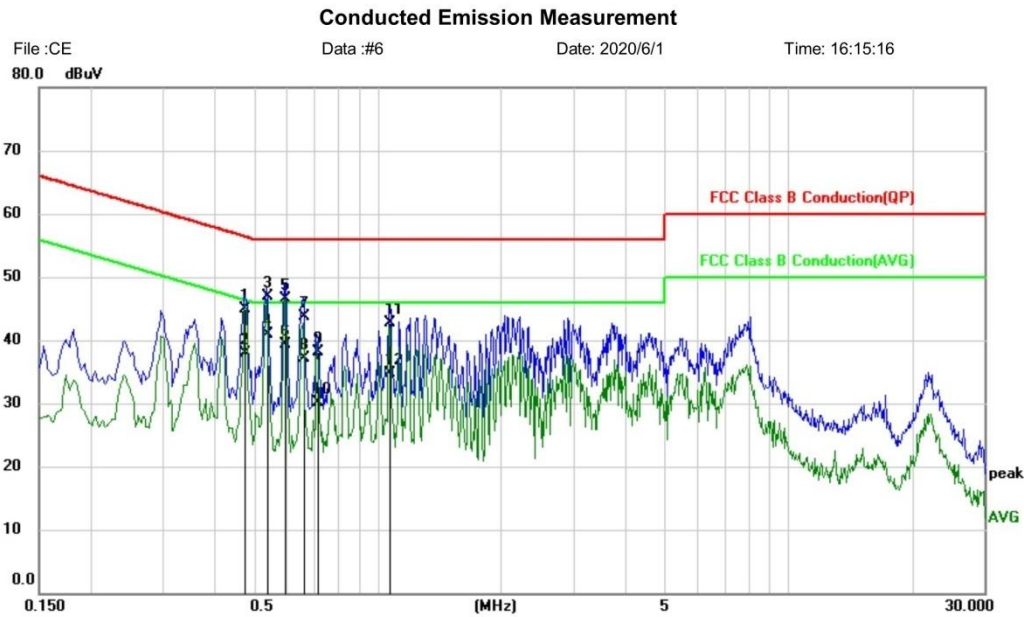

Site:      Phase: **L1**      Temperature: 26

Limit: FCC Class B Conduction(QP)      Power: AC120V/60Hz      Humidity: 60 %

EUT: Haylou Wireless Earbuds

M/N: Haylou-GT5

Mode: BLE mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4740	35.27	9.72	44.99	56.44	-11.45	QP	
2		0.4740	28.24	9.72	37.96	46.44	-8.48	AVG	
3		0.5380	37.13	9.73	46.86	56.00	-9.14	QP	
4	*	0.5380	31.08	9.73	40.81	46.00	-5.19	AVG	
5		0.5940	36.76	9.74	46.50	56.00	-9.50	QP	
6		0.5940	29.52	9.74	39.26	46.00	-6.74	AVG	
7		0.6580	34.05	9.69	43.74	56.00	-12.26	QP	
8		0.6580	27.37	9.69	37.06	46.00	-8.94	AVG	
9		0.7140	28.41	9.68	38.09	56.00	-17.91	QP	
10		0.7140	20.49	9.68	30.17	46.00	-15.83	AVG	
11		1.0700	32.81	9.86	42.67	56.00	-13.33	QP	
12		1.0700	24.83	9.86	34.69	46.00	-11.31	AVG	

\*:Maximum data    x:Over limit    !:over margin


(Reference Only)

**Test Result: Pass**



[TestMode: Normal Working]; [Line: Nutral]

Conducted Emission Measurement

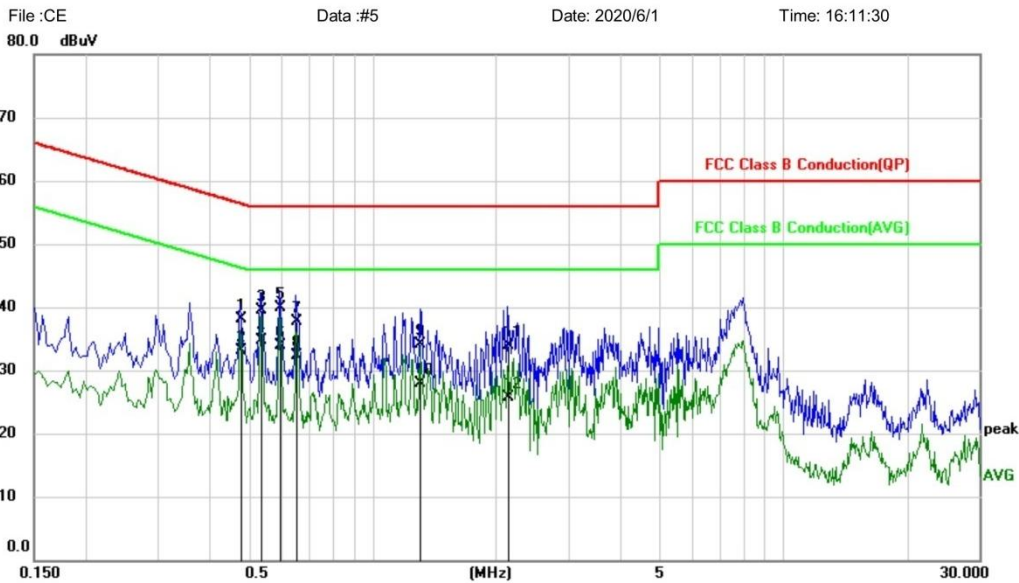

Site: Phase: **N** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC120V/60Hz Humidity: 60 %  
 EUT: Haylow Wireless Earbuds  
 M/N: Haylou-GT5  
 Mode: BLE mode  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4780	28.47	9.72	38.19	56.37	-18.18	QP	
2		0.4780	23.42	9.72	33.14	46.37	-13.23	AVG	
3		0.5340	29.87	9.73	39.60	56.00	-16.40	QP	
4	*	0.5340	24.98	9.73	34.71	46.00	-11.29	AVG	
5		0.5940	30.13	9.74	39.87	56.00	-16.13	QP	
6		0.5940	24.13	9.74	33.87	46.00	-12.13	AVG	
7		0.6540	28.01	9.73	37.74	56.00	-18.26	QP	
8		0.6540	22.58	9.73	32.31	46.00	-13.69	AVG	
9		1.3060	24.19	9.83	34.02	56.00	-21.98	QP	
10		1.3060	18.12	9.83	27.95	46.00	-18.05	AVG	
11		2.1380	24.12	9.86	33.98	56.00	-22.02	QP	
12		2.1380	15.77	9.86	25.63	46.00	-20.37	AVG	

\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Test Result: Pass**


### 3 CONDUCTED BAND EDGES MEASUREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	55%

#### 3.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

#### 3.2 BLOCK DIAGRAM OF TEST SETUP

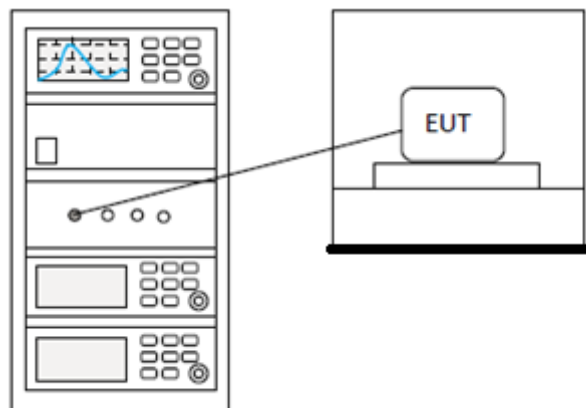

#### 3.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

#### 4 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	55%

##### 4.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 4.2 BLOCK DIAGRAM OF TEST SETUP

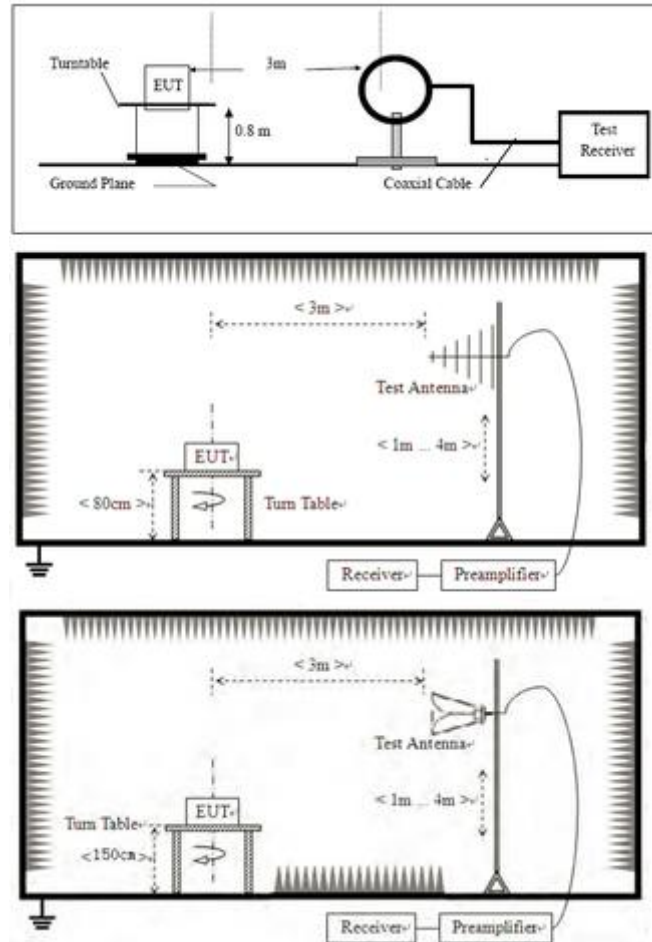

## 4.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

#### 4.4 TEST DATA

Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	58.31	2.38	60.69	74	-13.31	Vertical
7206.00	59.29	2.17	61.46	74	-12.54	Vertical
9608.00	58.43	2.06	60.49	74	-13.51	Vertical
12010.00	*			74		Vertical
14412.00	*			74		Vertical
4804.00	59.54	2.38	61.92	74	-12.08	Horizontal
7206.00	60.43	2.17	62.6	74	-11.4	Horizontal
9608.00	59.3	2.06	61.36	74	-12.64	Horizontal
12010.00	*			74		Horizontal
14412.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	41.33	2.38	43.71	54	-10.29	Vertical
7206.00	41.78	2.17	43.95	54	-10.05	Vertical
9608.00	41.73	2.06	43.79	54	-10.21	Vertical
12010.00	*			54		Vertical
14412.00	*			54		Vertical
4804.00	39.53	2.38	41.91	54	-12.09	Horizontal
7206.00	38.56	2.17	40.73	54	-13.27	Horizontal
9608.00	39.64	2.06	41.7	54	-12.3	Horizontal
12010.00	*			54		Horizontal
14412.00	*			54		Horizontal


Test channel:Middle						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4884.00	59.47	0.17	59.64	74	-14.36	Vertical
7326.00	59.17	1.43	60.6	74	-13.4	Vertical
9768.00	58.4	1.26	59.66	74	-14.34	Vertical
12210.00	*			74		Vertical
14652.00	*			74		Vertical
4884.00	58.22	0.17	58.39	74	-15.61	Horizontal
7326.00	60.1	1.43	61.53	74	-12.47	Horizontal
9768.00	58.6	1.26	59.86	74	-14.14	Horizontal
12210.00	*			74		Horizontal
14652.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	40.46	0.17	40.63	54	-13.37	Vertical
7323.00	40.46	1.43	41.89	54	-12.11	Vertical
9764.00	40.22	1.26	41.48	54	-12.52	Vertical
12205.00	*			54		Vertical
14646.00	*			54		Vertical
4882.00	41.64	0.17	41.81	54	-12.19	Horizontal
7323.00	40.14	1.43	41.57	54	-12.43	Horizontal
9764.00	39.85	1.26	41.11	54	-12.89	Horizontal
12205.00	*			54		Horizontal
14646.00	*			54		Horizontal

Test channel: Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	58.52	1.04	59.56	74	-14.44	Vertical
7440.00	60.22	2.59	62.81	74	-11.19	Vertical
9920.00	58.05	2.74	60.79	74	-13.21	Vertical
12400.00	*			74		Vertical
14880.00	*			74		Vertical
4960.00	61.93	1.04	62.97	74	-11.03	Horizontal
7440.00	59.9	2.59	62.49	74	-11.51	Horizontal
9920.00	60.51	2.74	63.25	74	-10.75	Horizontal
12400.00	*			74		Horizontal
14880.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	39.19	1.04	40.23	54	-13.77	Vertical
7440.00	38.52	2.59	41.11	54	-12.89	Vertical
9920.00	40.2	2.74	42.94	54	-11.06	Vertical
12400.00	*			54		Vertical
14880.00	*			54		Vertical
4960.00	38.99	1.04	40.03	54	-13.97	Horizontal
7440.00	41.35	2.59	43.94	54	-10.06	Horizontal
9920.00	41.47	2.74	44.21	54	-9.79	Horizontal
12400.00	*			54		Horizontal
14880.00	*			54		Horizontal



[TestMode: TX]; [Polarity: Horizontal]

**Radiated Emission Measurement**

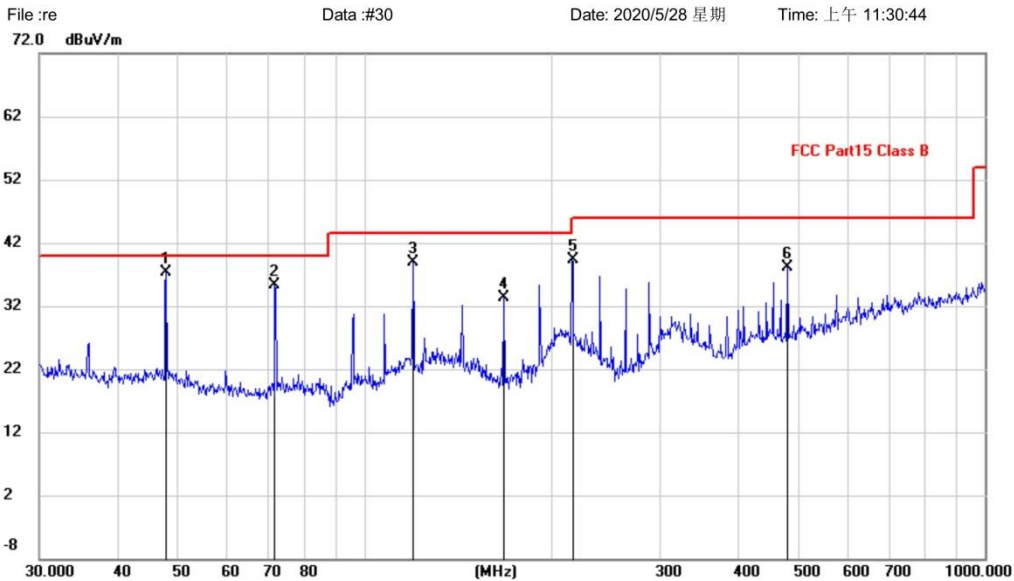

Site Polarization: **Horizontal** Temperature:  
Limit: FCC Part15 Class B Power: Humidity: %  
EUT: Distance:  
M/N:  
Mode:  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	47.9938	13.88	23.37	37.25	40.00	-2.75			QP	
2		71.8319	15.04	20.33	35.37	40.00	-4.63			QP	
3		119.8555	16.91	22.01	38.92	43.50	-4.58			QP	
4		167.8240	10.00	23.22	33.22	43.50	-10.28			QP	
5		216.0240	18.59	20.75	39.34	46.00	-6.66			QP	
6		480.5276	10.03	28.06	38.09	46.00	-7.91			QP	


\*:Maximum data x:Over limit !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX]; [Polarity: Vertical]

**Radiated Emission Measurement**

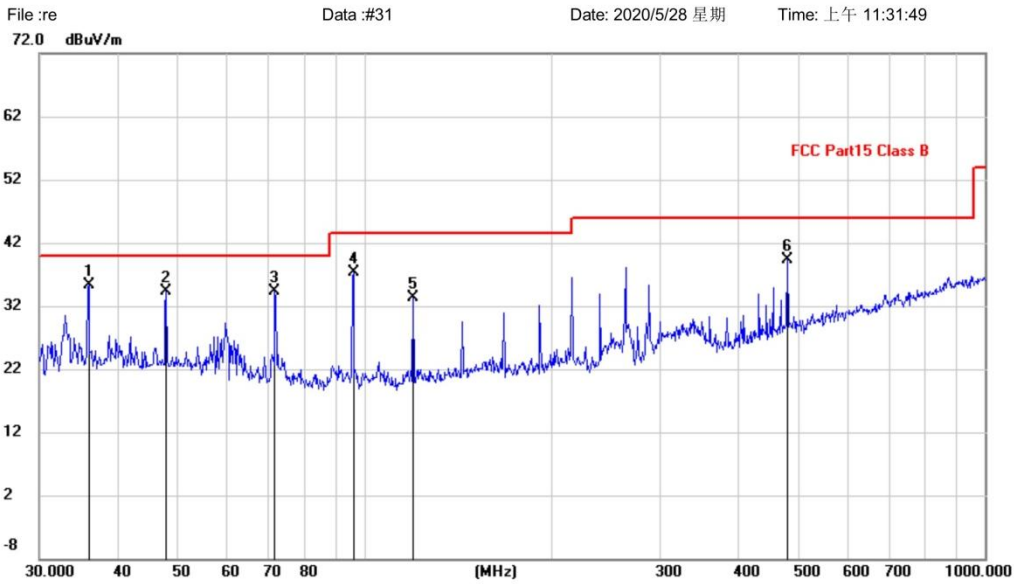

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 Class B	Power:	Humidity: %
EUT:	Distance:	
M/N:		
Mode:		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	36.0007	11.90	23.32	35.22	40.00	-4.78	QP		
2		47.9938	10.85	23.37	34.22	40.00	-5.78	QP		
3		71.8319	14.01	20.33	34.34	40.00	-5.66	QP		
4		96.0986	17.65	19.65	37.30	43.50	-6.20	QP		
5		119.8555	11.39	22.01	33.40	43.50	-10.10	QP		
6		480.5276	11.18	28.06	39.24	46.00	-6.76	QP		

\*:Maximum data    x:Over limit    !:over margin      <Reference Only

**Test Result: Pass**


## 5 CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	55%

### 5.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### 5.2 BLOCK DIAGRAM OF TEST SETUP

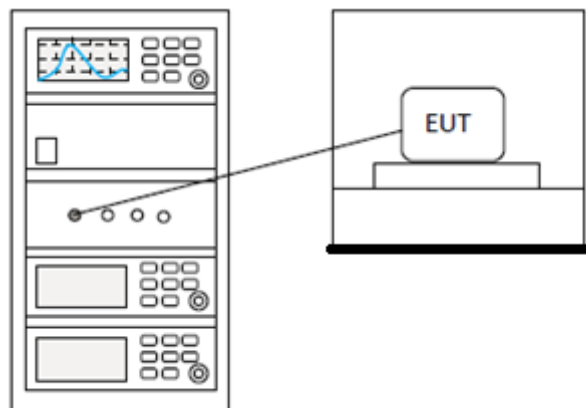

### 5.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

## 6 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	55%

### 6.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 6.2 BLOCK DIAGRAM OF TEST SETUP

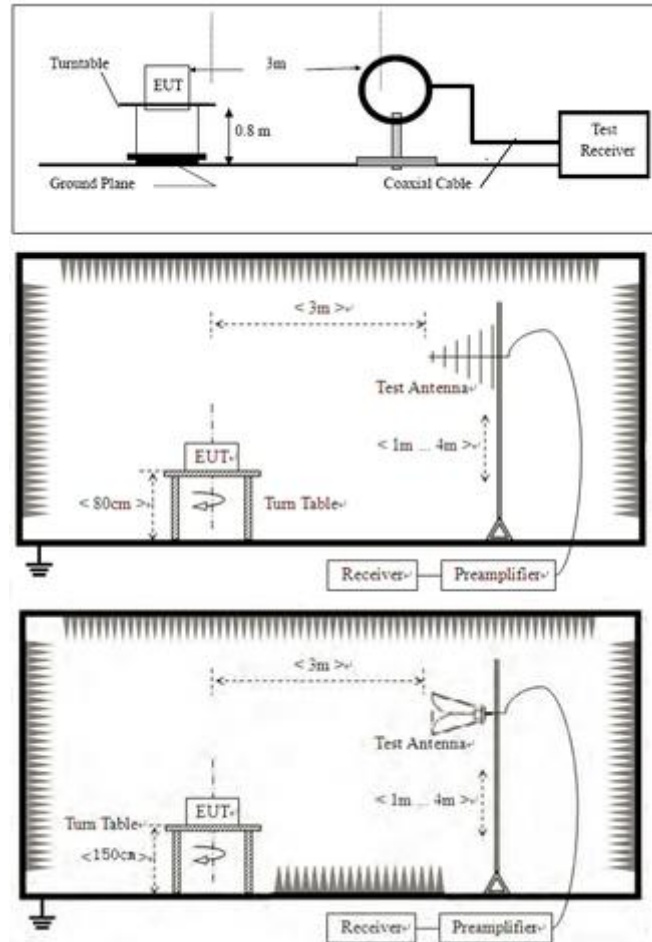

## 6.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

**6.4 TEST DATA**

[TestMode: TX]						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	42.64	-4.2	38.44	74	-35.56	Horizontal
2390	42.35	-3.88	38.47	74	-35.53	Horizontal
2310	44.07	-4.49	39.58	74	-34.42	Vertical
2390	53.57	-4.21	49.36	74	-24.64	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	31.43	-4.2	27.23	54	-26.77	Horizontal
2390	31.38	-3.88	27.5	54	-26.5	Horizontal
2310	32.2	-4.49	27.71	54	-26.29	Vertical
2390	34.25	-4.21	30.04	54	-23.96	Vertical
Test channel:Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	45.17	-3.39	41.78	74	-32.22	Horizontal
2500	44.34	-3.3	41.04	74	-32.96	Horizontal
2483.5	47.81	-3.78	44.03	74	-29.97	Vertical
2500	51.95	-3.7	48.25	74	-25.75	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	32.91	-3.39	29.52	54	-24.48	Horizontal
2500	31.76	-3.3	28.46	54	-25.54	Horizontal
2483.5	32.97	-3.78	29.19	54	-24.81	Vertical
2500	32.79	-3.7	29.09	54	-24.91	Vertical
<b>Test Result: Pass</b>						


## 7 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

### 7.1 LIMITS

<b>Limit:</b>	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	------------------------------------------------------------------------------------------

### 7.2 BLOCK DIAGRAM OF TEST SETUP

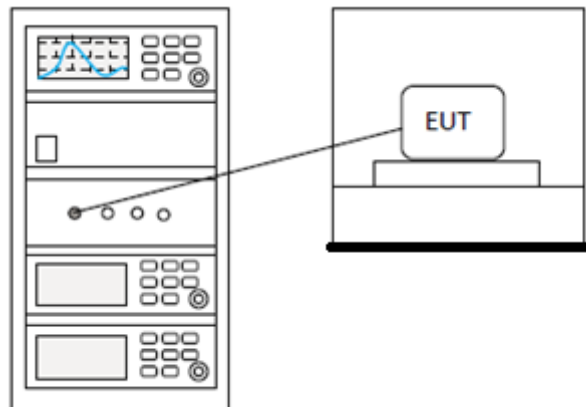

### 7.3 TEST DATA

<b>Pass: Please Refer To Appendix: For Details</b>
----------------------------------------------------




## 8 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Ben
<b>Temperature</b>	25°C
<b>Humidity</b>	55%

### 8.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 8.2 BLOCK DIAGRAM OF TEST SETUP

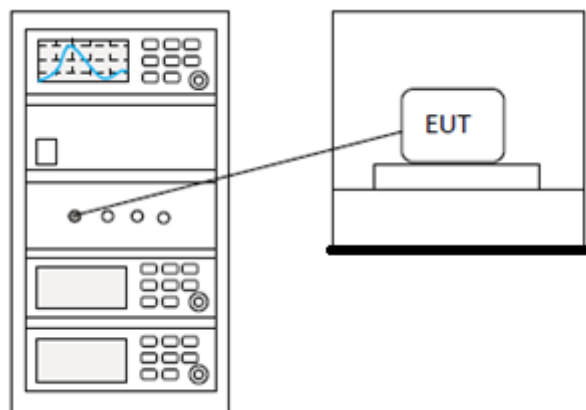

### 8.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**


## 9 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

### 9.1 LIMITS

Limit:	$\geq 500$ kHz
--------	----------------

### 9.2 BLOCK DIAGRAM OF TEST SETUP

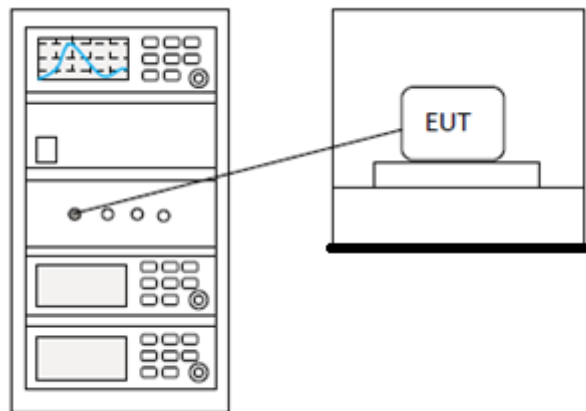

### 9.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**


## 10 APPENDIX

### 10.1 APPENDIX: DTS BANDWIDTH


#### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.678	>=0.5	PASS
		2442	0.672	>=0.5	PASS
		2480	0.678	>=0.5	PASS

#### Test Graphs

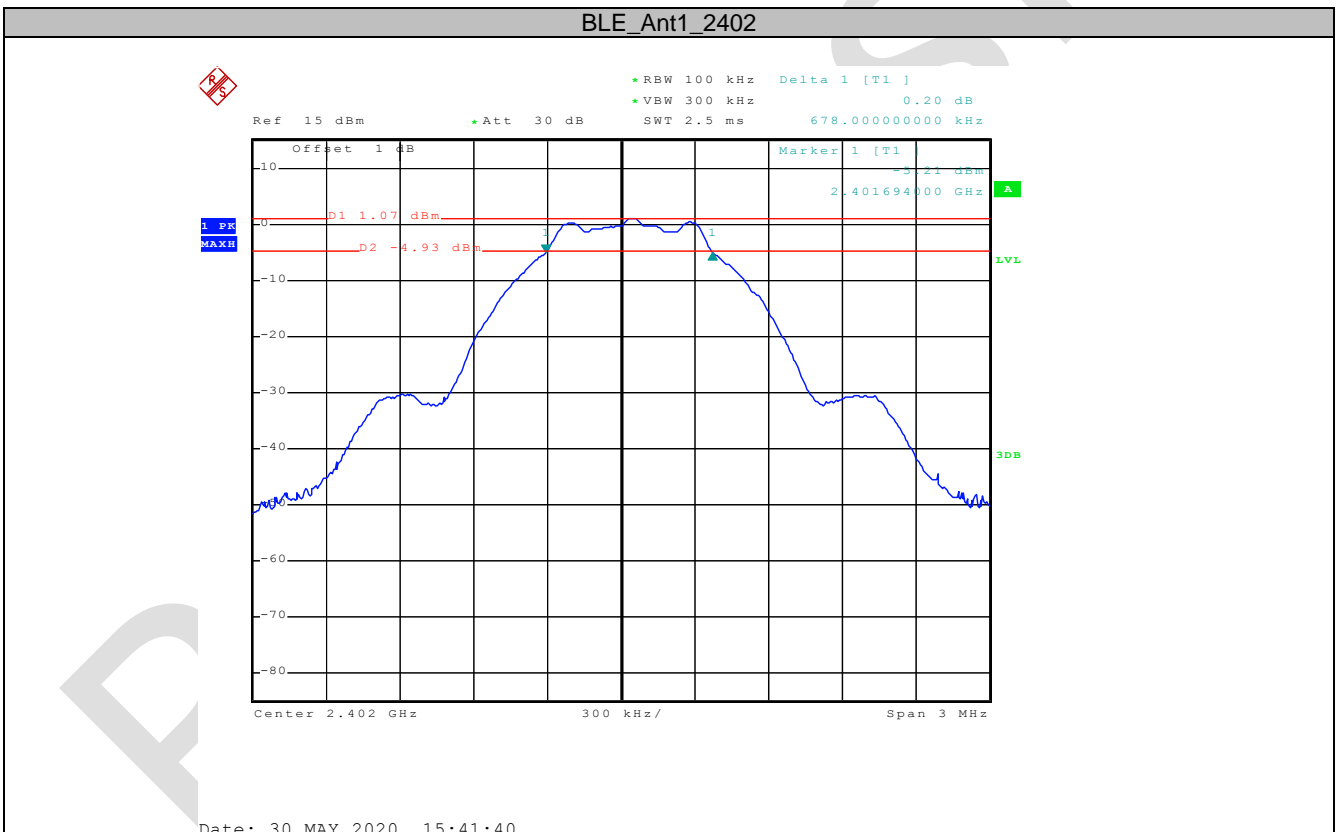


BLE\_Ant1\_2442

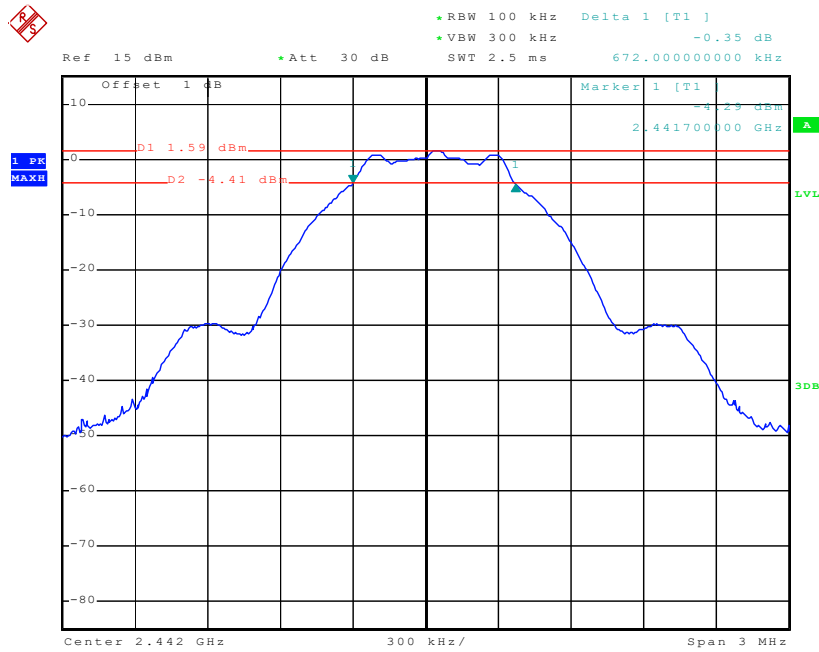

Date: 30 MAY 2020 15:40:36

BLE\_Ant1\_2480

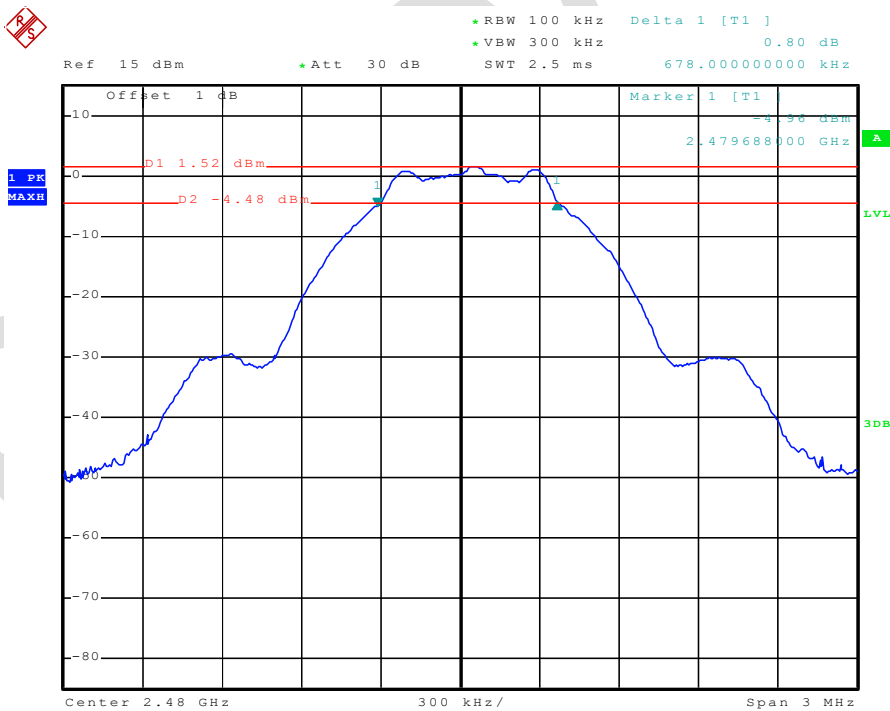


Date: 30 MAY 2020 15:39:09

### 10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER


#### Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	1.25	<=30	PASS
		2442	1.68	<=30	PASS
		2480	1.65	<=30	PASS

#### Test Graphs

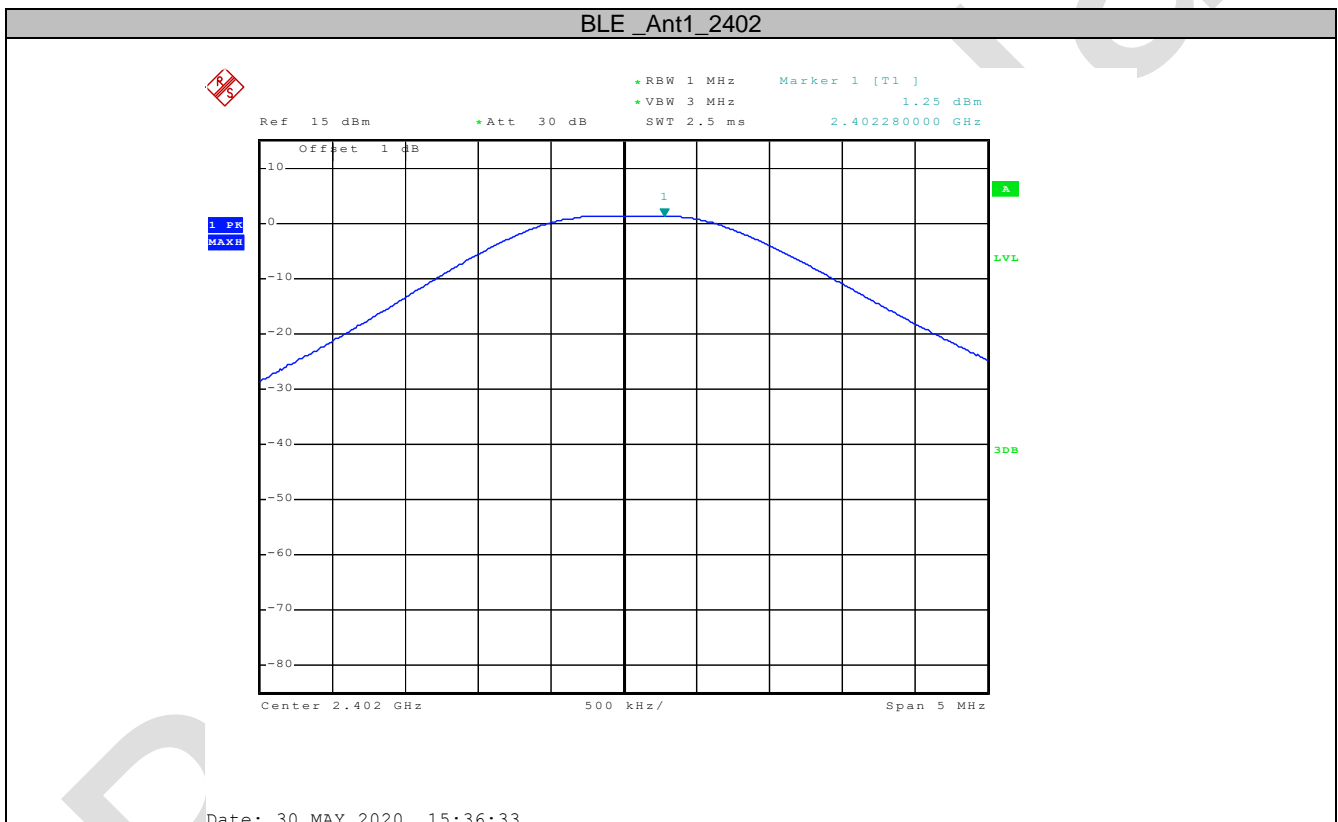


BLE\_Ant1\_2442

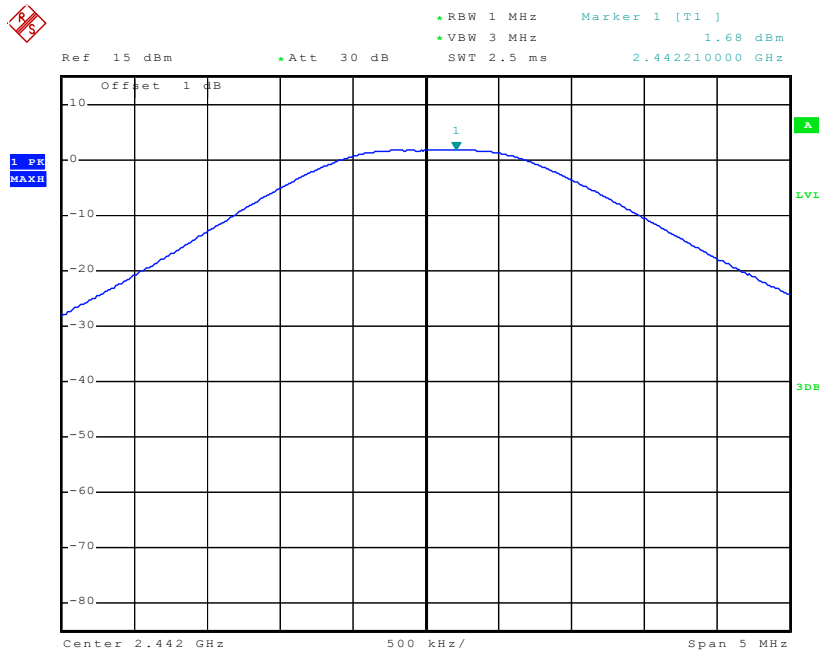

Date: 30 MAY 2020 15:37:08

BLE\_Ant1\_2480

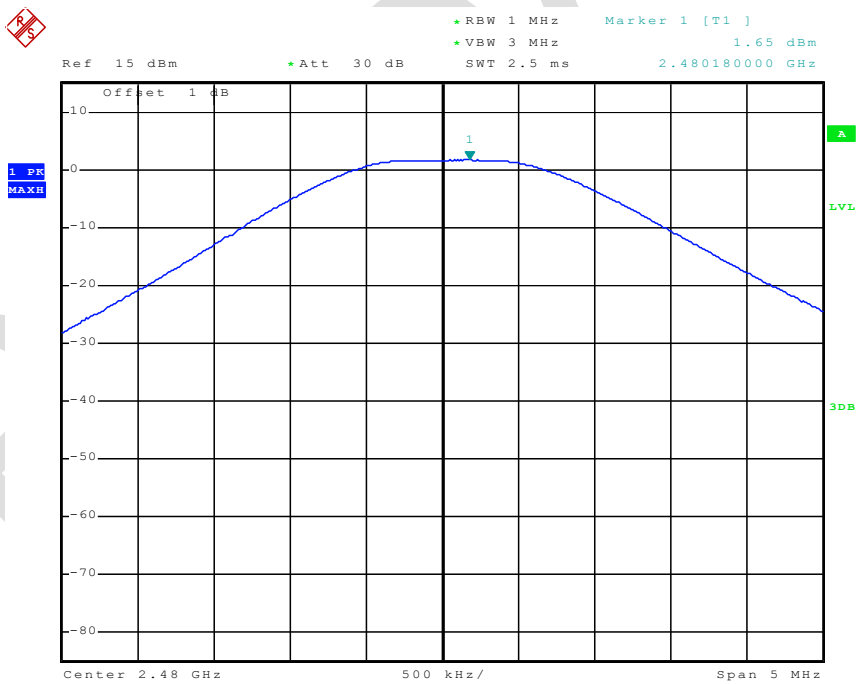


Date: 30 MAY 2020 15:37:28

### 10.3 APPENDIX: MAXIMUM POWER SPECTRAL DENSITY


#### Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-14.95	<=8	PASS
		2442	-13.53	<=8	PASS
		2480	-14.90	<=8	PASS

#### Test Graphs

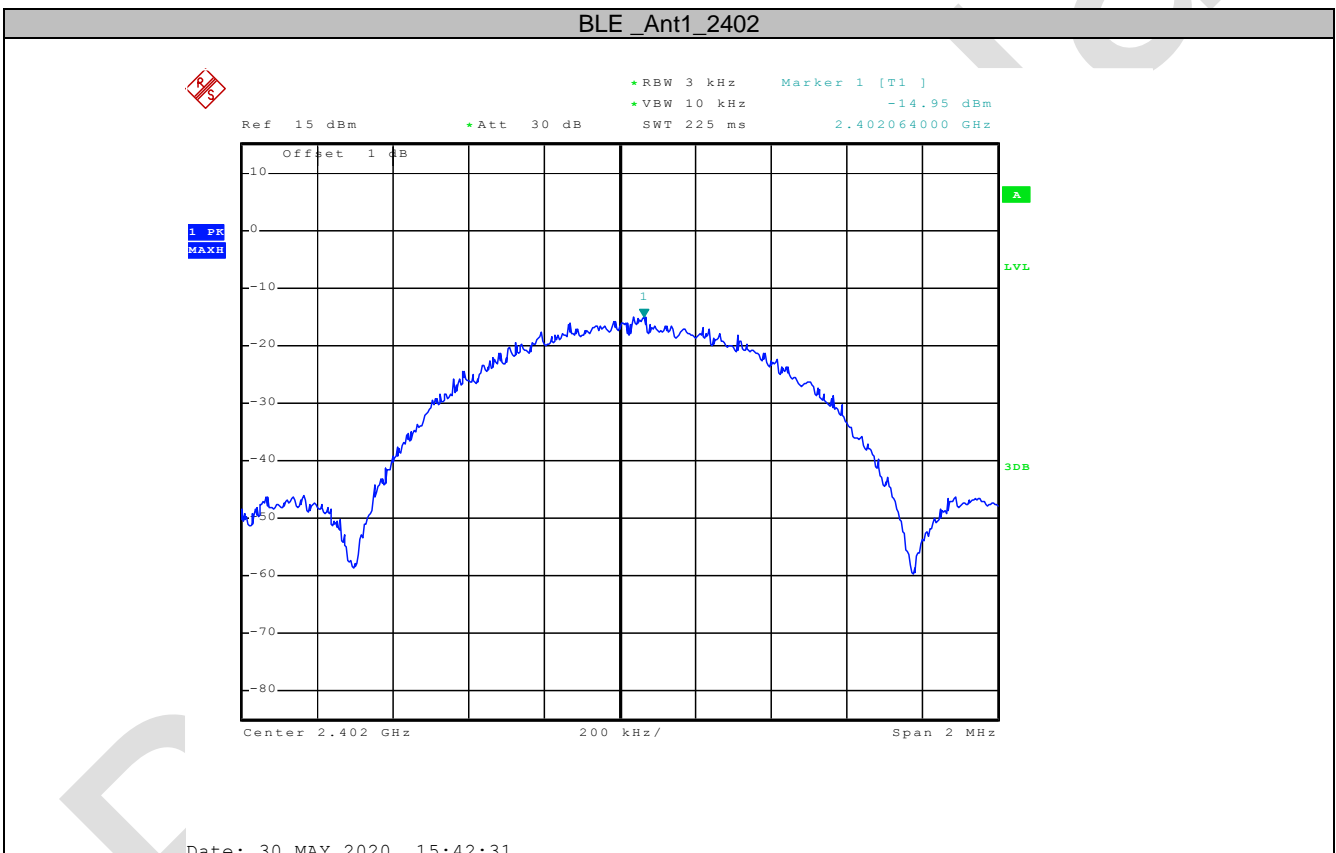


BLE\_Ant1\_2442

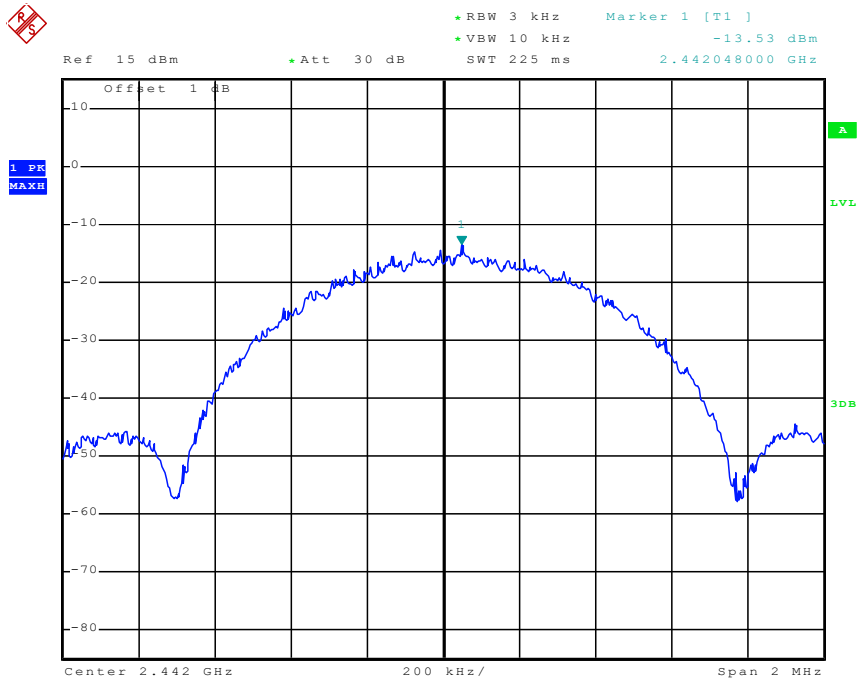

Date: 30 MAY 2020 15:43:06

BLE\_Ant1\_2480

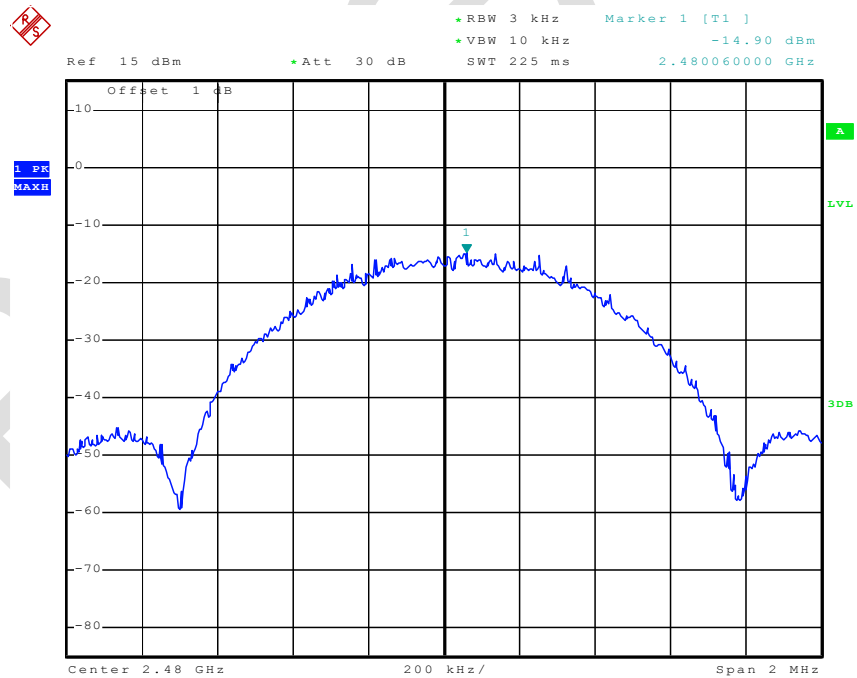

Date: 30 MAY 2020 15:43:33




### 10.4 APPENDIX: BAND EDGE MEASUREMENTS


#### Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	1.04	-50.31	<=-18.96	PASS
		High	2480	1.53	-51.76	<=-18.47	PASS

#### Test Graphs

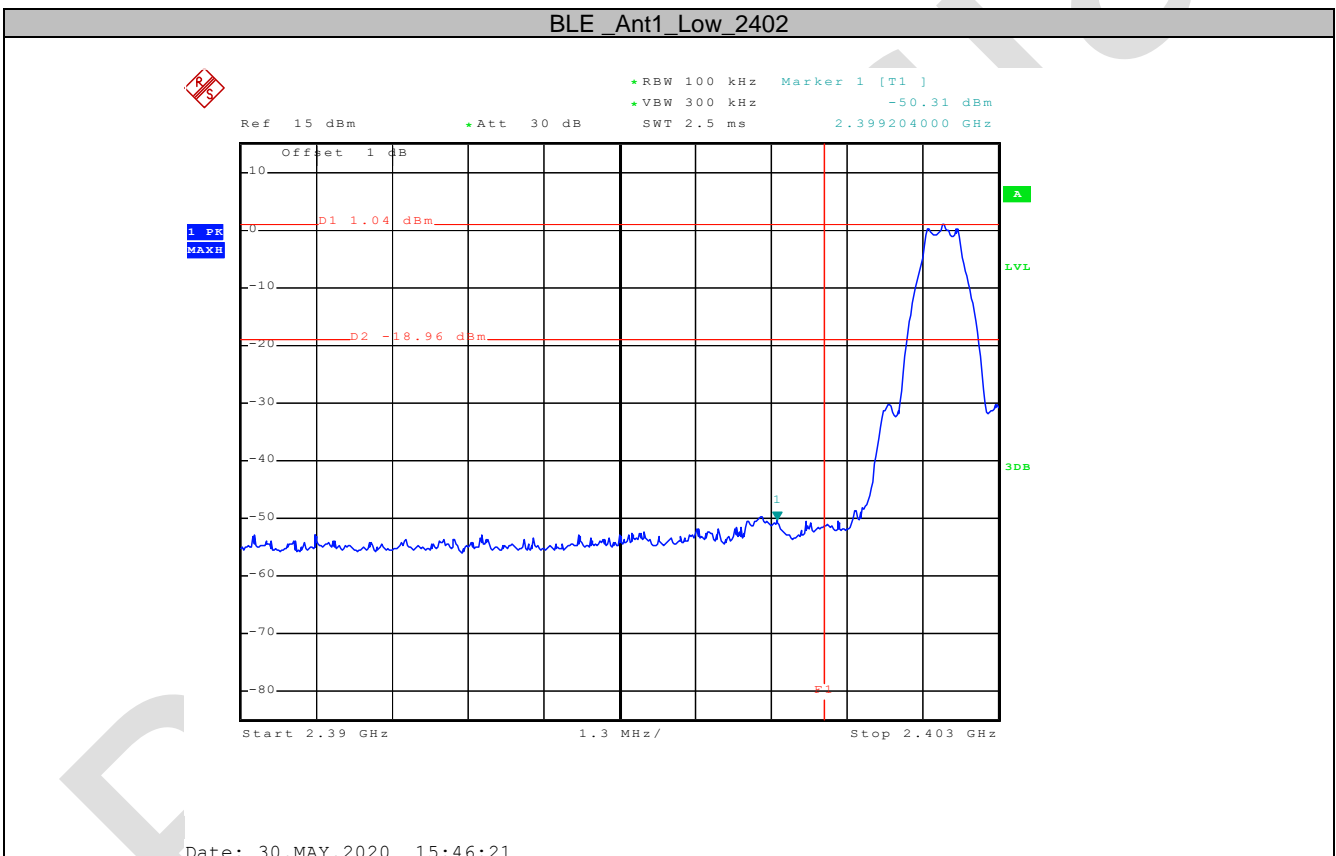

BLE\_Ant1\_High\_2480

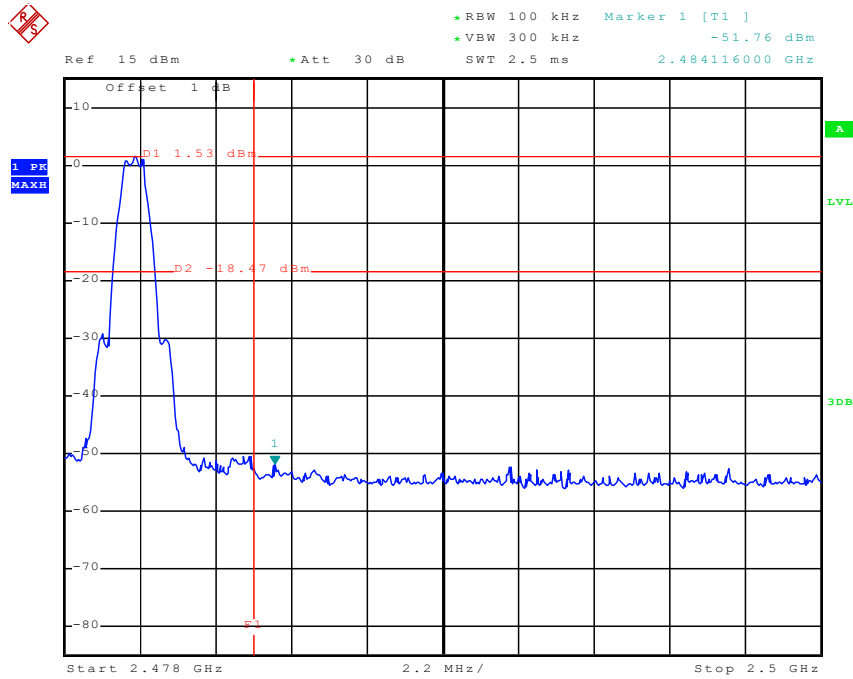


Date: 30 MAY 2020 15:45:12



### 10.5 APPENDIX F: CONDUCTED SPURIOUS EMISSION

#### Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	30~25000	0.05	-39.46	<=-19.95	PASS
		2442	30~25000	0.16	-40.53	<=-19.84	PASS
		2480	30~25000	-0.08	-40.47	<=-20.08	PASS

#### Test Graphs

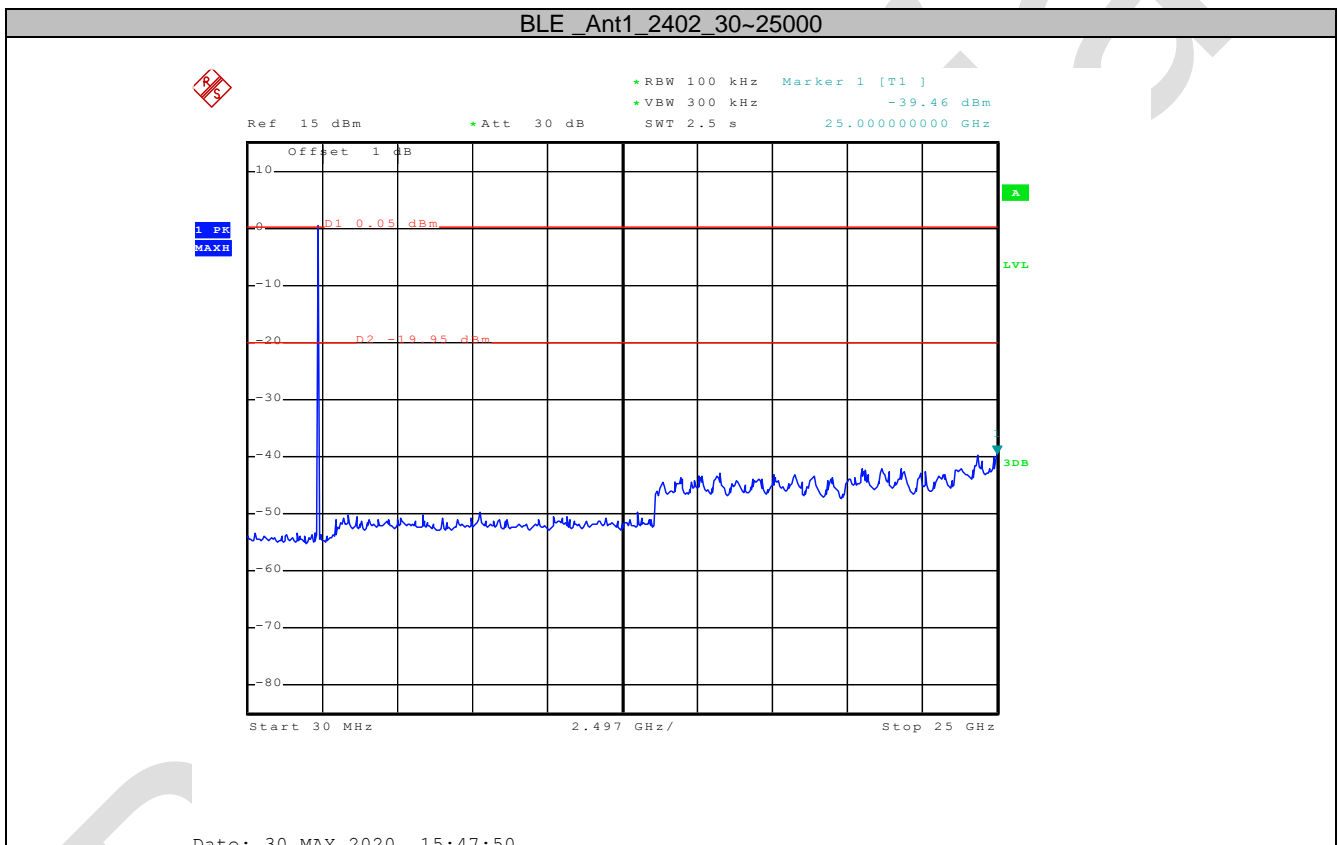

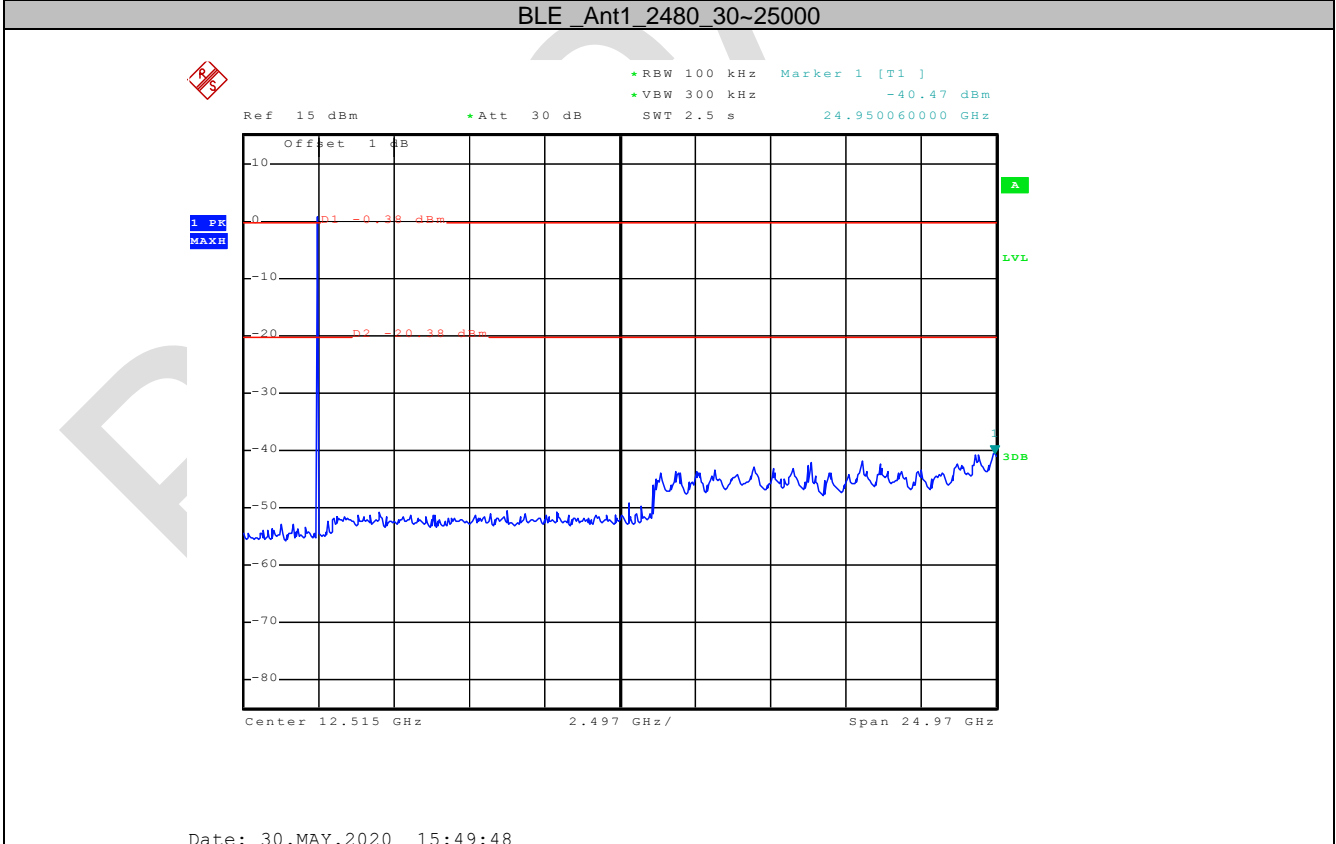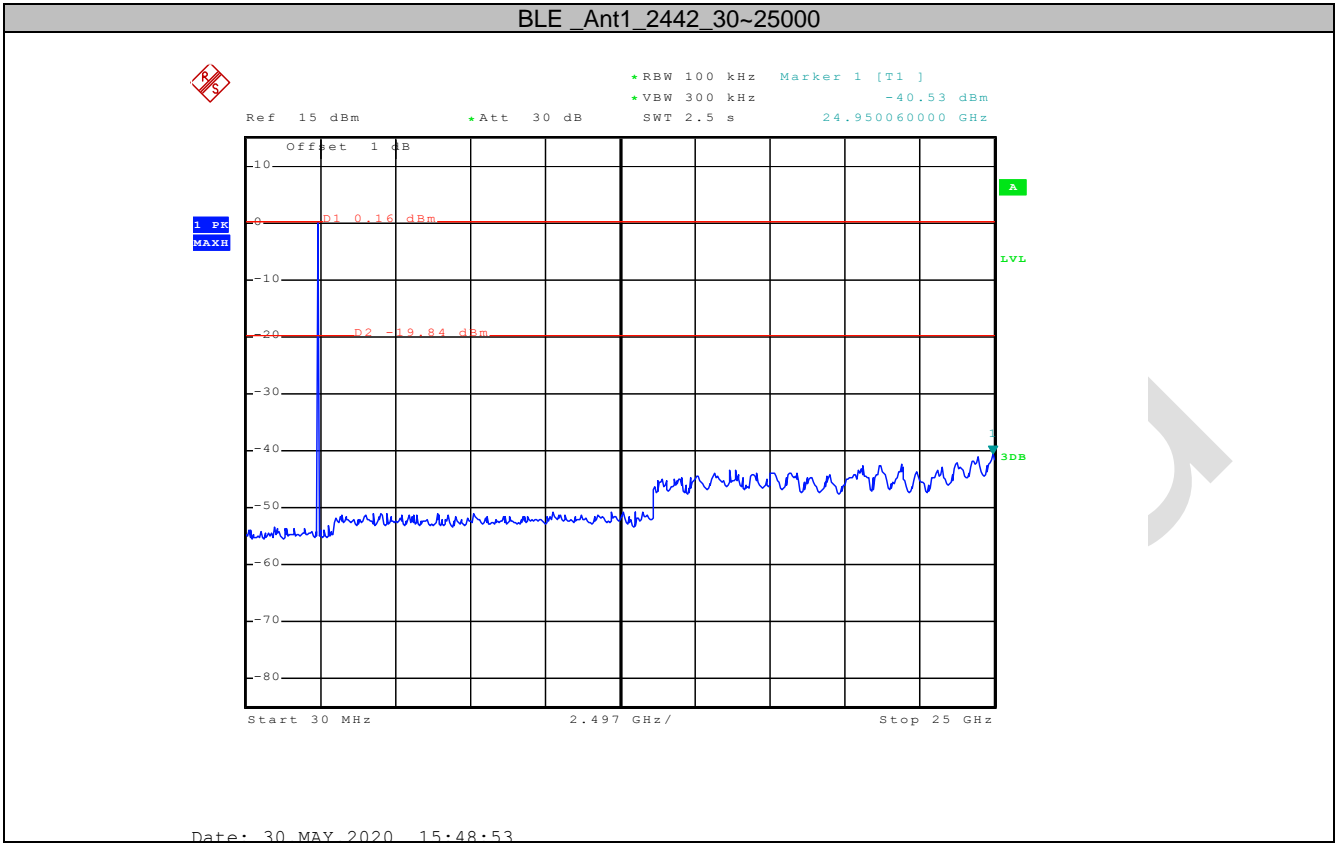

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

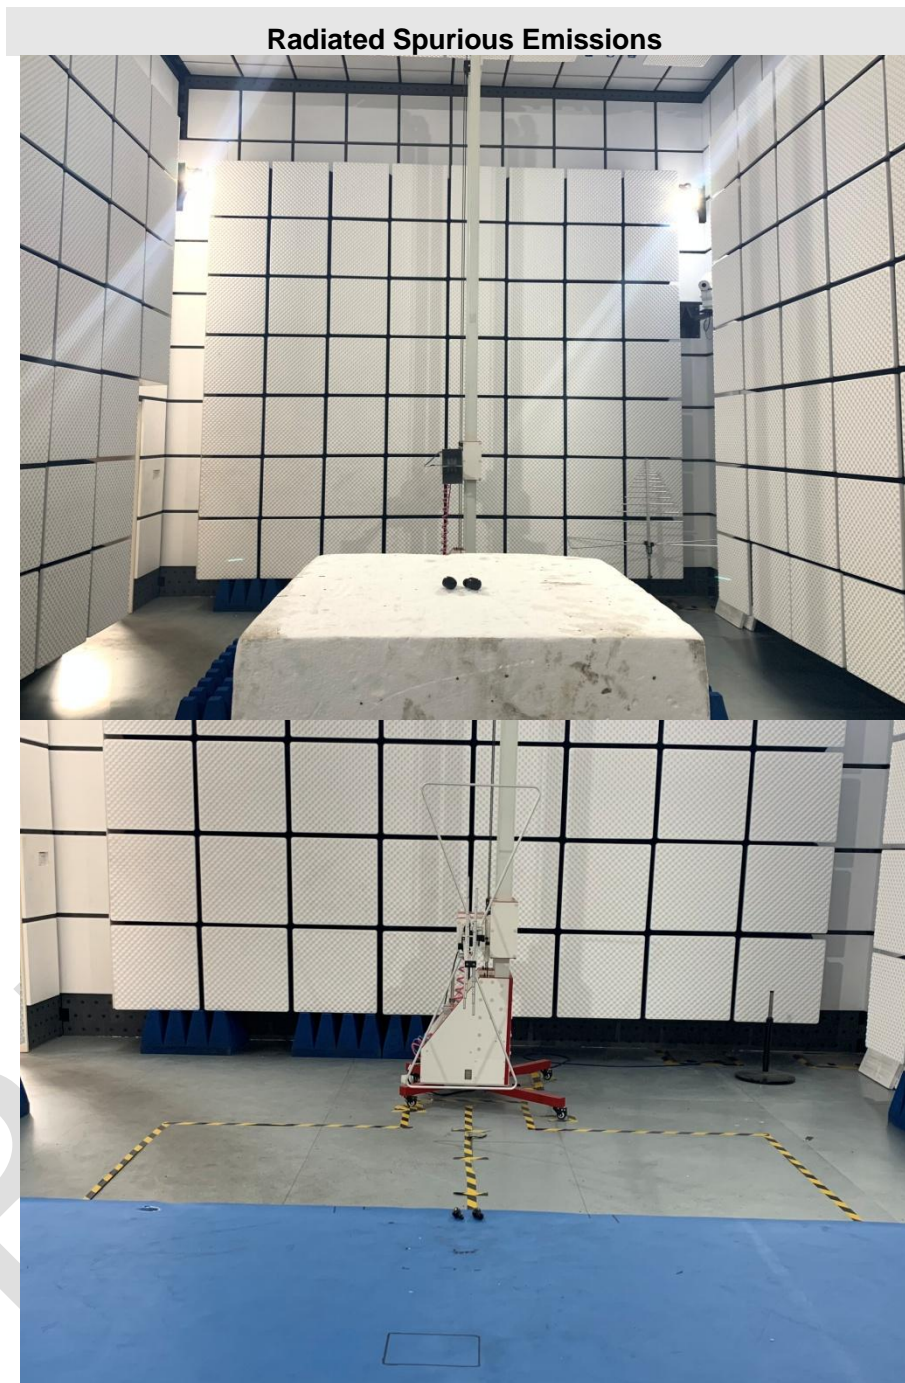

**Conducted Emissions at AC Power Line (150kHz-30MHz)**



## APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202005-A70-02

**----END OF REPORT----**

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.