

Sample Approved Sheet

Brand Co-tuo produced: HT-OW02-L-V3

work out	examine and verify	ratify	Time of completion of the letter of acknowledgment
Zhong Xiaoming	Wu Shouping	Dai Tingting	2024.09.12

Number of the letter of acknowledgment Date of provision of the letter of acknowledgment


admit	examine and verify	ratify	Date of recognition
Review items: ☐ 3 copies of letter of recognition ☐ specification/drawing ☐ test report ☐ sample PCS ☐ safety code ☐ HSF			
Evaluation result: ☐ Accept ☐ Conditional acceptance ☐ Reject			

Confidential Information

Item	date	order of the edition	revision note	remarks
1	2024.09.12	A0	initial issue	
2				

1. Antenna picture


The report mainly provides the test status of the electrical properties parameters of HT-OW02-L-V3. The HT-OW02-L-V3 antenna is a BT Band. The antenna picture and assembly are shown below.

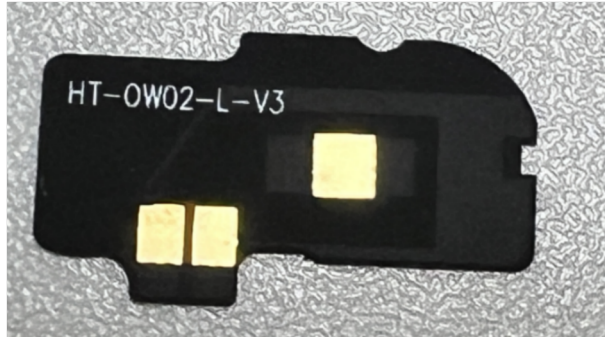

FPC Antenna picture & assembly picture

2. Antenna Test Equipment Introduction

Test of antenna input characteristics using Agilent E 5071 C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3 D near field Anechoic Chamber, and the instrument is used to Agilent 8960 E 5515 and Agilent E 4438 C. The test coordinates of the darkroom are as follows:

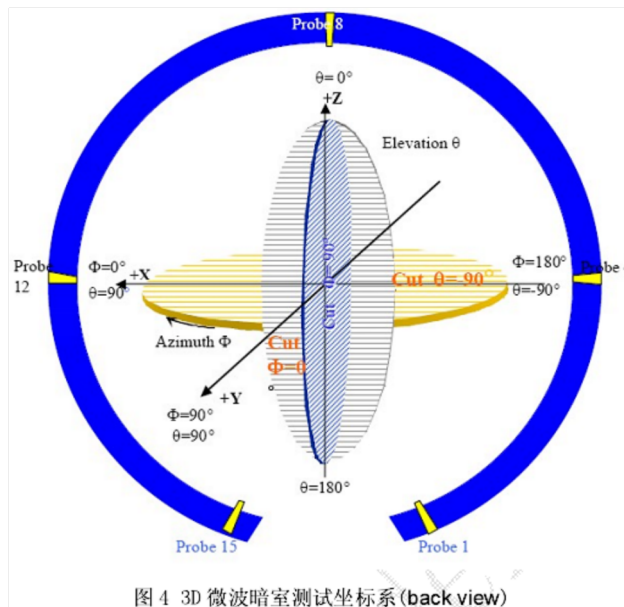

3. Electrical Specification


3-2 Passive S11 parameter


Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is

s connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

VSWR



											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-7.03	-6.96	-6.67	-6.25	-6.29	-6.43	-6.79	-7.39	-8.04	-8.39	-8.78
Gain (dBi)	-2.95	-2.95	-2.78	-1.82	-1.50	-1.35	-1.67	-2.14	-2.27	-3.25	-3.90
Efficiency (%)	19.82	20.12	21.53	23.71	23.51	22.76	20.96	18.24	15.69	14.50	13.24
Directivity (dB)	4.08	4.01	3.89	4.43	4.79	5.08	5.11	5.24	5.78	5.14	4.88
Peak Gain Position (Theta)	30.00	90.00	90.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Peak Gain Position (Phi)	105.00	105.00	105.00	0.00	0.00	15.00	15.00	105.00	90.00	105.00	90.00
Efficiency ThetaPol (%)	7.64	7.66	8.26	9.18	9.75	10.28	9.61	8.34	7.18	6.46	5.43
Efficiency PhiPol (%)	12.18	12.46	13.27	14.52	13.75	12.49	11.35	9.90	8.52	8.04	7.82
Upper Hem. Efficiency (%)	11.66	11.78	13.10	14.97	14.96	14.68	13.18	11.17	9.53	8.58	7.75
Lower Hem. Efficiency (%)	8.16	8.34	8.42	8.73	8.55	8.09	7.77	7.08	6.16	5.91	5.49

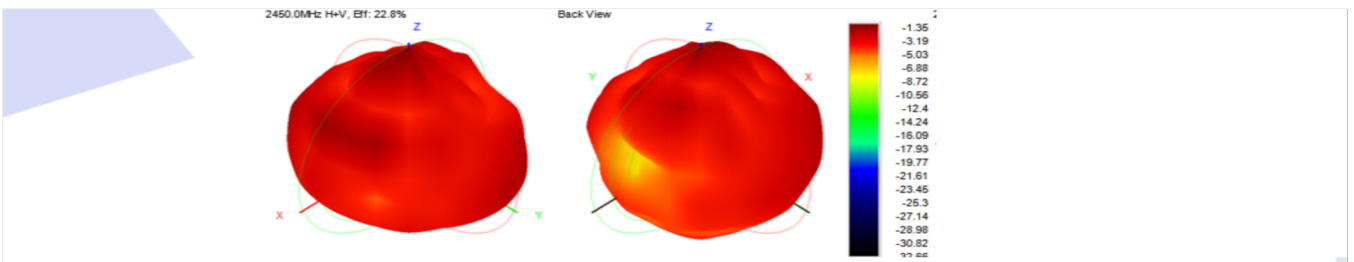

Test Equipment:	R&S CMW500			
Test Condition:	3D chamber			
Band	Wireless Protocol	Channel	TRP(dBm)	TIS(dBm)
BT		0	-2.25	-84.02
		39	-1.76	-84.61
		78	-0.46	-83.74

OTA DATA L (BH)

Test Equipment:	R&S CMW500			
Test Condition:	3D chamber			
Band	Wireless Protocol	Channel	TRP(dBm)	TIS(dBm)
BT		0	-2.98	-82.20
		39	-2.54	-82.46
		78	-1.36	-81.31

4. Mechanical Specification:

Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 10

Confidential Information

