

**FCC RF TEST REPORT**  
**No. 170600824SHA-001**

Applicant : Ningbo Litesun Electronics Co.,Ltd  
Simen Town, Yuyao, Zhejiang, 315472, China

Manufacturing Site : Ningbo Litesun Electronics Co.,Ltd  
Simen Town, Yuyao, Zhejiang, 315472, China

Product Name : Smart Plug

Type/Model : LA-WF1

**TEST RESULT : PASS**

**SUMMARY**

The equipment complies with the requirements according to the following standard(s) or specification:

**47CFR Part 15 (2016):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: July 20, 2017

Prepared by:



Wade Zhang (Project engineer)

Reviewed by:



Daniel Zhao (Reviewer)

## Description of Test Facility

Name: Intertek Testing Service Limited Shanghai  
Address: Building No.86, 1198 Qinzhou Road (North), Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing  
Tel: 86 21 61278271  
Fax: 86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY</b> .....	<b>2</b>
<b>1 GENERAL INFORMATION</b> .....	<b>4</b>
1.1 DESCRIPTION OF CLIENT .....	4
1.2 IDENTIFICATION OF THE EUT .....	4
1.3 TECHNICAL SPECIFICATION .....	4
<b>2 TEST SPECIFICATIONS</b> .....	<b>5</b>
2.1 STANDARDS OR SPECIFICATION .....	5
2.2 MODE OF OPERATION DURING THE TEST.....	5
2.3 TEST SOFTWARE LIST .....	6
2.4 TEST PERIPHERALS LIST .....	6
2.5 INSTRUMENT LIST .....	7
2.6 TEST SUMMARY .....	8
2.7 MEASUREMENT UNCERTAINTY .....	9
<b>3 MINIMUM 6DB BANDWIDTH</b> .....	<b>10</b>
3.1 LIMIT .....	10
3.2 TEST CONFIGURATION .....	10
3.3 TEST PROCEDURE AND TEST SETUP .....	10
3.4 TEST PROTOCOL .....	11
<b>4 MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>17</b>
4.1 TEST LIMIT .....	17
4.2 TEST CONFIGURATION .....	17
4.3 TEST PROCEDURE AND TEST SETUP .....	17
4.4 TEST PROTOCOL .....	18
<b>5 POWER SPECTRUM DENSITY</b> .....	<b>19</b>
5.1 TEST LIMIT .....	19
5.2 TEST CONFIGURATION .....	19
5.3 TEST PROCEDURE AND TEST SETUP .....	20
5.4 TEST PROTOCOL .....	21
<b>6 EMISSION OUTSIDE THE FREQUENCY BAND</b> .....	<b>27</b>
6.1 TEST LIMIT .....	27
6.2 TEST CONFIGURATION .....	27
6.3 TEST PROCEDURE AND TEST SETUP .....	28
6.4 TEST PROTOCOL .....	29
<b>7 RADIATED EMISSIONS</b> .....	<b>48</b>
7.1 TEST LIMIT .....	48
7.2 TEST CONFIGURATION .....	48
7.3 TEST PROCEDURE AND TEST SETUP .....	49
7.4 TEST PROTOCOL .....	50
<b>8 POWER LINE CONDUCTED EMISSION</b> .....	<b>55</b>
8.1 LIMIT .....	55
8.2 TEST CONFIGURATION .....	55
8.3 TEST PROCEDURE AND TEST SET UP .....	56
8.4 TEST PROTOCOL .....	57

## 1 GENERAL INFORMATION

### 1.1 Description of Client

Applicant : Ningbo Litesun Electronics Co.,Ltd  
Simen Town, Yuyao, Zhejiang, 315472, China  
Manufacturing Site : Ningbo Litesun Electronics Co.,Ltd  
Simen Town, Yuyao, Zhejiang, 315472, China

### 1.2 Identification of the EUT

Product Name : Smart Plug  
Type/model : LA-WF1  
FCC ID : 2AMQ8-WIFI-001

### 1.3 Technical Specification

Operation Frequency : 2400~2483.5 MHz  
Band  
Type of Modulation : DBPSK, DQPSK, CCK, BPSK, QPSK, 16-QAM  
EUT Modes of Modulation : 802.11b, 802.11g, 802.11n(HT20)  
Channel Number : 11Channels for 802.11b, 802.11g and 802.11n(HT20)  
Description of EUT : The EUT is a smart plug, it contains a WIFI module, and there have only one model, we test it and listed the results in the report.  
Antenna : PCB antenna, 3dBi max Peak gain  
Rating : 125VAC 60Hz 10A Max.1250W resistive or general purpose, 5A Max.625W tungsten lamp  
Category of EUT : Class B  
EUT type :  Table top  
 Floor standing  
Sample received date : June 12, 2017  
Date of test : June 12, 2017 ~ July 11, 2017

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2016)  
ANSI C63.10 (2013)  
KDB 558074 (v04)

### 2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462

#### Data rate VS Power:

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

After this pre-scan, we choose the following table of the data rata as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
2400-2483.5	802.11b	1Mbps
	802.11g	6Mbps
	802.11n(HT20)	MCS0

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz

## 2.5 Instrument list

Selected	Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
<input checked="" type="checkbox"/>	PXA Analyzer	N9030A	Agilent	EC5338	2017/3/3	2018/3/2
<input checked="" type="checkbox"/>	Vector SG	N5182B	Agilent	EC5175	2017/3/3	2018/3/2
<input checked="" type="checkbox"/>	Power sensor	U2021XA	Agilent	EC5338-1	2017/3/3	2018/3/2
<input checked="" type="checkbox"/>	MXG Analog SG	N5181A	Agilent	EC5338-2	2017/3/3	2018/3/2
<input checked="" type="checkbox"/>	Power meter	N1911A/N1921A	Agilent	EC4318	2017/5/17	2018/5/16
<input checked="" type="checkbox"/>	EMI Receiver	ESCS 30	R&S	EC 2107	2016/10/19	2017/10/18
<input checked="" type="checkbox"/>	A.M.N.	ESH2-Z5	R&S	EC 3119	2015/12/16	2017/12/15
<input checked="" type="checkbox"/>	I.S.N.	FCC-TLISN-T8-02	FCC	EC3756	2017/2/15	2018/2/14
<input checked="" type="checkbox"/>	EMI chamber	3m	Albatross	EC 3048	2016/9/10	2017/9/9
<input checked="" type="checkbox"/>	Test Receiver	ESIB 26	R&S	EC 3045	2016/10/19	2017/10/18
<input checked="" type="checkbox"/>	Test Receiver	ESCI 7	R&S	EC4501	2017/2/23	2018/2/22
<input checked="" type="checkbox"/>	Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2017/6/1	2018/5/31
<input checked="" type="checkbox"/>	Horn antenna	HF 906	R&S	EC 3049	2016/9/24	2017/9/23
<input checked="" type="checkbox"/>	Horn antenna	HAP18-26W	TOYO	EC 4792-3	2017/6/11	2018/6/10
<input checked="" type="checkbox"/>	Pre-amplifier	Pre-amp 18	R&S	EC 5262	2017/6/29	2018/6/28
<input checked="" type="checkbox"/>	Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2017/4/10	2018/4/9
<input checked="" type="checkbox"/>	Shielded room	-	Zhongyu	EC 2838	2017/1/8	2018/1/7

## 2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	RESULT	NOTE
Minimum 6dB Bandwidth & Occupied bandwidth	15.247(a)(2)	Pass	
Maximum peak output power	15.247(b)	Pass	
Power spectrum density	15.247(e)	Pass	
Radiated emission	15.205 & 15.209	Pass	
Emission outside the frequency band	15.247(d)	Pass	
Power line conducted emission	15.207	Pass	
Occupied bandwidth	-	Tested	

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$


### 3 Minimum 6dB Bandwidth

Test result: Pass

#### 3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.2 Test Configuration

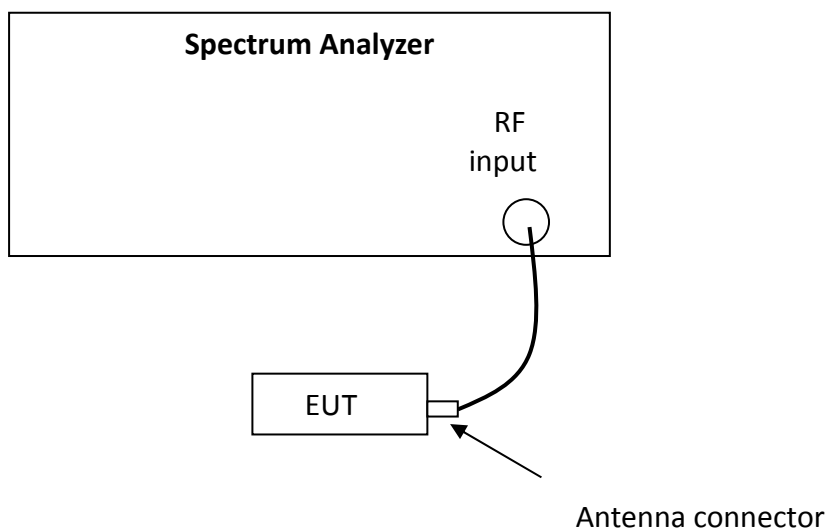

#### 3.3 Test Procedure and test setup

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 3.4 Test Protocol


Temperature: 25 °C  
Relative Humidity: 55 %

Mode	Channel	Minimum 6dB Bandwidth (MHz)	Limits (MHz)
802.11b	L	8.093	> 0.5
	M	8.089	> 0.5
	H	8.087	> 0.5
802.11g	L	16.340	> 0.5
	M	16.340	> 0.5
	H	16.350	> 0.5
802.11n (HT20)	L	17.580	> 0.5
	M	17.570	> 0.5
	H	17.590	> 0.5


Mode	Channel	99% Occupy Bandwidth (MHz)	Limits (MHz)
802.11b	L	10.496	> 0.5
	M	10.482	> 0.5
	H	10.523	> 0.5
802.11g	L	16.511	> 0.5
	M	16.507	> 0.5
	H	16.500	> 0.5
802.11n (HT20)	L	17.822	> 0.5
	M	17.809	> 0.5
	H	17.814	> 0.5

Test Plots:


802.11b-2412MHz

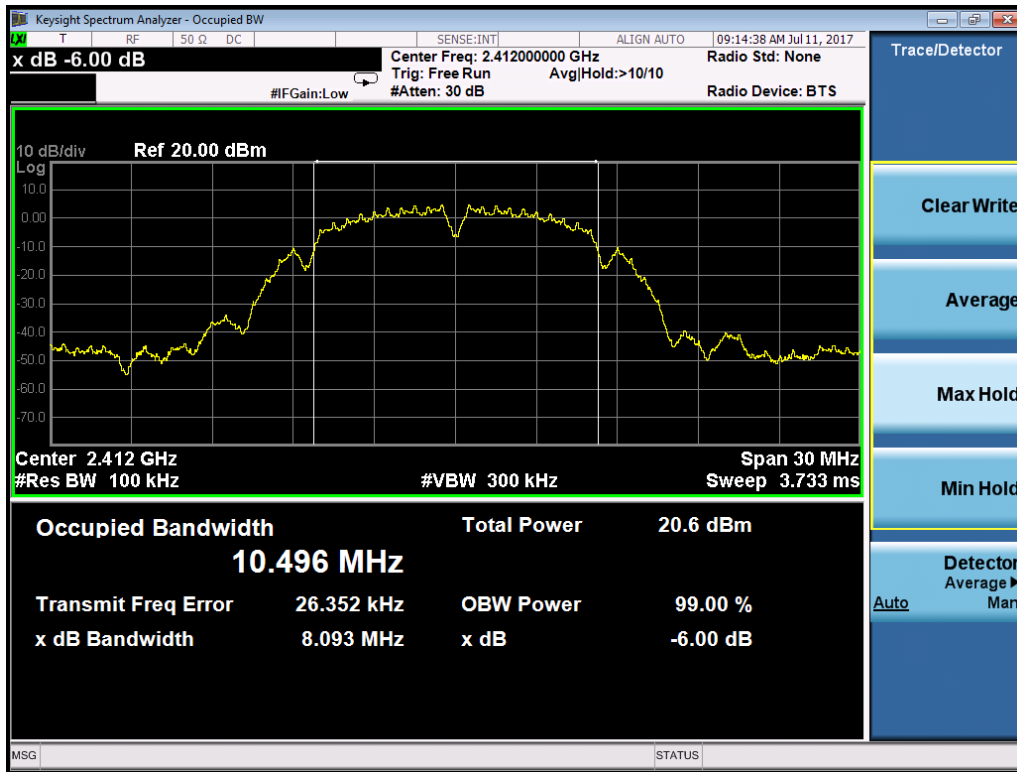


802.11b-2437MHz

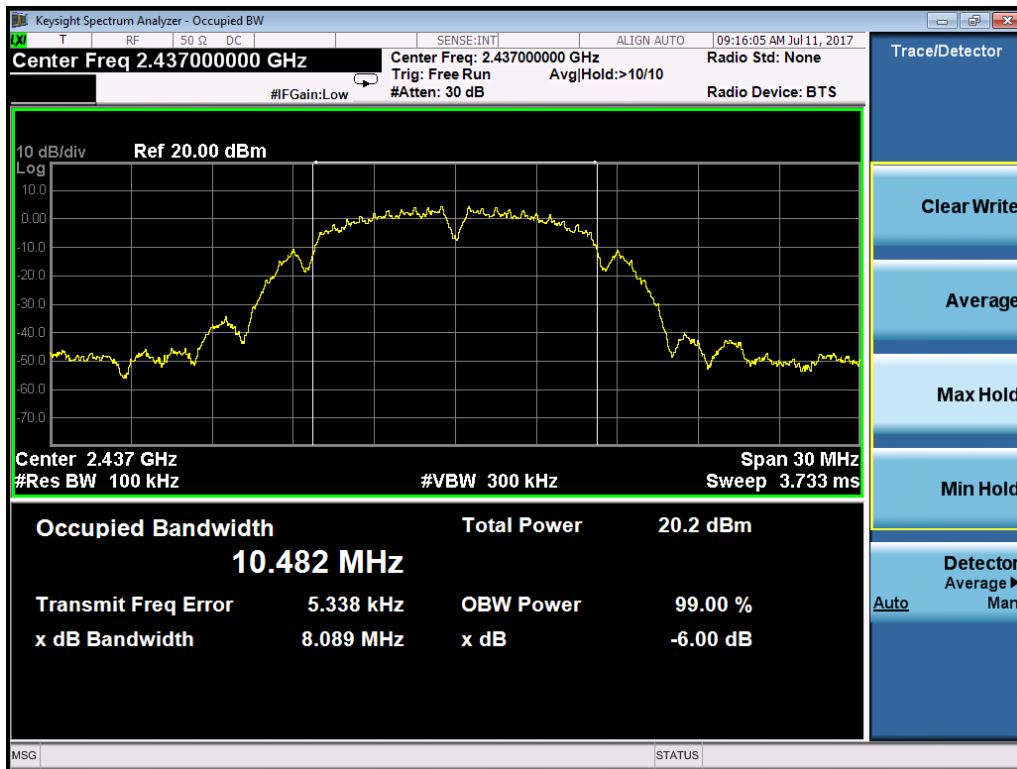


802.11b-2462MHz

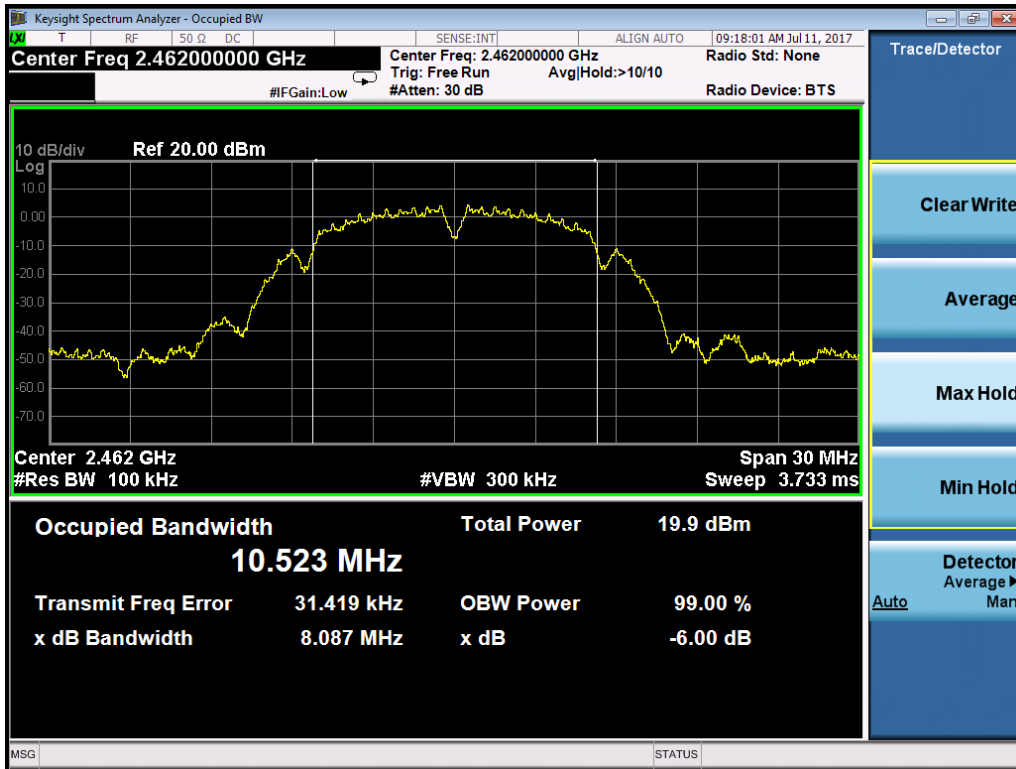


802.11g-2412MHz

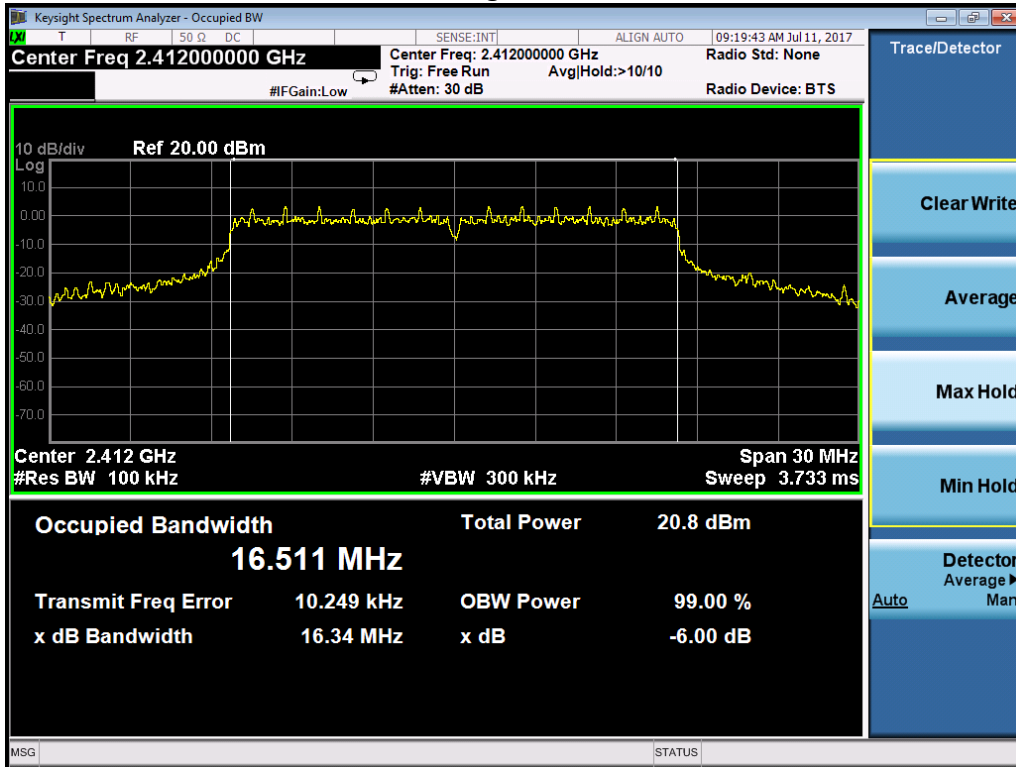


802.11g-2437MHz

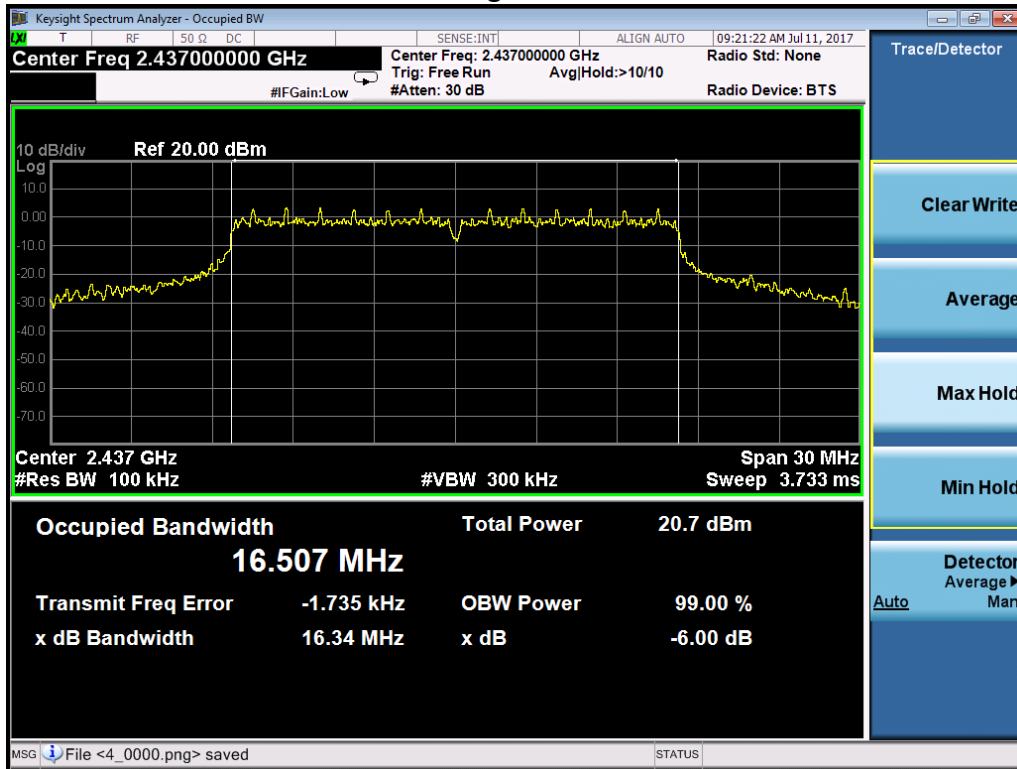


802.11g-2462MHz

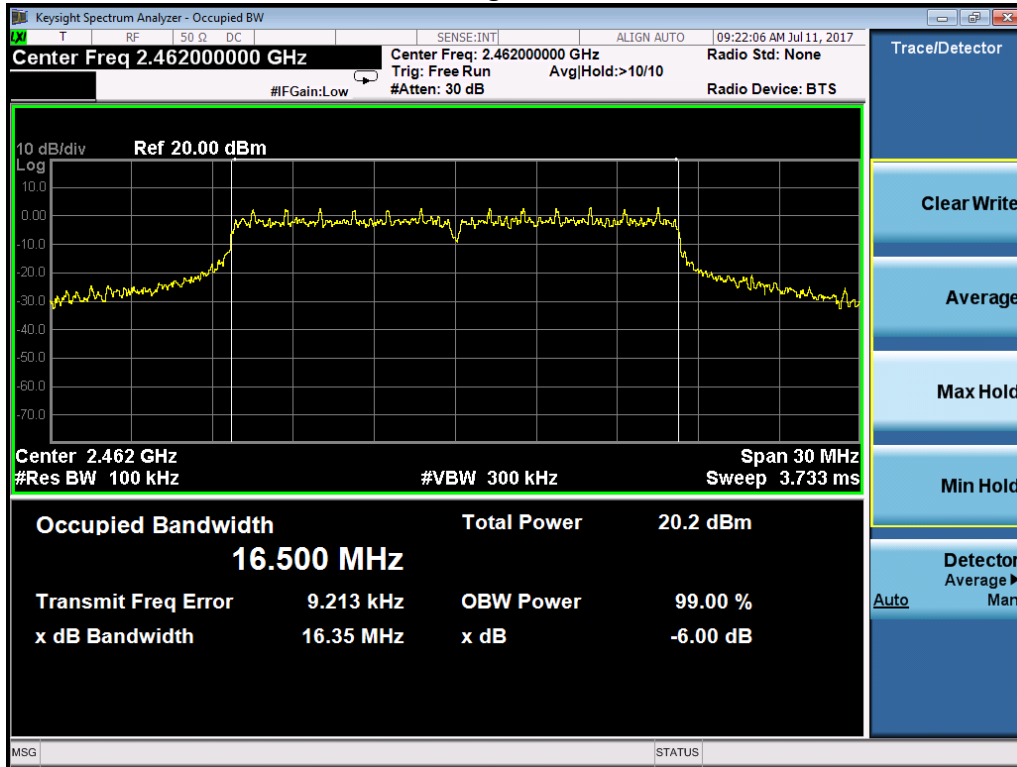


802.11n20-2412MHz

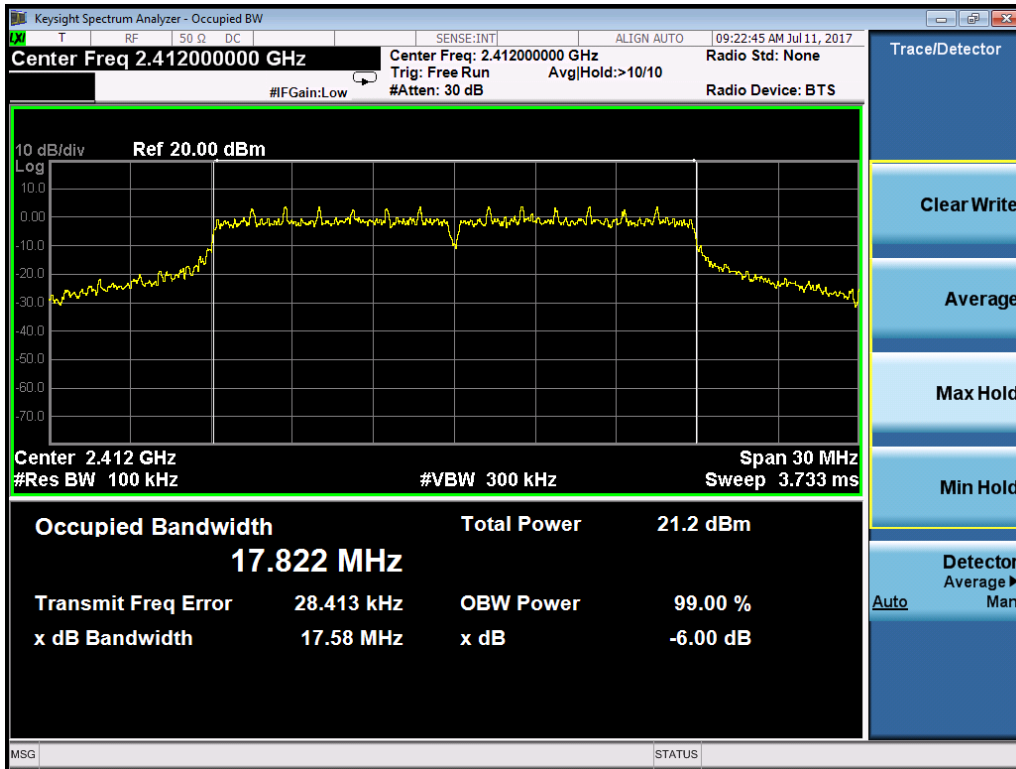

802.11n20-2437MHz

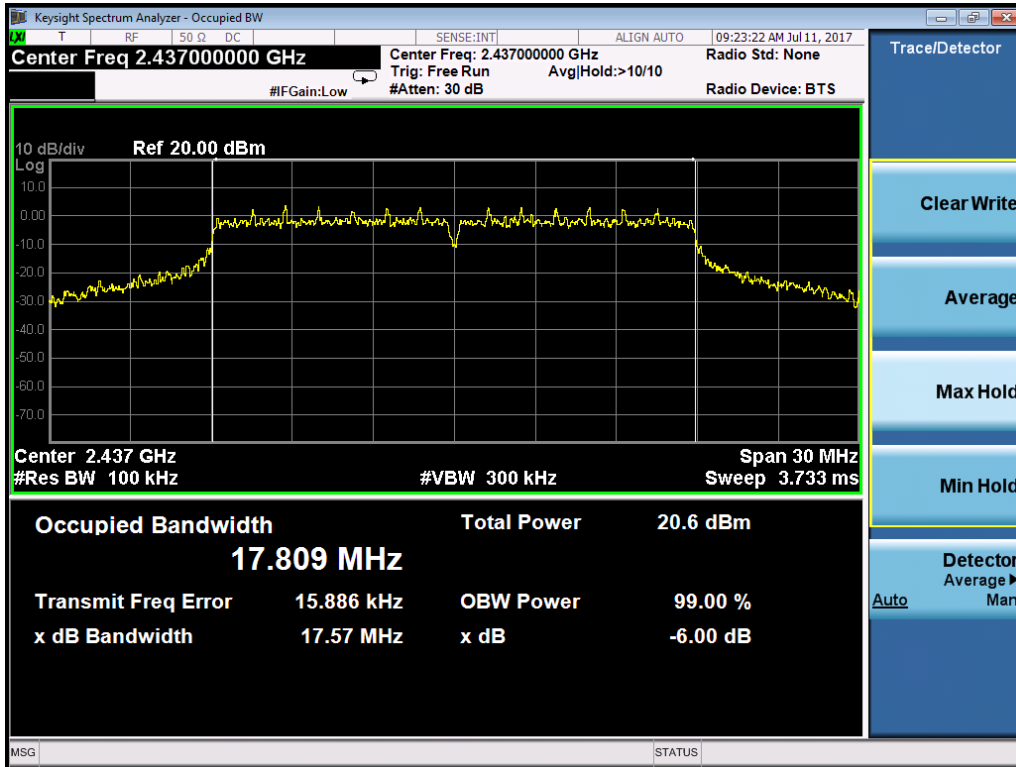

802.11n20-2462MHz

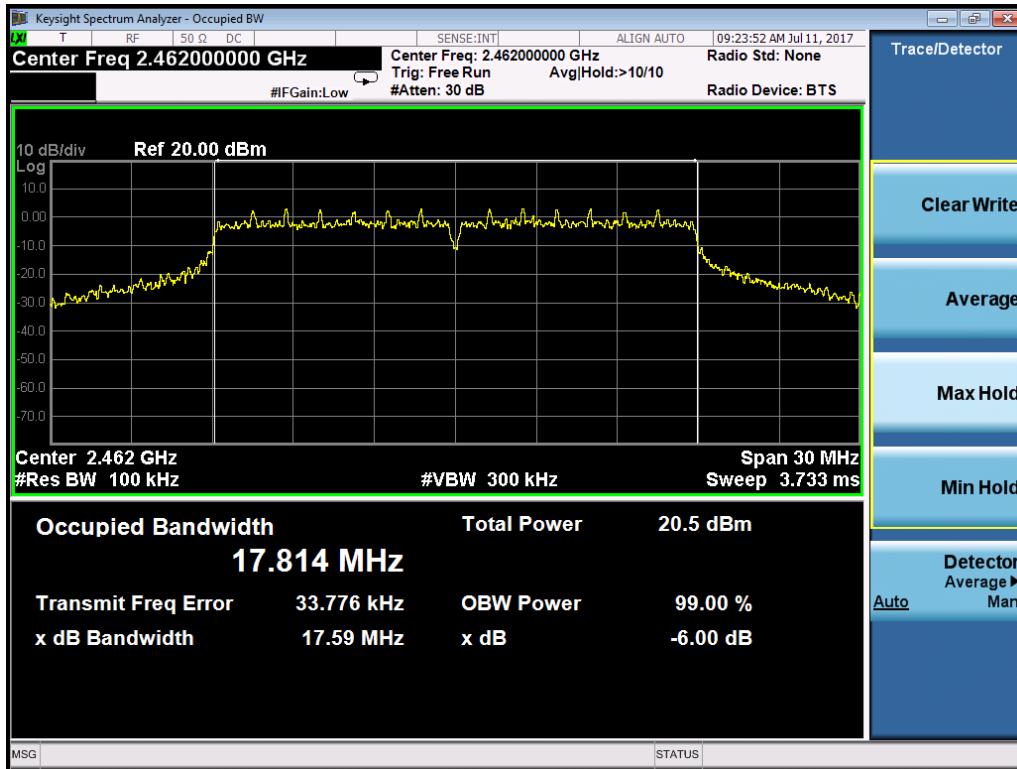



## 4 Maximum Conducted Output power


Test result: Pass

### 4.1 Test limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
- For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt and the e.i.r.p. shall not exceed 4 W.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

### 4.2 Test Configuration

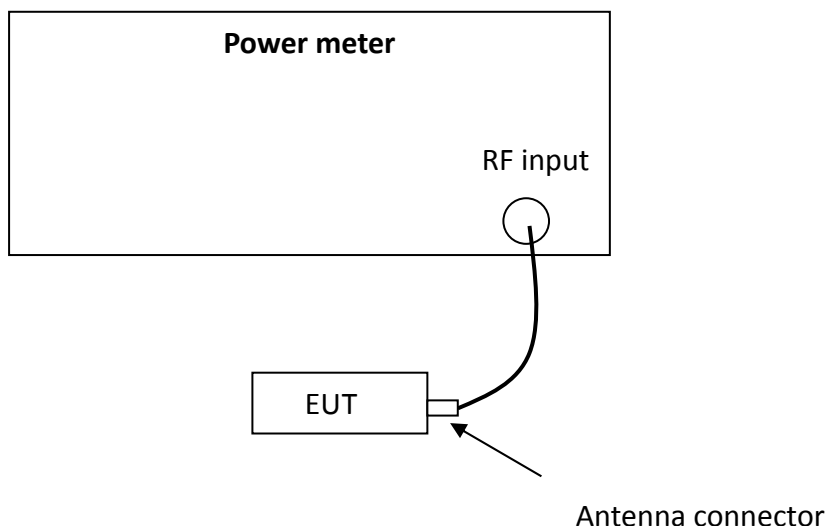

### 4.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" for compliance to FCC 47CFR 15.247 requirements (clause 9.2.3 PM Method.).

#### 4.4 Test protocol

Temperature: 25 °C  
Relative Humidity: 55 %

Mode	Channel	Corrected Reading (dBm)	Limit (dBm)	Result
802.11b	L	16.63	30.00	Pass
	M	15.56	30.00	Pass
	H	15.64	30.00	Pass
802.11g	L	19.46	30.00	Pass
	M	19.38	30.00	Pass
	H	19.42	30.00	Pass
802.11n (HT20)	L	19.62	30.00	Pass
	M	19.58	30.00	Pass
	H	<b>19.72</b>	30.00	Pass

Conclusion: The maximum EIRP = 19.72dBm+3dBi = 22.72dBm = 0.187W which is lower than the limit of 4W listed in RSS-247.

## 5 Power spectrum density


Test result:Pass

### 5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/3kHz and  $8 + (6 - \text{antenna gain} - \text{beam forming gain})$ .

### 5.2 Test Configuration

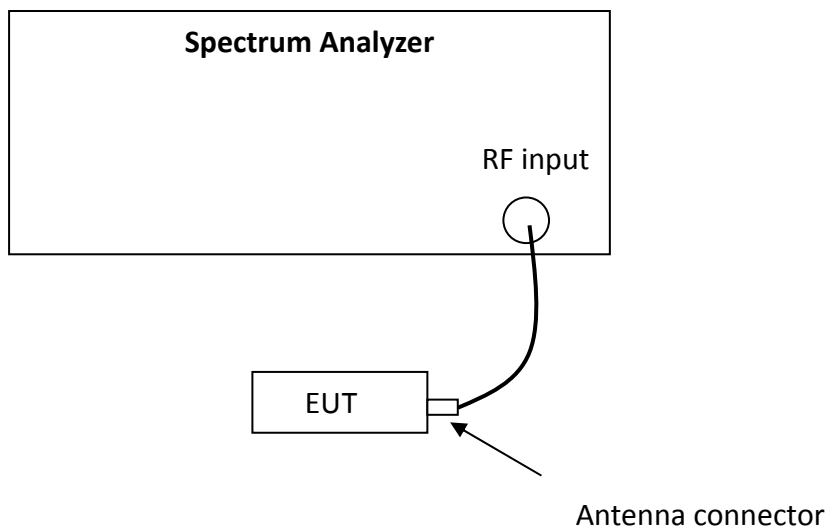

### 5.3 Test procedure and test setup

The power output per FCC §15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.2) for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the *DTS bandwidth*.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


### 5.4 Test Protocol

Temperature: 25 °C  
Relative Humidity: 55 %


Mode	Channel	Max PSD (dBm/100KHz)	Limit (dBm /3kHz)	Result
802.11b	L	7.462	8	Pass
	M	5.961	8	Pass
	H	5.419	8	Pass
802.11g	L	4.655	8	Pass
	M	4.551	8	Pass
	H	3.984	8	Pass
802.11n (HT20)	L	4.897	8	Pass
	M	4.739	8	Pass
	H	4.066	8	Pass

Test Plots:

802.11b-2412MHz

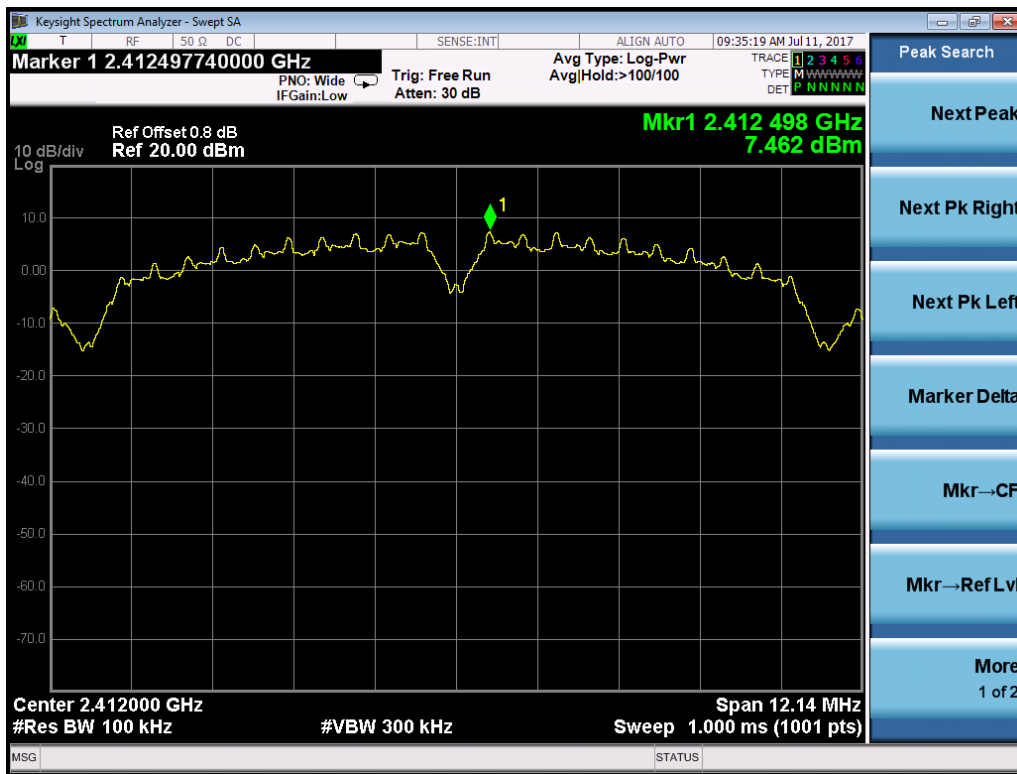


802.11b-2437MHz

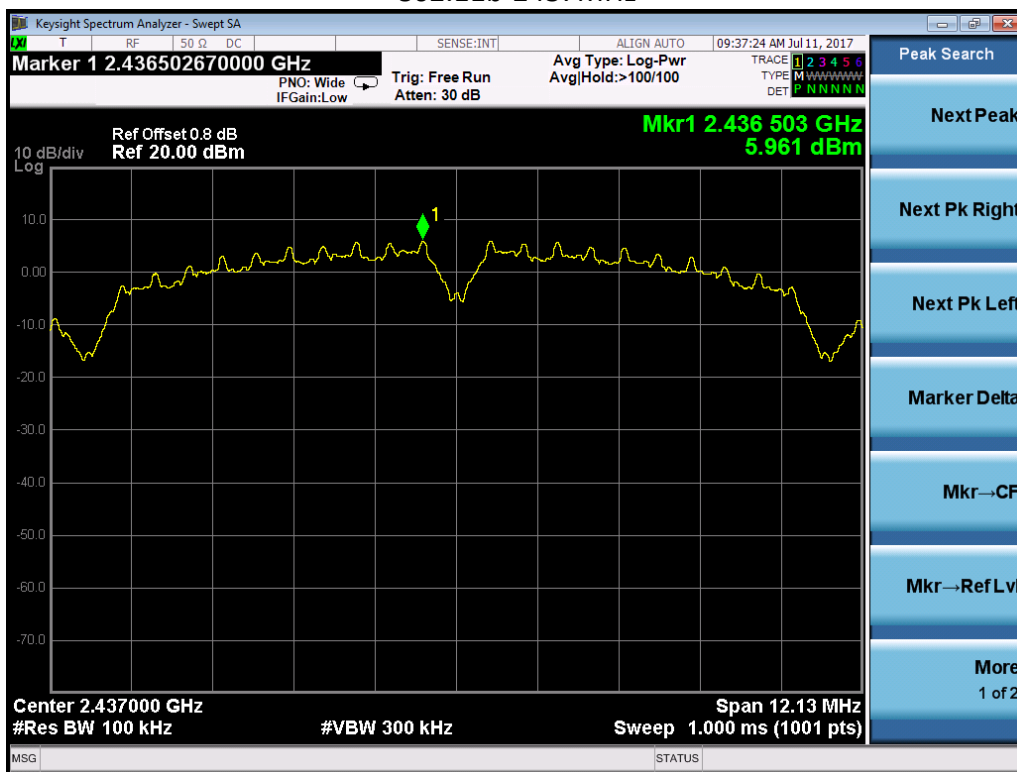


802.11b-2462MHz




802.11g-2412MHz

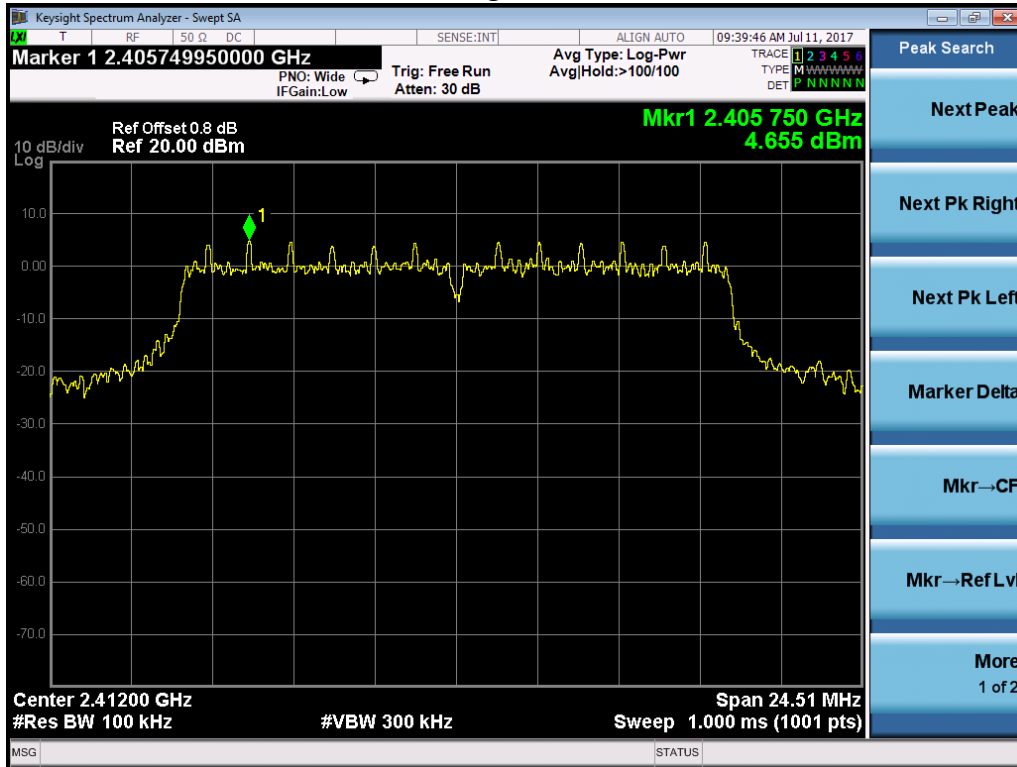

802.11g-2437MHz

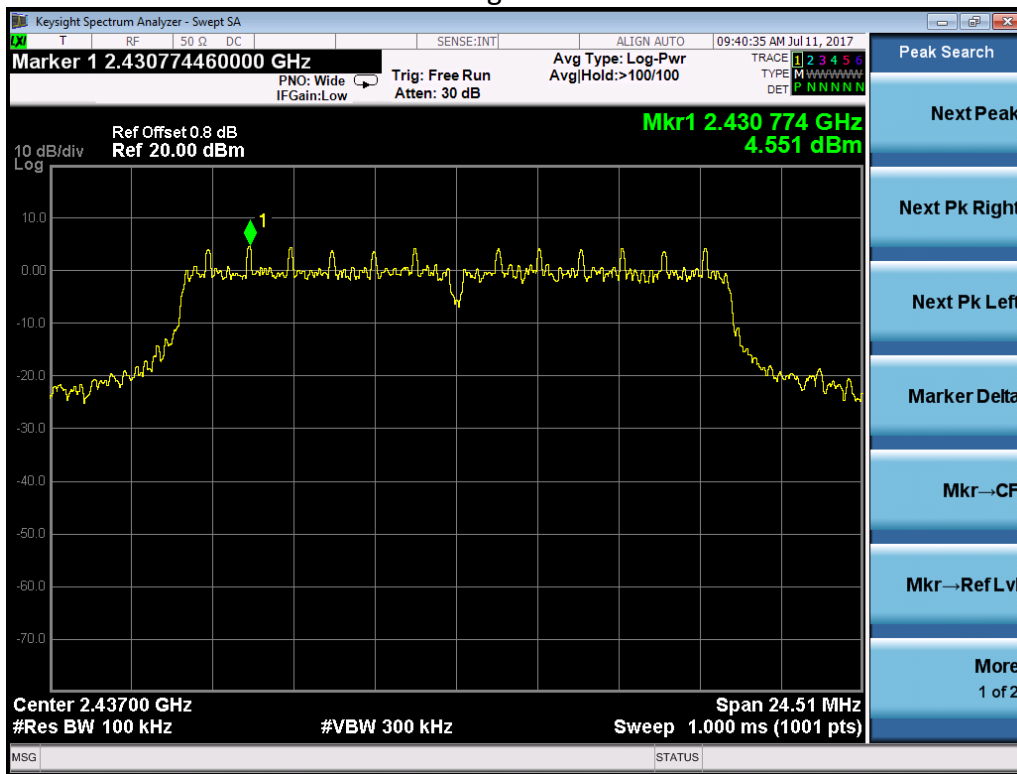


802.11g-2462MHz

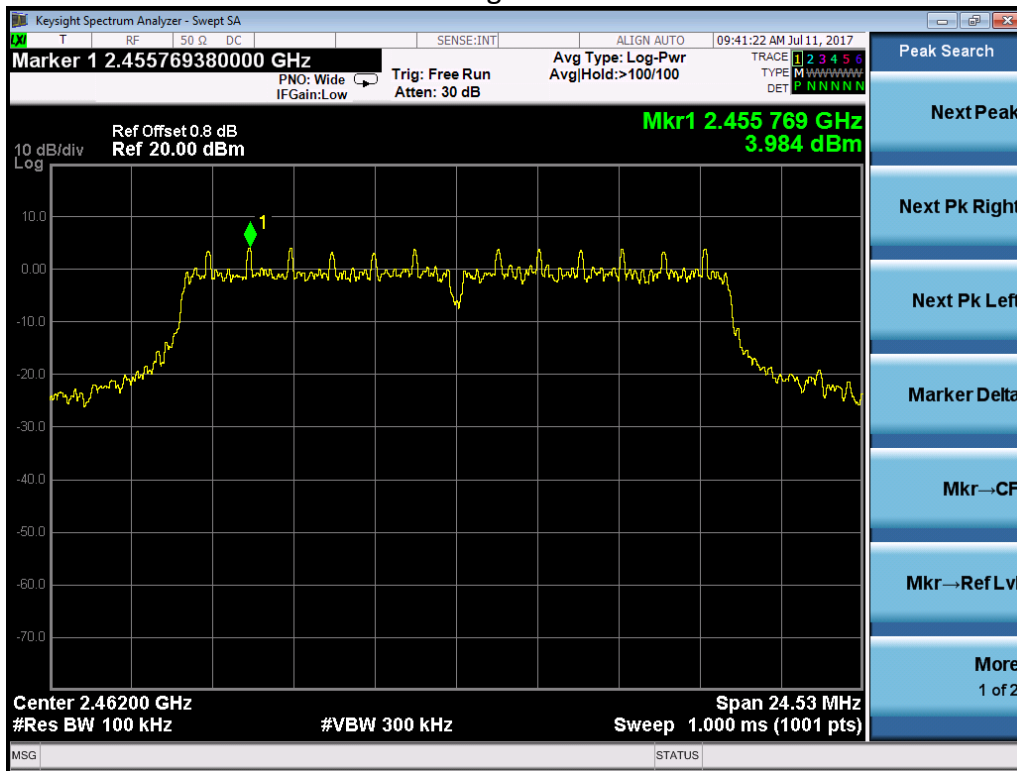





802.11n20-2412MHz

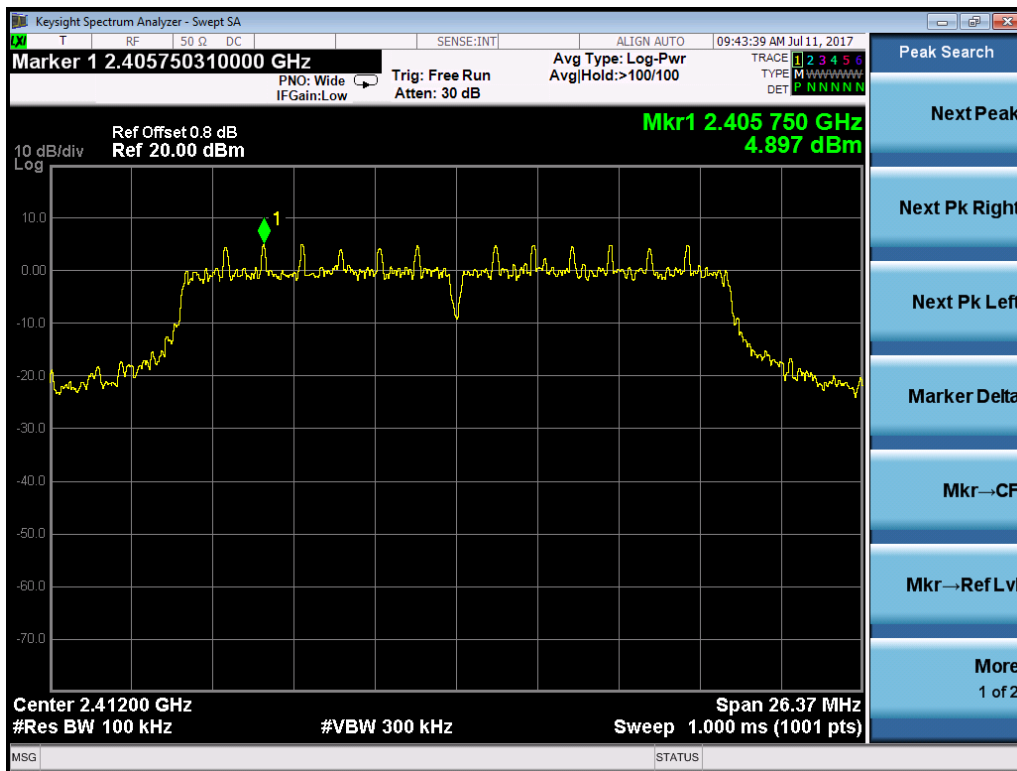

802.11n20-2437MHz

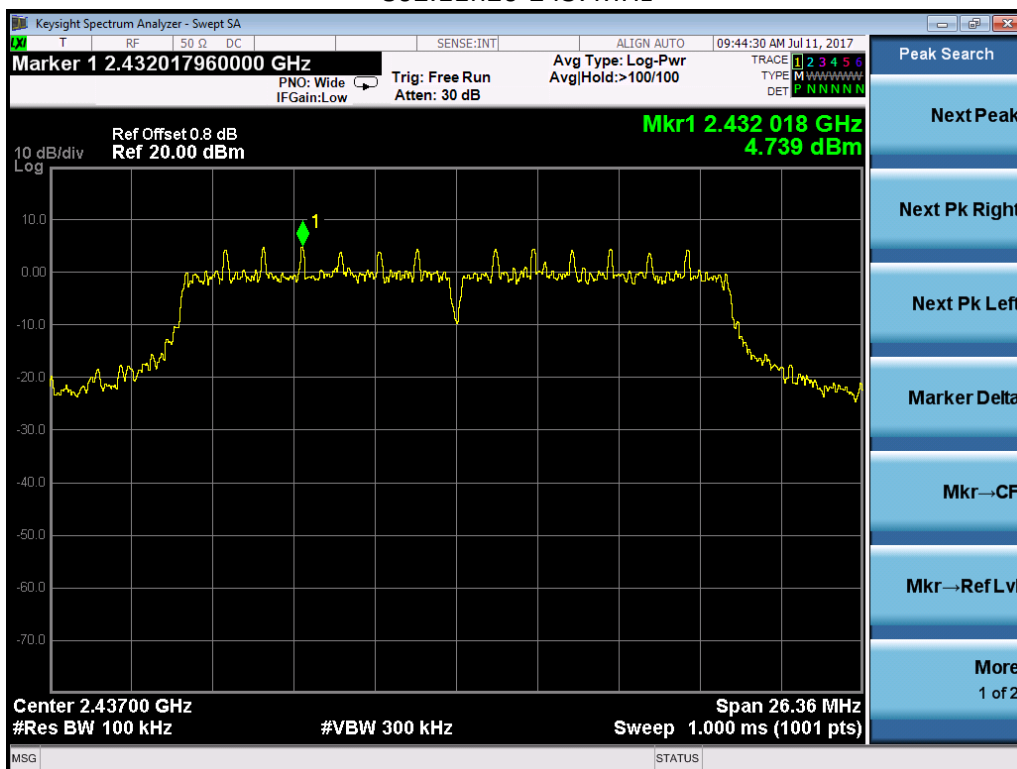

802.11n20-2462MHz

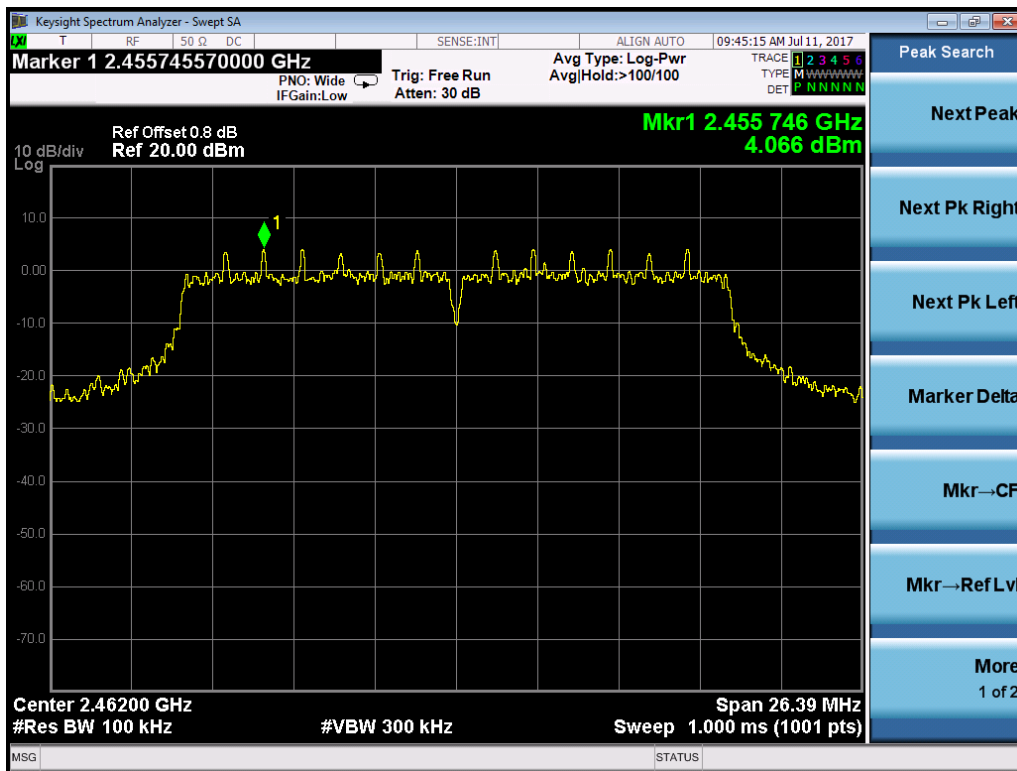


## 6 Emission outside the frequency band

Test result: Pass

### 6.1 Test limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 6.2 Test Configuration

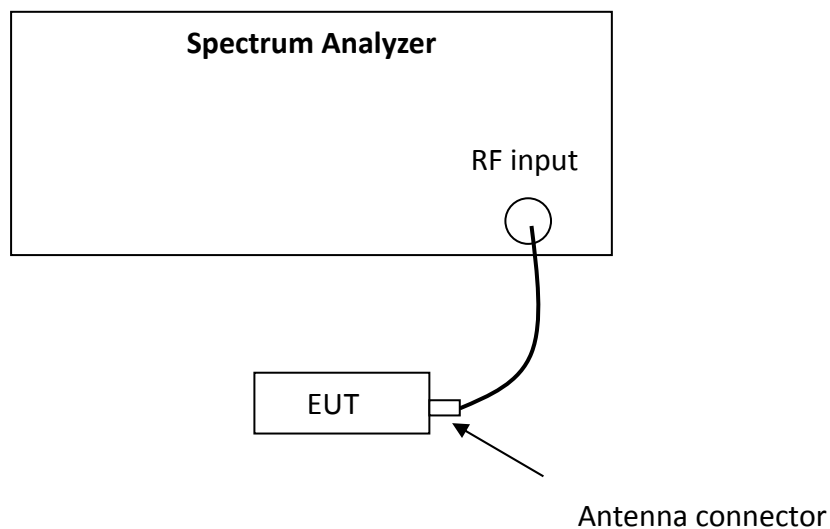

### 6.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

#### Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the *DTS bandwidth*.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 3 \times$  RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.



## 6.4 Test Protocol



Temperature: 25 °C  
Relative Humidity: 55 %

Mode	Channel	Results	Limits (dB)
802.11b	L	Pass	≥30
	M	Pass	≥30
	H	Pass	≥30
802.11g	L	Pass	≥30
	M	Pass	≥30
	H	Pass	≥30
802.11n (HT20)	L	Pass	≥30
	M	Pass	≥30
	H	Pass	≥30



Test Plots:

**802.11b**  
**Channel L**

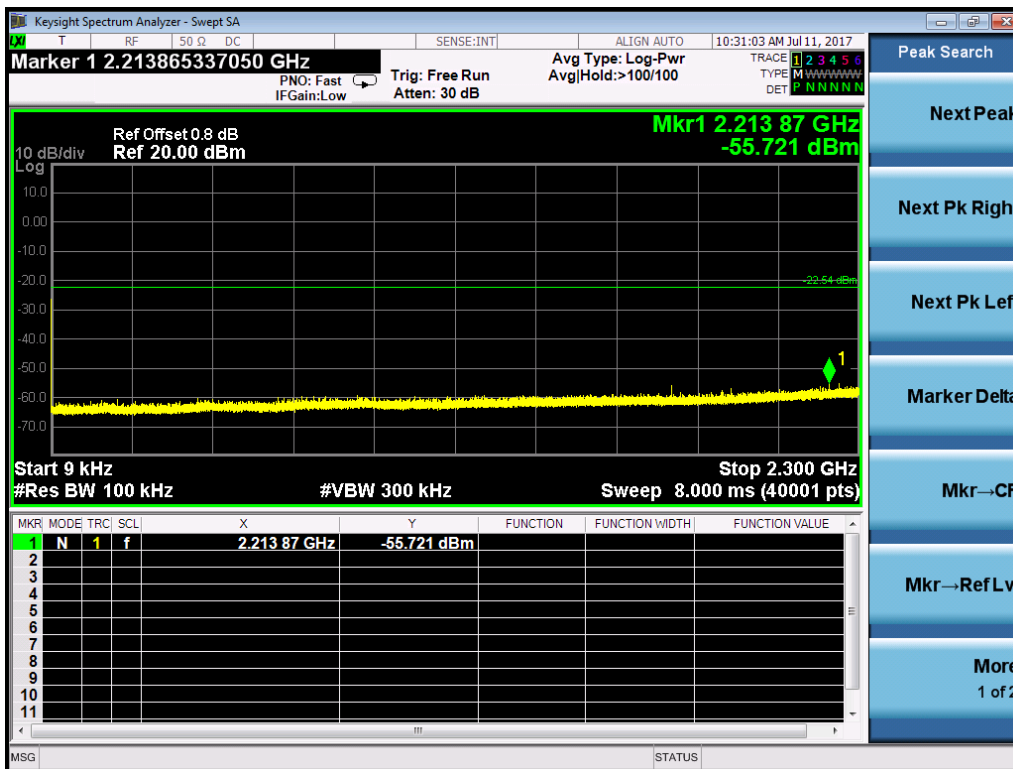
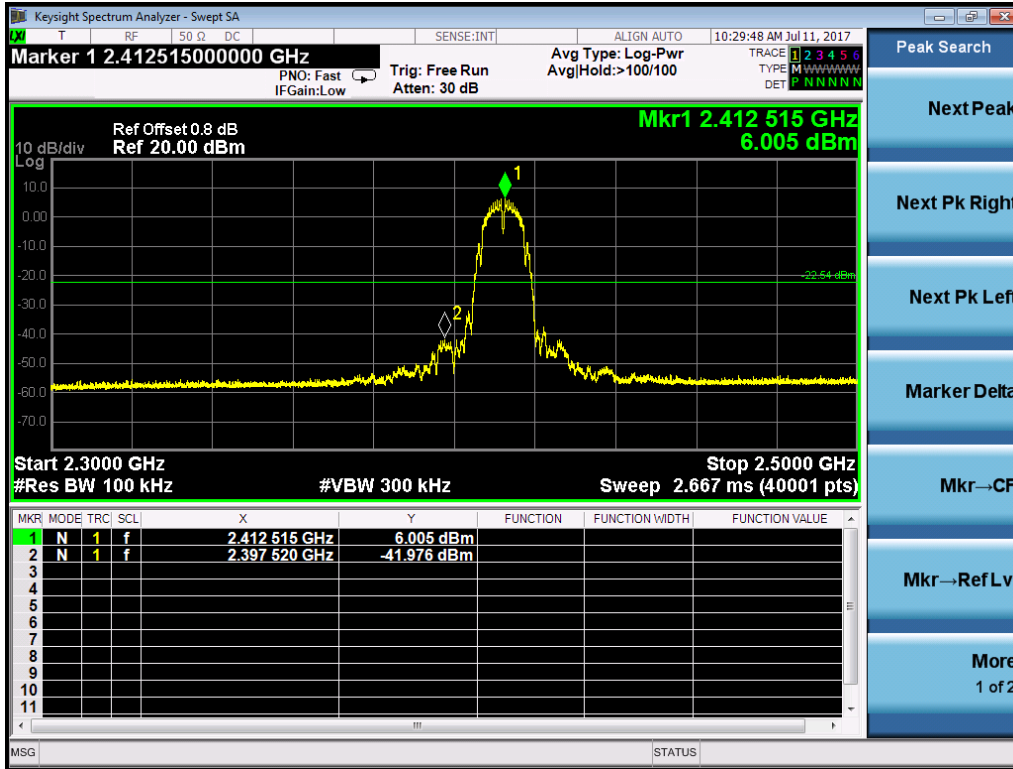


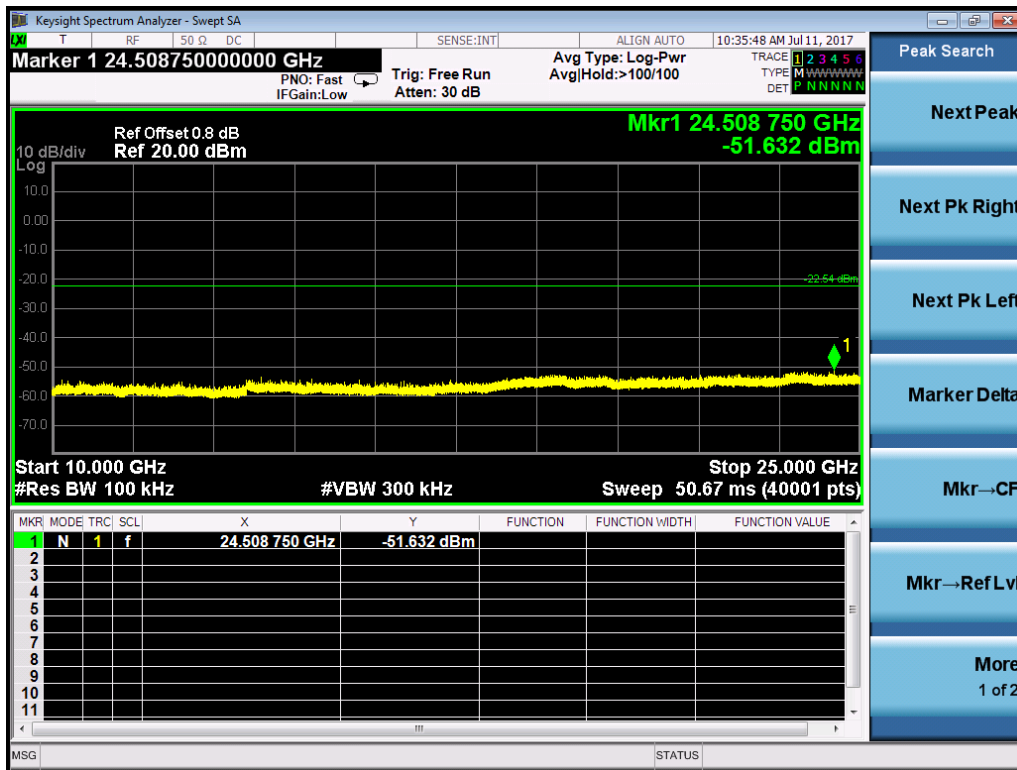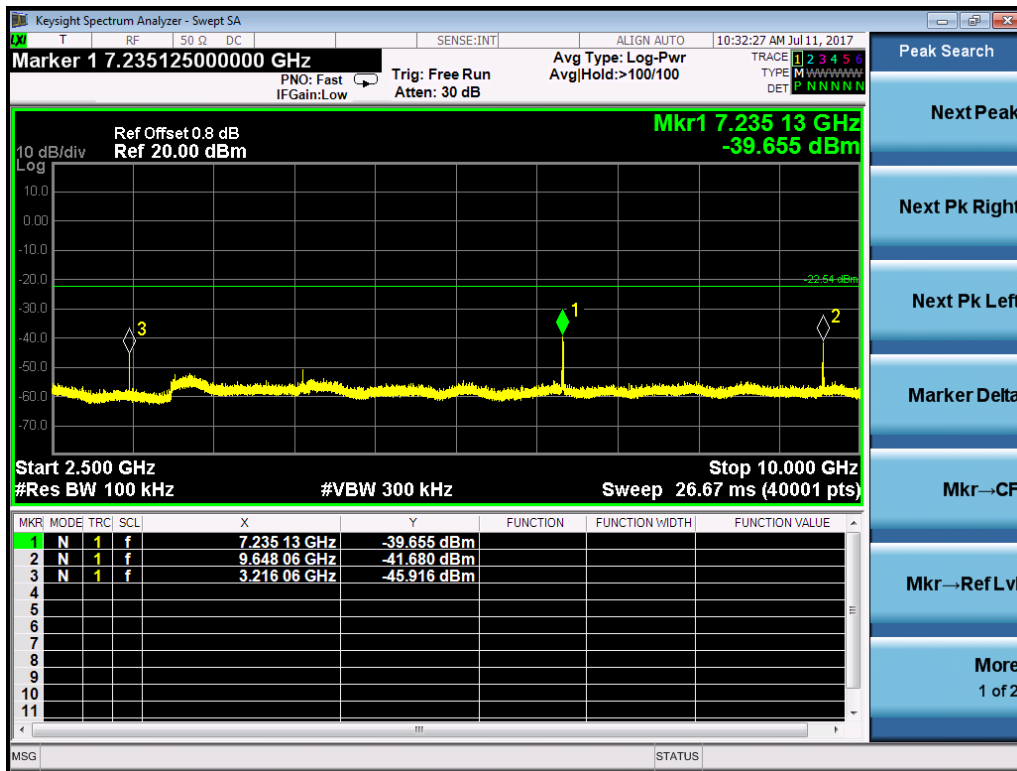



Channel M

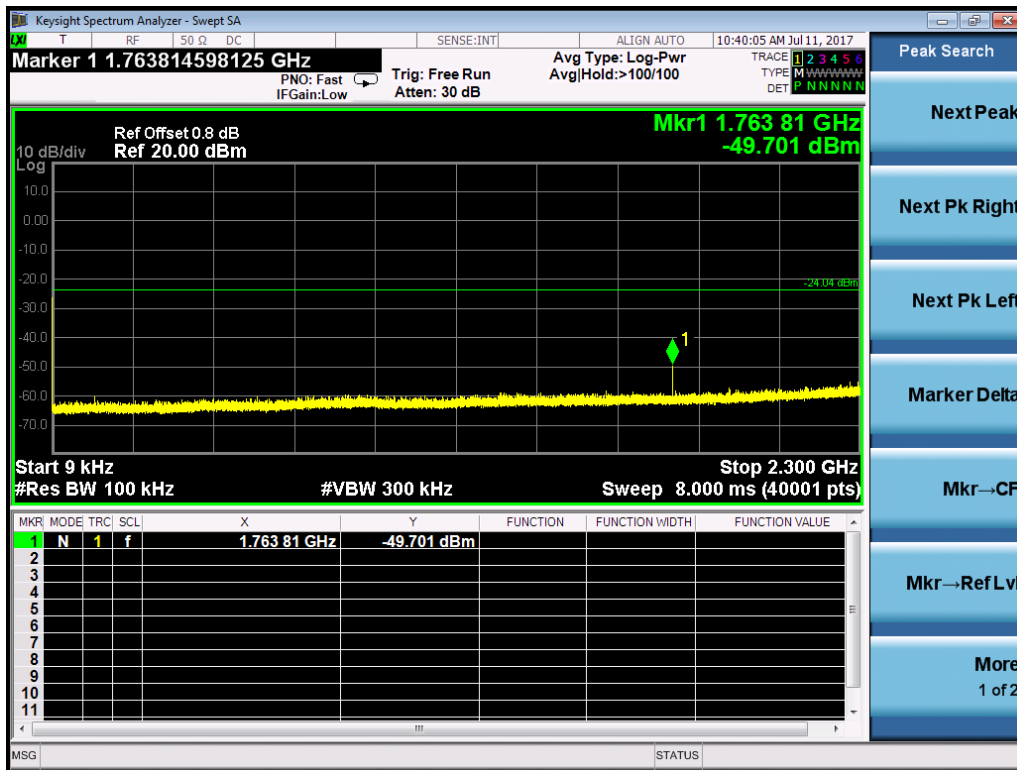
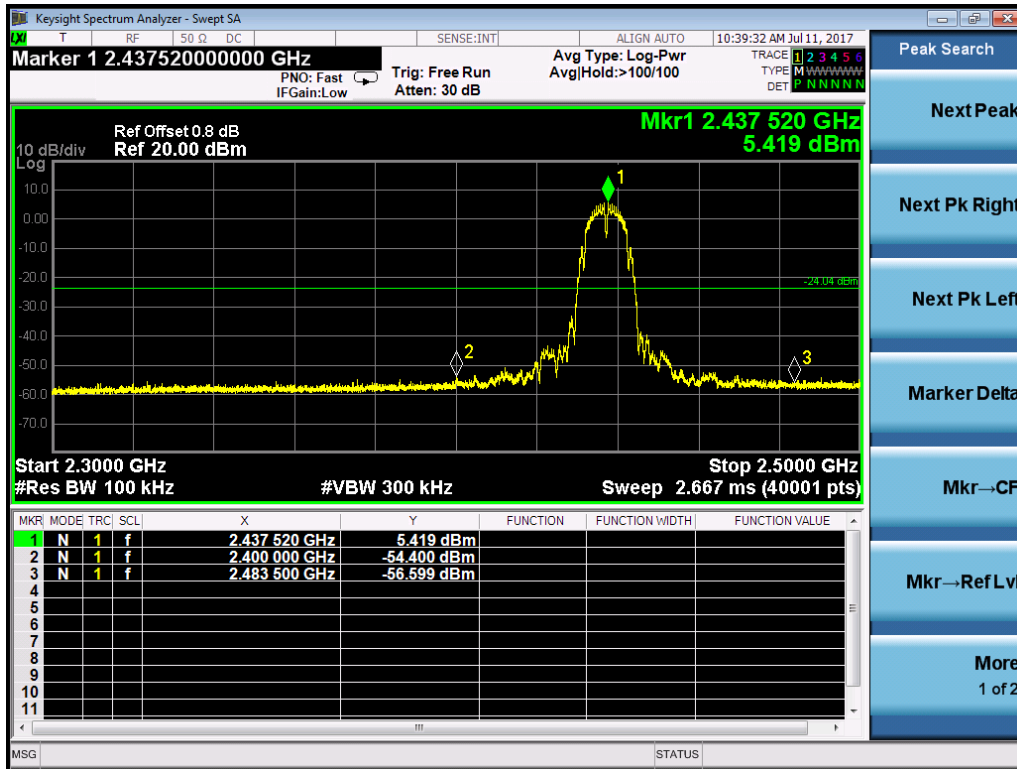




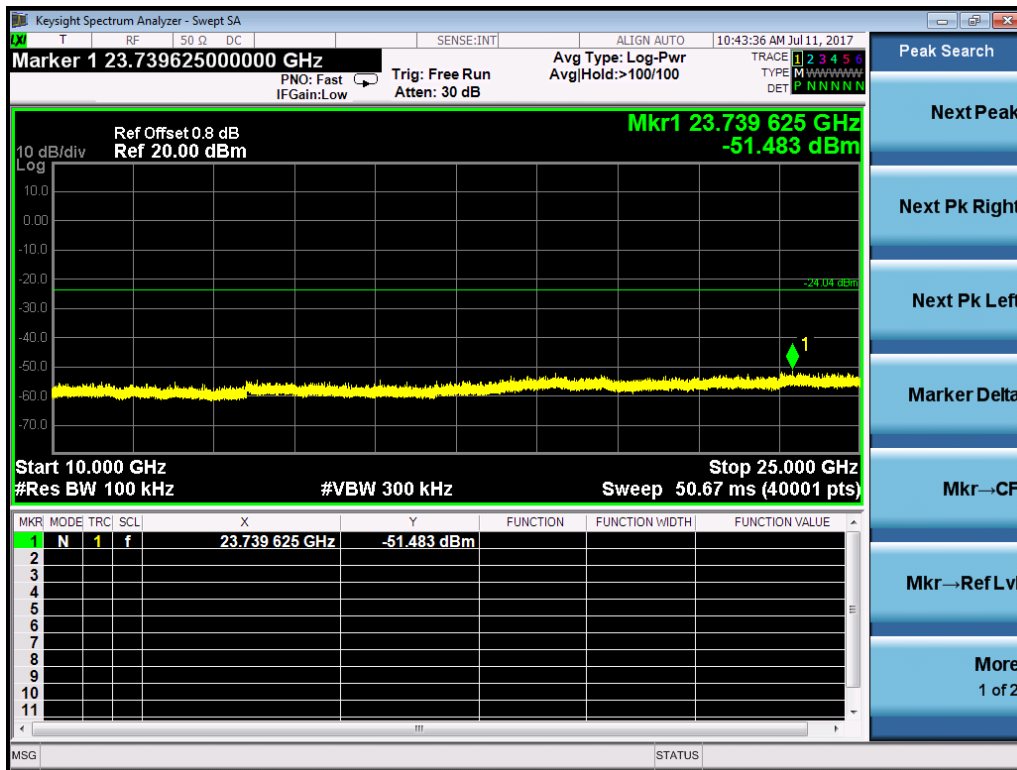
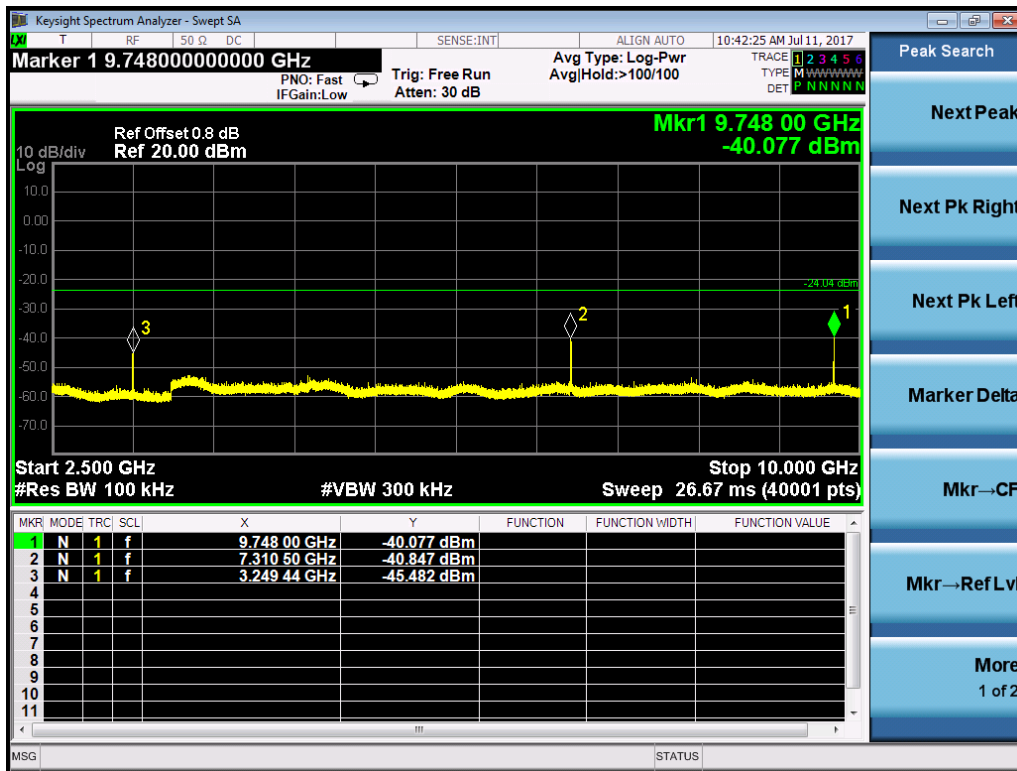




Channel H

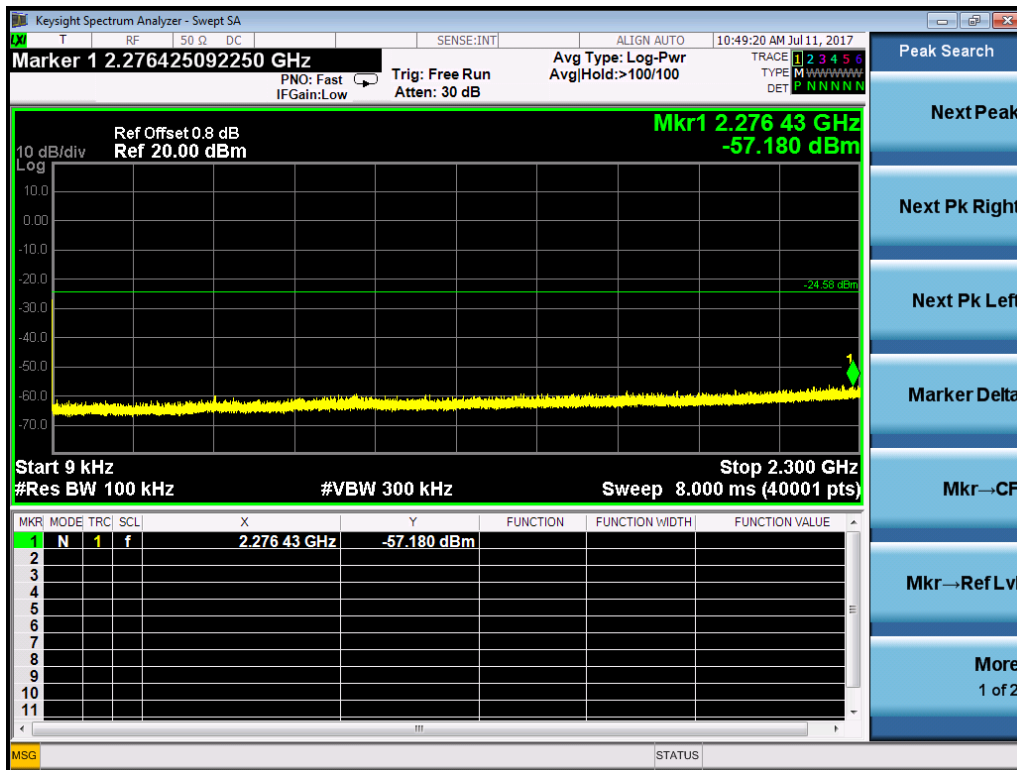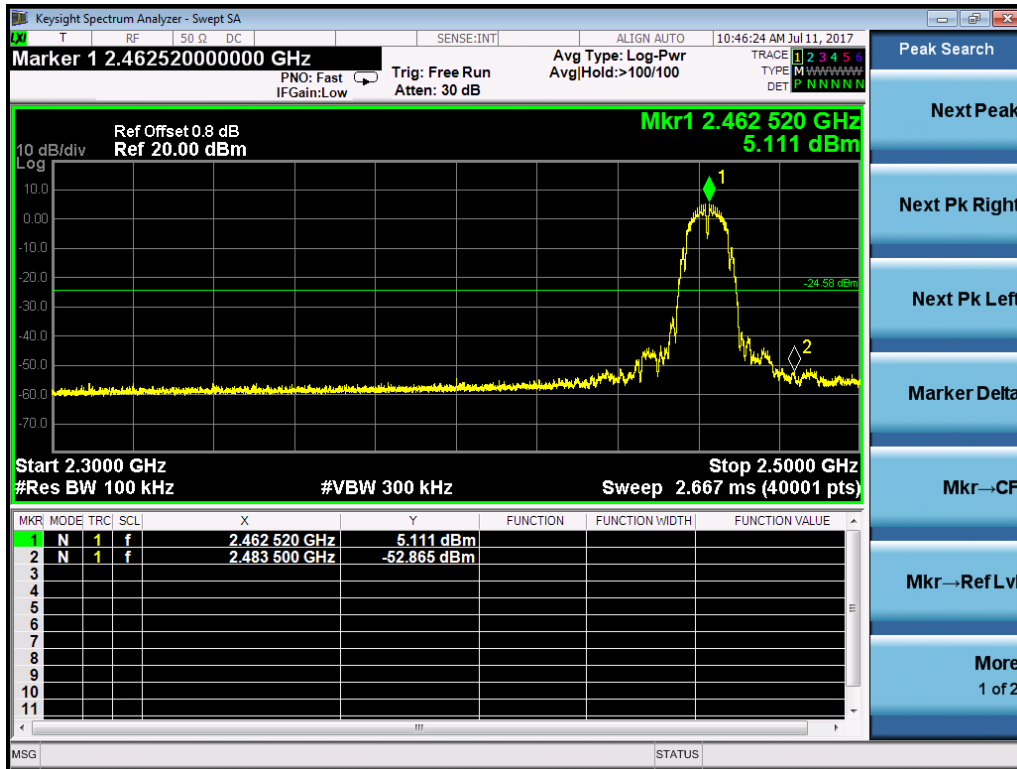

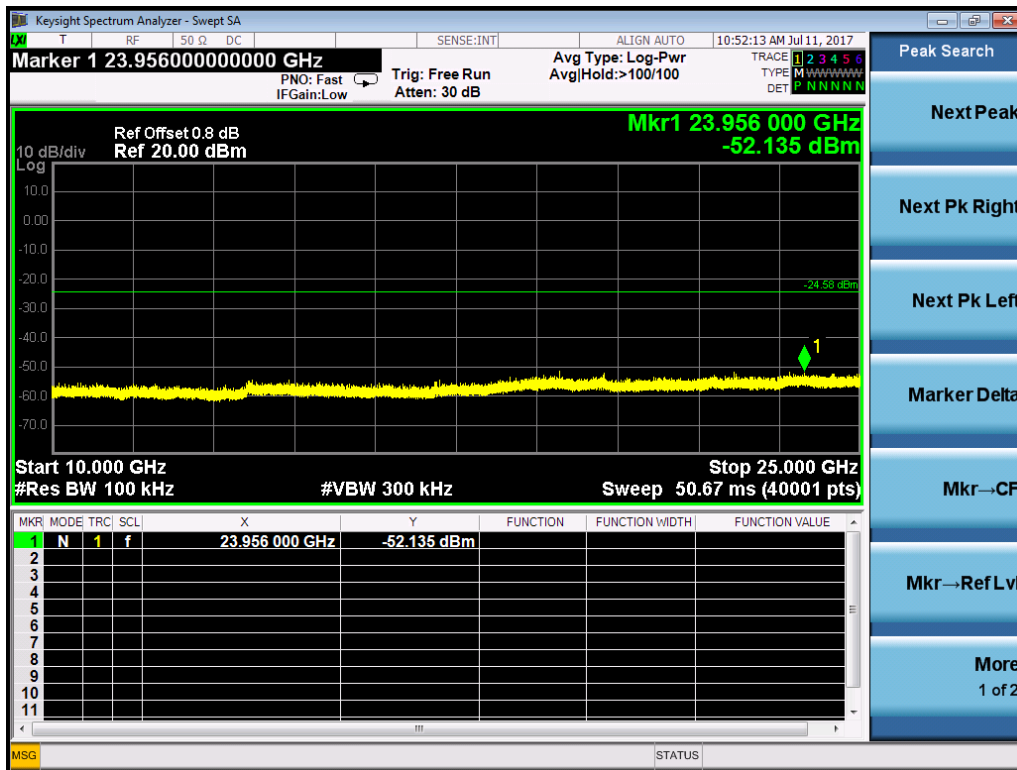
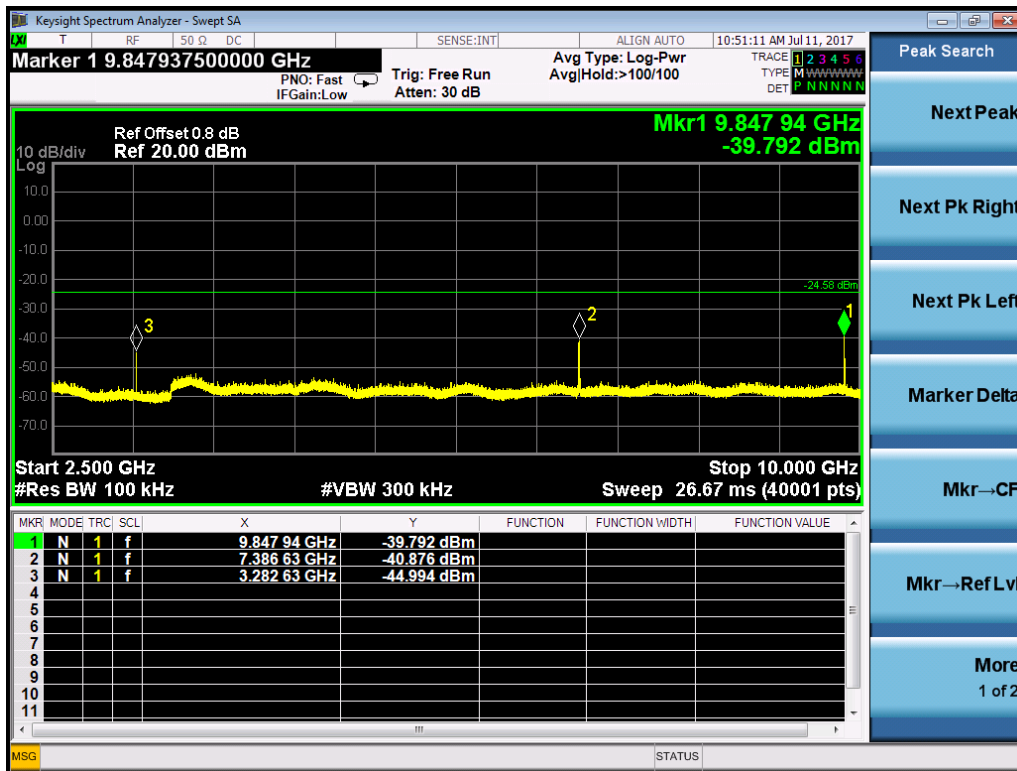




**802.11g**  
**Channel L**

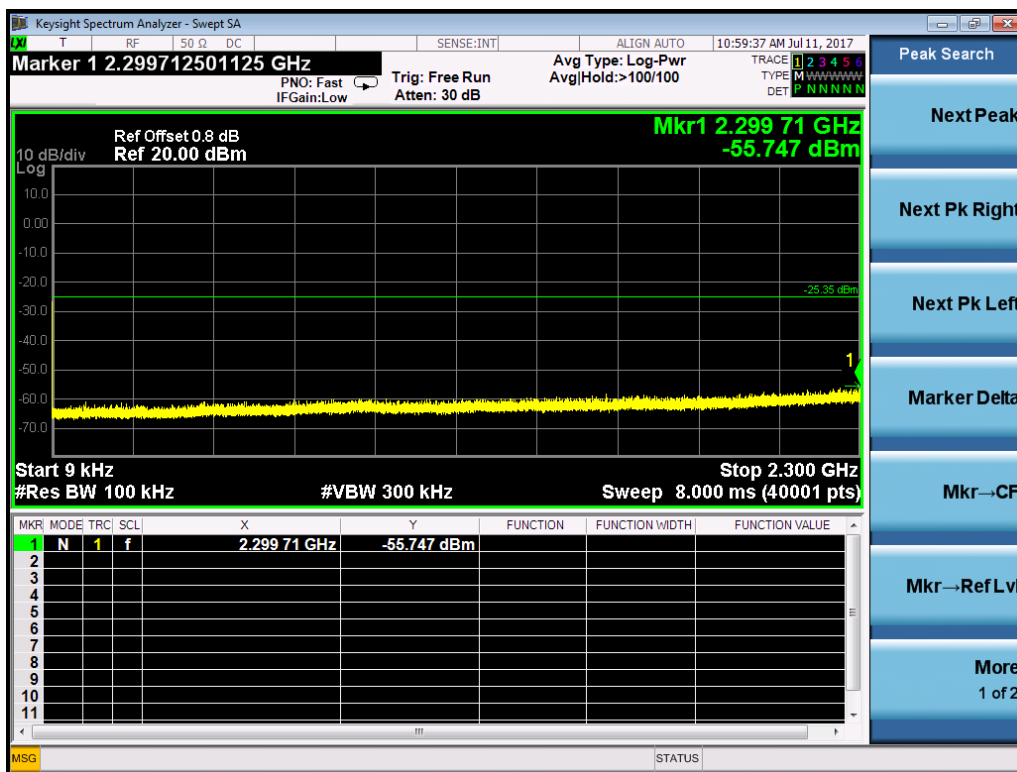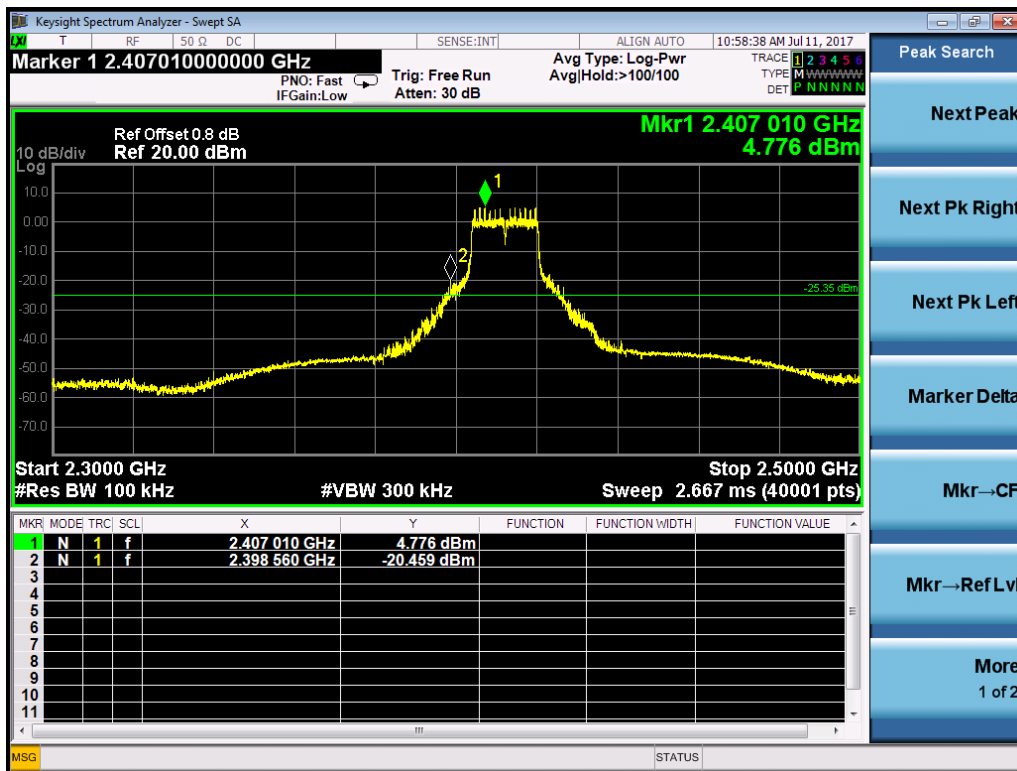

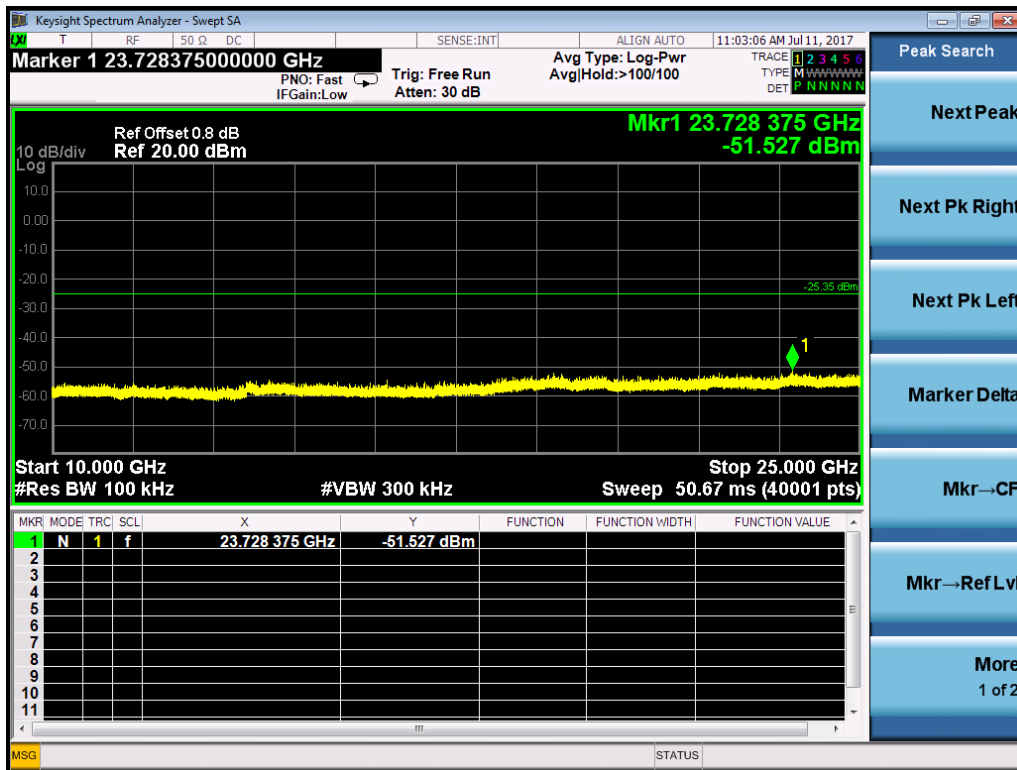
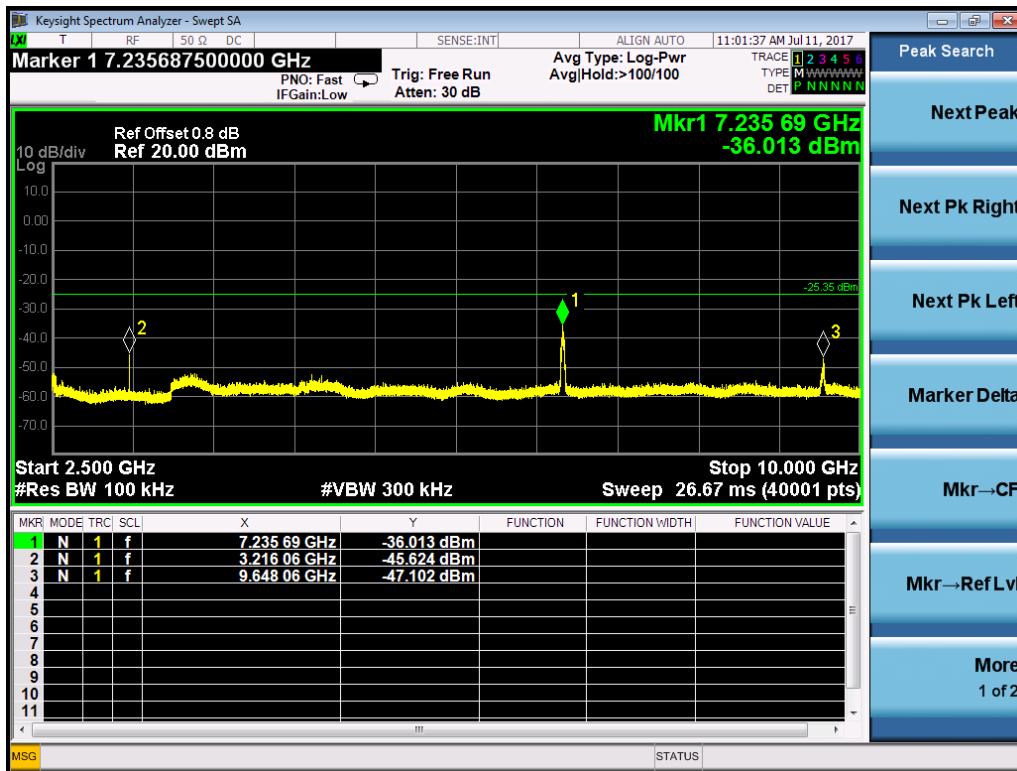


Channel M

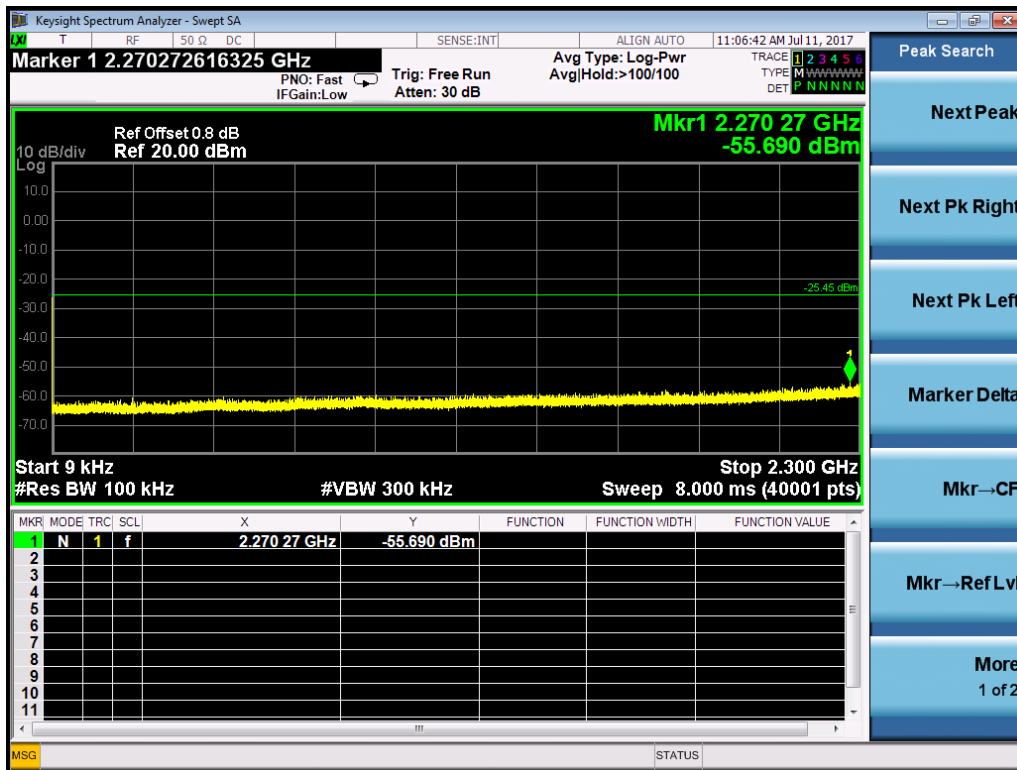
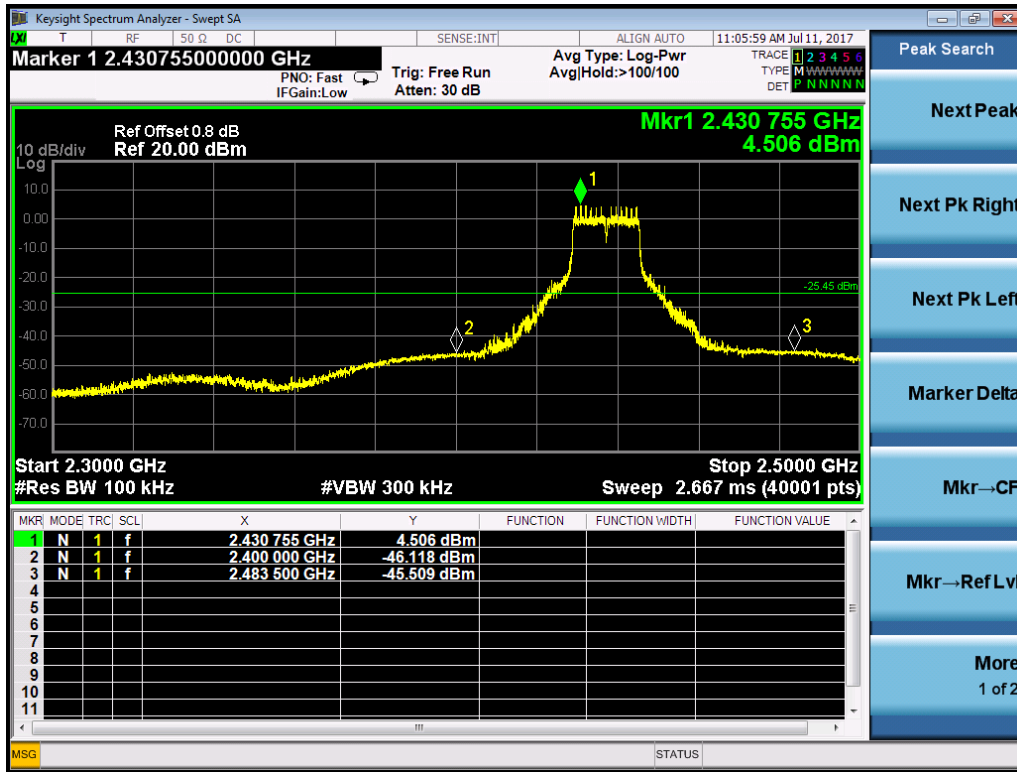


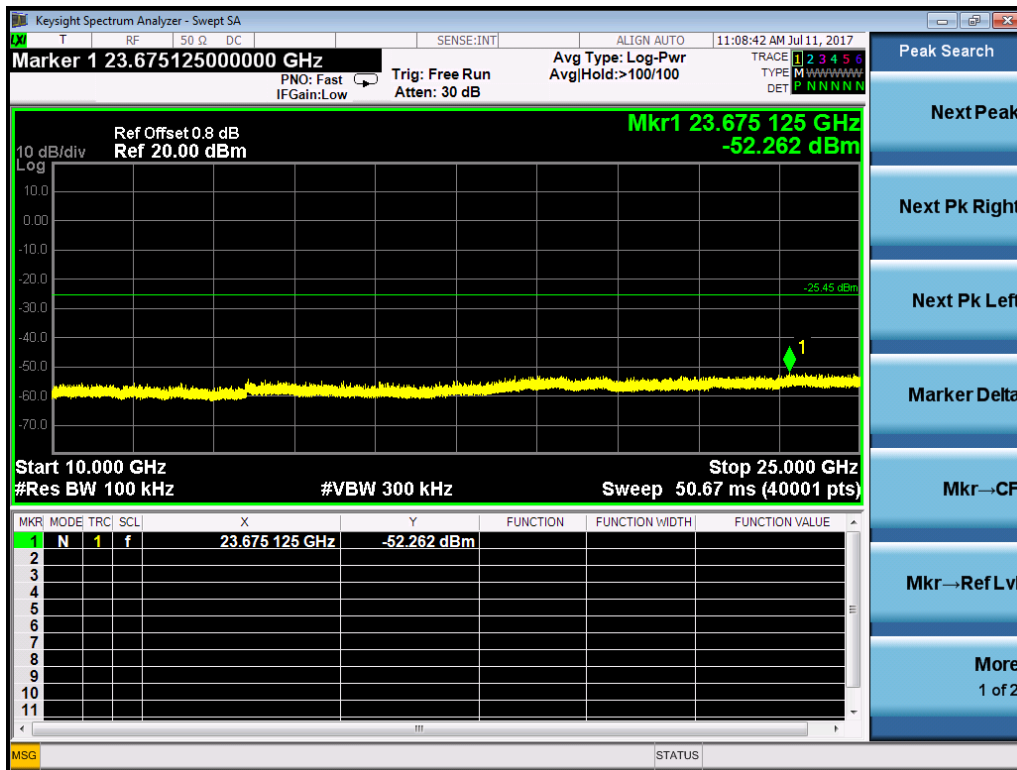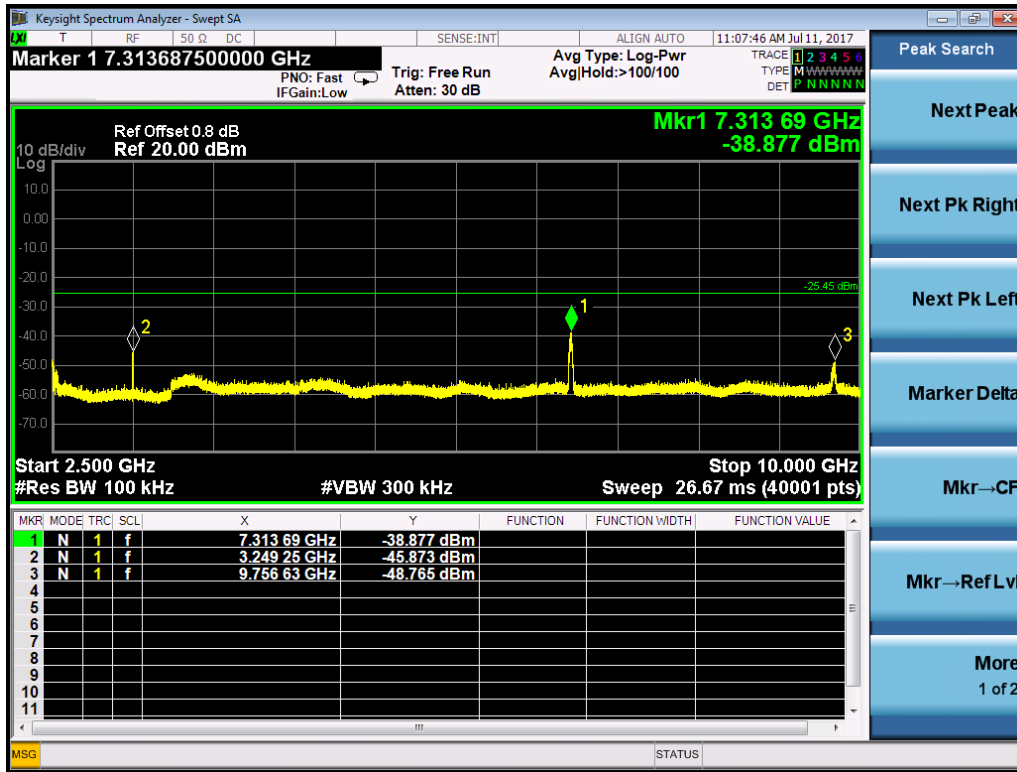



Channel H

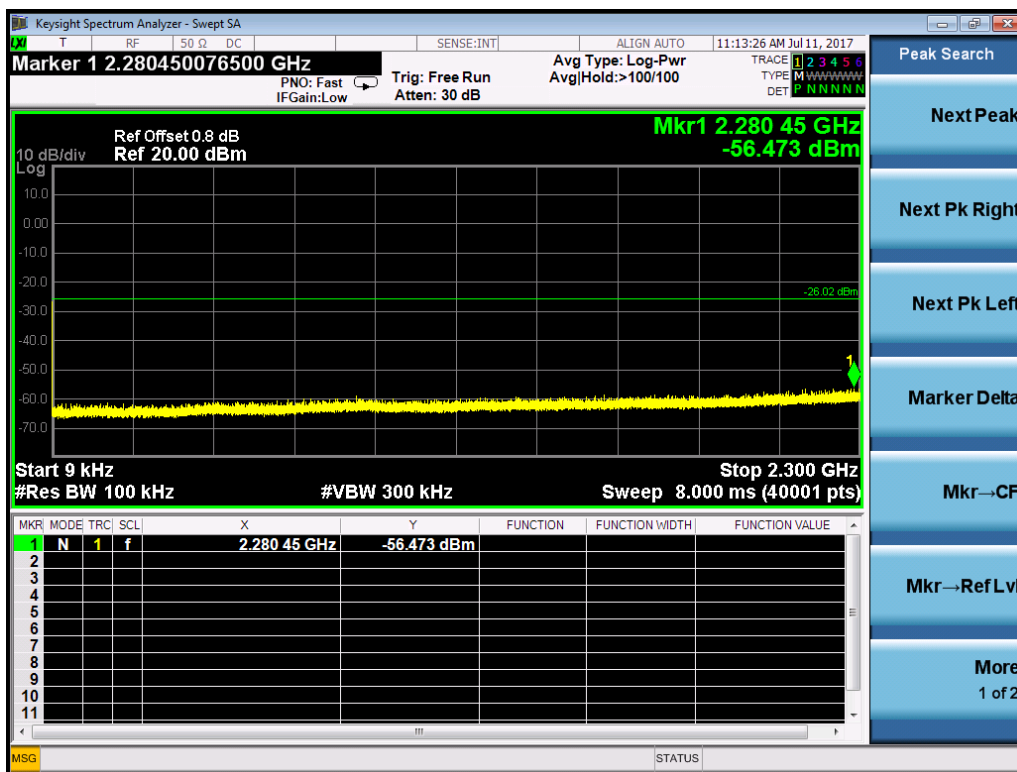
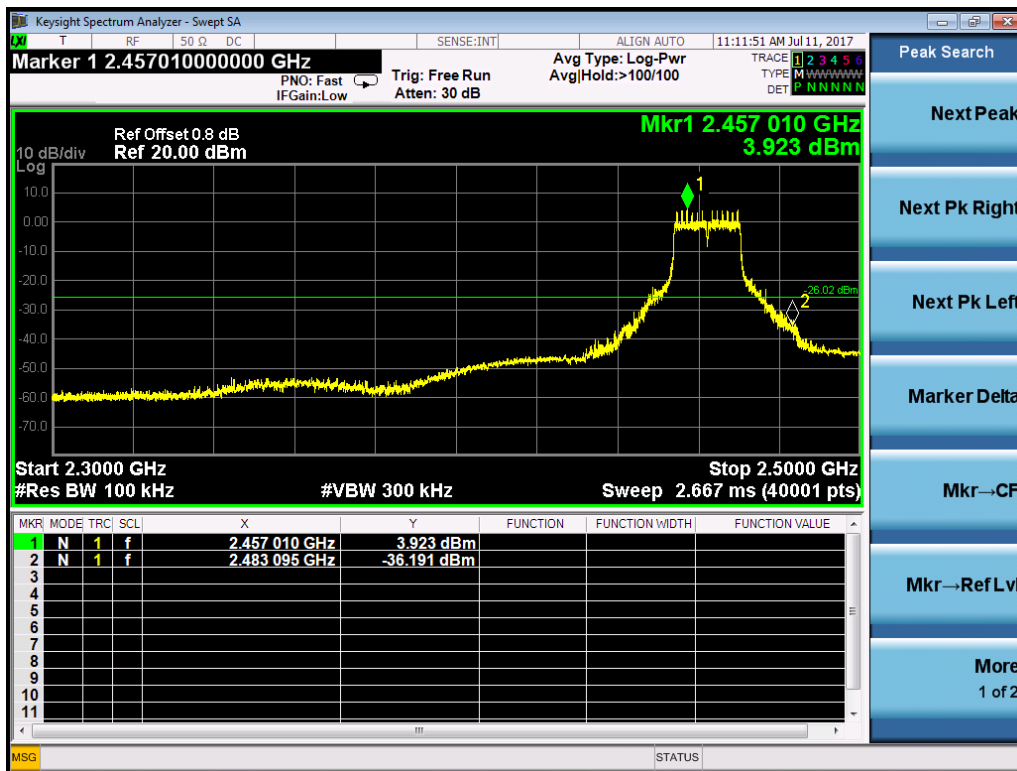




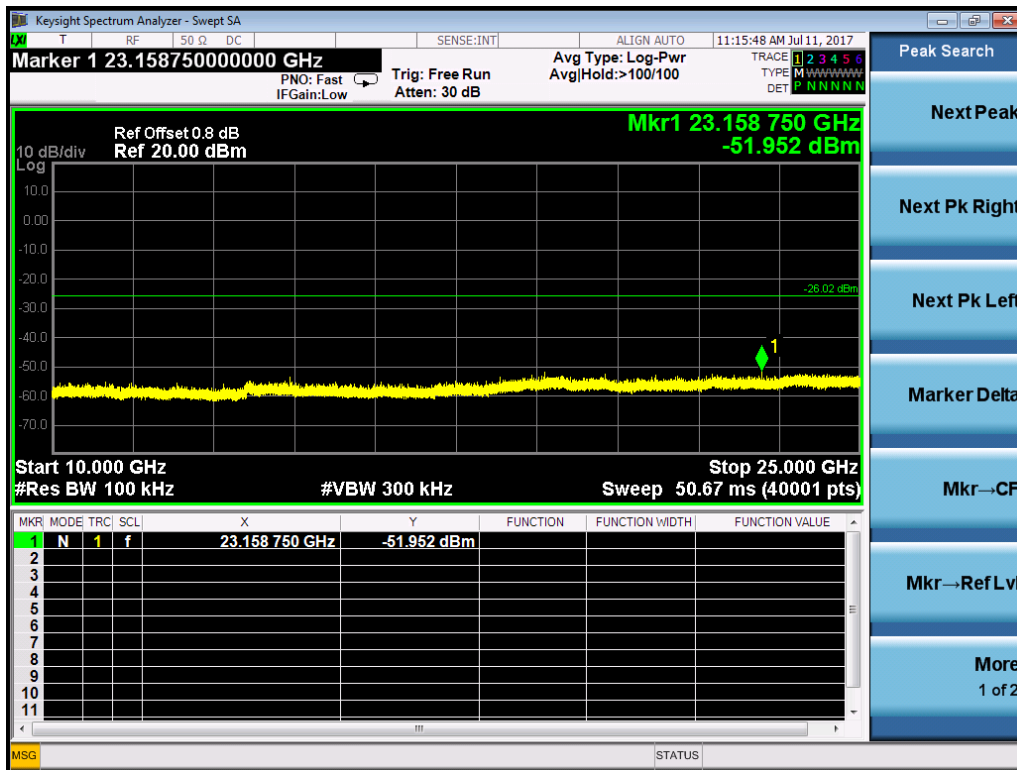
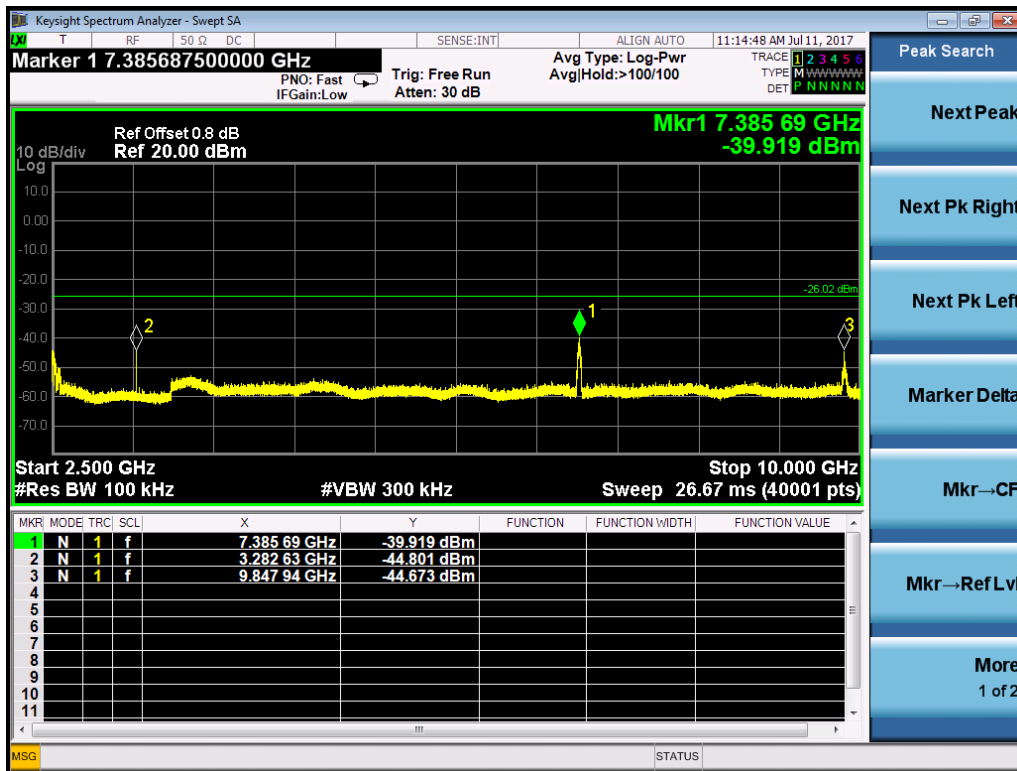




**802.11n (HT20)**  
Channel L

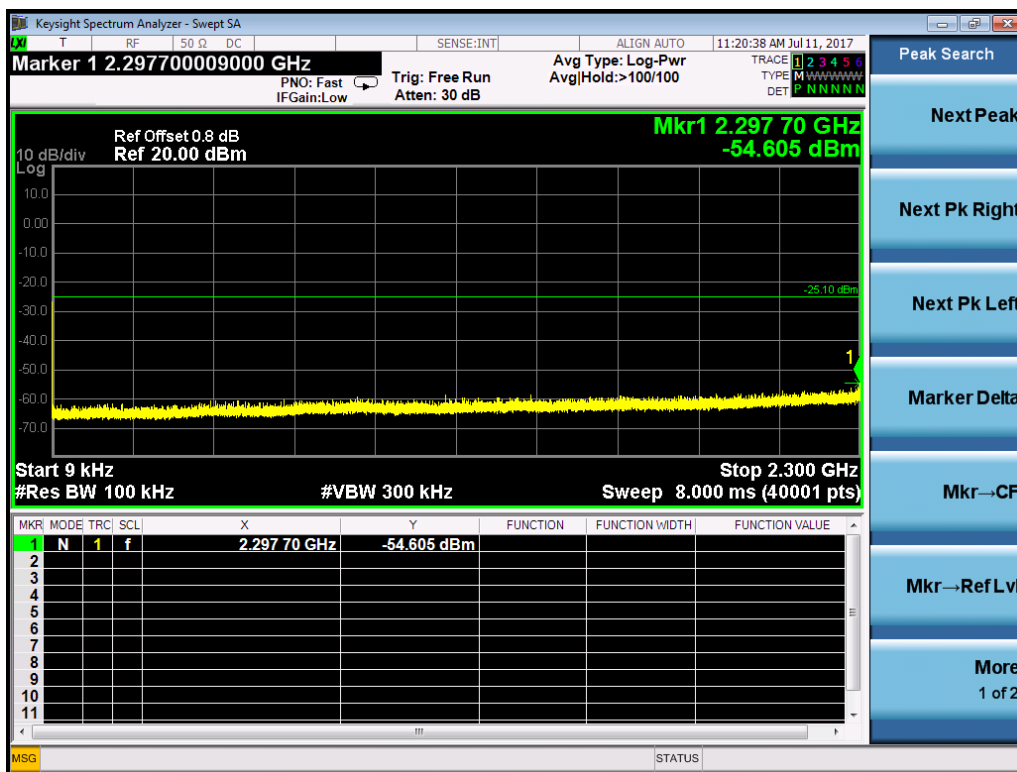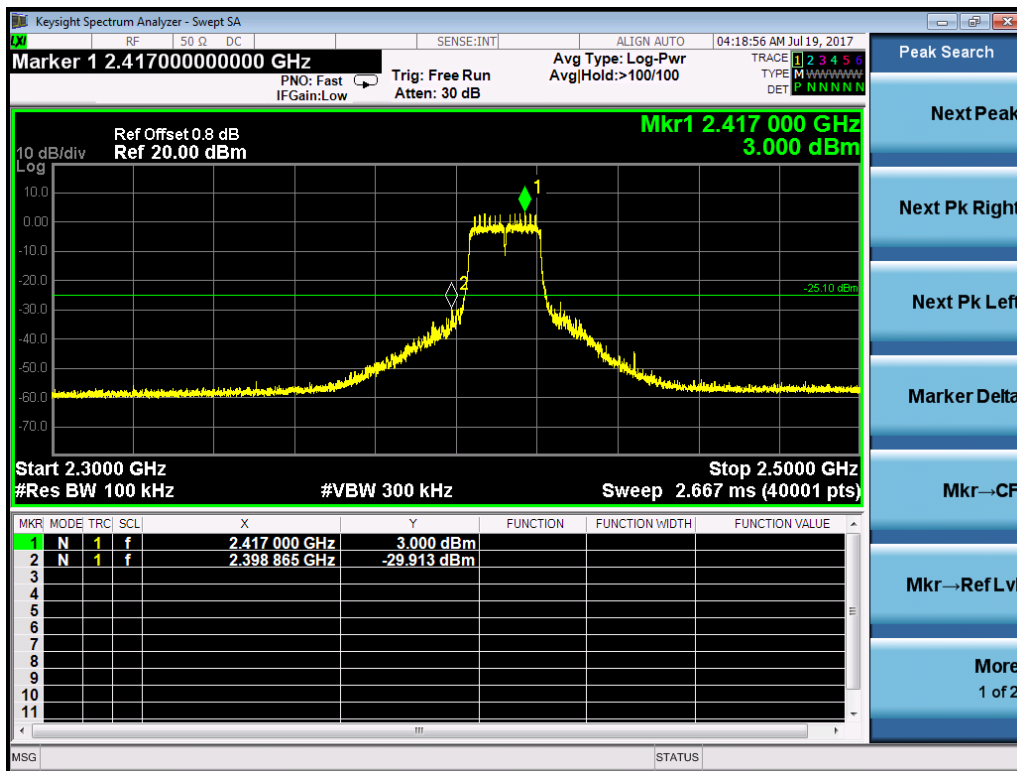

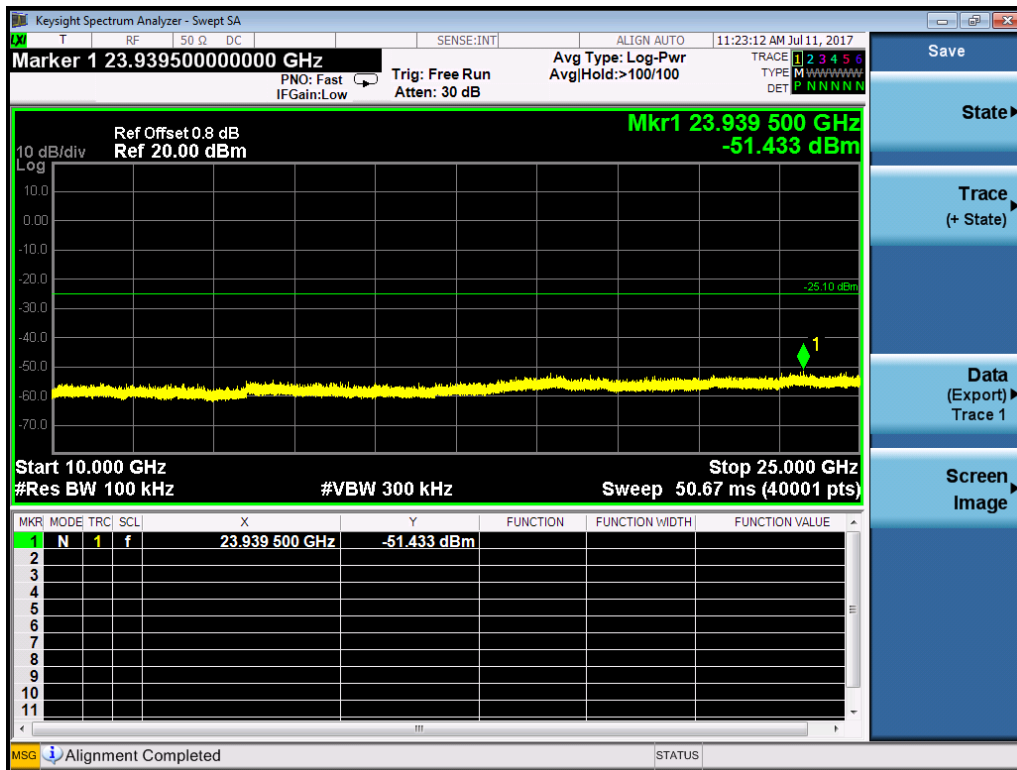
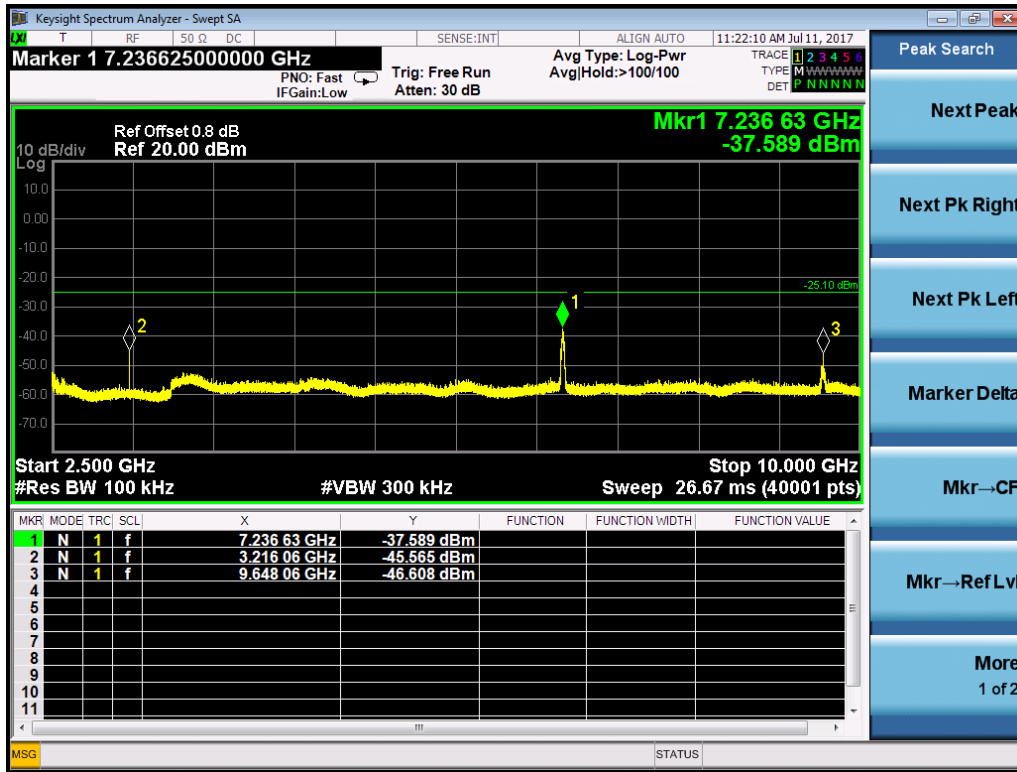




Channel M

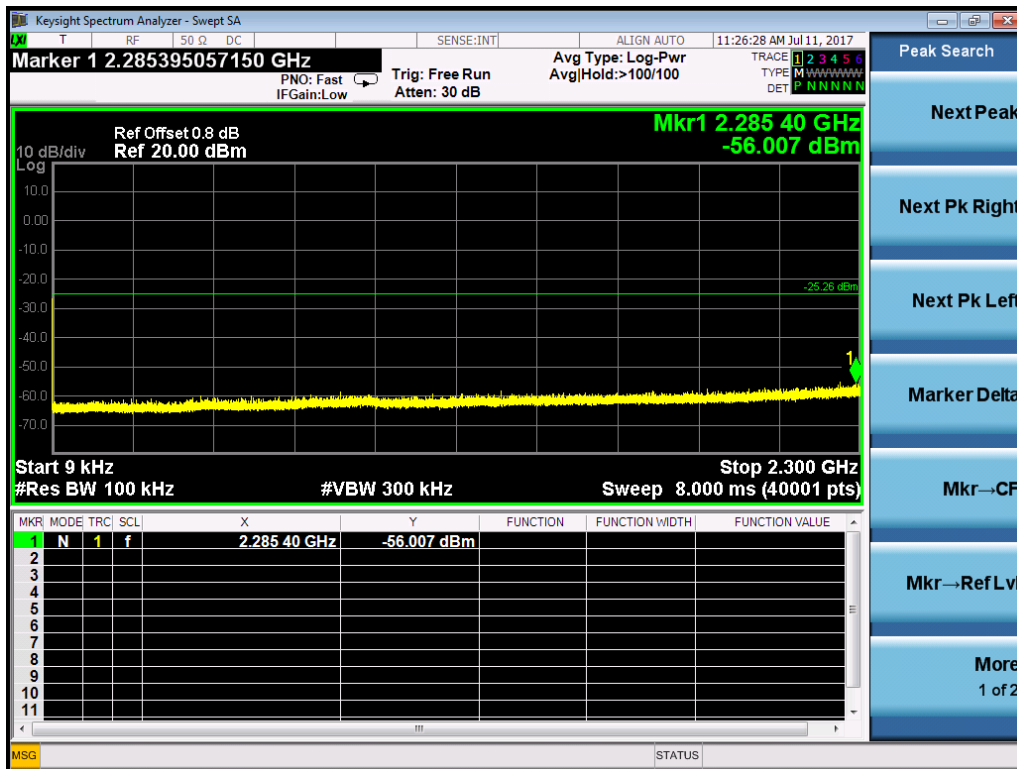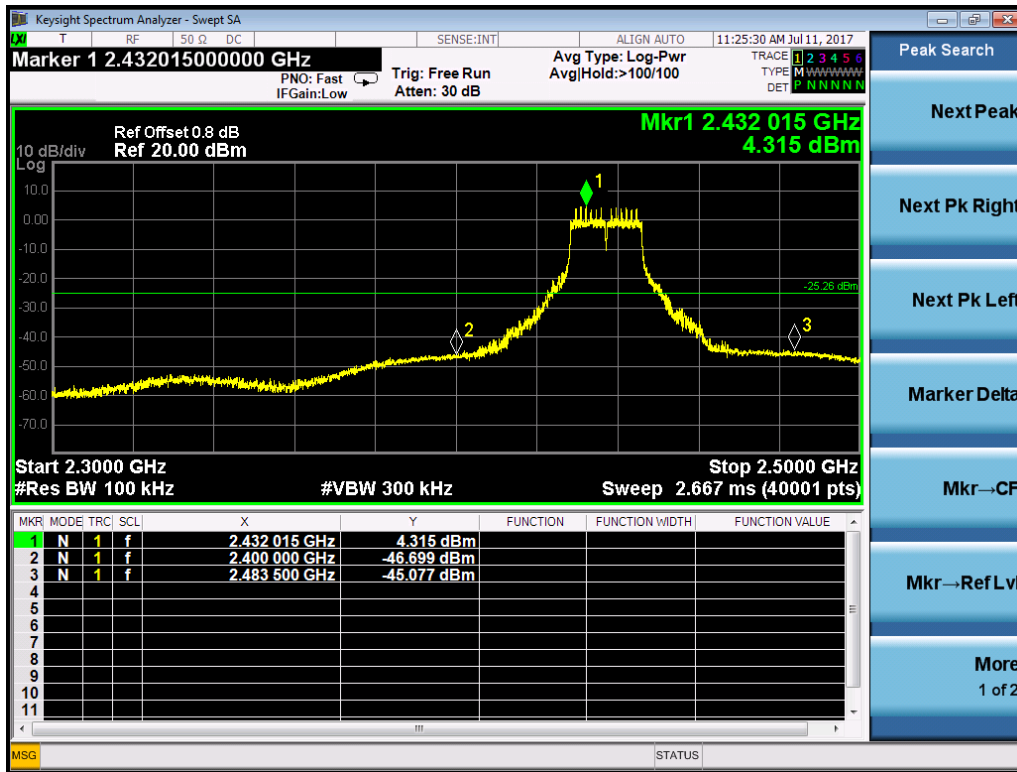

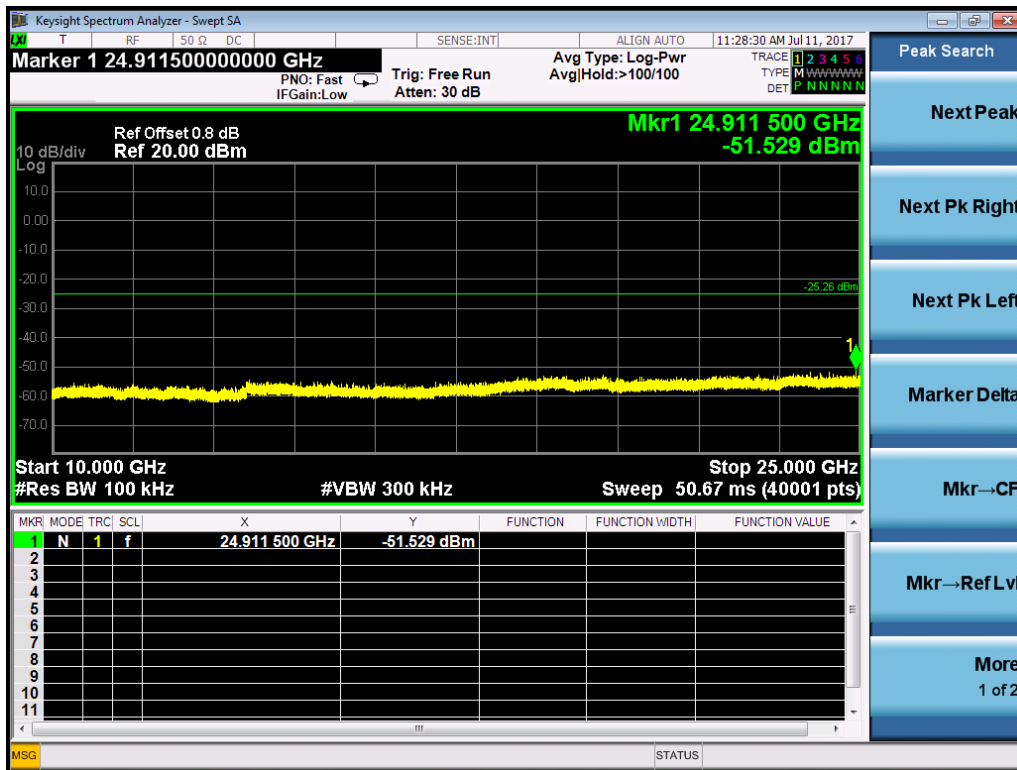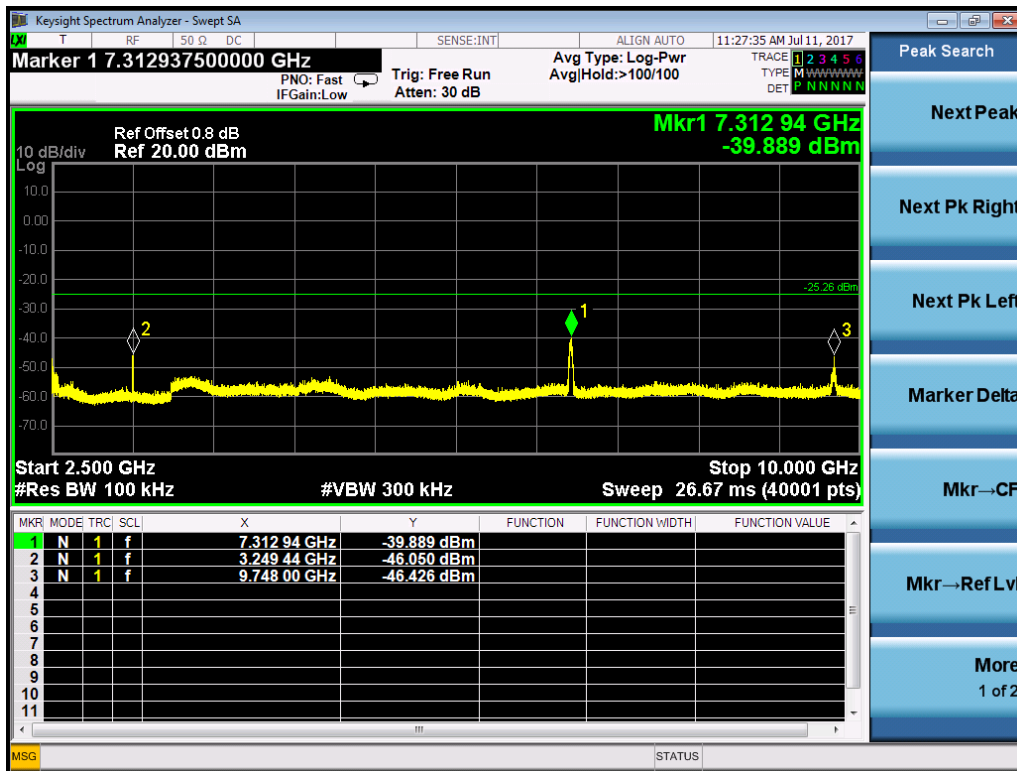

Channel H

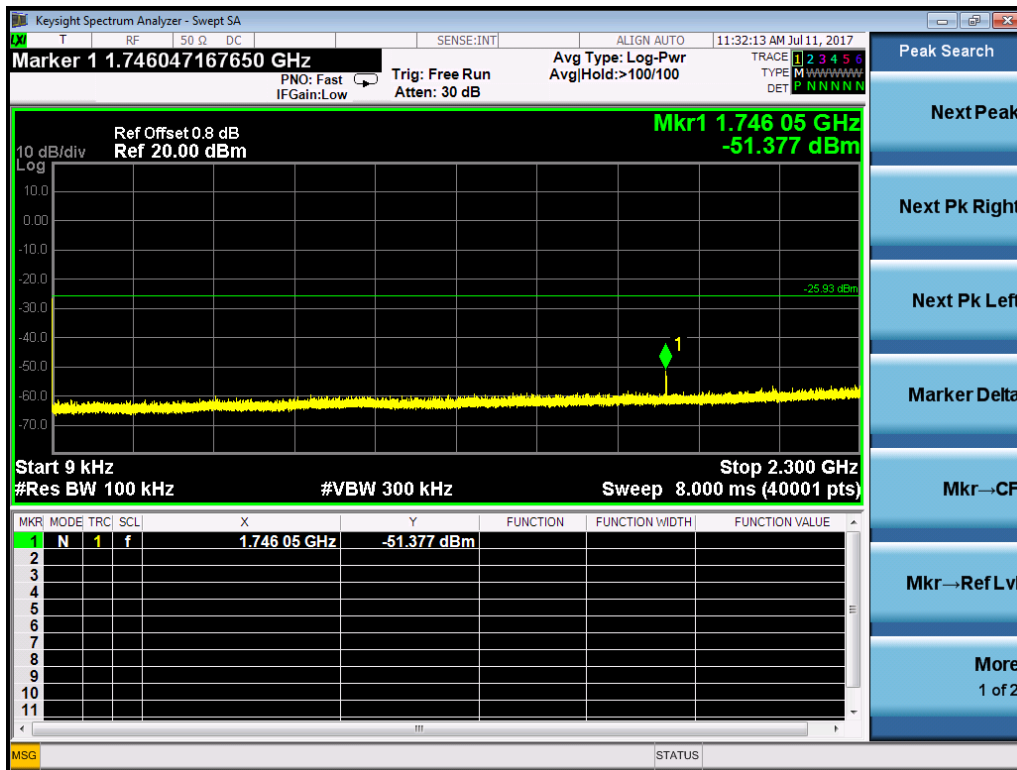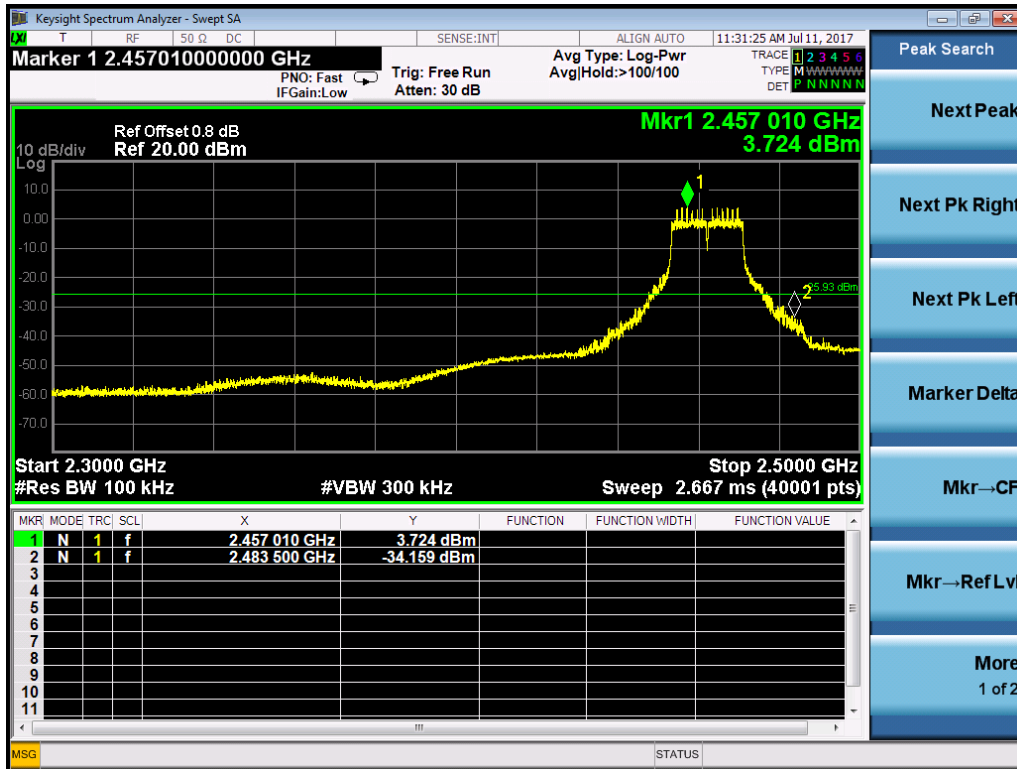

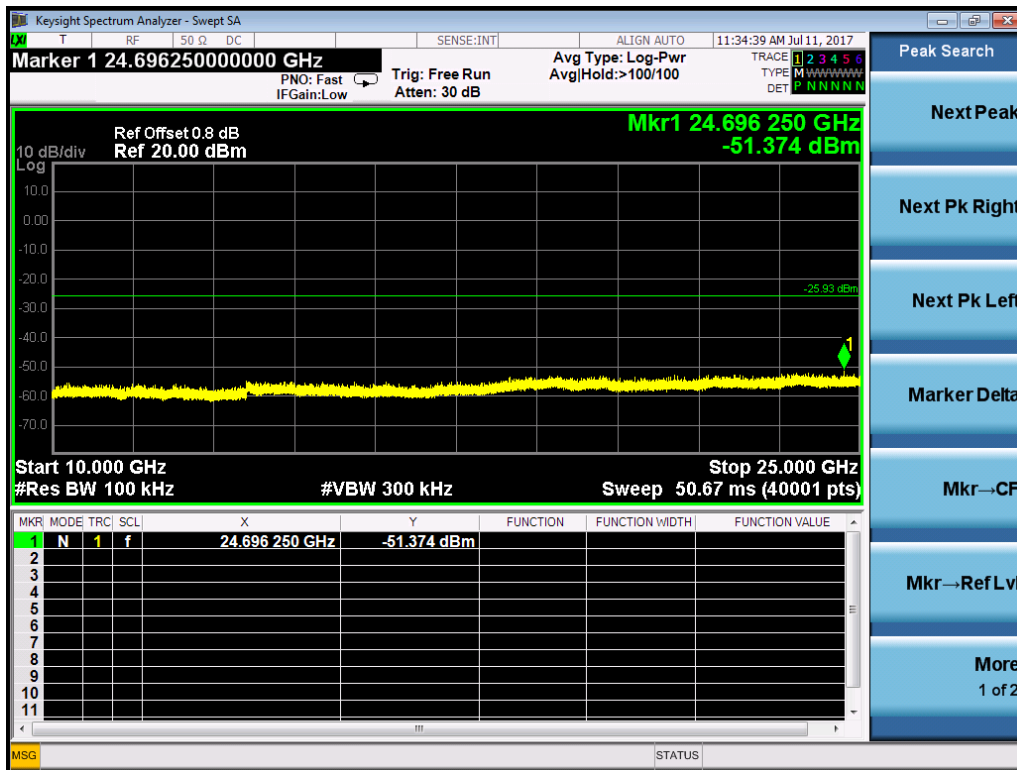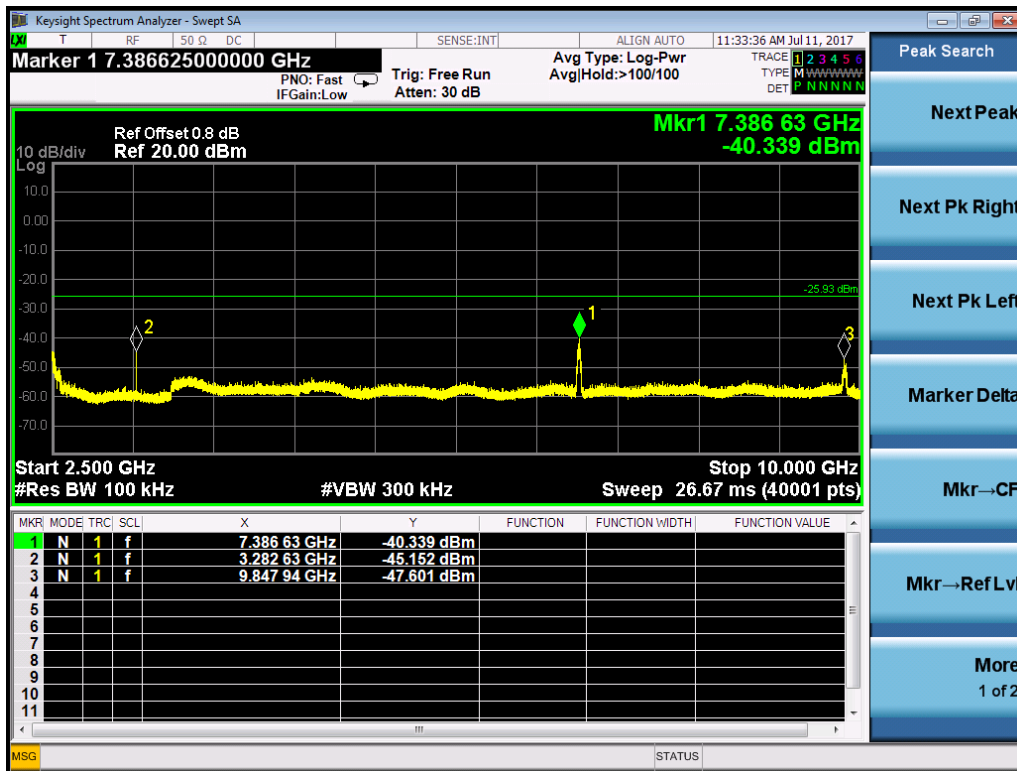

## 7 Radiated Emissions


Test result: Pass

### 7.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 7.2 Test Configuration

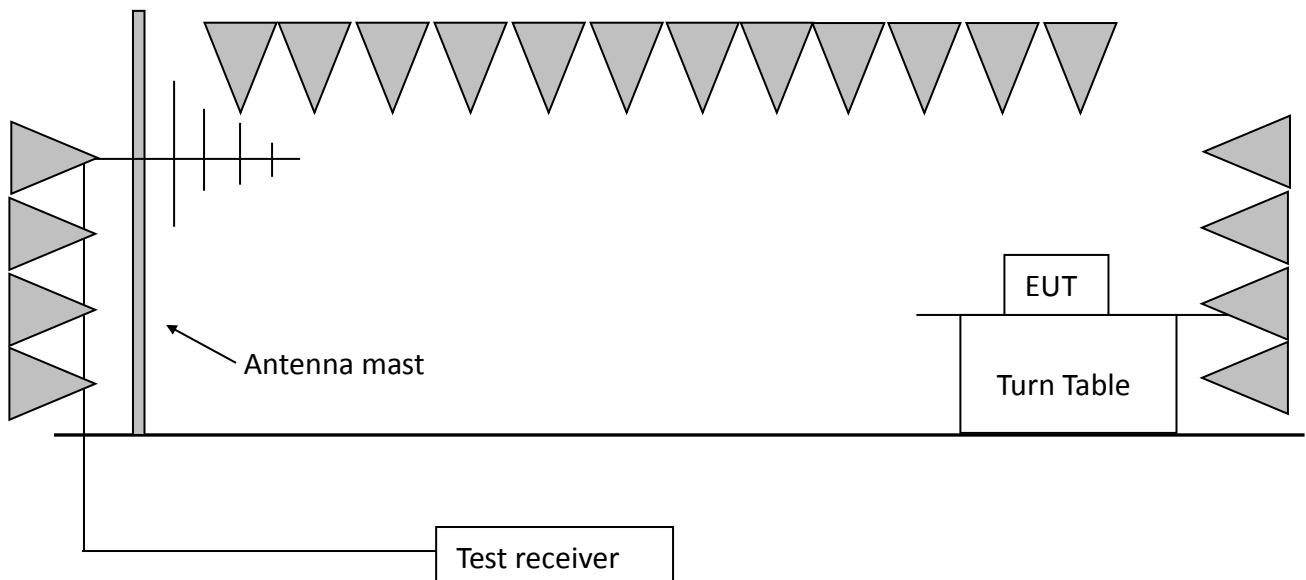



### 7.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The EUT was tested according to DTS test procedure of KDB558074 D01 DTS "Meas Guidance" for compliance to FCC 47CFR 15.247 requirements.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);  
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);  
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)  
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.  
Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
Measured level = 10dBuV + 0.20dB/m = 10.20dBuV/m  
Assuming limit = 54dBuV/m,  
Measured level = 10.20dBuV/m, then Margin = 54 - 10.20 = 43.80dBuV/m.


### 7.4 Test Protocol

Temperature: 25 °C  
Relative Humidity: 55 %


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

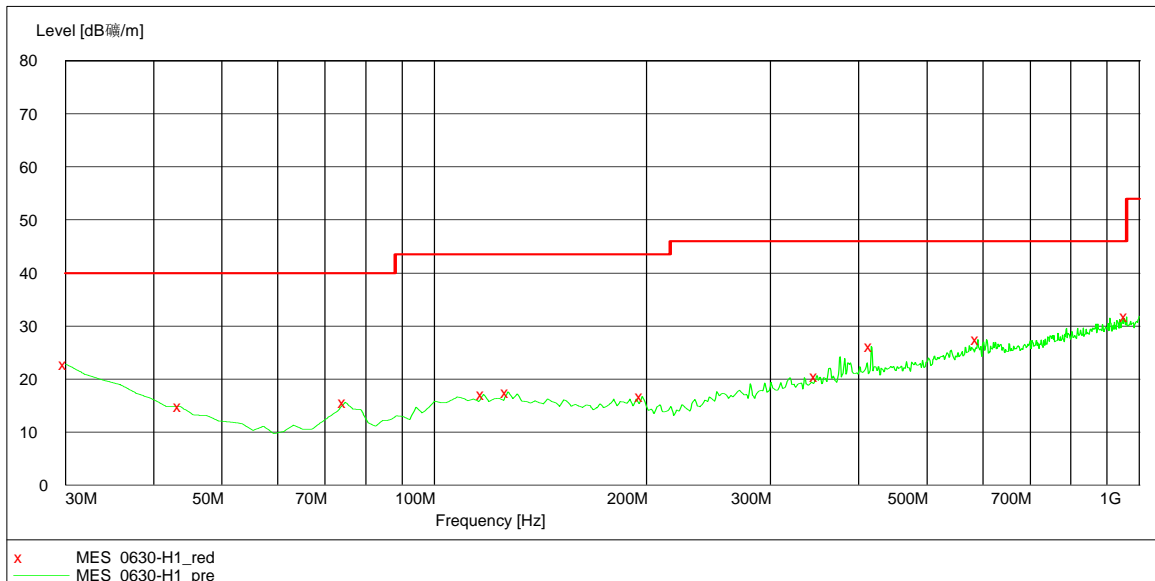

Vertical

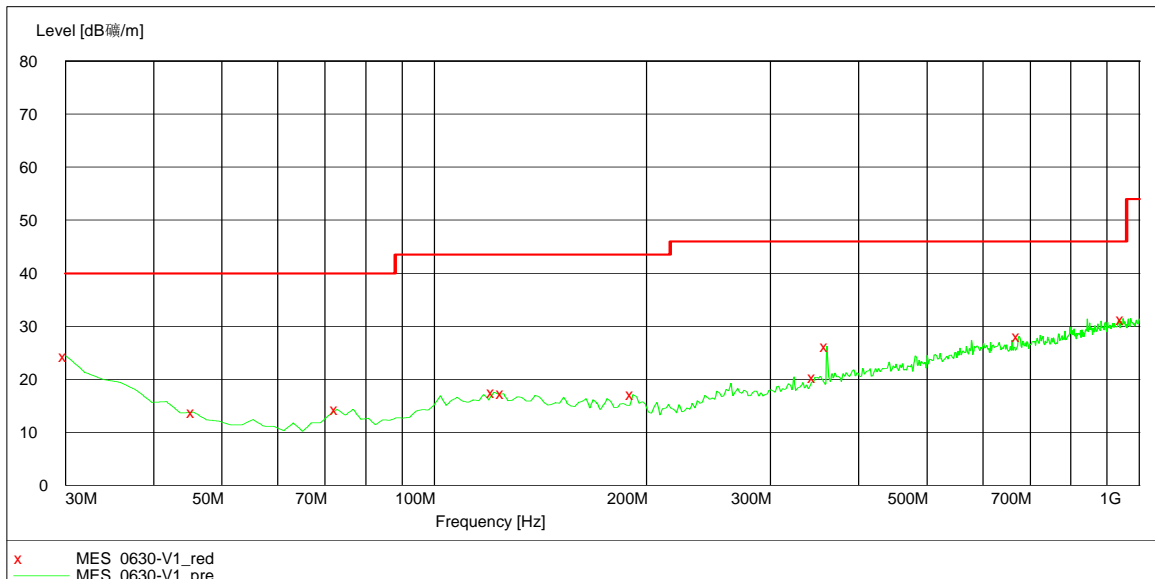

**Test data (30MHz~1GHz, 802.11n Mode):**

Polarization	Frequency (MHz)	Measured level (dB $\mu$ V/m)	Factor (dB)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
H	30.00	22.80	21.00	40.00	17.20	PK
	43.61	14.80	12.20	40.00	25.20	PK
	74.71	15.60	8.60	40.00	24.40	PK
	117.47	17.10	13.80	43.50	26.40	PK
	127.19	17.60	13.70	43.50	25.90	PK
	197.17	16.70	12.10	43.50	26.80	PK
	348.80	20.60	17.10	46.00	25.40	PK
	416.83	26.20	18.90	46.00	19.80	PK
	589.84	27.40	21.60	46.00	18.60	PK
	959.18	31.70	25.40	46.00	14.30	PK
V	30.00	24.40	21.00	40.00	15.60	PK
	45.55	13.80	11.30	40.00	26.20	PK
	72.77	14.40	8.50	40.00	25.60	PK
	121.36	17.60	14.00	43.50	25.90	PK
	125.25	17.30	13.80	43.50	26.20	PK
	191.34	17.10	11.90	43.50	26.40	PK
	346.85	20.40	17.00	46.00	25.60	PK
	360.46	26.20	17.50	46.00	19.80	PK
	675.37	28.10	22.30	46.00	17.90	PK
	949.46	31.40	25.30	46.00	14.60	PK

**Test result above 1GHz:**

The emission was conducted from 1GHz to 25GHz.

1 : 802.11b

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	53.37	74	-7.80	100	190	20.63	PK
		43.43	54	-7.80	100	190	10.57	AV
	2412	105.56	-	-7.80	100	190	-	PK
		97.27	-	-7.80	100	190	-	AV
	4824	49.56	74	-2.10	100	190	24.44	PK
		40.12	54	-2.10	100	190	13.88	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	105.21	-	-7.80	100	190	-	PK
		96.67	-	-7.80	100	190	-	AV
	4874	47.32	74	-2.10	100	190	26.68	PK
		38.54	54	-2.10	100	190	15.46	AV
	7311	49.12	74	6.50	100	190	24.88	PK
		39.66	54	6.50	100	190	14.34	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	104.37	-	-7.80	100	190	-	PK
		95.73	-	-7.80	100	190	-	AV
	2483.5	51.66	74	-7.50	100	190	22.34	PK
		41.45	54	-7.50	100	190	12.55	AV
	4924	47.22	74	-2.10	100	190	26.78	PK
		38.24	54	-2.10	100	190	15.76	AV
	7386	48.66	74	6.50	100	190	25.34	PK
		39.34	54	6.50	100	190	14.66	AV
Note:	2462MHz is fundamental signal.							

2 : 2.4G band 802.11g

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	53.24	74	-7.80	100	190	20.76	PK
		43.67	54	-7.80	100	190	10.33	AV
	2412	106.83	-	-7.80	100	190	-	PK
		94.43	-	-7.80	100	190	-	AV
	4824	49.43	74	-2.10	100	190	24.57	PK
		36.44	54	-2.10	100	190	17.56	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	106.56	-	-7.80	100	190	-	PK
		94.55	-	-7.80	100	190	-	AV
	4874	51.67	74	-2.10	100	190	22.33	PK
		42.46	54	-2.10	100	190	11.54	AV
	7311	49.97	74	6.50	100	190	24.03	PK
		39.43	54	6.50	100	190	14.57	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	106.56	-	-7.80	100	190	-	PK
		95.54	-	-7.80	100	190	-	AV
	2483.5	54.57	74	-7.50	100	190	19.43	PK
		43.57	54	-7.50	100	190	10.43	AV
	4924	46.55	74	-2.10	100	190	27.45	PK
		38.43	54	-2.10	100	190	15.57	AV
	7386	45.52	74	6.50	100	190	28.48	PK
		36.12	54	6.50	100	190	17.88	AV
Note:	2462MHz is fundamental signal.							

3 : 802.11n20

Polarity	Frequency (MHz)	Measured level (dBuV/m)	Limit (dBuV/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	56.32	74	-7.80	100	190	17.68	PK
		46.54	54	-7.80	100	190	7.46	AV
	2412	106.42	-	-7.80	100	190	-	PK
		92.85	-	-7.80	100	190	-	AV
	4824	51.54	74	-2.10	100	190	22.46	PK
		41.28	54	-2.10	100	190	12.72	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuV/m)	Limit (dBuV/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	107.44	-	-7.80	100	190	-	PK
		94.41	-	-7.80	100	190	-	AV
	4874	48.53	74	-2.10	100	190	25.47	PK
		38.53	54	-2.10	100	190	15.47	AV
	7311	51.44	74	6.50	100	190	22.56	PK
		40.76	54	6.50	100	190	13.24	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuV/m)	Limit (dBuV/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	106.55	-	-7.80	100	190	-	PK
		94.55	-	-7.80	100	190	-	AV
	2483.5	54.25	74	-7.50	100	190	19.75	PK
		43.61	54	-7.50	100	190	10.39	AV
	4924	52.58	74	-2.10	100	190	21.42	PK
		42.64	54	-2.10	100	190	11.36	AV
	7386	50.27	74	6.50	100	190	23.73	PK
		41.53	54	6.50	100	190	12.47	AV
Note:	2462MHz is fundamental signal.							

## 8 Power line conducted emission


Test result: Pass

### 8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 8.2 Test configuration

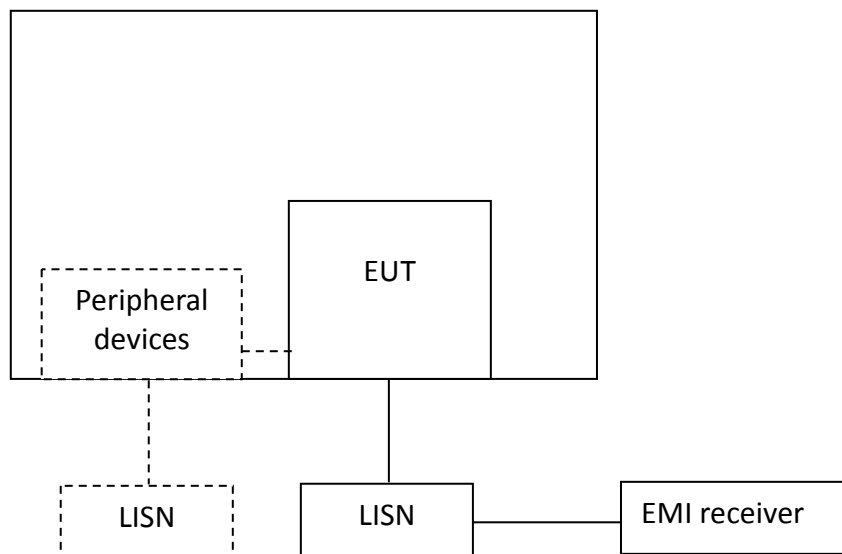

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

### 8.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.




### 8.4 Test protocol

Temperature: 22 °C  
Relative Humidity: 52 %

**L line:**

**Test Curve:**

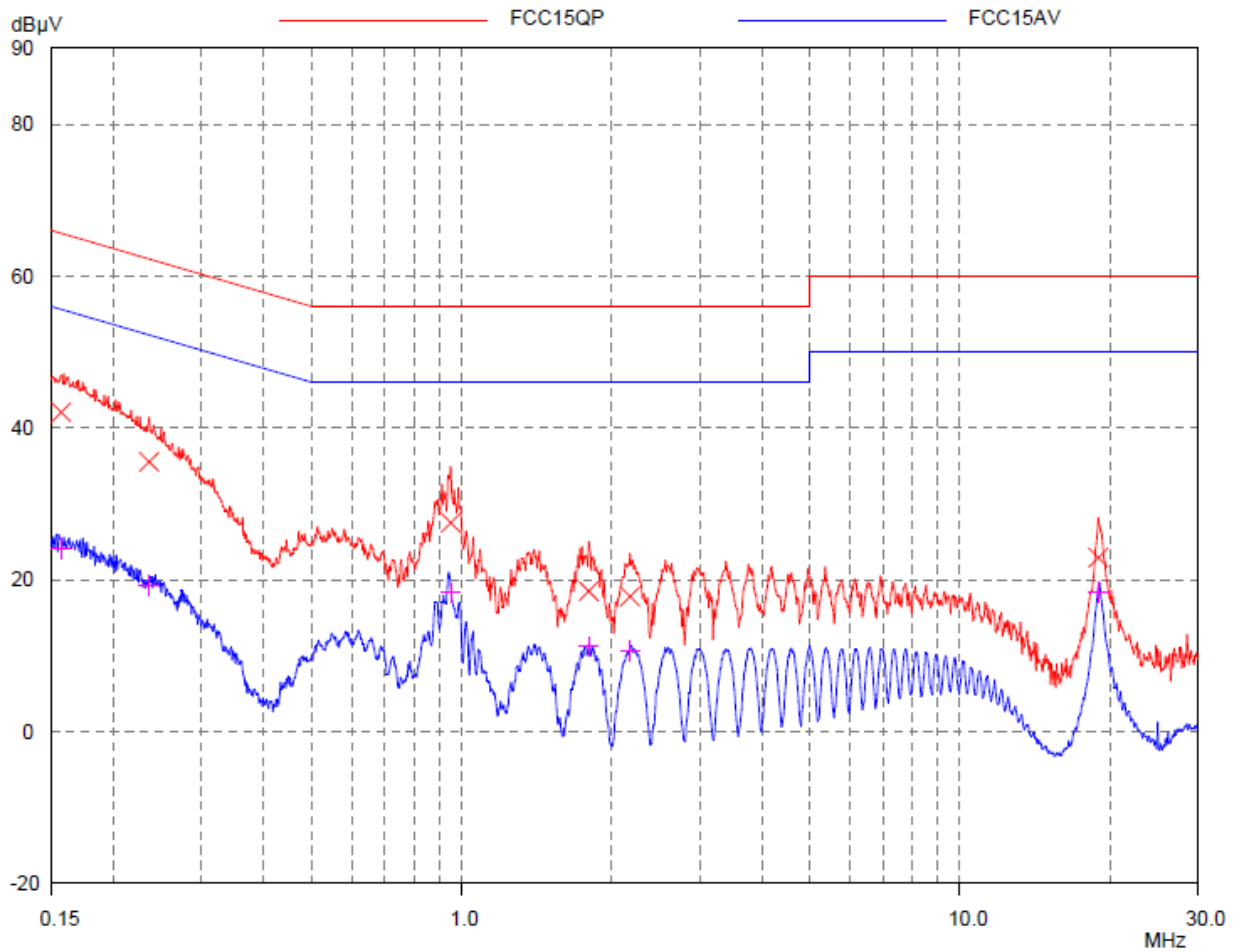


**Test Data:**

Frequency (MHz)	Quasi-peak			Average		
	Level dB(µV)	Limit dB(µV)	Margin dB	Level dB(µV)	Limit dB(µV)	Margin dB
0.157	42.09	65.64	23.55	24.11	55.64	31.53
0.236	35.54	62.25	26.71	19.28	52.25	32.97
0.949	27.50	56.00	28.50	18.31	46.00	27.69
1.797	18.51	56.00	37.49	11.19	46.00	34.81
2.176	17.81	56.00	38.19	10.69	46.00	35.31
18.939	22.92	60.00	37.08	18.42	50.00	31.58

**N line:**

**Test Curve:**

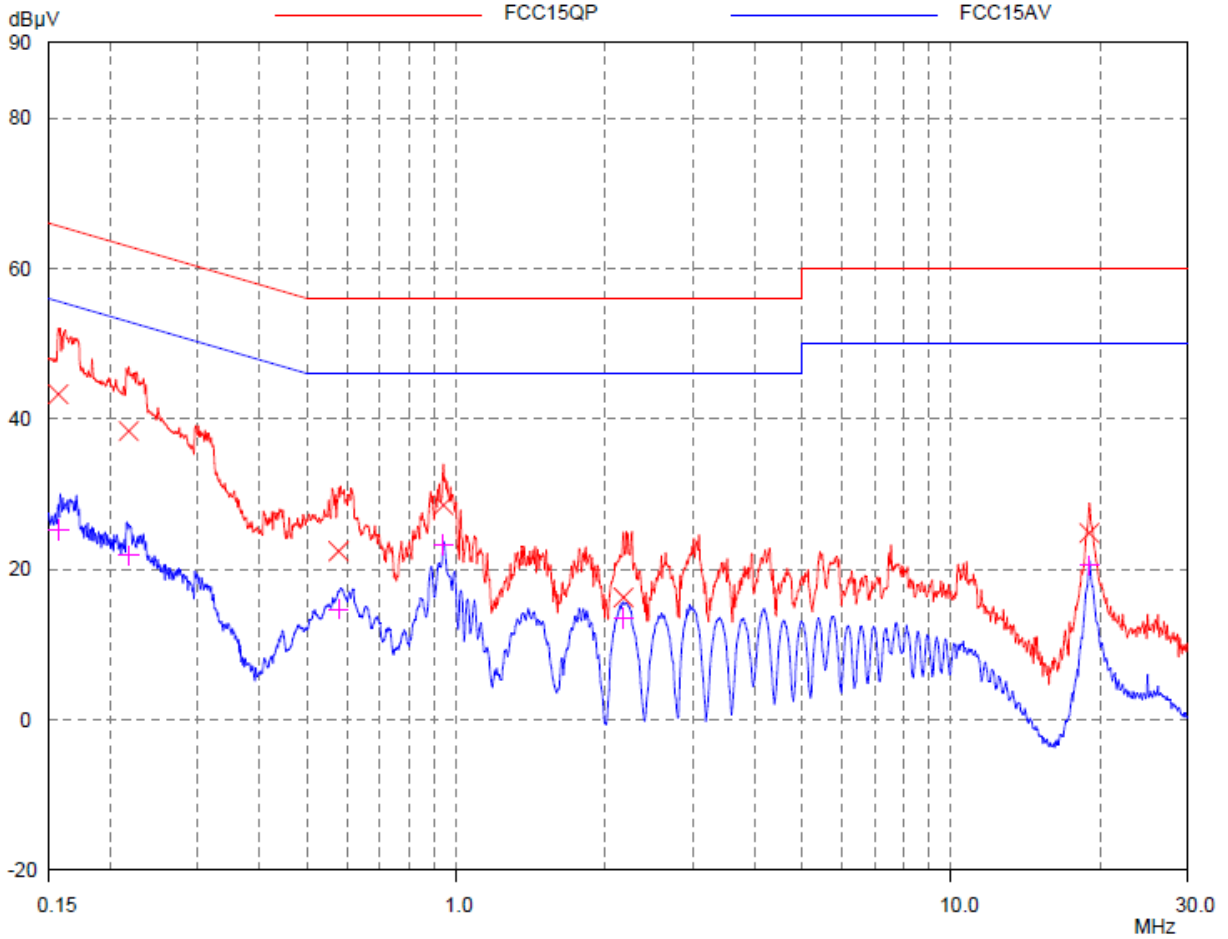

**Test Data:**

Frequency (MHz)	Quasi-peak			Average		
	Level dB(µV)	Limit dB(µV)	Margin dB	Level dB(µV)	Limit dB(µV)	Margin dB
0.157	43.30	65.64	22.34	25.29	55.64	30.35
0.217	38.40	62.92	24.52	21.82	52.92	31.10
0.578	22.42	56.00	33.58	14.74	46.00	31.26
0.941	28.52	56.00	27.48	23.24	46.00	22.76
2.176	16.26	56.00	39.74	13.56	46.00	32.44
19.014	24.84	60.00	35.16	20.52	50.00	29.48