

FCC Part 15.247

TEST REPORT

For

Ningbo Litesun Electronics Co.,Ltd

Simen Town, yuyao, Zhejiang, China, 315472

FCC ID: 2AMQ8 -WIFI-017

Report Type:
Original Report

Product Type:
CURRENT TAPS WITH SURGE
PROTECTOR

Report Producer : Nana Hsu *Nana*

Report Number : RXZ211025007RF01

Report Date : 2021-12-16

Reviewed By: Andy Shih *Andy Shih*

Prepared By: Bay Area Compliance Laboratories Corp.
70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,
New Taipei City 22183, Taiwan, R.O.C.
Tel: +886 (2) 2647 6898
Fax: +886 (2) 2647 6895
www.bacl.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ211025007	RXZ211025007RF01	2021-12-16	Original Report	Nana Hsu

TABLE OF CONTENTS

1	General Information	5
1.1	Product Description for Equipment under Test (EUT)	5
1.2	Objective	6
1.3	Related Submittal(s)/Grant(s).....	6
1.4	Test Methodology.....	6
1.5	Statement of Compliance	6
1.6	Measurement Uncertainty	7
1.7	Environmental Conditions.....	7
1.8	Test Facility.....	7
2	System Test Configuration.....	8
2.1	Description of Test Configuration.....	8
2.2	Equipment Modifications	8
2.3	EUT Exercise Software.....	8
2.4	Test Mode.....	9
2.5	Support Equipment List and Details.....	9
2.6	External Cable List and Details.....	9
2.7	Block Diagram of Test Setup	9
2.8	Duty Cycle.....	11
3	Summary of Test Results.....	13
4	Test Equipment List and Details	14
5	FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE).....	16
5.1	Applicable Standard	16
5.2	RF Exposure Evaluation Result.....	16
6	FCC §15.203 – Antenna Requirements.....	17
6.1	Applicable Standard	17
6.2	Antenna List and Details.....	17
7	FCC §15.207(a) – AC Line Conducted Emissions	18
7.1	Applicable Standard	18
7.2	EUT Setup	18
7.3	EMI Test Receiver Setup	19
7.4	Test Procedure.....	19
7.5	Corrected Factor & Margin Calculation.....	19
7.6	Test Results	20
8	FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions.....	22
8.1	Applicable Standard	22
8.2	EUT Setup	23
8.3	EMI Test Receiver & Spectrum Analyzer Setup.....	24
8.4	Test Procedure.....	24
8.5	Corrected Factor & Margin Calculation.....	24
8.6	Test Results	25
9	FCC §15.247(a)(2) – 6 dB Emission Bandwidth.....	40
9.1	Applicable Standard	40
9.2	Test Procedure.....	40
9.3	Test Results	40

10 FCC §15.247(b)(3) – Maximum Output Power..... 46

10.1 Applicable Standard 46

10.2 Test Procedure..... 46

10.3 Test Results 46

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge 47

11.1 Applicable Standard 47

11.2 Test Procedure..... 47

11.3 Test Results 48

12 FCC §15.247(e) – Power Spectral Density 52

12.1 Applicable Standard 52

12.2 Test Procedure..... 52

12.3 Test Results 53

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Ningbo Litesun Electronics Co.,Ltd
	Simen Town, yuyao, Zhejiang, China, 315472
Manufacturer	Ningbo Litesun Electronics Co.,Ltd
	Simen Town, yuyao, Zhejiang, China, 315472
Brand(Trade) Name	LITESUN
Product (Equipment)	CURRENT TAPS WITH SURGE PROTECTOR
Main Model Name	LA-9A-14
Frequency Range	IEEE 802.11b/g /IEEE 802.11n HT20 Mode: 2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b Mode: 20.21 dBm
	IEEE 802.11g Mode: 18.24 dBm
	IEEE 802.11n HT20 Mode: 18.26 dBm
Modulation Technique	IEEE 802.11b Mode: DSSS
	IEEE 802.11g Mode: OFDM
	IEEE 802.11n HT20 Mode: OFDM
Power Operation (Voltage Range)	<input checked="" type="checkbox"/> AC 125V/60Hz, 15A, 1875W
	<input type="checkbox"/> Adapter
	<input checked="" type="checkbox"/> By AC Power
	<input type="checkbox"/> PoE
	<input type="checkbox"/> DC Type
	<input type="checkbox"/> Battery
	<input type="checkbox"/> DC Power Supply
	<input type="checkbox"/> External from USB Cable
	<input type="checkbox"/> External DC Adapter
	<input type="checkbox"/> Host System
Received Date	Oct, 25 2021
Date of Test	Nov 01, 2021 ~ Dec 16, 2021

*All measurement and test data in this report was gathered from production sample serial number: RXZ211025007
(Assigned by BAACL).

1.2 Objective

This report is prepared on behalf of *Ningbo Litesun Electronics Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

N/A.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices KDB 558074 D01 15.247 Meas Guidance v05r02

1.5 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.6 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		+/- 2.36 dB
RF output power, conducted		+/- 0.93 dB
Power Spectral Density, conducted		+/- 0.93 dBm
Occupied Bandwidth		+/- 0.35 MHz
Unwanted Emissions, conducted		+/- 1.69 dBm
Emissions, radiated	30 MHz~1GHz	+/- 5.22 dB
	1 GHz~6 GHz	+/- 6.12 dB
	18 GHz~40 GHz	+/- 4.99 dB
Temperature		+/- 1.27 °C
Humidity		+/- 3 %

1.7 Environmental Conditions

Test Site	Test Data	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
AC Line Conducted Emissions	2021/12/16	23	41	1010	Howard.Ho
Radiation Spurious Emissions	2021/11/01 ~ 2021/12/16	22.6 ~ 23	66 ~ 74	1010	Howard.Ho
Conducted Spurious Emissions	2021/11/04	24.6	48	1010	Ken
6 dB Emission Bandwidth	2021/11/04	24.6	48	1010	Ken
Maximum Output Power	2021/11/04	24.6	48	1010	Ken
100 kHz Bandwidth of Frequency Band Edge	2021/11/04	24.6	48	1010	Ken
Power Spectral Density	2021/11/04	24.6	48	1010	Ken

1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. to collect test data is located on
 ☒70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

For WIFI mode, there are totally 11 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11 b/g/n20 Mode were tested with channel 1, 6 and 11.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

The test software was used “Beken Wi-Fi Test Tool V1.6.0”

Test Frequency		Low	Middle	High
Power Level Setting	802.11b Mode	79	79	79
	802.11g Mode	79	79	79
	802.11n HT20 Mode	79	79	79

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

802.11b: 1Mbps

802.11g: 6Mbps

802.11n HT20: MCS0

2.4 Test Mode

Mode 1: Full System (model: LA-9A-14) for all test item.

2.5 Support Equipment List and Details

Description	Manufacturer	Model Number	S/N
NB	DELL	E6410	8N7PXN1
Fixture Cable	N/A	N/A	N/A
Light Bubble	Yousheng Industrial	120V, 300W	N/A
Light Bubble	Yousheng Industrial	120V, 200W	N/A
Light Bubble	Yousheng Industrial	120V, 150W	N/A
Light Bubble	Yousheng Industrial	120V, 25W	N/A

2.6 External Cable List and Details


Cable Description	Length (m)	From	To
Fixture Cable	0.1	Fixture	EUT
Power Cable	0.8	EUT	Light Bubble

2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:


Below 1GHz:

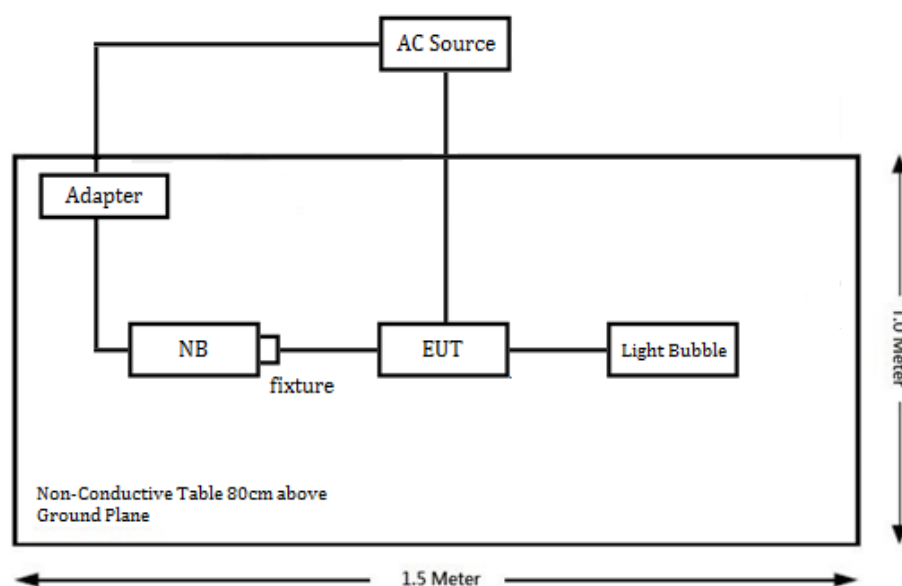

Above 1GHz:

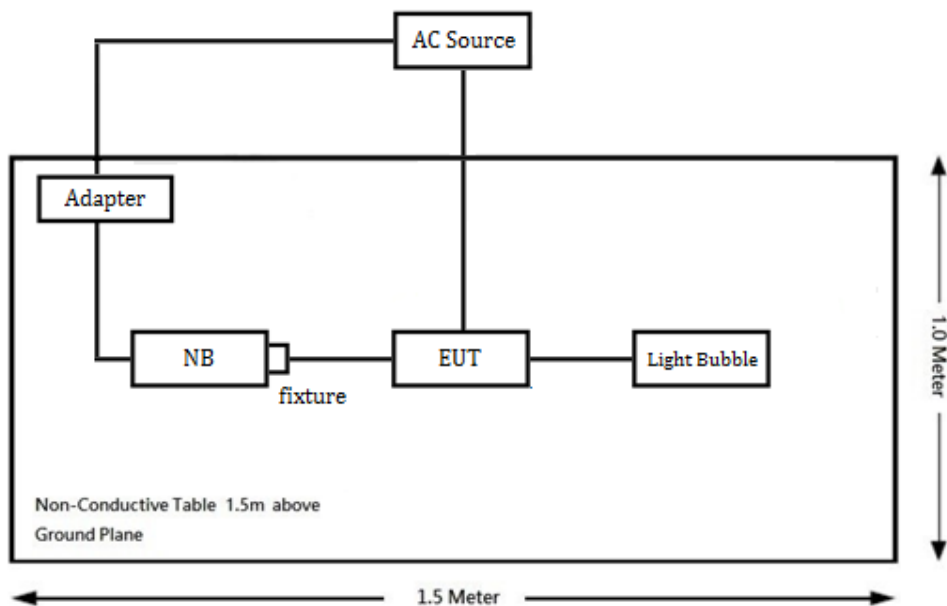

Conduction:

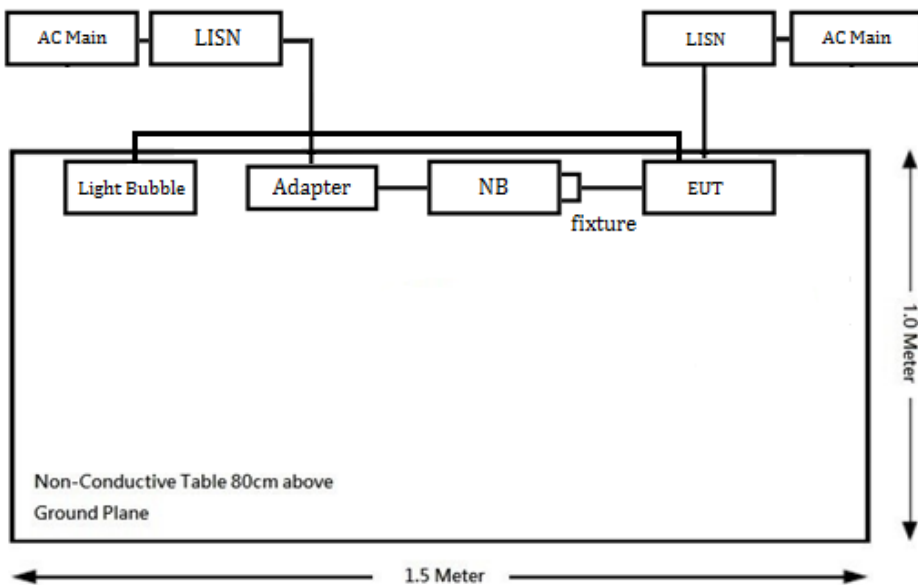

2.8 Duty Cycle


The duty cycle as below:

Radio Mode	On Time (ms)	Off Time (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	8.4	35	19	7.21
802.11g	1.4	12.65	10	10.00
802.11n HT20	1.3	11.8	10	10.00

Note: Duty Cycle Correction Factor = 10*log(1/duty cycle)


Please refer to the following plots.

B Mode

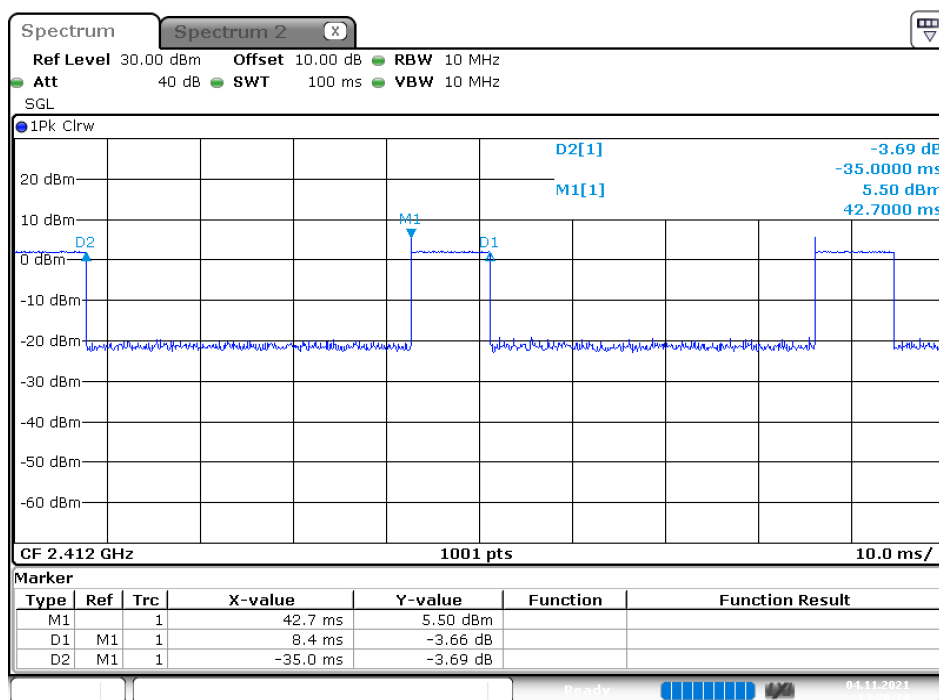


Date: 4.NOV.2021 13:26:14

G Mode

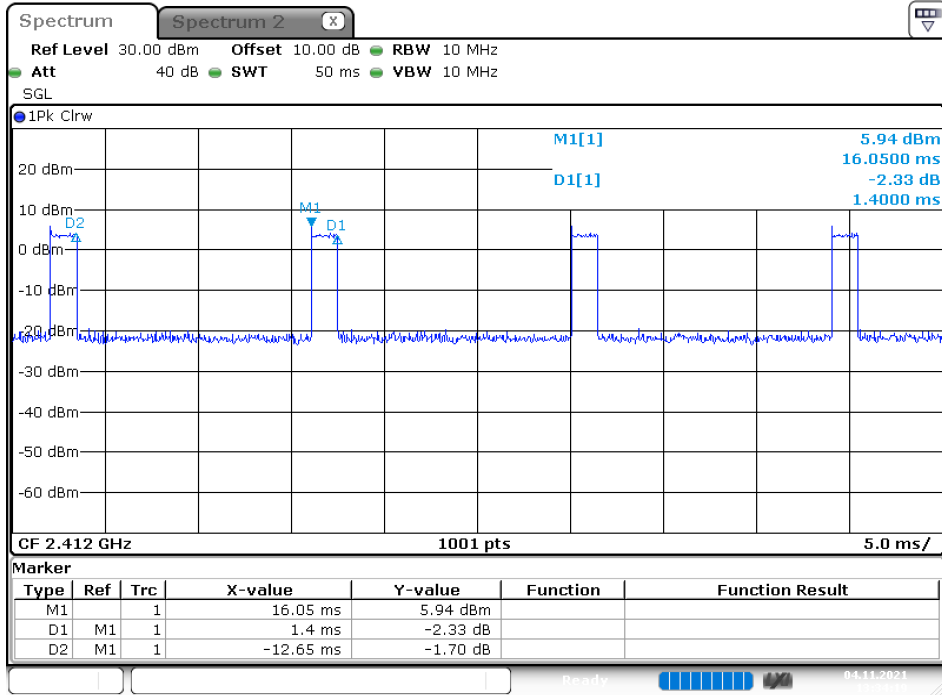

Date: 4.NOV.2021 13:34:19

N20 Mode

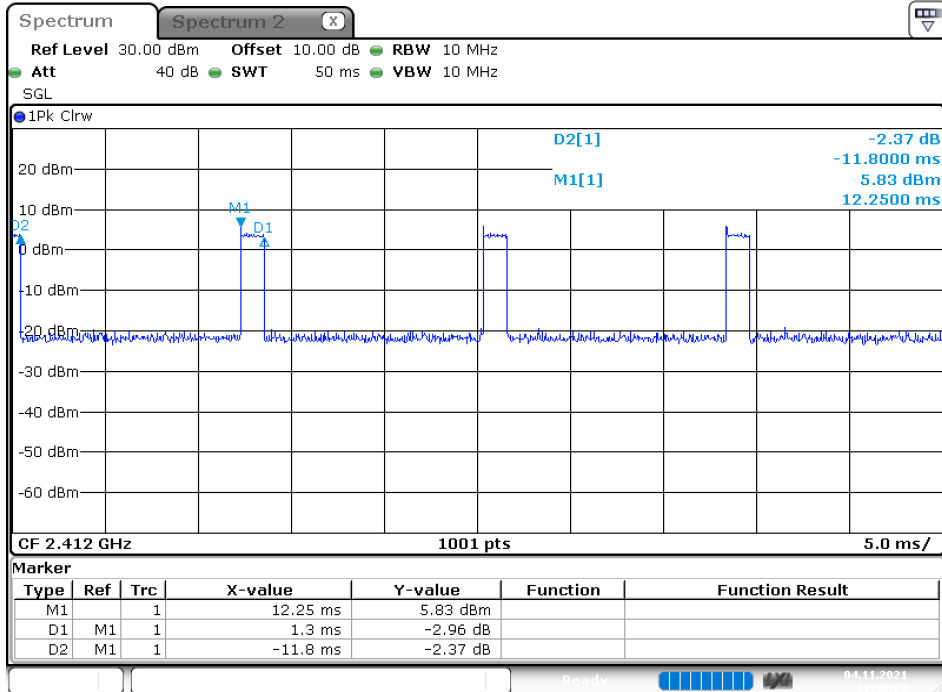

Date: 4.NOV.2021 13:36:23

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101612	2020/12/30	2021/12/29
LISN	Rohde & Schwarz	ENV216	101248	2021/06/08	2022/06/07
EMI Test Receiver	Rohde & Schwarz	ESR3	102099	2021/6/9	2022/6/8
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2021/7/29	2022/7/29
RF Cable	EMEC	EM-CB5D	001	2021/6/11	2022/6/11
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiated Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2021/01/19	2022/01/18
Horn Antenna	EMCO	3115	9311-4158	2021/08/26	2022/08/25
Horn Antenna	ETS-Lindgren	3116	62638	2021/08/11	2022/08/10
Preamplifier	Sonoma	310N	130602	2021/06/08	2022/06/07
Preamplifier	A.H. system Inc.	PAM-0118P	470	2021/03/15	2022/03/14
Microwave Preamplifier	EM Electronics Corporation	EM18G40G	060656	2020/12/30	2021/12/29
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2020/11/12	2021/11/11
				2021/11/09	2022/11/08
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2021/01/07	2022/01/06
Micro flex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2021/2/1	2022/1/31
Coaxial Cable	COMMATE	PEWC	8Dr	2020/12/25	2021/12/24
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2021/2/1	2022/1/31
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2020/12/25	2021/12/24
Cable	EMC	EMC105-SM-SM-10000	201003	2021/2/3	2022/2/2
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	60772	N.C.R	N.C.R

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Software	Farad	EZ_EM C	BACL-03A1	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101140	2021/01/07	2022/01/06
Cable	UTIFLEX	UFA210A	9435	2021/10/05	2022/10/04
Attenuator	MCL	BW-S10W5+	1419	2021/01/28	2022/01/27
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2021/01/28	2022/01/27

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

5.2 RF Exposure Evaluation Result

MPE evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WI-FI	2412-2462	2.5	1.778	20.5	112.202	20	0.0397	1

Note: the maximum antenna gain was used for evaluation.

Result: MPE evaluation meets the requirements of the **20cm** standard.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

6.2 Antenna List and Details

Manufacturer	Model	Antenna Type	Antenna Gain
Ningbo Litesun Electronics Co.,Ltd	N/A	PCB	2.5 dBi

Result: Compliance

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard


According to §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 (Note 1)	56 to 46 (Note 1)
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

7.2 EUT Setup

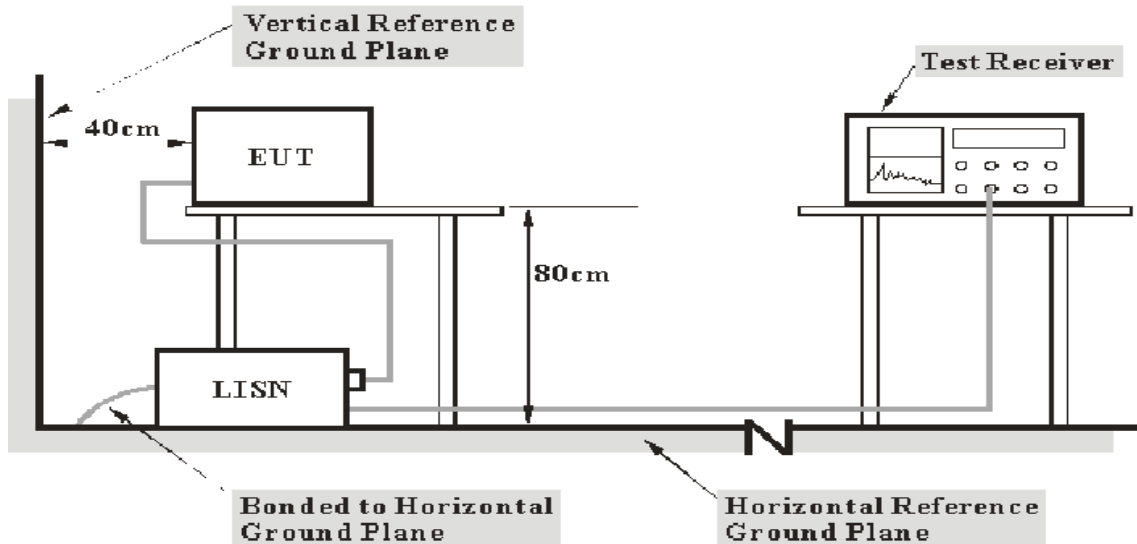

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

7.4 Test Procedure

During the conducted emission test, the EUT is connected to the LISN via the power cord.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.5 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

7.6 Test Results

Test Mode: Transmitting

Main: AC120 V, 60 Hz, Line

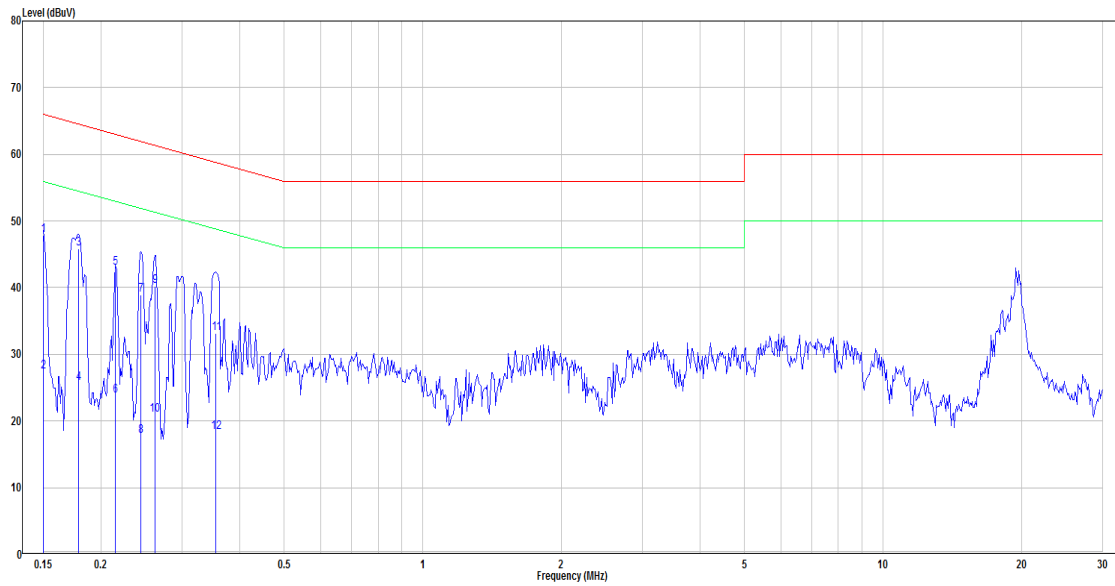

No.	Frequency (MHz)	Reading (dBµV)	Correct Factor(dB)	Result (dBµV)	Limit (dBµV)	Over limit (dB)	Remark
1	0.150	28.27	19.60	47.87	66.00	-18.13	QP
2	0.150	7.79	19.60	27.39	56.00	-28.61	Average
3	0.179	26.25	19.59	45.84	64.55	-18.71	QP
4	0.179	6.08	19.59	25.67	54.55	-28.88	Average
5	0.215	23.35	19.58	42.93	63.01	-20.08	QP
6	0.215	4.15	19.58	23.73	53.01	-29.28	Average
7	0.244	19.38	19.58	38.96	61.95	-22.99	QP
8	0.244	-1.89	19.58	17.69	51.95	-34.26	Average
9	0.262	20.57	19.58	40.15	61.38	-21.23	QP
10	0.262	1.36	19.58	20.94	51.38	-30.44	Average
11	0.356	13.56	19.58	33.14	58.83	-25.69	QP
12	0.356	-1.23	19.58	18.35	48.83	-30.48	Average


Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

Main: AC120 V, 60 Hz, Neutral

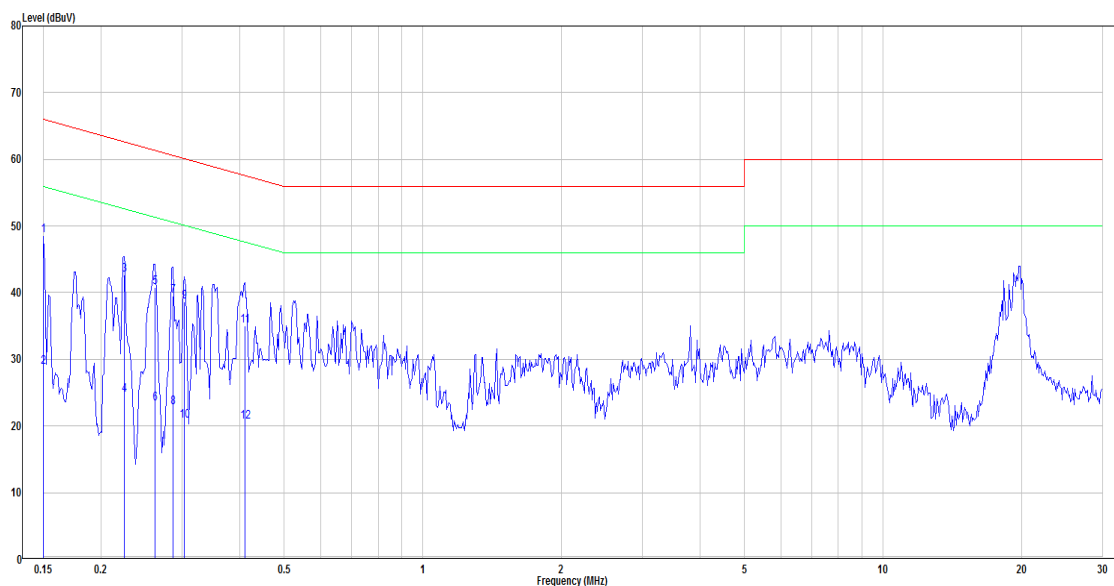

No.	Frequency (MHz)	Reading (dBμV)	Correct Factor(dB)	Result (dBμV)	Limit (dBμV)	Over limit (dB)	Remark
1	0.150	28.91	19.60	48.51	66.00	-17.49	QP
2	0.150	9.20	19.60	28.80	56.00	-27.20	Average
3	0.224	23.15	19.58	42.73	62.66	-19.93	QP
4	0.224	5.09	19.58	24.67	52.66	-27.99	Average
5	0.262	21.19	19.58	40.77	61.38	-20.61	QP
6	0.262	3.75	19.58	23.33	51.38	-28.05	Average
7	0.286	19.95	19.58	39.53	60.63	-21.10	QP
8	0.286	3.13	19.58	22.71	50.63	-27.92	Average
9	0.303	19.11	19.58	38.69	60.15	-21.46	QP
10	0.303	1.20	19.58	20.78	50.15	-29.37	Average
11	0.410	15.46	19.58	35.04	57.64	-22.60	QP
12	0.410	1.00	19.58	20.58	47.64	-27.06	Average

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5. 35 – 5. 46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3 3458 – 3 358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 EUT Setup

Below 1 GHz:

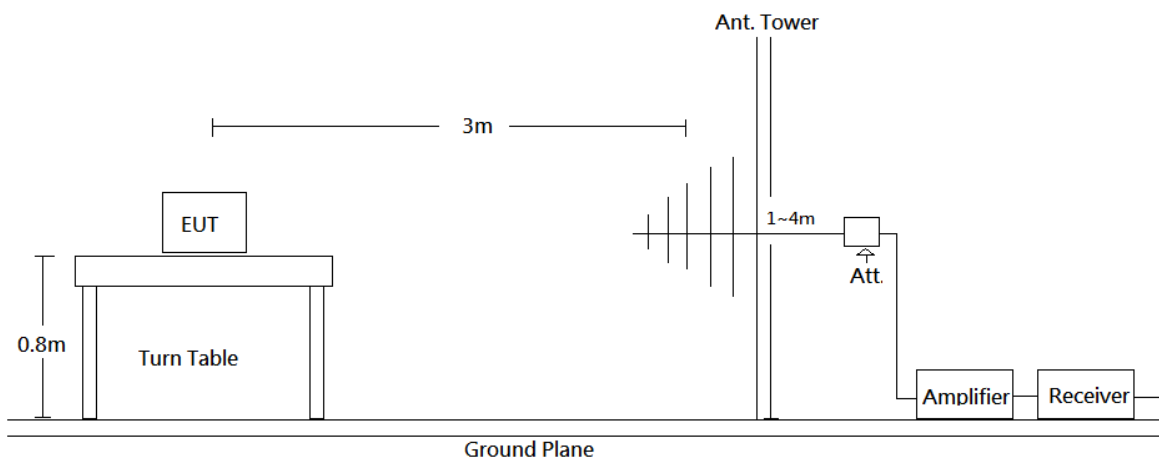

Above 1 GHz:

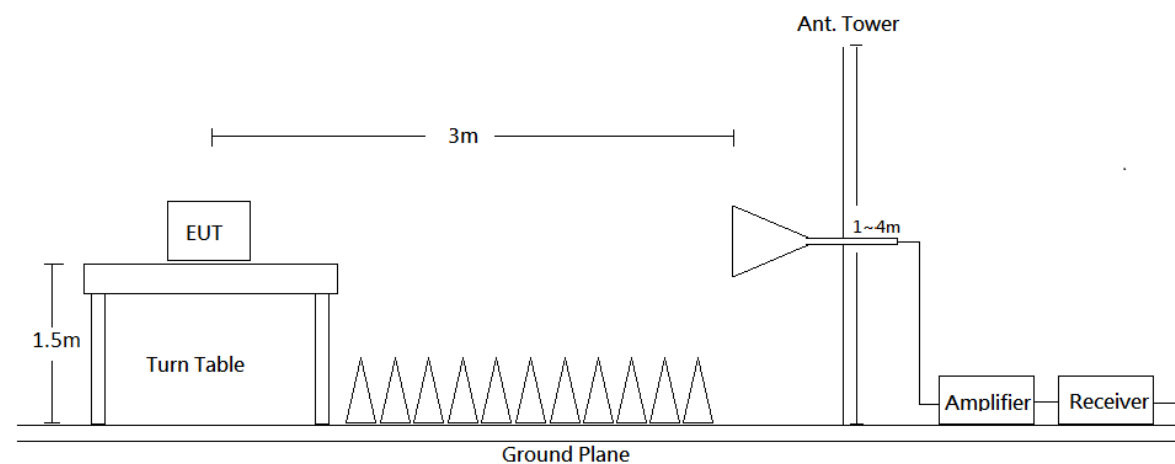

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	/	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	>98%	Ave
	1 MHz	1/T	<98%	Ave

8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$


8.6 Test Results

Test Mode: Transmitting


(Pre-scan with three orthogonal axis, and worse case as X axis.)

30MHz-1GHz: (worst case is 802.11b mode Low channel)

Horizontal

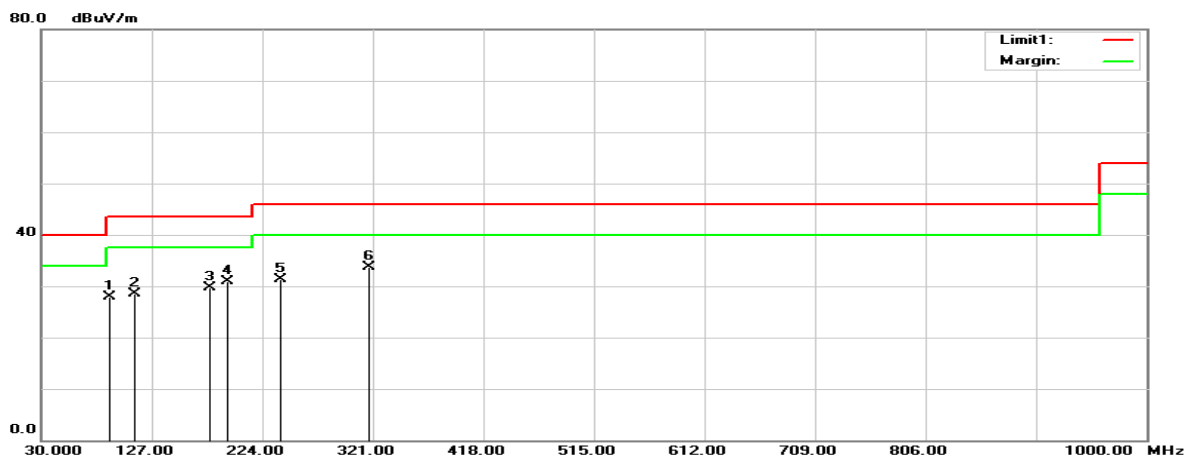


Vertical

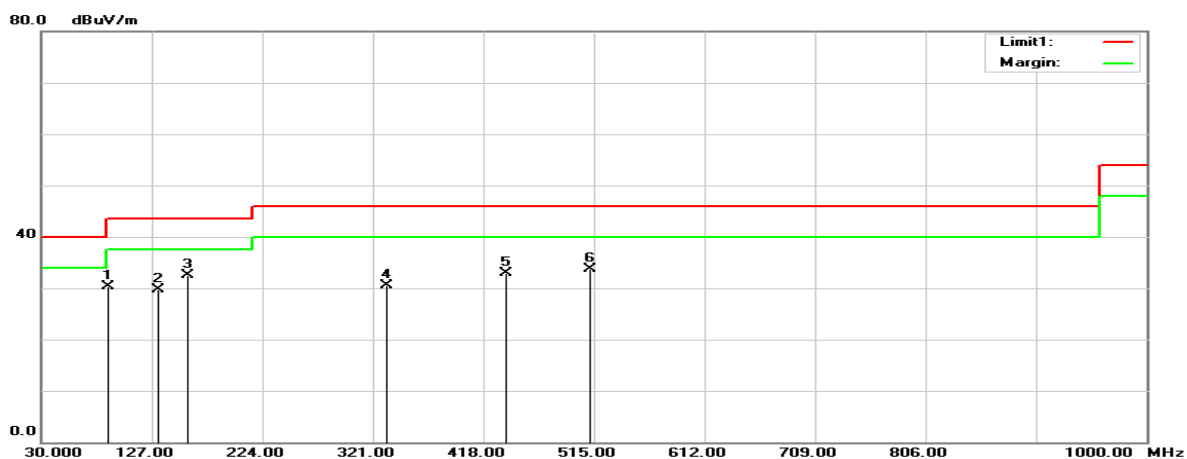


Horizontal (worst case is 802.11b mode Low channel)

1GHz-18GHz:

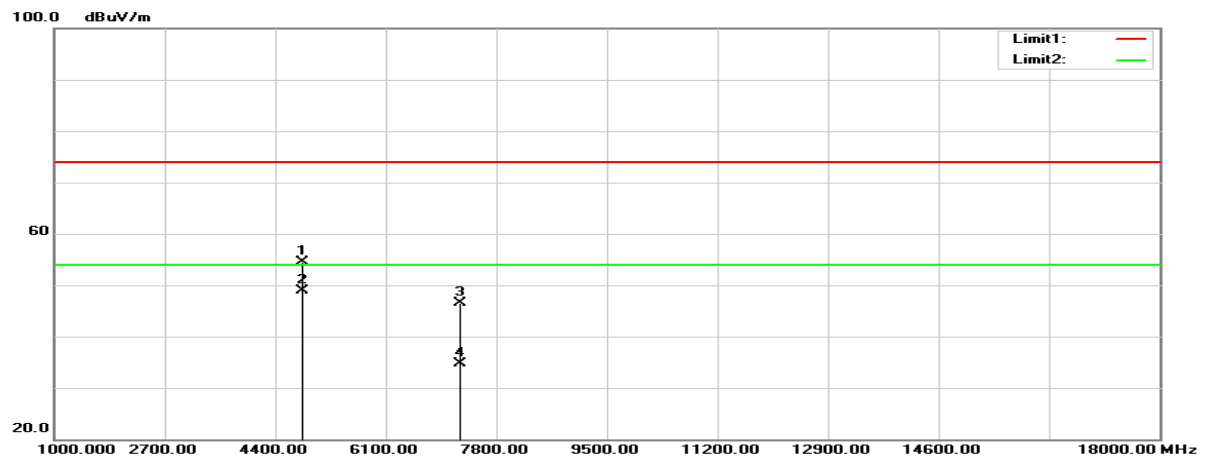


18GHz-26.5GHz:

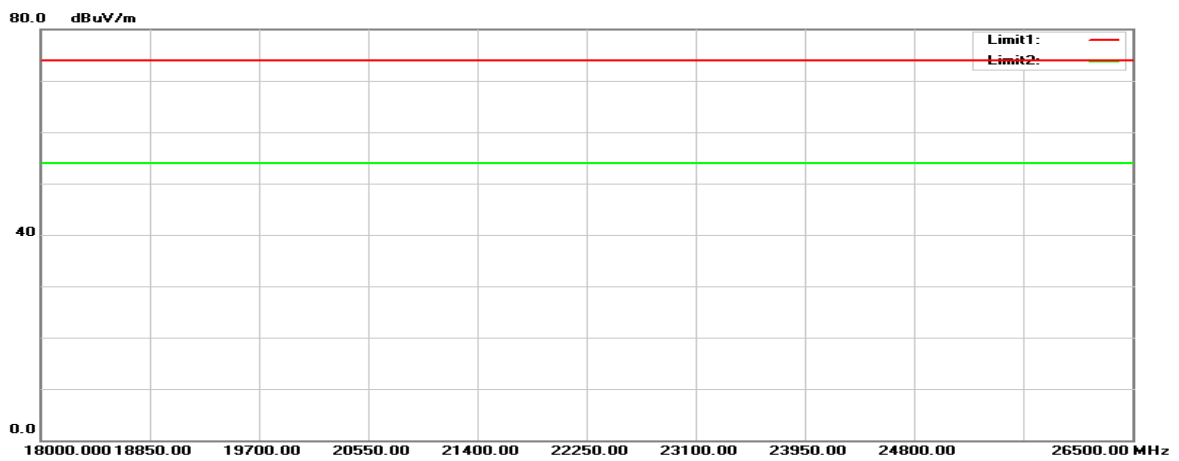


Vertical (worst case is 802.11b mode Low channel)

1GHz-18GHz:

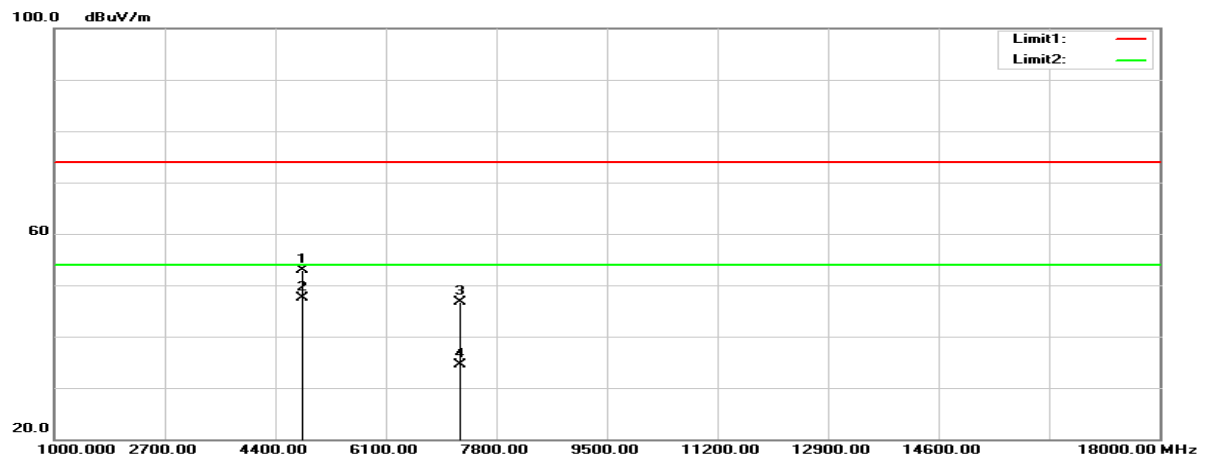

18GHz-26.5GHz:

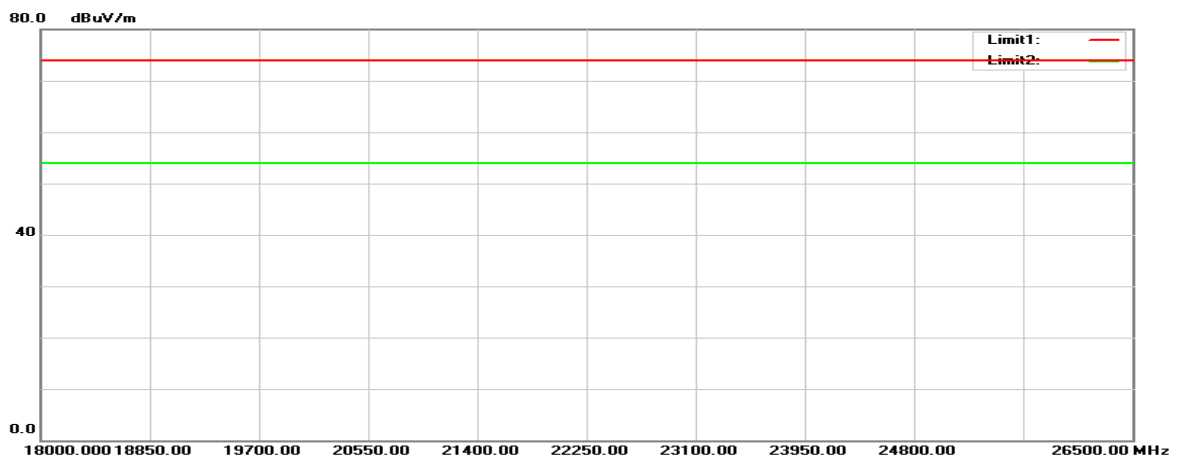

Below 1GHz**Horizontal**

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
90.1400	44.39	-16.53	27.86	43.50	-15.64	100	223	peak
111.4800	39.97	-11.55	28.42	43.50	-15.08	100	108	peak
178.4100	42.63	-12.83	29.80	43.50	-13.70	100	237	peak
192.9600	43.27	-12.29	30.98	43.50	-12.52	100	111	peak
239.5200	43.47	-12.25	31.22	46.00	-14.78	100	105	peak
317.1200	43.34	-9.68	33.66	46.00	-12.34	100	129	peak

Vertical

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
89.1700	46.98	-16.70	30.28	43.50	-13.22	100	251	peak
132.8200	40.07	-10.40	29.67	43.50	-13.83	100	183	peak
158.0400	43.73	-11.14	32.59	43.50	-10.91	100	211	peak
332.6400	39.88	-9.46	30.42	46.00	-15.58	100	119	peak
437.4000	39.54	-6.68	32.86	46.00	-13.14	100	208	peak
512.0900	39.33	-5.69	33.64	46.00	-12.36	100	315	peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Above 1GHz

Horizontal

Frequency (MHz)	Reading (dBµV)	Correct Factor(dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
B Mode, Low channel								
2386.832	72.36	-9.49	62.87	74.00	-11.13	157	251	peak
2386.832	61.08	-9.49	51.59	54.00	-2.41	157	251	AVG
2412.000	115.15	-9.28	105.87	N/A	N/A	157	251	peak
2412.000	106.39	-9.28	97.11	N/A	N/A	157	251	AVG
4824.000	56.60	-2.15	54.45	74.00	-19.55	144	193	peak
4824.000	51.14	-2.15	48.99	54.00	-5.01	144	193	AVG
7236.000	41.98	4.55	46.53	74.00	-27.47	154	217	peak
7236.000	30.16	4.55	34.71	54.00	-19.29	154	217	AVG
B Mode, Middle channel								
2437.000	113.55	-9.06	104.49	N/A	N/A	149	241	peak
2437.000	102.62	-9.06	93.56	N/A	N/A	149	241	AVG
4874.000	52.27	-1.92	50.35	74.00	-23.65	107	150	peak
4874.000	47.40	-1.92	45.48	54.00	-8.52	107	150	AVG
7311.000	43.08	5.08	48.16	74.00	-25.84	142	297	peak
7311.000	29.84	5.08	34.92	54.00	-19.08	142	297	AVG
B Mode, High channel								
2462.000	113.87	-8.77	105.10	N/A	N/A	142	52	peak
2462.000	105.51	-8.77	96.74	N/A	N/A	142	52	AVG
2487.904	68.32	-8.39	59.93	74.00	-14.07	142	52	peak
2487.904	58.56	-8.39	50.17	54.00	-3.83	142	52	AVG
4924.000	53.59	-1.63	51.96	74.00	-22.04	116	82	peak
4924.000	47.69	-1.63	46.06	54.00	-7.94	116	82	AVG
7386.000	41.87	5.20	47.07	74.00	-26.93	144	258	peak
7386.000	30.17	5.20	35.37	54.00	-18.63	144	258	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
B Mode, Low channel								
2387.056	69.34	-9.48	59.86	74.00	-14.14	100	265	peak
2387.056	58.33	-9.48	48.85	54.00	-5.15	100	265	AVG
2412.000	111.59	-9.28	102.31	N/A	N/A	100	265	peak
2412.000	103.04	-9.28	93.76	N/A	N/A	100	265	AVG
4824.000	54.96	-2.15	52.81	74.00	-21.19	144	109	peak
4824.000	49.71	-2.15	47.56	54.00	-6.44	144	109	AVG
7236.000	42.16	4.55	46.71	74.00	-27.29	147	285	peak
7236.000	30.04	4.55	34.59	54.00	-19.41	147	285	AVG
B Mode, Middle channel								
2437.000	112.79	-9.06	103.73	N/A	N/A	100	254	peak
2437.000	104.05	-9.06	94.99	N/A	N/A	100	254	AVG
4874.000	52.21	-1.92	50.29	74.00	-23.71	152	116	peak
4874.000	46.90	-1.92	44.98	54.00	-9.02	152	116	AVG
7311.000	42.73	5.08	47.81	74.00	-26.19	143	174	peak
7311.000	29.95	5.08	35.03	54.00	-18.97	143	174	AVG
B Mode, High channel								
2462.000	112.12	-8.77	103.35	N/A	N/A	125	301	peak
2462.000	103.72	-8.77	94.95	N/A	N/A	125	301	AVG
2487.328	66.07	-8.39	57.68	74.00	-16.32	125	301	peak
2487.328	56.06	-8.39	47.67	54.00	-6.33	125	301	AVG
4924.000	46.27	-1.63	44.64	74.00	-29.36	130	92	peak
4924.000	41.27	-1.63	39.64	54.00	-14.36	130	92	AVG
7386.000	41.69	5.20	46.89	74.00	-27.11	152	196	peak
7386.000	30.11	5.20	35.31	54.00	-18.69	152	196	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
G Mode, Low channel								
2390.000	74.16	-9.46	64.70	74.00	-9.30	149	244	peak
2390.000	60.40	-9.46	50.94	54.00	-3.06	149	244	AVG
2412.000	112.82	-9.28	103.54	N/A	N/A	149	244	peak
2412.000	100.96	-9.28	91.68	N/A	N/A	149	244	AVG
4824.000	44.82	-2.15	42.67	74.00	-31.33	151	332	peak
4824.000	37.98	-2.15	35.83	54.00	-18.17	151	332	AVG
7236.000	42.71	4.55	47.26	74.00	-26.74	159	285	peak
7236.000	30.03	4.55	34.58	54.00	-19.42	159	285	AVG
G Mode, Middle channel								
2437.000	112.89	-9.06	103.83	N/A	N/A	155	249	peak
2437.000	101.59	-9.06	92.53	N/A	N/A	155	249	AVG
4874.000	46.26	-1.92	44.34	74.00	-29.66	157	191	peak
4874.000	36.29	-1.92	34.37	54.00	-19.63	157	191	AVG
7311.000	43.29	5.08	48.37	74.00	-25.63	154	39	peak
7311.000	30.07	5.08	35.15	54.00	-18.85	154	39	AVG
G Mode, High channel								
2462.000	113.40	-8.77	104.63	N/A	N/A	136	249	peak
2462.000	101.54	-8.77	92.77	N/A	N/A	136	249	AVG
2483.500	73.37	-8.45	64.92	74.00	-9.08	136	249	peak
2483.500	60.32	-8.45	51.87	54.00	-2.13	136	249	AVG
4924.000	44.23	-1.63	42.60	74.00	-31.40	144	182	peak
4924.000	35.64	-1.63	34.01	54.00	-19.99	144	182	AVG
7386.000	41.79	5.20	46.99	74.00	-27.01	147	256	peak
7386.000	29.94	5.20	35.14	54.00	-18.86	147	256	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
(MHz)	(dB μ V)	Factor(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	(cm)	($^{\circ}$)	
G Mode, Low channel								
2388.960	71.56	-9.47	62.09	74.00	-11.91	100	266	peak
2388.960	57.48	-9.47	48.01	54.00	-5.99	100	266	AVG
2412.000	109.70	-9.28	100.42	N/A	N/A	100	266	peak
2412.000	97.76	-9.28	88.48	N/A	N/A	100	266	AVG
4824.000	45.49	-2.15	43.34	74.00	-30.66	127	291	peak
4824.000	39.26	-2.15	37.11	54.00	-16.89	127	291	AVG
7236.000	42.26	4.55	46.81	74.00	-27.19	148	254	peak
7236.000	30.23	4.55	34.78	54.00	-19.22	148	254	AVG
G Mode, Middle channel								
2437.000	111.40	-9.06	102.34	N/A	N/A	100	258	peak
2437.000	99.88	-9.06	90.82	N/A	N/A	100	258	AVG
4874.000	46.74	-1.92	44.82	74.00	-29.18	130	297	peak
4874.000	38.94	-1.92	37.02	54.00	-16.98	130	297	AVG
7311.000	42.30	5.08	47.38	74.00	-26.62	143	219	peak
7311.000	30.13	5.08	35.21	54.00	-18.79	143	219	AVG
G Mode, High channel								
2462.000	111.58	-8.77	102.81	N/A	N/A	100	263	peak
2462.000	99.78	-8.77	91.01	N/A	N/A	100	263	AVG
2483.500	71.18	-8.45	62.73	74.00	-11.27	100	263	peak
2483.500	58.79	-8.45	50.34	54.00	-3.66	100	263	AVG
4924.000	43.82	-1.63	42.19	74.00	-31.81	114	296	peak
4924.000	36.81	-1.63	35.18	54.00	-18.82	114	296	AVG
7386.000	42.97	5.20	48.17	74.00	-25.83	152	198	peak
7386.000	29.94	5.20	35.14	54.00	-18.86	152	198	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
N20 Mode, Low channel								
2390.000	74.61	-9.46	65.15	74.00	-8.85	146	252	peak
2390.000	61.01	-9.46	51.55	54.00	-2.45	146	252	AVG
2412.000	114.37	-9.28	105.09	N/A	N/A	146	252	peak
2412.000	102.88	-9.28	93.60	N/A	N/A	146	252	AVG
4824.000	44.71	-2.15	42.56	74.00	-31.44	146	333	peak
4824.000	37.64	-2.15	35.49	54.00	-18.51	146	333	AVG
7236.000	42.96	4.55	47.51	74.00	-26.49	142	193	peak
7236.000	30.22	4.55	34.77	54.00	-19.23	142	193	AVG
N20 Mode, Middle channel								
2437.000	114.27	-9.06	105.21	N/A	N/A	151	248	peak
2437.000	103.33	-9.06	94.27	N/A	N/A	151	248	AVG
4874.000	46.13	-1.92	44.21	74.00	-29.79	143	312	peak
4874.000	38.24	-1.92	36.32	54.00	-17.68	143	312	AVG
7311.000	42.19	5.08	47.27	74.00	-26.73	152	264	peak
7311.000	29.86	5.08	34.94	54.00	-19.06	152	264	AVG
N20 Mode, High channel								
2462.000	114.01	-8.77	105.24	N/A	N/A	140	244	peak
2462.000	102.12	-8.77	93.35	N/A	N/A	140	244	AVG
2487.088	74.63	-8.39	66.24	74.00	-7.76	140	244	peak
2487.088	60.18	-8.39	51.79	54.00	-2.21	140	244	AVG
4924.000	44.57	-1.63	42.94	74.00	-31.06	152	108	peak
4924.000	36.24	-1.63	34.61	54.00	-19.39	152	108	AVG
7386.000	41.95	5.20	47.15	74.00	-26.85	145	213	peak
7386.000	29.65	5.20	34.85	54.00	-19.15	145	213	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Vertical

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree ($^{\circ}$)	Remark
N20 Mode, Low channel								
2390.000	72.61	-9.46	63.15	74.00	-10.85	100	264	peak
2390.000	58.30	-9.46	48.84	54.00	-5.16	100	264	AVG
2412.000	111.90	-9.28	102.62	N/A	N/A	100	264	peak
2412.000	100.40	-9.28	91.12	N/A	N/A	100	264	AVG
4824.000	45.96	-2.15	43.81	74.00	-30.19	125	294	peak
4824.000	39.49	-2.15	37.34	54.00	-16.66	125	294	AVG
7236.000	42.52	4.55	47.07	74.00	-26.93	156	299	peak
7236.000	30.24	4.55	34.79	54.00	-19.21	156	299	AVG
N20 Mode, Middle channel								
2437.000	111.80	-9.06	102.74	N/A	N/A	100	253	peak
2437.000	100.63	-9.06	91.57	N/A	N/A	100	253	AVG
4874.000	45.31	-1.92	43.39	74.00	-30.61	130	293	peak
4874.000	38.80	-1.92	36.88	54.00	-17.12	130	293	AVG
7311.000	42.43	5.08	47.51	74.00	-26.49	156	238	peak
7311.000	30.20	5.08	35.28	54.00	-18.72	156	238	AVG
N20 Mode, High channel								
2462.000	108.38	-8.77	99.61	N/A	N/A	150	265	peak
2462.000	97.26	-8.77	88.49	N/A	N/A	150	265	AVG
2486.752	68.89	-8.40	60.49	74.00	-13.51	150	265	peak
2486.752	54.49	-8.40	46.09	54.00	-7.91	150	265	AVG
4924.000	45.04	-1.63	43.41	74.00	-30.59	143	305	peak
4924.000	37.58	-1.63	35.95	54.00	-18.05	143	305	AVG
7386.000	42.32	5.20	47.52	74.00	-26.48	153	24	peak
7386.000	29.82	5.20	35.02	54.00	-18.98	153	24	AVG

Result = Reading + Correct Factor

Margin = Result – Limit


Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Conducted Spurious Emissions:


Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
B Mode				
Low	2412	43.02	≥ 20	PASS
Mid	2437	42.90	≥ 20	PASS
High	2462	41.72	≥ 20	PASS
G Mode				
Low	2412	38.47	≥ 20	PASS
Mid	2437	40.80	≥ 20	PASS
High	2462	38.44	≥ 20	PASS
N20 Mode				
Low	2412	46.38	≥ 20	PASS
Mid	2437	37.61	≥ 20	PASS
High	2462	40.35	≥ 20	PASS

**B Mode
Low Channel**

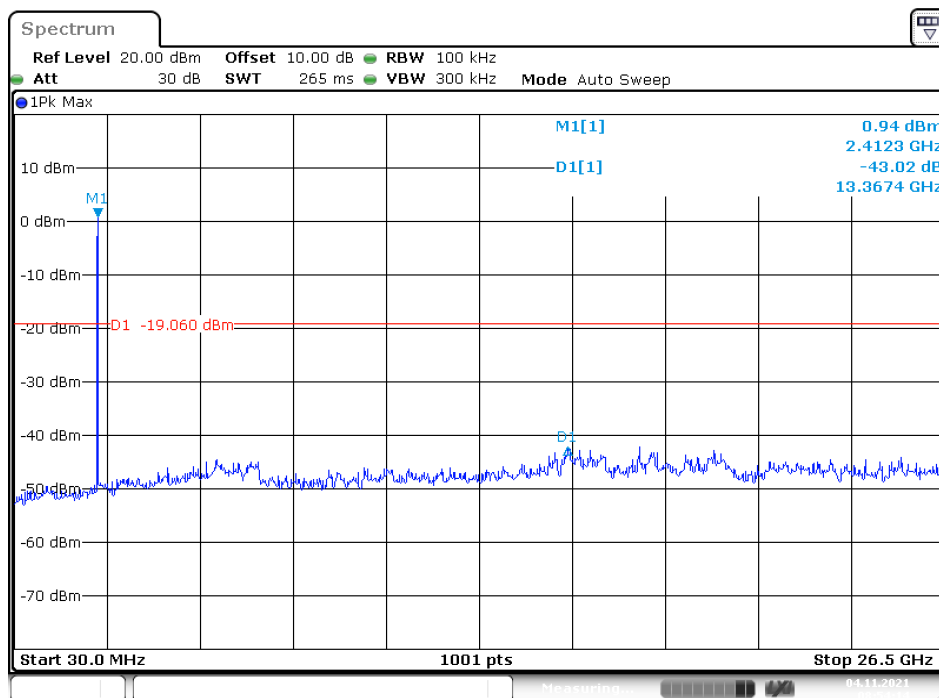


Date: 4.NOV.2021 08:54:15

Middle Channel

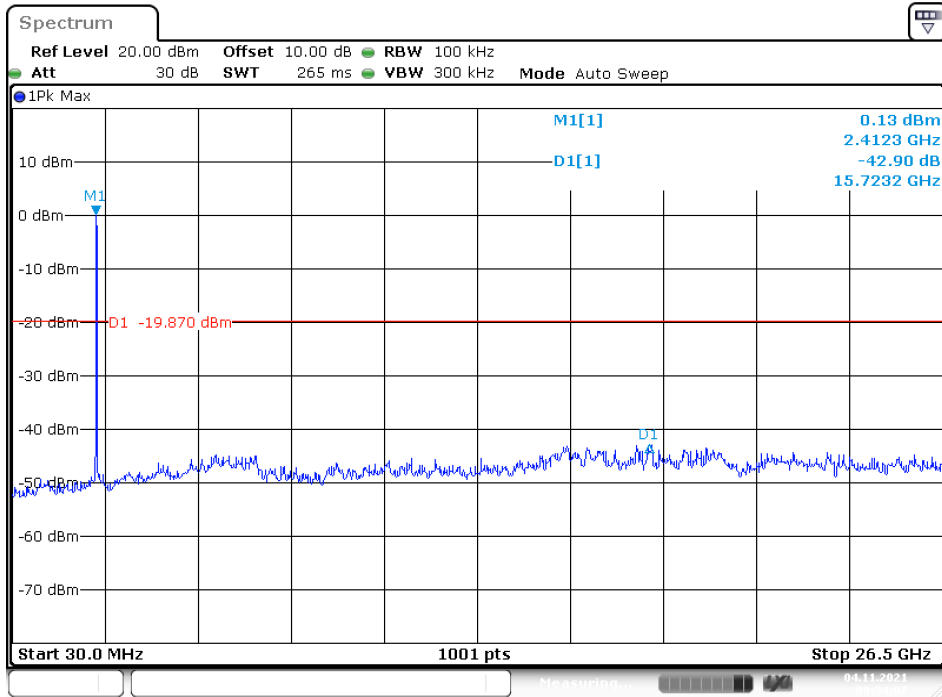


Date: 4.NOV.2021 09:34:07

High Channel

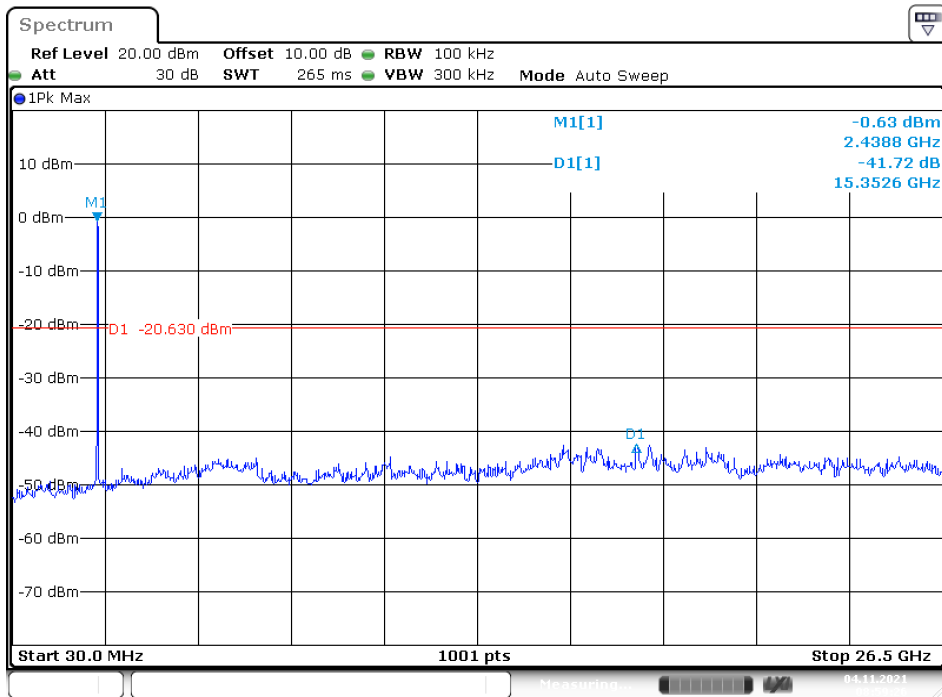


Date: 4.NOV.2021 08:59:27


G Mode Low Channel

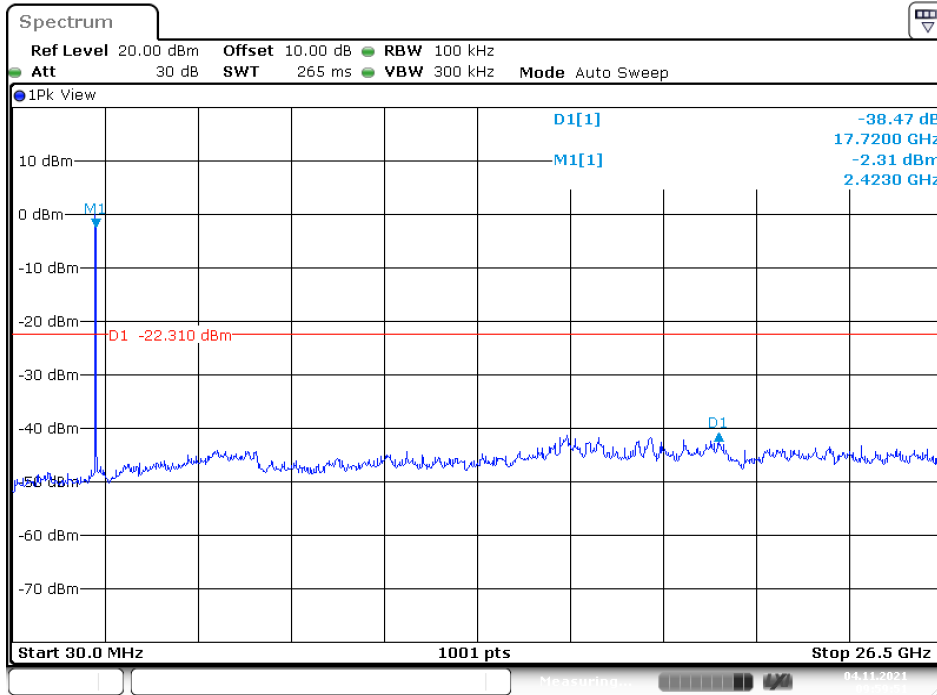


Middle Channel

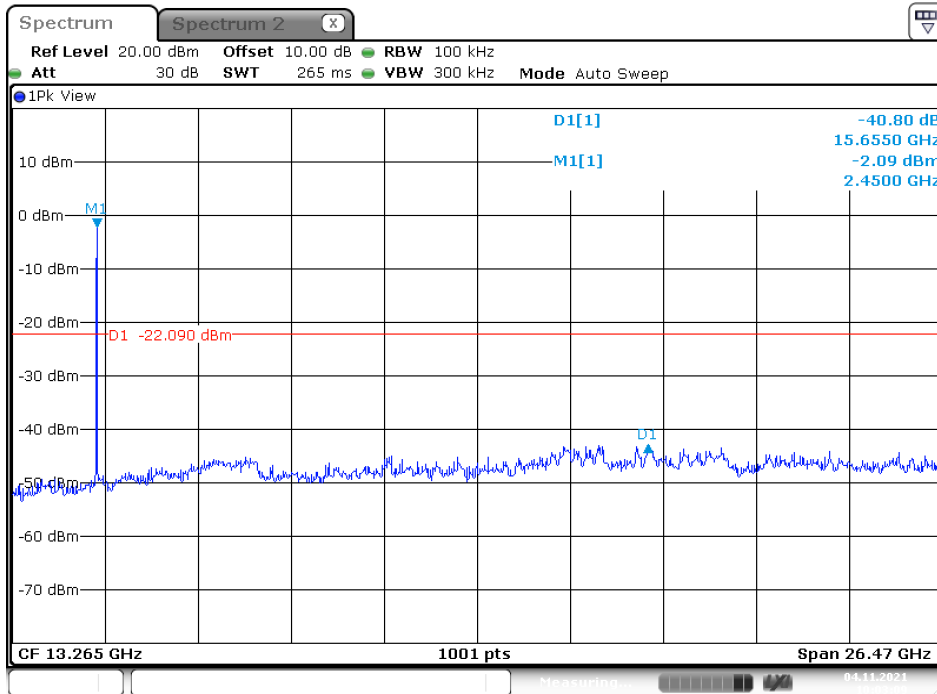


High Channel

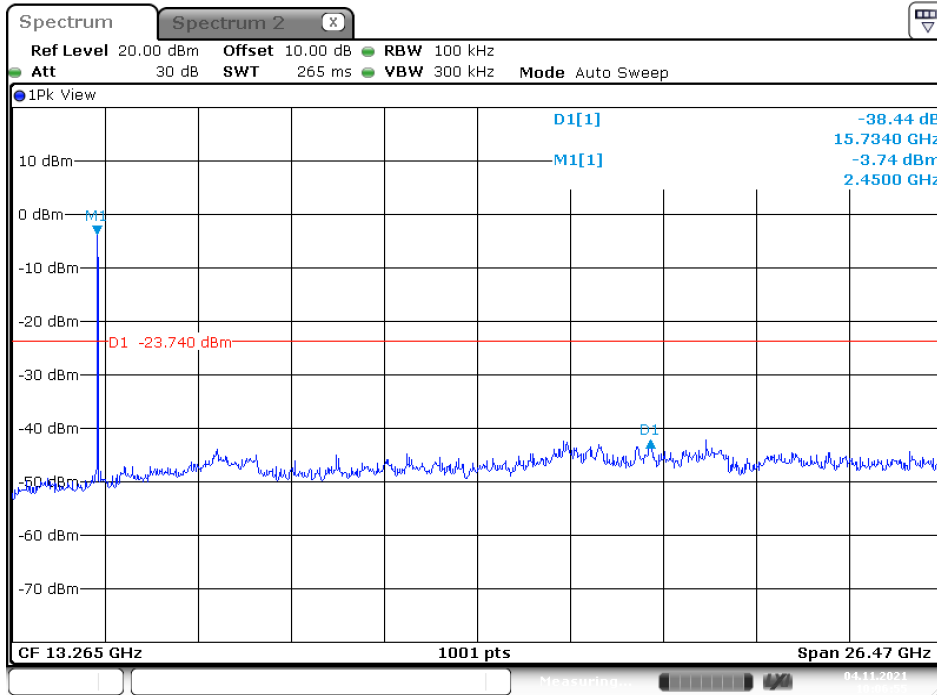

N20 Mode Low Channel

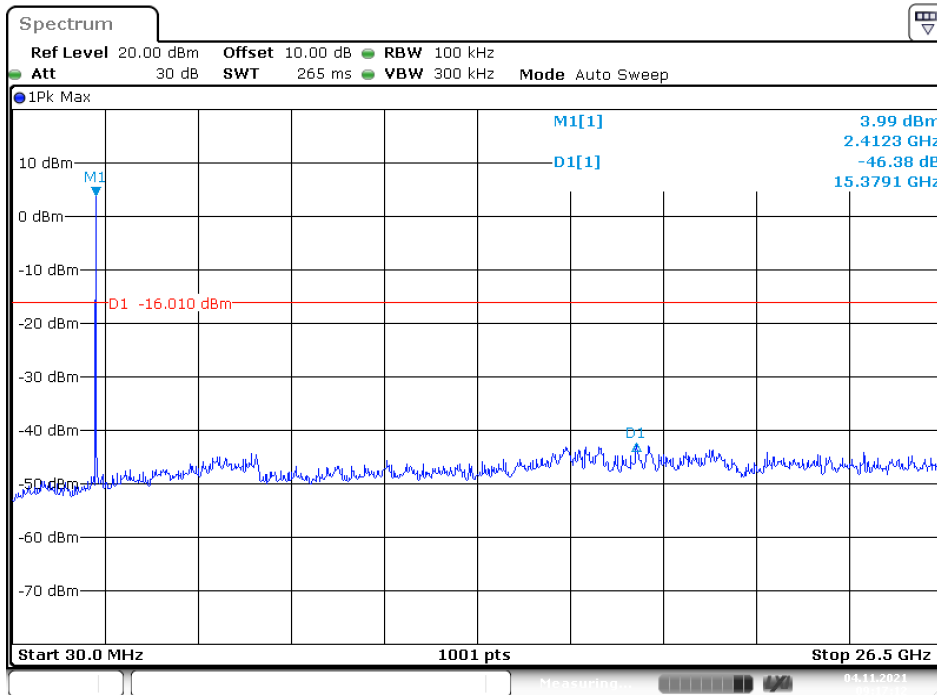


Middle Channel

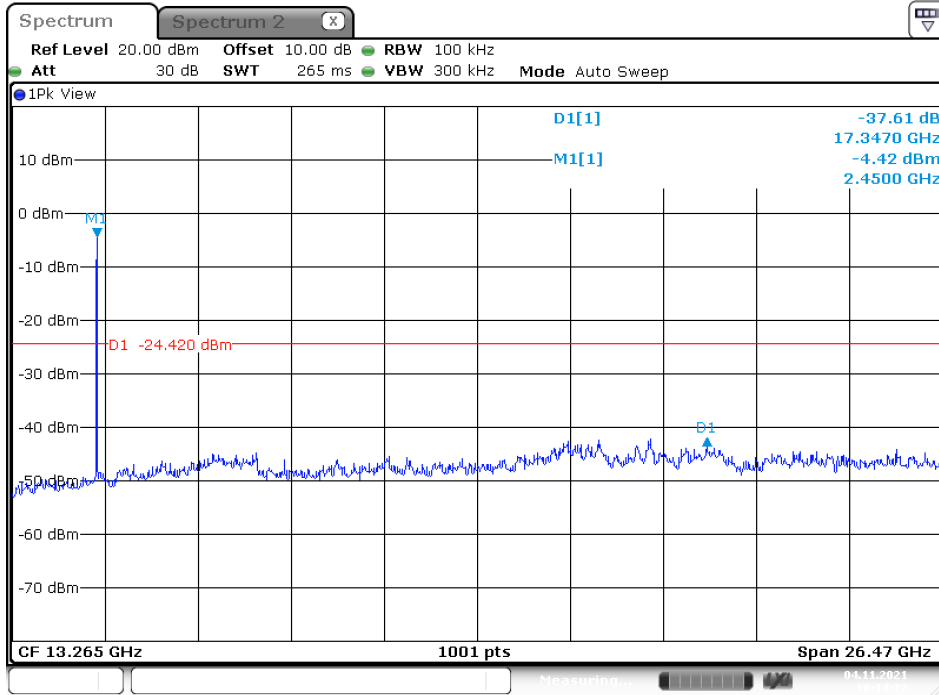

Date: 4.NOV.2021 10:14:23

High Channel

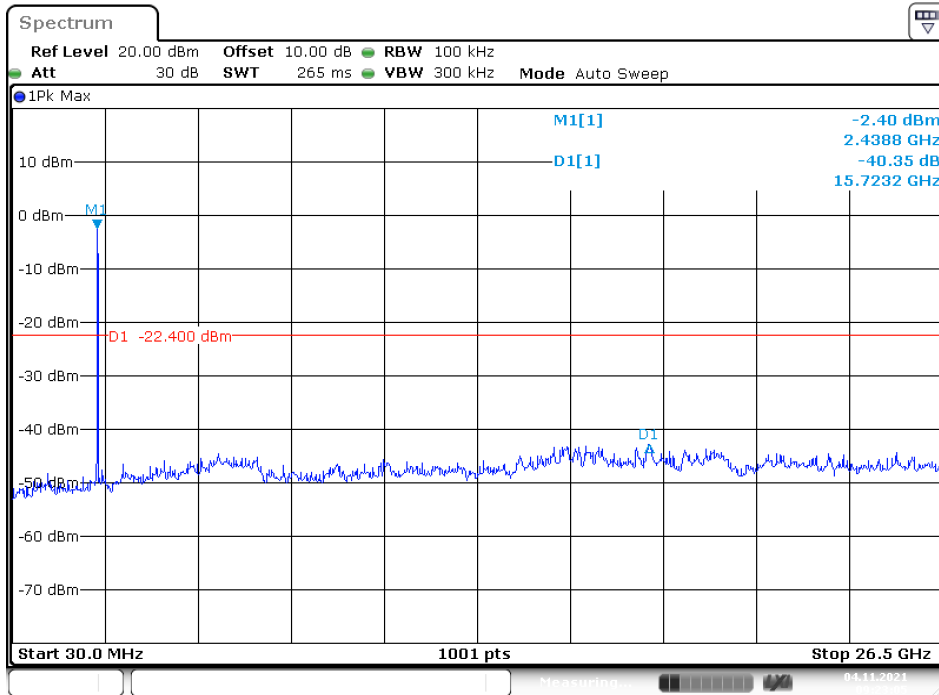

Date: 4.NOV.2021 09:23:06

9 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Test Procedure

The steps for the first option are as follows:


- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.3 Test Results


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)	Result
B Mode				
Low	2412	8.56	> 500	PASS
Middle	2437	8.64	> 500	PASS
High	2462	8.28	> 500	PASS
G Mode				
Low	2412	15.16	> 500	PASS
Middle	2437	15.16	> 500	PASS
High	2462	15.16	> 500	PASS
N20 Mode				
Low	2412	15.16	> 500	PASS
Middle	2437	15.16	> 500	PASS
High	2462	15.16	> 500	PASS

Please refer to the following plots

B Mode Low Channel

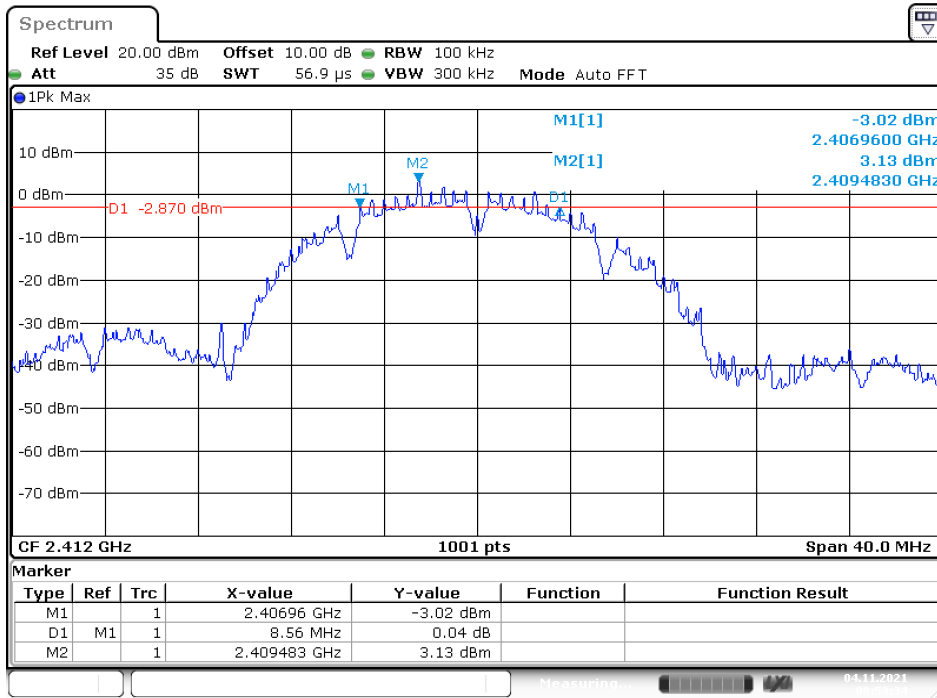


Middle Channel

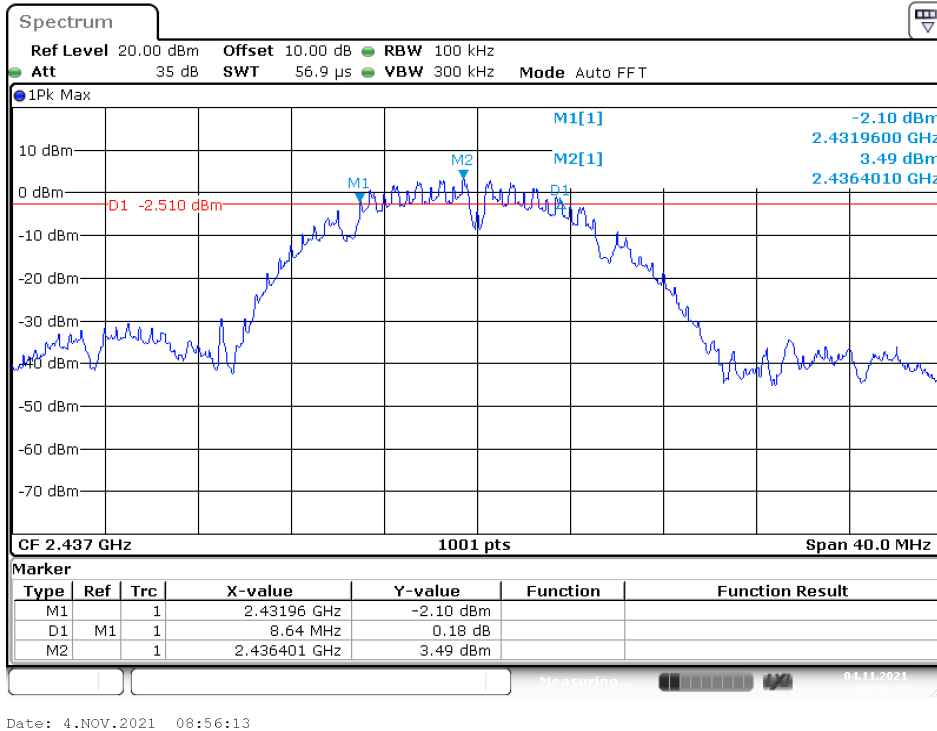


Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.


High Channel

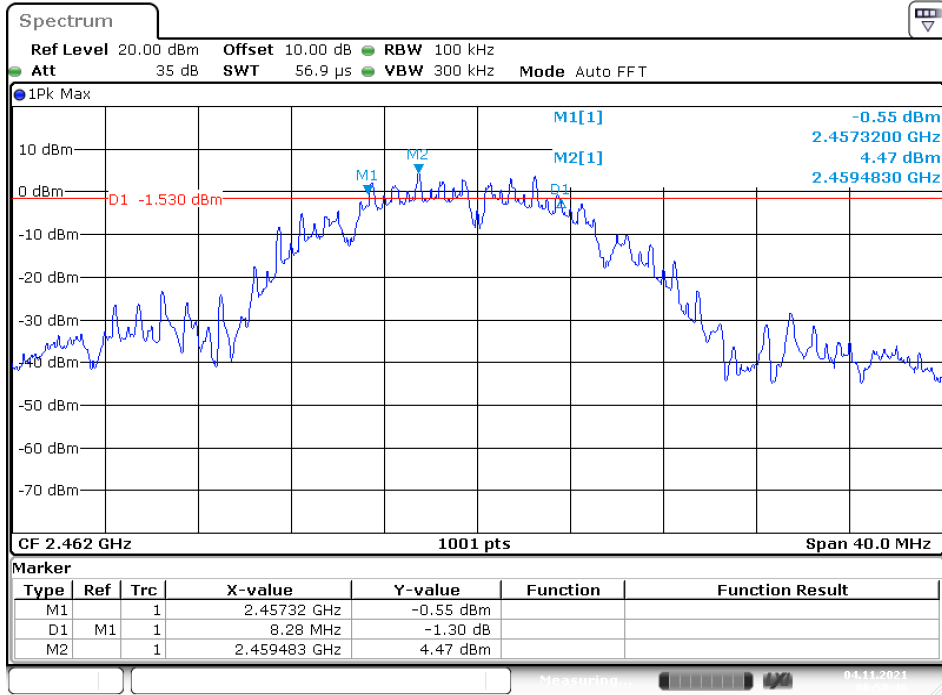


G Mode Low Channel

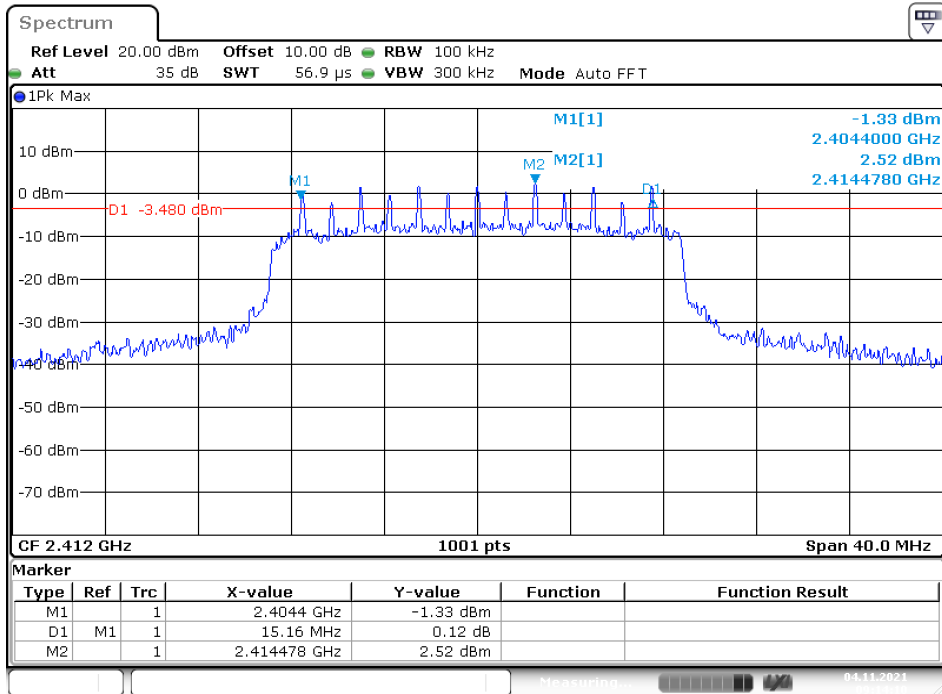


Middle Channel

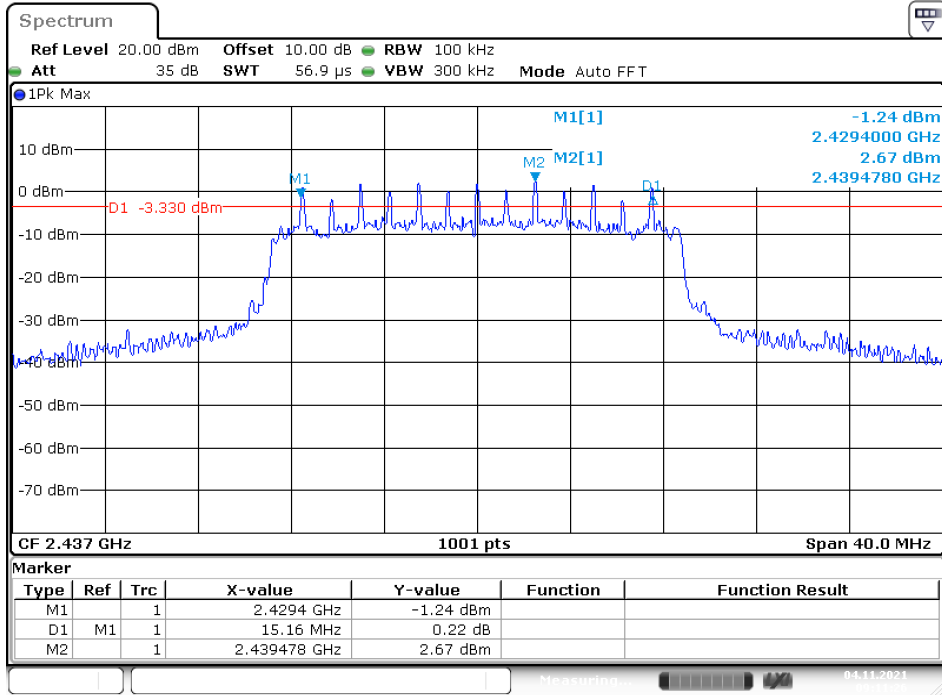


High Channel

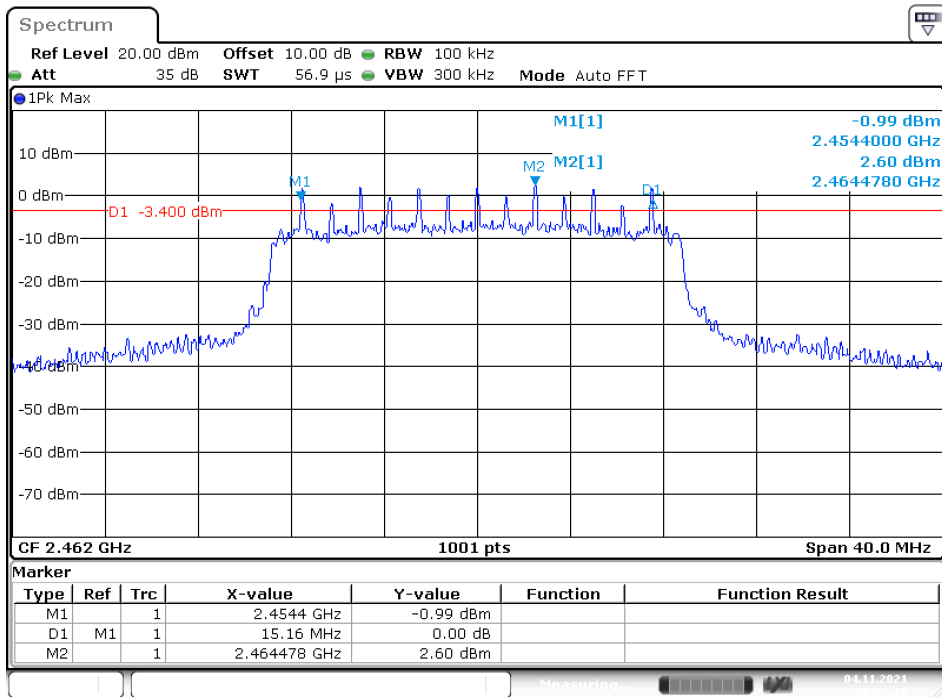


N20 Mode Low Channel

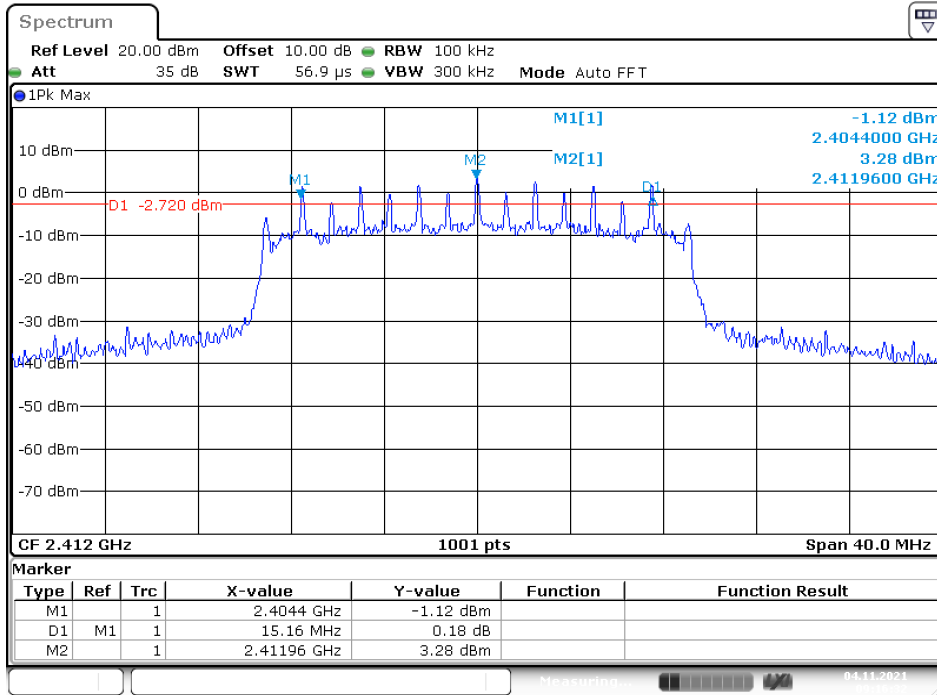

Middle Channel

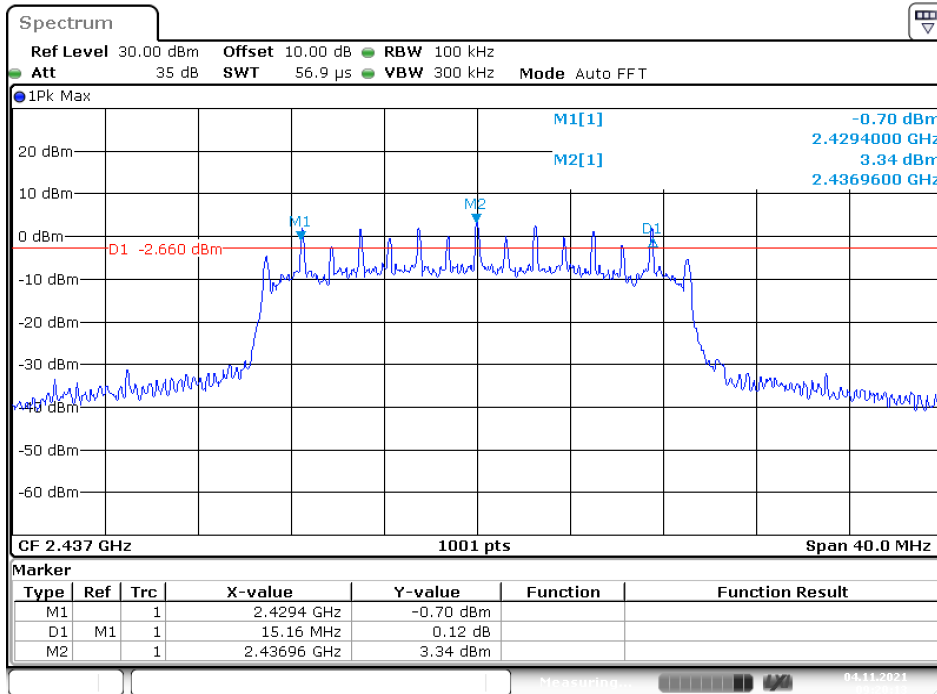

High Channel

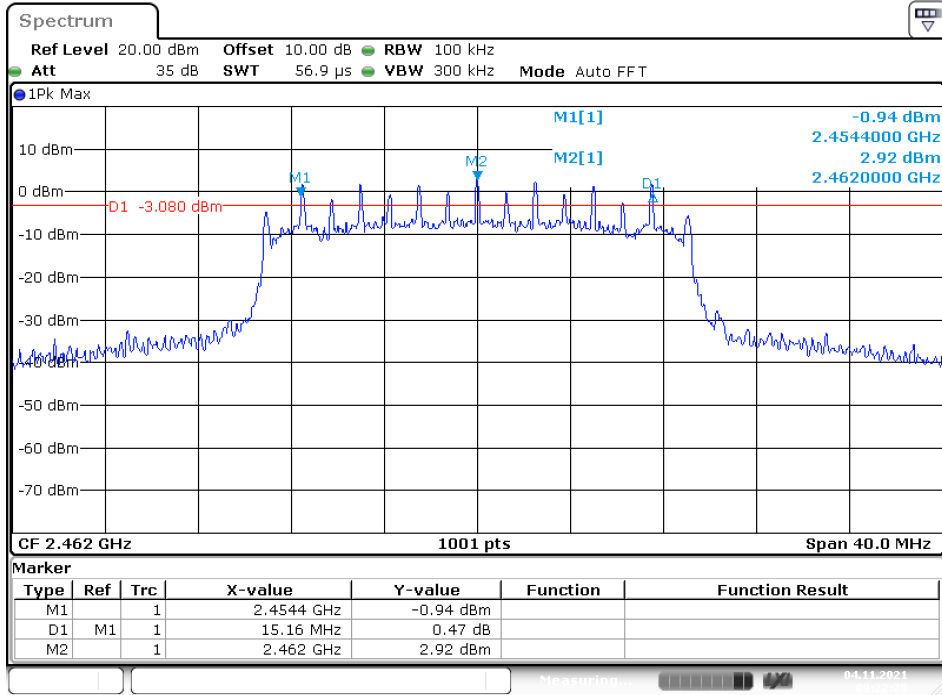

Date: 4.NOV.2021 09:22:26

10 FCC §15.247(b)(3) – Maximum Output Power

10.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

10.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

10.3 Test Results

Conducted Peak Output Power

Channel	Frequency (MHz)	Power (dBm)	Power (W)	Limit (W)	Result
B Mode					
Low	2412	20.13	0.103	1	PASS
Middle	2437	20.21	0.105	1	PASS
High	2462	20.06	0.101	1	PASS
G Mode					
Low	2412	18.24	0.067	1	PASS
Middle	2437	18.14	0.065	1	PASS
High	2462	17.98	0.063	1	PASS
N20 Mode					
Low	2412	18.21	0.066	1	PASS
Middle	2437	18.26	0.067	1	PASS
High	2462	17.95	0.062	1	PASS

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

11.1 Applicable Standard

According to FCC §15.247(d).

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
B Mode				
Low	2412	32.84	≥ 20	PASS
High	2462	44.77	≥ 20	PASS
G Mode				
Low	2412	33.00	≥ 20	PASS
High	2462	36.68	≥ 20	PASS
N20 Mode				
Low	2412	34.43	≥ 20	PASS
High	2462	40.95	≥ 20	PASS


Please refer to the following plots.

B Mode Band Edge, Left Side

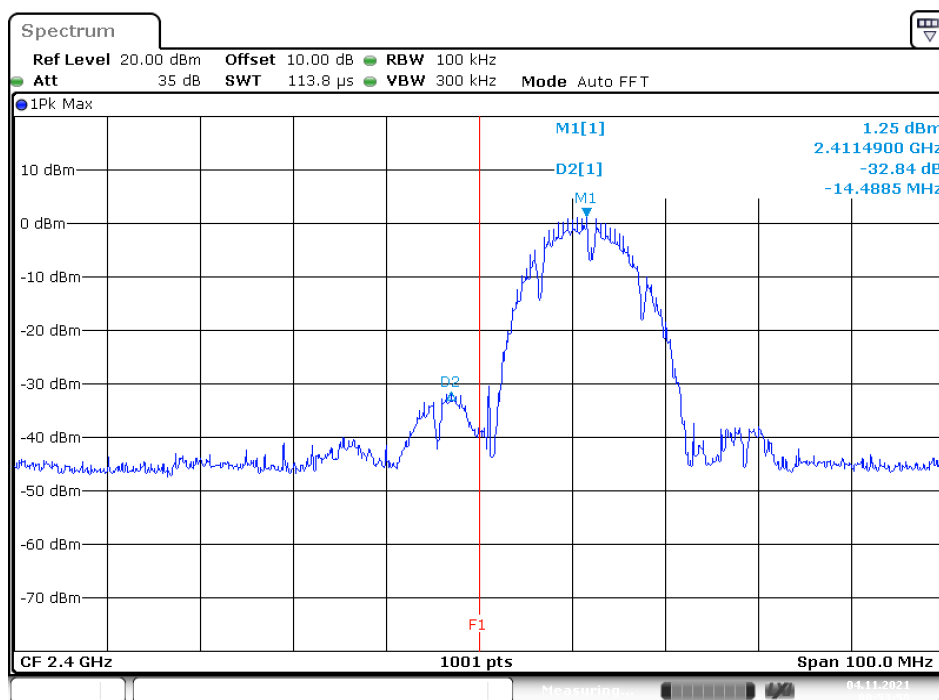


Date: 4.NOV.2021 08:53:59


Band Edge, Right Side

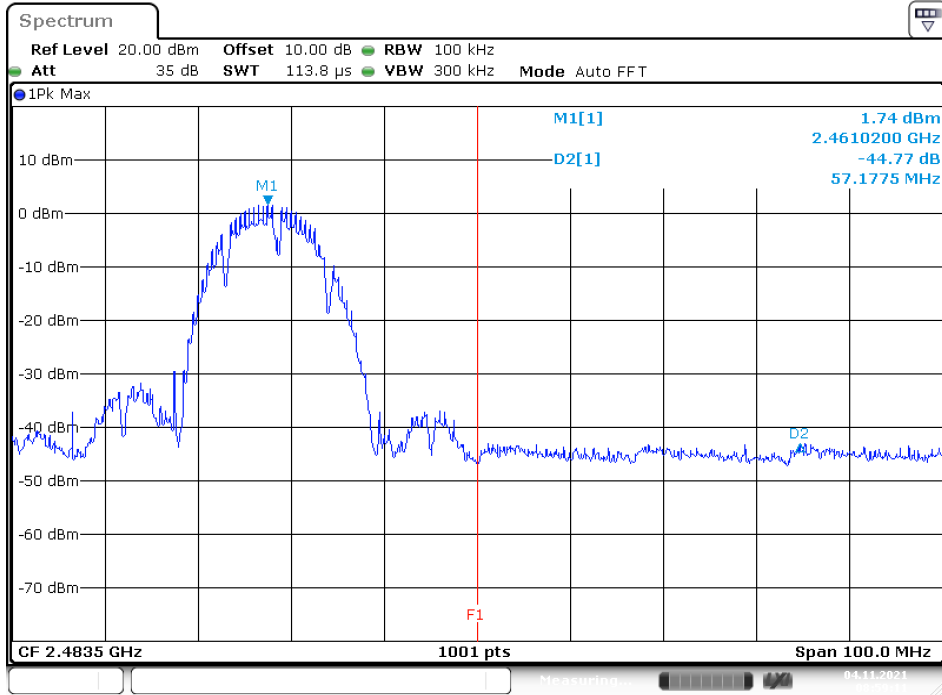


G Mode Band Edge, Left Side

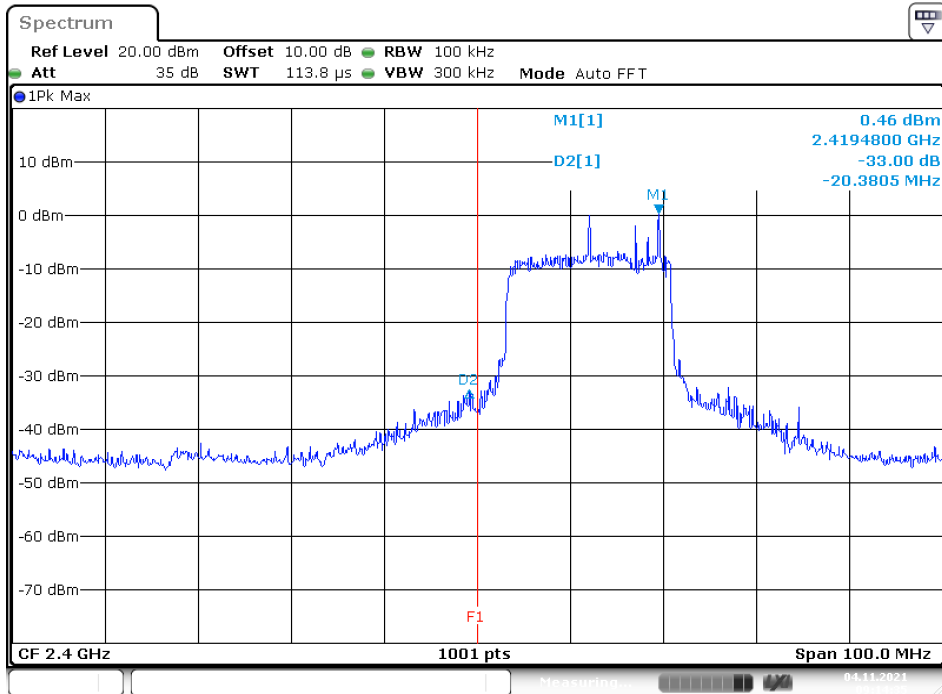


Band Edge, Right Side

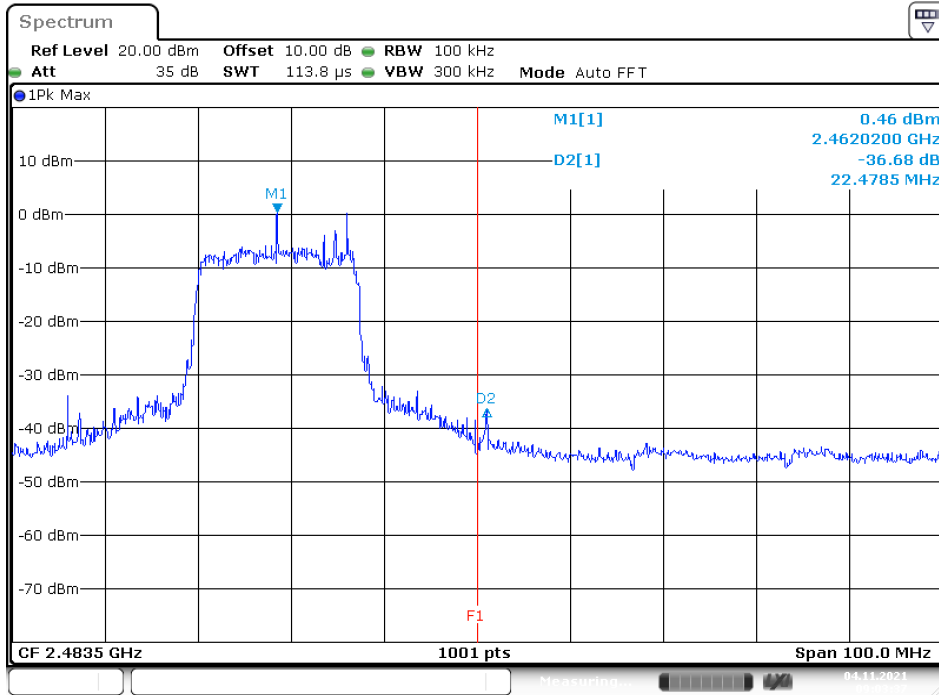

N20 Mode Band Edge, Left Side

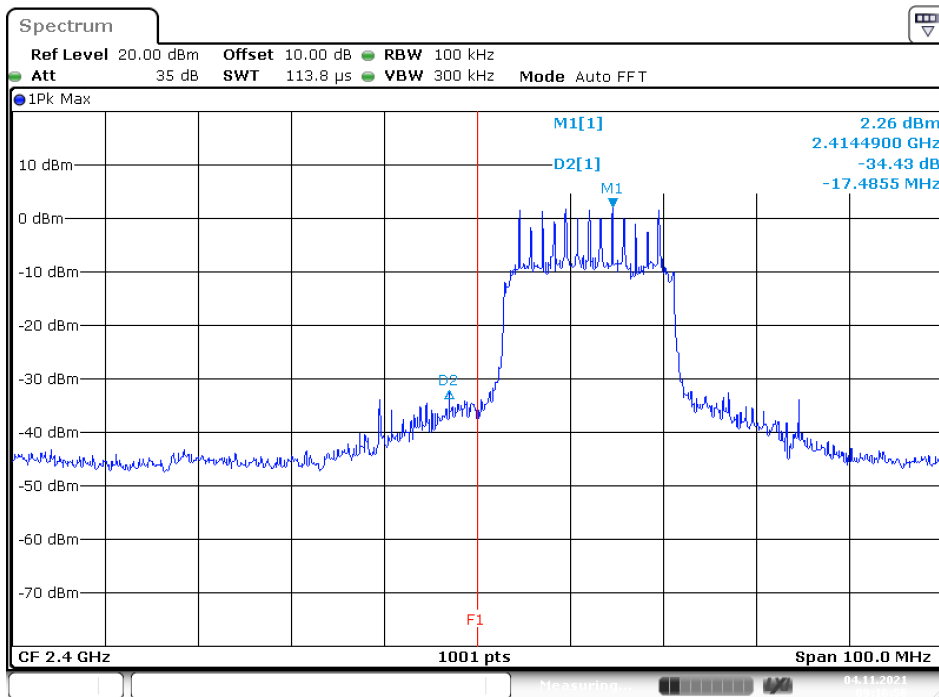

Band Edge, Right Side

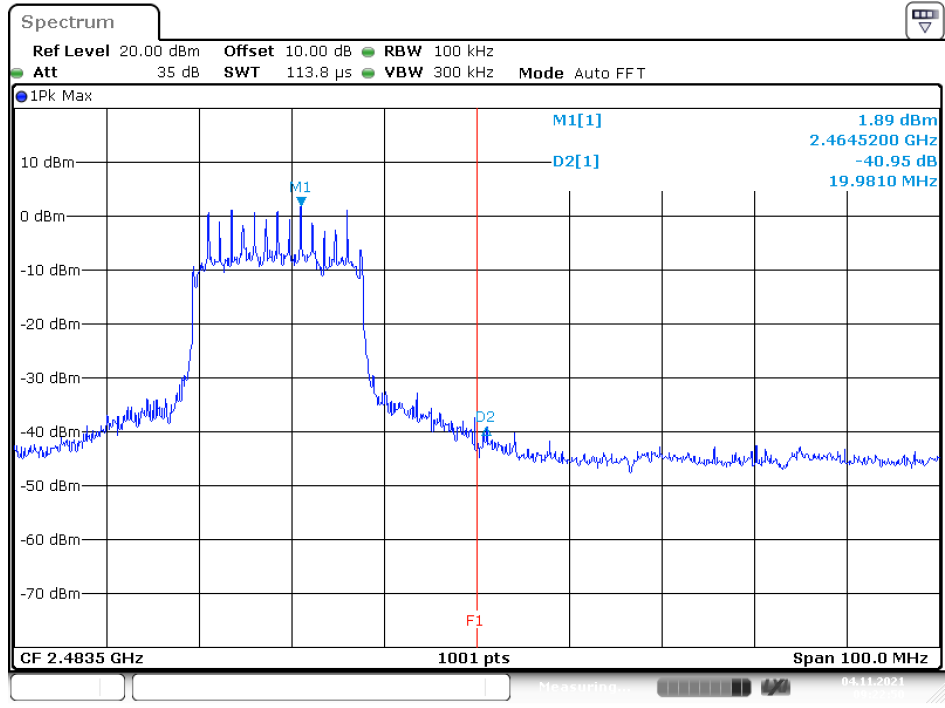

12 FCC §15.247(e) – Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Test Procedure


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

12.3 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
B Mode				
Low	2412	-10.88	8	PASS
Middle	2437	-10.43	8	PASS
High	2462	-10.25	8	PASS
G Mode				
Low	2412	-9.22	8	PASS
Middle	2437	-8.93	8	PASS
High	2462	-8.63	8	PASS
N20 Mode				
Low	2412	-8.99	8	PASS
Middle	2437	-8.50	8	PASS
High	2462	-8.40	8	PASS

Please refer to the following plots


B Mode Low Channel

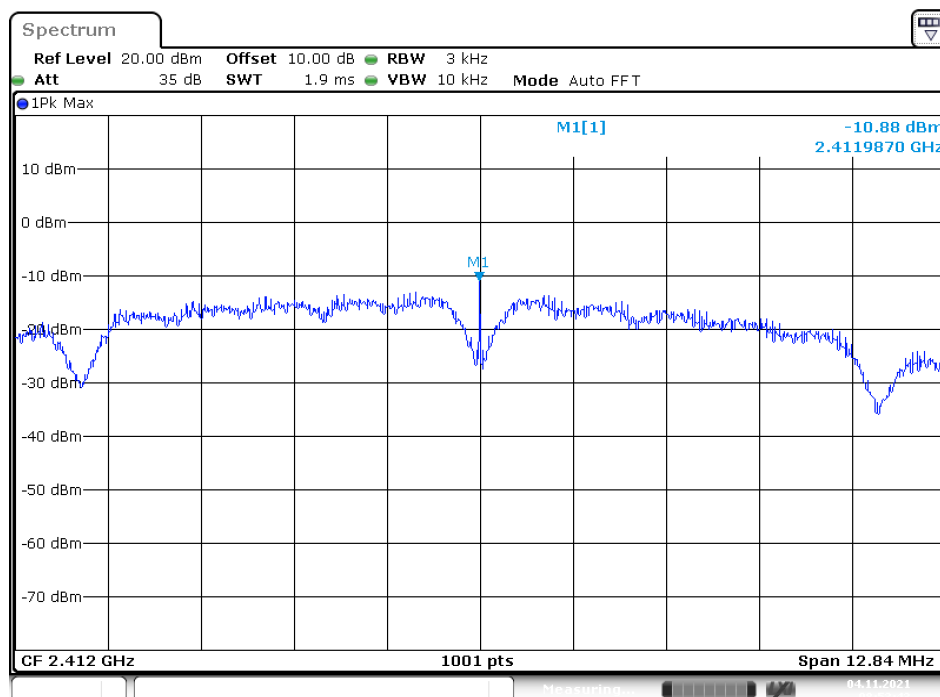

Date: 4.NOV.2021 08:53:43


Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Middle Channel

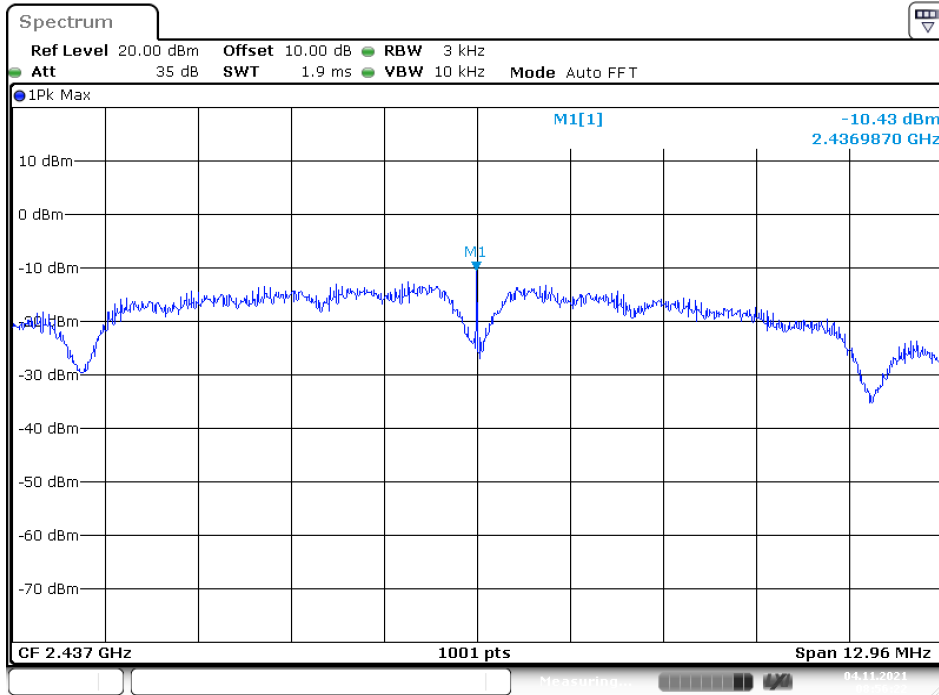


Date: 4.NOV.2021 08:56:22

High Channel

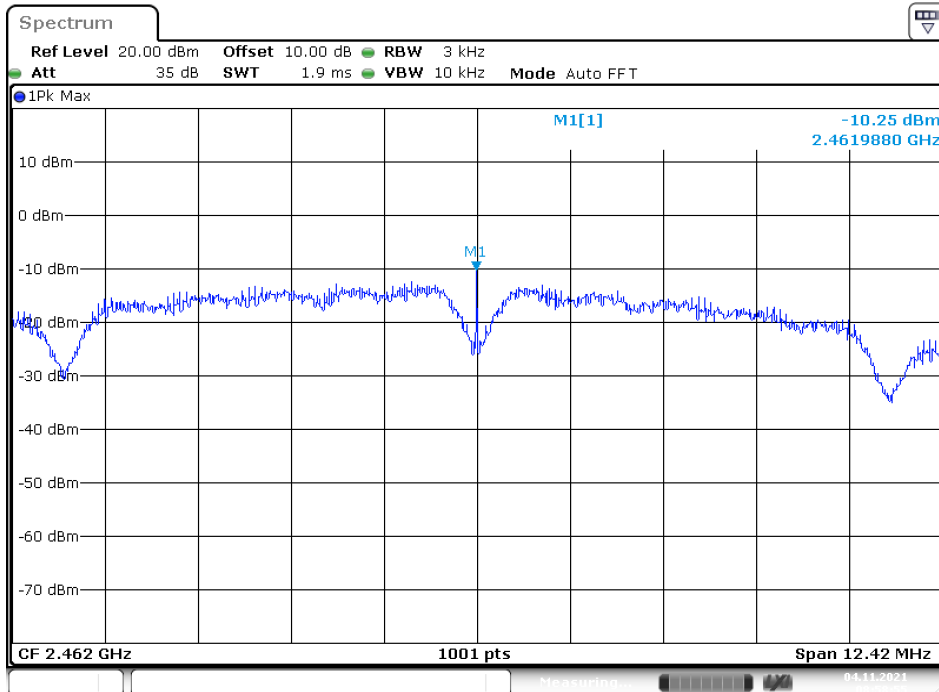


Date: 4.NOV.2021 08:58:55

G Mode Low Channel

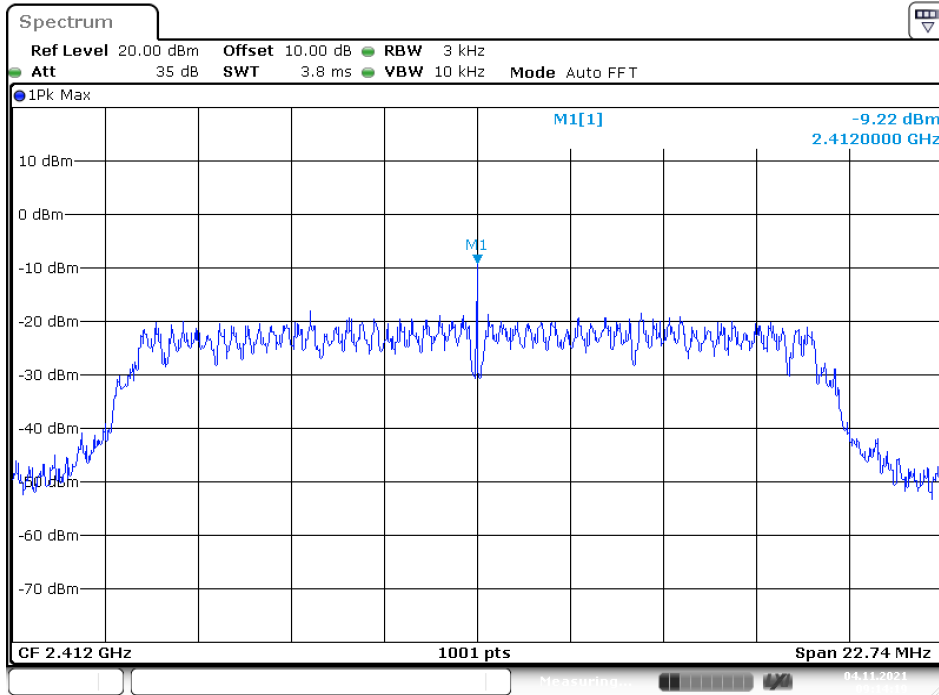


Date: 4.NOV.2021 09:14:20

Middle Channel

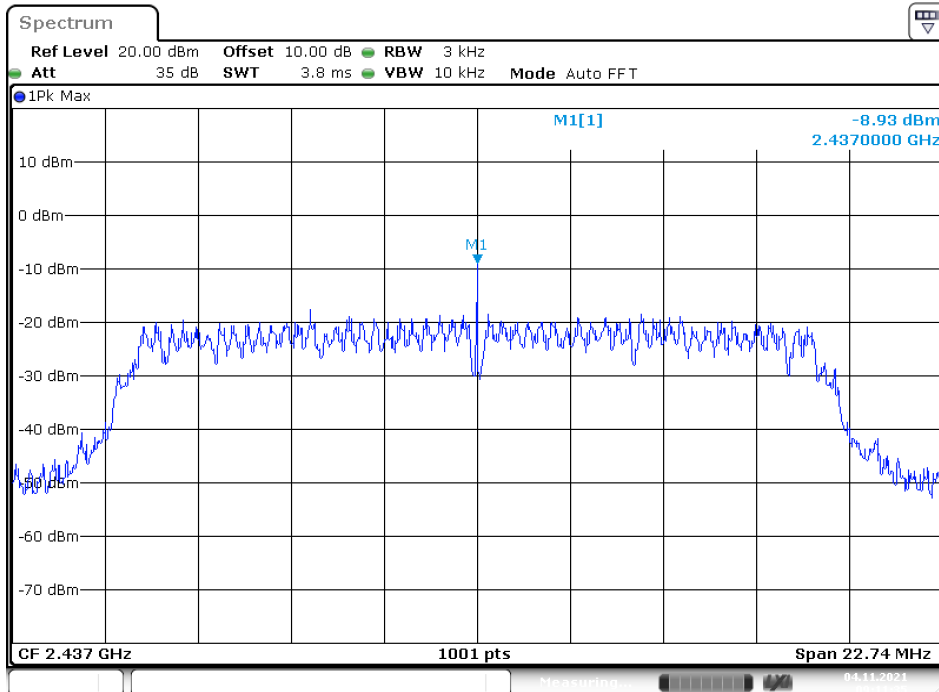


Date: 4.NOV.2021 09:11:36


High Channel

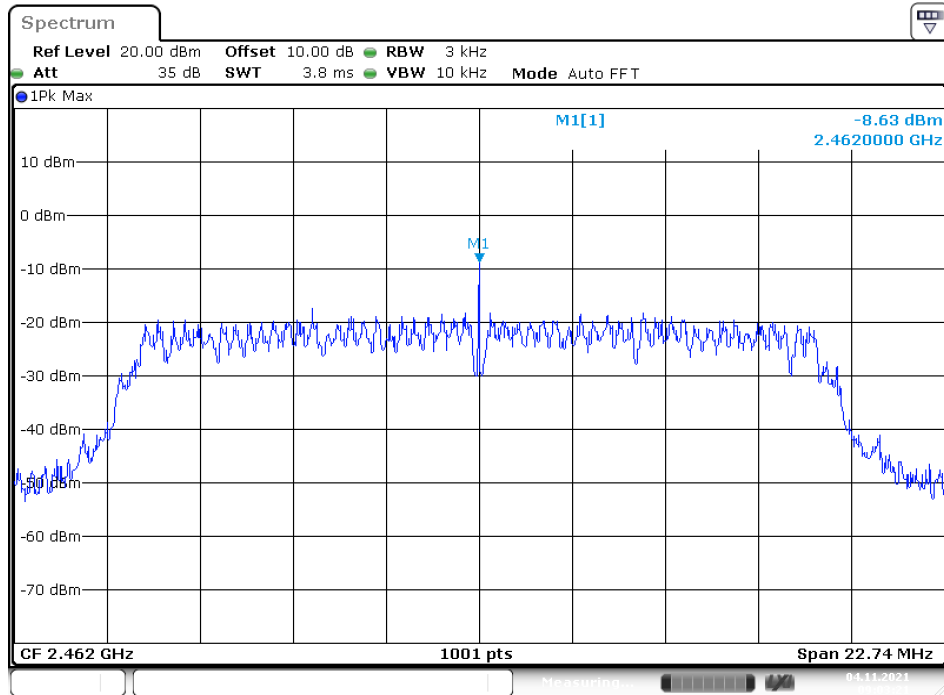

N20 Mode Low Channel

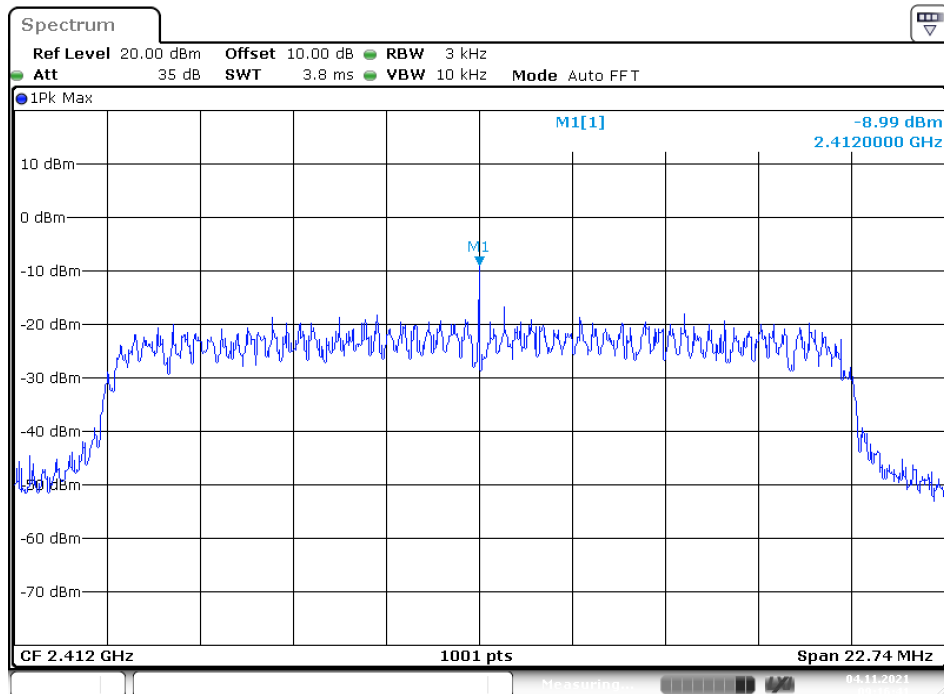


Middle Channel

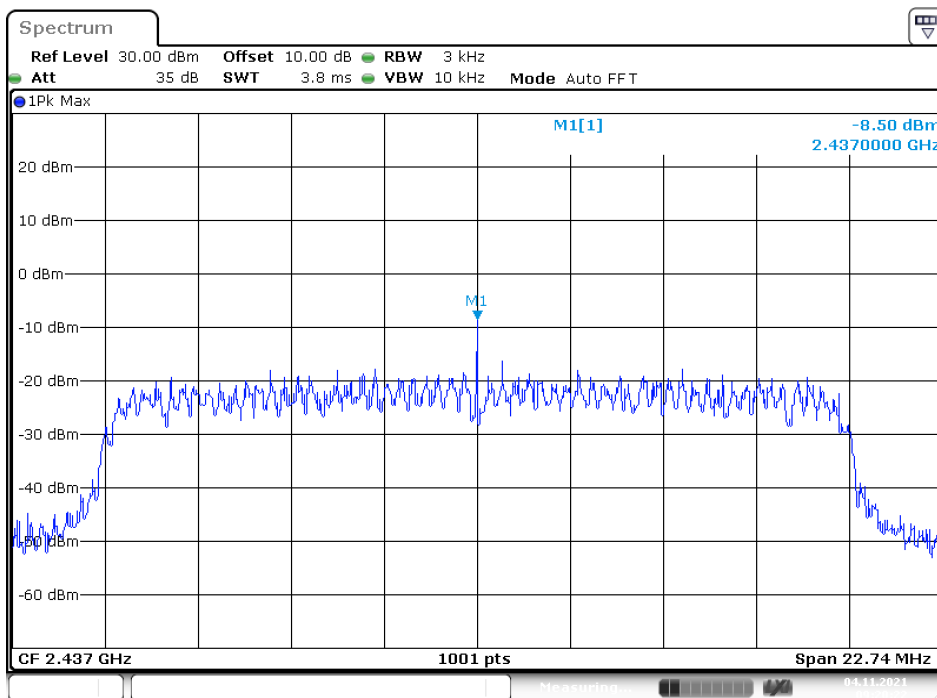

Date: 4.NOV.2021 09:20:22

High Channel

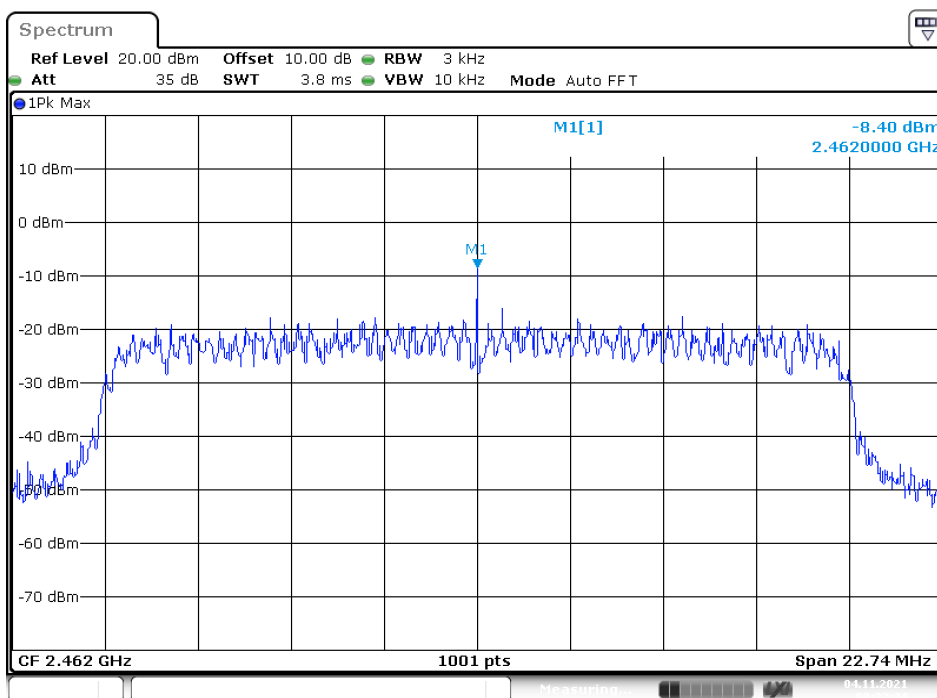

Date: 4.NOV.2021 09:22:35

***** END OF REPORT *****