



FCC Part 15C Test Report

FCC ID: 2AMQOA8

Product Name:	A8 Android Handheld Computer
Trademark:	N/A
Model Name :	A8
Serial Model:	A8(2D), A8(CCD), DAH-A422
Prepared For :	Alium Technology Inc
Address :	3728 Julian In Leander TX 78641
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	May 22 – Jun. 05, 2017
Date of Report :	Jun. 05, 2017
Report No.:	BCTC-FY170503099-2E



VERIFICATION OF COMPLIANCE

Applicant's name : Alium Technology Inc

Address..... : 3728 Julian In Leander TX 78641

Manufacture's Name : OBM TECHNOLOGIES INC.

Address..... : RM.401, BLDG #9, 600 GUANGSHAN ER ROAD, TIANHE DISTRICT, GUANGZHOU, CHINA

Product description

Product name..... : A8 Android Handheld Computer

Trademark: N/A

Model Name: A8, A8(2D), A8(CCD), DAH-A422

Standards: ANSI C63.10-2013

FCC Part15.249

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result..... : **Pass**

Prepared by(Engineer): Jack Bu

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS	20
3.3 CONDUCTED EMISSION MEASUREMENT	24
3.3.1 LIMIT	24
3.3.2 TEST SETUP	24
3.3.3 MEASUREMENT PROCEDURE	24
3.3.4 TEST RESULT	24
4 . BANDWIDTH TEST	30
4.1 APPLIED PROCEDURES / LIMIT	30
4.1.1 TEST PROCEDURE	30
4.1.2 DEVIATION FROM STANDARD	30
4.1.3 TEST SETUP	30
4.1.4 EUT OPERATION CONDITIONS	30



Table of Contents	Page
4.1.5 TEST RESULTS	31
5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	33
5.1 DEVIATION FROM STANDARD	34
5.2 TEST SETUP	34
5.3 EUT OPERATION CONDITIONS	34
5.4 TEST RESULTS	34
6 . ANTENNA REQUIREMENT	37
6.1 STANDARD REQUIREMENT	37
6.2 EUT ANTENNA	37
7 . EUT TEST PHOTO	38
8 . PHOTOS OF THE EUT	40



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.249	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.249	Conducted Spurious Emission	PASS	
15.249	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.
Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China
FCC Registration No.:187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	A8 Android Handheld Computer											
Trade Name	N/A											
Model Name	A8											
Serial Model	A8(2D), A8(CCD), DAH-A422											
Model Difference	All the same, Only model name is different.											
Product Description	<table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Bit Rate of Transmitter</td><td>2M</td></tr><tr><td>Number Of Channel</td><td>40 CH</td></tr><tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>		Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Bit Rate of Transmitter	2M	Number Of Channel	40 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	2402~2480 MHz											
Modulation Type:	GFSK											
Bit Rate of Transmitter	2M											
Number Of Channel	40 CH											
Antenna Designation:	Please see Note 3.											
Channel List	Please refer to the Note 2.											
Adapter	<p>Model: KA25-0501000CN AC Power Input: 100-240V~ 50/60Hz 0.25A Output: 5V == 1000mA</p>											
Connecting I/O Port(s)	Please refer to the User's Manual											
hardware version	--											
Software version	--											
Serial number	--											



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	Integrated antenna	0	BT&WIFI antenna
2	N/A	N/A	Integrated antenna	1	GSM/WCDMA antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Conducted & Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH20
Mode 3	CH40
Mode 4	Link Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test




2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Frequency	2402 MHz	2440 MHz	2480 MHz
Channel	Low	Middle	High

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission

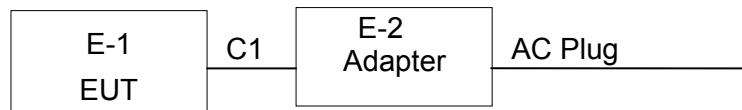

Radiated Spurious Emission Test



RF test setup:





2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	A8 Android Handheld Computer	N/A	A8	N/A	EUT
E-2	Adapter	N/A	KA25-0501000CN	N/A	Lab Provide

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	1166.5950K 03-101165- ha	2016.06.06	2017.06.05	1 year
2	LISN	R&S	NSLK81 26	812646 6	2015.08.24	2016.08.23	1 year
3	LISN	R&S	NSLK81 26	812648 7	2015.08.24	2016.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 7	2016.06.07	2017.06.06	1 year
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05	1 year

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	R&S	HF906	10027	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	R&S	BBV9743	9743-01 9	2015.08.25	2016.08.24	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05	1 year
11	Antenna connector	Florida RFLabs	Lab-Fle	RF 01#	2016.07.06	2017.07.05	1 year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

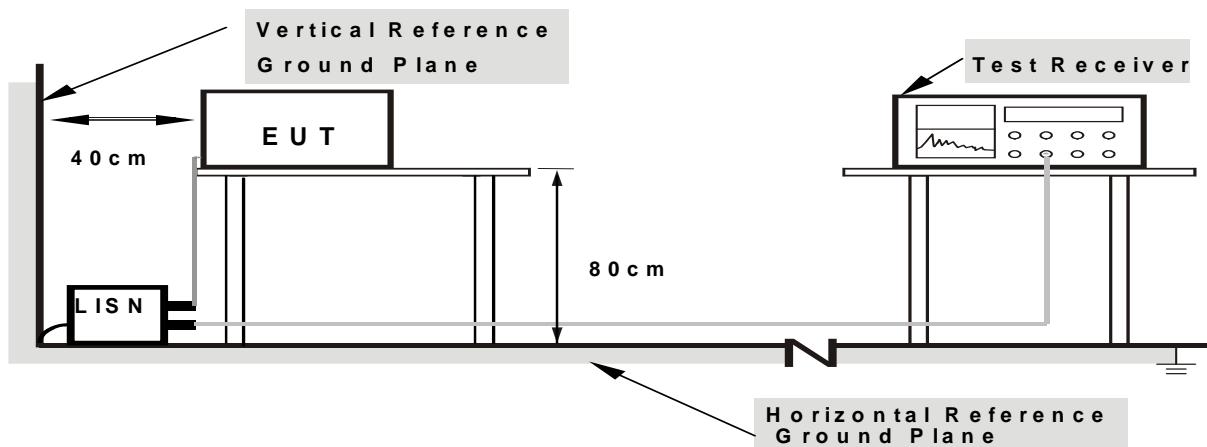

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



3.1.6 TEST RESULTS


Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz Output: DC 3.7V	Test Mode :	Mode 4

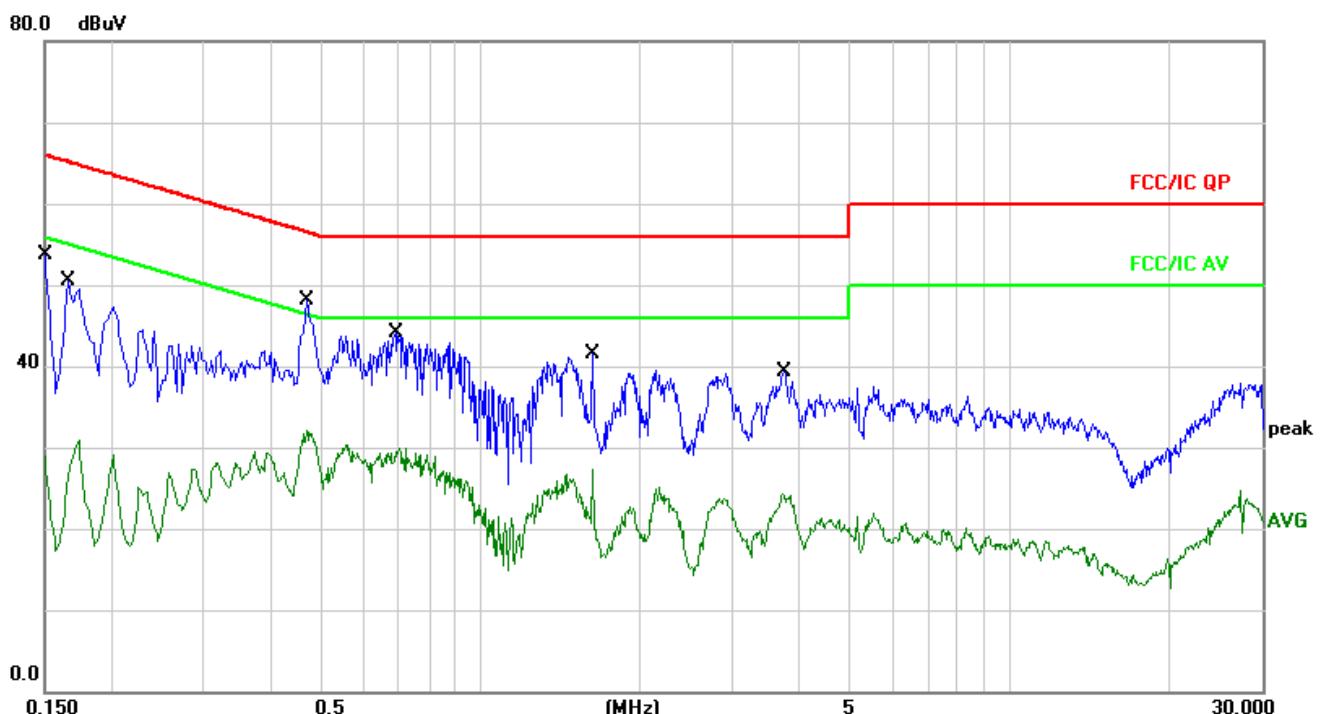

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1500	44.04	9.74	53.78	65.99	-12.21	QP	
2		0.1500	19.09	9.74	28.83	55.99	-27.16	AVG	
3		0.1660	40.72	9.70	50.42	65.15	-14.73	QP	
4		0.1660	21.14	9.70	30.84	55.15	-24.31	AVG	
5	*	0.4700	38.46	9.67	48.13	56.51	-8.38	QP	
6		0.4700	22.52	9.67	32.19	46.51	-14.32	AVG	
7		0.6900	34.34	9.67	44.01	56.00	-11.99	QP	
8		0.6900	20.25	9.67	29.92	46.00	-16.08	AVG	
9		1.6340	31.74	9.71	41.45	56.00	-14.55	QP	
10		1.6340	17.63	9.71	27.34	46.00	-18.66	AVG	
11		3.7460	29.49	9.73	39.22	56.00	-16.78	QP	
12		3.7460	14.59	9.73	24.32	46.00	-21.68	AVG	



Temperature :	25°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz Output: DC 3.7V	Test Mode :	Mode 4

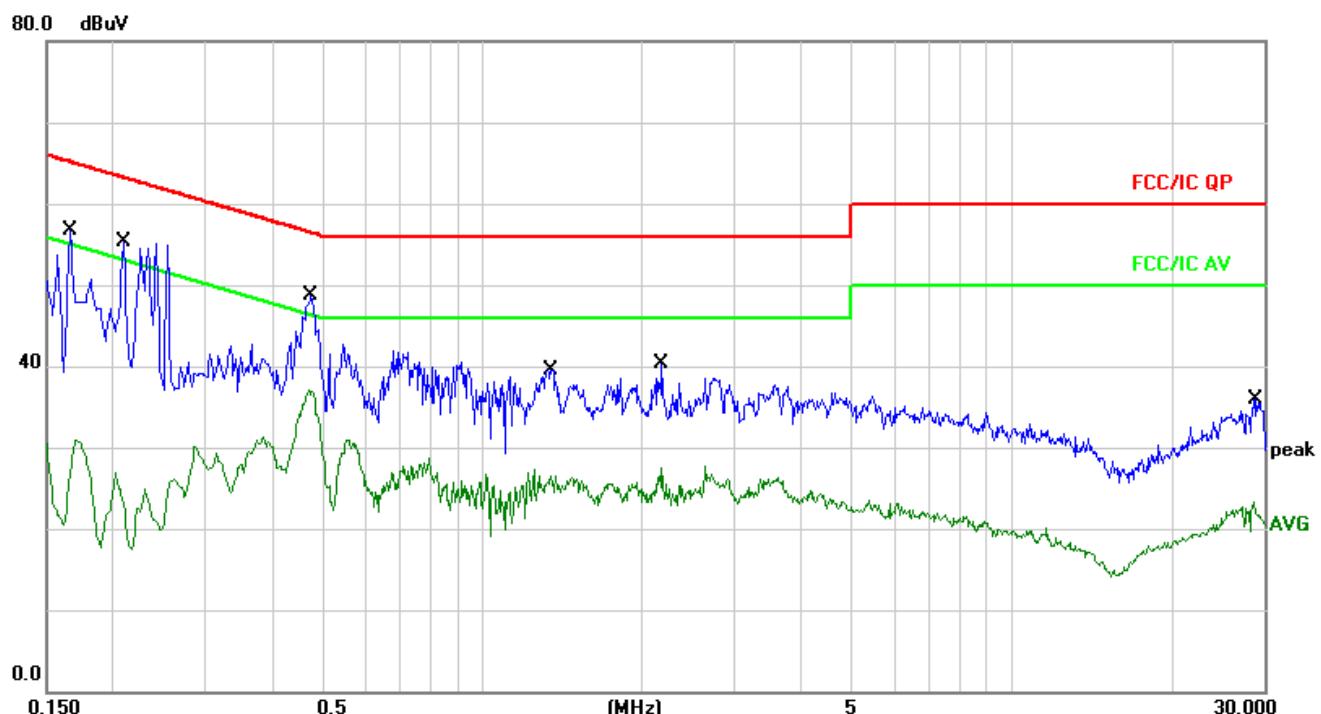

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1		0.1660	47.04	9.70	56.74	65.15	-8.41	QP
2		0.1660	21.28	9.70	30.98	55.15	-24.17	AVG
3		0.2100	45.75	9.63	55.38	63.20	-7.82	QP
4		0.2100	17.24	9.63	26.87	53.20	-26.33	AVG
5	*	0.4740	38.99	9.68	48.67	56.44	-7.77	QP
6		0.4740	27.36	9.68	37.04	46.44	-9.40	AVG
7		1.3500	29.84	9.71	39.55	56.00	-16.45	QP
8		1.3500	16.80	9.71	26.51	46.00	-19.49	AVG
9		2.1860	30.52	9.72	40.24	56.00	-15.76	QP
10		2.1860	17.72	9.72	27.44	46.00	-18.56	AVG
11		28.9300	25.80	10.08	35.88	60.00	-24.12	QP
12		28.9300	13.31	10.08	23.39	50.00	-26.61	AVG



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

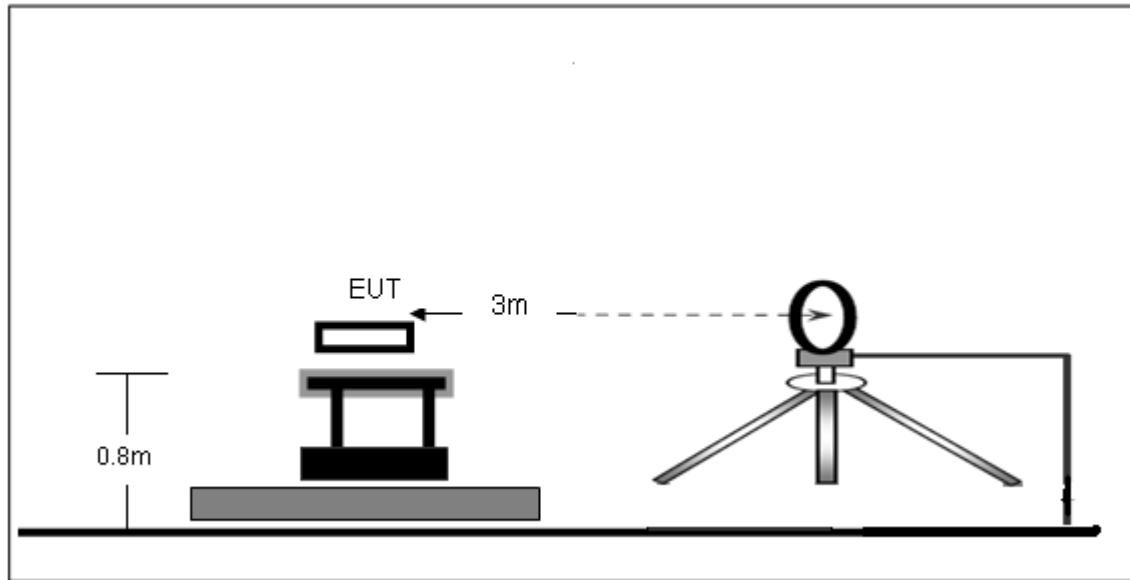

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

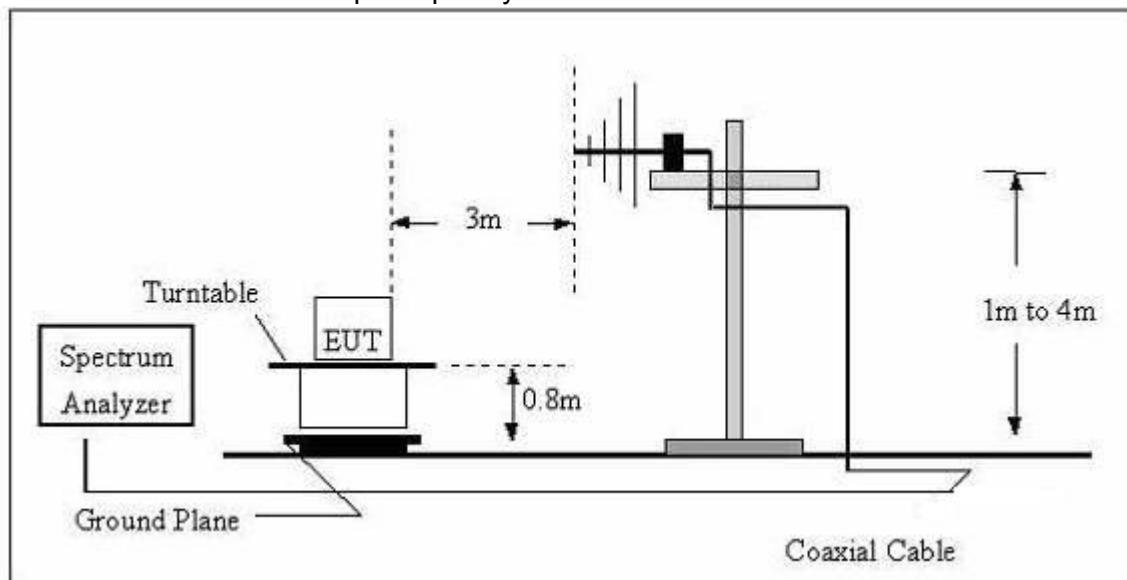

(C) Radiated Emission Test-Up Frequency Above 1GHz

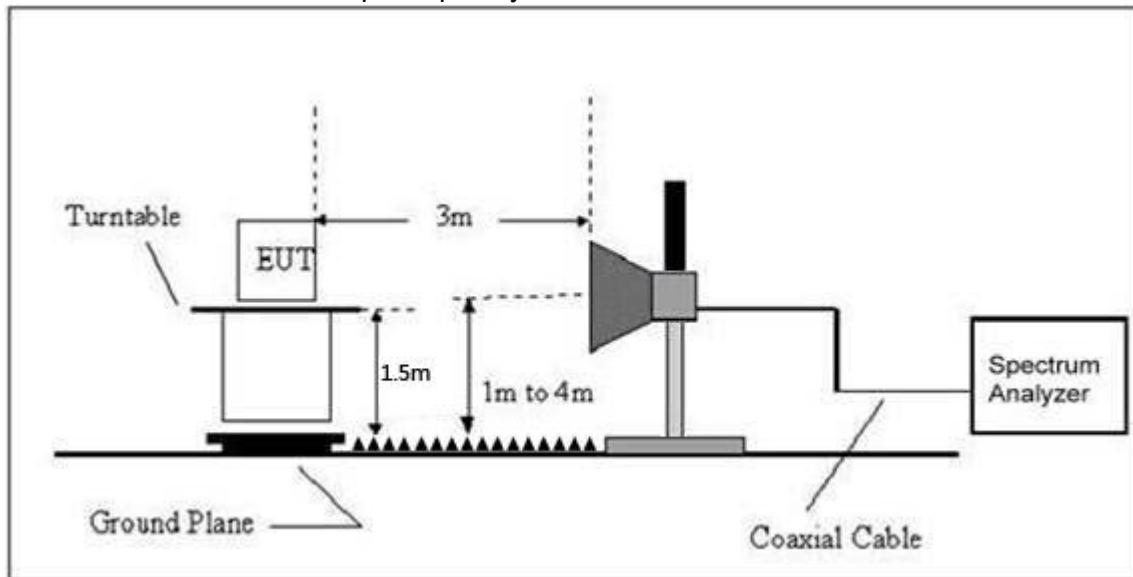**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3.7V From Battery		
Test Mode :	Link Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuV) + distance extrapolation factor.

Correct Factor=Antenna Factor + Cable Loss – Pre-amplifier.



Radiated Spurious Emission (Between 30MHz – 1GHz)


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V From Battery		
Test Mode : (Worst)	Link Mode		

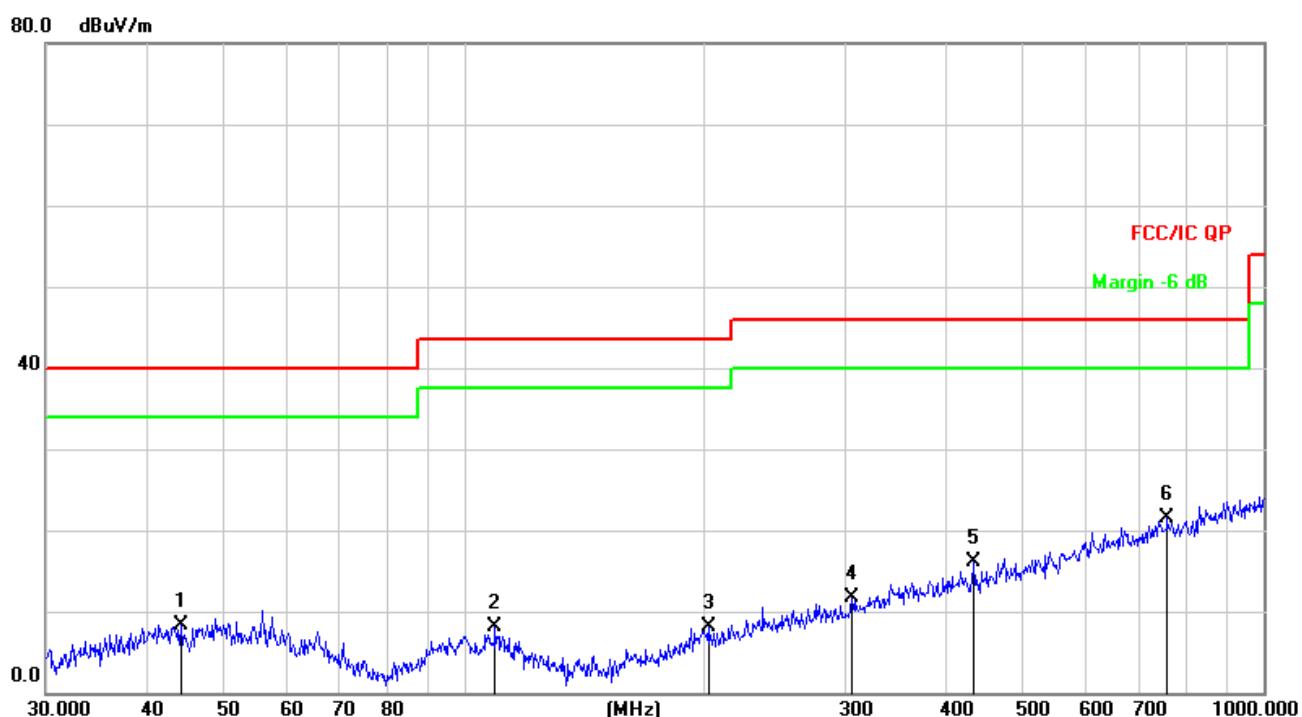

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1		44.2752	23.15	-14.87	8.28	40.00	-31.72
2		109.4116	24.55	-16.44	8.11	43.50	-35.39
3		202.1005	23.85	-15.69	8.16	43.50	-35.34
4		305.6800	23.72	-11.98	11.74	46.00	-34.26
5		434.0651	24.77	-8.60	16.17	46.00	-29.83
6	*	758.0408	23.21	-1.66	21.55	46.00	-24.45



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V From Battery		
Test Mode : (Worst)	Link Mode		

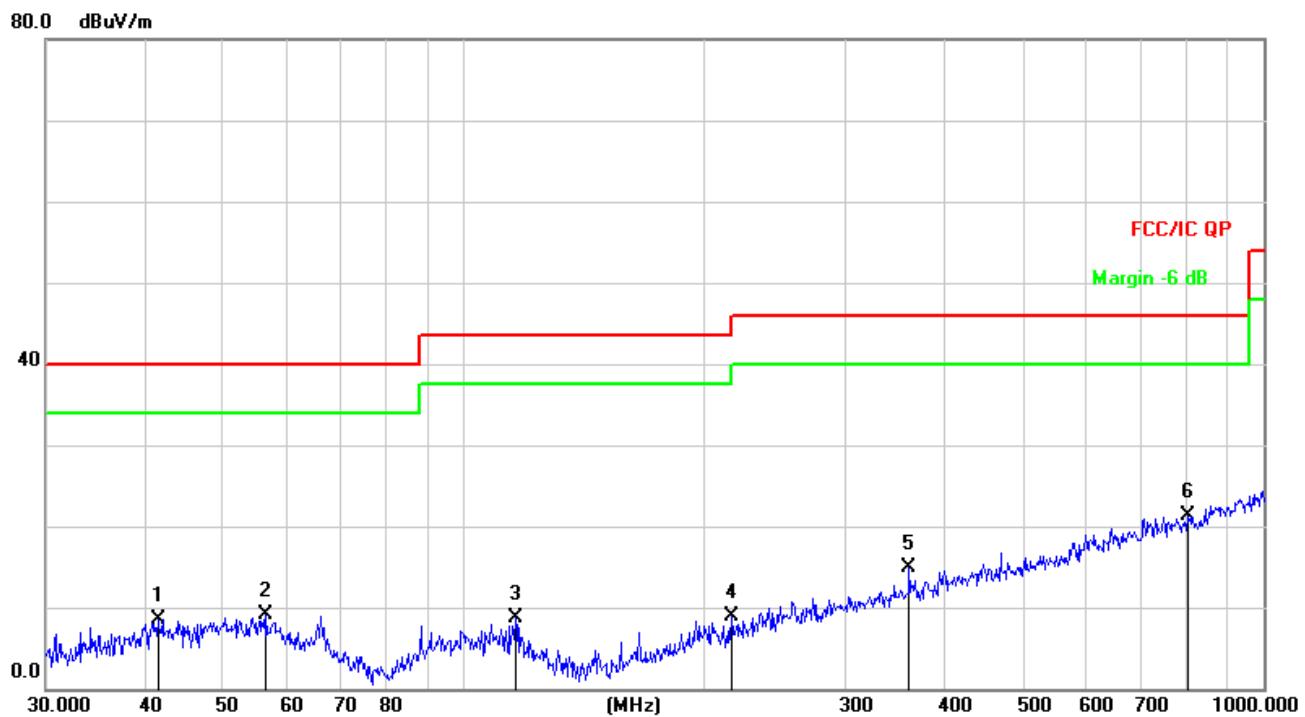

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		41.4215	23.72	-15.30	8.42	40.00	-31.58	QP
2		56.5929	24.60	-15.55	9.05	40.00	-30.95	QP
3		116.1321	26.09	-17.42	8.67	43.50	-34.83	QP
4		216.0240	24.45	-15.61	8.84	46.00	-37.16	QP
5		360.4476	25.40	-10.40	15.00	46.00	-31.00	QP
6	*	804.6028	22.39	-1.10	21.29	46.00	-24.71	QP

Radiated Spurious Emission (1GHz to 10th harmonics)

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel 2402MHz									
V	2402.00	102.71	38.11	7.44	20.36	92.4	114	-21.6	PK
V	2402.00	82.58	38.11	7.44	20.36	72.27	94	-21.73	AV
V	4804.00	61.94	38.65	7.80	23.61	54.7	74	-19.3	PK
V	4804.00	48.36	38.65	7.80	23.61	41.12	54	-12.88	AV
V	17850.00	34.37	38.75	10.36	26.57	32.55	74	-41.45	PK
H	2402.00	102.25	38.11	7.44	20.36	91.94	114	-22.06	PK
H	2402.00	81.40	38.11	7.44	20.36	71.09	94	-22.91	AV
H	4804.00	58.93	38.65	7.80	23.61	51.69	74	-22.31	PK
H	4804.00	39.08	38.65	7.80	23.61	31.84	54	-22.16	AV
H	17850.00	35.49	38.75	10.36	26.57	33.67	74	-40.33	PK
Middle Channel 2441MHz									
V	2440.00	102.84	38.11	7.44	20.36	92.53	114	-21.47	PK
V	2440.00	84.22	38.11	7.44	20.36	73.91	94	-20.09	AV
V	4880.00	57.58	38.65	7.80	23.61	50.34	74	-23.66	PK
V	4880.00	43.16	38.65	7.80	23.61	35.92	54	-18.08	AV
V	17850.00	34.93	38.75	10.36	26.57	33.11	74	-40.89	PK
H	2440.00	100.71	38.11	7.44	20.36	90.4	114	-23.6	PK
H	2440.00	81.64	38.11	7.44	20.36	71.33	94	-22.67	AV
H	4880.00	62.16	38.65	7.80	23.61	54.92	74	-19.08	PK
H	4880.00	39.05	38.65	7.80	23.61	31.81	54	-22.19	AV
H	17850.00	35.50	38.75	10.36	26.57	33.68	74	-40.32	PK
High Channel 2480MHz									
V	2480.00	102.22	38.17	7.47	20.51	92.03	114	-21.97	PK
V	2480.00	83.46	38.17	7.47	20.51	73.27	94	-20.73	AV
V	4960.00	58.78	38.69	7.83	23.83	51.75	74	-22.25	PK
V	4960.00	39.80	38.69	7.83	23.83	32.77	54	-21.23	AV
V	17850.00	34.08	38.75	10.36	26.57	32.26	74	-41.74	PK
H	2480.00	79.96	38.17	7.47	20.51	69.77	114	-44.23	PK
H	2480.00	61.60	38.17	7.47	20.51	51.41	94	-42.59	AV
H	4960.00	58.37	38.69	7.83	23.83	51.34	74	-22.66	PK
H	4960.00	38.88	38.69	7.83	23.83	31.85	54	-22.15	AV
H	17850.00	32.75	38.75	10.36	26.57	30.93	74	-43.07	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 CONDUCTED EMISSION MEASUREMENT


3.3.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz

bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits

specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

3.3.2 TEST SETUP

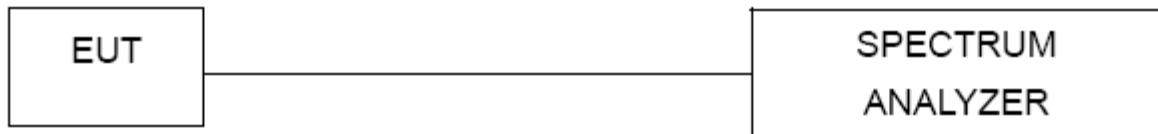

3.3.3 MEASUREMENT PROCEDURE

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 100KHz, Start=300KHz, Below 1GHz.

Set the RBW, VBW = 1MHz, Start=3MHz, Above 1GHz to 10th harmonic.


3.3.4 TEST RESULT

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.




Operation Mode: BLE mode(CH00, CH20, CH40)

CH 00 (BLE mode) - Frequency Band 1 (30 MHz \leq f \leq 1000 MHz)

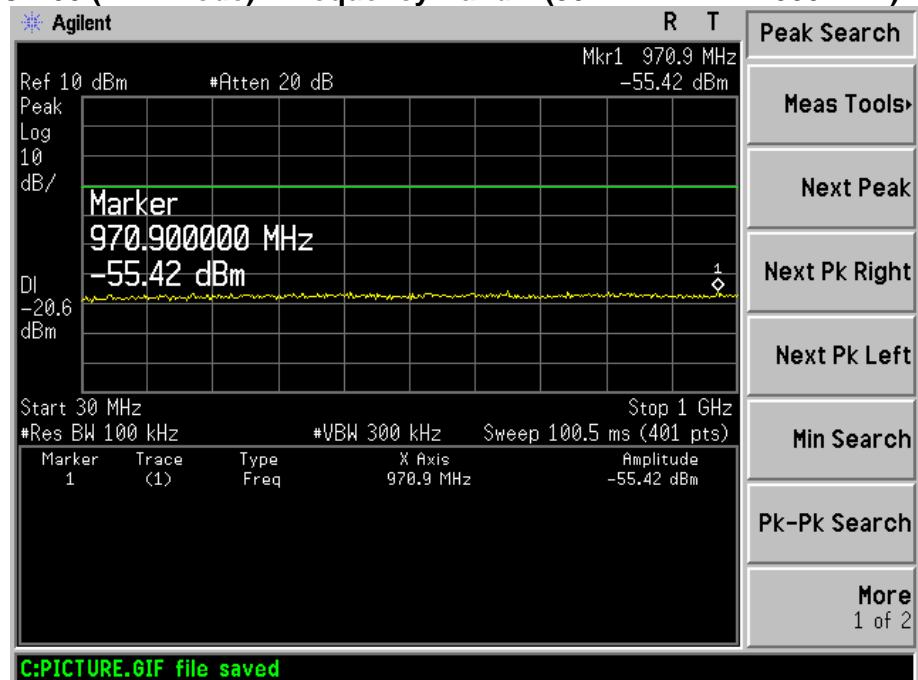

CH 00 (BLE mode) - Frequency Band 2 (1000 MHz < f \leq 3000 MHz)

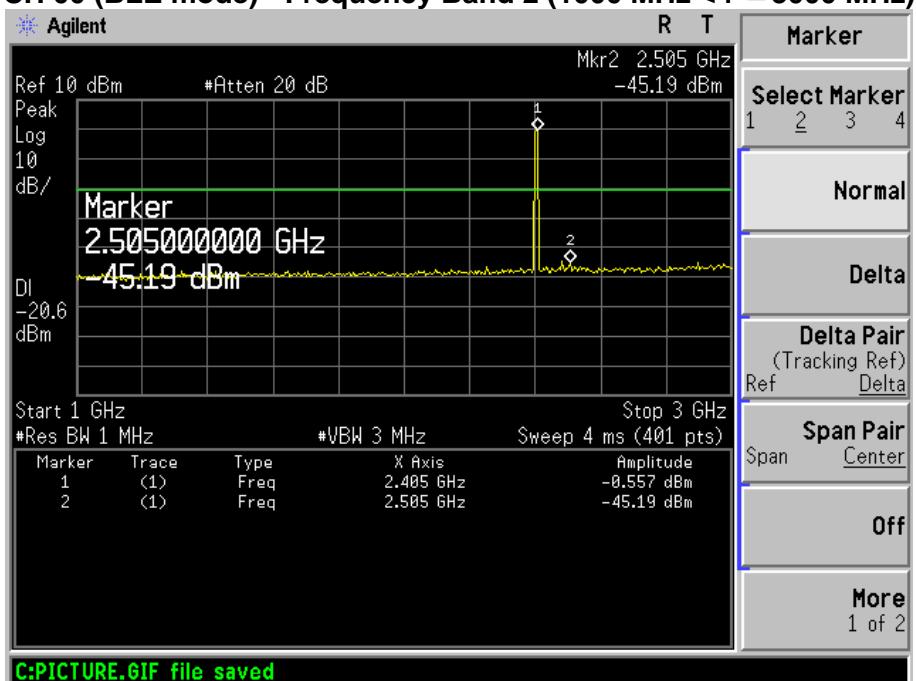




CH 00 (BLE mode) - Frequency Band 3 (3000 MHz < f ≤ 25000 MHz)




CH 20 (BLE mode) - Frequency Band 1 (30 MHz ≤ f ≤ 1000 MHz)

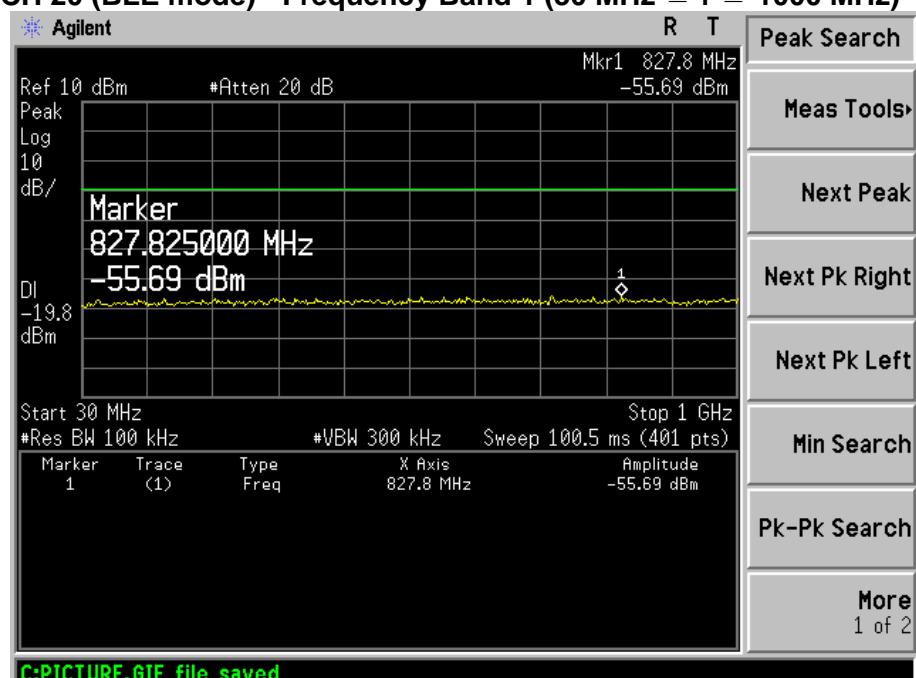




CH 20 (BLE mode) - Frequency Band 2 (1000 MHz < f \leq 3000 MHz)

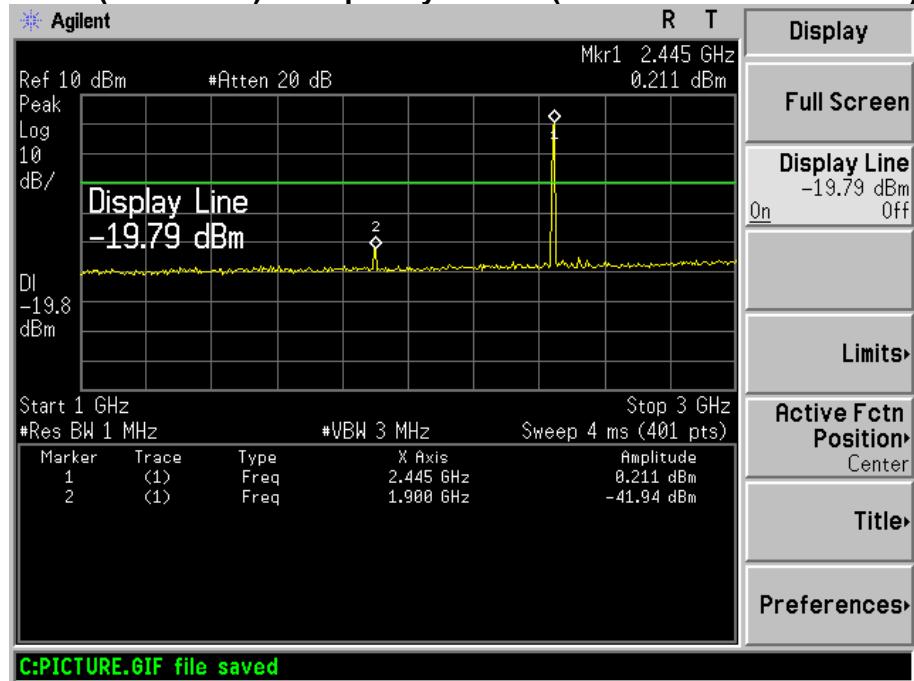


CH 20 (BLE mode) - Frequency Band 3 (3000 MHz < f \leq 25000 MHz)

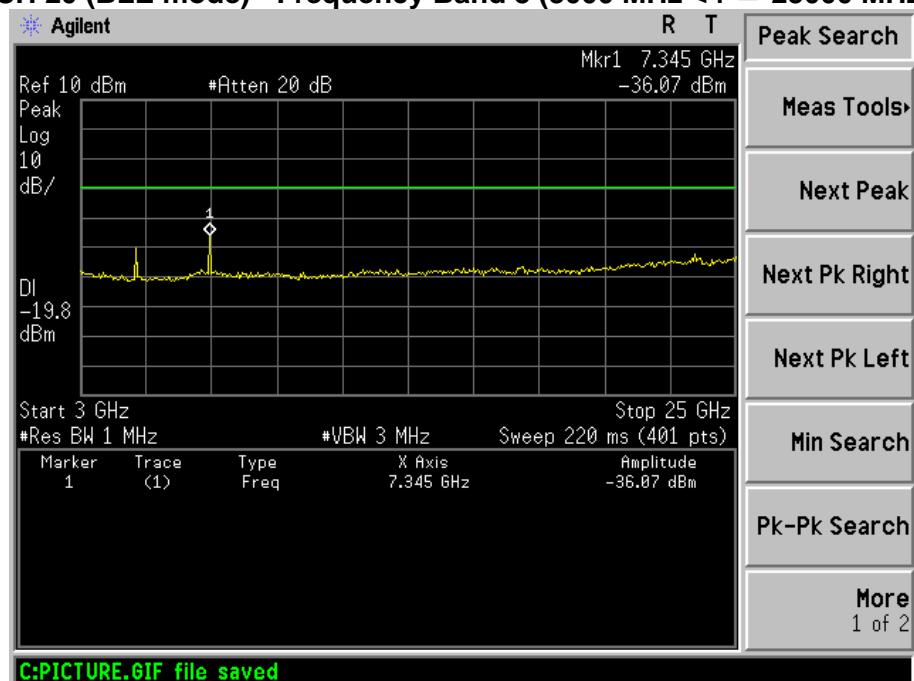




CH 40 (BLE mode) - Frequency Band 1 (30 MHz \leq f \leq 1000 MHz)

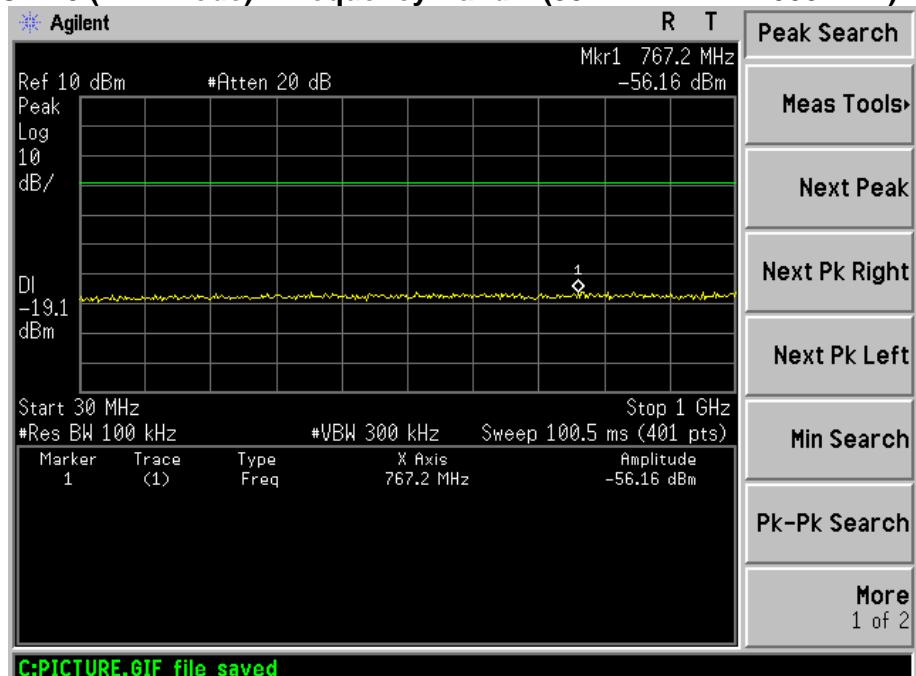


CH 40 (BLE mode) - Frequency Band 2 (1000 MHz < f \leq 3000 MHz)

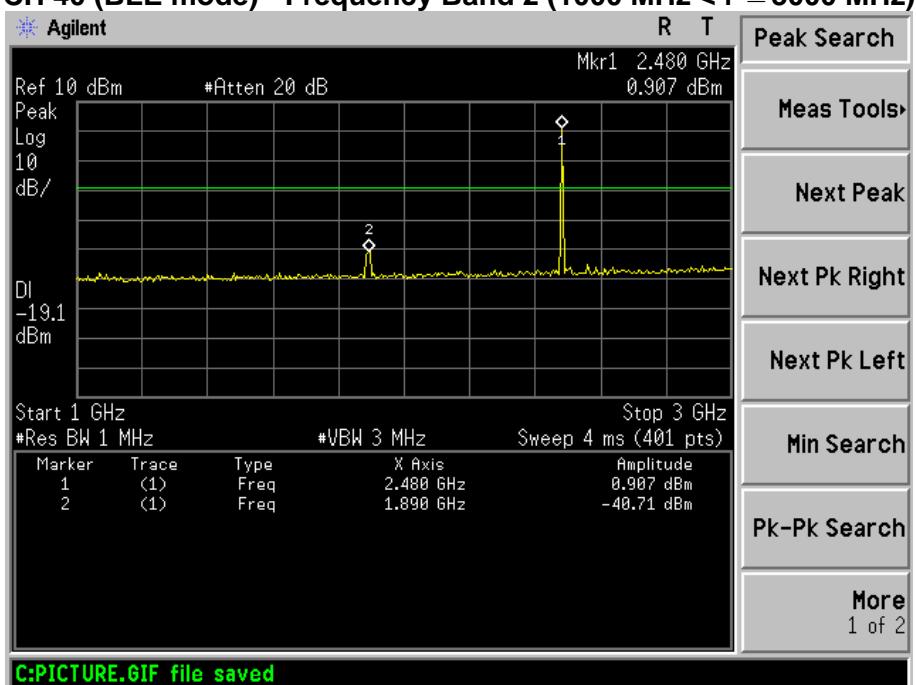



CH 40 (BLE mode) - Frequency Band 3 (3000 MHz < f ≤ 25000 MHz)

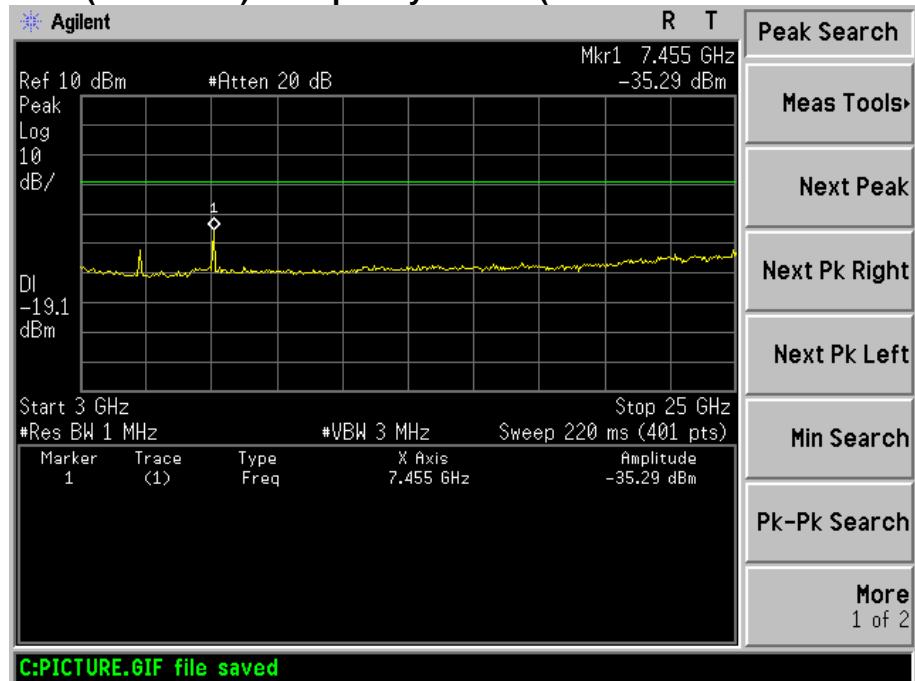



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	\geq RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW \geq RBW, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





4.1.5 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	CH01 / CH20 /CH40		

	Frequency	20dB Bandwidth (MHz)	Result
GFSK	2402 MHz	1.207	PASS
	2440 MHz	1.199	PASS
	2480 MHz	1.21	PASS

GFSK

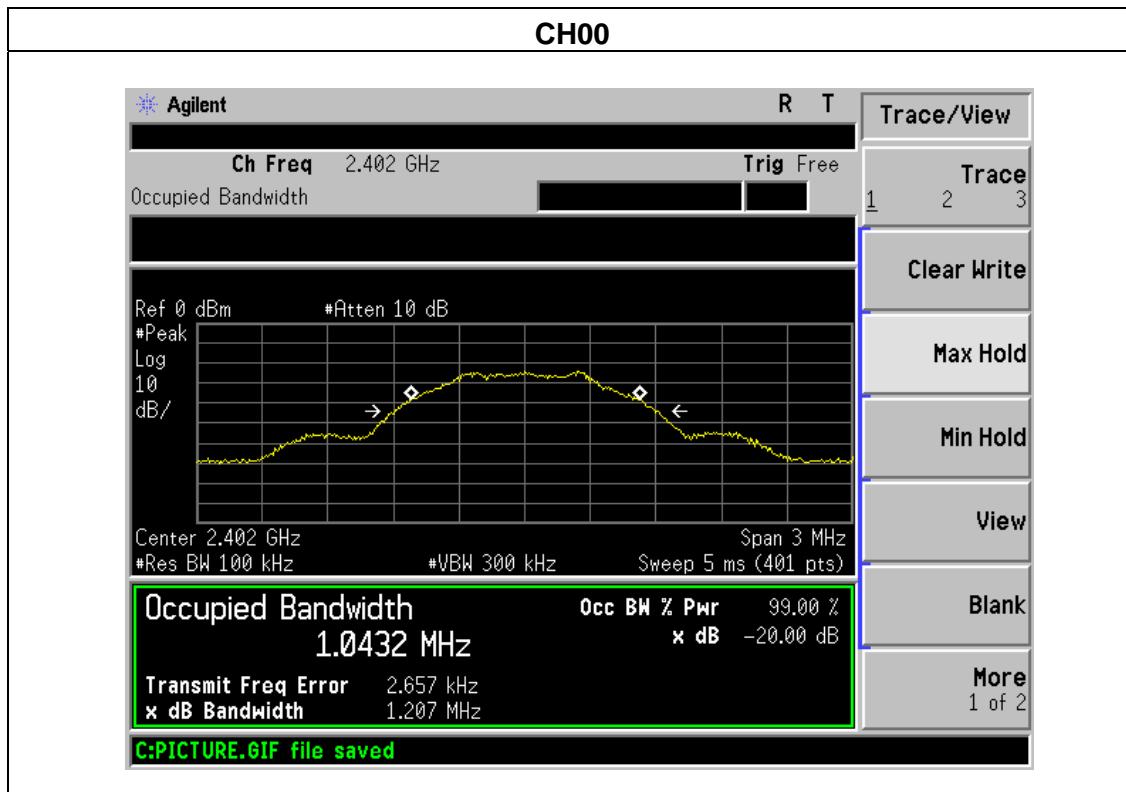

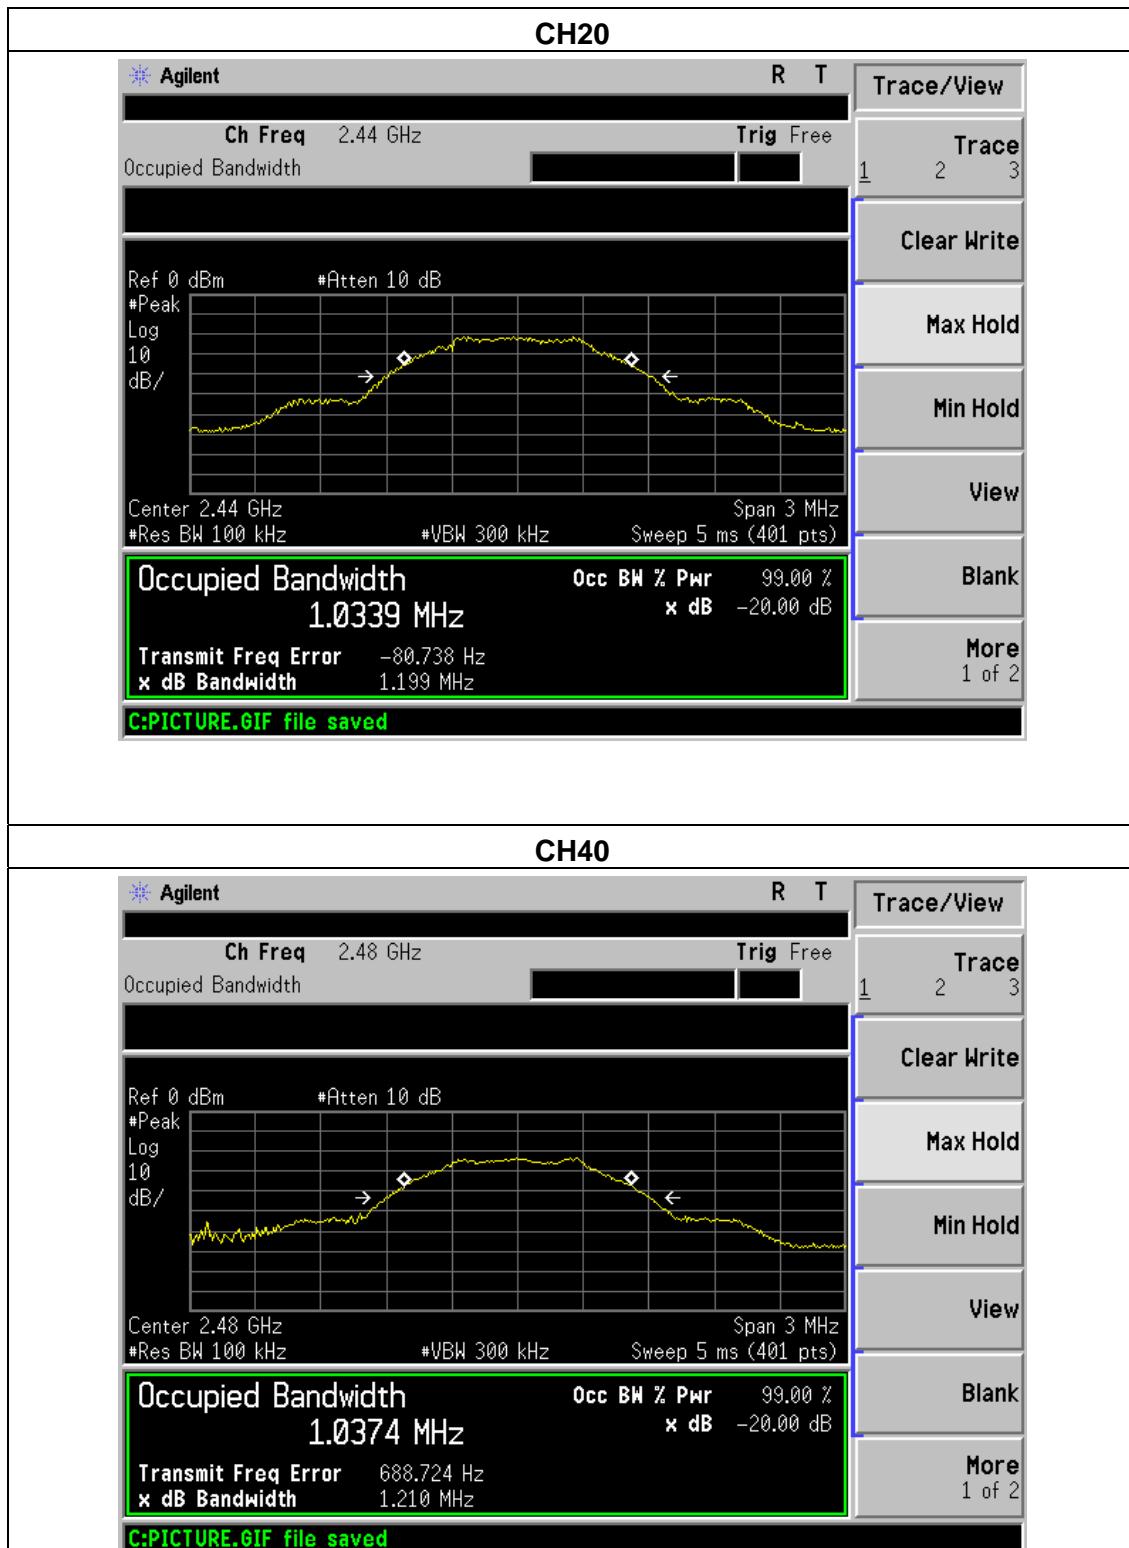



5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



5.1 DEVIATION FROM STANDARD

No deviation.

5.2 TEST SETUP

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

Temperature :	25 °C		Relative Humidity :		54%			
Pressure :	1012 hPa		Test Voltage :		DC 3.7V From Battery			
Test Mode :	CH01/CH40							

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
								PK	PK	
Low Channel 2402MHz										
GFSK	H	2390.00	42.88	38.06	7.42	20.15	32.39	74.00	54.00	PASS
	H	2400.00	43.13	38.06	7.42	20.15	32.64	74.00	54.00	PASS
	V	2390.00	42.59	38.06	7.42	20.15	32.10	74.00	54.00	PASS
	V	2400.00	41.42	38.06	7.42	20.15	30.93	74.00	54.00	PASS
	High Channel 2480MHz									
	H	2483.50	43.35	38.17	7.42	20.51	33.11	74.00	54.00	PASS
	H	2483.50	42.86	38.17	7.42	20.51	32.62	74.00	54.00	PASS
	V	2485.50	43.47	38.2	7.45	20.54	33.26	74.00	54.00	PASS
	V	2485.50	43.21	38.2	7.45	20.54	33.00	74.00	54.00	PASS


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.





2402 Horizontal

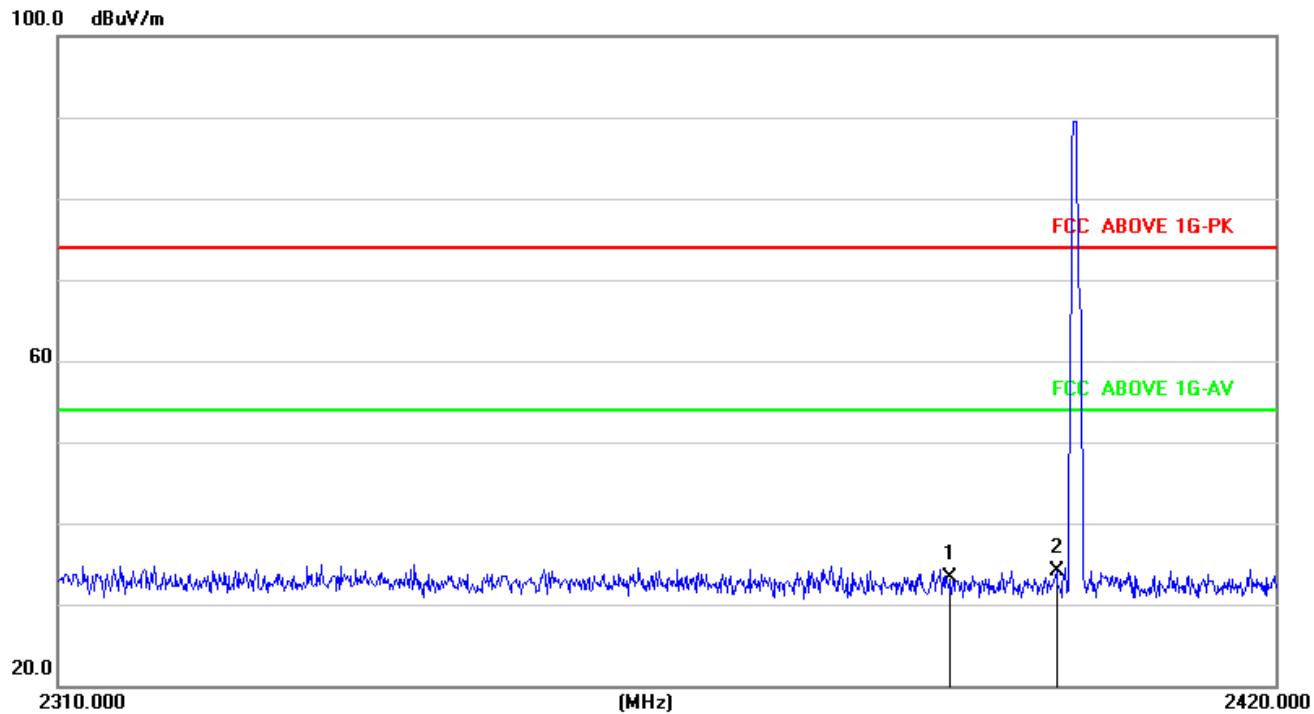

2402 Vertical

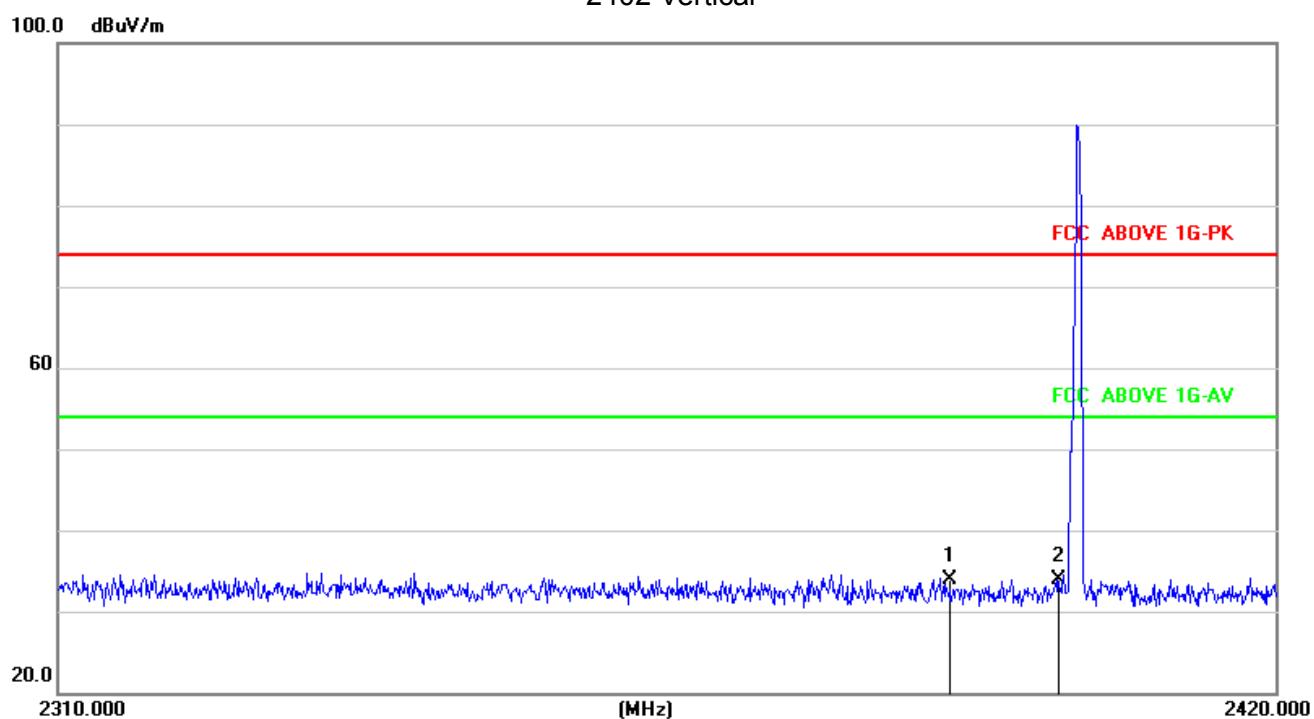

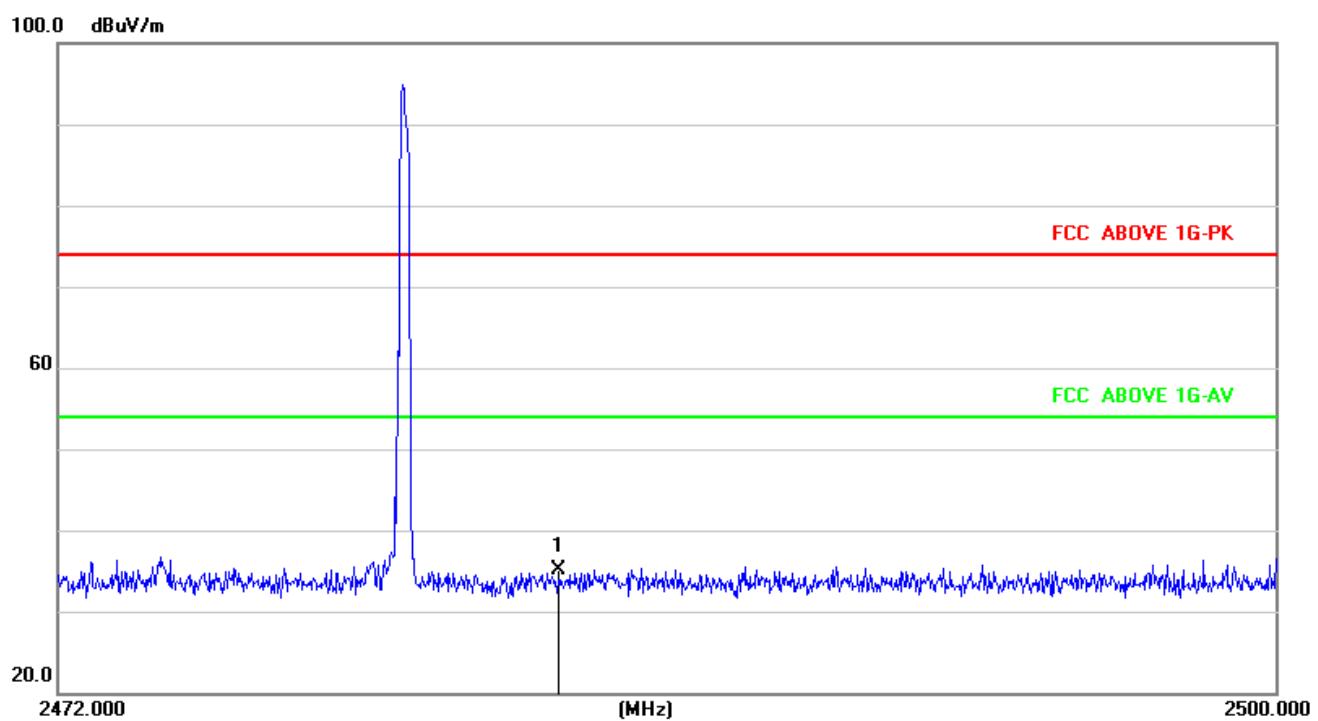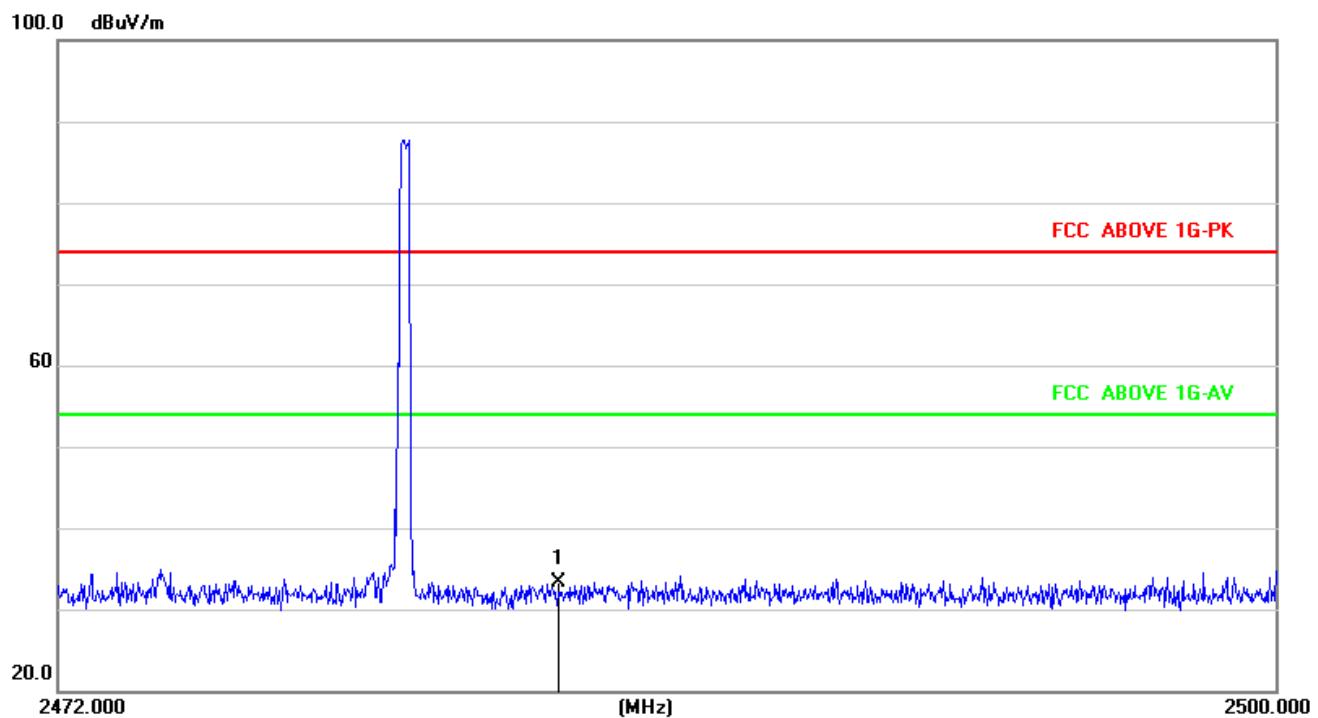



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is Integrated antenna. It complies with the standard requirement.


7. EUT TEST PHOTO

Conducted Measurement Photos

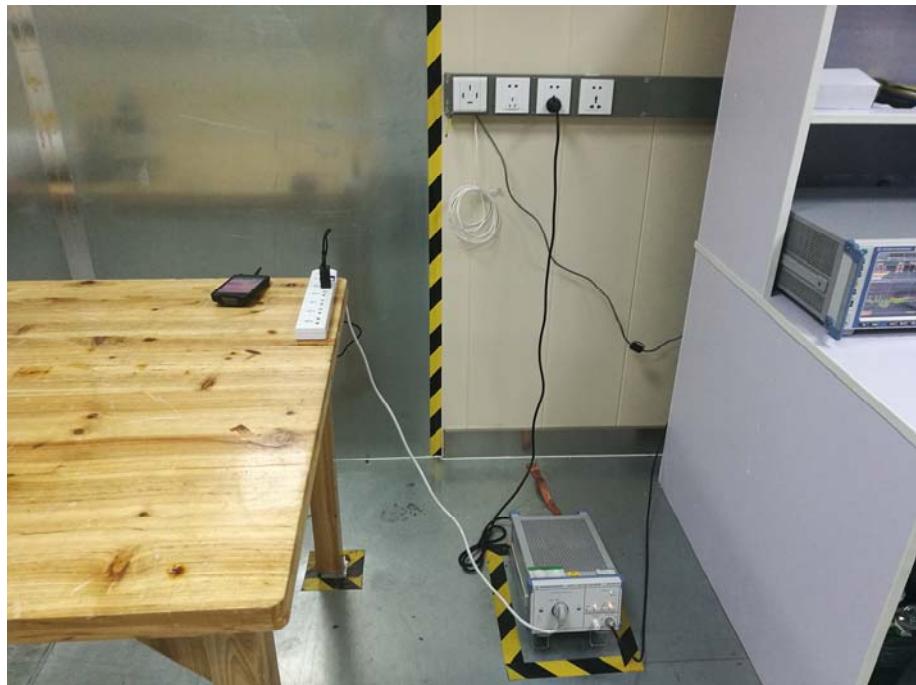



Radiated Measurement Photos

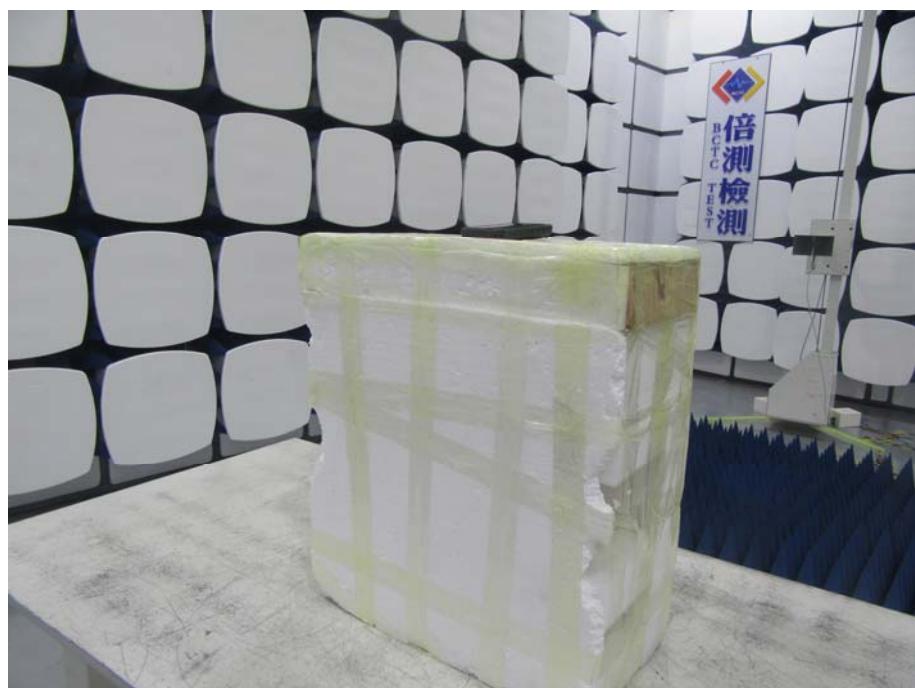



8. PHOTOS OF THE EUT



***** END OF REPORT *****