

P11 802.11n_HT20_Ch6_Top Side_0cm**DUT: Tablet;**

Communication System: UID 0, WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.867$ S/m; $\epsilon_r = 38.266$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2021/4/28
- Probe: EX3DV4 - SN7400; ConvF(7.51, 7.51, 7.51) @ 2437 MHz; Calibrated: 2021/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (6x12x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.05 W/kg


Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.139 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

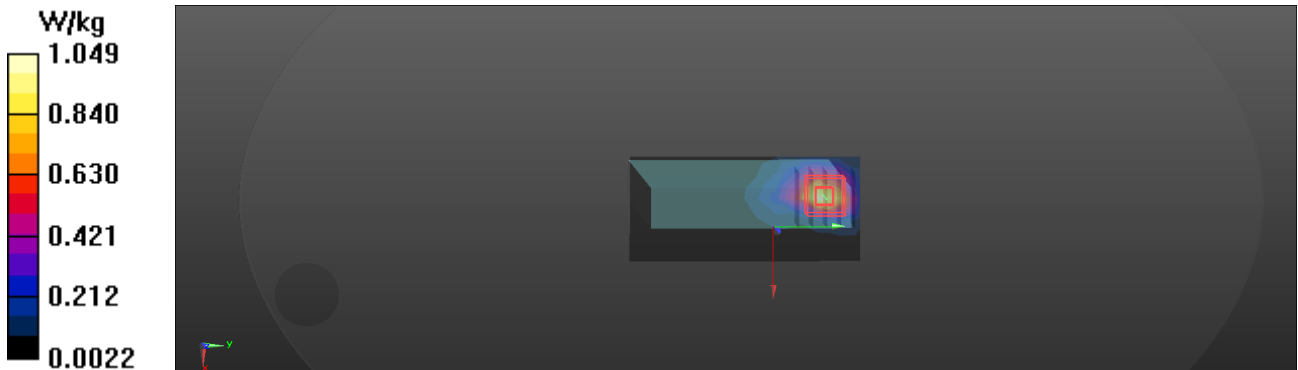

P33 802.11n_HT40_Ch46_Top Side_0cm**DUT: Tablet;**

Communication System: UID 0, WiFi (0); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.787$ S/m; $\epsilon_r = 35.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2021/4/28
- Probe: EX3DV4 - SN7400; ConvF(4.99, 4.99, 4.99) @ 5230 MHz; Calibrated: 2021/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.832 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.309 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

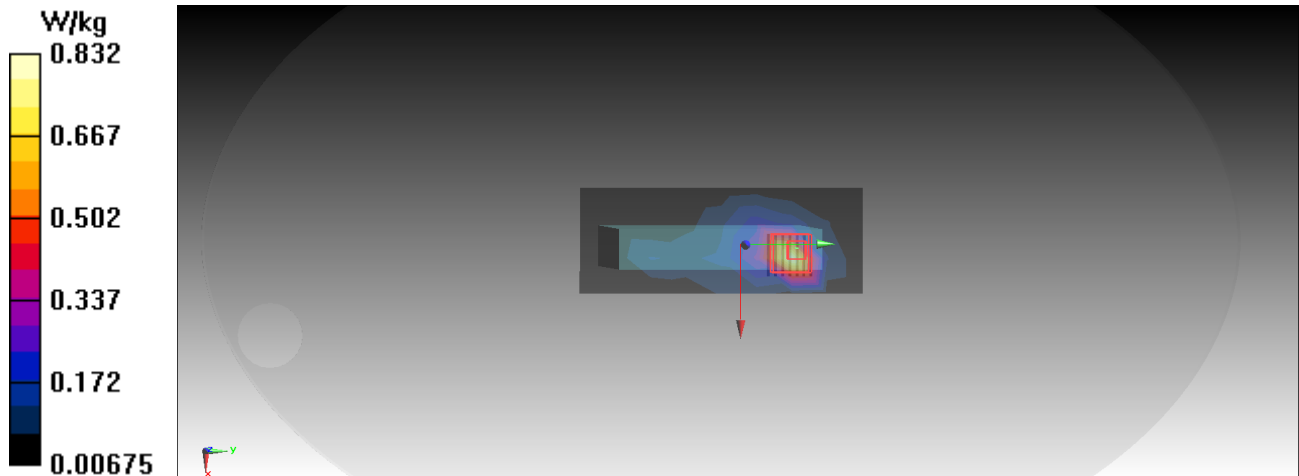

P38 802.11n_HT20_Ch60_Top Side_0cm**DUT: Tablet;**

Communication System: UID 0, WiFi (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.863$ S/m; $\epsilon_r = 35.184$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2021/4/28
- Probe: EX3DV4 - SN7400; ConvF(4.99, 4.99, 4.99) @ 5300 MHz; Calibrated: 2021/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.04 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.882 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

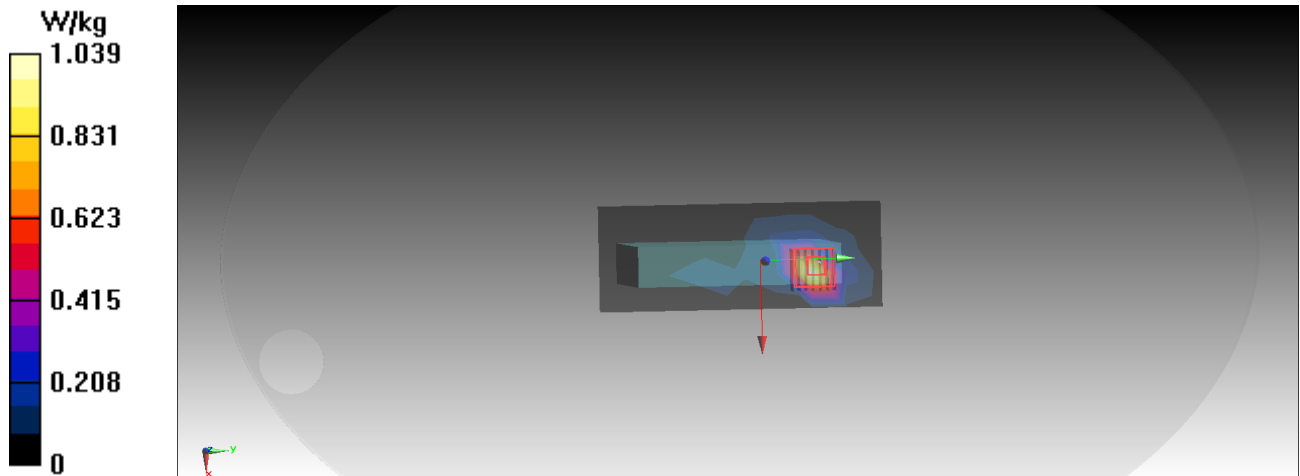

P46 802.11a_Ch140_Top Side_0cm**DUT: Tablet;**

Communication System: UID 0, WiFi (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5700$ MHz; $\sigma = 5.336$ S/m; $\epsilon_r = 34.233$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2021/4/28
- Probe: EX3DV4 - SN7400; ConvF(4.75, 4.75, 4.75) @ 5700 MHz; Calibrated: 2021/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.86 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.207 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

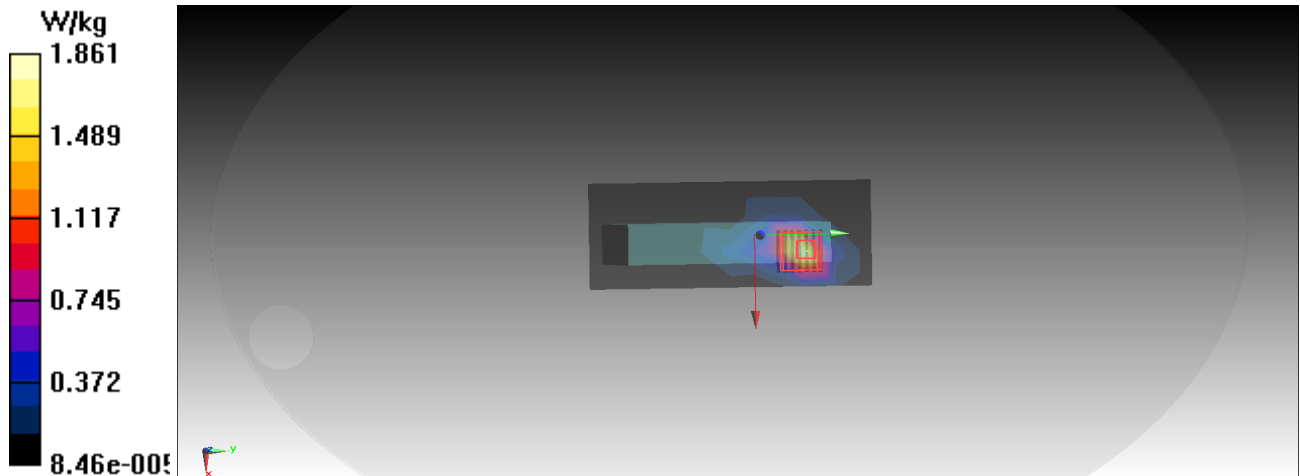

P50 802.11n_HT20_Ch149_Top Side_0cm**DUT: Tablet;**

Communication System: UID 0, WiFi (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.383$ S/m; $\epsilon_r = 34.099$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2021/4/28
- Probe: EX3DV4 - SN7400; ConvF(4.75, 4.75, 4.75) @ 5745 MHz; Calibrated: 2021/4/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (9x18x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.35 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.739 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.16 W/kg

SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

