

TEST REPORT

Reference No..... : WTX22X01003464W-2
FCC ID : 2AMRO-MGSFIO202
Applicant : iOttie.Inc
Address..... : 20W 37th 6th floor 10018 New York
Product Name : Velox Magnetic Wireless Charging Duo Stand
Test Model. : MGSFIO202
Standards : KDB 680106 D01 V03
Date of Receipt sample : Jan. 07, 2022
Date of Test..... : Jan. 07, 2022 to Jan. 26, 2022, Mar. 14, 2022
Date of Issue : Mar. 14, 2022
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:


Mike Shi / Project Engineer


Jason Su / RF Manager


Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
 1.2 TEST EQUIPMENT LIST AND DETAILS6

2. RF EXPOSURE TEST REPORT.....7
 2.1 STANDARD APPLICABLE.....7
 2.2 TEST CONDITIONS7
 2.3 TEST PROCEDURE.....8
 2.4 TEST RESULT.....9
 2.5 MEASUREMENT UNCERTAINTY11
 2.6 TEST PHOTOS12

APPENDIX PHOTOGRAPHS.....13

Report version

Version No.	Date of issue	Description
Rev.00	Mar. 14, 2022	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: iOttie.Inc
 Address of applicant: 20W 37th 6th floor 10018 New York

Manufacturer: Shenzhen Elecjar Technology Co., Ltd
 Address of manufacturer: 5/F East, Building 1, Jinyuda Industrial Park Shajing Street, Baoan District, Shenzhen

General Description of EUT	
Product Name:	Velox Magnetic Wireless Charging Duo Stand
Trade Name:	/
Model No.:	MGSFIO202
Adding Model(s):	/
Battery Capacity	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	112~205KHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Input:	DC5V2.4A/DC9V2A
Wireless output:	5W,7.5W
Power adapter:	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	Xiaomi	MDY-12-ED	/
iPhone 12	apple	MGGT3CH/A	F17DK2EA0DYK
iWatch	apple	MJ3T2ZP/A	/

EUT Cable List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

1.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2021-05-20	2024-05-19
Note: The deviation response is 0.8dB.					

2. RF Exposure Test Report

2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)



Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

2.2 Test Conditions

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless charging	Wireless output(5W)	DC5V2.4A/DC9V2A
TM2	Wireless charging	Wireless output(7.5W)	DC5V2.4A/DC9V2A
TM3	Wireless charging	Two coils are simultaneously output	DC5V2.4A/DC9V2A
Measurement Distance:	15 cm and 20 cm		

2.3 Test Procedure

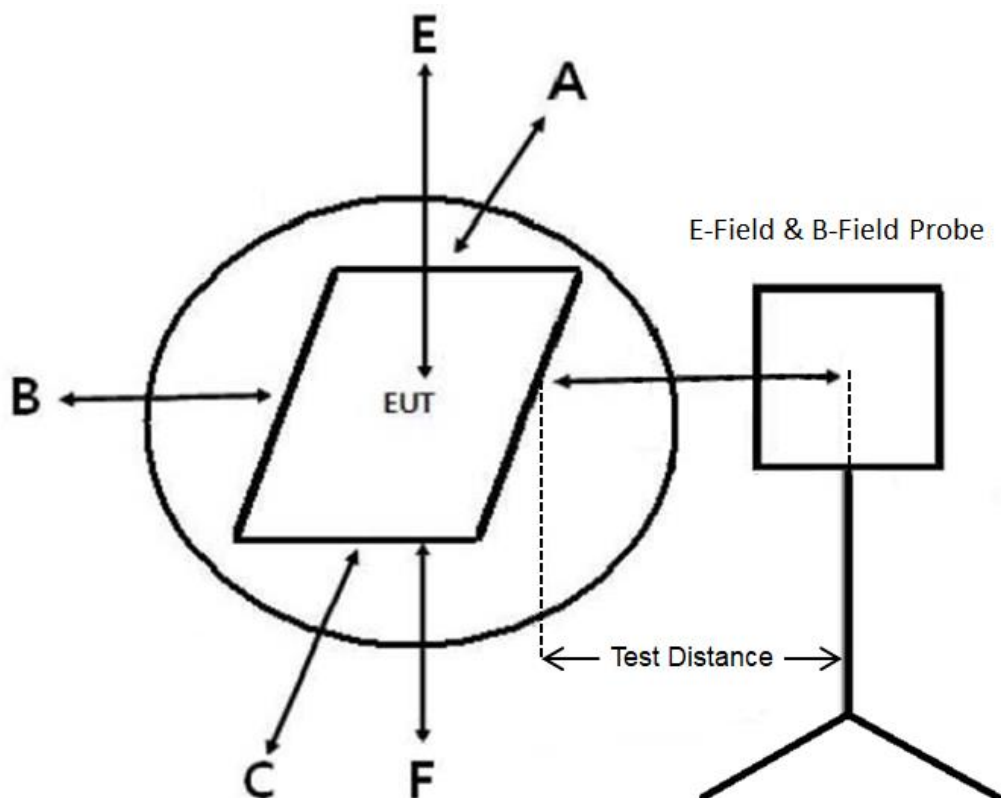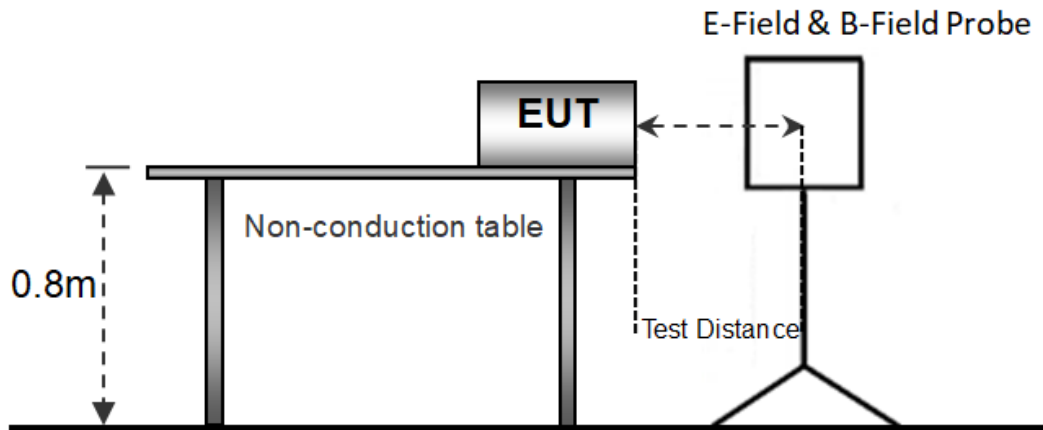

- The measurement probe was placed at test distance (15 cm for A, B, C, D, F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

2.4 Test Result

The EUT complies with item 5.2 of KDB 680106 D01V03

1. Power transfer frequency is less than 1 MHz
Yes, the device operates in the frequency range from 112 kHz to 205 kHz.
2. Output power from each primary coil is less than or equal to 15 watts
Yes, the maximum output power of the primary coil is less than 7.5W.
3. The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
Yes, the client device includes only single primary coils.
4. Client device is inserted in or placed directly in contact with the transmitter
Yes, Client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
Yes, it is mobile exposure conditions only.
6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test result.

Test Mode: Worst case TM2

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	6.80	614	307
Point F	6.23	614	307
Point A	5.14	614	307
Point B	5.51	614	307
Point C	4.87	614	307
Point D	3.47	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.55	1.63	0.815
Point F	0.43	1.63	0.815
Point A	0.54	1.63	0.815
Point B	0.31	1.63	0.815
Point C	0.43	1.63	0.815
Point D	0.12	1.63	0.815

Test Mode: TM3

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	6.31	614	307
Point F	6.13	614	307
Point A	5.90	614	307
Point B	5.46	614	307
Point C	5.64	614	307
Point D	3.00	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.48	1.63	0.815
Point F	0.36	1.63	0.815
Point A	0.36	1.63	0.815
Point B	0.29	1.63	0.815
Point C	0.38	1.63	0.815
Point D	0.12	1.63	0.815

2.5 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Electric Field Emissions	Radiated	± 1.56 (V/m)
Magnetic Field Emissions	Radiated	± 0.08 (A/m)

2.6 Test Photos



APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******