

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100

Detail Specification: 9/17/2015


Page 1 of 6

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

General Specifications


Part Number	2450AT18D0100	Input/Output Power	2W max. (CW)
Frequency (MHz)	2400 - 2500	Impedance	50 Ω
Peak Gain	1.5 dBi typ. (XZ-total)	Reel Quantity	3,000
Average Gain	-1.0 dBi typ. (XZ-total)	Storage Temp	-40 to +85°C
Return Loss	10.0 dB min.	Total Radiation Efficiency ¹	72%
Operating Temperature	-40 to +125°C	¹ Efficiency measured on 2450AT18D0100-EB1SMA 40x20mm EVB on page 2	

No.	Terminal Function			
	1	Feeding Point	3	GND
2	GND	4	GND	



Mechanical Specifications

In	mm	
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.047 ± 0.008	1.20 ± 0.20
a	0.012 ± .004/-0.008	0.30 ± 0.1/-0.2
b	0.020 ± 0.008	0.50 ± 0.20

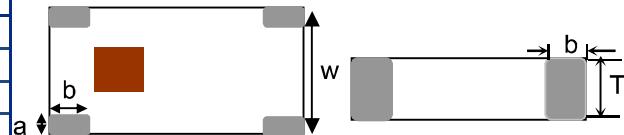


Need help designing the antenna in? Use our antenna design services! www.johansontechnology.com/pcbcantennaservices

²Free layout reviews and if you need us to tune and characterize our antenna on your design (anechoic chamber) we can do that too (lab fee may apply for the latter).

Mounting Considerations 1: Standard Rectangular Layout

Mount these devices with the red square mark facing up. Otherwise, the antenna will not operate as intended.

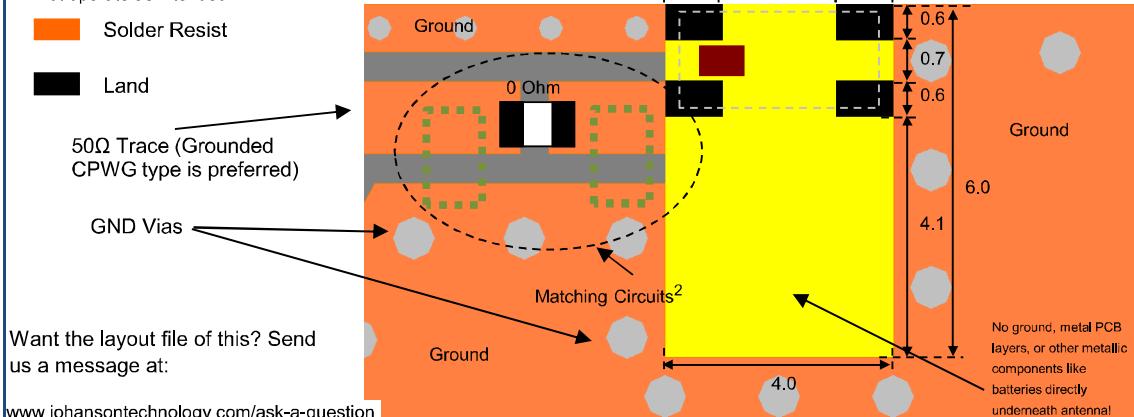

Want the layout file of this? Send us a message at:

www.johansontechnology.com/ask-a-question

²It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network, even if all slots won't be used, this will prepare the PCB for the final mass production values of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different. Go to: <http://johansontechnology.com/tuning> and see how to obtain the new values yourself if you have a network analyzer.

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 2 of 6

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Mounting Considerations 1: Standard Rectangular Layout (continued)

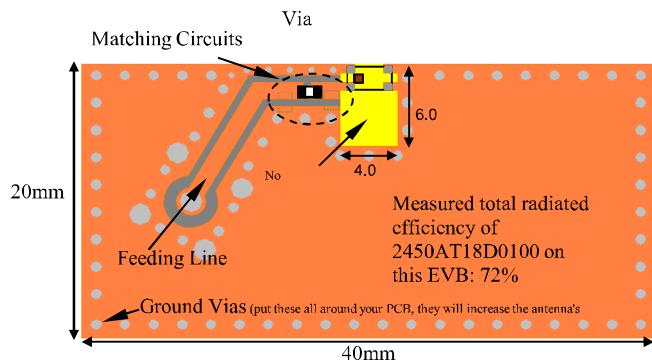

Orderable EVB p/n (comes with 1 female SMA connector mounted on the opposite side):

2450AT18D0100-EB1SMA

We offer 2 free layout reviews as well as antenna tuning and characterization services (lab fee may apply). For more info go to:

www.johansontechnology.com/pcantennaservice


Want the layout file of the above? Send us a message at: www.johansontechnology.com/ask-a-question

To order a pre-tuned 50Ω EVB with a female SMA connector you see above Click here:

www.johansontechnology.com/request-a-sample

Reference p/n: 2450AT18D0100-EB1SMA

Mounting Considerations 2: Small clearance or "thin edge" applications

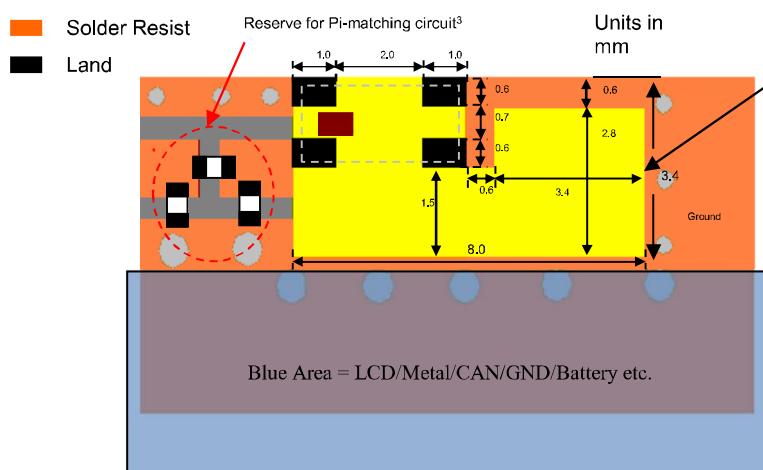

³It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network, even if all slots won't be used, this will prepare the PCB for the unpredictable final mass production version of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different.

Note: There's no orderable EVB available for the above reference "Mounting Considerations 2" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON
TECHNOLOGY

www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 3 of 6


This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Mounting Considerations 3: Thin Edge + Circular PCB applications

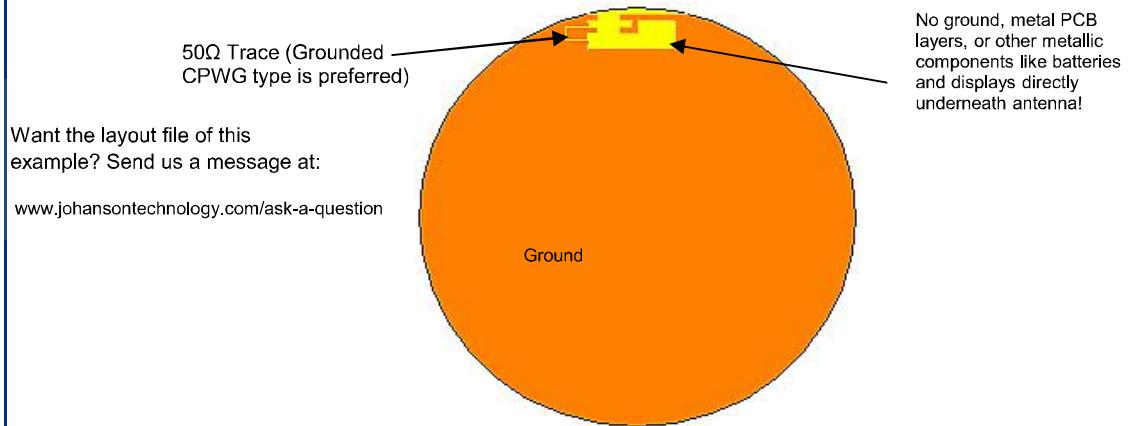

Note: There's no orderable EVB available for the above reference "Mounting Considerations 3" reference design

Mounting Considerations 4: Chip antenna fed from the right

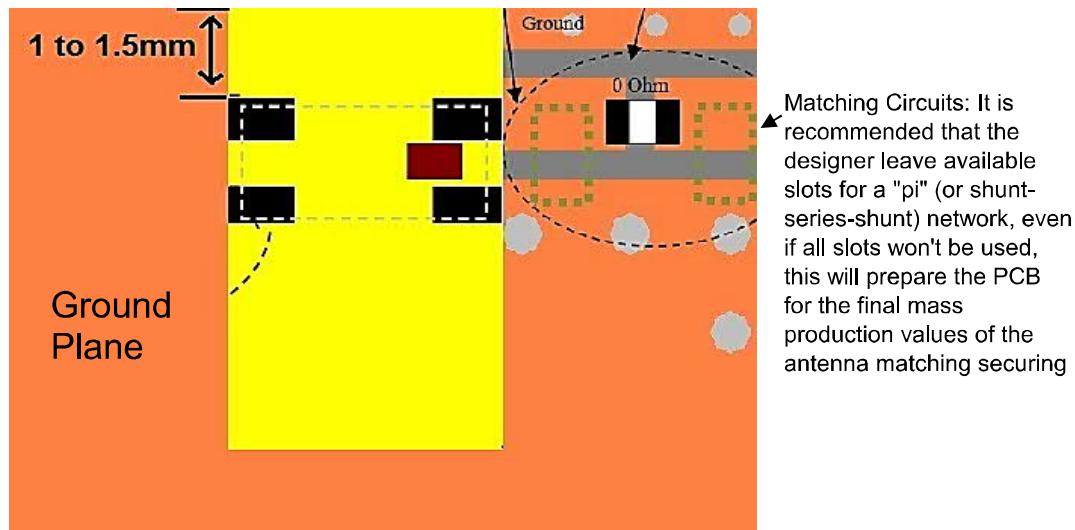

Note: There's no orderable EVB available for the above reference "Mounting Considerations 4" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON
TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design


P/N 2450AT18D0100

Detail Specification: 04/04/12

Page 3 of 5

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Typical Return Loss (S11) Electrical Performance (T=25°C)

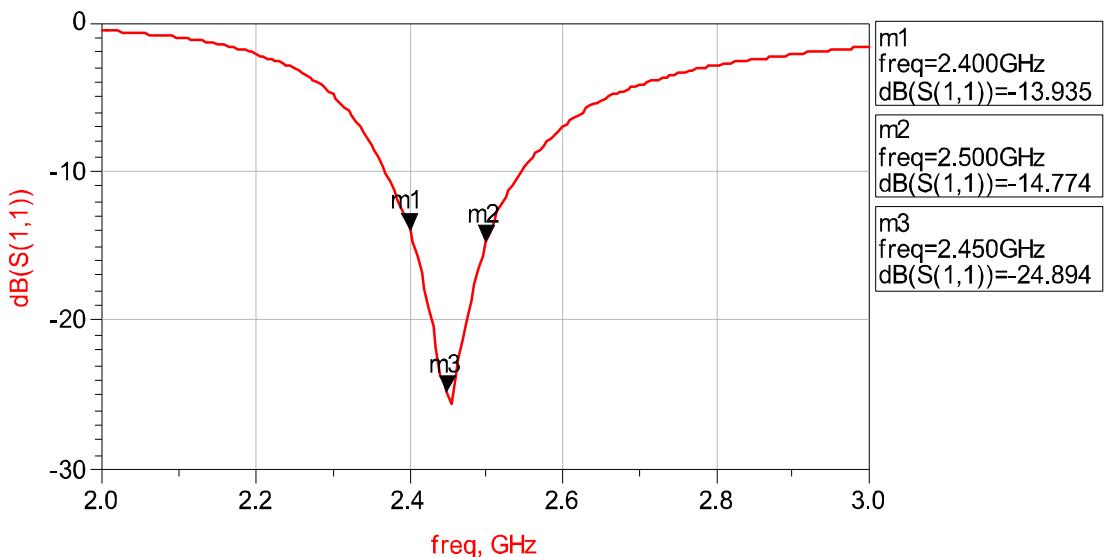

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON
TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100


Detail Specification: 9/17/2015

Page 4 of 5



This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Typical EM Radiation Performance (T=25°C)



Typical Radiation Patterns

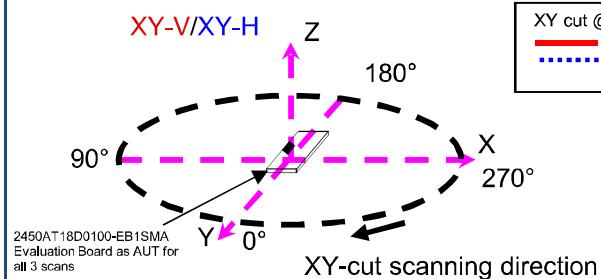


XY cut @ 2.45GHz
Vertical
Horizontal

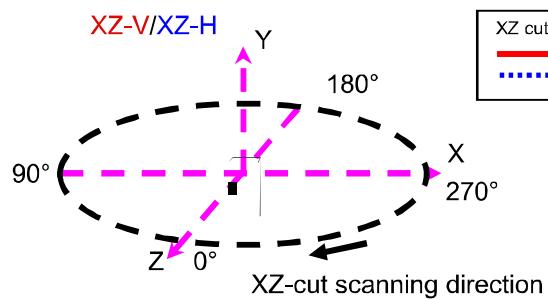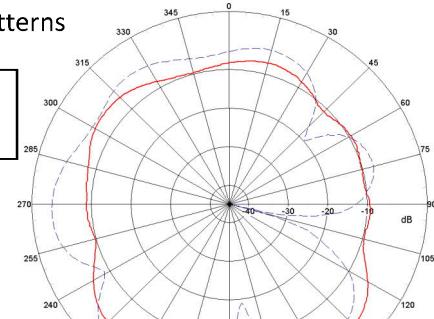

XZ cut @ 2.45GHz
Vertical
Horizontal

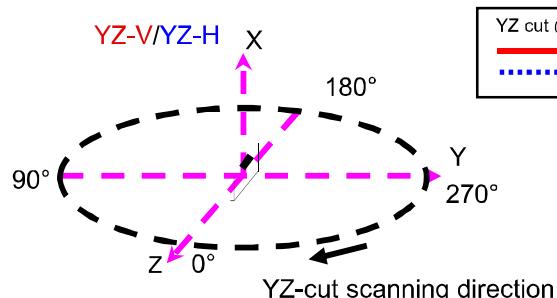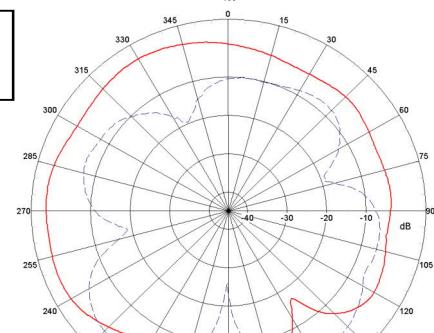

YZ cut @ 2.45GHz
Vertical
Horizontal

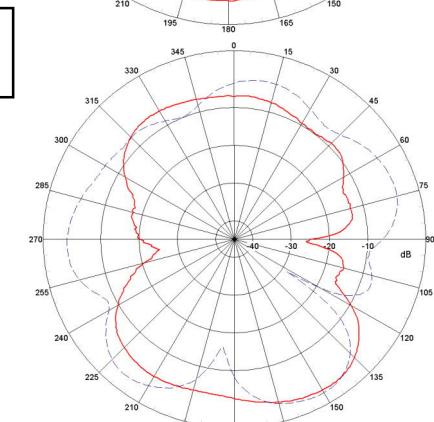

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

JOHANSON
TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45 GHz SMD Antenna, EIA 1210, Detuning resilient, Edge Mount Design

P/N 2450AT18D0100

Detail Specification: 9/17/2015

Page 5 of 5

This antenna is optimal for edge middle mounting; rectangular and circular PCB shape applications, go to pages 2-4 for more info.

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 2450AT18D0100S	
		T & R	Suffix = E	e.g., 2450AT18D0100E	
EVB p/n		2450AT18D0100-EB1SMA			
Recommended Storage Conditions of <u>uninstalled</u> product still on T&R		+5 ~ +35 °C, Humidity 45~75%RH, 18 mos. Max			

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

More SMD Chip Antennas at:

www.johansontechnology.com/antennas

Soldering Information

www.johansontechnology.com/pcsoldering-profile

Antenna layout and tuning techniques (How to obtain the new antenna matching values)

www.johansontechnology.com/tuning

Packaging information

www.johansontechnology.com/ipcpackaging.html

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

P/N Explanation and Breakdown

www.johansontechnology.com/ipc-pn-explained

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.

Technical Author: Manuel Carmona

JOHANSON
TECHNOLOGY

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.0

2015 Johanson Technology, Inc. All Rights Reserved