



Test report

according to ISO/IEC 17025:2017

FCC
(Federal Communications Commission)
Test Firm Registration Number: 768032
Designation Number DE0022

ISED
(Innovation, Science and Economic Development)
CAB identifier: DE0012
ISED#: 6155A

WLAN; DSSS

Electromagnetic compatibility

Intentional Radiators



TESTED
IN GERMANY

STC Germany GmbH
Ohmstrasse 1
84160 Frontenhausen, Germany
Tel.: + 49 (0) 8732 6381
Fax: + 49 (0) 8732 2345
E-mail: grstc@stc.group

Test report no.: **22/09-0001 H**

Page 1 of 94 pages

Table of contents

1. Client information.....	3
2. Equipment under test (EUT).....	3
3. Description of the Equipment under test and test conditions.....	4
4. Performed measurements and results	6
5. Antenna requirement	7
6. AC Mains conducted emissions.....	8
7. Radiated emission measurements.....	10
8. Operation within the band 902-928 MHz, 2400-2483,5 MHz and 5725-5850 MHz	43
9. Test equipment.....	78
10. Test setups.....	80
11. Measurement uncertainty.....	84
12. Photos setup	86
13. Conclusions.....	88
14. Photos of tested sample.....	89

Location of test facility:



STC Germany GmbH
Ohmstrasse 1
84160 Frontenhausen
Germany

1. Client information

Name: Carl Zeiss AG
Address: Carl-Zeiss-Straße 22
D-73447 Oberkochen
Germany
Name of contact: Mr. Andreas Wolf
Telephone: +49 (0) 7364 20 87060
Fax:
E-mail: andreas2.wolf@zeiss.com

2. Equipment under test (EUT)

2.1 Identification of the EUT

Equipment: Wärmebildkamera / Thermal Imaging Monocular
Model: DTI 6
Types: DTI 6/20, DTI 6/40
Brand name: Zeiss
Serial no.: Sample 1: 5272768 Sample 2: 5272777
Sample 3: NVDEM085
Manufacturer: Carl Zeiss AG

Country of origin: Germany
Power rating: 7.2 V DC
Highest frequency generated or used 2.48 GHz
in the device or on which the device
operates or tunes (MHz):
Date Sample Received: 05.09.2022
Tests were performed: 05.09.2022 – 03.11.2022

2.2 Additional information about the EUT:

The EUT is a host devices were a modular approved module is integrated.
The EUT can also operate at 2.4 GHz in BLE mode simultaneously to the 2.4 GHz Wifi-function.
The 2.4 GHz BLE mode is not documented in this Report.

To duplicate parts of this test report needs the written confirmation of the test laboratory.

The test results relate only to the above mentioned test sample(s).

3. Description of the Equipment under test and test conditions

Power:	Adaptor: RWD018G In: 100..240 V 50/60 Hz 0,6 A max Out: 5 V 3 A (15 W), 9 V 2 A (18 W), 12 V 1,5 A (18 W) Li-ion Battery: 2INR 19/66 Voltage: 7.2 V, Capacity: 3.2 Ah, Energy: 23.04 Wh Battery Charger Model: DD-PS2 In 5 V 3 A, 9V 3 A, 12 V 2.5 A, 15 V 2 A Out: 8.4 V 3 A	
Cables:	USB (PC/Charger) 94.5 cm	
Approx. Size (l x w x h):	(227 x 70 x 73) mm	
Test conditions:	<p>The "Wärmebildkamera / Thermal Imaging Monocular" Model: DTI 6 (= equipment under test – EUT) had been tested with different type of connection as well as controlled by test software.</p> <p>1) WLAN < EUT 2) BLE</p> <p>Types DTI 6/20 and DTI 6/40 are electrically identical and just differ by objective lens diameter.</p> <p>The tested configuration represents (based on the product specification) with the tested operation modes the worst case.</p>	
RF Module Model Number:	Laird Sterling LWB-Module, Part-Number: 450-0152	
RF Module FCC ID:	2AMSP-DTI6	
RF Module IC:	22938-DTI6	
Type of modulation (ITU designation):	/-	
Operating temperature range:	/-	
Operating voltage range:	/-	
Frequency range:	2400 MHz ... 2483.5MHz	
Transmission protocol	WLAN	BLE
Specification	802.11/b/g/n	BLE 4.2
Number of channels:	11	3
Channel separation:	5 MHz	2 MHz
Output power (effective radiated power):	radiated: 8.21 dBm conducted: -/-	radiated: 5.02 dBm conducted: -/-
Environmental conditions during tests:	Ambient temperature: 22 °C Relative humidity 60 % Atmospheric pressure 966 mbar	
Antenna specification:	Model: Ceramic chip antenna 2450AT18D0100 Gain: 1.5 dBi Type: <input type="checkbox"/> External (with accessible antenna socket) <input checked="" type="checkbox"/> Internal (integrated)	
Test standard:	e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C § 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. RSS-247 issue 02 February 2017 Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices	

Channel List**2.4 GHz Band**

Frequency Allocation for WLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

20 MHz bandwidth systems, use Channel 1 – Channel 11 / TX Power setting: +8dBm

Additional information for the test conditions:**Region: US**

The radio module was tested on channels 1, 6, 7 and 11.

The worst case is 802.11b.

TX-mode; 802.11b, BW 20 MHz, 11 MBps, Modulation DSSS, duty cycle of >98 %.

The settings are the Linux command: `iw wlan0 set txpower limit 800`

4. Performed measurements and results

The complete list of measurements required in e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 is given below.

Standard:	Standard:	Test Method:	Test requirements:				
			applicable:		fulfilled:		
			yes	no	yes	no	
§ 15.203	RSS-Gen issue 5	ANSI 63.10 Section 14	Antenna requirement	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§ 15.207	RSS-Gen issue 5	ANSI 63.10 Section 6.2	AC Mains Conducted Emissions	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§ 15.209	RSS-Gen issue 5	ANSI 63.10 Section 6.3 - 6.6	Radiated Emissions Out-of-Band Emission	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
§ 15.247	RSS-247 issue 2	ANSI 63.10 Section 11.8.1	6 dB DTS Bandwidth	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§ 15.247	RSS-247 issue 2	ANSI 63.10 Section 11.9.2	Output Power of Fundamental Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
§ 15.247	RSS-247 issue 2	ANSI 63.10 Section 11.10.3	Maximum Power Spectral Density	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§ 15.247	RSS-247 issue 2	ANSI 63.10 Section 11.13.2	Band Edges Measurement	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
-/-	RSS-Gen issue 5	ANSI 63.10 Section 6.9.3	99% Power Bandwidth	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

All required / applicable tests according to the following standards were performed under Ref-No. 22/09-0001.

- e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 with test Method according to ANSI C63.10-2013

-RSS-247 issue 02 February 2017 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

- e-CFR data is current as of November 25, 2022

Remark: -/-

5. Antenna requirement

Applied standards

- e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C, § 15.203 Antenna requirement
- RSS-Gen issue 05 section 6.8

Test conditions and configuration of EUT

The EUT was configured and operated with conditions as mentioned under "Test conditions" in clause 3 above.

Module has on board a Ceramic Chip Antenna with the given gain values below.

Antenna	Part Number	Gain (2.4 GHz) (dBi)
Ceramic Chip Antenna	2450AT18D0100	1.5

Requirements:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Usage with PCB antennas There is no external antenna, the antenna gain max =1.5dBi
User is unable to remove or change the Antenna

6. AC Mains conducted emissions

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C, § 15.207 Conducted limits
-RSS-Gen issue 05 section 7.2

Test site

Measurements of conducted emission from EUT was made in the shielded chamber (DC - 10GHz) located in the test facility.

Test equipment and test set up

Test equipment used for conducted measurements on Mains as given in clause Test equipment of this report.

Test setup used for conducted measurements on Mains as given in clause Test setups of this report.

Detector function selection and bandwidth

In conducted emissions measurement CISPR quasi-peak- and average-detector were used.
The bandwidth of the detector of instrument is 10 kHz over the frequency range of 150 kHz to 30 MHz.

Frequency range to be scanned

For conducted emission measurements, the spectrum in the range of 150 kHz to 30 MHz was investigated.

Test conditions and configuration of EUT

The EUT was configured and operated with conditions as mentioned under "Test conditions" in clause 3 above.

All modes are investigated by operating the EUT in a range of typical modes of operation, with typical cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation are performed within the range of likely configurations. The highest values measured are shown in the table below. The corresponding configuration is shown in the "Photo(s) of test setup".

The EUT was placed on a 80 cm high non metallic table. Measurements were performed on the AC terminals of the Host AC-Adaptor, on neutral (N)- and live (L1)-wire had been performed.

Requirements

Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average Limits [dB μ V]
0.15 - 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note 1: The level decreases linearly with the logarithm of the frequency

Measurement

Not applicable as device is battery-operated only.

Remarks:

Composition of the measurement value:

$$M_{\text{Value}} = M_{\text{Rec}} + C_{\text{Loss}} + LISN_{\text{cor}}$$

M_{Value} = Measurement Value

M_{Rec} = Reading value of test receiver

C_{Loss} = Cable loss between Receiver and LISN

$LISN_{\text{cor}}$ = LISN correction factor.

Sample calculation:

$$40.8 \text{ dB}\mu\text{V} = 40.1 \text{ dB}\mu\text{V} + 0.3 \text{ dB} + 0.4 \text{ dB}$$

Results

Not applicable as device is battery-operated only.

7. Radiated emission measurements

Test site

Measurement of radiated emissions from EUT was made in the semi-anechoic chamber SAC3 (DC to 26 GHz) located in the test facility.

Test equipment and test set up

Test equipment used for radiated measurements as given in clause Test equipment of this report.
Test setup used for radiated measurements as given in clause Test setups of this report.

Detector function selection and bandwidth

In radiated emissions measurement, an EMI test receiver that have CISPR detectors was used.

Frequency range	Resolution Bandwidth
9KHz – 150kHz (Quasi Peak & Average* Detector)	200Hz
150KHz – 30MHz (Quasi Peak & Average* Detector)	9kHz
30MHz – 1GHz (Quasi Peak Detector)	120kHz
Above 1GHz (Peak & Average Detector)	1MHz

*Average Detector only in specify frequency range.

Antennas

Measurements were made using a calibrated loop antenna in the range 9 kHz – 30 MHz, as well as a calibrated bilog antenna in the range of 30 to 1000 MHz to determine the emission characteristics of the EUT. Measurements were also made for both horizontal and vertical polarization.

The horizontal distance between the receiving antenna and the EUT was 3 meters.

In the range of 1 GHz to 26 GHz measurements were made using a calibrated horn antenna to determine the emission characteristics of the EUT. Measurements were also made for both horizontal and vertical polarization. The horizontal distance between the receiving antenna and the EUT was 3 meters.

Frequency range to be scanned

For radiated emissions measurements, the spectrum in the range of 9kHz MHz to 26GHz was investigated as the highest frequency generated in the EUT is 2.462 GHz.

Test conditions and configuration of EUT

The EUT was configured and operated with conditions as mentioned under "Test conditions" in clause 3 above.

During test the EUT was operated as specified in the user manual of the EUT. For frequencies below 1000 MHz the EUT was placed on a 80 cm and for frequencies above 1000 MHz the RF Transmitter modul was placed on a 150 cm high non metallic table placed on the turntable. The EUT was rotated and the antenna height was varied between 1 m to 4 m to find the maximum RF energy generated from EUT. The procedure according to ANSI C63.10:2013 is used and all modes are investigated by operating the EUT in a range of typical modes of operation, with typical cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation, cable manipulation are performed within the range of likely configurations. The highest values measured are shown in the table below.

Remarks:

- Correction factor included antenna factor and cable attenuation.
- In the frequency range 1 GHz – 7 GHz the Band Reject Filter 2,4 GHz (ID11243) was used to attenuate the fundamental emission.

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C, § 15.209 Radiated emission limits
-RSS-Gen issue 05 section 8.9

Requirements

acc. e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C, § 15.209 Radiated emission limits

Frequency MHz	Limits [μ V/m] Quasi-peak	Limits [dB μ V/m] Quasi-peak	Limits [μ V/m] Average	Limits [dB μ V/m] Average	Test distance [m]
0.009 – 0.090	-/-	-/-	2400/F (kHz)	48.5 – 28.5	300
0.090 - 0.110	2400/F (kHz)	28.5 – 26.8	-/-	-/-	300
0.110 – 0.490	-/-	-/-	2400/F (kHz)	26.8 – 13.8	300
0.490 - 1.705	24000/F (kHz)	33.8 – 23.0	-/-	-/-	30
1.705 - 30.0	30	29.5	-/-	-/-	30

acc. RSS-Gen issue 05 section 8.9

Frequency MHz	Limits [μ A/m] Quasi-peak	Limits [dB μ A/m] Quasi-peak	Limits [μ A/m] Average	Limits [dB μ A/m] Average	Test distance [m]
0.009 – 0.090	-/-	-/-	6.37/F (kHz)	-3 – -23.0	300
0.090 - 0.110	6.37/F (kHz)	-23.0 – -24.7	-/-	-/-	300
0.110 – 0.490	-/-	-/-	6.37/F (kHz)	-24.7 – -37.7	300
0.490 - 1.705	63.7/F (kHz)	-17.7 – -28.5	-/-	-/-	30
1.705 - 30.0	0.08	-22	-/-	-/-	30

acc. e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C, § 15.209 Radiated emission limits and RSS-Gen issue 05 section 8.9

Frequency MHz	Limits [μ V/m] Quasi-peak	Limits [dB μ V/m] Quasi-peak	Limits [μ V/m] Average	Limits [dB μ V/m] Average	Test distance [m]
30 - 88	100	40	-/-	-/-	3
88 - 216	150	43.5	-/-	-/-	3
216 - 960	200	46	-/-	-/-	3
960 - 1000	500	54	-/-	-/-	3
Above 1000	-/-	-/-	500	54	3

Results

From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the **Out of Band Emission**.

Measurement

The Measurement was performed on: 07.09.2022

Out of Band Emission

TESTED
IN GERMANYIT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C; § 15.247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Product: Camera

Sample: 01

Date: 07.09.2022

Operator: BI


pass fail

Remarks:

Result:

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position X (9kHz - 150kHz)

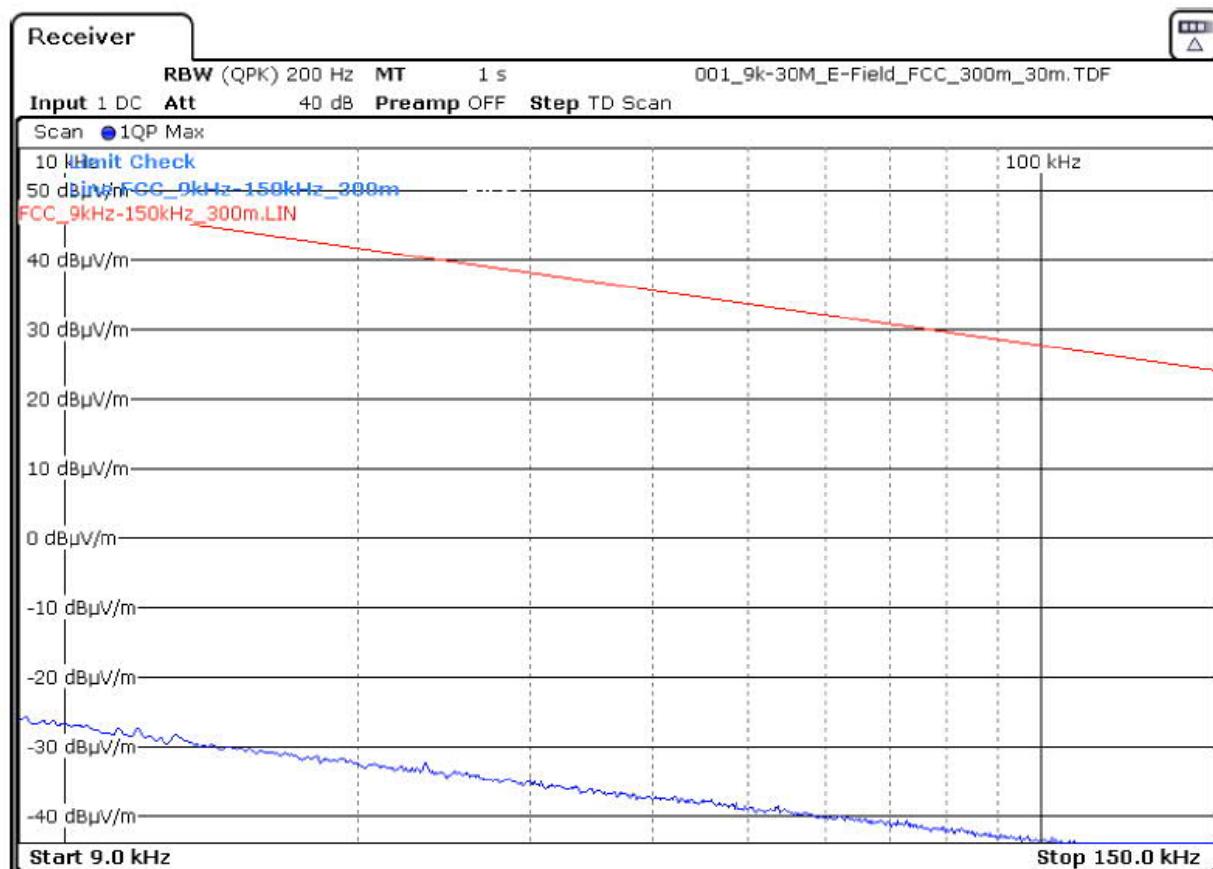

Position: X					
Detector QP					
Freq. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	
9kHz-150kHz	-/-	>20	-/-	pass	

TESTED
IN GERMANY


IT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C: § 15.247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position X (150kHz – 30MHz)

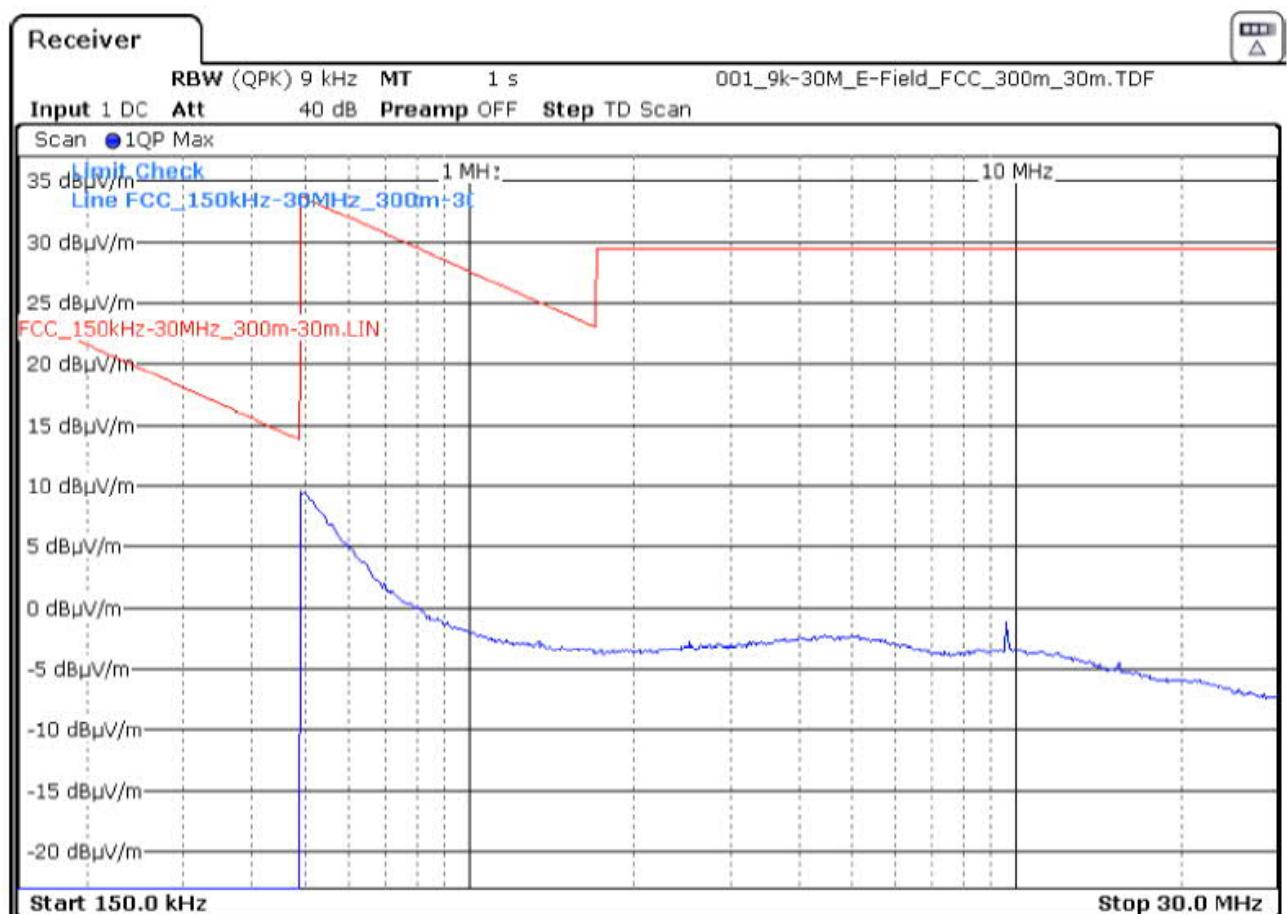


TESTED
IN GERMANYIT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C; § 15.247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Y (9kHz - 150kHz)

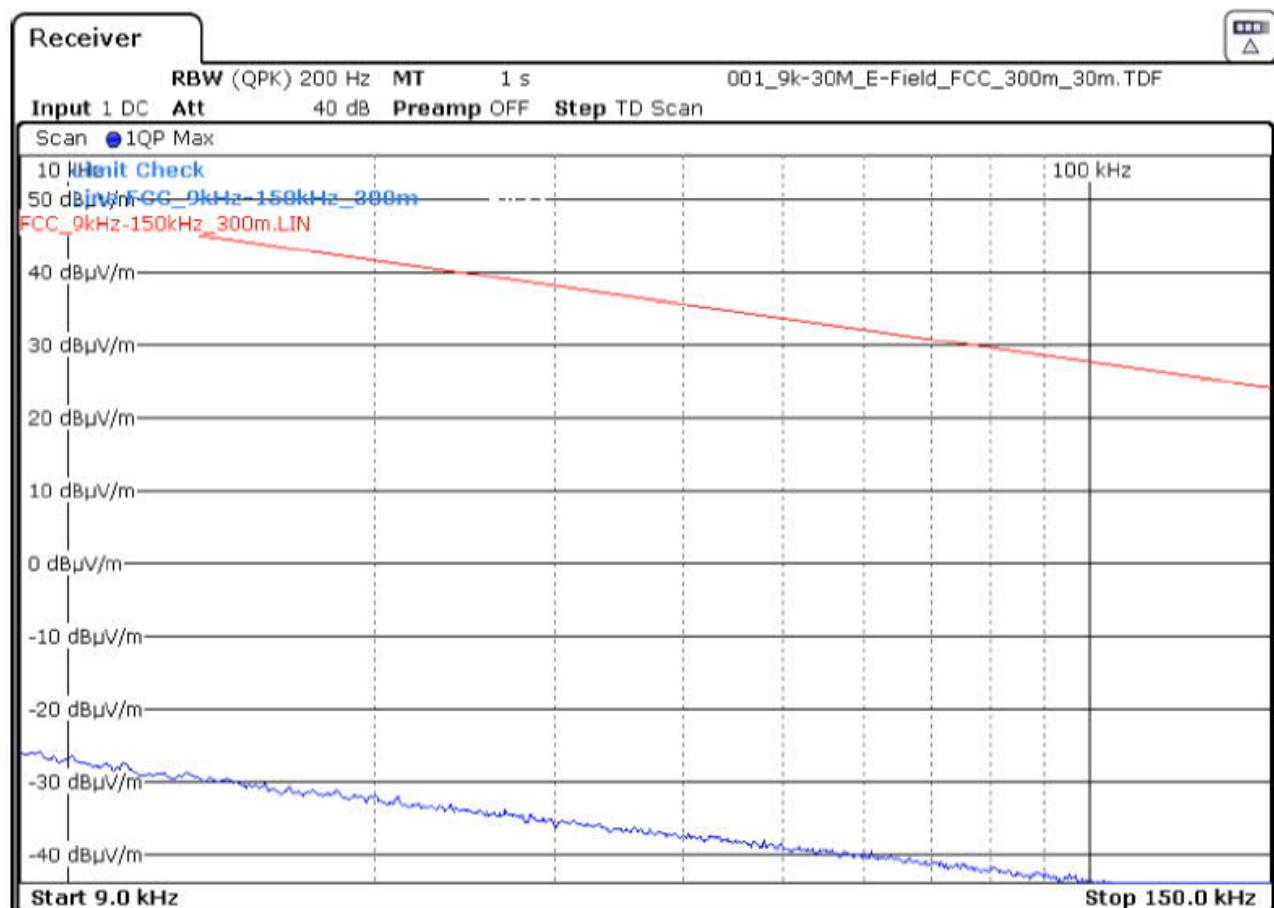


Position: Y					
Detector QP					
Frequ. [MHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result	
9kHz- 150kHz	-/-	>20	-/-	pass	

TESTED
IN GERMANYIT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C; § 15.247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Y (150kHz – 30MHz)

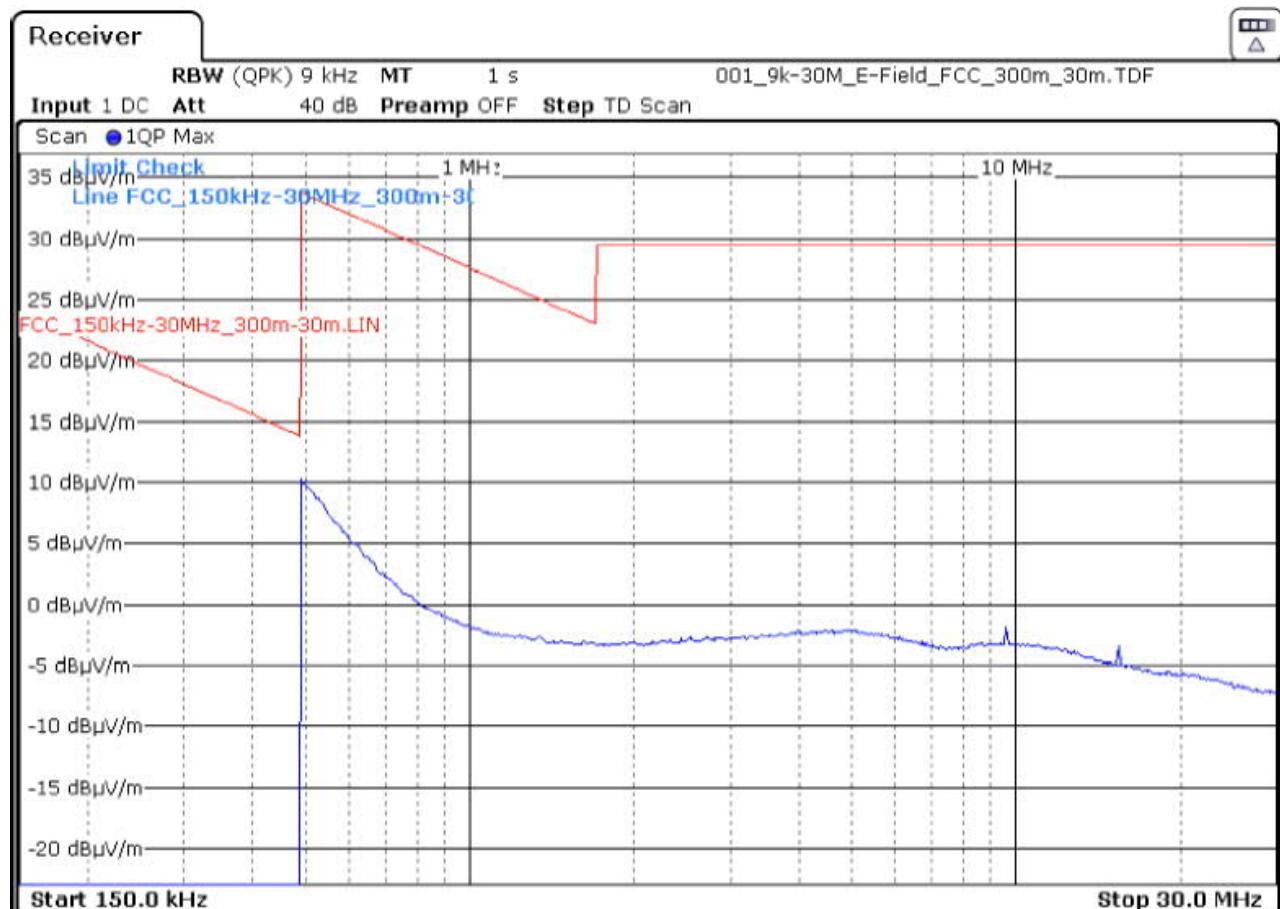


Position: Y					
Detector QP					
Frequ. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	
150kHz- 30MHz	-/-	>20	-/-	pass	

TESTED
IN GERMANYIT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C; § 15.247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Z (9kHz - 150kHz)

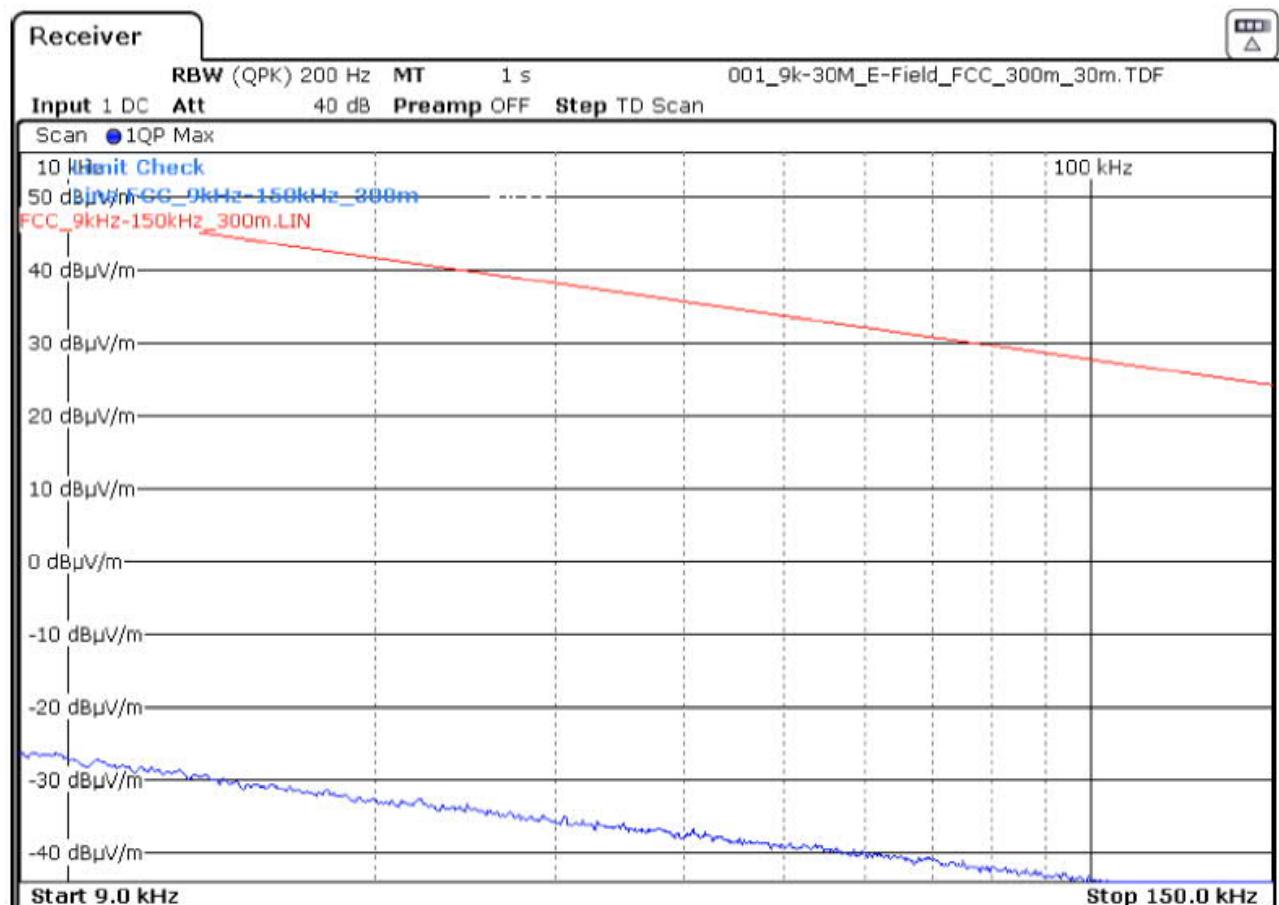

Position: Z					
Detector QP					
Freq. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	
9kHz-150kHz	-/-	>20	-/-	pass	

TESTED
IN GERMANY


IT 3/4
Interference radiation (9kHz – 30MHz)
acc. FCC Subpart C: § 15.247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Z (150kHz – 30MHz)

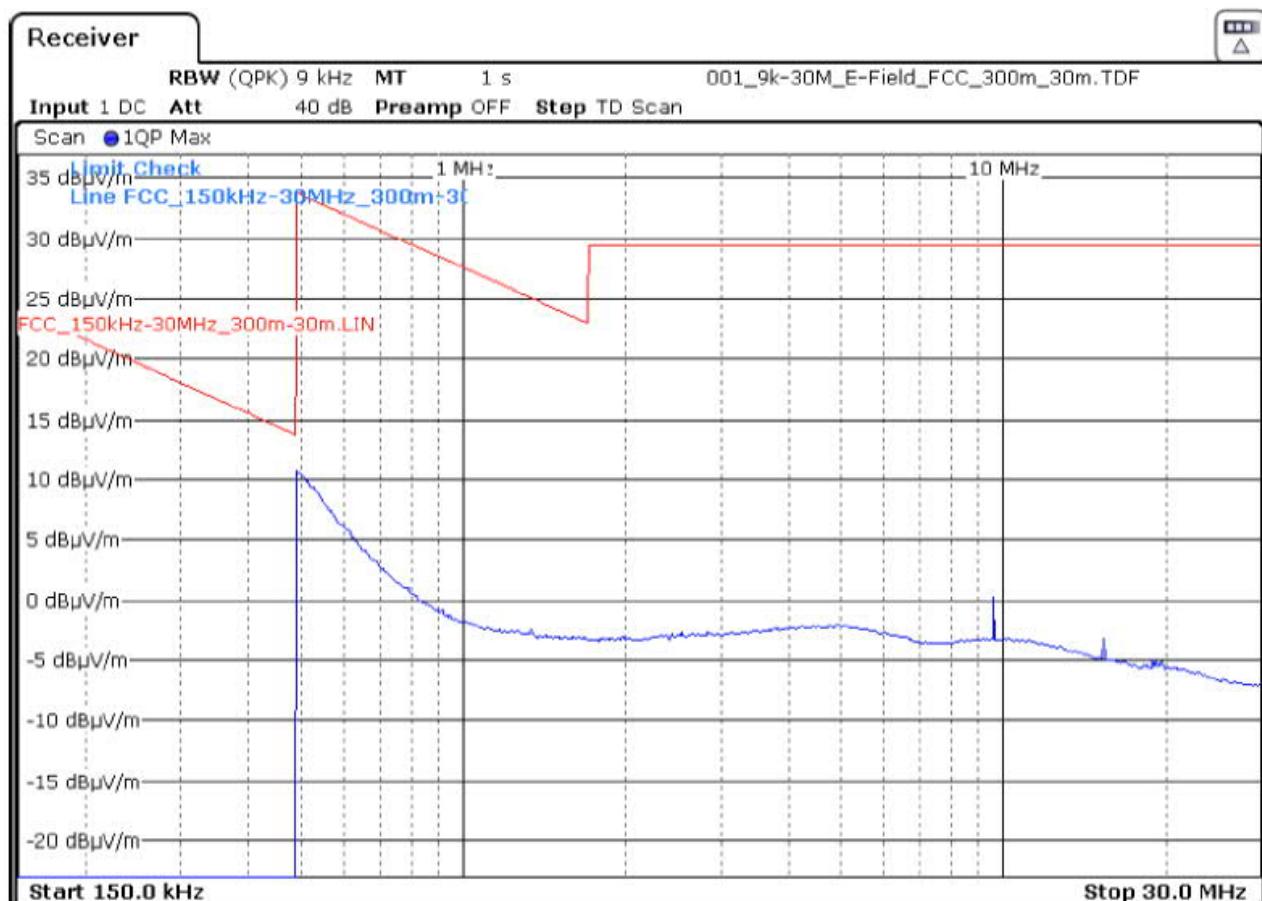

TESTED
IN GERMANY

IT 3/4

Interference radiation (9kHz – 30MHz)
acc. RSS-247

ESTC

Ref.-No : 22/09-0001

Product: Camera

Sample: 01

Date: 07 09 2022

Operator: BI

Remarks:

pass fail


fail

Result:

1

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position X (9kHz - 150kHz)

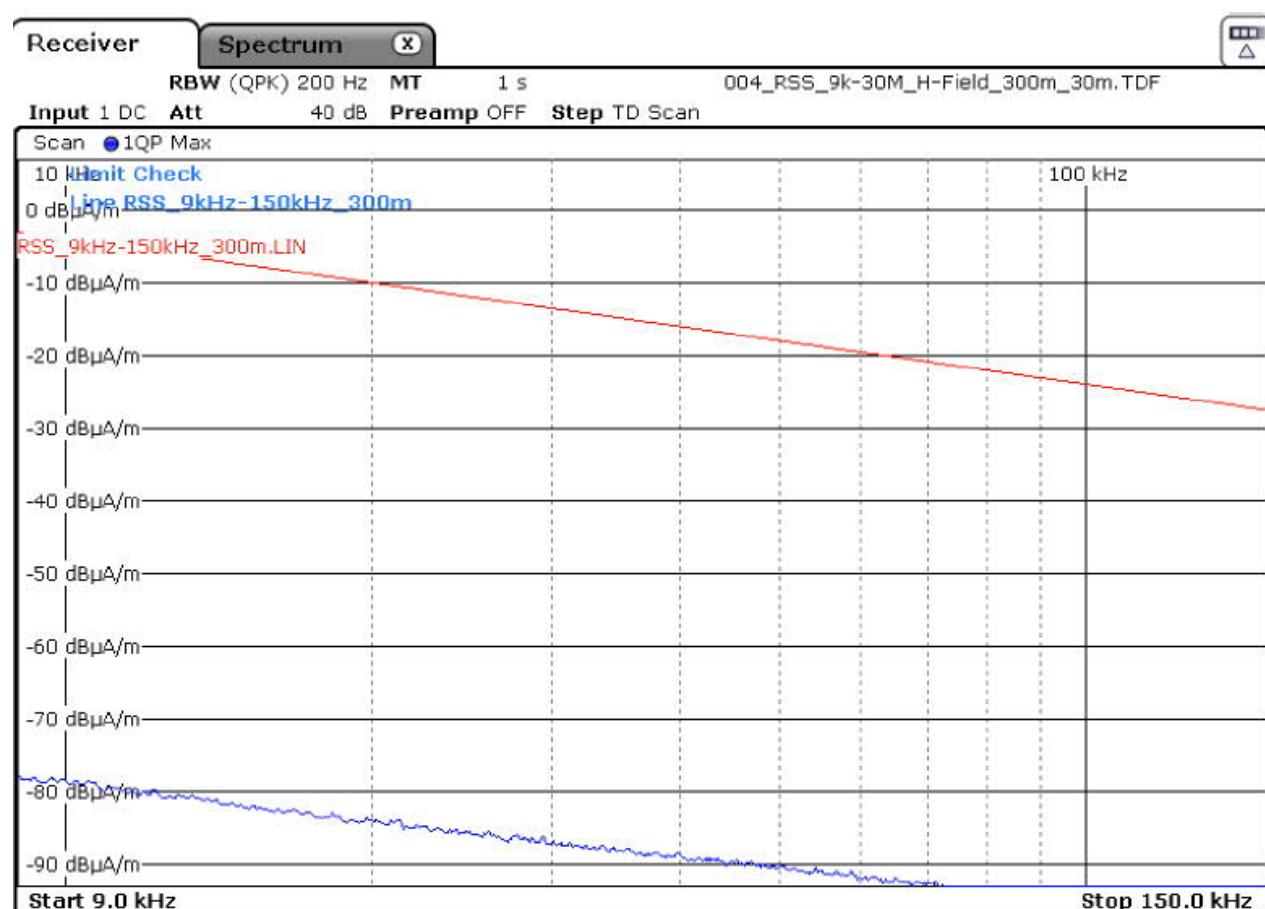


TESTED
IN GERMANYIT 3/4
Interference radiation (9kHz – 30MHz)
acc. RSS-247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position X (150kHz – 30MHz)

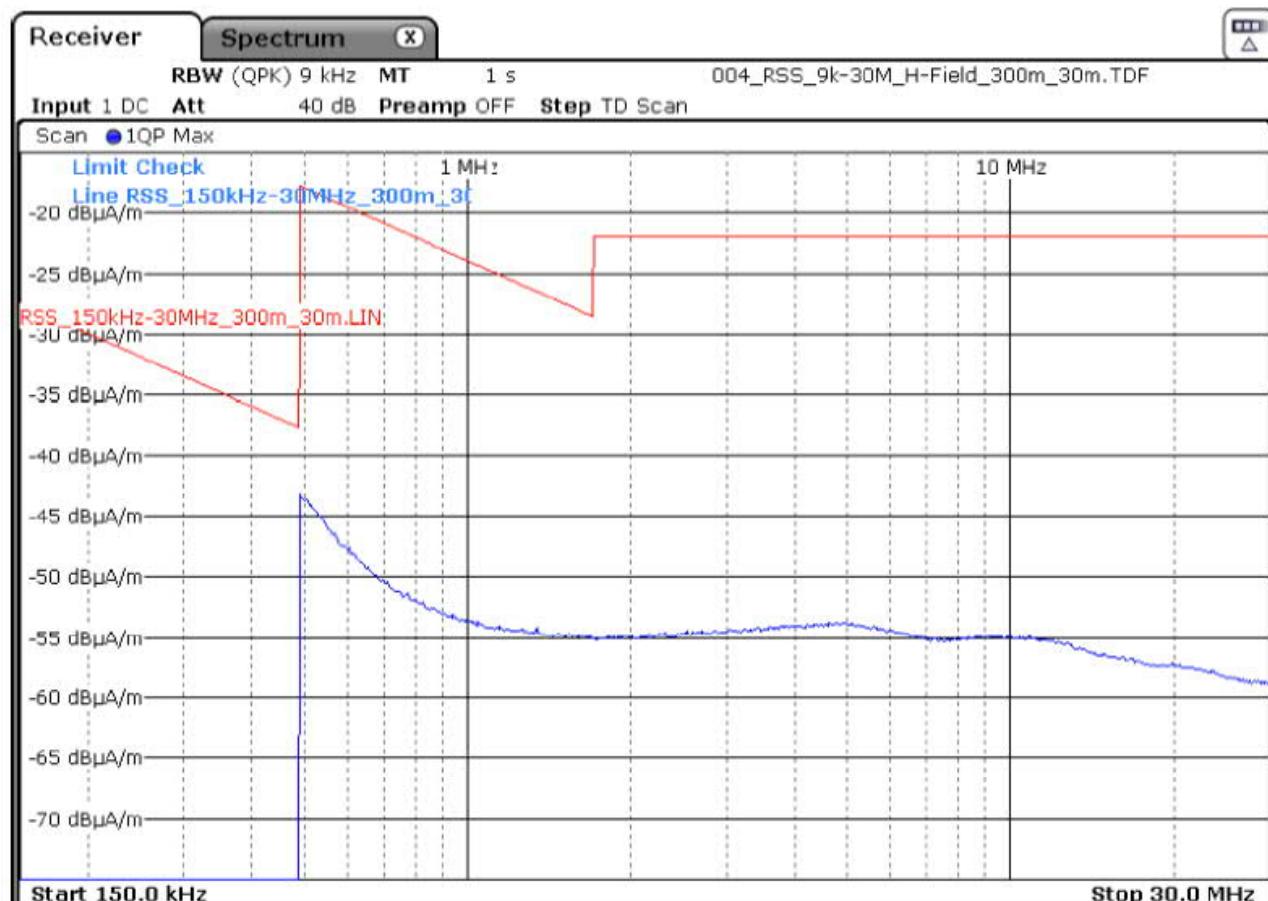

Position: X					
Detector QP					
Frequ. [MHz]	Level [dB μ A/m]	Margin to Limit [dB]	Limit [dB μ A/m]	Result	
150kHz- 30MHz	-/-	>20	-/-	pass	

TESTED
IN GERMANY


IT 3/4
Interference radiation (9kHz – 30MHz)
acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Y (150kHz – 30MHz)

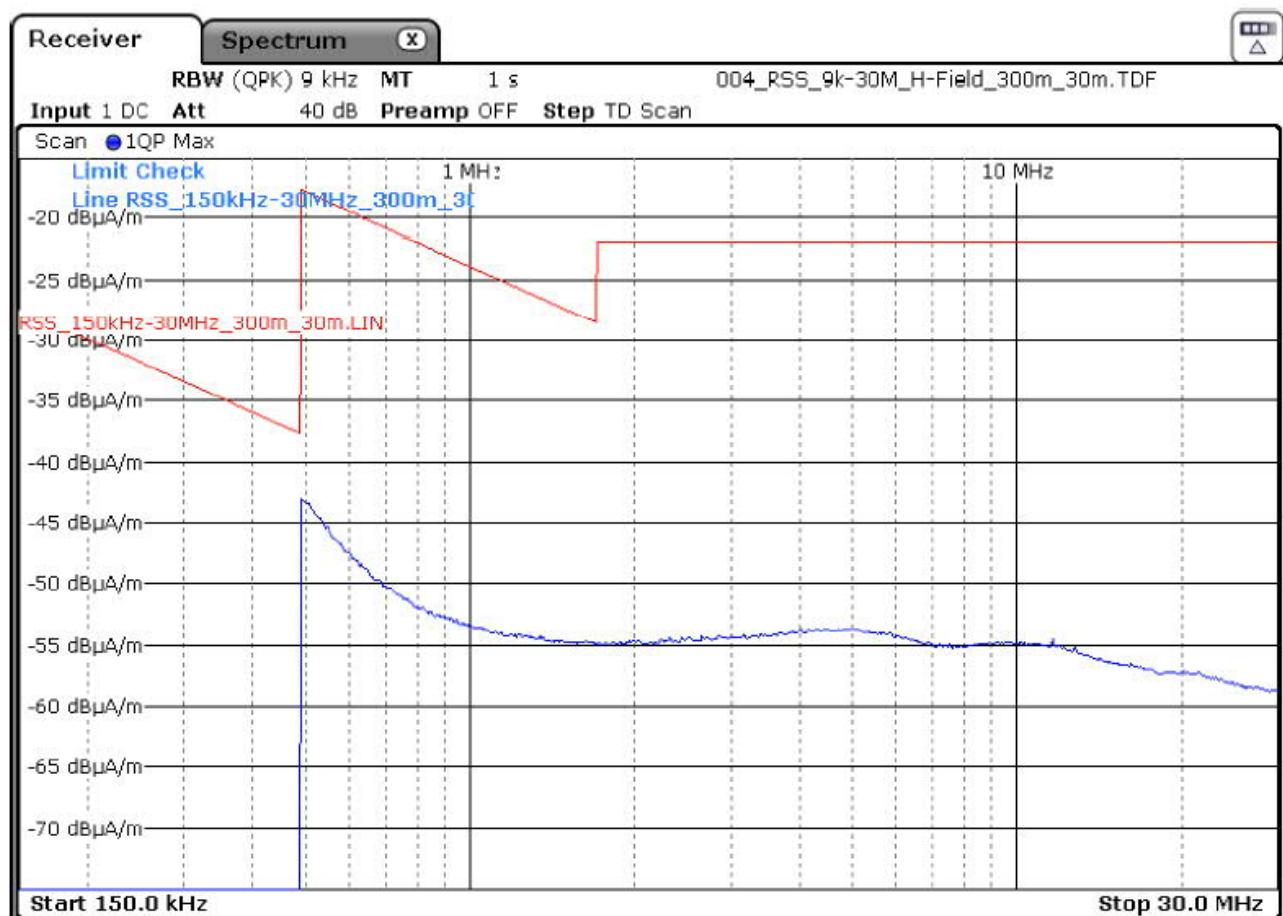

TESTED
IN GERMANY


IT 3/4
Interference radiation (9kHz – 30MHz)
acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

Position Z (150kHz – 30MHz)

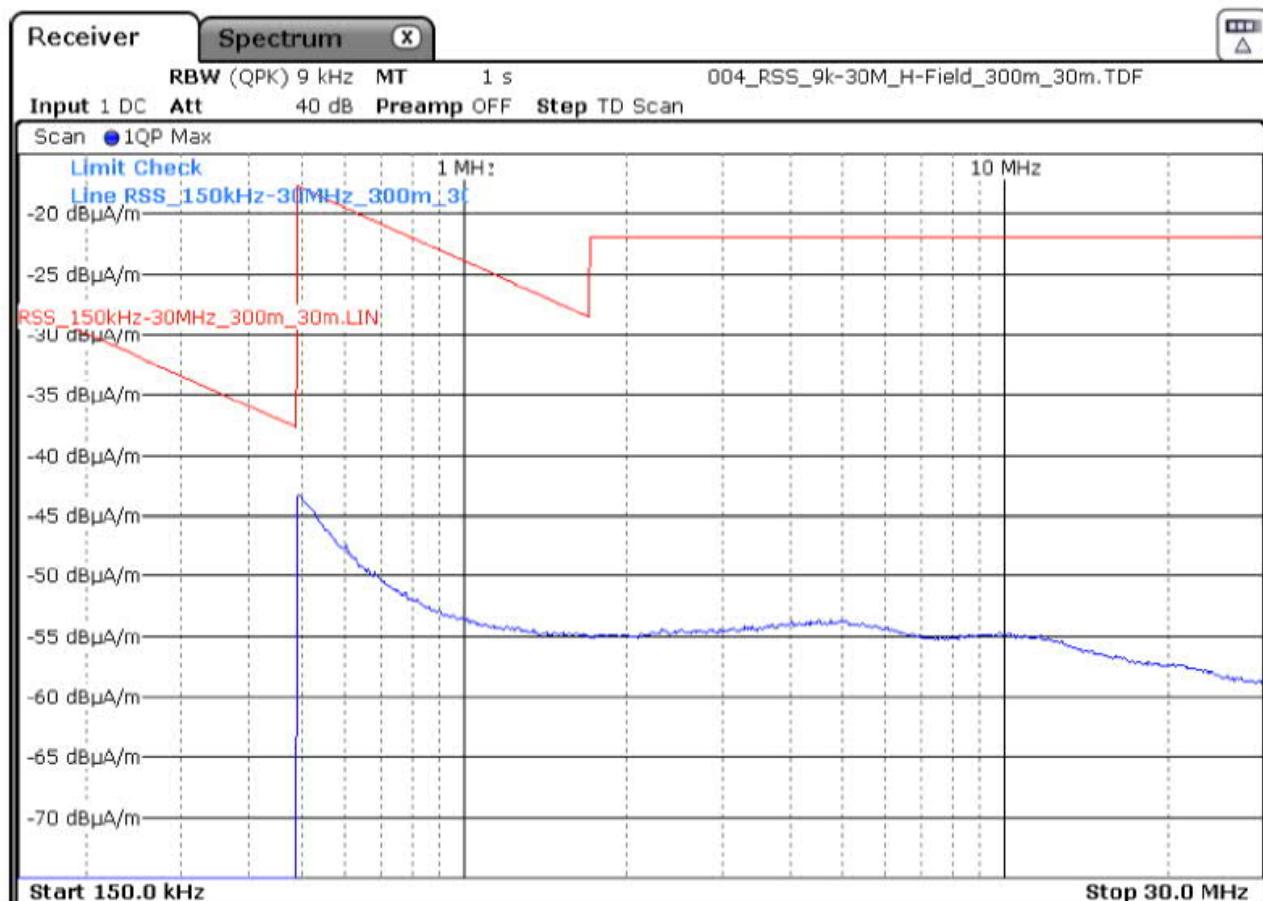

TESTED
IN GERMANYIT 5/6
Interference radiation
acc. FCC Subpart C §15.247 / acc. RSS-247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Product: Camera

Sample: 01

Date: 07.09.2022

Operator: BI


pass fail

Remarks:

Result:

Final Measurement

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz

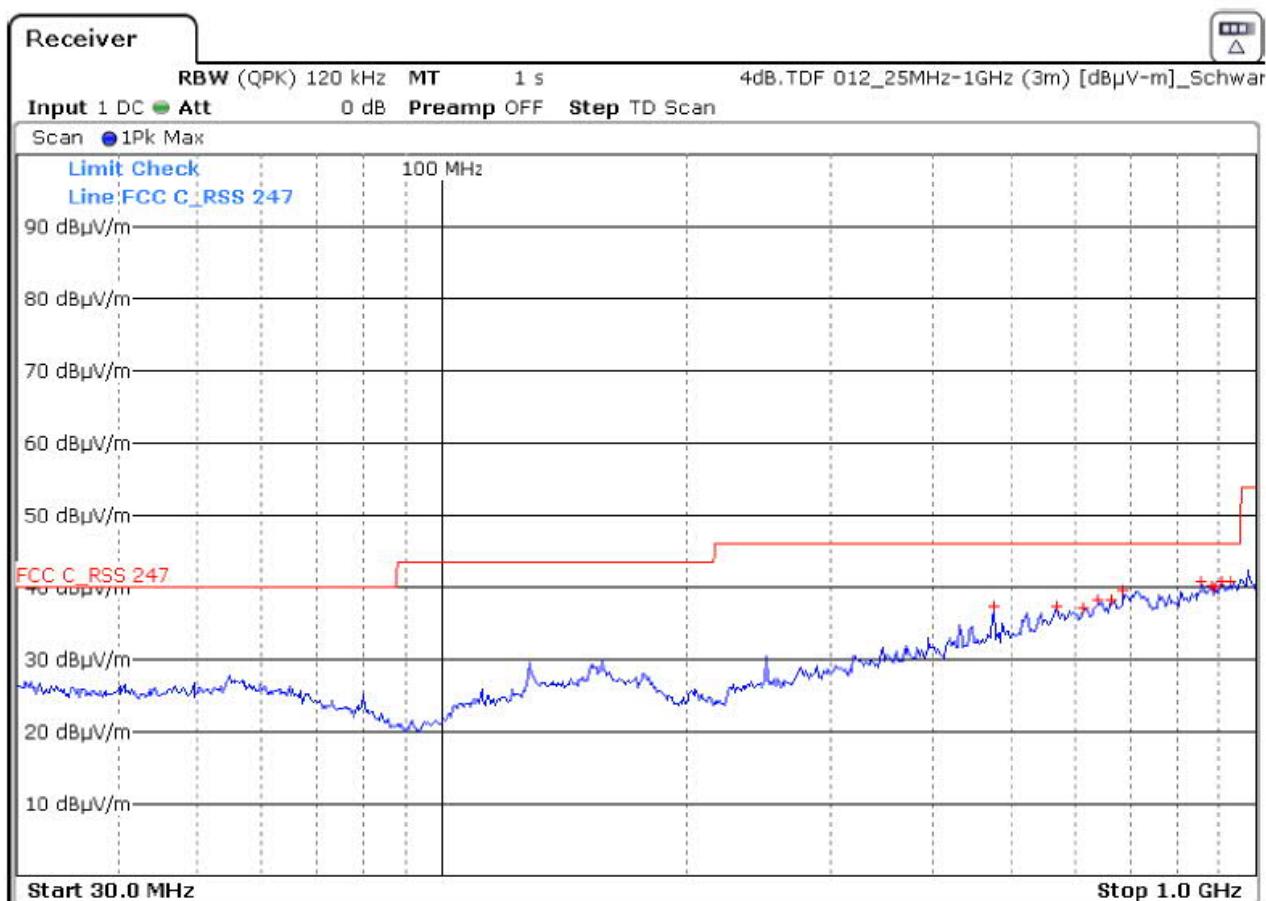

Polarisation: V

Scan Detector Peak					Final Detector Quasi Peak				
Frequ. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
930,33	40,96	-5,04	46,00	pass					
857,46	40,86	-5,14	46,00	pass					
905,04	40,84	-5,16	46,00	pass					
882,33	40,19	-5,81	46,00	pass					
892,56	40,08	-5,92	46,00	pass					
687,18	39,50	-6,50	46,00	pass					

*Retest with Quasi Peak

Retest with Quasi Peak Detector not required


TESTED IN GERMANY

IT 5/6
Interference radiation
acc. FCC Subpart C §15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz

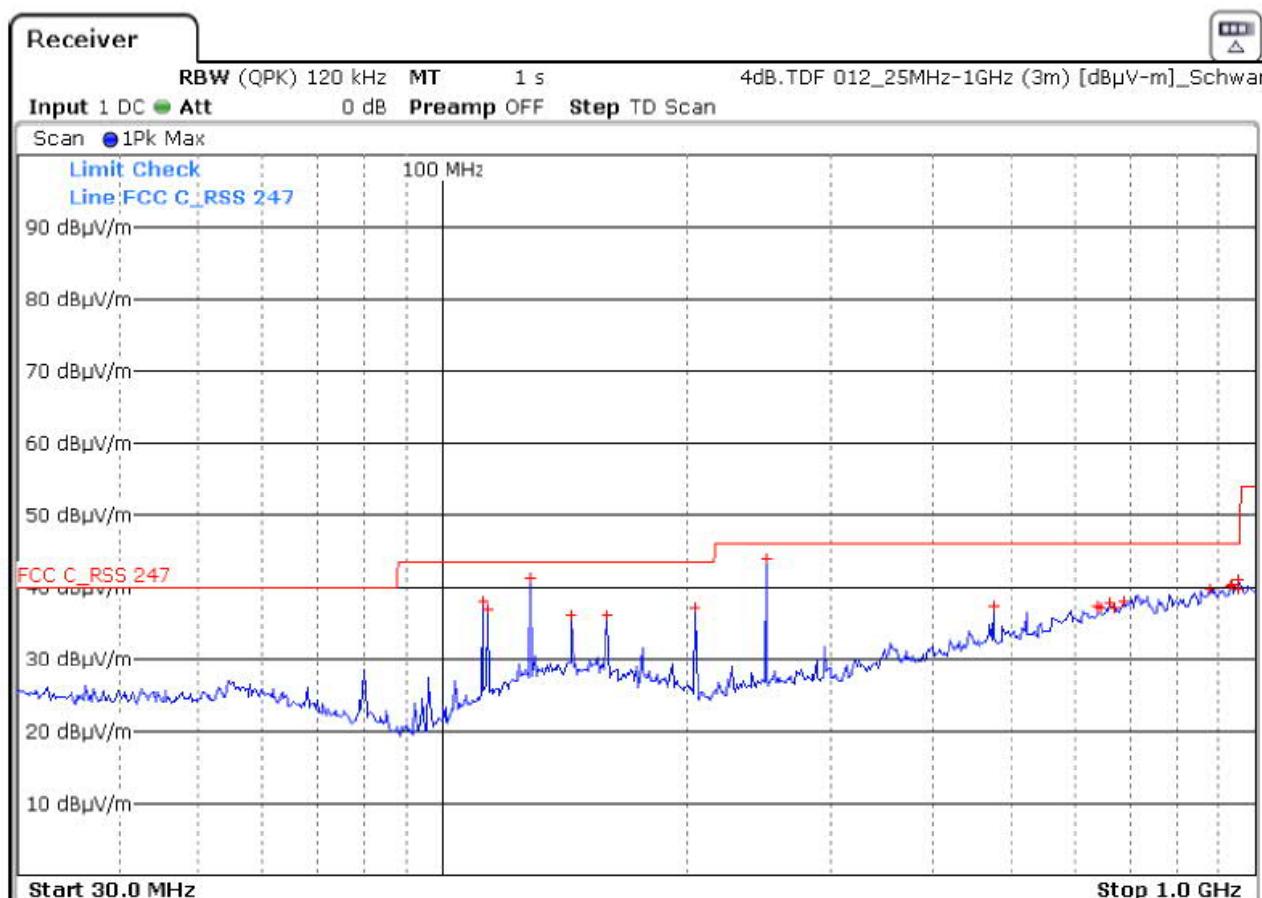

Polarisation: H									
Scan Detector Peak					Final Detector Quasi Peak				
Frequ. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [MHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
249,99	44,00	-2,00	46,00	pass					
127,98	41,25	-2,25	43,50	pass					
953,40	41,12	-4,88	46,00	pass					
111,99	38,12	-5,38	43,50	pass					
934,50	40,38	-5,62	46,00	pass					
931,02	40,25	-5,75	46,00	pass					
*Retest with Quasi Peak					Retest with Quasi Peak Detector not required				

Testdistance Antenna/EUT: 3m

TESTED
IN GERMANY

IT 5/6
Interference radiation
acc. FCC Subpart C § 15.247 / acc. RSS-247

ESTC

Ref -No : 22/09-0001

Product: Camera

Sample: 01

Date: 07.09.2022

Operator: BII


Remarks: BRF (2.4GHz/11243) connected (1-7GHz)

pass fail

1

Result:

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

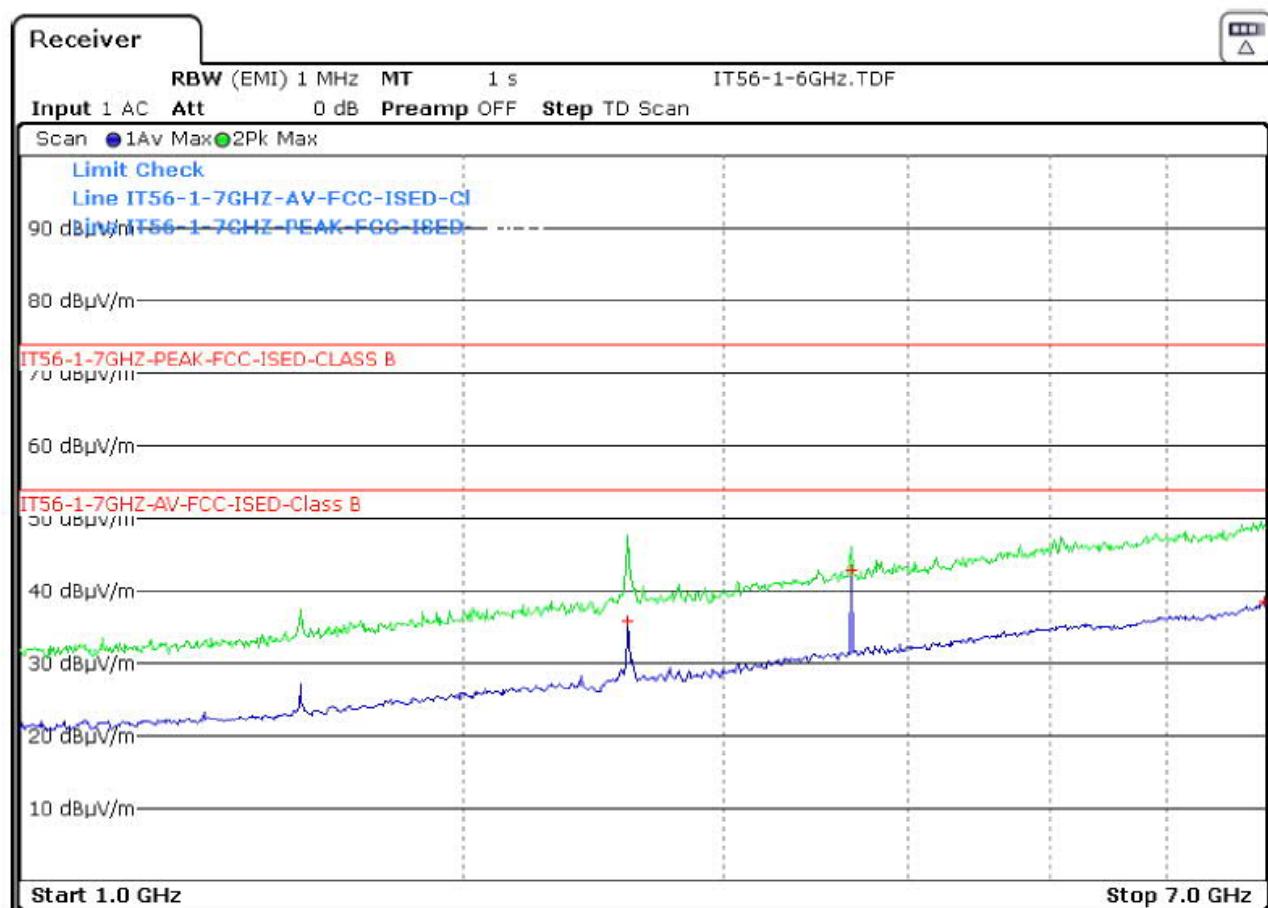


TESTED
IN GERMANY

IT 5/6
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

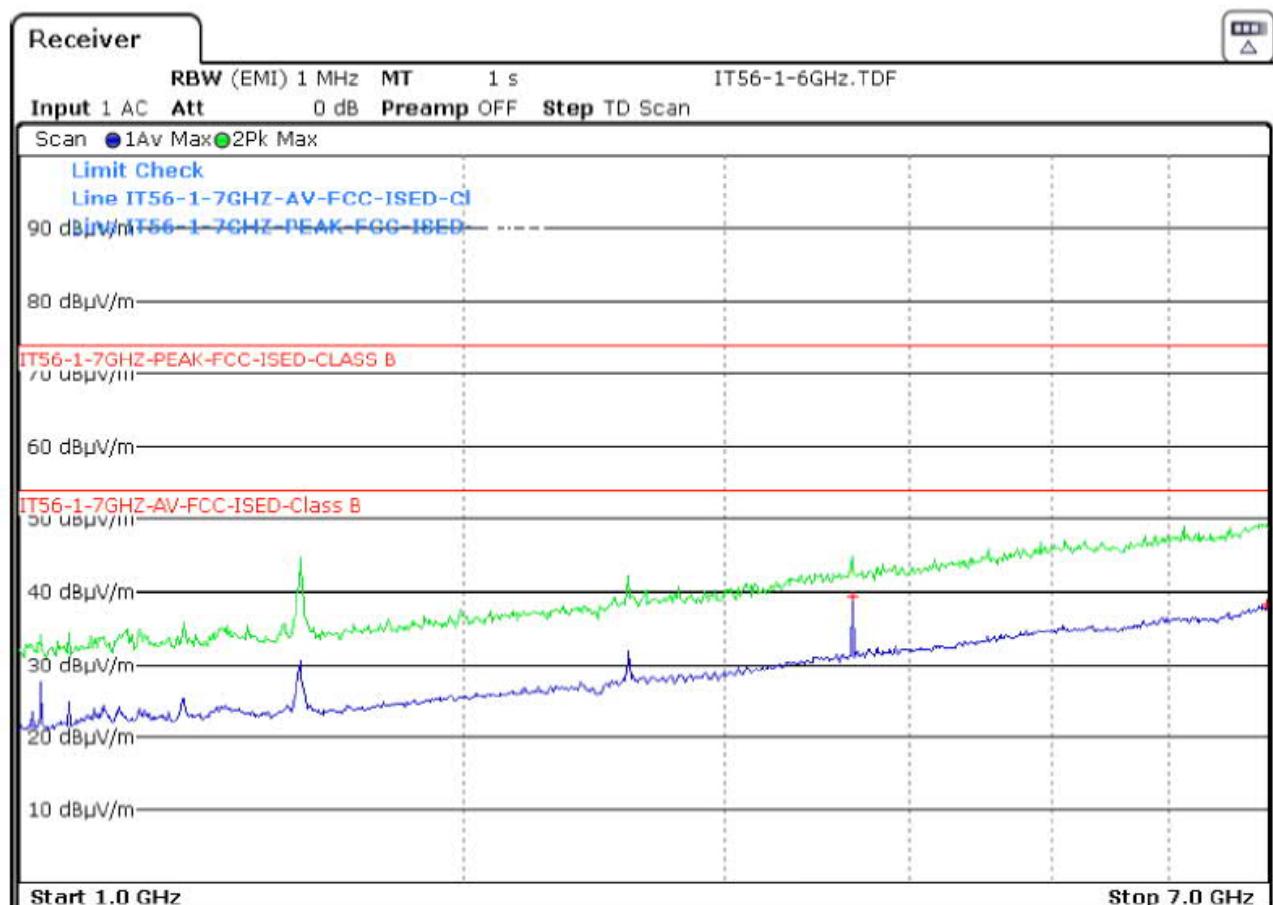

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**

Product: Camera

Sample: 01

Date: 07.09.2022


Operator: BI

pass fail

Remarks:

Result:


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 7GHz-8,85GHz used; RBW 100 kHz; No significant emission found

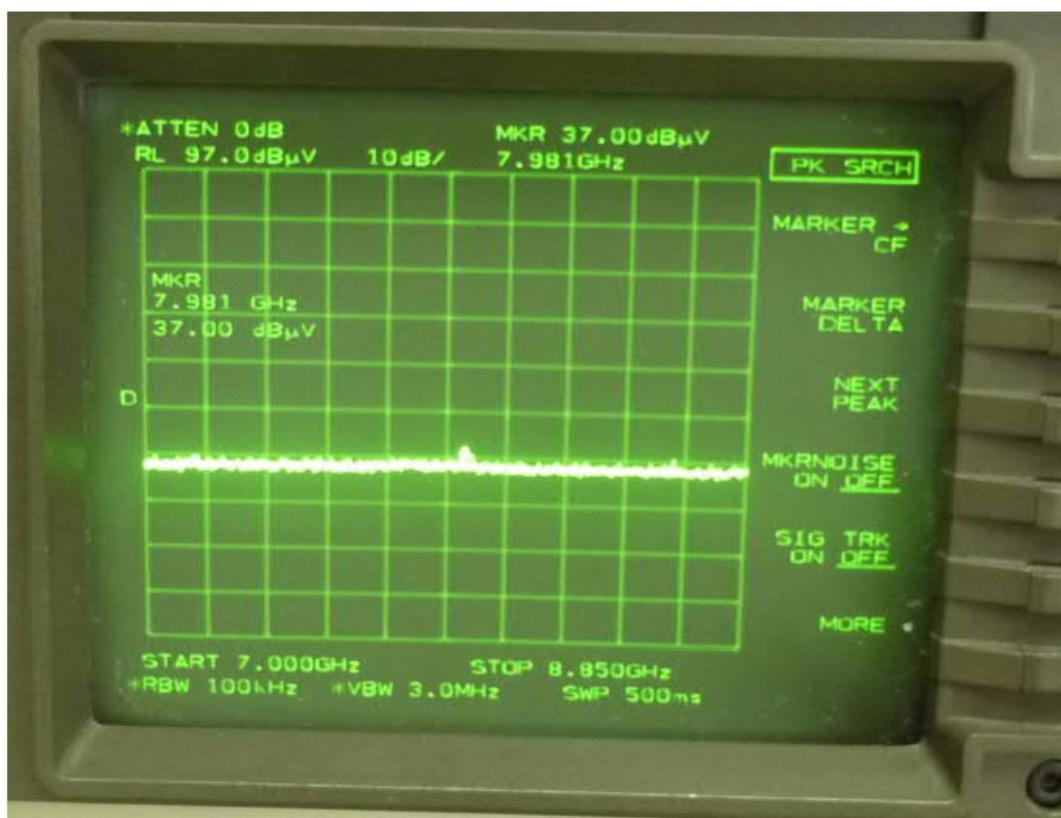

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
7 – 8,85	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 7GHz-8,85GHz used; RBW 100 kHz; No significant emission found

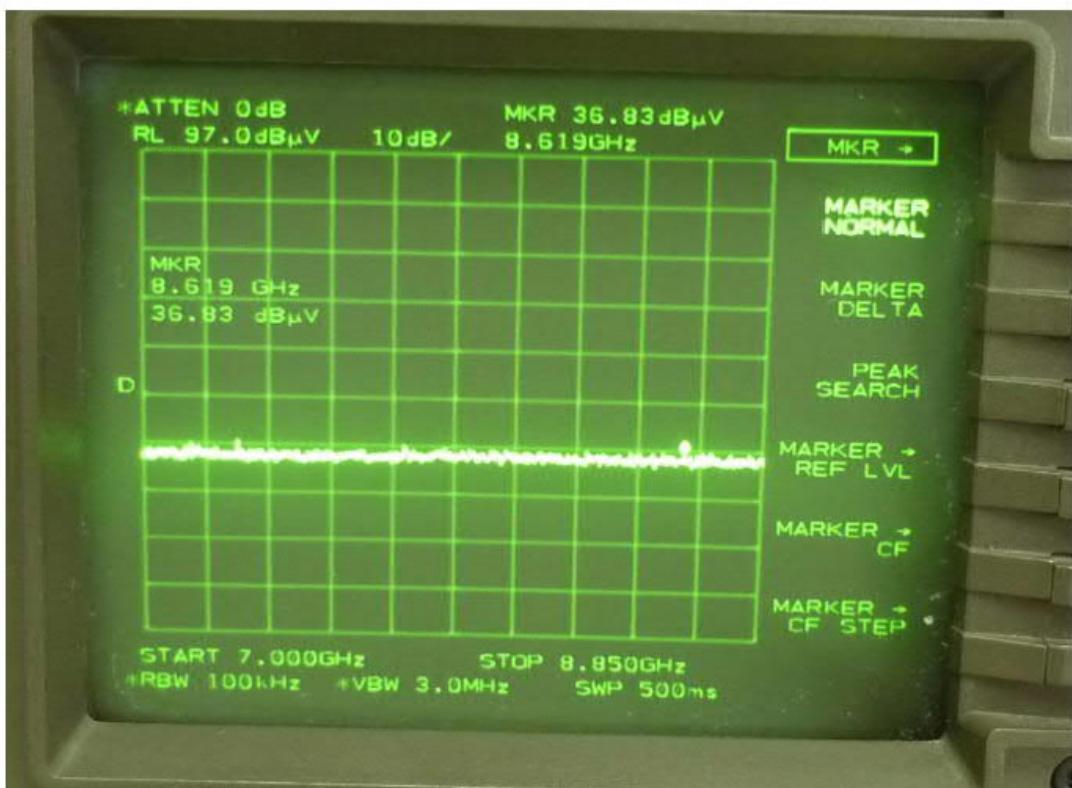

Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
7 – 8,85	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 8,3GHz - 11,3GHz used; RBW 100kHz; No significant emission found

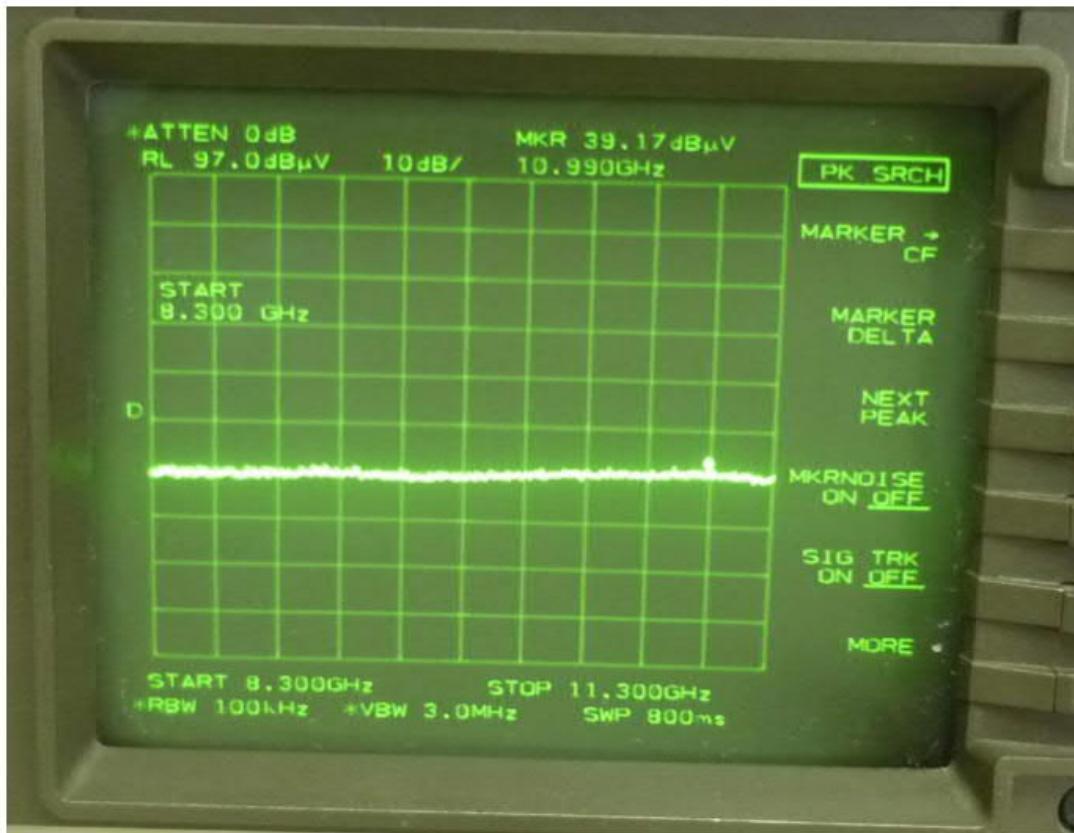

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result
8,3 – 11,3	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 8,3GHz - 11,3GHz used; RBW 100kHz; No significant emission found

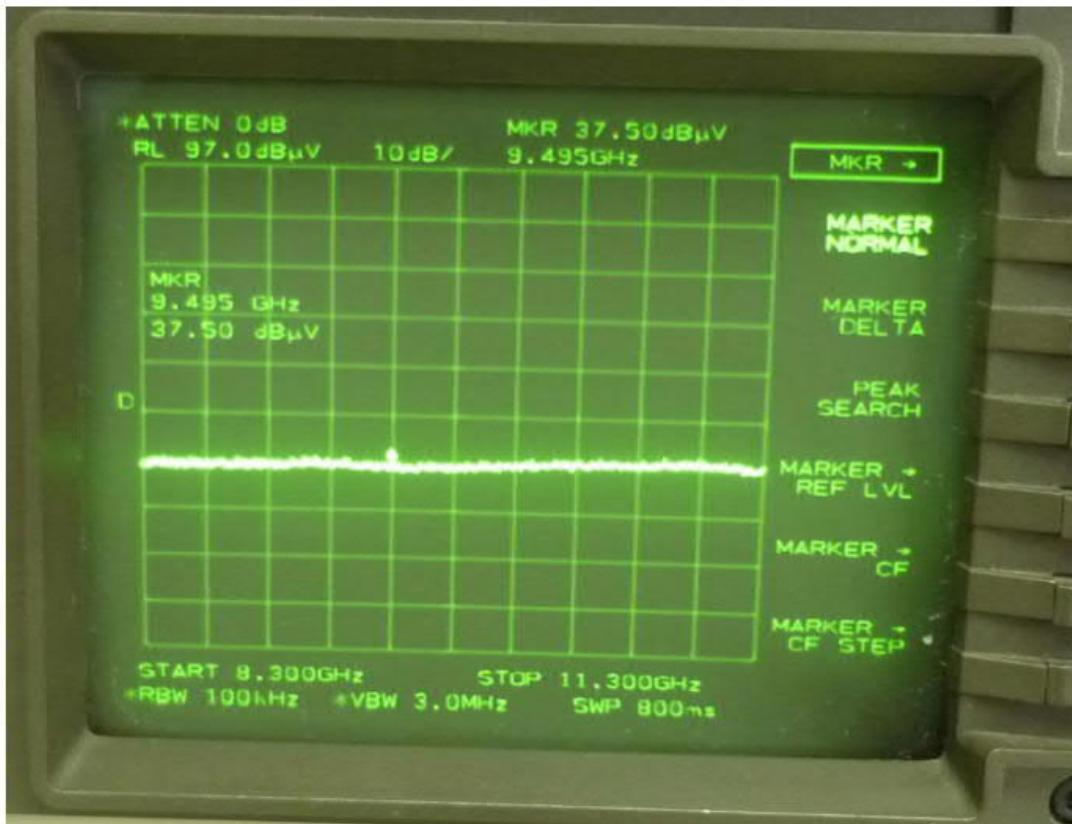

Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
8,3 – 11,3	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 10,8GHz -13,6GHz used; RBW 100 kHz; No significant emission found

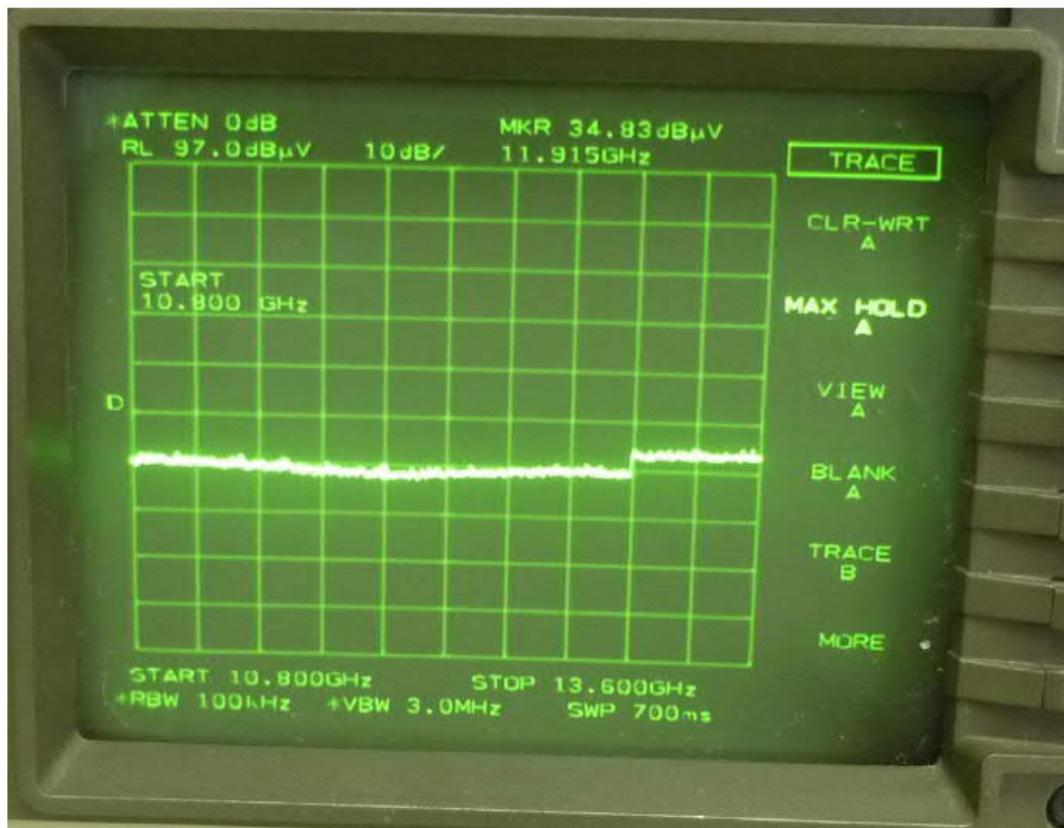

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
10,8 – 13,6	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 10,8 GHz-13,6GHz used; RBW 100kHz; No significant emission found

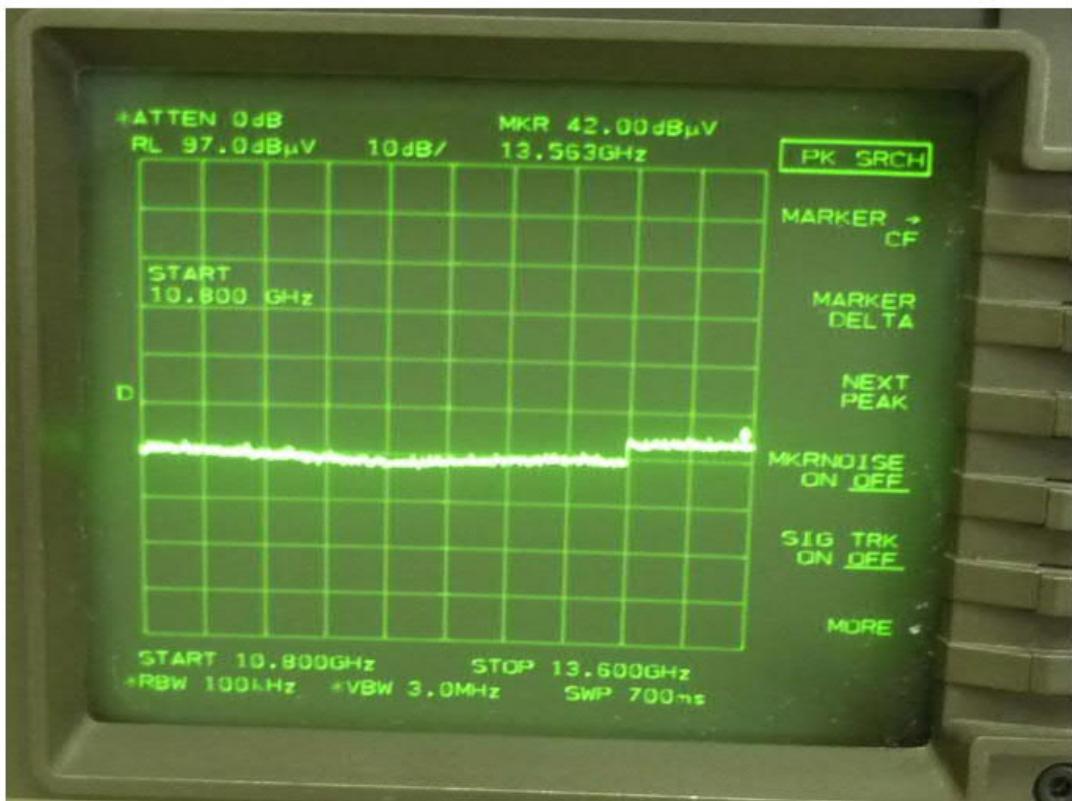

Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result
10,8 – 13,6	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 13,2GHz -16,2GHz used; RBW 100kHz; No significant emission found



Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
13,2 – 16,2	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**TESTED
IN GERMANY**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 13,2GHz -16,2GHz used; RBW 100kHz; No significant emission found

**Polarisation: H****Detector Peak**

Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
13,2 – 16,2	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; Bandpass 15,5GHz -18GHz used; RBW 100kHz; No significant emission found

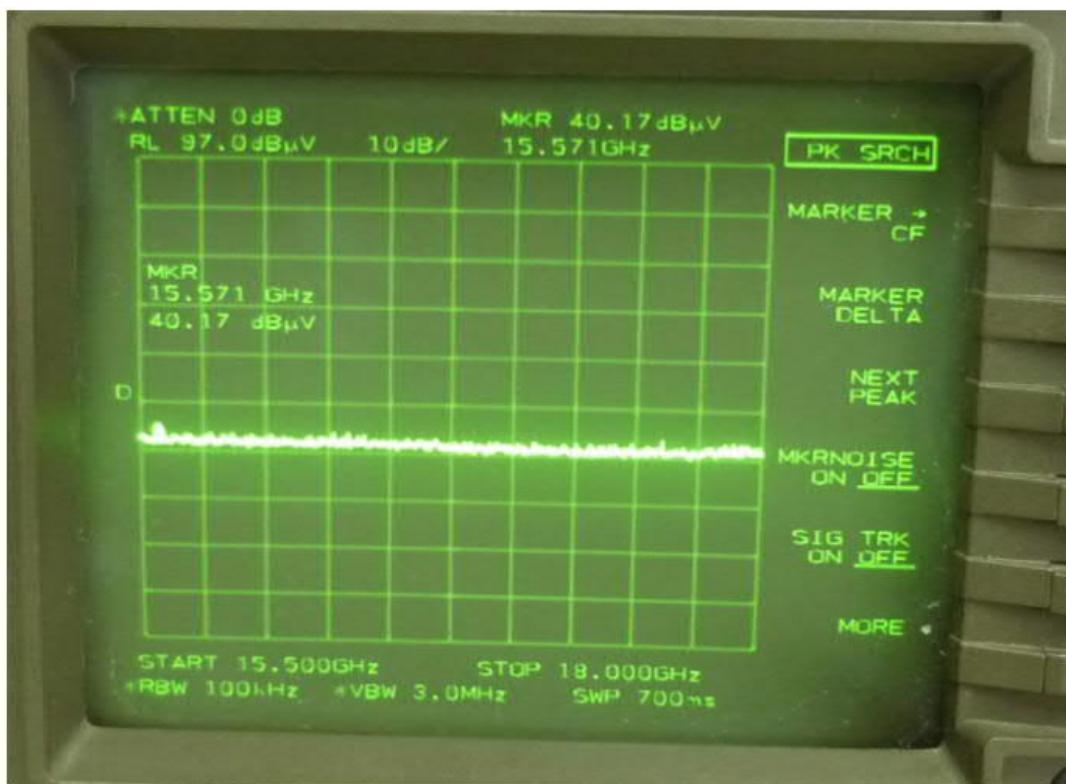

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
15,5 – 18	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz; Bandpass 15,5GHz -18GHz used; RBW 100kHz; No significant emission found

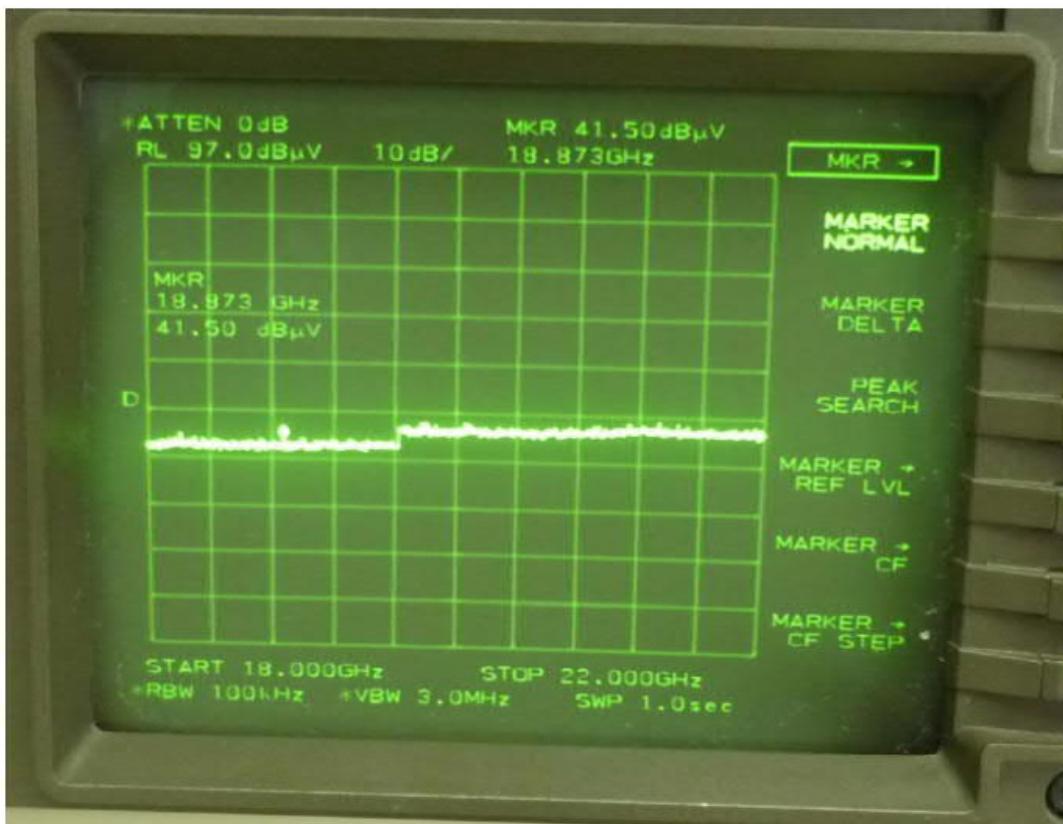

Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
15,5 – 18	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz; RBW 100kHz; No significant emission found

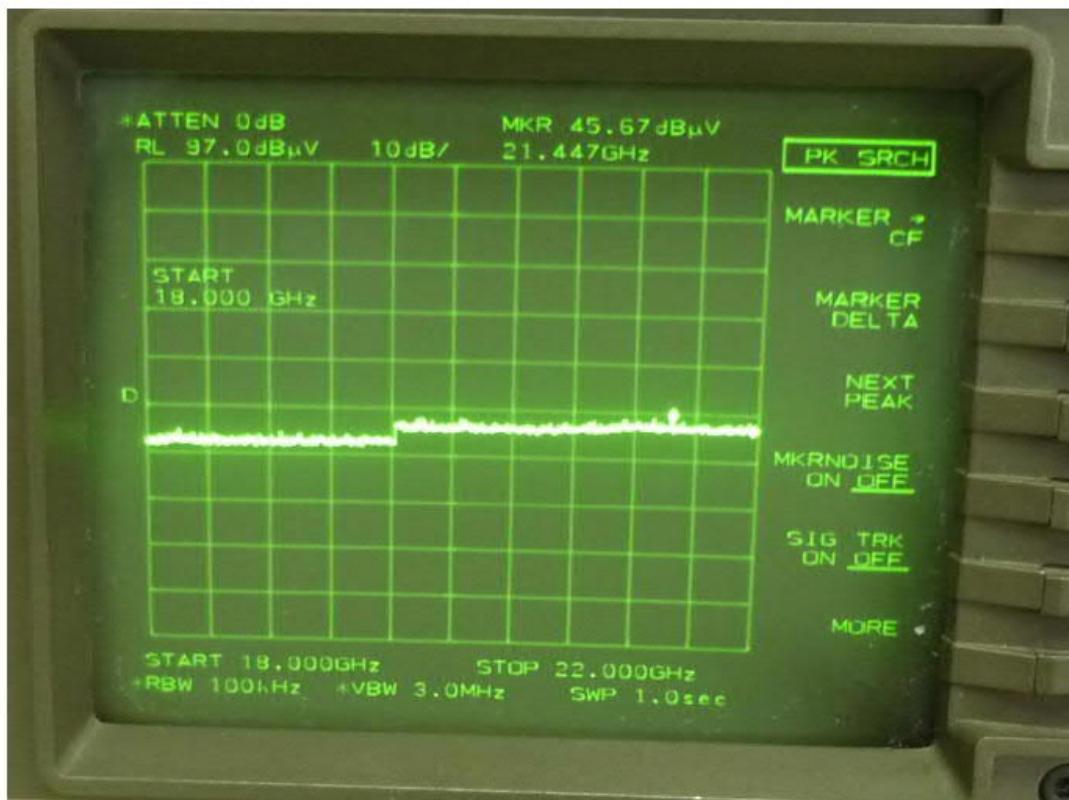

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result
18 – 22	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**


Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; RBW 100kHz; No significant emission found

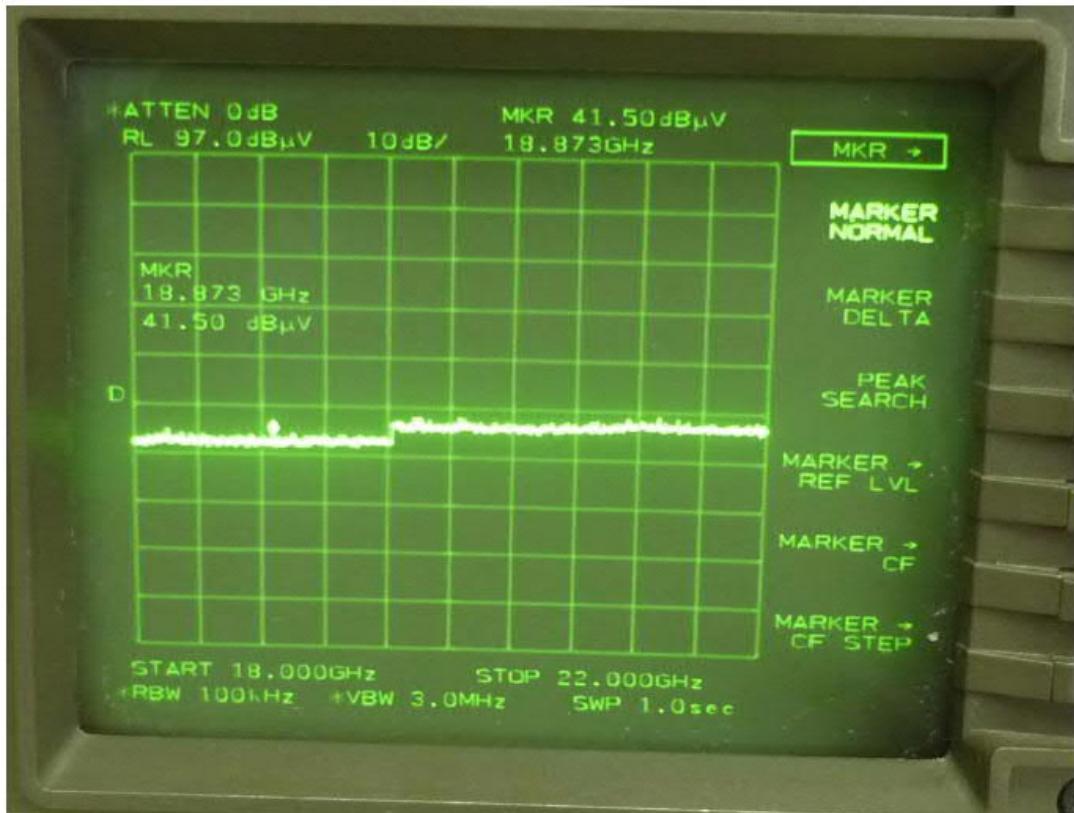

Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dBμV/m]	Margin to Limit [dB]	Limit [dBμV/m]	Result
18 – 22	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc.FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; RBW 100kHz; No significant emission found

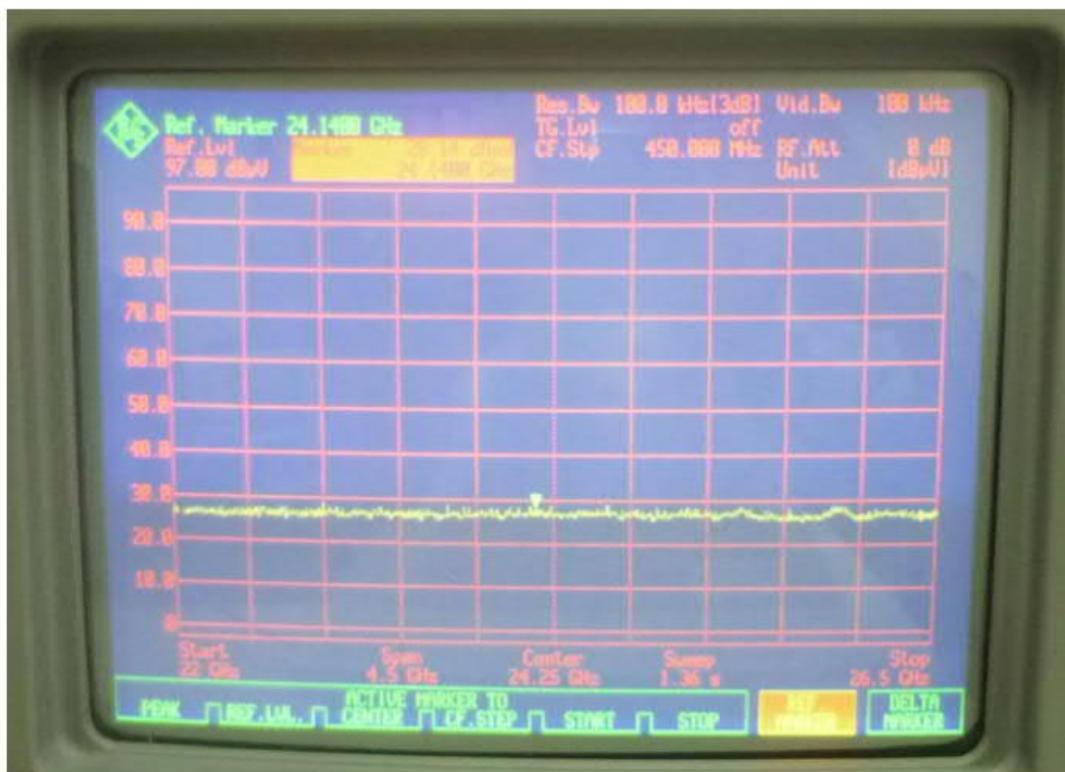

Polarisation: V				
Detector Peak				
Frequ. [GHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result
22 – 26,5	-/-	>10	74,00	pass

**TESTED
IN GERMANY****IT 5/6**
Interference radiation
acc. FCC Subpart C § 15.247 / acc. RSS-247**ESTC**Ref.-No.: **22/09-0001**

Operation mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW= 20 MHz; RBW 100kHz; No significant emission found



Polarisation: H				
Detector Peak				
Frequ. [GHz]	Level [dBµV/m]	Margin to Limit [dB]	Limit [dBµV/m]	Result
22 – 26,5	-/-	>10	74,00	pass

Result: 9 kHz – 30 MHz

Remarks:

Composition of the measurement value (Freq.-range < 30 MHz):

$$M_{Value} = M_{Rec} + C_{Loss} + AF_{Rec}$$

M_{Value} = Measurement Value
 M_{Rec} = Reading value of test receiver
 C_{Loss} = Cable loss between Receiver and Antenna
 AF_{Rec} = Antenna factor.

Sample calculation:

$$38.2 \text{ dB}\mu\text{V} = 18.3 \text{ dB}\mu\text{V} + 0.1 \text{ dB} + 19.8 \text{ dB}$$

Result: 30 MHz – 1000 MHz

Remarks:

Composition of the measurement value (Freq.-range 30 MHz – 1000 MHz):

$$M_{Value} = M_{Rec} + C_{Loss} + AF_{Rec}$$

M_{Value} = Measurement Value
 M_{Rec} = Reading value of test receiver
 C_{Loss} = Cable loss between Receiver and Antenna
 AF_{Rec} = Antenna factor.

Sample calculation:

$$38.7 \text{ dB}\mu\text{V} = 18.3 \text{ dB}\mu\text{V} + 0.6 \text{ dB} + 19.8 \text{ dB}$$

Result: Freq.-range > 1 GHz

Remarks:

Composition of the measurement value (Freq.-range 1 GHz – 26 GHz):

$$M_{Value} = M_{Rec} + C_{Loss} + AF_{Rec} - G_{Amp}$$

M_{Value} = Measurement Value
 M_{Rec} = Reading value of test receiver
 C_{Loss} = Cable loss between Receiver and Antenna
 AF_{Rec} = Antenna factor.
 G_{Amp} = Gain Amplifier

Sample calculation:

$$39.7 \text{ dB}\mu\text{V} = 53.01 \text{ dB}\mu\text{V} + 0.9 \text{ dB} + 24.19 \text{ dB} - 38.4 \text{ dB}$$

8. Operation within the band 902-928 MHz, 2400-2483,5 MHz and 5725-5850 MHz

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247
-RSS-247 issue 2

8.1. 6 dB DTS Bandwidth Measurement

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 (a) (2)
-RSS-247 issue 2 Section 5.2 (a)

Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test equipment and test set up

Test equipment used for conducted measurements as given in clause Test equipment of this report.
Test setup used for conducted measurements as given in clause Test setups of this report.

Description

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Result

Not applicable

8.2. Output Power of Fundamental Emissions

Maximum conducted/radiated Output Power

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 (b) (3)

-RSS-247 Issue 2 section 5.4 (d)

Limits for Peak Output Power of Fundamental (EIRP)

The maximum peak conducted/radiated output power of the intentional radiator shall not exceed: 1 Watt
As an alternative to the maximum peak conducted/radiated output power the average output power is measured to show compliance to the limit.

Test equipment and test set up

Test equipment used for conducted/radiated measurements as given in clause Test equipment of this report.
Test setup used for conducted/radiated measurements as given in clause Test setups of this report.

Description

For the conducted/radiated measurement, the RF output of the EUT was connected/radiated to the Analyzer.
All the attenuation or cable loss will be added to the measured maximum output power.
The results are recorded in Watt.

Radiated measurement data:

The Measurement was performed on: 07.09.2022

Maximum output power radiated measurement: Max. E.I.R.P. Mode 802.11b						
Channel	Frequency [MHz]	Output Power		Limit		Result
		[dBm]	[mW]	[dBm]	[mW]	
1	2412	8.21	6.62	30	1000	Pass
6	2437	6.96	4.97	30	1000	Pass
11	2462	5.76	3.77	30	1000	Pass

Maximum output power radiated measurement: Max. E.I.R.P. Mode 802.11g						
1	2412	7.05	5.07	30	1000	Pass
6	2437	6.41	4.38	30	1000	Pass
11	2462	5.33	3.41	30	1000	Pass

Maximum output power radiated measurement: Max. E.I.R.P. Mode 802.11n20						
1	2412	7.22	5.27	30	1000	Pass
6	2437	6.17	4.14	30	1000	Pass
11	2462	5.12	3.25	30	1000	Pass

Result

The operating mode 802.11b with the highest performance is documented.

From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements of **Output Power of Fundamental Emissions**.

Lowest operating frequency

TESTED
IN GERMANY

FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Product: Camera


Sample: 01

Date: 07.09.2022

Operator: BI

pass fail


Remarks:

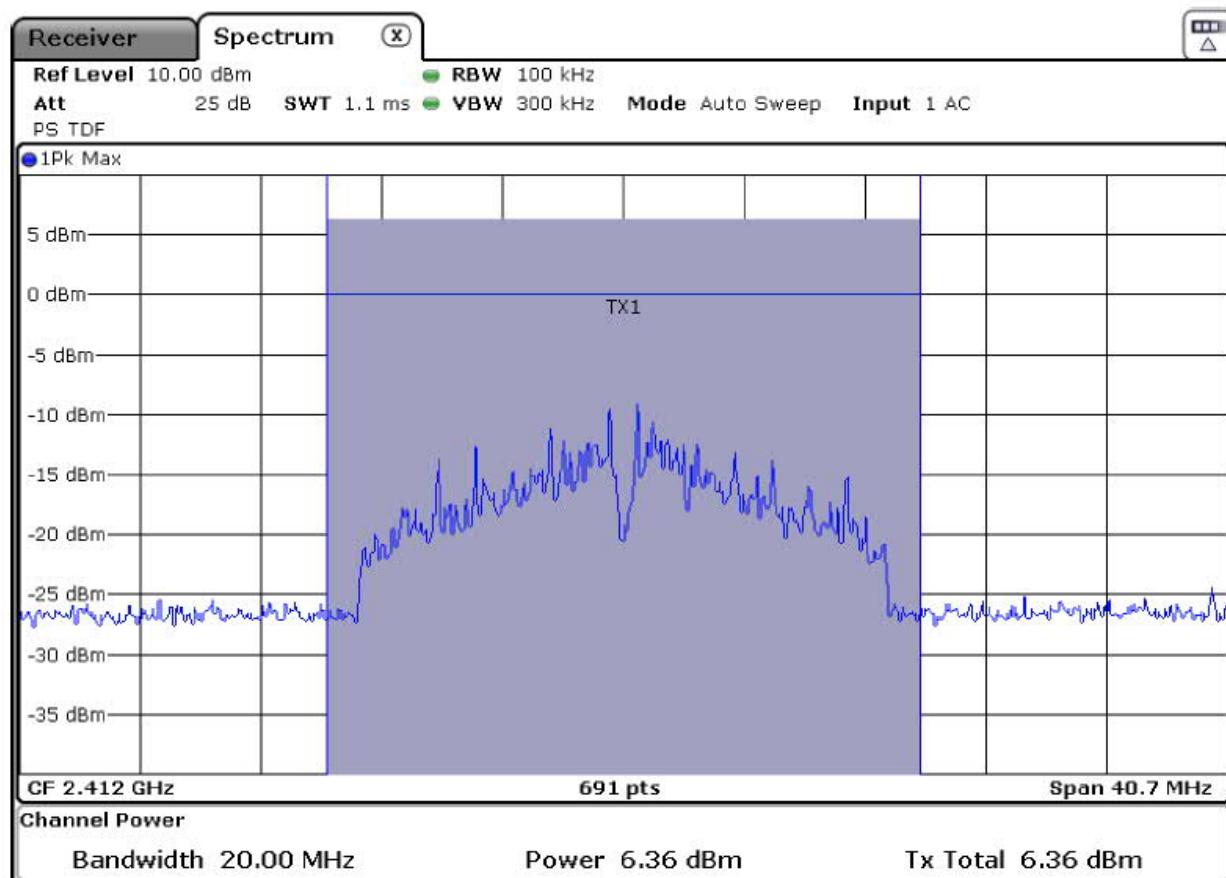Result: **Operating Mode:** TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: X / Polarisation: V

Detector: PEAK max.


Freq. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	6,36	-23,64	30,00	pass

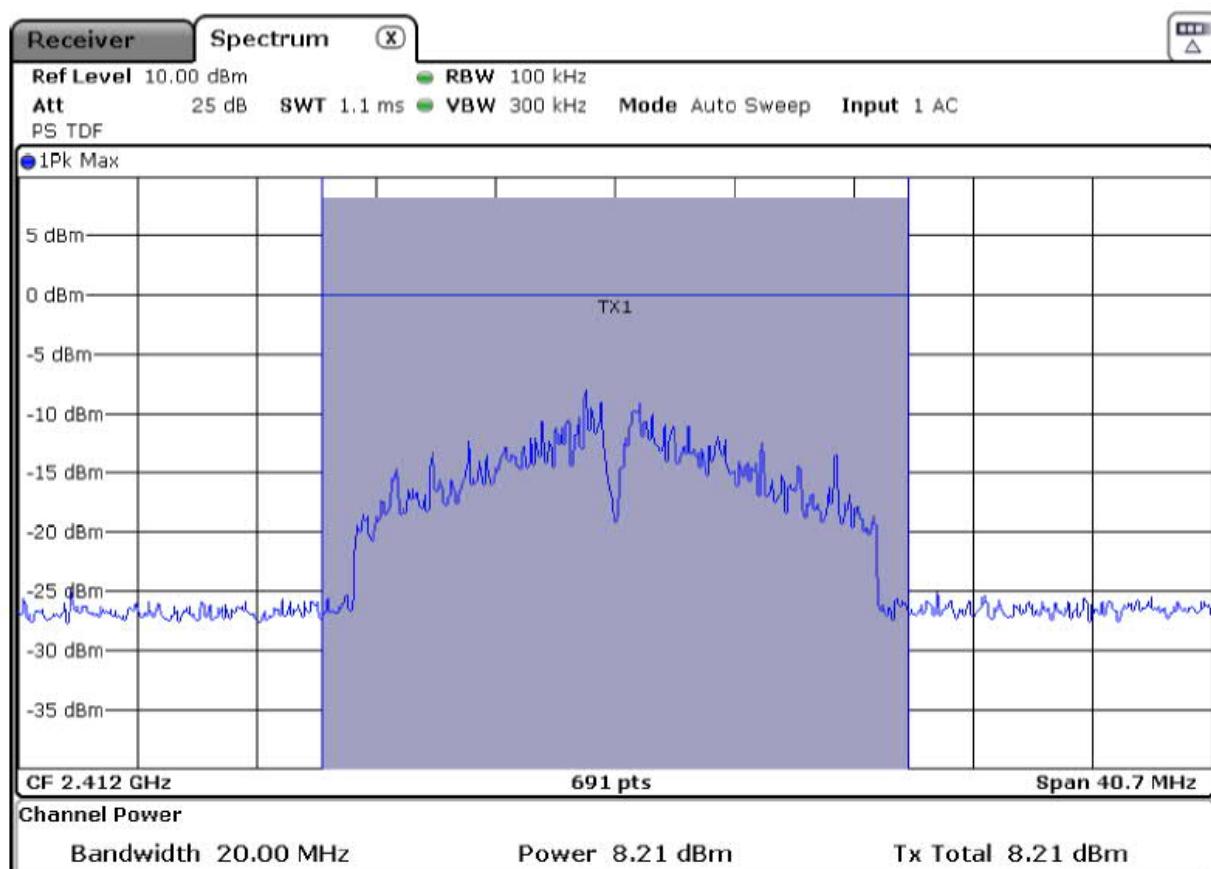**TESTED
IN GERMANY****FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247**ESTC****Operating Mode:** TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: X / Polarisation: H				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	8.21	-21,79	30,00	pass

**TESTED
IN GERMANY****FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247**ESTC**


Operating Mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

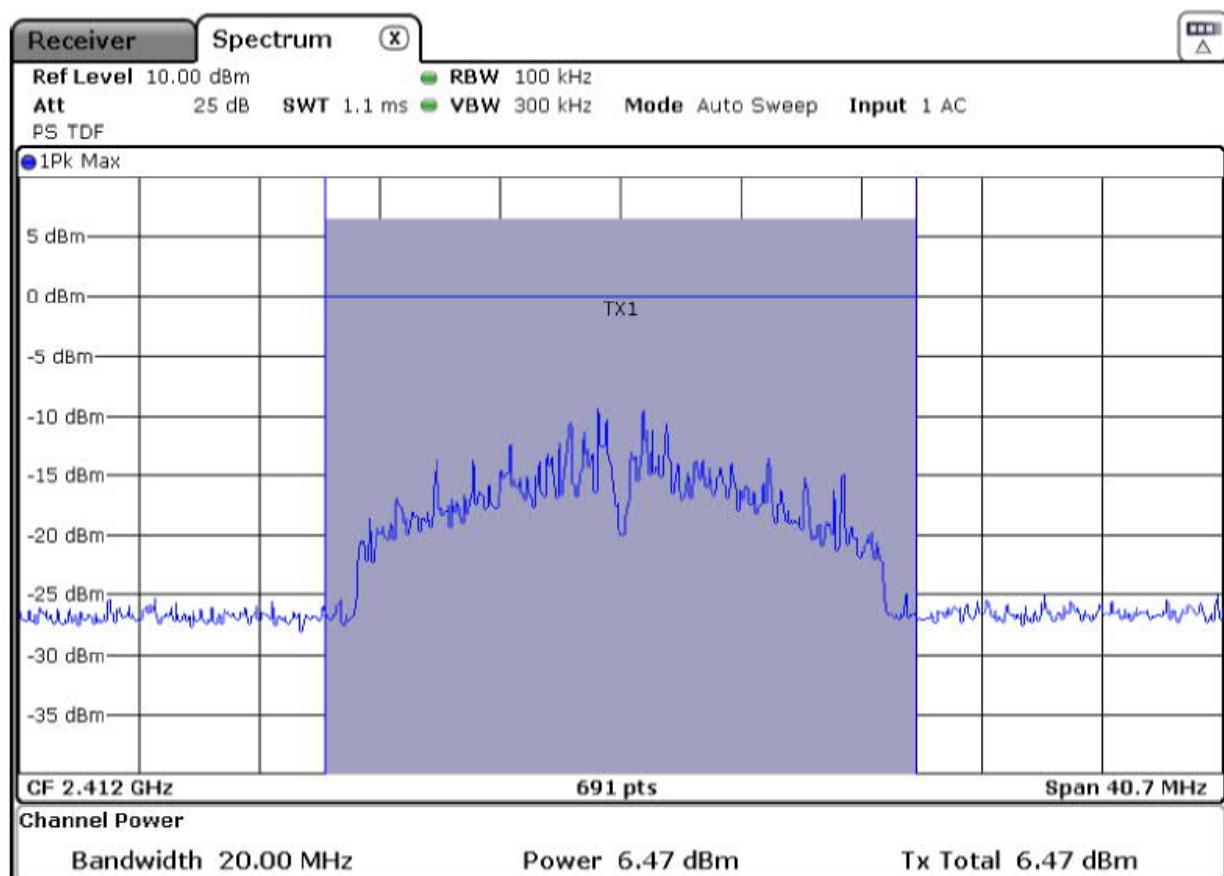

Position: Y / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	6,47	-23,53	30,00	pass

**TESTED
IN GERMANY****FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247**ESTC**

Operating Mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

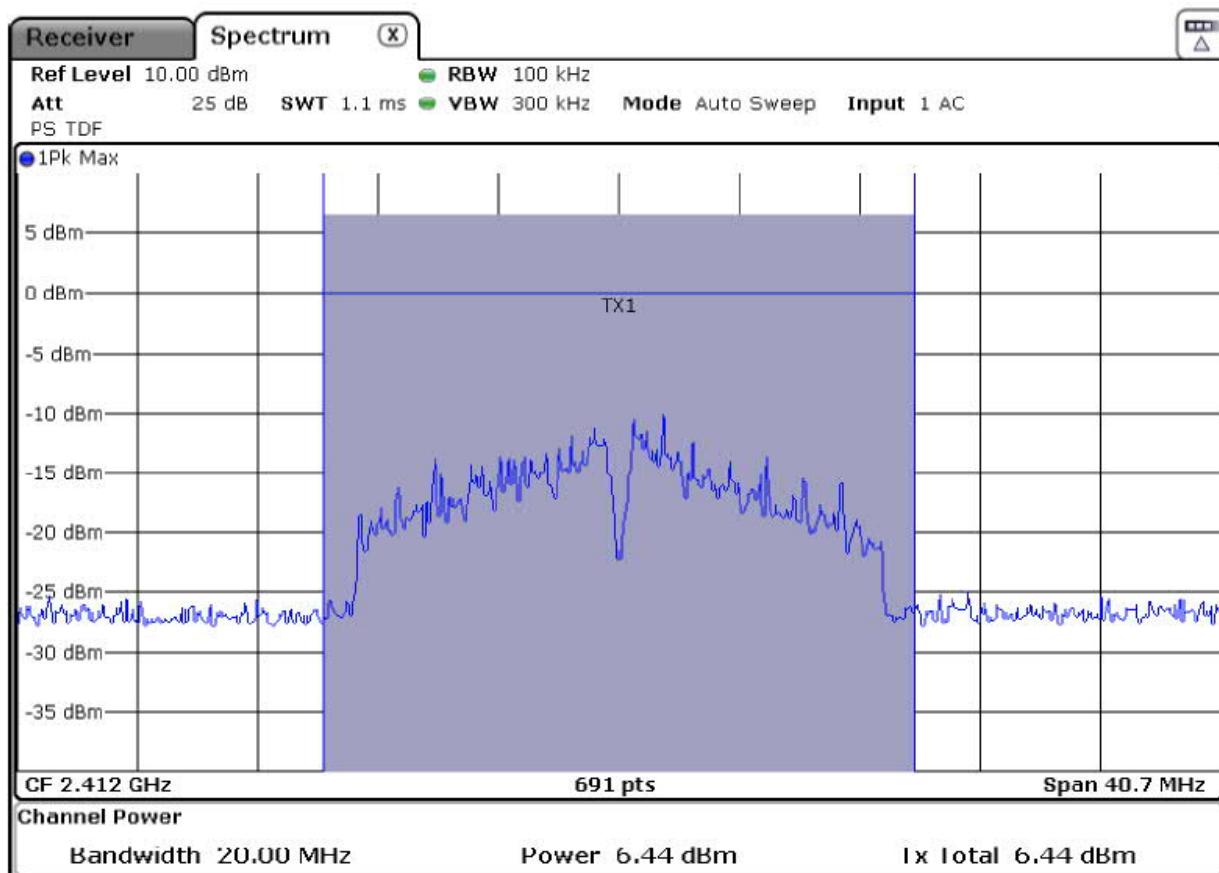

Position: Y / Polarisation: H				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	6,44	-23,56	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC

Operating Mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

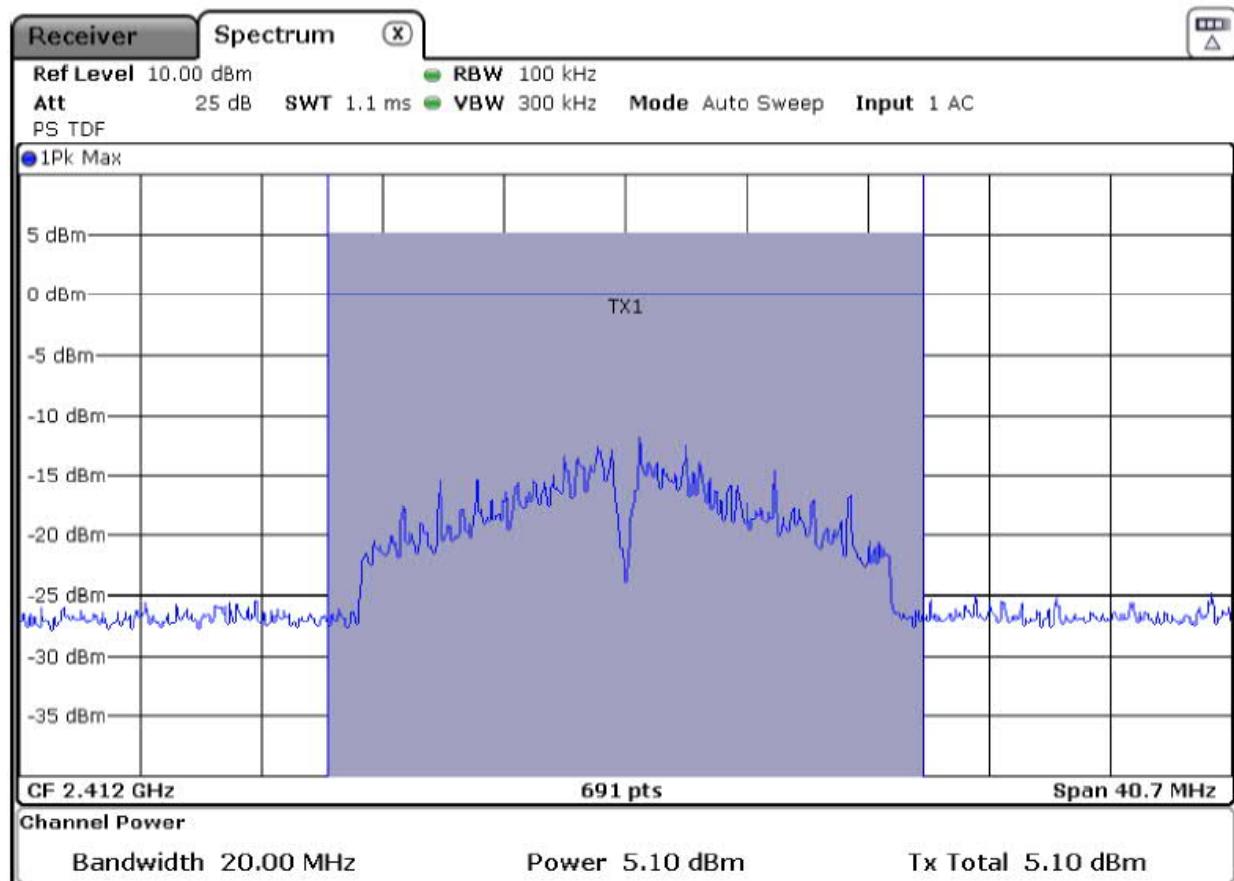

Position: Z / Polarisation: V

Detector PEAK max

Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	5,10	-24,90	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

TESTED
IN GERMANY

Operating Mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

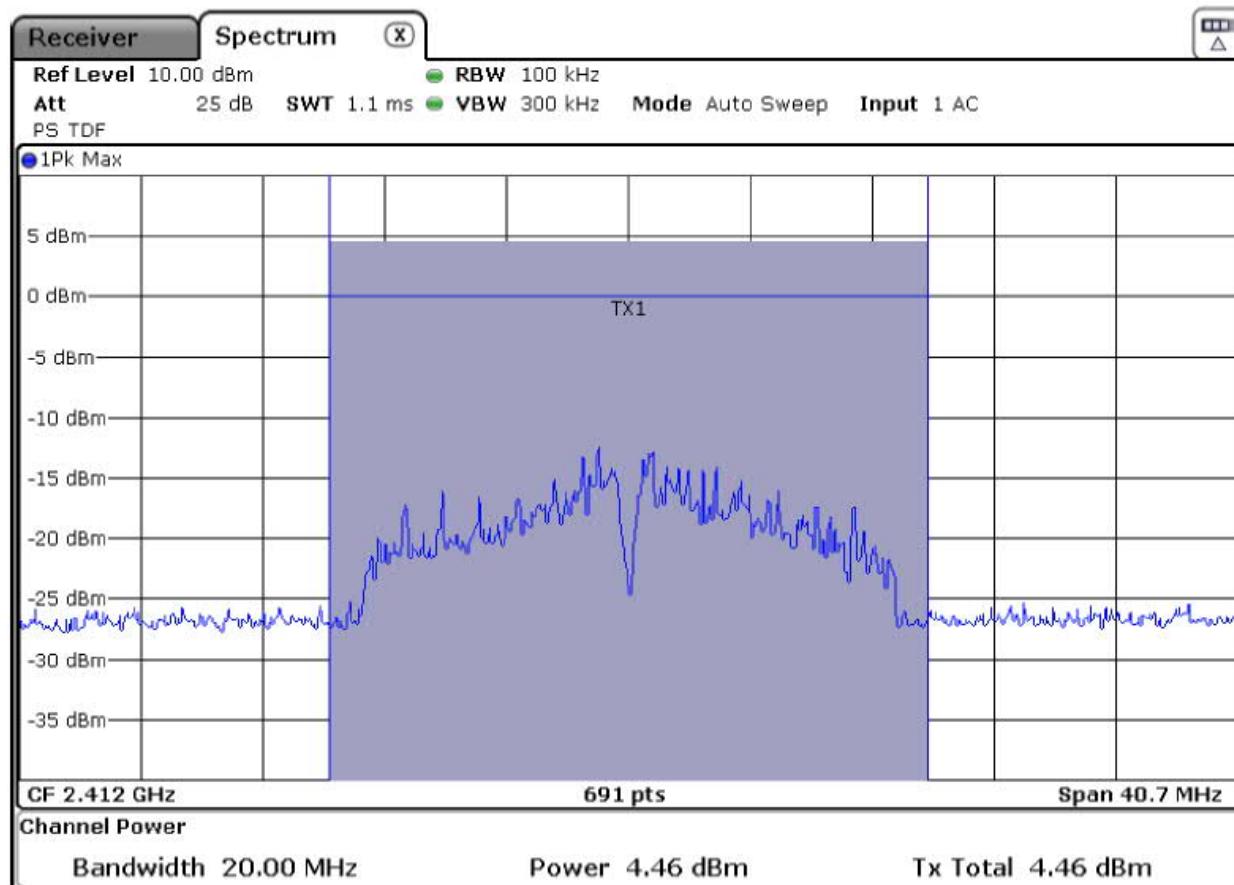

Position: Z / Polarisation: H				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2412	4,46	-25,54	30,00	pass


Summary of the findings

Test conditions	Polarization of receiving antenna	Tested frequency [MHz]	Meas value [dBm]	Limit [dBm]	Result
Position: X	V	2412	6,36	30,00	pass
Position: X	H	2412	8,21	30,00	pass
Position: Y	V	2412	6,47	30,00	pass
Position: Y	H	2412	6,44	30,00	pass
Position: Z	V	2412	5,10	30,00	pass
Position: Z	H	2412	4,46	30,00	pass

Middle operating frequency

TESTED
IN GERMANYFCC 1
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY


Operating Mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

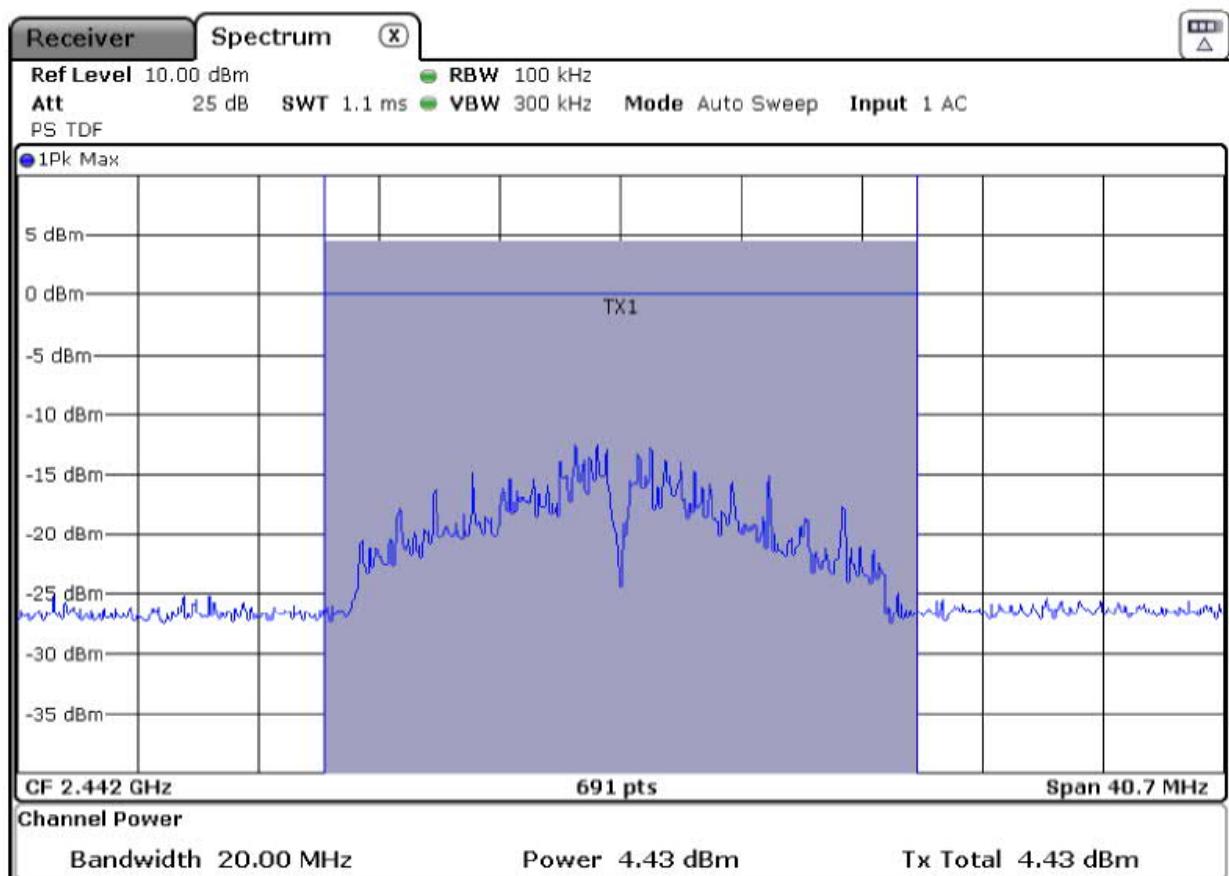

Position: X / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	4,43	-25,57	30,00	pass

TESTED
IN GERMANY**FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC

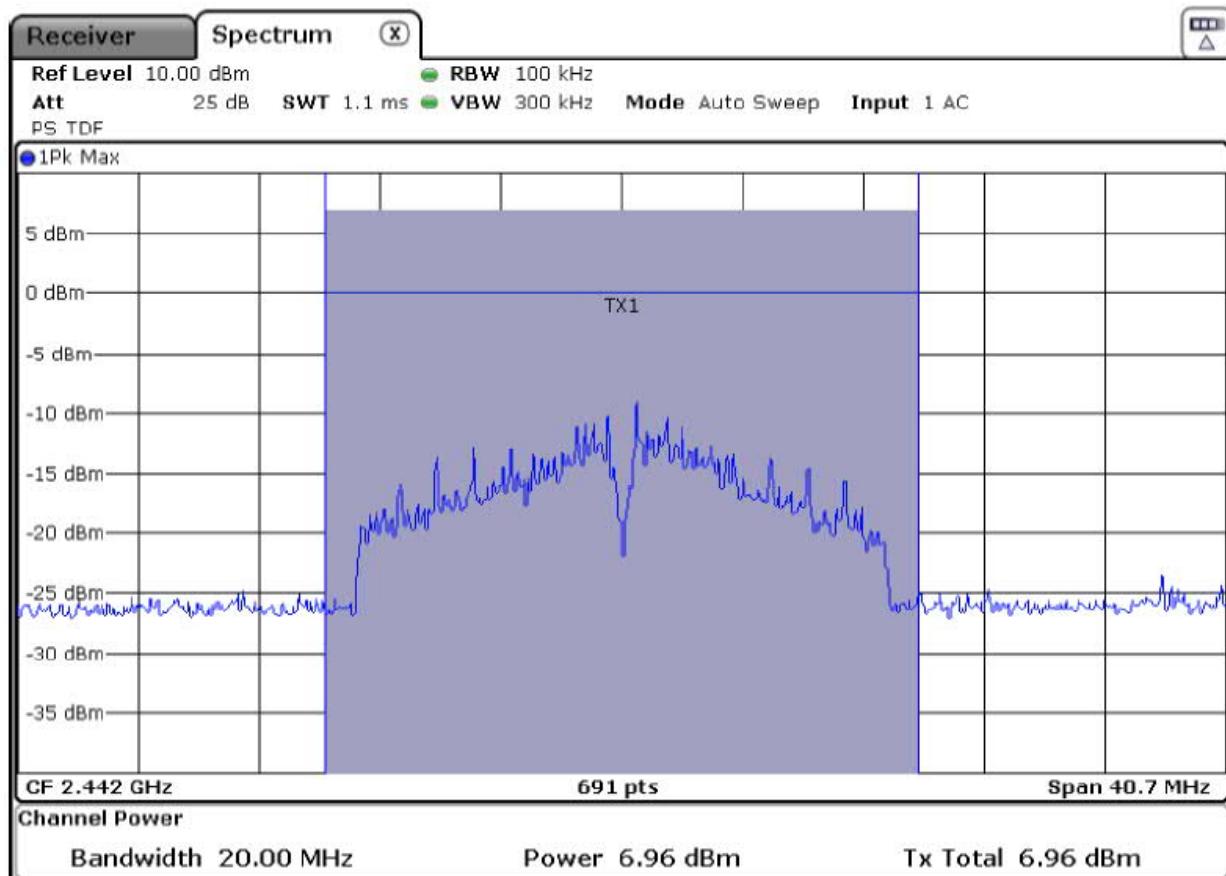Operating Mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: X / Polarisation: H				
Detector: PEAK max				
Freq. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	6,96	-23,04	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power


acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC

Operating Mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

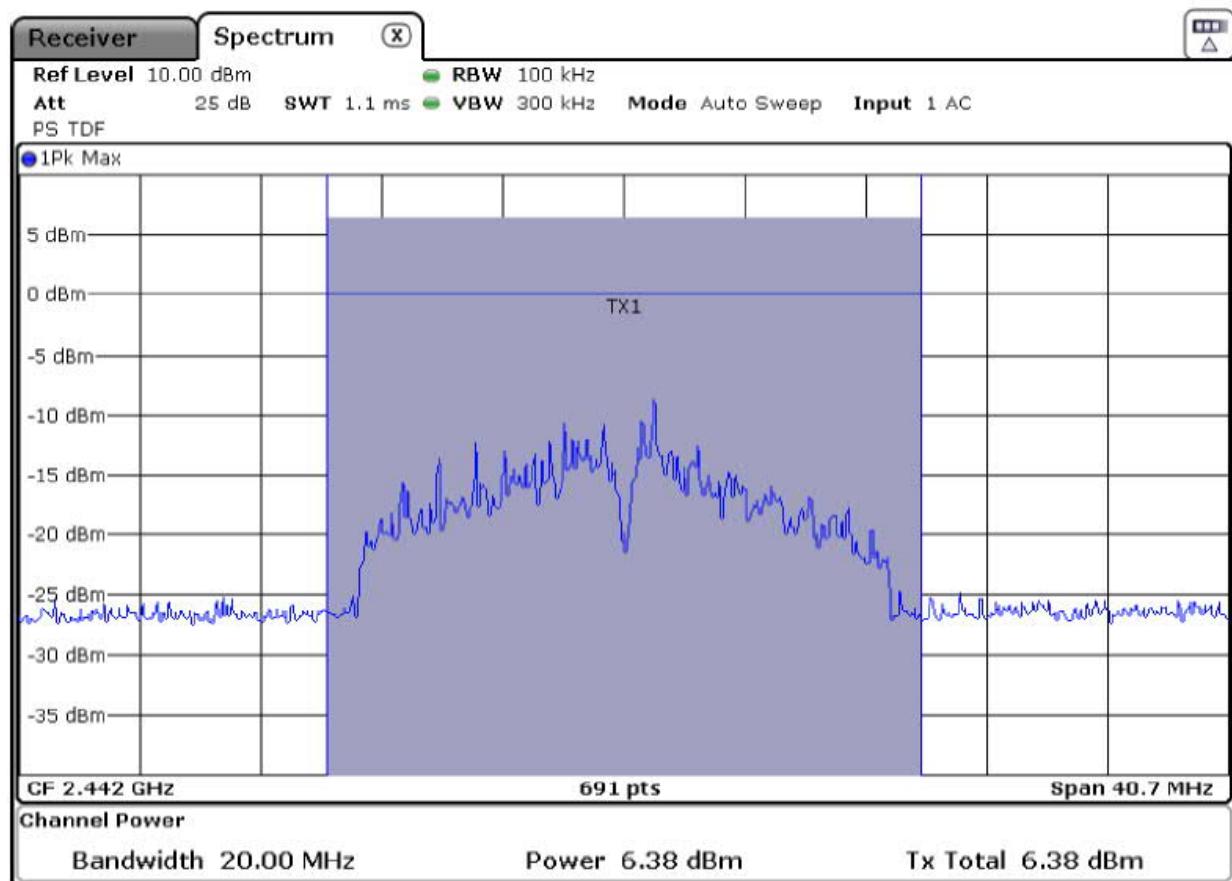


Position: Y / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	6,38	-23,62	30,00	pass

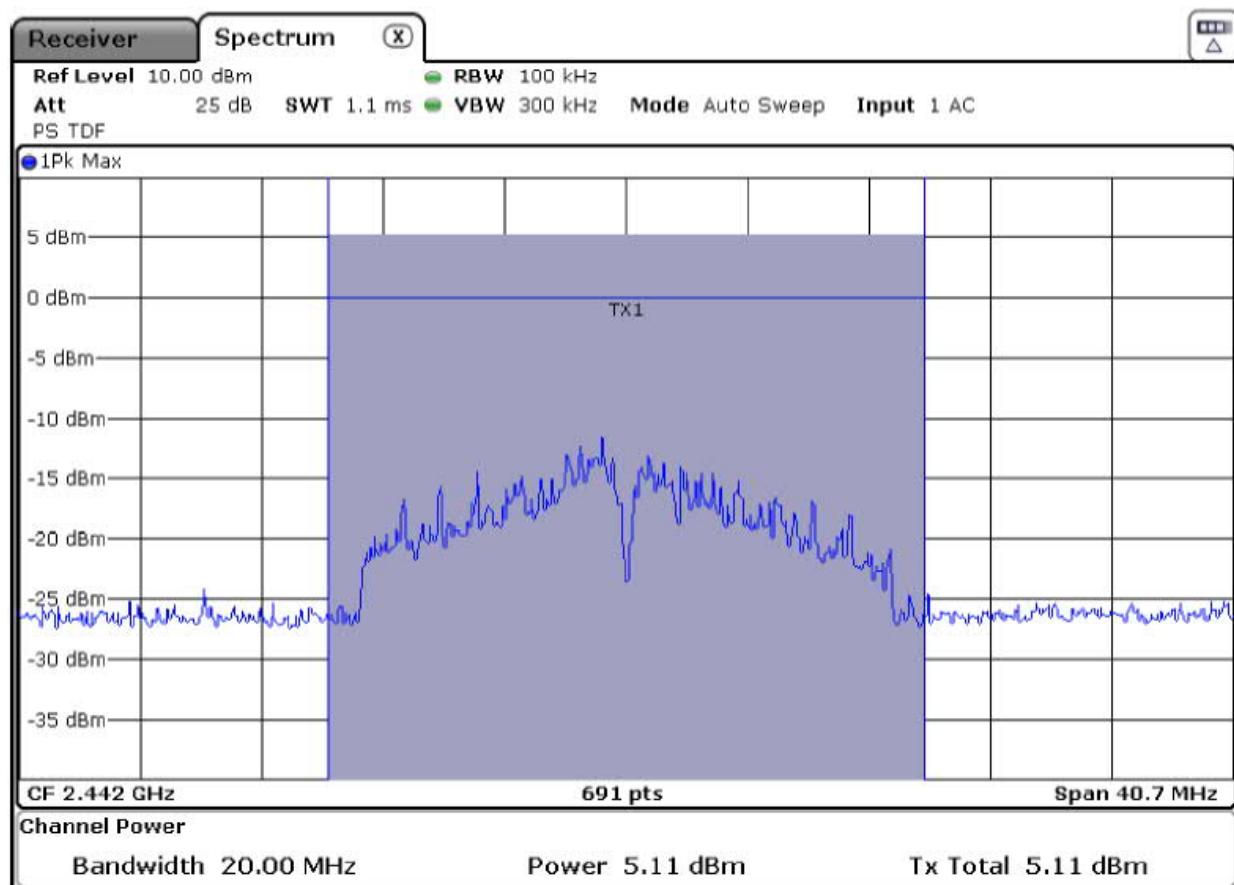TESTED
IN GERMANY**FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY**Operating Mode:** TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: Y / Polarisation: H				
Detector: PEAK max				
Freq. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	5,11	-24,89	30,00	pass

TESTED
IN GERMANY**FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY

Operating Mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

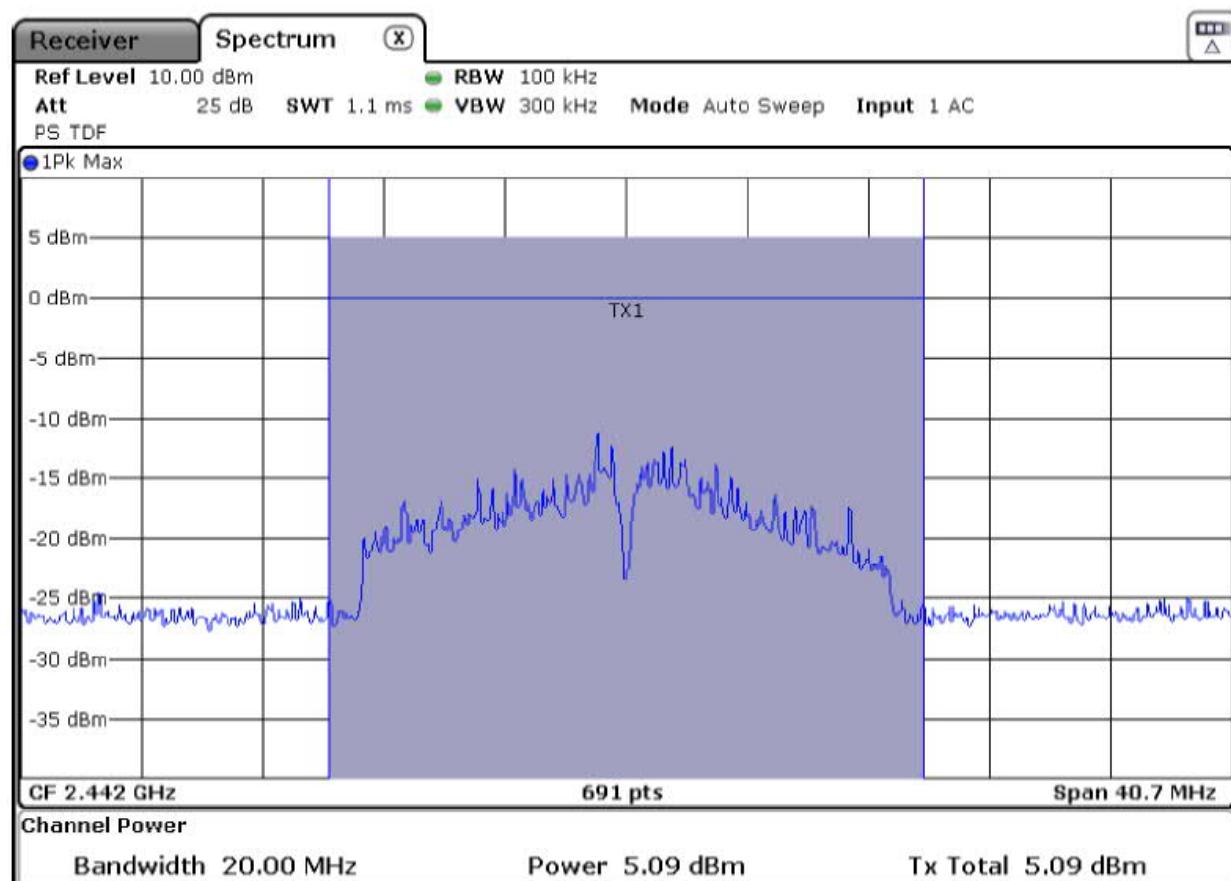

Position: Z / Polarisation: V				
Detector: PEAK max				
Freq. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	5,09	-24,91	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

TESTED
IN GERMANY

Operating Mode: TX WLAN; CH.07 (2442MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

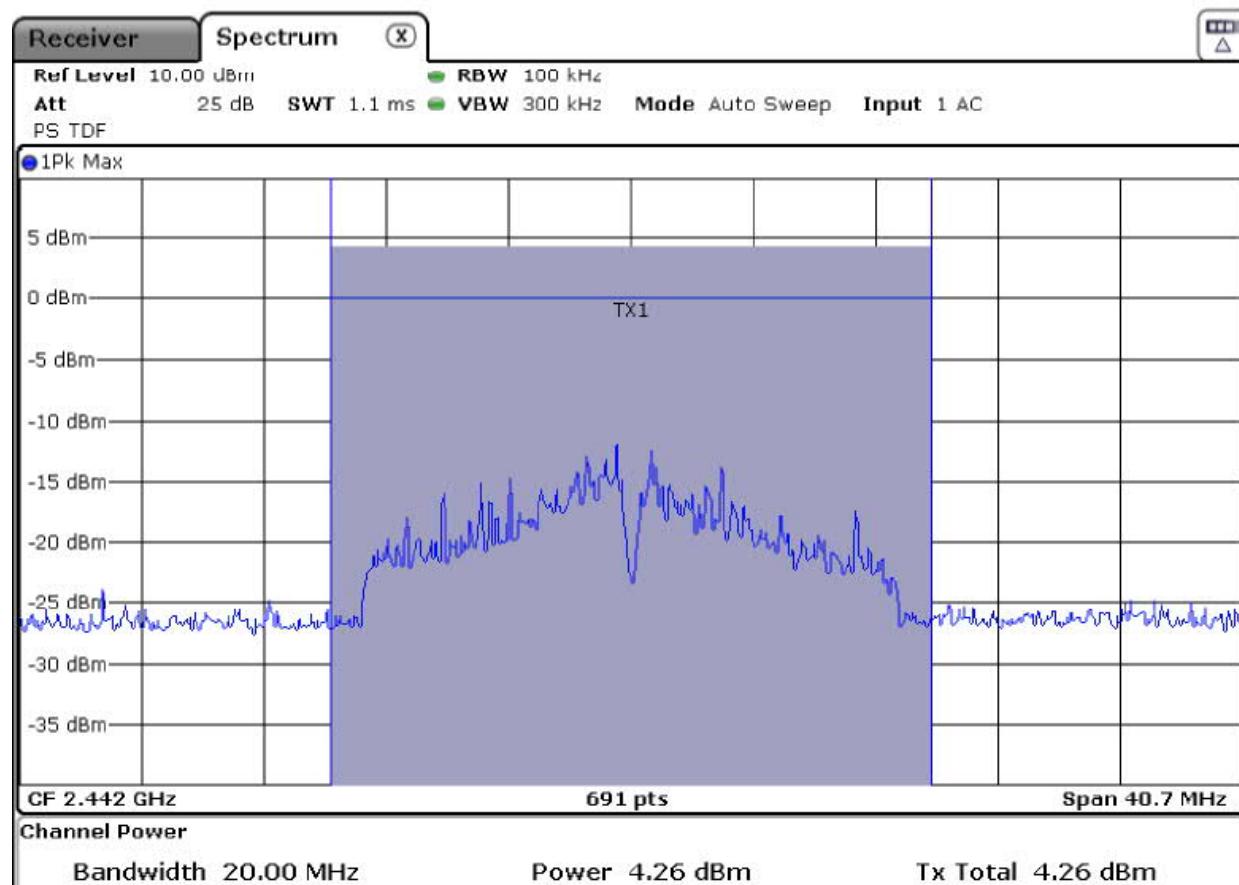

Position: Z / Polarisation: H				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2442	4,26	-25,74	30,00	pass


Summary of the findings

Test conditions	Polarization of receiving antenna	Tested frequency [MHz]	Meas value [dBm]	Limit [dBm]	Result
Position: X	V	2442	4,43	30,00	pass
Position: X	H	2442	6,96	30,00	pass
Position: Y	V	2442	6,38	30,00	pass
Position: Y	H	2442	5,11	30,00	pass
Position: Z	V	2442	5,09	30,00	pass
Position: Z	H	2442	4,26	30,00	pass

Highest operating frequency

TESTED
IN GERMANYFCC 1
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY

Operating Mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

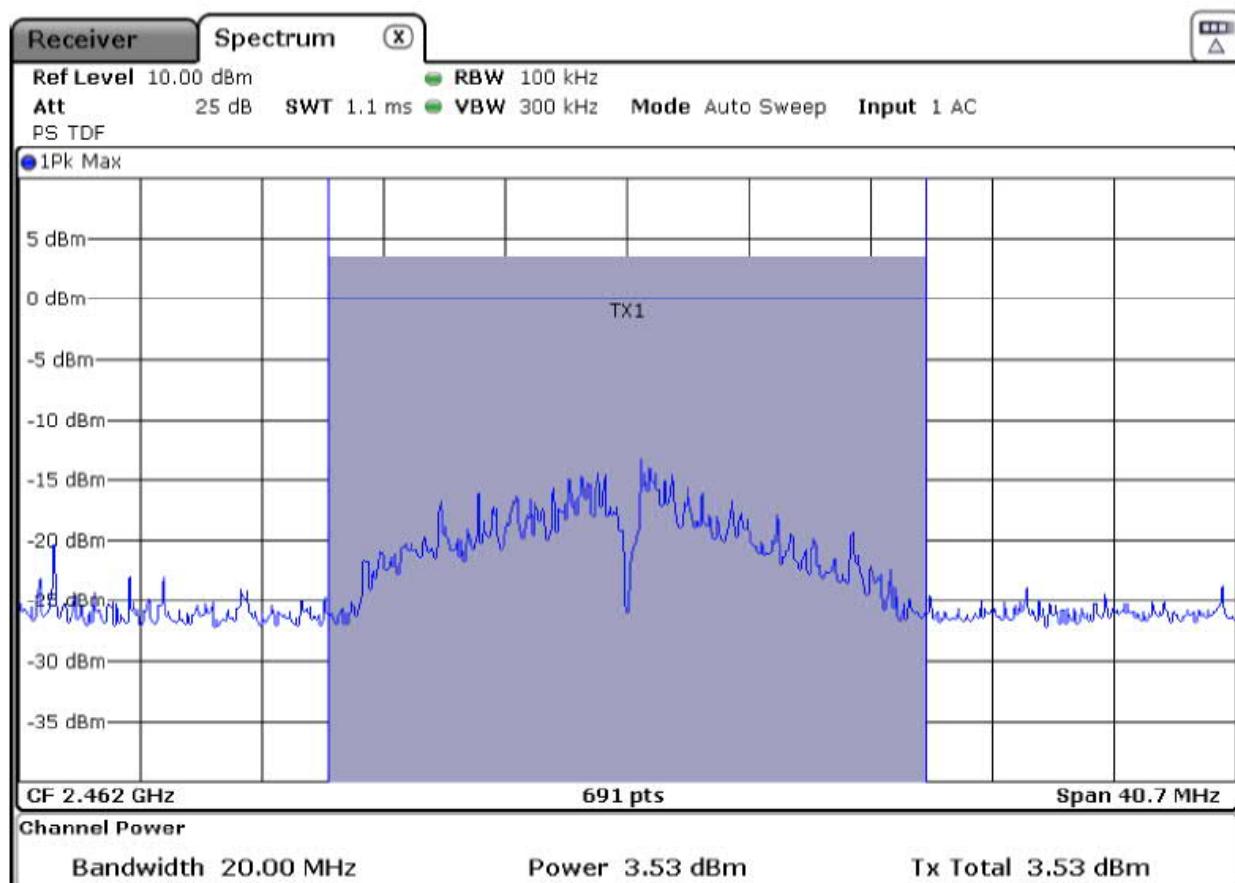

Position: X / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	3,53	-26,47	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC

Operating Mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

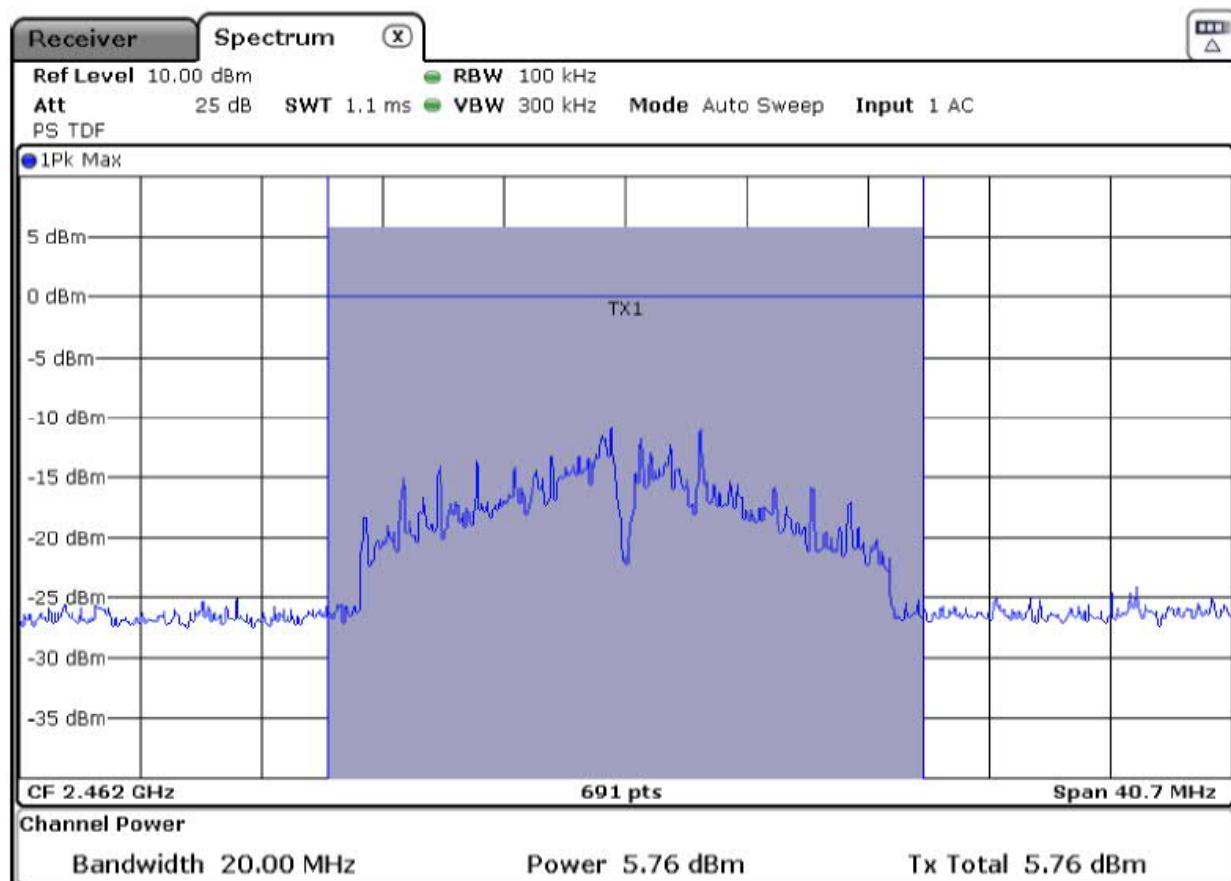

Position: X / Polarisation: H

Detector: PEAK max

Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	5,76	-24,24	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power


acc. FCC Subpart C; § 15.247 / acc. RSS-247

ESTC


Operating Mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

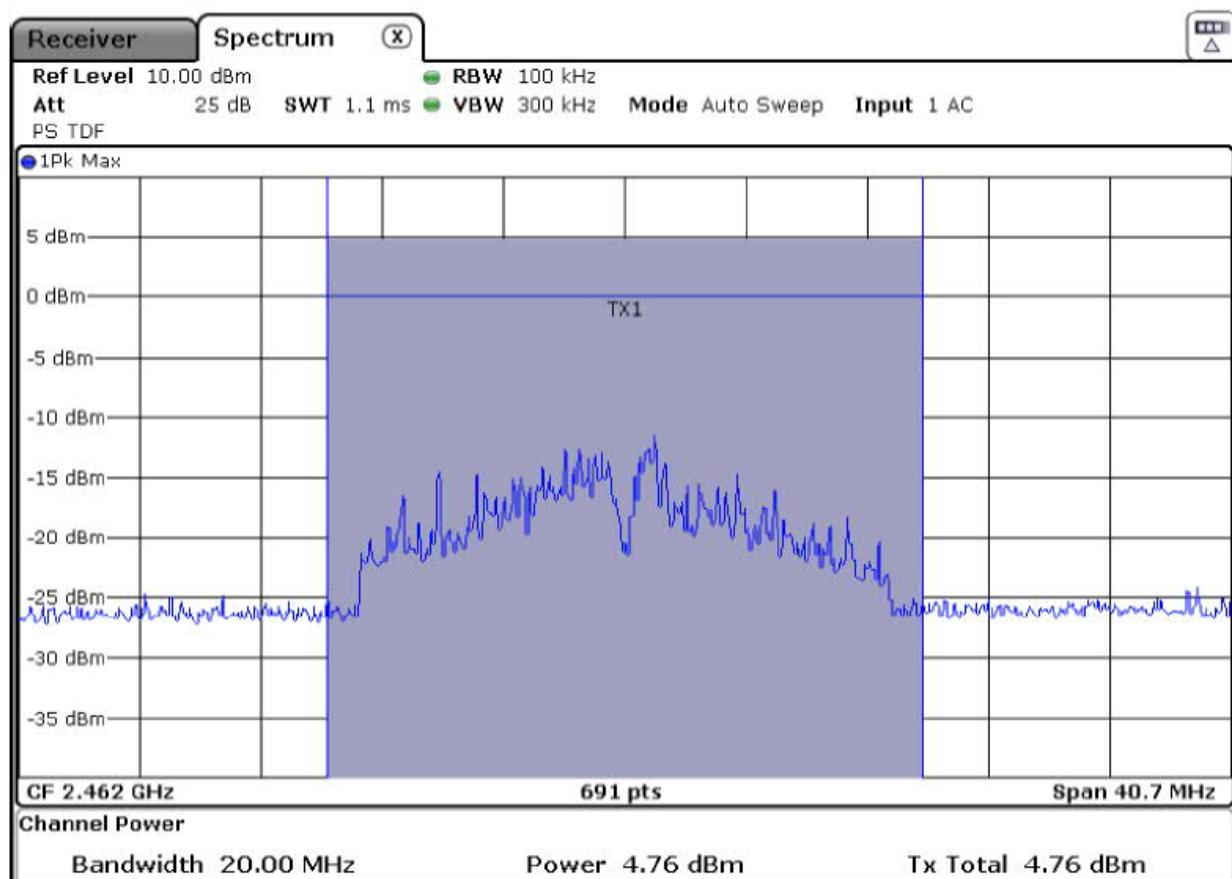

Position: Y / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	4,76	-25,24	30,00	pass

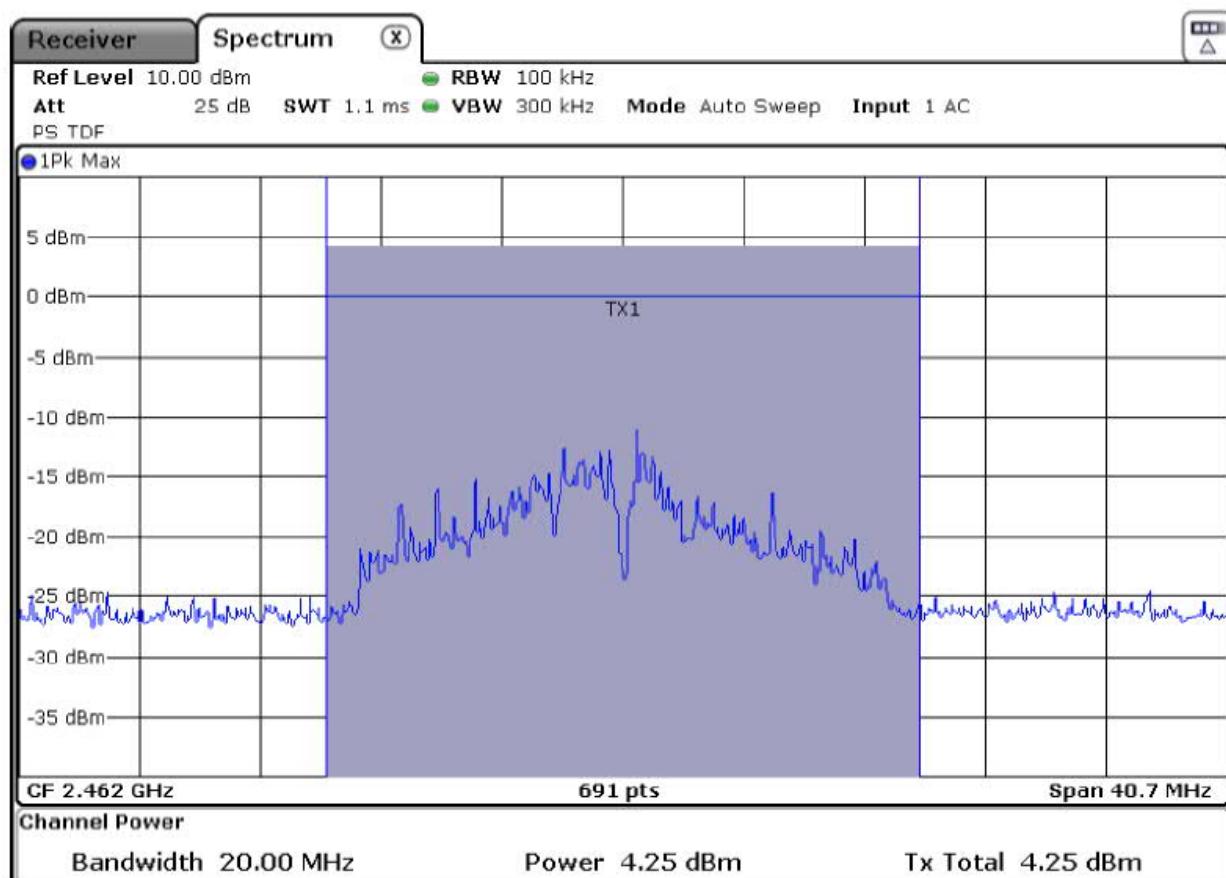TESTED
IN GERMANY**FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY**Operating Mode:** TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: Y / Polarisation: H				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	4,25	-25,75	30,00	pass

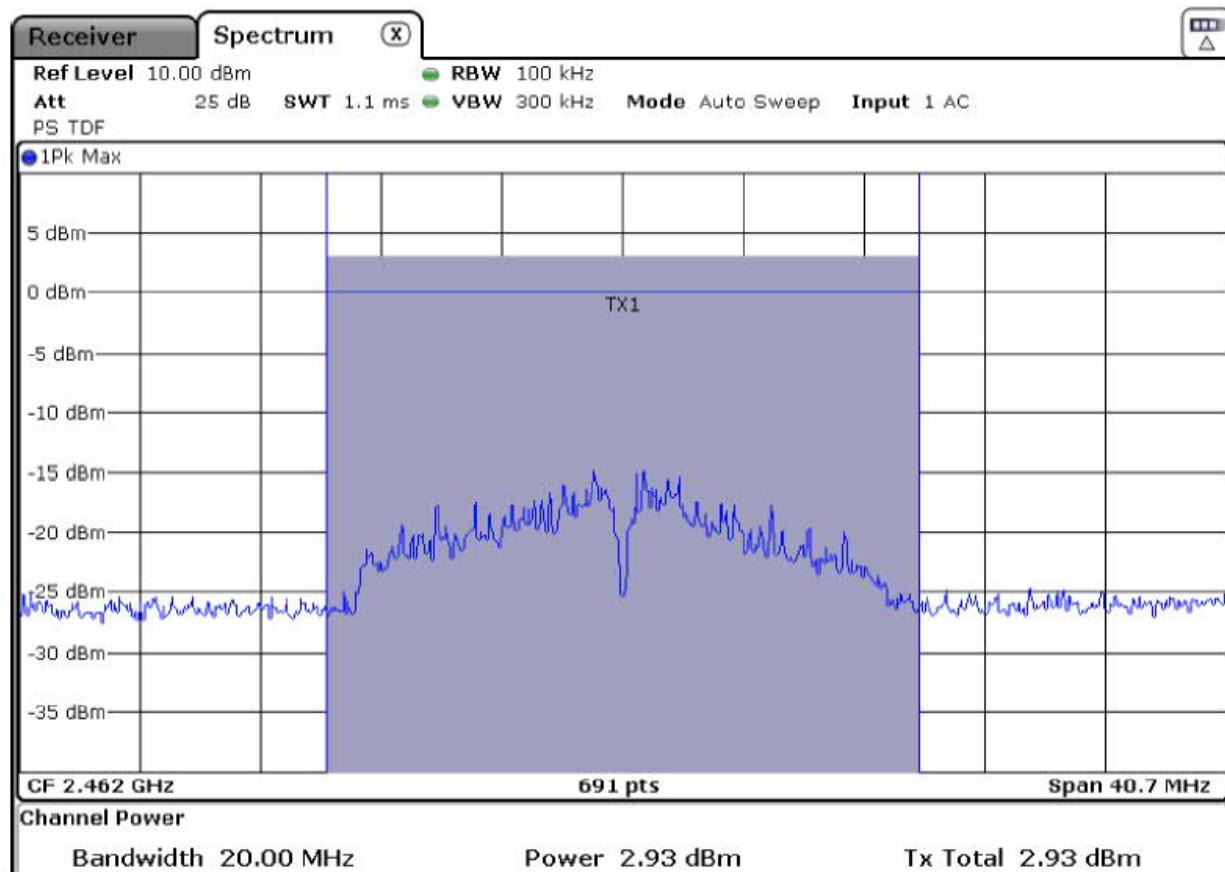TESTED
IN GERMANY**FCC 1**
Effective radiated power
acc. FCC Subpart C; § 15.247 / acc. RSS-247TESTED
IN GERMANY**Operating Mode:** TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

Position: Z / Polarisation: V				
Detector: PEAK max				
Frequ. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	2,93	-27,07	30,00	pass

TESTED
IN GERMANY


FCC 1

Effective radiated power

acc. FCC Subpart C; § 15.247 / acc. RSS-247

TESTED
IN GERMANY

Operating Mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20MHz

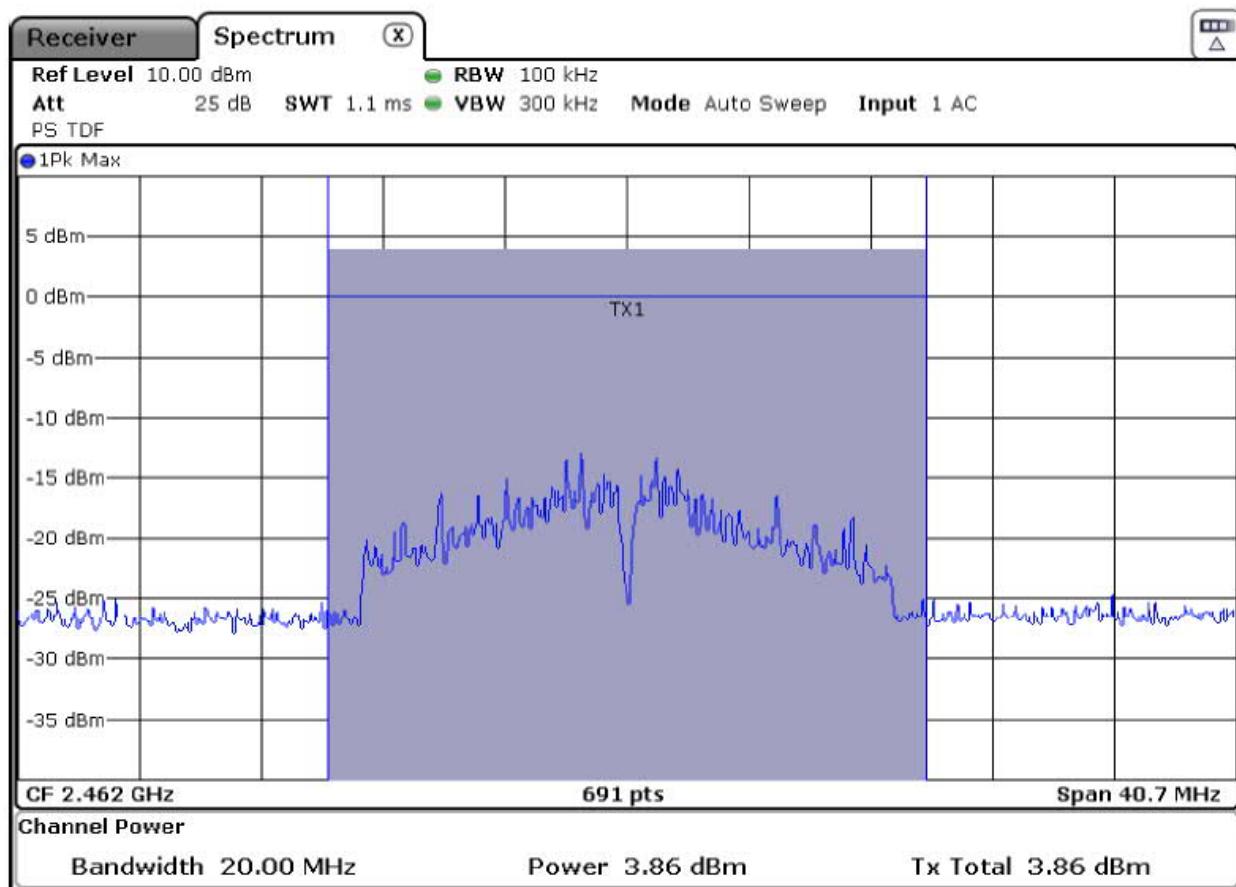

Position: Z / Polarisation: H				
Detector: PEAK max				
Freq. [MHz]	Level [dBm]	Margin to Limit [dB]	Limit [dBm]	Result
2462	3,86	-26,14	30,00	pass

Summary of the findings

Test conditions	Polarization of receiving antenna	Tested frequency [MHz]	Meas value [dBm]	Limit [dBm]	Result
Position: X	V	2462	3,53	30,00	pass
Position: X	H	2462	5,76	30,00	pass
Position: Y	V	2462	4,76	30,00	pass
Position: Y	H	2462	4,25	30,00	pass
Position: Z	V	2462	2,93	30,00	pass
Position: Z	H	2462	3,86	30,00	pass

8.3. Power Spectral Density

Applied standards

- e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 (e)
- RSS-247 issue 2 Section 5.2 (b)

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test equipment and test set up

Test equipment used for conducted measurements as given in clause Test equipment of this report.
Test setup used for conducted measurements as given in clause Test setups of this report.

Description

The maximum average conducted output power was used to determine compliance to the fundamental output power limit. So the maximum average conducted PSD level is measured with a power averaging (rms) detector.

Result**Not applicable**

8.4. Band-Edge Measurement

Applied standards

-e-CFR Title 47 Chapter I Subchapter A Part 15 Subpart C §15.247 (d)
-RSS-247 issue 2 Section 5.5

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in § 15.209 and RSS-Gen Table 5 is not required. Emissions which fall in the restricted bands, as defined in §15.205 Restricted Bands of operation as well as in restricted bands of the RSS-Gen Issue 5 (see Section 8.10 Restricted Frequency Bands) and must also comply with the radiated emission limits specified in §15.209 Radiated emission limits as well as the limits specified in RSS-Gen Table 5.

Test equipment and test set up

Test equipment used for Band Edge measurements as given in clause Test equipment of this report.
Test setup used for Band Edge measurements as given in clause Test setups of this report.

Description

For restricted Bands:

The Emission must comply with the radiated emission limits. Measured with Average and Peak detector.

For non restricted Bands:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The measurements are initially carried out according to the requirements for restricted bands, as these requirements are more stringent. If the limit value is exceeded in a non-restricted band according to the restricted band specifications, the measurement is repeated again with requirements for non restricted bands in order to prove the conformity.

Note: It was not necessary to carry out a re-test for non restricted band requirements for the tested EUT.

Detector function selection and bandwidth

For the measurement, an EMI test receiver that have CISPR peak detector as well as average detector were used.

Band Edge for restricted Band

Frequency range:	Bandwidth	
See measurement graph	RBW:	1 MHz
	VBW:	3 MHz

Band Edge for non restricted Band

Frequency range:	Bandwidth	
See measurement graph	RBW:	100 kHz
	VBW:	300 kHz

Result

From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the **Band Edges**.

Measurement

The Measurement was performed on: 07.09.2022

Band Edge Measurement (radiated)

TESTED
IN GERMANY

FCC 3
Band edge emission
acc. FCC: Subpart C: \$15.247 / acc. RSS-247

ESTC

Ref -No : 22/09-0001

Product: Camera

Sample: 01

Date: 07.09.2022


Operator: BI

Remarks:

pass fail

ss fail

Operation mode

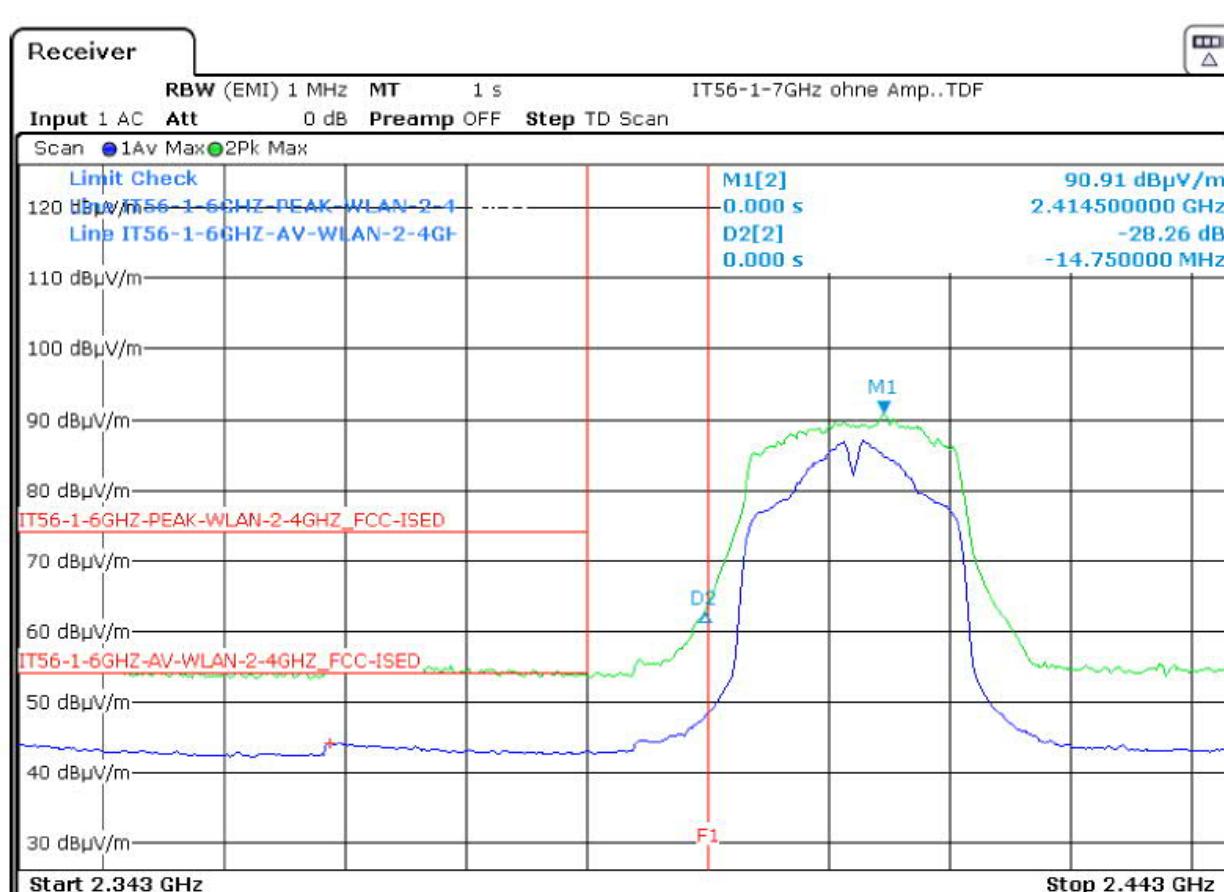

TESTED
IN GERMANY

FCC 3
Band edge emission

ESTC

Ref -No : 22/09-0001

Operation mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

