


TESTED
IN GERMANYFCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

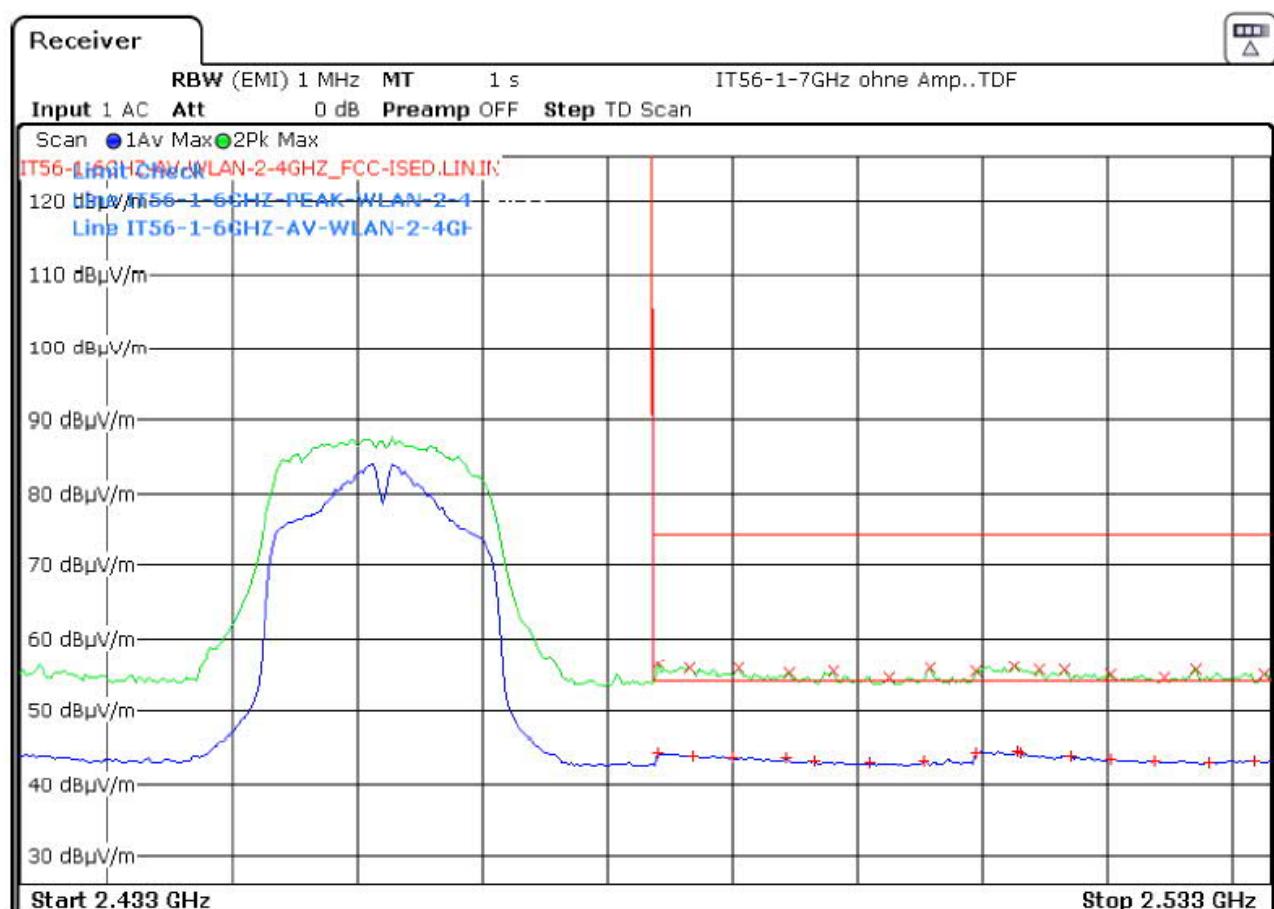


Position : X / Polarisation: V									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,5128	44,50	-9,50	54,00	pass	2,4840	56,35	-17,65	74,00	pass
2,5095	44,34	-9,66	54,00	pass	2,5125	56,02	-17,98	74,00	pass
2,5130	44,20	-9,80	54,00	pass	2,5058	55,88	-18,12	74,00	pass
2,4840	44,17	-9,83	54,00	pass	2,4905	55,87	-18,13	74,00	pass
2,4868	43,92	-10,08	54,00	pass	2,4865	55,80	-18,20	74,00	pass
2,5170	43,90	-10,10	54,00	pass	2,5270	55,66	-18,34	74,00	pass

TESTED
IN GERMANYFCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

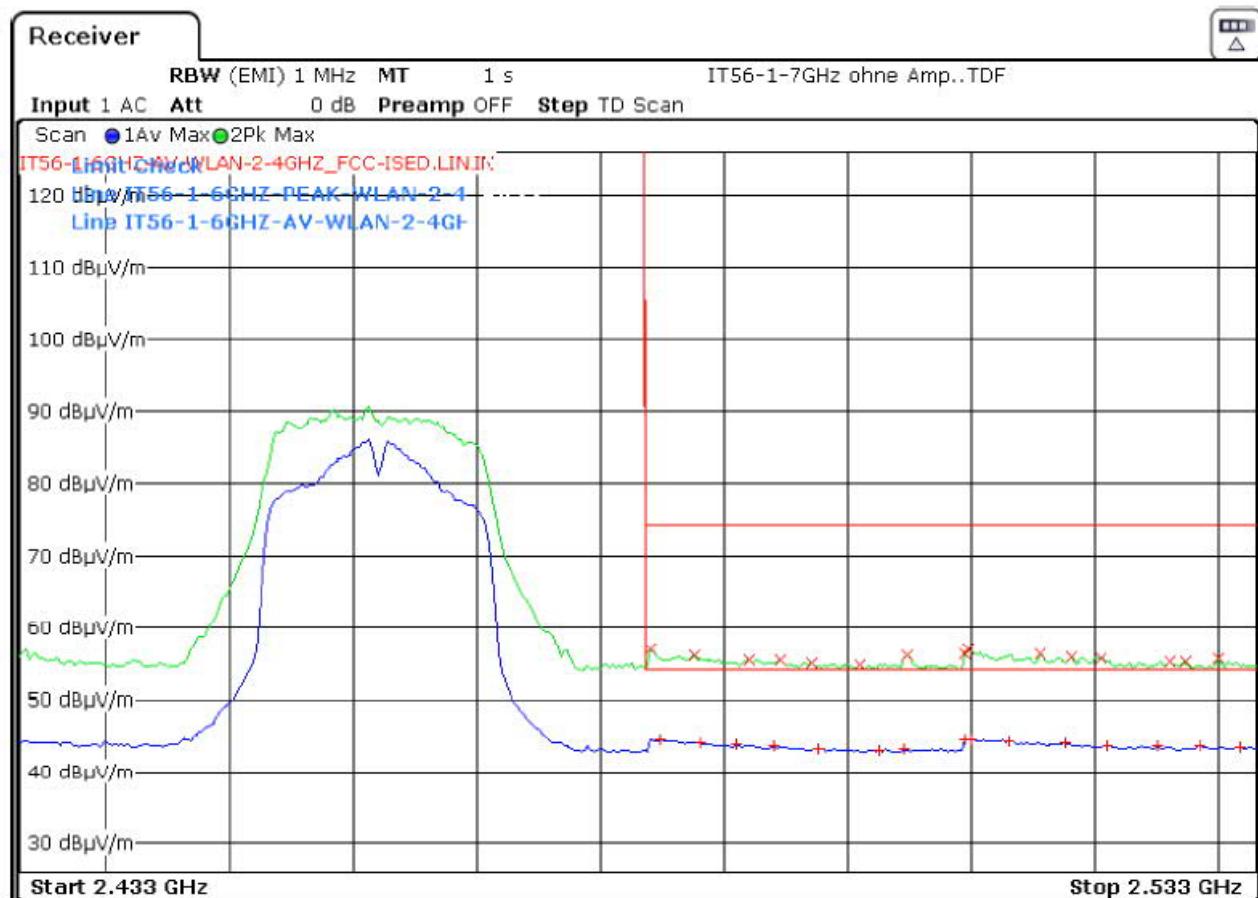

Position: X / Polarisation: H									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,5100	44,53	-9,47	54,00	pass	2,4840	56,93	-17,07	74,00	pass
2,4848	44,51	-9,49	54,00	pass	2,5098	56,82	-17,18	74,00	pass
2,5095	44,44	-9,56	54,00	pass	2,5155	56,19	-17,81	74,00	pass
2,5130	44,32	-9,68	54,00	pass	2,5095	56,12	-17,88	74,00	pass
2,4880	44,14	-9,86	54,00	pass	2,4875	56,00	-18,00	74,00	pass
2,5175	44,01	-9,99	54,00	pass	2,5048	55,90	-18,10	74,00	pass


TESTED
IN GERMANY

FCC 3
Band edge emission

STC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

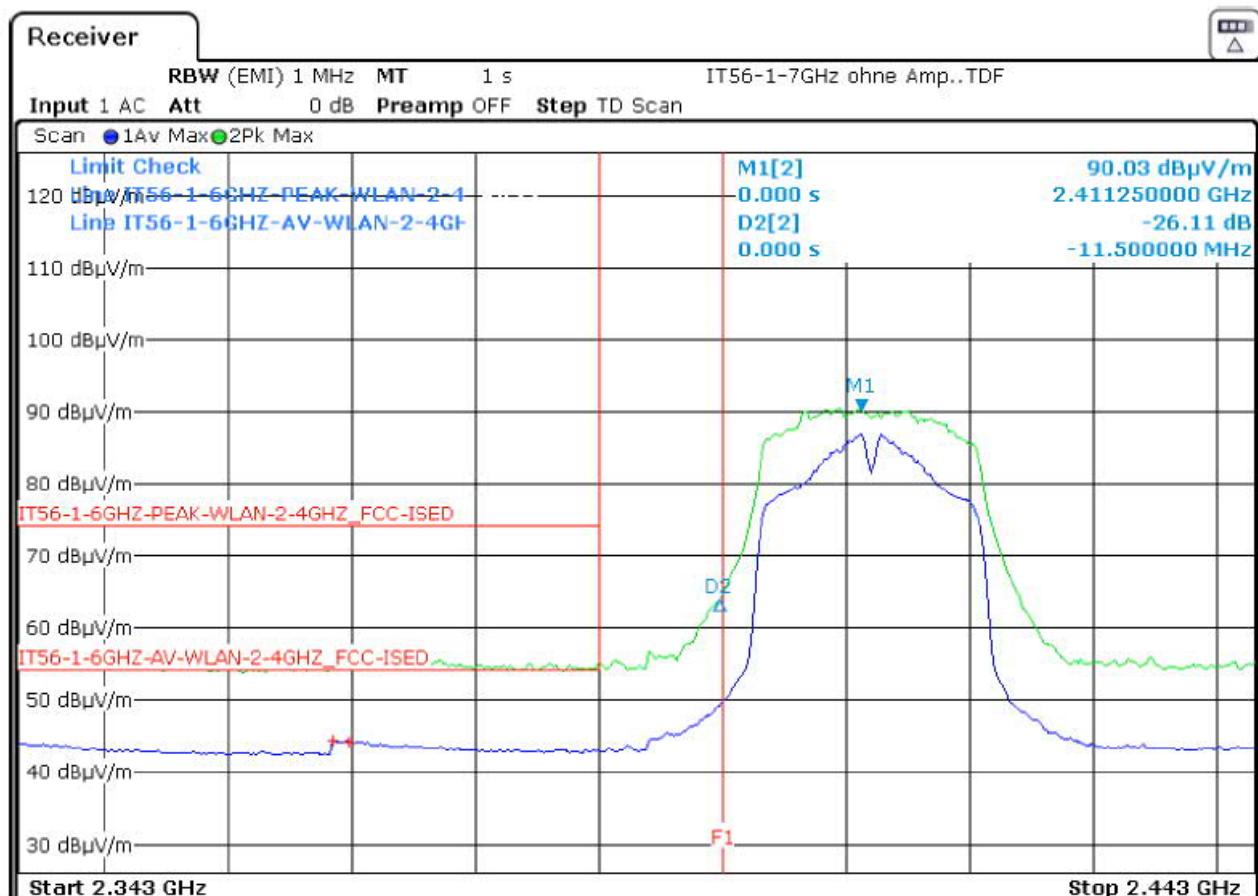




FCC 3
Band edge emission



Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

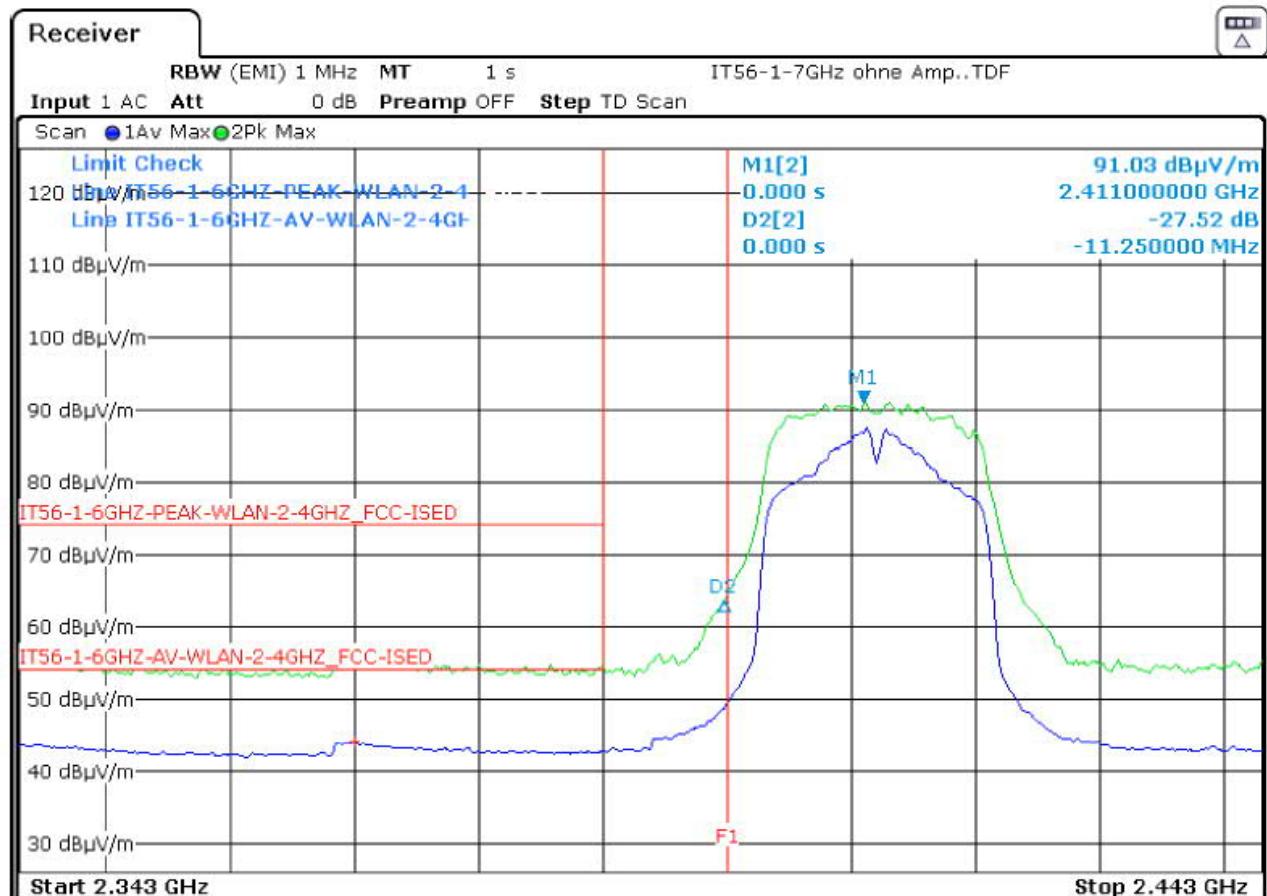


TESTED
IN GERMANYFCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

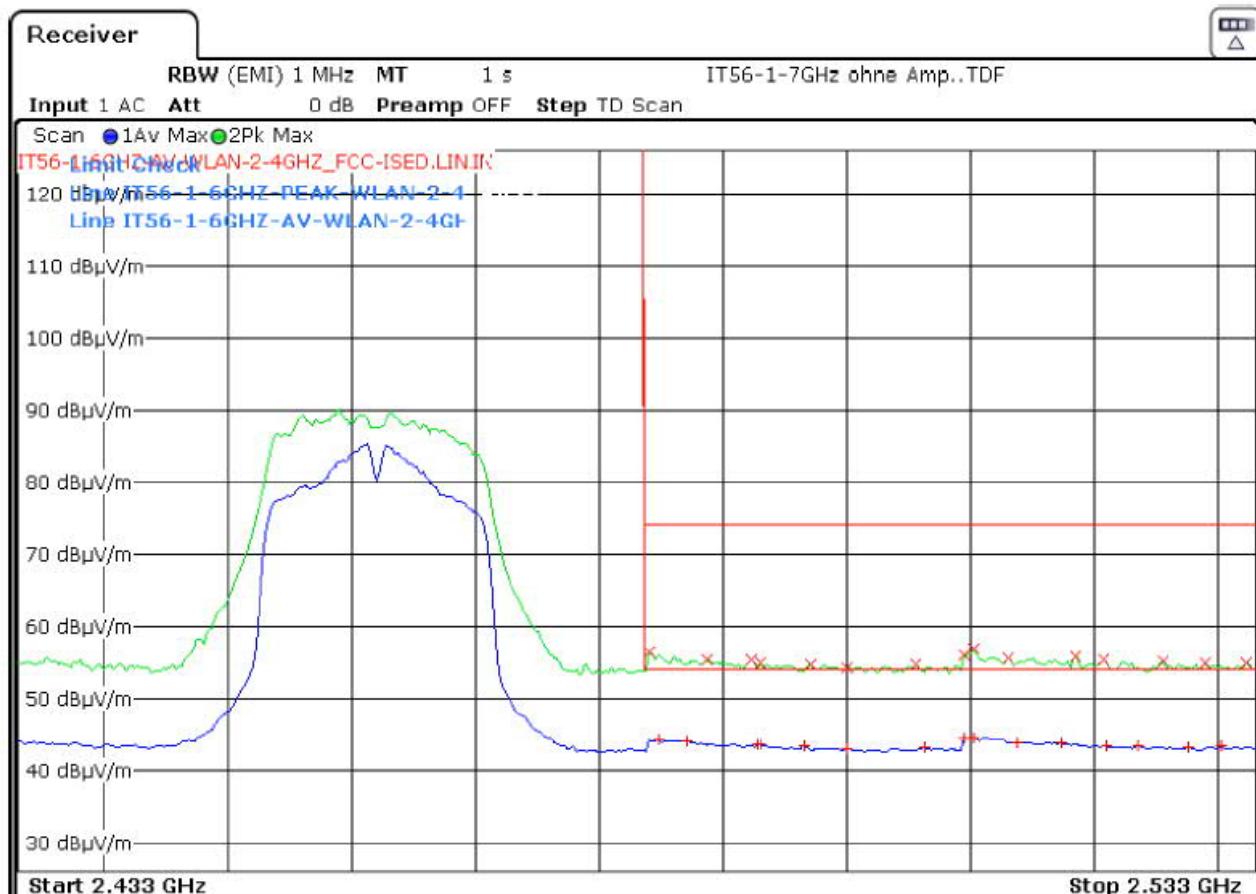


Position : Y / Polarisation: V									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,5103	44,56	-9,44	54,00	pass	2,5103	56,77	-17,23	74,00	pass
2,5095	44,47	-9,53	54,00	pass	2,4840	56,33	-17,67	74,00	pass
2,4848	44,27	-9,73	54,00	pass	2,5095	56,10	-17,90	74,00	pass
2,4870	44,10	-9,90	54,00	pass	2,5185	55,80	-18,20	74,00	pass
2,5138	43,90	-10,10	54,00	pass	2,5130	55,61	-18,39	74,00	pass
2,5173	43,80	-10,20	54,00	pass	2,4923	55,41	-18,59	74,00	pass

TESTED
IN GERMANYFCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

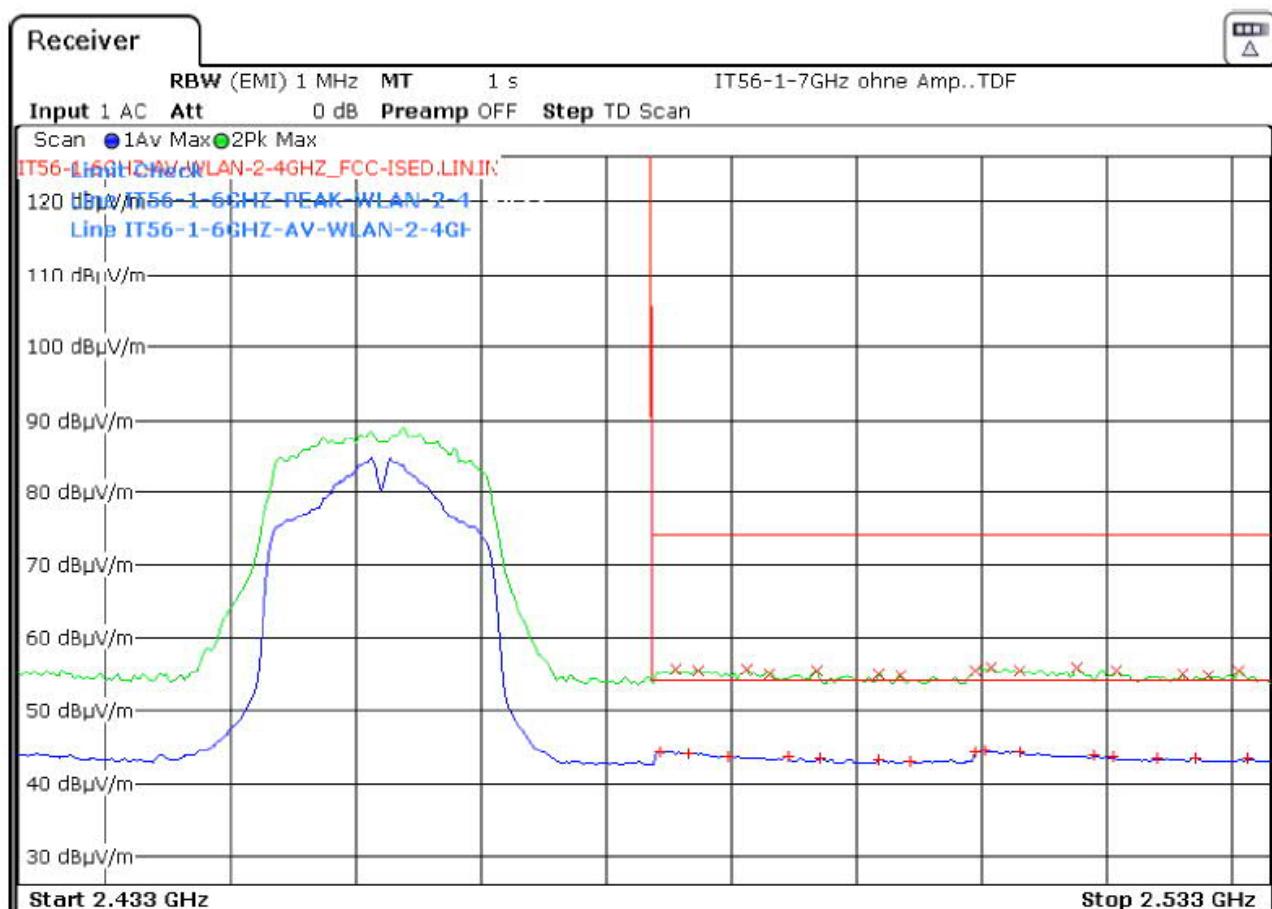

Position: Y / Polarisation: H									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,5103	44,46	-9,54	54,00	pass	2,5175	55,76	-18,24	74,00	pass
2,5095	44,25	-9,75	54,00	pass	2,5108	55,74	-18,26	74,00	pass
2,4843	44,24	-9,76	54,00	pass	2,4913	55,51	-18,49	74,00	pass
2,5130	44,18	-9,82	54,00	pass	2,4855	55,51	-18,49	74,00	pass
2,4865	44,06	-9,94	54,00	pass	2,4873	55,45	-18,55	74,00	pass
2,5190	43,74	-10,26	54,00	pass	2,4968	55,41	-18,59	74,00	pass


TESTED
IN GERMANY

FCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

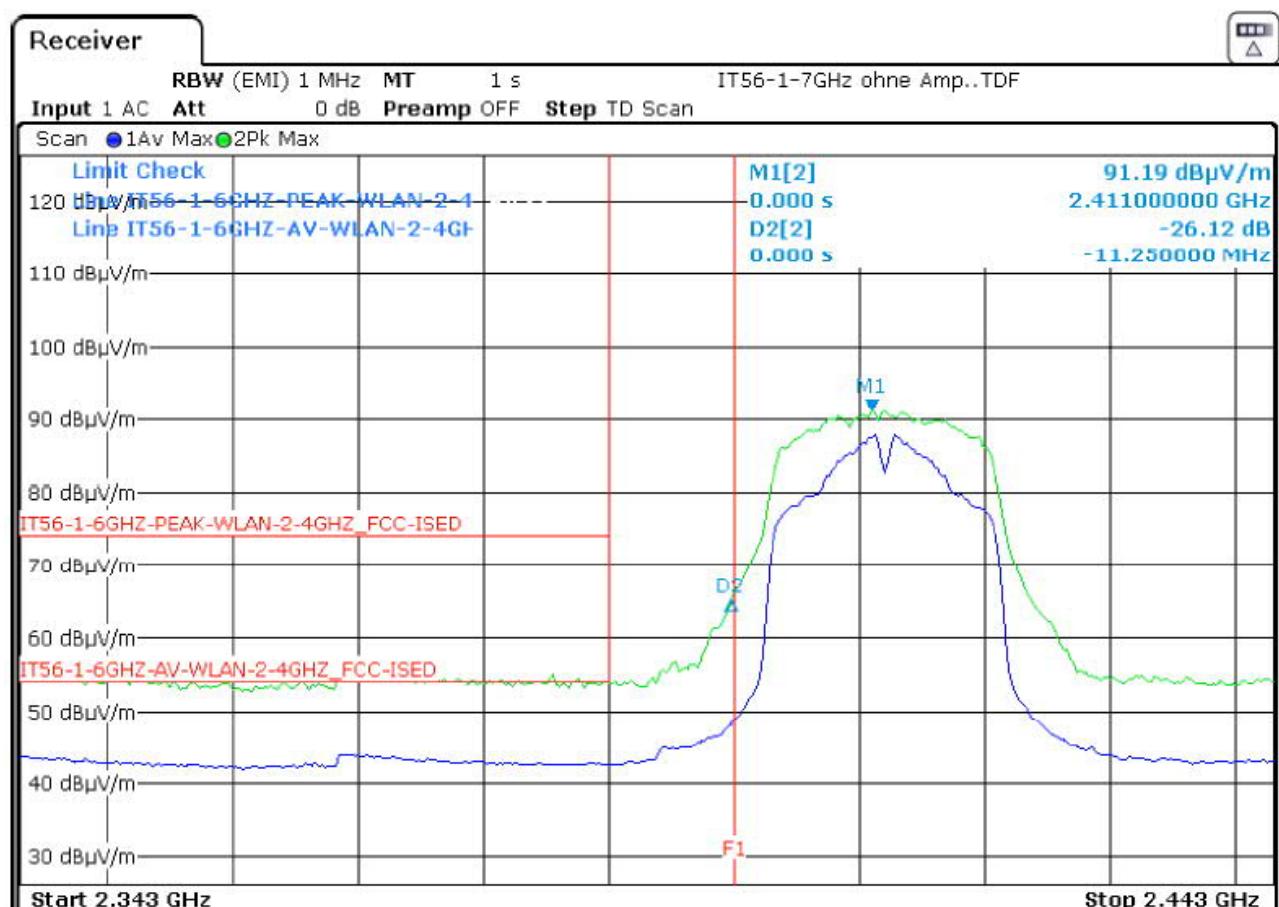




FCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247



Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.01 (2412MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

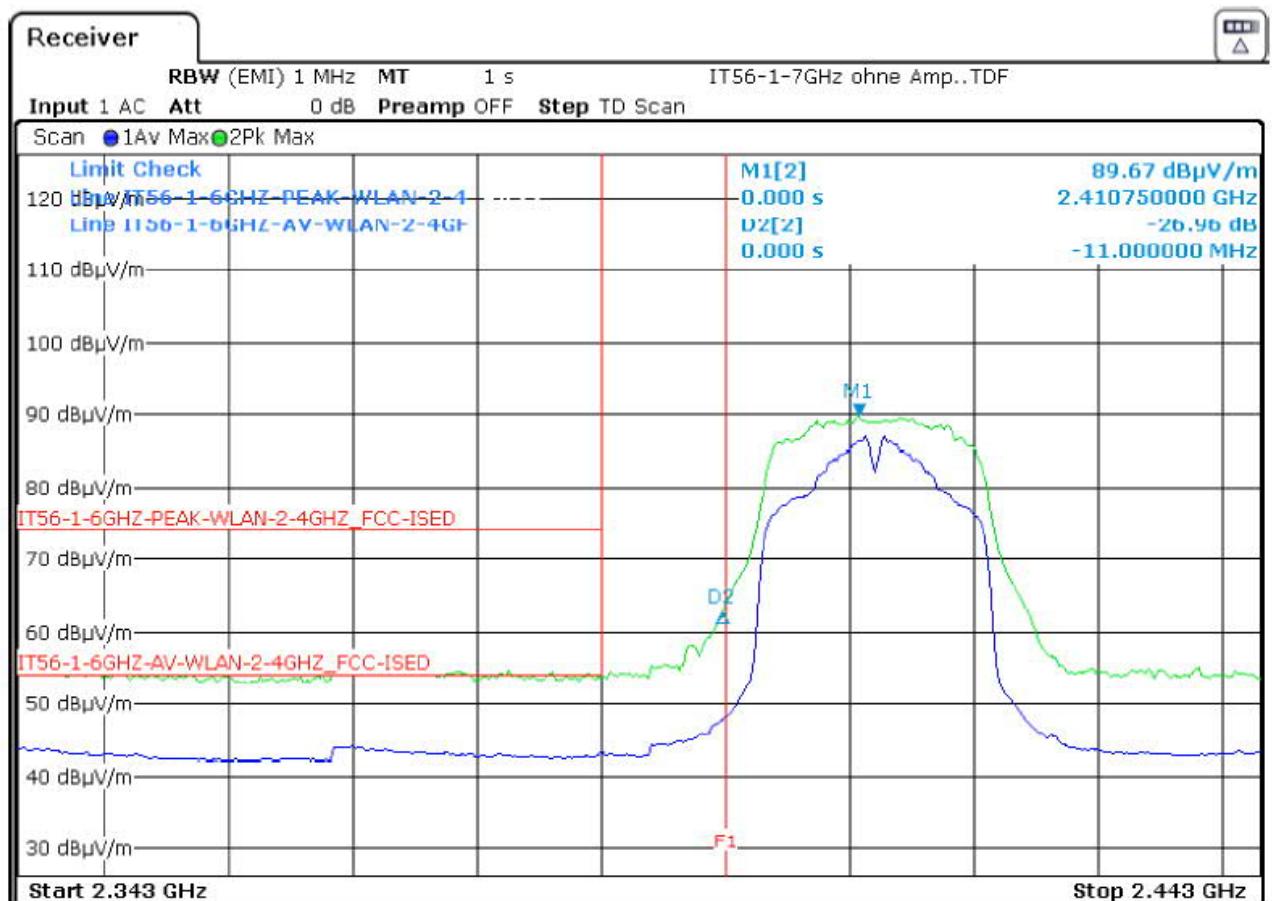


TESTED
IN GERMANY

FCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247

TESTED
IN GERMANY

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

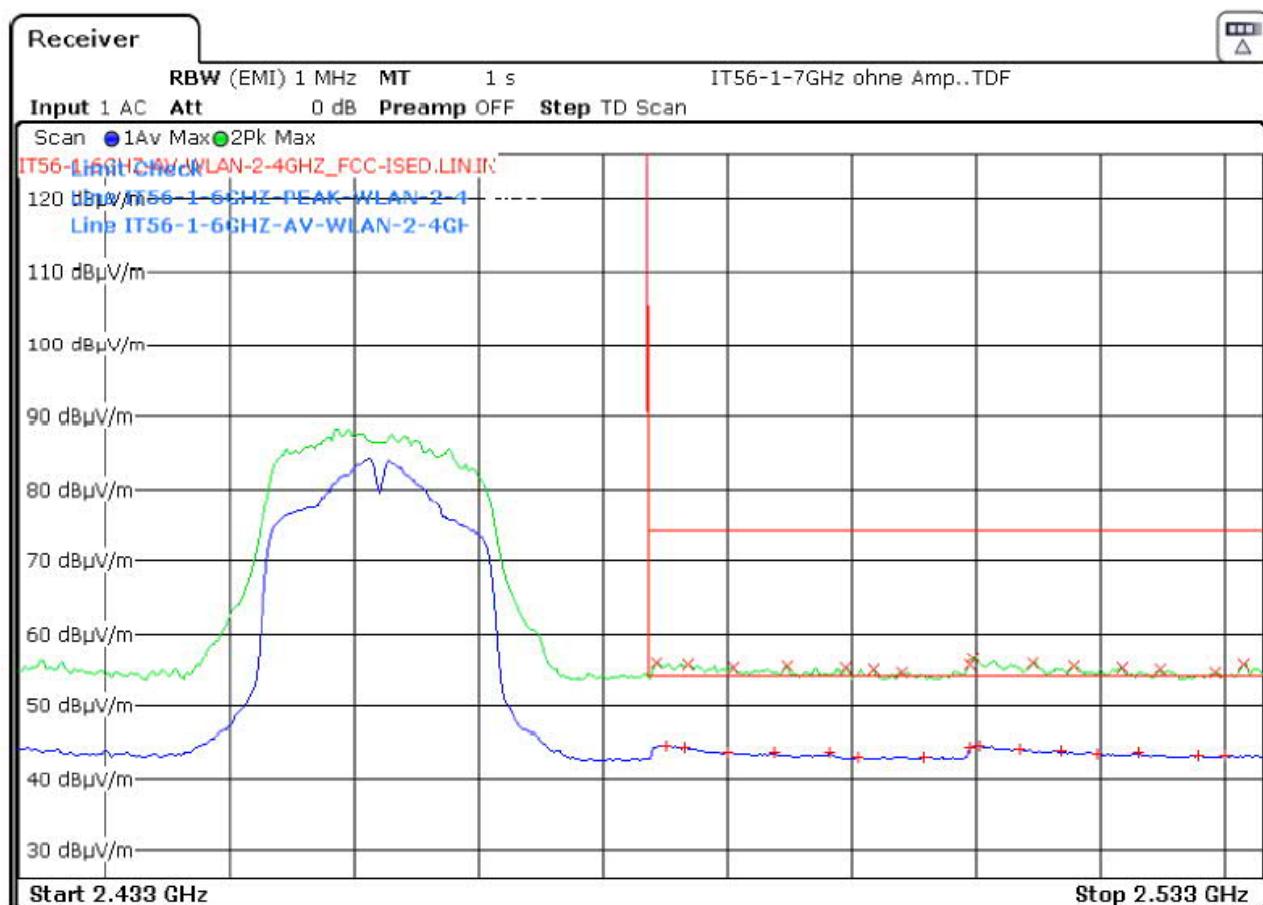

Position : Z / Polarisation: V									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,4850	44,49	-9,51	54,00	pass	2,5098	56,67	-17,33	74,00	pass
2,5103	44,48	-9,52	54,00	pass	2,5145	55,87	-18,13	74,00	pass
2,4865	44,35	-9,65	54,00	pass	2,4843	55,71	-18,29	74,00	pass
2,5095	44,29	-9,71	54,00	pass	2,5095	55,66	-18,34	74,00	pass
2,5135	44,03	-9,97	54,00	pass	2,5315	55,59	-18,41	74,00	pass
2,5168	43,72	-10,28	54,00	pass	2,4868	55,48	-18,52	74,00	pass


TESTED IN GERMANY

FCC 3
Band edge emission
acc. FCC; Subpart C; §15.247 / acc. RSS-247

ESTC

Ref.-No.: 22/09-0001

Operation mode: TX WLAN; CH.11 (2462MHz); Power setting +8dBm; 11 Mb/s; 802.11b; DSSS; BW=20 MHz

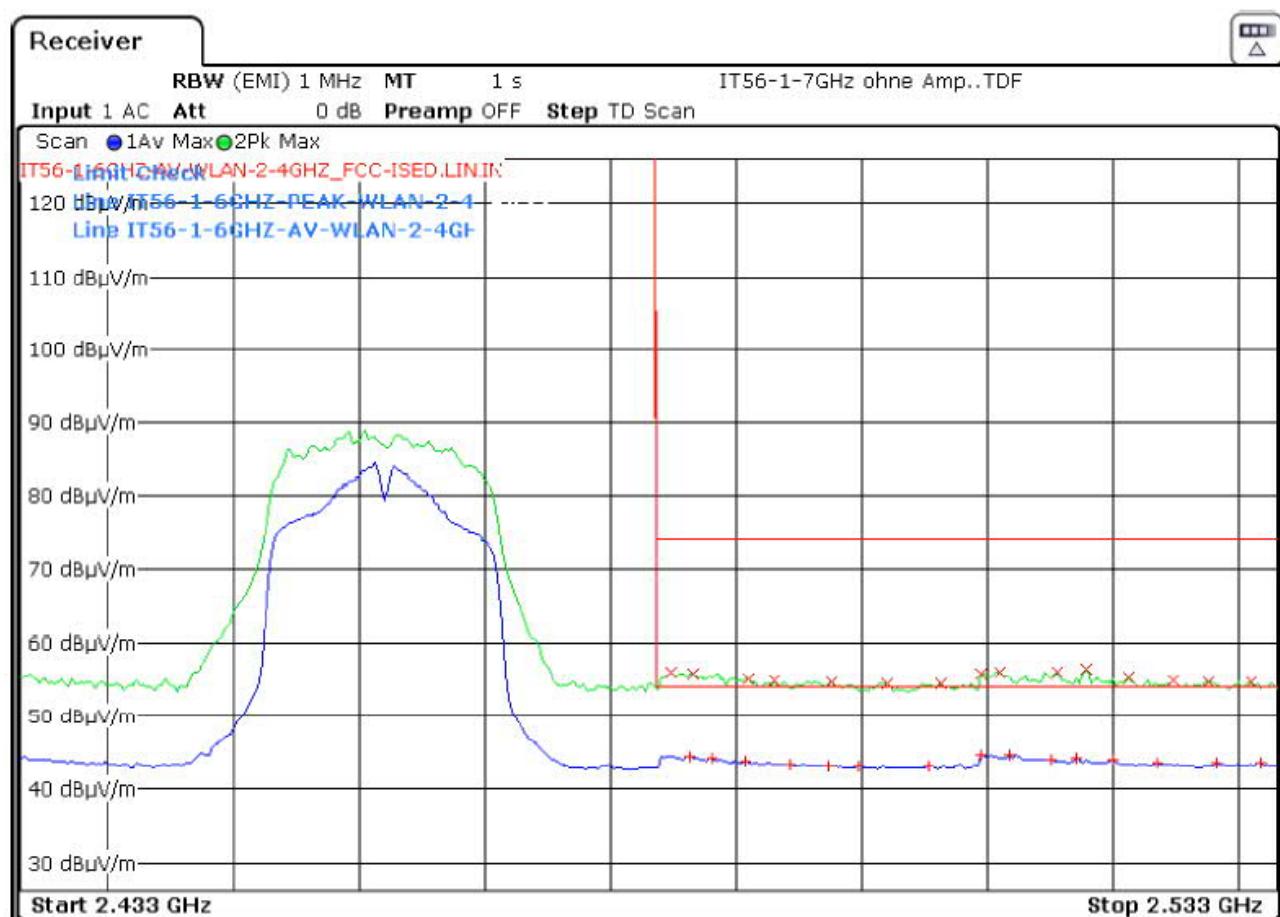

Position: Z / Polarisation: H									
Detector Average					Detector Peak				
Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result	Frequ. [GHz]	Level [dB μ V/m]	Margin to Limit [dB]	Limit [dB μ V/m]	Result
2,5095	44,52	-9,48	54,00	pass	2,5178	56,37	-17,63	74,00	pass
2,5118	44,40	-9,60	54,00	pass	2,5110	56,05	-17,95	74,00	pass
2,4863	44,31	-9,69	54,00	pass	2,4848	55,96	-18,04	74,00	pass
2,4880	44,13	-9,87	54,00	pass	2,5155	55,91	-18,09	74,00	pass
2,5170	44,02	-9,98	54,00	pass	2,5095	55,80	-18,20	74,00	pass
2,5150	43,91	-10,09	54,00	pass	2,4865	55,72	-18,28	74,00	pass

8.5. 99% Power Bandwidth

Applied standards

-RSS-Gen issue 5 Section 6.7

Test equipment and test set up

Test equipment used for conducted measurements as given in clause Test equipment of this report.

Test setup used for conducted measurements as given in clause Test setups of this report.

Description

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The 99% power bandwidth function of the instrument was used for the measurement.

Result

No measurement not applicable

9. Test equipment

Test equipment used for radiated Measurements:

Kind of equipment	Manufacturer	Type	Ident no.	Serial no.	Calibrated on (y-m)	Calibration interval
Signal Spectrum Analyzer 2 Hz - 26.5 GHz	Rohde & Schwarz	FSW26 Instrument FW 5.00	11571	102047	2022-March	3 years
ESR 7 EMI Testreceiver 7 GHz	Rohde & Schwarz	ESR 7 Instrument FW 3.36	11676	101694	2021-April	3 years
Signal Spectrum Analyzer 7 GHz - 22 GHz	Hewlett Packard	8562B	10208	2750A002 09	2021-April	3 years
Signal Spectrum Analyzer 26 – 40 GHz	Rohde & Schwarz	FSMS 26	10481/ 10482	839014/00 4	-/-	no
Antenna 1 GHz – 18 GHz	Electro Metric	RGA 50/60	10273	2753	2021-Jan.	3 years
Antenna (FCC) 30 MHz – 1 GHz	Chase	CBL6111	10022	1064	2022-Aug.	3 years
Antenna 9 kHz – 30 MHz	Schwarzbeck	EMCO 6502	10546	2018	2021-Jan.	3 years
Antenna 15 GHz – 26.5 (40) GHz	Schwarzbeck	BBHA 9170	11580	BBHA917 06	2019-Dec.	3 years
Preamplifier 18 GHz – 40 GHz	CERNEX	CBM18403523	11679	29711	2022-June	3 years
Shielded room/ Chamber	Frankonia	SAC3 "SEMI-ANECHOIC-CHAMBER"	11609	004/16	2022-March	3 years
Climatic exposure test cabinet	Heraeus	HC4020	10369			3 years
Multimeter	Fluke	79III	10938	71150461	2020-April	3 years
Broadband-Preamplifier 1 GHz - 18 GHz	Schwarzbeck	BBV9718	11231	9718-002	2021-Jan.	3 years
Cable 8 m	el-spec GmbH	FlexCore-SMA11-SMA11-8000-ARM	11625	-/-	2020-Oct.	3 years
Cable 1.5 m	Suhner	Sucoflex 100	11648	-/-	2020-Oct.	3 years
Band Reject Filter	Telemeter	BRF-2450-150-7-N (0441)	11243	-/-	2020-Oct.	3 years
High Pass Filter	Wainwright Instruments GmBH	WHKX10-902-1100-1500-80ST	11735	1	2020-Oct.	3 years

Test equipment used for Band Edge Measurements:

Kind of equipment	Manufacturer	Type	Ident no.	Serial no.	Calibrated on (y-m)	Calibration interval
ESR 7 EMI Testreceiver 7 GHz	Rohde & Schwarz	ESR 7 Instrument FW 3.36	11676	101694	2021-April	3 years
Antenna 1 GHz – 18 GHz	Electro Metric	RGA 50/60	10273	2753	2021-Jan.	3 years
Cable 8 m	el-spec GmbH	FlexCore-SMA11-SMA11-8000-ARM	11625	-/-	2020-Oct.	3 years
Shielded room/ Chamber	Frankonia	SAC3 "SEMI-ANECHOIC-CHAMBER"	11609	004/16	2022-March	3 years



All measurements were made with measuring instruments, including any accessories that may affect test results, calibrated according to the requests of ISO/IEC 17025 according to which the test site is accredited from DAkkS. Measurement of conducted mains emissions was made with instruments conforming to American National Standard Specification, ANSI C63.4-2014.



Test equipment to support EUT functions:


Kind of equipment	Manufacturer	Type	Ident no.
Laptop	Lenovo	G700	11568
Mobil telephone	Samsung	Galaxy A21	-/-

10. Test setups


Block diagram Conducted Mains emissions

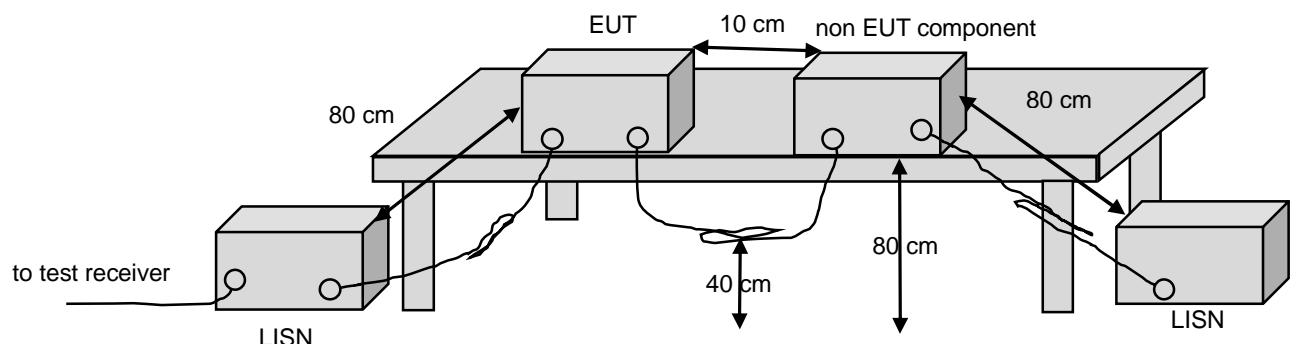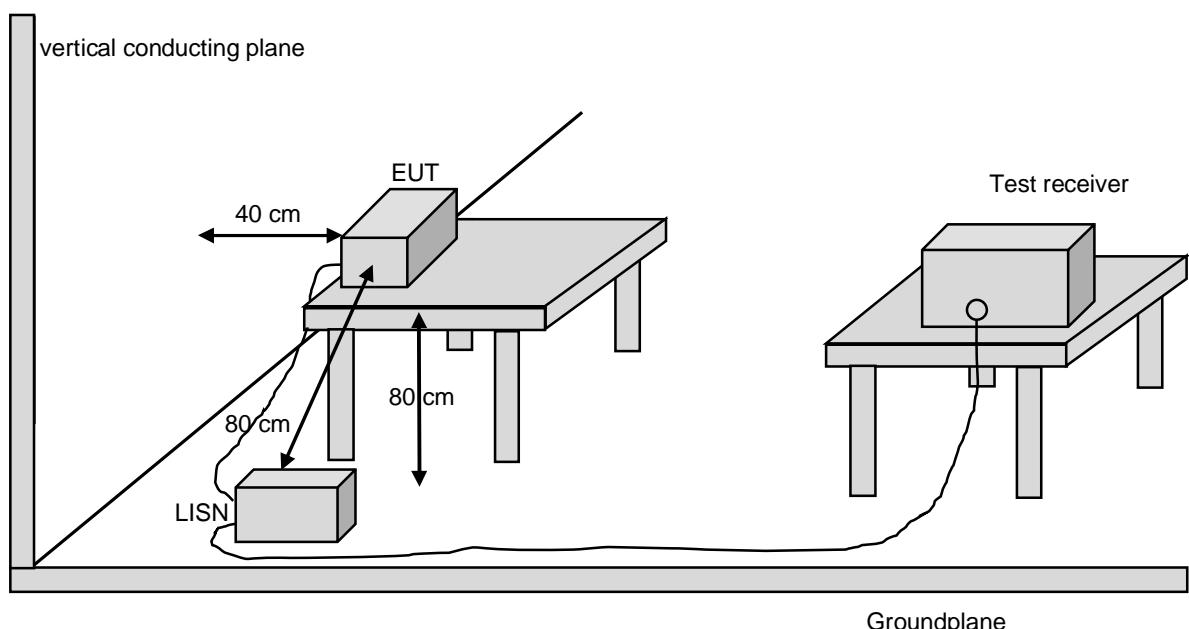


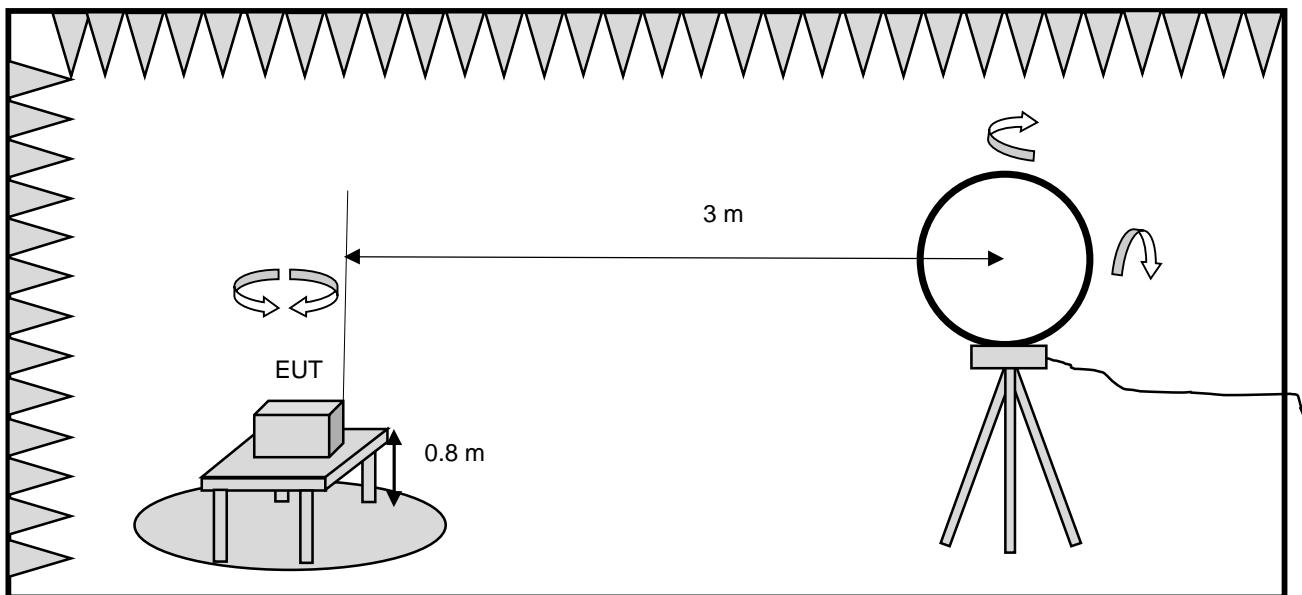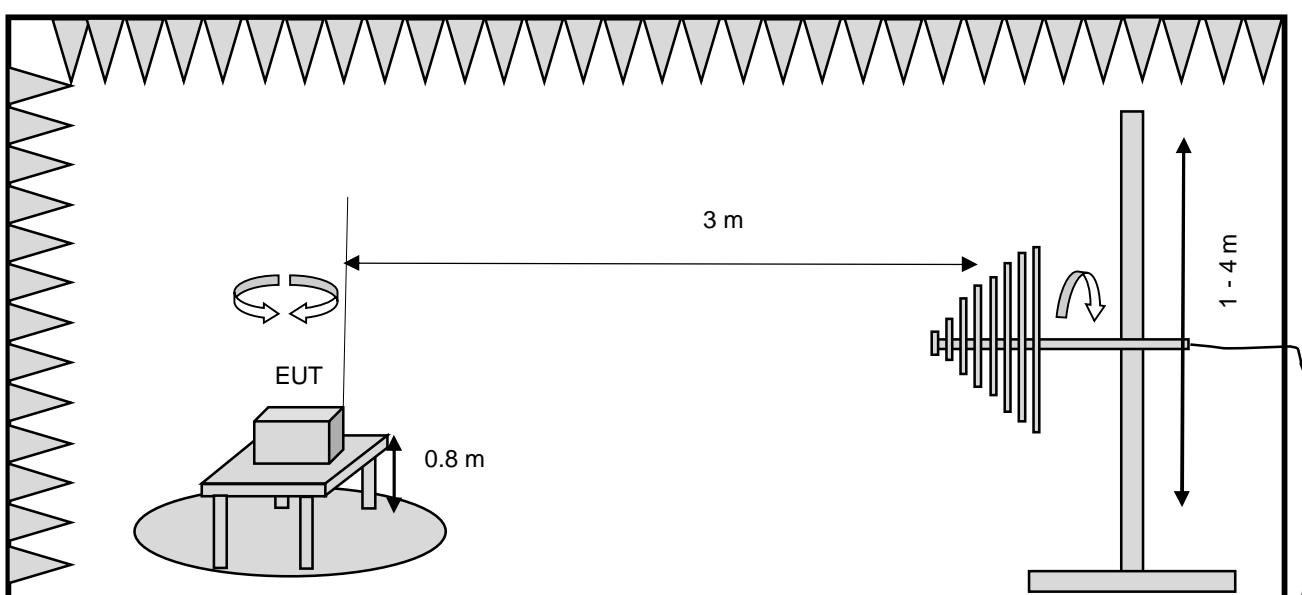Block diagram Radiated emissions**Semi anechoic chamber with absorber and ferrite tiles****tested frequency range 9 kHz - 30 MHz****Test receiver****Semi anechoic chamber with absorber and ferrite tiles****tested frequency range 30 MHz - 1000 MHz****Test receiver**

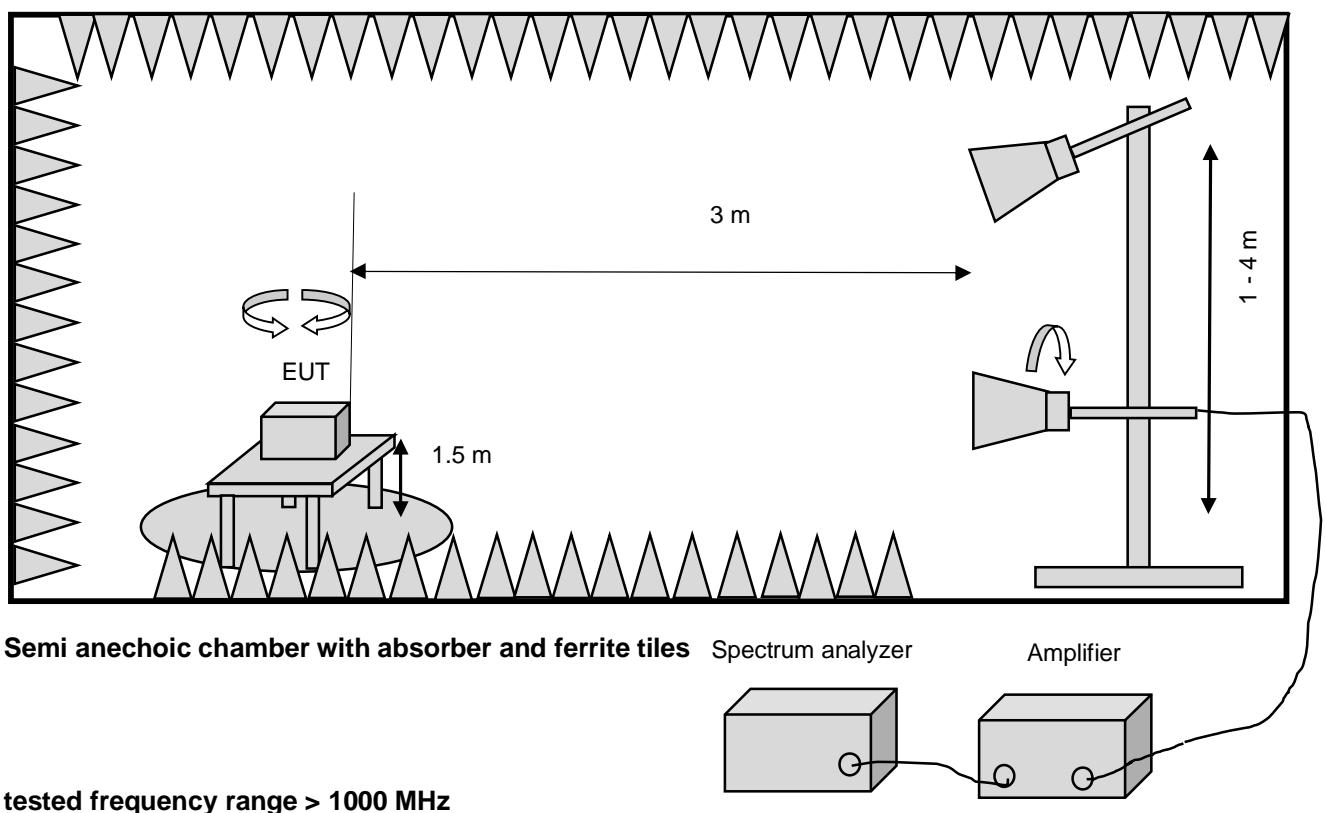

Block diagram Band Edge emissions

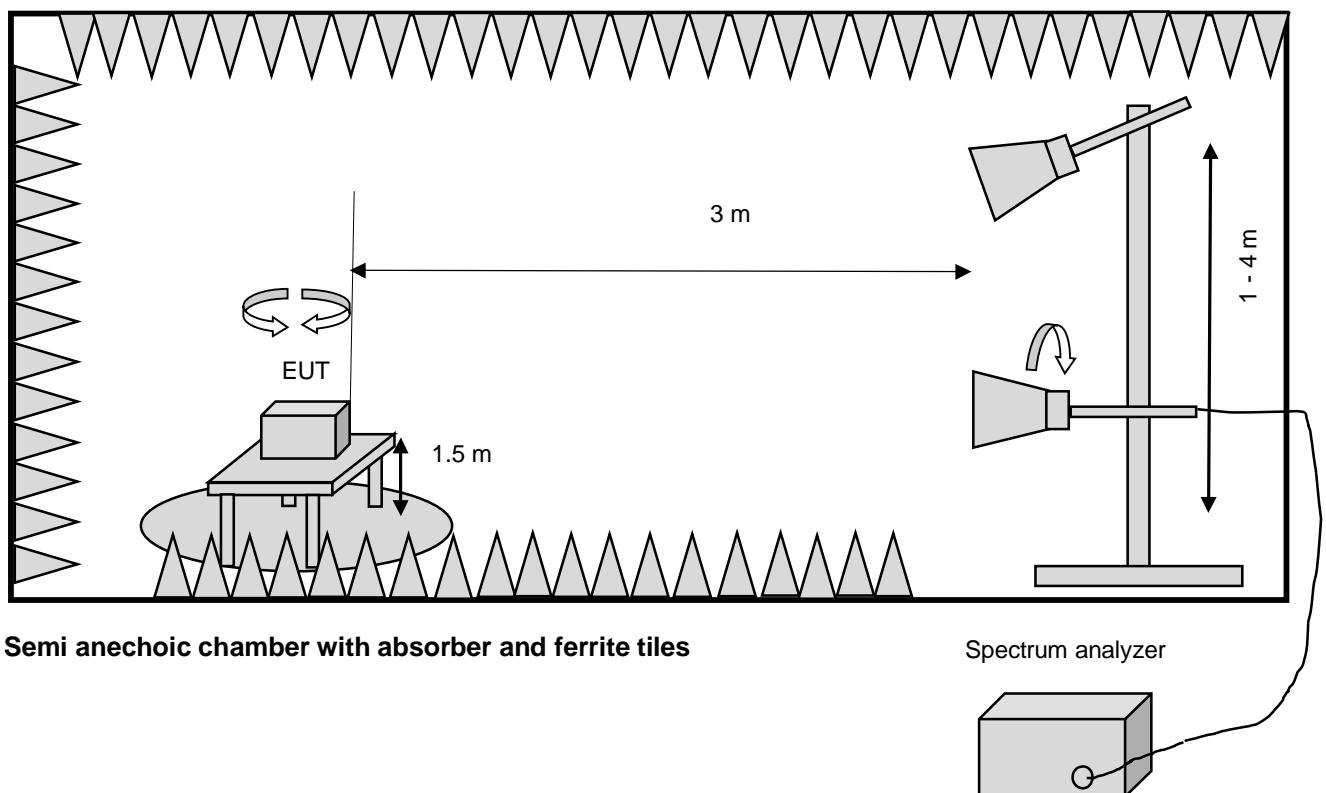

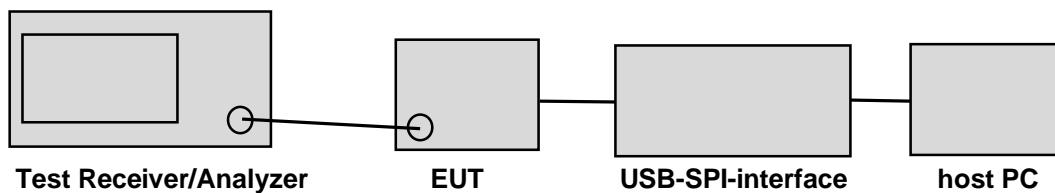Block diagram for conducted measurements

11. Measurement uncertainty

Measurement uncertainty

nach CISPR 16-4-2 Edition 2.0 2011-06/according to CISPR 16-4-2 Edition 2.0 2011-06

Messgröße Measurement	berechnete Messunsicherheit calculated uncertainty U_{lab}	Vorgegebene CISPR Messunsicherheit nach CISPR 16-4-2 Edition 2.0 2011-06, Tabelle 1 Specified CISPR uncertainty according CISPR 16-4- 2 Edition 2.0 2011-06, table 1 U_{CISPR}
Conducted disturbance at mains port using AMN 9 kHz – 150 kHz	3.6 dB	3.8 dB
Conducted disturbance at mains port using AMN 150 kHz – 30 MHz	3.2 dB	3.4 dB
Conducted disturbance at mains port using voltage probe 9 kHz to 30 MHz	2.1 dB	2.9 dB
Conducted disturbance at telecommunication port using AAN 150 kHz to 30 MHz	3.7 dB	5.0 dB
Conducted disturbance at telecommunication port using CVP 150 kHz to 30 MHz	3.2 dB	3.9 dB
Conducted disturbance at telecommunication port using CP 150 kHz to 30 MHz	2.4 dB	2.9 dB
Disturbance power 30 MHz to 300 MHz	4.1 dB	4.5 dB
Radiated disturbance (electric field strength in the SAC) 30 MHz to 1 000 MHz	4.7 dB	6.3 dB
Radiated disturbance (electric field strength at the OATS) 30 MHz to 1 000 MHz	4.5 dB	6.3 dB
Radiated disturbance (electric field strength in the SAC) 1 GHz to 6 GHz	4.1 dB	-/-
Radiated disturbance (electric field strength in the SAC) 6 GHz to 18 GHz	4.6 dB	-/-
Radiated disturbance (electric field strength in the SAC) 18 GHz to 26 GHz	4.6 dB	-/-

The horizontal and vertical site attenuation for the semi anechoic chamber is within the tolerance of +/-4dB according to CISPR16-1 series.

The uncertainty of the measurement equipment fulfils the requirements of CISPR 16-4-2 Edition 2.0 2011-06, table 1.


Zusätzliche Messunsicherheitsangaben/additional measurement uncertainty

Messgröße Measurement	berechnete Messunsicherheit calculated uncertainty	Messgröße Measurement	berechnete Messunsicherheit calculated uncertainty
Magnetische Feldstärke/ Magn. fieldstrength 9kHz - 30MHz	3.4 dB	Störspannung/ Interference voltage according CAR-Directive 2004/104/EC	1.2 dB
Störleistung an der Antennenbuchse/ Interference power at antenna socket	2.1 dB	Temperatur/Temperature	0.58 °C
Audio Pegel/ Audio level	1.9 dB	Feuchtigkeit/Humidity	0.58 % rel.
Schirmdämpfung/ Screening immunity	3.9 dB	Druck/ Pressure	3.1 %

The shown measurement uncertainty is based on a coverage factor of $k = 2$ (95 % level of confidence).

Applied Decision Rule:

STC Germany Decision Rule applied for following tests: all

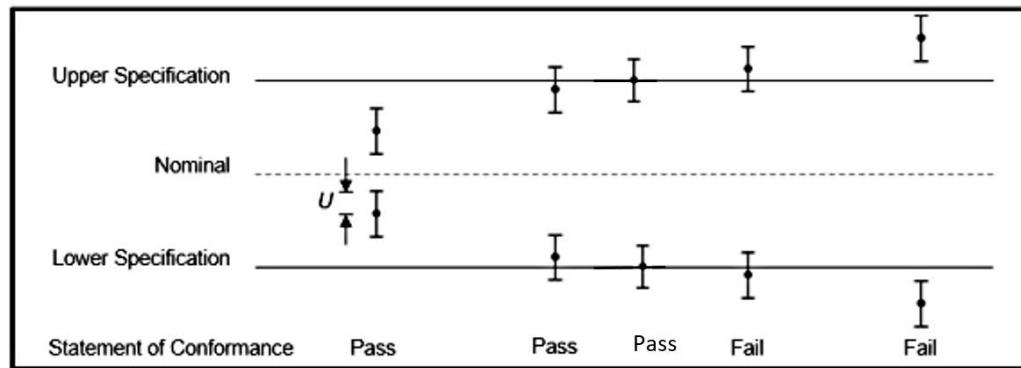**Explanation:**


The dot indicates the measured value and "U" indicates the measurement uncertainty. If the measured value is exactly on the limit value (specification), the result is assessed with "pass" - see the drawing above.

Decision Rule prescribed by

- Customer applied for following tests: -/-
- Regulations applied for following tests: -/-
- Normative Documents applied for following tests: -/-

12. Photos setup

Interference Radiation:

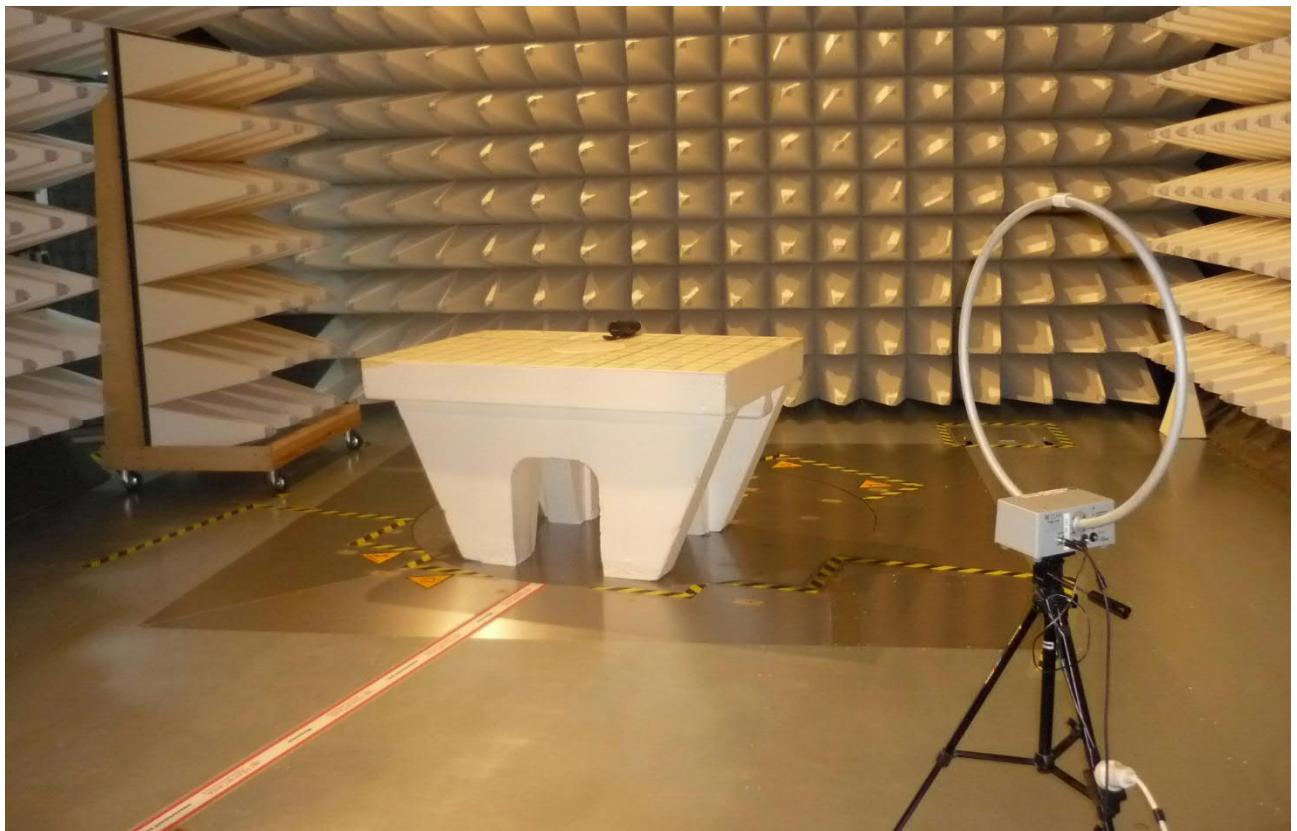


tested frequency range 9 kHz – 30 MHz radiated



tested frequency range 30 MHz – 1000 MHz radiated

Interference Radiation and Output Power

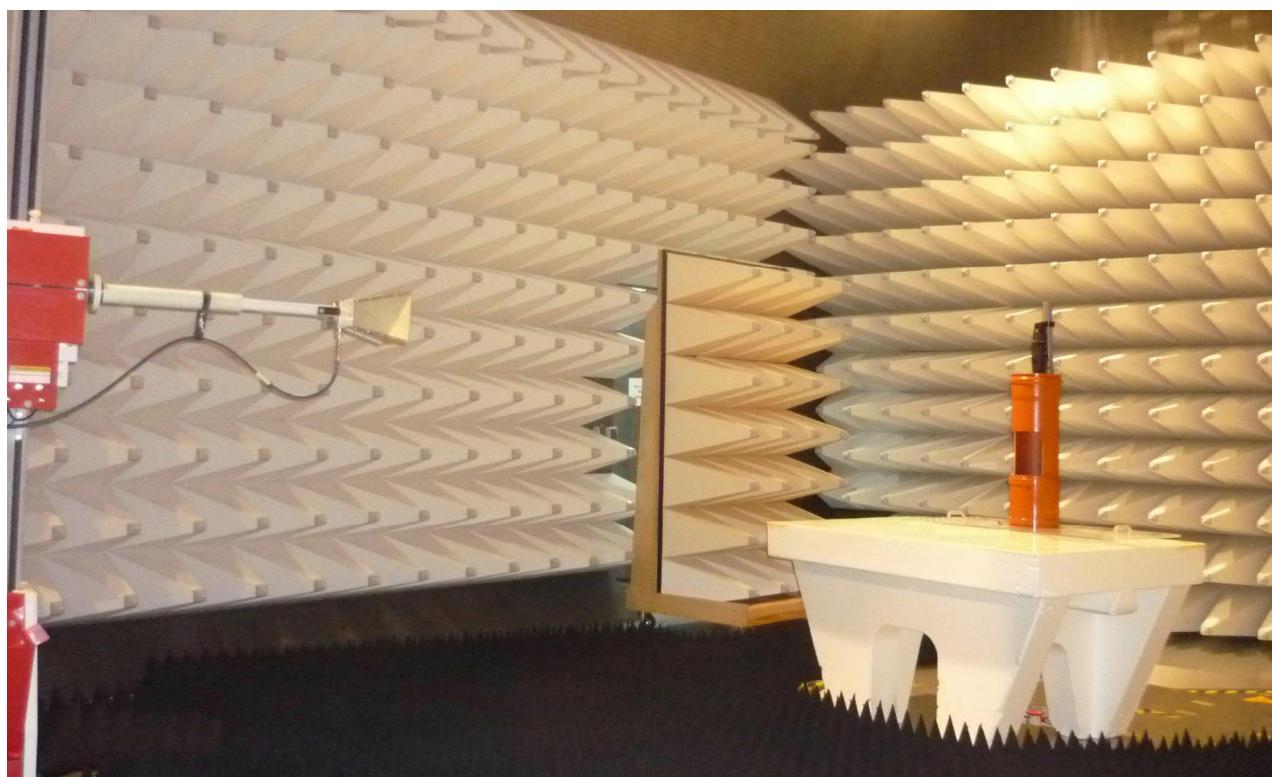

tested frequency range > 1000 MHz radiated

13. Conclusions

From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant §15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant RSS-247 issue 02 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network.

Following specific modifications and/or special attributes are necessary to pass the above mentioned requirements:

none

05.12.2022

Erstellt am/prepared on

M. Wundrak, Laboratory Engineer

(Name/name / Stellung/position)

(Unterschrift/signature)



12.12.2022

Freigabe am/released on

K. Gisbert, Laboratory Supervisor

(Name/name / Stellung/position)

(Unterschrift/signature)



14. Photos of tested sample













End of test report