

FCC TEST REPORT

For

AtGames Digital Media Inc.

Legends Ultimate Home Arcade

Model No.: HA8800

Additional Model: Please Refer to Page 6

Prepared for	:	AtGames Digital Media Inc.
Address	:	2228 E Maple Ave, El Segundo, CA 90245, USA
Prepared by	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	:	1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China
Tel	:	(+86)755-82591330
Fax	:	(+86)755-82591332
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	July 19,2019
Number of tested samples	:	2
Serial number	:	Prototype
Date of Test	:	July 19,2019~August 12, 2019
Date of Report	:	August 20, 2019

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.249)**Report Reference No.** : **LCS190625047AEA**

Date of Issue : August 20, 2019

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name**..... : **AtGames Digital Media Inc.**

Address : 2228 E Maple Ave, El Segundo, CA 90245, USA

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249)

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **Legends Ultimate Home Arcade**

Trade Mark : N/A

Model/ Type reference : HA8800

Ratings : Input: AC100-240V, 50/60Hz 2A

Output: DC12V/5A

Result : **Positive****Compiled by:**

Jayden Zhuo/ File administrators

Supervised by:

Aking Jin / Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS190719010AEF	<u>August 20, 2019</u> Date of issue
--	---

Type / Model.....	: HA8800
EUT.....	: Legends Ultimate Home Arcade
Applicant.....	: AtGames Digital Media Inc.
Address.....	: 2228 E Maple Ave, El Segundo, CA 90245, USA
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: AtGames Digital Media Inc.
Address.....	: 2228 E Maple Ave, El Segundo, CA 90245, USA
Telephone.....	: /
Fax.....	: /
Factory.....	: AtGames Digital Media Inc.
Address.....	: 2228 E Maple Ave, El Segundo, CA 90245, USA
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	August 20, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	7
1.3. EXTERNAL I/O CABLE	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
1.6. MEASUREMENT UNCERTAINTY	8
1.7. DESCRIPTION OF TEST MODES	8
2. TEST METHODOLOGY	9
2.1. EUT CONFIGURATION	9
2.2. EUT EXERCISE	9
2.3. GENERAL TEST PROCEDURES	9
3. SYSTEM TEST CONFIGURATION	10
3.1. JUSTIFICATION	10
3.2. EUT EXERCISE SOFTWARE	10
3.3. SPECIAL ACCESSORIES	10
3.4. BLOCK DIAGRAM/SCHEMATICS	10
3.5. EQUIPMENT MODIFICATIONS	10
3.6. TEST SETUP	10
4. SUMMARY OF TEST RESULTS	11
5. TEST RESULT	12
5.1. RADIATED EMISSION MEASUREMENT	12
5.2. 20 dB BANDWIDTH MEASUREMENT	23
5.3. AC POWER LINE CONDUCTED EMISSIONS	25
5.4. RESULTS FOR BAND EDGE TESTING	28
5.5. ANTENNA REQUIREMENTS	38
6. LIST OF MEASURING EQUIPMENTS	39
7. TEST SETUP PHOTOGRAPHS OF EUT	40
8. EXTERIOR PHOTOGRAPHS OF THE EUT	40
9. INTERIOR PHOTOGRAPHS OF THE EUT	40

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Legends Ultimate Home Arcade
Test Model	: HA8800 HA8800S,HA8800B,HA8800C;HA8800D,HA8801,HA8801S,HA8801B, HA8801C,HA8801D,HA8802,HA8802S,HA8802B,HA8802C;HA8803, HA8803S,HA8803B,HA8803C,HA8804,HA8804S,HA8804B,HA8804C, HA8805,HA8805S,HA8805B,HA8805C,HA8810,HA8810S,HA8810B, HA8810C,HA8810D,HA8811,HA8811S,HA8811B,HA8811C,HA8812, HA8812S,HA8812B,HA8812C,HA8813,HA8813S,HA8813B,HA8813C, HA8814,HA8814S,HA8814B,HA8814C,HA8815,HA8815S,HA8815B, HA8815C,HA8820,HA8820S,HA8820B,HA8820C,HA2800,HA2800S, HA2800B,HA2800C,HA2800D,HA2801,HA2801S,HA2801B,HA2801C, HA2801D
Model Number	: PCB board, structure and internal of these model(s) are the same, Only the model name is different for these models.
Model Declaration	: Input: AC100-240V, 50/60Hz 2A Output: DC12V/5A
Power Supply	: HA8800-V2.2
Hardware Version	: HA8800_Wifi_V2.0
Software Version	
Bluetooth	
Frequency Range	: 2402-2480MHz
Channel Number	: 79 channels for Bluetooth V4.1 (BDR/EDR) 40 channels for Bluetooth V4.1 (BT LE)
Channel Spacing	: 1MHz for Bluetooth V4.1 (BDR/EDR) 2MHz for Bluetooth V4.1 (BT LE)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.1 (BDR/EDR) GFSK for Bluetooth V4.1 (BT LE)
Bluetooth Version	: V4.1
WIFI(2.4G Band)	
Frequency Range	: 2412-2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 channels for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK); IEEE 802.11g/n: OFDM(64QAM, 16QAM, QPSK, BPSK)
WIFI (5.2G Band)	
Frequency Range	: 5180-5240MHz 4 channels for 20MHz bandwidth(5180-5240MHz)
Channel Number	: 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	: IEEE 802.11a/n/ac: OFDM(64QAM, 16QAM, QPSK, BPSK)
WIFI (5.8G Band)	
Frequency Range	: 5745-5825MHz 5 channels for 20MHz bandwidth(5745-5825MHz)
Channel Number	: 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	: IEEE 802.11a/n/ac: OFDM(64QAM, 16QAM, QPSK, BPSK)

2.4G Function :

Frequency Range : 2407- 2469MHz
(2407 MHz, 2413 MHz, 2420 MHz, 2426 MHz, 2431 MHz, 2436 MHz, 2439 MHz, 2442 MHz, 2447 MHz, 2449 MHz, 2452 MHz, 2454 MHz, 2459 MHz, 2462 MHz, 2467 MHz, 2469 MHz)

Channel Number : 16

Modulation Type : GFSK

Antenna Description :

One External Antenna(ANT0), for Bluetooth, 2.4G WLAN, 5.2G WLAN and 5.8G WLAN 2.0dBi (Max.)

One PCB Antenna(ANT1) used for 2.4G Function TX/RX, 2.0dBi(max.)

One PCB Antenna(ANT2) used for 2.4G Function TX/RX, 2.0dBi(max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
Charge Port	1	N/A

1.4. Description of Test Facility

FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A-1.

EMSD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier: CN0071.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 2.4GHz mode(Low Channel).

All test modes were tested, only the result of the worst case was recorded in the report.

Channel List & Frequency

Channel	Frequency(MHz)
1	2407
2	2413
3	2420
4	2426
5	2431
6	2436
7	2439
8	2442
9	2447
10	2449
11	2452
12	2454
13	2459
14	2462
15	2467
16	2469

Mode of Operations	Transmitting Frequency (MHz)
GFSK	2407
	2442
	2469
For Radiated Emission	
Test Mode	TX Mode

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.1 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.1 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.215(c)	20 dB Bandwidth Measurement	Compliant
§15.205, §15.249(d)	Emissions at Restricted Band	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

5. TEST RESULT

5.1. Radiated Emission Measurement

5.1.1. Standard Applicable

1. According to §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

2. According to §15.249 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

5.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.1.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.1.4. Test Setup Layout

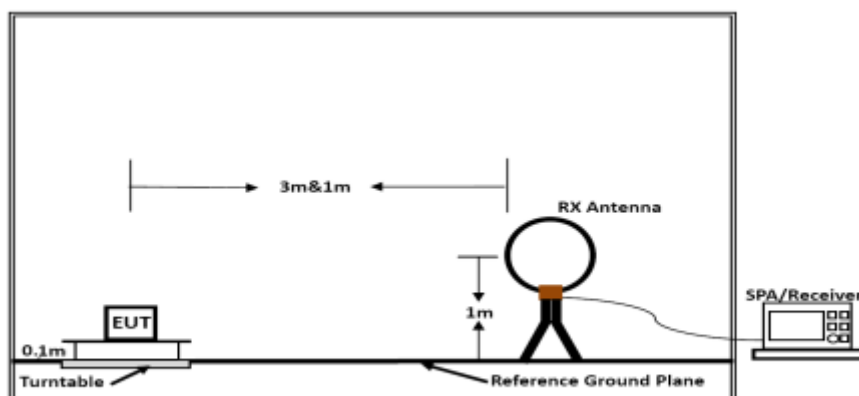

Below 30MHz

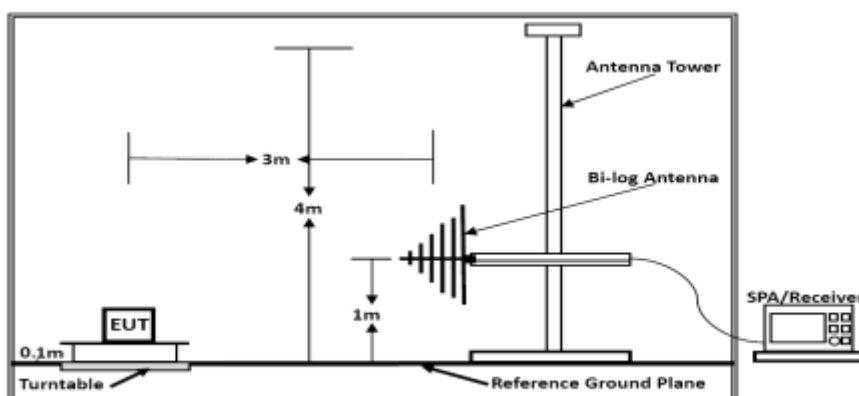

Below 1GHz

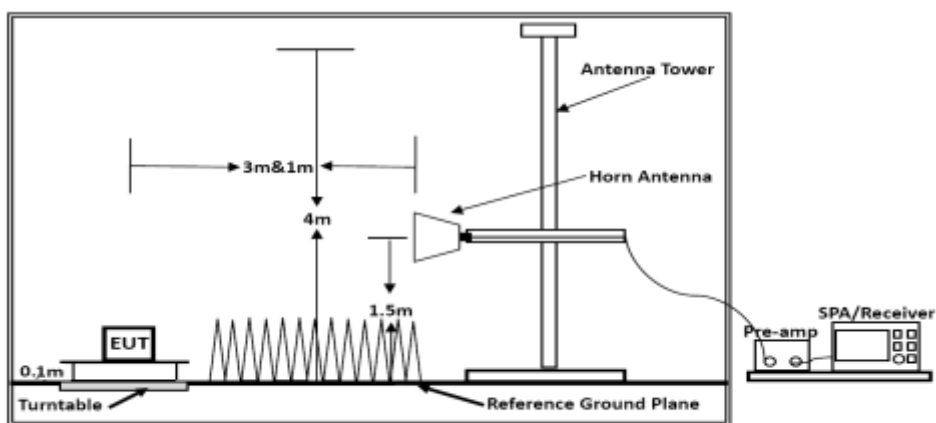

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	23.6℃	Humidity	53.8%
Test Engineer	JK Zhou	Configurations	Low Channel

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


5.1.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23.6℃	Humidity	53.8%
Test Engineer	JK Zhou	Configurations	Low Channel

Antenna 1 test data is as follows


Low Channel

Horizontal:

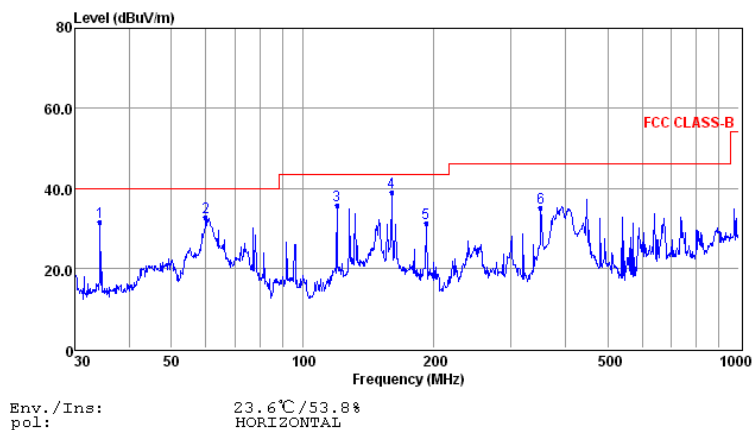

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.28	18.87	0.37	12.30	31.54	40.00	-8.46	QP
2	59.86	19.51	0.49	12.70	32.70	40.00	-7.30	QP
3	119.86	24.43	0.64	10.51	35.58	43.50	-7.92	QP
4	159.78	29.42	0.75	8.66	38.83	43.50	-4.67	QP
5	191.75	19.79	0.86	10.56	31.21	43.50	-12.29	QP
6	351.71	19.73	1.15	14.30	35.18	46.00	-10.82	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

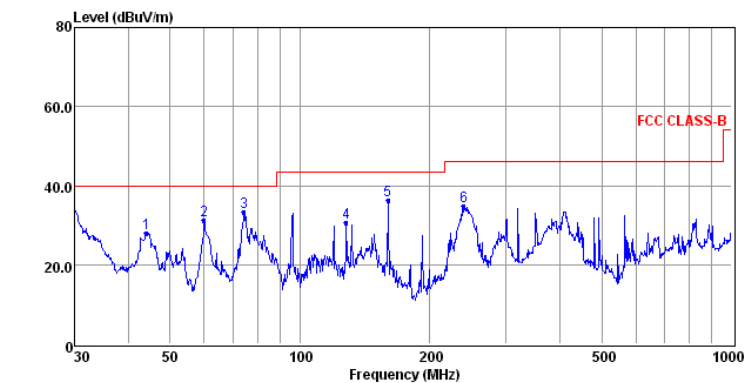Vertical:

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	44.12	14.13	0.41	13.56	28.10	40.00	-11.90	QP
2	59.86	18.06	0.49	12.70	31.25	40.00	-8.75	QP
3	74.14	24.77	0.54	7.95	33.26	40.00	-6.74	QP
4	128.11	20.80	0.67	9.22	30.69	43.50	-12.81	QP
5	159.78	26.91	0.75	8.66	36.32	43.50	-7.18	QP
6	239.99	21.80	1.01	12.09	34.90	46.00	-11.10	QP


Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported


Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (Low Channel). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

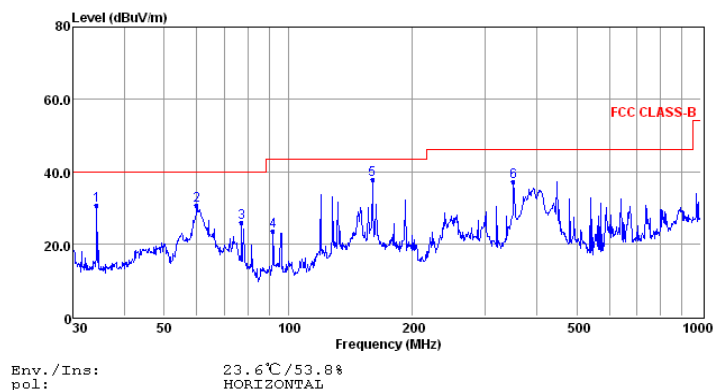Antenna 2 test data is as follows**Low Channel
Horizontal:**

Env./Ins:		23.6℃/53.8%						
pol:		HORIZONTAL						
	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.28	17.87	0.37	12.30	30.54	40.00	-9.46	QP
2	59.86	17.51	0.49	12.70	30.70	40.00	-9.30	QP
3	77.05	17.33	0.47	8.10	25.90	40.00	-14.10	QP
4	91.82	10.62	0.56	12.24	23.42	43.50	-20.08	QP
5	159.78	28.42	0.75	8.66	37.83	43.50	-5.67	QP
6	351.71	21.73	1.15	14.30	37.18	46.00	-8.82	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

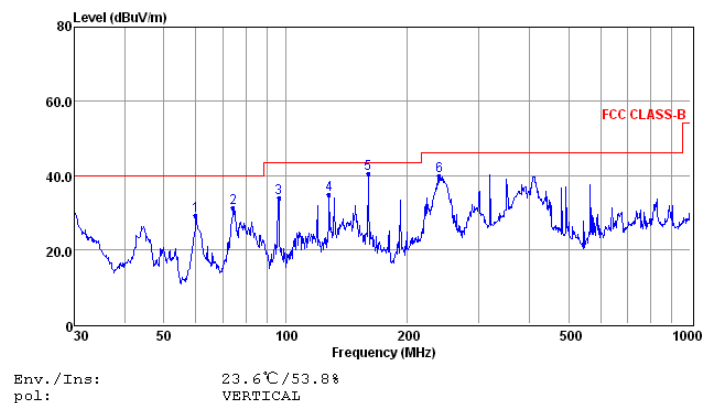Vertical:

Env./Ins:	23.6℃/53.8%							
pol:	VERTICAL							
	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	59.86	16.06	0.49	12.70	29.25	40.00	-10.75	QP
2	74.14	22.77	0.54	7.95	31.26	40.00	-8.74	QP
3	96.10	20.49	0.58	12.91	33.98	43.50	-9.52	QP
4	128.11	24.80	0.67	9.22	34.69	43.50	-8.81	QP
5	159.78	30.91	0.75	8.66	40.32	43.50	-3.18	QP
6	239.99	26.80	1.01	12.09	39.90	46.00	-6.10	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (Low Channel). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

5.1.8. Results of Radiated Emissions (Above 1GHz)

Antenna 1 test data is as follows

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2407	H	86.56	82.04	114	94	Pass
2407	V	86.67	82.18	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4814.26	52.48	33.06	35.04	3.94	54.44	74.00	-19.56	Peak	Horizontal
4814.18	38.83	33.06	35.04	3.94	40.79	54.00	-13.21	Average	Horizontal
4814.18	53.53	33.16	35.06	3.96	55.59	74.00	-18.41	Peak	Vertical
4814.11	40.48	33.16	35.06	3.96	42.54	54.00	-11.46	Average	Vertical

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2442	H	86.88	82.49	114	94	Pass
2442	V	86.57	82.28	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4884.27	49.81	33.16	35.15	3.96	51.78	74.00	-22.22	Peak	Horizontal
4884.06	39.94	33.16	35.15	3.96	41.91	54.00	-12.09	Average	Horizontal
4884.07	51.02	33.26	35.17	3.98	53.09	74.00	-20.91	Peak	Vertical
4884.14	42.72	33.26	35.17	3.98	44.79	54.00	-9.21	Average	Vertical

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2469	H	86.58	82.42	114	94	Pass
2469	V	86.46	82.19	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4938.28	51.62	33.26	35.14	3.98	53.72	74.00	-20.28	Peak	Horizontal
4938.13	40.00	33.26	35.14	3.98	42.10	54.00	-11.90	Average	Horizontal
4938.29	49.97	33.36	35.16	4.00	52.17	74.00	-21.83	Peak	Vertical
4938.26	37.66	33.36	35.16	4.00	39.86	54.00	-14.14	Average	Vertical

Antenna 2 test data is as follows

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2407	H	86.61	82.11	114	94	Pass
2407	V	86.48	82.52	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4814.26	53.61	33.06	35.04	3.94	55.57	74.00	-18.43	Peak	Horizontal
4814.18	39.11	33.06	35.04	3.94	41.07	54.00	-12.93	Average	Horizontal
4814.18	52.12	33.16	35.06	3.96	54.18	74.00	-19.82	Peak	Vertical
4814.11	40.23	33.16	35.06	3.96	42.29	54.00	-11.71	Average	Vertical

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2442	H	86.82	82.36	114	94	Pass
2442	V	86.69	82.41	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4884.27	50.78	33.16	35.15	3.96	52.75	74.00	-21.25	Peak	Horizontal
4884.06	40.82	33.16	35.15	3.96	42.79	54.00	-11.21	Average	Horizontal
4884.07	52.49	33.26	35.17	3.98	54.56	74.00	-19.44	Peak	Vertical
4884.14	42.39	33.26	35.17	3.98	44.46	54.00	-9.54	Average	Vertical

Field Strength Of Fundamental						
Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
2469	H	86.29	82.28	114	94	Pass
2469	V	86.34	82.31	114	94	Pass

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4938.28	51.93	33.26	35.14	3.98	54.03	74.00	-19.97	Peak	Horizontal
4938.13	40.02	33.26	35.14	3.98	42.12	54.00	-11.88	Average	Horizontal
4938.29	49.07	33.36	35.16	4.00	51.27	74.00	-22.73	Peak	Vertical
4938.26	37.80	33.36	35.16	4.00	40.00	54.00	-14.00	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


5.2. 20 dB Bandwidth Measurement

5.2.1. Standard Applicable

According to § 15.215(c) Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

5.2.2. Block Diagram of Test Setup

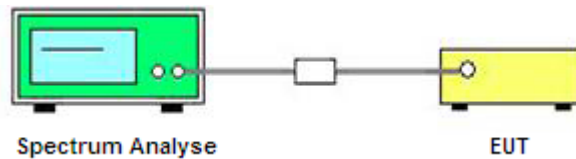

5.2.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 20MHz

RBW = 30 KHz

VBW = 100 KHz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

5.2.4. Test Result


Temperature	24.5°C	Humidity	53.6%
Test Engineer	JK Zhou	Configurations	2.4G (GFSK)

Test Mode	Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limits	Verdict
Antenna 1	Low	2407	15.61	Non-specified	PASS
	Middle	2442	16.01		
	High	2469	16.54		
Antenna 2	Low	2407	15.93	Non-specified	PASS
	Middle	2442	15.85		
	High	2469	16.32		


Remark:

1. Test results including cable loss;
2. please refer to following plots;


20dB Bandwidth

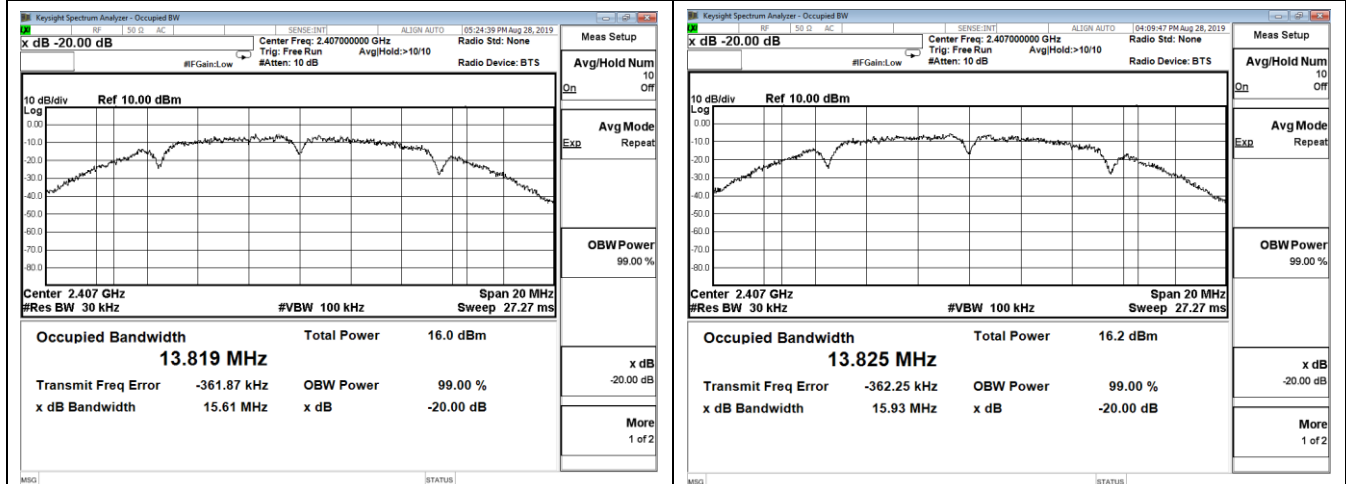


Low Channel- 2407MHz- Antenna 1

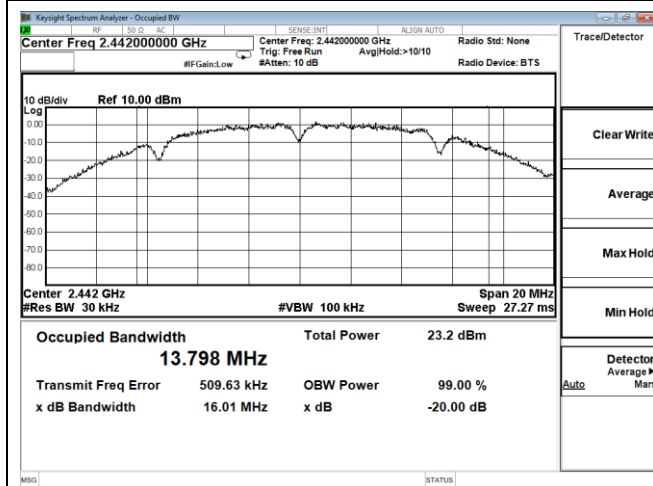


Low Channel- 2407MHz- Antenna 2

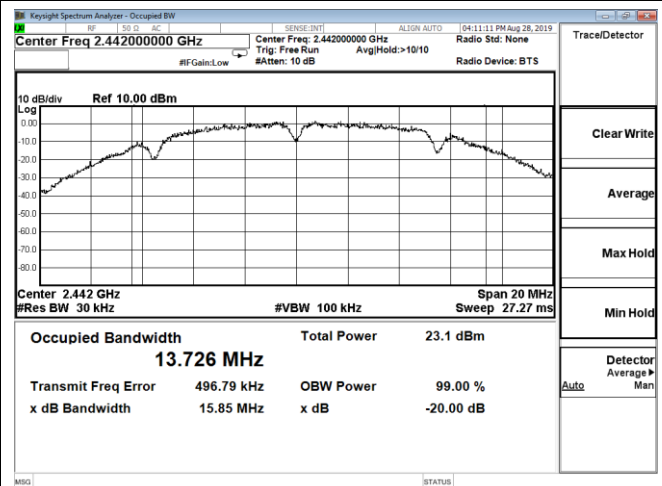

Middle Channel- 2442MHz- Antenna 1

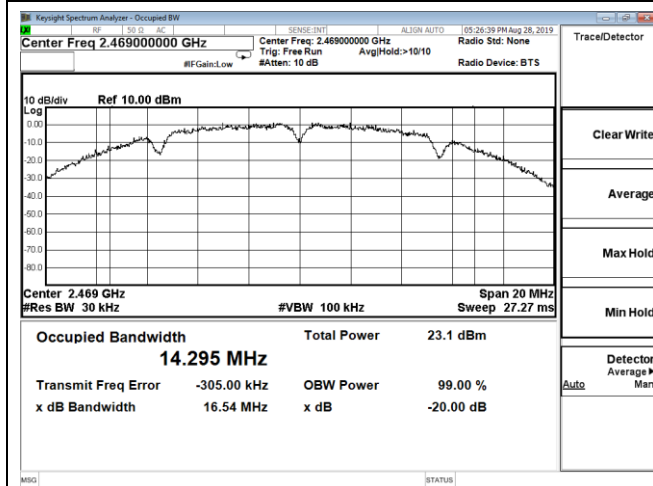

Middle Channel- 2442MHz- Antenna 2

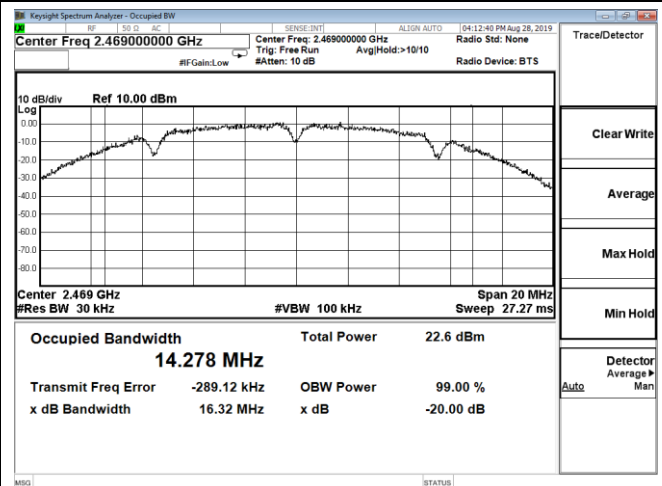

High Channel- 2469MHz- Antenna 1

High Channel- 2469MHz- Antenna 2

5.3. AC Power line conducted emissions


5.3.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency


5.3.2 Block Diagram of Test Setup

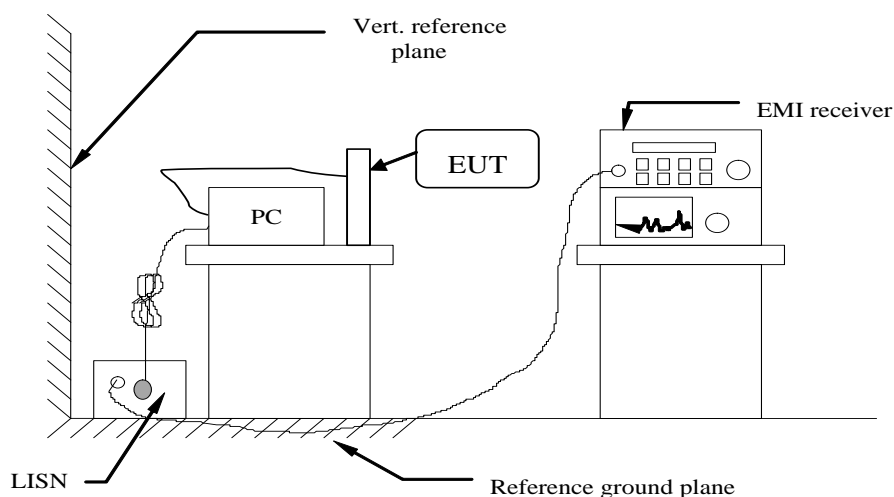

5.3.3 Test Results


PASS.

The test data please refer to following page.

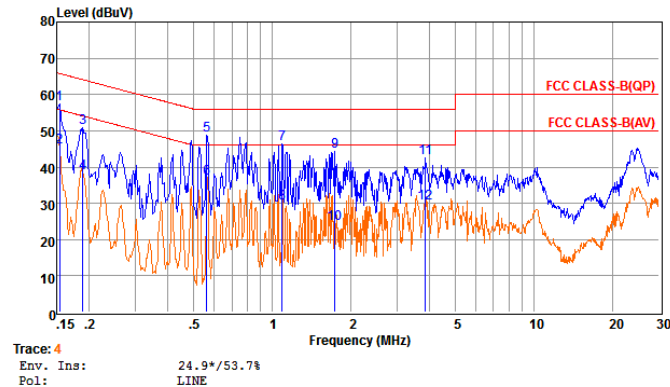AC Conducted Emission of charge from PC mode @ AC 120V/60Hz @ GFSK (worst case)**Antenna 1 test data is as follows***Line*

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	37.85	9.58	0.02	10.00	57.45	65.78	-8.33	QP
2	0.15	25.90	9.58	0.02	10.00	45.50	55.77	-10.27	Average
3	0.19	31.35	9.62	0.02	10.00	50.99	64.11	-13.12	QP
4	0.19	18.77	9.62	0.02	10.00	38.41	54.10	-15.69	Average
5	0.56	28.97	9.63	0.04	10.00	48.64	56.00	-7.36	QP
6	0.56	17.18	9.63	0.04	10.00	36.85	46.00	-9.15	Average
7	1.09	26.72	9.63	0.05	10.00	46.40	56.00	-9.60	QP
8	1.09	10.32	9.63	0.05	10.00	30.00	46.00	-16.00	Average
9	1.73	24.66	9.64	0.05	10.00	44.35	56.00	-11.65	QP
10	1.74	4.68	9.64	0.05	10.00	24.37	46.00	-21.63	Average
11	3.84	22.74	9.65	0.06	10.00	42.45	56.00	-13.55	QP
12	3.84	10.40	9.65	0.06	10.00	30.11	46.00	-15.89	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

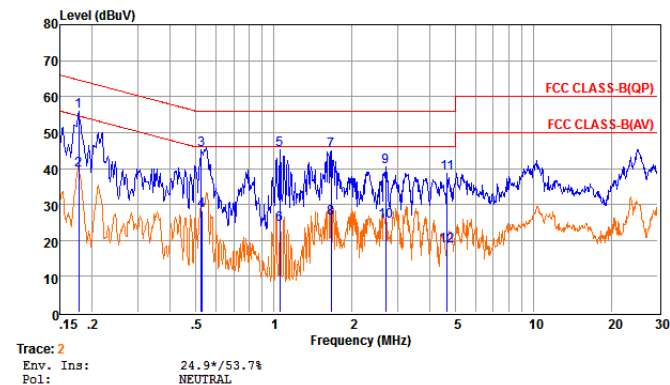Neutral


	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.18	36.14	9.64	0.02	10.00	55.80	64.59	-8.79	QP
2	0.18	19.90	9.63	0.02	10.00	39.55	54.59	-15.04	Average
3	0.53	25.49	9.62	0.04	10.00	45.15	56.00	-10.85	QP
4	0.53	8.54	9.62	0.04	10.00	28.20	46.00	-17.80	Average
5	1.05	25.59	9.63	0.05	10.00	45.27	56.00	-10.73	QP
6	1.06	4.75	9.63	0.05	10.00	24.43	46.00	-21.57	Average
7	1.66	25.20	9.63	0.05	10.00	44.88	56.00	-11.12	QP
8	1.66	6.46	9.63	0.05	10.00	26.14	46.00	-19.86	Average
9	2.69	20.73	9.64	0.05	10.00	40.42	56.00	-15.58	QP
10	2.69	5.53	9.64	0.05	10.00	25.22	46.00	-20.78	Average
11	4.65	19.03	9.66	0.06	10.00	38.75	56.00	-17.25	QP
12	4.65	-1.24	9.66	0.06	10.00	18.48	46.00	-27.52	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report.

AC Conducted Emission of charge from PC mode @ AC 120V/60Hz @ GFSK (worst case)**Antenna 2 test data is as follows**


Line

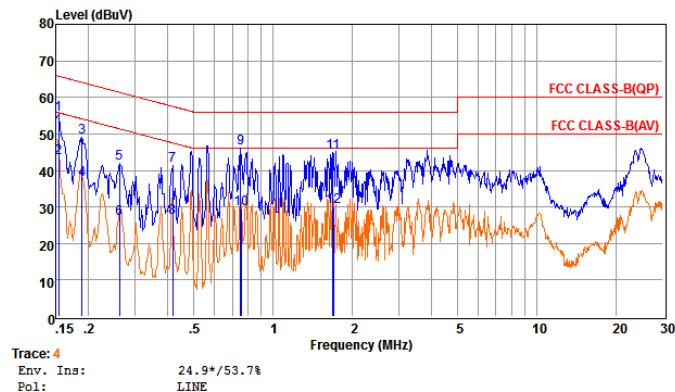

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	35.85	9.58	0.02	10.00	55.45	65.78	-10.33	QP
2	0.15	23.90	9.58	0.02	10.00	43.50	55.77	-12.27	Average
3	0.19	29.35	9.62	0.02	10.00	48.99	64.11	-15.12	QP
4	0.19	17.77	9.62	0.02	10.00	37.41	54.10	-16.69	Average
5	0.26	22.27	9.63	0.03	10.00	41.93	61.38	-19.45	QP
6	0.26	7.23	9.63	0.03	10.00	26.89	51.38	-24.49	Average
7	0.42	21.74	9.62	0.04	10.00	41.40	57.51	-16.11	QP
8	0.42	7.34	9.62	0.04	10.00	27.00	47.50	-20.50	Average
9	0.75	26.41	9.64	0.04	10.00	46.09	56.00	-9.91	QP
10	0.76	9.84	9.64	0.04	10.00	29.52	46.00	-16.48	Average
11	1.69	25.28	9.64	0.05	10.00	44.97	56.00	-11.03	QP
12	1.69	10.44	9.64	0.05	10.00	30.13	46.00	-15.87	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Neutral

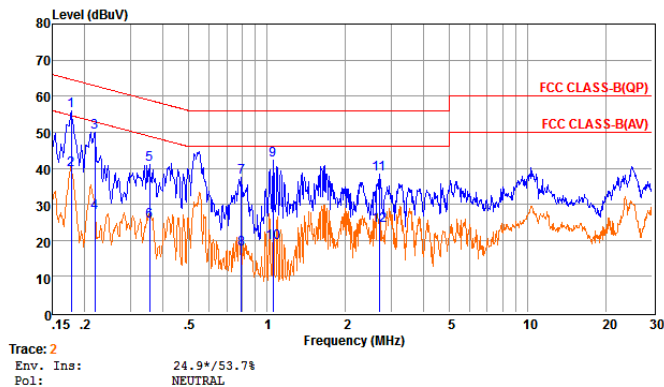

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.18	36.14	9.64	0.02	10.00	55.80	64.59	-8.79	QP
2	0.18	19.90	9.63	0.02	10.00	39.55	54.59	-15.04	Average
3	0.22	30.37	9.59	0.03	10.00	49.99	62.88	-12.89	QP
4	0.22	8.05	9.59	0.03	10.00	27.67	52.87	-25.20	Average
5	0.35	21.35	9.61	0.03	10.00	40.99	58.87	-17.88	QP
6	0.35	5.62	9.61	0.03	10.00	25.26	48.87	-23.61	Average
7	0.80	17.84	9.63	0.04	10.00	37.51	56.00	-18.49	QP
8	0.80	-1.99	9.63	0.04	10.00	17.68	46.00	-28.32	Average
9	1.05	22.59	9.63	0.05	10.00	42.27	56.00	-13.73	QP
10	1.06	-0.25	9.63	0.05	10.00	19.43	46.00	-26.57	Average
11	2.69	18.73	9.64	0.05	10.00	38.42	56.00	-17.58	QP
12	2.69	4.53	9.64	0.05	10.00	24.22	46.00	-21.78	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report.


5.4. Results for Band edge Testing

5.4.1 Standard Applicable

According to FCC §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to RSS-210 B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

5.4.2. Test Setup Layout

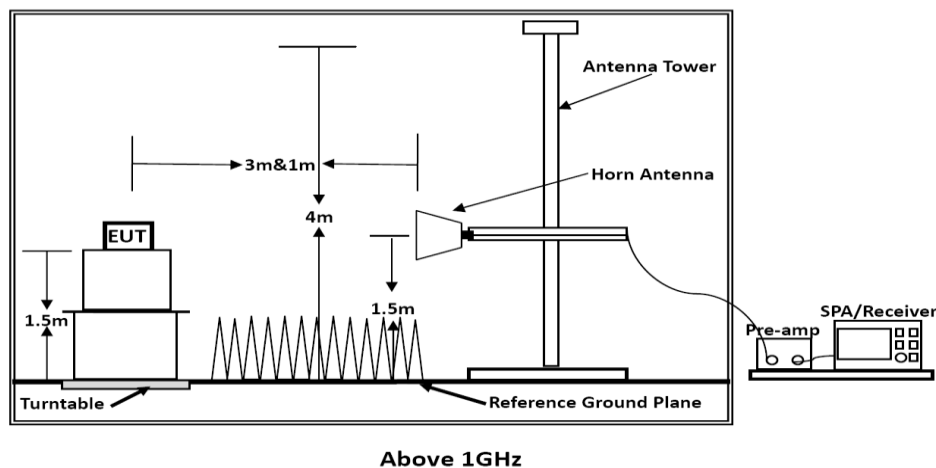

5.4.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.4.4. Test Procedures

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height scan range is 1 meter to 2.5 meter.

--- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

5.4.5. Measuring Instruments and Setting

Temperature	23.6°C	Humidity	53.8%
Test Engineer	JK Zhou		

PASS


Remark:

1. The other emission levels were very low against the limit.
2. The average measurement was not performed when the peak measured data under the limit of average detection.
3. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=330Hz/Sweep time=Auto/Detector=Peak;
4. Please refer to following test plots;

Antenna 1 test data is as follows

Channel 1 / 2407 MHz


Horizontal

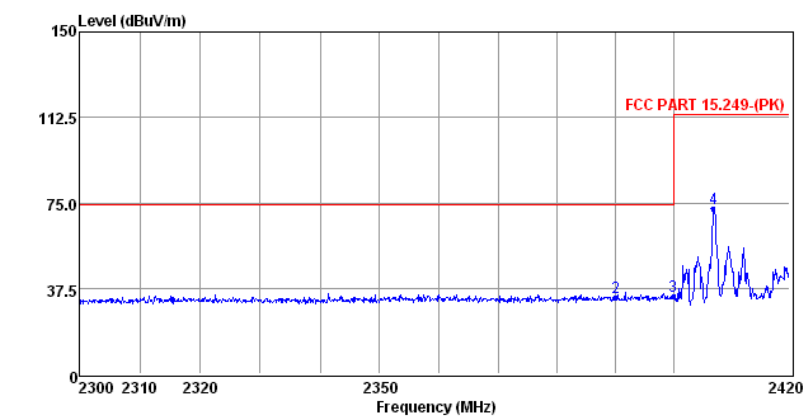

Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-1.99	3.22	30.39	31.62	74.00	-42.38	Peak
2	2390.03	-0.79	3.08	31.16	33.45	74.00	-40.55	Peak
3	2400.02	-0.33	3.06	31.24	33.97	114.00	-80.03	Peak
4	2406.87	38.36	2.94	31.26	72.56	114.00	-41.44	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

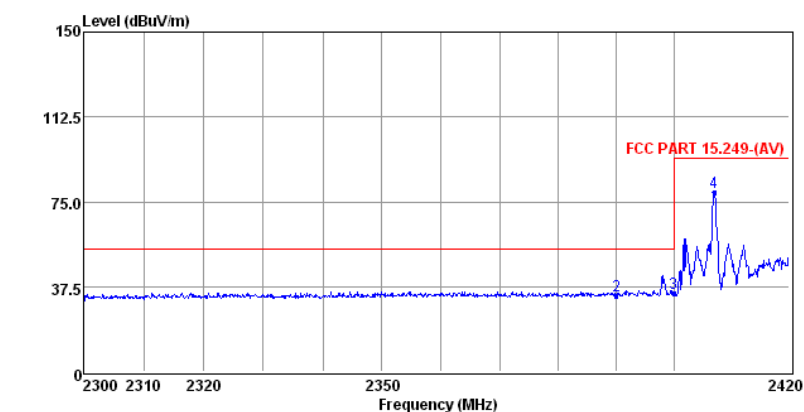


Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-1.24	3.22	30.39	32.37	54.00	-21.63	Average
2	2390.03	-0.79	3.08	31.16	33.45	54.00	-20.55	Average
3	2400.02	0.04	3.06	31.24	34.34	94.00	-59.66	Average
4	2406.99	44.98	2.94	31.26	79.18	94.00	-14.82	Average


Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Vertical

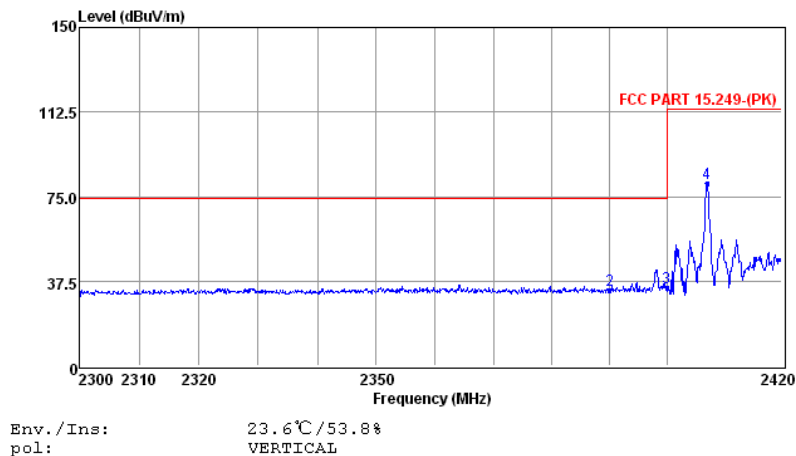

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-1.70	3.22	30.39	31.91	74.00	-42.09	Peak
2	2390.03	-0.92	3.08	31.16	33.32	74.00	-40.68	Peak
3	2400.02	0.39	3.06	31.24	34.69	114.00	-79.31	Peak
4	2406.99	46.43	2.94	31.26	80.63	114.00	-33.37	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

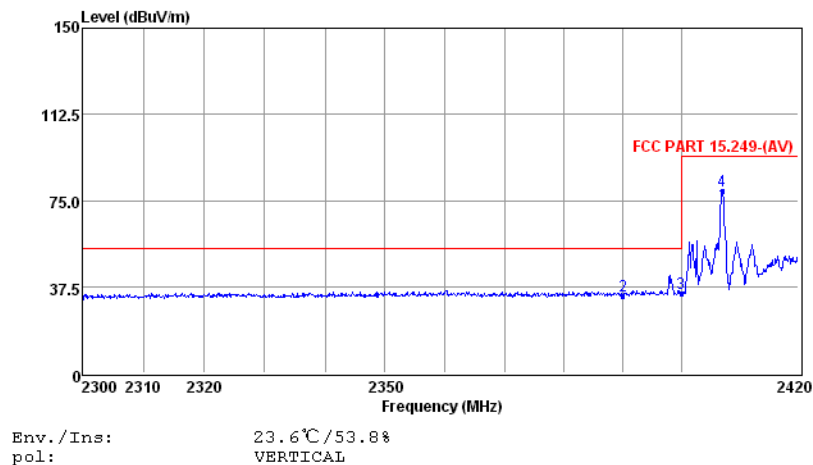


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-0.64	3.22	30.39	32.97	54.00	-21.03	Average
2	2390.03	-0.79	3.08	31.16	33.45	54.00	-20.55	Average
3	2400.02	0.26	3.06	31.24	34.56	94.00	-59.44	Average
4	2406.99	44.98	2.94	31.26	79.18	94.00	-14.82	Average

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Channel 16 / 2469 MHz


Horizontal

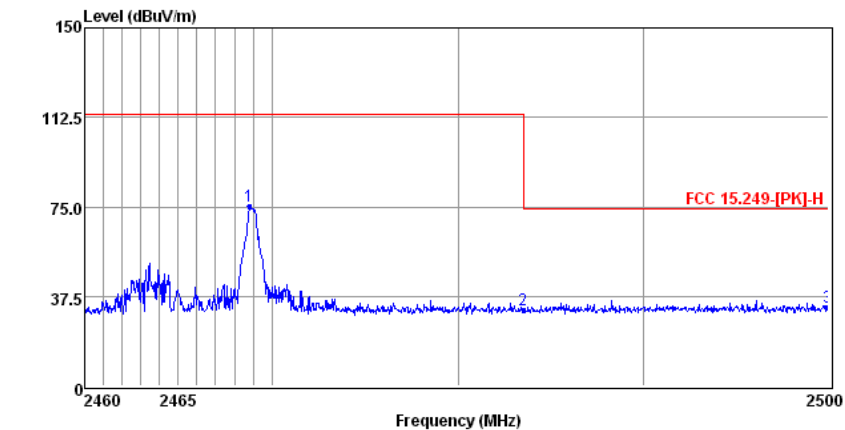

Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.79	40.66	3.12	31.48	75.26	114.00	-38.74	Peak
2	2483.52	-2.77	3.23	31.53	31.99	74.00	-42.01	Peak
3	2499.96	-2.06	3.36	31.59	32.89	74.00	-41.11	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

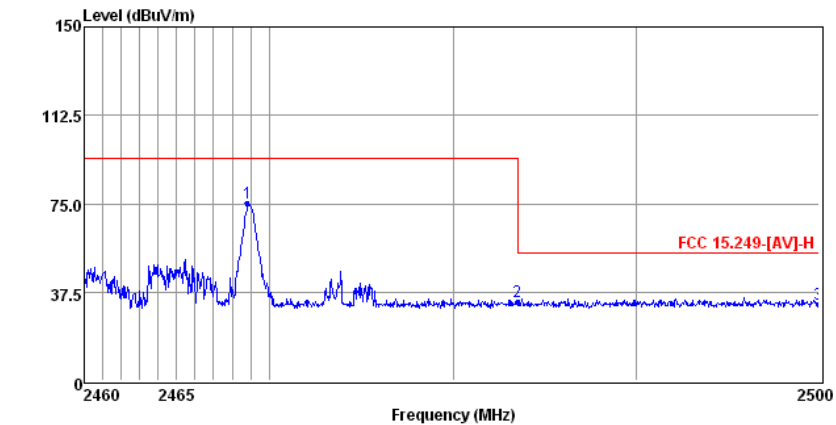


Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.82	40.62	3.12	31.48	75.22	94.00	-18.78	Average
2	2483.52	-1.43	3.23	31.53	33.33	54.00	-20.67	Average
3	2500.00	-2.61	3.36	31.59	32.34	54.00	-21.66	Average

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported


Vertical

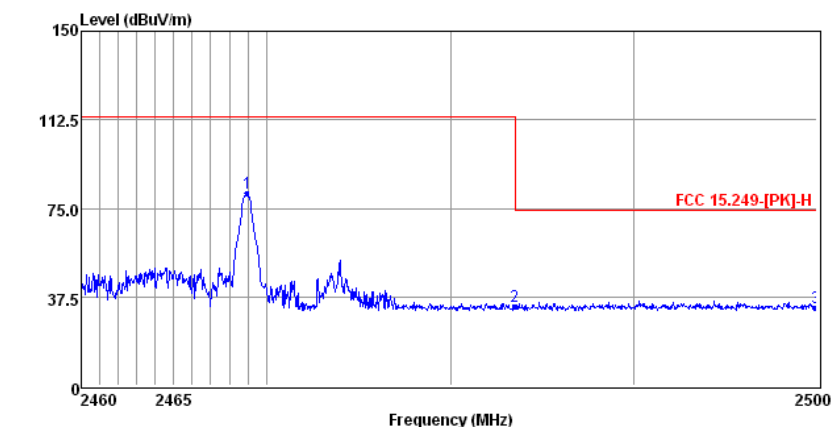

Env./Ins: 23.6°C/53.8%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.98	46.91	3.12	31.48	81.51	114.00	-32.49	Peak
2	2483.52	-1.25	3.23	31.53	33.51	74.00	-40.49	Peak
3	2499.96	-2.08	3.36	31.59	32.87	74.00	-41.13	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

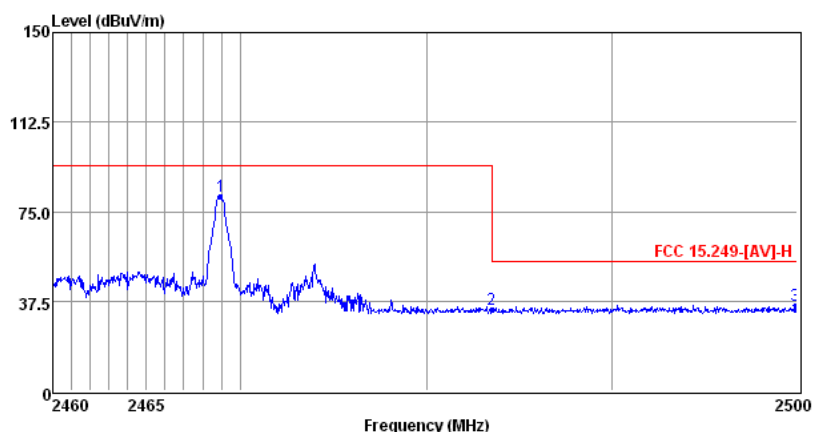

Env./Ins: 23.6°C/53.8%
pol: VERTICAL


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.98	46.91	3.12	31.48	81.51	94.00	-12.49	Average
2	2483.52	-0.54	3.23	31.53	34.22	54.00	-19.78	Average
3	2499.92	0.95	3.36	31.59	35.90	54.00	-18.10	Average

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Antenna 2 test data is as follows

Channel 1 / 2407 MHz


Horizontal

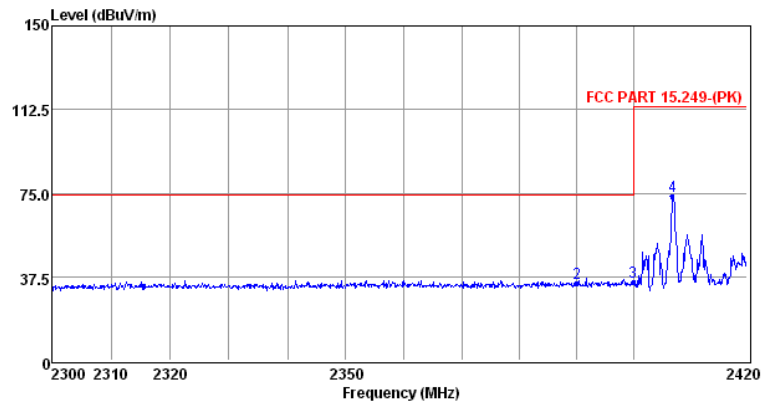

Env./Ins: 23.6°C / 53.8%
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-0.99	3.22	30.39	32.62	74.00	-41.38	Peak
2	2390.03	0.21	3.08	31.16	34.45	74.00	-39.55	Peak
3	2400.02	0.67	3.06	31.24	34.97	114.00	-79.03	Peak
4	2406.87	39.36	2.94	31.26	73.56	114.00	-40.44	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

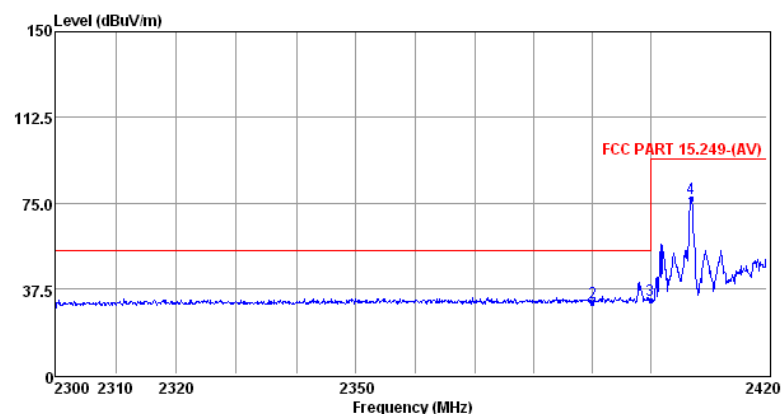


Env./Ins: 23.6°C / 53.8%
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-3.24	3.22	30.39	30.37	54.00	-23.63	Average
2	2390.03	-2.79	3.08	31.16	31.45	54.00	-22.55	Average
3	2400.02	-1.96	3.06	31.24	32.34	94.00	-61.66	Average
4	2406.99	42.98	2.94	31.26	77.18	94.00	-16.82	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported


Vertical

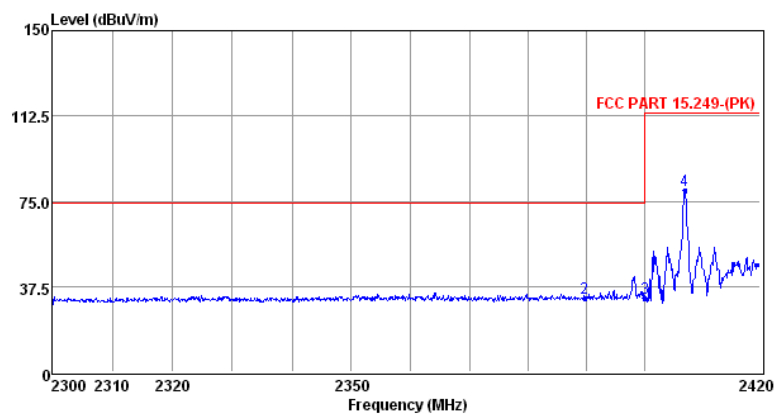

Env./Ins: 23.6°C/53.8%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	-2.70	3.22	30.39	30.91	74.00	-43.09	Peak
2	2389.79	-1.94	3.08	31.15	32.29	74.00	-41.71	Peak
3	2400.14	-2.22	3.06	31.24	32.08	114.00	-81.92	Peak
4	2406.99	45.43	2.94	31.26	79.63	114.00	-34.37	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

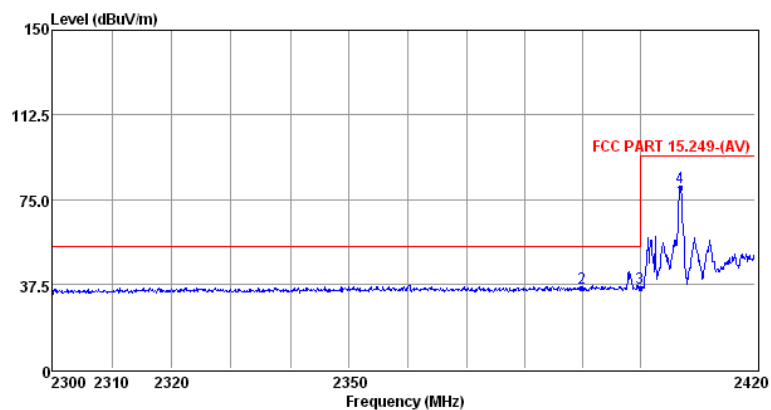


Env./Ins: 23.6°C/53.8%
pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	0.36	3.22	30.39	33.97	54.00	-20.03	Average
2	2389.91	1.30	3.08	31.15	35.53	54.00	-18.47	Average
3	2400.02	1.26	3.06	31.24	35.56	94.00	-58.44	Average
4	2406.99	45.98	2.94	31.26	80.18	94.00	-13.82	Average

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported


Channel 16 / 2469 MHz
Horizontal

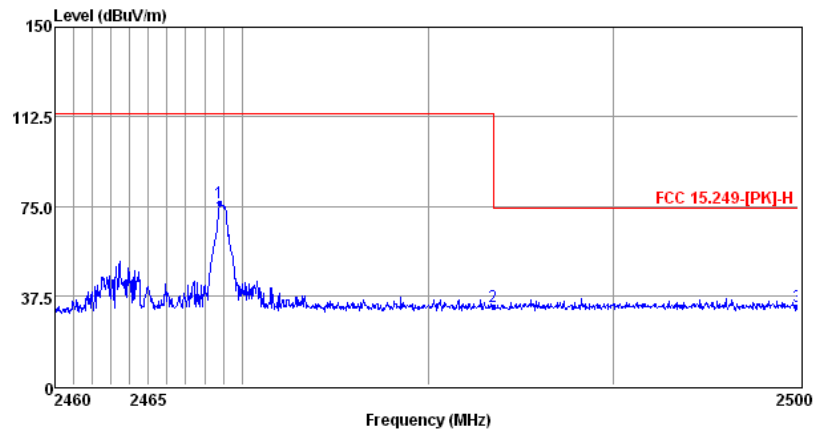

Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.79	41.66	3.12	31.48	76.26	114.00	-37.74	Peak
2	2483.52	-1.77	3.23	31.53	32.99	74.00	-41.01	Peak
3	2499.96	-2.06	3.36	31.59	32.89	74.00	-41.11	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

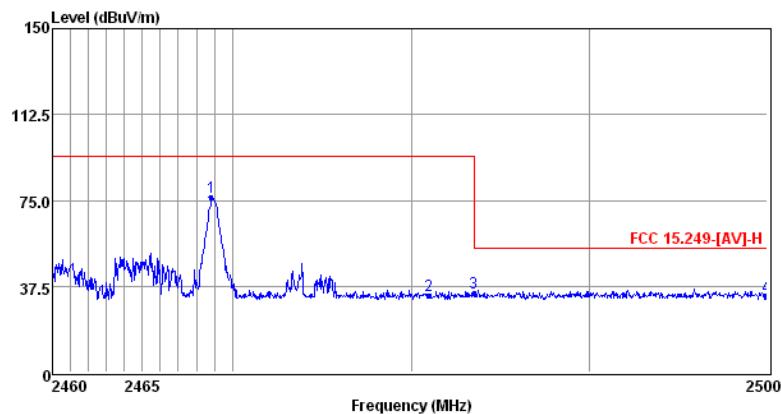


Env./Ins: 23.6°C/53.8%
pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.82	41.62	3.12	31.48	76.22	94.00	-17.78	Average
2	2481.00	-1.17	3.12	31.52	33.47	94.00	-60.53	Average
3	2483.52	-0.43	3.23	31.53	34.33	54.00	-19.67	Average
4	2499.96	-2.24	3.36	31.59	32.71	54.00	-21.29	Average


Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Vertical

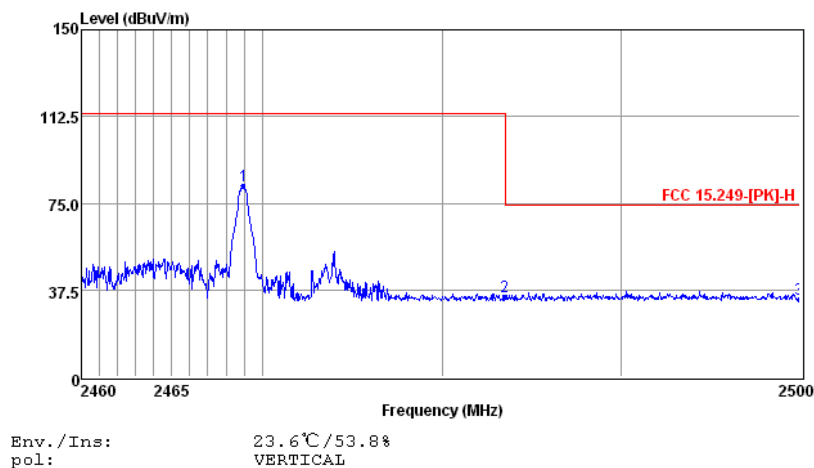

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.98	47.91	3.12	31.48	82.51	114.00	-31.49	Peak
2	2483.52	-0.25	3.23	31.53	34.51	74.00	-39.49	Peak
3	2500.00	-1.68	3.36	31.59	33.27	74.00	-40.73	Peak

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

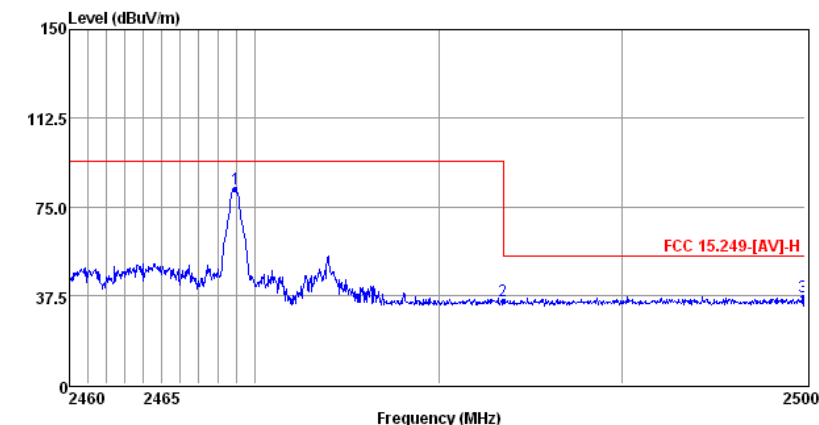

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2468.98	47.91	3.12	31.48	82.51	94.00	-11.49	Average
2	2483.52	0.46	3.23	31.53	35.22	54.00	-18.78	Average
3	2499.92	1.95	3.36	31.59	36.90	54.00	-17.10	Average

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

5.5. Antenna Requirements

5.5.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.5.2 Antenna Connected Construction

5.5.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.5.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi, and the antenna is a PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.5.2.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2019-11-13	2020-11-12
2	DC Power Supply	Agilent	E3642A	N/A	2019-11-13	2020-11-12
3	Temperature & Humidity Chamber	GUANGZHOU GOGNWN	GDS-100	70932	2018-10-10	2019-10-09
4	EMI Test Software	AUDIX	E3	/	N/A	N/A
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12	2020-06-11
6	Positioning Controller	MF	MF-7082	/	2019-06-12	2020-06-11
7	Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00005	2019-07-24	2020-07-23
8	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2019-07-24	2020-07-23
9	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2019-07-01	2020-06-30
10	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	791	2018-09-20	2019-09-19
11	Broadband Preamplifier	SCHWARZBEC K	BBV 9719	9719-025	2018-09-20	2019-09-19
12	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12	2020-06-11
13	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15	2019-11-14
14	Broadband Preamplifier	/	BP-01M18G	P190501	2019-07-01	2020-06-30
15	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12	2020-06-11
16	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12	2020-06-11
17	EMI Test Receiver	R&S	ESPI	101840	2019-06-11	2020-06-10
18	Artificial Mains	R&S	ENV216	101288	2019-06-12	2020-06-11
19	10dB Attenuator	SCHWARZBEC K	MTS-IMP-136	261115-001-0032	2019-06-11	2020-06-10

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----