



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

TekConnec Inc

39H, LA ROSSA A, 12 TUNG CHUNG WATERFRONT ROAD TUNG CHUNG, LANTAU, NT
Hong Kong

FCC ID: 2AMVHAA737F

Report Type: Original Report	Product Type: Mobile Phone
Report Number: RDG180524007-00D	
Report Date: 2018-08-21	
Reviewed By: Jerry Zhang EMC Manager <i>Jerry Zhang</i>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	48
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST EQUIPMENT LIST AND DETAILS.....	65
TEST DATA	66
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST EQUIPMENT LIST AND DETAILS.....	69
TEST DATA	70
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	104

APPLICABLE STANDARD	104
TEST PROCEDURE	104
TEST EQUIPMENT LIST AND DETAILS.....	105
TEST DATA	105

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Phone
EUT Model:		AA737F
FCC ID:		2AMVHAA737F
Rated Input Voltage:		DC3.7V from Battery or DC5V from adapter
Adapter Information	Model Name:	AA737F
	Input:	AC 100-240V, 50/60Hz 150mA
	Output:	DC5V, 500mA
External Dimension:		Length (123.1mm)*Width (53.5 mm)*High (14.3 mm)
Serial Number:		180524007
EUT Received Date:		2018.05.24

Objective

This report is prepared on behalf of **TekConnec Inc** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.
Part 2, Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AMVHAA737F.
FCC Part 15C DSS submissions with FCC ID: 2AMVHAA737F.
FCC Part 15B JBP submissions with FCC ID: 2AMVHAA737F.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode. The device support GSM/GPRS/EDGE 850 band and 1900 band, WCDMA/HSUPA/HPDPA/DC-HSDPA/HSPA+ Band 2/5, LTE band 2,12 and 13.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
R&S	Wideband Radio Communication Tester	CMW500	147473
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

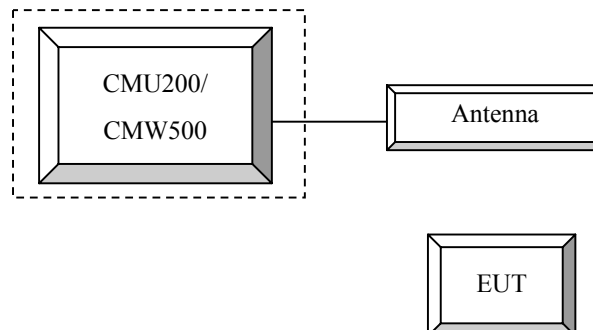

Block Diagram of Test Setup

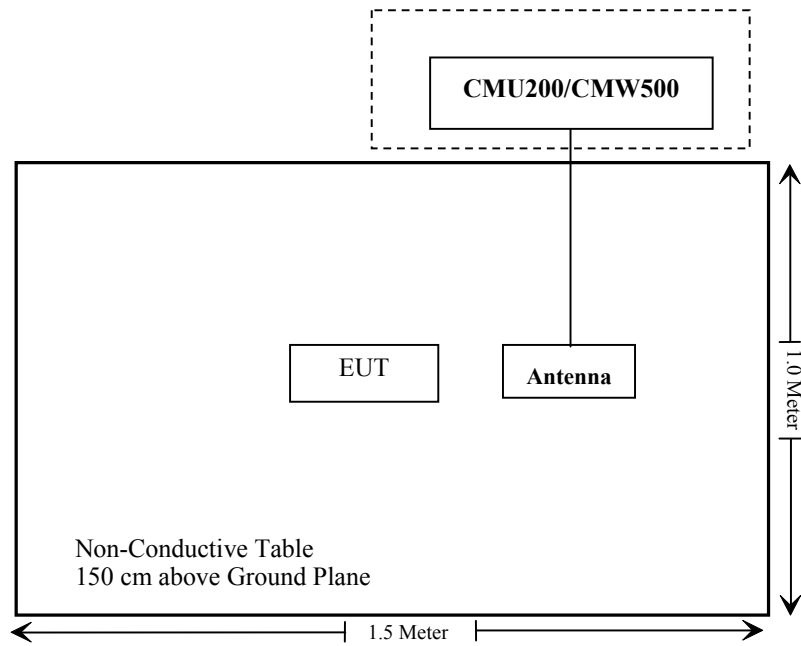

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG180524007-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
 Press Connection control to choose the different menus
 Press RESET > choose all the reset all settings
 Connection Press Signal Off to turn off the signal and change settings
 Network Support > GSM + GPRS or GSM + EGSM
 Main Service > Packet Data
 Service selection > Test Mode A – Auto Slot Config. off
 MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900
 > 27 dBm for EGPRS 850
 > 26 dBm for EGPRS 1900
 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
 Frequency Offset > + 0 Hz
 Mode > BCCH and TCH
 BCCH Level > -85 dBm (May need to adjust if link is not stable)
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

 Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

 Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	βc / βd	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
<p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p>		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	Spectrum Analyzer	FSU 26	200256	2017-01-04	2018-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
HP	Signal Generator	1026	320408	2017-12-08	2018-12-08
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each Time	/
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-18	2018-07-18
R&S	Wideband Radio Communication Tester	CMW500	147473	2017-08-31	2018-08-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1~26.7°C
Relative Humidity:	53~56 %
ATM Pressure:	101.2~101.8 kPa

* *The testing was performed by Blake Yang & Vern Shen & Kami Zhou from 2018-05-29 to 2018-06-01.*

Conducted Output Power

Cellular Band & PCS Band

Band	Channel No.	Conducted Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	31.24	31.28	29.81	27.98	27.15	24.72	24.12	22.59	21.28
	190	31.27	31.23	29.75	28.09	27.35	24.68	24.26	22.67	21.23
	251	31.33	31.45	29.95	28.15	27.42	24.56	24.15	22.78	21.42
PCS	512	26.58	25.84	24.76	23.83	22.75	23.57	23.10	22.48	21.06
	661	25.86	25.49	24.82	23.75	22.68	23.58	23.16	22.47	21.08
	810	25.48	25.34	24.51	23.68	22.45	23.78	23.28	22.56	21.29

WCDMA Band II

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.56	3.12	20.87	3.12	20.17	3.16
HSDPA	1	20.72	4.04	20.78	3.64	19.79	4.28
	2	20.89	4.32	21.02	3.93	20.00	4.47
	3	20.95	3.83	20.52	3.51	20.03	4.49
	4	20.73	3.95	21.06	3.71	19.91	4.48
HSUPA	1	20.46	4.20	20.24	4.04	19.27	3.80
	2	20.24	4.48	20.48	3.77	19.47	3.66
	3	20.24	4.23	20.46	4.10	19.50	4.10
	4	20.39	3.91	20.35	4.26	19.67	3.78
	5	20.57	4.40	20.54	3.95	19.42	3.70
DC-HSDPA	1	20.18	4.23	19.98	4.16	19.28	3.84
	2	20.57	3.95	20.39	3.97	19.27	3.55
	3	20.43	4.19	20.11	3.88	19.51	3.58
	4	20.35	4.27	19.94	4.01	19.48	4.08
HSPA+	1	20.37	4.36	20.54	4.06	19.27	3.84

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.72	3.16	22.75	3.24	22.78	3.16
HSDPA	1	22.31	3.40	21.98	3.56	22.34	3.60
	2	22.60	3.50	21.72	3.53	22.44	3.52
	3	22.38	3.35	21.85	3.46	22.27	3.46
	4	22.17	3.50	22.16	3.56	22.10	3.70
HSUPA	1	22.15	3.68	21.67	3.68	22.17	3.92
	2	21.91	3.82	21.5	3.83	22.11	4.06
	3	22.08	3.87	21.83	3.83	22.28	4.06
	4	22.28	3.67	21.97	3.73	22.04	3.96
	5	22.08	3.58	21.58	3.87	22.28	3.77
DC-HSDPA	1	22.36	3.45	21.93	3.66	21.9	4.09
	2	22.10	3.91	21.84	3.95	22.35	4.20
	3	22.16	3.89	21.48	3.39	22.04	3.99
	4	22.43	3.71	21.66	3.83	22.14	4.19
HSPA+	1	22.45	3.51	21.66	3.61	22.03	3.95

LTE Band 2 (PART 24)

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	20.77	20.64	20.71
		1#3	20.77	20.86	20.91
		1#5	20.73	20.62	20.66
		3#0	20.75	20.50	20.60
		3#3	20.18	19.64	20.20
		6#0	20.15	19.90	19.96
	16QAM	1#0	20.22	19.84	19.76
		1#3	19.94	19.84	19.67
		1#5	19.99	18.95	19.86
		3#0	20.52	19.59	19.72
		3#3	19.17	18.86	17.76
		6#0	18.90	18.94	18.01
3MHz	QPSK	1#0	20.85	20.58	20.53
		1#8	20.72	20.52	20.27
		1#14	20.83	20.62	20.77
		10#0	20.81	20.63	20.33
		10#5	19.86	20.08	19.84
		15#0	20.08	19.88	20.14
	16QAM	1#0	20.27	20.88	20.11
		1#8	20.07	20.58	20.11
		1#14	20.34	20.61	20.31
		10#0	20.48	20.62	20.17
		10#5	19.31	19.38	19.03
		15#0	19.08	19.35	18.83
5MHz	QPSK	1#0	20.95	20.55	20.48
		1#13	20.93	20.28	20.66
		1#24	21.04	20.56	20.86
		10#0	21.19	20.49	20.62
		10#15	20.13	19.72	20.08
		25#0	20.11	19.87	19.86
	16QAM	1#0	20.21	19.02	19.42
		1#13	20.10	19.21	19.22
		1#24	20.25	19.07	19.73
		10#0	19.96	19.11	19.21
		10#15	18.88	19.45	19.03
		25#0	19.18	19.34	18.87

10MHz	QPSK	1#0	20.71	20.58	20.45
		1#25	20.73	20.43	20.59
		1#49	20.68	20.61	20.69
		25#0	20.49	20.48	20.72
		25#25	19.90	20.00	20.01
	16QAM	50#0	20.11	19.94	20.02
		1#0	20.23	18.96	20.35
		1#25	20.20	18.67	20.25
		1#49	20.18	18.97	20.52
		25#0	20.12	19.00	20.50
15MHz	QPSK	25#25	19.50	19.48	19.44
		50#0	19.58	19.21	19.48
		1#0	21.01	20.63	20.18
		1#38	21.28	20.66	20.34
		1#74	20.87	20.61	20.61
		36#0	20.99	20.59	20.13
	16QAM	36#39	20.25	19.83	19.89
		75#0	20.07	19.89	19.74
		1#0	20.67	18.93	19.56
		1#38	20.53	19.09	19.67
		1#74	20.48	18.86	19.83
		36#0	20.96	18.95	19.41
		36#39	19.67	18.71	19.35
20MHz	QPSK	75#0	19.75	19.00	19.34
		1#0	20.87	20.33	20.35
		1#50	20.98	20.52	20.60
		1#99	20.58	20.35	20.73
		50#0	20.63	20.47	20.40
		50#50	19.99	20.60	19.73
	16QAM	100#0	19.97	20.71	19.68
		1#0	20.36	19.81	20.41
		1#50	20.38	19.71	20.64
		1#99	20.14	19.71	20.62
		50#0	20.37	20.01	20.36
		50#50	20.12	19.96	19.81
		100#0	20.07	19.83	19.72

LTE Band 12 (PART 27)

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	23.12	22.91	23.00
		1#3	22.83	23.18	22.94
		1#5	23.07	22.86	23.01
		3#0	22.98	22.94	23.11
		3#3	22.48	22.08	22.22
		6#0	22.40	22.31	22.34
	16QAM	1#0	21.01	21.06	22.02
		1#3	20.89	20.79	22.28
		1#5	21.15	21.08	22.09
		3#0	20.87	21.06	21.83
3#3		20.85	21.40	21.24	
3MHz	QPSK	1#0	23.12	22.92	22.97
		1#8	23.21	22.74	23.03
		1#14	23.13	22.86	23.06
		10#0	23.02	23.10	22.81
		10#5	22.19	22.45	22.14
		15#0	22.45	22.39	22.28
	16QAM	1#0	23.01	22.46	22.30
		1#8	22.82	22.35	22.50
		1#14	22.86	22.64	22.92
		10#0	23.13	22.37	22.08
10#5		21.87	22.15	21.07	
5MHz	QPSK	1#0	23.04	23.03	22.70
		1#13	23.14	23.08	22.96
		1#24	23.09	23.02	22.78
		10#0	23.08	22.84	22.88
		10#15	22.57	22.44	22.54
		25#0	22.54	22.34	22.34
	16QAM	1#0	22.29	22.91	22.04
		1#13	22.19	23.19	21.89
		1#24	22.37	22.86	22.15
		10#0	22.53	22.75	21.83
10#15		21.89	22.25	21.28	
10MHz	QPSK	1#0	22.89	23.05	22.75
		1#25	22.81	23.15	22.70
		1#49	22.92	22.97	22.82
		25#0	22.88	23.25	23.05
		25#25	22.70	22.53	22.23
		50#0	22.44	22.43	22.35
	16QAM	1#0	21.83	21.67	23.33
		1#25	21.99	21.80	23.33
		1#49	21.73	21.81	23.41
		25#0	21.62	21.64	23.30
25#25		21.46	22.17	22.19	
50#0	21.30	22.16	21.95		

LTE Band 13(PART 27)

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	
5MHz	QPSK	1#0	23.39	23.52	23.44	
		1#13	23.16	23.65	23.39	
		1#24	23.48	23.50	23.43	
		10#0	23.28	23.57	23.19	
		10#15	22.93	23.10	22.53	
		25#0	22.79	22.82	22.76	
	16QAM	1#0	22.74	23.47	22.59	
		1#13	22.85	23.28	22.53	
		1#24	22.85	23.52	22.56	
		10#0	22.64	23.31	22.53	
		10#15	22.05	22.01	22.02	
		25#0	22.03	21.83	21.93	
	10MHz	QPSK	1#0	/	23.46	/
			1#25	/	23.37	/
1#49			/	22.82	/	
25#0			/	23.59	/	
25#25			/	22.55	/	
50#0			/	22.83	/	
16QAM		1#0	/	23.35	/	
		1#25	/	23.51	/	
		1#49	/	23.39	/	
		25#0	/	23.27	/	
		25#25	/	22.19	/	
		50#0	/	21.97	/	

PAR, Band 2

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.96	4.96	5.96	13
	100 RB		6.52	6.36	6.36	13
16QAM	1 RB	20 MHz	5.20	6.08	5.44	13
	100 RB		7.16	7.04	7.00	13

PAR, Band 12

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	5.00	4.92	4.84	13
	50 RB		5.68	6.84	5.40	13
16QAM	1 RB	10 MHz	5.84	6.16	5.44	13
	50 RB		6.56	7.12	6.20	13

PAR, Band 13

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	/	5.52	/	13
	50 RB		/	5.28	/	13
16QAM	1 RB	10 MHz	/	4.20	/	13
	50 RB		/	6.08	/	13

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Middle Channel								
836.600	H	93.48	18.6	0.0	1	17.6	38.45	20.9
836.600	V	104.80	33	0.0	1	32.0	38.45	6.5
EDGE 850 Middle Channel								
836.600	H	90.74	15.8	0.0	1	14.8	38.45	23.7
836.600	V	98.68	26.9	0.0	1	25.9	38.45	12.6
WCDMA Band V Middle Channel								
836.600	H	83.20	8.3	0.0	1	7.3	38.45	31.2
836.600	V	95.51	23.7	0.0	1	22.7	38.45	15.8

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Middle Channel								
1880.000	H	88.88	16.3	11.7	2.7	25.3	33.00	7.7
1880.000	V	91.15	18.7	11.7	2.7	27.7	33.00	5.3
EDGE 1900 Middle Channel								
1880.000	H	86.62	14	11.7	2.7	23.0	33.00	10.0
1880.000	V	88.04	15.6	11.7	2.7	24.6	33.00	8.4
WCDMA Band II Middle Channel								
1880.000	H	82.69	10.1	11.7	2.7	19.1	33.00	13.9
1880.000	V	86.40	13.9	11.7	2.7	22.9	33.00	10.1

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

LTE Band 2

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4 MHz Middle Channel								
1880.000	H	82.25	9.6	11.7	2.7	18.6	33.00	14.4
1880.000	V	83.42	11	11.7	2.7	20.0	33.00	13.0
16QAM 1.4 MHz Middle Channel								
1880.000	H	82.76	10.2	11.7	2.7	19.2	33.00	13.8
1880.000	V	83.45	11	11.7	2.7	20.0	33.00	13.0
QPSK 3 MHz Middle Channel								
1880.000	H	81.58	9	11.7	2.7	18.0	33.00	15.0
1880.000	V	83.73	11.3	11.7	2.7	20.3	33.00	12.7
16QAM 3 MHz Middle Channel								
1880.000	H	80.21	7.6	11.7	2.7	16.6	33.00	16.4
1880.000	V	82.94	10.5	11.7	2.7	19.5	33.00	13.5
QPSK 5 MHz Middle Channel								
1880.000	H	81.92	9.3	11.7	2.7	18.3	33.00	14.7
1880.000	V	83.32	10.9	11.7	2.7	19.9	33.00	13.1
16QAM 5 MHz Middle Channel								
1880.000	H	81.13	8.5	11.7	2.7	17.5	33.00	15.5
1880.000	V	83.85	11.4	11.7	2.7	20.4	33.00	12.6
QPSK 10 MHz Middle Channel								
1880.000	H	81.55	8.9	11.7	2.7	17.9	33.00	15.1
1880.000	V	83.29	10.8	11.7	2.7	19.8	33.00	13.2
16QAM 10 MHz Middle Channel								
1880.000	H	81.06	8.4	11.7	2.7	17.4	33.00	15.6
1880.000	V	83.79	11.3	11.7	2.7	20.3	33.00	12.7
QPSK 15 MHz Middle Channel								
1880.000	H	81.36	8.7	11.7	2.7	17.7	33.00	15.3
1880.000	V	83.49	11	11.7	2.7	20.0	33.00	13.0
16QAM 15 MHz Middle Channel								
1880.000	H	81.54	8.9	11.7	2.7	17.9	33.00	15.1
1880.000	V	83.02	10.6	11.7	2.7	19.6	33.00	13.4
QPSK 20 MHz Middle Channel								
1880.000	H	81.85	9.2	11.7	2.7	18.2	33.00	14.8
1880.000	V	83.76	11.3	11.7	2.7	20.3	33.00	12.7
16QAM 20 MHz Middle Channel								
1880.000	H	81.24	8.6	11.7	2.7	17.6	33.00	15.4
1880.000	V	83.11	10.6	11.7	2.7	19.6	33.00	13.4

LTE Band 12

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4 MHz Middle Channel								
707.500	H	88.19	11.3	0.0	0.9	10.4	34.77	24.4
707.500	V	99.14	24.7	0.0	0.9	23.8	34.77	11.0
16QAM 1.4 MHz Middle Channel								
707.500	H	86.11	9.3	0.0	0.9	8.4	34.77	26.4
707.500	V	98.11	23.7	0.0	0.9	22.8	34.77	12.0
QPSK 3 MHz Middle Channel								
707.500	H	87.00	10.1	0.0	0.9	9.2	34.77	25.6
707.500	V	98.41	24	0.0	0.9	23.1	34.77	11.7
16QAM 3 MHz Middle Channel								
707.500	H	86.94	10.1	0.0	0.9	9.2	34.77	25.6
707.500	V	98.29	23.9	0.0	0.9	23.0	34.77	11.8
QPSK 5 MHz Middle Channel								
707.500	H	90.00	13.1	0.0	0.9	12.2	34.77	22.6
707.500	V	98.01	23.6	0.0	0.9	22.7	34.77	12.1
16QAM 5 MHz Middle Channel								
707.500	H	84.07	7.2	0.0	0.9	6.3	34.77	28.5
707.500	V	99.20	24.8	0.0	0.9	23.9	34.77	10.9
QPSK 10 MHz Middle Channel								
707.500	H	91.16	14.3	0.0	0.9	13.4	34.77	21.4
707.500	V	98.26	23.8	0.0	0.9	22.9	34.77	11.9
16QAM 10 MHz Middle Channel								
707.500	H	90.69	13.8	0.0	0.9	12.9	34.77	21.9
707.500	V	97.59	23.2	0.0	0.9	22.3	34.77	12.5

LTE Band 13

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 5 MHz Middle Channel								
782.000	H	94.82	19.3	0.0	0.9	18.4	34.77	16.4
782.000	V	97.00	24.4	0.0	0.9	23.5	34.77	11.3
16QAM 5 MHz Middle Channel								
782.000	H	97.45	21.9	0.0	0.9	21.0	34.77	13.8
782.000	V	97.10	24.5	0.0	0.9	23.6	34.77	11.2
QPSK 10 MHz Middle Channel								
782.000	H	93.74	18.2	0.0	0.9	17.3	34.77	17.5
782.000	V	97.10	24.5	0.0	0.9	23.6	34.77	11.2
16QAM 10 MHz Middle Channel								
782.000	H	94.35	18.8	0.0	0.9	17.9	34.77	16.9
782.000	V	97.31	24.7	0.0	0.9	23.8	34.77	11.0

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

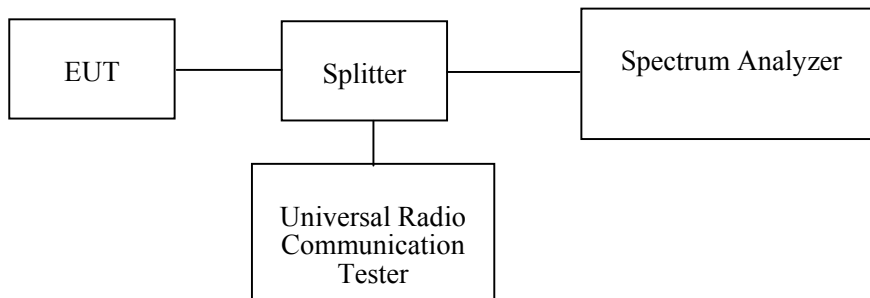

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-18	2018-07-18
R&S	Universal Radio Communication Tester	CMU200	109 038	2018-07-18	2019-07-18
R&S	Wideband Radio Communication Tester	CMW500	147473	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each Time	/
Pasternack	RF Coaxial Cable	0.5m	C-5	Each Time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.3~27 °C
Relative Humidity:	54~65 %
ATM Pressure:	100.2~101.8 kPa

The testing was performed by Kami Zhou from 2018-05-30 to 2018-08-21.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	M	GSM	0.246	0.314
		EDGE	0.244	0.312
PCS		PCS	0.244	0.314
		EDGE	0.246	0.310
WCDMA Band II		Rel 99	4.120	4.700
		HSDPA	4.100	4.680
		HSUPA	4.100	4.700
WCDMA Band V		Rel 99	4.100	4.700
		HSDPA	4.120	4.700
		HSUPA	4.100	4.700


Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band 2	QPSK	1.4	M	1.116	1.464
		3		2.688	3.008
		5		4.540	5.200
		10		9.000	9.800
		15		13.560	15.540
		20		18.080	20.140
	16QAM	1.4	M	1.110	1.446
		3		2.700	3.032
		5		4.540	5.480
		10		8.960	9.920
		15		13.560	15.060
		20		18.160	20.060
LTE Band 12	QPSK	1.4	M	1.110	1.488
		3		2.688	3.024
		5		4.520	5.164
		10		8.920	9.704
	16QAM	1.4	M	1.110	1.506
		3		2.688	3.024
		5		4.540	5.344
		10		8.920	9.904
LTE Band 13	QPSK	5	M	4.540	5.460
		10		8.960	9.800
	16QAM	5	M	4.540	5.400
		10		8.960	9.920

GSM 850 Cellular Band

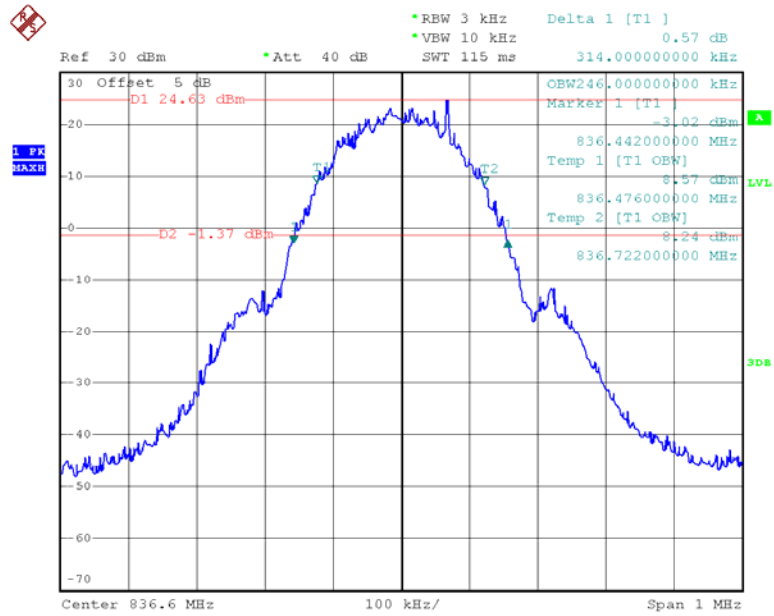


Date: 30.MAY.2018 09:16:29

GSM PCS1900 Cellular Band

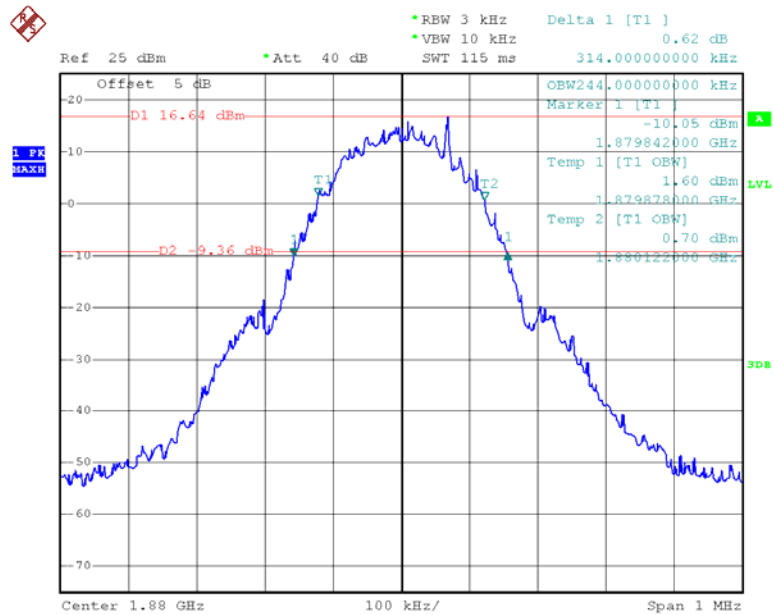


Date: 30.MAY.2018 09:31:01

EDGE 850 Cellular Band

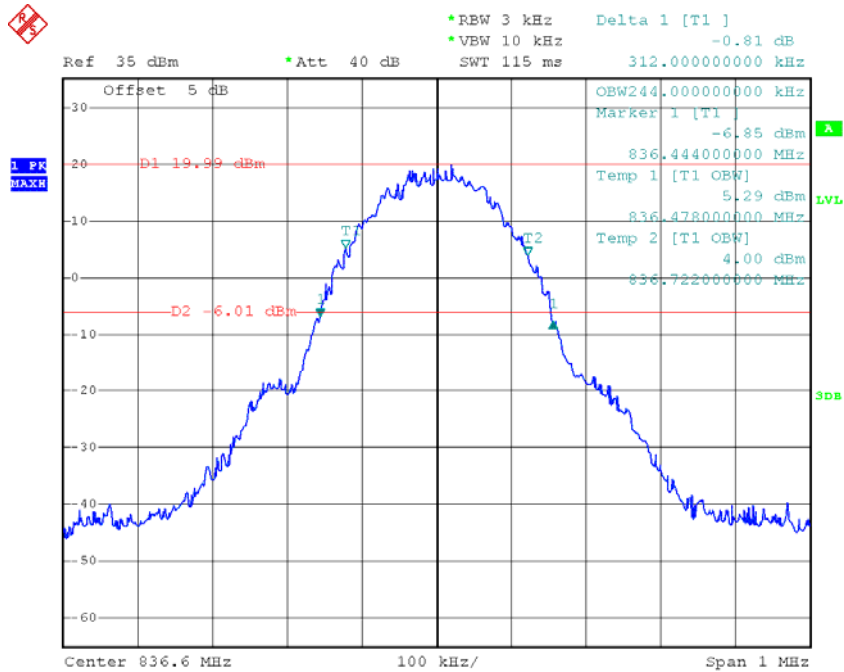


Date: 21.AUG.2018 10:21:01

EDGE PCS1900 Cellular Band

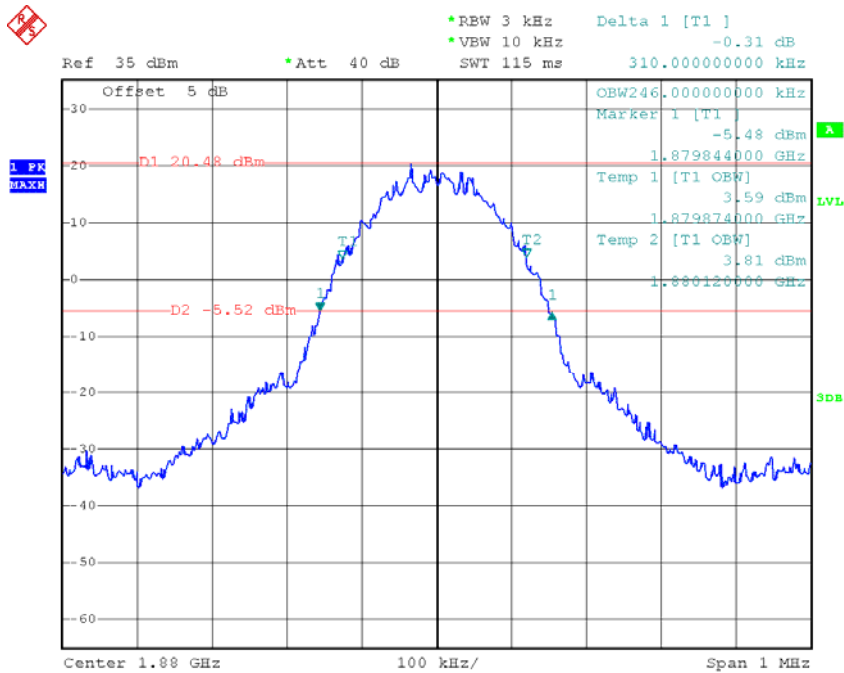


Date: 21.AUG.2018 10:18:15

WCDMA Band II, Rel 99

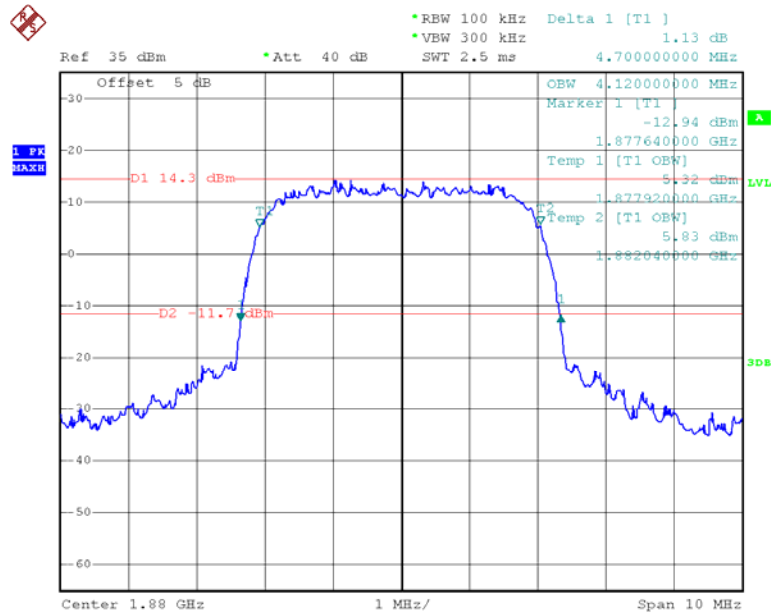


Date: 30.MAY.2018 11:17:15

WCDMA Band II, HSUPA

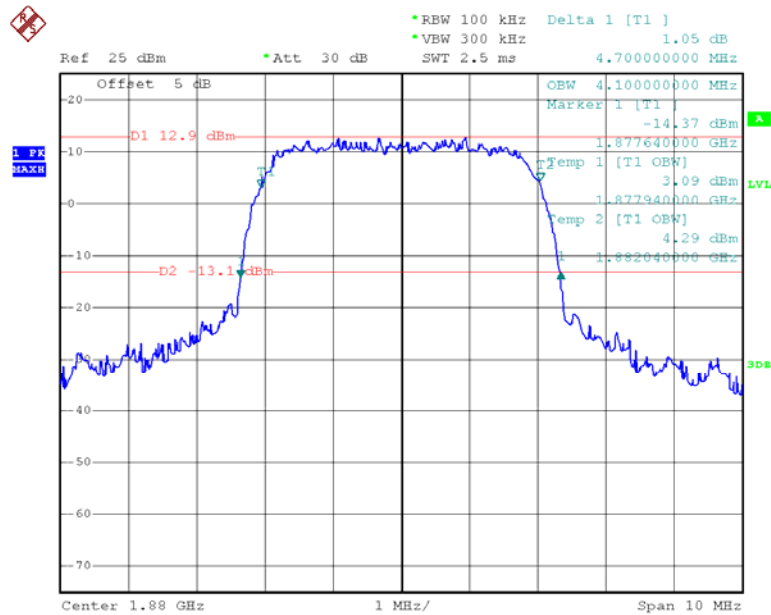


Date: 30.MAY.2018 11:26:38

WCDMA Band II, HSDPA

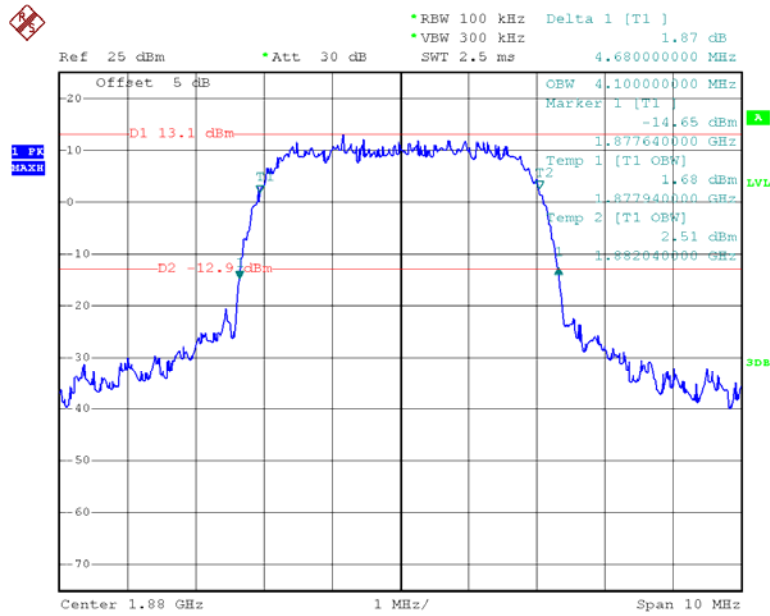


Date: 30.MAY.2018 11:25:13

WCDMA Band V, Rel 99

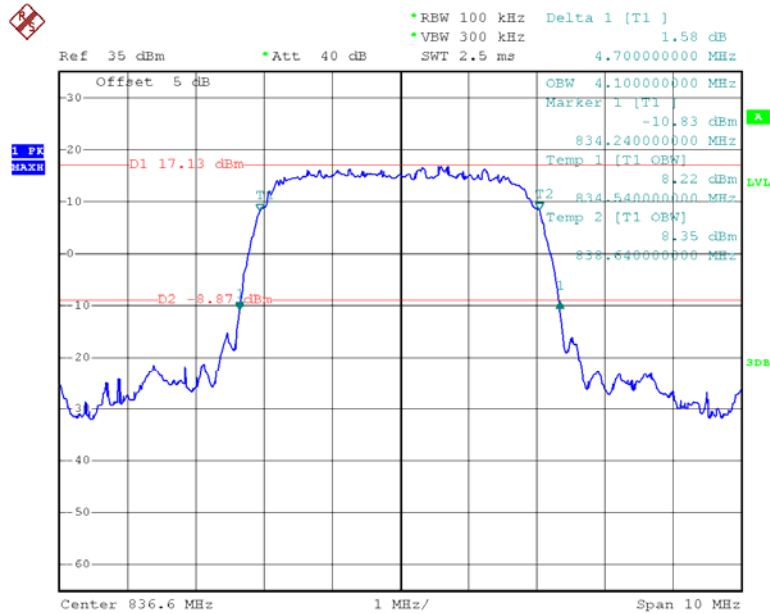


Date: 30.MAY.2018 10:33:05

WCDMA Band V, HSUPA

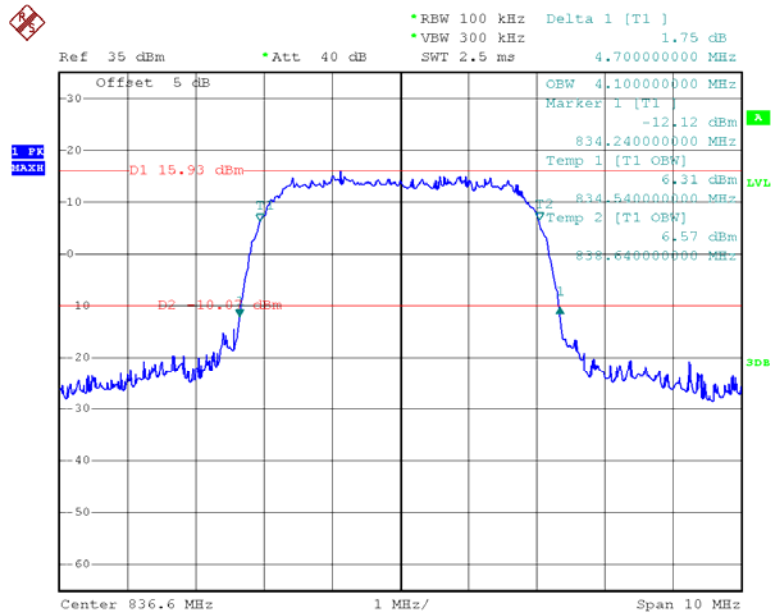

Date: 30.MAY.2018 10:35:30


WCDMA Band V, HSDPA

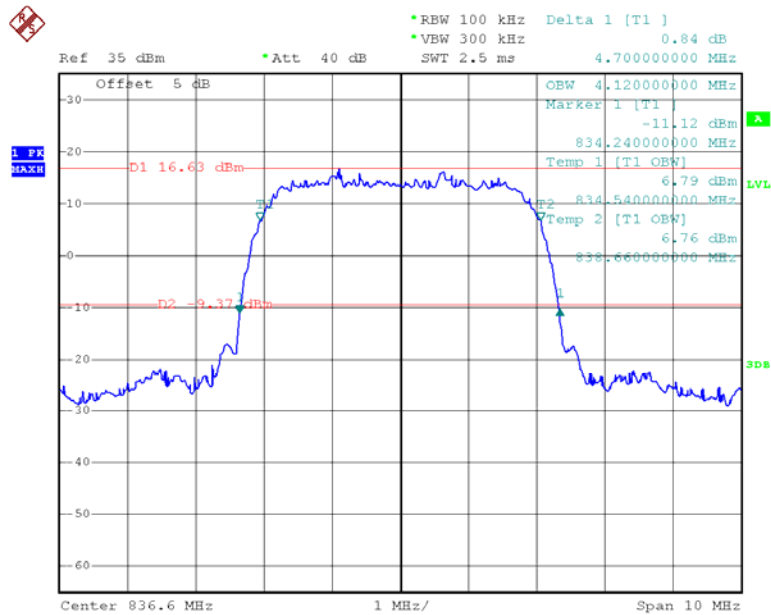

Date: 30.MAY.2018 10:37:43


LTE Band 2

QPSK_1.4 MHz

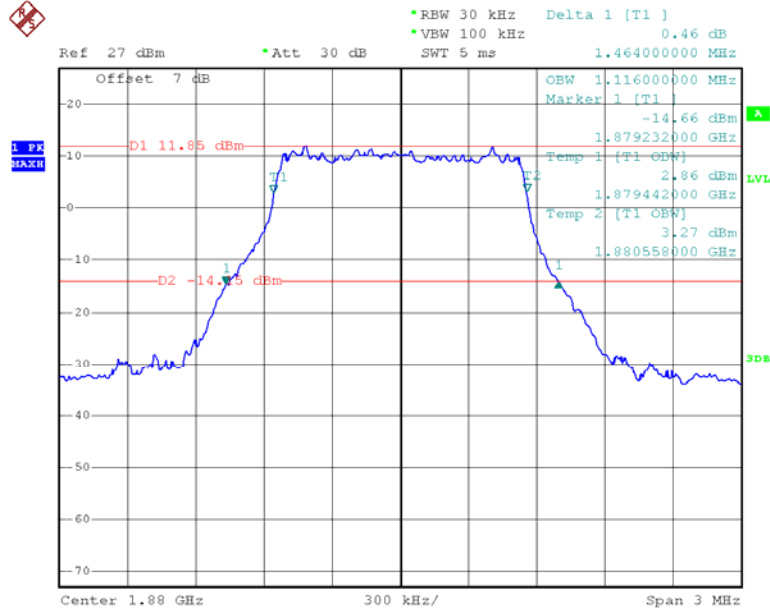


Date: 31.MAY.2018 17:06:22

QPSK_3 MHz

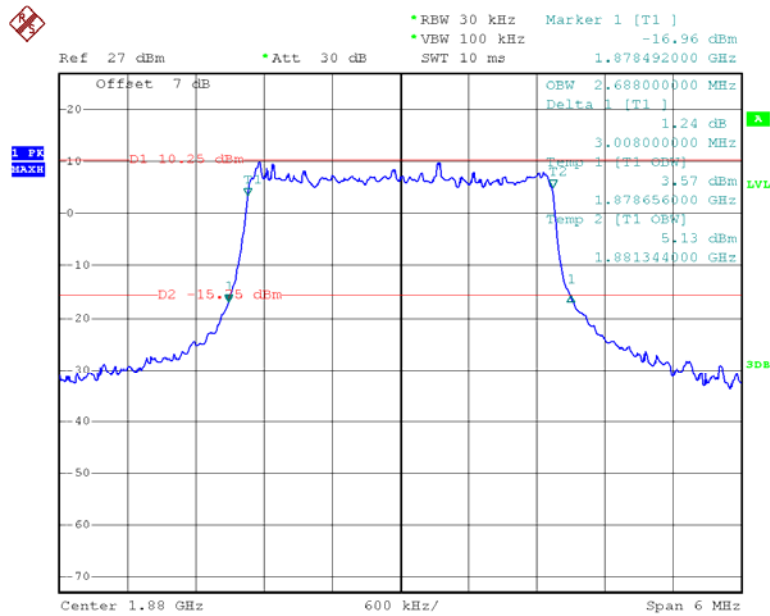


Date: 31.MAY.2018 17:03:32

QPSK_5 MHz

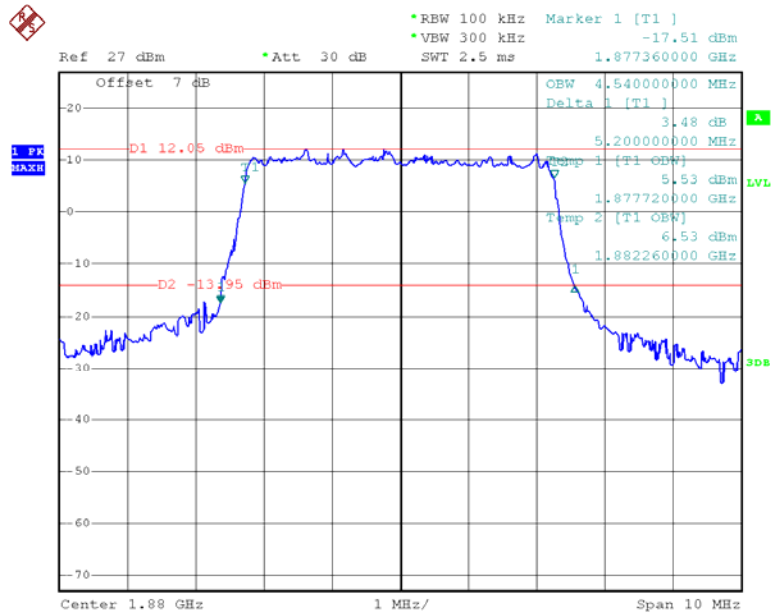


Date: 31.MAY.2018 17:01:25

QPSK_10 MHz

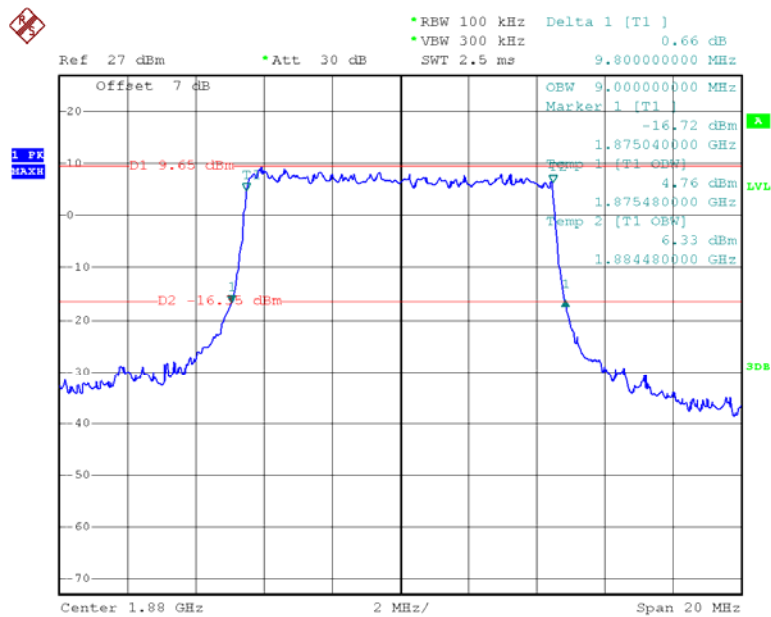


Date: 31.MAY.2018 16:55:08

QPSK_15 MHz

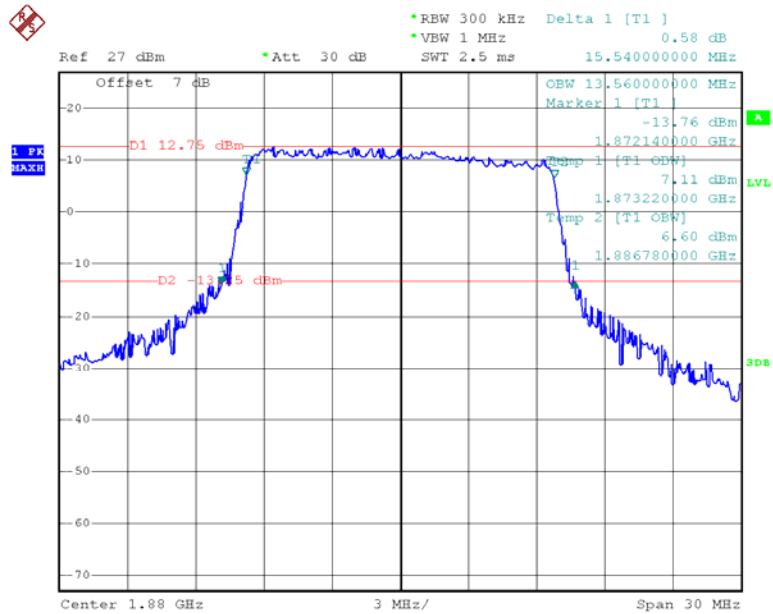


Date: 31.MAY.2018 16:57:04

QPSK_20 MHz

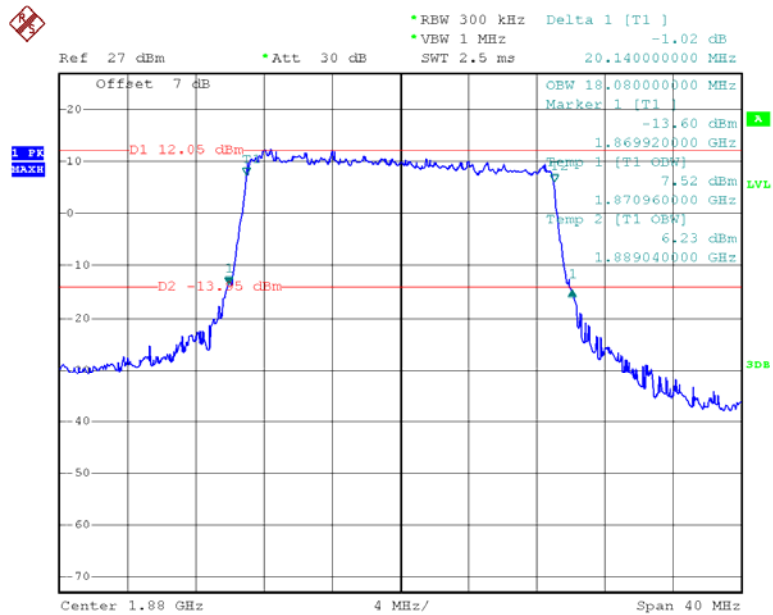


Date: 31.MAY.2018 16:58:53

16QAM_1.4 MHz

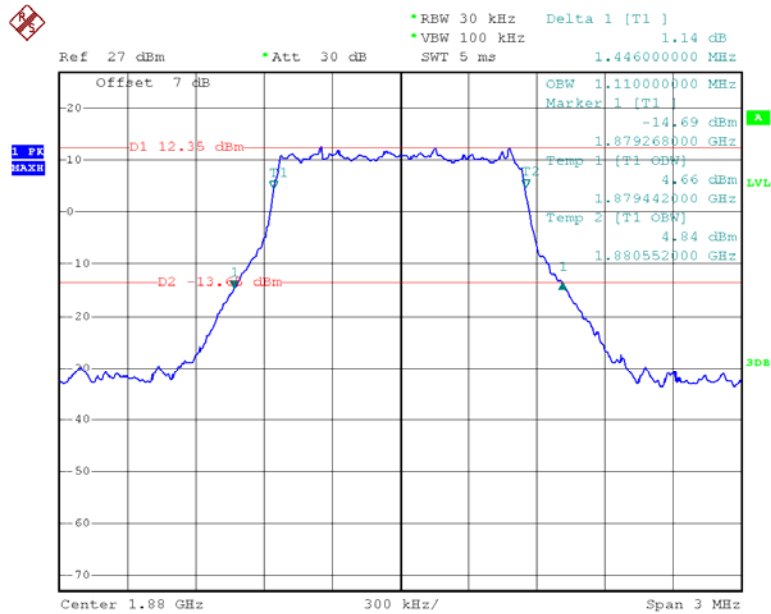


Date: 31.MAY.2018 17:05:42

16QAM_3 MHz

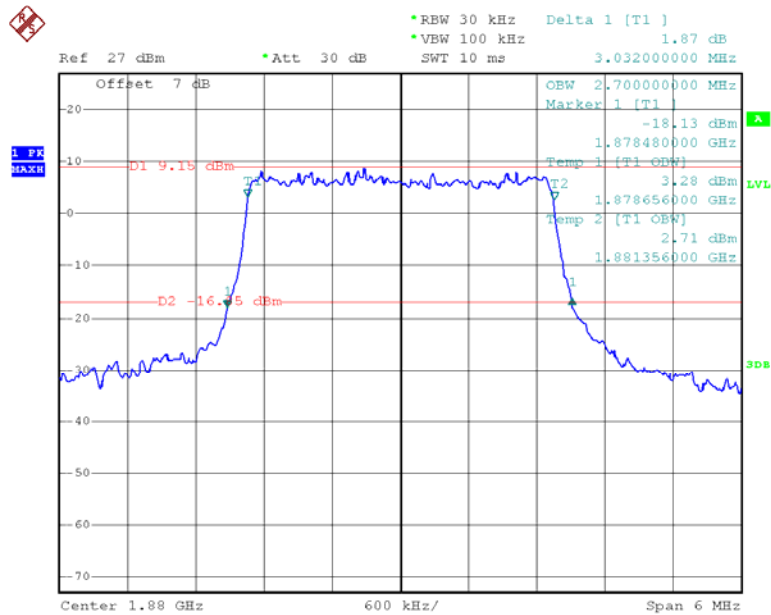


Date: 31.MAY.2018 17:04:37

16QAM_5 MHz

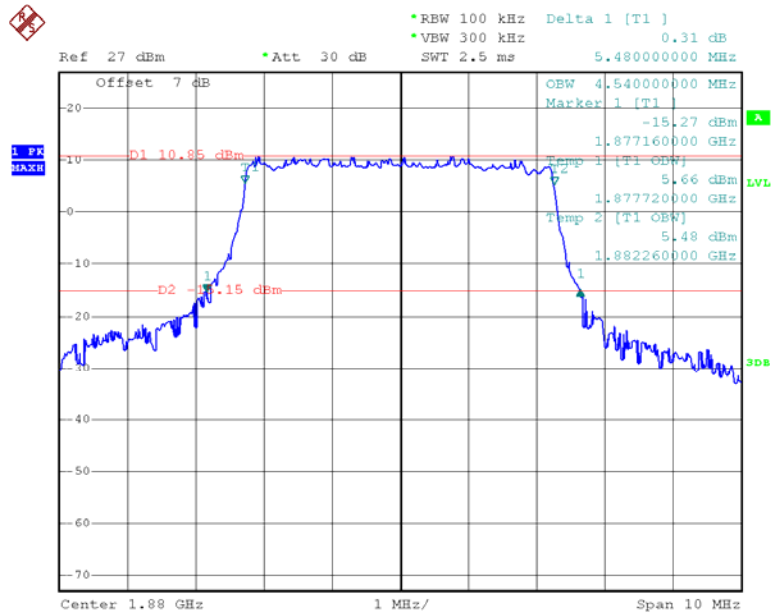


Date: 31.MAY.2018 17:02:12

16QAM_10 MHz

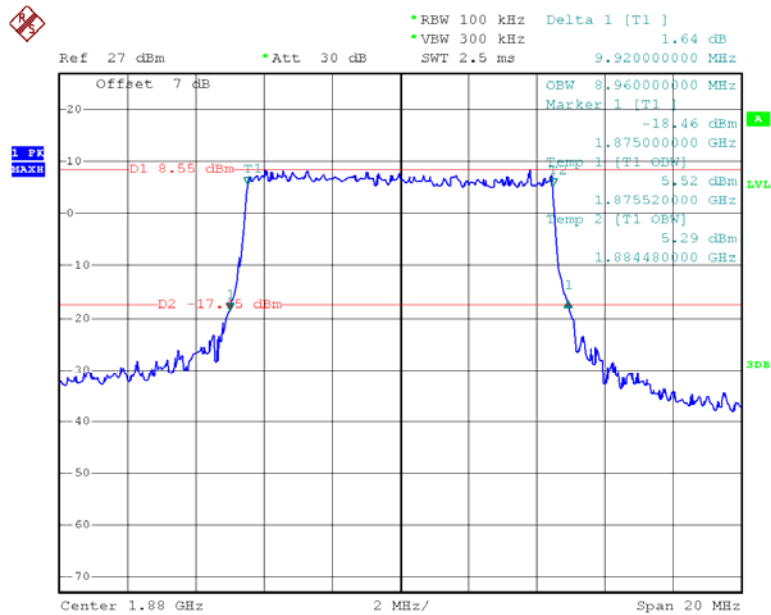


Date: 31.MAY.2018 16:55:57

16QAM_15 MHz

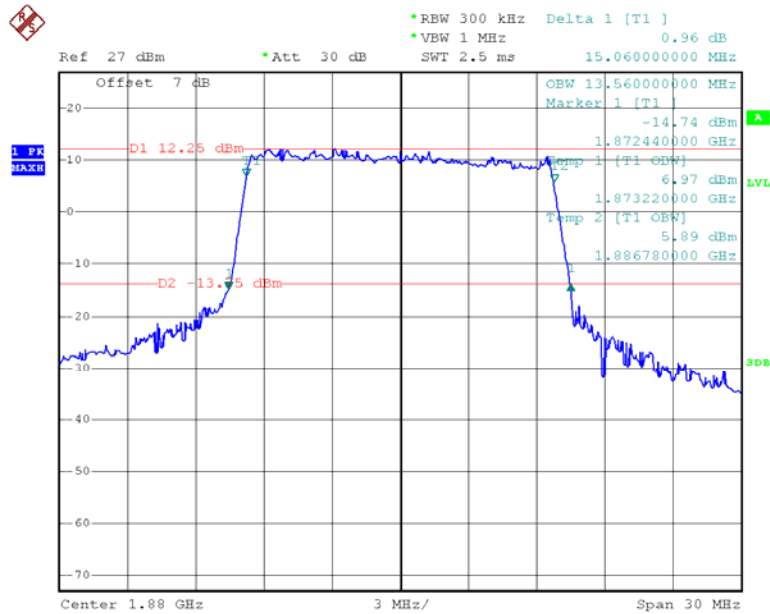

Date: 31.MAY.2018 16:57:51


16QAM_20 MHz

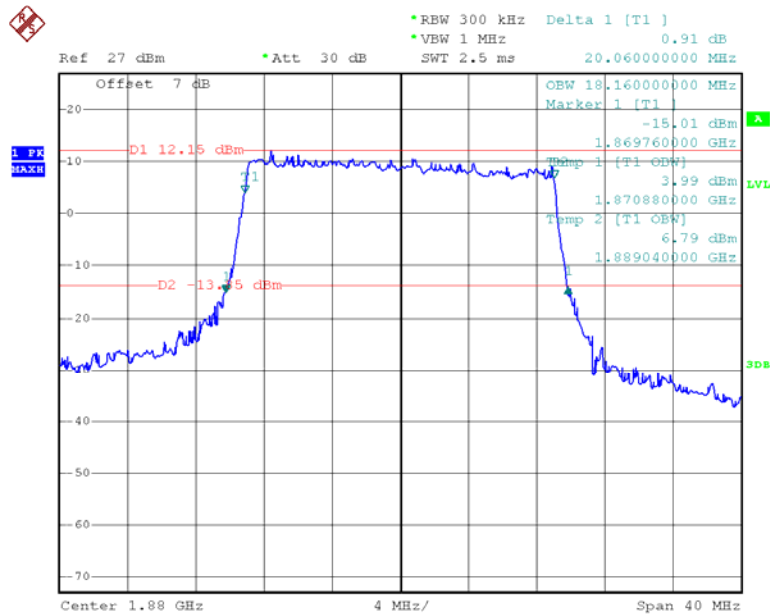

Date: 31.MAY.2018 16:59:36


LTE Band 12:

QPSK_1.4 MHz

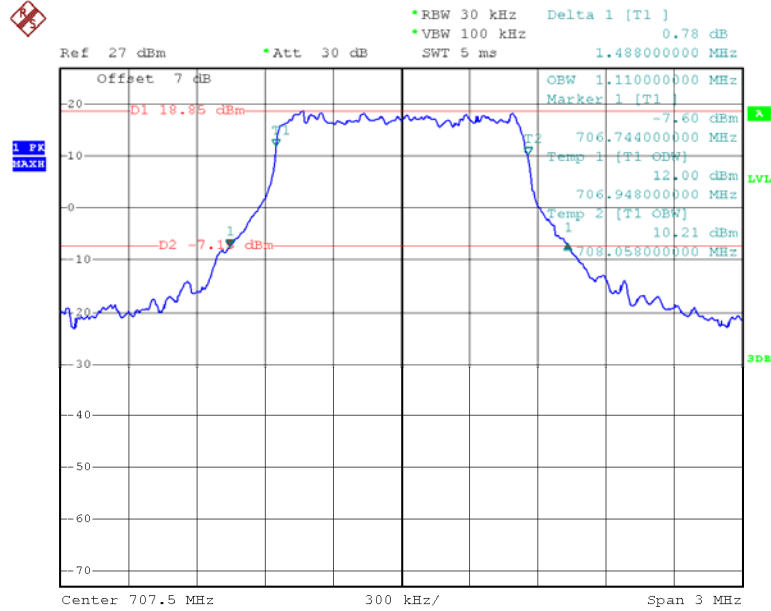


Date: 31.MAY.2018 17:08:52

QPSK_3 MHz

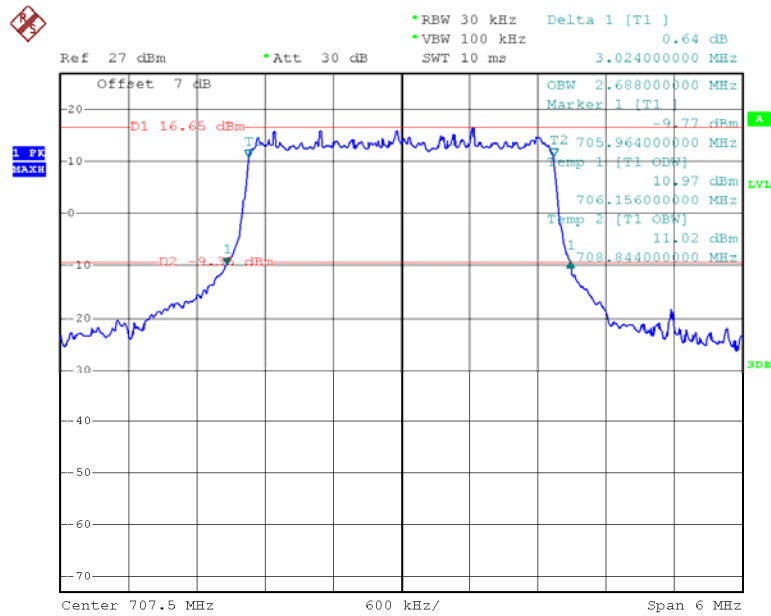


Date: 31.MAY.2018 17:10:35

QPSK_5 MHz

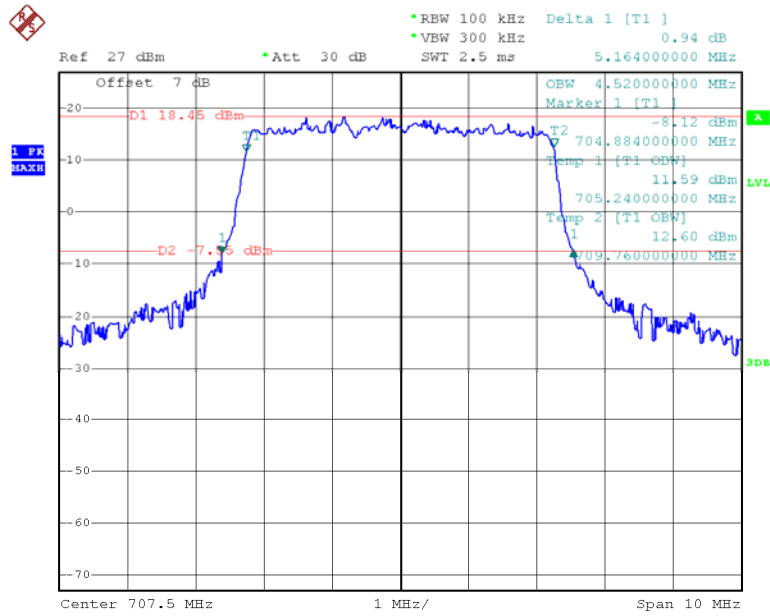


Date: 31.MAY.2018 17:11:57

QPSK_10 MHz

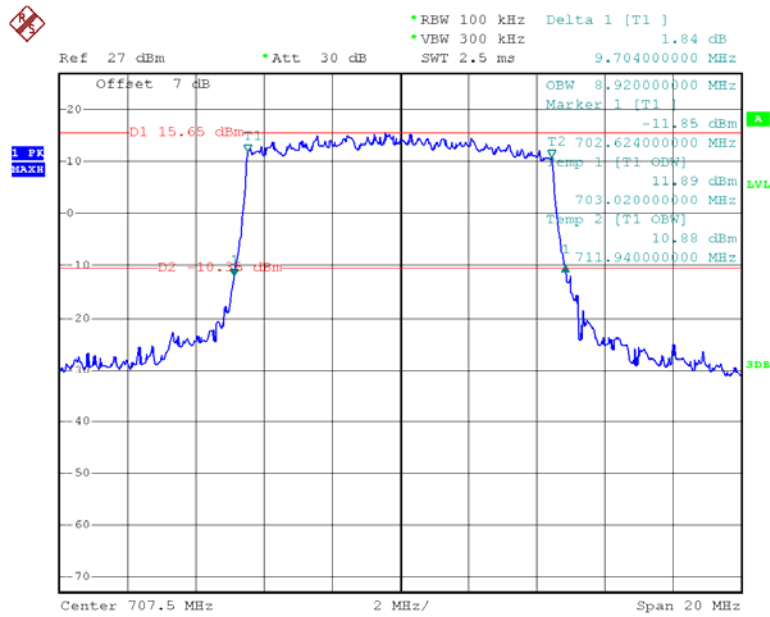


Date: 31.MAY.2018 17:13:34

16QAM_1.4 MHz

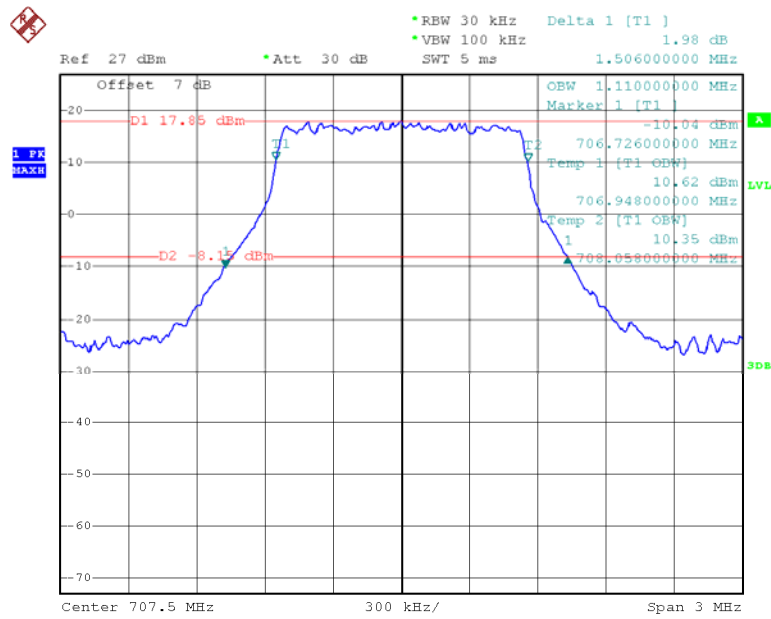


Date: 31.MAY.2018 17:08:07

16QAM_3 MHz

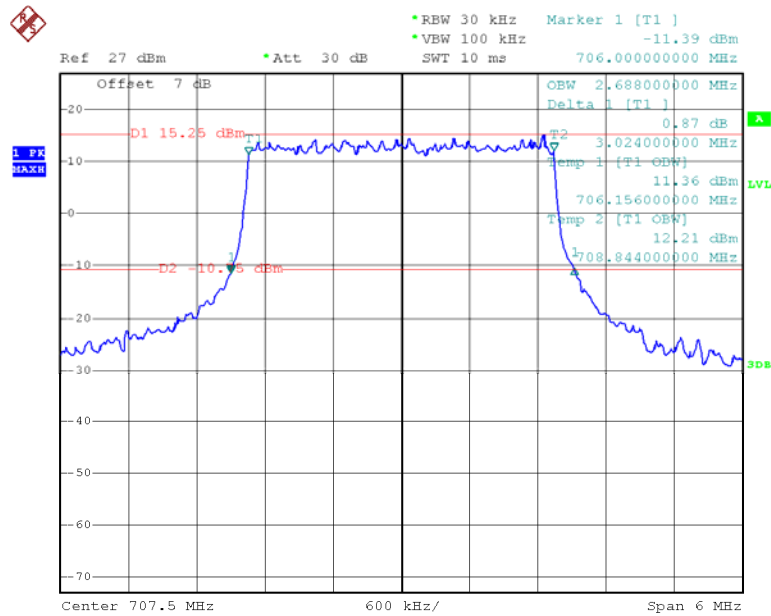


Date: 31.MAY.2018 17:09:58

16QAM_5 MHz

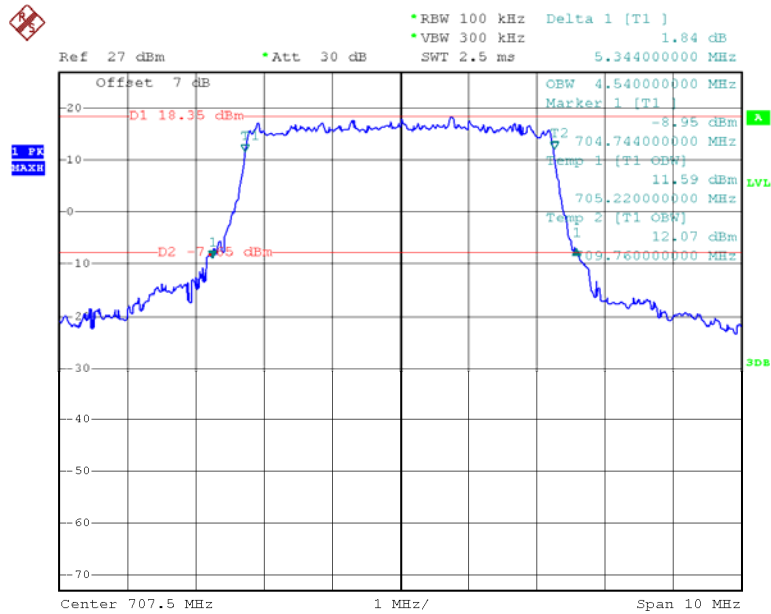

Date: 31.MAY.2018 17:12:45


16QAM_10 MHz

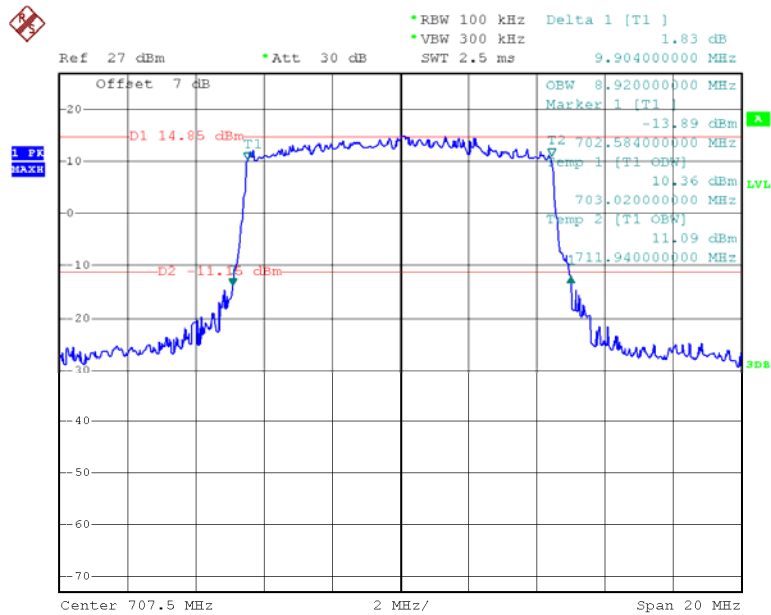

Date: 31.MAY.2018 17:14:36


LTE Band 13:

QPSK_5 MHz

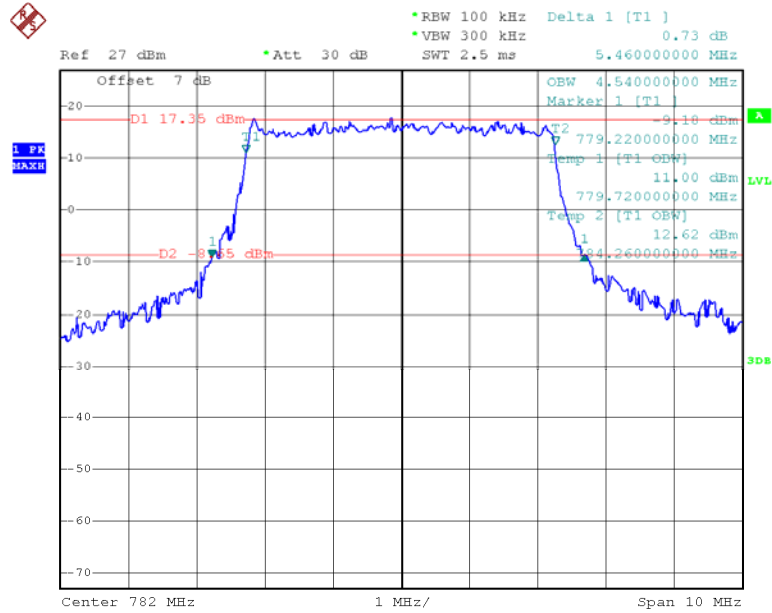


Date: 31.MAY.2018 17:22:44

QPSK_10 MHz

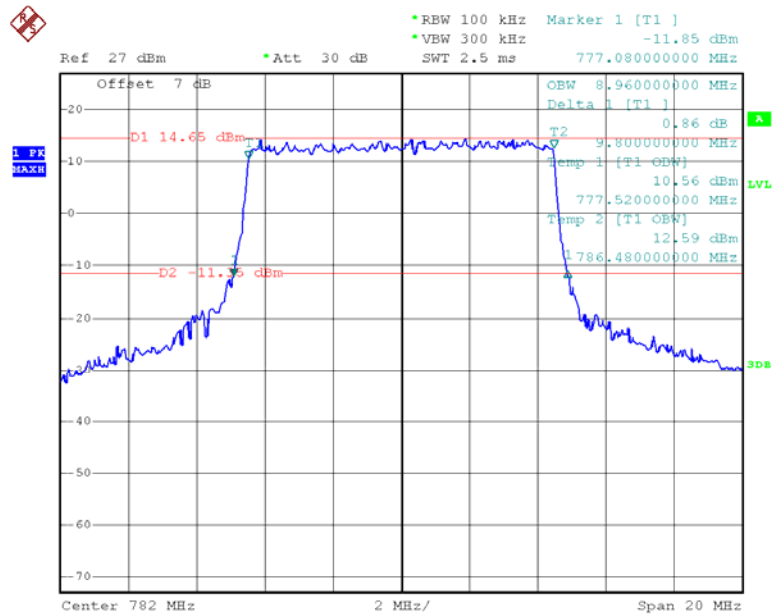


Date: 31.MAY.2018 17:20:52

16QAM_5 MHz

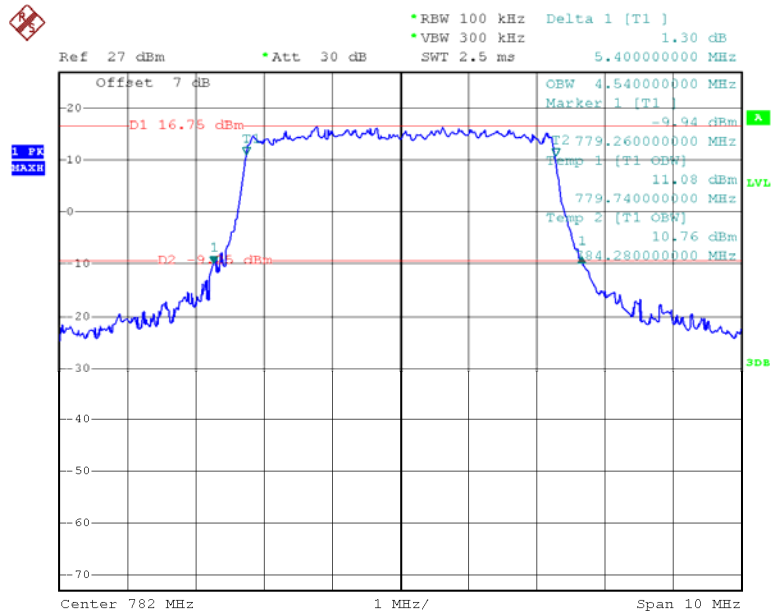

Date: 31.MAY.2018 17:23:30

16QAM_10 MHz

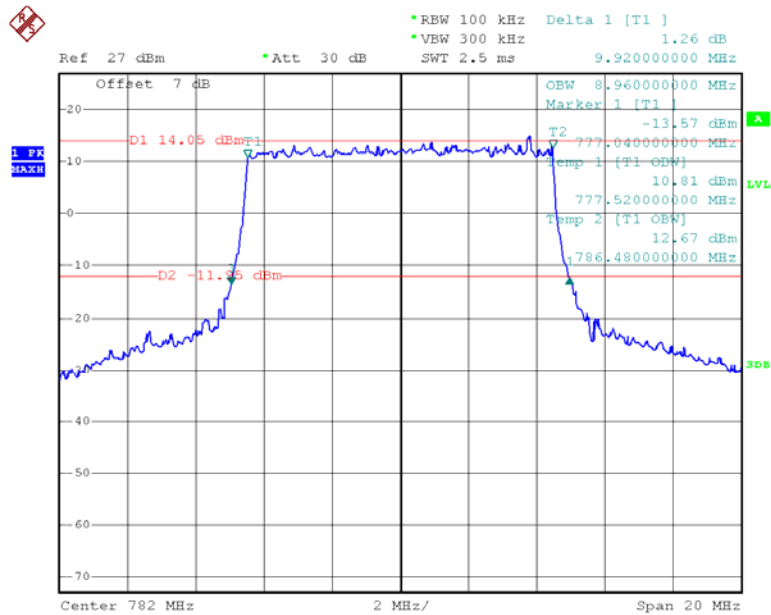

Date: 31.MAY.2018 17:21:48

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

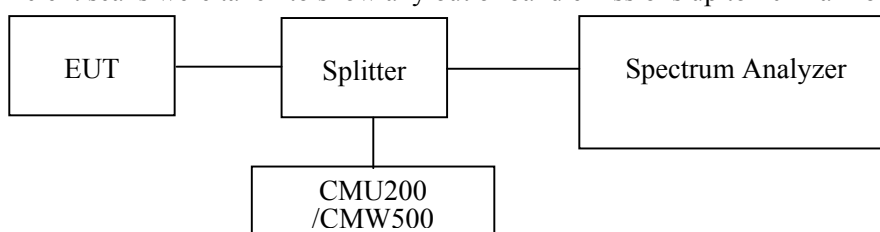

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-18	2018-07-18
R&S	Wideband Radio Communication Tester	CMW500	147473	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each Time	/
Pasternack	RF Coaxial Cable	0.5m	C-5	Each Time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	/
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	26.3~26.9°C
Relative Humidity:	54~59 %
ATM Pressure:	101.2~101.8 kPa


The testing was performed by Kami Zhou from 2018-05-30 to 2018-06-04.

Please refer to the following plots.

GSM850_Middle Channel

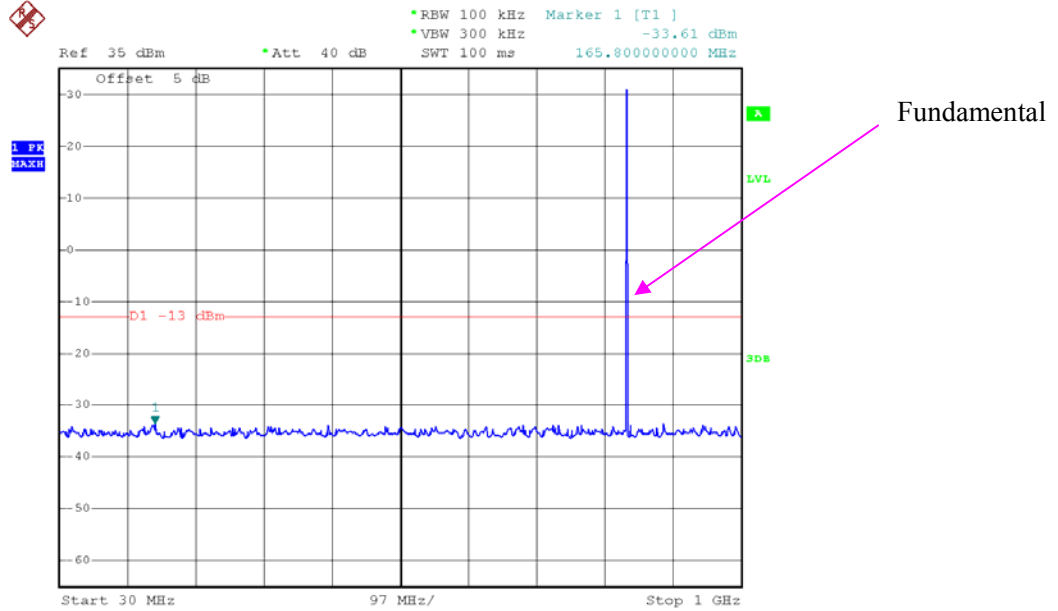


Date: 30.MAY.2018 09:18:20

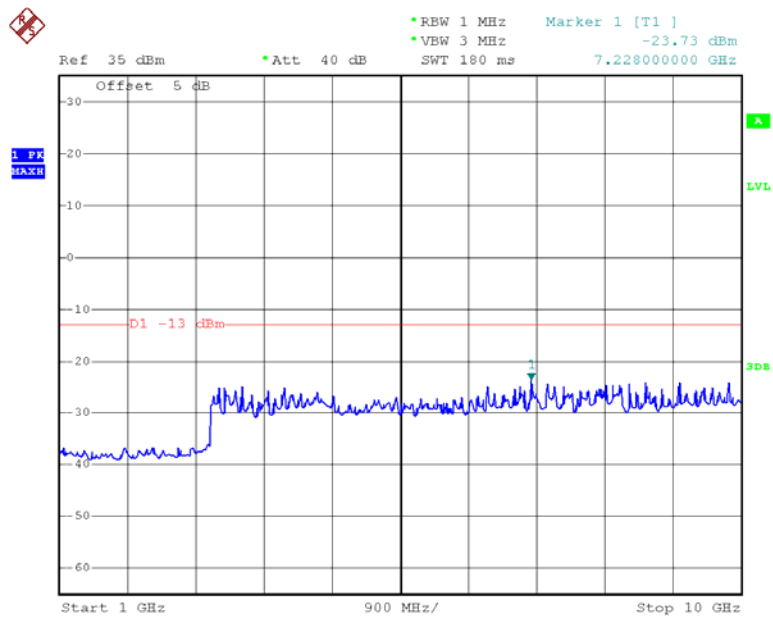


Date: 30.MAY.2018 09:18:43

PCS 1900_ Middle Channel

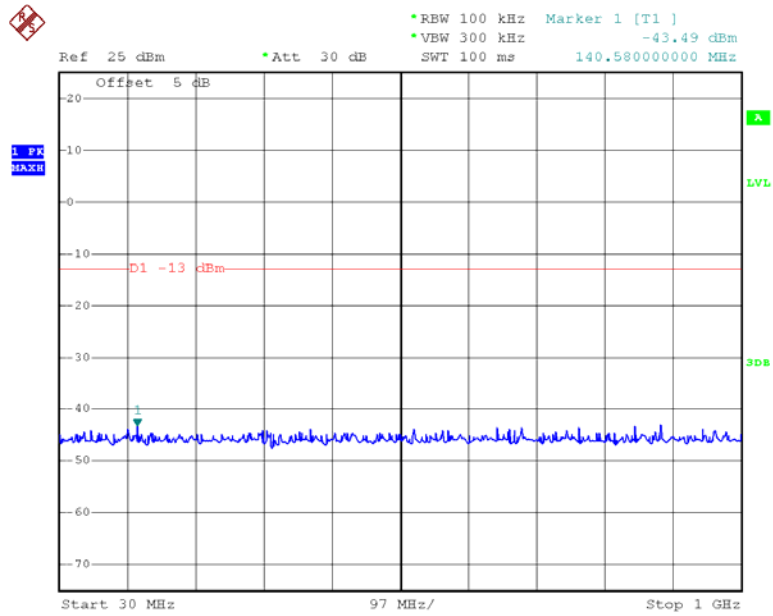


Date: 30.MAY.2018 09:25:42

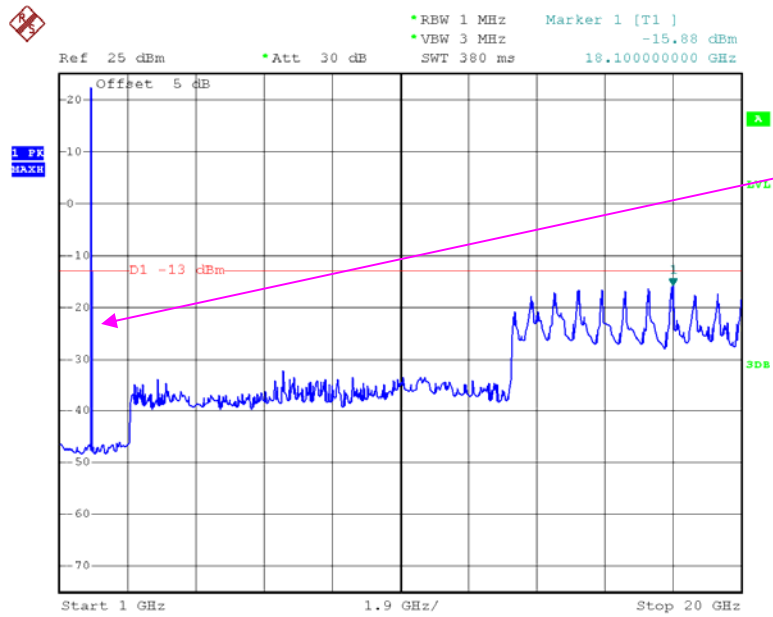


Date: 30.MAY.2018 09:32:48

WCDMA Band II,Rel99

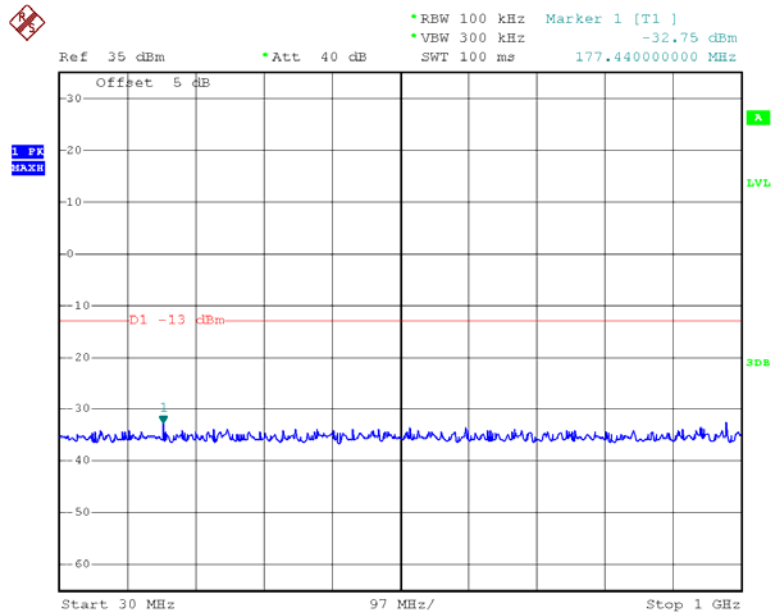


Date: 30.MAY.2018 11:18:12

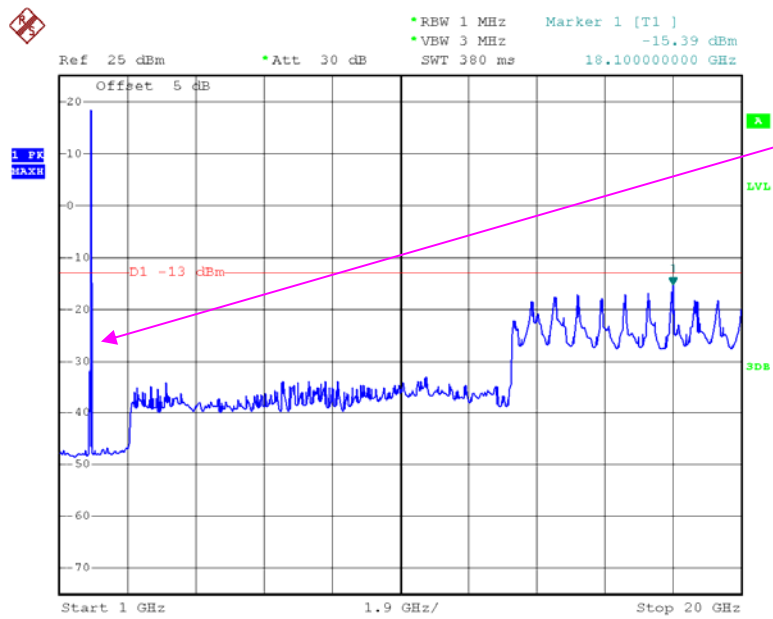


Date: 30.MAY.2018 11:19:53

WCDMA Band V, Rel99

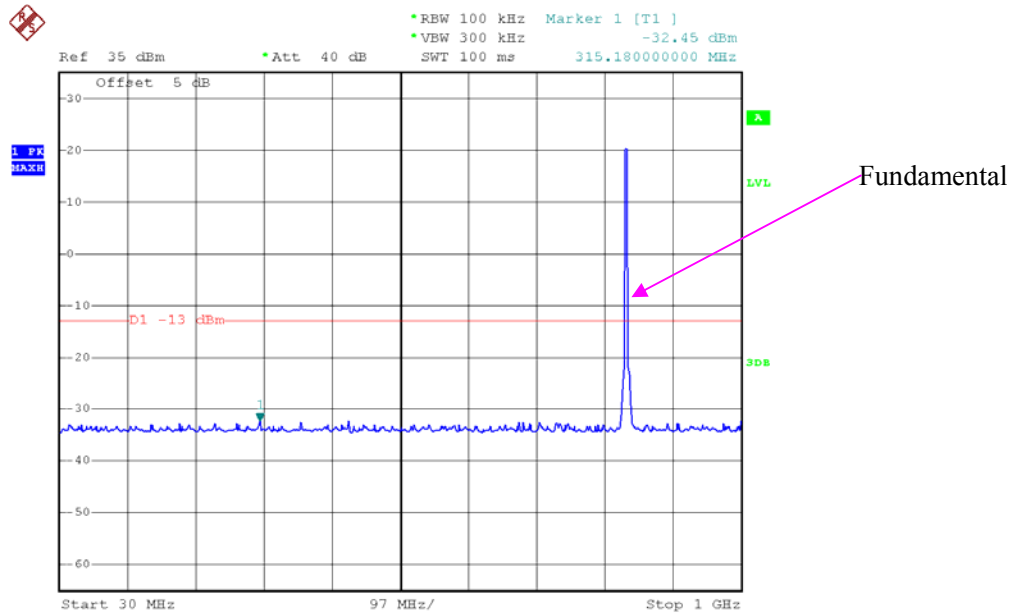


Date: 30.MAY.2018 10:56:04

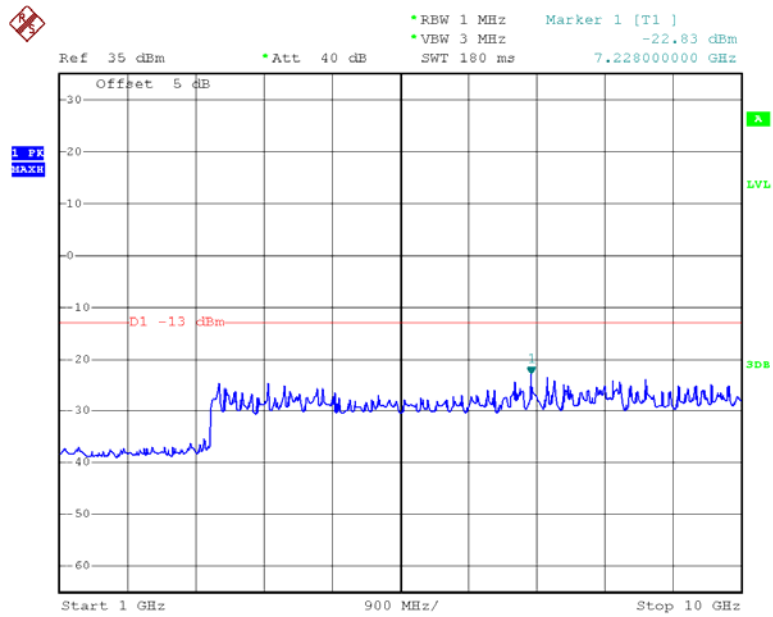

Date: 30.MAY.2018 10:56:24


LTE Band 2 (Middle Channel)

QPSK_1.4 MHz

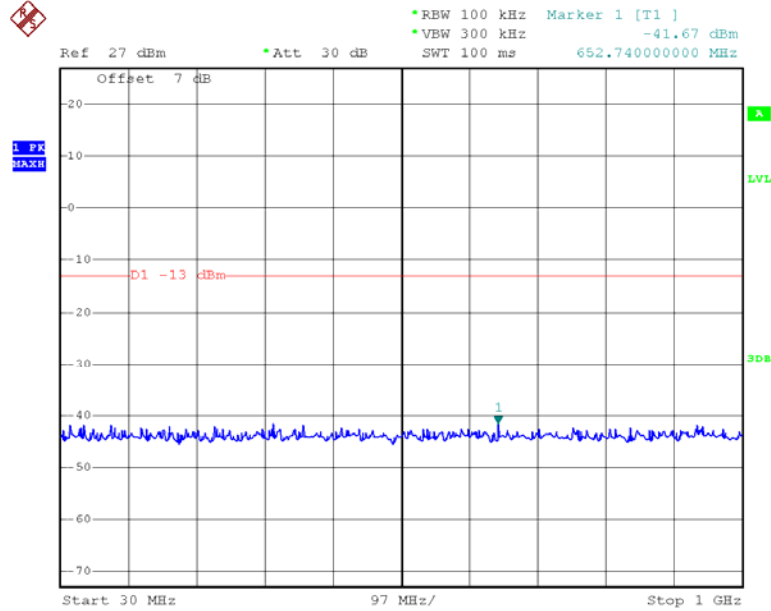


Date: 31.MAY.2018 17:36:10

Fundamental

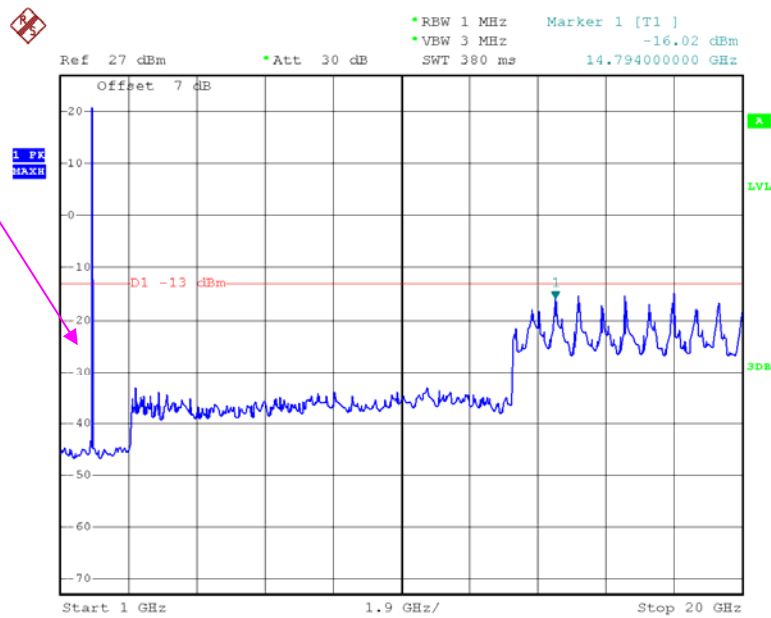


Date: 31.MAY.2018 17:35:41

QPSK_3 MHz

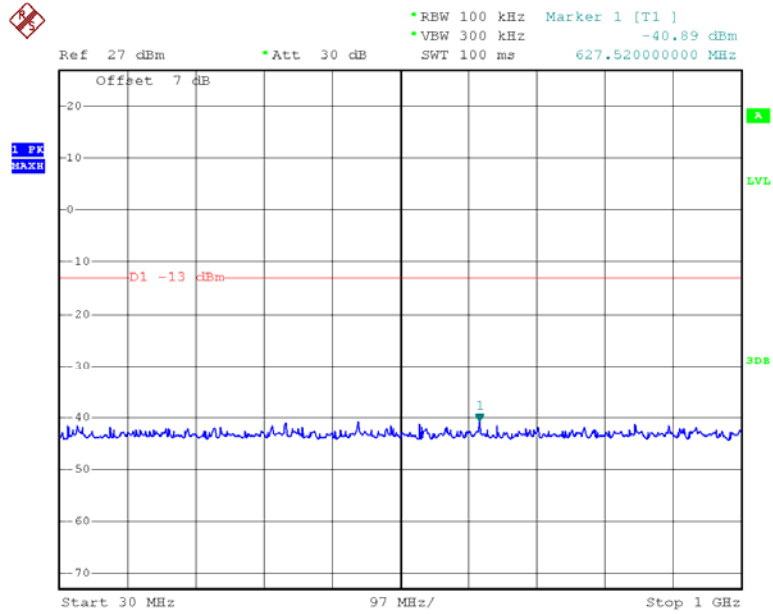


Date: 31.MAY.2018 17:36:30

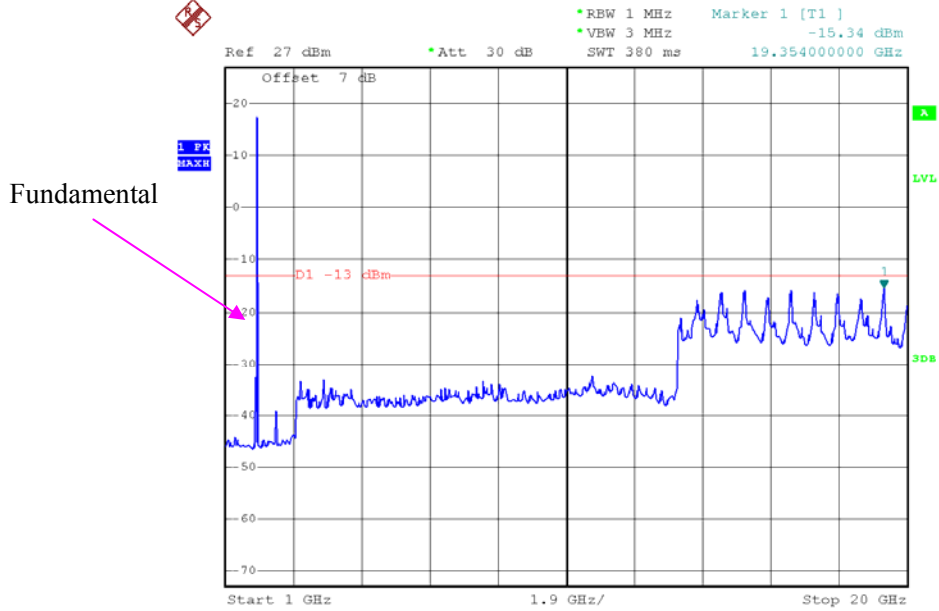


Date: 31.MAY.2018 17:37:25

QPSK_5 MHz

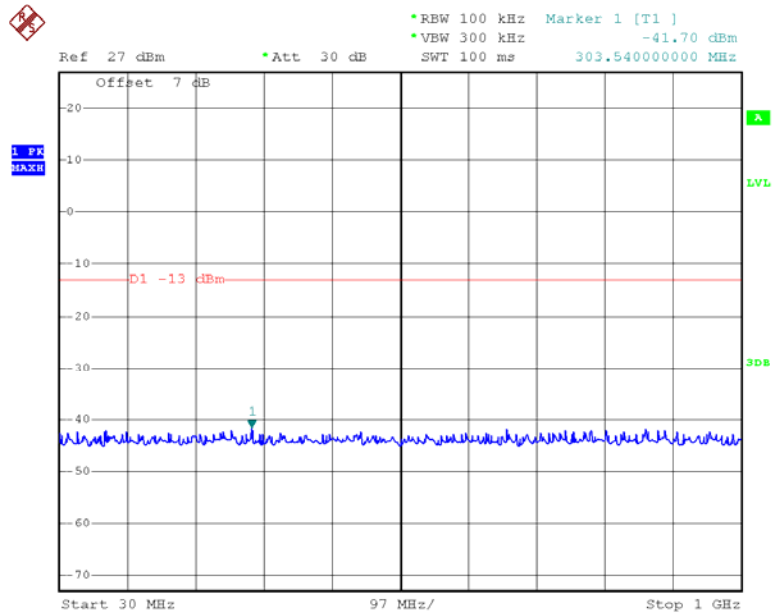


Date: 31.MAY.2018 17:38:22

Fundamental

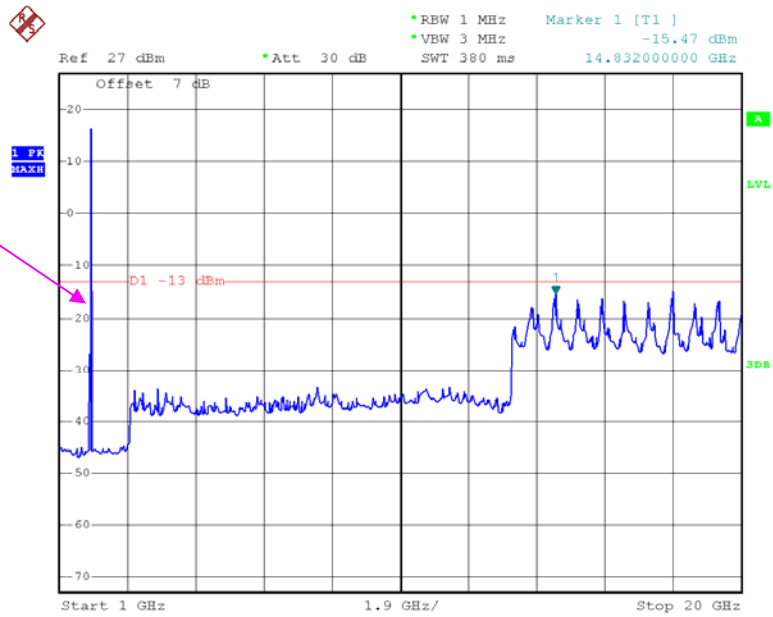


Date: 31.MAY.2018 17:38:01

QPSK_10 MHz

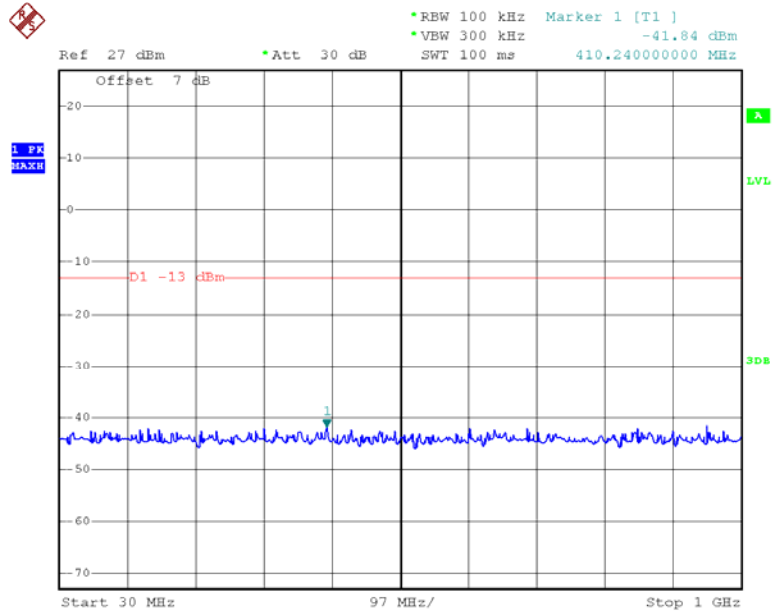


Date: 31.MAY.2018 17:38:40

Fundamental

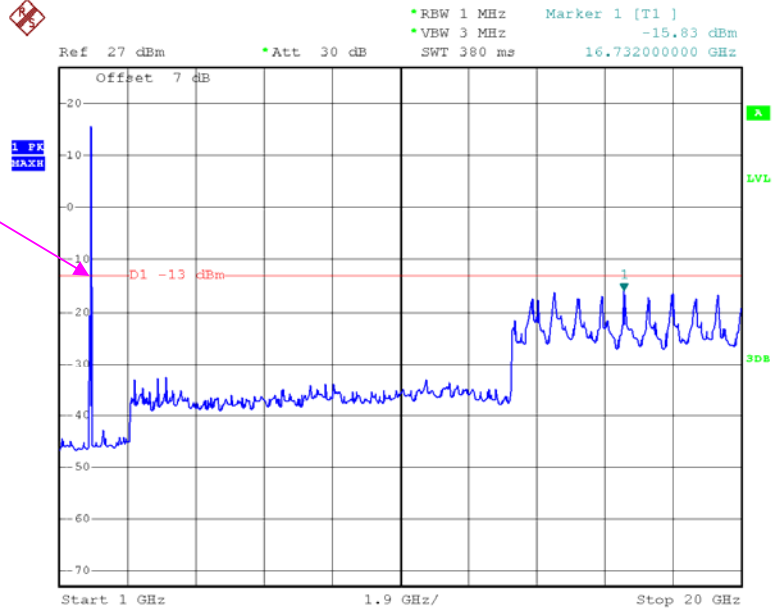


Date: 31.MAY.2018 17:39:04

QPSK_15 MHz

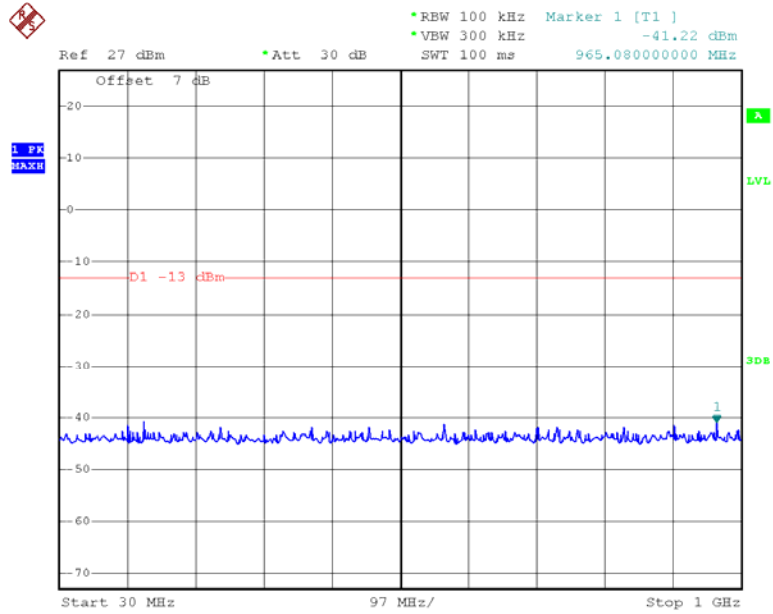


Date: 31.MAY.2018 17:39:46

Fundamental

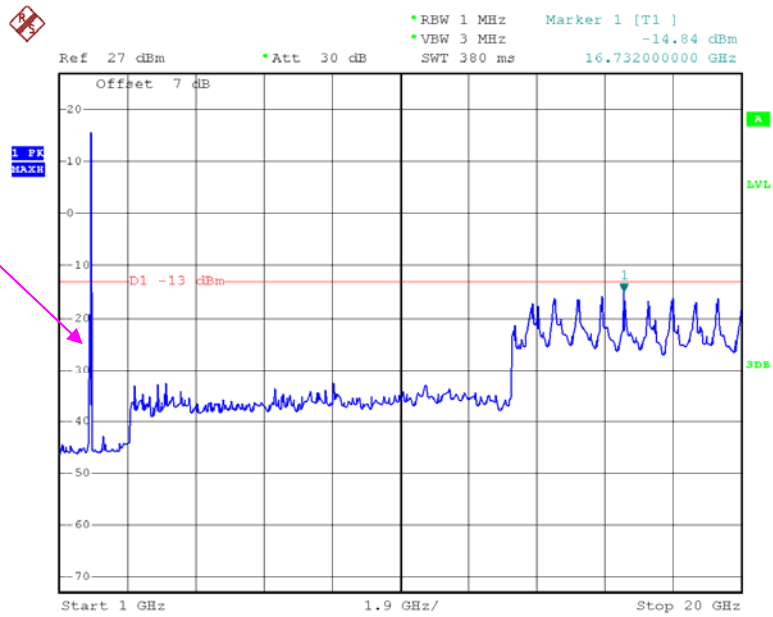


Date: 31.MAY.2018 17:39:29

QPSK_20 MHz

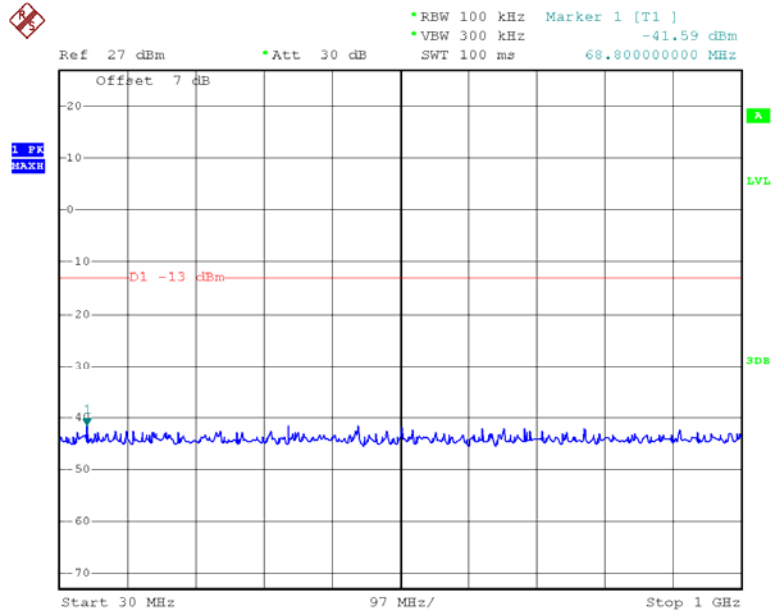

Date: 31.MAY.2018 17:39:57

Fundamental

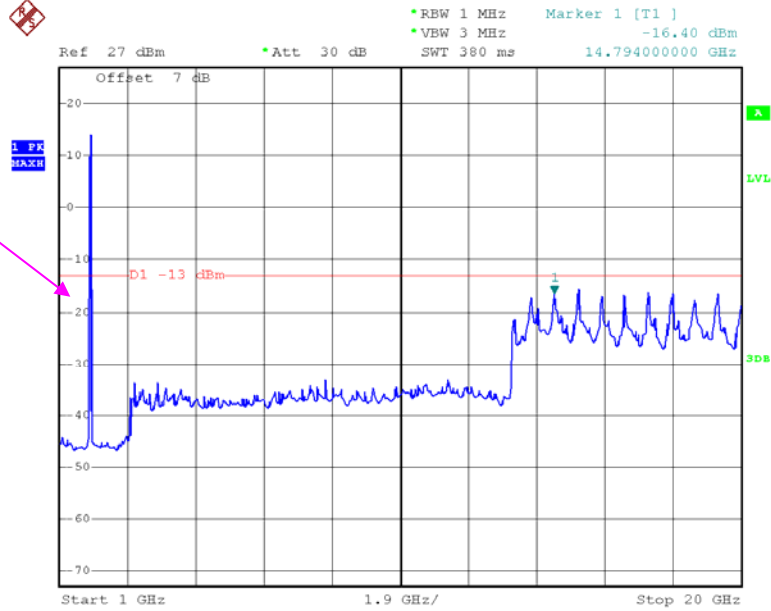


Date: 31.MAY.2018 17:40:29


LTE Band 12 (Middle Channel)

QPSK_1.4 MHz

Fundamental

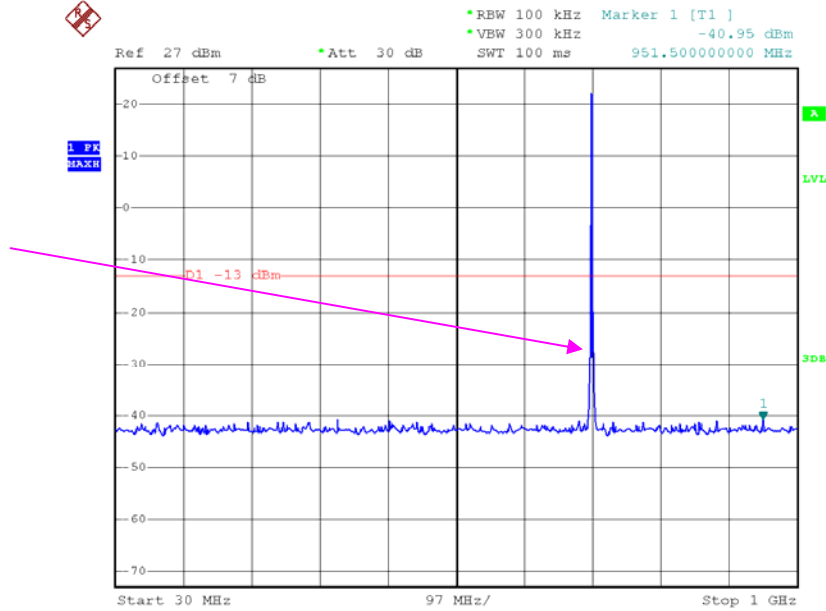


Date: 31.MAY.2018 17:28:42

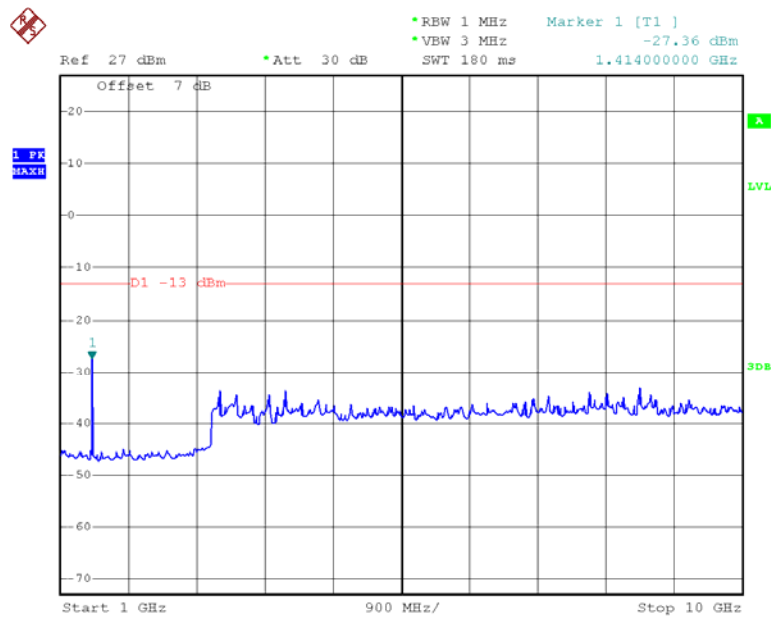


Date: 31.MAY.2018 17:29:02

QPSK_3 MHz

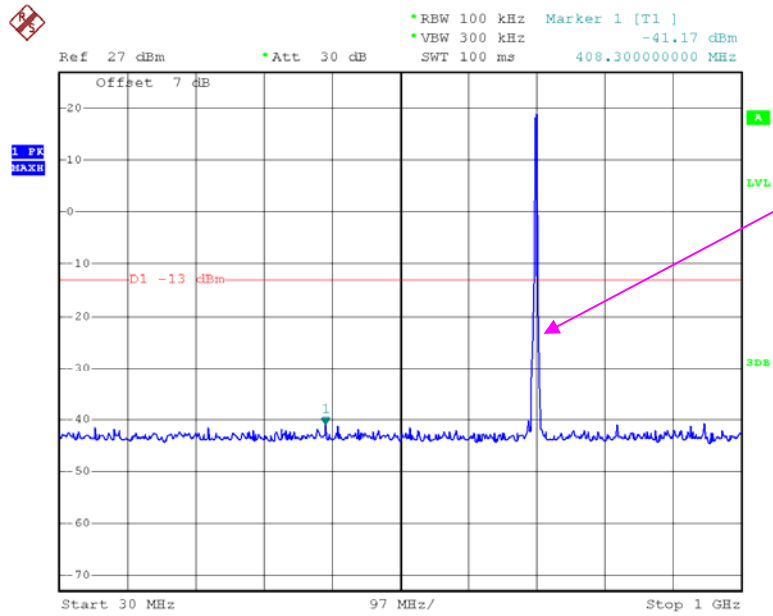


Fundamental

Date: 31.MAY.2018 17:31:15

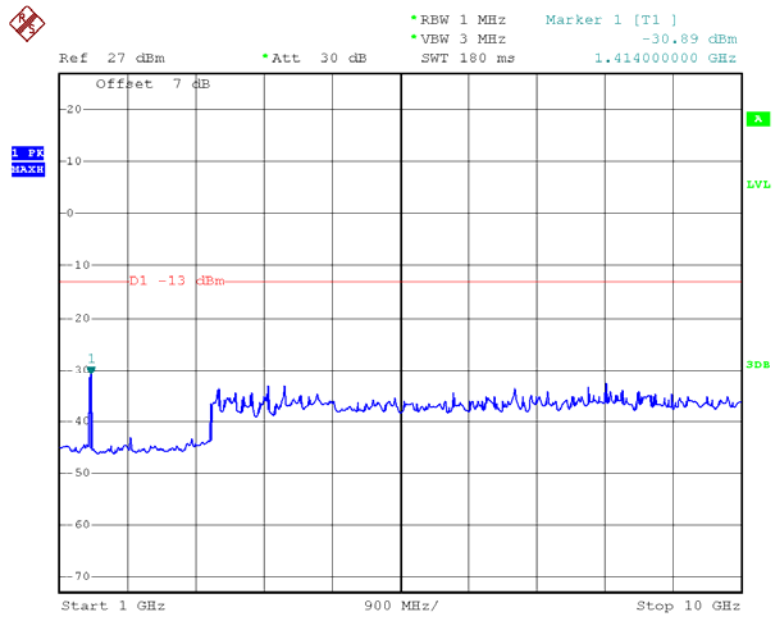


Date: 31.MAY.2018 17:30:38

QPSK_5 MHz

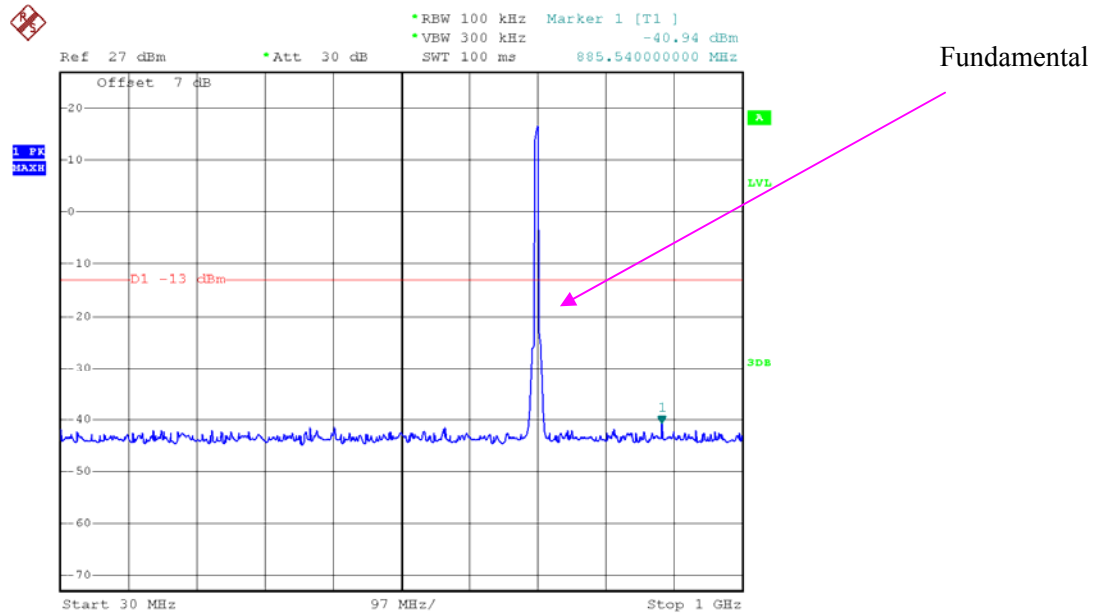


Date: 31.MAY.2018 17:31:52

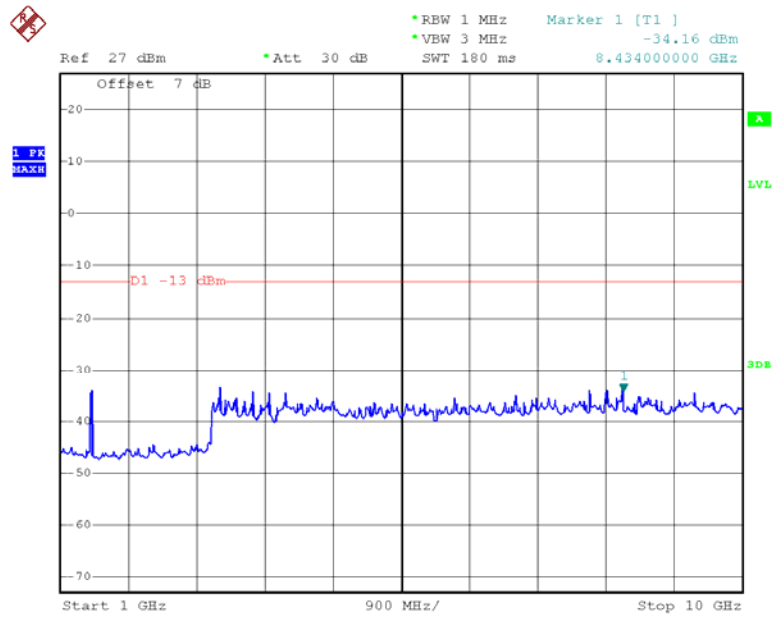


Date: 31.MAY.2018 17:32:10

QPSK_10 MHz

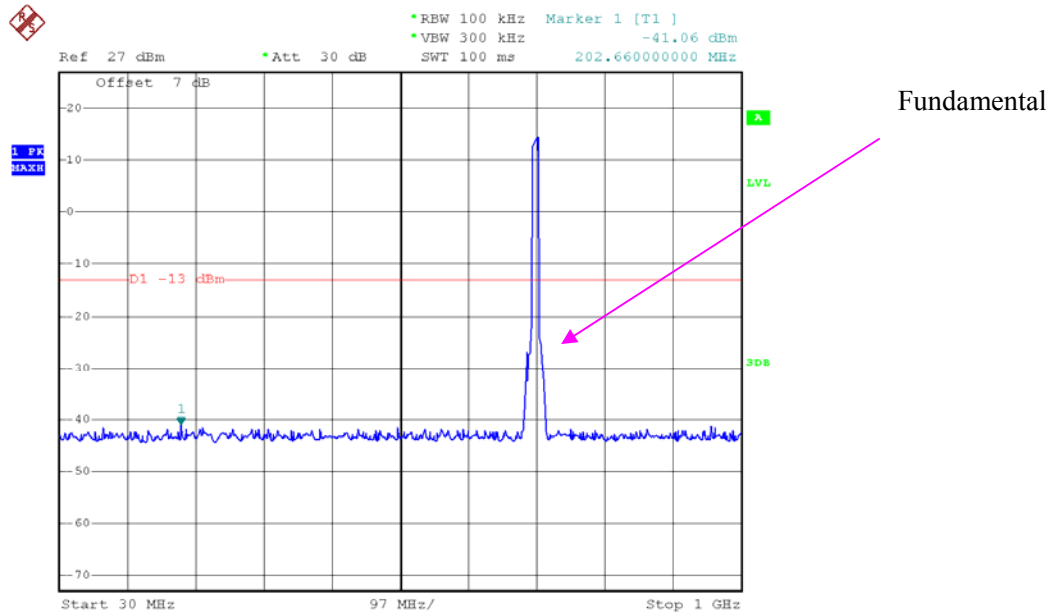


Date: 31.MAY.2018 17:33:08

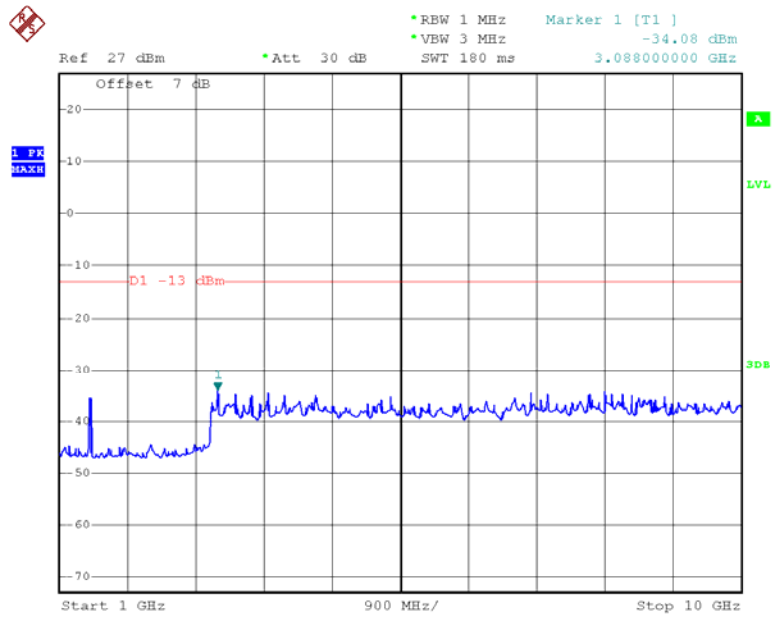


Date: 31.MAY.2018 17:32:33

LTE Band 13 (Middle Channel)

QPSK_5 MHz

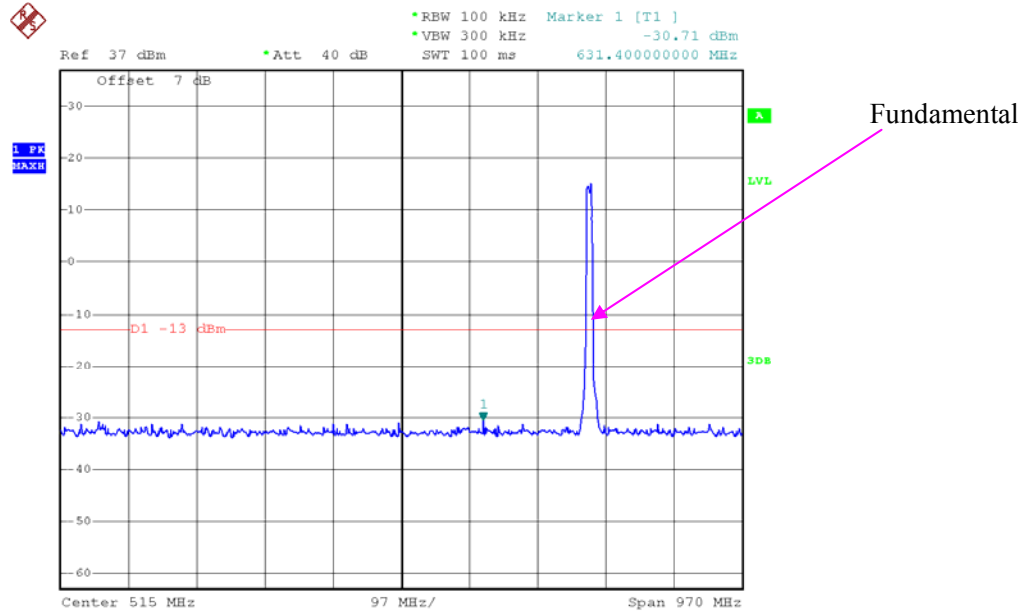


Date: 4.JUN.2018 17:23:51

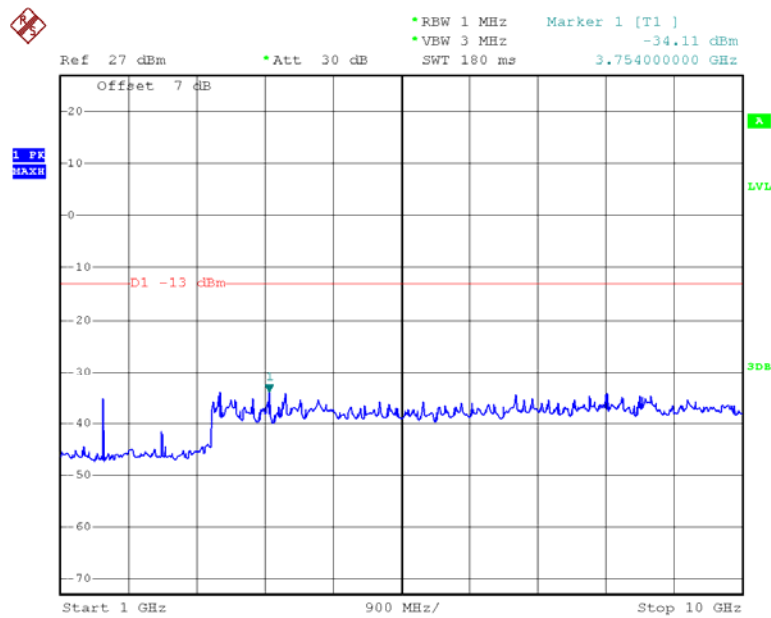


Date: 31.MAY.2018 17:25:53

QPSK_10 MHz

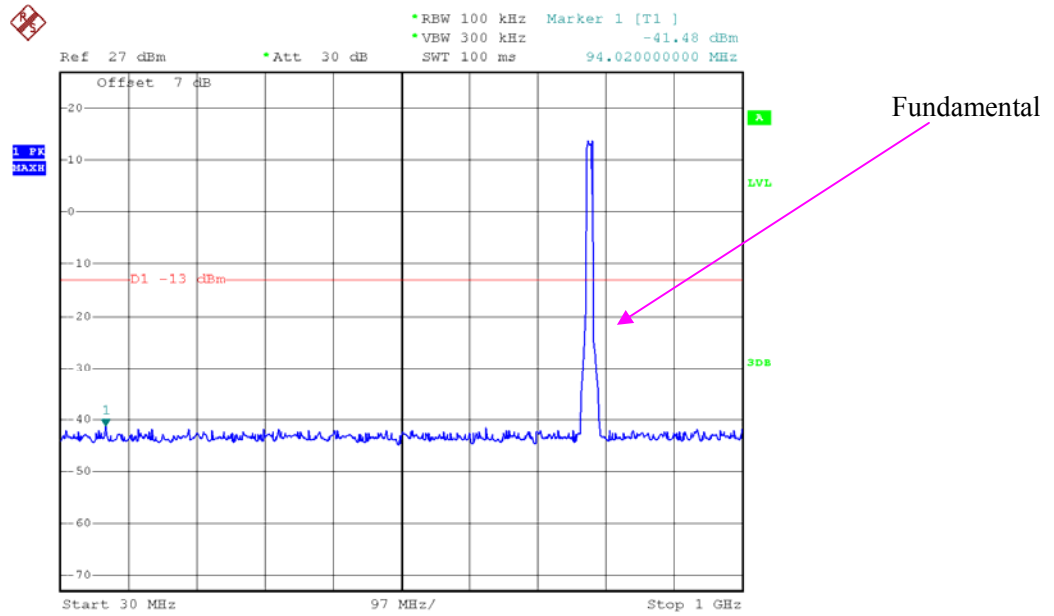

Date: 31.MAY.2018 17:26:51

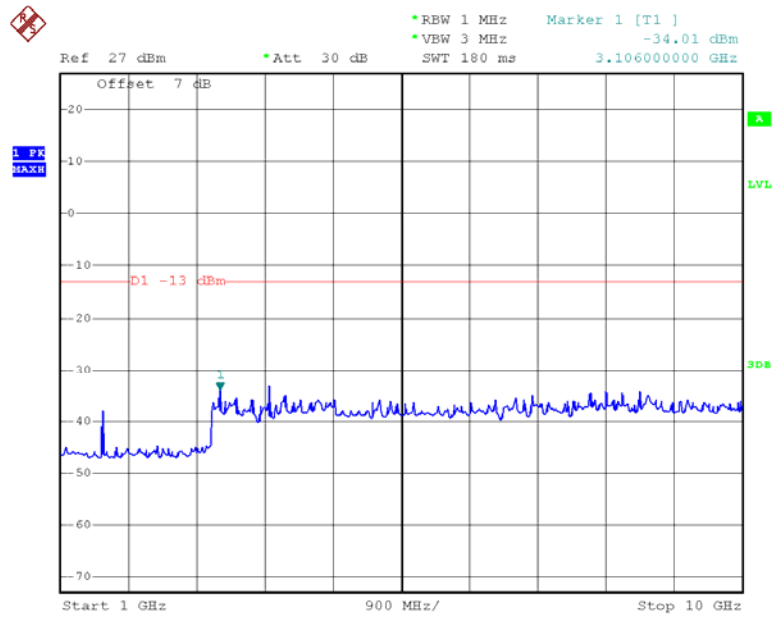

Date: 31.MAY.2018 17:26:11

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2017-08-04	2018-08-04
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
HP	Amplifier	8447F	2443A01912	2017-09-05	2018-09-05
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
ETS LINDGREN	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Mini-Circuit	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
HP	Signal Generator	1026	320408	2017-12-08	2018-12-08
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1~26.7°C
Relative Humidity:	53~56 %
ATM Pressure:	101.2~101.8 kPa

* The testing was performed by Blake Yang & Vern Shen from 2018-05-29 to 2018-06-01

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)

30 MHz-10 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	67.53	-46.7	10.6	0.7	-36.8	-13.0	23.8
1673.200	V	77.85	-37	10.6	0.7	-27.1	-13.0	14.1
2509.800	H	51.63	-61.4	13.1	1.2	-49.5	-13.0	36.5
2509.800	V	54.37	-58.7	13.1	1.2	-46.8	-13.0	33.8
3346.400	H	50.48	-60.2	13.8	1.6	-48.0	-13.0	35.0
3346.400	V	53.66	-57	13.8	1.6	-44.8	-13.0	31.8
743.920	H	46.04	-54.2	0.0	0.9	-55.1	-13.0	42.1
394.720	V	54.11	-54.2	0.0	0.6	-54.8	-13.0	41.8

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V R99, Frequency:836.600 MHz								
1673.200	H	53.84	-60.4	10.6	0.7	-50.5	-13.0	37.5
1673.200	V	63.23	-51.6	10.6	0.7	-41.7	-13.0	28.7
2509.800	H	48.32	-64.7	13.1	1.2	-52.8	-13.0	39.8
2509.800	V	49.63	-63.4	13.1	1.2	-51.5	-13.0	38.5
3346.400	H	48.52	-62.1	13.8	1.6	-49.9	-13.0	36.9
3346.400	V	50.13	-60.6	13.8	1.6	-48.4	-13.0	35.4
363.300	H	43.23	-63	0.0	0.6	-63.6	-13.0	50.6
300.000	V	45.30	-64.7	0.0	0.5	-65.2	-13.0	52.2

PCS Band (PART 24E)

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	54.54	-54.3	13.8	1.6	-42.1	-13.0	29.1
3760.000	V	57.88	-50.8	13.8	1.6	-38.6	-13.0	25.6
5640.000	H	52.68	-53.4	14.0	1.3	-40.7	-13.0	27.7
5640.000	V	54.46	-51.5	14.0	1.3	-38.8	-13.0	25.8
128.940	H	55.21	-49.3	0.0	0.3	-49.6	-13.0	36.6
128.940	V	53.80	-57.7	0.0	0.3	-58.0	-13.0	45.0

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II R99, Frequency: 1880.000 MHz								
3760.000	H	50.65	-58.2	13.8	1.6	-46.0	-13.0	33.0
3760.000	V	53.21	-55.5	13.8	1.6	-43.3	-13.0	30.3
5640.000	H	49.87	-56.2	14.0	1.3	-43.5	-13.0	30.5
5640.000	V	51.69	-54.2	14.0	1.3	-41.5	-13.0	28.5
701.240	H	43.33	-58.1	0.0	0.9	-59.0	-13.0	46.0
299.660	V	45.62	-64.4	0.0	0.5	-64.9	-13.0	51.9
3760.000	H	50.65	-58.2	13.8	1.6	-46.0	-13.0	33.0
3760.000	V	53.21	-55.5	13.8	1.6	-43.3	-13.0	30.3

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBµV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency:1880.000 MHz								
3760.000	H	48.73	-60.1	13.8	1.6	-47.9	-13.0	34.9
3760.000	V	50.35	-58.3	13.8	1.6	-46.1	-13.0	33.1
5640.000	H	46.25	-59.8	14.0	1.3	-47.1	-13.0	34.1
5640.000	V	49.82	-56.1	14.0	1.3	-43.4	-13.0	30.4
401.000	H	45.30	-59.5	0.0	0.6	-60.1	-13.0	47.1
39.700	V	47.92	-38.8	-26.3	0.2	-65.3	-13.0	52.3

LTE Band 12 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 707.500 MHz								
1415.000	H	47.35	-66.2	9.1	1.2	-58.3	-13.0	45.3
1415.000	V	48.66	-65.4	9.1	1.2	-57.5	-13.0	44.5
2122.500	H	46.28	-66.5	11.3	1.1	-56.3	-13.0	43.3
2122.500	V	47.12	-65.6	11.3	1.1	-55.4	-13.0	42.4
2830.000	H	45.69	-66.4	13.3	1.4	-54.5	-13.0	41.5
2830.000	V	46.37	-65.9	13.3	1.4	-54.0	-13.0	41.0
592.600	H	45.14	-57.1	0.0	0.8	-57.9	-13.0	44.9
37.760	V	47.63	-36.5	-25.3	0.2	-62.0	-13.0	49.0

LTE Band 13 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 782 MHz								
1564.000	H	55.82	-59.1	9.9	0.9	-50.1	-13.0	37.1
1564.000	V	58.79	-56.6	9.9	0.9	-47.6	-13.0	34.6
2346.000	H	47.63	-64.8	11.7	1.3	-54.4	-13.0	41.4
2346.000	V	48.21	-64.2	11.7	1.3	-53.8	-13.0	40.8
3128.000	H	46.25	-64.4	13.3	1.8	-52.9	-13.0	39.9
3128.000	V	47.31	-63.4	13.3	1.8	-51.9	-13.0	38.9
441.280	H	45.44	-59.1	0.0	0.7	-59.8	-13.0	46.8
35.820	V	47.94	-33.7	-24.4	0.2	-58.3	-13.0	45.3

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

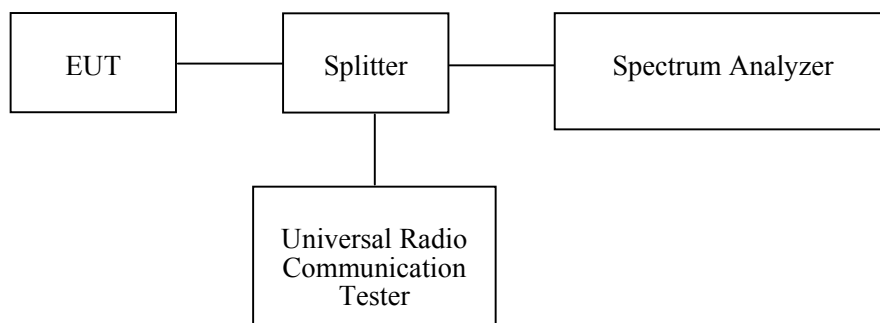

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-18	2018-07-18
R&S	Wideband Radio Communication Tester	CMW500	147473	2017-08-31	2018-08-31
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each Time	/
Pasternack	RF Coaxial Cable	0.5m	C-5	Each Time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	/
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.3~27.5°C
Relative Humidity:	54~56 %
ATM Pressure:	101.3~101.8 kPa

The testing was performed by Kami Zhou from 2018-05-30 to 2018-06-25.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

GSM 850, Left Band Edge

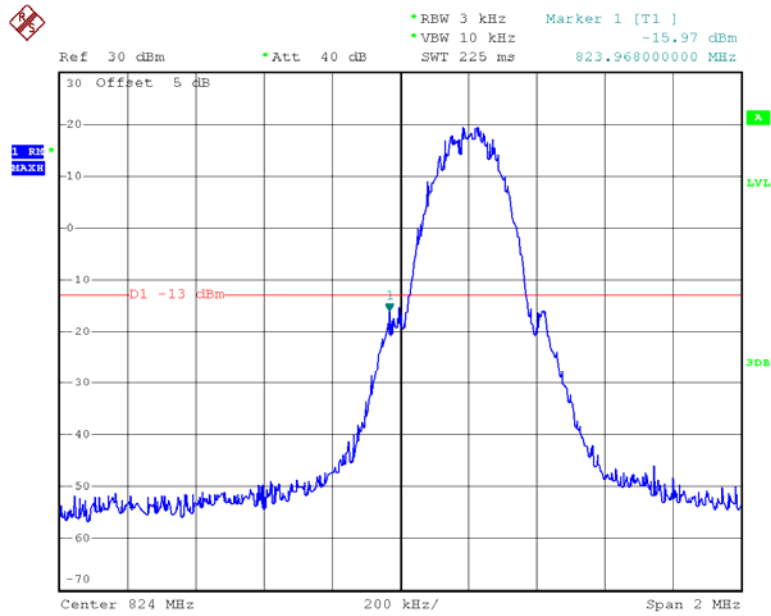


Date: 30.MAY.2018 09:12:02

GSM 850, Right Band Edge

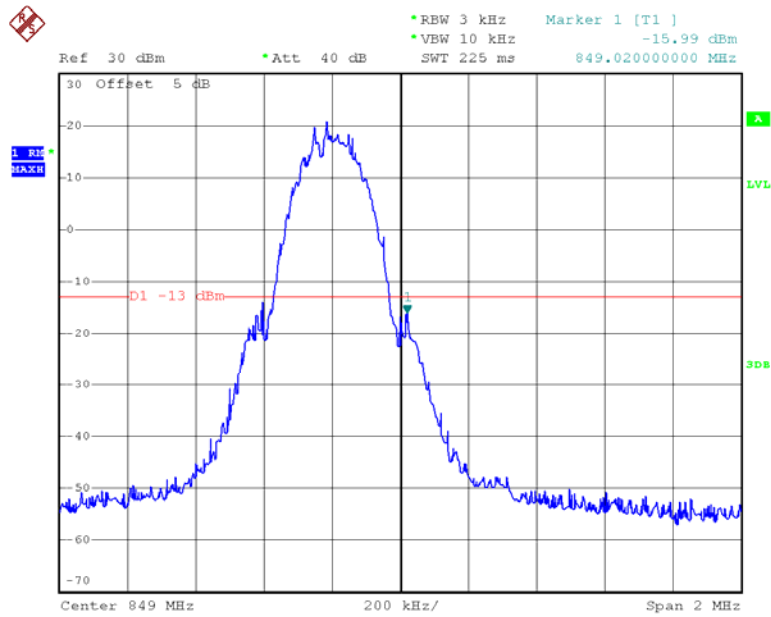


Date: 30.MAY.2018 09:14:15

GSM 1900, Left Band Edge

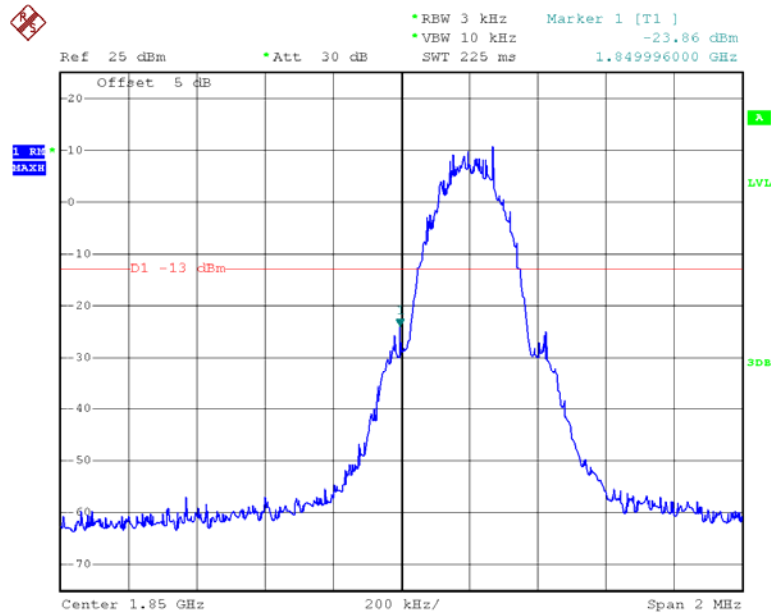


Date: 30.MAY.2018 09:35:51

GSM 1900, Right Band Edge

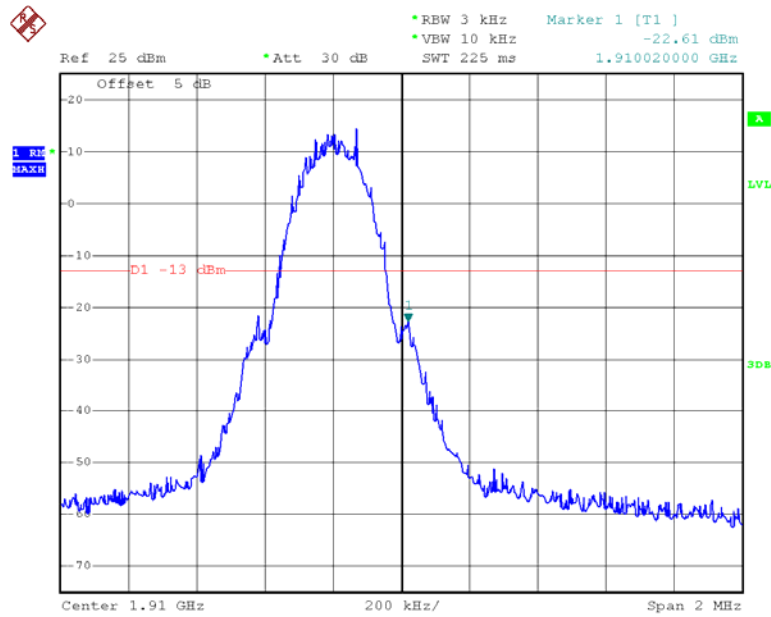


Date: 30.MAY.2018 09:37:17

EDGE 850, Left Band Edge

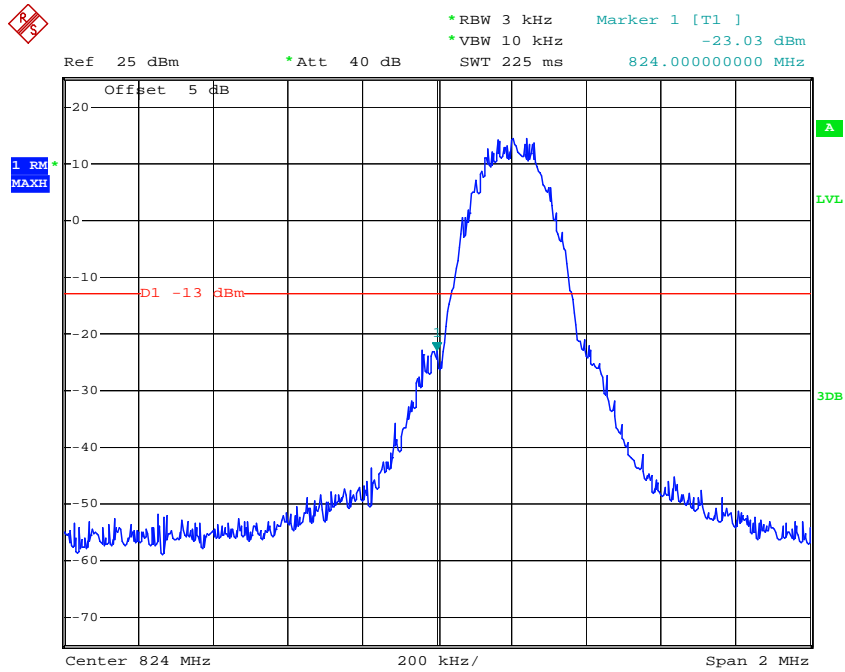


Date: 25.JUN.2018 15:06:49

EDGE 850, Right Band Edge

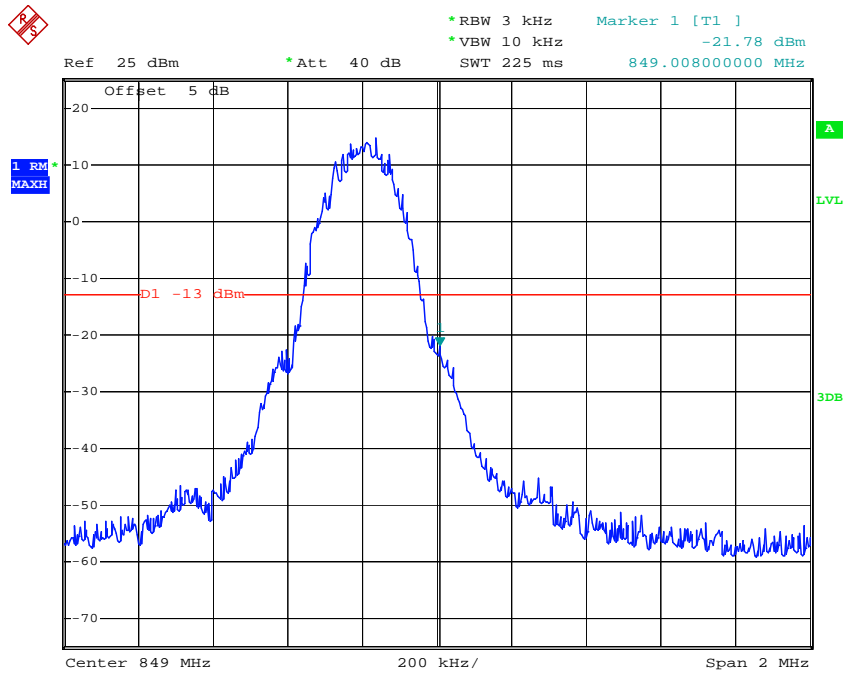


Date: 25.JUN.2018 15:07:46

EDGE 1900, Left Band Edge

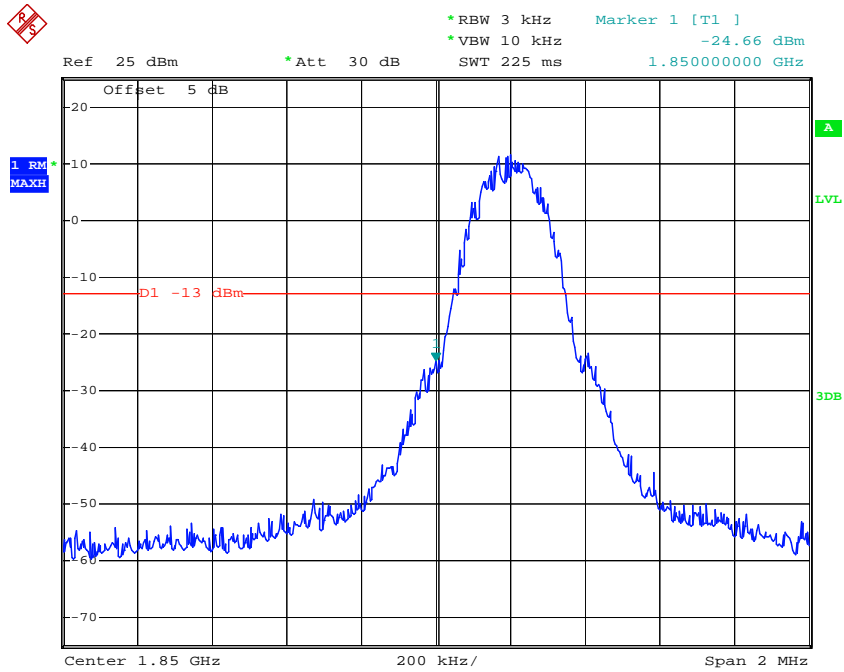


Date: 25.JUN.2018 15:02:44

EDGE 1900, Right Band Edge

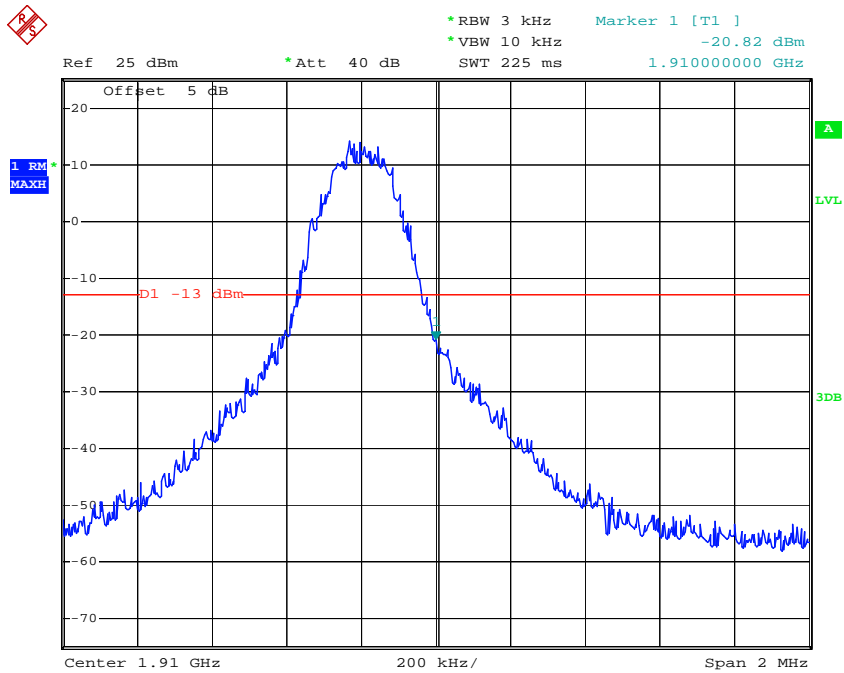


Date: 25.JUN.2018 15:04:52

WCDMA Band II Rel 99, Left Band Edge

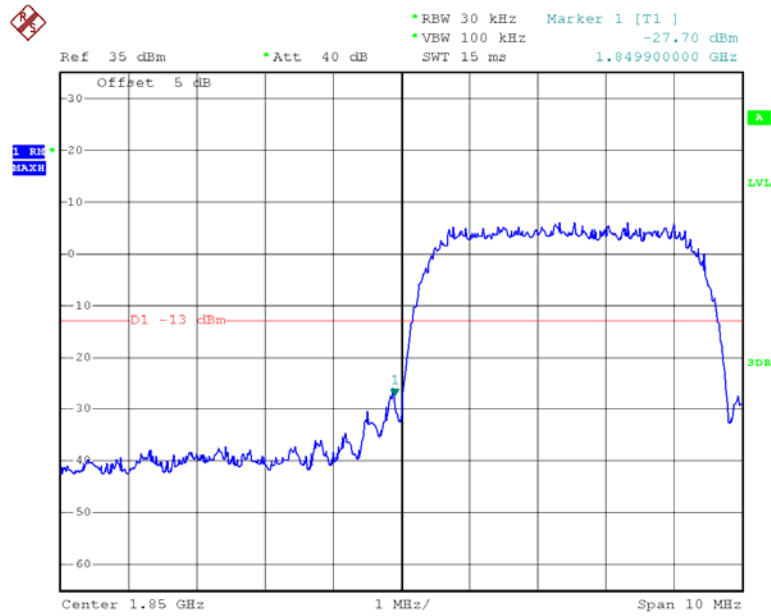


Date: 30.MAY.2018 11:09:26

WCDMA Band II Rel 99, Right Band Edge

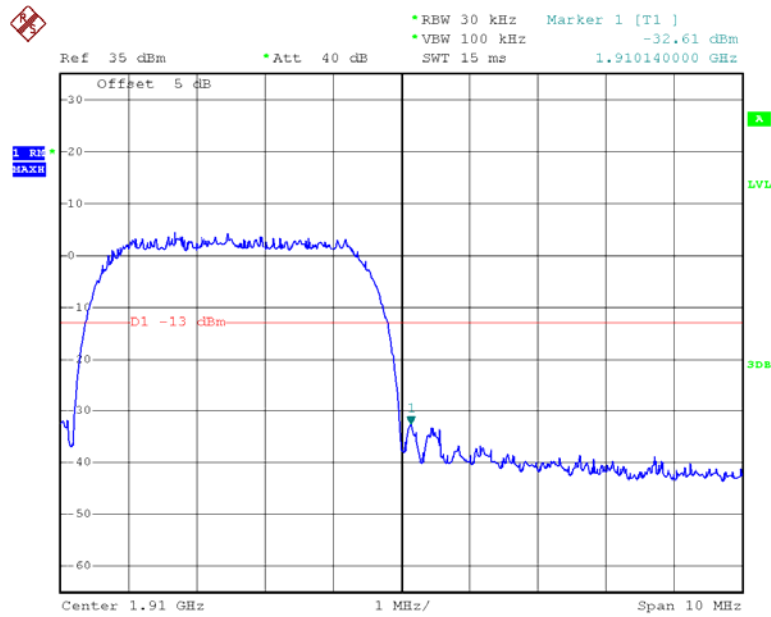


Date: 30.MAY.2018 11:10:18

WCDMA Band II HSUPA, Left Band Edge

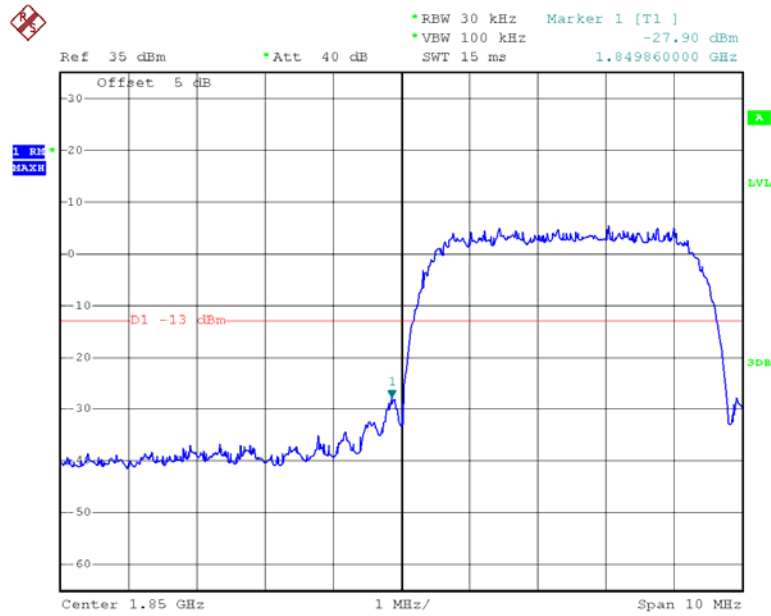


Date: 30.MAY.2018 11:05:36

WCDMA Band II HSUPA, Right Band Edge

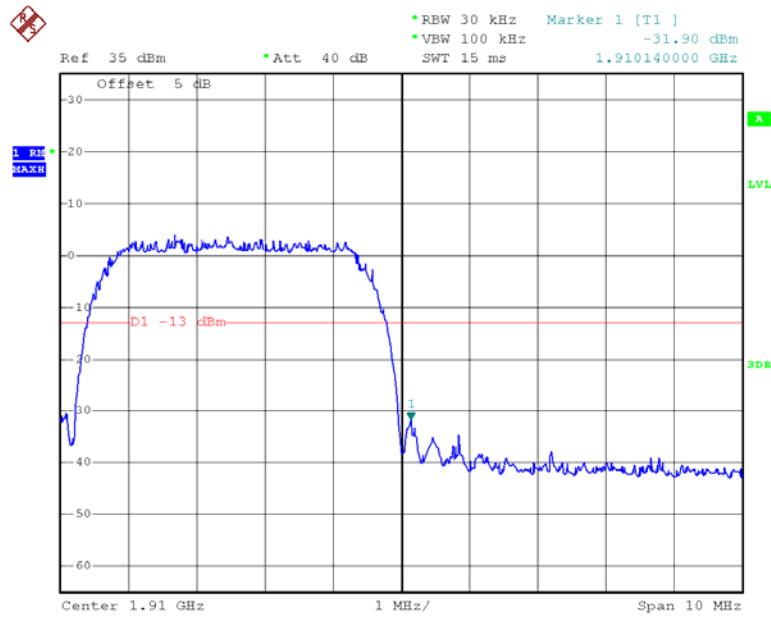


Date: 30.MAY.2018 11:06:31

WCDMA Band II HSDPA, Left Band Edge

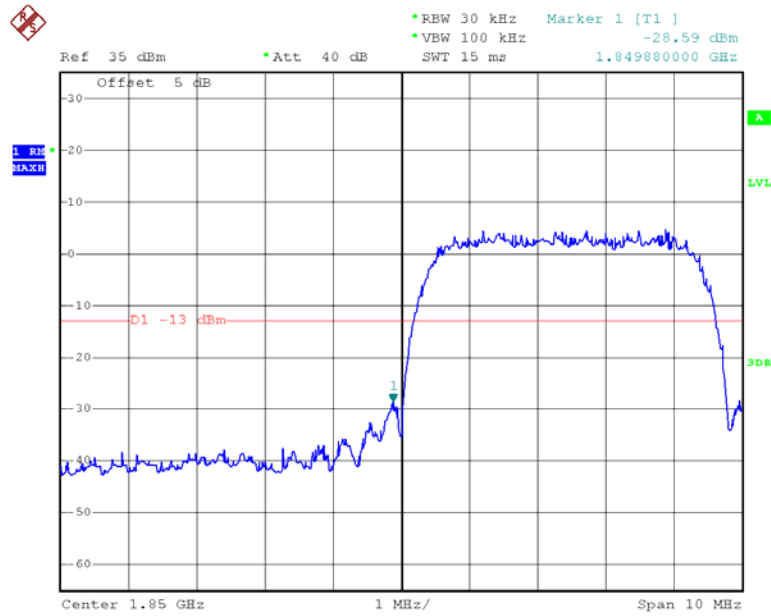


Date: 30.MAY.2018 11:08:47

WCDMA Band II HSDPA, Right Band Edge

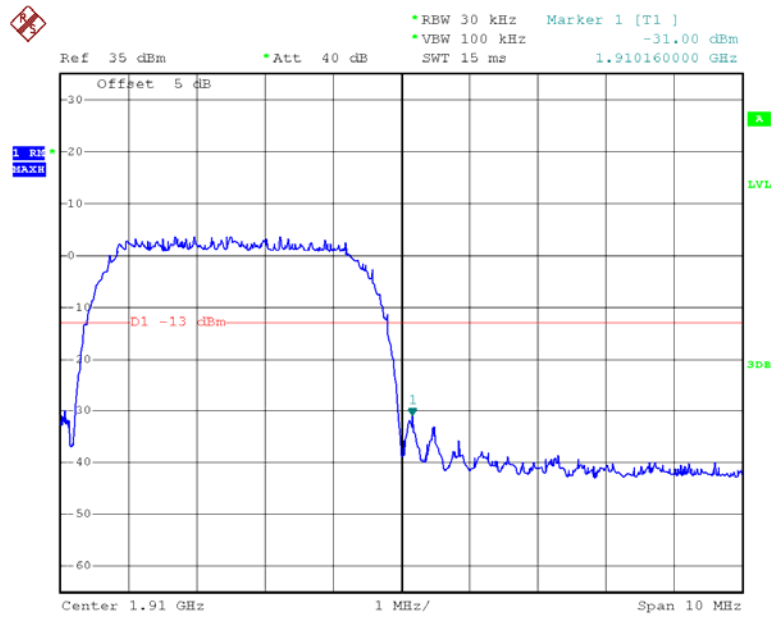


Date: 30.MAY.2018 11:07:53

WCDMA Band V Rel 99, Left Band Edge

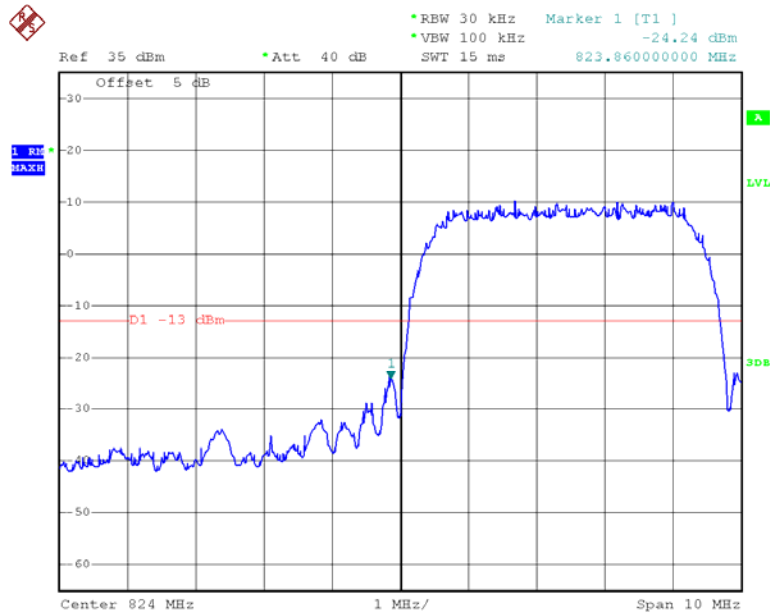


Date: 30.MAY.2018 10:58:03

WCDMA Band V Rel 99, Right Band Edge

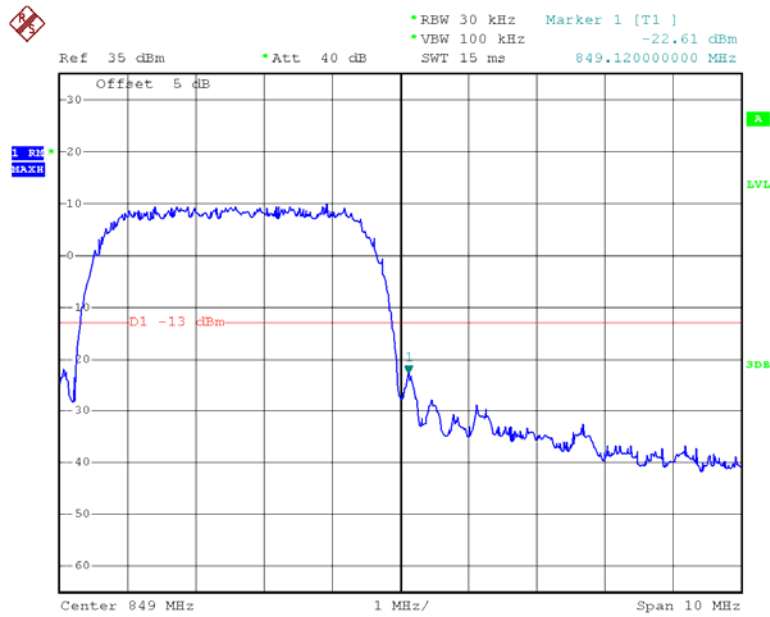


Date: 30.MAY.2018 10:58:48

WCDMA Band V HSUPA, Left Band Edge

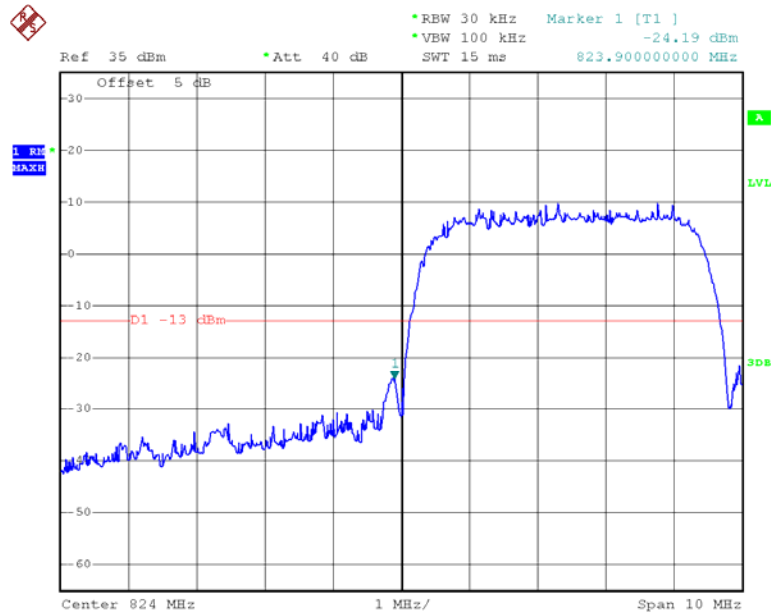


Date: 30.MAY.2018 11:01:39

WCDMA Band V HSUPA, Right Band Edge

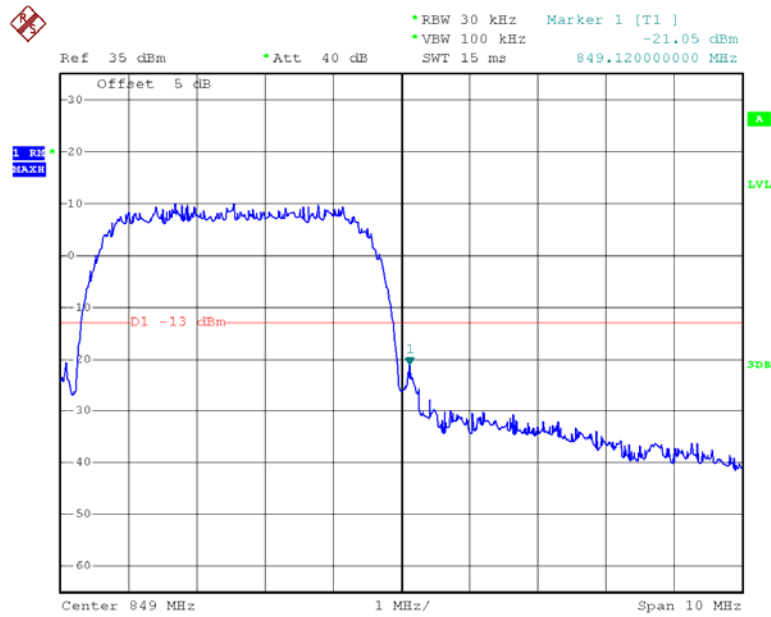


Date: 30.MAY.2018 11:02:10

WCDMA Band V HSDPA, Left Band Edge

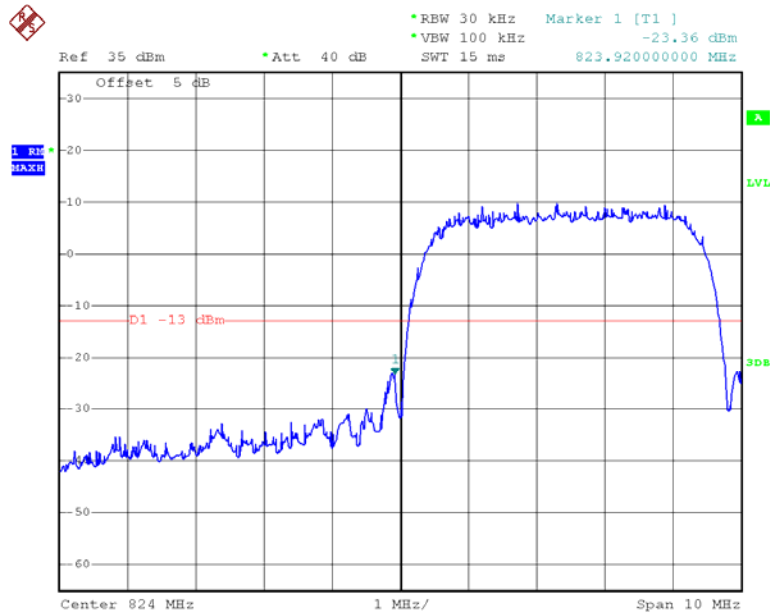

Date: 30.MAY.2018 11:00:46


WCDMA Band V HSDPA, Right Band Edge

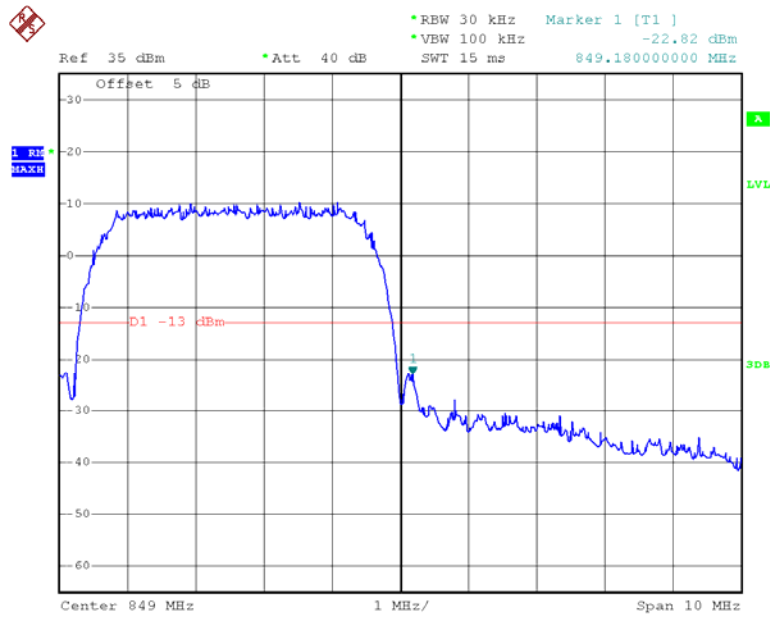

Date: 30.MAY.2018 11:00:07


LTE Band II

QPSK_1.4MHz_6 RB_Left

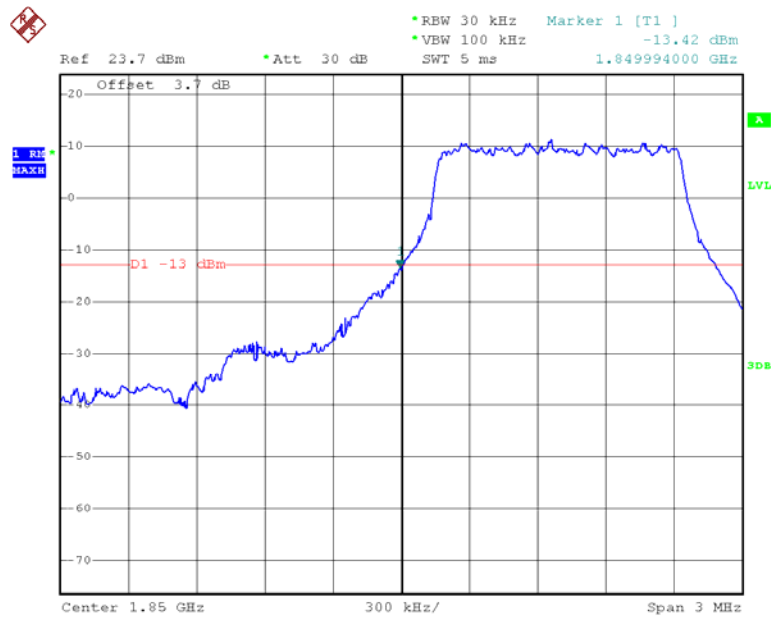


Date: 31.MAY.2018 16:43:33

QPSK_1.4MHz_6 RB_Right

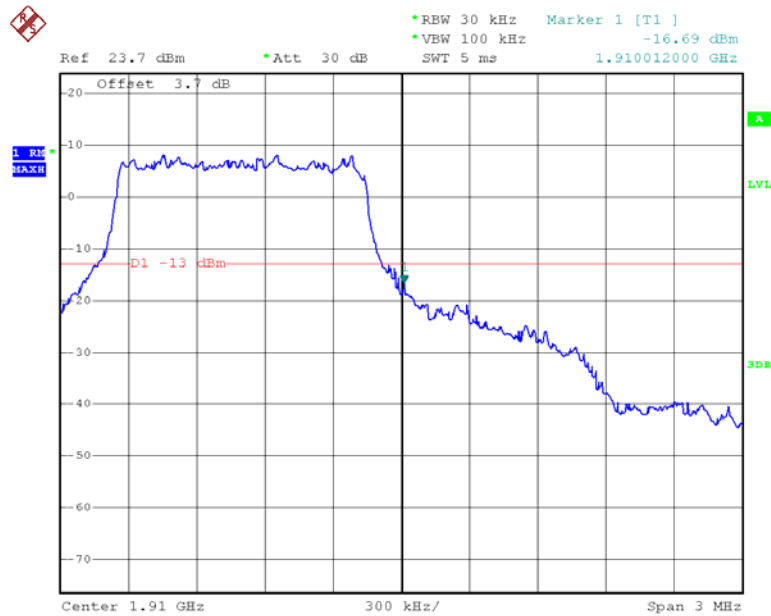


Date: 31.MAY.2018 16:41:24

QPSK_3MHz_15 RB_Left

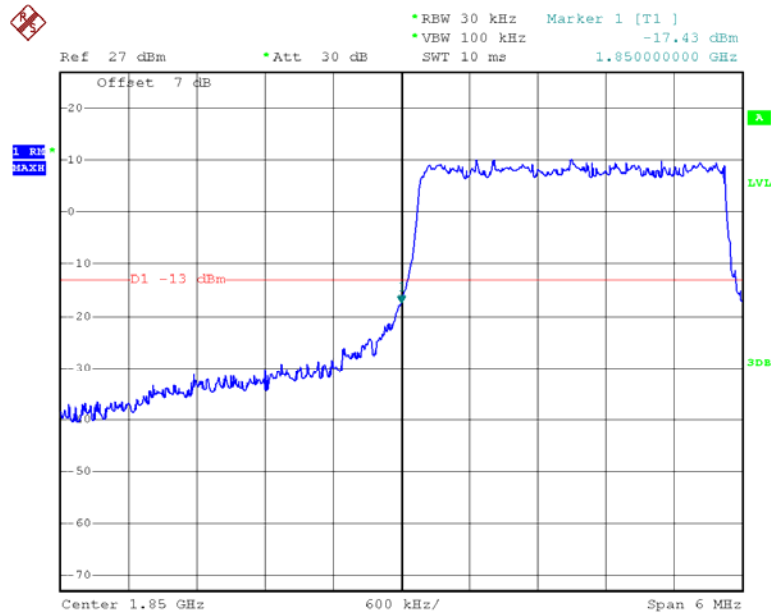


Date: 31.MAY.2018 16:30:44

QPSK_3MHz_15 RB_Right

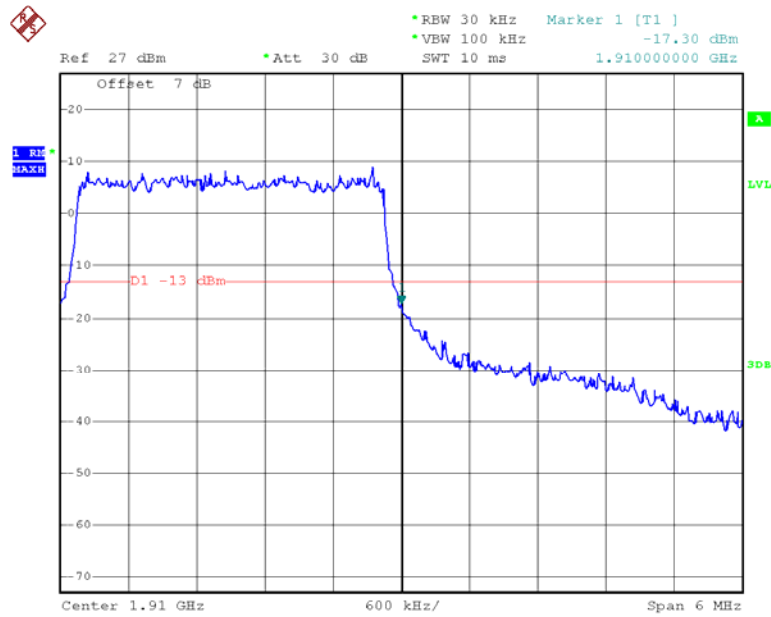


Date: 31.MAY.2018 16:32:37

QPSK_5MHz_25 RB_Left

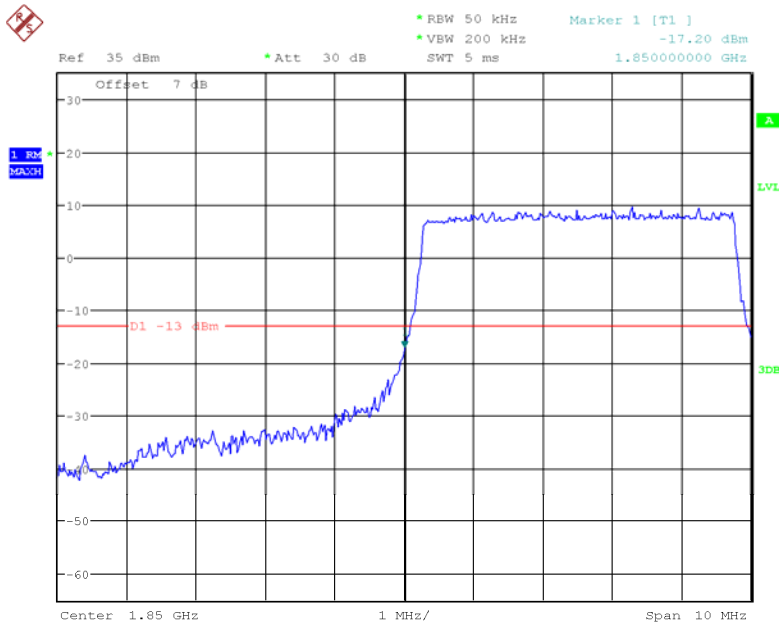


Date: 3.JUN.2018 16:31:17

QPSK_5MHz_25 RB_Right

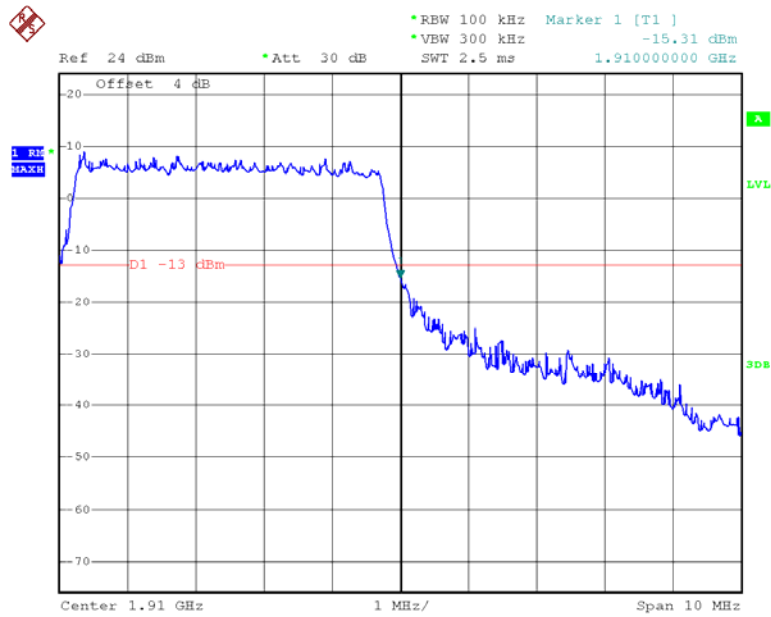


Date: 31.MAY.2018 16:25:35

QPSK_10MHz_50 RB_Left

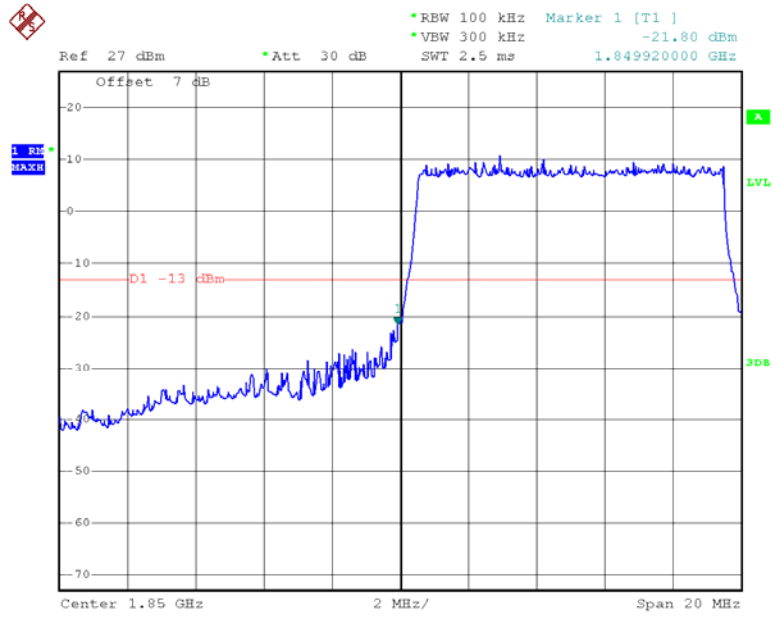


Date: 31.MAY.2018 16:14:13

QPSK_10MHz_50 RB_Right

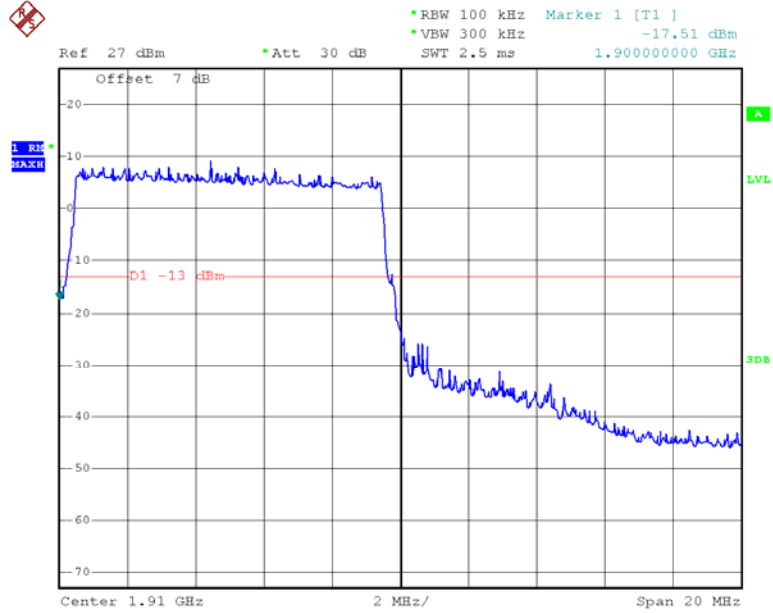


Date: 31.MAY.2018 16:15:10

QPSK_15MHz_75 RB_Left

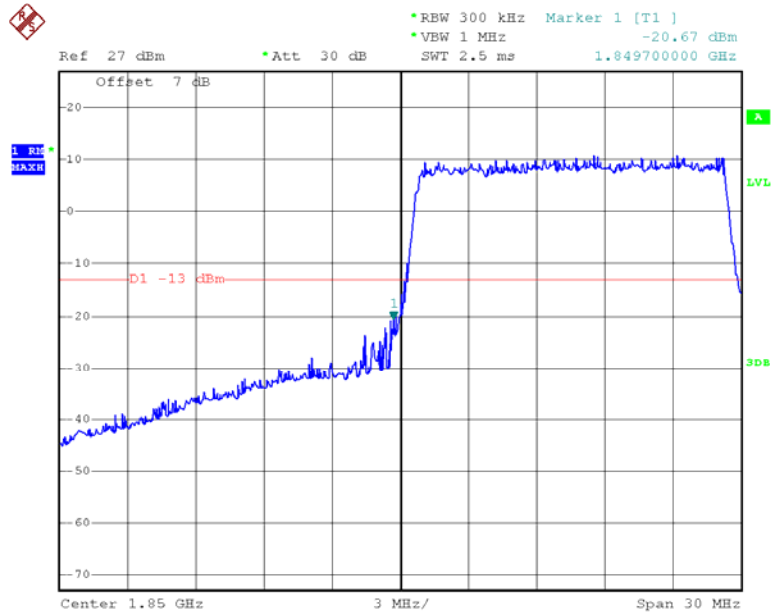


Date: 31.MAY.2018 16:09:52

QPSK_15MHz_75 RB_Right

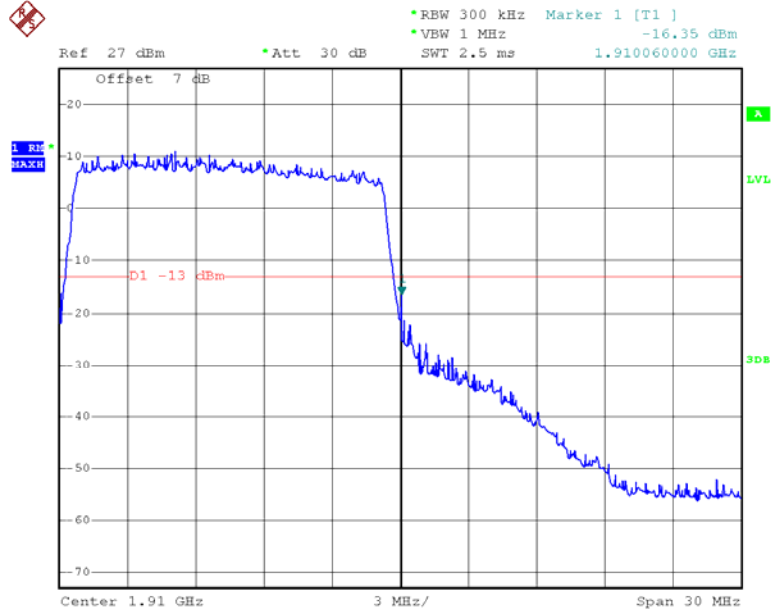


Date: 31.MAY.2018 16:11:13

QPSK_20MHz_FULL RB_Left

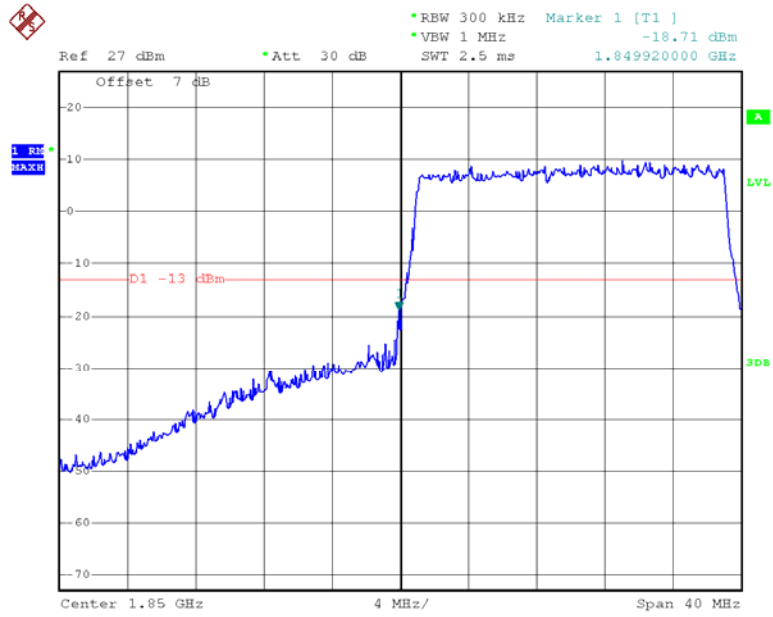


Date: 31.MAY.2018 16:05:45

QPSK_20MHz_FULL RB_Right

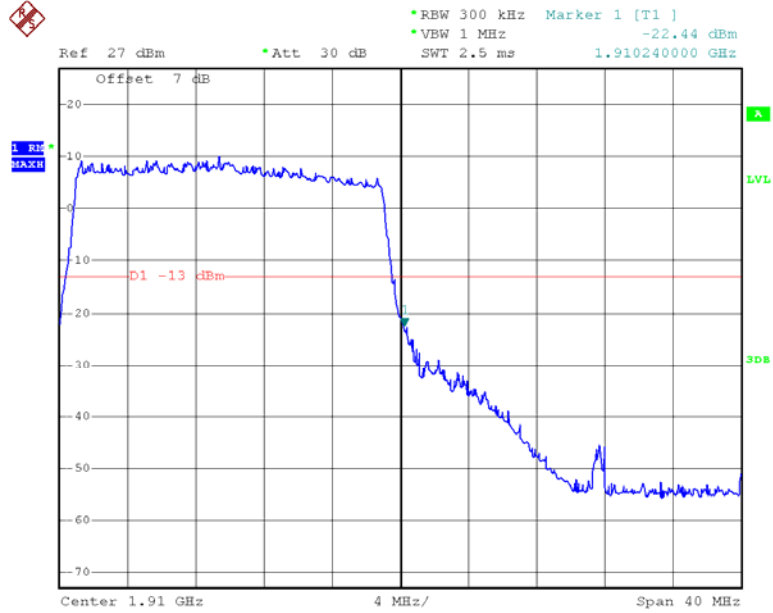


Date: 31.MAY.2018 16:01:38

16QAM_1.4MHz_6 RB_ Left

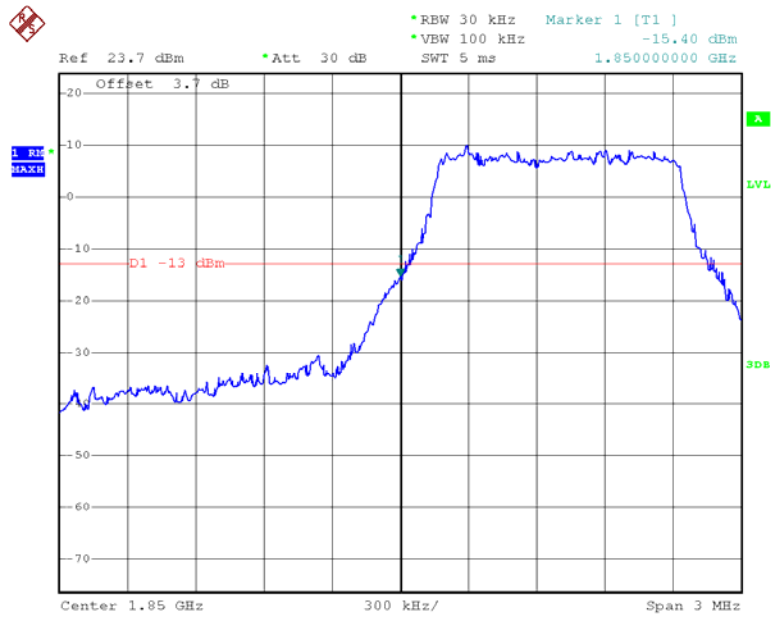


Date: 31.MAY.2018 16:44:35

16QAM_1.4MHz_6 RB_ Right

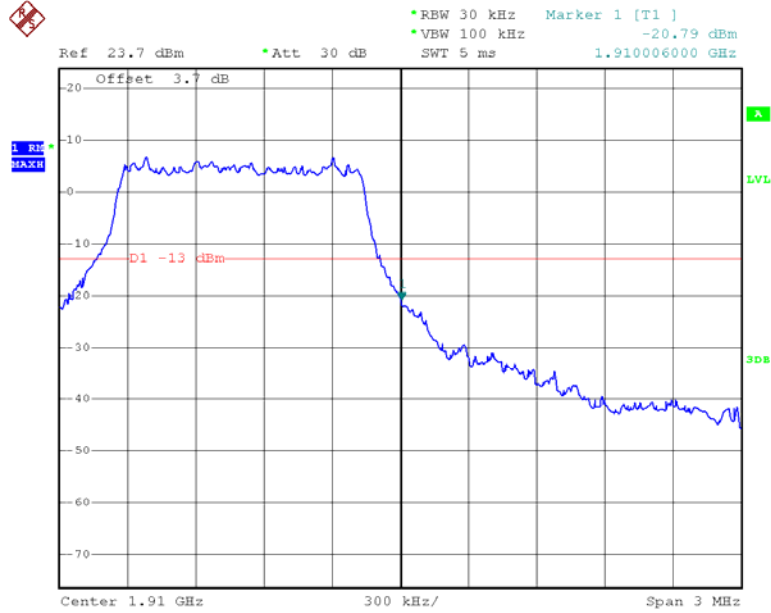


Date: 31.MAY.2018 16:42:06

16QAM_3MHz_15 RB_Left

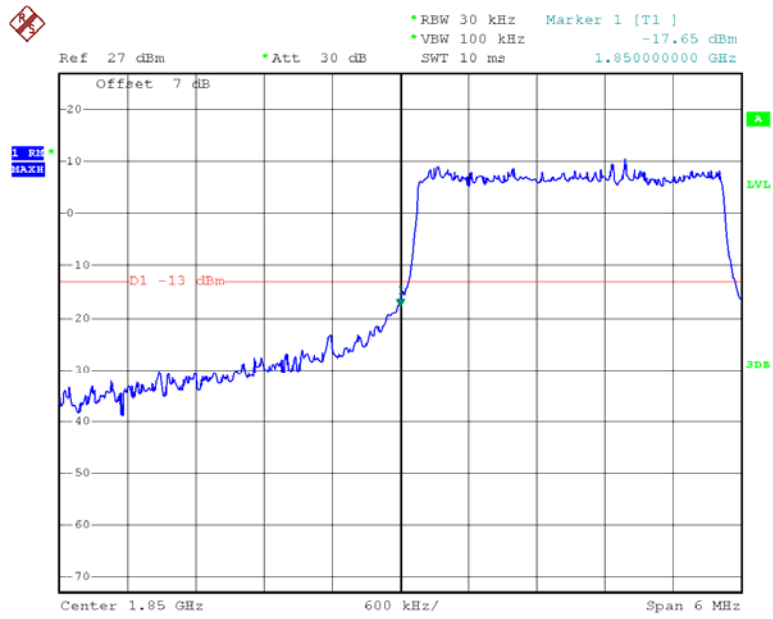


Date: 31.MAY.2018 16:31:18

16QAM_3MHz_15 RB_Right

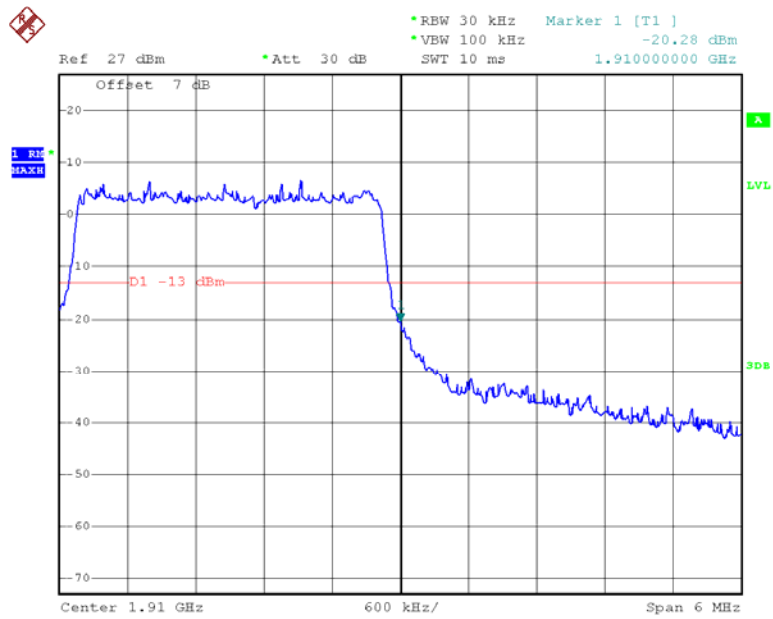


Date: 31.MAY.2018 16:33:25

16QAM_5MHz_25 RB_Left

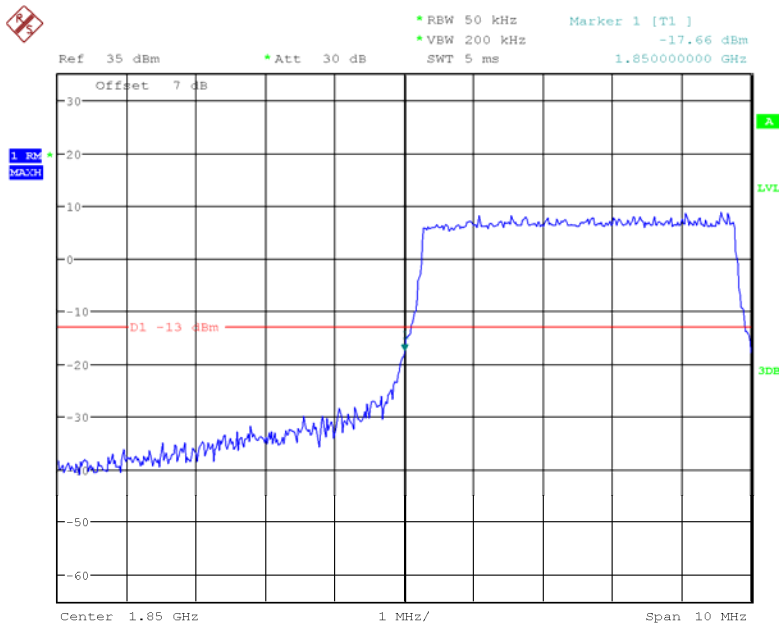


Date: 3.JUN.2018 16:32:02

16QAM_5MHz_25 RB_Right

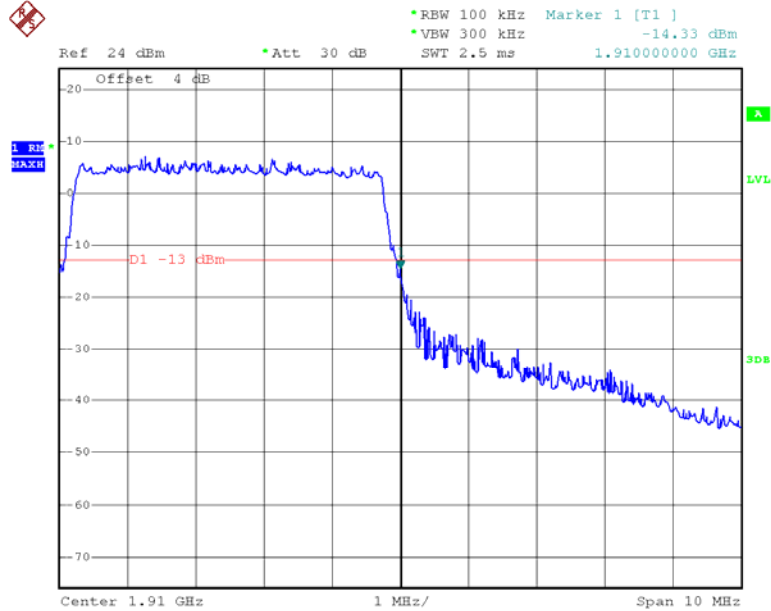


Date: 31.MAY.2018 16:25:59

16QAM_10MHz_50 RB_Left

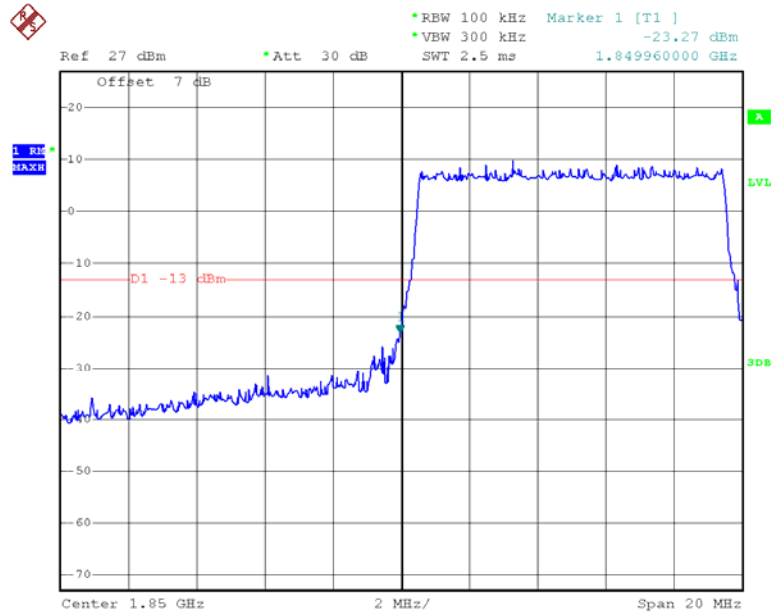


Date: 31.MAY.2018 16:14:38

16QAM_10MHz_50 RB_Right

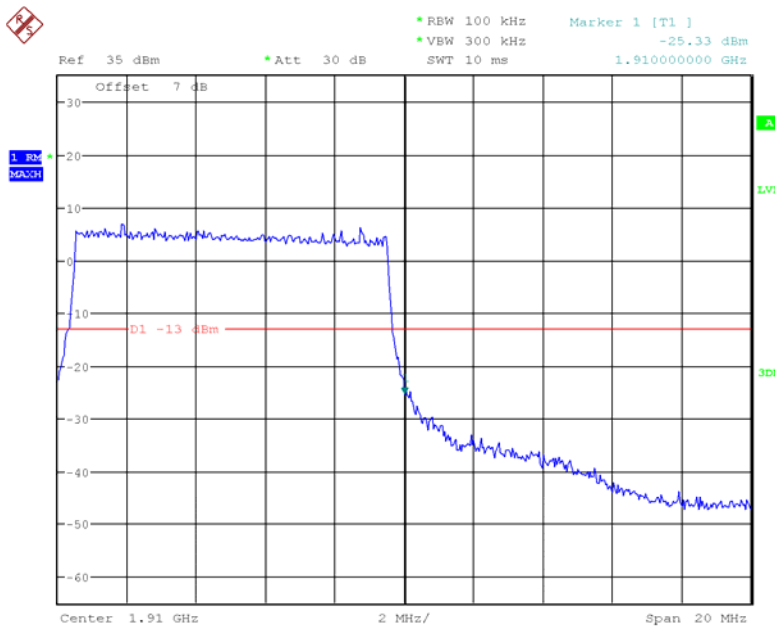


Date: 3.JUN.2018 16:39:11

16QAM_15MHz_75 RB_Left

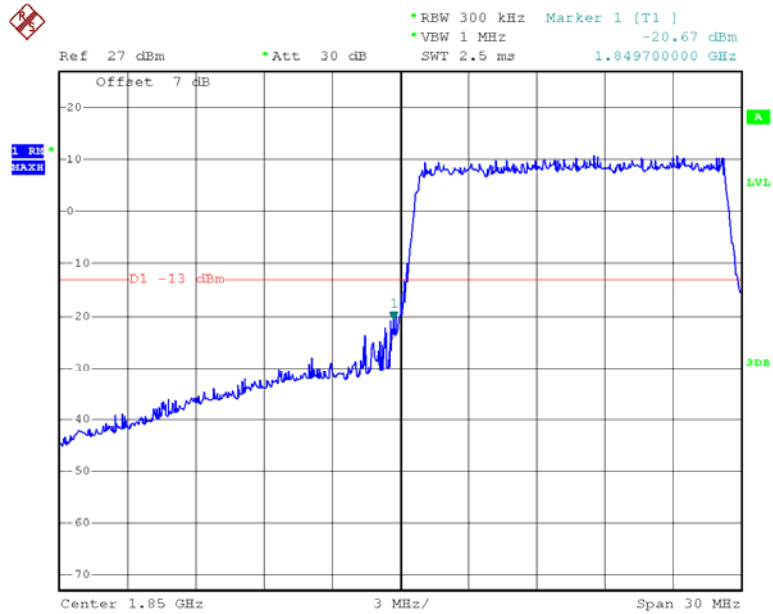


Date: 31.MAY.2018 16:09:52

16QAM_15MHz_75 RB_Right

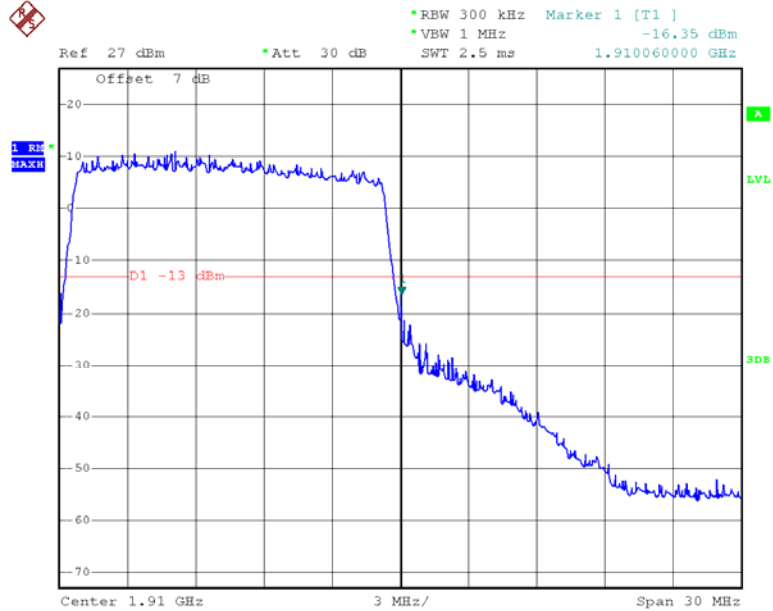


Date: 31.MAY.2018 16:11:13

16QAM_20MHz_FULL RB_Left

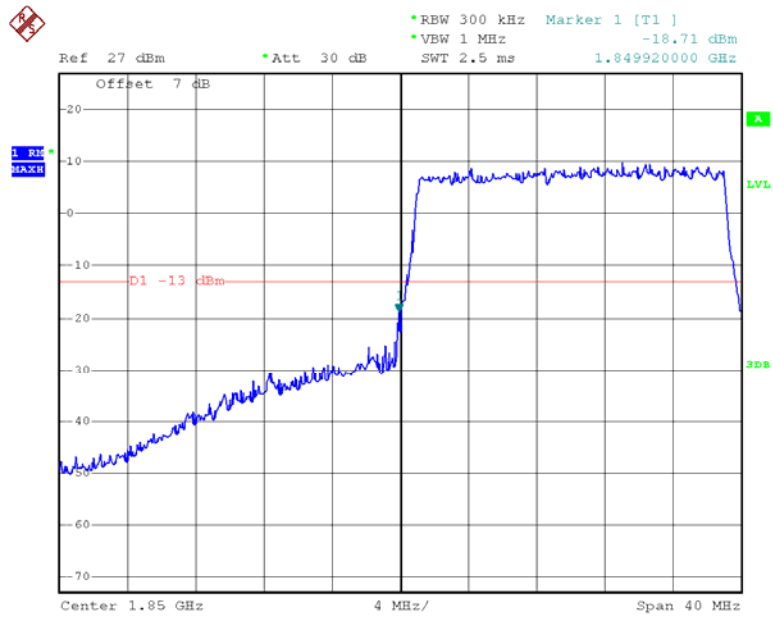

Date: 31.MAY.2018 16:05:45


16QAM_20MHz_FULL RB_Right

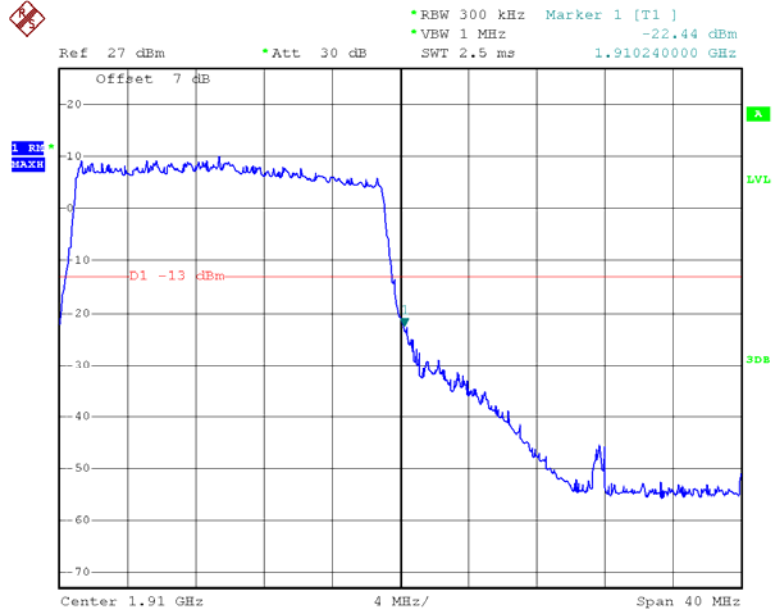

Date: 31.MAY.2018 16:01:38


LTE Band 12

QPSK_1.4MHz_6 RB_ Left

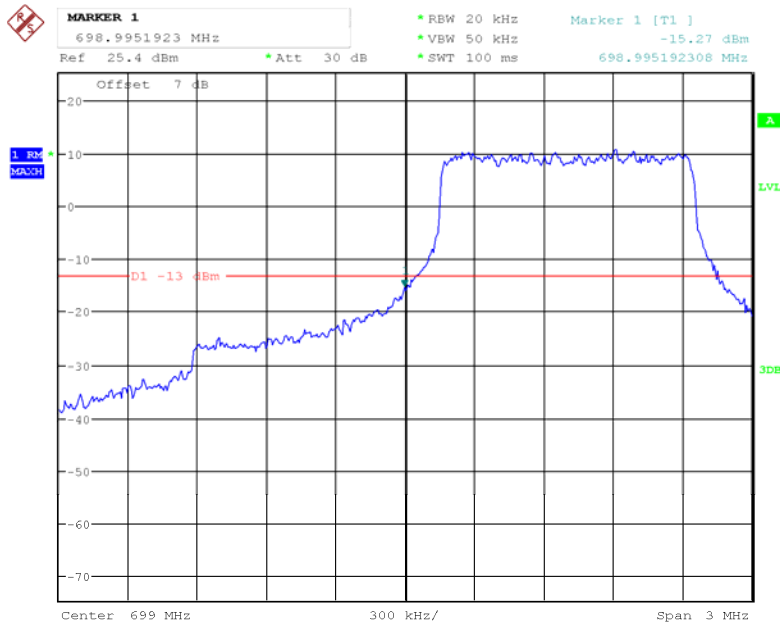


Date: 3.JUN.2018 14:25:46

QPSK_1.4MHz_6 RB_ Right

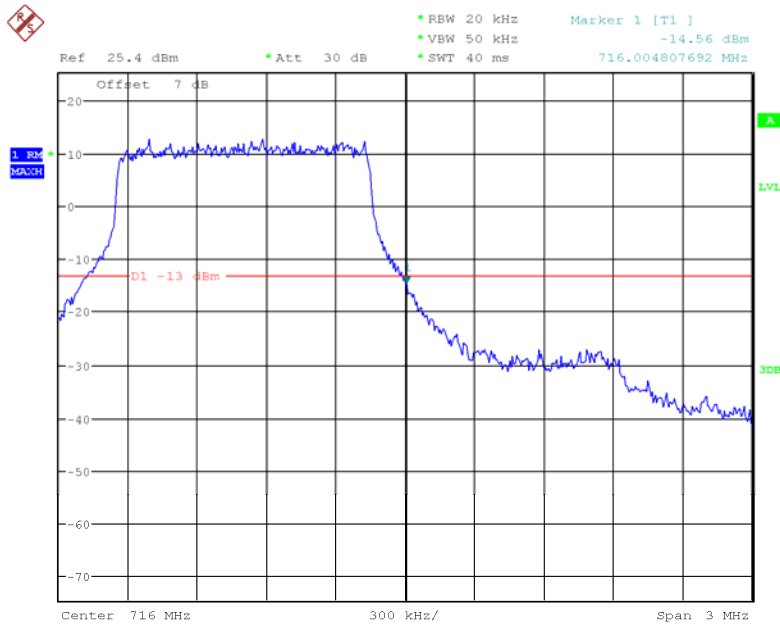


Date: 3.JUN.2018 14:20:28

QPSK_3MHz_15 RB_Left

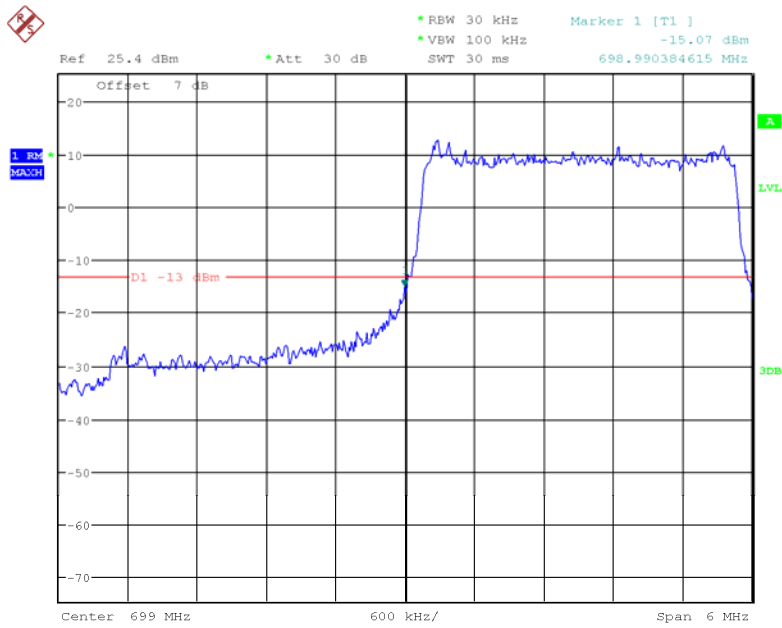


Date: 3.JUN.2018 15:19:22

QPSK_3MHz_15 RB_Right

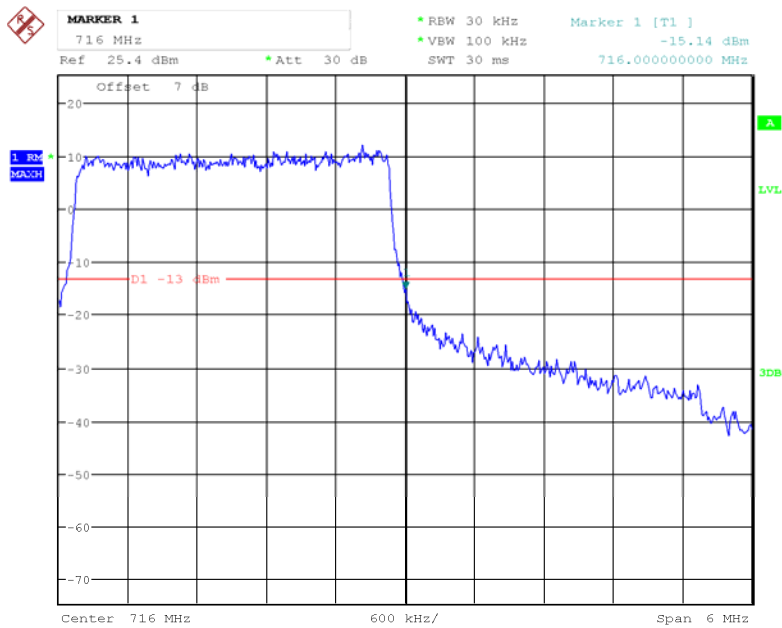


Date: 3.JUN.2018 15:21:57

QPSK_5MHz_25 RB_Left

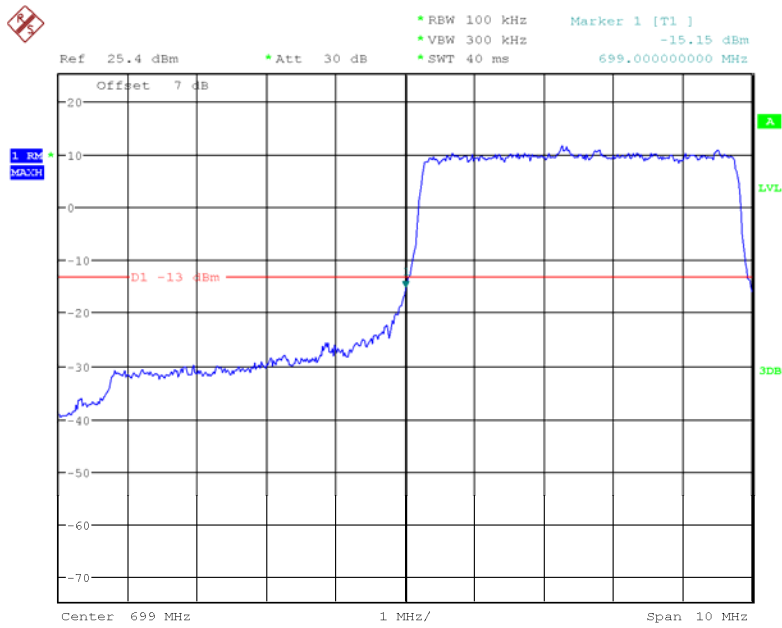


Date: 3.JUN.2018 15:30:37

QPSK_5MHz_25 RB_Right

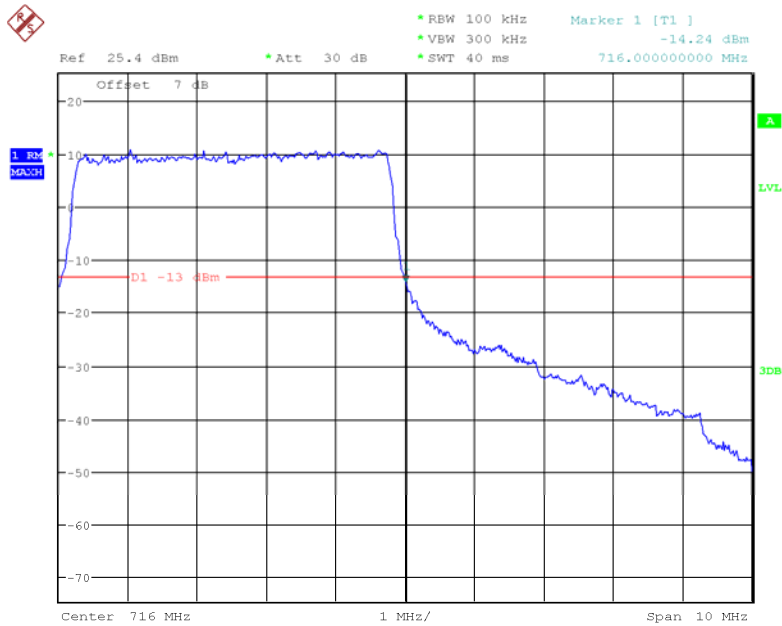


Date: 3.JUN.2018 15:32:43

QPSK_10MHz_50 RB_Left

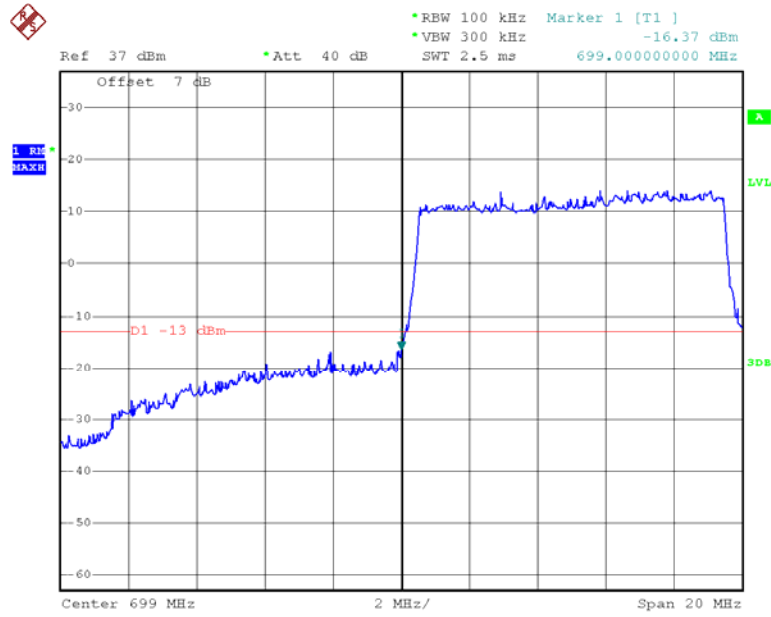


Date: 4.JUN.2018 16:54:06

QPSK_10MHz_50 RB_Right

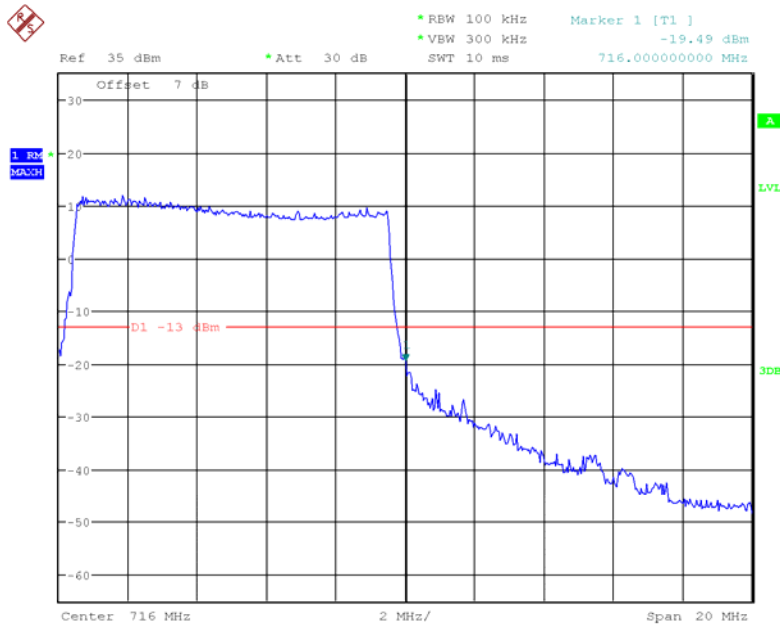


Date: 3.JUN.2018 15:40:12

16QAM_1.4MHz_6 RB_Left

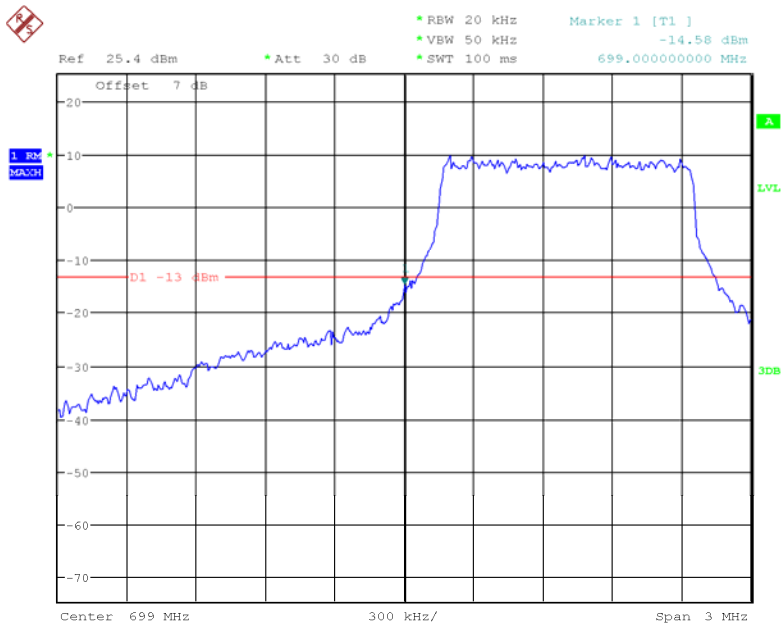


Date: 3.JUN.2018 14:26:18

16QAM_1.4MHz_6 RB_Right

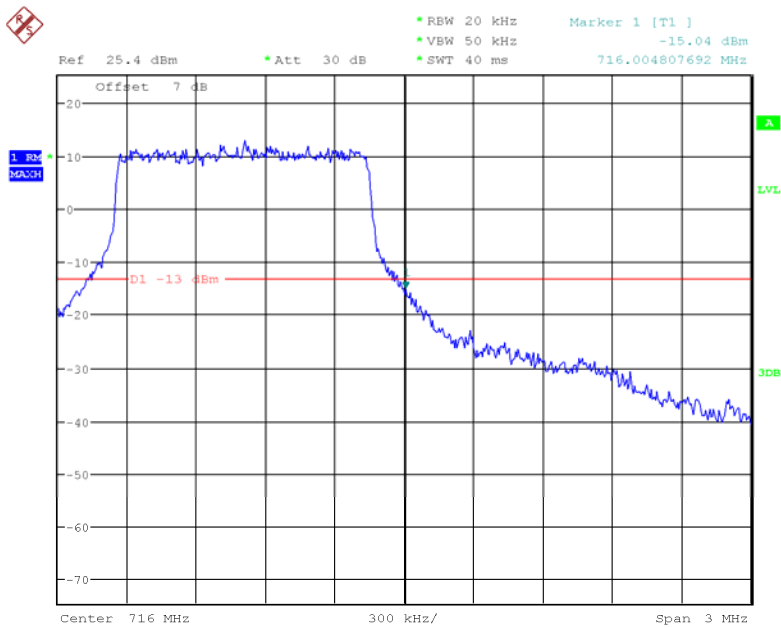


Date: 3.JUN.2018 14:21:12

16QAM_3MHz_15 RB_Left

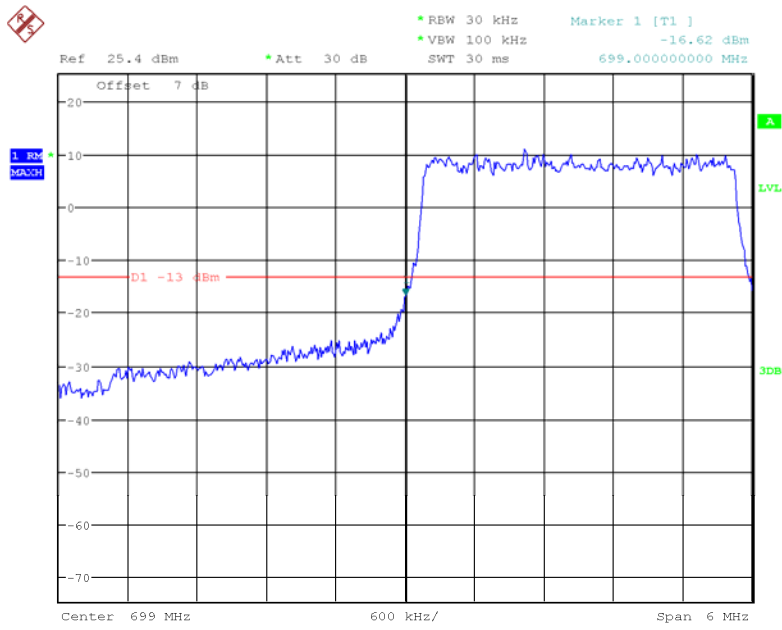


Date: 3.JUN.2018 15:20:30

16QAM_3MHz_15 RB_Right

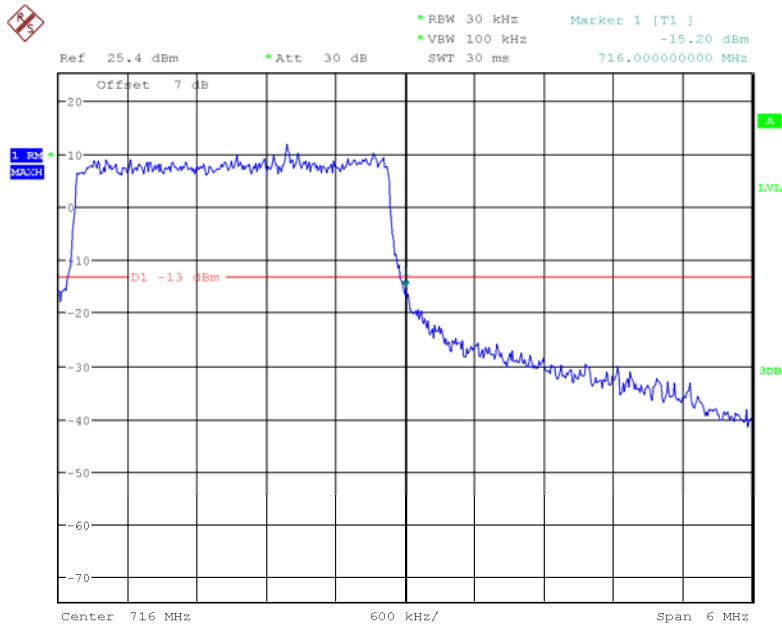


Date: 3.JUN.2018 15:22:28

16QAM_5MHz_25 RB_Left

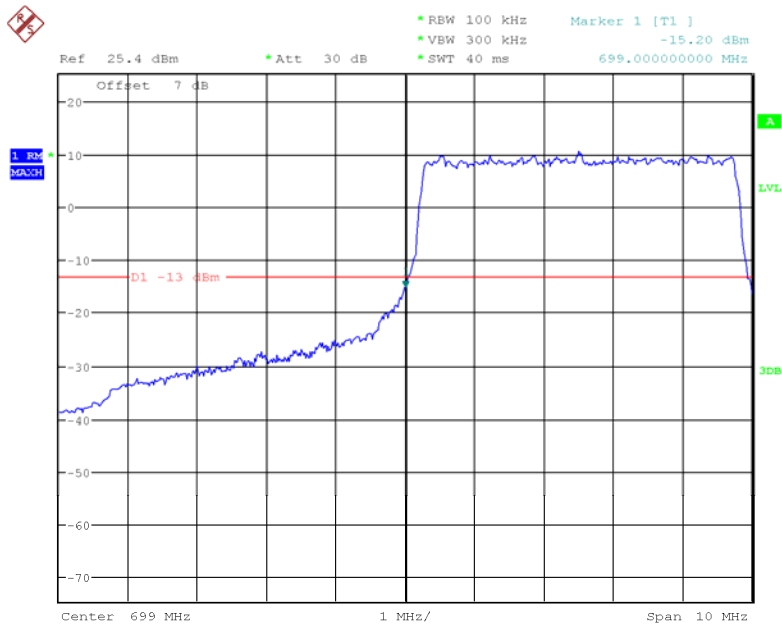


Date: 3.JUN.2018 15:29:44

16QAM_5MHz_25 RB_Right

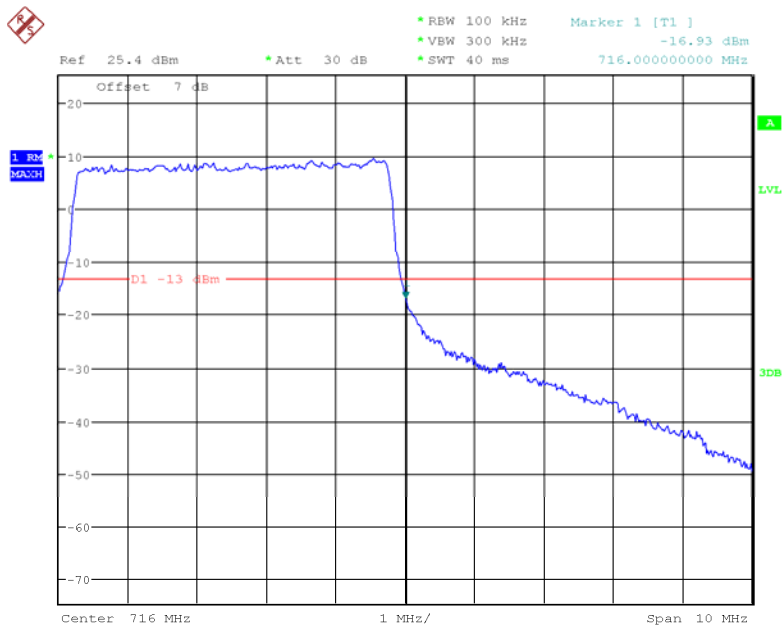


Date: 3.JUN.2018 15:33:23

16QAM_10MHz_50 RB_Left

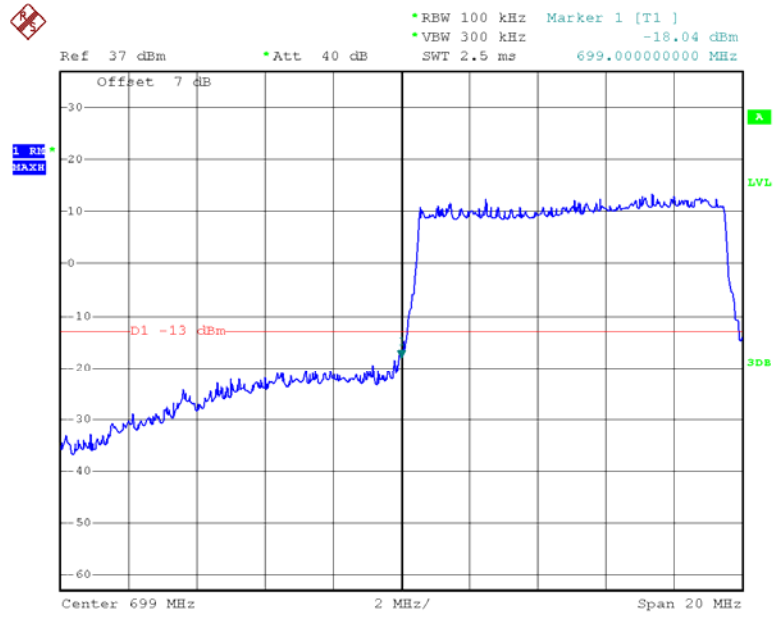

Date: 4.JUN.2018 16:53:40


16QAM_10MHz_50 RB_Right

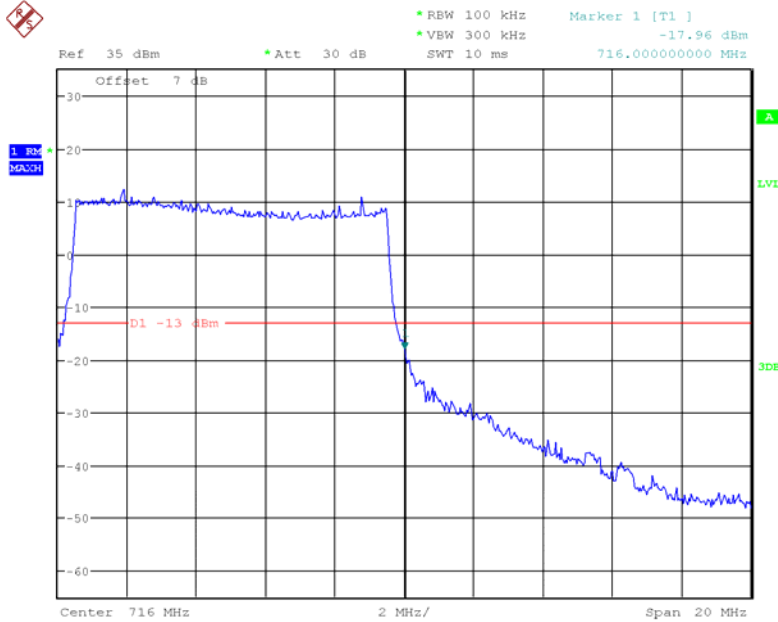

Date: 3.JUN.2018 15:40:59


LTE Band 13

QPSK_5MHz_25 RB_Left

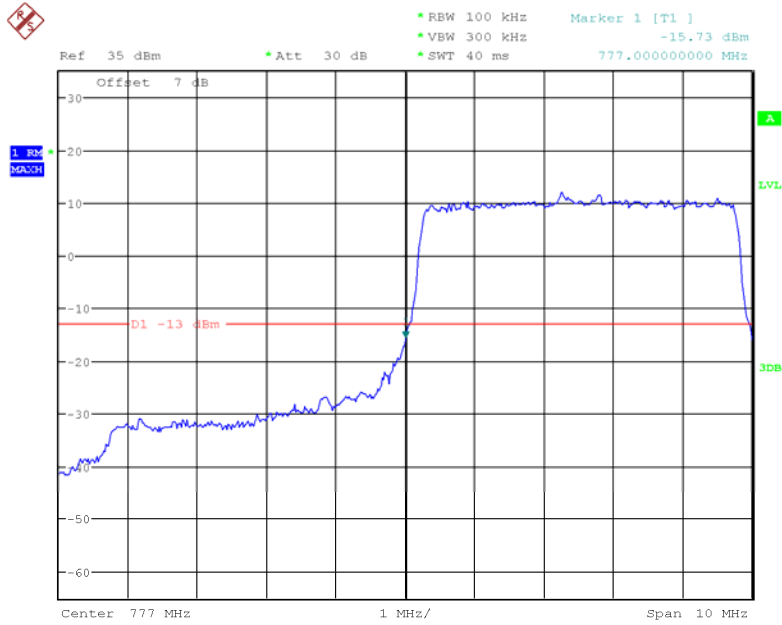


Date: 3.JUN.2018 15:45:27

QPSK_5MHz_25 RB_Right

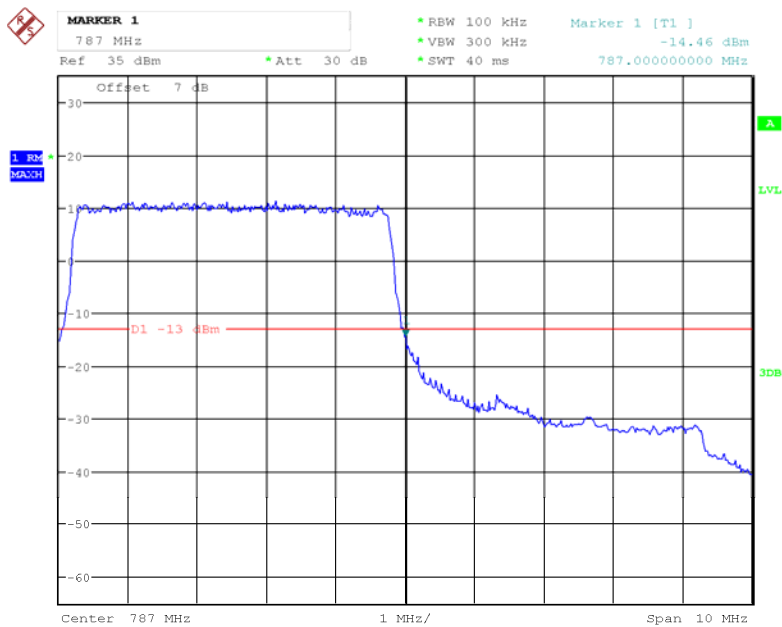


Date: 3.JUN.2018 15:48:28

QPSK_10MHz_50 RB

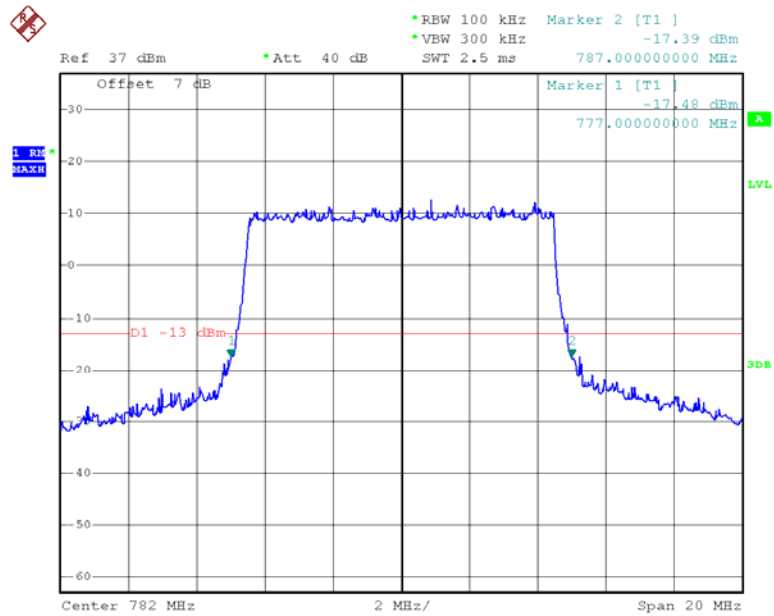


Date: 4.JUN.2018 18:07:54

16QAM_5MHz_25 RB_Left

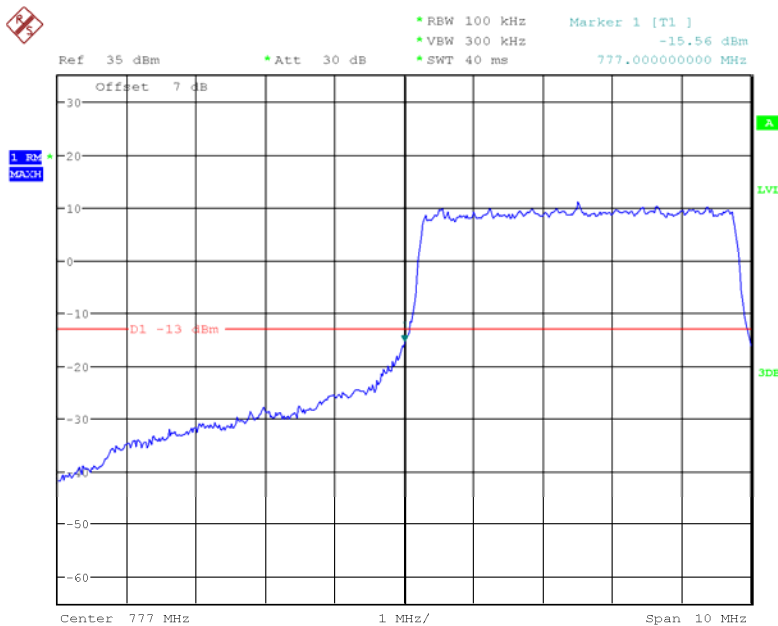


Date: 3.JUN.2018 15:46:13

16QAM_5MHz_25 RB_Right

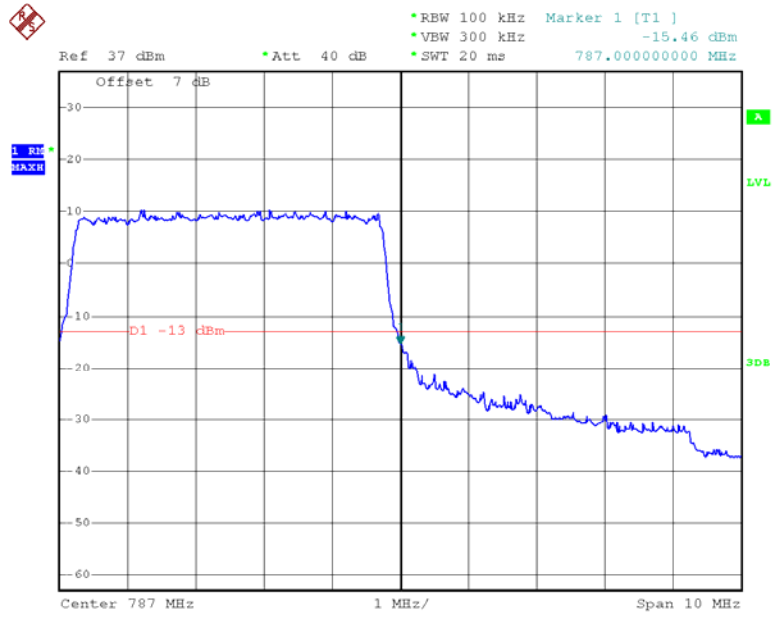

Date: 4.JUN.2018 18:00:15

16QAM_10MHz_50 RB

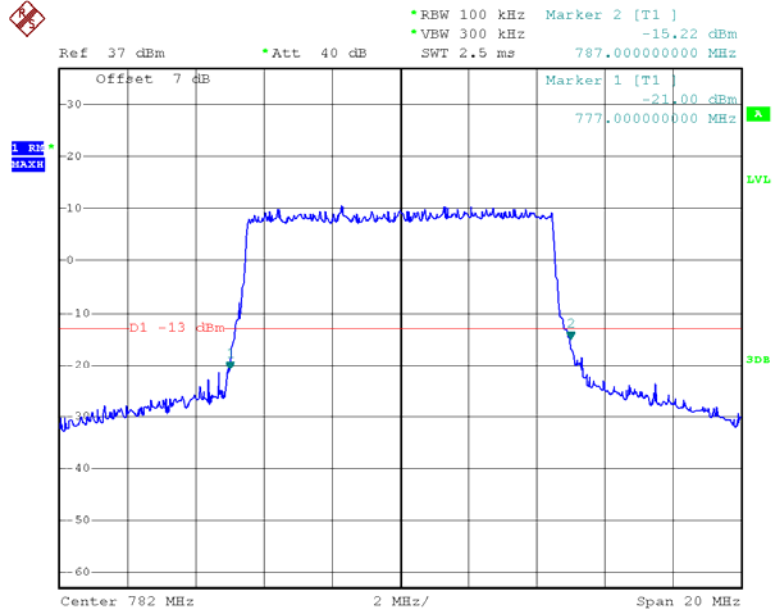

Date: 4.JUN.2018 18:08:18

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

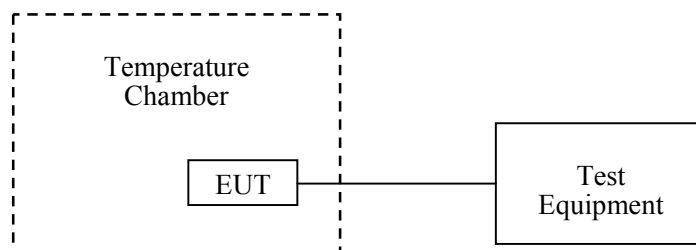

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-09-10	2018-09-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2017-07-18	2018-07-18
R&S	Wideband Radio Communication Tester	CMW500	147473	2017-08-31	2018-08-31
UNI-T	Multimeter	UT39A	M130199938	2018-04-02	2019-04-02
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each Time	/
Pro instrument	DC Power Supply	pps3300	N/A	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.4 ~ 26.7 °C
Relative Humidity:	53 ~ 56 %
ATM Pressure:	101.3 ~ 101.8 kPa

The testing was performed by Kami Zhou from 2018-05-30 to 2018-05-31.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	1	0.001	2.5
-20		0	0.000	
-10		2	0.002	
0		-1	-0.001	
10		2	0.002	
20		3	0.004	
30		-1	-0.001	
40		2	0.002	
50		0	0.000	
25		3.4	1	
25	4.2	2	0.002	

8PSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	5	0.006	2.5
-20		7	0.008	
-10		3	0.004	
0		4	0.005	
10		2	0.002	
20		3	0.004	
30		5	0.006	
40		-2	-0.002	
50		1	0.001	
25		3.4	3	
25	4.2	2	0.002	

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V_{DC}	Hz	ppm	
-30	3.7	-5	-0.003	Pass
-20		-2	-0.001	
-10		1	0.001	
0		2	0.001	
10		-1	-0.001	
20		3	0.002	
30		2	0.001	
40		-5	-0.003	
50		-1	-0.001	
25		3.4	2	
25	4.2	3	0.002	

8PSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V_{DC}	Hz	ppm	
-30	3.7	-7	-0.004	Pass
-20		-4	-0.002	
-10		3	0.002	
0		5	0.003	
10		-2	-0.001	
20		1	0.001	
30		2	0.001	
40		-4	-0.002	
50		-3	-0.002	
25		3.4	4	
25	4.2	1	0.001	

WCDMA Band II: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	7	0.004	2.5
-20		4	0.002	
-10		3	0.002	
0		-1	-0.001	
10		1	0.001	
20		2	0.001	
30		-1	-0.001	
40		-2	-0.001	
50		-4	-0.002	
25	3.4	5	0.003	
25	4.2	4	0.002	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	1	0.001	2.5
-20		2	0.002	
-10		-1	-0.001	
0		1	0.001	
10		0	0.000	
20		2	0.002	
30		-3	-0.004	
40		-2	-0.002	
50		1	0.001	
25	3.4	4	0.005	
25	4.2	2	0.002	

LTE Band 2:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	-1.17	-0.0006	Pass
-20		-0.56	-0.0003	
-10		-1.27	-0.0007	
0		0.25	0.0001	
10		-0.37	-0.0002	
20		-0.12	-0.0001	
30		-0.18	-0.0001	
40		-0.24	-0.0001	
50		-0.26	-0.0001	
25	3.4	-0.08	0.0000	
25	4.2	-1.25	-0.0007	

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.7	-1.28	-0.0007	Pass
-20		-2.45	-0.0013	
-10		-1.05	-0.0006	
0		0.25	0.0001	
10		-0.24	-0.0001	
20		-0.39	-0.0002	
30		-0.75	-0.0004	
40		0.34	0.0002	
50		0.85	0.0005	
25	3.4	0.17	0.0001	
25	4.2	0.94	0.0005	

LTE Band 12:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 707.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	-1.42	-0.00200707	Pass
-20		-1.37	-0.0019364	
-10		-1.28	-0.00180919	
0		-0.85	-0.00120141	
10		-1.26	-0.00178092	
20		-0.64	-0.00090459	
30		-0.84	-0.00118728	
40		-0.29	-0.00040989	
50		0.18	0.000254417	
25	3.4	0.27	0.000381625	
25	4.2	0.16	0.000226148	

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 707.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	-0.34	-0.00048057	Pass
-20		-0.08	-0.00011307	
-10		-1.61	-0.00227562	
0		-1.07	-0.00151237	
10		0.17	0.000240283	
20		0.28	0.00039576	
30		-0.34	-0.00048057	
40		-0.42	-0.00059364	
50		-0.17	-0.00024028	
25	3.4	-0.78	-0.00110247	
25	4.2	-0.25	-0.00035336	

LTE Band 13:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 782$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	1.25	0.001598465	Pass
-20		1.08	0.001381074	
-10		0.51	0.000652174	
0		0.38	0.000485934	
10		1.08	0.001381074	
20		1.17	0.001496164	
30		1.34	0.001713555	
40		0.94	0.001202046	
50		0.28	0.000358056	
25		3.4	0.08	
25	4.2	0.32	0.000409207	

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 782$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.7	1.02	0.001304348	Pass
-20		1.34	0.001713555	
-10		1.28	0.001636829	
0		1.61	0.002058824	
10		0.98	0.001253197	
20		1.07	0.001368286	
30		1.31	0.001675192	
40		1.07	0.001368286	
50		0.95	0.001214834	
25		3.4	1.17	
25	4.2	1.64	0.002097187	

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******