



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

TekConnec Inc

39H, LA ROSSA A, 12 TUNG CHUNG WATERFRONT ROAD TUNG CHUNG, LANTAU, NT
Hong Kong

FCC ID: 2AMVHAA777S

| | |
|---|---------------------------------|
| Report Type: Original Report | Product Type: INFERNO |
| Report Number: RDG180326004-00D | |
| Report Date: 2018-04-05 | |
| Reviewed By: Jerry Zhang EMC Manager | <i>Jerry Zhang</i> |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

| | |
|---|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| MEASUREMENT UNCERTAINTY | 5 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| JUSTIFICATION | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 6 |
| CONFIGURATION OF TEST SETUP | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 7 |
| SUMMARY OF TEST RESULTS | 8 |
| FCC §1.1310 & §2.1093- RF EXPOSURE | 9 |
| APPLICABLE STANDARD | 9 |
| TEST RESULT | 9 |
| FCC §2.1047 - MODULATION CHARACTERISTIC | 10 |
| FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER..... | 11 |
| APPLICABLE STANDARD | 11 |
| TEST PROCEDURE | 12 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| TEST DATA | 17 |
| FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH..... | 28 |
| APPLICABLE STANDARD | 28 |
| TEST PROCEDURE | 28 |
| TEST EQUIPMENT LIST AND DETAILS..... | 28 |
| TEST DATA | 28 |
| FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .. | 46 |
| APPLICABLE STANDARD | 46 |
| TEST PROCEDURE | 46 |
| TEST EQUIPMENT LIST AND DETAILS..... | 46 |
| TEST DATA | 46 |
| FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS | 62 |
| APPLICABLE STANDARD | 62 |
| TEST PROCEDURE | 62 |
| TEST EQUIPMENT LIST AND DETAILS..... | 62 |
| TEST DATA | 63 |
| FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES..... | 66 |
| APPLICABLE STANDARD | 66 |
| TEST PROCEDURE | 66 |
| TEST EQUIPMENT LIST AND DETAILS..... | 66 |
| TEST DATA | 67 |
| FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY..... | 99 |

| | |
|--------------------------------------|-----|
| APPLICABLE STANDARD | 99 |
| TEST PROCEDURE | 99 |
| TEST EQUIPMENT LIST AND DETAILS..... | 100 |
| TEST DATA | 100 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | | |
|-----------------------------|--------------------|--|
| EUT Name: | | INFERNO |
| EUT Model: | | AA777S |
| FCC ID: | | 2AMVHAA777S |
| Rated Input Voltage: | | DC3.8V from Battery or DC5V from adapter |
| Adapter Information | Model Name: | AA777S |
| | Input: | AC 100-240V, 50/60Hz 150mA |
| | Output: | DC5V, 1000mA |
| External Dimension: | | Length (143mm)*Width (72 mm)*High (9.3 mm) |
| Serial Number: | | 180326004 |
| EUT Received Date: | | 2018.03.26 |

Objective

This report is prepared on behalf of **TekConnec Inc** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.
Part 2, Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AMVHAA777S.
FCC Part 15C DSS submissions with FCC ID: 2AMVHAA777S.
FCC Part 15B JBP submissions with FCC ID: 2AMVHAA777S.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

| Parameter | Measurement Uncertainty |
|-------------------------------|--|
| Occupied Channel Bandwidth | ±5 % |
| RF output power, conducted | ±0.61dB |
| Unwanted Emissions, radiated | 30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted | ±1.5 dB |
| Temperature | ±1 °C |
| Humidity | ±5% |
| DC and low frequency voltages | ±0.4% |
| Duty Cycle | 1% |

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode. The device support GSM/GPRS/EDGE 850 band and 1900 band, WCDMA/HSUPA/HPDPA/DC-HSDPA/HSPA+ Band 5, LTE band 2,12 and 13.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|--------------------------------------|--------|---------------|
| R&S | Universal Radio Communication Tester | CMU200 | 109038 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 |
| N/A | ANTENNA | N/A | N/A |

Configuration of Test Setup

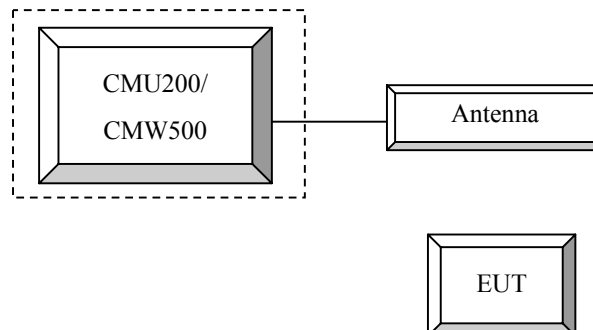

Block Diagram of Test Setup

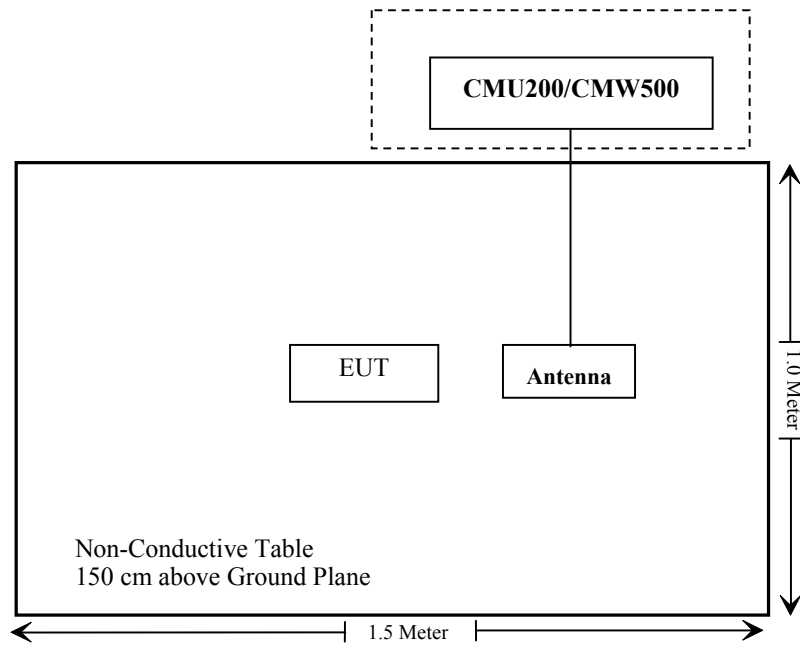

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|--|--|----------------|
| §1.1310, §2.1093 | RF Exposure | Compliance |
| §2.1046; § 22.913 (a); § 24.232 (c); §27.50 | RF Output Power | Compliance |
| § 2.1047 | Modulation Characteristics | Not Applicable |
| § 2.1049; § 22.905 § 22.917; § 24.238; §27.53 | Occupied Bandwidth | Compliance |
| § 2.1051, § 22.917 (a); § 24.238 (a); §27.53 | Spurious Emissions at Antenna Terminal | Compliance |
| § 2.1053 § 22.917 (a); § 24.238 (a); §27.53 | Field Strength of Spurious Radiation | Compliance |
| § 22.917 (a); § 24.238 (a); §27.53 | Out of band emission, Band Edge | Compliance |
| § 2.1055 § 22.355; § 24.235; §27.54 | Frequency stability vs. temperature Frequency stability vs. voltage | Compliance |

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG180326004-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
 Press Connection control to choose the different menus
 Press RESET > choose all the reset all settings
 Connection Press Signal Off to turn off the signal and change settings
 Network Support > GSM + GPRS or GSM + EGSM
 Main Service > Packet Data
 Service selection > Test Mode A – Auto Slot Config. off
 MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900
 > 27 dBm for EGPRS 850
 > 26 dBm for EGPRS 1900
 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
 Frequency Offset > + 0 Hz
 Mode > BCCH and TCH
 BCCH Level > -85 dBm (May need to adjust if link is not stable)
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

 Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

 Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

| | | |
|-----------------------------------|-------------------------|--------------|
| WCDMA General Settings | Loopback Mode | Test Mode 1 |
| | Rel99 RMC | 12.2kbps RMC |
| | Power Control Algorithm | Algorithm2 |
| | βc / βd | 8/15 |

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

| | Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|-------------------------------|---------------------------------|--------------|-------|-------|-------|
| | Subset | 1 | 2 | 3 | 4 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set1 | | | |
| | Power Control Algorithm | Algorithm2 | | | |
| | β_c | 2/15 | 12/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | β_d (SF) | 64 | | | |
| | β_c / β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| | MPR(dB) | 0 | 0 | 0.5 | 0.5 |
| HSDPA Specific Settings | DACK | 8 | | | |
| | DNAK | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | CQI Feedback | 4ms | | | |
| | CQI Repetition Factor | 2 | | | |
| | $A_{hs} = \beta_{hs} / \beta_c$ | 30/15 | | | |

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

| | Mode | HSUPA | HSUPA | HSUPA | HSUPA | HSUPA |
|--------------------------------|----------------------------------|--|--|--|--|-------|
| | Subset | 1 | 2 | 3 | 4 | 5 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2kbps RMC | | | | |
| | HSDPA FRC | H-Set1 | | | | |
| | HSUPA Test | HSUPA Loopback | | | | |
| | Power Control Algorithm | Algorithm2 | | | | |
| | β_c | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 9/15 | 15/15 | 0 |
| | β_{ec} | 209/225 | 12/15 | 30/15 | 2/15 | 5/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | - |
| | β_{hs} | 22/15 | 12/15 | 30/15 | 4/15 | 5/15 |
| | CM(dB) | 1.0 | 3.0 | 2.0 | 3.0 | 1.0 |
| MPR(dB) | 0 | 2 | 1 | 2 | 0 | |
| HSDPA Specific Settings | DACK | 8 | | | | |
| | DNAK | 8 | | | | |
| | DCQI | 8 | | | | |
| | Ack-Nack repetition factor | 3 | | | | |
| | CQI Feedback | 4ms | | | | |
| | CQI Repetition Factor | 2 | | | | |
| | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15 | | | | |
| HSUPA Specific Settings | DE-DPCCH | 6 | 8 | 8 | 5 | 7 |
| | DHARQ | 0 | 0 | 0 | 0 | 0 |
| | AG Index | 20 | 12 | 15 | 17 | 21 |
| | ETFCI | 75 | 67 | 92 | 71 | 81 |
| | Associated Max UL Data Rate kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 |
| | Reference E_FCI | E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27 | E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18 | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27 | E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27 | |

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

| Sub-test | β_c (Note3) | β_d | β_{HS} (Note1) | β_{ec} | β_{ed} (2xSF2) (Note 4) | β_{ed} (2xSF4) (Note 4) | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 4) | E-TFCI (Note 5) | E-TFCI (boost) |
|----------|----------------------|-----------|-------------------------|--------------|--|--|------------------------|-------------------------|-------------------------|--------------------|-------------------|
| 1 | 1 | 0 | 30/15 | 30/15 | β_{ed1} : 30/15 β_{ed2} : 30/15 | β_{ed3} : 24/15 β_{ed4} : 24/15 | 3.5 | 2.5 | 14 | 105 | 105 |

- Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.
- Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
- Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
- Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
- Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

| Parameter | Unit | Value |
|---|-----------|-------|
| Nominal Avg. Inf. Bit Rate | kbps | 60 |
| Inter-TTI Distance | TTI's | 1 |
| Number of HARQ Processes | Processes | 6 |
| Information Bit Payload (N_{INF}) | Bits | 120 |
| Number Code Blocks | Blocks | 1 |
| Binary Channel Bits Per TTI | Bits | 960 |
| Total Available SML's in UE | SML's | 19200 |
| Number of SML's per HARQ Proc. | SML's | 3200 |
| Coding Rate | | 0.15 |
| Number of Physical Channel Codes | Codes | 1 |
| Modulation | | QPSK |
| <p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p> | | |

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

| Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) |
|------------|---|---------|-------|--------|--------|--------|----------|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

| Network Signalling value | Requirements (sub-clause) | E-UTRA Band | Channel bandwidth (MHz) | Resources Blocks (N _{RB}) | A-MPR (dB) |
|--------------------------|---------------------------|--------------------------|-------------------------|-------------------------------------|---------------|
| NS_01 | 6.6.2.1.1 | Table 5.5-1 | 1.4, 3, 5, 10, 15, 20 | Table 5.6-1 | NA |
| NS_03 | 6.6.2.2.1 | 2, 4, 10, 23, 25, 35, 36 | 3 | >5 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| | | | 10 | >6 | ≤ 1 |
| | | | 15 | >8 | ≤ 1 |
| NS_04 | 6.6.2.2.2 | 41 | 20 | >10 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| NS_05 | 6.6.3.3.1 | 1 | 10, 15, 20 | ≥ 50 | ≤ 1 |
| NS_06 | 6.6.2.2.3 | 12, 13, 14, 17 | 1.4, 3, 5, 10 | Table 5.6-1 | n/a |
| NS_07 | 6.6.2.2.3 | 13 | 10 | Table 6.2.4-2 | Table 6.2.4-2 |
| | 6.6.3.3.2 | | | | |
| NS_08 | 6.6.3.3.3 | 19 | 10, 15 | > 44 | ≤ 3 |
| NS_09 | 6.6.3.3.4 | 21 | 10, 15 | > 40 | ≤ 1 |
| | | | | > 55 | ≤ 2 |
| NS_10 | | 20 | 15, 20 | Table 6.2.4-3 | Table 6.2.4-3 |
| NS_11 | 6.6.2.2.1 | 23 ¹ | 1.4, 3, 5, 10 | Table 6.2.4-5 | Table 6.2.4-5 |
| .. | | | | | |
| NS_32 | - | - | - | - | - |

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESCI | 100224 | 2017-12-11 | 2018-12-11 |
| Sunol Sciences | Antenna | JB3 | A060611-1 | 2017-11-10 | 2020-11-10 |
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2017-01-04 | 2018-01-04 |
| ETS-Lindgren | Horn Antenna | 3115 | 000 527 35 | 2016-01-05 | 2019-01-04 |
| HP | Signal Generator | 1026 | 320408 | 2017-12-08 | 2018-12-08 |
| EMCO | Adjustable Dipole Antenna | 3121C | 9109-753 | N/A | N/A |
| TDK RF | Horn Antenna | HRN-0118 | 130 084 | 2016-01-05 | 2019-01-04 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0075-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1000-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-SJSJ-50 | C-0800-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/02 | Each Time | / |
| R&S | Universal Radio Communication Tester | CMU200 | 109 038 | 2017-07-18 | 2018-07-18 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 | 2017-08-31 | 2018-08-31 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24.2°C |
| Relative Humidity: | 45 % |
| ATM Pressure: | 101.1 kPa |

* *The testing was performed by Blake Yang & Steve Zuo & Sunny Cen on 2018-03-30*

Conducted Output Power

Cellular Band & PCS Band

| Band | Channel No. | Conducted Peak Output Power (dBm) | | | | | | | | |
|----------|-------------|-----------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | | GSM | GPRS 1 TX Slot | GPRS 2 TX Slot | GPRS 3 TX Slot | GPRS 4 TX Slot | EDGE 1 TX Slot | EDGE 2 TX Slot | EDGE 3 TX Slot | EDGE 4 TX Slot |
| Cellular | 128 | 31.50 | 31.48 | 31.04 | 29.56 | 28.61 | 25.47 | 24.37 | 22.40 | 20.97 |
| | 190 | 31.50 | 31.47 | 30.96 | 29.44 | 28.48 | 25.28 | 24.42 | 22.26 | 20.95 |
| | 251 | 31.50 | 31.47 | 30.97 | 29.49 | 28.55 | 25.35 | 24.55 | 22.26 | 21.02 |
| PCS | 512 | 29.60 | 29.58 | 28.89 | 27.40 | 26.50 | 24.65 | 23.82 | 21.73 | 20.58 |
| | 661 | 29.30 | 29.27 | 28.69 | 27.14 | 26.20 | 24.49 | 23.64 | 21.61 | 20.27 |
| | 810 | 29.30 | 29.26 | 28.69 | 27.10 | 26.11 | 24.33 | 23.49 | 21.58 | 20.23 |

WCDMA Band V

| Mode | 3GPP Sub Test | Low Channel | | Middle Channel | | High Channel | |
|----------|---------------|------------------|----------|------------------|----------|------------------|----------|
| | | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) |
| Rel 99 | 1 | 22.73 | 2.44 | 22.76 | 2.12 | 22.70 | 1.99 |
| HSDPA | 1 | 21.58 | 2.51 | 21.69 | 2.10 | 21.71 | 2.05 |
| | 2 | 20.83 | 2.53 | 20.83 | 2.03 | 20.74 | 2.06 |
| | 3 | 20.80 | 2.54 | 20.80 | 2.13 | 20.71 | 2.00 |
| | 4 | 20.83 | 2.36 | 20.83 | 2.08 | 20.74 | 1.92 |
| HSUPA | 1 | 21.69 | 2.46 | 21.70 | 2.22 | 21.70 | 1.95 |
| | 2 | 21.75 | 2.37 | 21.75 | 2.20 | 21.66 | 2.08 |
| | 3 | 21.71 | 2.41 | 21.71 | 2.10 | 21.62 | 1.90 |
| | 4 | 21.80 | 2.41 | 21.80 | 2.22 | 21.71 | 2.00 |
| | 5 | 21.76 | 2.34 | 21.76 | 2.06 | 21.67 | 2.06 |
| DC-HSDPA | 1 | 21.85 | 2.36 | 21.85 | 2.06 | 21.76 | 1.97 |
| | 2 | 22.24 | 2.44 | 22.24 | 2.14 | 22.15 | 1.94 |
| | 3 | 21.75 | 2.49 | 21.75 | 2.02 | 21.66 | 2.03 |
| | 4 | 22.24 | 2.44 | 22.24 | 2.13 | 22.15 | 1.98 |
| HSPA+ | 1 | 21.63 | 2.52 | 21.63 | 2.06 | 21.54 | 2.07 |

LTE Band 2 (PART 24)

| Channel Bandwidth | Modulation | Resource Block & RB offset | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|-------------------|------------|----------------------------|-------------------|----------------------|--------------------|
| 1.4MHz | QPSK | 1#0 | 23.04 | 23.03 | 22.97 |
| | | 1#3 | 23.03 | 23.01 | 22.99 |
| | | 1#5 | 23.03 | 23.04 | 22.96 |
| | | 3#0 | 23.06 | 23.05 | 22.98 |
| | | 3#3 | 23.08 | 23.06 | 23.00 |
| | | 6#0 | 22.02 | 22.04 | 21.97 |
| | 16QAM | 1#0 | 21.98 | 22.03 | 22.02 |
| | | 1#3 | 21.99 | 22.02 | 22.03 |
| | | 1#5 | 22.00 | 22.03 | 22.01 |
| | | 3#0 | 22.17 | 22.25 | 21.90 |
| 3#3 | | 22.17 | 22.24 | 21.91 | |
| 3MHz | QPSK | 1#0 | 23.05 | 22.91 | 22.96 |
| | | 1#8 | 23.04 | 22.92 | 22.95 |
| | | 1#14 | 23.06 | 22.95 | 22.94 |
| | | 10#0 | 22.04 | 21.97 | 21.98 |
| | | 10#5 | 22.07 | 21.91 | 21.96 |
| | | 15#0 | 22.03 | 21.97 | 21.99 |
| | 16QAM | 1#0 | 22.10 | 22.40 | 22.02 |
| | | 1#8 | 22.10 | 22.37 | 22.00 |
| | | 1#14 | 22.10 | 22.42 | 22.03 |
| | | 10#0 | 21.02 | 21.03 | 20.97 |
| 10#5 | | 21.04 | 21.00 | 20.99 | |
| 5MHz | QPSK | 1#0 | 23.12 | 22.95 | 23.05 |
| | | 1#13 | 23.15 | 22.96 | 23.05 |
| | | 1#24 | 23.11 | 22.92 | 23.07 |
| | | 10#0 | 22.07 | 22.00 | 22.02 |
| | | 10#15 | 22.10 | 22.02 | 22.05 |
| | | 25#0 | 22.02 | 21.98 | 21.97 |
| | 16QAM | 1#0 | 22.31 | 21.85 | 22.00 |
| | | 1#13 | 22.32 | 21.84 | 22.03 |
| | | 1#24 | 22.30 | 21.86 | 21.99 |
| | | 10#0 | 21.10 | 21.05 | 21.05 |
| 10#15 | | 21.08 | 21.04 | 21.08 | |
| | | 25#0 | 21.01 | 21.03 | 20.95 |

| | | | | | |
|-------|-------|-------|-------|-------|-------|
| 10MHz | QPSK | 1#0 | 23.11 | 22.98 | 23.07 |
| | | 1#25 | 23.14 | 22.99 | 23.08 |
| | | 1#49 | 23.12 | 22.97 | 23.06 |
| | | 25#0 | 22.02 | 22.00 | 21.98 |
| | | 25#25 | 22.04 | 21.94 | 22.00 |
| | 16QAM | 50#0 | 21.98 | 21.99 | 21.92 |
| | | 1#0 | 22.24 | 21.85 | 21.97 |
| | | 1#25 | 22.27 | 21.82 | 21.98 |
| | | 1#49 | 22.23 | 21.83 | 21.91 |
| | | 25#0 | 21.07 | 21.01 | 20.95 |
| 15MHz | QPSK | 25#25 | 21.11 | 21.02 | 20.92 |
| | | 50#0 | 20.95 | 21.05 | 20.97 |
| | | 1#0 | 23.09 | 22.97 | 23.29 |
| | | 1#38 | 23.08 | 22.95 | 23.32 |
| | | 1#74 | 23.11 | 22.99 | 23.30 |
| | | 36#0 | 22.18 | 22.07 | 22.29 |
| | 16QAM | 36#39 | 22.17 | 22.10 | 22.32 |
| | | 75#0 | 22.17 | 22.07 | 22.19 |
| | | 1#0 | 22.17 | 22.36 | 22.19 |
| | | 1#38 | 22.19 | 22.35 | 22.19 |
| | | 1#74 | 22.18 | 22.37 | 22.17 |
| | | 36#0 | 21.09 | 21.07 | 21.12 |
| | | 36#39 | 21.06 | 21.02 | 21.15 |
| | | 75#0 | 21.07 | 21.09 | 21.07 |
| 20MHz | QPSK | 1#0 | 23.09 | 23.03 | 23.08 |
| | | 1#50 | 23.13 | 23.04 | 23.10 |
| | | 1#99 | 23.11 | 23.01 | 23.06 |
| | | 50#0 | 22.01 | 22.01 | 21.95 |
| | | 50#50 | 22.04 | 22.03 | 21.97 |
| | | 100#0 | 21.92 | 22.01 | 22.00 |
| | 16QAM | 1#0 | 22.23 | 22.39 | 22.40 |
| | | 1#50 | 22.24 | 22.42 | 22.38 |
| | | 1#99 | 22.25 | 22.41 | 22.41 |
| | | 50#0 | 20.97 | 21.07 | 22.88 |
| | | 50#50 | 20.99 | 21.04 | 22.88 |
| | | 100#0 | 20.93 | 21.10 | 20.96 |

LTE Band 12 (PART 27)

| Channel Bandwidth | Modulation | Resource Block & RB offset | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|-------------------|------------|----------------------------|-------------------|----------------------|--------------------|
| 1.4MHz | QPSK | 1#0 | 22.75 | 22.74 | 22.74 |
| | | 1#3 | 22.79 | 22.72 | 22.76 |
| | | 1#5 | 22.77 | 22.73 | 22.73 |
| | | 3#0 | 22.90 | 22.89 | 22.81 |
| | | 3#3 | 22.89 | 22.90 | 22.81 |
| | 16QAM | 6#0 | 21.74 | 21.74 | 21.68 |
| | | 1#0 | 21.95 | 21.77 | 21.72 |
| | | 1#3 | 21.94 | 21.81 | 21.74 |
| | | 1#5 | 21.96 | 21.78 | 21.71 |
| | | 3#0 | 21.88 | 22.08 | 21.85 |
| 3MHz | QPSK | 3#3 | 21.88 | 22.07 | 21.85 |
| | | 6#0 | 20.76 | 20.79 | 20.61 |
| | | 1#0 | 22.69 | 22.75 | 22.75 |
| | | 1#8 | 22.71 | 22.75 | 22.74 |
| | | 1#14 | 22.70 | 22.77 | 22.74 |
| | 16QAM | 10#0 | 21.82 | 21.82 | 21.80 |
| | | 10#5 | 21.81 | 21.83 | 21.79 |
| | | 15#0 | 21.78 | 21.80 | 21.83 |
| | | 1#0 | 21.87 | 21.78 | 22.24 |
| | | 1#8 | 21.79 | 21.82 | 21.84 |
| 5MHz | QPSK | 1#14 | 21.80 | 21.83 | 21.81 |
| | | 10#0 | 20.83 | 20.99 | 20.88 |
| | | 10#5 | 20.81 | 21.02 | 20.90 |
| | | 15#0 | 20.76 | 20.90 | 20.91 |
| | | 1#0 | 22.83 | 22.78 | 22.78 |
| | 16QAM | 1#13 | 22.83 | 22.79 | 22.79 |
| | | 1#24 | 22.85 | 22.76 | 22.79 |
| | | 10#0 | 21.82 | 21.83 | 21.82 |
| | | 10#15 | 21.84 | 21.85 | 21.81 |
| | | 25#0 | 21.84 | 21.80 | 21.87 |
| 10MHz | QPSK | 1#0 | 22.09 | 21.64 | 21.86 |
| | | 1#13 | 22.10 | 21.64 | 21.89 |
| | | 1#24 | 22.11 | 21.63 | 21.88 |
| | | 10#0 | 20.94 | 20.86 | 20.94 |
| | | 10#15 | 20.96 | 20.86 | 20.94 |
| | 16QAM | 25#0 | 20.83 | 20.99 | 20.87 |
| | | 1#0 | 22.77 | 22.76 | 22.82 |
| | | 1#25 | 22.76 | 22.76 | 22.83 |
| | | 1#49 | 22.78 | 22.78 | 22.82 |
| | | 25#0 | 21.78 | 21.79 | 21.85 |
| 16QAM | 25#25 | 21.81 | 21.80 | 21.83 | |
| | 50#0 | 21.83 | 21.84 | 21.89 | |
| | 1#0 | 21.95 | 22.24 | 21.81 | |
| | 1#25 | 21.97 | 22.23 | 21.83 | |
| | 1#49 | 21.97 | 22.27 | 21.79 | |
| | 16QAM | 25#0 | 20.83 | 20.90 | 21.01 |
| | | 25#25 | 20.83 | 20.91 | 20.99 |
| | | 50#0 | 20.85 | 20.89 | 21.02 |

LTE Band 13(PART 27)

| Channel Bandwidth | Modulation | Resource Block & RB offset | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|-------------------|------------|----------------------------|-------------------|----------------------|--------------------|
| 5MHz | QPSK | 1#0 | 22.96 | 22.88 | 22.92 |
| | | 1#13 | 22.89 | 22.78 | 22.81 |
| | | 1#24 | 22.91 | 22.88 | 22.93 |
| | | 10#0 | 22.84 | 22.85 | 22.89 |
| | | 10#15 | 22.80 | 22.81 | 22.84 |
| | 25#0 | 22.88 | 22.87 | 22.88 | |
| | 16QAM | 1#0 | 23.16 | 22.74 | 22.95 |
| | | 1#13 | 23.05 | 22.76 | 22.89 |
| | | 1#24 | 23.01 | 22.71 | 22.85 |
| | | 10#0 | 22.97 | 22.87 | 22.95 |
| 10#15 | | 22.95 | 22.83 | 22.85 | |
| 25#0 | 22.88 | 22.92 | 22.87 | | |
| 10MHz | QPSK | 1#0 | 22.90 | 22.90 | 22.89 |
| | | 1#25 | 22.84 | 22.85 | 22.85 |
| | | 1#49 | 22.83 | 22.86 | 22.86 |
| | | 25#0 | 22.84 | 22.89 | 22.85 |
| | | 25#25 | 22.81 | 22.81 | 22.79 |
| | 50#0 | 22.81 | 22.88 | 22.90 | |
| | 16QAM | 1#0 | 22.91 | 23.38 | 22.89 |
| | | 1#25 | 22.88 | 23.20 | 22.81 |
| | | 1#49 | 22.83 | 22.99 | 22.86 |
| | | 25#0 | 22.82 | 22.92 | 22.96 |
| 25#25 | | 22.86 | 22.90 | 22.92 | |
| 50#0 | 22.87 | 22.91 | 22.91 | | |

PAR, Band 2

| Test Modulation | | Channel Bandwidth | Low Channel PAR (dB) | Middle Channel PAR (dB) | High Channel PAR (dB) | Limit (dB) |
|-----------------|--------|-------------------|----------------------|-------------------------|-----------------------|------------|
| QPSK | 1 RB | 20 MHz | 3.11 | 4.20 | 2.88 | 13 |
| | 100 RB | | 6.41 | 6.47 | 6.51 | 13 |
| 16QAM | 1 RB | 20 MHz | 3.91 | 4.78 | 3.88 | 13 |
| | 100 RB | | 7.12 | 7.18 | 7.18 | 13 |

PAR, Band 12

| Test Modulation | | Channel Bandwidth | Low Channel PAR (dB) | Middle Channel PAR (dB) | High Channel PAR (dB) | Limit (dB) |
|-----------------|-------|-------------------|----------------------|-------------------------|-----------------------|------------|
| QPSK | 1 RB | 10 MHz | 4.87 | 5.38 | 5.22 | 13 |
| | 50 RB | | 5.74 | 5.96 | 5.64 | 13 |
| 16QAM | 1 RB | 10 MHz | 5.67 | 6.47 | 6.12 | 13 |
| | 50 RB | | 6.44 | 6.67 | 6.38 | 13 |

PAR, Band 13

| Test Modulation | | Channel Bandwidth | Low Channel PAR (dB) | Middle Channel PAR (dB) | High Channel PAR (dB) | Limit (dB) |
|-----------------|-------|-------------------|----------------------|-------------------------|-----------------------|------------|
| QPSK | 1 RB | 10 MHz | 5.06 | 5.16 | 5.16 | 13 |
| | 50 RB | | 5.54 | 5.58 | 5.51 | 13 |
| 16QAM | 1 RB | 10 MHz | 5.51 | 5.35 | 5.38 | 13 |
| | 50 RB | | 6.19 | 6.22 | 6.35 | 13 |

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

Part 22H

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dB μ V) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| GSM 850 Middle Channel | | | | | | | | |
| 836.600 | H | 96.37 | 21.4 | 0.0 | 1 | 20.4 | 38.45 | 18.1 |
| 836.600 | V | 102.29 | 30.5 | 0.0 | 1 | 29.5 | 38.45 | 9.0 |
| EDGE 850 Middle Channel | | | | | | | | |
| 836.600 | H | 92.48 | 17.6 | 0.0 | 1 | 16.6 | 38.45 | 21.9 |
| 836.600 | V | 99.31 | 27.5 | 0.0 | 1 | 26.5 | 38.45 | 12.0 |
| WCDMA Band V Middle Channel | | | | | | | | |
| 836.600 | H | 88.45 | 13.5 | 0.0 | 1 | 12.5 | 38.45 | 26.0 |
| 836.600 | V | 95.13 | 23.3 | 0.0 | 1 | 22.3 | 38.45 | 16.2 |

Part 24E

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dB μ V) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| PCS 1900 Middle Channel | | | | | | | | |
| 1880.000 | H | 92.65 | 20 | 11.7 | 2.7 | 29.0 | 33.00 | 4.0 |
| 1880.000 | V | 90.03 | 17.6 | 11.7 | 2.7 | 26.6 | 33.00 | 6.4 |
| EDGE 1900 Middle Channel | | | | | | | | |
| 1880.000 | H | 90.47 | 17.9 | 11.7 | 2.7 | 26.9 | 33.00 | 6.1 |
| 1880.000 | V | 88.79 | 16.3 | 11.7 | 2.7 | 25.3 | 33.00 | 7.7 |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

LTE Band 2

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK 1.4 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.96 | 14.4 | 11.7 | 2.7 | 23.4 | 33.00 | 9.6 |
| 1880.000 | V | 84.75 | 12.3 | 11.7 | 2.7 | 21.3 | 33.00 | 11.7 |
| 16QAM 1.4 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.67 | 14.1 | 11.7 | 2.7 | 23.1 | 33.00 | 9.9 |
| 1880.000 | V | 84.71 | 12.2 | 11.7 | 2.7 | 21.2 | 33.00 | 11.8 |
| QPSK 3 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.67 | 14.1 | 11.7 | 2.7 | 23.1 | 33.00 | 9.9 |
| 1880.000 | V | 84.34 | 11.9 | 11.7 | 2.7 | 20.9 | 33.00 | 12.1 |
| 16QAM 3 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.64 | 14 | 11.7 | 2.7 | 22.0 | 33.00 | 10.0 |
| 1880.000 | V | 84.13 | 11.7 | 11.7 | 2.7 | 20.7 | 33.00 | 12.3 |
| QPSK 5 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.52 | 13.9 | 11.7 | 2.7 | 22.9 | 33.00 | 10.1 |
| 1880.000 | V | 84.18 | 11.7 | 11.7 | 2.7 | 20.7 | 33.00 | 12.3 |
| 16QAM 5 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.62 | 14 | 11.7 | 2.7 | 23.0 | 33.00 | 10.0 |
| 1880.000 | V | 84.27 | 11.8 | 11.7 | 2.7 | 20.8 | 33.00 | 12.2 |
| QPSK 10 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.77 | 14.2 | 11.7 | 2.7 | 23.2 | 33.00 | 9.8 |
| 1880.000 | V | 84.64 | 12.2 | 11.7 | 2.7 | 21.2 | 33.00 | 11.8 |
| 16QAM 10 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.79 | 14.2 | 11.7 | 2.7 | 23.2 | 33.00 | 9.8 |
| 1880.000 | V | 84.59 | 12.1 | 11.7 | 2.7 | 21.1 | 33.00 | 11.9 |
| QPSK 15 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.52 | 13.9 | 11.7 | 2.7 | 22.9 | 33.00 | 10.1 |
| 1880.000 | V | 84.36 | 11.9 | 11.7 | 2.7 | 20.9 | 33.00 | 12.1 |
| 16QAM 15 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.56 | 14 | 11.7 | 2.7 | 23.0 | 33.00 | 10.0 |
| 1880.000 | V | 84.28 | 11.8 | 11.7 | 2.7 | 20.8 | 33.00 | 12.2 |
| QPSK 20 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.07 | 13.5 | 11.7 | 2.7 | 22.5 | 33.00 | 10.5 |
| 1880.000 | V | 83.95 | 11.5 | 11.7 | 2.7 | 20.5 | 33.00 | 12.5 |
| 16QAM 20 MHz Middle Channel | | | | | | | | |
| 1880.000 | H | 86.16 | 13.6 | 11.7 | 2.7 | 22.6 | 33.00 | 10.4 |
| 1880.000 | V | 83.87 | 11.4 | 11.7 | 2.7 | 20.4 | 33.00 | 12.6 |

LTE Band 12

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK 1.4 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 89.13 | 12.3 | 0.0 | 0.9 | 11.4 | 34.77 | 23.4 |
| 707.500 | V | 96.58 | 22.2 | 0.0 | 0.9 | 21.3 | 34.77 | 13.5 |
| 16QAM 1.4 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 88.53 | 11.7 | 0.0 | 0.9 | 10.8 | 34.77 | 24.0 |
| 707.500 | V | 95.51 | 21.1 | 0.0 | 0.9 | 20.2 | 34.77 | 14.6 |
| QPSK 3 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 88.37 | 11.5 | 0.0 | 0.9 | 10.6 | 34.77 | 24.2 |
| 707.500 | V | 95.82 | 21.4 | 0.0 | 0.9 | 20.5 | 34.77 | 14.3 |
| 16QAM 3 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 88.04 | 11.2 | 0.0 | 0.9 | 10.3 | 34.77 | 24.5 |
| 707.500 | V | 95.30 | 20.9 | 0.0 | 0.9 | 20.0 | 34.77 | 14.8 |
| QPSK 5 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 87.81 | 11 | 0.0 | 0.9 | 10.1 | 34.77 | 24.7 |
| 707.500 | V | 94.21 | 19.8 | 0.0 | 0.9 | 18.9 | 34.77 | 15.9 |
| 16QAM 5 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 87.32 | 10.5 | 0.0 | 0.9 | 9.6 | 34.77 | 25.2 |
| 707.500 | V | 93.71 | 19.3 | 0.0 | 0.9 | 18.4 | 34.77 | 16.4 |
| QPSK 10 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 87.31 | 10.5 | 0.0 | 0.9 | 9.6 | 34.77 | 25.2 |
| 707.500 | V | 93.72 | 19.3 | 0.0 | 0.9 | 18.4 | 34.77 | 16.4 |
| 16QAM 10 MHz Middle Channel | | | | | | | | |
| 707.500 | H | 86.94 | 10.1 | 0.0 | 0.9 | 9.2 | 34.77 | 25.6 |
| 707.500 | V | 94.11 | 19.7 | 0.0 | 0.9 | 18.8 | 34.77 | 16.0 |

LTE Band 13

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK 5 MHz Middle Channel | | | | | | | | |
| 782.000 | H | 92.43 | 16.9 | 0.0 | 0.9 | 16.0 | 34.77 | 18.8 |
| 782.000 | V | 97.13 | 24.5 | 0.0 | 0.9 | 23.6 | 34.77 | 11.2 |
| 16QAM 5 MHz Middle Channel | | | | | | | | |
| 782.000 | H | 91.63 | 16.1 | 0.0 | 0.9 | 15.2 | 34.77 | 19.6 |
| 782.000 | V | 96.62 | 24 | 0.0 | 0.9 | 23.1 | 34.77 | 11.7 |
| QPSK 10 MHz Middle Channel | | | | | | | | |
| 782.000 | H | 91.23 | 15.7 | 0.0 | 0.9 | 14.8 | 34.77 | 20.0 |
| 782.000 | V | 96.70 | 24.1 | 0.0 | 0.9 | 23.2 | 34.77 | 11.6 |
| 16QAM 10 MHz Middle Channel | | | | | | | | |
| 782.000 | H | 90.85 | 15.3 | 0.0 | 0.9 | 14.4 | 34.77 | 20.4 |
| 782.000 | V | 96.54 | 23.9 | 0.0 | 0.9 | 23.0 | 34.77 | 11.8 |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

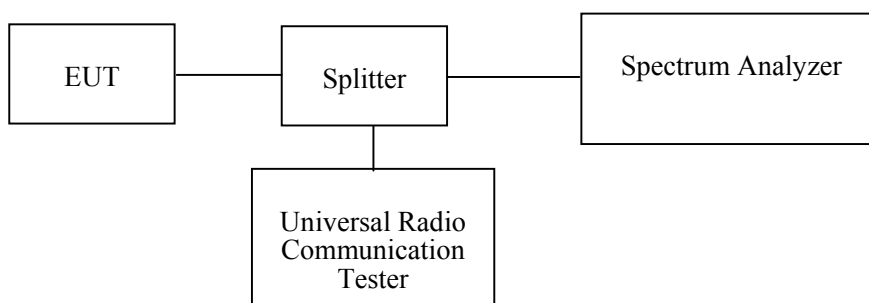

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2018-01-04 | 2019-01-04 |
| R&S | Universal Radio Communication Tester | CMU200 | 109 038 | 2017-07-18 | 2018-07-18 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 | 2017-08-31 | 2018-08-31 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/02 | Each Time | / |
| Pasternack | RF Coaxial Cable | 0.5m | C-5 | Each Time | / |
| E-Microwave | Two-way Splitter | ODP-1-6-2S | OE0120142 | Each Time | / |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------------|
| Temperature: | 25.8~25.9°C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.8~101.1 kPa |

The testing was performed by Nami Quan & Harry Yang on 2018-03-29 & 2018-03-30.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

| Band | Test Channel | Mode | 99% Occupied Bandwidth (MHz) | 26 dB Occupied Bandwidth (MHz) |
|--------------|--------------|--------|------------------------------|--------------------------------|
| Cellular | M | GSM | 0.247 | 0.319 |
| | | EDGE | 0.252 | 0.319 |
| PCS | | PCS | 0.244 | 0.317 |
| | | EDGE | 0.256 | 0.317 |
| WCDMA Band V | | Rel 99 | 4.220 | 4.952 |
| | | HSDPA | 4.215 | 4.872 |
| | HSUPA | 4.231 | 4.904 | |


| Band | Test Modulation | Test Bandwidth (MHz) | Test Channel | 99% Occupied Bandwidth (MHz) | 26 dB Occupied Bandwidth (MHz) |
|-------------|-----------------|----------------------|--------------|------------------------------|--------------------------------|
| LTE Band 2 | QPSK | 1.4 | M | 1.101 | 1.303 |
| | | 3 | | 2.740 | 3.048 |
| | | 5 | | 4.551 | 5.144 |
| | | 10 | | 9.135 | 10.385 |
| | | 15 | | 13.558 | 15.112 |
| | | 20 | | 18.013 | 19.567 |
| | 16QAM | 1.4 | M | 1.111 | 1.308 |
| | | 3 | | 2.750 | 3.067 |
| | | 5 | | 4.519 | 5.080 |
| | | 10 | | 9.103 | 10.288 |
| | | 15 | | 13.510 | 15.016 |
| | | 20 | | 18.013 | 19.696 |
| LTE Band 12 | QPSK | 1.4 | M | 1.101 | 1.288 |
| | | 3 | | 2.750 | 3.072 |
| | | 5 | | 4.551 | 5.123 |
| | | 10 | | 9.135 | 10.396 |
| | 16QAM | 1.4 | M | 1.111 | 1.284 |
| | | 3 | | 2.750 | 3.063 |
| | | 5 | | 4.535 | 5.059 |
| | | 10 | | 9.135 | 10.332 |
| LTE Band 13 | QPSK | 5 | M | 4.535 | 5.096 |
| | | 10 | | 9.167 | 10.321 |
| | 16QAM | 5 | M | 4.535 | 5.112 |
| | | 10 | | 9.103 | 10.288 |

GSM 850 Cellular Band

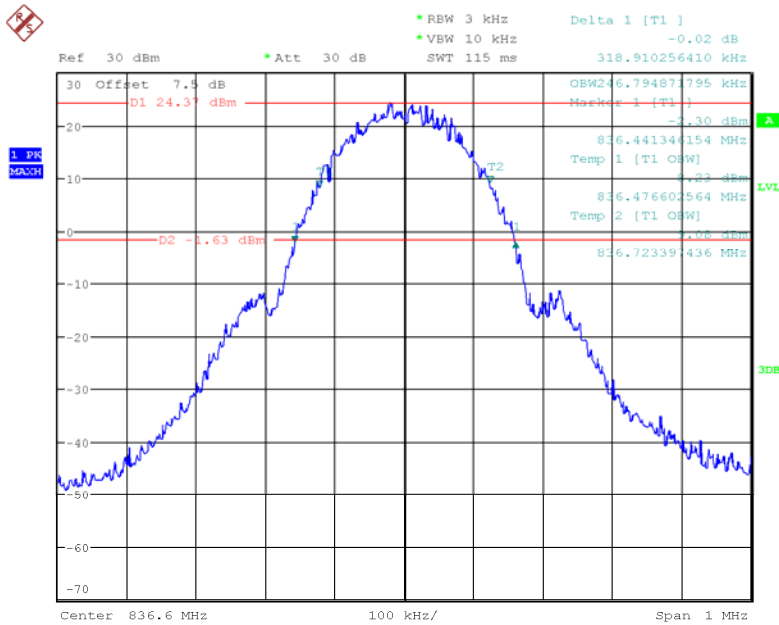


Date: 29.MAR.2018 15:01:02

GSM PCS1900 Cellular Band

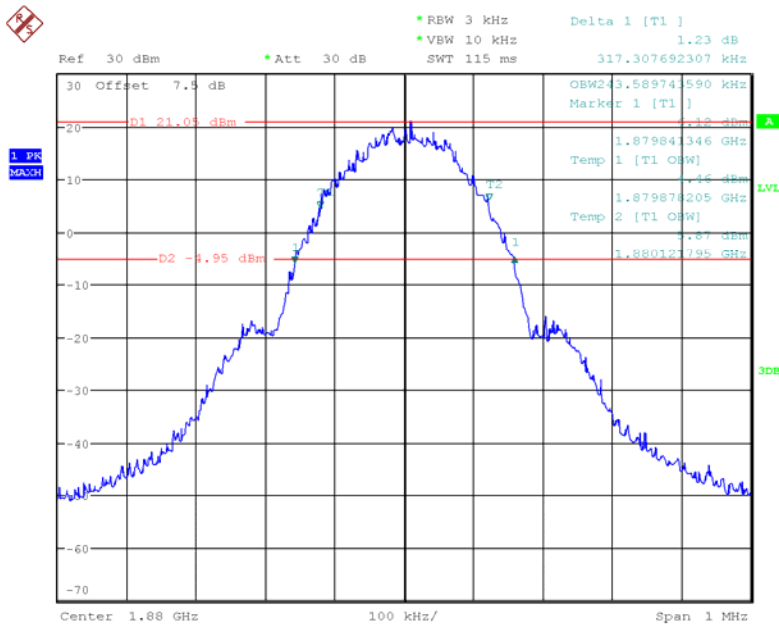


Date: 29.MAR.2018 15:30:23

EDGE 850 Cellular Band

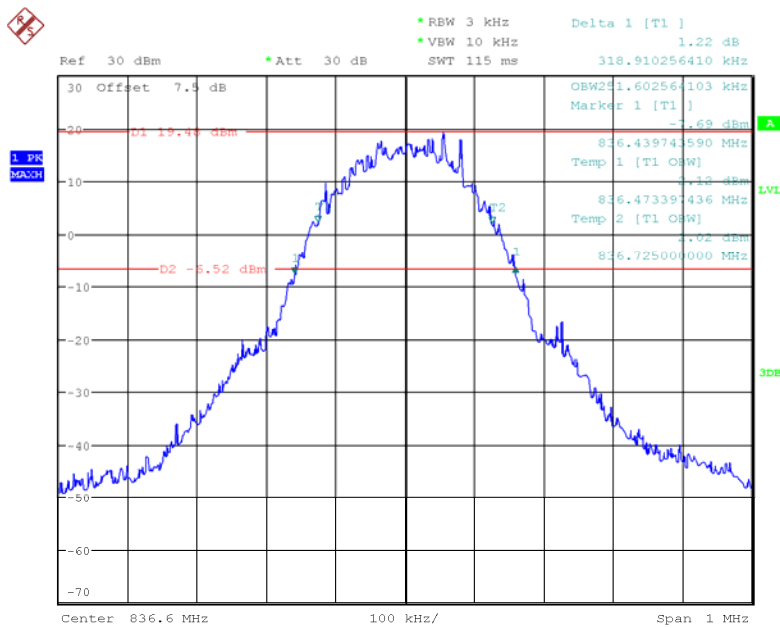


Date: 29.MAR.2018 15:13:43

EDGE PCS1900 Cellular Band

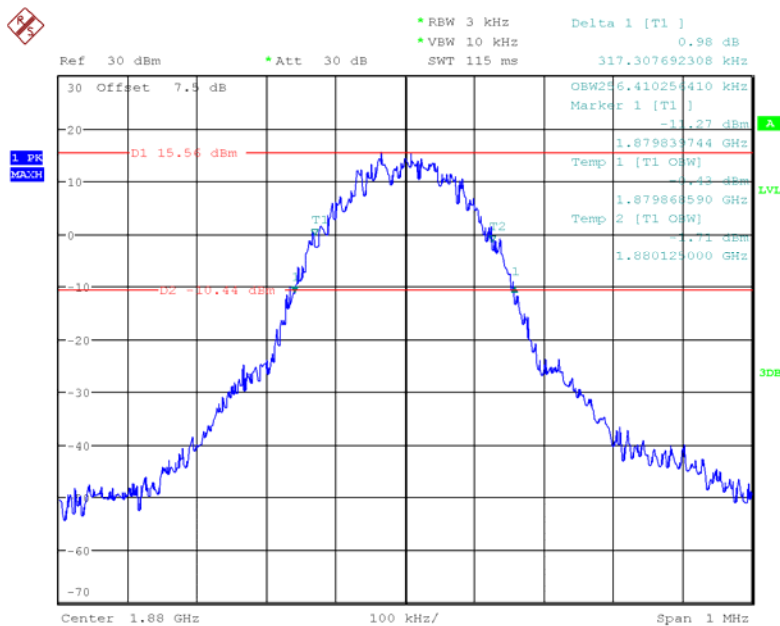


Date: 29.MAR.2018 15:24:48

WCDMA Band V, Rel 99

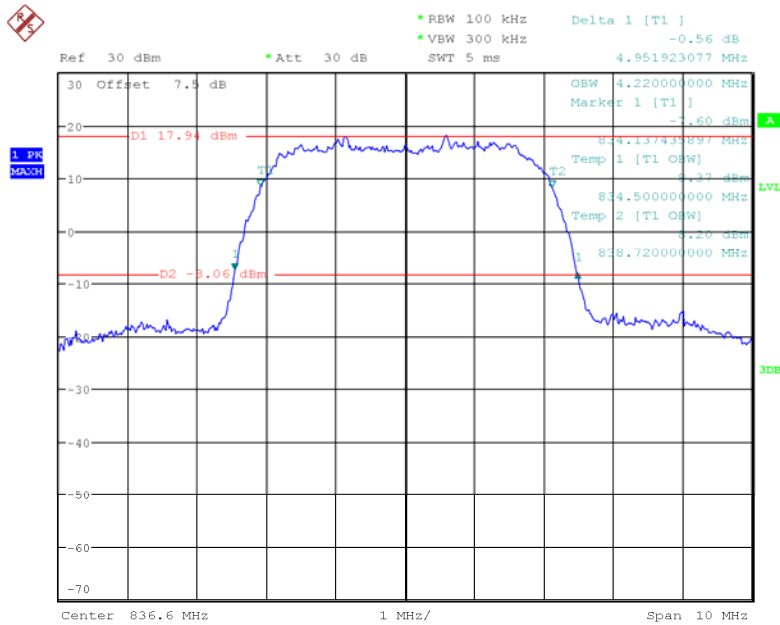


Date: 29.MAR.2018 14:15:31

WCDMA Band V, HSUPA

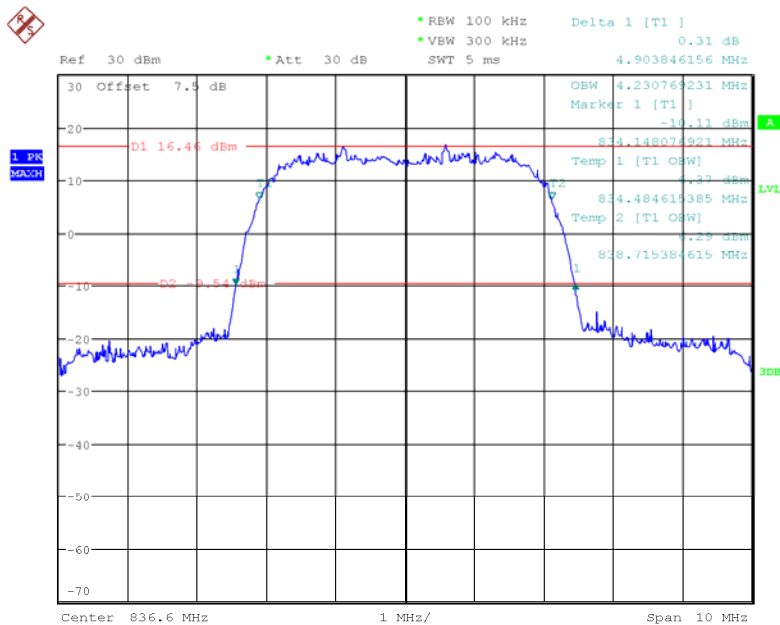

Date: 29.MAR.2018 14:35:28


WCDMA Band V, HSDPA

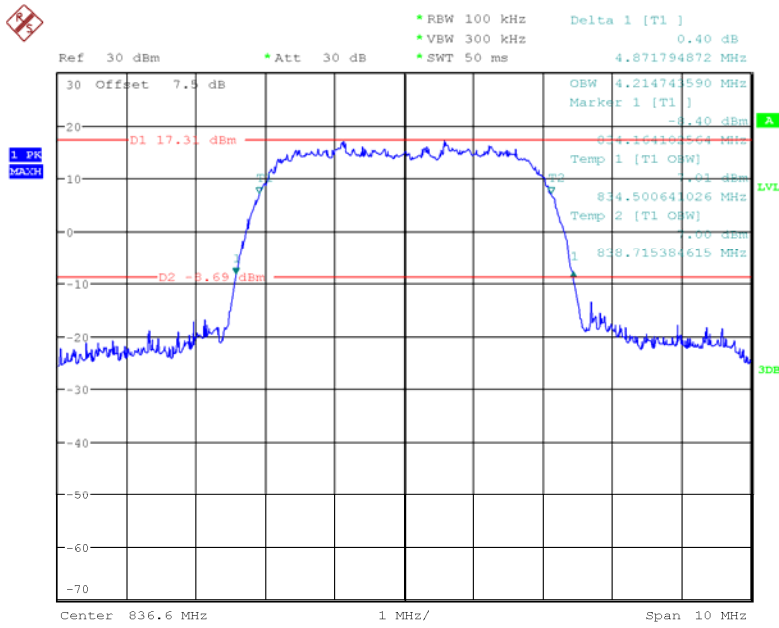

Date: 29.MAR.2018 14:56:35


LTE Band 2

QPSK_1.4 MHz

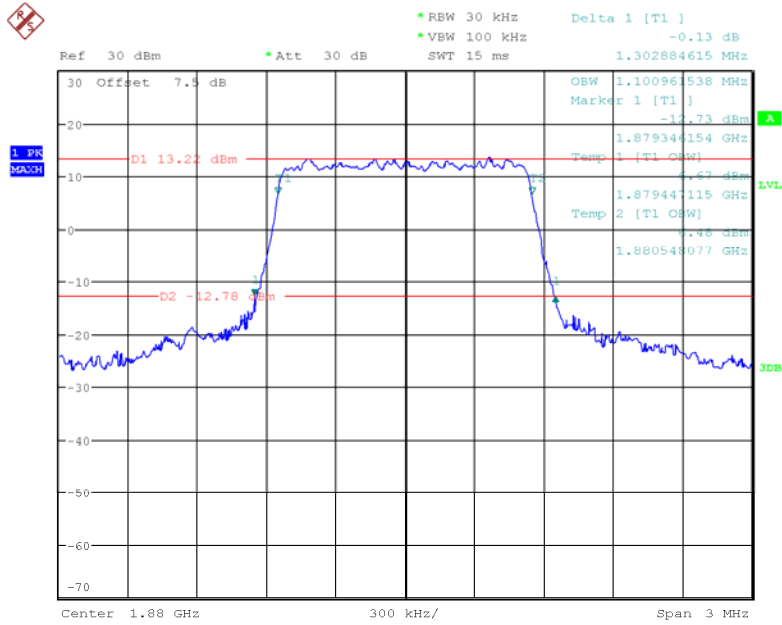


Date: 30.MAR.2018 13:08:49

QPSK_3 MHz

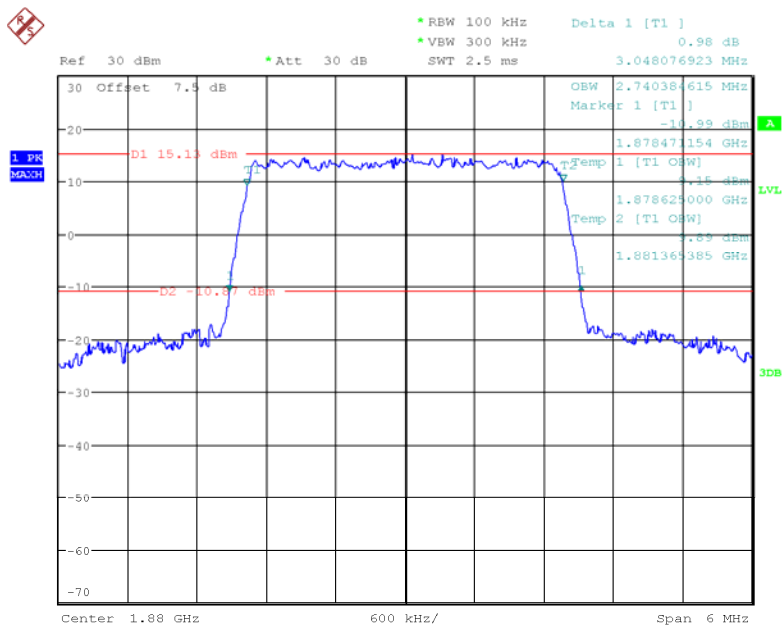


Date: 30.MAR.2018 13:11:46

QPSK_5 MHz

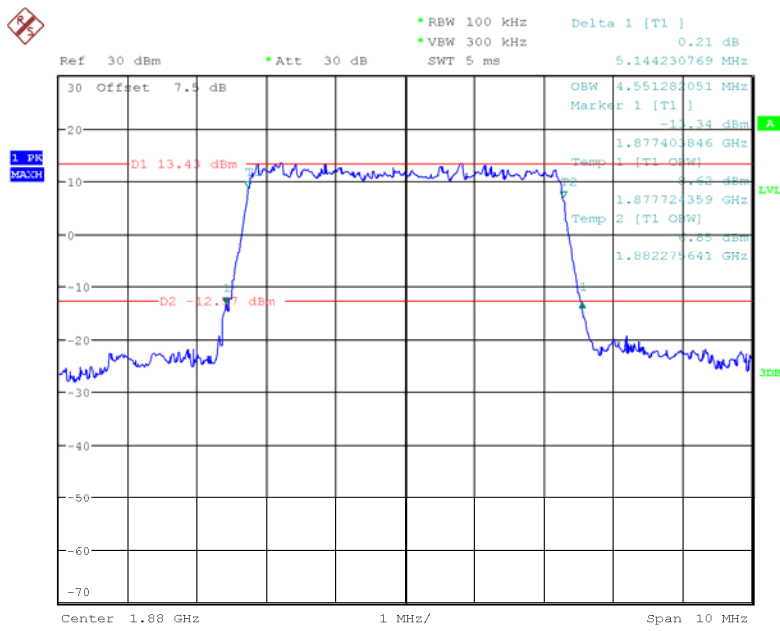


Date: 30.MAR.2018 13:13:34

QPSK_10 MHz

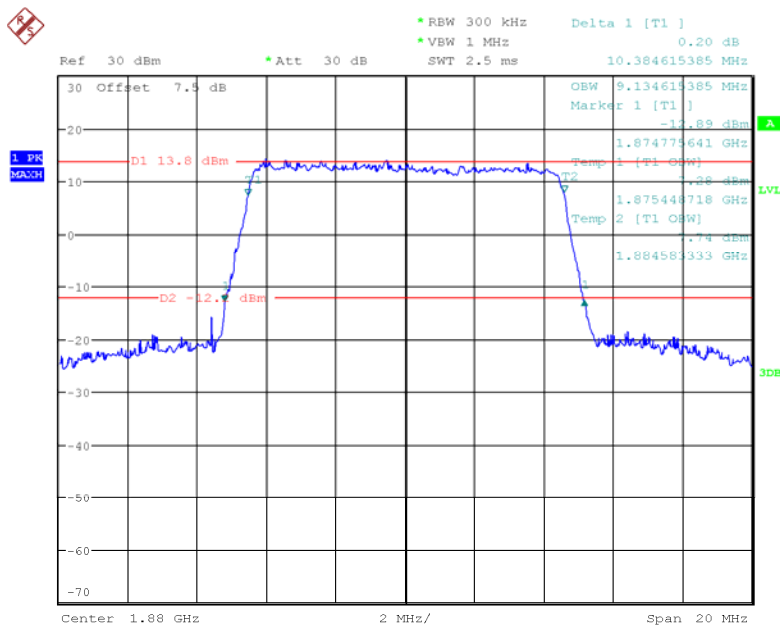


Date: 30.MAR.2018 13:17:02

QPSK_15 MHz

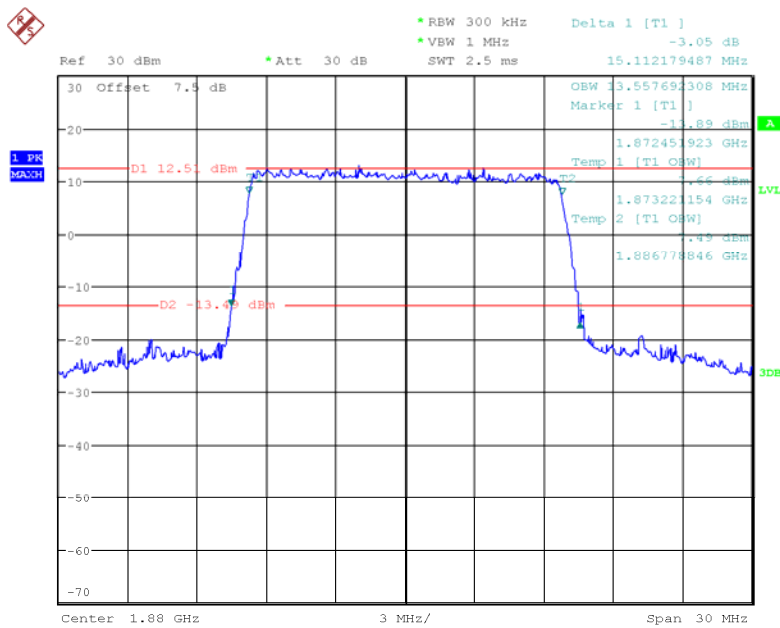


Date: 30.MAR.2018 13:18:38

QPSK_20 MHz

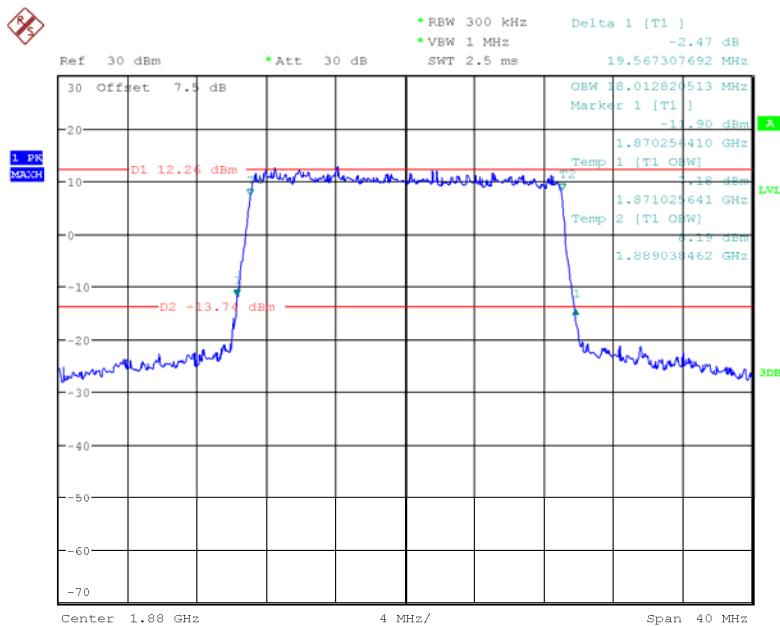


Date: 30.MAR.2018 13:20:17

16QAM_1.4 MHz

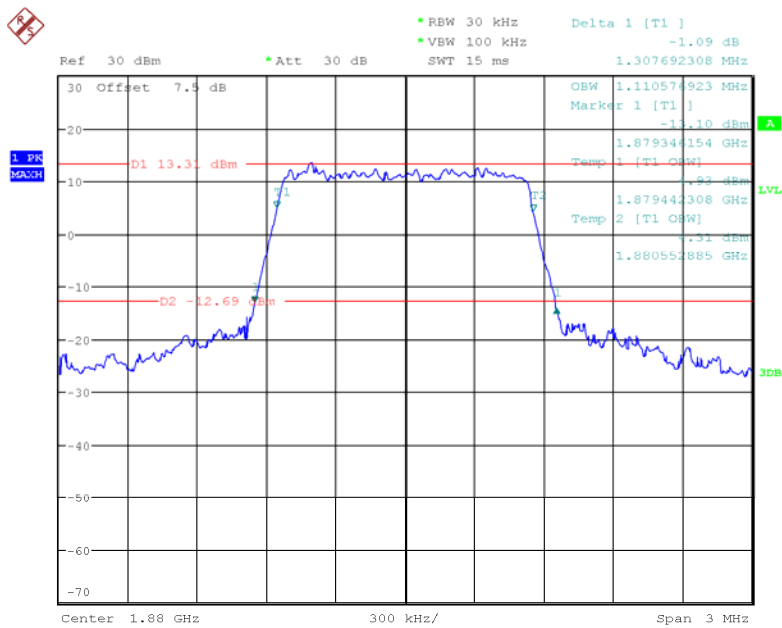


Date: 30.MAR.2018 13:09:49

16QAM_3 MHz

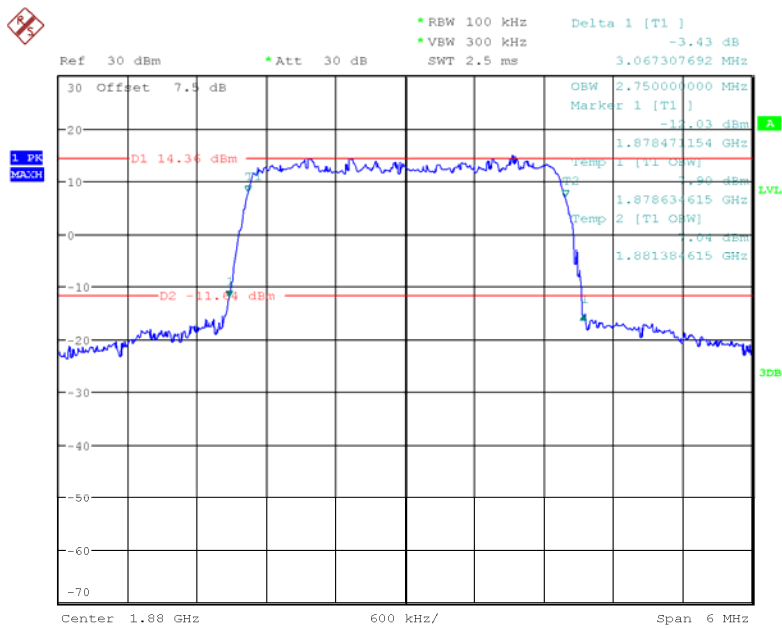


Date: 30.MAR.2018 13:12:37

16QAM_5 MHz

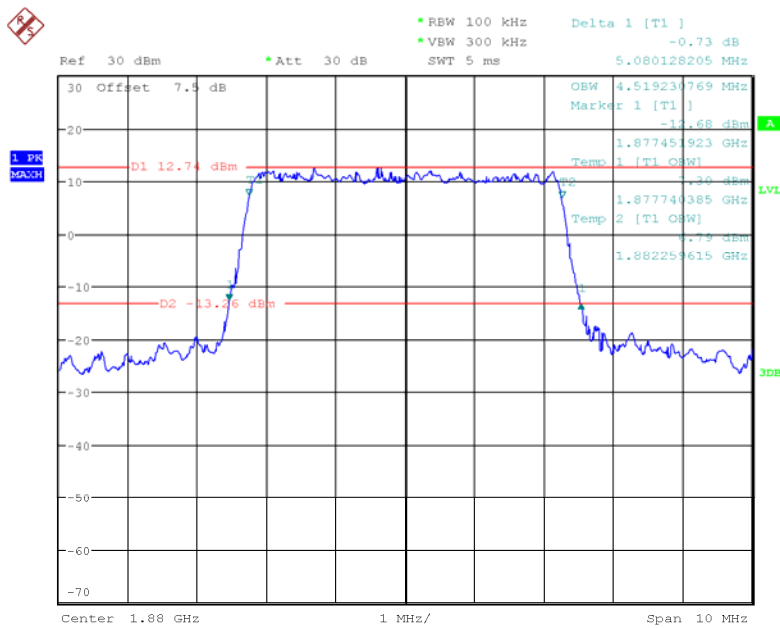


Date: 30.MAR.2018 13:14:29

16QAM_10 MHz

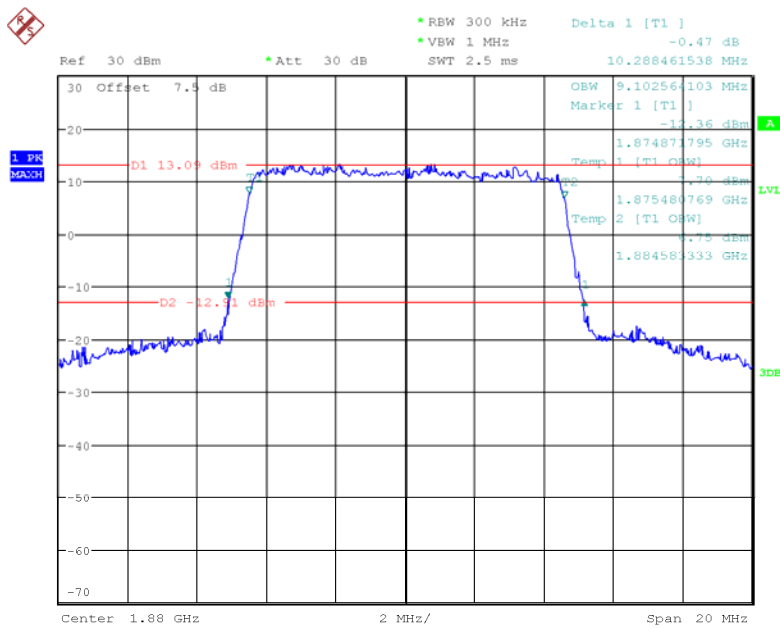


Date: 30.MAR.2018 13:17:38

16QAM_15 MHz

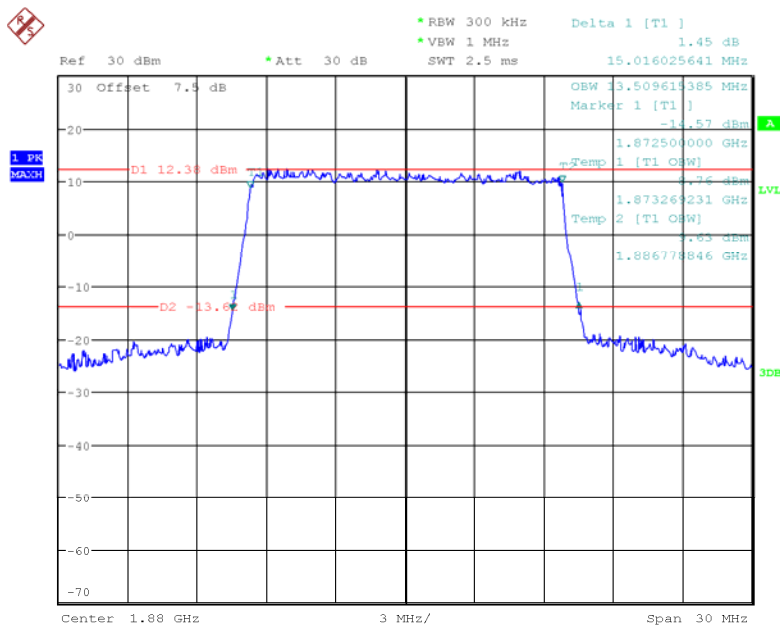


Date: 30.MAR.2018 13:19:23

16QAM_20 MHz

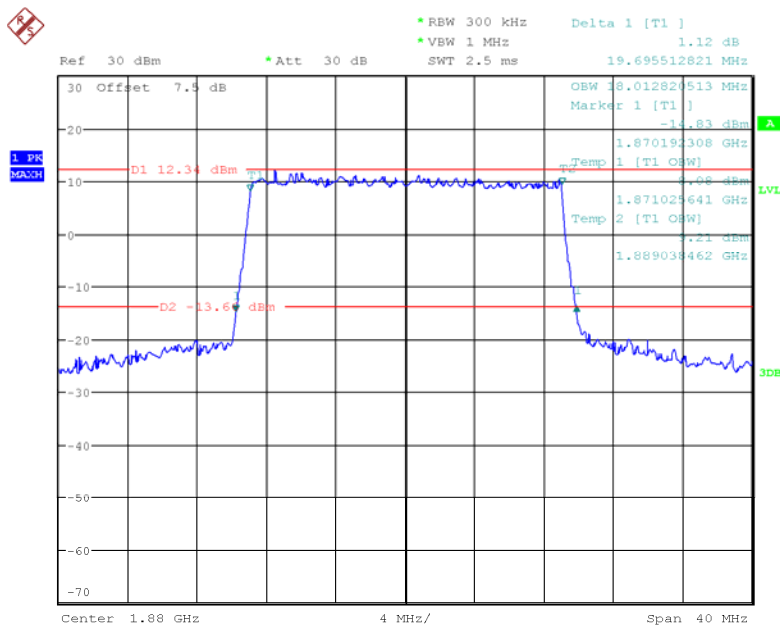


Date: 30.MAR.2018 13:21:27

QPSK_5 MHz

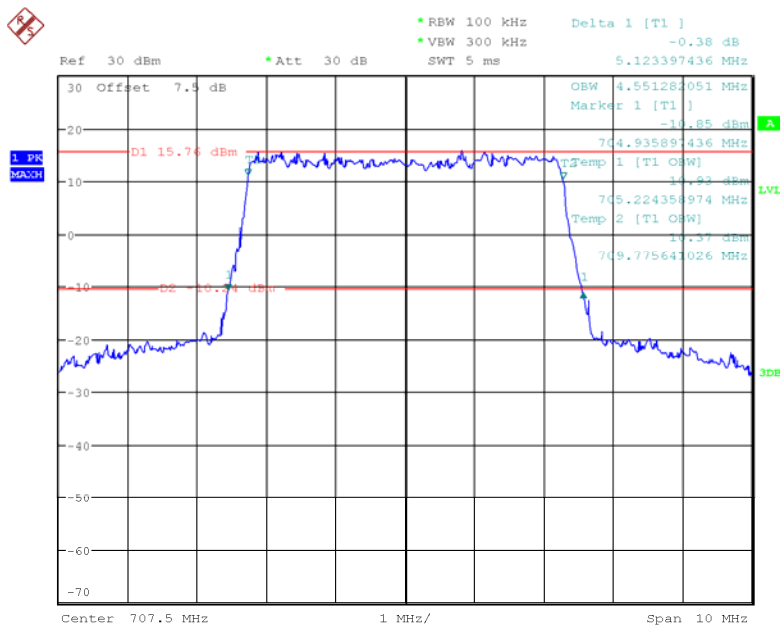


Date: 30.MAR.2018 13:29:45

QPSK_10 MHz

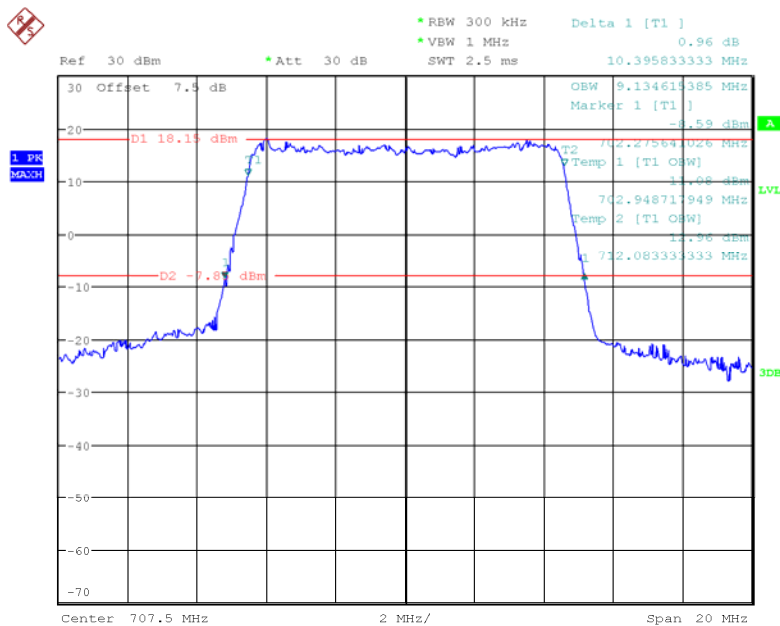


Date: 30.MAR.2018 13:34:01

16QAM_5 MHz

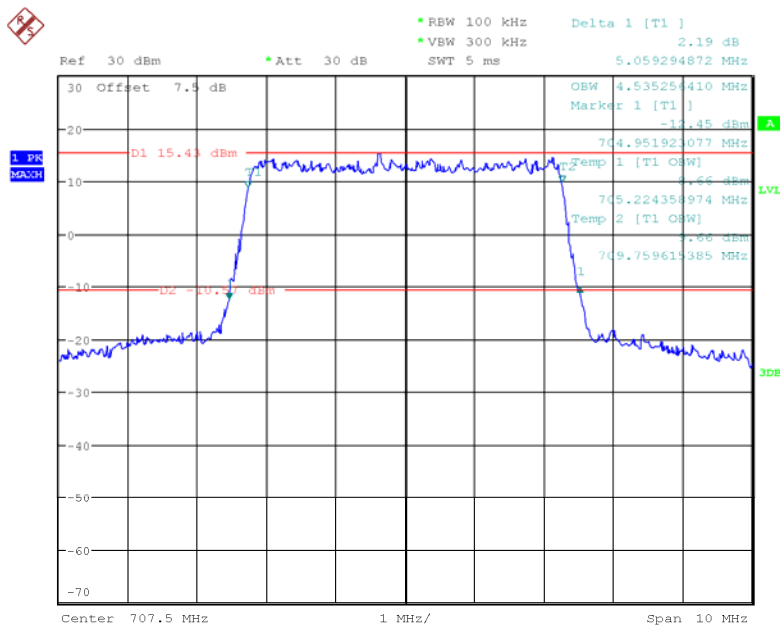

Date: 30.MAR.2018 13:30:35


16QAM_10 MHz

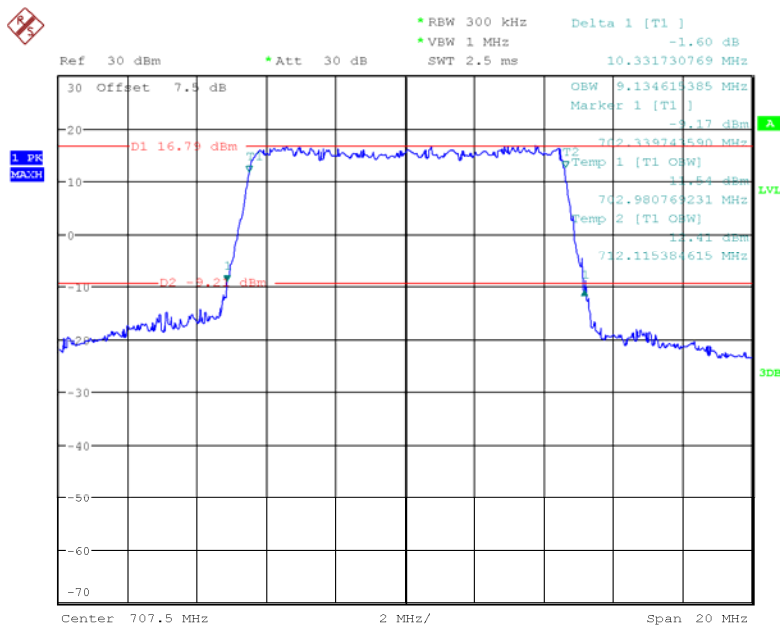

Date: 30.MAR.2018 13:34:42


LTE Band 13:

QPSK_5 MHz

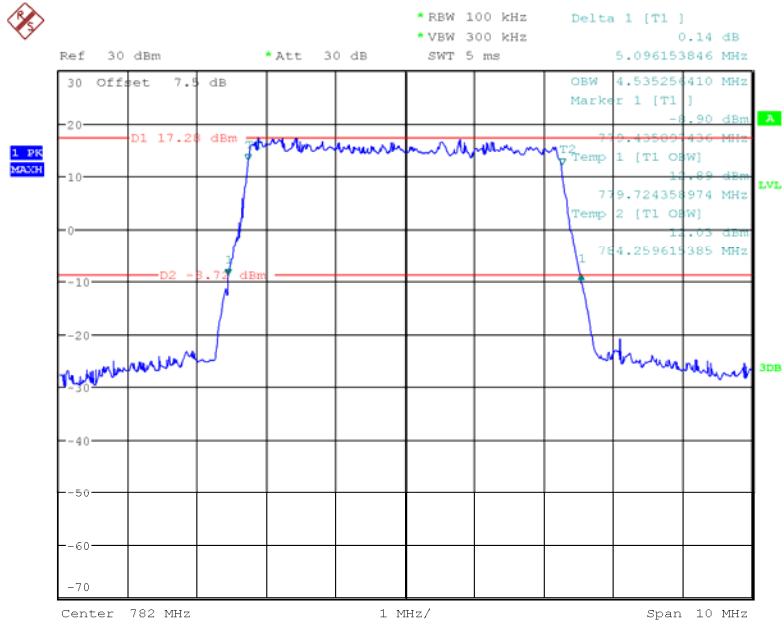

Date: 30.MAR.2018 13:37:54

QPSK_10 MHz

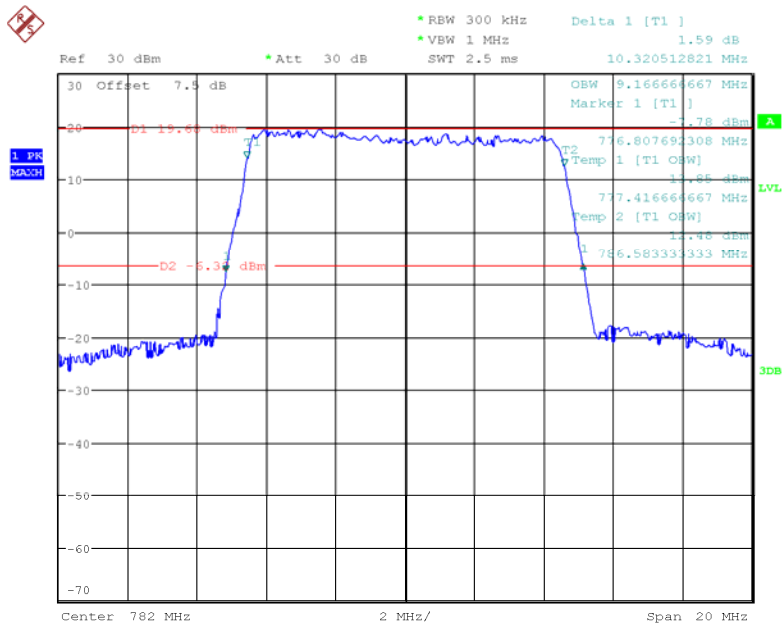

Date: 30.MAR.2018 13:36:15

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

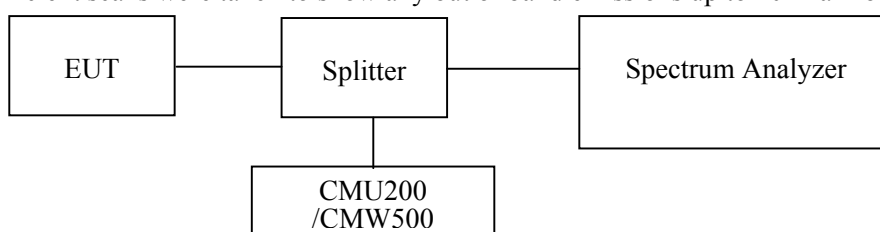

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| R&S | Universal Radio Communication Tester | CMU200 | 109 038 | 2017-07-18 | 2018-07-18 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 | 2017-08-31 | 2018-08-31 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/02 | Each Time | / |
| Pasternack | RF Coaxial Cable | 0.5m | C-5 | Each Time | / |
| E-Microwave | Two-way Splitter | ODP-1-6-2S | OE0120142 | Each Time | / |
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2018-01-04 | 2019-01-04 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

| | |
|--------------------|-----------------|
| Temperature: | 25.8~25.9°C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.8~101.1 kPa |


The testing was performed by Nami Quan & Harry Yang from 2018-03-29 to 2018-03-30.

Please refer to the following plots.

GSM850_Middle Channel

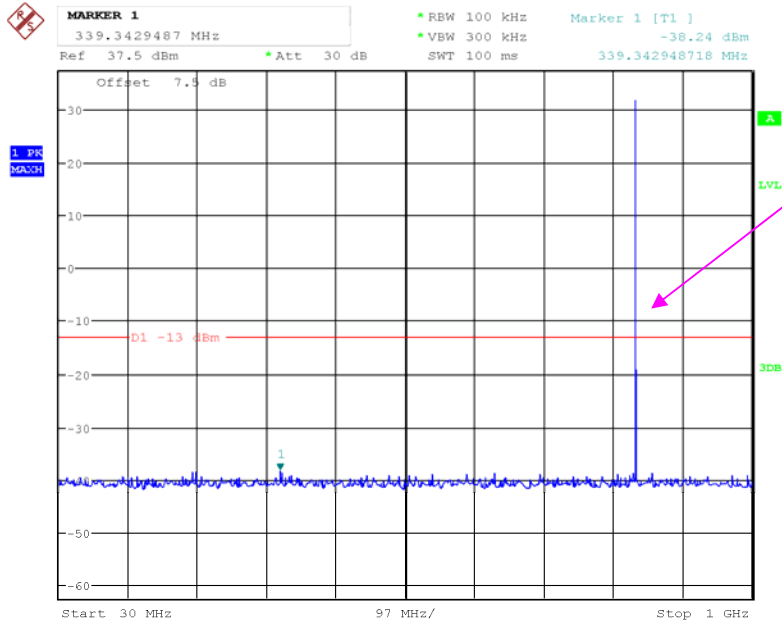


Date: 29.MAR.2018 15:03:01

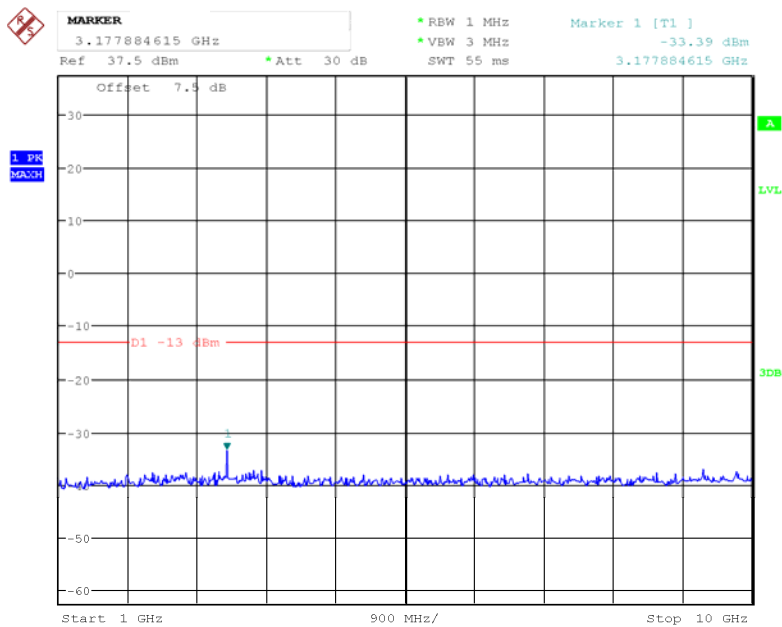


Date: 29.MAR.2018 15:04:01

PCS 1900_ Middle Channel

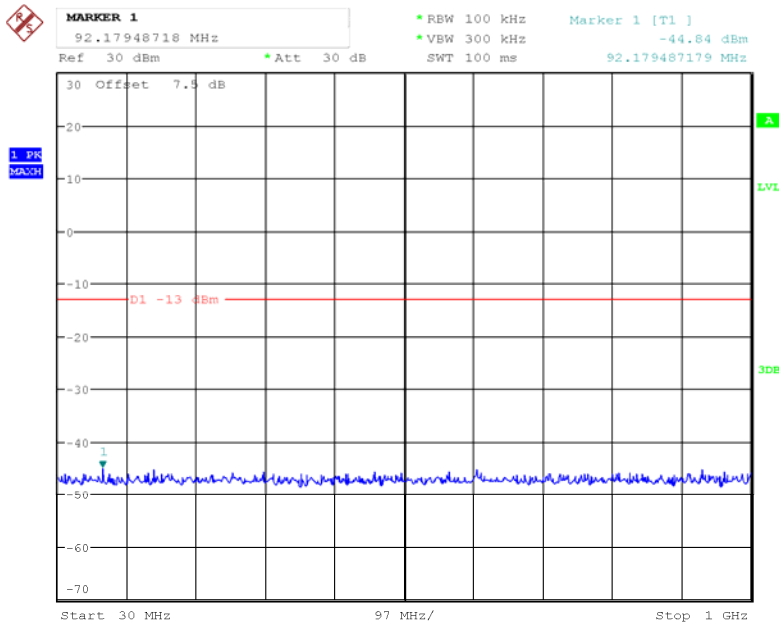


Date: 29.MAR.2018 15:38:35

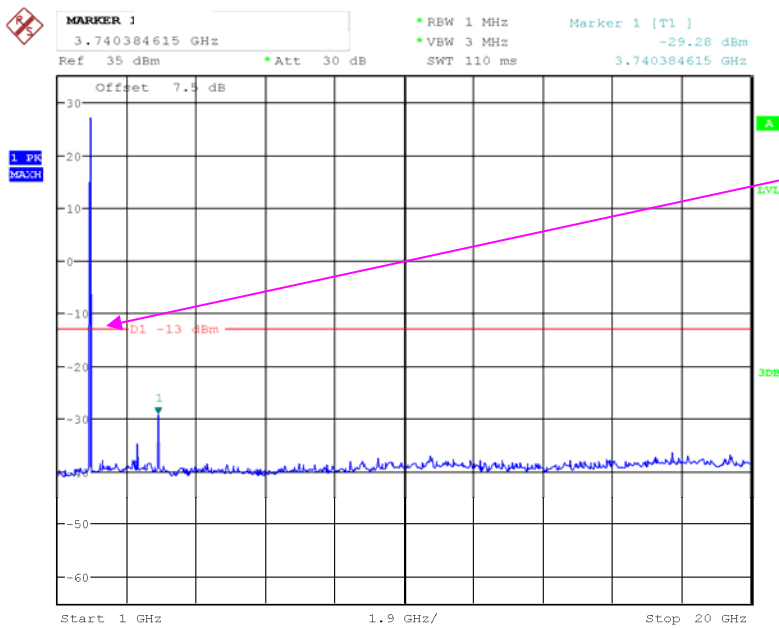


Date: 29.MAR.2018 15:39:21

WCDMA Band V, Rel99

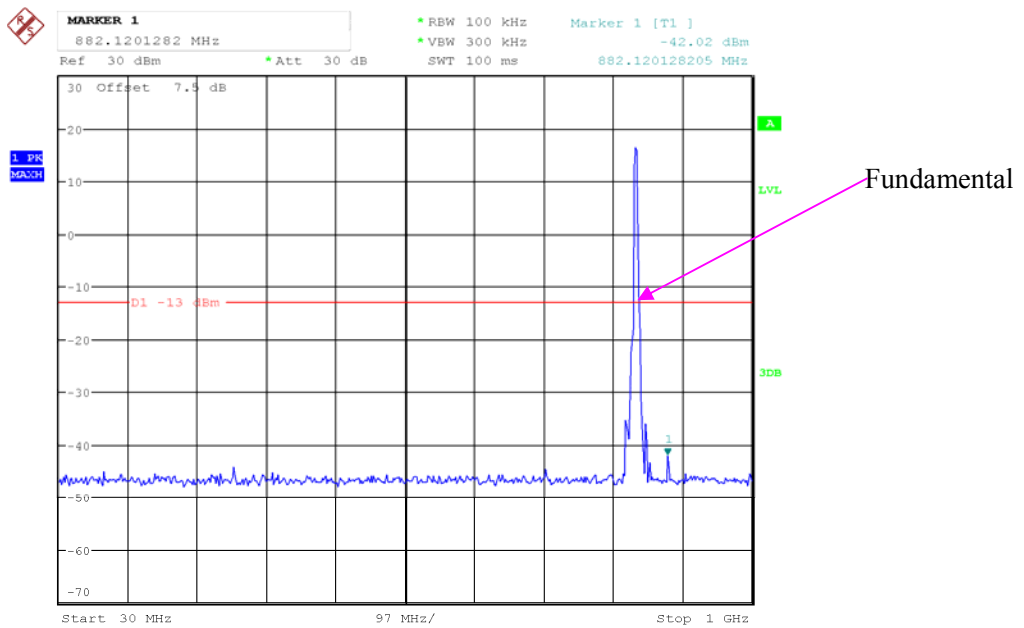


Date: 29.MAR.2018 14:16:24

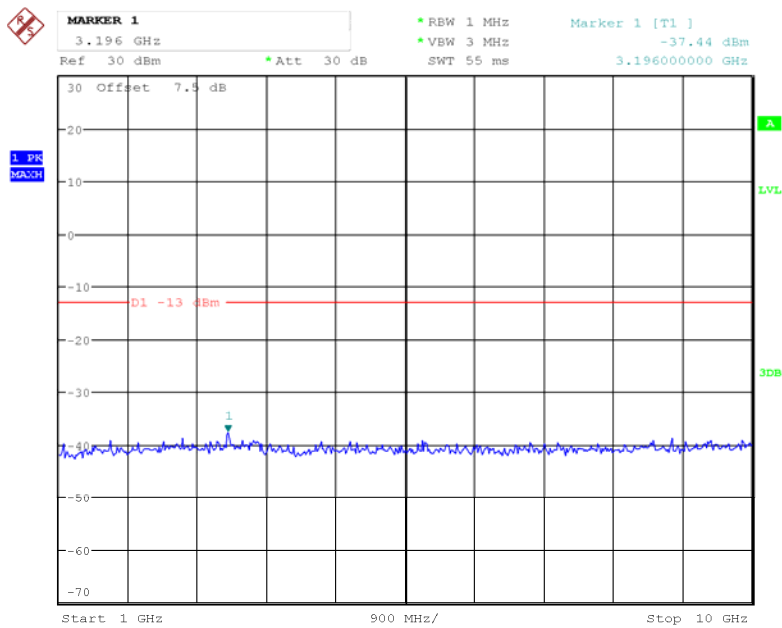

Date: 29.MAR.2018 14:16:41


LTE Band 2 (Middle Channel)

QPSK_1.4 MHz

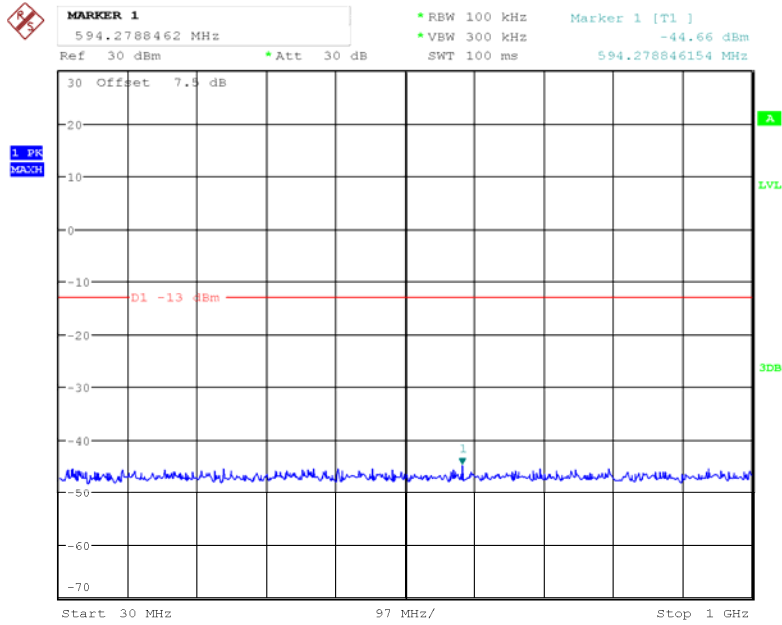


Date: 30.MAR.2018 13:55:07

Fundamental

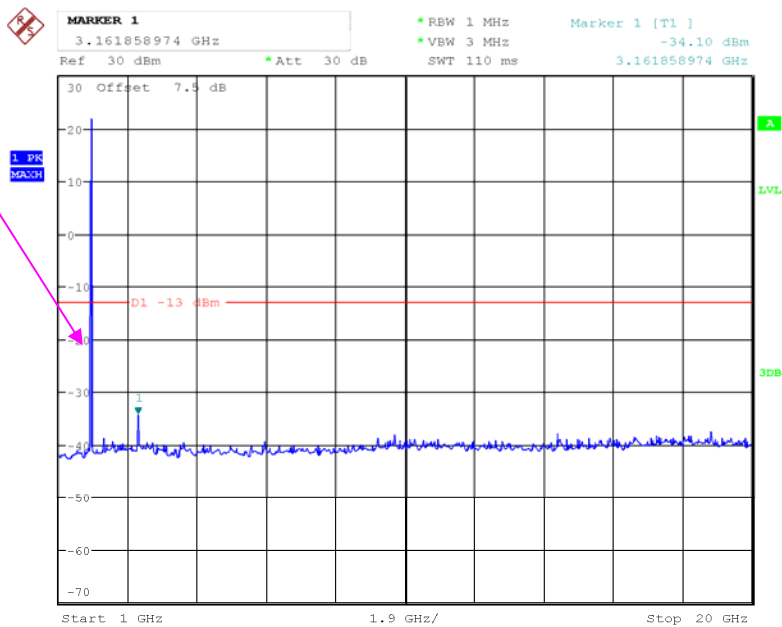


Date: 30.MAR.2018 13:55:21

QPSK_3 MHz

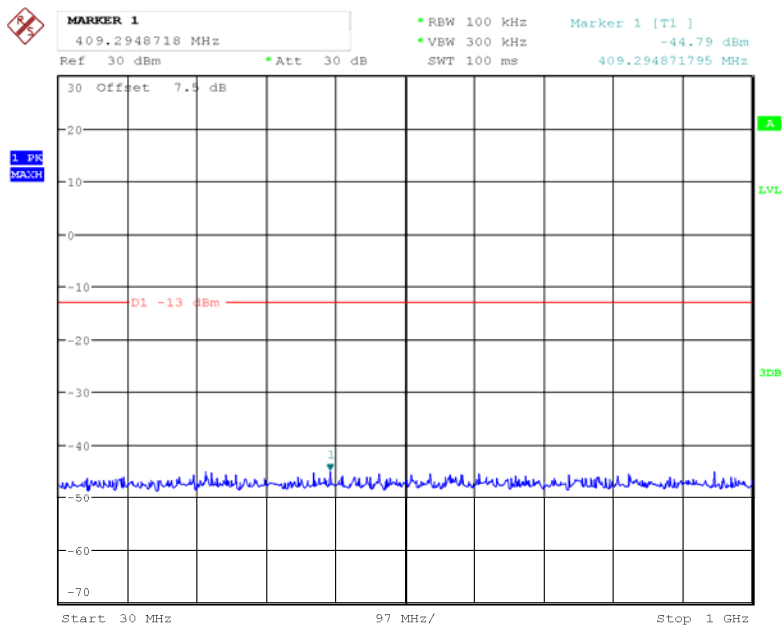


Date: 30.MAR.2018 13:55:59

Fundamental

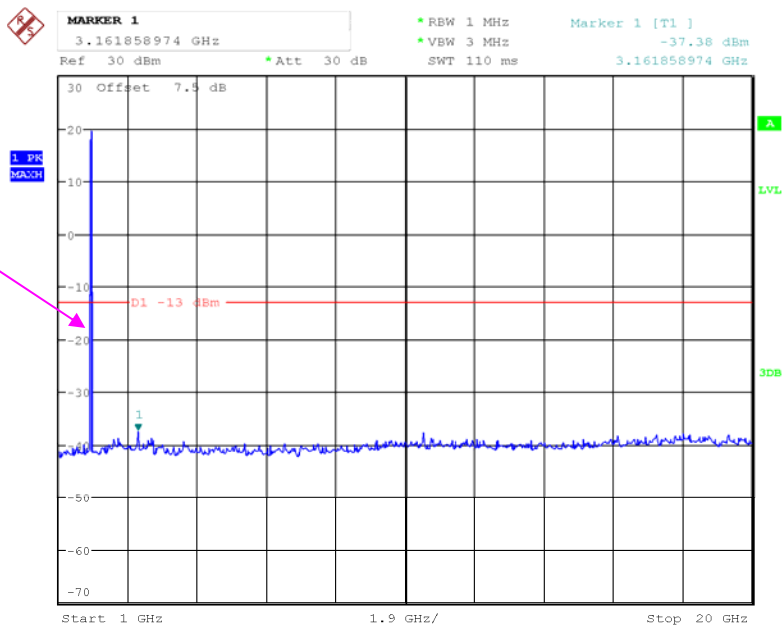


Date: 30.MAR.2018 13:55:41

QPSK_5 MHz

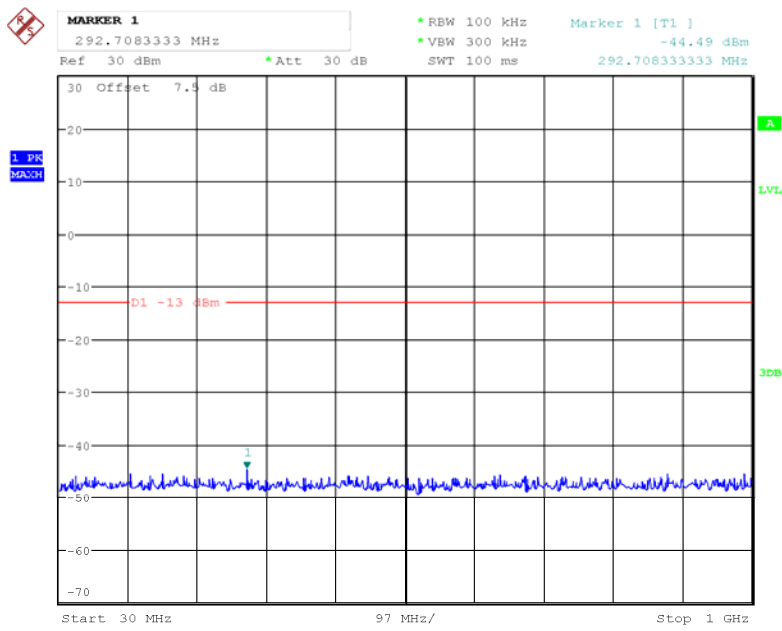


Date: 30.MAR.2018 13:56:33

Fundamental

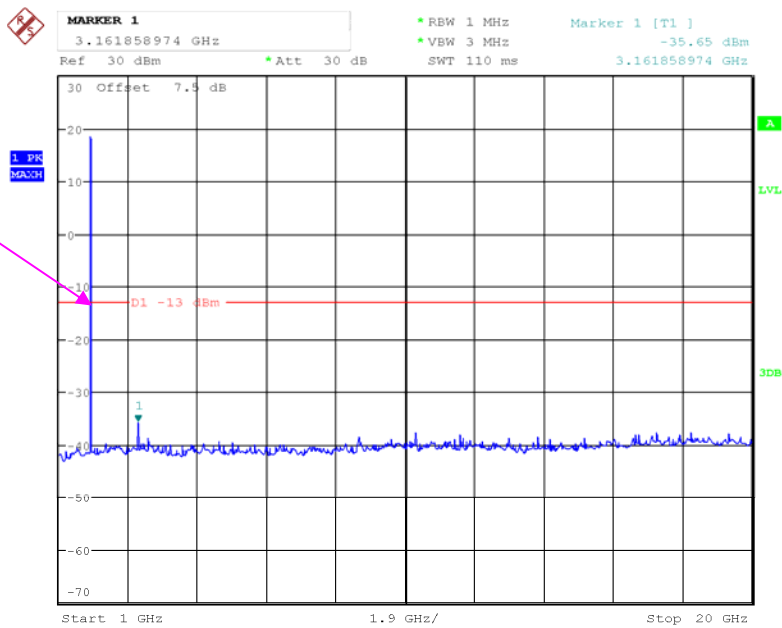


Date: 30.MAR.2018 13:56:47

QPSK_10 MHz

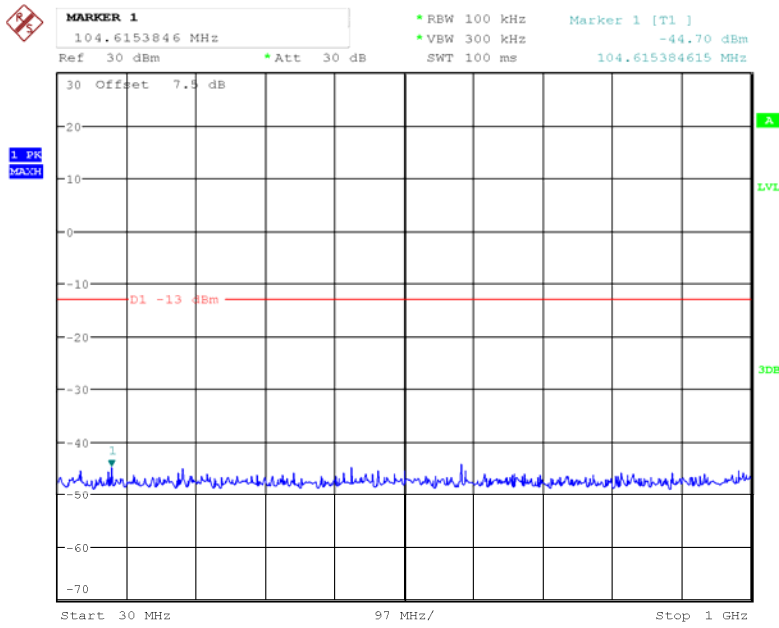


Date: 30.MAR.2018 13:57:25

Fundamental

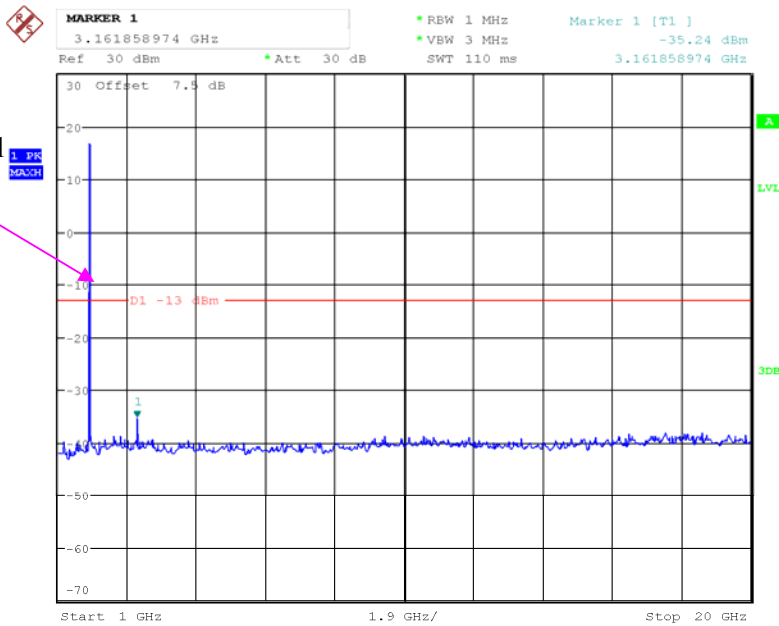


Date: 30.MAR.2018 13:57:11

QPSK_15 MHz

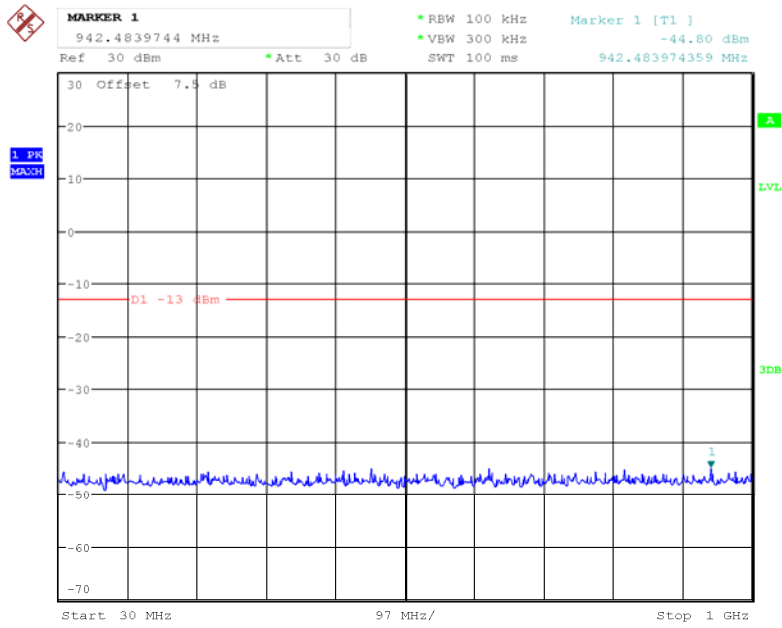


Date: 30.MAR.2018 13:57:50

Fundamental

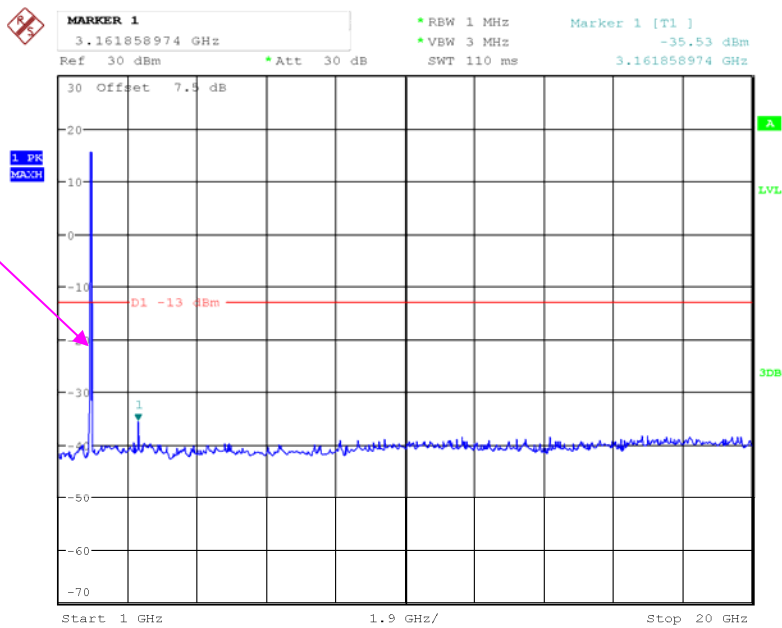


Date: 30.MAR.2018 13:58:02

QPSK_20 MHz

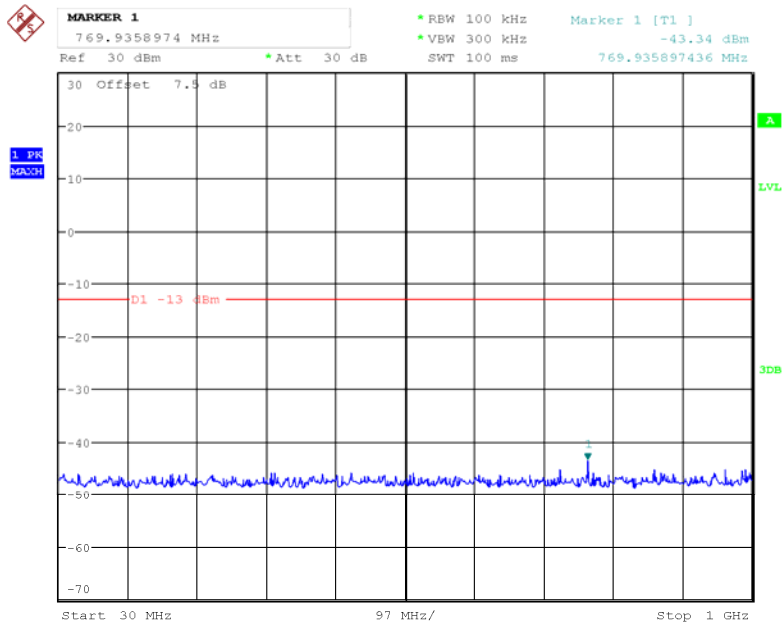

Date: 30.MAR.2018 13:58:45

Fundamental

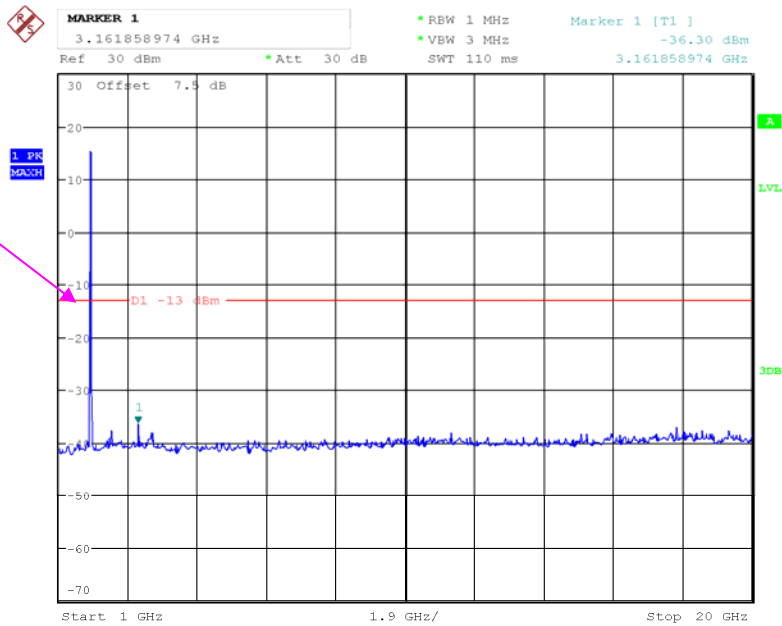


Date: 30.MAR.2018 13:58:30


LTE Band 12 (Middle Channel)

QPSK_1.4 MHz

Fundamental

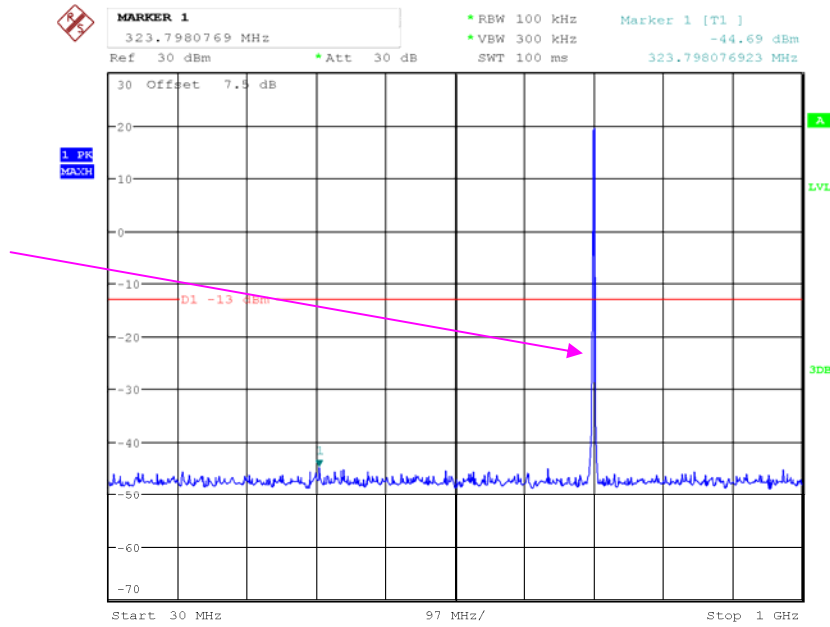


Date: 30.MAR.2018 13:51:28

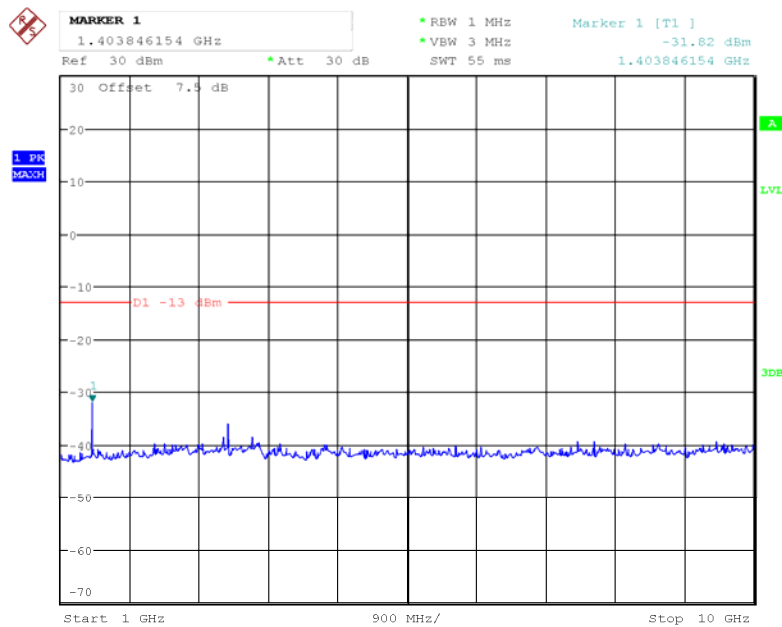


Date: 30.MAR.2018 13:51:42

QPSK_3 MHz

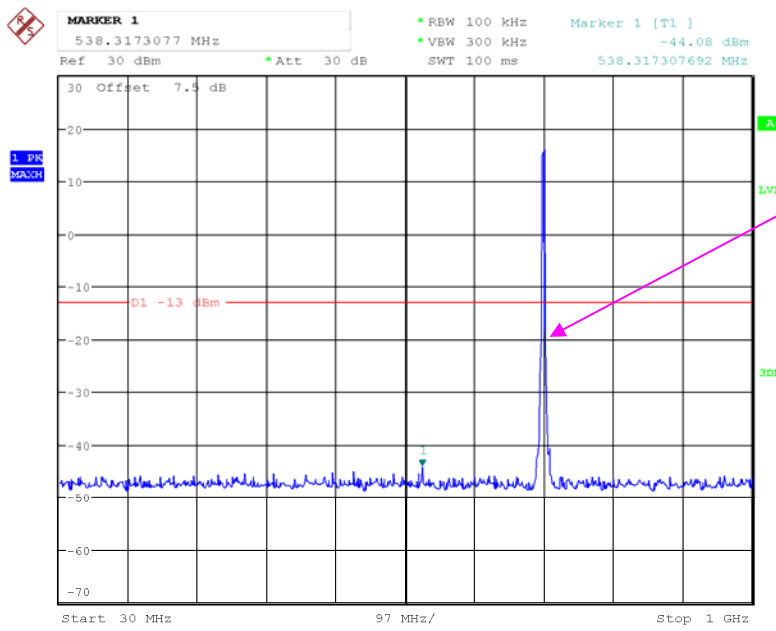


Date: 30.MAR.2018 13:52:22

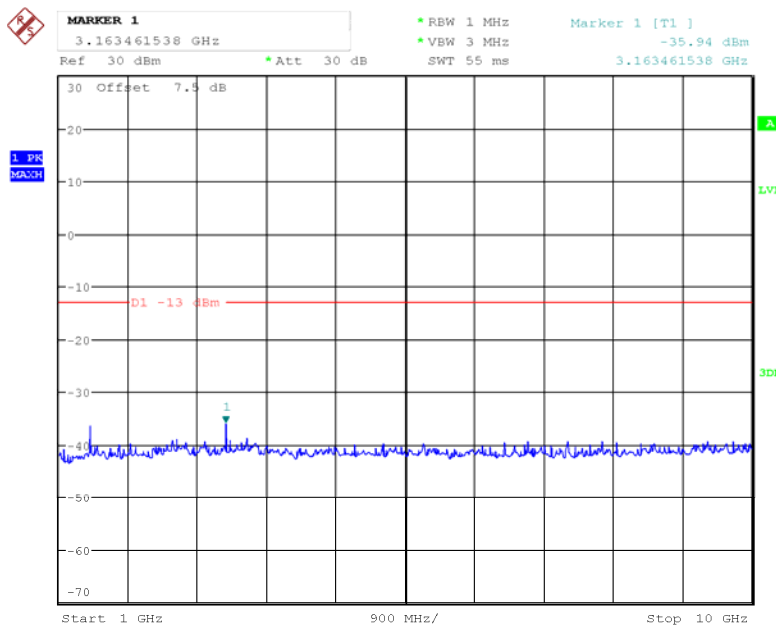


Date: 30.MAR.2018 13:52:04

QPSK_5 MHz

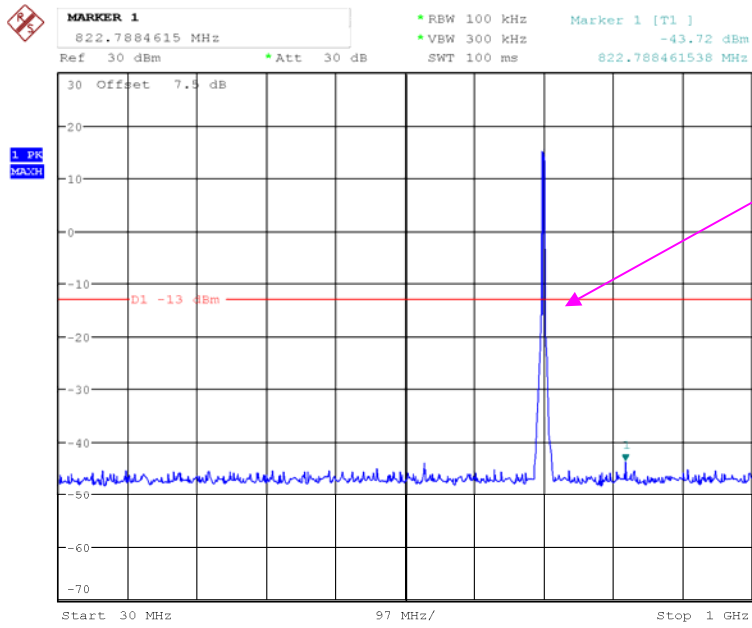


Date: 30.MAR.2018 13:52:50

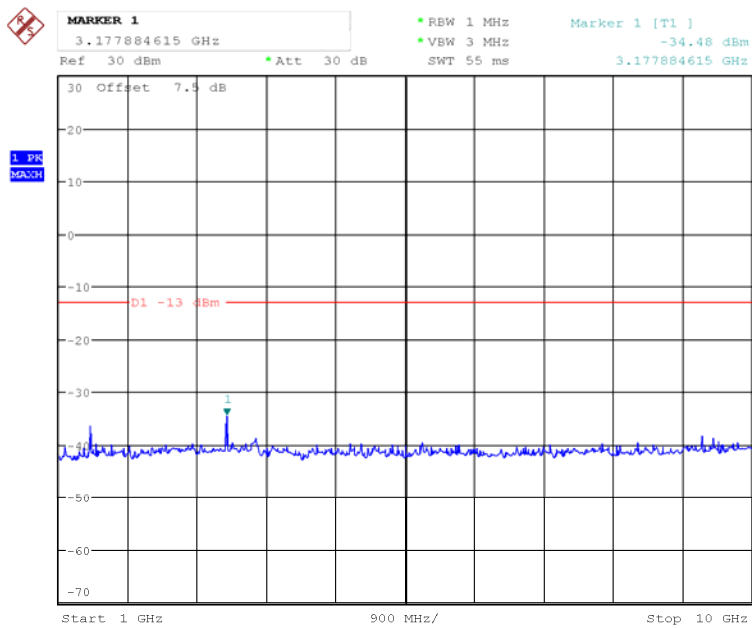


Date: 30.MAR.2018 13:53:16

QPSK_10 MHz

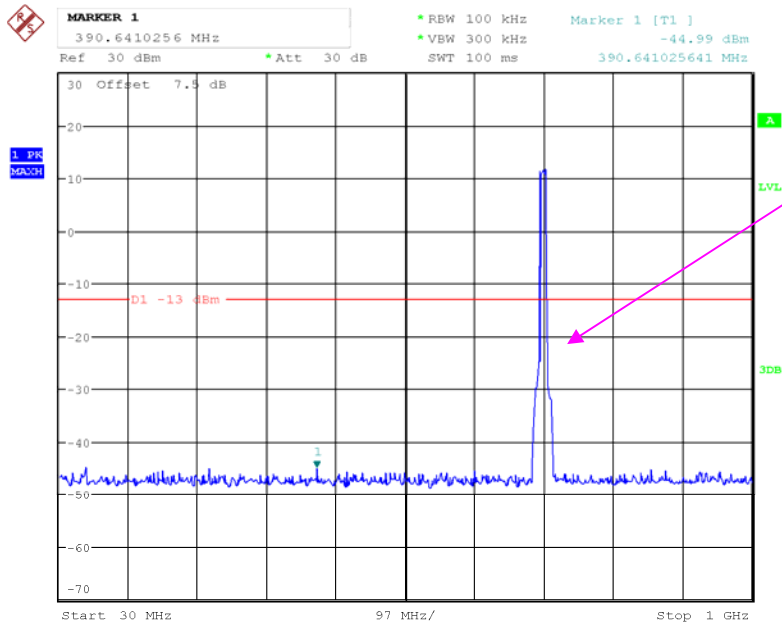

Fundamental


Date: 30.MAR.2018 13:54:17

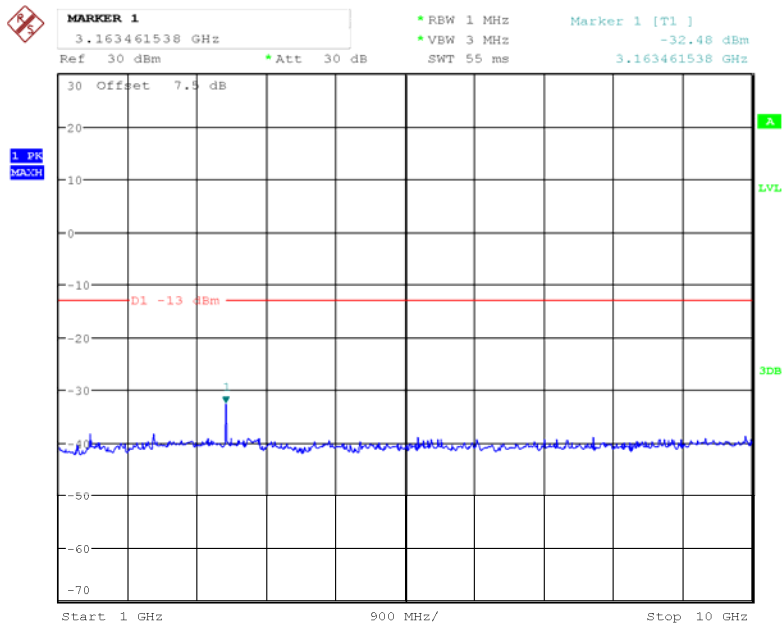


Date: 30.MAR.2018 13:53:59

LTE Band 13 (Middle Channel)

QPSK_5 MHz

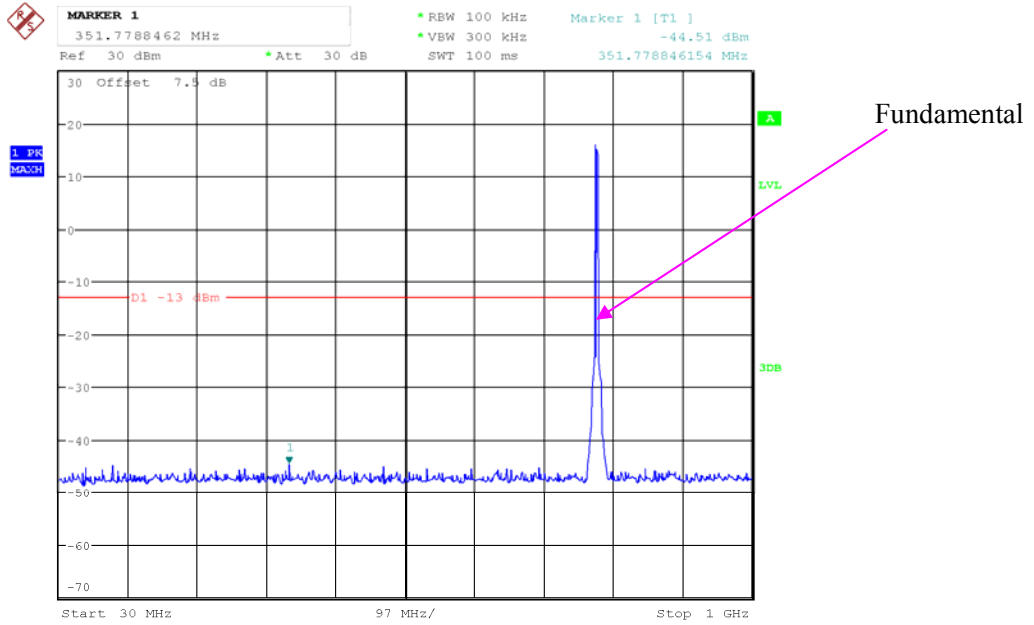


Date: 30.MAR.2018 13:47:48

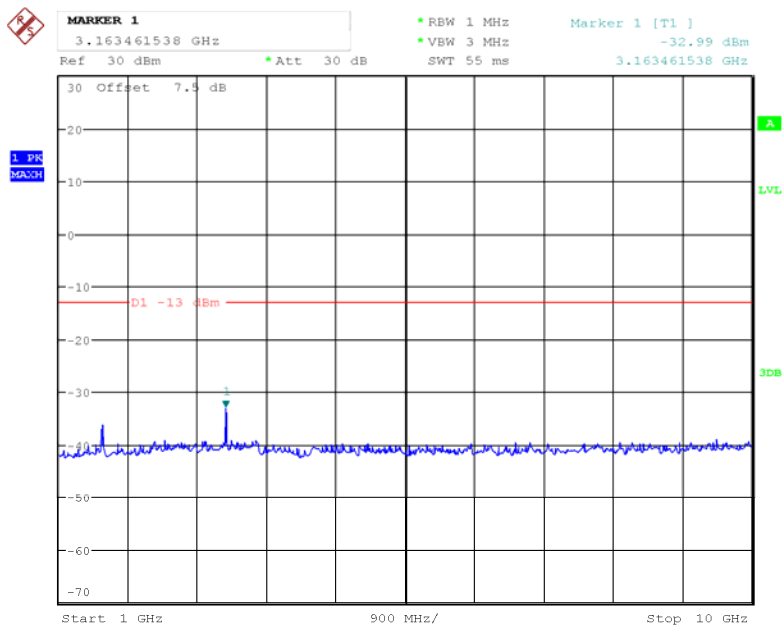


Date: 30.MAR.2018 13:48:33

QPSK_10 MHz

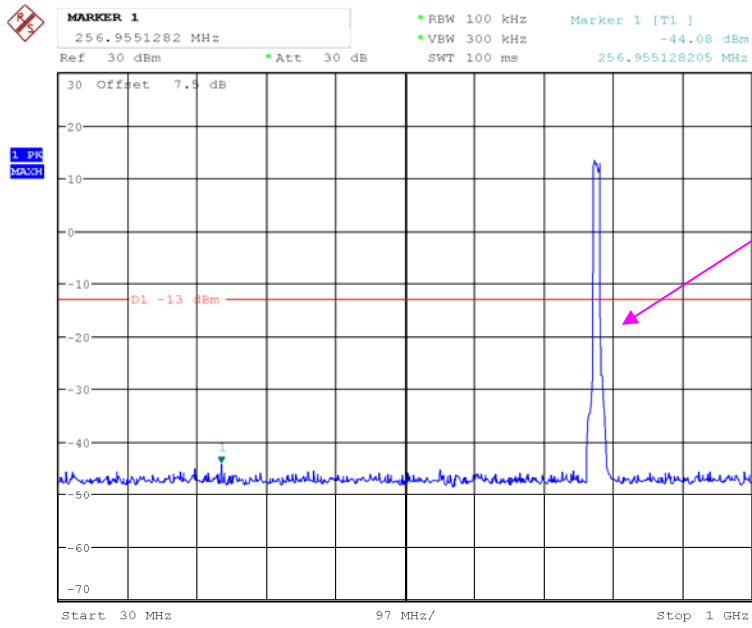

Fundamental

Date: 30.MAR.2018 13:50:55

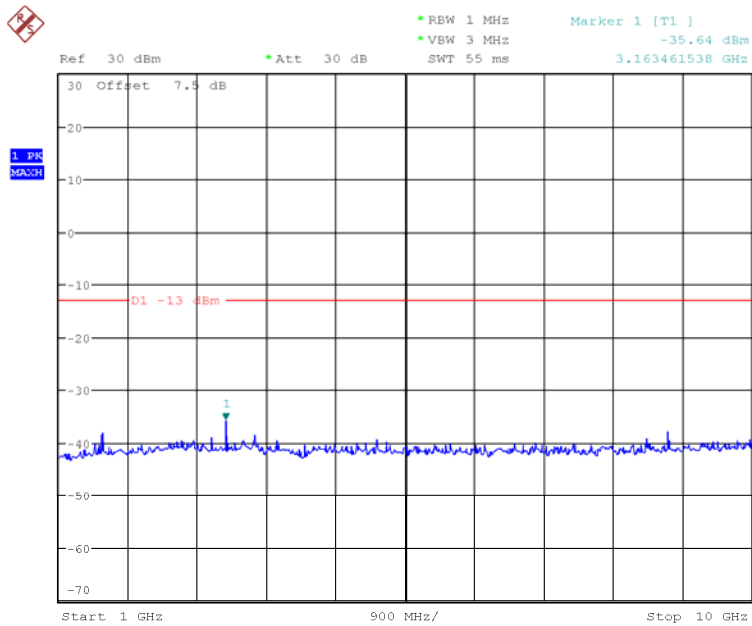

Date: 30.MAR.2018 13:49:42

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|---------------------------|------------------------|--------------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESCI | 100035 | 2017-08-04 | 2018-08-04 |
| Sunol Sciences | Antenna | JB3 | A060611-3 | 2017-07-21 | 2019-07-21 |
| HP | Amplifier | 8447F | 2443A01912 | 2017-09-05 | 2018-09-05 |
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2018-01-04 | 2019-01-04 |
| ETS LINDGREN | Horn Antenna | 3115 | 000 527 35 | 2016-01-05 | 2019-01-04 |
| Mini-Circuit | Amplifier | AFS42-00101800-25-S-42 | 2001271 | 2017-09-05 | 2018-09-05 |
| HP | Signal Generator | 1026 | 320408 | 2017-12-08 | 2018-12-08 |
| EMCO | Adjustable Dipole Antenna | 3121C | 9109-753 | N/A | N/A |
| TDK RF | Horn Antenna | HRN-0118 | 130 084 | 2016-01-05 | 2019-01-04 |
| Ducommun Technologies | Horn Antenna | ARH-4223-02 | 1007726-02 1304 | 2017-06-16 | 2020-06-15 |
| Ducommun Technologies | Horn Antenna | ARH-4223-02 | 1007726-01 1304 | 2016-11-18 | 2019-11-18 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0075-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1000-01 | 2017-09-05 | 2018-09-05 |
| Unknown | Coaxial Cable | C-SJSJ-50 | C-0800-01 | 2017-09-05 | 2018-09-05 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 24.2 °C |
| Relative Humidity: | 45 % |
| ATM Pressure: | 101.1 kPa |

* The testing was performed by Blake Yang on 2018-03-30

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)**30 MHz-10 GHz:**

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|-------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| GSM850, Frequency:836.600 MHz | | | | | | | | |
| 1673.200 | H | 53.25 | -61 | 10.6 | 0.7 | -51.1 | -13.0 | 38.1 |
| 1673.200 | V | 55.59 | -59.2 | 10.6 | 0.7 | -49.3 | -13.0 | 36.3 |
| 2509.800 | H | 66.90 | -46.1 | 13.1 | 1.2 | -34.2 | -13.0 | 21.2 |
| 2509.800 | V | 64.08 | -49 | 13.1 | 1.2 | -37.1 | -13.0 | 24.1 |
| 3346.400 | H | 47.18 | -63.5 | 13.8 | 1.6 | -51.3 | -13.0 | 38.3 |
| 3346.400 | V | 56.81 | -53.9 | 13.8 | 1.6 | -41.7 | -13.0 | 28.7 |
| 275.460 | H | 47.35 | -61.6 | 0.0 | 0.5 | -62.1 | -13.0 | 49.1 |
| 275.460 | V | 48.62 | -62.7 | 0.0 | 0.5 | -63.2 | -13.0 | 50.2 |

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| WCDMA Band V R99, Frequency:836.600 MHz | | | | | | | | |
| 1673.200 | H | 44.57 | -69.6 | 10.6 | 0.7 | -59.7 | -13.0 | 46.7 |
| 1673.200 | V | 44.02 | -70.8 | 10.6 | 0.7 | -60.9 | -13.0 | 47.9 |
| 2509.800 | H | 48.32 | -64.7 | 13.1 | 1.2 | -52.8 | -13.0 | 39.8 |
| 2509.800 | V | 47.82 | -65.2 | 13.1 | 1.2 | -53.3 | -13.0 | 40.3 |
| 3346.400 | H | 46.48 | -64.2 | 13.8 | 1.6 | -52.0 | -13.0 | 39.0 |
| 3346.400 | V | 45.32 | -65.4 | 13.8 | 1.6 | -53.2 | -13.0 | 40.2 |
| 401.270 | H | 46.32 | -58.5 | 0.0 | 0.6 | -59.1 | -13.0 | 46.1 |
| 401.270 | V | 48.36 | -59.8 | 0.0 | 0.6 | -60.4 | -13.0 | 47.4 |

PCS Band (PART 24E)

30 MHz-20 GHz:

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| GSM1900, Frequency:1880.000 MHz | | | | | | | | |
| 3760.000 | H | 46.57 | -62.2 | 13.8 | 1.6 | -50.0 | -13.0 | 37.0 |
| 3760.000 | V | 48.65 | -60 | 13.8 | 1.6 | -47.8 | -13.0 | 34.8 |
| 5640.000 | H | 45.97 | -60.1 | 14.0 | 1.3 | -47.4 | -13.0 | 34.4 |
| 5640.000 | V | 48.22 | -57.7 | 14.0 | 1.3 | -45.0 | -13.0 | 32.0 |
| 322.940 | H | 46.82 | -60.9 | 0.0 | 0.5 | -61.4 | -13.0 | 48.4 |
| 322.940 | V | 48.97 | -60.6 | 0.0 | 0.5 | -61.1 | -13.0 | 48.1 |

LTE Band 2 (30MHz-20GHz):

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dBµV) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK, Frequency:1880.000 MHz | | | | | | | | |
| 3760.000 | H | 50.16 | -58.6 | 13.8 | 1.6 | -46.4 | -13.0 | 33.4 |
| 3760.000 | V | 53.62 | -55 | 13.8 | 1.6 | -42.8 | -13.0 | 29.8 |
| 5640.000 | H | 60.25 | -45.8 | 14.0 | 1.3 | -33.1 | -13.0 | 20.1 |
| 5640.000 | V | 60.52 | -45.4 | 14.0 | 1.3 | -32.7 | -13.0 | 19.7 |
| 374.580 | H | 48.31 | -57.5 | 0.0 | 0.6 | -58.1 | -13.0 | 45.1 |
| 374.580 | V | 50.13 | -58.5 | 0.0 | 0.6 | -59.1 | -13.0 | 46.1 |

LTE Band 12 (30MHz-10GHz):

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dB μ V) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK, Frequency: 707.500 MHz | | | | | | | | |
| 1415.000 | H | 51.28 | -62.2 | 9.1 | 1.2 | -54.3 | -13.0 | 41.3 |
| 1415.000 | V | 50.63 | -63.4 | 9.1 | 1.2 | -55.5 | -13.0 | 42.5 |
| 2122.500 | H | 54.86 | -57.9 | 11.3 | 1.1 | -47.7 | -13.0 | 34.7 |
| 2122.500 | V | 56.37 | -56.4 | 11.3 | 1.1 | -46.2 | -13.0 | 33.2 |
| 2830.000 | H | 54.23 | -57.9 | 13.3 | 1.4 | -46.0 | -13.0 | 33.0 |
| 2830.000 | V | 52.49 | -59.8 | 13.3 | 1.4 | -47.9 | -13.0 | 34.9 |
| 452.660 | H | 47.25 | -57.3 | 0.0 | 0.7 | -58.0 | -13.0 | 45.0 |
| 452.660 | V | 49.82 | -57.9 | 0.0 | 0.7 | -58.6 | -13.0 | 45.6 |

LTE Band 13 (30MHz-10GHz):

| Frequency (MHz) | Polar (H/V) | Receiver Reading (dB μ V) | Substituted Method | | | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
| | | | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) | | | |
| QPSK, Frequency: 782 MHz | | | | | | | | |
| 1564.000 | H | 51.68 | -63.3 | 9.9 | 0.9 | -54.3 | -13.0 | 41.3 |
| 1564.000 | V | 52.46 | -62.9 | 9.9 | 0.9 | -53.9 | -13.0 | 40.9 |
| 2346.000 | H | 53.79 | -58.6 | 11.7 | 1.3 | -48.2 | -13.0 | 35.2 |
| 2346.000 | V | 53.98 | -58.4 | 11.7 | 1.3 | -48.0 | -13.0 | 35.0 |
| 3128.000 | H | 46.75 | -63.9 | 13.3 | 1.8 | -52.4 | -13.0 | 39.4 |
| 3128.000 | V | 47.16 | -63.5 | 13.3 | 1.8 | -52.0 | -13.0 | 39.0 |
| 294.320 | H | 47.66 | -61 | 0.0 | 0.5 | -61.5 | -13.0 | 48.5 |
| 294.320 | V | 49.28 | -61 | 0.0 | 0.5 | -61.5 | -13.0 | 48.5 |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

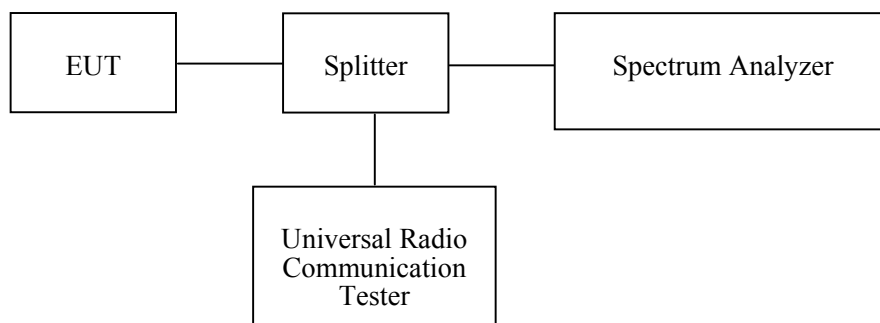

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| R&S | Universal Radio Communication Tester | CMU200 | 109 038 | 2017-07-18 | 2018-07-18 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 | 2017-08-31 | 2018-08-31 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/02 | Each Time | / |
| Pasternack | RF Coaxial Cable | 0.5m | C-5 | Each Time | / |
| E-Microwave | Two-way Splitter | ODP-1-6-2S | OE0120142 | Each Time | / |
| R&S | Spectrum Analyzer | FSU 26 | 200256 | 2018-01-04 | 2019-01-04 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


| | |
|---------------------------|-----------------|
| Temperature: | 25.8~25.9°C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.8~101.1 kPa |

The testing was performed by Nami Quan & Harry Yang on 2018-03-29 on 2018-03-30.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

GSM 850, Left Band Edge

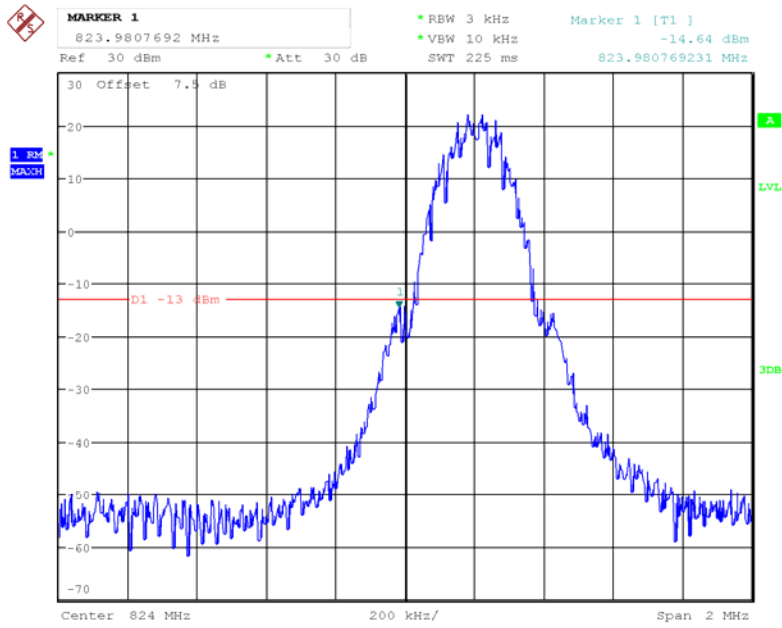


Date: 29.MAR.2018 15:06:46

GSM 850, Right Band Edge

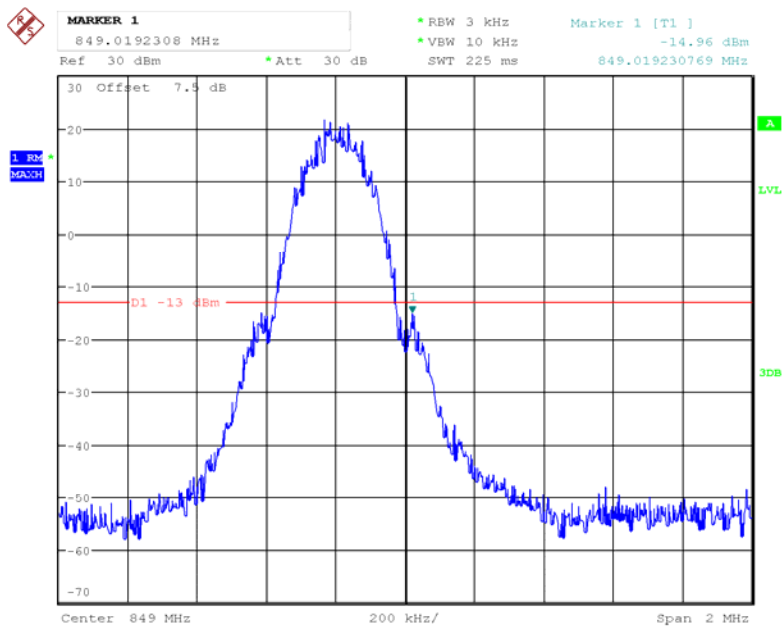


Date: 29.MAR.2018 15:07:37

GSM 1900, Left Band Edge

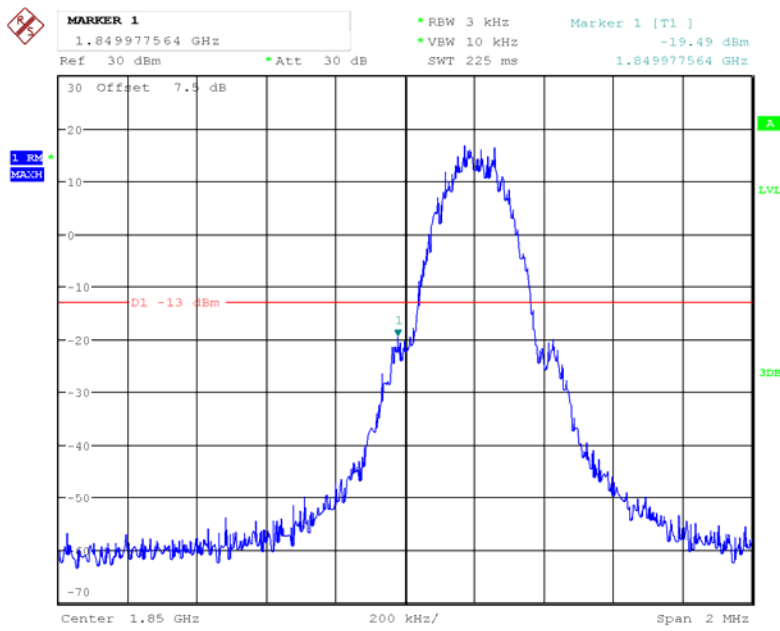


Date: 29.MAR.2018 15:31:24

GSM 1900, Right Band Edge

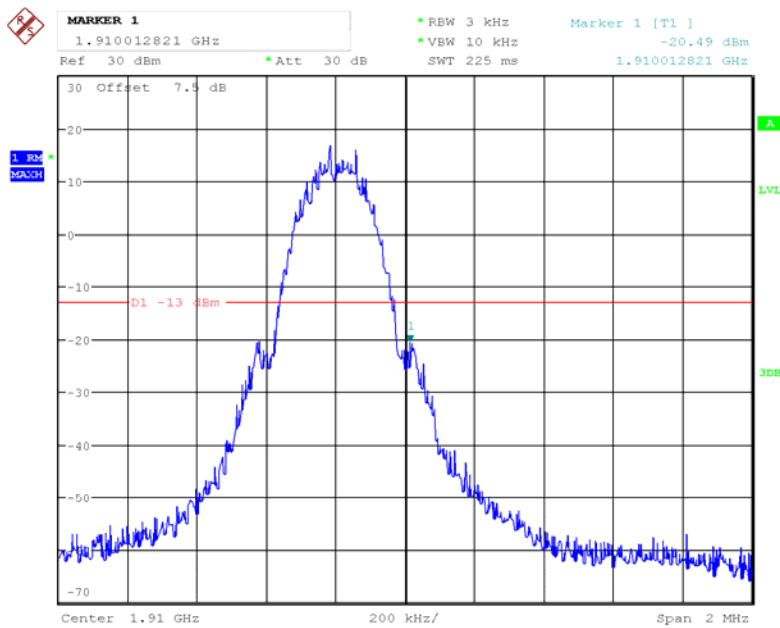


Date: 29.MAR.2018 15:32:04

EDGE 850, Left Band Edge

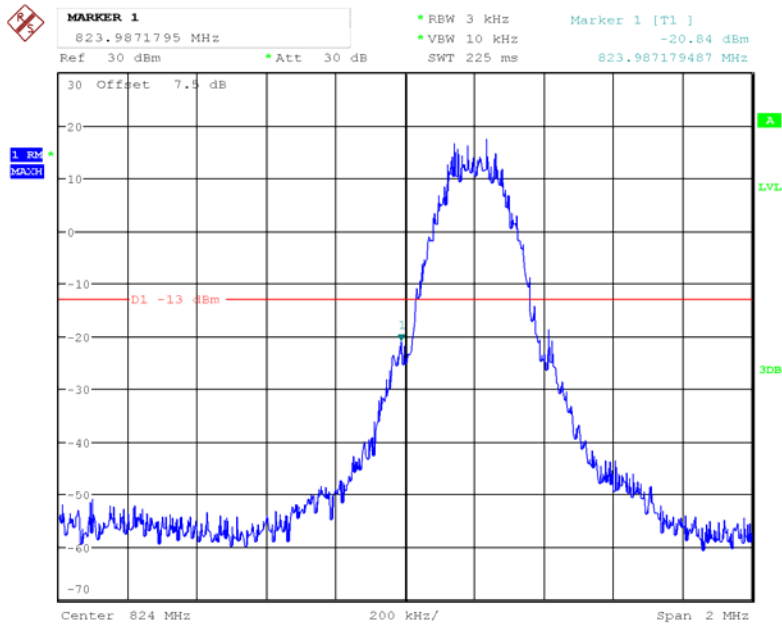


Date: 29.MAR.2018 15:48:13

EDGE 850, Right Band Edge

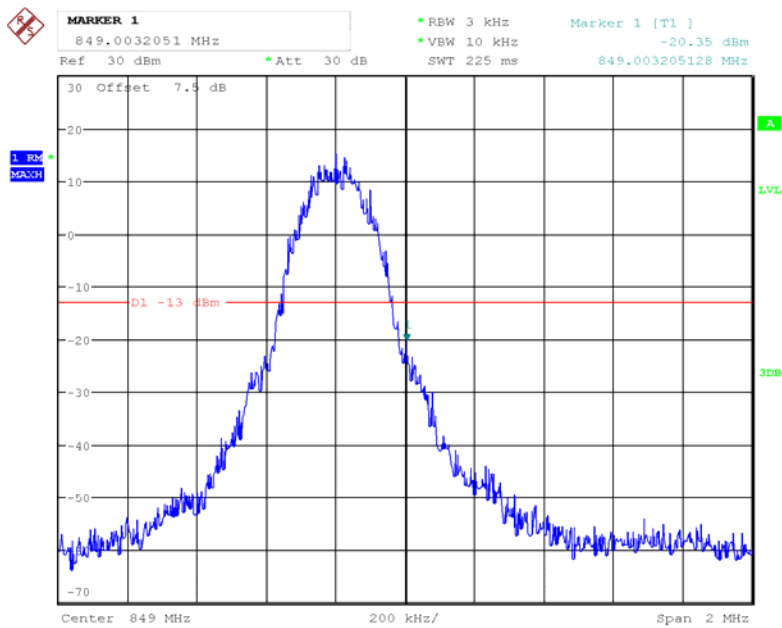


Date: 29.MAR.2018 15:48:54

EDGE 1900, Left Band Edge

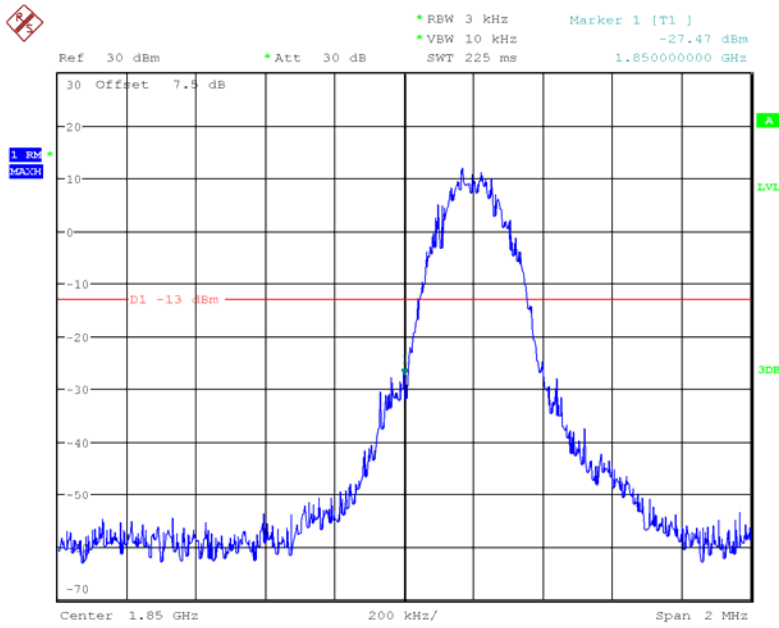


Date: 29.MAR.2018 15:25:57

EDGE 1900, Right Band Edge

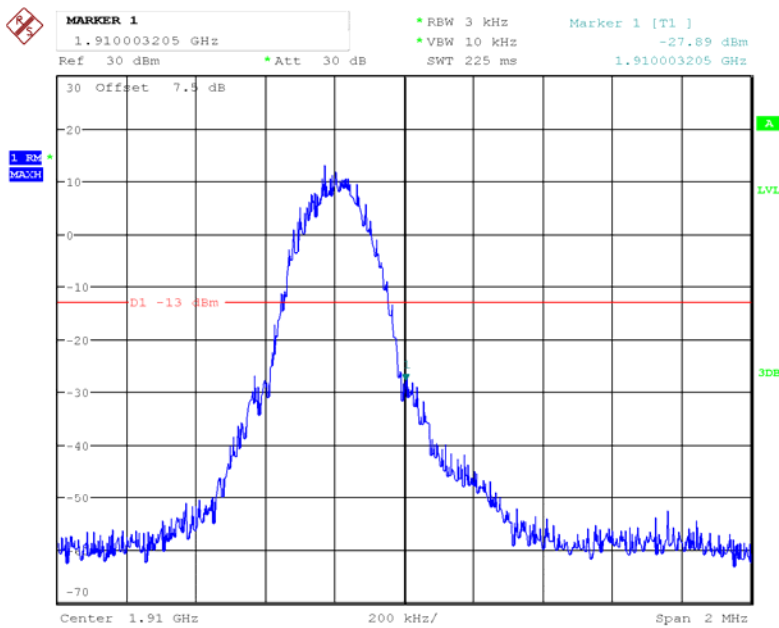


Date: 29.MAR.2018 15:26:40

WCDMA Band V Rel 99, Left Band Edge

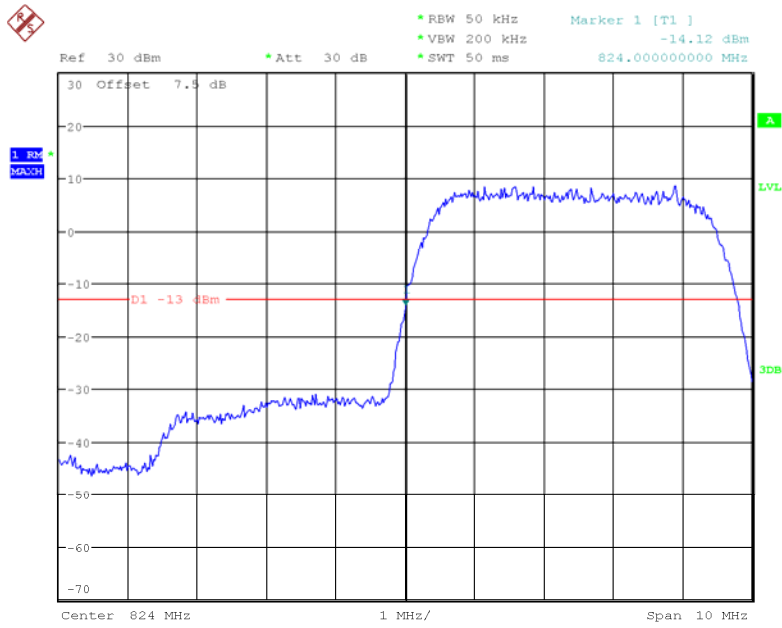


Date: 29.MAR.2018 14:18:56

WCDMA Band V Rel 99, Right Band Edge

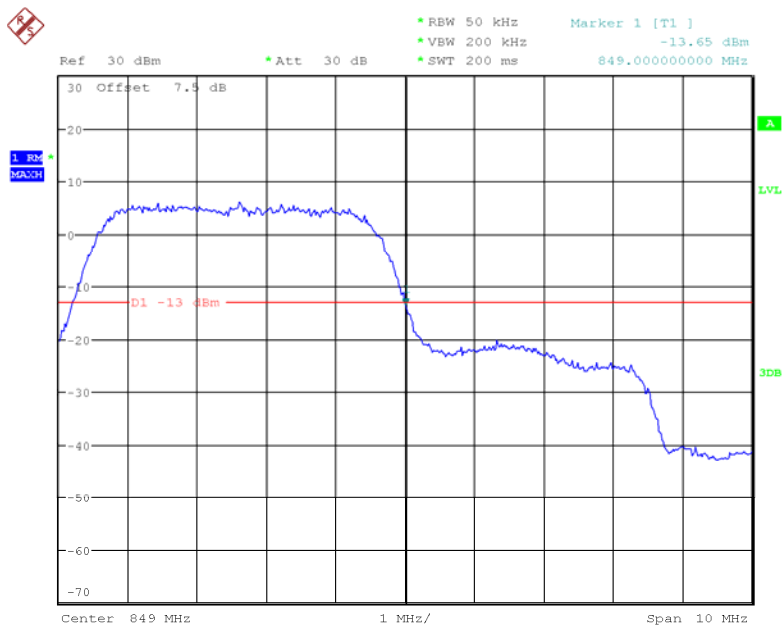


Date: 29.MAR.2018 14:21:05

WCDMA Band V HSUPA, Left Band Edge

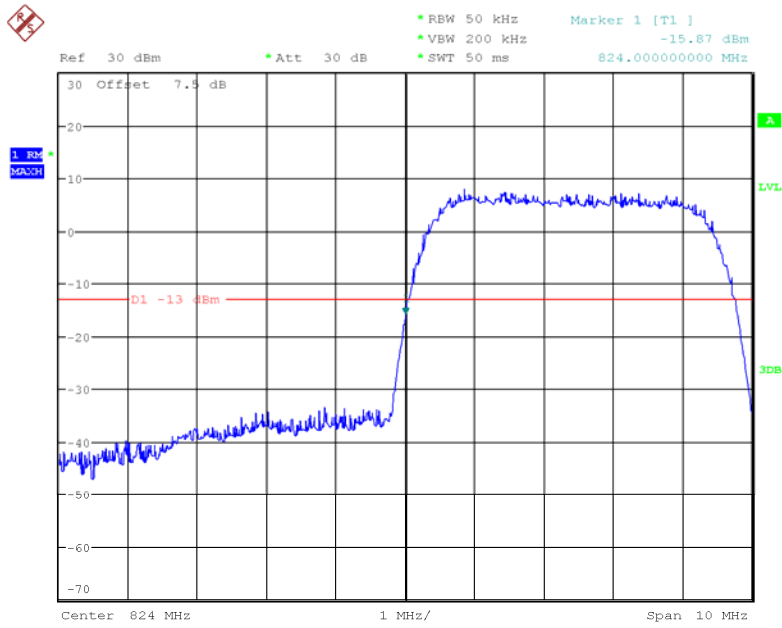


Date: 29.MAR.2018 14:54:07

WCDMA Band V HSUPA, Right Band Edge

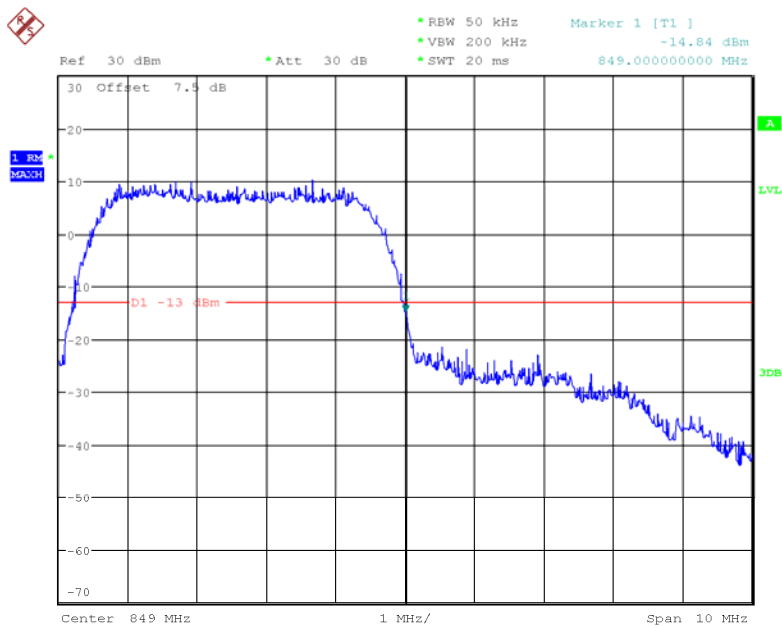


Date: 29.MAR.2018 14:53:34

WCDMA Band V HSDPA, Left Band Edge

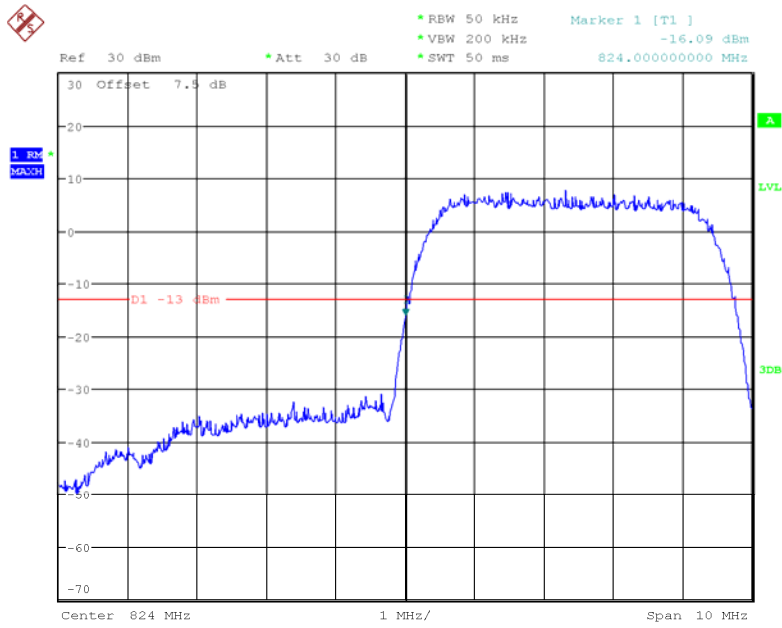

Date: 29.MAR.2018 14:37:14


WCDMA Band V HSDPA, Right Band Edge

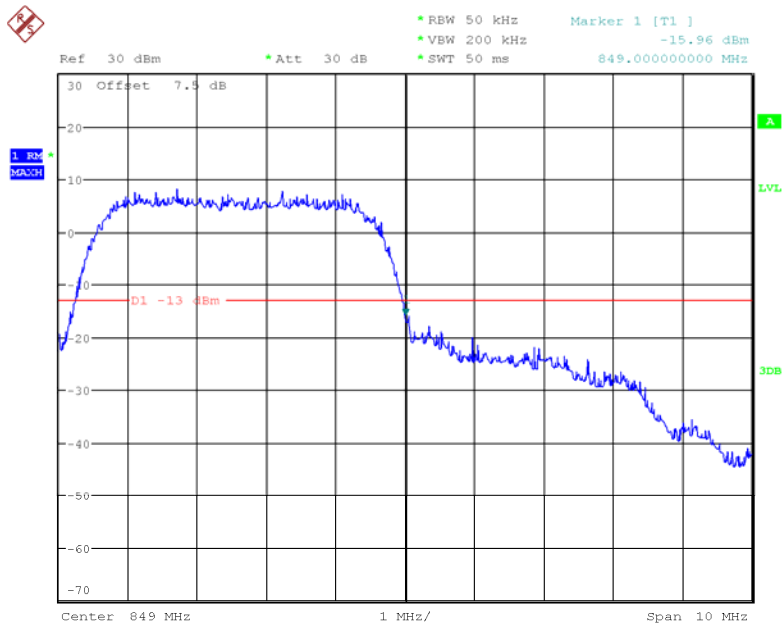

Date: 29.MAR.2018 14:37:48


LTE Band II

QPSK_1.4MHz_6 RB_Left

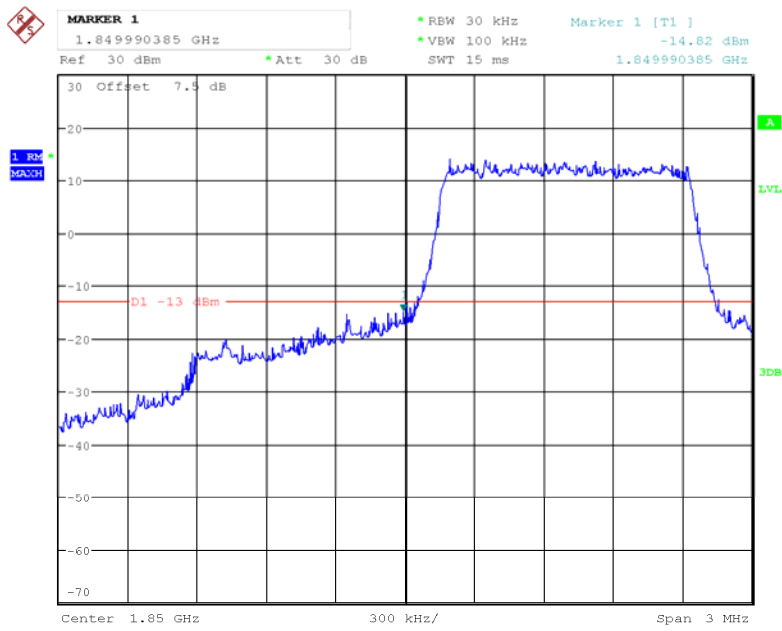


Date: 30.MAR.2018 14:30:13

QPSK_1.4MHz_6 RB_Right

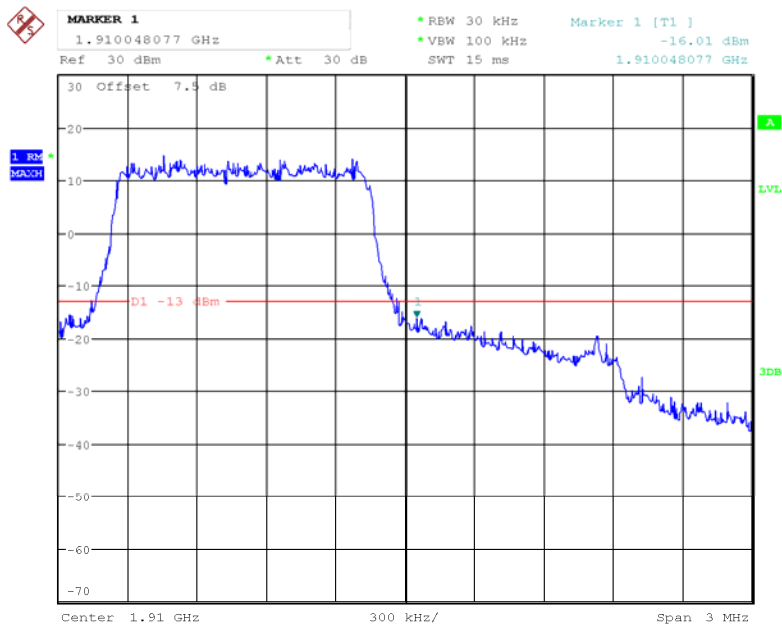


Date: 30.MAR.2018 14:31:23

QPSK_3MHz_15 RB_Left

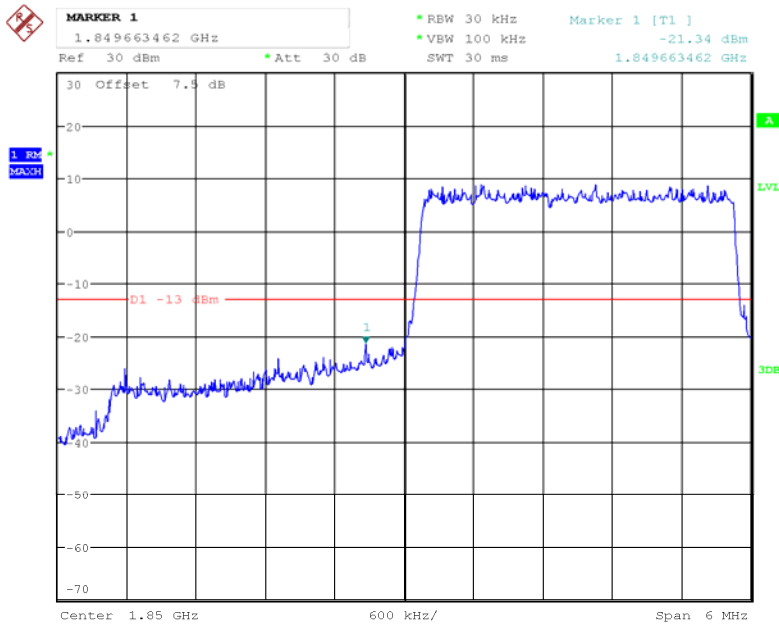


Date: 30.MAR.2018 14:33:20

QPSK_3MHz_15 RB_Right

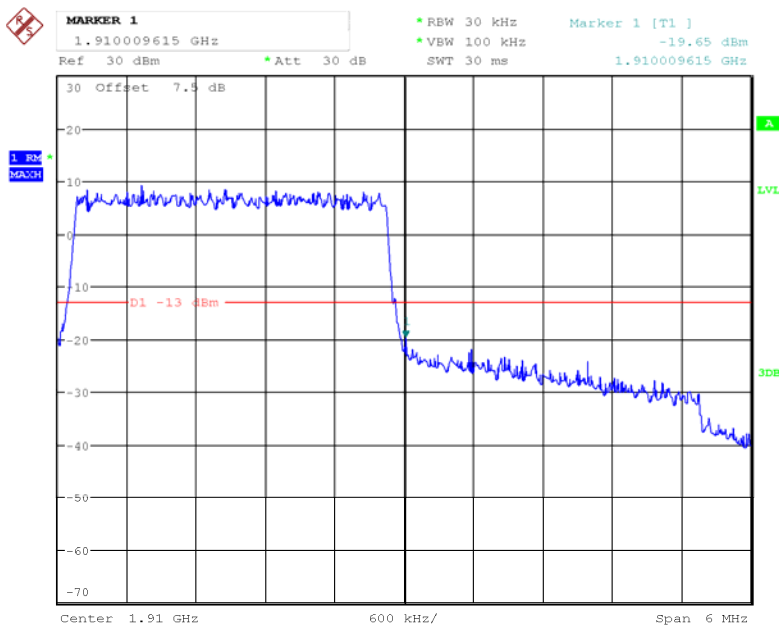


Date: 30.MAR.2018 14:34:06

QPSK_5MHz_25 RB_Left

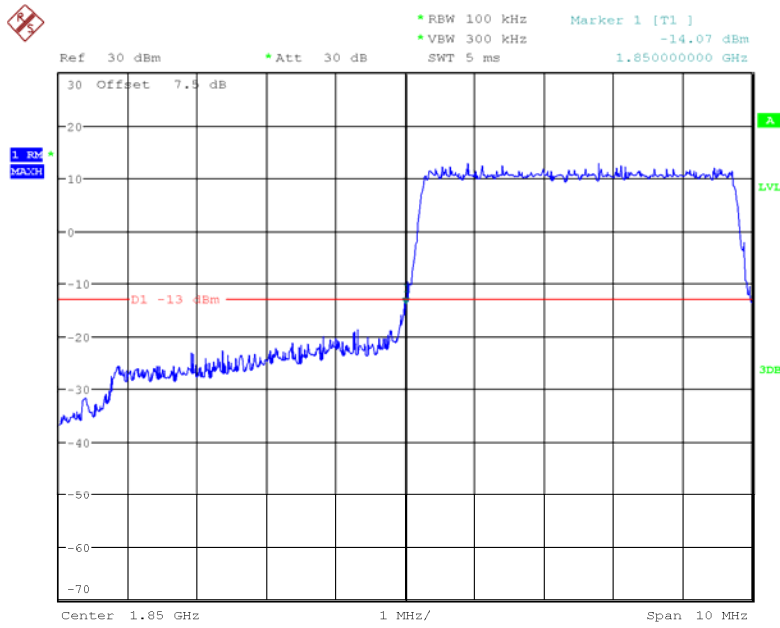


Date: 30.MAR.2018 14:39:30

QPSK_5MHz_25 RB_Right

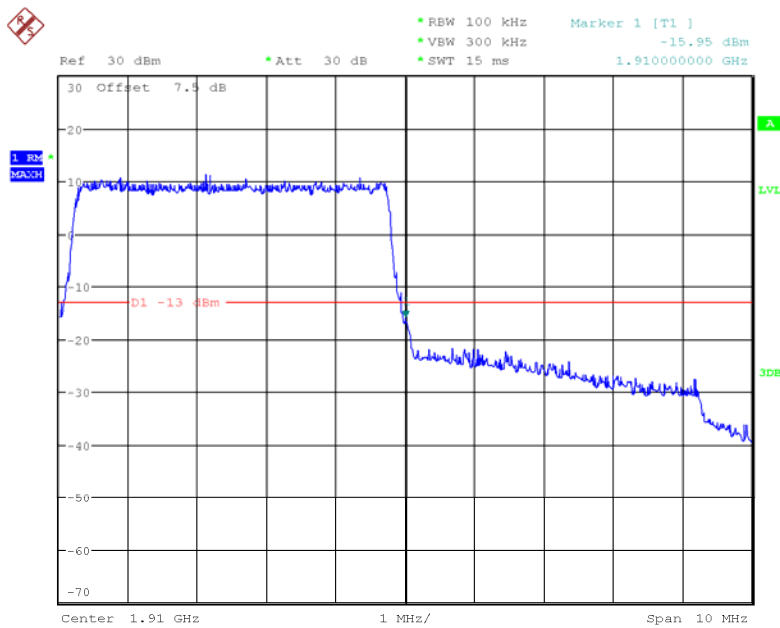


Date: 30.MAR.2018 14:40:51

QPSK_10MHz_50 RB_Left

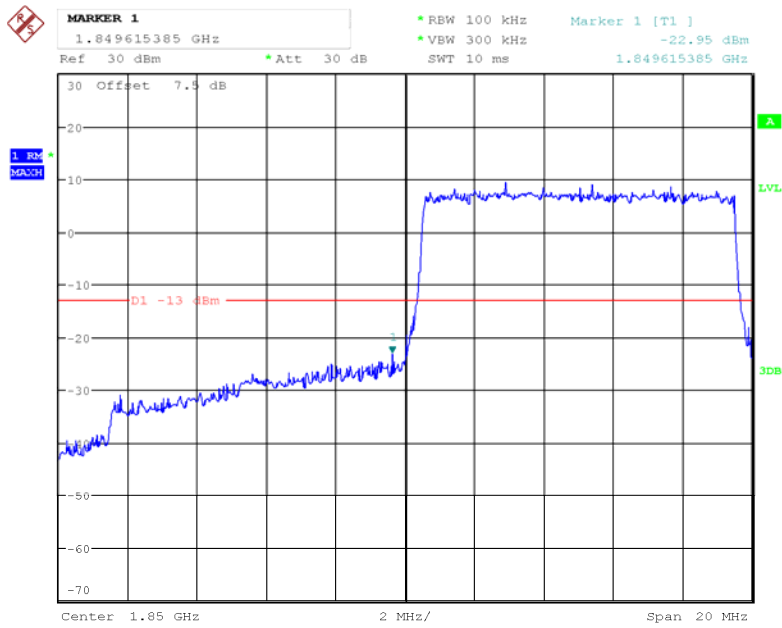


Date: 30.MAR.2018 14:42:30

QPSK_10MHz_50 RB_Right

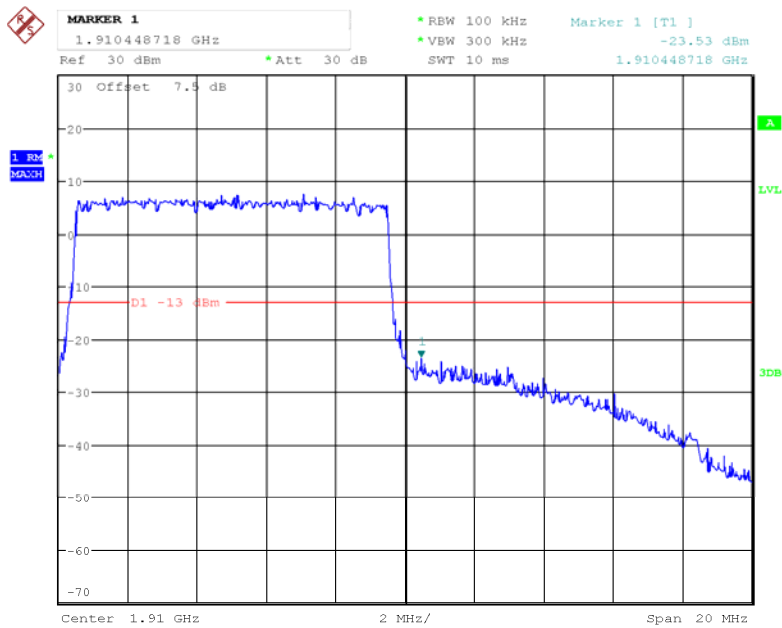


Date: 30.MAR.2018 14:43:08

QPSK_15MHz_75 RB_Left

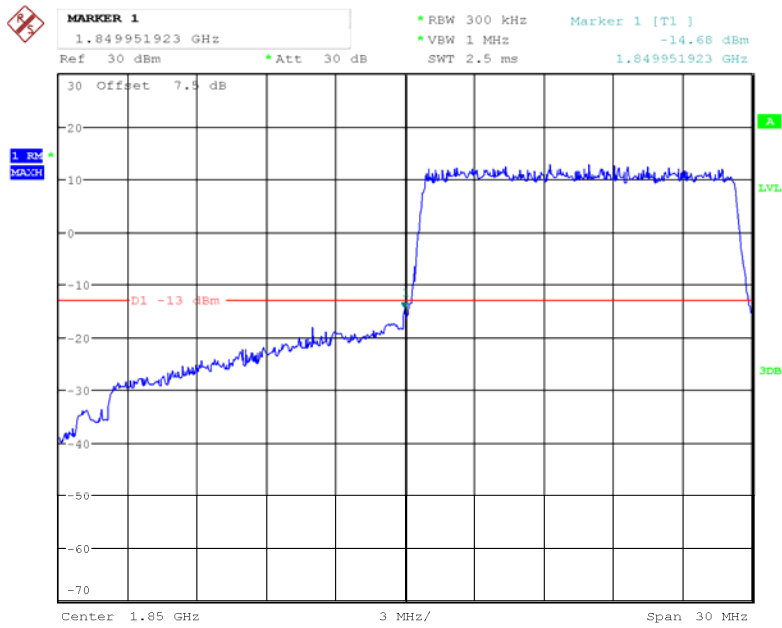


Date: 30.MAR.2018 14:44:22

QPSK_15MHz_75 RB_Right

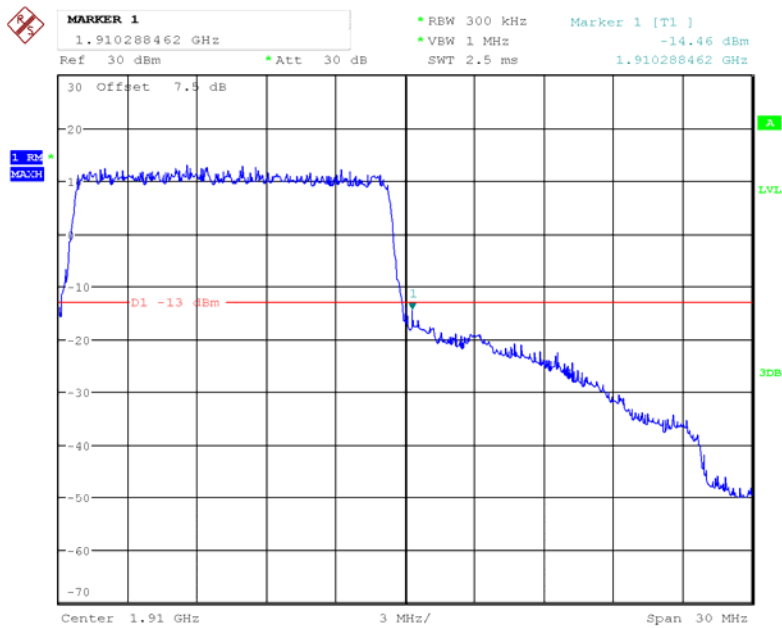


Date: 30.MAR.2018 14:45:04

QPSK_20MHz_FULL RB_Left

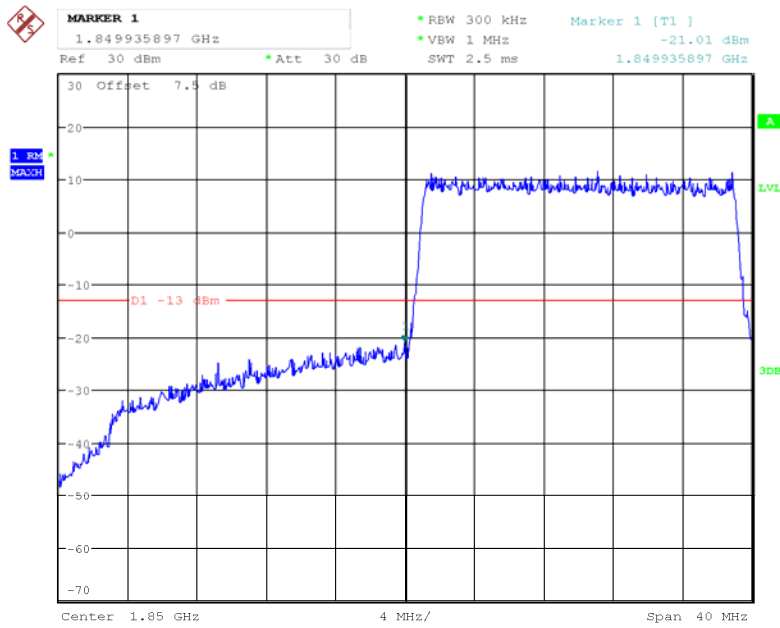


Date: 30.MAR.2018 14:48:18

QPSK_20MHz_FULL RB_Right

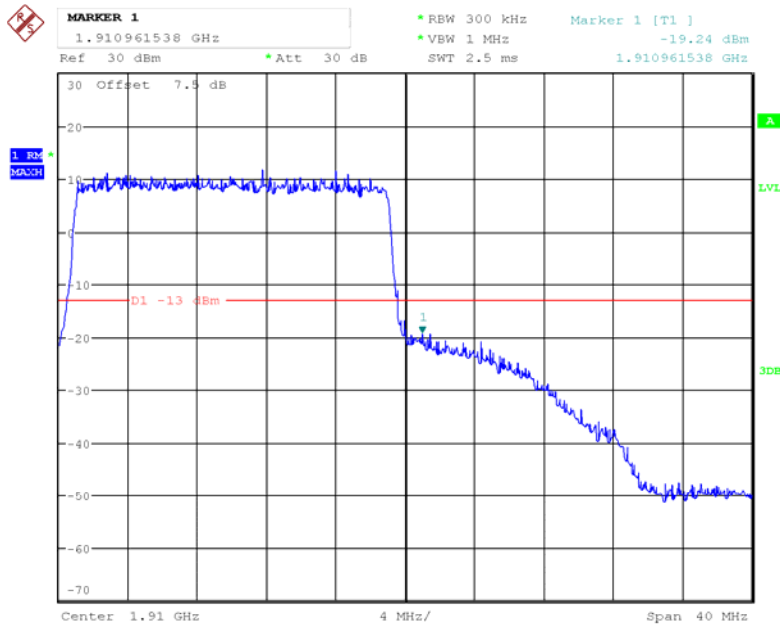


Date: 30.MAR.2018 14:50:02

16QAM_1.4MHz_6 RB_Left

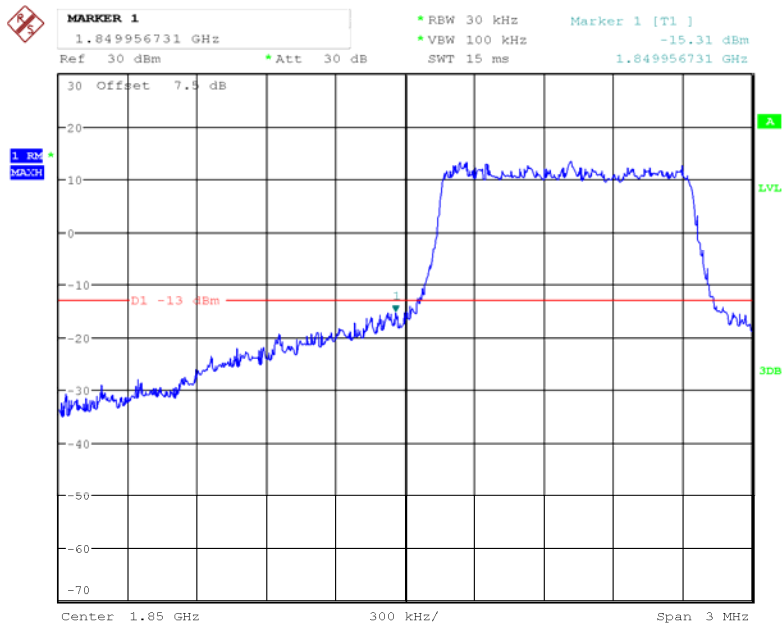


Date: 30.MAR.2018 14:29:42

16QAM_1.4MHz_6 RB_Right

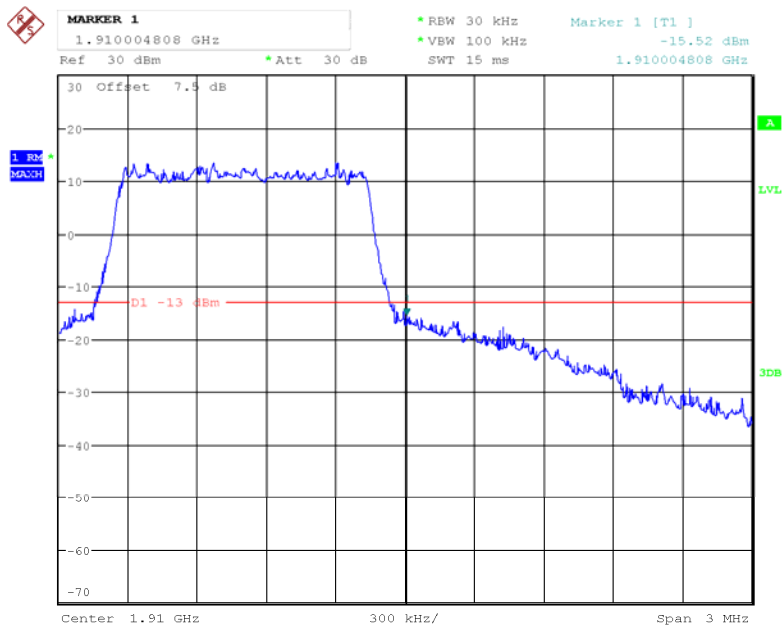


Date: 30.MAR.2018 14:31:05

16QAM_3MHz_15 RB_Left

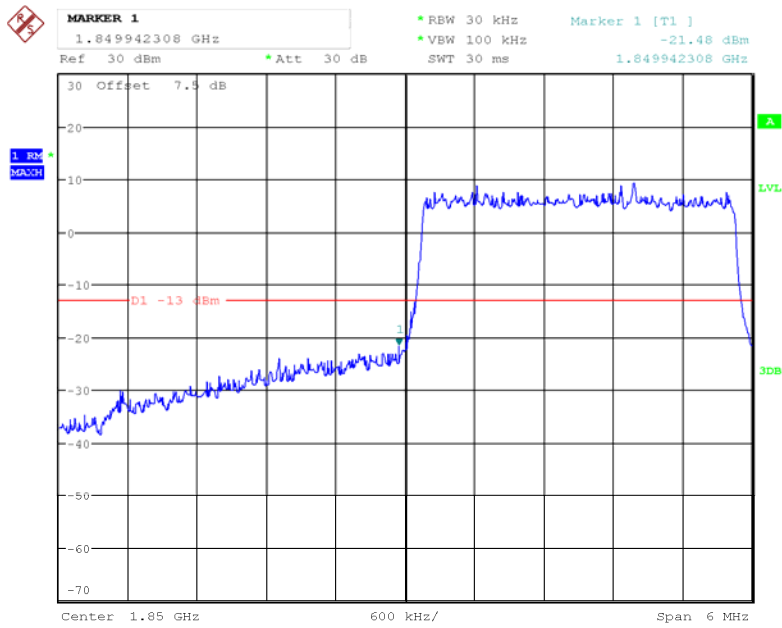


Date: 30.MAR.2018 14:33:07

16QAM_3MHz_15 RB_Right

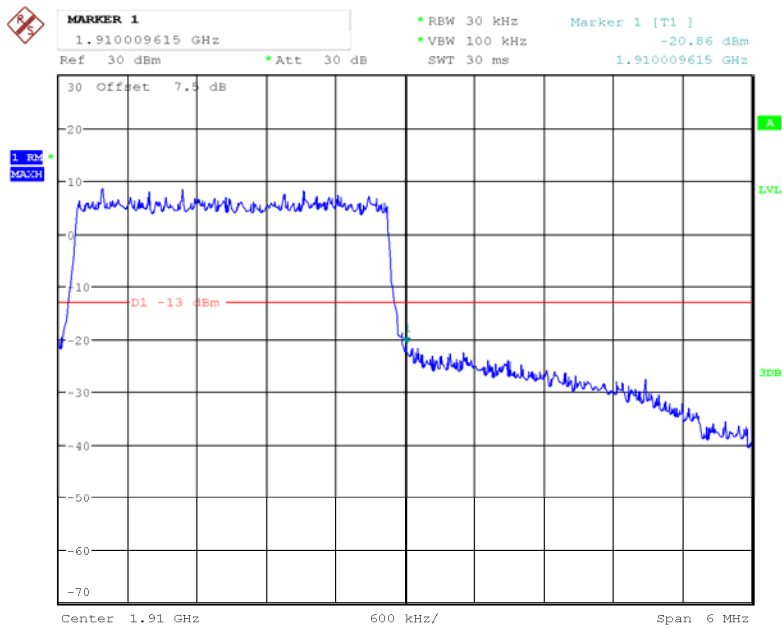


Date: 30.MAR.2018 14:33:52

16QAM_10MHz_50 RB_Left

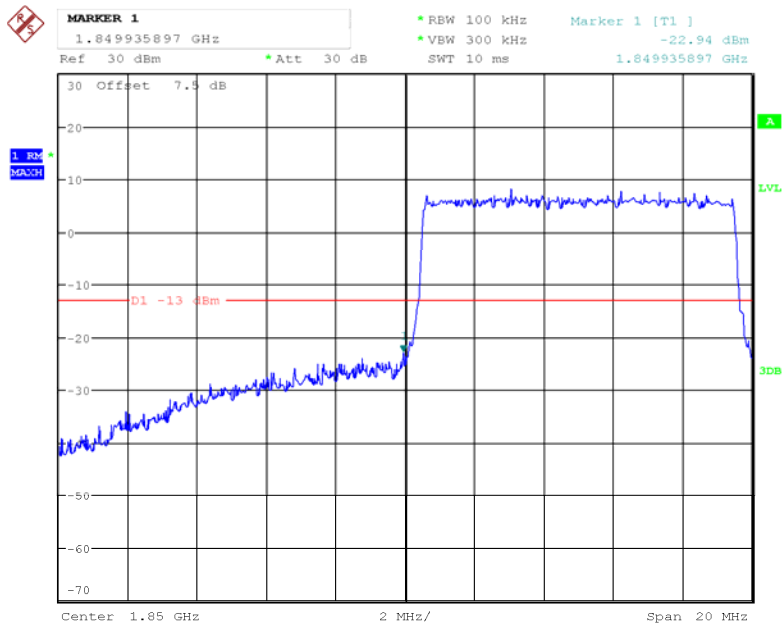


Date: 30.MAR.2018 14:42:17

16QAM_10MHz_50 RB_Right

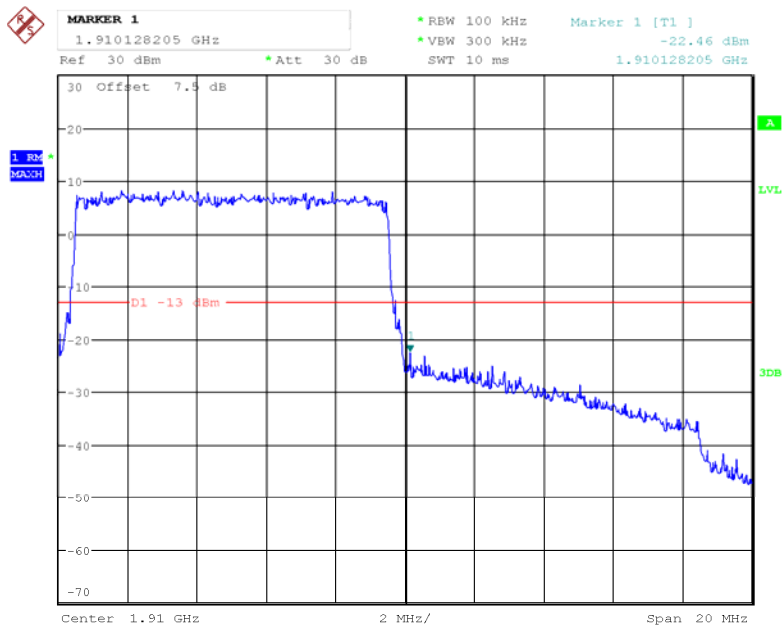


Date: 30.MAR.2018 14:42:51

16QAM_15MHz_75 RB_Left

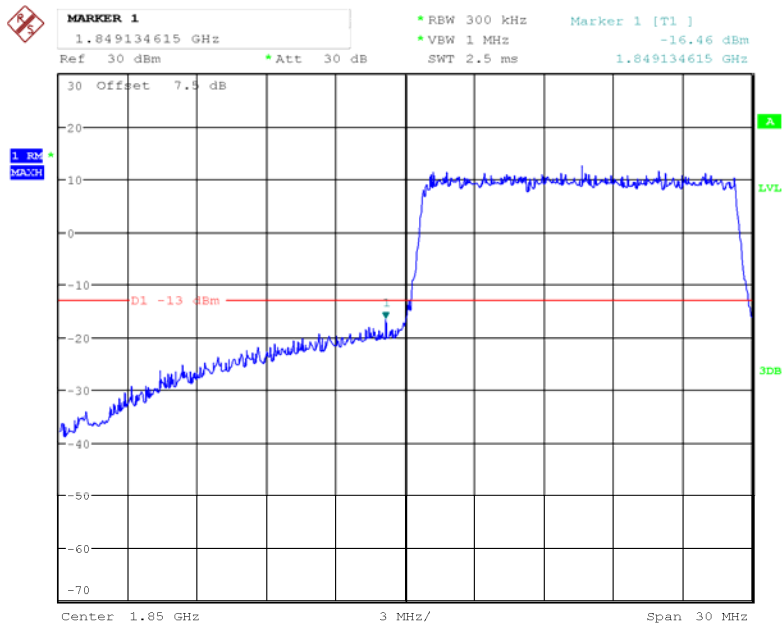


Date: 30.MAR.2018 14:43:57

16QAM_15MHz_75 RB_Right

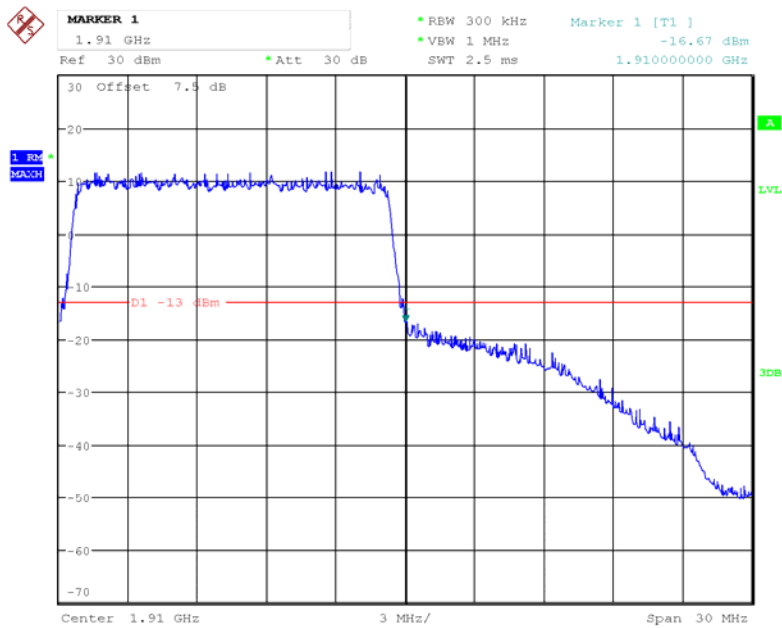


Date: 30.MAR.2018 14:44:51

16QAM_20MHz_FULL RB_Left

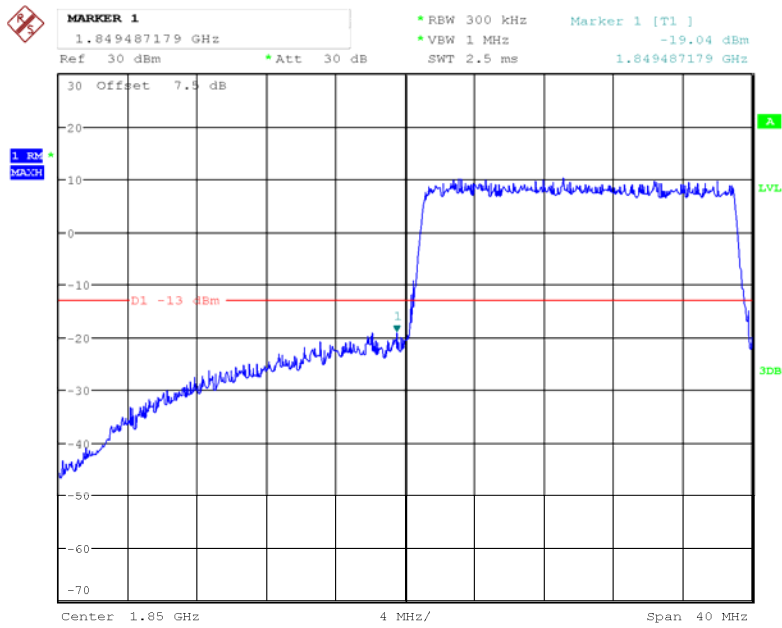

Date: 30.MAR.2018 14:47:53


16QAM_20MHz_FULL RB_Right

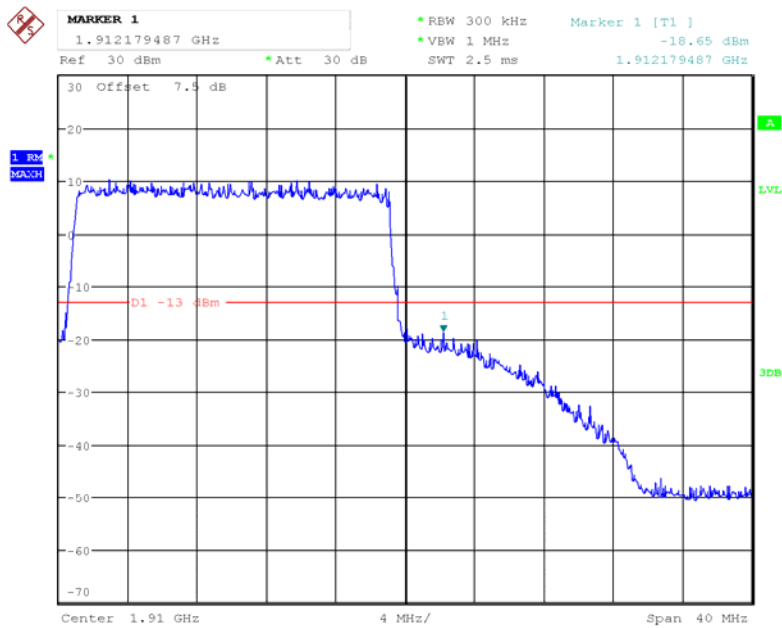

Date: 30.MAR.2018 14:49:48


LTE Band 12

QPSK_1.4MHz_6 RB_Left

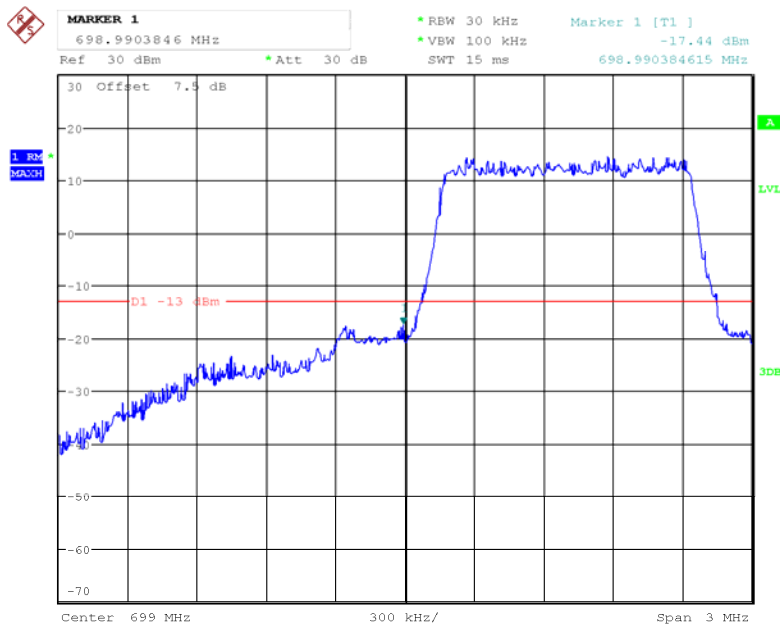


Date: 30.MAR.2018 14:52:49

QPSK_1.4MHz_6 RB_Right

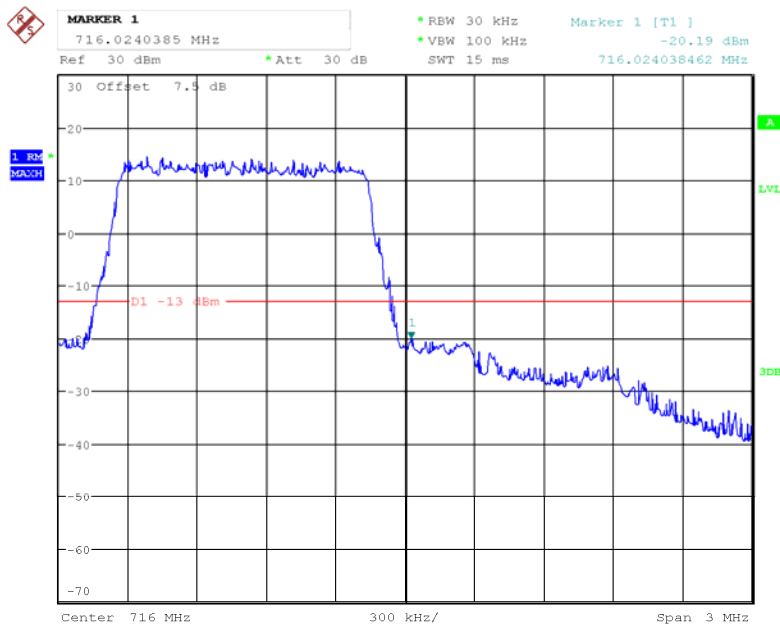


Date: 30.MAR.2018 14:53:44

QPSK_3MHz_15 RB_Left

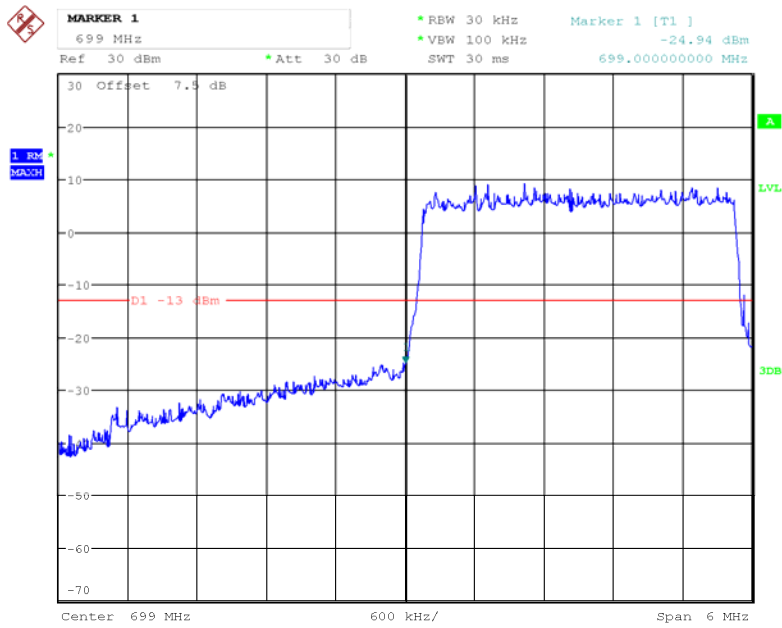


Date: 30.MAR.2018 15:12:35

QPSK_3MHz_15 RB_Right

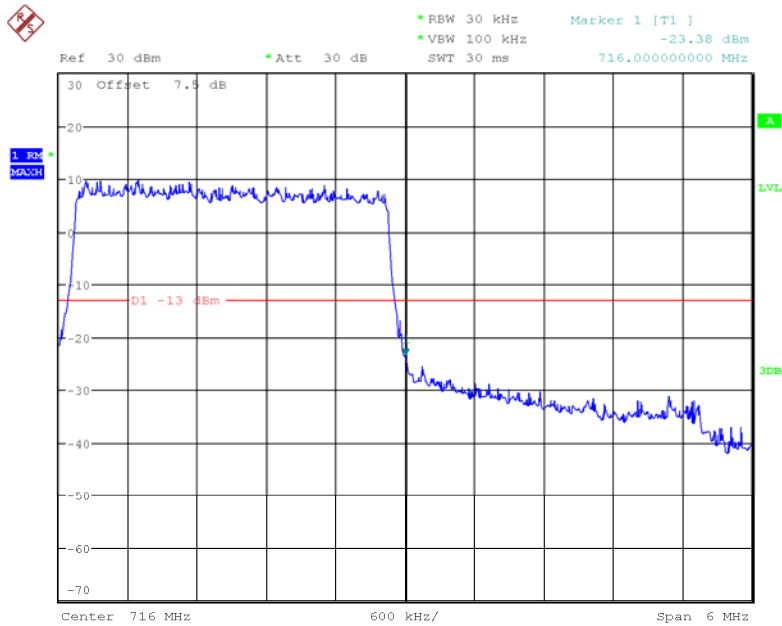


Date: 30.MAR.2018 15:14:33

QPSK_5MHz_25 RB_Left

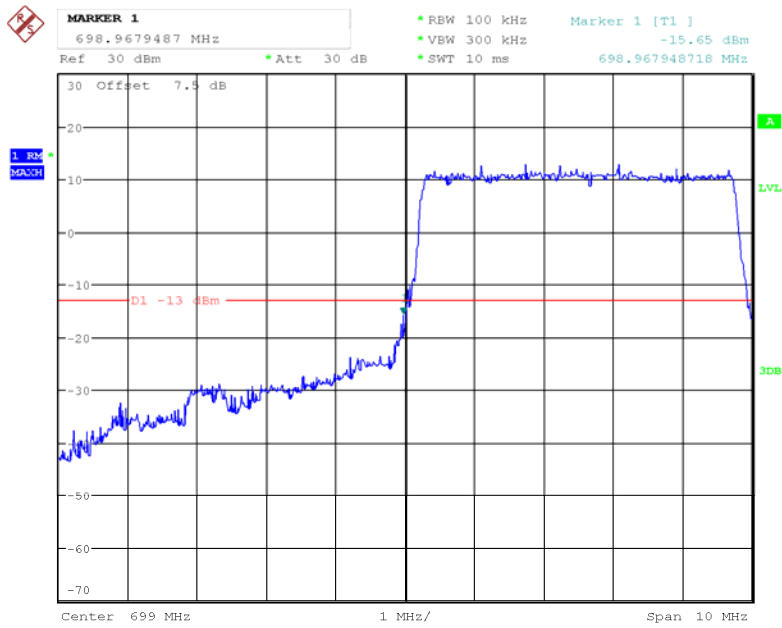


Date: 30.MAR.2018 15:18:53

QPSK_5MHz_25 RB_Right

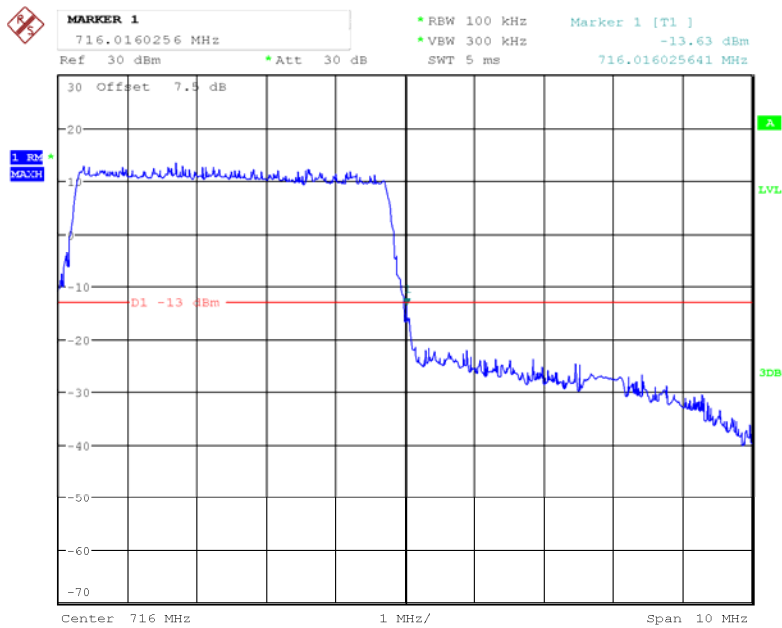


Date: 30.MAR.2018 15:19:47

QPSK_10MHz_50 RB_Left

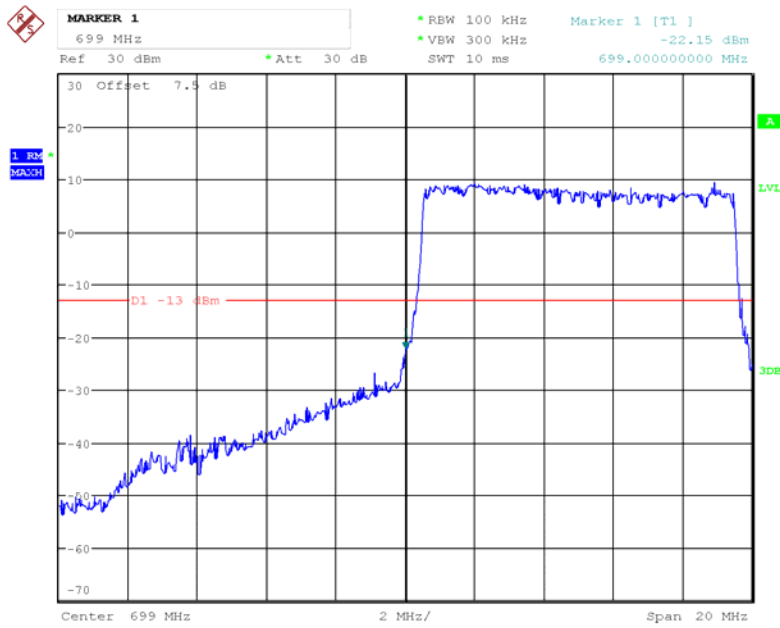


Date: 30.MAR.2018 15:21:09

QPSK_10MHz_50 RB_Right

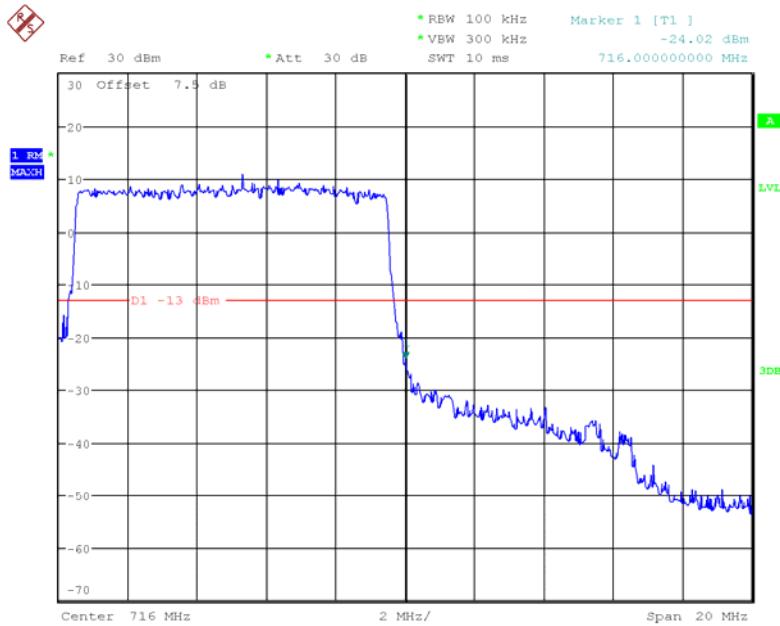


Date: 30.MAR.2018 15:22:02

16QAM_1.4MHz_6 RB_Left

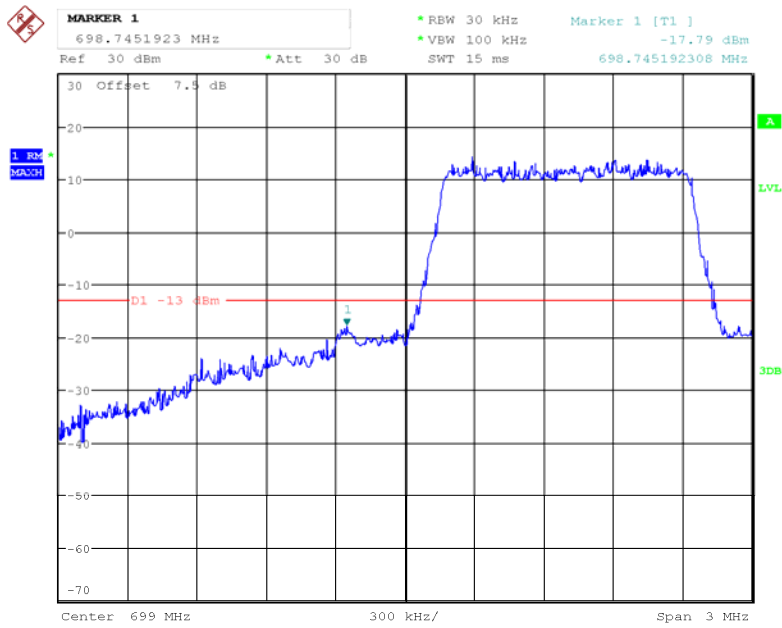


Date: 30.MAR.2018 14:52:36

16QAM_1.4MHz_6 RB_Right

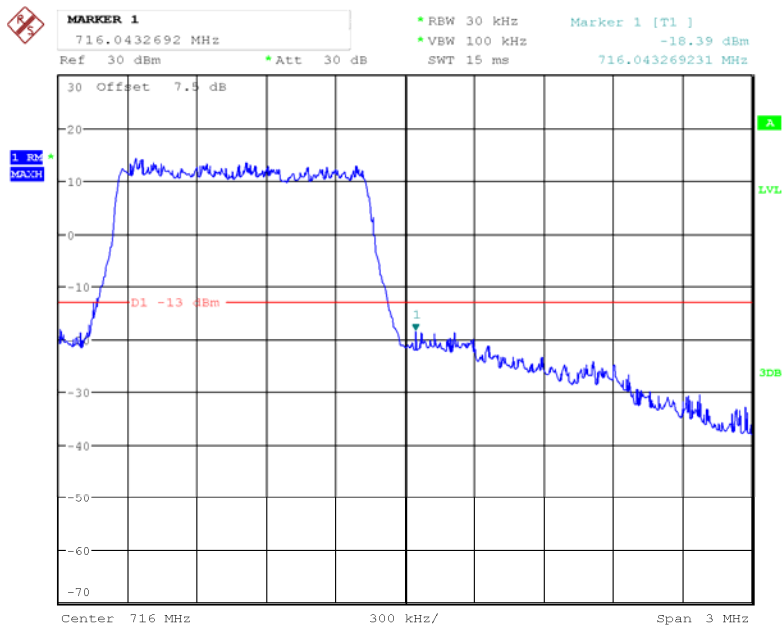


Date: 30.MAR.2018 14:53:30

16QAM_3MHz_15 RB_Left

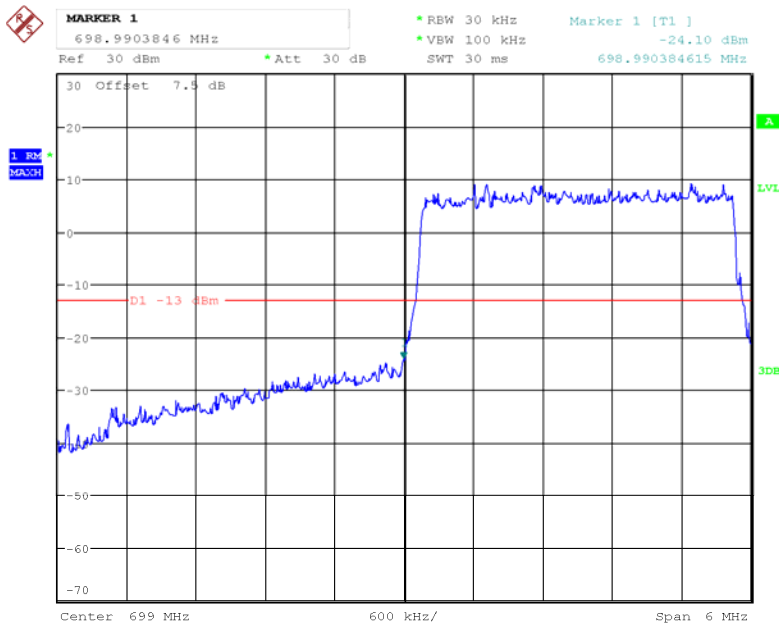


Date: 30.MAR.2018 14:55:38

16QAM_3MHz_15 RB_Right

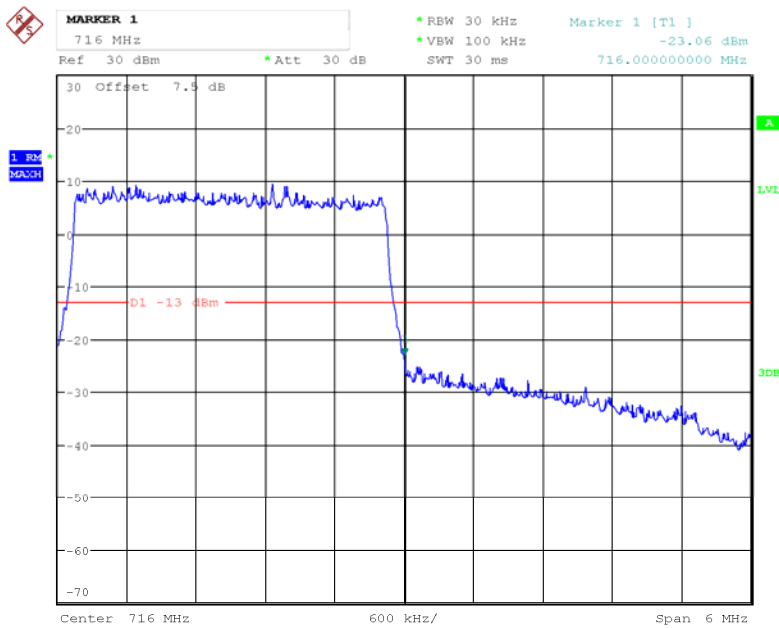


Date: 30.MAR.2018 15:14:23

16QAM_5MHz_25 RB_Left

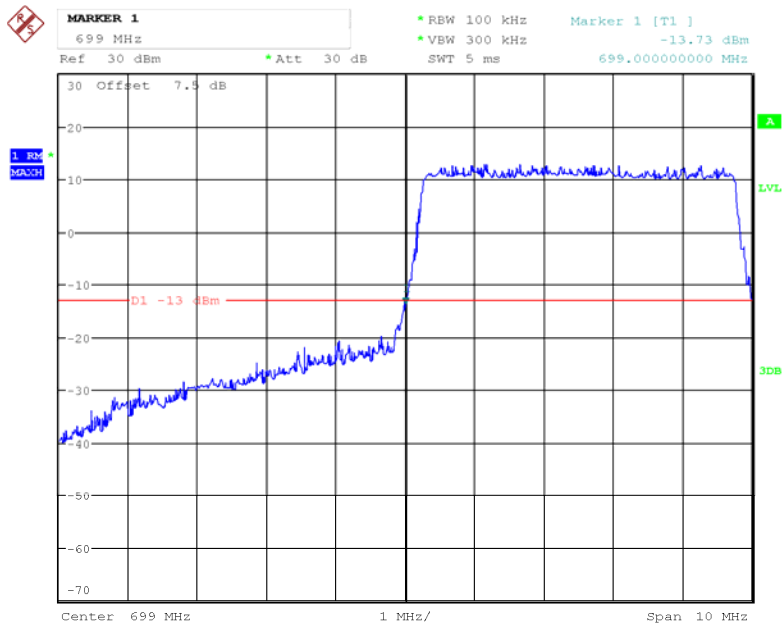


Date: 30.MAR.2018 15:18:15

16QAM_5MHz_25 RB_Right

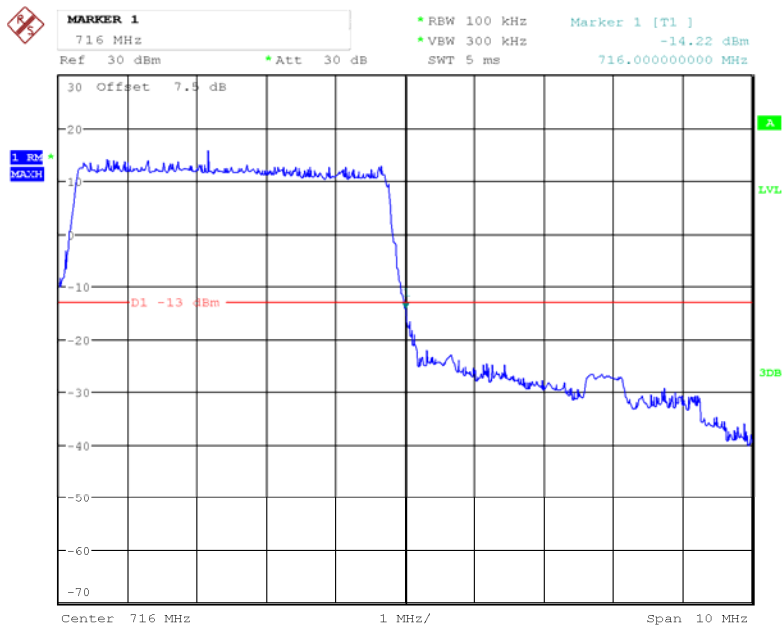


Date: 30.MAR.2018 15:19:29

16QAM_10MHz_50 RB_Left

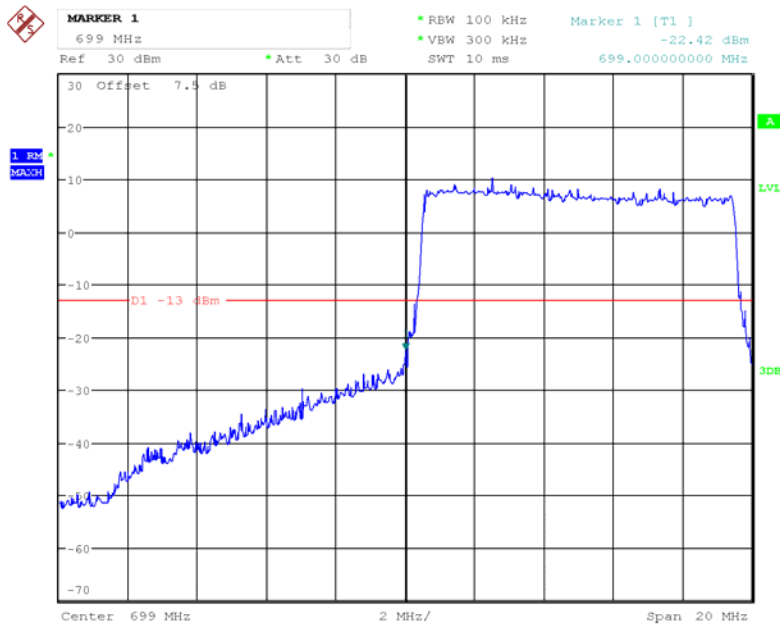

Date: 30.MAR.2018 15:20:54


16QAM_10MHz_50 RB_Right

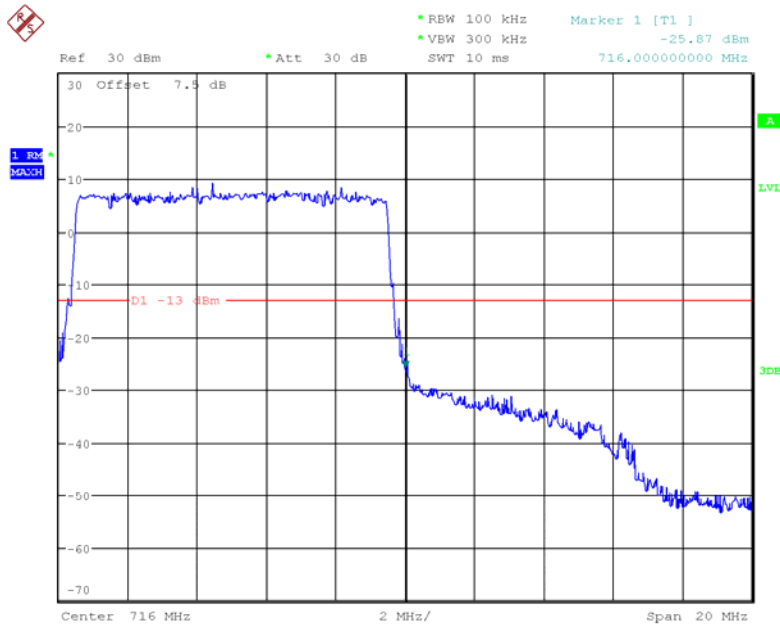

Date: 30.MAR.2018 15:21:51


LTE Band 17

QPSK_5MHz_25 RB_Left

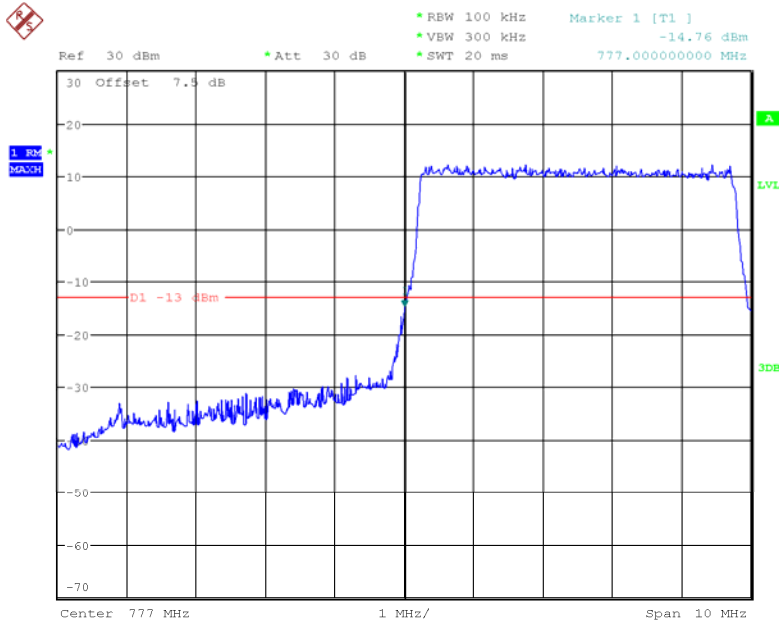


Date: 30.MAR.2018 15:26:14

QPSK_5MHz_25 RB_Right

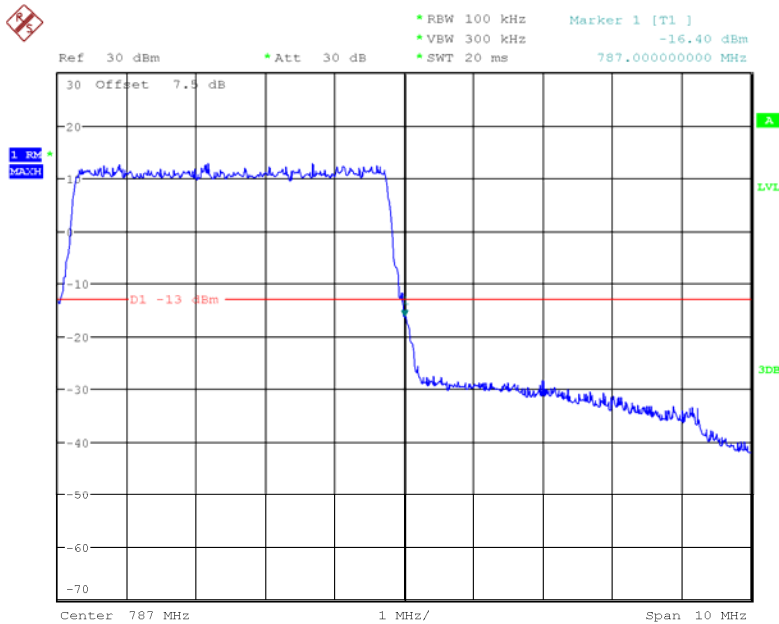


Date: 30.MAR.2018 15:27:49

QPSK_10MHz_50 RB_Left

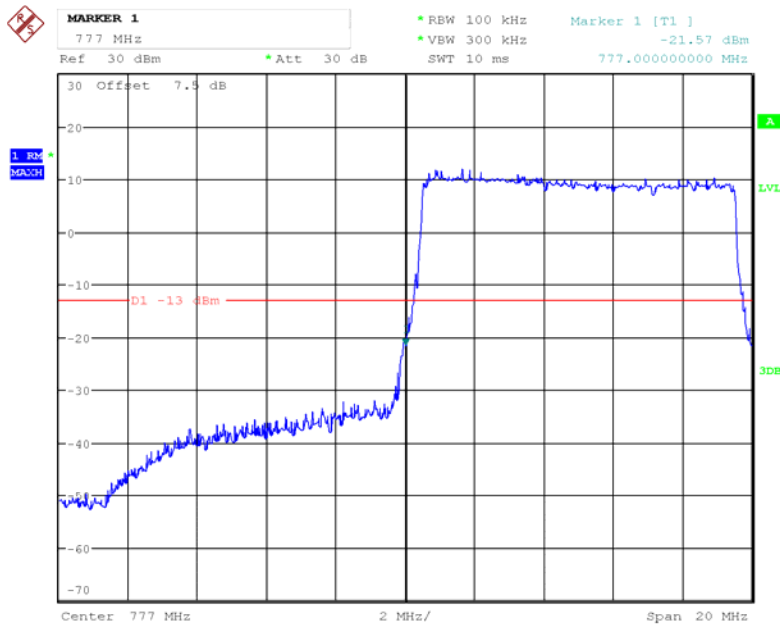


Date: 30.MAR.2018 15:29:42

QPSK_10MHz_50 RB_Right

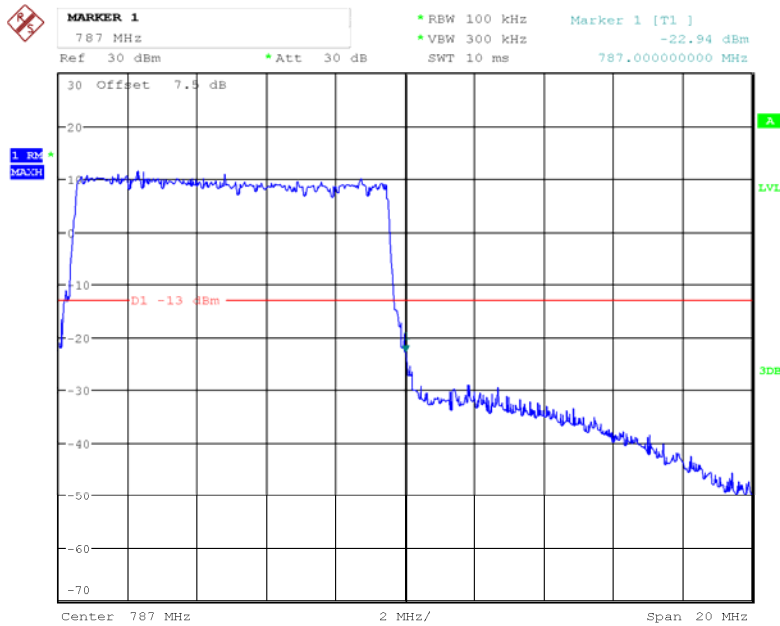


Date: 30.MAR.2018 15:31:04

16QAM_5MHz_25 RB_Left

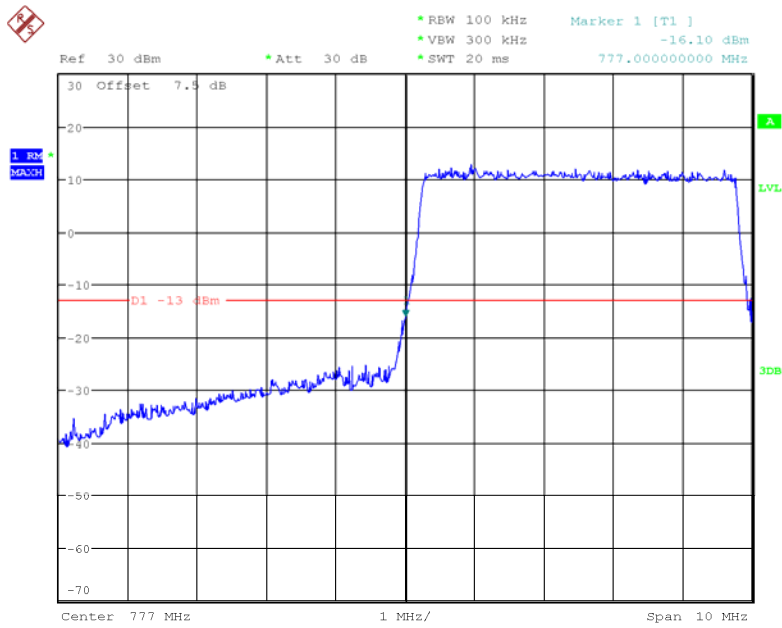


Date: 30.MAR.2018 15:25:58

16QAM_5MHz_25 RB_Right

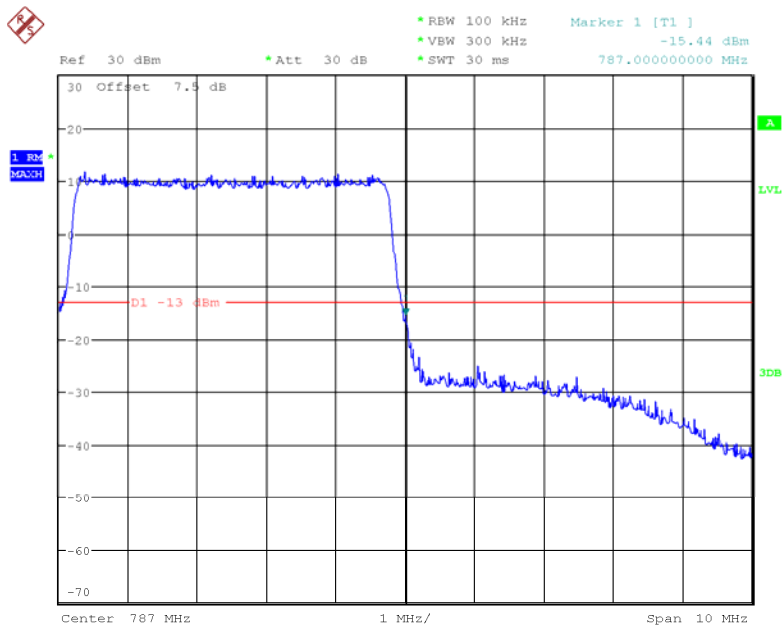


Date: 30.MAR.2018 15:27:12

16QAM_10MHz_50 RB_Left

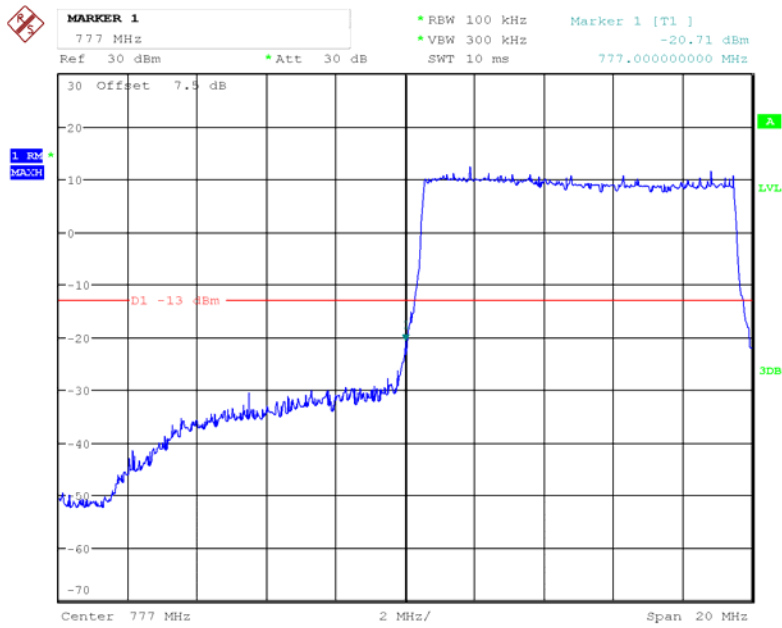

Date: 30.MAR.2018 15:29:24

16QAM_10MHz_50 RB_Right

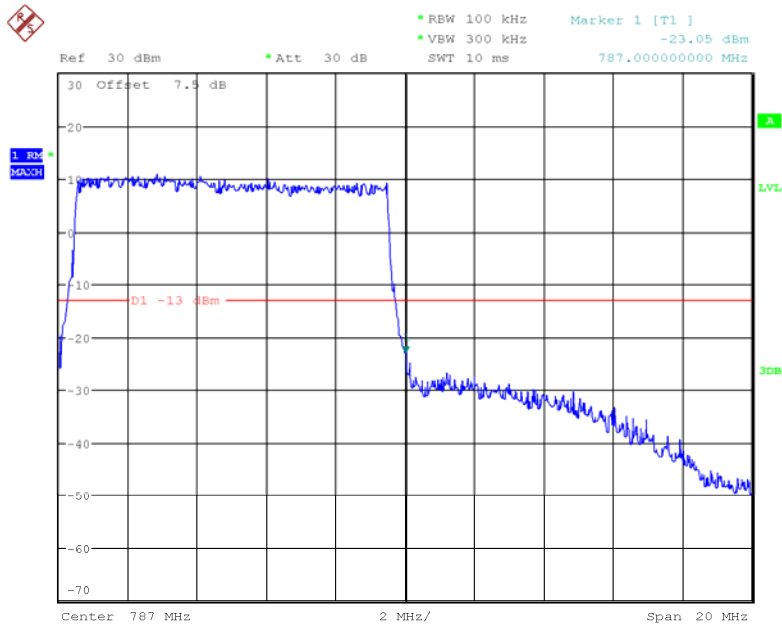

Date: 30.MAR.2018 15:30:28

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile > 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50 | 20.0 | 20.0 | 50.0 |
| 50 to 450 | 5.0 | 5.0 | 50.0 |
| 450 to 512 | 2.5 | 5.0 | 5.0 |
| 821 to 896 | 1.5 | 2.5 | 2.5 |
| 928 to 929. | 5.0 | N/A | N/A |
| 929 to 960. | 1.5 | N/A | N/A |
| 2110 to 2220 | 10.0 | N/A | N/A |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

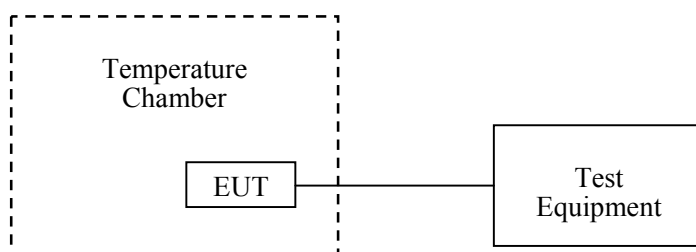

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| Dongzhixu | High Temperature Test Chamber | DP1000 | 201105083-4 | 2017-09-10 | 2018-09-09 |
| R&S | Universal Radio Communication Tester | CMU200 | 109 038 | 2017-07-18 | 2018-07-18 |
| R&S | Wideband Radio Communication Tester | CMW500 | 147473 | 2017-08-31 | 2018-08-31 |
| UNI-T | Multimeter | UT39A | M130199938 | 2017-04-02 | 2018-04-02 |
| Unknown | Coaxial Cable | C-SJ00-0010 | C0010/02 | Each Time | / |
| Pro instrument | DC Power Supply | pps3300 | N/A | N/A | N/A |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

| | |
|---------------------------|-------------------|
| Temperature: | 25.8 ~ 27 °C |
| Relative Humidity: | 50 ~ 53 % |
| ATM Pressure: | 100.7 ~ 101.4 kPa |

The testing was performed by Nami Quan & Harry Yang on 2018-03-30 & 2018-04-02.

Cellular Band (Part 22H)

| GMSK, Middle Channel, $f_c = 836.6$ MHz | | | | |
|---|-----------------|-----------------|-----------------|-------|
| Temperature | Voltage | Frequency Error | Frequency Error | Limit |
| °C | V _{DC} | Hz | ppm | ppm |
| -30 | 3.8 | 8 | 0.010 | 2.5 |
| -20 | | 7 | 0.008 | |
| -10 | | 4 | 0.005 | |
| 0 | | 3 | 0.004 | |
| 10 | | 10 | 0.012 | |
| 20 | | 7 | 0.008 | |
| 30 | | 4 | 0.005 | |
| 40 | | 5 | 0.006 | |
| 50 | | 11 | 0.013 | |
| 25 | | 3.6 | 5 | |
| 25 | 4.35 | 7 | 0.008 | |

| 8PSK, Middle Channel, $f_c = 836.6$ MHz | | | | |
|---|-----------------|-----------------|-----------------|-------|
| Temperature | Voltage | Frequency Error | Frequency Error | Limit |
| °C | V _{DC} | Hz | ppm | ppm |
| -30 | 3.8 | 50 | 0.060 | 2.5 |
| -20 | | 53 | 0.063 | |
| -10 | | 49 | 0.059 | |
| 0 | | 55 | 0.066 | |
| 10 | | 50 | 0.060 | |
| 20 | | 53 | 0.063 | |
| 30 | | 49 | 0.059 | |
| 40 | | 51 | 0.061 | |
| 50 | | 57 | 0.068 | |
| 25 | | 3.6 | 49 | |
| 25 | 4.35 | 54 | 0.065 | |

PCS Band (Part 24E)

| GMSK, Middle Channel, $f_c = 1880.0$ MHz | | | | |
|--|-----------------------|------------------------|------------------------|----------------|
| Temperature | Voltage | Frequency Error | Frequency Error | Results |
| °C | V_{DC} | Hz | ppm | |
| -30 | 3.8 | 29 | 0.015 | Pass |
| -20 | | 27 | 0.014 | |
| -10 | | 26 | 0.014 | |
| 0 | | 30 | 0.016 | |
| 10 | | 27 | 0.014 | |
| 20 | | 26 | 0.014 | |
| 30 | | 21 | 0.011 | |
| 40 | | 26 | 0.014 | |
| 50 | | 26 | 0.014 | |
| 25 | | 3.6 | 29 | |
| 25 | 4.35 | 23 | 0.012 | |

| 8PSK, Middle Channel, $f_c = 1880.0$ MHz | | | | |
|--|-----------------------|------------------------|------------------------|----------------|
| Temperature | Voltage | Frequency Error | Frequency Error | Results |
| °C | V_{DC} | Hz | ppm | |
| -30 | 3.8 | 32 | 0.017 | Pass |
| -20 | | 28 | 0.015 | |
| -10 | | 35 | 0.019 | |
| 0 | | 36 | 0.019 | |
| 10 | | 28 | 0.015 | |
| 20 | | 28 | 0.015 | |
| 30 | | 35 | 0.019 | |
| 40 | | 36 | 0.019 | |
| 50 | | 35 | 0.019 | |
| 25 | | 3.6 | 29 | |
| 25 | 4.35 | 30 | 0.016 | |

WCDMA Band V: R99

| Middle Channel, $f_c = 836.6$ MHz | | | | |
|-----------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature | Voltage | Frequency Error | Frequency Error | Limit |
| °C | V _{DC} | Hz | ppm | ppm |
| -30 | 3.8 | 3 | 0.004 | 2.5 |
| -20 | | 4 | 0.005 | |
| -10 | | 3 | 0.004 | |
| 0 | | 9 | 0.011 | |
| 10 | | 1 | 0.001 | |
| 20 | | 4 | 0.005 | |
| 30 | | 3 | 0.004 | |
| 40 | | 2 | 0.002 | |
| 50 | | 1 | 0.001 | |
| 25 | | 3.6 | 6 | |
| 25 | 4.35 | 6 | 0.007 | |

LTE Band 2:

| QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz | | | | |
|--|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | 1.11 | 0.0006 | Pass |
| -20 | | 1.12 | 0.0006 | |
| -10 | | 0.71 | 0.0004 | |
| 0 | | 0.67 | 0.0004 | |
| 10 | | 0.91 | 0.0005 | |
| 20 | | 1.12 | 0.0006 | |
| 30 | | 0.71 | 0.0004 | |
| 40 | | 0.68 | 0.0004 | |
| 50 | | 0.71 | 0.0004 | |
| 25 | 3.6 | 1.07 | 0.0006 | |
| 25 | 4.35 | 1.34 | 0.0007 | |

| 16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz | | | | |
|---|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | -2.83 | -0.0015 | Pass |
| -20 | | -5.57 | -0.0030 | |
| -10 | | -2.08 | -0.0011 | |
| 0 | | -2.12 | -0.0011 | |
| 10 | | -2.82 | -0.0015 | |
| 20 | | -5.57 | -0.0030 | |
| 30 | | -2.08 | -0.0011 | |
| 40 | | -2.42 | -0.0013 | |
| 50 | | -2.74 | -0.0015 | |
| 25 | 3.6 | -2.64 | -0.0014 | |
| 25 | 4.35 | -2.56 | -0.0014 | |

LTE Band 12:

| QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 707.5$ MHz | | | | |
|---|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | 1.60 | 0.0023 | Pass |
| -20 | | 1.14 | 0.0016 | |
| -10 | | 1.08 | 0.0015 | |
| 0 | | 0.67 | 0.0009 | |
| 10 | | 1.37 | 0.0019 | |
| 20 | | 1.14 | 0.0016 | |
| 30 | | 1.08 | 0.0015 | |
| 40 | | 1.09 | 0.0015 | |
| 50 | | 1.30 | 0.0018 | |
| 25 | | 3.6 | 1.45 | |
| 25 | 4.35 | 1.04 | 0.0015 | |

| 16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 707.5$ MHz | | | | |
|--|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | 4.23 | 0.0060 | Pass |
| -20 | | 3.87 | 0.0055 | |
| -10 | | 3.82 | 0.0054 | |
| 0 | | 3.72 | 0.0053 | |
| 10 | | 3.87 | 0.0055 | |
| 20 | | 3.82 | 0.0054 | |
| 30 | | 3.75 | 0.0053 | |
| 40 | | 3.63 | 0.0051 | |
| 50 | | 4.07 | 0.0058 | |
| 25 | | 3.6 | 4.08 | |
| 25 | 4.35 | 3.58 | 0.0051 | |

LTE Band 13:

| QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 782$ MHz | | | | |
|---|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | 0.11 | 0.0001 | Pass |
| -20 | | 0.11 | 0.0001 | |
| -10 | | -0.19 | -0.0002 | |
| 0 | | -0.10 | -0.0001 | |
| 10 | | 0.11 | 0.0001 | |
| 20 | | -0.19 | -0.0002 | |
| 30 | | 0.18 | 0.0002 | |
| 40 | | -0.09 | -0.0001 | |
| 50 | | -0.03 | 0.0000 | |
| 25 | 3.6 | -0.56 | -0.0007 | |
| 25 | 4.35 | -0.35 | -0.0004 | |

| 16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 782$ MHz | | | | |
|--|-----------------|-----------------|-----------------|--------|
| Temperature | Voltage | Frequency Error | Frequency Error | Result |
| °C | V _{DC} | Hz | ppm | |
| -30 | 3.8 | -0.86 | -0.0011 | Pass |
| -20 | | -1.20 | -0.0015 | |
| -10 | | -1.20 | -0.0015 | |
| 0 | | -1.04 | -0.0013 | |
| 10 | | -1.20 | -0.0015 | |
| 20 | | -1.20 | -0.0015 | |
| 30 | | -1.68 | -0.0021 | |
| 40 | | -1.62 | -0.0021 | |
| 50 | | -1.15 | -0.0015 | |
| 25 | 3.6 | -1.30 | -0.0017 | |
| 25 | 4.35 | -1.43 | -0.0018 | |

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******