


## Inverted F Antenna Specification

### Summary

| ITEM                 | ANT SPEC                            |         |         |          |         |         |
|----------------------|-------------------------------------|---------|---------|----------|---------|---------|
| Model Name           | 2.4G ANT(PCB)                       |         |         |          |         |         |
| Center Frequency     | Horizontal                          |         |         | Vertical |         |         |
|                      | 2400MHz                             | 2450MHz | 2500MHz | 2400MHz  | 2450MHz | 2500MHz |
|                      | -1.26                               | -0.76   | -0.58   | -5.25    | -2.46   | -1.86   |
| MAX. Gain            | -0.58dB                             |         |         |          |         |         |
| Polarization         | Horizontal and Vertical             |         |         |          |         |         |
| Azimuth Beam Pattern | Omni-directional                    |         |         |          |         |         |
| Impedance            | 50 Ohm                              |         |         |          |         |         |
| Antenna Length       | 38.2mm                              |         |         |          |         |         |
| Manufacture          | SHENZHEN RENYUAN TECHNOLOGY CO.,LTD |         |         |          |         |         |

Address: Yihe Industrial Zone, Boluo County, Huizhou City, China.

### Antenna Photo & Length (mm)

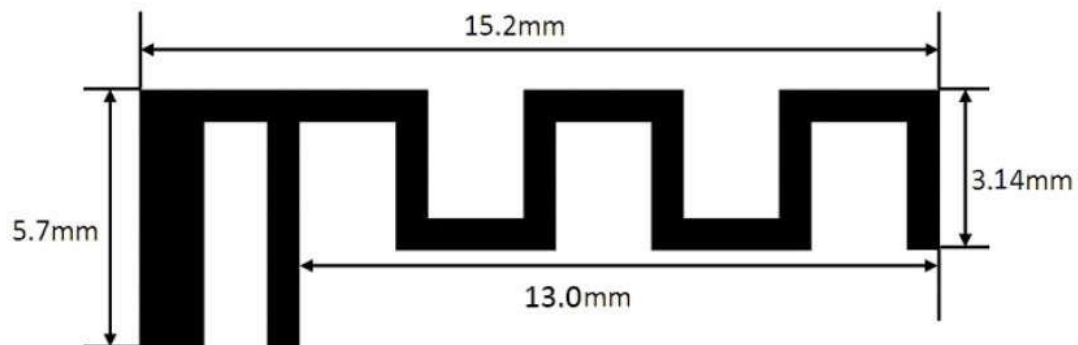

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div



| Frequency<br>(MHz) | Gain(dB)  |          |          |
|--------------------|-----------|----------|----------|
|                    | Max       | Min      | Avg      |
| 2400               | -1.26174  | -30.0801 | -7.18716 |
| 2450               | -0.765802 | -36.5604 | -7.48023 |
| 2500               | -0.585582 | -22.0315 | -6.59127 |

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/di

| Frequency<br>(MHz) | Gain(dB) |          |          |
|--------------------|----------|----------|----------|
|                    | Max      | Min      | Avg      |
| 2400               | -5.2537  | -22.1424 | -12.4294 |
| 2450               | -2.4652  | -24.5837 | -10.4702 |
| 2500               | -1.86120 | -29.5214 | -9.20432 |

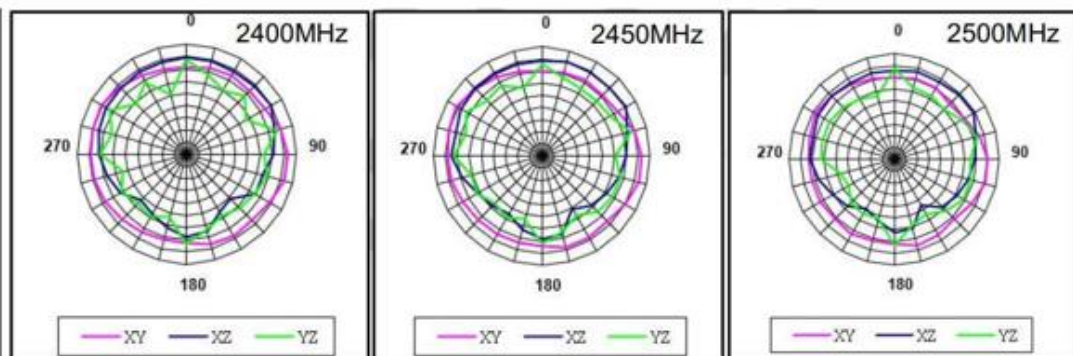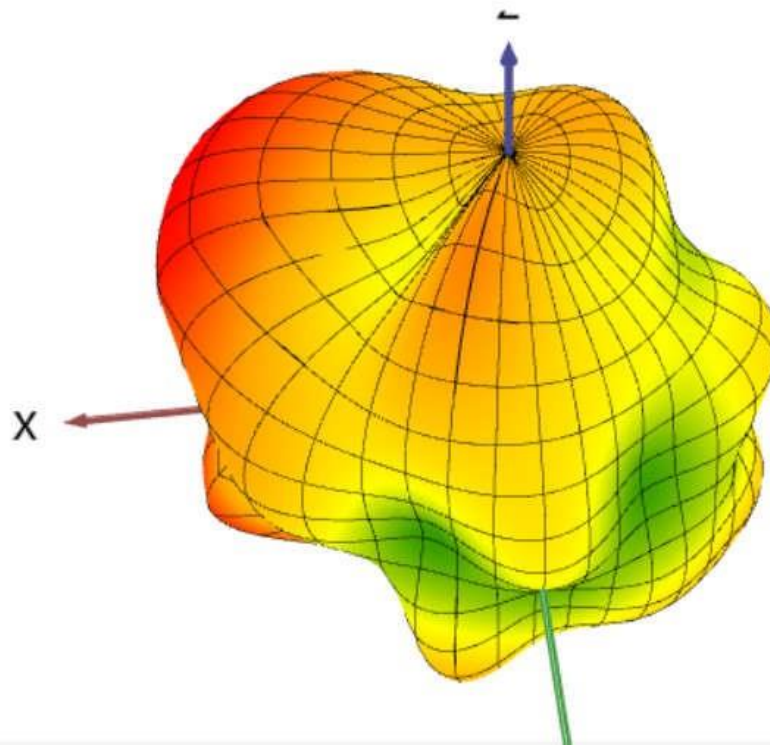

|             | 2400MHz  | 2450MHz  | 2500MHz  |
|-------------|----------|----------|----------|
| Efficiency  | 80.2%    | 83.4%    | 82.1%    |
| Peak Gain   | -1.25dBi | -0.58dBi | -1.2dBi  |
| Directivity | -3.21dBi | -2.58dBi | -2.43dBi |