



# FCC SAR Compliance Test Report

For

**Acer India Pvt Ltd.**

Embassy Heights 6th Floor, No. 13, Magrath Road, (Next to Hosmat Hospital), Bangalore-560

025, India.

**Model: Acer One 8 T9-422L**

Test Engineer: Wei Liangmei *Wei Liangmei*

Report Number: WSCT-A2LA-R&E230300002A-SAR

Report Date: 10 April 2023

FCC ID: 2AMY3-8T9-422L

Check By: Peng Peng *Peng Peng*

Liu Fuxin

World Standardization Certification & Testing Group  
(Shenzhen) Co., Ltd.

Prepared By: Building A-B, Baoshi Science & Technology Park,  
Baoshi Road, Bao'an District, Shenzhen, Guangdong,  
China

Tel: +86-755-26996192

Fax: +86-755-86376605





## Table of contents

1	General information .....	5
1.1	Notes .....	5
1.2	Application details .....	5
1.3	Statement of Compliance .....	6
1.4	EUT Information .....	8
2	Testing laboratory .....	10
2.1	ACCREDITATIONS .....	10
3	Test Environment .....	10
4	Applicant and Manufacturer .....	10
5	Test standard/s: .....	11
5.1	RF exposure limits .....	12
5.2	SAR Definition .....	12
6	SAR Measurement System .....	13
6.1	The Measurement System .....	13
6.2	Robot .....	14
6.3	Probe .....	14
6.4	Measurement procedure .....	15
6.5	Description of interpolation/extrapolation scheme .....	16
6.6	Phantom .....	17
6.7	Device Holder .....	18
6.8	Video Positioning System .....	19
6.9	Tissue simulating liquids: dielectric properties .....	20
6.10	Tissue simulating liquids: parameters .....	21
7	System Check .....	23
7.1	System check procedure .....	23
7.2	System check results .....	24
8	SAR Test Test Configuration .....	25





8.1	GSM Test Configurations.....	25
8.2	LTE Test Configuration .....	25
8.3	Wi-Fi Test Configuration .....	27
8.4	WiFi 2.4G SAR Test Procedures.....	27
8.5	WiFi 5G SAR Test Procedures.....	28
9	Detailed Test Results.....	30
9.1	Conducted Power measurements.....	30
9.1.1	Conducted Power of GSM850.....	30
9.1.2	Conducted Power of GSM1900.....	31
9.1.3	Conducted Power of LTE Band 5 .....	32
9.1.4	Conducted Power of LTE Band 41 .....	34
9.1.5	Conducted Power of Wi-Fi 2.4G .....	36
9.1.6	Conducted Power of Wi-Fi 5G .....	37
9.1.7	Conducted Power of BT .....	38
9.1.8	Conducted Power of BLE.....	38
9.1.9	Tune-up power tolerance .....	39
9.2	SAR test results .....	40
9.2.1	Results overview of GSM850.....	43
9.2.2	Results overview of GSM1900.....	44
9.2.3	Results overview of LTE Band 5 .....	45
9.2.4	Results overview of LTE Band 41 .....	46
9.2.5	Results overview of Wi-Fi 2.4G .....	47
9.2.6	Results overview of Wi-Fi 5G .....	48
10	Multiple Transmitter Information.....	50
10.1.1	Stand-alone SAR test exclusion.....	51
10.1.2	Simultaneous Transmission Possibilities.....	52





11	Measurement uncertainty evaluation .....	53
11.1	Measurement uncertainty evaluation for SAR test .....	53
11.2	Measurement uncertainty evaluation for system check.....	55
12	Test equipment and ancillaries used for tests .....	57
Annex A:	System performance verification.....	58
Annex B:	Measurement results.....	58
Annex C:	Calibration reports .....	58





### Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Relesse	10 April 2023	Liu Fuxin

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. Shenzhen Timeway Testing Laboratories does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

### 1.2 Application details

Date of receipt of test item: 2023-03-17  
 Start of test: 2023-03-19  
 End of test: 2023-03-29





### 1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Acer One 8 T9-422L is as below:

Band	Position	MAX Reported SAR <sub>1g</sub> (W/kg)
GSM850	Head	0.613
	Body & Worn 0mm	0.696
GSM1900	Head	<b>0.746</b>
	Body & Worn 0mm	0.383
LTE Band 5	Head	0.428
	Body & Worn 0mm	0.491
LTE Band 41	Head	0.682
	Body & Worn 0mm	0.434
Wi-Fi 2.4G	Head	0.384
	Body & Worn 0mm	0.398
Wi-Fi 5G	Head	0.321
	Body & Worn 0mm	0.347
The highest simultaneous SAR is 1.130W/kg per KDB690783 D01		





The device is in compliance with Specific Absorption Rate ( SAR ) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:2005, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.





### 1.4 EUT Information

<b>Device Information:</b>			
<b>Product Type:</b>	Tablet		
<b>Model:</b>	Acer One 8 T9-422L		
<b>Trade Name:</b>	Acer		
<b>Device Type:</b>	Portable device		
<b>Exposure Category:</b>	uncontrolled environment / general population		
<b>Production Unit or Identical Prototype:</b>	Production Unit		
<b>Antenna Type :</b>	Internal Antenna		
<b>Device Operating Configurations:</b>			
<b>Supporting Mode(s) :</b>	GSM850,PCS1900, LTE Band 5 , LTE Band 41, Wi-Fi , BT		
<b>Modulation:</b>	GSM(GMSK),UMTS(QPSK/16QAM),LTE(QPSK/16QAM), WiFi(OFDM/CCK),BT(GFSK/π/4-DQPSK/ 8-DPSK)		
<b>Device Class :</b>	Class B, No DTM Mode		
<b>Operating Frequency Range(s)</b>	<b>Band</b>	<b>TX(MHz)</b>	<b>RX(MHz)</b>
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	LTE Band 5	824~849	869~894
	LTE Band 41	2496~2690	2496~2690
	Wi-Fi (2.4G)	2412-2462	
	Wi-Fi (5G)	Band 1: 5180-5240 MHz Band 2: 5260-5320 MHz Band 3: 5500-5700 MHz Band 4: 5745-5825 MHz	
	BT	2402~2480	
<b>GPRS class level:</b>	GPRS class 12		







<b>Test Channels (low-mid-high):</b>	128-190-251(GSM850)
	512-661-810(GSM1900)
	20450-20525-20600(LTE Band 5)
	39750-39948-40740(LTE Band 41)
	1-6-11 (Wi-Fi)
	802.11a/n/ac 20M: 36-40-44-48-52-56-60-64-149-153-157-161-165
	802.11 n/ac 40M: 38-46-54-62-151-159 (Wi-Fi 5G)
<b>Power Source:</b>	0-39-78(BT)
	0-19-39(BLE)
	Model: GFL 1100100 1ICP4/100/100 Nominal Voltage: 3.8V Rated capacity: 5100mAh/19.38Wh Limited Charge Voltage: 4.35V





## 2 Testing laboratory

Test Site	World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Test Location	Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
Telephone	+86-755-26996192
Fax	+86-755-86376605

### 2.1 ACCREDITATIONS

#### China National Accreditation Service for Conformity Assessment (CNAS)

Registration number NO: L3732

#### American Association for Laboratory Accreditation(A2LA)

Registration NO: 5768.01

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

## 3 Test Environment

	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2 °C
Tissue Simulating liquid:	22 ± 2 °C	22 ± 2 °C
Relative humidity content:	30 – 70 %	30 – 70 %

## 4 Applicant and Manufacturer

Applicant/Client Name:	Acer India Pvt Ltd.
Applicant Address:	Embassy Heights 6th Floor, No. 13, Magrath Road, (Next to Hosmat Hospital), Bangalore-560 025, India.
Manufacturer Name:	Acer India Pvt Ltd.
Manufacturer Address:	Embassy Heights 6th Floor, No. 13, Magrath Road, (Next to Hosmat Hospital), Bangalore-560 025, India.



## 5 Test standard/s:

ANSI Std C95.1-2005	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 March 2015))
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Head set SAR v01r03
KDB941225 D06	Hot Spot SAR V02r01
KDB248227 D01	SAR meas for 802.11 a/b/g v02r02
KDB865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	RF Exposure Reporting v01r02
KDB 941225 D05	SAR Evaluation Considerations for LTE Devices
KDB941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02





## 5.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Heads/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

### Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

## 5.2 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

E = rms electric field strength (V/m)





## 6 SAR Measurement System

### 6.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Device holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.



## 6.2 Robot

The COMOSAR system uses the high precision robots KR 6 R900 sixx type out of the newer series from Satimo SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used. The KR 6 R900 sixx robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

## 6.3 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE 5 with following specifications is used



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

- Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

- Calibration range: 300MHz to 3GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line:less than 30°



Figure 2 – MVG COMOSAR Dosimetric E field Dipole

Dynamic range: 0.01-100 W/kg

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

- Calibration range: 5GHz to 6GHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line:less than 30°





## 6.4 Measurement procedure

### The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



### SAR Averaged Methods

In SATIMO, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### 6.5 Description of interpolation/extrapolation scheme

- The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.
- An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.
- The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR average over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.







## 6.6 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



## 6.7 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

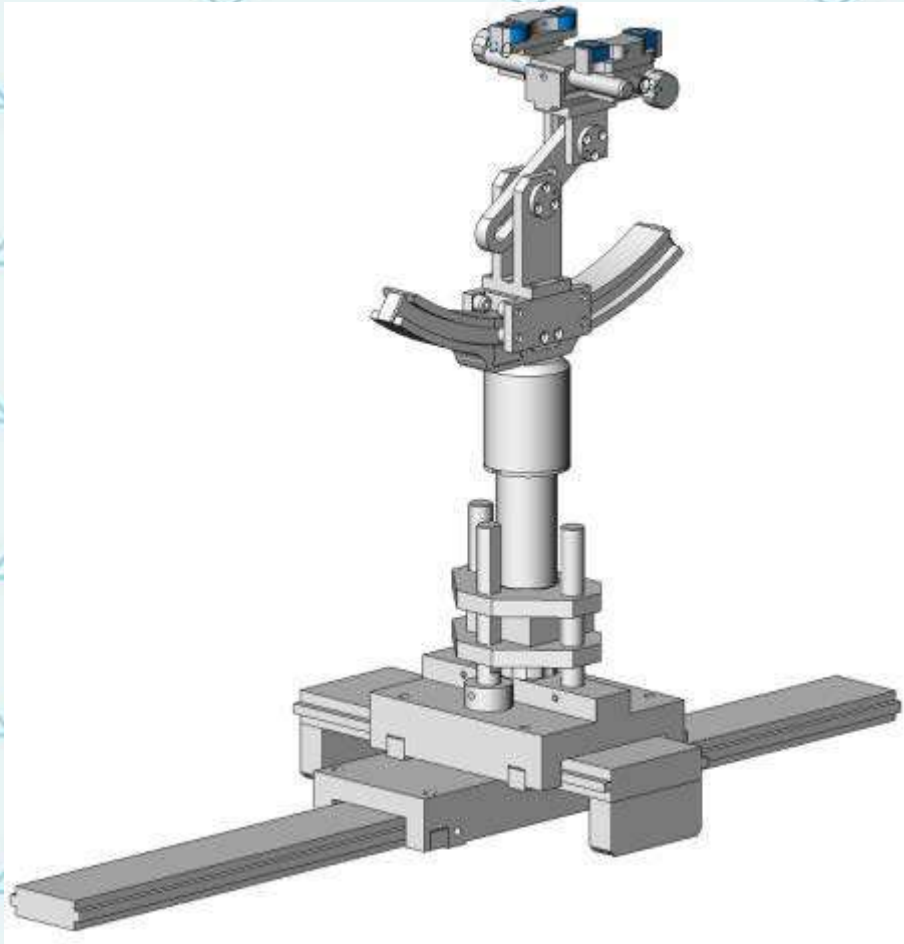

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



## 6.8 Video Positioning System

- The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.
- During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.
- The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.





### 6.9 Tissue simulating liquids: dielectric properties

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with ):

Ingredients(% of weight)	Frequency (MHz)					
	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input checked="" type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 2600
frequency band	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input checked="" type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 2600
Tissue Type	Head	Head	Head	Head	Head	Head
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	47.0	44.542	0.0	44.452

Ingredients(% of weight)	Frequency (MHz)					
	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input checked="" type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 2600
frequency band	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input checked="" type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input checked="" type="checkbox"/> 2600
Tissue Type	Body	Body	Body	Body	Body	Body
Water	50.30	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether





### 6.10 Tissue simulating liquids: parameters

Tissue Type	Measured Frequency (MHz)	Target Tissue				Measured Tissue		Liquid Temp.	Test Date		
		Target Permittivity $\epsilon_r$	Range of $\pm 5\%$	Target Conductivity $\sigma$ (S/m)	Range of $\pm 5\%$	$\epsilon_r$	$\sigma$ (S/m)				
835MHz Head	825	41.60	39.52~43.68	0.90	0.86~0.95	40.34	0.91	21.6°C	2023-03-19		
	835	41.50	39.43~43.58	0.90	0.86~0.95	40.33	0.92				
	850	41.50	39.43~43.58	0.92	0.87~0.97	40.11	0.94				
835MHz Body	825	55.20	52.44~57.96	0.97	0.92~1.02	54.04	0.98			21.6°C	2023-03-22
	835	55.20	52.44~57.96	0.97	0.92~1.02	53.93	0.99				
	850	55.20	52.44~57.96	0.99	0.94~1.04	53.69	1.01				
1900MHz Head	1850	40.00	38.00~42.00	1.40	1.33~1.47	39.93	1.37	21.6°C	2023-03-28		
	1880	40.00	38.00~42.00	1.40	1.33~1.47	39.91	1.40				
	1900	40.00	38.00~42.00	1.40	1.33~1.47	39.98	1.41				
	1910	40.00	38.00~42.00	1.40	1.33~1.47	39.97	1.42				
1900MHz Body	1850	53.30	50.64~55.97	1.52	1.44~1.60	53.23	1.49			21.6°C	2023-03-28
	1880	53.30	50.64~55.97	1.52	1.44~1.60	53.36	1.53				
	1900	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.56				
2450MHz Head	1910	53.30	50.64~55.97	1.52	1.44~1.60	53.37	1.57				
	2410	39.30	37.34~41.26	1.76	1.67~1.85	39.22	1.78				
	2435	39.20	37.24~41.16	1.79	1.70~1.88	39.25	1.77				
	2450	39.20	37.24~41.16	1.80	1.71~1.89	39.24	1.76				
2450MHz Body	2460	39.20	37.24~41.16	1.81	1.72~1.90	39.20	1.76	21.6°C	2023-03-28		
	2410	52.80	50.16~55.44	1.91	1.81~2.00	52.72	1.92				
	2435	52.70	50.07~55.34	1.94	1.84~2.04	52.75	1.92				
	2450	52.70	50.07~55.34	1.95	1.85~2.05	52.74	1.91				
2450MHz Body	2460	52.70	50.07~55.34	1.96	1.86~2.06	52.70	1.91			21.6°C	2023-03-28





2600MHz Head	2510	39.00	37.05~40.95	1.96	1.86~2.06	38.87	1.93	21.6°C	2023-03-27
	2535	39.00	37.05~40.95	1.96	1.86~2.06	38.58	1.93		
	2560	39.00	37.05~40.95	1.96	1.86~2.06	38.98	2.02		
	2600	39.00	37.05~40.95	1.96	1.86~2.06	52.50	2.02		
2600MHz Body	2510	52.50	49.90~55.11	2.16	2.05~2.27	52.21	2.05	21.6°C	2023-03-29
	2535	52.50	49.90~55.11	2.16	2.05~2.27	51.92	2.06		
	2560	52.50	49.90~55.11	2.16	2.05~2.27	52.01	2.09		
	2600	52.50	49.90~55.11	2.16	2.05~2.27	38.87	1.93		
5G Body	5200	49.0	46.55~51.45	5.30	5.03~5.56	49.86	5.19	21.6°C	2023-03-29
	5300	48.9	46.05~51.35	5.42	5.15~5.69	48.32	5.27		
	5800	48.20	45.79~50.61	6.00	5.70~6.30	47.74	6.09		
$\epsilon_r$ = Relative permittivity, $\sigma$ = Conductivity									






## 7 System Check

### 7.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

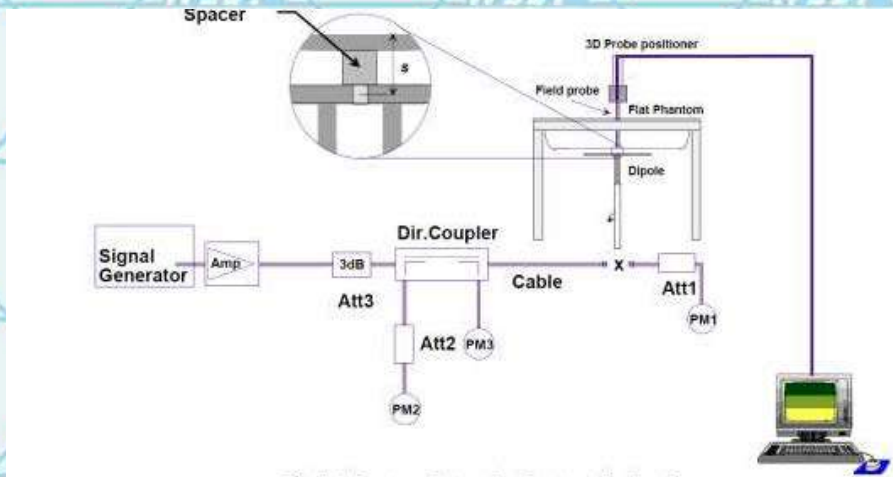



## 7.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check	Target SAR (1W) (+/-10%)				Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/g)	Range of $\pm 10\%$ 1-g (W/g)	10-g (W/g)	Range of $\pm 10\%$ 10-g (W/g)	1-g (W/g)	10-g (W/g)		
D835V2 Head	9.82	8.84~10.80	6.35	5.72~6.99	9.700	6.150	21.6°C	2023/03/19
D1900V2 Head	38.93	35.04~42.82	20.27	18.45~22.55	39.980	21.070	21.6°C	2023/03/22
D2450V2 Head	53.41	48.07~58.75	23.95	21.56~26.35	53.930	24.530	21.6°C	2023/03/28
D2600V2 Head	56.88	51.20~62.56	24.92	22.43~27.41	53.180	23.430	21.6°C	2023/03/29
D835V2 Body	9.41	8.47~10.35	6.22	5.99~6.84	10.150	6.450	21.6°C	2023/03/19
D1900V2 Body	38.73	34.86~42.60	20.48	18.43~22.53	39.330	20.940	21.6°C	2023/03/22
D2450V2 Body	51.39	46.25~56.53	23.63	21.27~25.99	54.330	23.330	21.6°C	2023/03/28
D2600V2 Body	54.54	49.09~59.99	24.37	21.94~26.80	57.860	25.600	21.6°C	2023/03/29
D5200V2 Body	163.36	147.03~179.69	57.09	51.39~62.79	167.180	59.640	21.6°C	2023/03/29
D5300V2 Body	166.22	149.60~182.84	57.22	51.50~62.94	165.370	58.820	21.6°C	2023/03/29
D5800V2 Body	177.10	159.39~194.81	59.95	53.96~65.94	179.660	60.800	21.6°C	2023/03/29

Note: All SAR values are normalized to 1W forward power.

Note: 5G band system check USES standard waveguide, so the test results are standard en62209-2 table B2





## 8 SAR Test Test Configuration

### 8.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

### 8.2 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

#### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

#### 3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS\_01”on the base station simulator.



#### 4) LTE procedures for SAR testing

##### A) Largest channel bandwidth standalone SAR test requirements

###### i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

###### ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

###### iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

###### iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

##### B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

#### 5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.



### 8.3 Wi-Fi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for Wi-Fi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. 802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2412	1#	√	△
		2437	6	√	△
		2462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

# = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

#### 802.11 Test Channels per FCC Requirements

### 8.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

#### A)802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.





## B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

## 8.5 WiFi 5G SAR Test Procedures

### A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U- NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.

Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is  $> 1.2$  W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.





## B) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

## C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11 a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
  - 1) The channel closest to mid-band frequency is selected for SAR measurement.
  - 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.



## D) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

## 9 Detailed Test Results

### 9.1 Conducted Power measurements

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

#### 9.1.1 Conducted Power of GSM850

GSM850(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		34.53	34.18	33.69	-9.03	25.50	25.15	24.66
GPRS (GMSK)	1 Tx Slot	31.17	32.69	32.21	-9.03	22.14	23.66	23.18
	2 Tx Slots	32.13	30.85	31.61	-6.02	26.11	24.83	25.59
	3 Tx Slots	31.11	30.86	31.04	-4.26	<b>26.85</b>	<b>26.60</b>	<b>26.78</b>
	4 Tx Slots	27.34	28.02	27.82	-3.01	24.33	25.01	24.81
EGPRS (8-PSK)	1 Tx Slot	27.34	28.02	27.82	-9.03	18.31	18.99	18.79
	2 Tx Slots	27.83	28.47	27.17	-6.02	21.81	22.45	21.15
	3 Tx Slots	28.32	28.45	27.98	-4.26	24.06	24.19	23.72
	4 Tx Slots	28.19	29.33	28.01	-3.01	25.18	26.32	25.00

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3)The bolded GPRS 3Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel /Frequency: 128/824.2; 190/836.6; 251/848.8





### 9.1.2 Conducted Power of GSM1900

GSM1900(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		30.86	31.17	31.96	-9.03	21.83	22.14	22.93
GPRS (GMSK)	1 Tx Slot	28.51	27.56	28.42	-9.03	19.48	18.53	19.39
	2 Tx Slots	29.11	29.66	27.78	-6.02	23.09	23.64	21.76
	3 Tx Slots	28.42	29.00	28.56	-4.26	24.16	24.74	24.30
	4 Tx Slots	28.29	28.32	28.25	-3.01	<b>25.28</b>	<b>25.31</b>	<b>25.24</b>
EGPRS (8-PSK)	1 Tx Slot	27.07	27.85	28.01	-9.03	18.04	18.82	18.98
	2 Tx Slots	28.15	27.44	26.99	-6.02	22.13	21.42	20.97
	3 Tx Slots	27.70	27.37	28.00	-4.26	23.44	23.11	23.74
	4 Tx Slots	28.26	27.32	27.43	-3.01	25.25	24.31	24.42

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3)The bolded GPRS 4Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel /Frequency: 512/1850.2; 661/1880; 810/1909.8





**9.1.3 Conducted Power of LTE Band 5**

Please Contact with WSCT  
www.wsct-cert.com

Conducted Power of LTE Band 5							
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				20470	20525	20643	
1.4MHz	QPSK	1	0	23.94	23.96	23.64	
			3	24.07	23.69	23.85	
			5	23.90	23.44	23.72	
		3	0	20.97	20.91	20.33	
			2	20.61	21.16	20.53	
			3	20.25	20.58	20.43	
	16QAM	1	0	23.94	23.52	23.64	
			3	24.07	23.69	23.85	
			5	23.90	23.51	23.72	
		3	0	20.95	20.88	20.99	
			2	20.95	20.31	20.50	
			3	21.10	20.30	20.76	
	6	0	20.86	20.89	20.26		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
					20415	20525	20635
	3MHz	QPSK	1	0	23.87	23.41	23.76
				7	24.10	23.90	24.07
				14	23.85	24.18	23.80
8			0	20.70	20.33	20.79	
			4	21.16	20.39	20.67	
			7	21.04	20.83	21.02	
15		0	20.26	20.88	20.46		
16QAM		1	0	23.87	23.61	23.76	
			7	24.10	23.90	24.07	
			14	23.85	23.60	23.80	
		8	0	20.61	21.08	20.98	
			4	20.91	20.90	20.34	
			7	20.27	21.02	20.45	
15		0	20.93	20.89	20.76		







### Conducted Power of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				20425	20525	20625	
5MHz	QPSK	1	0	23.79	23.88	23.55	
			13	24.27	24.12	23.90	
			24	23.75	23.33	23.58	
		12	0	20.83	20.63	20.36	
			6	20.22	21.13	20.34	
			13	20.22	20.98	20.69	
	25	0	20.77	20.46	20.57		
		16QAM	1	0	23.79	23.59	23.55
				13	20.97	20.21	21.14
	24			24.27	24.12	23.90	
	12	0	20.47	20.38	20.62		
		6	20.86	20.94	21.09		
		13	20.62	20.69	20.82		
	25	0	20.81	21.04	20.37		

### Conducted Power of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				20450	20525	20600	
10MHz	QPSK	1	0	23.84	23.68	23.70	
			25	23.86	23.75	23.74	
			49	23.74	23.75	<b>23.75</b>	
		25	0	20.48	20.98	21.04	
			13	20.31	20.61	20.21	
			25	20.72	21.16	20.57	
	50	0	20.67	21.17	20.75		
		16QAM	1	0	23.84	23.69	23.70
				25	23.86	23.75	23.74
	49			23.74	23.69	23.75	
	25	0	21.00	20.92	20.78		
		13	21.10	20.95	20.86		
		25	20.83	20.40	21.08		
	50	0	20.96	20.55	20.44		





**9.1.4 Conducted Power of LTE Band 41**

Please Contact with WSCT  
www.wsct-cert.com

**Conducted Power of LTE Band 41**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				40265	40740	41215	
5MHz	QPSK	1	0	22.10	21.03	22.06	
			13	22.34	22.36	22.31	
			24	22.13	20.66	22.04	
		12	0	20.58	21.74	22.10	
			6	20.73	21.60	21.78	
			13	20.99	21.36	22.63	
	25	0	21.00	21.64	22.35		
	16QAM	1	0	20.86	21.71	22.04	
			13	21.10	21.47	21.96	
			24	21.18	22.13	22.00	
		12	0	20.53	22.17	22.17	
			6	21.20	21.98	21.94	
			13	20.73	21.69	22.10	
		25	0	21.09	21.36	22.02	
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel
10MHz		QPSK	1	0	22.21	21.22	22.13
	25			22.46	22.35	22.29	
	49			22.23	20.60	22.14	
	25		0	21.22	21.49	22.48	
			13	20.78	21.26	22.12	
			25	20.50	21.22	21.87	
	50	0	20.83	21.70	22.64		
	16QAM	1	0	22.21	22.20	22.13	
			25	22.46	22.35	22.29	
			49	22.23	22.25	22.14	
		25	0	21.36	21.58	22.60	
			13	20.81	21.63	22.26	
			25	21.18	21.27	22.47	
		50	0	20.43	22.14	22.66	





### Conducted Power of LTE Band 41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				40315	40740	41165	
15MHz	QPSK	1	0	22.12	20.58	22.12	
			38	22.44	22.43	22.43	
			74	22.15	20.47	22.07	
		36	0	21.40	21.81	22.05	
			18	21.57	22.07	21.85	
			39	20.80	21.92	21.73	
			75	22.33	21.94	22.08	
			16QAM	0	22.12	22.10	22.12
				38	22.44	22.43	22.43
	74	22.15		22.18	22.07		
	0	20.82		21.68	22.59		
	18	20.70		21.58	21.96		
	39	20.80		21.25	21.80		
	75	0	22.22	21.71	21.91		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
					40340	40740	41140
	20MHz	QPSK	1	0	21.94	20.54	21.94
				50	22.40	22.40	22.35
99				22.04	20.88	21.90	
50			0	20.71	22.03	22.41	
			25	20.57	22.46	21.82	
			50	20.61	21.65	22.34	
			100	0	20.76	22.39	22.29
			16QAM	0	21.94	21.94	21.94
				50	22.40	22.40	22.35
99		22.04		22.04	21.90		
0		21.30		21.64	22.63		
25		21.02		21.54	22.64		
50		21.31		21.45	22.56		
100		0	20.51	21.35	22.59		





### 9.1.5 Conducted Power of Wi-Fi 2.4G

Mode	802.11b		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	15.15	15.56	14.62
Mode	802.11g		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	<b>16.67</b>	16.53	15.88
Mode	802.11n(HT20)		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	16.37	16.49	15.94
Mode	802.11n(HT40)		
Channel / Frequency (MHz)	1(2412)	6(2437)	11(2462)
Average Power(dBm)	15.24	15.55	15.61



### 9.1.6 Conducted Power of Wi-Fi 5G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Setting	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.2G (IEEE 802.11a/n/ac/ax) 20MHz	Band1	36	5180	6	11.00	11.00±0.5	11.01	No
		48	5240		10.00	11.00±0.5	10.78	Yes
	Band2	52	5260	6.5M	11.00	11.00±0.5	11.08	No
		64	5320		9.50	9.50±0.5	9.66	No
	Band3	112	5550	13.5M	10.50	10.50±0.5	10.66	No
		140	5700		12.00	12.00±0.5	12.45	No
	Band4	149	5745	29.3M	11.50	11.50±0.5	11.98	No
		165	5825		11.00	11.00±0.5	11.39	No
5.3G (IEEE 802.11n/a/c/ax) 40MHz	Band1	36	5190	6	10.50	10.50±0.5	10.96	No
		44	5230		10.50	10.50±0.5	10.65	Yes
	Band2	56	5270	6.5M	10.50	10.50±0.5	10.57	No
		60	5310		9.50	9.50±0.5	9.59	No
	Band3	100	5510	13.5M	10.00	10.00±0.5	10.29	No
		132	5670		11.50	11.50±0.5	11.91	No
	Band4	149	5755	29.3M	11.50	11.50±0.5	11.69	No
		165	5595		11.00	11.00±0.5	11.24	No
5.8G (IEEE 802.11ac/ax) 80MHz	Band1	44	5210	6	10.00	10.00±0.5	10.35	No
	Band2	56	5290	6.5M	10.00	10.00±0.5	10.00	No
	Band3	108	5530	13.5M	10.50	10.50±0.5	10.58	No
		124	5610		11.00	11.00±0.5	11.36	No
Band4	149	5755	29.3M	11.00	11.00±0.5	11.21	No	

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.





### 9.1.7 Conducted Power of BT

The maximum output power of BT is:

Mode	GFSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	<b>1.05</b>	-0.08	-1.41
Mode	Pi/4DQPSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	-0.68	-1.07	-2.26
Mode	8DPSK mode		
Channel / Frequency (MHz)	0(2402)	39(2441)	78(2480)
Average Power(dBm)	0.28	-1.06	-2.43

### 9.1.8 Conducted Power of BLE

The maximum output power of BLE is:

Mode	BLE 1M		
Channel / Frequency (MHz)	0(2402)	19(2440)	39(2480)
Average Power(dBm)	-10.77	-10.16	-10.97
Mode	BLE 2M		
Channel / Frequency (MHz)	0(2402)	19(2440)	39(2480)
Average Power(dBm)	-7.97	<b>-7.31</b>	-8.11





### 9.1.9 Tune-up power tolerance

Band	Tune-up power tolerance(dBm)			
GSM850	GSM/GPRS (GMSK)	GSM	Max output power =34.0dBm±0.5dBm	
		1TXslots	Max output power =32.5dBm±0.5dBm	
		2TXslots	Max output power =32.0dBm±0.5dBm	
		3TXslots	Max output power =32.0dBm±0.5dBm	
GSM850	EGPRS (8-PSK)	4TXslots	Max output power =31.0dBm±0.5dBm	
		1TXslots	Max output power =28.0dBm±0.5dBm	
		2TXslots	Max output power =28.0dBm±0.5dBm	
		3TXslots	Max output power =28.0dBm±0.5dBm	
GSM850	EGPRS (8-PSK)	4TXslots	Max output power =29.0dBm±0.5dBm	
		GSM	Max output power =31.5dBm±0.5dBm	
		1TXslots	Max output power =28.5dBm±0.5dBm	
		2TXslots	Max output power =29.5dBm±0.5dBm	
GSM1900	GSM/GPRS (GMSK)	3TXslots	Max output power =28.5dBm±0.5dBm	
		4TXslots	Max output power =28.0dBm±0.5dBm	
		1TXslots	Max output power =28.0dBm±0.5dBm	
		2TXslots	Max output power =28.5dBm±0.5dBm	
GSM1900	EGPRS (8-PSK)	3TXslots	Max output power =28.0dBm±0.5dBm	
		4TXslots	Max output power =28.0dBm±0.5dBm	
		LTE B5		Max output power =23.5dbm±0.5dbm
		LTE B41		Max output power =21.0dbm±0.5dbm
2.4G Wi-Fi	802.11b	802.11b	Max output power =15.5±0.5dbm	
		802.11g	Max output power =16.5±0.5dbm	
		802.11n (HT20)	Max output power =16.0 ±0.5dbm	
		802.11n (HT40)	Max output power =15.5±0.5dbm	
	5.2G	802.11n(HT20)	Max output power =11.0dbm±1.0dBm	
		802.11n(HT40)	Max output power =11.0dbm±1.0dBm	
		802.11ac20M	Max output power =12.0dbm±1.0dBm	
		802.11ac40M	Max output power =11.5dbm±1.0dBm	
	5.3G	802.11n(HT20)	Max output power =10.5dbm±1.0dBm	
		802.11n(HT40)	Max output power =10.5dbm±1.0dBm	
		802.11ac20M	Max output power =11.5dbm±1.0dBm	
		802.11ac40M	Max output power =11.5dbm±1.0dBm	
	5.8G	802.11n(HT20)	Max output power =10.0dbm±1.0dBm	
		802.11n(HT40)	Max output power =10.0dbm±1.0dBm	
		802.11ac20M	Max output power =11.0dbm±1.0dBm	
		802.11ac40M	Max output power =11.0dbm±1.0dBm	
BT	1Mbps Power		Max output power =1.0dBm±0.5dbm	
	2Mbps Power		Max output power =1.0dBm±0.5dbm	
	3Mbps Power		Max output power =1.0dBm±0.5dbm	





## 9.2 SAR test results

### Notes:

1) Per KDB447498 D01v05 r02, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the scaled SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ( $< 0.8 \text{ W/kg}$ ), testing at the high and low channels is optional.

2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$ . When the maximum output power variation across the required test channels is  $> \frac{1}{2} \text{ dB}$ , instead of the middle channel, the highest output power channel must be used.

3) Per KDB447498 D01v05r02, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

4) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn with headset SAR.

5) Per KDB248227 D01v01r02, the procedures required to establish specific device operating configurations for testing the SAR of 802.11 a/b/g transmitters.

(1) For Headsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is  $\leq 0.4 \text{ W/kg}$ , SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8 \text{ W/kg}$  or all test positions are measured.

(2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is  $\leq 0.8 \text{ W/kg}$ , no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is  $> 1.2 \text{ W/kg}$ , SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2 \text{ W/kg}$ .







(3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is  $> 0.8$  W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is  $\leq 1.2$  W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is  $\leq 1.2$  W/kg.

6) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/Kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/Kg, only one repeated measurement is required.

7) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5$  W/kg, or  $> 7.0$  W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

8) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

9) Per KDB 941225 D01, 3G SAR Measurement Procedures, The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

10) Per KDB 941225 D05, SAR Evaluation Considerations for LTE Devices

(1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.





(2)QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be

tested.

(3)Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

(4)Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.





### 9.2.1 Results overview of GSM850

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	128/824.2	GPRS 4TS	0.550	0.365	0.220	34.530	35.000	<b>0.613</b>	1.114
Left Head Tilted 15°	128/824.2	GPRS 4TS	0.528	0.334	-2.700	34.530	35.000	0.588	1.114
Right Head Touched	128/824.2	GPRS 4TS	0.519	0.338	-1.290	34.530	35.000	0.578	1.114
Right Head Tilted 15°	128/824.2	GPRS 4TS	0.521	0.337	3.540	34.530	35.000	0.581	1.114
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	128/824.2	GPRS 4TS	0.600	0.377	-3.560	34.530	35.000	0.669	1.114
Rear side	128/824.2	GPRS 4TS	0.625	0.410	0.335	34.530	35.000	<b>0.696</b>	1.114
Bottom side	128/824.2	GPRS 4TS	0.602	0.370	-2.950	34.530	35.000	0.671	1.114
Left side	128/824.2	GPRS 4TS	0.595	0.388	-2.490	34.530	35.000	0.663	1.114
Right side	128/824.2	GPRS 4TS	0.588	0.370	0.020	34.530	35.000	0.655	1.114





### 9.2.2 Results overview of GSM1900

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	661/1880	GPRS 4TS	0.722	0.331	2.730	26.360	26.500	<b>0.746</b>	1.009
Left Head Tilted 15°	661/1880	GPRS 4TS	0.683	0.302	-1.600	26.360	26.500	0.705	1.009
Right Head Touched	661/1880	GPRS 4TS	0.696	0.308	1.330	26.360	26.500	0.719	1.009
Right Head Tilted 15°	661/1880	GPRS 4TS	0.687	0.302	2.690	26.360	26.500	0.710	1.009
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	661/1880	GPRS 4TS	0.356	0.220	0.414	31.960	32.000	0.359	1.009
Rear side	661/1880	GPRS 4TS	0.379	0.265	-0.970	31.960	32.000	<b>0.383</b>	1.009
Bottom side	661/1880	GPRS 4TS	0.317	0.182	-3.720	31.960	32.000	0.320	1.009
Left side	661/1880	GPRS 4TS	0.321	0.196	4.200	31.960	32.000	0.324	1.009
Right side	661/1880	GPRS 4TS	0.33	0.189	-3.570	31.960	32.000	0.333	1.009





### 9.2.3 Results overview of LTE Band 5

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20600/844	10M QPSK 1RB#49	0.398	0.201	0.114	24.180	24.500	<b>0.428</b>	1.076
Left Head Tilted 15°	20600/844	10M QPSK 1RB#49	0.376	0.172	3.040	24.180	24.500	0.405	1.076
Right Head Touched	20600/844	10M QPSK 1RB#49	0.373	0.162	0.000	24.180	24.500	0.402	1.076
Right Head Tilted 15°	20600/844	10M QPSK 1RB#49	0.363	0.170	-0.510	24.180	24.500	0.391	1.076
Left Head Touched	20600/844	10M QPSK 25RB#25	0.370	0.176	-2.310	24.180	24.500	0.398	1.076
Left Head Tilted 15°	20600/844	10M QPSK 25RB#25	0.370	0.165	3.810	24.180	24.500	0.398	1.076
Right Head Touched	20600/844	10M QPSK 25RB#25	0.375	0.164	-3.960	24.180	24.500	0.404	1.076
Right Head Tilted 15°	20600/844	10M QPSK 25RB#25	0.359	0.235	-3.620	24.180	24.500	0.386	1.076
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	20600/844	10M QPSK 1RB#49	0.441	0.235	0.220	24.180	24.500	0.475	1.076
Rear side	20600/844	10M QPSK 1RB#49	0.456	0.280	0.114	24.180	24.500	<b>0.491</b>	1.076
Bottom side	20600/844	10M QPSK 1RB#49	0.325	0.198	0.335	24.180	24.500	0.351	1.076
Left side	20600/844	10M QPSK 1RB#49	0.421	0.220	0.220	24.180	24.500	0.453	1.076
Right side	20600/844	10M QPSK 1RB#49	0.365	0.216	0.225	24.180	24.500	0.393	1.076
Front side	20600/844	10M QPSK 25RB#25	0.398	0.198	0.156	24.180	24.500	0.428	1.076
Rear side	20600/844	10M QPSK 25RB#25	0.415	0.206	0.698	24.180	24.500	0.447	1.076
Bottom side	20600/844	10M QPSK 25RB#25	0.406	0.232	0.445	24.180	24.500	0.437	1.076
Left side	20600/844	10M QPSK 25RB#25	0.426	0.168	0.325	24.180	24.500	0.458	1.076
Right side	20600/844	10M QPSK 25RB#25	0.379	0.196	0.445	24.180	24.500	0.408	1.076





### 9.2.4 Results overview of LTE Band 41

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	40740/2605	20M QPSK 1RB#99	0.625	0.402	0.332	21.120	21.500	<b>0.682</b>	1.091
Left Head Tilted 15°	40740/2605	20M QPSK 1RB#99	0.587	0.367	0.020	21.120	21.500	0.641	1.091
Right Head Touched	40740/2605	20M QPSK 1RB#99	0.603	0.366	0.980	21.120	21.500	0.658	1.091
Right Head Tilted 15°	40740/2605	20M QPSK 1RB#99	0.595	0.369	2.580	21.120	21.500	0.649	1.091
Left Head Touched	40740/2605	20M QPSK 50%RB#25	0.603	0.379	-0.800	21.120	21.500	0.658	1.091
Left Head Tilted 15°	40740/2605	20M QPSK 50%RB#25	0.592	0.380	-3.590	21.120	21.500	0.646	1.091
Right Head Touched	40740/2605	20M QPSK 50%RB#25	0.590	0.381	2.790	21.120	21.500	0.644	1.091
Right Head Tilted 15°	40740/2605	20M QPSK 50%RB#25	0.595	0.363	-0.240	21.120	21.500	0.649	1.091
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	40740/2605	20M QPSK 1RB#99	0.368	0.217	-0.180	21.120	21.500	0.402	1.091
Rear side	40740/2605	20M QPSK 1RB#99	0.398	0.256	0.110	21.120	21.500	<b>0.434</b>	1.091
Bottom side	40740/2605	20M QPSK 1RB#99	0.369	0.234	3.610	21.120	21.500	0.403	1.091
Left side	40740/2605	20M QPSK 1RB#99	0.365	0.236	-3.420	21.120	21.500	0.398	1.091
Right side	40740/2605	20M QPSK 1RB#99	0.374	0.220	-1.340	21.120	21.500	0.408	1.091
Front side	40740/2605	20M QPSK 50%RB#25	0.366	0.228	-0.320	21.120	21.500	0.399	1.091
Rear side	40740/2605	20M QPSK 50%RB#25	0.370	0.229	-2.560	21.120	21.500	0.404	1.091
Bottom side	40740/2605	20M QPSK 50%RB#25	0.362	0.234	-2.470	21.120	21.500	0.395	1.091
Left side	40740/2605	20M QPSK 50%RB#25	0.369	0.218	0.410	21.120	21.500	0.403	1.091
Right side	40740/2605	20M QPSK 50%RB#25	0.377	0.217	-0.960	21.120	21.500	0.411	1.091





### 9.2.5 Results overview of Wi-Fi 2.4G

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	6/2437	802.11b	0.356	0.169	0.225	16.670	17.000	<b>0.384</b>	1.079
Left Head Tilted 15°	6/2437	802.11b	0.317	0.138	-0.820	16.670	17.000	0.342	1.079
Right Head Touched	6/2437	802.11b	0.321	0.134	-0.690	16.670	17.000	0.346	1.079
Right Head Tilted 15°	6/2437	802.11b	0.333	0.147	2.310	16.670	17.000	0.359	1.079
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	6/2437	802.11b	0.345	0.198	0.220	16.670	17.000	0.372	1.079
Rear side	6/2437	802.11b	0.369	0.168	0.198	16.670	17.000	<b>0.398</b>	1.079
Top side	6/2437	802.11b	0.333	0.202	0.145	16.670	17.000	0.359	1.079
Right side	6/2437	802.11b	0.315	0.175	0.220	16.670	17.000	0.340	1.079





### 9.2.6 Results overview of Wi-Fi 5G

Test Position of Body with 0mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
<b>5.2G U-NII-1 band (802.11a)</b>									
Wi-Fi antenna to side									
Left Head Touched	48/5240	802.11a	0.320	0.126	0.220	11.980	12.000	<b>0.321</b>	1.005
Left Head Tilted 15°	48/5240	802.11a	0.282	0.094	-3.270	11.980	12.000	0.283	1.005
Right Head Touched	48/5240	802.11a	0.296	0.090	-0.690	11.980	12.000	0.297	1.005
Right Head Tilted 15°	48/5240	802.11a	0.289	0.094	0.960	11.980	12.000	0.290	1.005
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	48/5240	802.11b	0.330	0.230	0.335	11.980	12.000	0.332	1.005
Rear side	48/5240	802.11b	0.345	0.198	0.202	11.980	12.000	<b>0.347</b>	1.005
Bottom side	48/5240	802.11b	0.298	0.210	0.445	11.980	12.000	0.299	1.005
Right side	48/5240	802.11b	0.269	0.186	0.025	11.980	12.000	0.270	1.005







**5.8G U-NII-3 Band (802.11a)**

Wi-Fi antenna to side

Left Head Touched	165/5825	802.11a	0.298	0.135	0.200	11.910	12.000	<b>0.304</b>	1.021
Left Head Tilted 15°	165/5825	802.11a	0.271	0.097	-3.860	11.910	12.000	0.277	1.021
Right Head Touched	165/5825	802.11a	0.263	0.100	-0.690	11.910	12.000	0.269	1.021
Right Head Tilted 15°	165/5825	802.11a	0.263	0.110	-3.570	11.910	12.000	0.269	1.021

**SAR Results for Hotspot Exposure Condition**

Front side	6/2437	802.11b	0.298	0.198	0.220	11.910	12.000	0.304	1.021
Rear side	6/2437	802.11b	0.305	0.202	0.145	11.910	12.000	<b>0.311</b>	1.021
Top side	6/2437	802.11b	0.249	0.200	0.265	11.910	12.000	0.254	1.021
Right side	6/2437	802.11b	0.269	0.189	0.120	11.910	12.000	0.275	1.021

**5.8G U-NII-4 Band (802.11a)**

Wi-Fi antenna to side

Left Head Touched	157/5785	802.11a	0.289	0.156	0.225	11.360	11.500	<b>0.299</b>	1.033
Left Head Tilted 15°	157/5785	802.11a	0.265	0.119	-3.520	11.360	11.500	0.274	1.033
Right Head Touched	157/5785	802.11a	0.260	0.117	-0.690	11.360	11.500	0.269	1.033
Right Head Tilted 15°	157/5785	802.11a	0.258	0.127	-3.790	11.360	11.500	0.266	1.033

**SAR Results for Hotspot Exposure Condition**


Front side	6/2437	802.11b	0.245	0.136	0.114	11.360	11.500	0.253	1.033
Rear side	6/2437	802.11b	0.269	0.152	0.356	11.360	11.500	<b>0.278</b>	1.033
Top side	6/2437	802.11b	0.256	0.133	0.254	11.360	11.500	0.264	1.033
Right side	6/2437	802.11b	0.226	0.128	0.165	11.360	11.500	0.233	1.033





### 10 Multiple Transmitter Information

The SAR measurement positions of each side are as below:

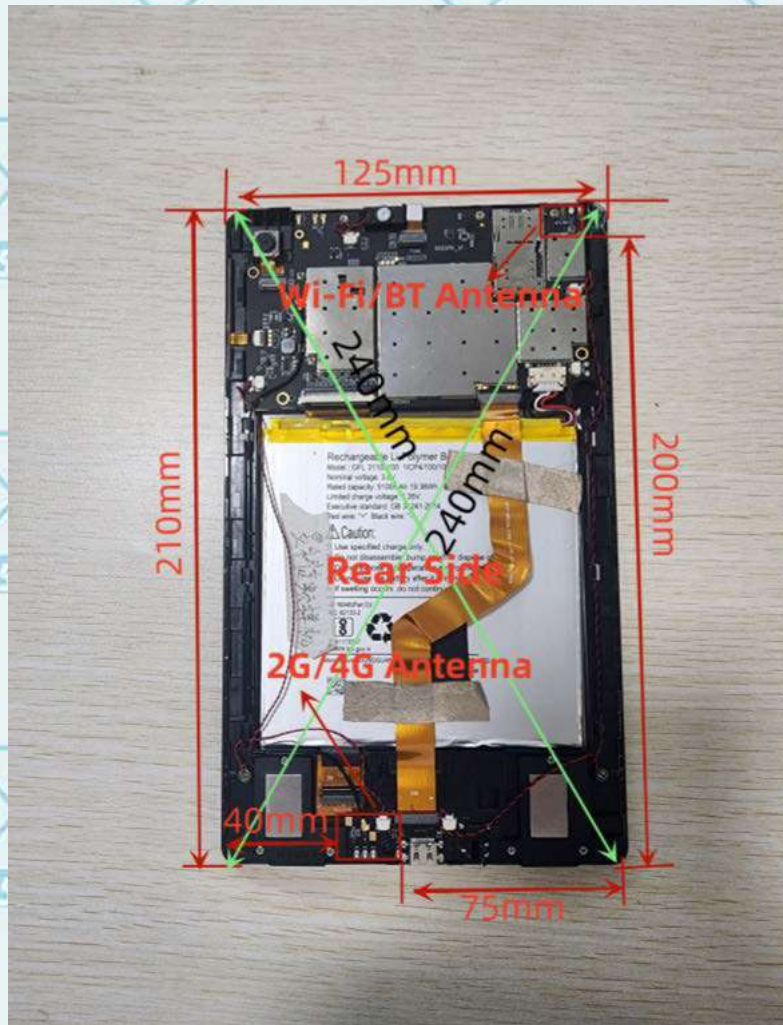

< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Bottom side	Bottom side
2G/4G Antenna	Yes	Yes	Yes	Yes	No	Yes
Wi-Fi/BT Antenna	Yes	Yes	No	Yes	Yes	No

1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.





### 10.1.1 Stand-alone SAR test exclusion

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	1.05	1.27	5.00	2.45	0.040	3.00	Yes

Body-Worn position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	1.05	1.27	10.00	2.45	0.020	3.00	Yes





When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm, where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Head	1.05	1.27	5.00	2.45	7.50	0.053
BT	Body	1.05	1.27	10.00	2.45	7.50	0.027

### 10.1.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities					
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot	
1	GSM/GPRS/ LTE +Wi-Fi	YES	YES	YES	
2	GSM/GPRS/LTE +BT	YES	NO	NO	

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.





## 11 Measurement uncertainty evaluation

### 11.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Measurement Uncertainty evaluation for SAR test								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g U <sub>i</sub> (±%)	10g U <sub>i</sub> (±%)	V <sub>i</sub>
<b>measurement system</b>								
Probe Calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system Detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>Test sample Related</b>								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation-SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞





Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	$\infty$
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	$\infty$
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	$\infty$
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.42	$\infty$
<b>Combined Standard Uncertainty</b>		Rss				10.63	10.54	
<b>Expanded Uncertainty{95% CONFIDENCE INTERVAL}</b>		k				21.26	21.08	





## 11.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Uncertainty For System Performance Check								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C <sub>i</sub> 1g	C <sub>i</sub> 10g	1g U <sub>i</sub> (±%)	10g U <sub>i</sub> (±%)	V <sub>i</sub>
<b>measurement system</b>								
Probe Calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions – Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>Dipole</b>								
Deviation of experimental source from numerical source	4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid Distance	2	R	$\sqrt{3}$	1	1	1.16	1.16	∞





**Phantom and Tissue Parameters**

Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	$\infty$
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	$\infty$
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	$\infty$
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.41	$\infty$
<b>Combined Standard Uncertainty</b>		Rss				10.28	9.98	
<b>Expanded Uncertainty (95% Confidence interval)</b>		k				20.57	19.95	







## 12 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	SATIMO	COMOSAR DOSIMETRIC E FIELD PROBE	SSE5	0123-EPGO-396	2023-01-30	2024-01-29
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	SN 48/16 DIP0G750-444	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	SN 14/13 DIP0G835-235	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 900 MHz REFERENCE DIPOLE	SID900	SN 14/13 DIP0G900-231	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 1800 MHz REFERENCE DIPOLE	SID1800	SN 14/13 DIP1G800-232	2020-06-25	2023-06-24
<input type="checkbox"/>	SATIMO	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	SN 14/13 DIP1G900-236	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 2000 MHz REFERENCE DIPOLE	SID2000	SN 14/13 DIP2G000-237	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	SN 14/13 DIP2G450-238	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	SN 28/14 DIP2G600-327	2020-06-25	2023-06-24
<input checked="" type="checkbox"/>	SATIMO	Software	OPENSAR	N/A	N/A	N/A
<input checked="" type="checkbox"/>	SATIMO	Phantom	COMOSAR IEEE SAM PHANTOM	SN 14/13 SAM99	N/A	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	119733	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW500	144459	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	R & S	UXM5G Wireless Test Platform	E7515B	MY60192341	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	HP	Network Analyser	8753D	3410A08889	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	HP	Signal Generator	E4421B	GB39340770	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	Keithley	Multimeter	Keithley 2000	4014539	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	SATIMO	Amplifier	Power Amplifier	MODU-023-A-0004	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4418B	GB43312909	2022-11-03	2023-11-02
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E4412A	MY41500046	2022-11-03	2023-11-02





## Annex A: System performance verification

(Please See the SAR Measurement Plots of annex A.)

## Annex B: Measurement results

(Please See the SAR Measurement Plots of annex B.)

## Annex C: Calibration reports

(Please See the Calibration reports of annex C.)

