

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Tablet PC

Trademark : Acer

Model Name : Acer One 7 T4-729L

Family Model : N/A

Report No. : S19071605508001

FCC ID : 2AMY3-T4-729L

Prepared for

Acer India Pvt Ltd.

Embassy Heights 6thFloor.No.13 Magrath Road, (Next to Hosmat Hospital) Bangalore,
560025, India

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District,

Shenzhen, Guangdong, China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Acer India Pvt Ltd.

Address..... : Embassy Heights 6thFloor.No.13 Magrath Road, (Next to Hosmat Hospital) Bangalore, 560025, India

Manufacturer's Name : SHENZHEN YUKO TECHNOLOGY CO.,LTD

Address..... : 6TH FLOOR,A9 BUILDING TIANRUI INDUSTRIAL PARK,FUYUAN 1ST ROAD,BAO'AN,SHENZHEN, CHINA

Product description

Product name..... : Tablet PC

Trademark : Acer

Model Name : Acer One 7 T4-729L

Family Model..... : N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards : IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests : Jul. 18, 2019 ~ Jul. 30, 2019

Date of Issue : Sep. 29, 2019

Test Result..... : **Pass**

Prepared By
(Test Engineer)

: 
(Cheng Jiawen)

Approved By
(Lab Manager)

: 
(Sam Chen)

※※ Revision History ※※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Sep. 29, 2019	Cheng Jiawen

TABLE OF CONTENTS

1.	General Information	6
1.1.	RF exposure limits	6
1.2.	Statement of Compliance.....	7
1.3.	EUT Description	7
1.4.	Test specification(s)	9
1.5.	Ambient Condition.....	9
2.	SAR Measurement System	10
2.1.	SATIMO SAR Measurement Set-up Diagram	10
2.2.	Robot	11
2.3.	E-Field Probe.....	12
2.3.1.	E-Field Probe Calibration.....	12
2.4.	SAM phantoms	13
2.4.1.	Technical Data	14
2.5.	Device Holder	15
2.6.	Test Equipment List	16
3.	SAR Measurement Procedures	18
3.1.	Power Reference.....	18
3.2.	Area scan & Zoom scan	18
3.3.	Description of interpolation/extrapolation scheme	20
3.4.	Volumetric Scan	20
3.5.	Power Drift	20
4.	System Verification Procedure.....	21
4.1.	Tissue Verification.....	21
4.1.1.	Tissue Dielectric Parameter Check Results	22
4.2.	System Verification Procedure	23
4.2.1.	System Verification Results	24
5.	SAR Measurement variability and uncertainty	25
5.1.	SAR measurement variability	25
5.2.	SAR measurement uncertainty.....	25
6.	RF Exposure Positions	26
6.1.	Ear and handset reference point.....	26
6.2.	Definition of the cheek position.....	26
6.3.	Definition of the tilt position.....	28
6.4.	Tablet host platform exposure conditions	28
7.	RF Output Power	29
7.1.	GSM Conducted Power	29
7.2.	WCDMA Conducted Power.....	29
7.3.	LTE Conducted Power.....	30
7.4.	WLAN & Bluetooth Output Power.....	34

7.4.1. Output Power Results Of WLAN	34
7.4.2. Output Power Results Of Bluetooth	35
8. Antenna Location.....	36
9. Stand-alone SAR test exclusion	42
10. SAR Results	43
10.1. SAR measurement results	43
10.1.1. SAR measurement Result of GSM850.....	43
10.1.2. SAR measurement Result of GSM1900.....	44
10.1.3. SAR measurement Result of WCDMA Band 2	45
10.1.4. SAR measurement Result of WCDMA Band 5	45
10.1.5. SAR measurement Result of LTE Band 5	46
10.1.6. SAR measurement Result of LTE Band 41	47
10.1.7. SAR measurement Result of WLAN 2.4G	49
10.1.8. SAR measurement Result of WLAN 5.2G	49
10.1.9. SAR measurement Result of WLAN 5.8G	50
10.2. SAR Summation Scenario.....	50
11. Appendix A. Photo documentation.....	60
12. Appendix B. System Check Plots	60
13. Appendix C. Plots of High SAR Measurement	85
14. Appendix D. Calibration Certificate.....	122

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE

HEAD AND TRUNK LIMIT

1.6 W/kg

APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Acer One 7 T4-729L are as follows.

Band	Max Reported SAR Value(W/kg)		
	1-g Head	1-g Body (Separation distance of 0mm)	Max Simultaneous Tx
GSM 850	0.099	1.161	1.554
GSM 1900	0.323	1.220	
WCDMA Band 2	0.130	0.661	
WCDMA Band 5	0.575	1.186	
LTE Band 5	0.031	0.762	
LTE Band 41	0.164	0.659	
WLAN 2.4G	0.194	0.213	
WLAN 5.2G	0.166	0.194	
WLAN 5.8G	0.311	0.272	

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Tablet PC
Trade Name	Acer
Model Name	Acer One 7 T4-729L
Family Model	N/A
FCC ID	2AMY3-T4-729L
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	PIFA Antenna
Battery Information	DC 3.8V, 3500mAh
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/5, LTE Band 5/41, WLAN 2.4G/5.2G/5.8G, Bluetooth
Test Modulation	GSM(GMSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, π/4-DQPSK, 8DPSK)

Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 5	824-849	869-894
	LTE Band 41	2555-2650	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
GPRS Multislot Class(12)	Bluetooth	2402-2480	
	Max Number of Timeslots in Uplink	4	
	Max Number of Timeslots in Downlink	4	
Power Class	Max Total Timeslot	5	
	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 5)		
Test Channels (low-mid-high)	3, tested with power control all Max.(LTE Band 41)		
	128-189-251(GSM 850)		
	512-661-810(GSM 1900)		
	9262-9400-9538(WCDMA Band 2)		
	4132-4182-4233(WCDMA Band 5)		
	20407-20525-20643(LTE Band 5 BW=1.4MHz)		
	20415-20525-20635(LTE Band 5 BW=3MHz)		
	20425-20525-20625(LTE Band 5 BW=5MHz)		
	20450-20525-20600(LTE Band 5 BW=10MHz)		
	40625-40715-41165(LTE Band 41 BW=5MHz)		
	40290-40715-41140(LTE Band 41 BW=10MHz)		
	40315-40715-41115(LTE Band 41 BW=15MHz)		
	40340-40715-41090(LTE Band 41 BW=20MHz)		
	1-3-6-9-11(WLAN 2.4G)		
	36-38-40-42-46-48(WLAN 5.2G)		
	149-151-155-157-159-165(WLAN 5.8G)		

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 616217 D04 SAR for laptop and tablets

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

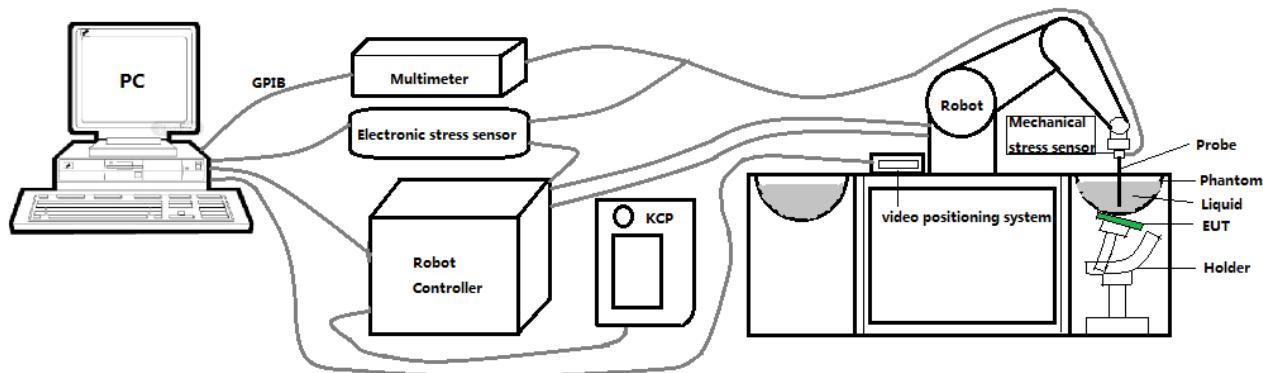

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface".

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.08 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 7mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°.

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positioner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

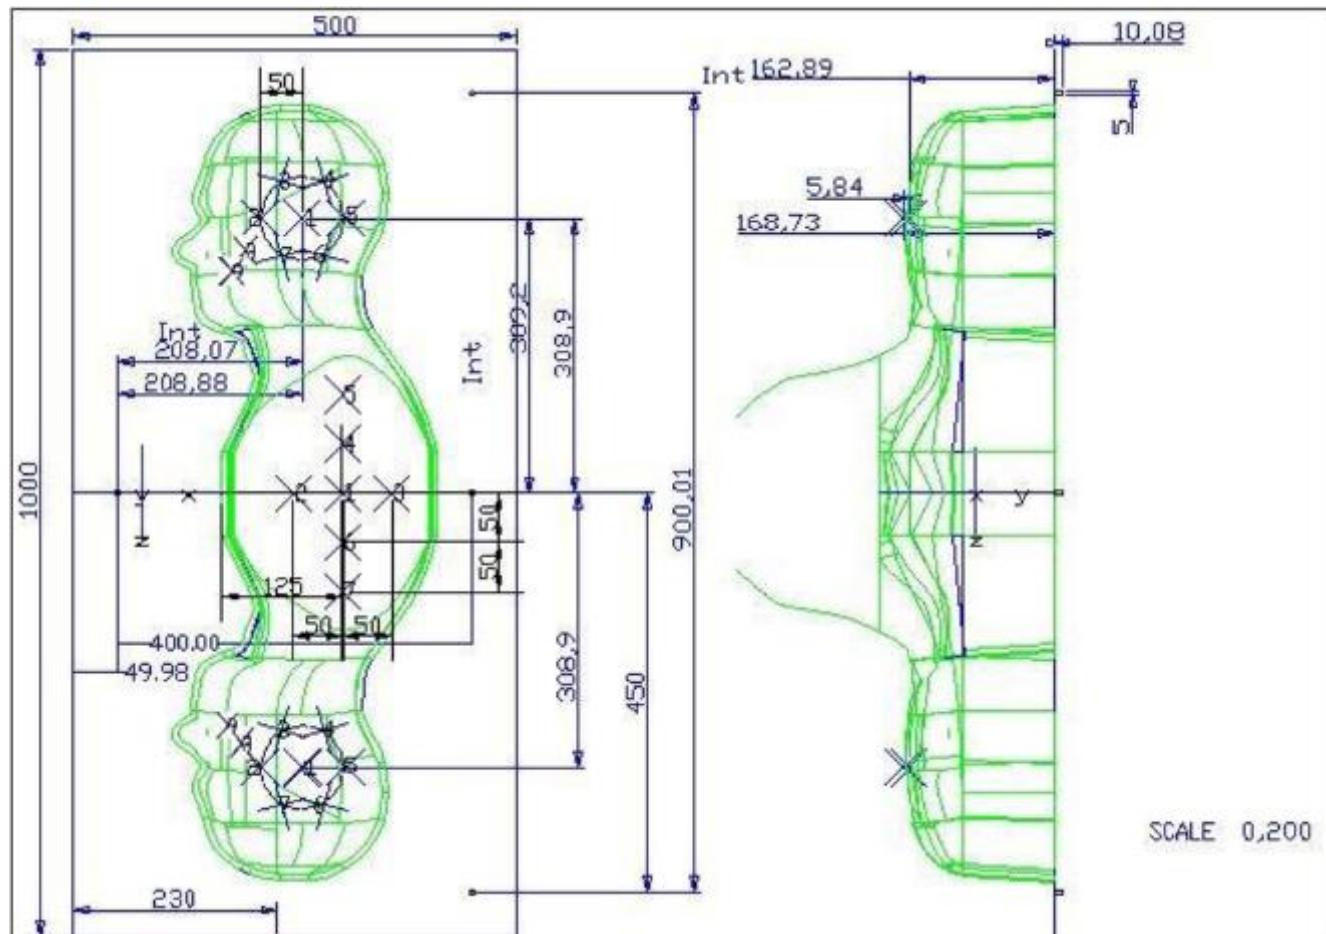


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

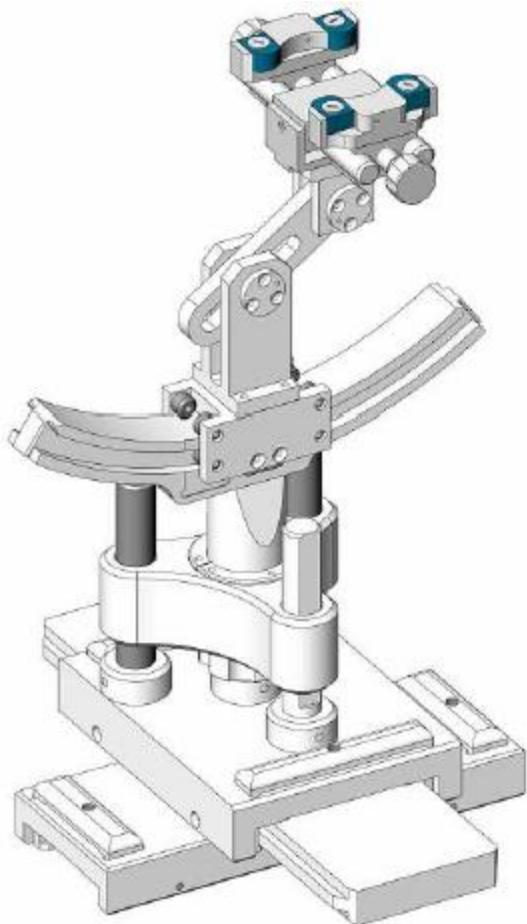

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Sep. 17, 2018	Sep. 16, 2019
<input type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
<input type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	Aug. 05, 2018	Aug. 04, 2019
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Oct. 08, 2018	Oct. 07, 2019
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Aug. 05, 2018	Aug. 04, 2019
<input checked="" type="checkbox"/>	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Aug. 05, 2018	Aug. 04, 2019

<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Aug. 05, 2018	Aug. 04, 2019
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Aug. 05, 2018	Aug. 04, 2019
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Aug. 05, 2018	Aug. 04, 2019
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Aug. 05, 2018	Aug. 04, 2019

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid $\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

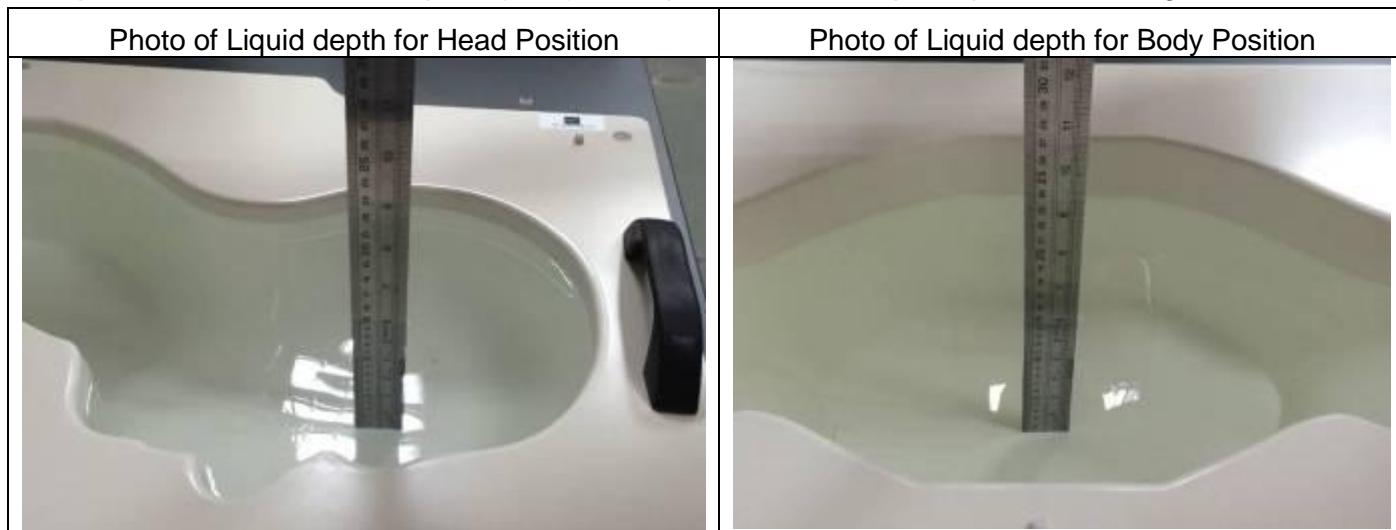

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.83	0.93	21.4 °C	Jul. 18, 2019
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.46	1.01	21.3 °C	Jul. 25, 2019
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	41.06	1.46	21.4 °C	Jul. 25, 2019
Body 1900	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.80	1.58	21.4 °C	Jul. 25, 2019
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.30	1.88	21.3 °C	Jul. 24, 2019
Body 2450	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	52.29	2.02	21.2 °C	Jul. 24, 2019
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.37	2.03	21.3 °C	Jul. 30, 2019
Body 2600	2600	52.51 (49.88~55.14)	2.16 (2.05~2.27)	52.66	2.22	21.2 °C	Jul. 30, 2019
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	35.72	4.69	21.5 °C	Jul. 20, 2019
Body 5200	5200	49.00 (46.55~51.45)	5.30 (5.04~5.57)	49.61	5.34	21.5 °C	Jul. 19, 2019
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.63	5.27	21.4 °C	Jul. 20, 2019
Body 5800	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	48.32	6.12	21.4 °C	Jul. 19, 2019

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

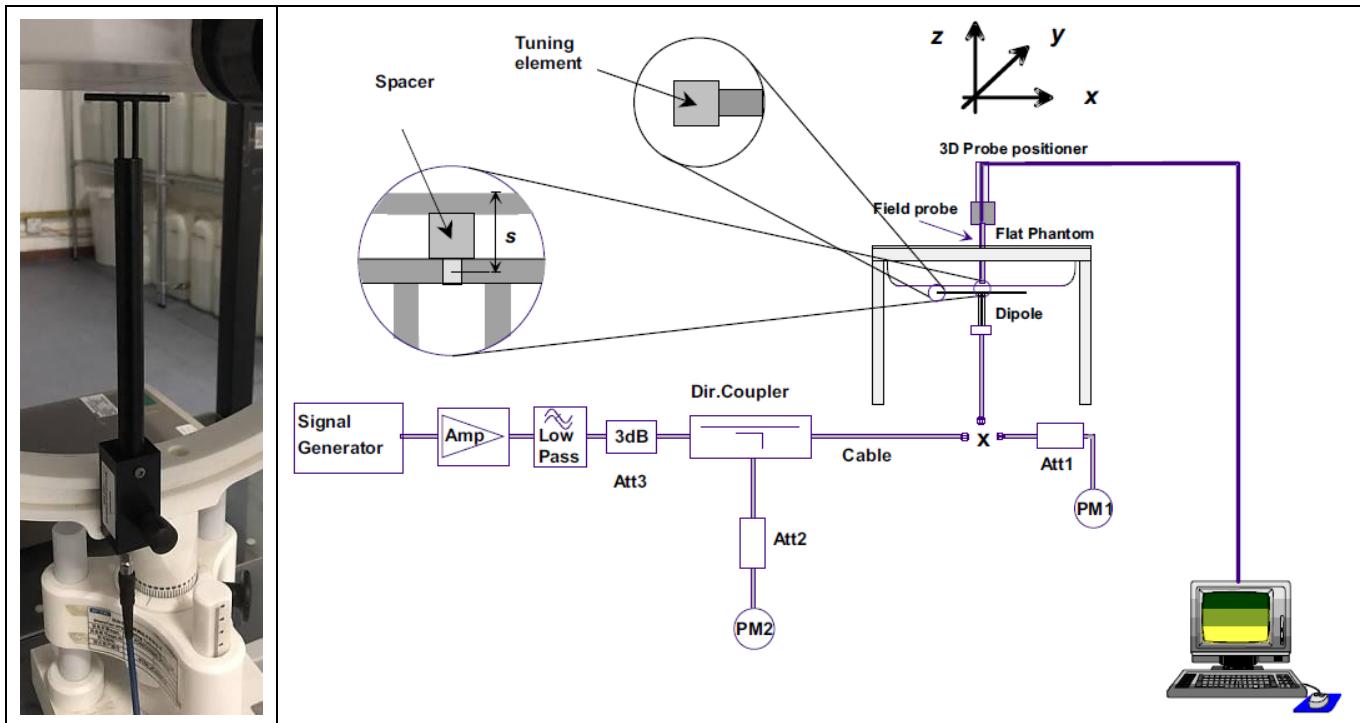

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz Head	9.55 (8.60~10.51)	6.10 (5.49~6.71)	9.35	6.19	21.4 °C	Jul. 18, 2019
835MHz Body	9.83 (8.85~10.81)	6.45 (5.81~7.10)	9.32	5.99	21.3 °C	Jul. 25, 2019
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	39.25	20.35	21.4 °C	Jul. 25, 2019
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	38.32	20.19	21.4 °C	Jul. 25, 2019
2450MHz Head	53.76 (48.38~59.14)	24.12 (21.71~26.53)	53.23	23.84	21.3 °C	Jul. 24, 2019
2450MHz Body	52.90 (47.61~58.19)	24.09 (21.68~26.50)	49.22	22.94	21.2 °C	Jul. 24, 2019
2600MHz Head	55.60 (50.04~61.16)	24.60 (22.14~27.06)	55.23	25.12	21.3 °C	Jul. 30, 2019
2600MHz Body	52.49 (47.24~57.74)	23.74 (21.37~26.11)	52.82	23.28	21.2 °C	Jul. 30, 2019
5200MHz Head	160.94 (144.85~177.03)	55.97 (50.37~61.57)	162.58	57.24	21.5 °C	Jul. 20, 2019
5200MHz Body	156.85 (141.17~172.54)	55.20 (49.68~60.72)	158.88	54.69	21.5 °C	Jul. 19, 2019
5800MHz Head	184.13 (165.72~202.54)	62.74 (56.47~69.01)	179.43	62.85	21.4 °C	Jul. 20, 2019
5800MHz Body	169.30 (152.37~186.23)	58.49 (52.64~64.34)	176.23	61.58	21.4 °C	Jul. 19, 2019

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

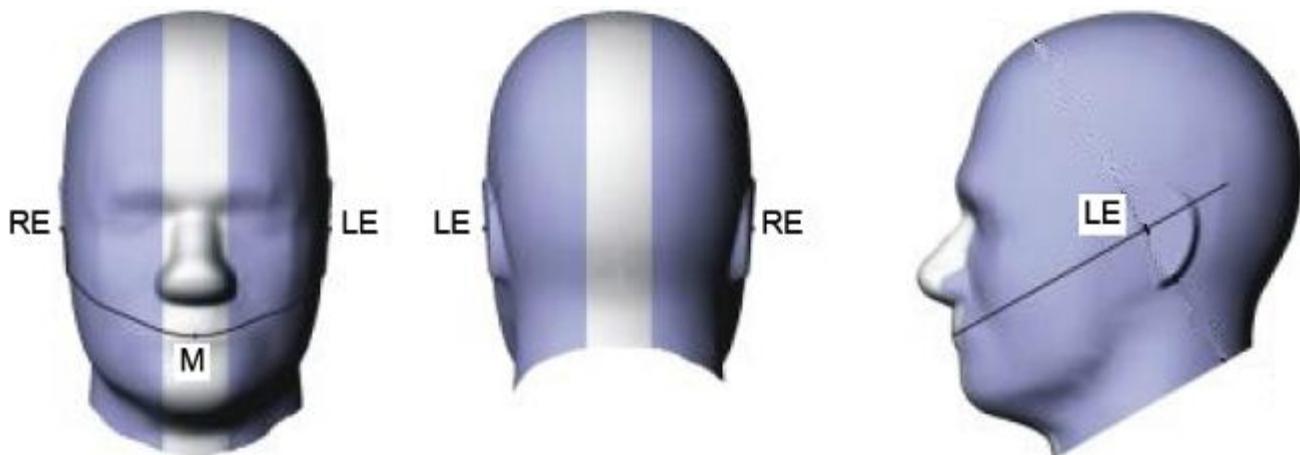


Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

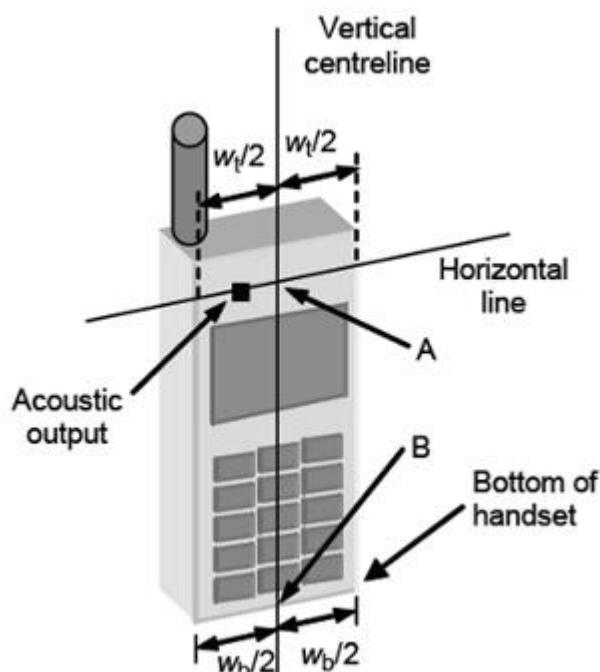


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

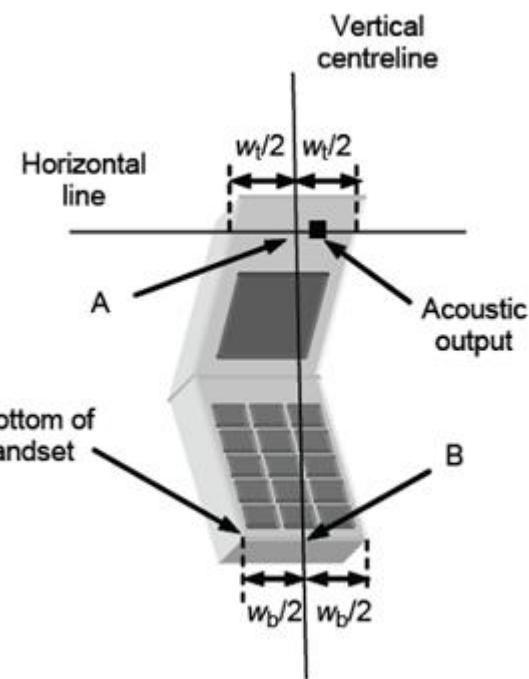


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

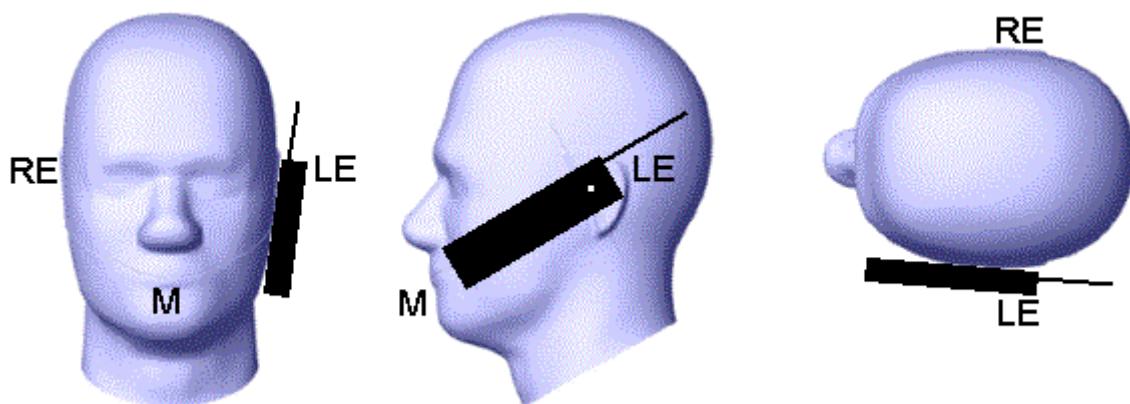


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

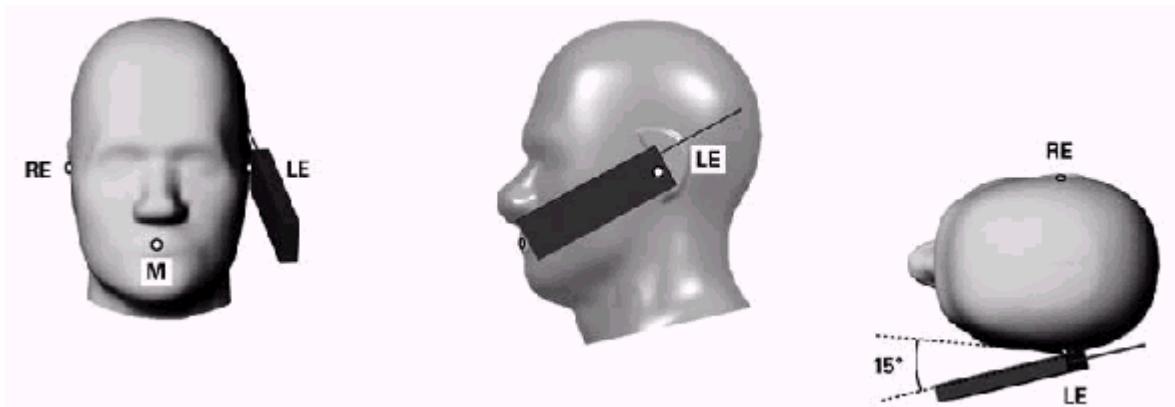


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Tablet host platform exposure conditions

Refer to KDB616217 D04, when the modular approach is used, transmitters and modules must be initially tested for standalone operations in generic host conditions according to the following minimum test separation distance and antenna installation requirements for incorporation in the tablet platform. The separation distance required for incorporation in qualified hosts is described in KDB 447498; item 5) of section 4.1 and item 1) of section 5.2.2 etc.

- ≤ 5 mm between the antenna and user for both back surface and edge exposure conditions
- the antennas used by the host must have been tested for equipment approval or qualify for SAR test exclusion
- the antenna polarization, physical orientation, rotation and installation configurations used by the host must have been tested for compliance or qualify for test exclusion
- when the *SAR Test Exclusion Threshold* in KDB 447498 applies, a *test separation distance* of 5 mm is required to determine test exclusion for the tablet platform

The antennas embedded in tablets are typically ≤ 5 mm from the outer housing. The required antenna to user test separation distance is a “not to exceed test” distance required to apply the modular approach. Instead of the typical zero gap tablet edge test requirement between the edge of a tablet

and the user, when an antenna has been tested at ≤ 5 mm according to the modular approach it can be incorporated into tablets with at least twice the tested distance from the outer housing of the tablet edge; otherwise, the tablet edge zero gap test requirement applies. When the dedicated host approach is applied, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	32.00	31.79	31.95	31.76	22.97	22.76	22.92	22.73
GPRS(GMSK, 1 TS)	32.00	31.83	31.98	31.80	22.97	22.80	22.95	22.77
GPRS(GMSK, 2 TS)	32.00	31.35	31.50	31.29	25.98	25.33	25.48	25.27
GPRS(GMSK, 3 TS)	31.00	29.89	30.09	29.80	26.74	25.63	25.83	25.54
GPRS(GMSK, 4 TS)	29.00	28.74	28.95	28.64	25.99	25.73	25.94	25.63
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.00	29.34	29.45	29.19	20.97	20.31	20.42	20.16
GPRS(GMSK, 1 TS)	30.00	29.38	29.48	29.23	20.97	20.35	20.45	20.20
GPRS(GMSK, 2 TS)	29.00	28.66	28.73	28.46	22.98	22.64	22.71	22.44
GPRS(GMSK, 3 TS)	27.00	26.78	26.87	26.56	22.74	22.52	22.61	22.30
GPRS(GMSK, 4 TS)	26.00	25.57	25.67	25.32	22.99	22.56	22.66	22.31

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (1 TS)} - 9.03 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (2 TS)} - 6.02 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (3 TS)} - 4.26 \text{ dB}$$

$$\text{Frame-averaged power} = \text{Maximum burst averaged power (4 TS)} - 3.01 \text{ dB}$$

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	23.00	22.93	22.93	22.10
HSDPA Subtest-1	23.00	22.04	21.99	21.78

HSDPA Subtest-2	22.00	21.20	21.25	21.34
HSDPA Subtest-3	21.00	20.80	20.62	20.04
HSDPA Subtest-4	21.00	20.58	20.60	19.95
HSUPA Subtest-1	22.00	20.01	21.53	21.31
HSUPA Subtest-2	22.00	21.99	21.92	21.69
HSUPA Subtest-3	21.00	20.59	20.45	20.64
HSUPA Subtest-4	23.00	22.06	21.98	21.75
HSUPA Subtest-5	22.00	21.51	21.38	21.03
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	23.00	22.91	22.97	23.00
HSDPA Subtest-1	23.00	22.07	21.98	22.03
HSDPA Subtest-2	22.00	21.56	21.32	21.44
HSDPA Subtest-3	21.00	20.69	20.59	20.55
HSDPA Subtest-4	21.00	20.43	20.75	20.18
HSUPA Subtest-1	23.00	22.14	22.00	22.04
HSUPA Subtest-2	22.00	21.33	21.40	21.33
HSUPA Subtest-3	21.00	20.36	20.65	20.46
HSUPA Subtest-4	21.00	20.92	20.52	20.47
HSUPA Subtest-5	21.00	20.43	20.13	20.07

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	23.00	22.42	22.22	22.27
			1	2	23.00	22.52	22.32	22.43
			1	5	23.00	21.98	22.19	22.39
			3	0	23.00	22.48	22.34	22.43
			3	1	23.00	22.54	22.37	22.42
			3	2	23.00	22.48	22.32	22.44
			6	0	22.00	21.50	21.26	21.41
	20MHz	16QAM	1	0	22.00	21.53	21.43	21.20
			1	2	22.00	21.64	21.52	21.38
			1	5	22.00	21.61	21.40	21.26
			3	0	22.00	21.66	21.54	21.59
			3	1	22.00	21.66	21.50	21.58

			3	2	22.00	21.65	21.55	21.67
			6	0	21.00	20.65	20.48	20.60
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	23.00	22.50	22.24	22.30
			1	7	23.00	22.83	22.55	22.74
			1	14	23.00	22.43	22.28	22.41
			8	0	22.00	21.47	21.31	21.37
			8	4	22.00	21.51	21.37	21.44
			8	7	22.00	21.53	21.31	21.45
			15	0	22.00	21.48	21.33	21.34
		16QAM	1	0	23.00	21.85	21.47	21.24
			1	7	23.00	22.18	21.59	21.56
			1	14	23.00	21.83	21.40	21.31
			8	0	21.00	20.53	20.34	20.35
			8	4	21.00	20.56	20.36	20.43
			8	7	21.00	20.58	20.32	20.42
			15	0	21.00	20.55	20.35	20.48
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	23.00	22.34	22.22	22.20
			1	12	23.00	22.91	22.57	22.48
			1	24	23.00	22.36	22.15	22.29
			12	0	22.00	21.41	21.37	21.35
			12	6	22.00	21.53	21.38	21.37
			12	11	22.00	21.50	21.21	21.38
			25	0	22.00	21.55	21.30	21.39
		16QAM	1	0	23.00	21.83	21.53	21.55
			1	12	23.00	22.18	21.87	21.79
			1	24	23.00	21.97	21.45	21.61
			12	0	21.00	20.44	20.30	20.38
			12	6	21.00	20.55	20.32	20.43
			12	11	21.00	20.54	20.17	20.42
			25	0	21.00	20.55	20.38	20.40
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	23.00	22.43	22.34	22.27
			1	24	23.00	22.55	22.40	22.36
			1	49	23.00	22.34	22.27	22.40
			25	0	22.00	21.37	21.50	21.42
			25	12	22.00	21.46	21.32	21.32
			25	24	22.00	21.54	21.22	21.40
			50	0	22.00	21.46	21.39	21.40
		16QAM	1	0	22.00	21.80	21.55	21.08
			1	24	22.00	22.00	21.52	21.25
			1	49	22.00	21.77	21.45	21.32
			25	0	21.00	20.45	20.48	20.43
			25	12	21.00	20.53	20.37	20.38
			25	24	21.00	20.62	20.25	20.42
			50	0	21.00	20.49	20.42	20.42

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40625/2557.5	40715/2602.5	41165/2647.5
LTE Band 41	5MHz	QPSK	1	0	24.00	23.13	22.17	22.35
			1	12	24.00	23.40	22.43	22.69
			1	24	24.00	23.04	22.11	22.40
			12	0	23.00	22.16	21.32	21.32
			12	6	23.00	22.20	21.35	21.40
			12	11	23.00	22.10	21.27	21.42
			25	0	23.00	22.15	21.32	21.38
		16QAM	1	0	23.00	22.27	21.48	21.69
			1	12	23.00	22.47	21.71	21.97
			1	24	23.00	22.20	21.42	21.78
			12	0	22.00	21.15	20.35	20.35
			12	6	22.00	21.20	20.42	20.44
			12	11	22.00	21.12	20.32	20.43
			25	0	22.00	21.21	20.33	20.41
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40290/2560	40715/2602.5	41140/2645
LTE	10MHz	QPSK	1	0	24.00	23.24	22.35	22.23

Band 41			1	24	24.00	23.28	22.42	22.42
			1	49	24.00	23.03	22.21	22.34
			25	0	23.00	22.20	21.39	21.30
			25	12	23.00	22.14	21.34	21.36
			25	24	23.00	22.11	21.32	21.45
			50	0	23.00	22.17	21.39	21.38
			1	0	23.00	22.51	21.48	21.13
			1	24	23.00	22.58	21.56	21.34
			1	49	23.00	22.42	21.40	21.28
			25	0	22.00	21.27	20.45	20.32
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40315/2562.5	40715/2602.5	41115/2642.5
LTE Band 41	15MHz	QPSK	1	0	24.00	23.07	22.36	22.03
			1	37	24.00	23.30	22.51	22.53
			1	74	24.00	22.78	22.09	22.23
			36	0	23.00	22.26	21.42	21.26
			36	18	23.00	22.20	21.37	21.44
			36	37	23.00	22.12	21.28	21.53
			75	0	23.00	22.18	21.37	21.44
		16QAM	1	0	23.00	22.46	21.47	21.23
			1	37	23.00	22.64	21.60	21.66
			1	74	23.00	22.20	21.21	21.43
			36	0	22.00	21.23	20.49	20.19
			36	18	22.00	21.20	20.44	20.33
			36	37	22.00	21.09	20.36	20.43
			75	0	22.00	21.17	20.37	20.40
LTE Band 41	20MHz	QPSK	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40340/2565	40715/2602.5	41090/2640
			1	0	24.00	22.92	22.13	22.04
			1	49	24.00	23.19	22.35	22.42
			1	99	24.00	22.62	22.04	22.12
		QPSK	50	0	23.00	22.15	21.39	21.06
			50	24	23.00	22.08	21.34	21.28

			50	49	23.00	21.98	21.18	21.39
			100	0	23.00	22.04	21.30	21.23
		16QAM	1	0	23.00	22.08	21.39	21.13
			1	49	23.00	22.31	21.61	21.42
			1	99	23.00	21.80	21.09	21.21
			50	0	22.00	21.24	20.41	20.14
			50	24	22.00	21.16	20.41	20.36
			50	49	22.00	21.07	20.30	20.45
			100	0	22.00	21.09	20.32	20.26

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	15.00	13.59
	6	2437	15.00	14.27
	11	2462	15.00	14.13
802.11g	1	2412	13.00	11.33
	6	2437	13.00	12.02
	11	2462	13.00	12.03
802.11n HT20	1	2412	13.00	11.23
	6	2437	13.00	12.07
	11	2462	13.00	12.14
802.11n HT40	3	2422	10.00	9.01
	6	2437	10.00	9.43
	9	2452	10.00	9.42

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	12.00	11.53
	40	5200	12.00	10.71
	48	5240	12.00	10.13
802.11n HT20	36	5180	12.00	11.06
	40	5200	12.00	10.62
	48	5240	12.00	10.14
802.11n HT40	38	5190	10.00	9.26
	46	5230	10.00	9.11
802.11ac VHT20	36	5180	10.00	9.89
	40	5200	10.00	9.09
	48	5240	10.00	9.00

802.11ac	38	5190	9.00	8.69
VHT40	46	5230	9.00	8.56
802.11ac	42	5210	10.00	9.93
VHT80				

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	12.00	11.08
	157	5785	12.00	10.39
	165	5825	12.00	10.55
802.11n HT20	149	5745	11.00	10.41
	157	5785	11.00	10.33
	165	5825	11.00	10.49
802.11n HT40	151	5755	11.00	10.59
	159	5795	11.00	9.93
802.11ac VHT20	149	5745	11.00	10.61
	157	5785	11.00	9.90
	165	5825	11.00	10.07
802.11ac VHT40	151	5755	10.00	9.85
	159	5795	10.00	9.84
802.11ac VHT80	155	5775	12.00	11.78


NOTE: Power measurement results of WLAN 5.8G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	8.000	7.185	6.607	6.503
	39CH	8.000	7.956	7.385	7.256
	78CH	9.000	8.108	7.335	7.352

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	0.000	-1.374
	19CH	1.000	0.535
	39CH	1.000	0.085

8. Antenna Location

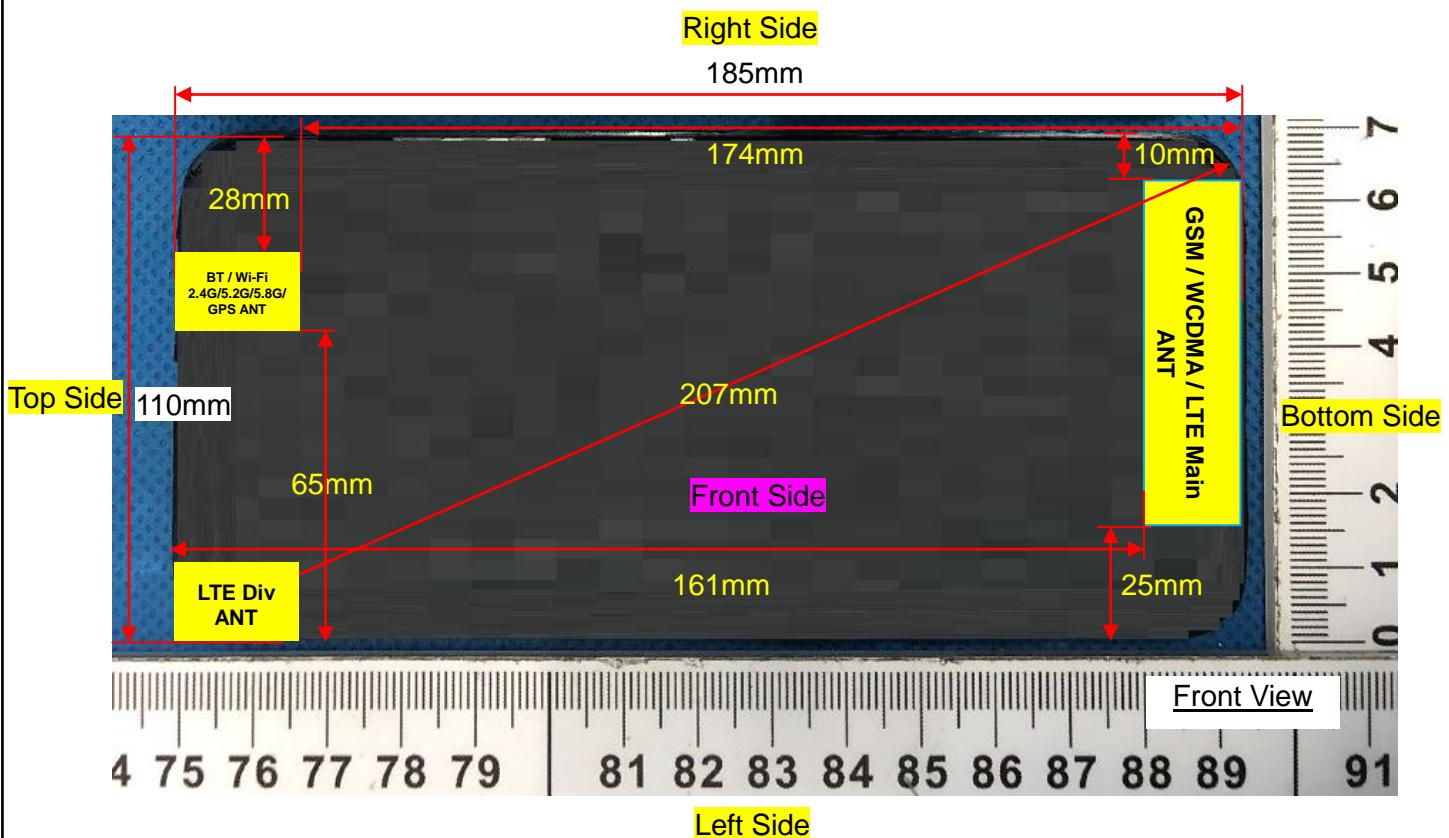

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	5mm	5mm	25mm	10mm	161mm	5mm
WLAN & Bluetooth	5mm	5mm	65mm	28mm	5mm	174mm

Positions for SAR tests		
Test separation distances \leqslant 50 mm		
Exposure Positions		Tune-up Maximum power of WLAN 2.4G
15dBm		
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	9.9
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	9.9
	SAR testing required?	YES
Right Side	Antenna to user(mm)	28
	SAR exclusion threshold	1.8
	SAR testing required?	NO
Top Side	Antenna to user(mm)	5
	SAR exclusion threshold	9.9
	SAR testing required?	YES
Exposure Positions		Tune-up Maximum power of WLAN 5.2G
12dBm		
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.3
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.3
	SAR testing required?	YES
Right Side	Antenna to user(mm)	28
	SAR exclusion threshold	1.3
	SAR testing required?	NO
Top Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.3
	SAR testing required?	YES
Exposure Positions		Tune-up Maximum power of WLAN 5.8G
12dBm		
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.7
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.7
	SAR testing required?	YES
Right Side	Antenna to user(mm)	28

	SAR exclusion threshold	1.4
	SAR testing required?	NO
Top Side	Antenna to user(mm)	5
	SAR exclusion threshold	7.7
	SAR testing required?	YES
	Tune-up Maximum power of GSM850	
Exposure Positions	32dBm	
	Antenna to user(mm)	5
	SAR exclusion threshold	292.0
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	292.0
	SAR testing required?	YES
	Antenna to user(mm)	
Left Side	25	
	SAR exclusion threshold	58.4
	SAR testing required?	YES
	Antenna to user(mm)	
Right Side	10	
	SAR exclusion threshold	146.0
	SAR testing required?	YES
	Antenna to user(mm)	
Bottom Side	5	
	SAR exclusion threshold	292.0
	SAR testing required?	YES
	Tune-up Maximum power of GSM1900	
Exposure Positions	30dBm	
	Antenna to user(mm)	5
	SAR exclusion threshold	276.4
	SAR testing required?	YES
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	276.4
	SAR testing required?	YES
	Antenna to user(mm)	
Back Side	5	
	SAR exclusion threshold	276.4
	SAR testing required?	YES
	Antenna to user(mm)	
Left Side	25	
	SAR exclusion threshold	55.3
	SAR testing required?	YES
	Antenna to user(mm)	
Right Side	10	
	SAR exclusion threshold	138.2
	SAR testing required?	YES
	Antenna to user(mm)	
Bottom Side	5	
	SAR exclusion threshold	276.4
	SAR testing required?	YES
	Tune-up Maximum power of WCDMA Band 2	
Exposure Positions		

	23dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.1
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.1
	SAR testing required?	YES
Left Side	Antenna to user(mm)	25
	SAR exclusion threshold	11.0
	SAR testing required?	YES
Right Side	Antenna to user(mm)	10
	SAR exclusion threshold	27.6
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	5
	SAR exclusion threshold	55.1
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of WCDMA Band 5	
	23dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.7
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.7
	SAR testing required?	YES
Left Side	Antenna to user(mm)	25
	SAR exclusion threshold	7.3
	SAR testing required?	YES
Right Side	Antenna to user(mm)	10
	SAR exclusion threshold	18.4
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.7
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band 5	
	23dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.8
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.8

	SAR testing required?	YES
Left Side	Antenna to user(mm)	25
	SAR exclusion threshold	7.4
	SAR testing required?	YES
Right Side	Antenna to user(mm)	10
	SAR exclusion threshold	18.4
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	5
	SAR exclusion threshold	36.8
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band 41	
	24dBm	
Front Side	Antenna to user(mm)	5
	SAR exclusion threshold	81.7
	SAR testing required?	YES
Back Side	Antenna to user(mm)	5
	SAR exclusion threshold	81.7
	SAR testing required?	YES
Left Side	Antenna to user(mm)	25
	SAR exclusion threshold	16.3
	SAR testing required?	YES
Right Side	Antenna to user(mm)	10
	SAR exclusion threshold	40.9
	SAR testing required?	YES
Bottom Side	Antenna to user(mm)	5
	SAR exclusion threshold	81.7
	SAR testing required?	YES

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

Positions for SAR tests		
Test separation distances > 50 mm		
Exposure Positions	Tune-up Maximum power of WLAN 2.4G	
	15dBm	31.6mW
Left Side	Antenna to user(mm)	65
	SAR exclusion threshold(mW)	246
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	174
	SAR exclusion threshold(mW)	1336
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.2G	

	12dBm	15.8mW
Left Side	Antenna to user(mm)	65
	SAR exclusion threshold(mW)	216
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	174
	SAR exclusion threshold(mW)	1306
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WLAN 5.8G	
	12dBm	15.8mW
Left Side	Antenna to user(mm)	65
	SAR exclusion threshold(mW)	212
	SAR testing required?	NO
Bottom Side	Antenna to user(mm)	174
	SAR exclusion threshold(mW)	1302
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of GSM850	
	32dBm	1584.9mW
Top Side	Antenna to user(mm)	161
	SAR exclusion threshold(mW)	165
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of GSM1900	
	30dBm	1000mW
Top Side	Antenna to user(mm)	161
	SAR exclusion threshold(mW)	1219
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WCDMA Band 2	
	23dBm	199.5mW
Top Side	Antenna to user(mm)	161
	SAR exclusion threshold(mW)	1219
	SAR testing required?	NO
Exposure Positions	Tune-up Maximum power of WCDMA Band 5	
	23dBm	199.5mW
Top Side	Antenna to user(mm)	161
	SAR exclusion threshold(mW)	165
	SAR testing required?	YES
Exposure Positions	Tune-up Maximum power of LTE Band 5	
	23dBm	199.5mW
Top Side	Antenna to user(mm)	161
	SAR exclusion threshold(mW)	165
	SAR testing required?	YES

Exposure Positions		Tune-up Maximum power of LTE Band 41	
		24dBm	251.2mW
Top Side	Antenna to user(mm)	161	
	SAR exclusion threshold(mW)	1206	
	SAR testing required?	NO	

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is $<$ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	9.000	7.943	5	2.480	2.502	3.0	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [1/\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances \leq 50mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $<$ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	9.000	7.943	5	2.480	7.5	0.334
Bluetooth	Body	9.000	7.943	5	2.480	7.5	0.334

NOTE: Estimated SAR calculation for Bluetooth.

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.094	0.062	-4.03	28.95	29.00	0.095
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.035	0.020	0.13	28.95	29.00	0.035
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.098	0.067	2.73	28.95	29.00	0.099
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.038	0.022	-4.18	28.95	29.00	0.038

NOTE: Head SAR test results of GSM850.

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.524	0.233	-0.02	28.95	29.00	0.530
Back Side	189/836.4	GPRS(GMSK 4TS)	0.951	0.470	1.76	28.95	29.00	0.962
Left Side	189/836.4	GPRS(GMSK 4TS)	0.434	0.216	1.07	28.95	29.00	0.439
Right Side	189/836.4	GPRS(GMSK 4TS)	0.367	0.174	-3.31	28.95	29.00	0.371
Top Side	189/836.4	GPRS(GMSK 4TS)	0.113	0.073	0.02	28.95	29.00	0.114
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.608	0.289	2.52	28.95	29.00	0.615
Back Side	128/824.2	GPRS(GMSK 4TS)	1.041	0.490	4.43	28.74	29.00	1.105
Back Side	251/848.8	GPRS(GMSK 4TS)	1.069	0.515	-0.46	28.64	29.00	1.161
Back Side -	251/848.8	GPRS(GMSK)	1.067	0.514	-3.64	28.64	29.00	1.159

Repeated		4TS)						
----------	--	------	--	--	--	--	--	--

NOTE: Body SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	661/1880	GPRS(GMSK 2TS)	0.298	0.151	0.49	28.73	29.00	0.317
Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.142	0.084	-3.11	28.73	29.00	0.151
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.304	0.157	-2.03	28.73	29.00	0.323
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.146	0.087	-2.28	28.73	29.00	0.155

NOTE: Head SAR test results of GSM1900

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 2TS)	0.465	0.207	4.23	28.73	29.00	0.495
Back Side	661/1880	GPRS(GMSK 2TS)	1.135	0.484	0.79	28.73	29.00	1.208
Back Side - Repeated	661/1880	GPRS(GMSK 2TS)	1.132	0.482	1.33	28.73	29.00	1.205
Left Side	661/1880	GPRS(GMSK 2TS)	0.554	0.262	-1.42	28.73	29.00	0.590
Right Side	661/1880	GPRS(GMSK 2TS)	0.327	0.150	-1.82	28.73	29.00	0.348
Bottom Side	661/1880	GPRS(GMSK 2TS)	0.689	0.334	-3.22	28.73	29.00	0.733
Back Side	512/1850.2	GPRS(GMSK 2TS)	1.128	0.480	-1.29	28.66	29.00	1.220
Back Side	810/1909.8	GPRS(GMSK 2TS)	0.822	0.345	0.41	28.46	29.00	0.931

NOTE: Body SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	9400/1880	RMC12.2K	0.124	0.072	-2.57	22.93	23.00	0.126
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.082	0.045	4.00	22.93	23.00	0.083
Right Cheek	9400/1880	RMC12.2K	0.128	0.076	-0.93	22.93	23.00	0.130
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.087	0.049	4.23	22.93	23.00	0.088

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.347	0.153	3.95	22.93	23.00	0.353
Back Side	9400/1880	RMC12.2K	0.650	0.298	-0.38	22.93	23.00	0.661
Left Side	9400/1880	RMC12.2K	0.408	0.187	-4.66	22.93	23.00	0.415
Right Side	9400/1880	RMC12.2K	0.366	0.161	0.00	22.93	23.00	0.372
Bottom Side	9400/1880	RMC12.2K	0.582	0.243	-2.99	22.93	23.00	0.591

NOTE: Body SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	4182/836.4	RMC12.2K	0.452	0.395	0.12	22.97	23.00	0.455
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.223	0.178	0.22	22.97	23.00	0.225
Right Cheek	4182/836.4	RMC12.2K	0.571	0.440	-0.83	22.97	23.00	0.575
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.230	0.182	1.01	22.97	23.00	0.232

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.621	0.389	0.23	22.97	23.00	0.625
Back Side	4182/836.4	RMC12.2K	1.178	0.702	-0.22	22.97	23.00	1.186

Back Side - Repeated	4182/836.4	RMC12.2K	1.171	0.692	1.21	22.97	23.00	1.179
Left Side	4182/836.4	RMC12.2K	0.425	0.231	0.12	22.97	23.00	0.428
Right Side	4182/836.4	RMC12.2K	0.418	0.227	0.32	22.97	23.00	0.421
Top Side	4182/836.4	RMC12.2K	0.114	0.071	0.11	22.97	23.00	0.115
Bottom Side	4182/836.4	RMC12.2K	0.607	0.352	1.05	22.97	23.00	0.611
Back Side	4132/826.4	RMC12.2K	1.065	0.658	0.23	22.91	23.00	1.087
Back Side	4233/846.6	RMC12.2K	0.962	0.623	1.02	23.00	23.00	0.962

NOTE: Body SAR test results of WCDMA Band 5

10.1.5. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20525/836.5	10M QPSK(1,24)	0.027	0.022	2.12	22.40	23.00	0.031
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.015	0.013	2.36	22.40	23.00	0.017
Right Cheek	20525/836.5	10M QPSK(1,24)	0.026	0.020	2.80	22.40	23.00	0.030
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.013	0.011	2.39	22.40	23.00	0.015
50%RB								
Left Cheek	20525/836.5	1.4M QPSK(3,1)	0.020	0.016	-1.86	22.37	23.00	0.023
Left Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.012	0.008	-3.26	22.37	23.00	0.014
Right Cheek	20525/836.5	1.4M QPSK(3,1)	0.018	0.014	1.14	22.37	23.00	0.021
Right Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.010	0.080	4.30	22.37	23.00	0.012

NOTE: Head SAR test results of LTE Band 5

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.428	0.207	-0.10	22.40	23.00	0.491
Back Side	20525/836.5	10M QPSK(1,24)	0.664	0.323	-0.86	22.40	23.00	0.762
Left Side	20525/836.5	10M QPSK(1,24)	0.364	0.179	4.79	22.40	23.00	0.418
Right Side	20525/836.5	10M QPSK(1,24)	0.455	0.221	3.94	22.40	23.00	0.522
Top Side	20525/836.5	10M QPSK(1,24)	0.097	0.045	-0.04	22.40	23.00	0.111
Bottom Side	20525/836.5	10M QPSK(1,24)	0.523	0.258	-0.01	22.40	23.00	0.600
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,1)	0.376	0.188	1.84	22.37	23.00	0.435
Back Side	20525/836.5	1.4M QPSK(3,1)	0.618	0.304	-0.94	22.37	23.00	0.714
Left Side	20525/836.5	1.4M QPSK(3,1)	0.307	0.143	-3.27	22.37	23.00	0.355
Right Side	20525/836.5	1.4M QPSK(3,1)	0.415	0.199	0.51	22.37	23.00	0.480
Top Side	20525/836.5	1.4M QPSK(3,1)	0.073	0.028	0.15	22.37	23.00	0.084
Bottom Side	20525/836.5	1.4M QPSK(3,1)	0.473	0.231	-1.52	22.37	23.00	0.547

NOTE: Body SAR test results of LTE Band 5

10.1.6. SAR measurement Result of LTE Band 41

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	40715/2602.5	20M QPSK(1,49)	0.110	0.062	-4.19	22.35	24.00	0.161
Left Tilt 15	40715/2602.5	20M QPSK(1,49)	0.036	0.020	-0.65	22.35	24.00	0.053

Degree								
Right Cheek	40715/2602.5	20M QPSK(1,49)	0.112	0.064	-1.83	22.35	24.00	0.164
Right Tilt 15 Degree	40715/2602.5	20M QPSK(1,49)	0.038	0.021	-0.82	22.35	24.00	0.056
50%RB								
Left Cheek	40715/2602.5	20M QPSK(50,0)	0.096	0.054	-4.83	21.39	23.00	0.139
Left Tilt 15 Degree	40715/2602.5	20M QPSK(50,0)	0.025	0.014	-2.01	21.39	23.00	0.036
Right Cheek	40715/2602.5	20M QPSK(50,0)	0.099	0.056	2.55	21.39	23.00	0.143
Right Tilt 15 Degree	40715/2602.5	20M QPSK(50,0)	0.026	0.016	3.70	21.39	23.00	0.038

NOTE: Head SAR test results of LTE Band 41

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tuned power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	40715/2602.5	20M QPSK(1,49)	0.308	0.131	3.22	22.35	24.00	0.450
Back Side	40715/2602.5	20M QPSK(1,49)	0.451	0.188	-0.21	22.35	24.00	0.659
Left Side	40715/2602.5	20M QPSK(1,49)	0.263	0.110	-3.06	22.35	24.00	0.385
Right Side	40715/2602.5	20M QPSK(1,49)	0.217	0.092	-2.33	22.35	24.00	0.317
Bottom Side	40715/2602.5	20M QPSK(1,49)	0.358	0.152	4.80	22.35	24.00	0.523
50%RB								
Front Side	40715/2602.5	20M QPSK(50,0)	0.280	0.118	-4.70	21.39	23.00	0.406
Back Side	40715/2602.5	20M QPSK(50,0)	0.415	0.175	0.15	21.39	23.00	0.601
Left Side	40715/2602.5	20M QPSK(50,0)	0.232	0.098	-3.09	21.39	23.00	0.336

Right Side	40715/2602.5	20M QPSK(50,0)	0.178	0.071	-2.37	21.39	23.00	0.258
Bottom Side	40715/2602.5	20M QPSK(50,0)	0.323	0.133	-4.62	21.39	23.00	0.468

NOTE: Body SAR test results of LTE Band 41

10.1.7. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	6/2437	802.11 b	0.160	0.075	3.54	14.27	15.00	0.189
Left Tilt 15 Degree	6/2437	802.11 b	0.124	0.058	0.75	14.27	15.00	0.147
Right Cheek	6/2437	802.11 b	0.164	0.081	0.08	14.27	15.00	0.194
Right Tilt 15 Degree	6/2437	802.11 b	0.128	0.063	4.64	14.27	15.00	0.151

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.115	0.052	0.21	14.27	15.00	0.136
Back Side	6/2437	802.11 b	0.180	0.088	-2.48	14.27	15.00	0.213
Top Side	6/2437	802.11 b	0.112	0.058	1.01	14.27	15.00	0.133

NOTE: Body SAR test results of WLAN 2.4G

10.1.8. SAR measurement Result of WLAN 5.2G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	40/5200	802.11 a	0.120	0.075	2.15	10.71	12.00	0.162
Left Tilt 15 Degree	40/5200	802.11 a	0.062	0.040	2.33	10.71	12.00	0.083
Right Cheek	40/5200	802.11 a	0.123	0.077	0.59	10.71	12.00	0.166
Right Tilt 15 Degree	40/5200	802.11 a	0.067	0.046	2.83	10.71	12.00	0.090

NOTE: Head SAR test results of WLAN 5.2G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	40/5200	802.11 a	0.122	0.075	0.30	10.71	12.00	0.164
Back Side	40/5200	802.11 a	0.144	0.086	-3.99	10.71	12.00	0.194
Top Side	40/5200	802.11 a	0.084	0.040	1.22	10.71	12.00	0.113

NOTE: Body SAR test results of WLAN 5.2G

10.1.9. SAR measurement Result of WLAN 5.8G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	157/5785	802.11 a	0.120	0.071	0.32	10.39	12.00	0.174
Left Tilt 15 Degree	157/5785	802.11 a	0.095	0.042	0.14	10.39	12.00	0.138
Right Cheek	157/5785	802.11 a	0.215	0.095	-3.22	10.39	12.00	0.311
Right Tilt 15 Degree	157/5785	802.11 a	0.112	0.060	0.25	10.39	12.00	0.162

NOTE: Head SAR test results of WLAN 5.8G

Test Position of Body with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ($\pm 5\%$)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	157/5785	802.11 a	0.152	0.096	0.18	10.39	12.00	0.220
Back Side	157/5785	802.11 a	0.188	0.109	2.81	10.39	12.00	0.272
Top Side	157/5785	802.11 a	0.121	0.078	0.31	10.39	12.00	0.175

NOTE: Body SAR test results of WLAN 5.8G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation < 1.6W/kg.
- 2) SPLSR = $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If SPLSR ≤ 0.04 , simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Head	Left Cheek	0.095	0.189	0.284	N/A	N/A
	Left Tilt 15 Degree	0.035	0.147	0.182	N/A	N/A
	Right Cheek	0.099	0.194	0.293	N/A	N/A
	Right Tilt 15 Degree	0.038	0.151	0.190	N/A	N/A
Body	Front Side	0.530	0.136	0.666	N/A	N/A
	Back Side	1.161	0.213	1.374	N/A	N/A
	Left Side	0.439	N/A	0.439	N/A	N/A
	Right Side	0.371	N/A	0.371	N/A	N/A
	Top Side	0.114	0.133	0.247	N/A	N/A
	Bottom Side	0.615	N/A	0.615	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 2.4G			
Head	Left Cheek	0.317	0.189	0.506	N/A	N/A
	Left Tilt 15 Degree	0.151	0.147	0.298	N/A	N/A
	Right Cheek	0.323	0.194	0.518	N/A	N/A
	Right Tilt 15 Degree	0.155	0.151	0.307	N/A	N/A
Body	Front Side	0.495	0.136	0.631	N/A	N/A
	Back Side	1.220	0.213	1.433	N/A	N/A
	Left Side	0.590	N/A	0.590	N/A	N/A
	Right Side	0.348	N/A	0.348	N/A	N/A
	Top Side	N/A	0.133	0.133	N/A	N/A
	Bottom Side	0.733	N/A	0.733	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 2.4G			
Head	Left Cheek	0.126	0.189	0.315	N/A	N/A
	Left Tilt 15 Degree	0.083	0.147	0.230	N/A	N/A
	Right Cheek	0.130	0.194	0.324	N/A	N/A
	Right Tilt 15 Degree	0.088	0.151	0.240	N/A	N/A
Body	Front Side	0.353	0.136	0.489	N/A	N/A
	Back Side	0.661	0.213	0.874	N/A	N/A
	Left Side	0.415	N/A	0.415	N/A	N/A
	Right Side	0.372	N/A	0.372	N/A	N/A

	Top Side	N/A	0.133	0.133	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 2.4G			
Head	Left Cheek	0.455	0.189	0.644	N/A	N/A
	Left Tilt 15 Degree	0.225	0.147	0.371	N/A	N/A
	Right Cheek	0.575	0.194	0.769	N/A	N/A
	Right Tilt 15 Degree	0.232	0.151	0.383	N/A	N/A
Body	Front Side	0.625	0.136	0.761	N/A	N/A
	Back Side	1.186	0.213	1.399	N/A	N/A
	Left Side	0.428	N/A	0.428	N/A	N/A
	Right Side	0.421	N/A	0.421	N/A	N/A
	Top Side	0.115	0.133	0.248	N/A	N/A
	Bottom Side	0.611	N/A	0.611	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	WLAN 2.4G			
Head	Left Cheek	0.031	0.189	0.220	N/A	N/A
	Left Tilt 15 Degree	0.017	0.147	0.164	N/A	N/A
	Right Cheek	0.030	0.194	0.224	N/A	N/A
	Right Tilt 15 Degree	0.015	0.151	0.166	N/A	N/A
Body	Front Side	0.491	0.136	0.627	N/A	N/A
	Back Side	0.762	0.213	0.975	N/A	N/A
	Left Side	0.418	N/A	0.418	N/A	N/A
	Right Side	0.522	N/A	0.522	N/A	N/A
	Top Side	0.111	0.133	0.244	N/A	N/A
	Bottom Side	0.600	N/A	0.600	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 41	WLAN 2.4G			
Head	Left Cheek	0.161	0.189	0.350	N/A	N/A
	Left Tilt 15 Degree	0.053	0.147	0.199	N/A	N/A
	Right Cheek	0.164	0.194	0.358	N/A	N/A

	Right Tilt 15 Degree	0.056	0.151	0.207	N/A	N/A
Body	Front Side	0.450	0.136	0.586	N/A	N/A
	Back Side	0.659	0.213	0.872	N/A	N/A
	Left Side	0.385	N/A	0.385	N/A	N/A
	Right Side	0.317	N/A	0.317	N/A	N/A
	Top Side	N/A	0.133	0.133	N/A	N/A
	Bottom Side	0.523	N/A	0.523	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 41 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.2G			
Head	Left Cheek	0.095	0.162	0.257	N/A	N/A
	Left Tilt 15 Degree	0.035	0.083	0.119	N/A	N/A
	Right Cheek	0.099	0.166	0.265	N/A	N/A
	Right Tilt 15 Degree	0.038	0.090	0.129	N/A	N/A
Body	Front Side	0.530	0.164	0.694	N/A	N/A
	Back Side	1.161	0.194	1.355	N/A	N/A
	Left Side	0.439	N/A	0.439	N/A	N/A
	Right Side	0.371	N/A	0.371	N/A	N/A
	Top Side	0.114	0.113	0.227	N/A	N/A
	Bottom Side	0.615	N/A	0.615	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.2G			
Head	Left Cheek	0.317	0.162	0.479	N/A	N/A
	Left Tilt 15 Degree	0.151	0.083	0.235	N/A	N/A
	Right Cheek	0.323	0.166	0.489	N/A	N/A
	Right Tilt 15 Degree	0.155	0.090	0.246	N/A	N/A
Body	Front Side	0.495	0.164	0.659	N/A	N/A
	Back Side	1.220	0.194	1.414	N/A	N/A
	Left Side	0.590	N/A	0.590	N/A	N/A
	Right Side	0.348	N/A	0.348	N/A	N/A
	Top Side	N/A	0.113	0.113	N/A	N/A
	Bottom Side	0.733	N/A	0.733	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA	WLAN 5.2G			

		Band 2				
Head	Left Cheek	0.126	0.162	0.288	N/A	N/A
	Left Tilt 15 Degree	0.083	0.083	0.167	N/A	N/A
	Right Cheek	0.130	0.166	0.296	N/A	N/A
	Right Tilt 15 Degree	0.088	0.090	0.179	N/A	N/A
Body	Front Side	0.353	0.164	0.517	N/A	N/A
	Back Side	0.661	0.194	0.854	N/A	N/A
	Left Side	0.415	N/A	0.415	N/A	N/A
	Right Side	0.372	N/A	0.372	N/A	N/A
	Top Side	N/A	0.113	0.113	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 5.2G			
Head	Left Cheek	0.455	0.162	0.617	N/A	N/A
	Left Tilt 15 Degree	0.225	0.083	0.308	N/A	N/A
	Right Cheek	0.575	0.166	0.740	N/A	N/A
	Right Tilt 15 Degree	0.232	0.090	0.322	N/A	N/A
Body	Front Side	0.625	0.164	0.789	N/A	N/A
	Back Side	1.186	0.194	1.380	N/A	N/A
	Left Side	0.428	N/A	0.428	N/A	N/A
	Right Side	0.421	N/A	0.421	N/A	N/A
	Top Side	0.115	0.113	0.228	N/A	N/A
	Bottom Side	0.611	N/A	0.611	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	WLAN 5.2G			
Head	Left Cheek	0.031	0.162	0.193	N/A	N/A
	Left Tilt 15 Degree	0.017	0.083	0.101	N/A	N/A
	Right Cheek	0.030	0.166	0.195	N/A	N/A
	Right Tilt 15 Degree	0.015	0.090	0.105	N/A	N/A
Body	Front Side	0.491	0.164	0.656	N/A	N/A
	Back Side	0.762	0.194	0.956	N/A	N/A
	Left Side	0.418	N/A	0.418	N/A	N/A
	Right Side	0.522	N/A	0.522	N/A	N/A

	Top Side	0.111	0.113	0.224	N/A	N/A
	Bottom Side	0.600	N/A	0.600	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 41	WLAN 5.2G			
Head	Left Cheek	0.161	0.162	0.322	N/A	N/A
	Left Tilt 15 Degree	0.053	0.083	0.136	N/A	N/A
	Right Cheek	0.164	0.166	0.329	N/A	N/A
	Right Tilt 15 Degree	0.056	0.090	0.146	N/A	N/A
Body	Front Side	0.450	0.164	0.615	N/A	N/A
	Back Side	0.659	0.194	0.853	N/A	N/A
	Left Side	0.385	N/A	0.385	N/A	N/A
	Right Side	0.317	N/A	0.317	N/A	N/A
	Top Side	N/A	0.113	0.113	N/A	N/A
	Bottom Side	0.523	N/A	0.523	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 41 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.8G			
Head	Left Cheek	0.095	0.174	0.269	N/A	N/A
	Left Tilt 15 Degree	0.035	0.138	0.173	N/A	N/A
	Right Cheek	0.099	0.311	0.411	N/A	N/A
	Right Tilt 15 Degree	0.038	0.162	0.201	N/A	N/A
Body	Front Side	0.530	0.220	0.750	N/A	N/A
	Back Side	1.161	0.272	1.434	N/A	N/A
	Left Side	0.439	N/A	0.439	N/A	N/A
	Right Side	0.371	N/A	0.371	N/A	N/A
	Top Side	0.114	0.175	0.290	N/A	N/A
	Bottom Side	0.615	N/A	0.615	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.8G			
Head	Left Cheek	0.317	0.174	0.491	N/A	N/A
	Left Tilt 15 Degree	0.151	0.138	0.289	N/A	N/A
	Right Cheek	0.323	0.311	0.635	N/A	N/A
	Right Tilt 15	0.155	0.162	0.318	N/A	N/A

	Degree					
Body	Front Side	0.495	0.220	0.715	N/A	N/A
	Back Side	1.220	0.272	1.492	N/A	N/A
	Left Side	0.590	N/A	0.590	N/A	N/A
	Right Side	0.348	N/A	0.348	N/A	N/A
	Top Side	N/A	0.175	0.175	N/A	N/A
	Bottom Side	0.733	N/A	0.733	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 5.8G			
Head	Left Cheek	0.126	0.174	0.300	N/A	N/A
	Left Tilt 15 Degree	0.083	0.138	0.221	N/A	N/A
	Right Cheek	0.130	0.311	0.442	N/A	N/A
	Right Tilt 15 Degree	0.088	0.162	0.251	N/A	N/A
Body	Front Side	0.353	0.220	0.573	N/A	N/A
	Back Side	0.661	0.272	0.933	N/A	N/A
	Left Side	0.415	N/A	0.415	N/A	N/A
	Right Side	0.372	N/A	0.372	N/A	N/A
	Top Side	N/A	0.175	0.175	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 5.8G			
Head	Left Cheek	0.455	0.174	0.629	N/A	N/A
	Left Tilt 15 Degree	0.225	0.138	0.362	N/A	N/A
	Right Cheek	0.575	0.311	0.886	N/A	N/A
	Right Tilt 15 Degree	0.232	0.162	0.394	N/A	N/A
Body	Front Side	0.625	0.220	0.846	N/A	N/A
	Back Side	1.186	0.272	1.458	N/A	N/A
	Left Side	0.428	N/A	0.428	N/A	N/A
	Right Side	0.421	N/A	0.421	N/A	N/A
	Top Side	0.115	0.175	0.290	N/A	N/A
	Bottom Side	0.611	N/A	0.611	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 5.8G.

Test Position	Scaled SAR _{MAX}	Σ 1-g SAR	SPLSR	Remark

		LTE Band 5	WLAN 5.8G	(W/Kg)		
Head	Left Cheek	0.031	0.174	0.205	N/A	N/A
	Left Tilt 15 Degree	0.017	0.138	0.155	N/A	N/A
	Right Cheek	0.030	0.311	0.341	N/A	N/A
	Right Tilt 15 Degree	0.015	0.162	0.177	N/A	N/A
Body	Front Side	0.491	0.220	0.712	N/A	N/A
	Back Side	0.762	0.272	1.035	N/A	N/A
	Left Side	0.418	N/A	0.418	N/A	N/A
	Right Side	0.522	N/A	0.522	N/A	N/A
	Top Side	0.111	0.175	0.287	N/A	N/A
	Bottom Side	0.600	N/A	0.600	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 41	WLAN 5.8G			
Head	Left Cheek	0.161	0.174	0.335	N/A	N/A
	Left Tilt 15 Degree	0.053	0.138	0.190	N/A	N/A
	Right Cheek	0.164	0.311	0.475	N/A	N/A
	Right Tilt 15 Degree	0.056	0.162	0.218	N/A	N/A
Body	Front Side	0.450	0.220	0.671	N/A	N/A
	Back Side	0.659	0.272	0.932	N/A	N/A
	Left Side	0.385	N/A	0.385	N/A	N/A
	Right Side	0.317	N/A	0.317	N/A	N/A
	Top Side	N/A	0.175	0.175	N/A	N/A
	Bottom Side	0.523	N/A	0.523	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 41 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Head	Left Cheek	0.095	0.334	0.429	N/A	N/A
	Left Tilt 15 Degree	0.035	0.334	0.369	N/A	N/A
	Right Cheek	0.099	0.334	0.433	N/A	N/A
	Right Tilt 15 Degree	0.038	0.334	0.372	N/A	N/A
Body	Front Side	0.530	0.334	0.864	N/A	N/A
	Back Side	1.161	0.334	1.495	N/A	N/A
	Left Side	0.439	N/A	0.439	N/A	N/A
	Right Side	0.371	N/A	0.371	N/A	N/A

	Top Side	0.114	0.334	0.448	N/A	N/A
	Bottom Side	0.615	N/A	0.615	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	Bluetooth			
Head	Left Cheek	0.317	0.334	0.651	N/A	N/A
	Left Tilt 15 Degree	0.151	0.334	0.485	N/A	N/A
	Right Cheek	0.323	0.334	0.657	N/A	N/A
	Right Tilt 15 Degree	0.155	0.334	0.489	N/A	N/A
Body	Front Side	0.495	0.334	0.829	N/A	N/A
	Back Side	1.220	0.334	1.554	N/A	N/A
	Left Side	0.590	N/A	0.590	N/A	N/A
	Right Side	0.348	N/A	0.348	N/A	N/A
	Top Side	N/A	0.334	0.334	N/A	N/A
	Bottom Side	0.733	N/A	0.733	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	Bluetooth			
Head	Left Cheek	0.126	0.334	0.460	N/A	N/A
	Left Tilt 15 Degree	0.083	0.334	0.417	N/A	N/A
	Right Cheek	0.130	0.334	0.464	N/A	N/A
	Right Tilt 15 Degree	0.088	0.334	0.422	N/A	N/A
Body	Front Side	0.353	0.334	0.687	N/A	N/A
	Back Side	0.661	0.334	0.995	N/A	N/A
	Left Side	0.415	N/A	0.415	N/A	N/A
	Right Side	0.372	N/A	0.372	N/A	N/A
	Top Side	N/A	0.334	0.334	N/A	N/A
	Bottom Side	0.591	N/A	0.591	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	Bluetooth			
Head	Left Cheek	0.455	0.334	0.789	N/A	N/A
	Left Tilt 15 Degree	0.225	0.334	0.559	N/A	N/A
	Right Cheek	0.575	0.334	0.909	N/A	N/A
	Right Tilt 15	0.232	0.334	0.566	N/A	N/A

	Degree					
Body	Front Side	0.625	0.334	0.959	N/A	N/A
	Back Side	1.186	0.334	1.520	N/A	N/A
	Left Side	0.428	N/A	0.428	N/A	N/A
	Right Side	0.421	N/A	0.421	N/A	N/A
	Top Side	0.115	0.334	0.449	N/A	N/A
	Bottom Side	0.611	N/A	0.611	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	Bluetooth			
Head	Left Cheek	0.031	0.334	0.365	N/A	N/A
	Left Tilt 15 Degree	0.017	0.334	0.351	N/A	N/A
	Right Cheek	0.030	0.334	0.364	N/A	N/A
	Right Tilt 15 Degree	0.015	0.334	0.349	N/A	N/A
Body	Front Side	0.491	0.334	0.825	N/A	N/A
	Back Side	0.762	0.334	1.096	N/A	N/A
	Left Side	0.418	N/A	0.418	N/A	N/A
	Right Side	0.522	N/A	0.522	N/A	N/A
	Top Side	0.111	0.334	0.445	N/A	N/A
	Bottom Side	0.600	N/A	0.600	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 41	Bluetooth			
Head	Left Cheek	0.161	0.334	0.495	N/A	N/A
	Left Tilt 15 Degree	0.053	0.334	0.387	N/A	N/A
	Right Cheek	0.164	0.334	0.498	N/A	N/A
	Right Tilt 15 Degree	0.056	0.334	0.390	N/A	N/A
Body	Front Side	0.450	0.334	0.784	N/A	N/A
	Back Side	0.659	0.334	0.993	N/A	N/A
	Left Side	0.385	N/A	0.385	N/A	N/A
	Right Side	0.317	N/A	0.317	N/A	N/A
	Top Side	N/A	0.334	0.334	N/A	N/A
	Bottom Side	0.523	N/A	0.523	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 41 and Bluetooth.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID835 - Head
MEASUREMENT 2 System Performance Check - SID835 - Body
MEASUREMENT 3 System Performance Check - SID1900 - Head
MEASUREMENT 4 System Performance Check - SID1900 - Body
MEASUREMENT 5 System Performance Check - SID2450 - Head
MEASUREMENT 6 System Performance Check - SID2450 - Body
MEASUREMENT 7 System Performance Check - SID2600 - Head
MEASUREMENT 8 System Performance Check - SID2600 - Body
MEASUREMENT 9 System Performance Check - SID5200 - Head
MEASUREMENT 10 System Performance Check - SID5200 - Body
MEASUREMENT 11 System Performance Check - SID5800 - Head
MEASUREMENT 12 System Performance Check - SID5800 - Body


MEASUREMENT 1

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.834133
Relative permittivity (imaginary part)	20.064130
Conductivity (S/m)	0.928488
Variation (%)	-1.340000

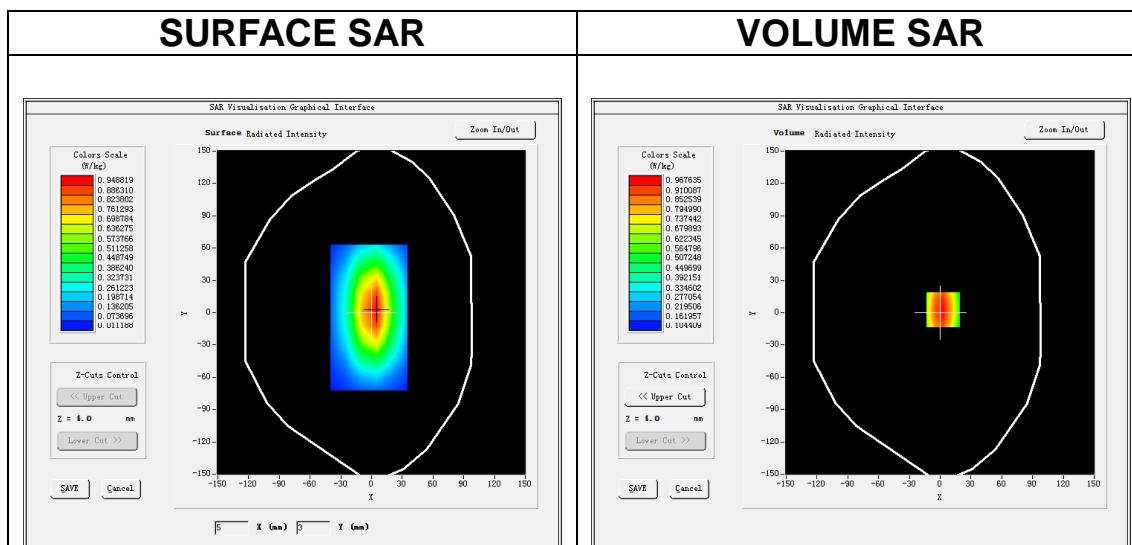

Maximum location: X=3.00, Y=3.00
SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.618725
SAR 1g (W/Kg)	0.934528

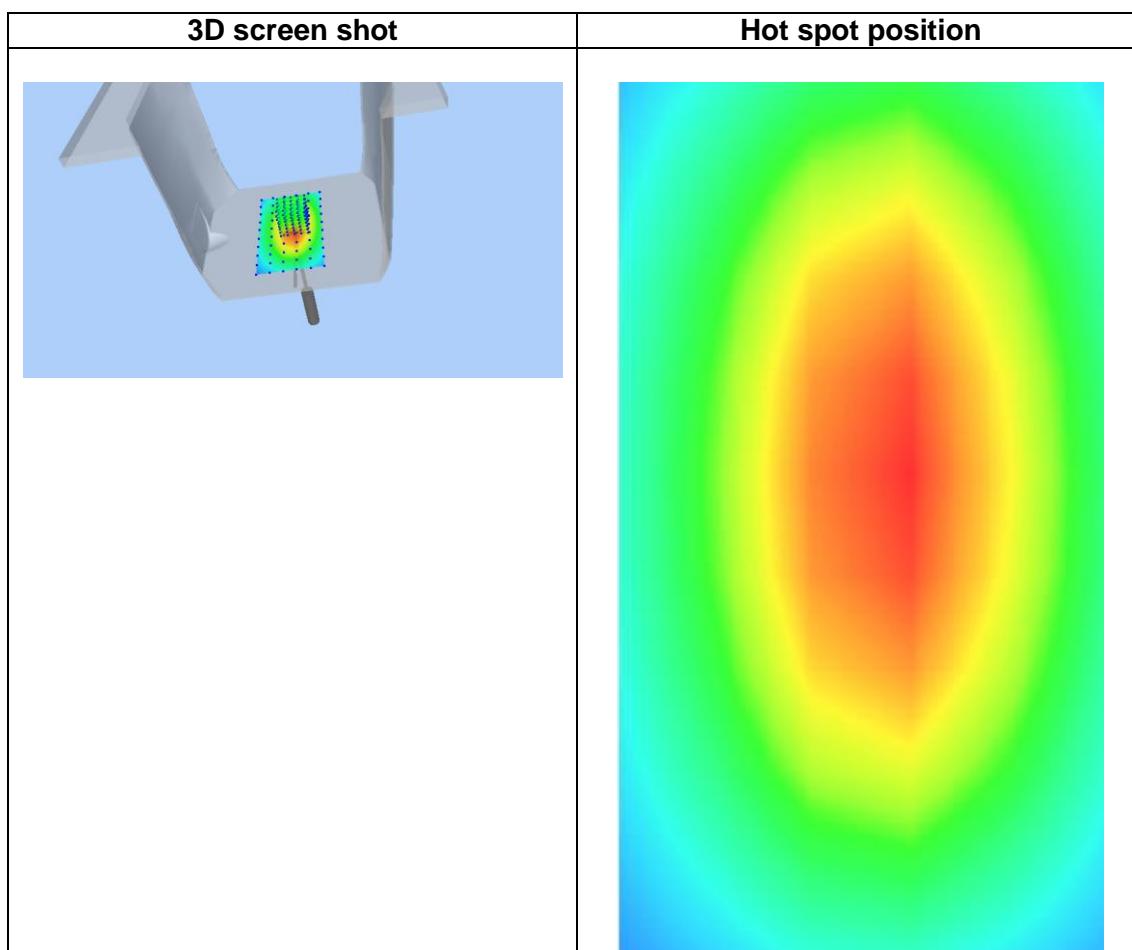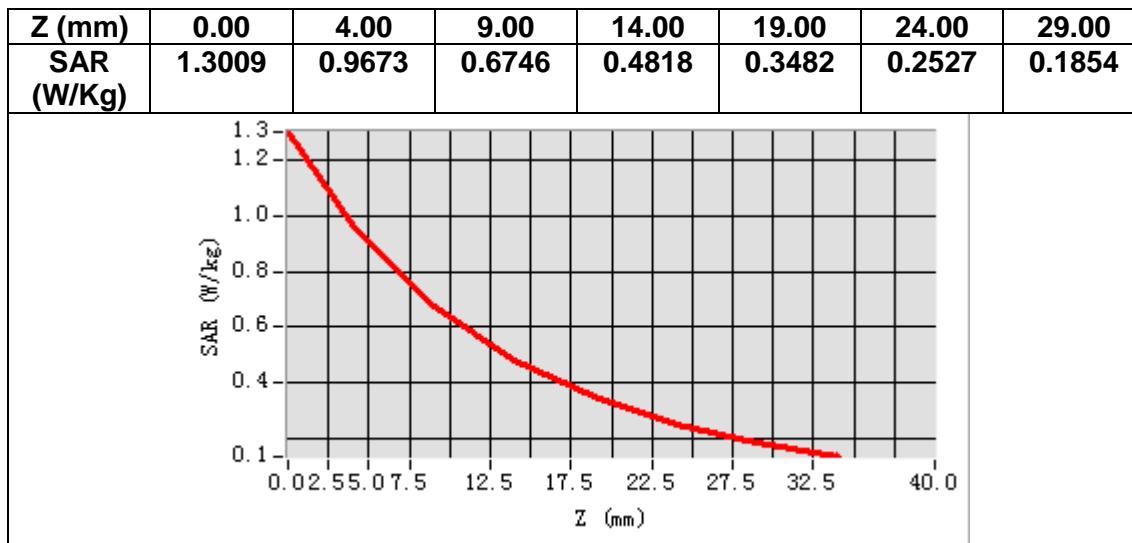


MEASUREMENT 2

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.463126
Relative permittivity (imaginary part)	21.841435
Conductivity (S/m)	1.013284
Variation (%)	-0.840000

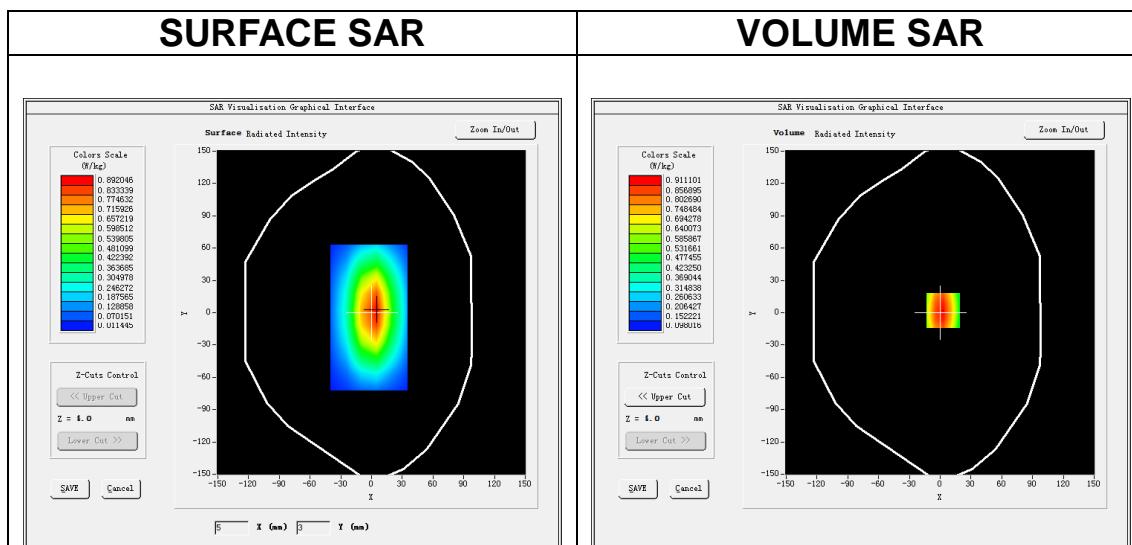

Maximum location: X=3.00, Y=2.00
SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.598729
SAR 1g (W/Kg)	0.932494

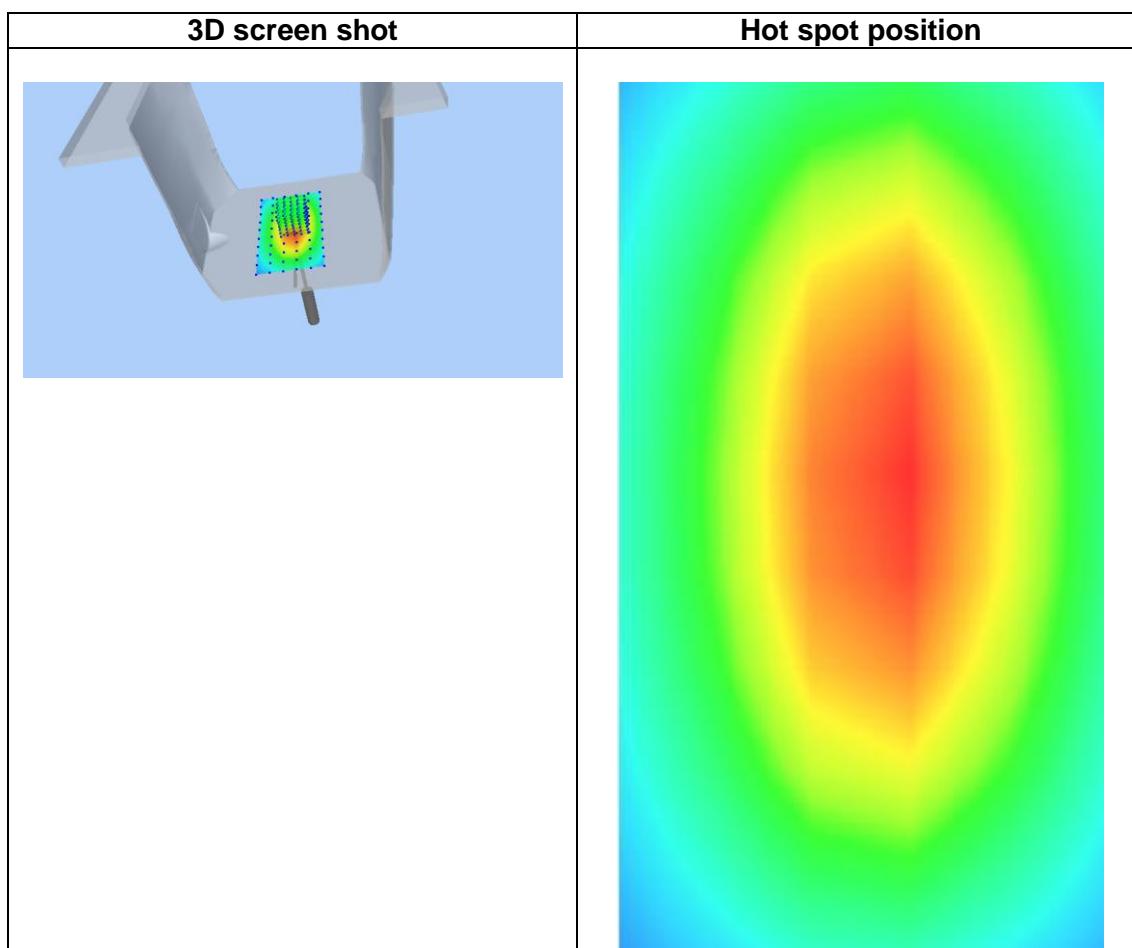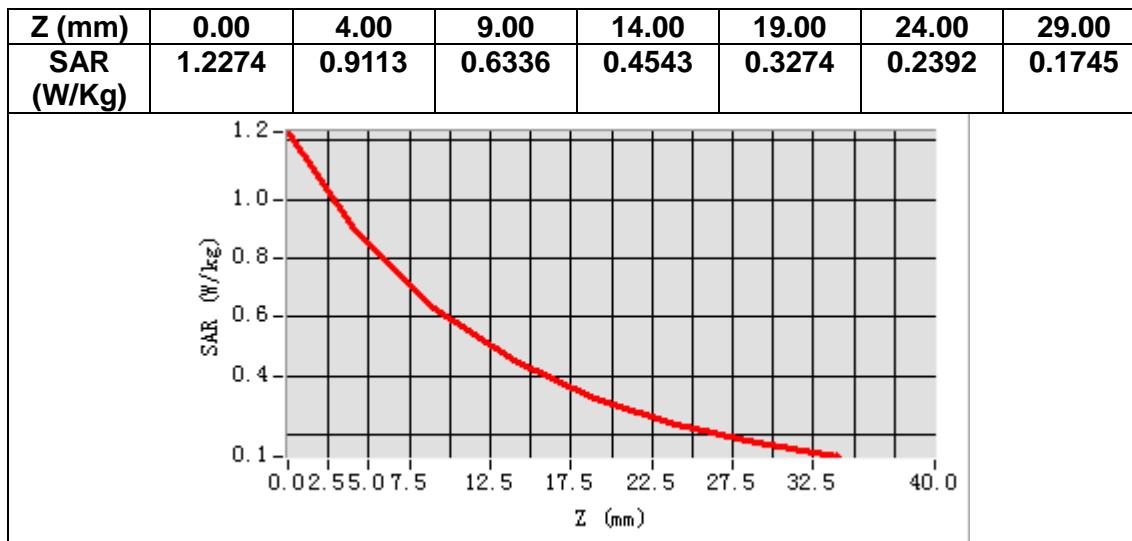


MEASUREMENT 3

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	41.063541
Relative permittivity (imaginary part)	13.79021
Conductivity (S/m)	1.462563
Variation (%)	-0.810000

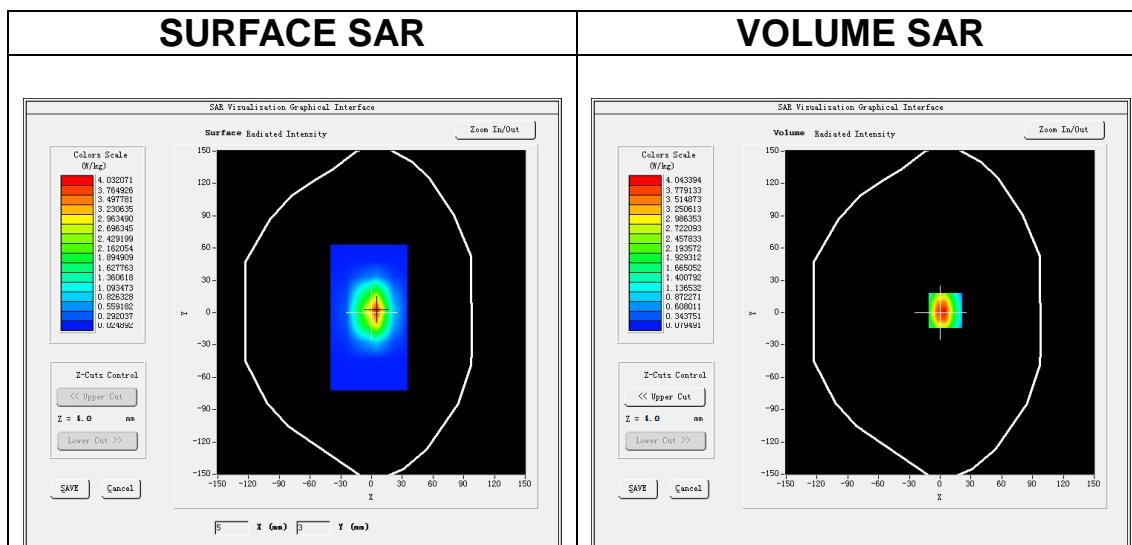

Maximum location: X=5.00, Y=2.00
SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.035364
SAR 1g (W/Kg)	3.924820

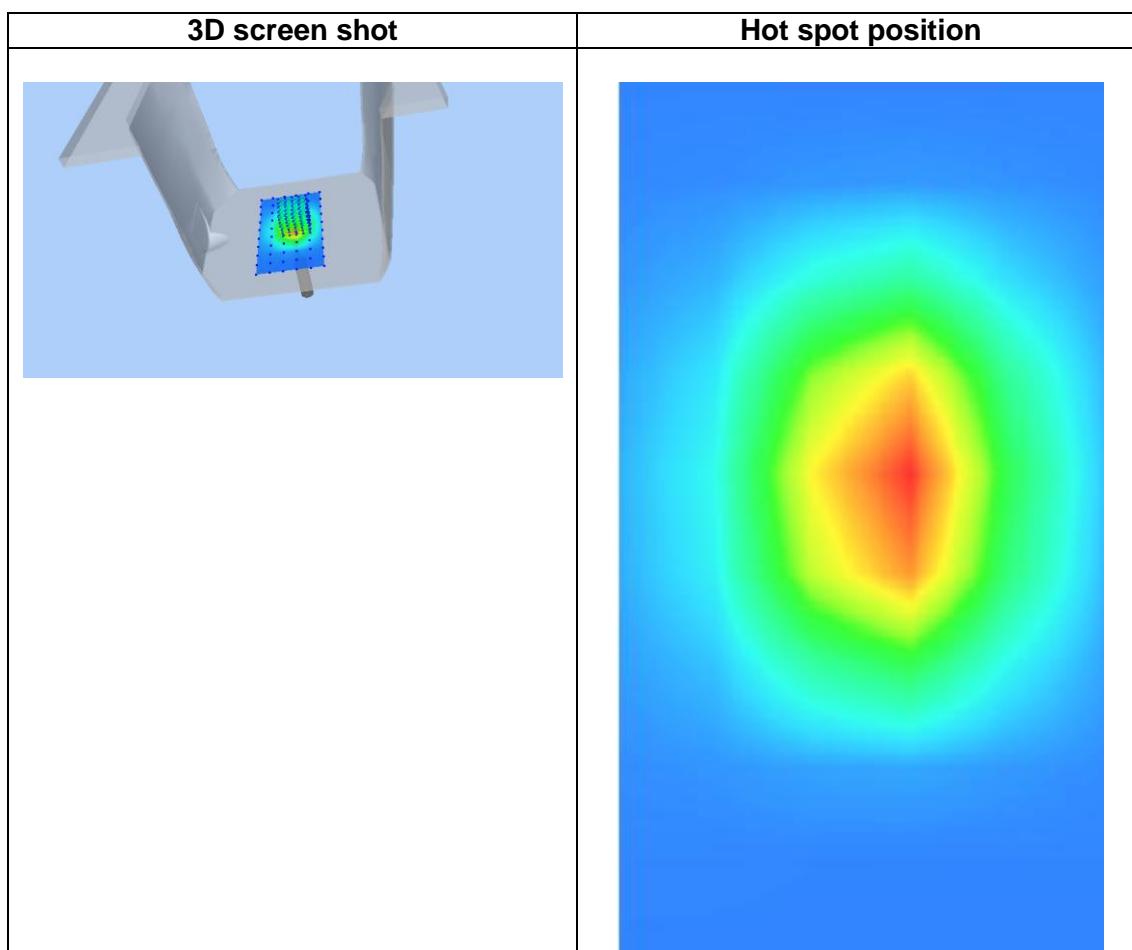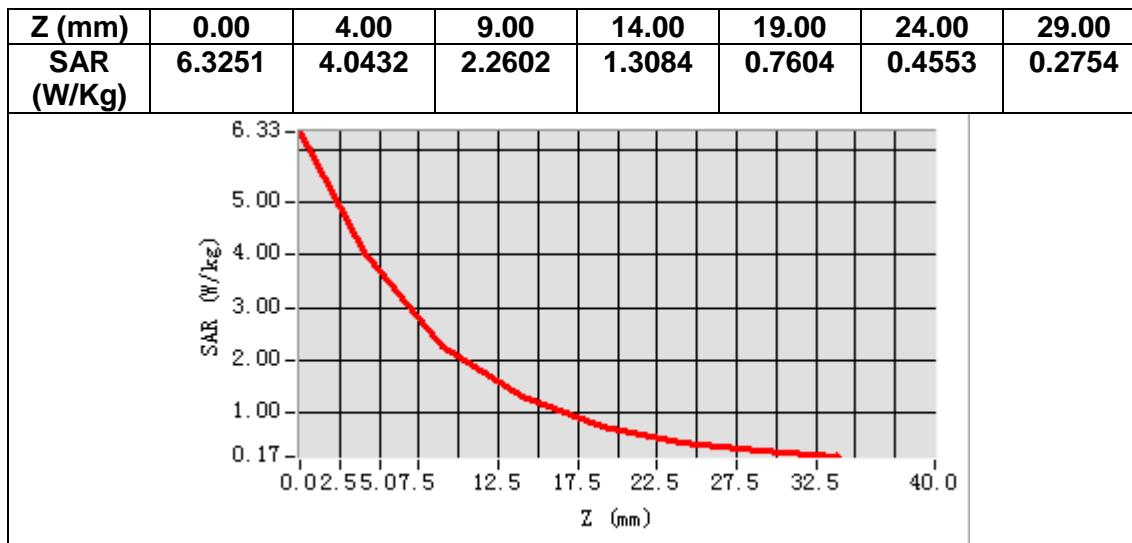


MEASUREMENT 4

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.802499
Relative permittivity (imaginary part)	15.004311
Conductivity (S/m)	1.578447
Variation (%)	-1.320000

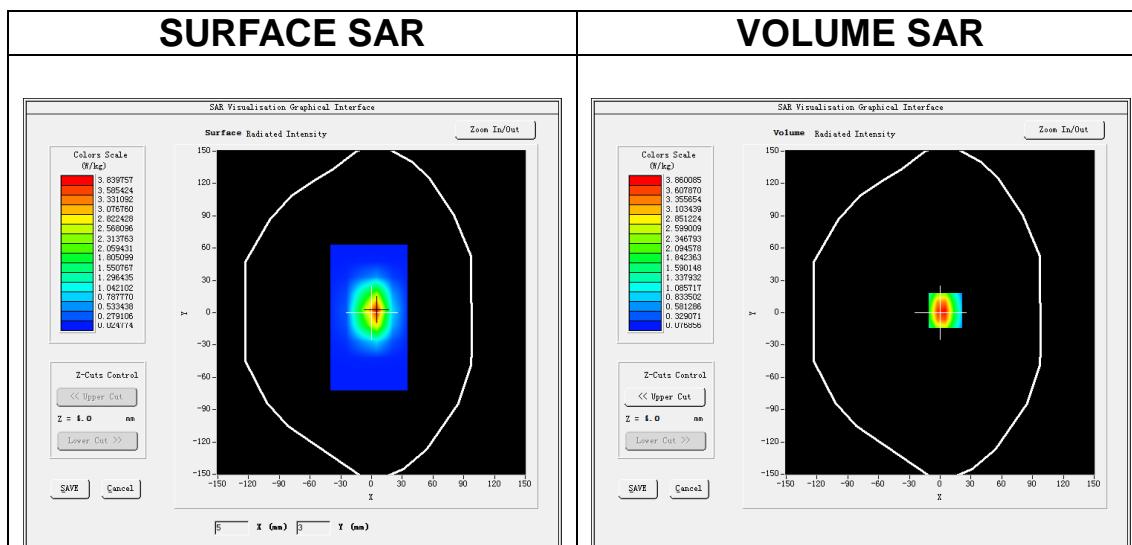

Maximum location: X=5.00, Y=2.00
SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	2.018784
SAR 1g (W/Kg)	3.832165

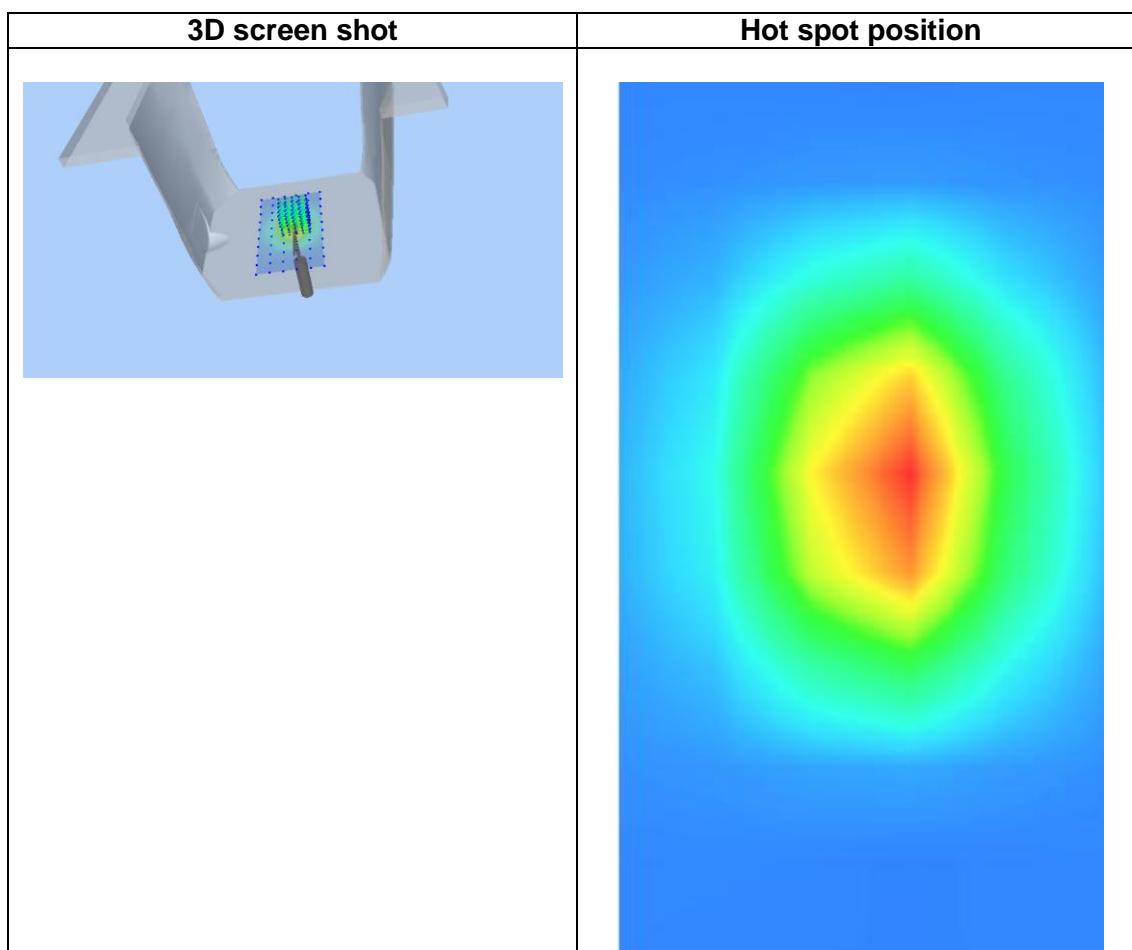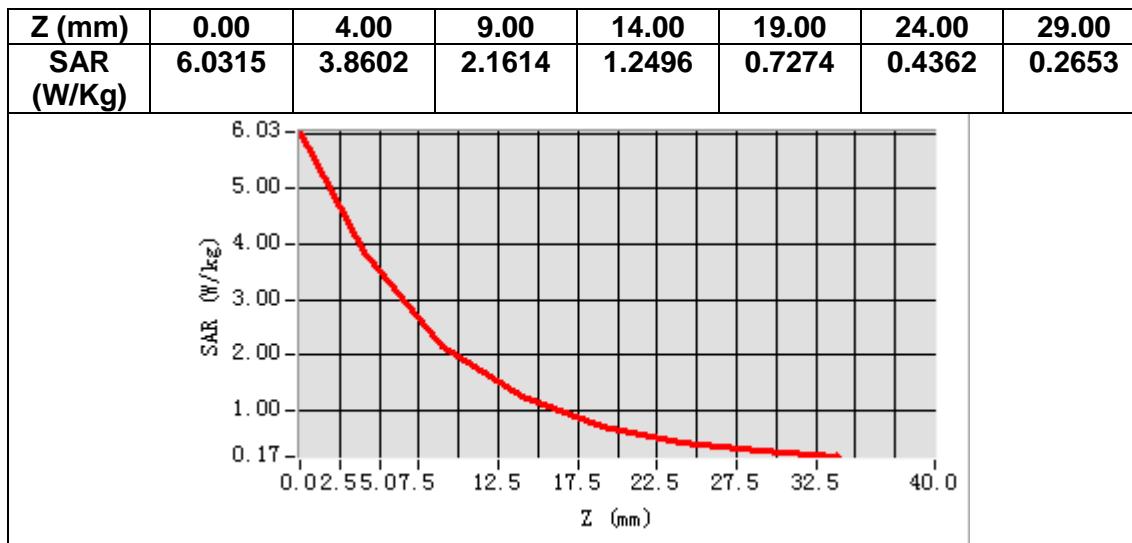


MEASUREMENT 5

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm$ $dy=12mm$, $h= 5.00 mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm$ $dy=5mm$ $dz=5mm$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.302341
Relative permittivity (imaginary part)	13.780112
Conductivity (S/m)	1.883464
Variation (%)	0.520000

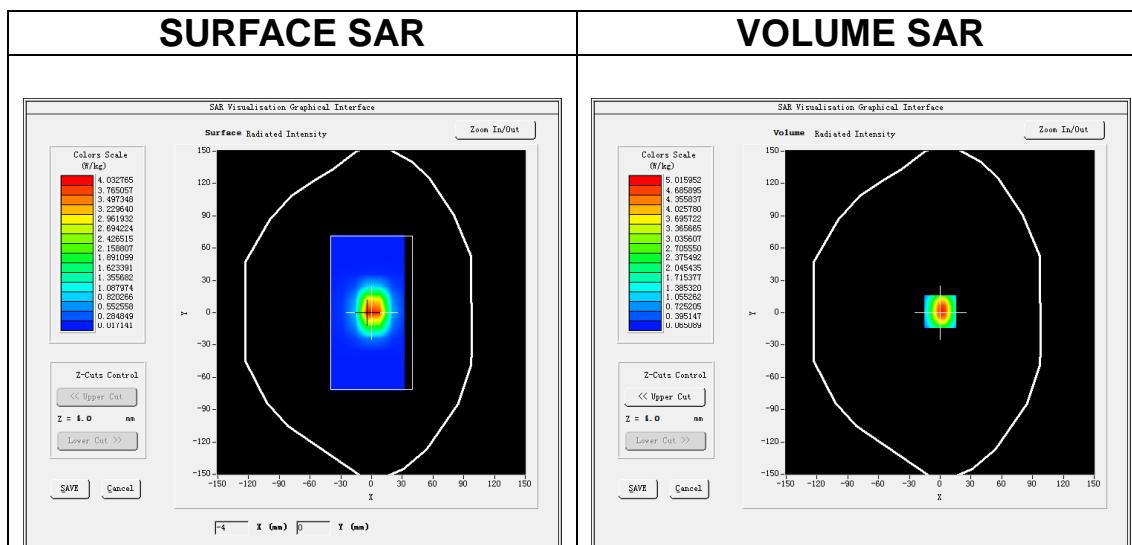

Maximum location: X=0.00, Y=1.00
SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.384108
SAR 1g (W/Kg)	5.323165

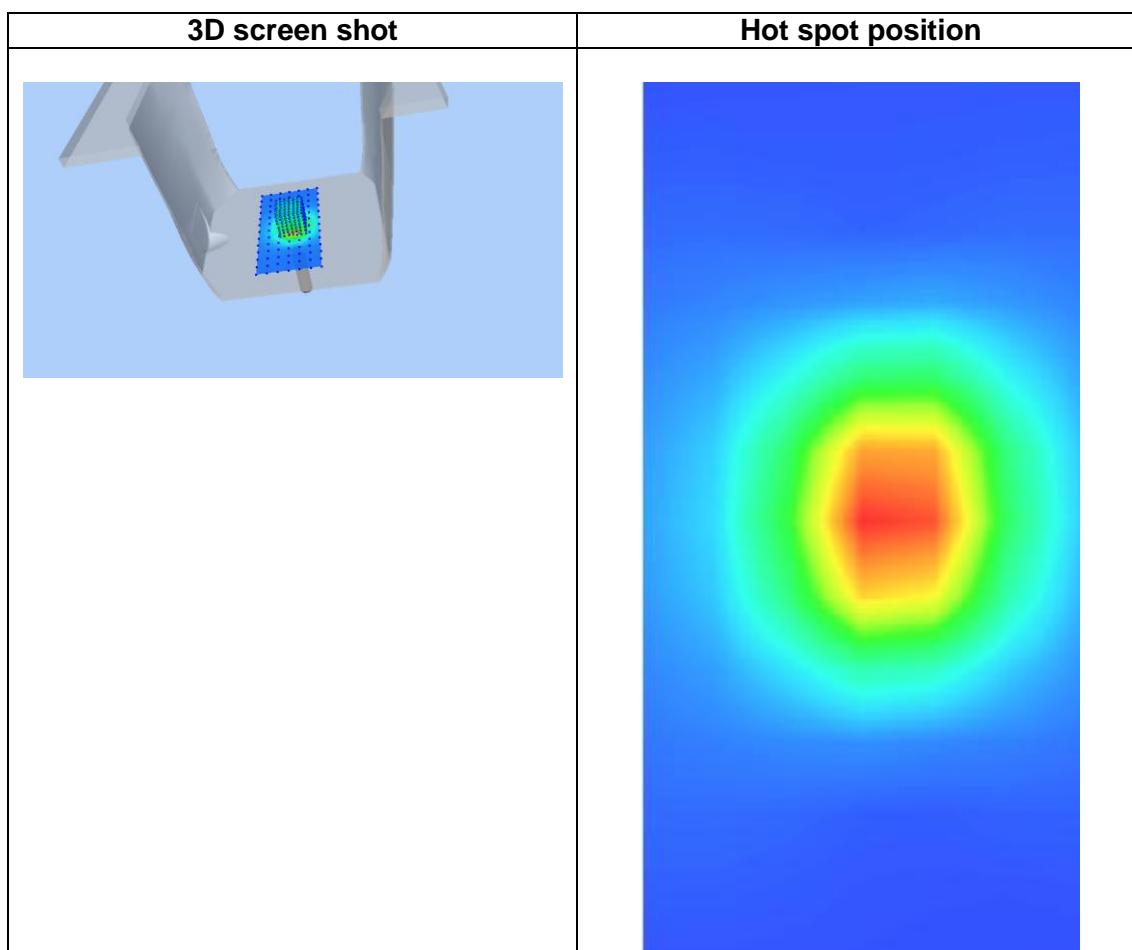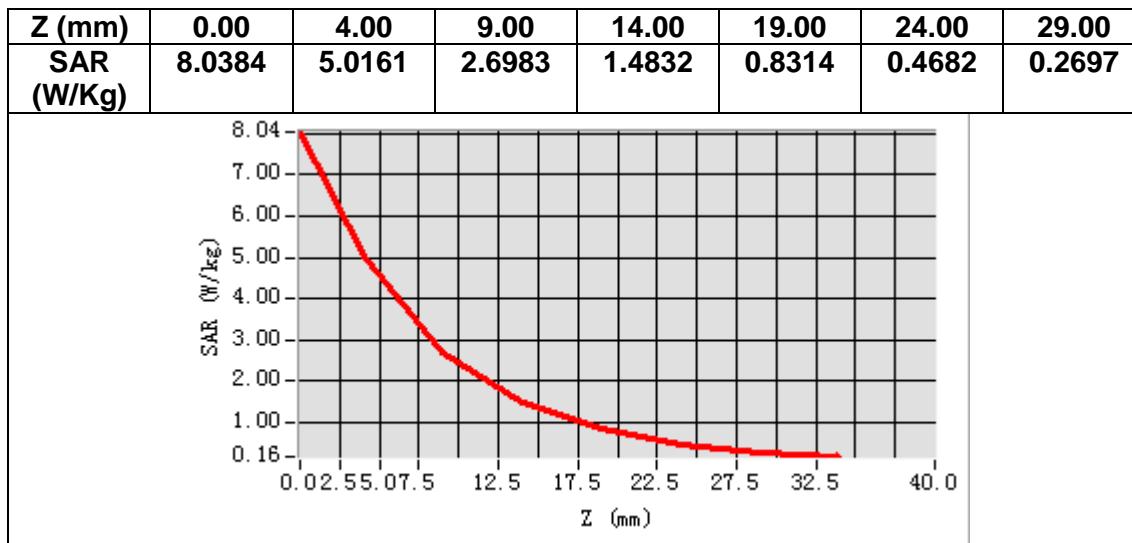


MEASUREMENT 6

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm\ dy=12mm,\ h= 5.00\ mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm\ dy=5mm\ dz=5mm$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.294343
Relative permittivity (imaginary part)	14.853194
Conductivity (S/m)	2.021329
Variation (%)	-1.020000

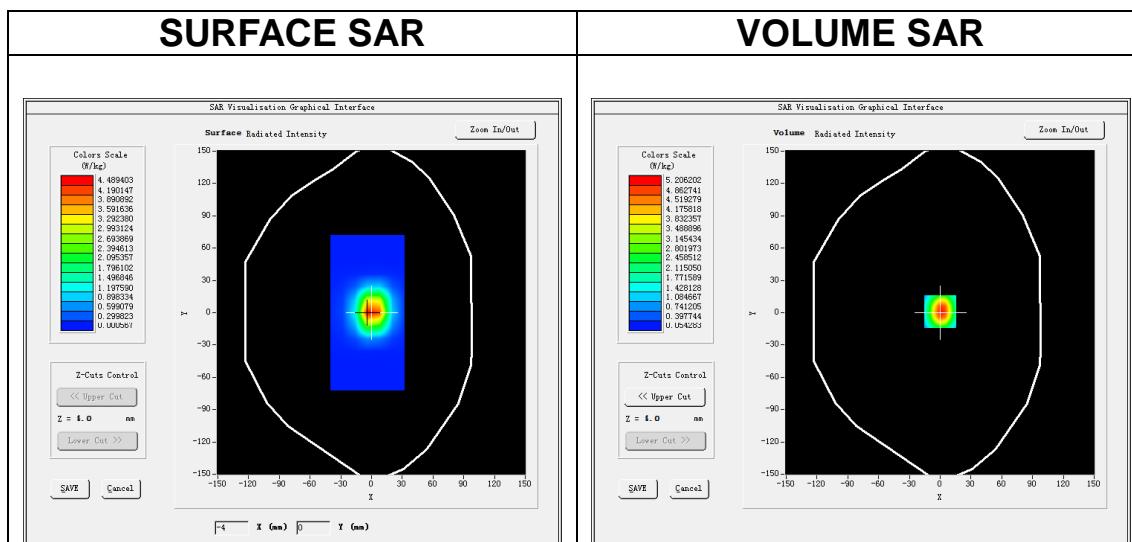

Maximum location: X=0.00, Y=1.00
SAR Peak: 8.46 W/kg

SAR 10g (W/Kg)	2.294106
SAR 1g (W/Kg)	4.922395

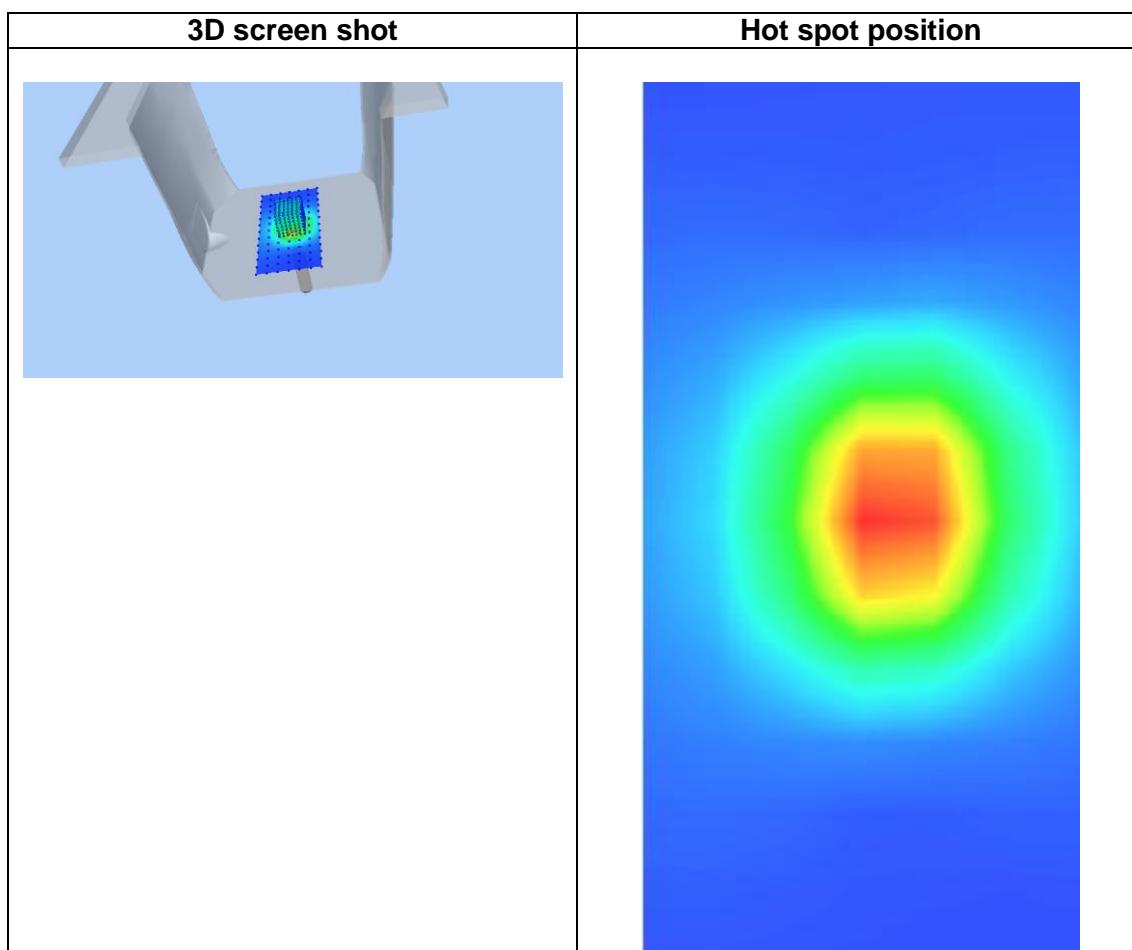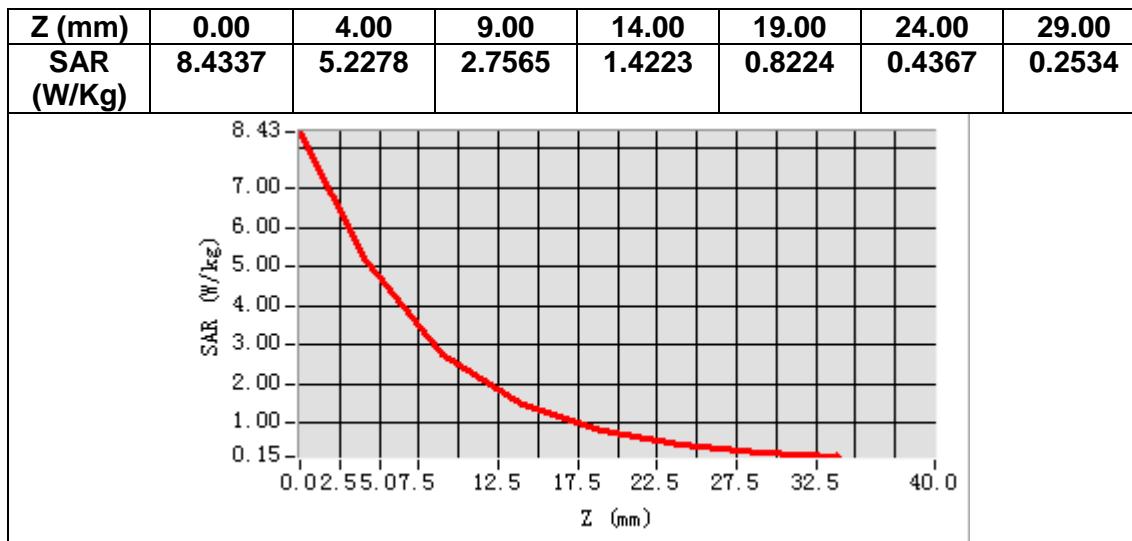


MEASUREMENT 7

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm$ $dy=12mm$, $h= 5.00 mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm$ $dy=5mm$ $dz=5mm$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.371213
Relative permittivity (imaginary part)	14.082359
Conductivity (S/m)	2.034158
Variation (%)	-2.280000

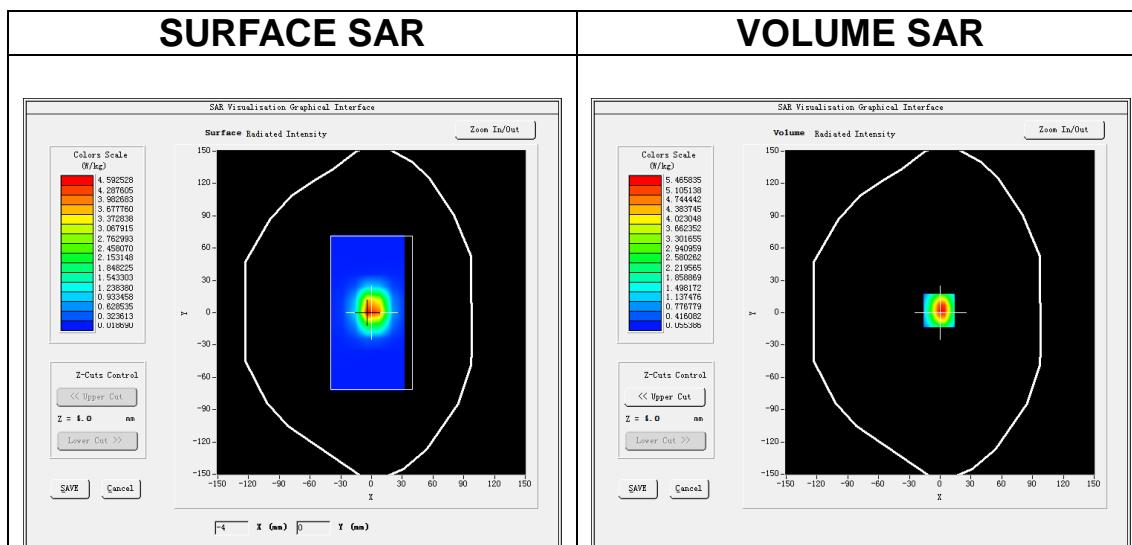

Maximum location: X=-1.00, Y=2.00
SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.512381
SAR 1g (W/Kg)	5.523138

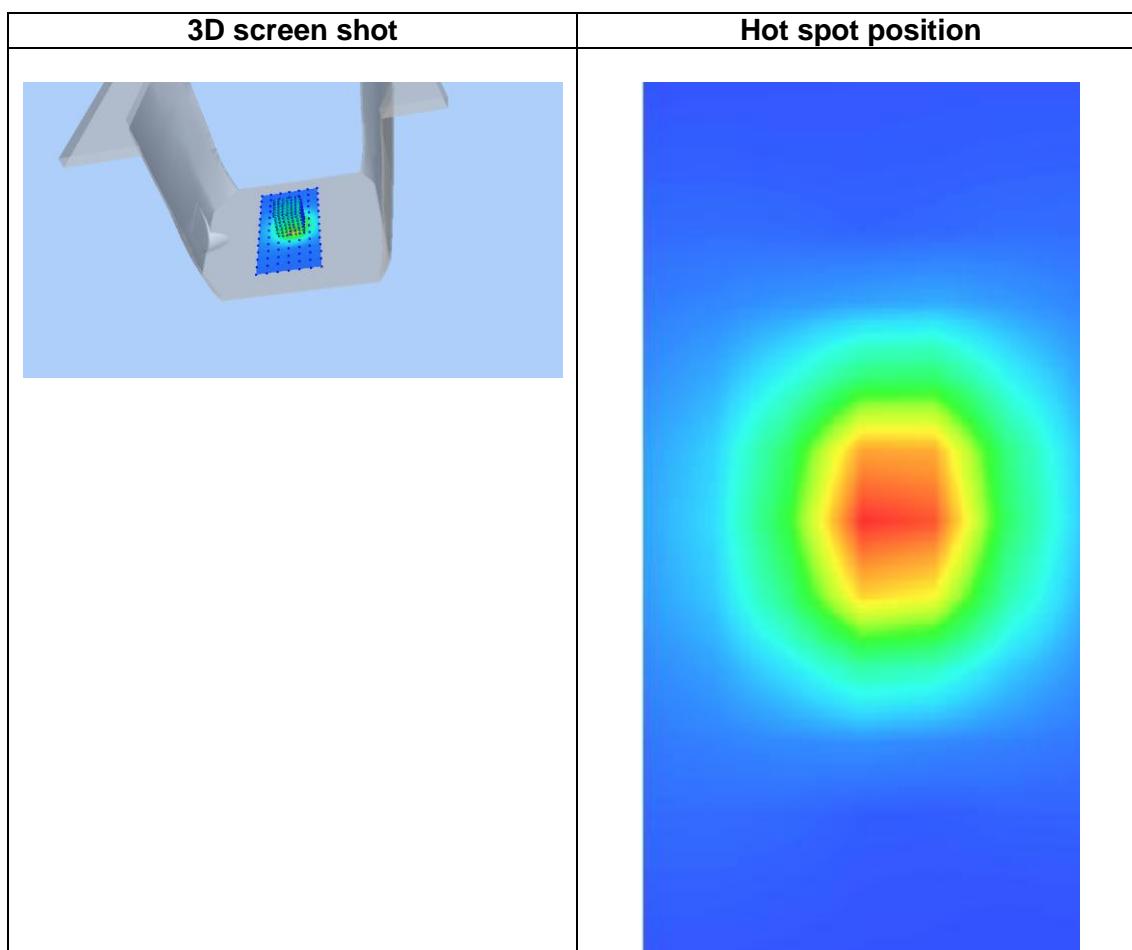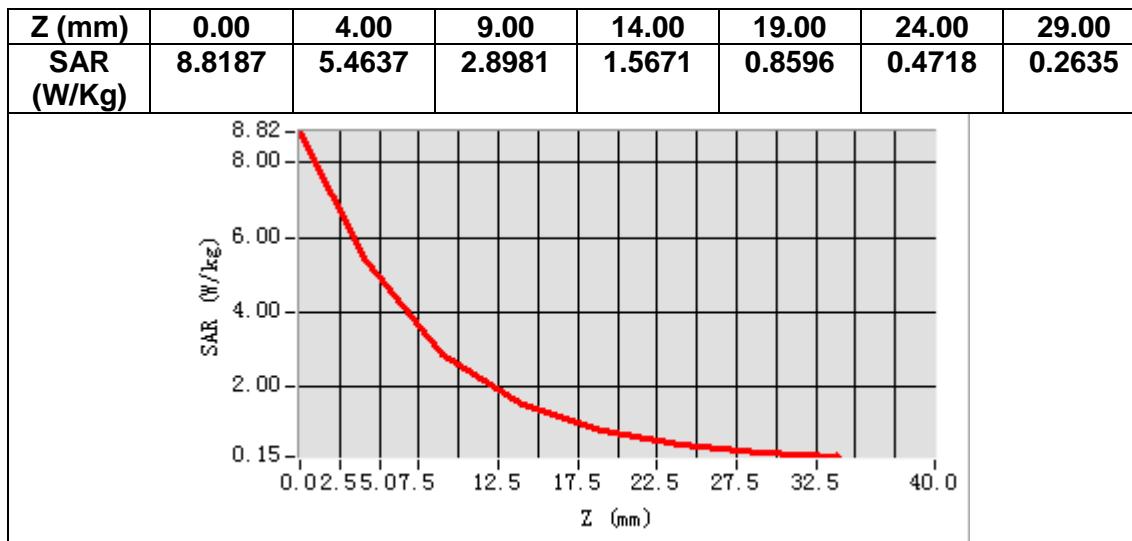


MEASUREMENT 8

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm\ dy=12mm,\ h= 5.00\ mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm\ dy=5mm\ dz=5mm$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	52.663291
Relative permittivity (imaginary part)	15.374188
Conductivity (S/m)	2.220218
Variation (%)	-2.430000

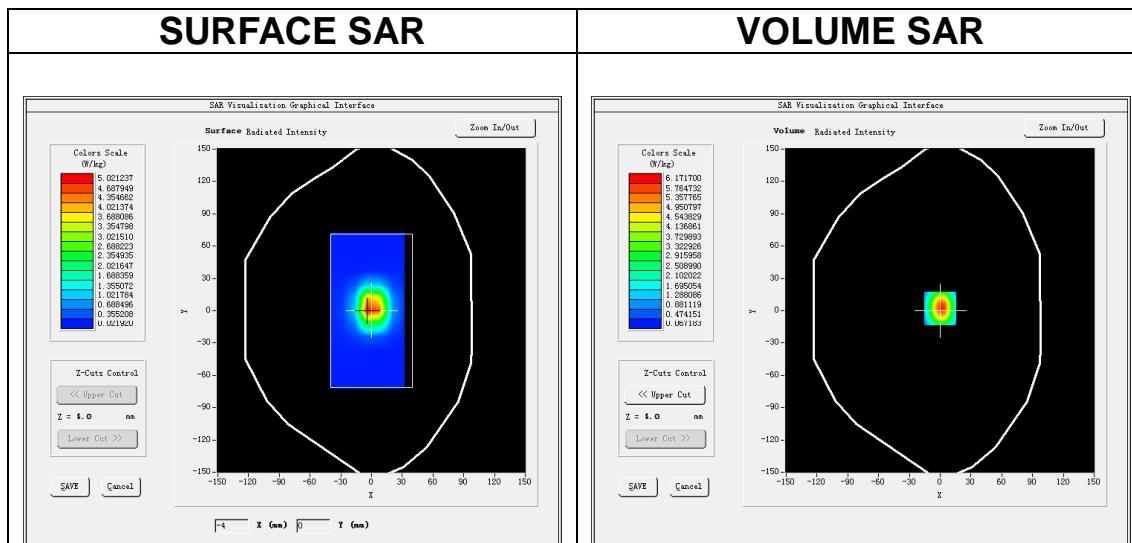

Maximum location: X=0.00, Y=2.00
SAR Peak: 9.99 W/kg

SAR 10g (W/Kg)	2.328140
SAR 1g (W/Kg)	5.282335

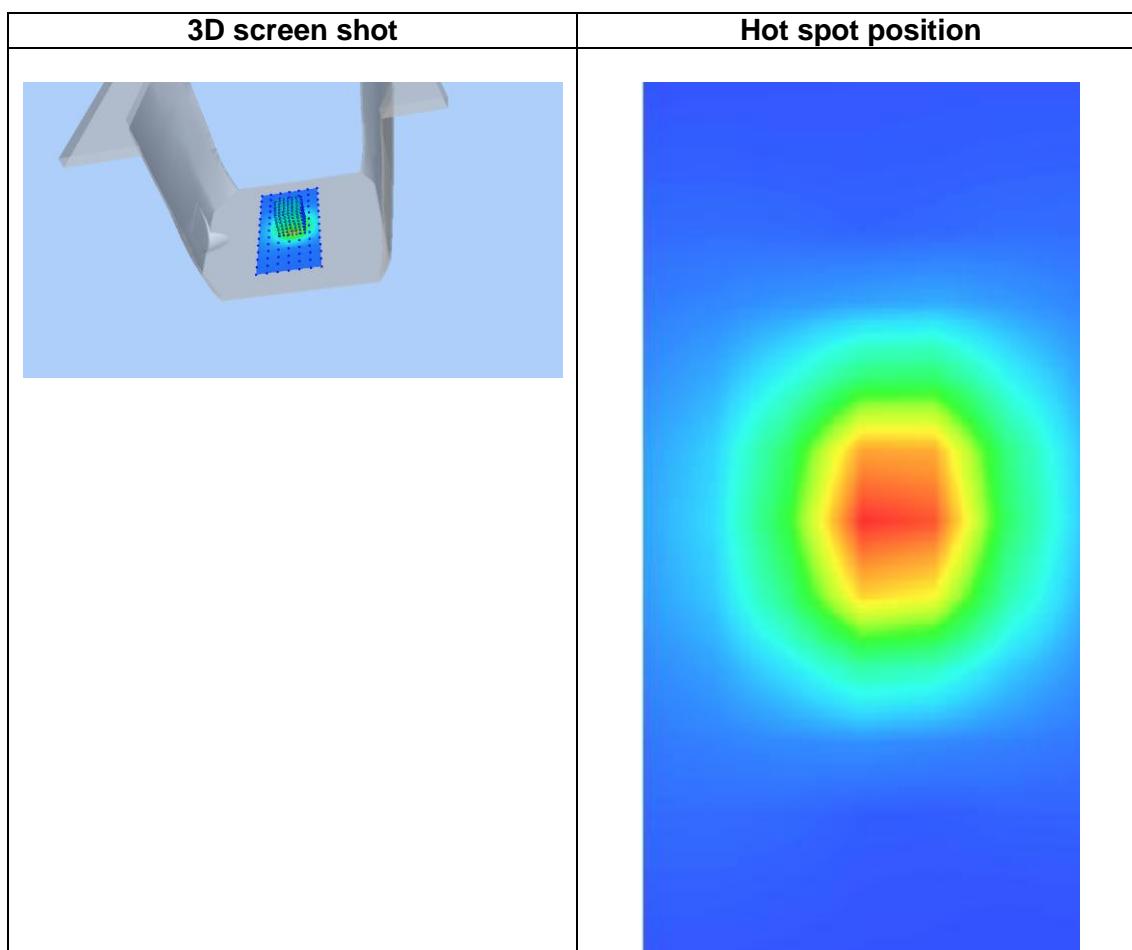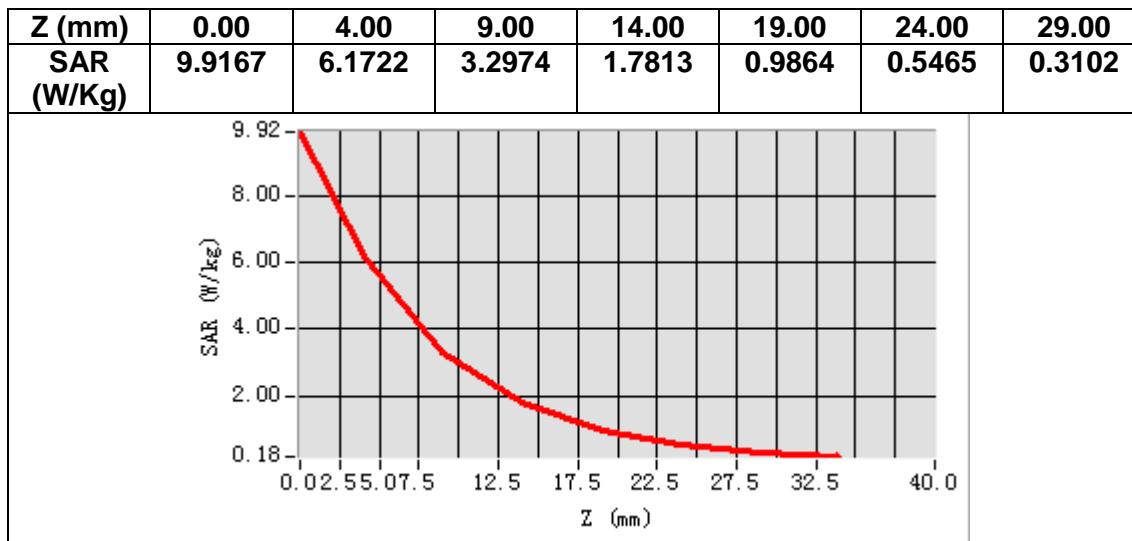


MEASUREMENT 9

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=10\text{mm}$ $dy=10\text{mm}$, $h= 2.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times7\times12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.723247
Relative permittivity (imaginary part)	16.243420
Conductivity (S/m)	4.689370
Variation (%)	-2.690000

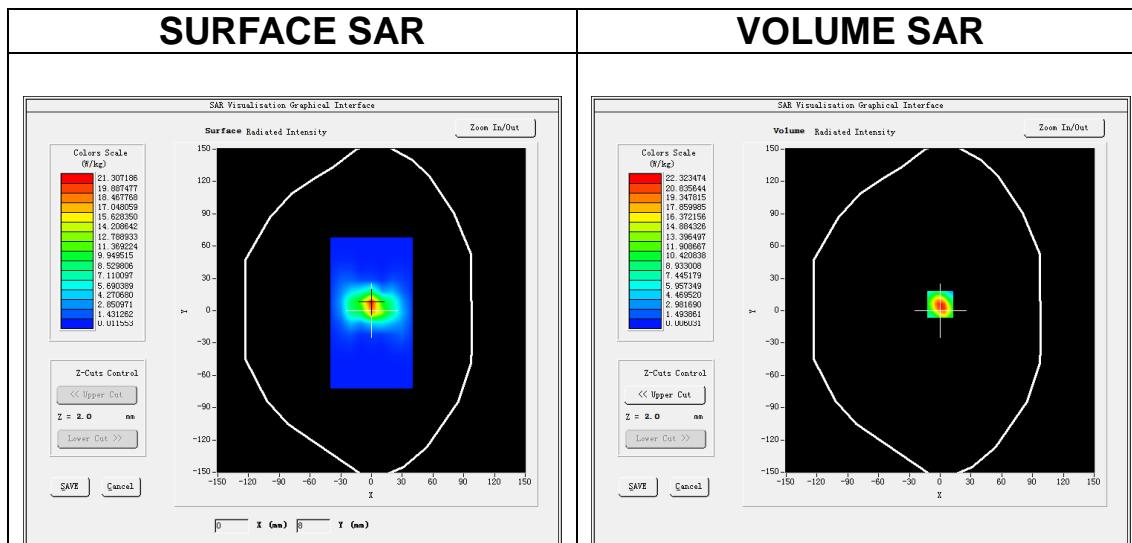

Maximum location: X=0.00, Y=6.00
SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.723648
SAR 1g (W/Kg)	16.258420

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	37.8 358	22.3 234	11.3 793	5.66 82	2.82 32	1.40 55	0.71 32	0.36 51	0.18 58	0.10 13	0.05 45	0.03 12

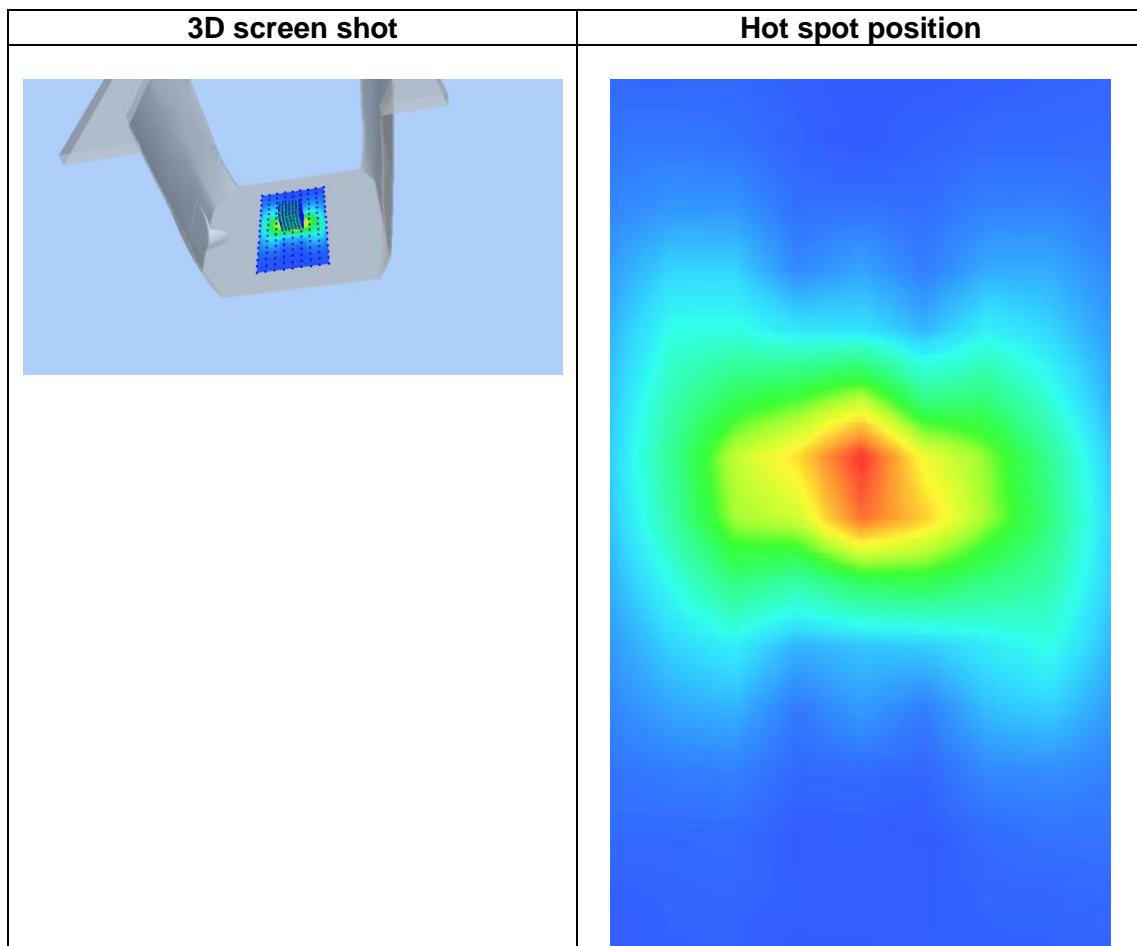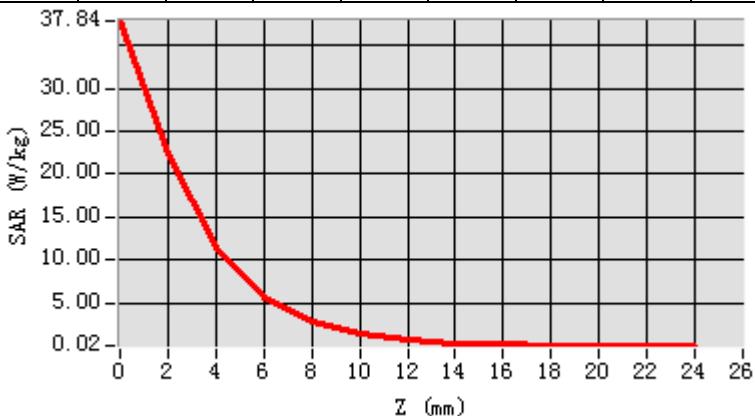


MEASUREMENT 10

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.612361
Relative permittivity (imaginary part)	18.476524
Conductivity (S/m)	5.336332
Variation (%)	-1.370000


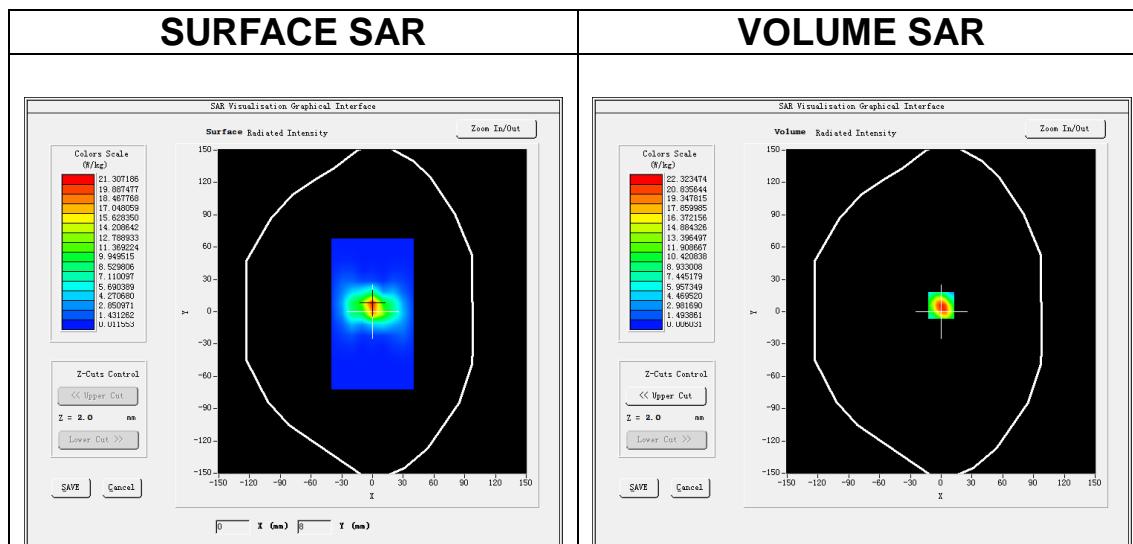


Maximum location: X=0.00, Y=6.00

SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.469272
SAR 1g (W/Kg)	15.887951

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	37.8 359	22.3 232	11.3 791	5.66 85	2.82 32	1.40 93	0.71 32	0.36 48	0.18 55	0.10 10	0.05 43	0.03 16

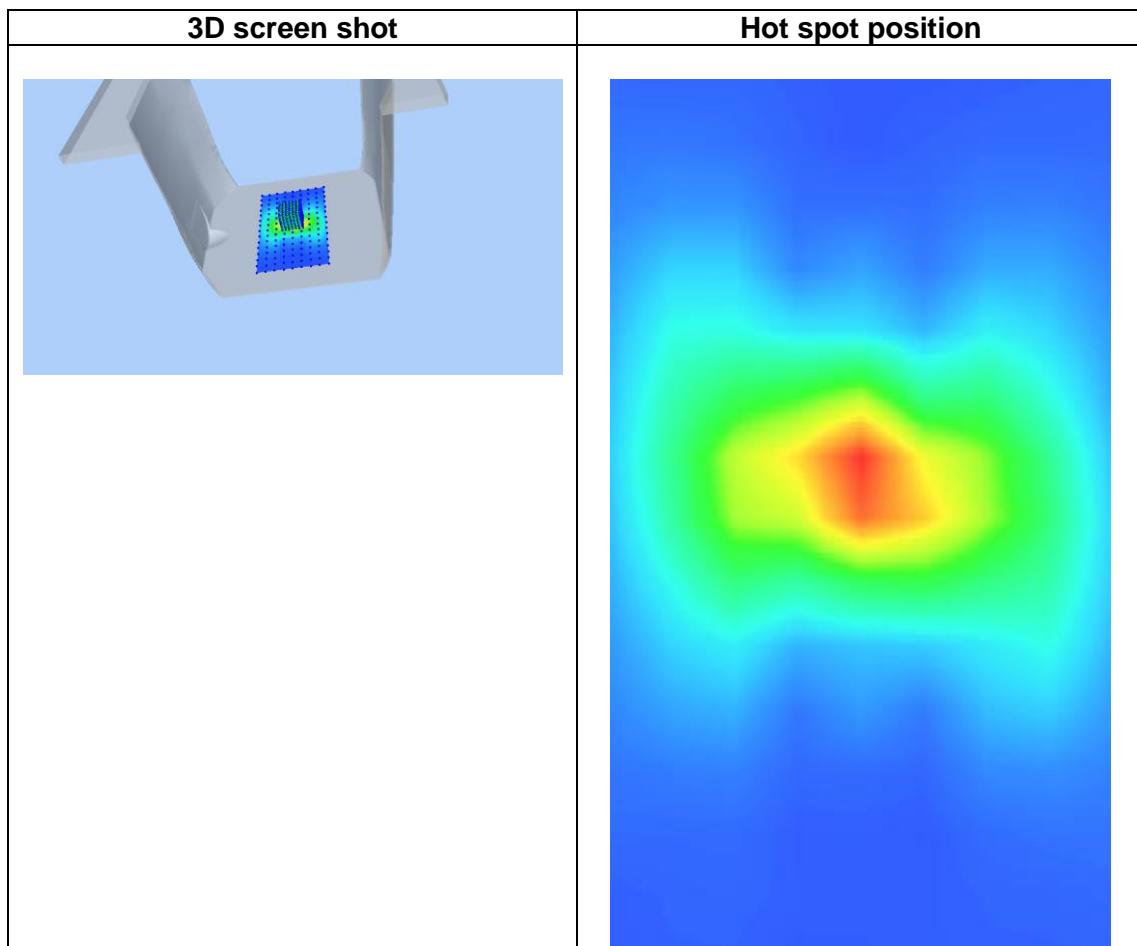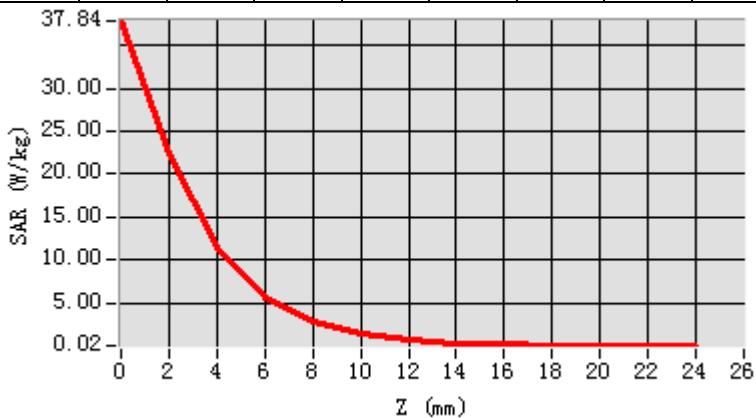


MEASUREMENT 11

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=10\text{mm}$ $dy=10\text{mm}$, $h= 2.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times7\times12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.630252
Relative permittivity (imaginary part)	16.352410
Conductivity (S/m)	5.274232
Variation (%)	-0.890000

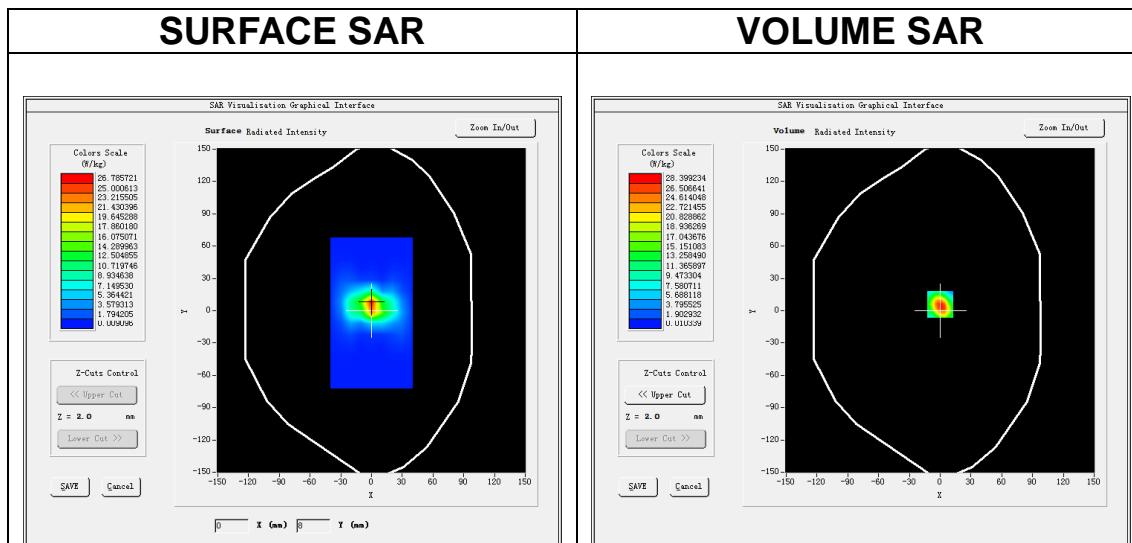

Maximum location: X=0.00, Y=6.00

SAR Peak: 50.97 W/kg

SAR 10g (W/Kg)	6.284634
SAR 1g (W/Kg)	17.942625

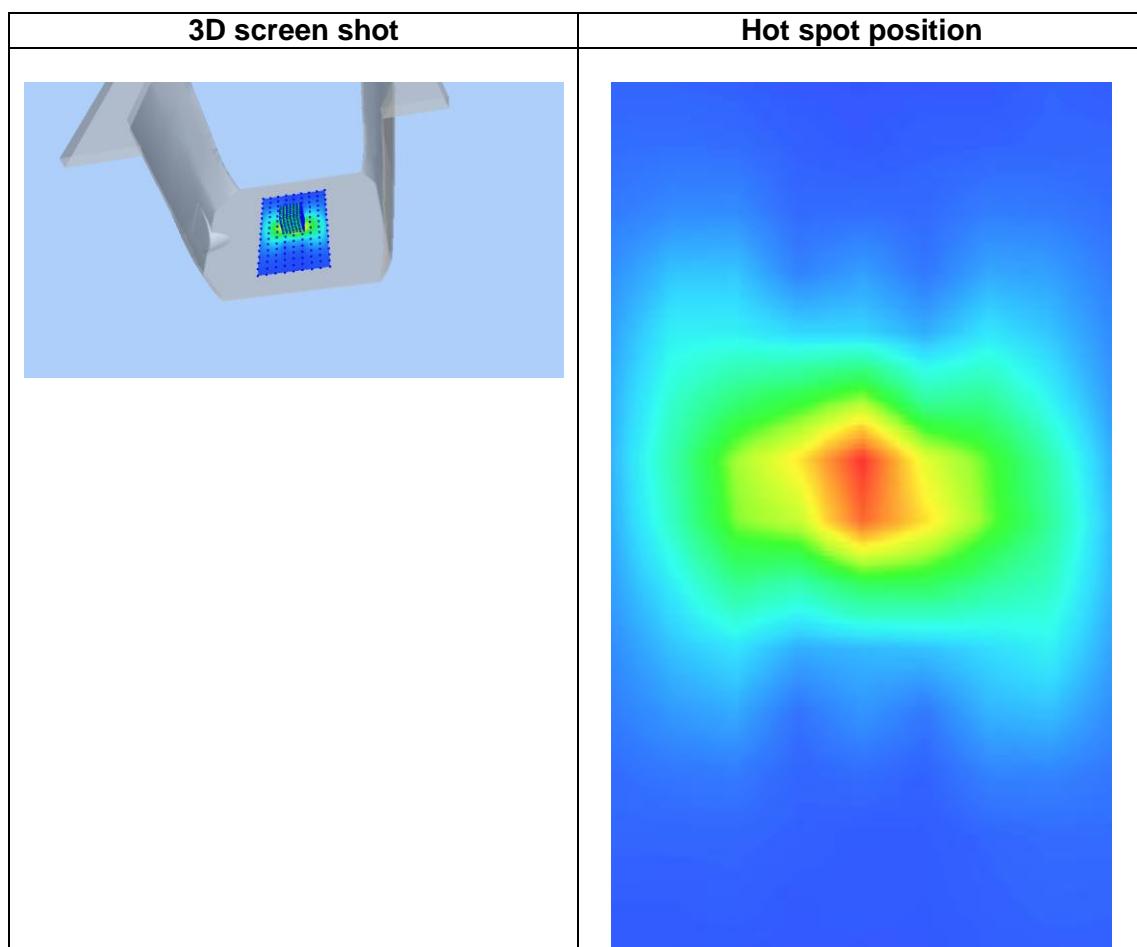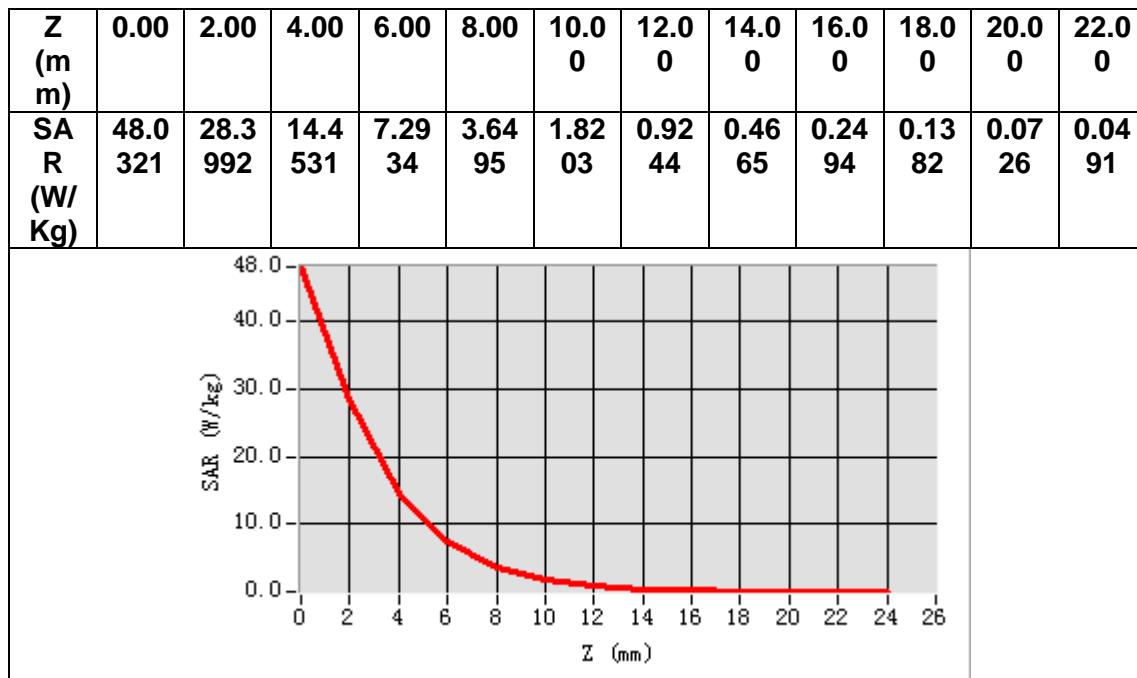


MEASUREMENT 12

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.318954
Relative permittivity (imaginary part)	18.992128
Conductivity (S/m)	6.123395
Variation (%)	-2.570000


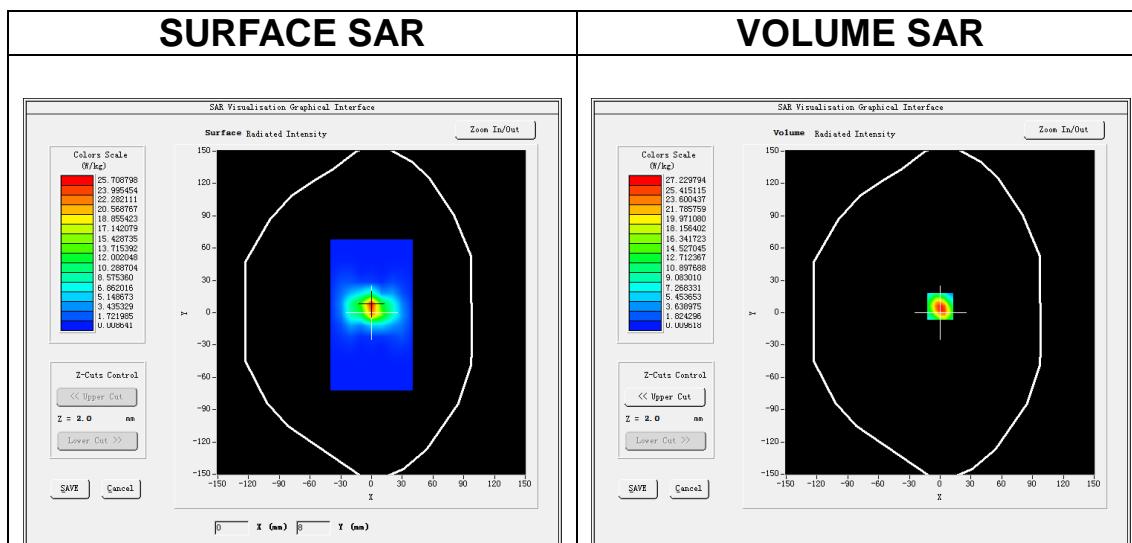


Maximum location: X=0.00, Y=6.00

SAR Peak: 48.83 W/kg

SAR 10g (W/Kg)	6.158432
SAR 1g (W/Kg)	17.622511

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	45.9 894	27.2 297	13.8 533	7.02 95	3.56 31	1.78 62	0.90 63	0.45 65	0.24 63	0.13 24	0.06 93	0.05 01

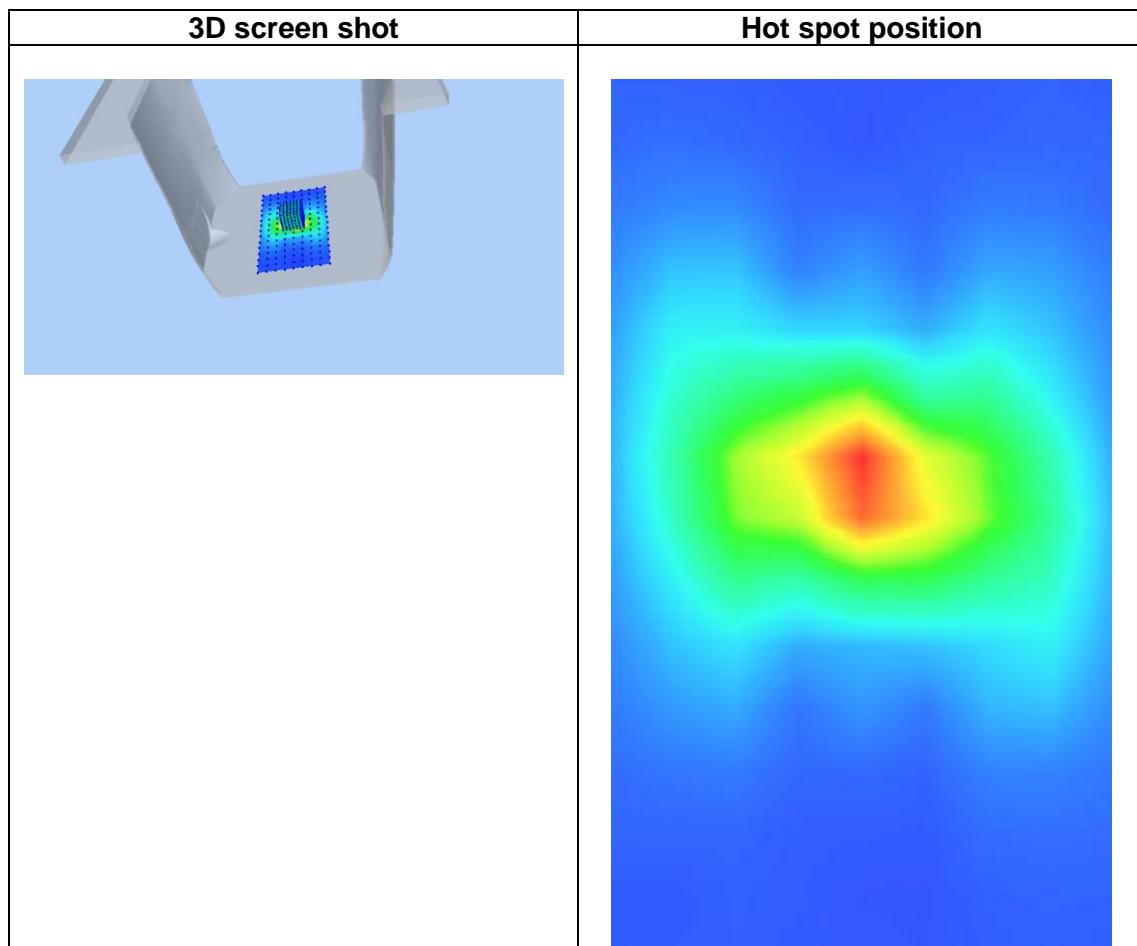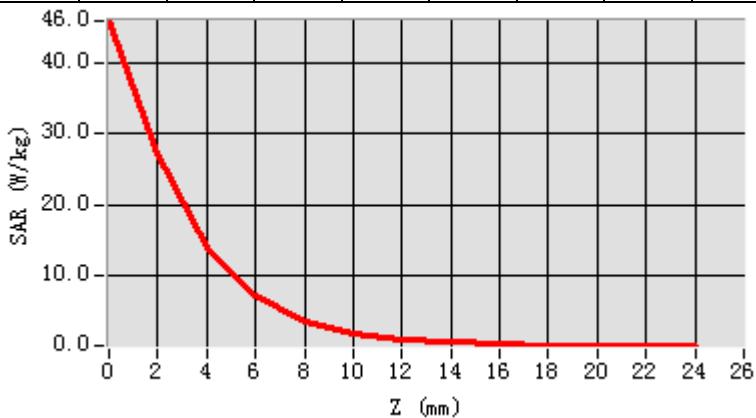

13. Appendix C. Plots of High SAR Measurement

Table of contents

- MEASUREMENT 1 GSM 850 Head**
- MEASUREMENT 2 GSM 850 Body**
- MEASUREMENT 3 GSM 1900 Head**
- MEASUREMENT 4 GSM 1900 Body**
- MEASUREMENT 5 WCDMA Band 2 Head**
- MEASUREMENT 6 WCDMA Band 2 Body**
- MEASUREMENT 7 WCDMA Band 5 Head**
- MEASUREMENT 8 WCDMA Band 5 Body**
- MEASUREMENT 9 WLAN 5.2G Head**
- MEASUREMENT 10 WLAN 5.8G Head**
- MEASUREMENT 11 WLAN 5.2G Body**
- MEASUREMENT 12 WLAN 5.8G Body**
- MEASUREMENT 13 WLAN 2.4G Head**
- MEASUREMENT 14 WLAN 2.4G Body**
- MEASUREMENT 15 LTE Band 5 Head**
- MEASUREMENT 16 LTE Band 5 Body**
- MEASUREMENT 17 LTE Band 41 Head**
- MEASUREMENT 18 LTE Band 41 Body**


MEASUREMENT 1

A. Experimental conditions.

<u>Area Scan</u>	$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$
<u>ZoomScan</u>	$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.740959
Relative permittivity (imaginary part)	20.081539
Conductivity (S/m)	0.933122
Variation (%)	2.730000

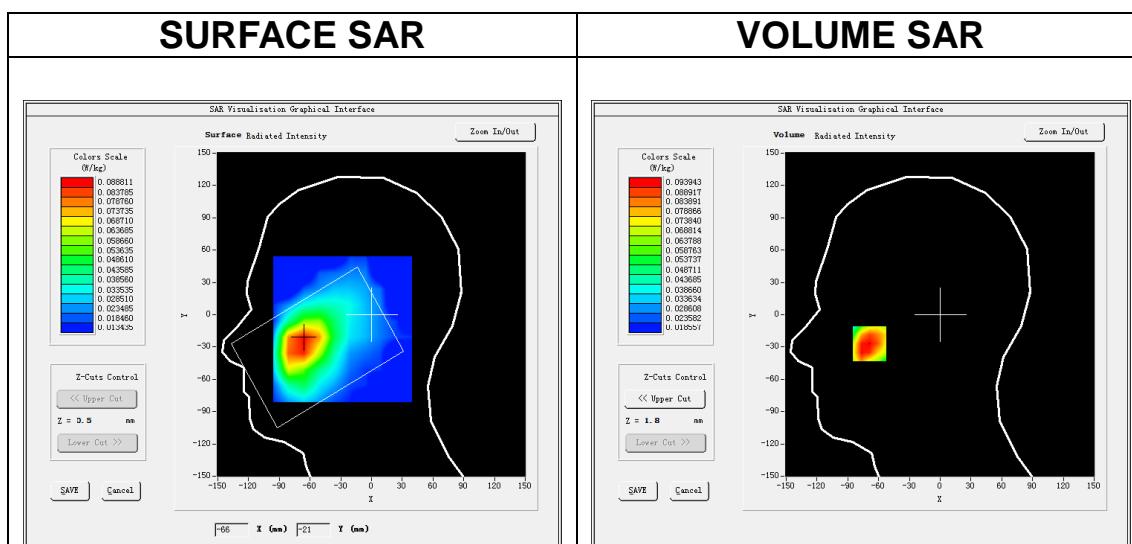

Maximum location: X=-69.00, Y=-27.00
SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.067439
SAR 1g (W/Kg)	0.097860

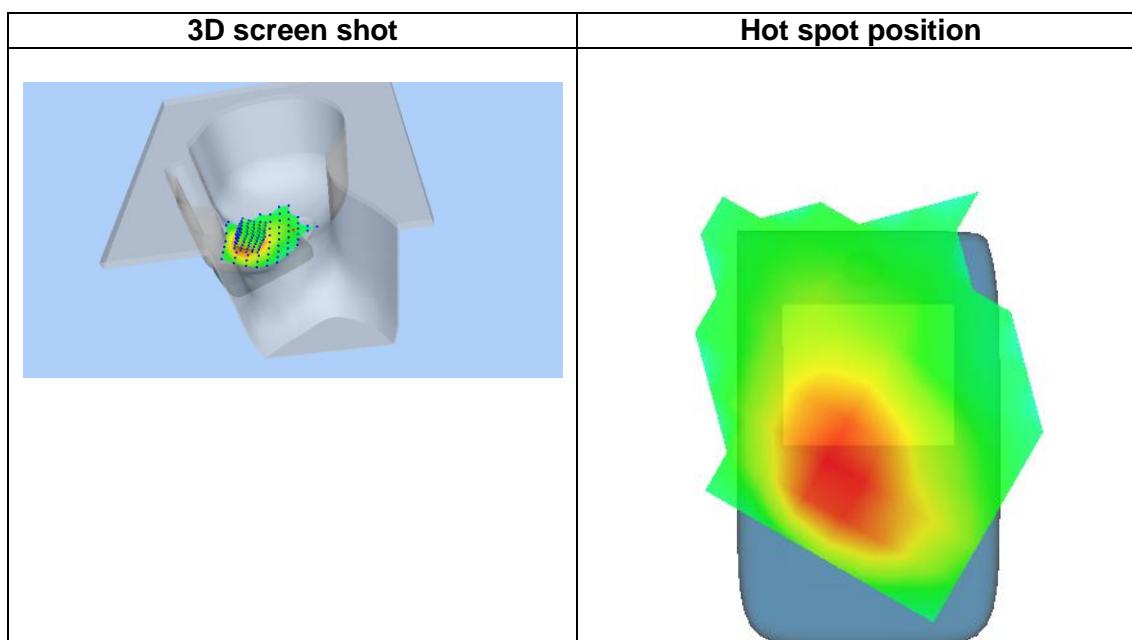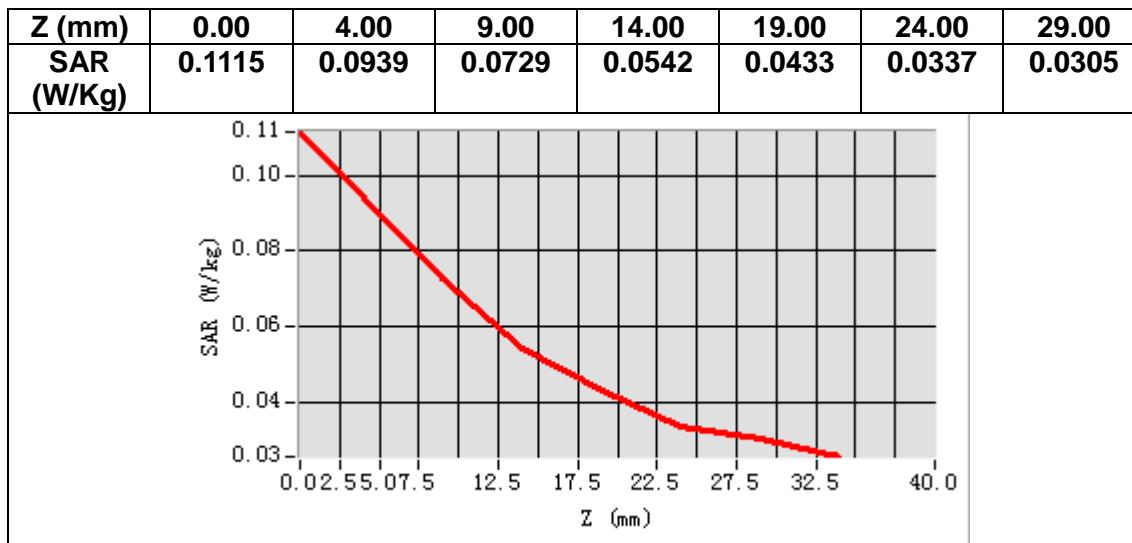


MEASUREMENT 2

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>



B. SAR Measurement Results

Frequency (MHz)	848.800000
Relative permittivity (real part)	54.388699
Relative permittivity (imaginary part)	21.867060
Conductivity (S/m)	1.031153
Variation (%)	-0.460000

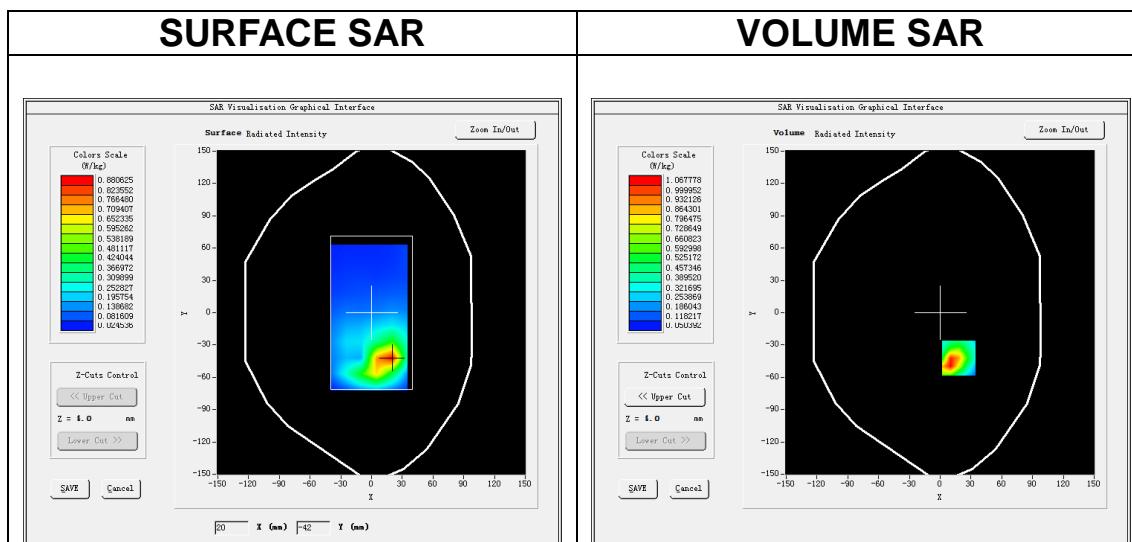

Maximum location: X=18.00, Y=-42.00
SAR Peak: 1.93 W/kg

SAR 10g (W/Kg)	0.515198
SAR 1g (W/Kg)	1.069340

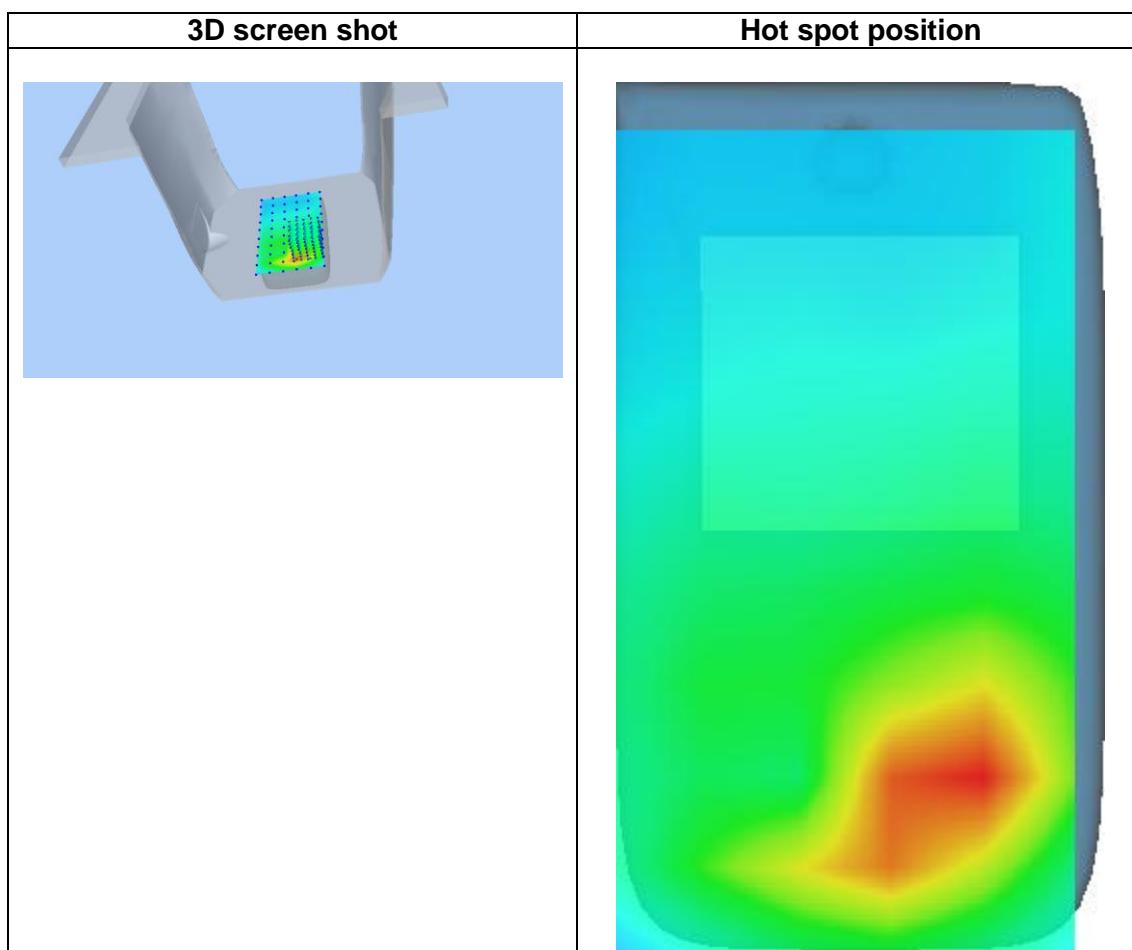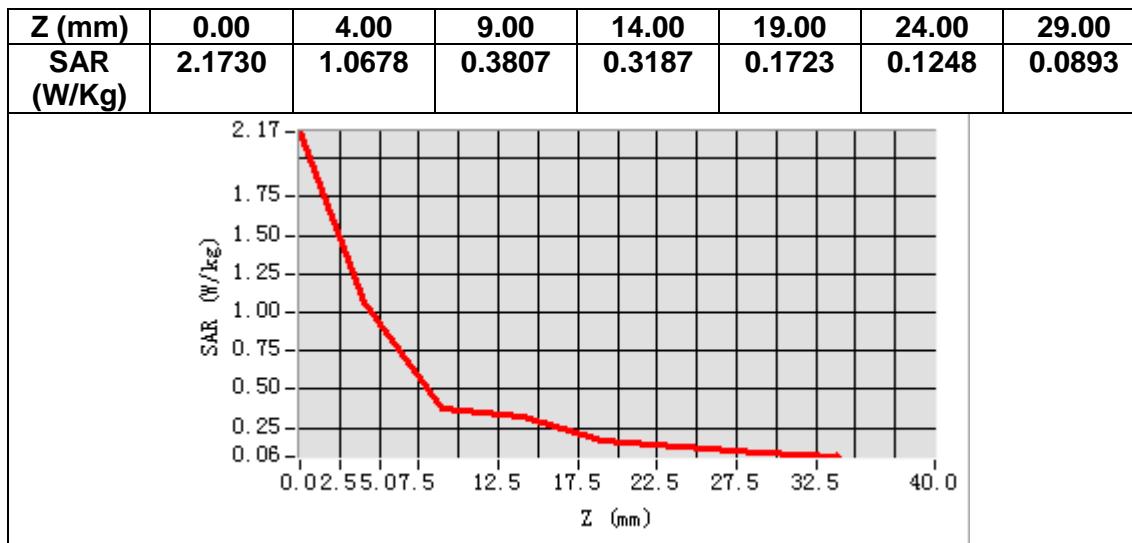


MEASUREMENT 3

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.098202
Relative permittivity (imaginary part)	13.734300
Conductivity (S/m)	1.434471
Variation (%)	-2.030000

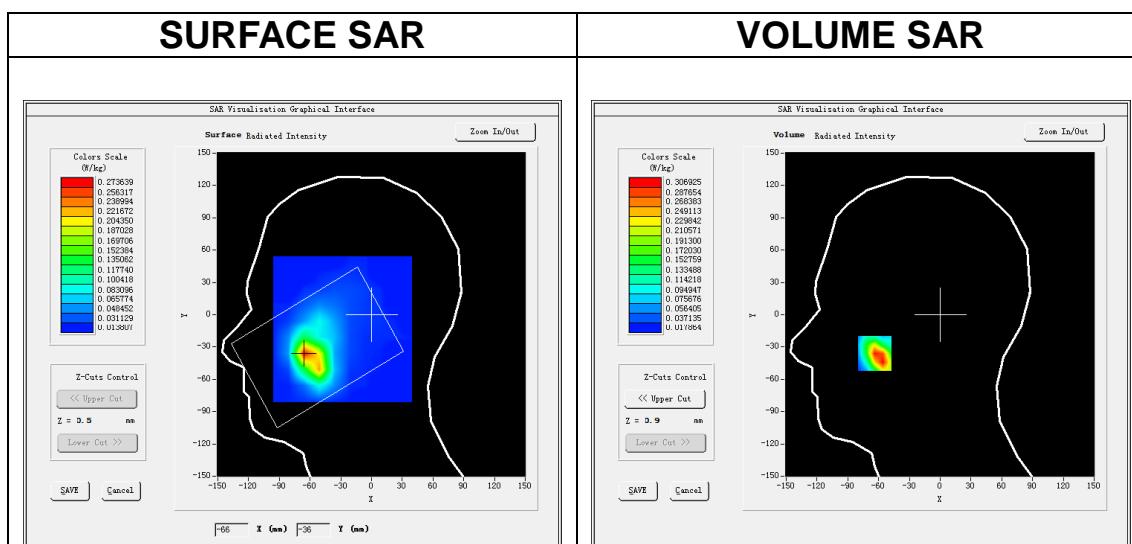

Maximum location: X=-64.00, Y=-36.00
SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.156759
SAR 1g (W/Kg)	0.303859

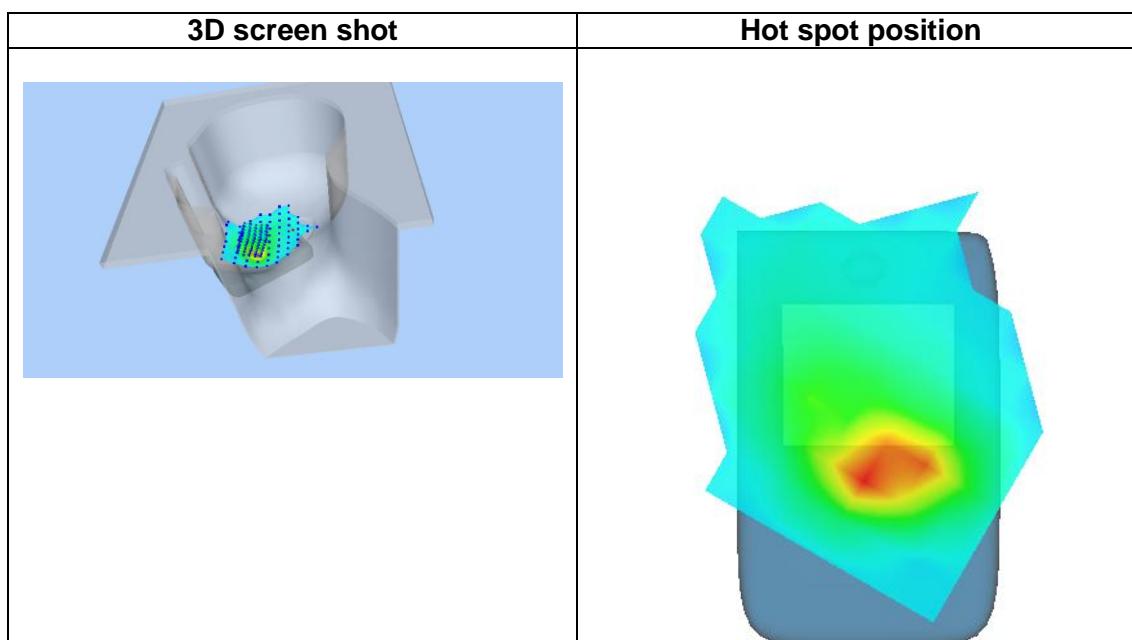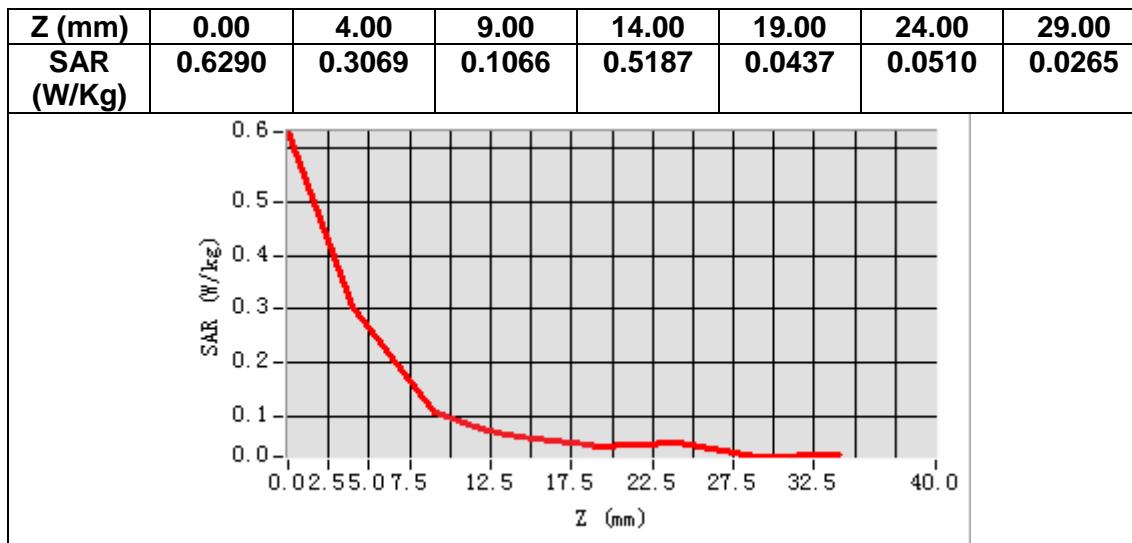


MEASUREMENT 4

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.878899
Relative permittivity (imaginary part)	15.087700
Conductivity (S/m)	1.575826
Variation (%)	0.790000

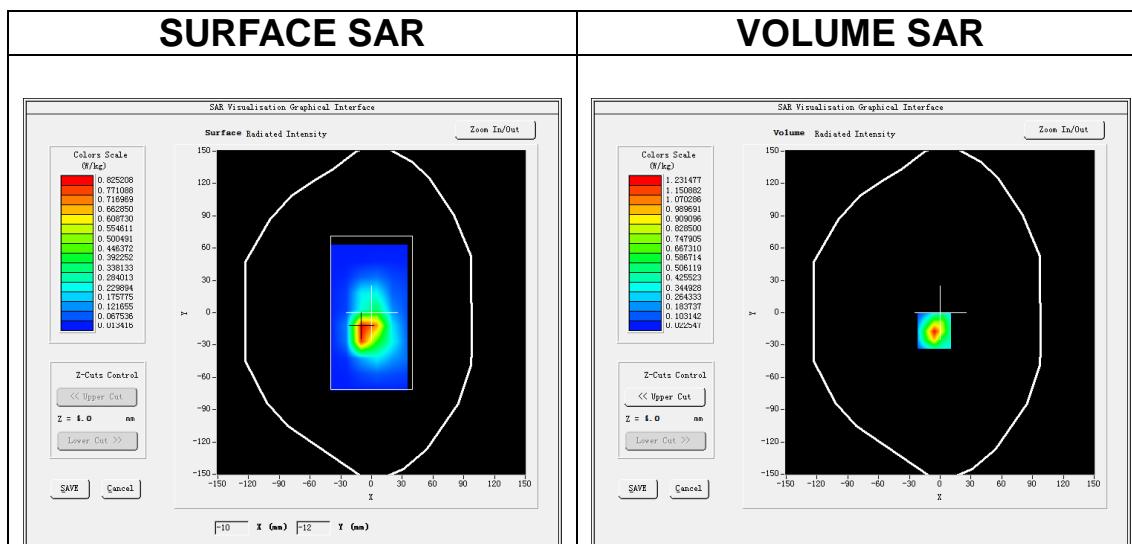

Maximum location: X=-6.00, Y=-17.00
SAR Peak: 2.11 W/kg

SAR 10g (W/Kg)	0.484147
SAR 1g (W/Kg)	1.135179

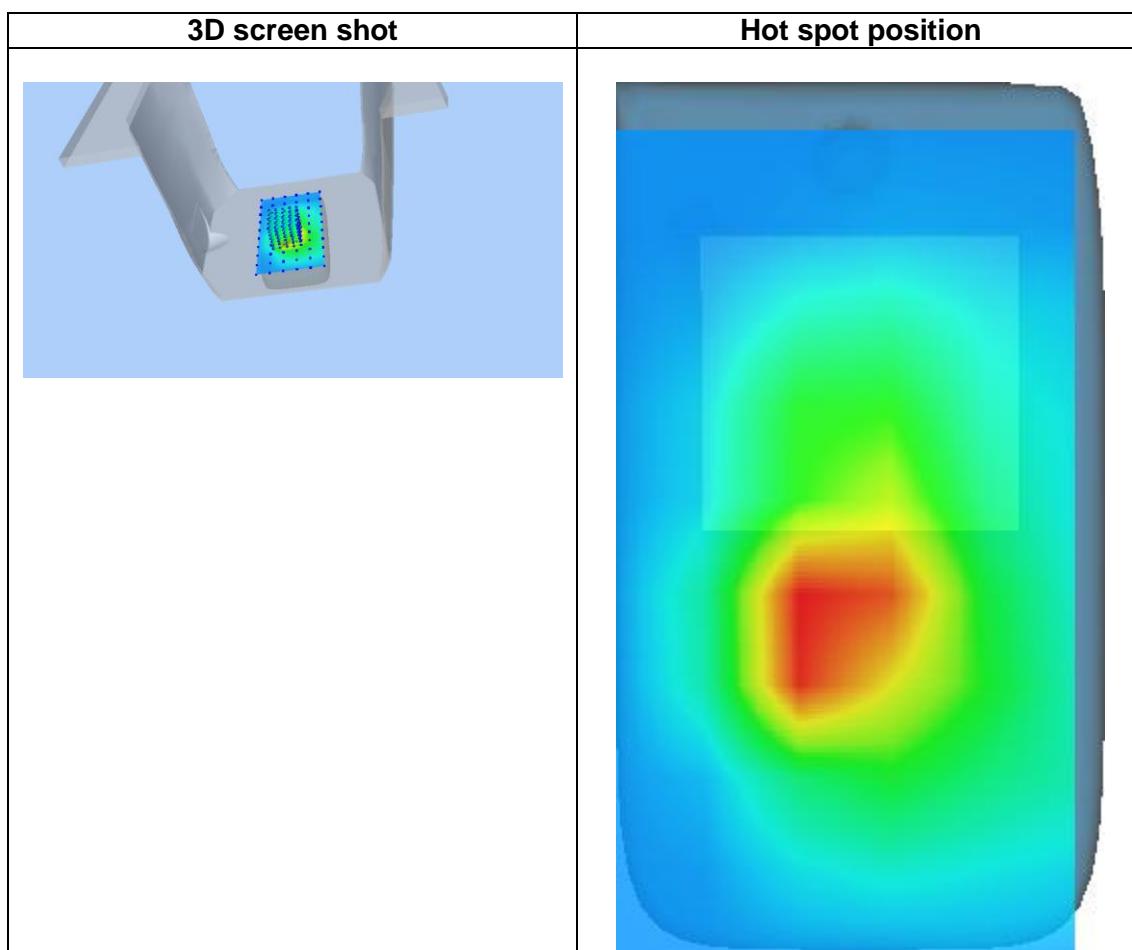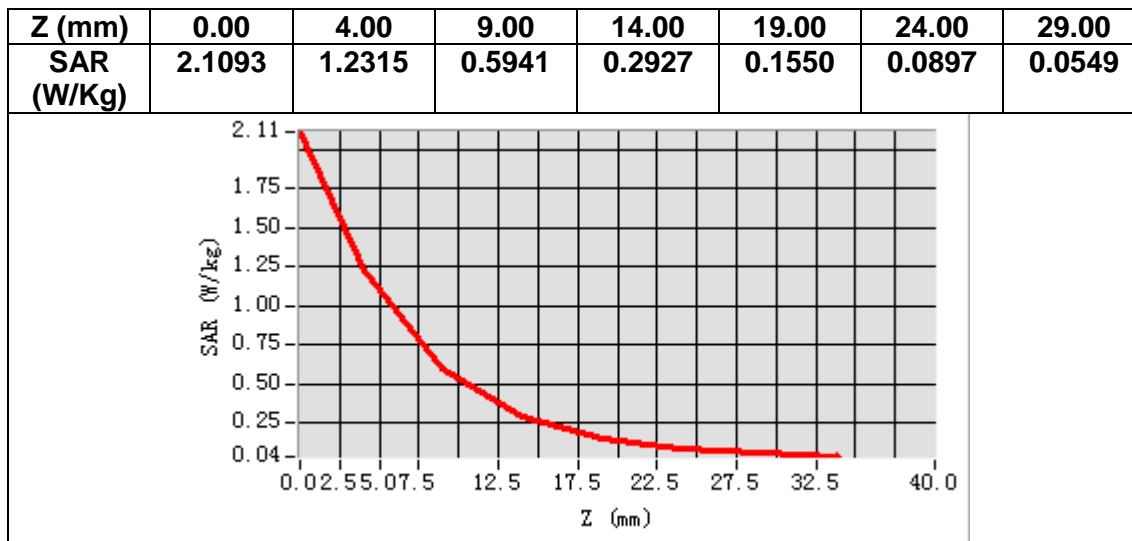


MEASUREMENT 5

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.098202
Relative permittivity (imaginary part)	13.734300
Conductivity (S/m)	1.434471
Variation (%)	-0.930000

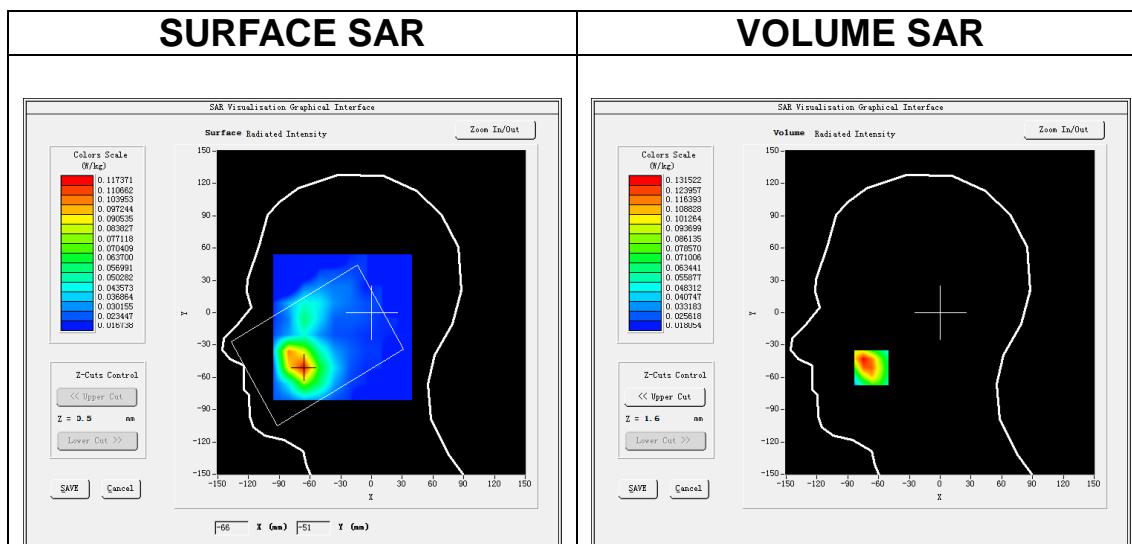

Maximum location: X=-67.00, Y=-51.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.076171
SAR 1g (W/Kg)	0.127657

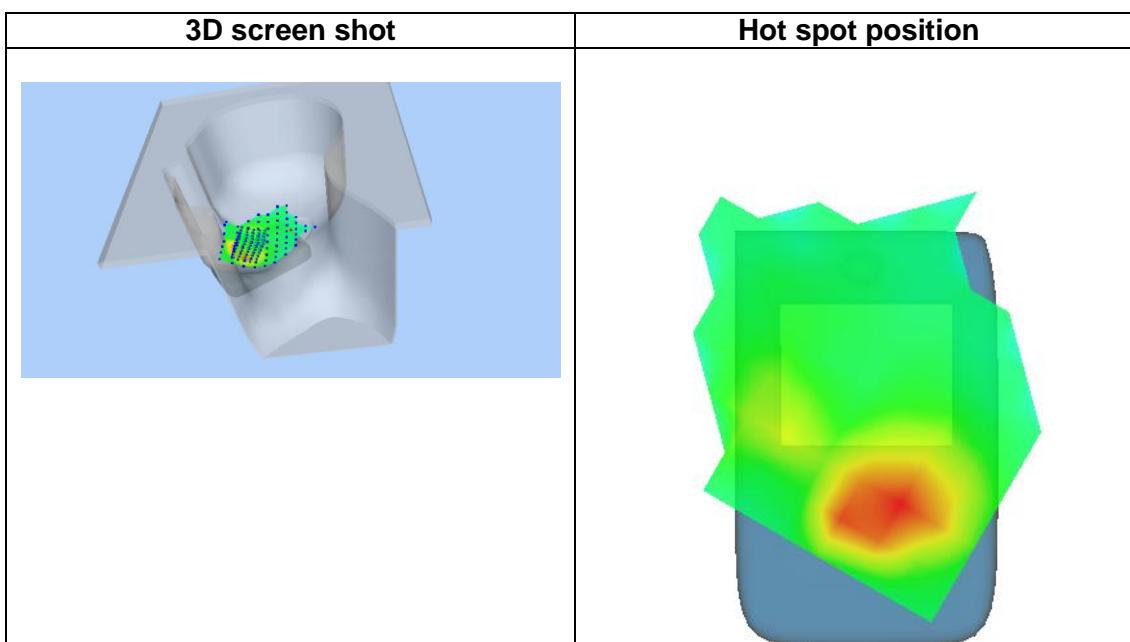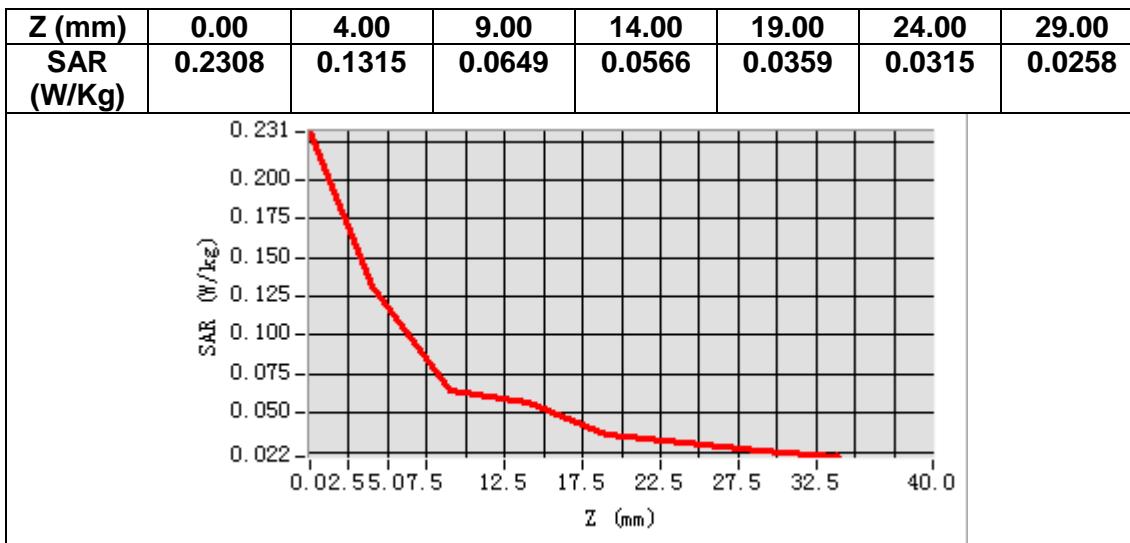


MEASUREMENT 6

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.878899
Relative permittivity (imaginary part)	15.087700
Conductivity (S/m)	1.575826
Variation (%)	-0.380000

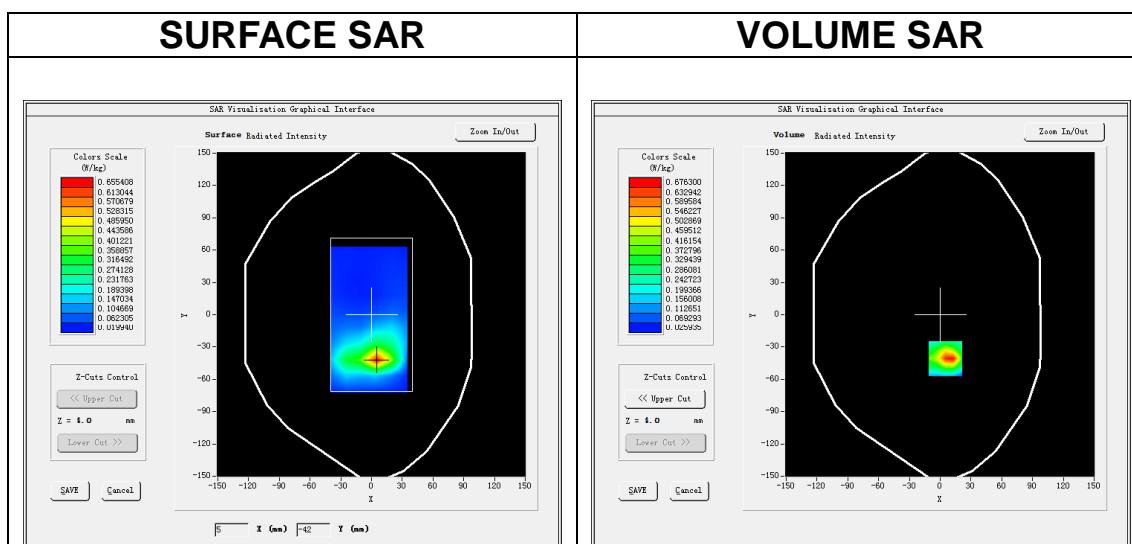

Maximum location: X=5.00, Y=-41.00
SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.298437
SAR 1g (W/Kg)	0.649645

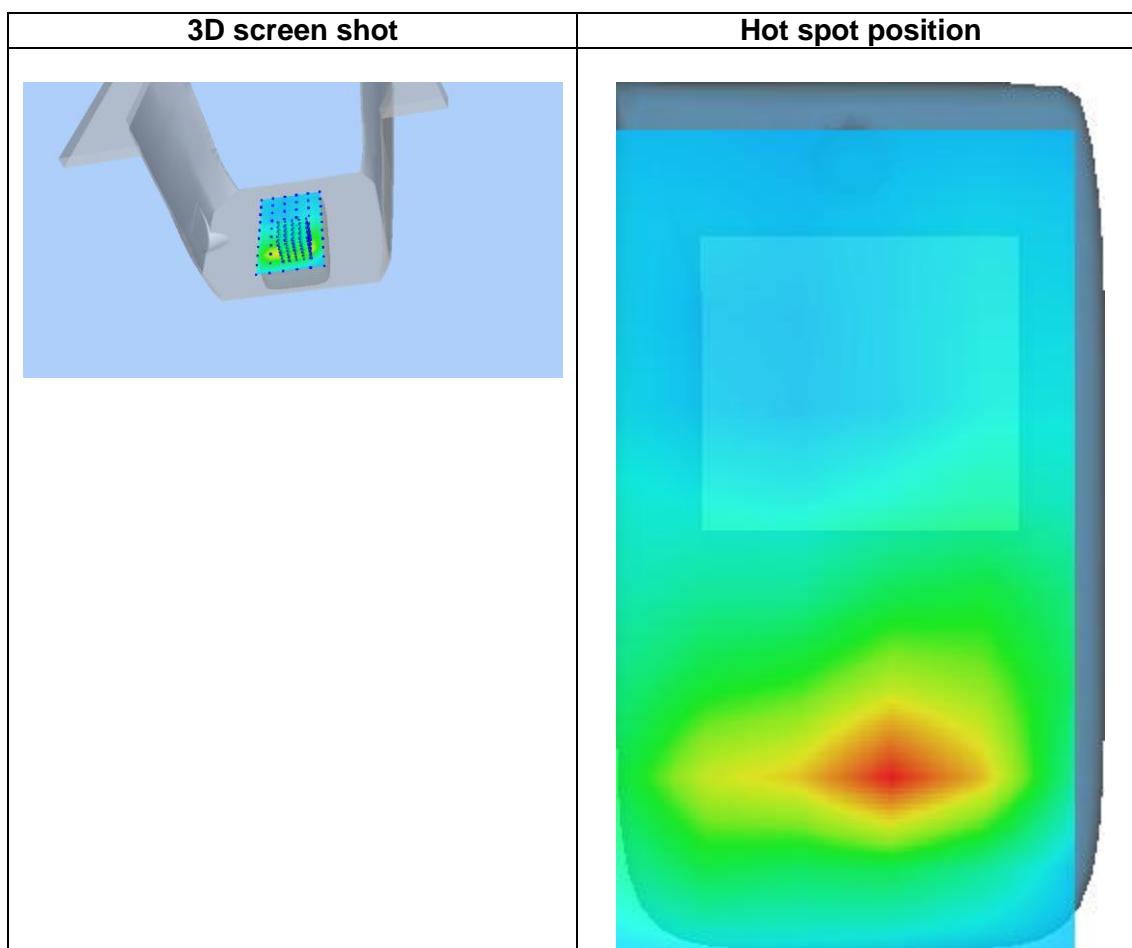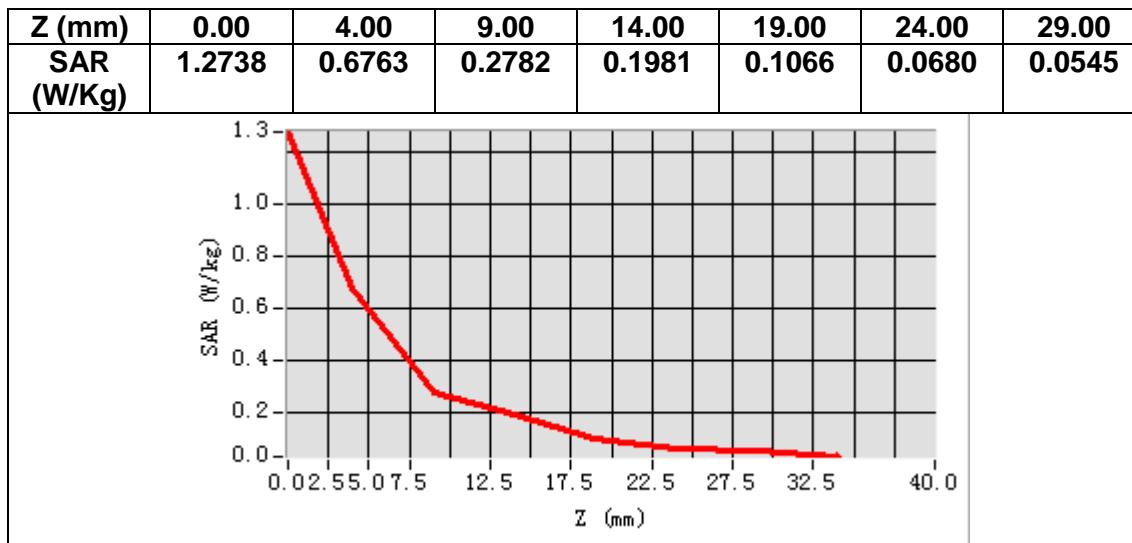


MEASUREMENT 7

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.740959
Relative permittivity (imaginary part)	20.081539
Conductivity (S/m)	0.933122
Variation (%)	-0.830000

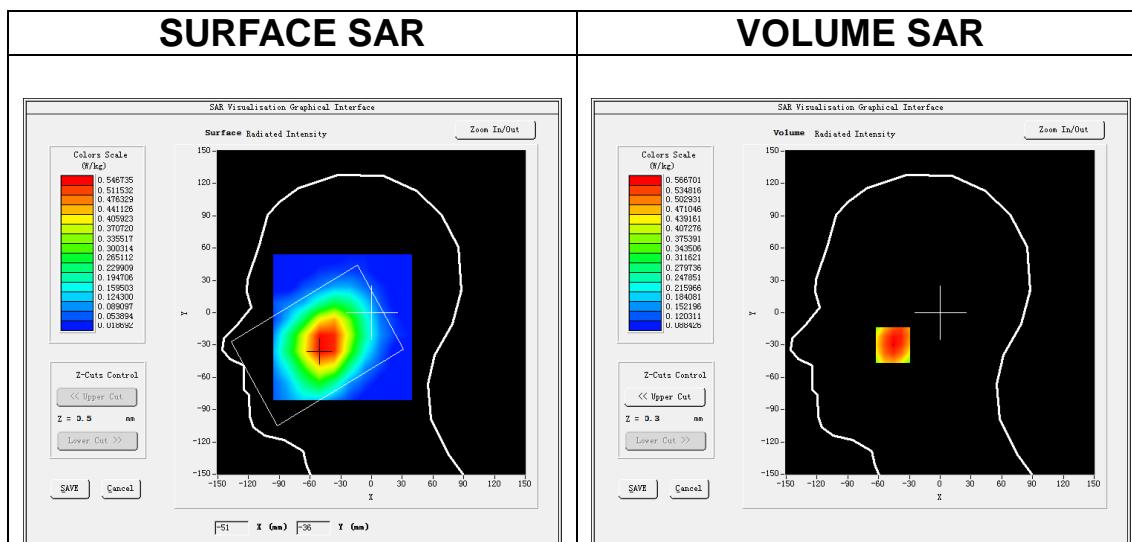

Maximum location: X=-46.00, Y=-30.00
SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.439933
SAR 1g (W/Kg)	0.570949

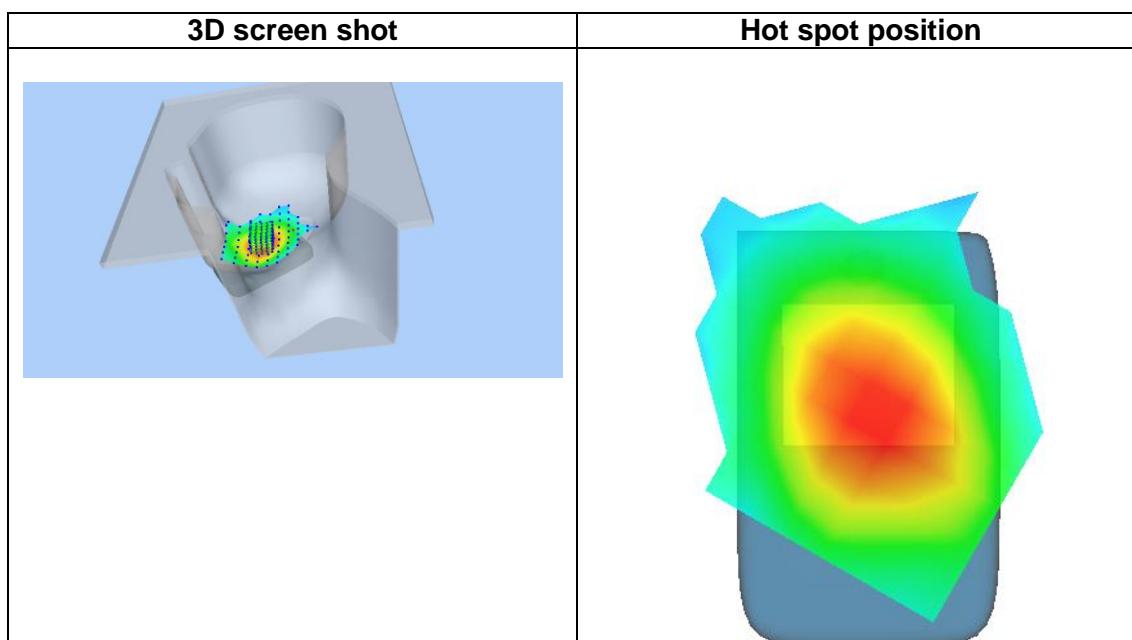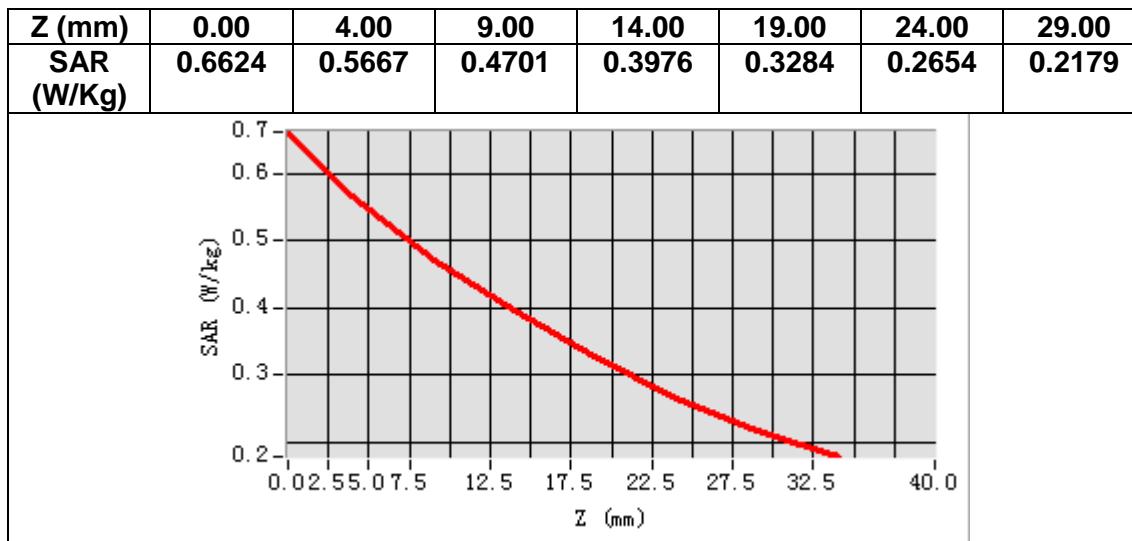


MEASUREMENT 8

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.469582
Relative permittivity (imaginary part)	21.822741
Conductivity (S/m)	1.014030
Variation (%)	-0.220000

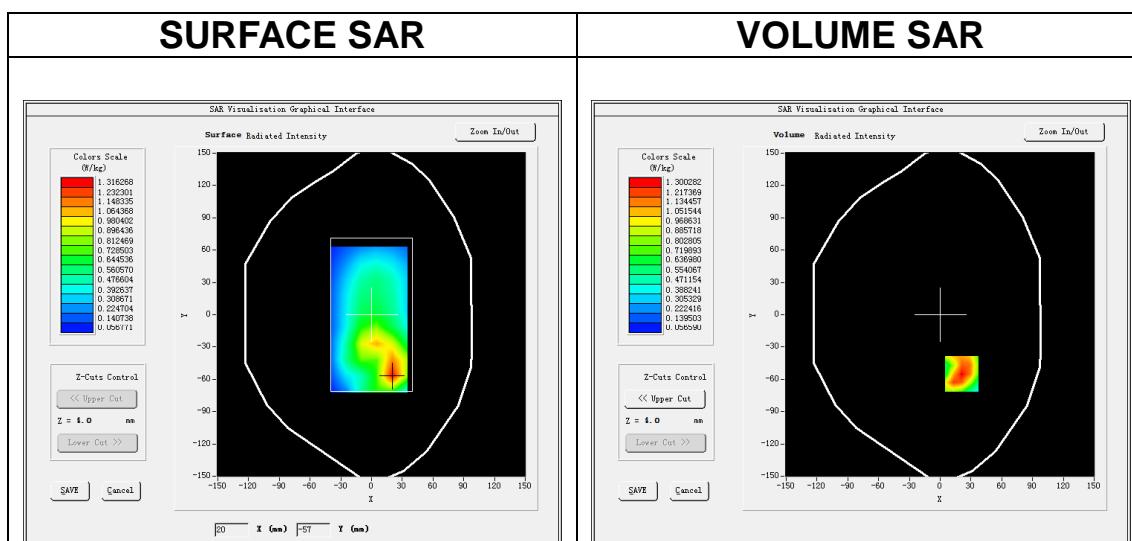

Maximum location: X=21.00, Y=-55.00
SAR Peak: 2.02 W/kg

SAR 10g (W/Kg)	0.702470
SAR 1g (W/Kg)	1.177424

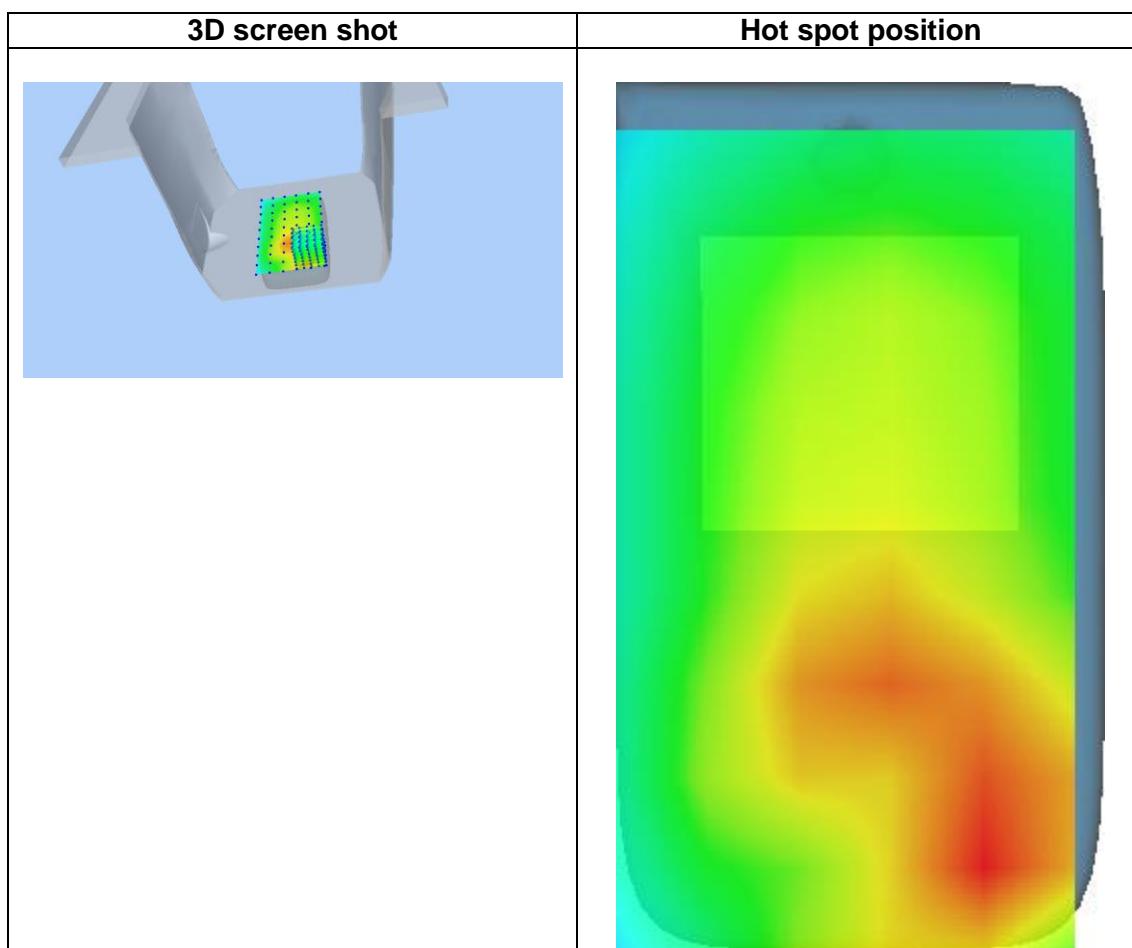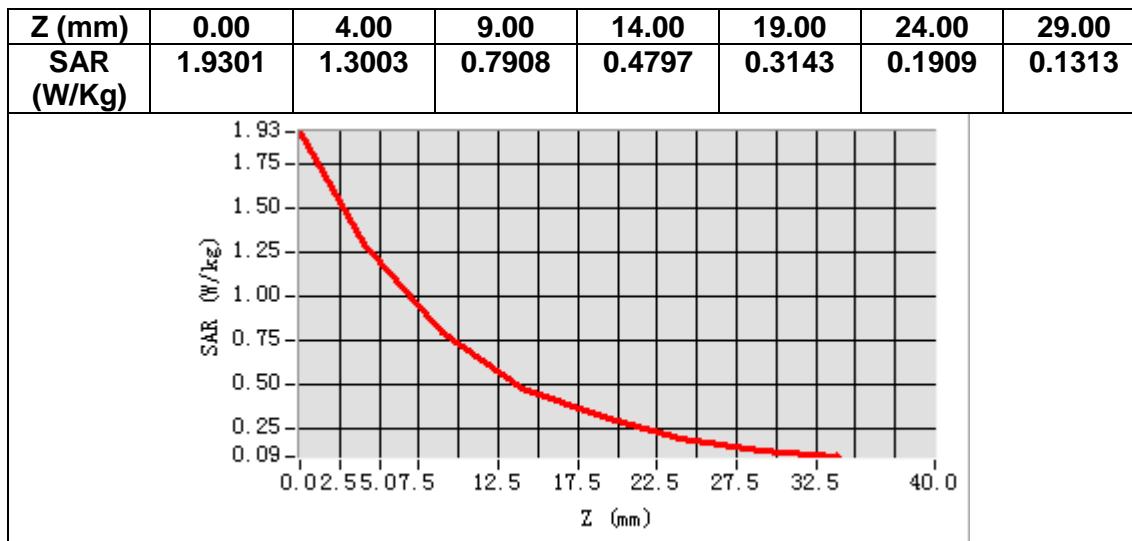


MEASUREMENT 9

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=10\text{mm}$ $dy=10\text{mm}$, $h= 2.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times 7\times 12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.722980
Relative permittivity (imaginary part)	16.241619
Conductivity (S/m)	4.692023
Variation (%)	0.590000

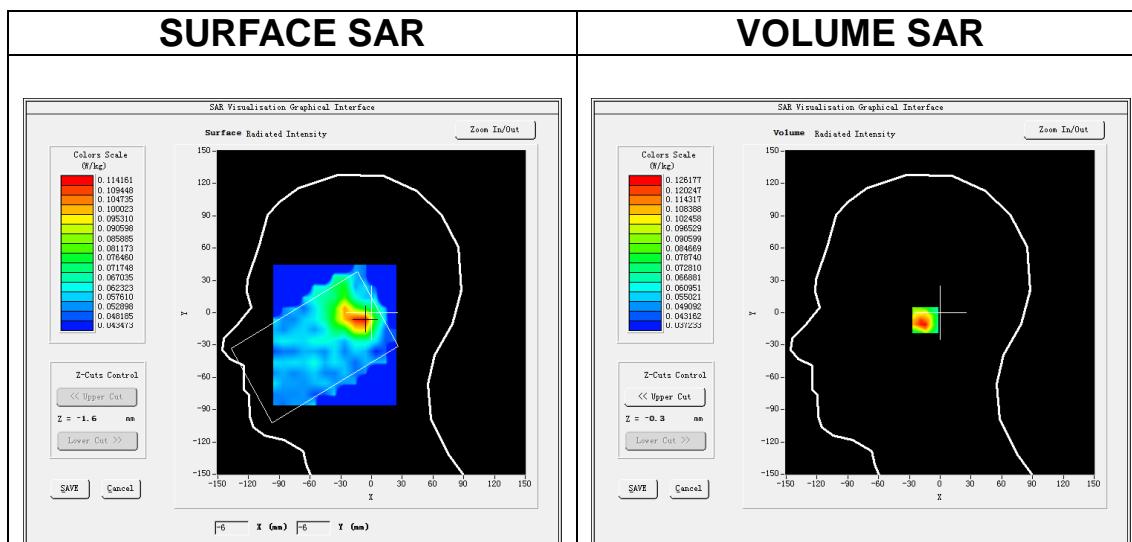

Maximum location: X=-9.00, Y=-7.00
SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.076567
SAR 1g (W/Kg)	0.122515

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	0.18 94	0.12 62	0.07 56	0.06 85	0.05 66	0.05 52	0.05 36	0.05 44	0.05 41	0.04 83	0.05 15	0.05 34

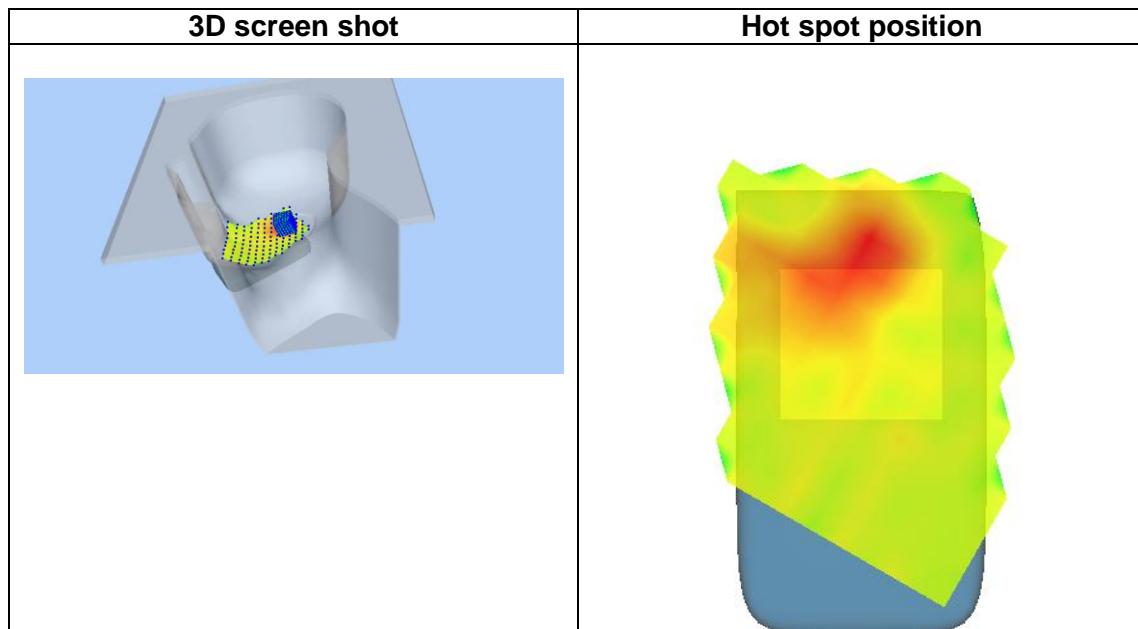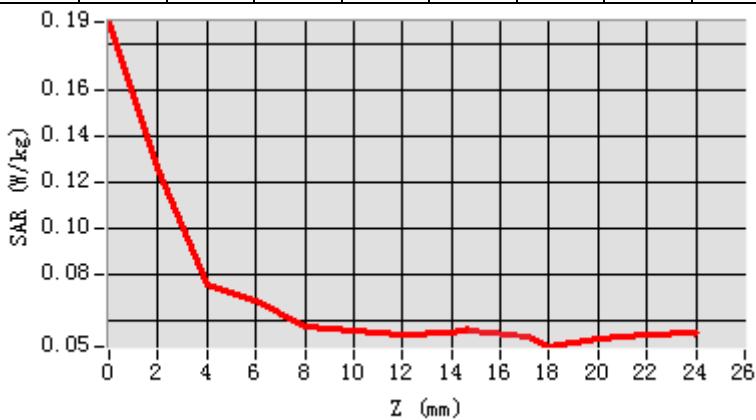


MEASUREMENT 10

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5785.000000
Relative permittivity (real part)	34.704788
Relative permittivity (imaginary part)	16.225266
Conductivity (S/m)	5.214620
Variation (%)	-3.220000

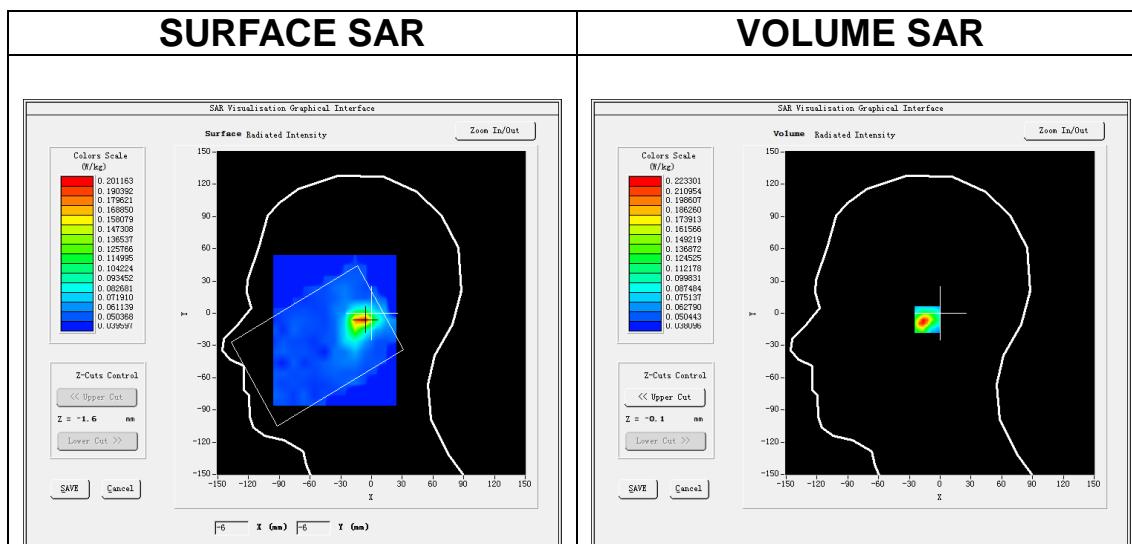

Maximum location: X=-7.00, Y=-6.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.095937
SAR 1g (W/Kg)	0.214909

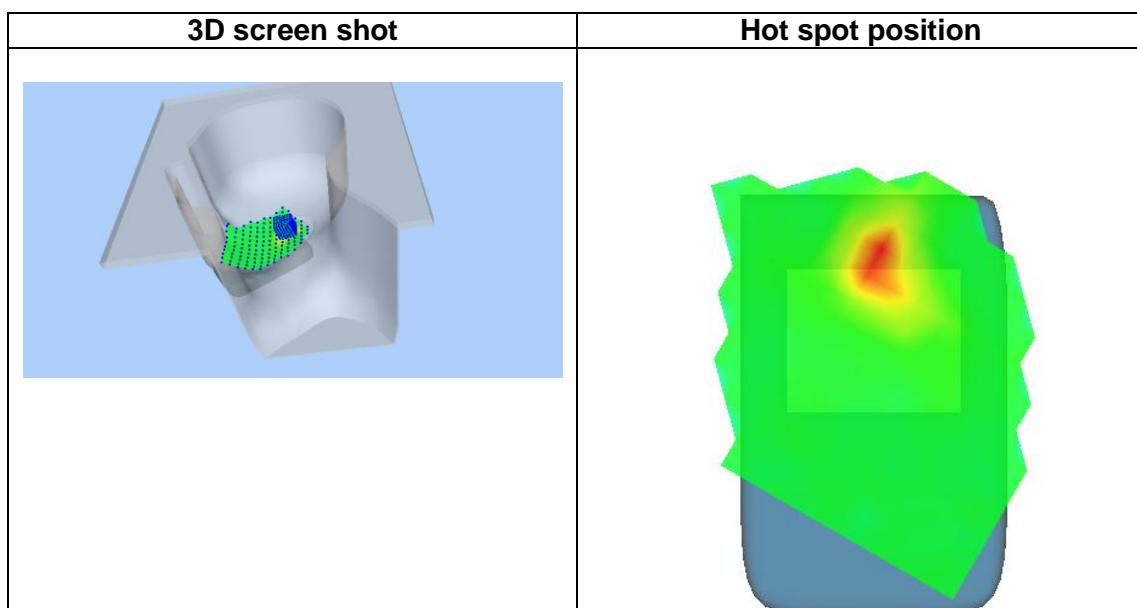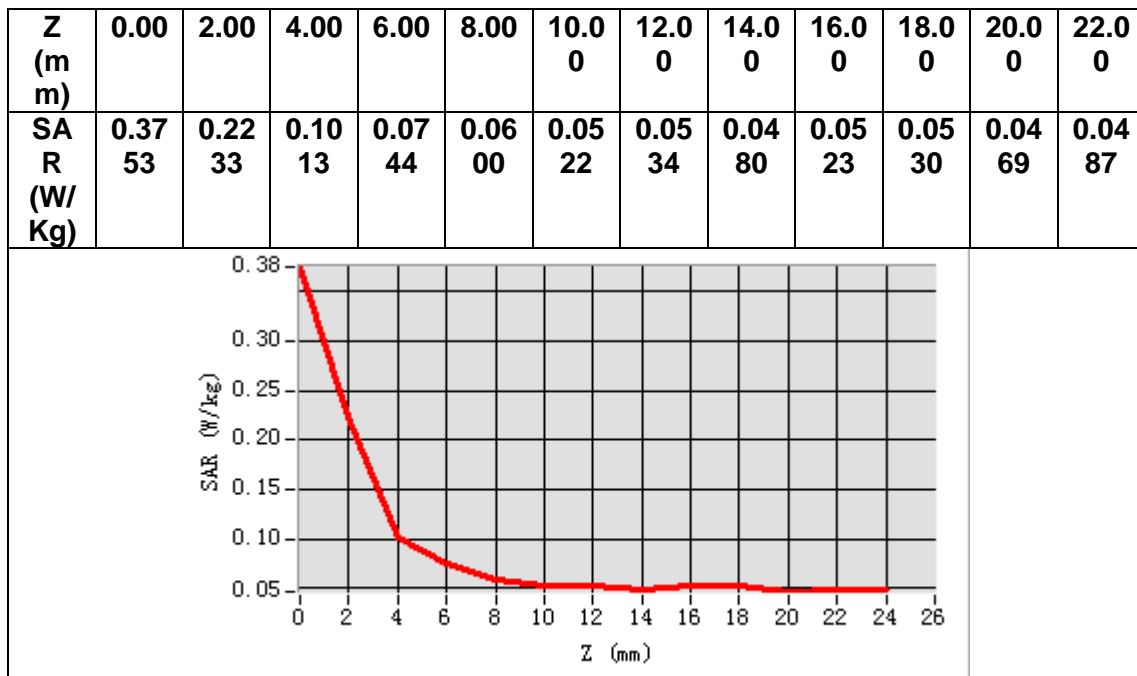


MEASUREMENT 11

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=10\text{mm}$ $dy=10\text{mm}$, $h= 2.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times 7\times 12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.609535
Relative permittivity (imaginary part)	18.475510
Conductivity (S/m)	5.337369
Variation (%)	-3.990000

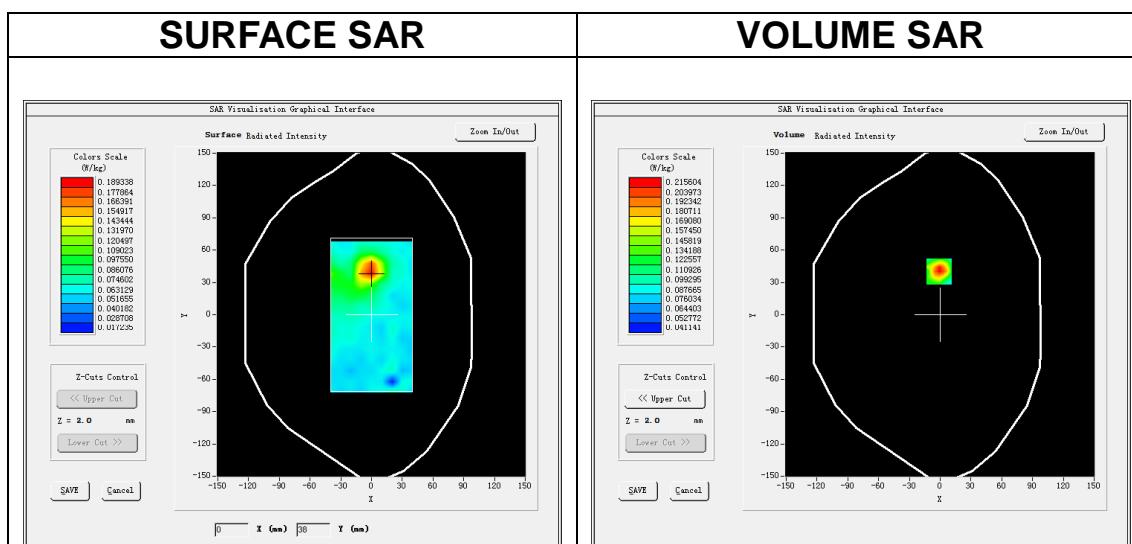

Maximum location: X=-1.00, Y=40.00
SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.086491
SAR 1g (W/Kg)	0.143712

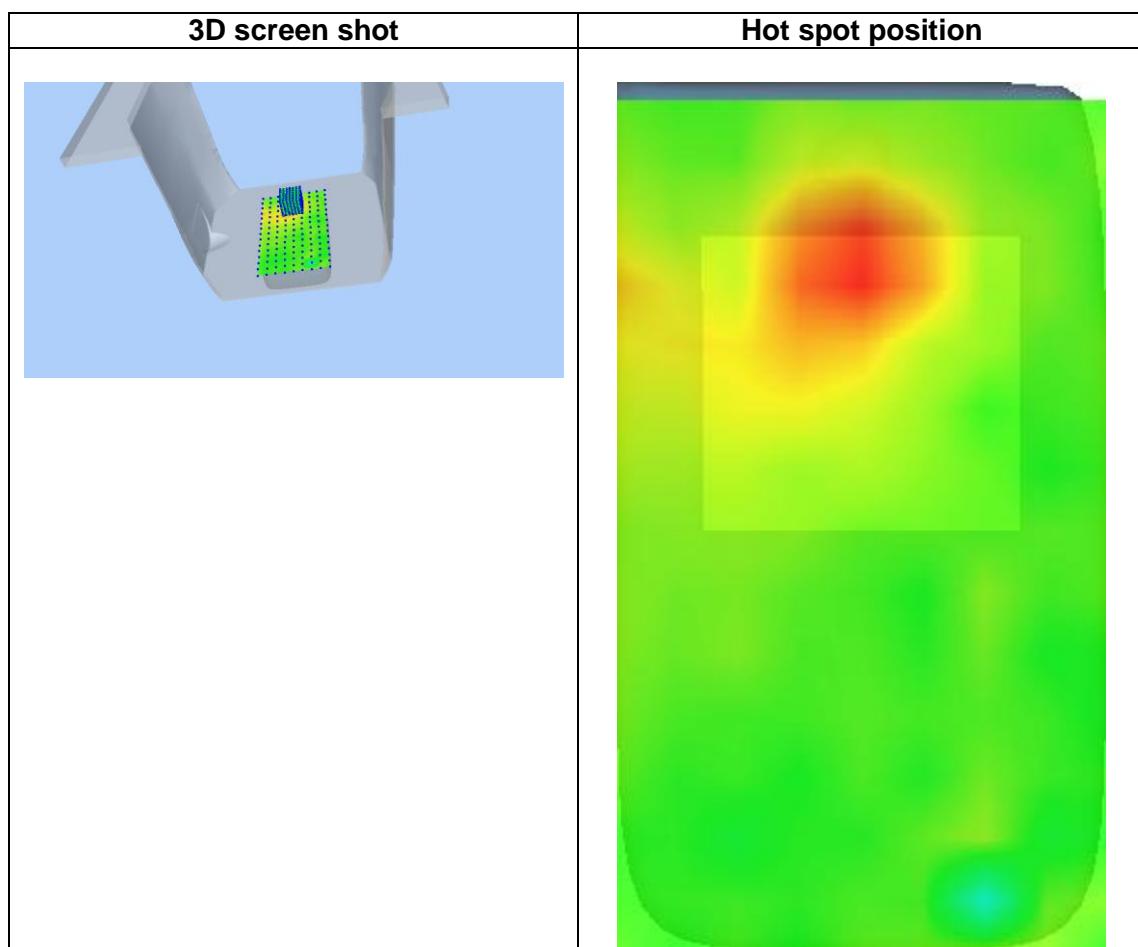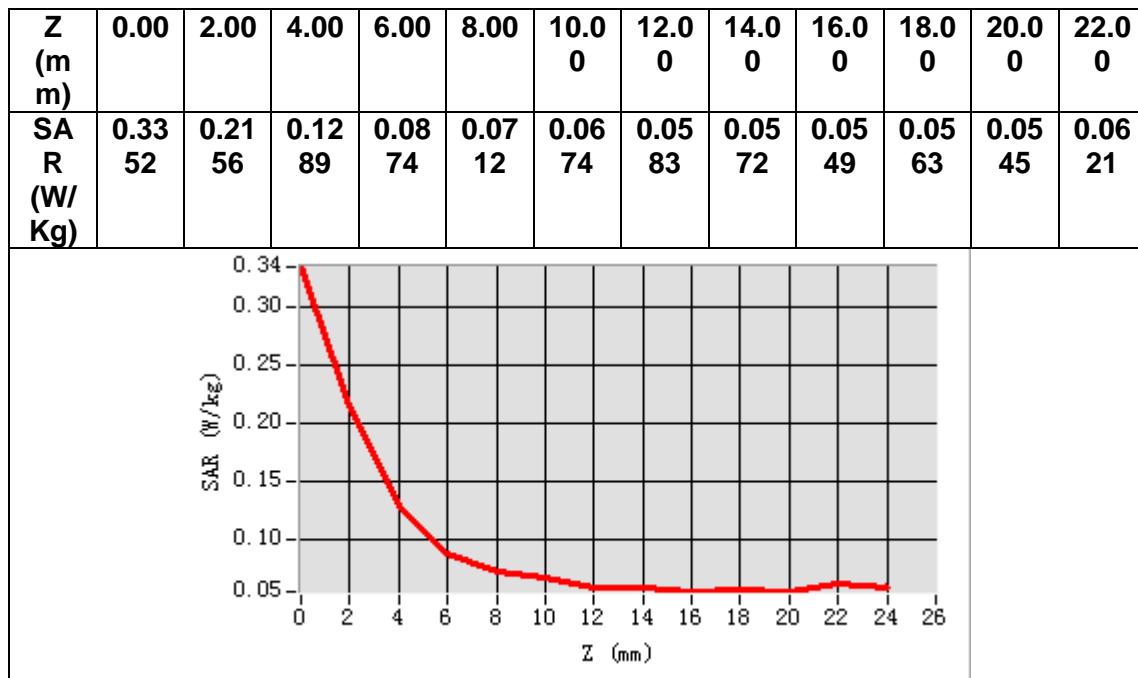


MEASUREMENT 12

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=10\text{mm}$ $dy=10\text{mm}$, $h= 2.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times 7\times 12, dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	48.398701
Relative permittivity (imaginary part)	18.866766
Conductivity (S/m)	6.063569
Variation (%)	2.810000

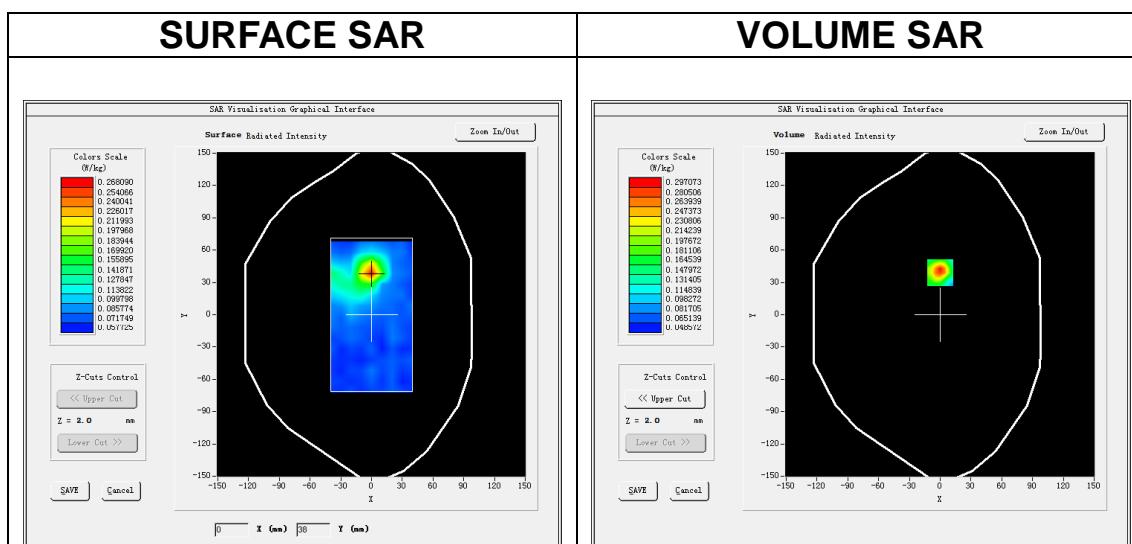

Maximum location: X=0.00, Y=39.00
SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.109095
SAR 1g (W/Kg)	0.187719

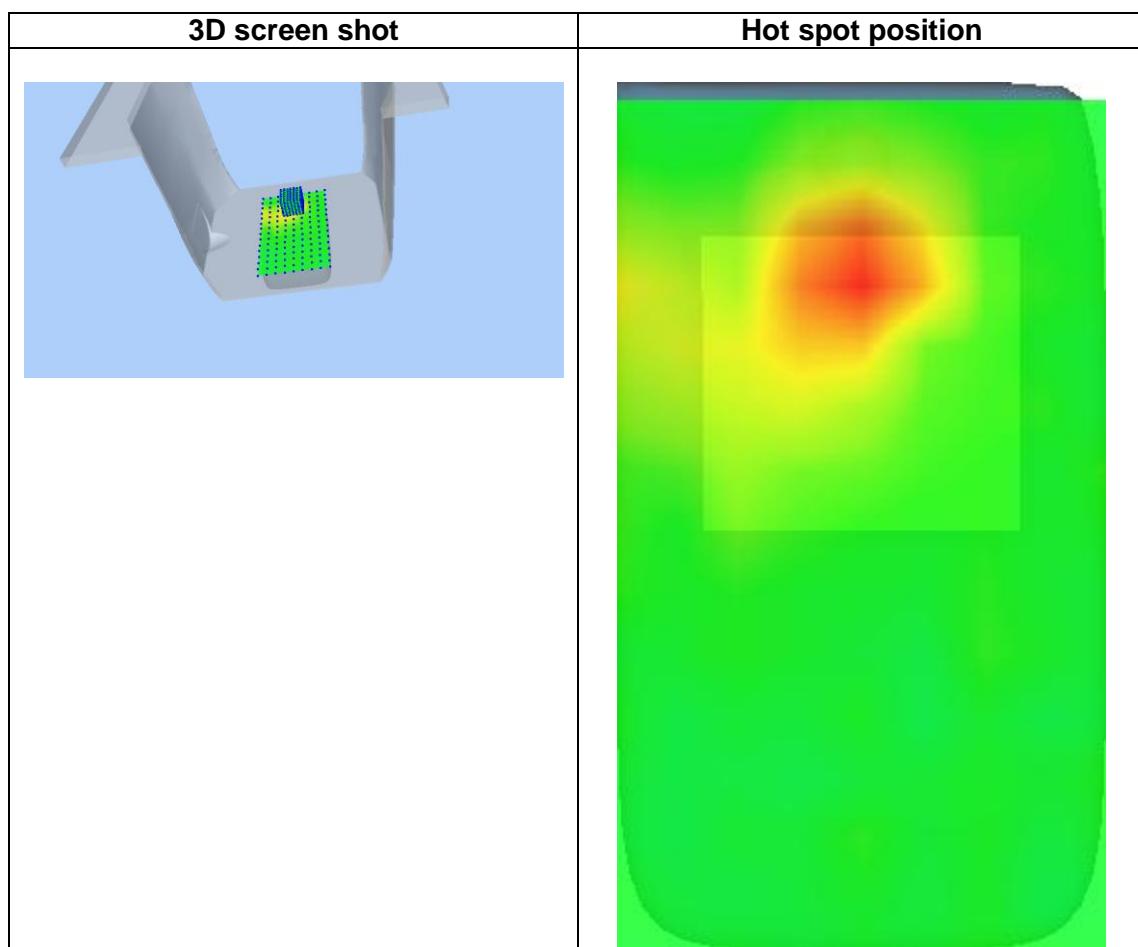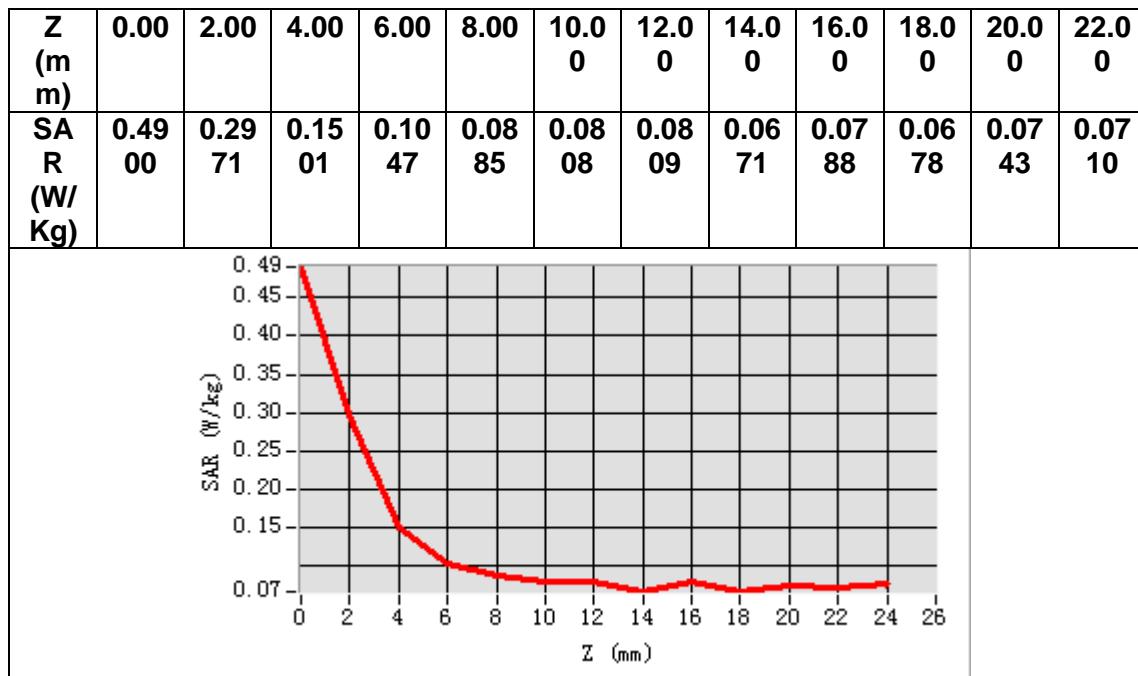


MEASUREMENT 13

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm\ dy=12mm,\ h= 5.00\ mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm\ dy=5mm\ dz=5mm$</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.351002
Relative permittivity (imaginary part)	13.700300
Conductivity (S/m)	1.854868
Variation (%)	0.080000

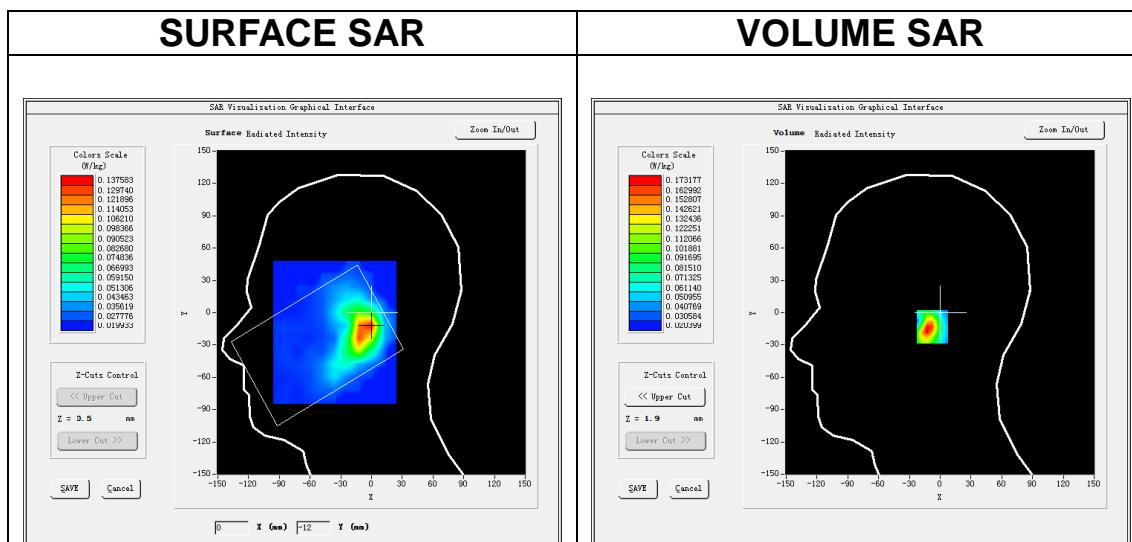

Maximum location: X=-3.00, Y=-13.00
SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.081256
SAR 1g (W/Kg)	0.164103

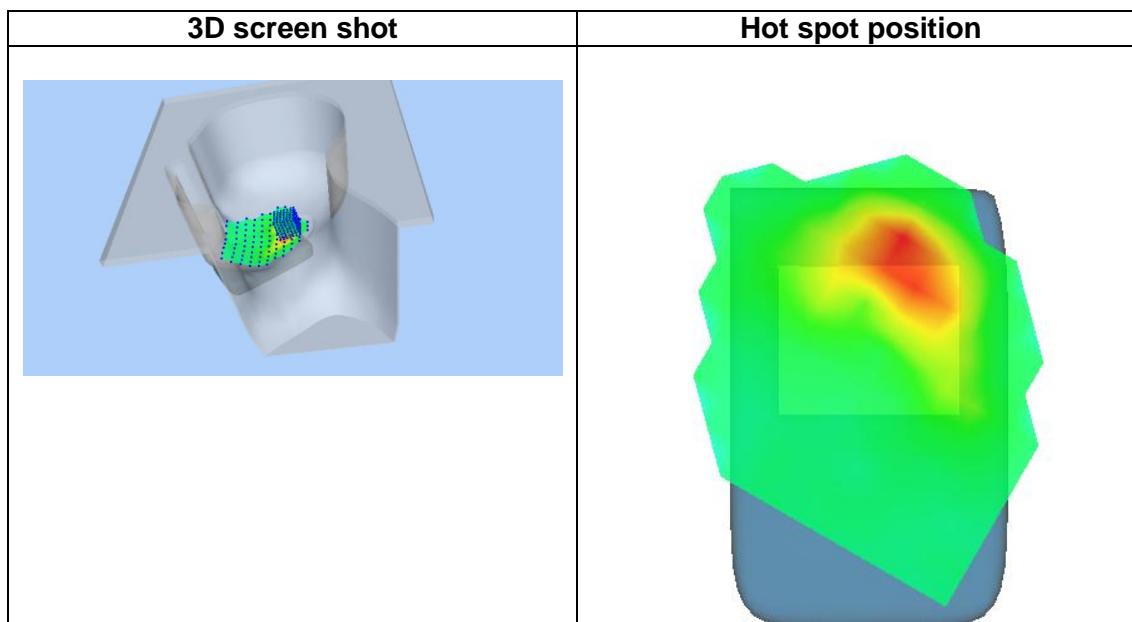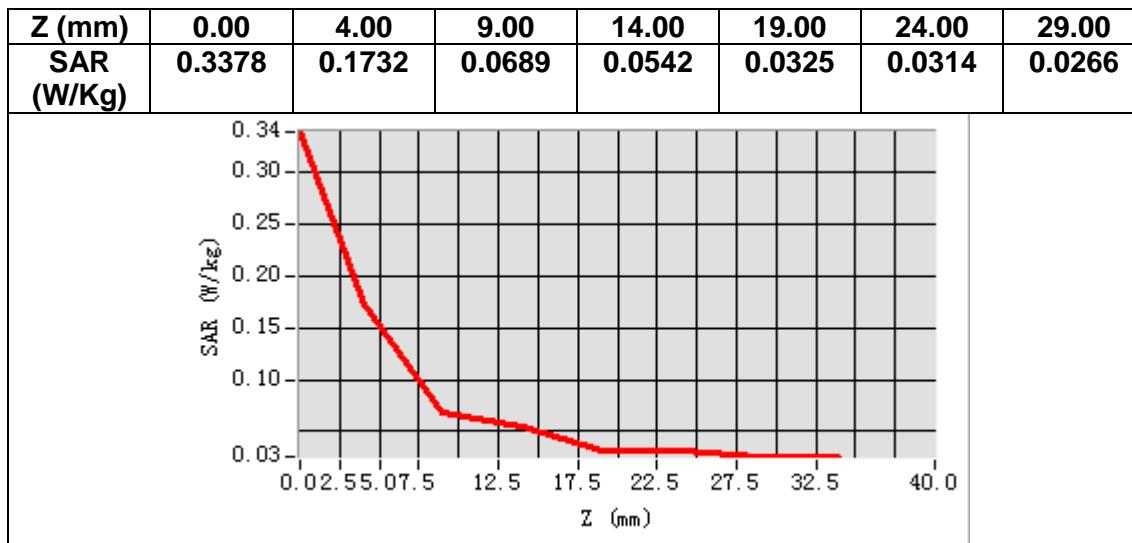


MEASUREMENT 14

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12\text{mm}$ $dy=12\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times7\times7, dx=5\text{mm}$ $dy=5\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.351601
Relative permittivity (imaginary part)	14.805620
Conductivity (S/m)	2.004516
Variation (%)	-2.480000

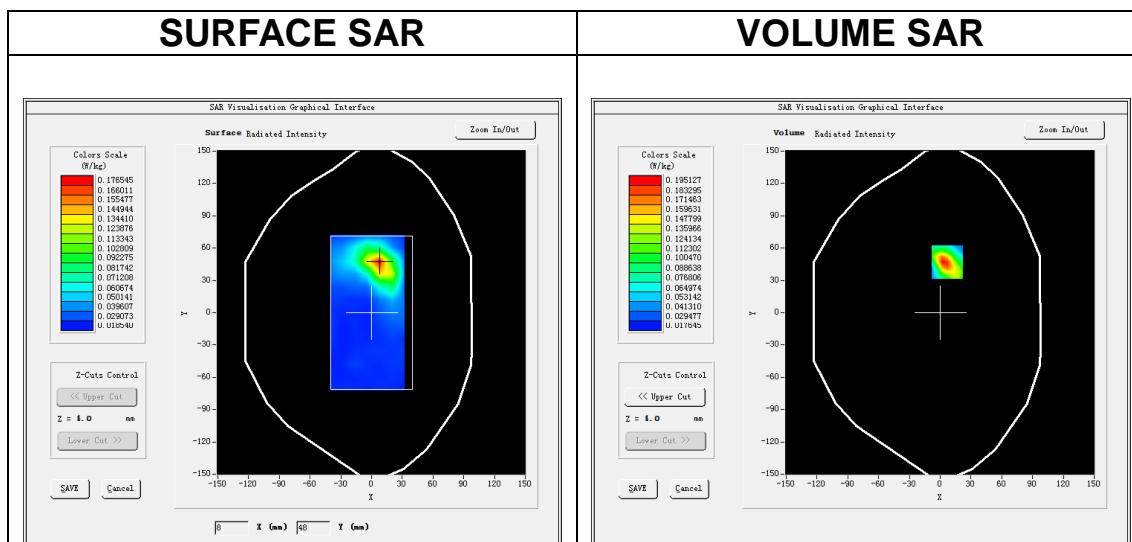

Maximum location: X=7.00, Y=47.00
SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.088441
SAR 1g (W/Kg)	0.180461

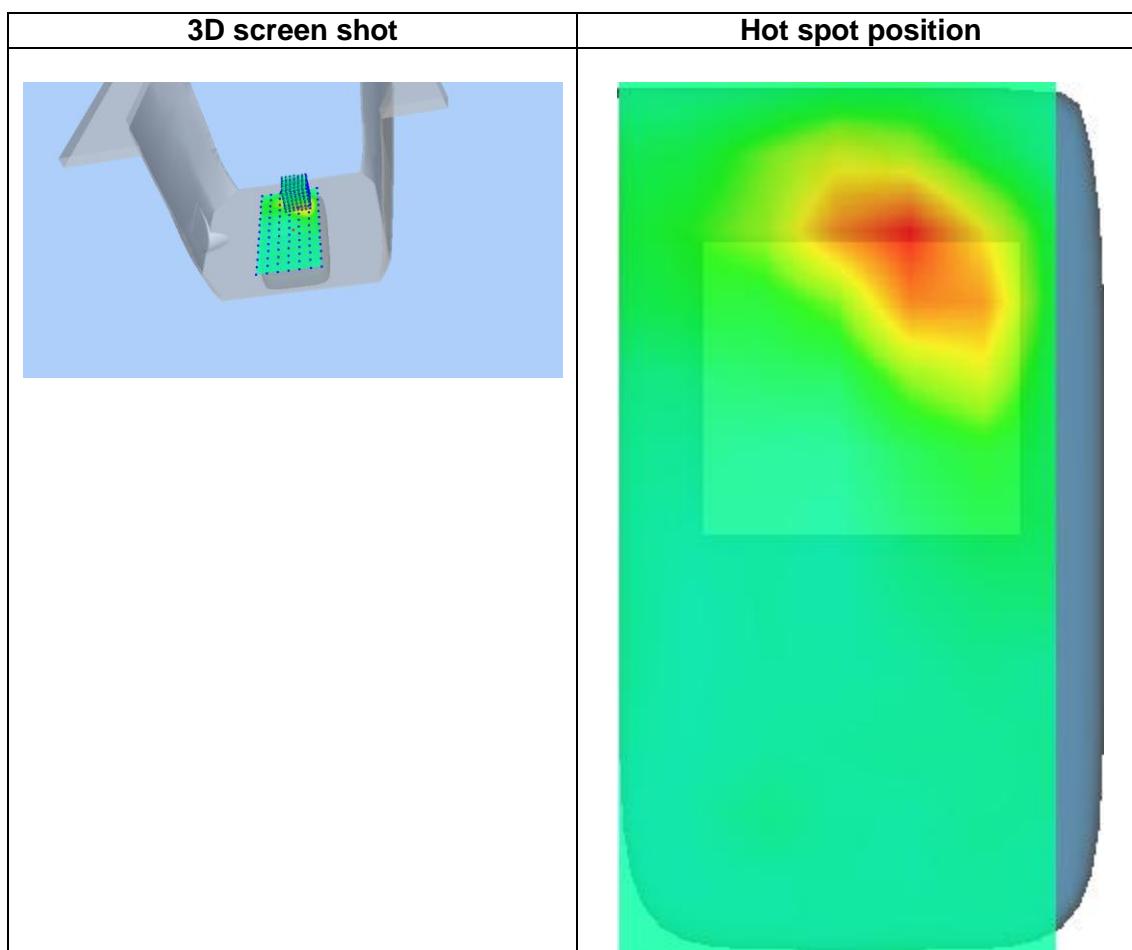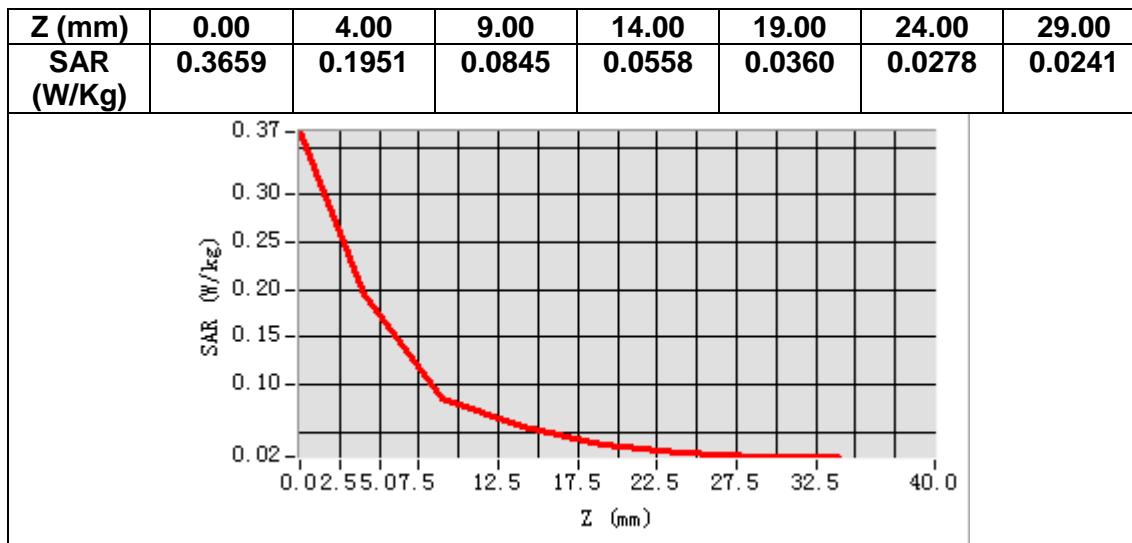


MEASUREMENT 15

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	40.743549
Relative permittivity (imaginary part)	20.080200
Conductivity (S/m)	0.933172
Variation (%)	2.120000

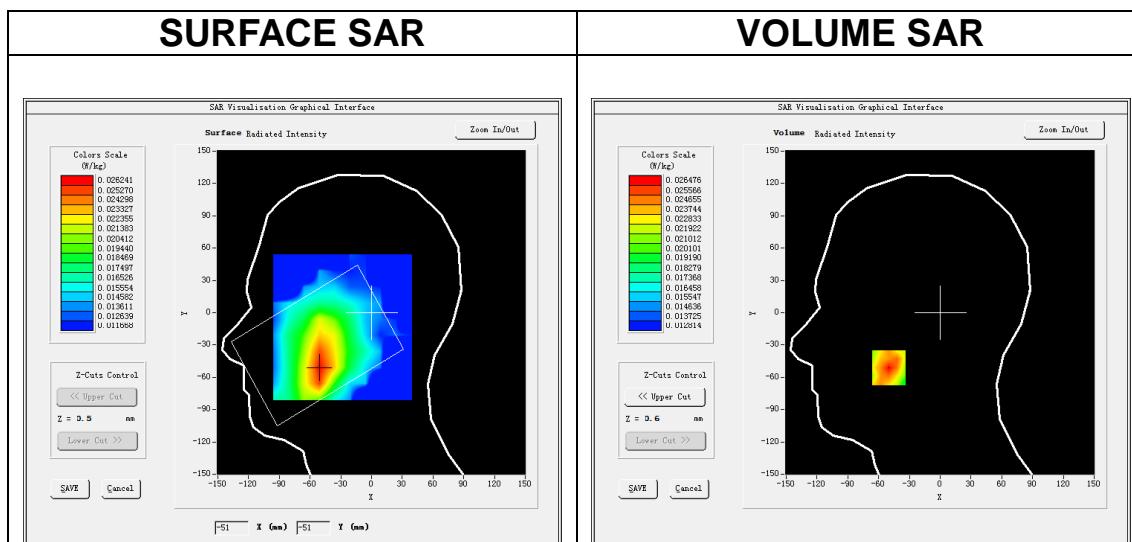

Maximum location: X=-50.00, Y=-51.00
SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.022309
SAR 1g (W/Kg)	0.027006

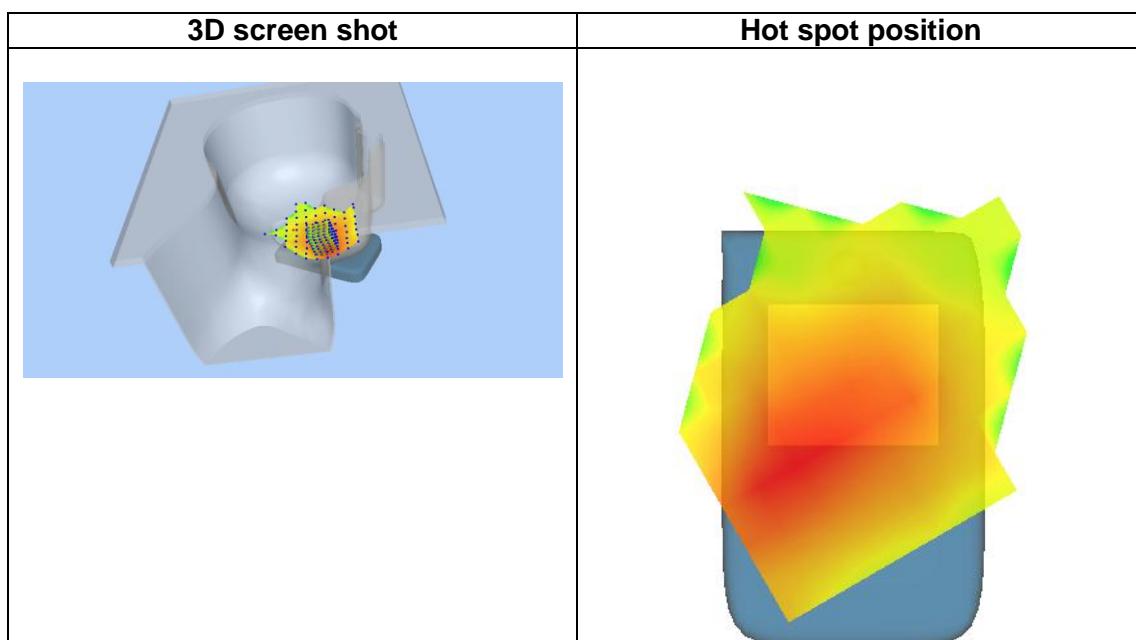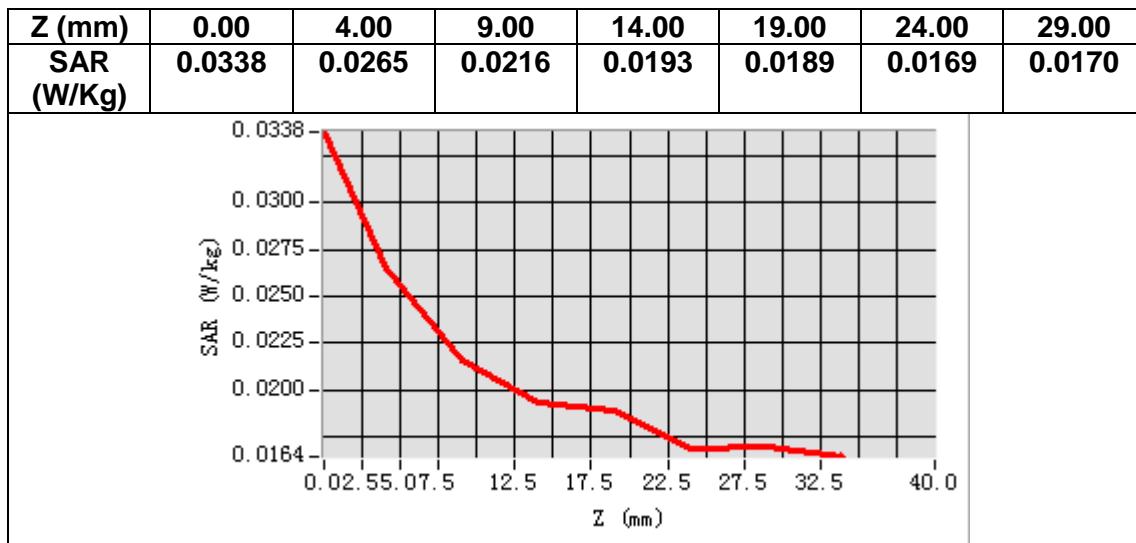


MEASUREMENT 16

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=15\text{mm}$ $dy=15\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$5\times 5\times 7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>



B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.473499
Relative permittivity (imaginary part)	21.816999
Conductivity (S/m)	1.013884
Variation (%)	-0.860000

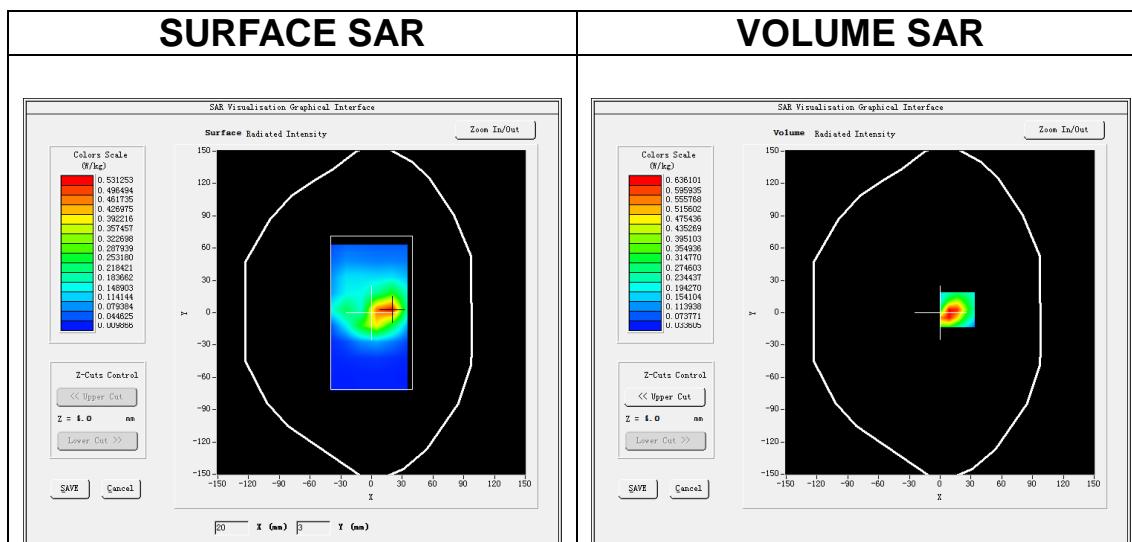

Maximum location: X=17.00, Y=3.00
SAR Peak: 1.17 W/kg

SAR 10g (W/Kg)	0.322757
SAR 1g (W/Kg)	0.664347

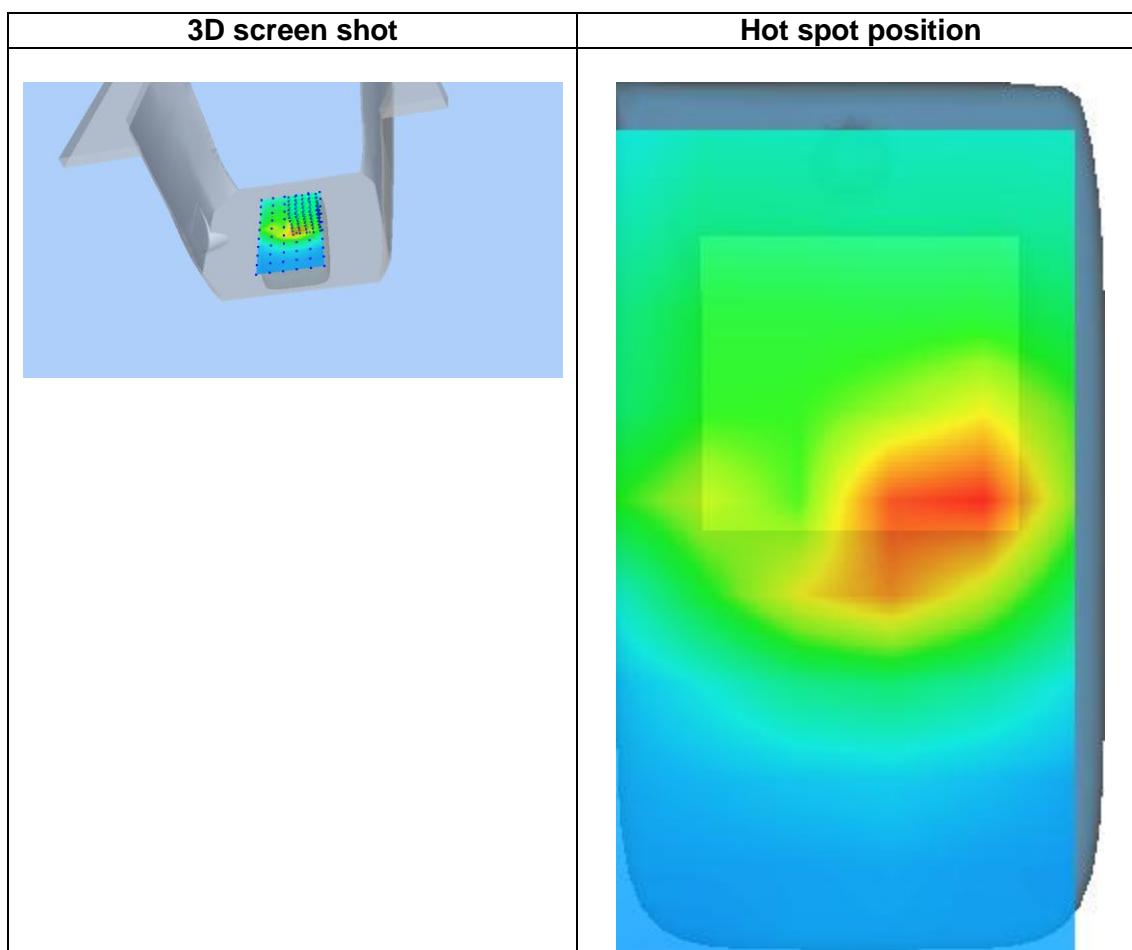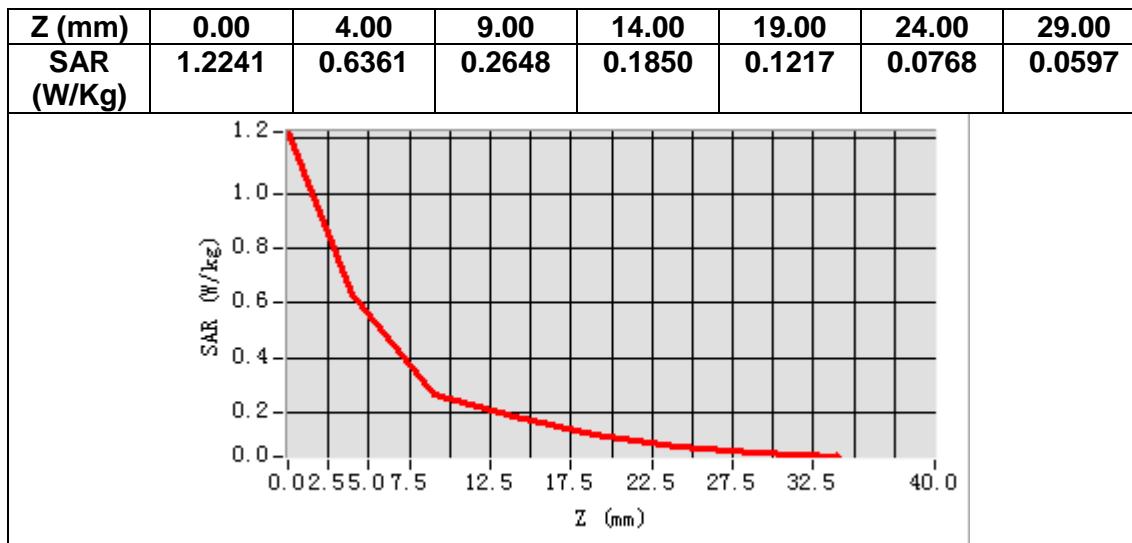


MEASUREMENT 17

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12mm dy=12mm, h= 5.00 mm$</u>
<u>ZoomScan</u>	<u>$7x7x7, dx=5mm dy=5mm dz=5mm$</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>



B. SAR Measurement Results

Frequency (MHz)	2602.500000
Relative permittivity (real part)	38.423985
Relative permittivity (imaginary part)	14.144360
Conductivity (S/m)	2.045039
Variation (%)	-1.830000

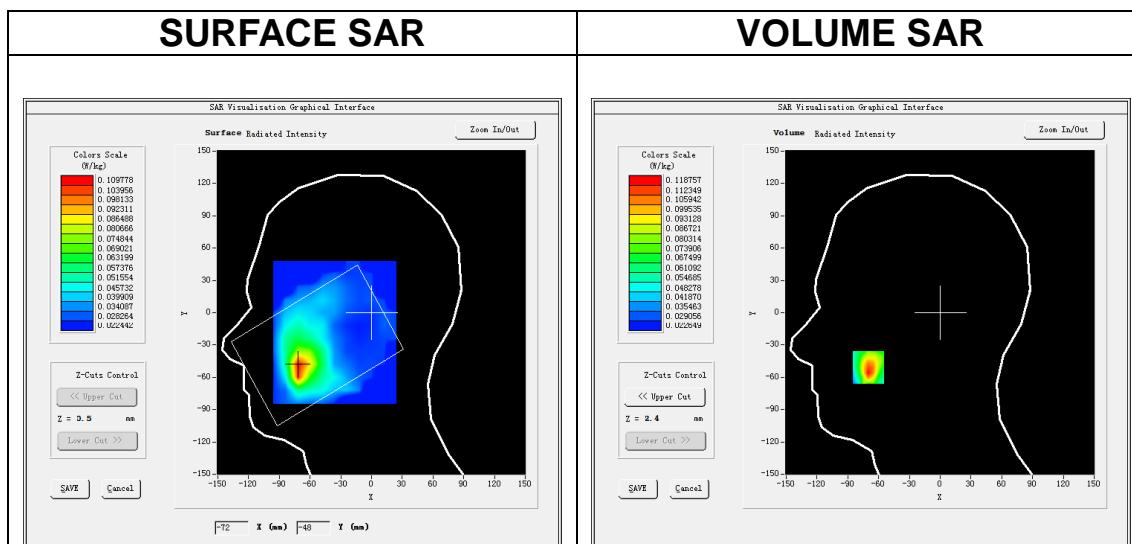

Maximum location: X=-70.00, Y=-51.00
SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.064364
SAR 1g (W/Kg)	0.112487

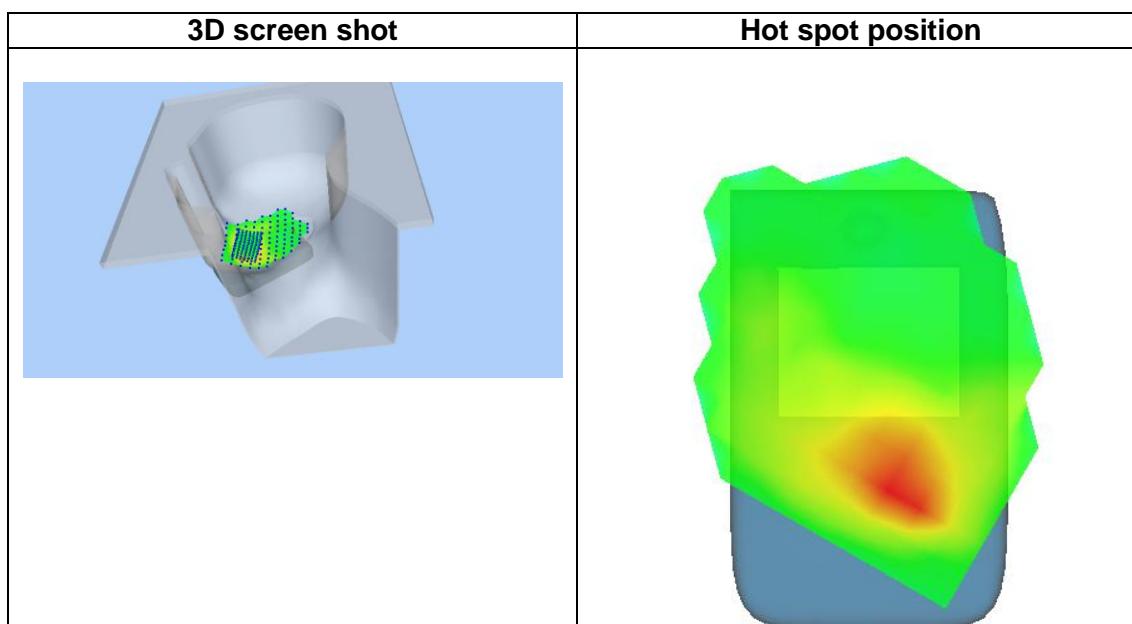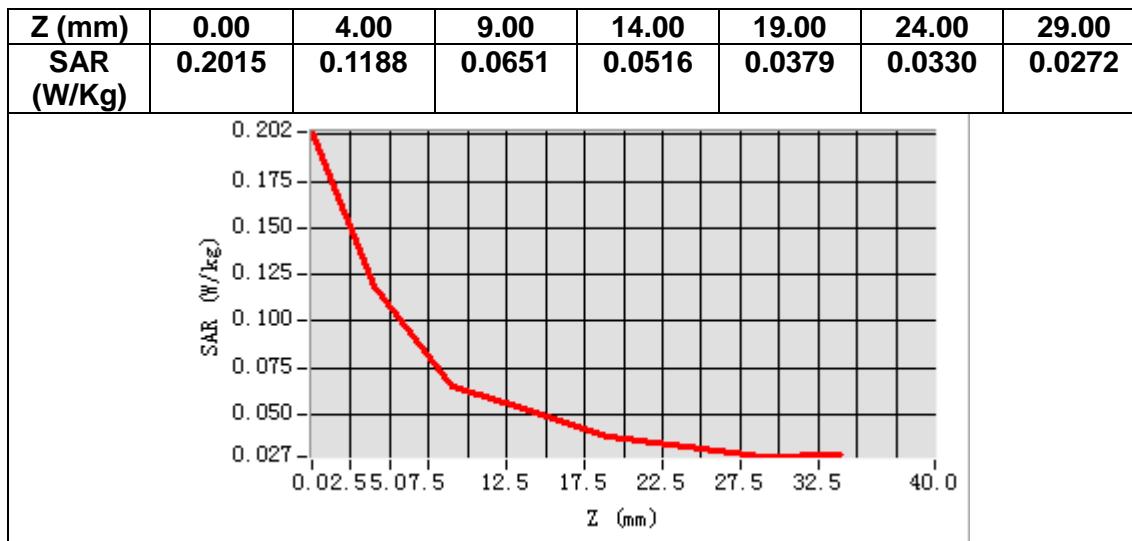


MEASUREMENT 18

A. Experimental conditions.

<u>Area Scan</u>	<u>$dx=12\text{mm}$ $dy=12\text{mm}$, $h= 5.00 \text{ mm}$</u>
<u>ZoomScan</u>	<u>$7\times7\times7, dx=5\text{mm}$ $dy=5\text{mm}$ $dz=5\text{mm}$</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>



B. SAR Measurement Results

Frequency (MHz)	2602.500000
Relative permittivity (real part)	52.575446
Relative permittivity (imaginary part)	15.431440
Conductivity (S/m)	2.231129
Variation (%)	-0.210000

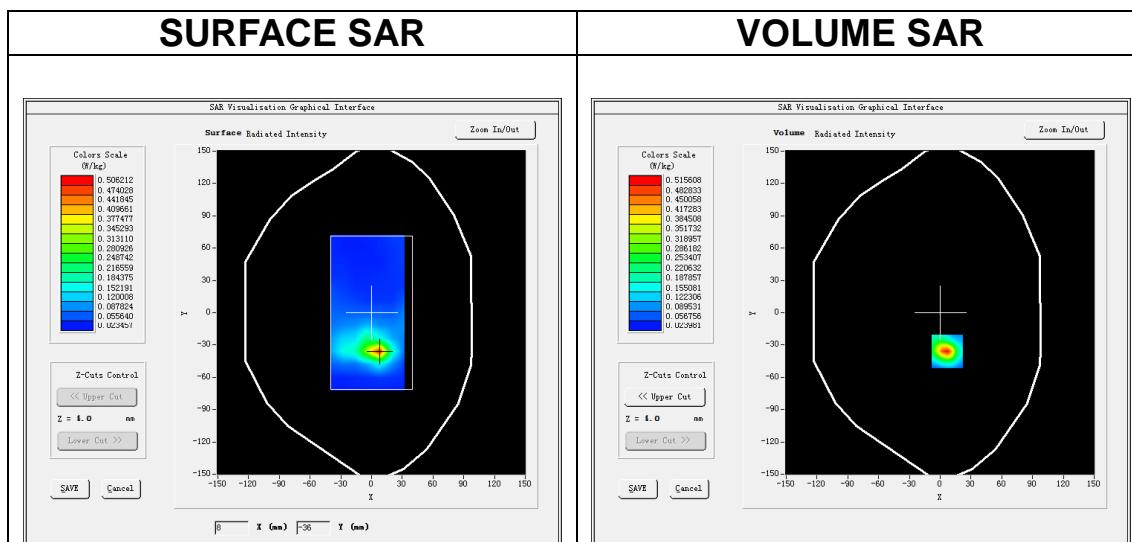

Maximum location: X=7.00, Y=-36.00
SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.188056
SAR 1g (W/Kg)	0.450679

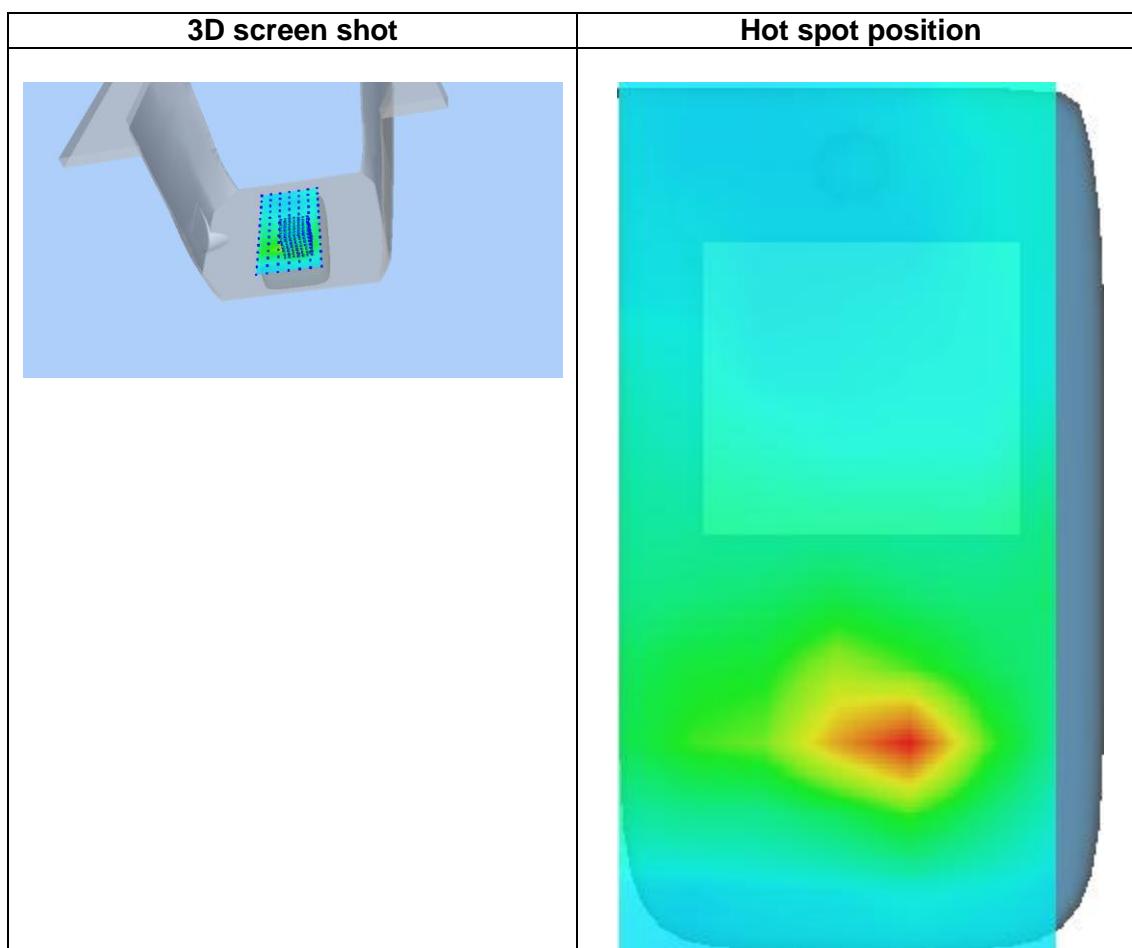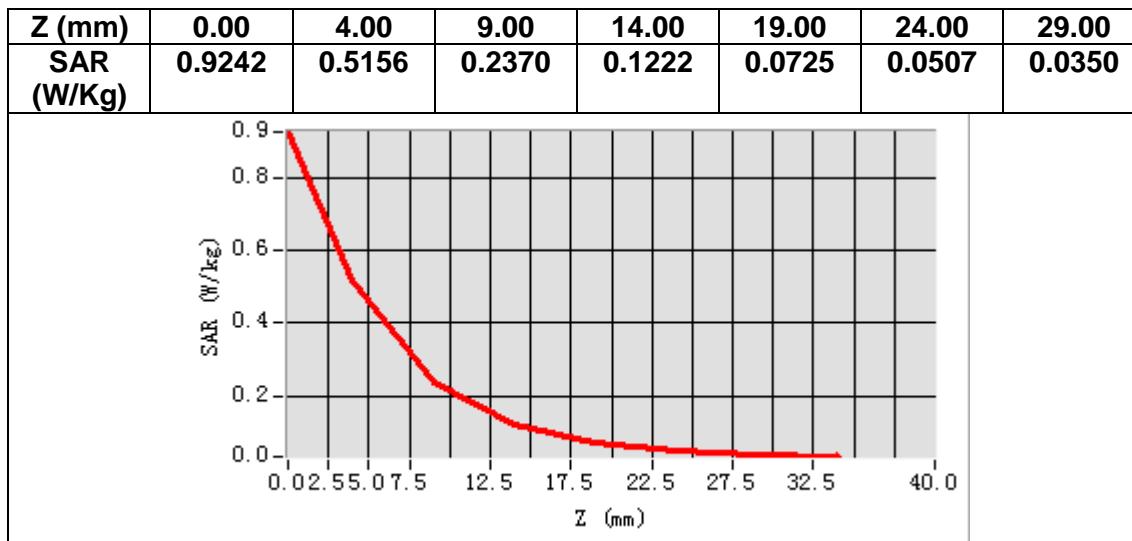

14. Appendix D. Calibration Certificate

Table of contents

E Field Probe - SN 08/16 EPGO287

835 MHz Dipole - SN 03/15 DIP 0G835-347

1900 MHz Dipole - SN 03/15 DIP 1G900-350

2450 MHz Dipole - SN 03/15 DIP 2G450-352

2600 MHz Dipole - SN 03/15 DIP 2G600-356

5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.260.1.18.SATU.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA**
MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 08/16 EPGO287

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 09/17/2018

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	9/17/2018	
Checked by :	Jérôme LUC	Product Manager	9/17/2018	
Approved by :	Kim RUTKOWSKI	Quality Manager	9/17/2018	Kim Rutkowski

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Date	Modifications
A	9/17/2018	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.209 MΩ Dipole 2: R2=0.196 MΩ Dipole 3: R3=0.197 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

Page: 5/10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters		
Liquid Temperature	21 °C	
Lab Temperature	21 °C	
Lab Humidity	45 %	


5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V/m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V/m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V/m})^2$)
0.66	0.75	0.58

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
93	93	98

Calibration curves $E_i = f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

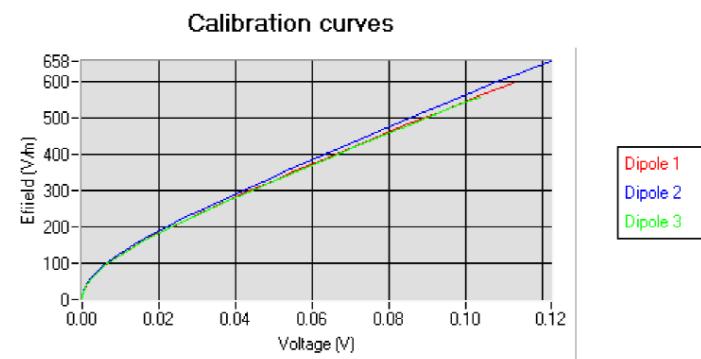



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

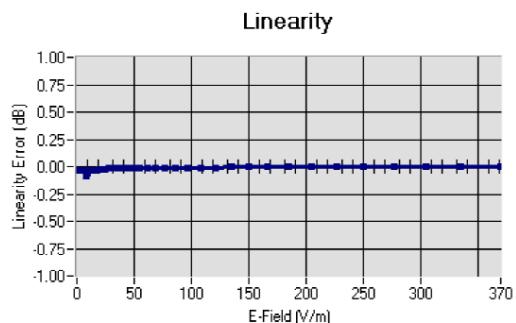5.2 LINEARITYLinearity: +/-1.89% (+/-0.08dB)5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	40.03	0.93	1.45
BL750	750	56.83	1.00	1.49
HL850	835	42.19	0.90	1.50
BL850	835	54.67	1.01	1.56
HL900	900	42.08	1.01	1.51
HL1800	1800	41.68	1.46	1.71
BL1800	1800	53.86	1.46	1.77
HL1900	1900	38.45	1.45	2.03
BL1900	1900	53.32	1.56	2.07
HL2000	2000	38.26	1.38	1.76
HL2450	2450	37.50	1.80	2.00
BL2450	2450	53.22	1.89	2.08
HL2600	2600	39.80	1.99	2.12
BL2600	2600	52.52	2.23	2.19
HL5200	5200	35.64	4.67	2.55
BL5200	5200	48.64	5.51	2.62
HL5400	5400	36.44	4.87	2.53
BL5400	5400	46.52	5.77	2.59
HL5600	5600	36.66	5.17	2.64
BL5600	5600	46.79	5.77	2.73
HL5800	5800	35.31	5.31	2.72
BL5800	5800	47.04	6.10	2.81

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5.4 ISOTROPY**HL900 MHz**

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

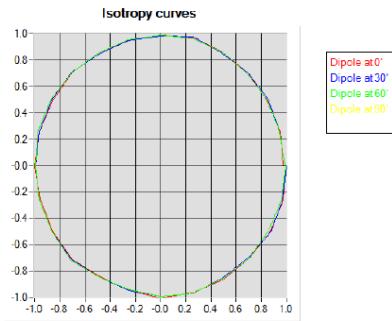**HL1800 MHz**

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

