

FCC TEST REPORT

FOR

Acer India Pvt Ltd.

Tablet PC

Test Model: Acer One 7

List Model No.: /

Prepared for : Acer India Pvt Ltd.
Address : Embassy Heights” 6th Floor, No.13, Magrath Road, (Next to Hosmat Hospital) Bangalore, 560025, India

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330

Fax : (+86)755-82591332

Web : www.LCS-cert.com

Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Jun 12, 2017

Number of tested samples : 1

Serial number : A17061229

Date of Test : Jun 12, 2017~Jul 07, 2017

Date of Report : Jul 07, 2017

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247)****Report Reference No. : LCS170612038AE**

Date of Issue : Jul 07, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name..... : Acer India Pvt Ltd.**Address : Embassy Heights" 6th Floor, No.13, Magrath Road, (Next to
Hosmat Hospital) Bangalore, 560025, India**Test Specification**

Standard : FCC CFR 47 PART 15 C(15.247) / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Tablet PC


Trade Mark..... : Acer

Test Model : Acer One 7

: DC 3.80V by Li-ion Battery(3500mAh)

Ratings Recharged by DC 5V/1500mA Adapter


Adapter Input : 100~240VAC, 50/60Hz, 0.3A

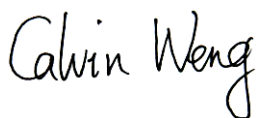Result : Positive**Compiled by:**


Calvin Weng/ Administrators

Supervised by:


Glin Lu/ Technique principal

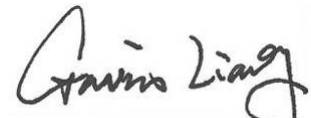Approved by:


Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|--|--------------------------------------|
| Test Report No. : LCS170612038AE | <u>Jul 07, 2017</u> Date of issue |
|--|--------------------------------------|

| | |
|--------------------------|--|
| Test Model..... | : Acer One 7 |
| EUT..... | : Tablet PC |
| Applicant..... | : Acer India Pvt Ltd. |
| Address..... | : Embassy Heights” 6th Floor, No.13, Magrath Road, (Next to Hosmat Hospital) Bangalore, 560025, India |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : Yuko Technology Co.,Limited |
| Address..... | : 6 TH floor, Building A9, Tianrui Industrial Park, Fuyuan 1st road, Fuyong, Shenzhen, China. |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : Yuko Technology Co.,Limited |
| Address..... | : 6 TH floor, Building A9, Tianrui Industrial Park, Fuyuan 1st road, Fuyong, Shenzhen, China. |
| Telephone..... | : / |
| Fax..... | : / |

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|--------------|---------------|-------------|
| 000 | Jul 07, 2017 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1 Description of Device (EUT) | 6 |
| 1.2 Support Equipment List | 7 |
| 1.3 External I/O | 7 |
| 1.4 Description of Test Facility | 7 |
| 1.5 Statement of the Measurement Uncertainty | 7 |
| 1.6 Internal Identification of AE used during the test | 7 |
| 1.7 Measurement Uncertainty | 8 |
| 1.8 Description of Test Modes | 8 |
| 1.9 List of Measuring Equipment | 9 |
| 2. TEST METHODOLOGY | 10 |
| 2.1 EUT Configuration | 10 |
| 2.2 EUT Exercise | 10 |
| 2.3 General Test Procedures | 10 |
| 3. SYSTEM TEST CONFIGURATION | 11 |
| 3.1 Justification | 11 |
| 3.2 EUT Exercise Software | 11 |
| 3.3 Special Accessories | 11 |
| 3.4 Block Diagram/Schematics | 11 |
| 3.5 Equipment Modifications | 11 |
| 3.6 Test Setup | 11 |
| 4. SUMMARY OF TEST RESULTS | 12 |
| 5. ANTENNA PORT MEASUREMENT | 13 |
| 5.1 Conducted Peak Output Power | 13 |
| 5.2 Frequency Separation and 20 dB Bandwidth | 15 |
| 5.3 Number of Hopping Frequency | 21 |
| 5.4 Time of Occupancy (Dwell Time) | 23 |
| 5.5 Conducted Spurious Emissions | 27 |
| 6. RADIATED MEASUREMENT | 34 |
| 7. AC POWER LINE CONDUCTED EMISSIONS | 43 |
| 7.1 Standard Applicable | 43 |
| 7.2 Block Diagram of Test Setup | 43 |
| 7.3 Test Results | 43 |
| 8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS | 45 |
| 8.1 Standard Applicable | 45 |
| 8.2 Block Diagram of Test Setup | 45 |
| 8.3 Measuring Instruments and Setting | 45 |
| 8.4. Test Procedures | 45 |
| 8.5. Test Results | 46 |
| 9. ANTENNA REQUIREMENT | 49 |
| 9.1 Standard Applicable | 49 |
| 9.2 Antenna Connected Construction | 49 |
| 10. TEST SETUP PHOTOGRAPHS OF EUT | 51 |
| 11. EXTERIOR PHOTOGRAPHS OF THE EUT | 52 |
| 12. INTERIOR PHOTOGRAPHS OF THE EUT | 53 |

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

The **Acer India Pvt Ltd.**'s Model: Acer One 7 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| | |
|--|---|
| Name of EUT | Tablet PC |
| Model Number | Acer One 7 |
| Modulation Type | GMSK for GSM/GPRS, 8-PSK for EDGE,QPSK for UMTS |
| Antenna Type | PIFA Antenna |
| Antenna Gain | 1.0dBi (max.) For GSM 850; 1.0dBi (max.) For GSM 900; 1.0dBi (max.) For DCS 1800; 1.0dBi (max.) For PCS 1900; 1.0dBi (max.) For WCDMA Band II/Band V -1.0dBi (max.) For BT and WLAN |
| UMTS Operation Frequency Band | Device supported UMTS FDD Band II/V |
| WLAN FCC Operation frequency | IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz |
| BT FCC Operation frequency | 2402MHz-2480MHz |
| HSDPA Release Version | Release 6 |
| HSUPA Release Version | Release 6 |
| DC-HSUPA Release Version | Not Supported |
| WCDMA Release Version | R99 |
| LTE Release Version | R9 |
| LTE Operation Frequency Band | Not Supported |
| WLAN FCC Modulation Type | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| BT Modulation Type | GFSK,8DPSK, $\pi/4$ DQPSK(BT V4.0) |
| Hardware version | E706J_V1_20170513 |
| Software version | E706J_V1 |
| Android version | Android 6.0 |
| GPS function | Support and only RX |
| NFC Function | Not Support |
| WLAN | Supported 802.11b/g/n20/n40 |
| Bluetooth | Supported BT V4.0 |
| GSM/EDGE/GPRS | Supported GSM/GPRS/EDGE |
| GSM/EDGE/GPRS Power Class | GSM850:Power Class 4/ PCS1900:Power Class 1 |
| UMTS Power Class | Level 3 |
| GSM/EDGE/GPRS Operation Frequency | GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz |
| GSM/EDGE/GPRS Operation Frequency Band | GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900 |
| GSM Release Version | R99 |
| GPRS/EDGE Multislot Class | GPRS/EDGE: Multi-slot Class 12 |
| Extreme temp. Tolerance | -30°C to +50°C |
| Extreme vol. Limits | 3.40VDC to 4.20VDC (nominal: 3.80VDC) |
| GPRS operation mode | Class B |

1.2 Support Equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--|---------------|----------------|---------------|-------------|
| ShenZhen XinChenMing Technology CO.,LTD. | Power Adapter | XCM06-0515UB02 | --- | FCC VoC |

1.3 External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-----------------------|
| Earphone Port | 1 | 1.0m |
| USB Port | 1 | 1.0m unshielded cable |

1.4 Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10: 2013, CISPR 22/EN 55022 and CISPR16-1-4 SVSWR requirements.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Internal Identification of AE used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version |
|---------|-----------------|-------------------|------------|
| EUT1 | 865698890199471 | E706J_V1_20170513 | E706J_V1 |
| EUT3 | 865698890447169 | E706J_V1_20170513 | E706J_V1 |

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to radiated test with the EUT1, and conducted power with the EUT3;

| AE ID* | Description |
|--------|-------------|
| AE1 | Adapter |

AE1

Model: XCM06-0515UB02

INPUT: AC100-240V 50/60Hz

OUTPUT: DC 5.0V/1500mA

*AE ID: is used to identify the test sample in the lab internally.

1.7 Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty | 9KHz~30MHz | 3.10dB | (1) |
| | 30MHz~200MHz | 2.96dB | (1) |
| | 200MHz~1000MHz | 3.10dB | (1) |
| | 1GHz~26.5GHz | 3.80dB | (1) |
| | 26.5GHz~40GHz | 3.90dB | (1) |
| Conduction Uncertainty | 150kHz~30MHz | 1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | 1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8 Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a $\pi/4$ -DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The following operating modes were applied for the related test items. For radiated measurement, the test was performed with EUT in X, Y, Z position and the worst case was found when EUT in Y position. All test modes were tested, only the result of the worst case was recorded in the report.

| Mode of Operations | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| GFSK | 2402 | 1 |
| | 2441 | 1 |
| | 2480 | 1 |
| Pi/4 DQPSK | 2402 | 2 |
| | 2441 | 2 |
| | 2480 | 2 |
| 8-DPSK | 2402 | 3 |
| | 2441 | 3 |
| | 2480 | 3 |
| For Conducted Emission | | |
| Test Mode | TX Mode | |
| For Radiated Emission | | |
| Test Mode | TX Mode | |

For pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

AC conducted emission pre-test at both at power adapter and power from PC modes, recorded worst case;

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be TX Mode (1Mbps-Hopping).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be TX-High Channel Mode(1Mbps).

***Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

1. 9 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristic | Cal Date | Due Date |
|-------------------------------|----------------|----------------------------------|--------------|----------------|--------------|--------------|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9kHz – | Jun 18, 2017 | Jun 17, 2018 |
| Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 9kHz~40GHz | Jul 16, 2016 | Jul 15, 2017 |
| LISN | MESS Tec | NNB-2/16Z | 99079 | 9KHz-30MHz | Jun 18, 2017 | Jun 17, 2018 |
| LISN | EMCO | 3819/2NM | 9703-1839 | 9KHz-30MHz | Jun 18, 2017 | Jun 17, 2018 |
| RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 9KHz-30MHz | Jun 18, 2017 | Jun 17, 2018 |
| ISN | SCHAFFNER | ISN ST08 | 21653 | 9KHz-30MHz | Jun 18, 2017 | Jun 17, 2018 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30M-18GHz | Jun 18, 2017 | Jun 17, 2018 |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 9kHz-2GHz | Apr 18, 2017 | Apr 17, 2018 |
| Amplifier | Agilent | 8449B | 3008A021 | 1GHz-26.5GH | Apr 18, 2017 | Apr 17, 2018 |
| Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 26.5GHz-40G | Apr 18, 2017 | Apr 17, 2018 |
| Loop Antenna | R&S | HFH2-Z2 | 860004/00 | 9k-30MHz | Apr 18, 2017 | Apr 17, 2018 |
| By-log Antenna | SCHWARZBEC | VULB9163 | 9163-470 | 30MHz-1GHz | Apr 18, 2017 | Apr 17, 2018 |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz-18GHz | Apr 18, 2017 | Apr 17, 2018 |
| Horn Antenna | SCHWARZBEC | BBHA9170 | BBHA9170 | 15GHz-40GH | Apr 18, 2017 | Apr 17, 2018 |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz-1GHz | Jun 18, 2017 | Jun 17, 2018 |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-H | 1GHz-40GHz | Jun 18, 2017 | Jun 17, 2018 |
| Power Meter | R&S | NRVS | 100444 | DC-40GHz | Jun 18, 2017 | Jun 17, 2018 |
| Power Sensor | R&S | NRV-Z81 | 100458 | DC-30GHz | Jun 18, 2017 | Jun 17, 2018 |
| Power Sensor | R&S | NRV-Z32 | 10057 | 30MHz-6GHz | Jun 18, 2017 | Jun 17, 2018 |
| AC Power Source | HPC | HPA-500E | HPA-9100 | AC 0~300V | Jun 18, 2017 | Jun 17, 2018 |
| DC power Source | GW | GPC-6030D | C671845 | DC 1V-60V | Jun 18, 2017 | Jun 17, 2018 |
| RF CABLE-1m | JYE Bao | RG142 | CB034-1m | 20MHz-7GHz | Jun 18, 2017 | Jun 17, 2018 |
| RF CABLE-2m | JYE Bao | RG142 | CB035-2m | 20MHz-1GHz | Jun 18, 2017 | Jun 17, 2018 |
| Signal Generator | R&S | SMR40 | 10016 | 10MHz~40GH | Jul 16, 2016 | Jul 15, 2017 |
| Universal Radio Communication | R&S | CMU200 | 112012 | N/A | Oct 27, 2016 | Oct 26, 2017 |
| Wideband Radio Communication | R&S | CMW500 | 1201.0002K50 | N/A | Nov 19, 2016 | Nov 18, 2017 |
| PSG Analog Signal Generator | Agilent | N8257D | MY46520521 | 250KHz~20G Hz | Nov 19, 2016 | Nov 18, 2017 |
| MXA Signal Analyzer | Agilent | N9020A | MY50510140 | 10Hz~26.5GHz | Oct 27, 2016 | Oct 26, 2017 |
| RF Control Unit | Tonscend | JS0806-1 | / | / | Nov 19, 2016 | Nov 18, 2017 |
| LTE Test Software | Tonscend | JS1120-1 | / | Version: | N/A | N/A |
| Test Software | Ascentest | AT890-SW | 20141230 | Version: | N/A | N/A |
| Splitter/Combiner(Qty: 2) | Mini-Circuits | ZAPD-50W 4.2-6.0 GHz | NN256400424 | / | Oct 27, 2016 | Oct 26, 2017 |
| Splitter/Combine(Qty: 2) | MCLI | PS3-7 | 4463/4464 | / | Oct 27, 2016 | Oct 26, 2017 |
| ATT (Qty: 1) | Mini-Circuits | VAT-30+ | 30912 | / | Oct 27, 2016 | Oct 26, 2017 |
| EMC Test Software | Audix | E3 | / | / | / | / |

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition by engineer code (**#3646633#**) enter engineer mode provided by application.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/ unshielded | Notes |
|-----|---------------|--------------|-----------|------------|--------|-------------------------|-------|
| 1 | PC | Lenovo | Ideapad | A131101550 | / | / | DOC |
| 2 | Power adapter | Lenovo | CPA-A090 | 36200414 | 1.00m | unshielded | DOC |

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.


4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b)(1) | Maximum Conducted Output Power | Compliant |
| §15.247(a)(1) | Frequency Separation And 20 dB Bandwidth | Compliant |
| §15.247(a)(1)(iii) | Number Of Hopping Frequency | Compliant |
| §15.247(a)(1)(iii) | Time Of Occupancy (Dwell Time) | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Line Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |

5. ANTENNA PORT MEASUREMENT

5.1 Conducted Peak Output Power

5.1.1 Block Diagram of Test Setup

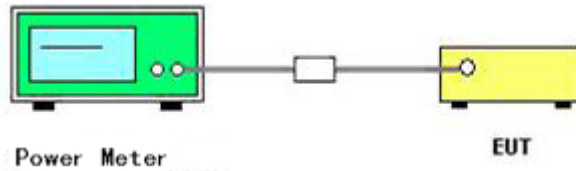

5.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.1.3 Test Procedure

The transmitter output is connected to the Power Meter.
According to ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices; this is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the power meter, through suitable attenuation. The hopping shall be disabled for this test:

5.1.4 Test Results

| | | | |
|---------------|--------------|----------------|-------|
| Temperature | 24.2°C | Humidity | 35.7% |
| Test Engineer | Riordon Yang | Configurations | BT |

| Test Mode | Channel | Frequency (MHz) | Measured Maximum Power (dBm) | | Limits (dBm) | Verdict |
|---------------|---------|-----------------|------------------------------|---------|--------------|---------|
| | | | Peak | Average | | |
| GFSK | 0 | 2402 | -1.96 | -2.55 | 30.00 | PASS |
| | 39 | 2441 | -1.67 | -2.14 | | |
| | 78 | 2480 | -1.11 | -1.62 | | |
| $\pi/4$ DQPSK | 0 | 2402 | -2.44 | -4.82 | 21.00 | PASS |
| | 39 | 2441 | -2.21 | -4.77 | | |
| | 78 | 2480 | -1.67 | -4.21 | | |
| 8DPSK | 0 | 2402 | -2.28 | -4.79 | 21.00 | PASS |
| | 39 | 2441 | -1.99 | -4.73 | | |
| | 78 | 2480 | -1.47 | -4.11 | | |

Remark:


1. Test results including cable loss;
2. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, $\pi/4$ DQPSK, 8DPSK modulation type;
4. Average power is for report only;

5.2 Frequency Separation and 20 dB Bandwidth

5.2.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2.2 Block Diagram of Test Setup

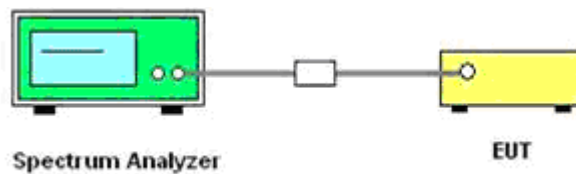

5.2.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set to the maximum power setting and enable the EUT transmit continuously.
- D. For carrier frequency separation measurement, use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW / VBW=100 KHz/ 300KHz; Sweep = auto; Detector function = peak;
Trace = max hold.
- E. For 20dB bandwidth measurement, use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW/VBW=30 KHz/ 100KHz; Sweep = auto; Detector function = peak;
Trace = max hold.

5.2.4 Test Results

5.2.4.1 20dB Bandwidth

| Test Mode | Channel | Frequency (MHz) | Measured Bandwidth (KHz) | | Limits (KHz) | Verdict |
|-----------|---------|-----------------|--------------------------|---------|--------------|---------|
| | | | 99% | 20dB | | |
| GFSK | 0 | 2402 | 831.07 | 827.70 | No Limits | PASS |
| | 39 | 2441 | 829.52 | 826.20 | | |
| | 78 | 2480 | 828.55 | 828.20 | | |
| π/4DQPSK | 0 | 2402 | 1063.60 | 1118.00 | No Limits | PASS |
| | 39 | 2441 | 1062.60 | 1113.00 | | |
| | 78 | 2480 | 1064.00 | 1119.00 | | |
| 8DPSK | 0 | 2402 | 1102.60 | 1164.00 | No Limits | PASS |
| | 39 | 2441 | 1101.90 | 1164.00 | | |
| | 78 | 2480 | 1101.90 | 1166.00 | | |

Remark:

1. *Test results including cable loss;*
2. *Measured 99% and 20dB Bandwidth at difference Packet Type for each mode and recorded worst case for each mode.*
3. *Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ DQPSK, 3DH5 for 8DPSK modulation type;*
4. *Please refer following test plots;*

20dB Bandwidth and 99% Bandwidth

GFSK



π /4DQPSK




Channel 0 / 2402 MHz




Channel 0 / 2402 MHz



Channel 39 / 2441 MHz

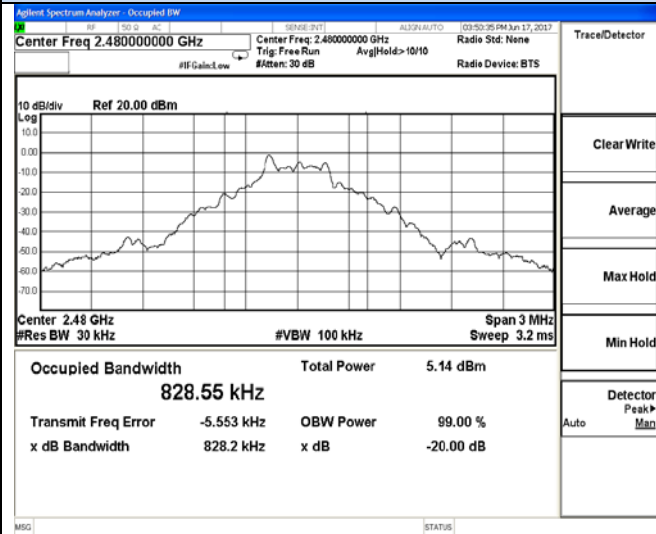


Channel 39 / 2441 MHz

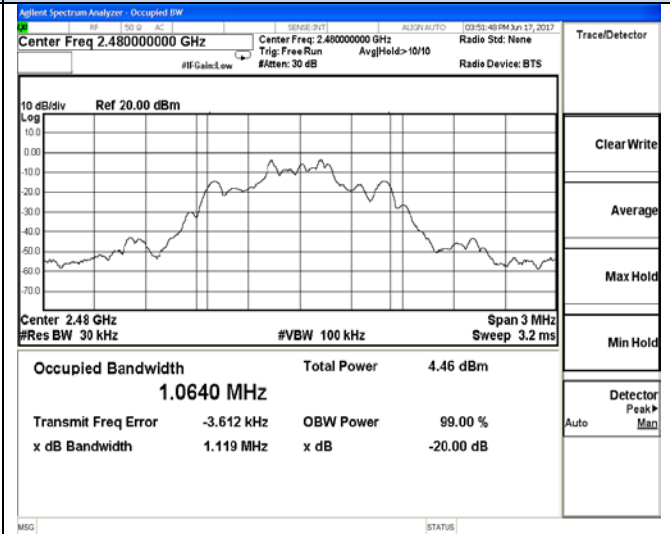

Channel 78 / 2480 MHz



Channel 78 / 2480 MHz



20dB Bandwidth and 99% Bandwidth


8DPSK



Channel 0 / 2402 MHz



Channel 39 / 2441 MHz

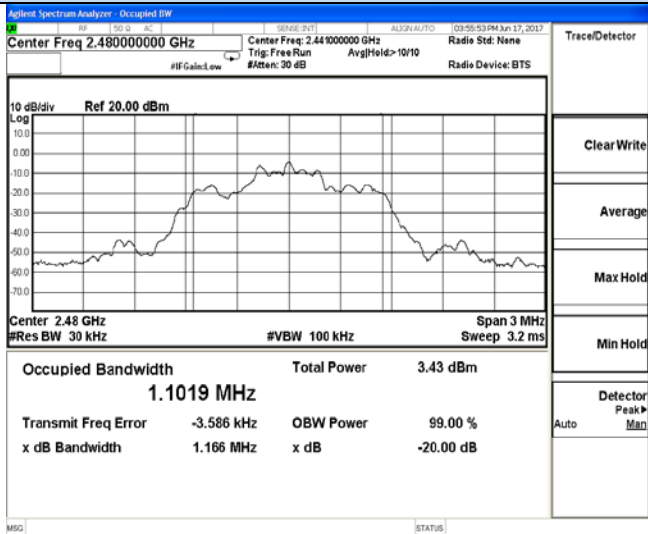

Channel 78 / 2480 MHz

5.2.4.2 Frequency Separation


| The Measurement Result With 1Mbps For GFSK Modulation | | | | |
|---|----------------------|--------------------------|-------------|--------|
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 827.70 | 1.000 | 827.70 | Pass |
| Middle | 826.20 | | 826.20 | Pass |
| High | 828.20 | | 828.20 | Pass |
| The Measurement Result With 2Mbps For $\pi/4$ -DQPSK Modulation | | | | |
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 1118.00 | 1.000 | 745.33 | Pass |
| Middle | 1113.00 | | 742.00 | Pass |
| High | 1119.00 | | 746.00 | Pass |
| The Measurement Result With 3Mbps For 8-DPSK Modulation | | | | |
| Channel | 20dB Bandwidth (KHz) | Channel Separation (MHz) | Limit (KHz) | Result |
| Low | 1164.00 | 1.000 | 776.00 | Pass |
| Middle | 1164.00 | | 776.00 | Pass |
| High | 1166.00 | | 777.33 | Pass |

Remark:


1. Test results including cable loss;
2. Please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ -DQPSK, 3DH5 for 8DPSK modulation type;
5. We measured low, middle and high channels, recorded worst case at middle channel;

Frequency Separation

GFSK

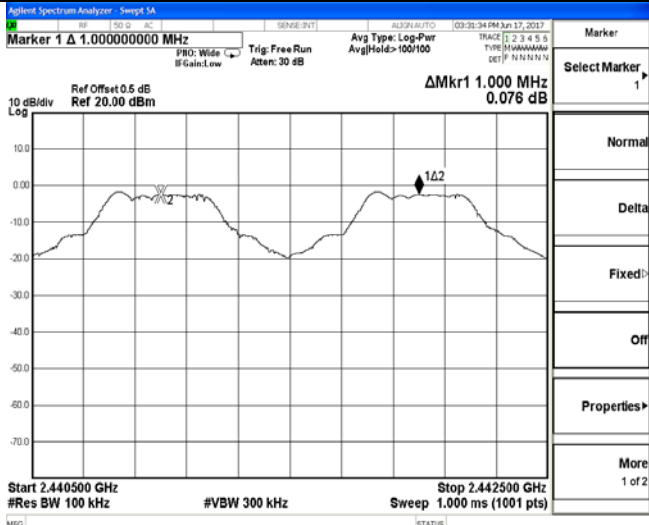


π /4DQPSK

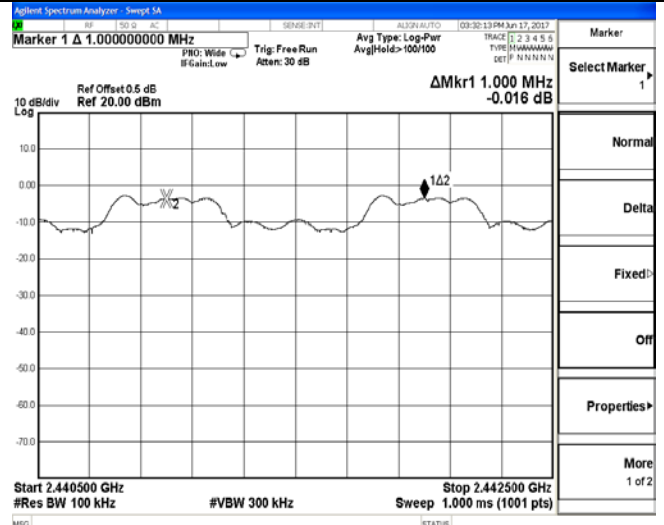

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

8DPSK

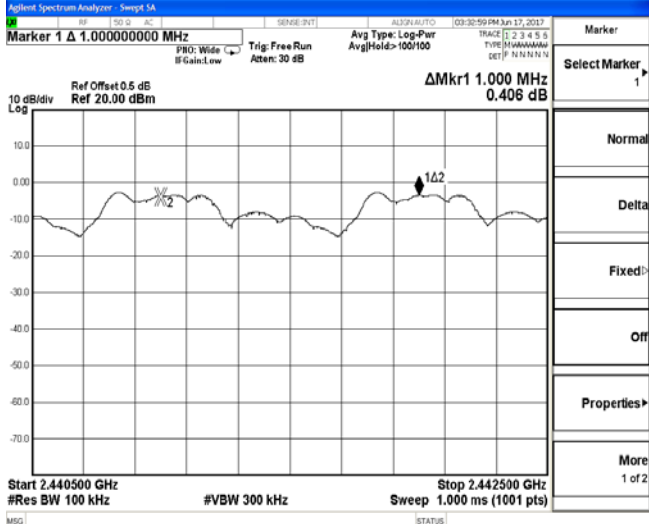


Channel 39 / 2441 MHz

5.3 Number of Hopping Frequency

5.3.1 Limit

According to §15.247(a) (1) (iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.3.2 Block Diagram of Test Setup

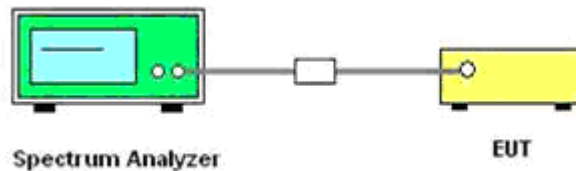

5.3.3 Test Procedure


- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz.
- E. Max hold, view and count how many channel in the band.

5.3.4 Test Results

| Test Mode | Measurement Result (No. of Channels) | Limit (No. of Channels) | Result |
|---------------|---|----------------------------|--------|
| GFSK | 79 | ≥15 | PASS |
| $\pi/4$ DQPSK | 79 | ≥15 | PASS |
| 8DPSK | 79 | ≥15 | PASS |

Remark:

1. Test results including cable loss;
2. Measured number of hopping channels at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ DQPSK, 3DH5 for 8DPSK modulation type;
4. Record test plots only for GFSK;
5. Please refer following test plots;

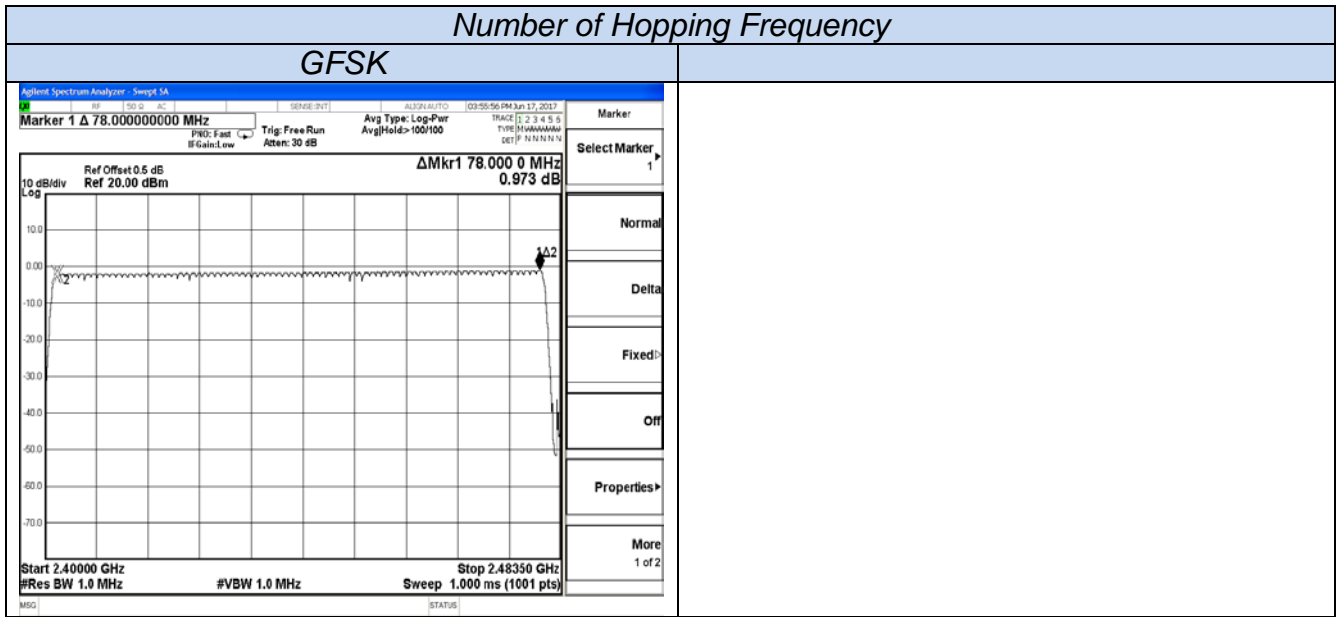


5.4 Time of Occupancy (Dwell Time)

5.4.1 Limit

According to §15.247(a) (1) (iii), frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

5.4.2 Block Diagram of Test Setup

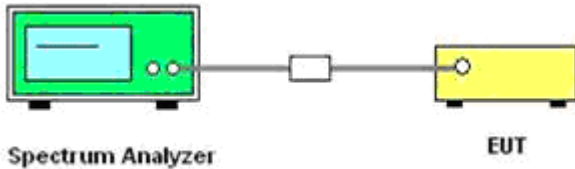

5.4.3 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

5.4.4 Test Results

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4[s]*hopping\ number=0.4[s]*79[ch]=31.6[s*ch]$;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6=266.67\ [ch*hop/s]$

The hops per second on one channel: $266.67\ [ch*hops/s]/79\ [ch]=3.38\ [hop/s]$;

The total hops for all channels within the dwell time calculation duration: $3.38\ [hop/s]*31.6[s*ch]=106.67\ [hop*ch]$;



The dwell time for all channels hopping: $106.67\ [hop*ch]*Burst\ Width\ [ms/hop/ch]$.

| Mode | Frequency (MHz) | Burst Type | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Verdict |
|-----------|-----------------|------------|------------------|----------------|-----------|---------|
| GFSK | 2441 | DH1 | 0.3655 | 0.117 | 0.4 | PASS |
| | | DH3 | 1.622 | 0.260 | 0.4 | PASS |
| | | DH5 | 2.870 | 0.306 | 0.4 | PASS |
| π/4-DQPSK | 2441 | 2DH1 | 0.3695 | 0.118 | 0.4 | PASS |
| | | 2DH3 | 1.622 | 0.260 | 0.4 | PASS |
| | | 2DH5 | 2.873 | 0.306 | 0.4 | PASS |
| 8DPSK | 2441 | 3DH1 | 0.3735 | 0.120 | 0.4 | PASS |
| | | 3DH3 | 1.620 | 0.259 | 0.4 | PASS |
| | | 3DH5 | 2.869 | 0.306 | 0.4 | PASS |



Remark:

1. *Test results including cable loss;*
2. *Please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded worst case for each mode.*
4. *Dwell Time Calculate formula:*
DH1: Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second
DH3: Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second
DH5: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second
5. *Measured at low, middle and high channel, recorded worst at middle channel;*



Dwell time

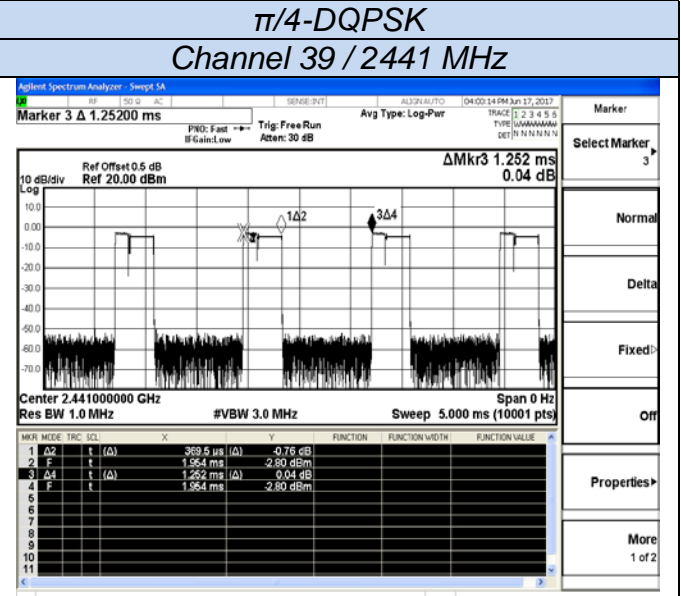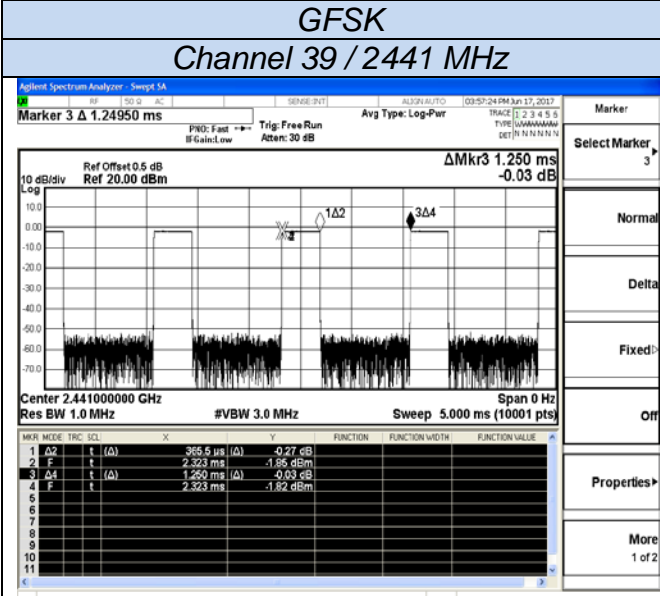



DH1

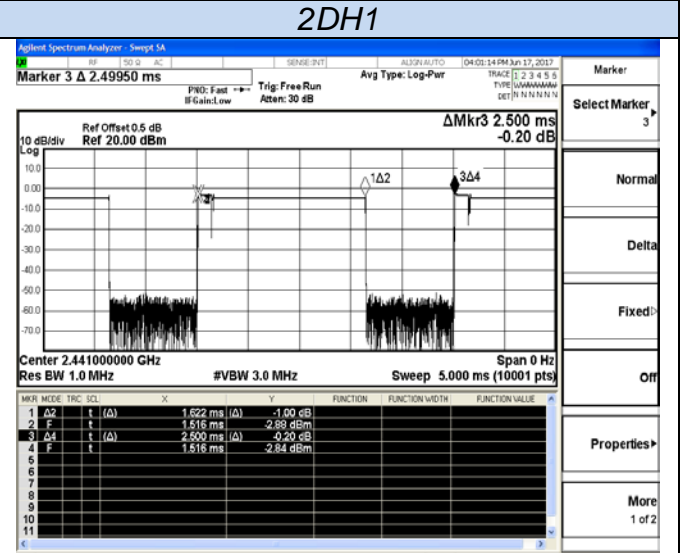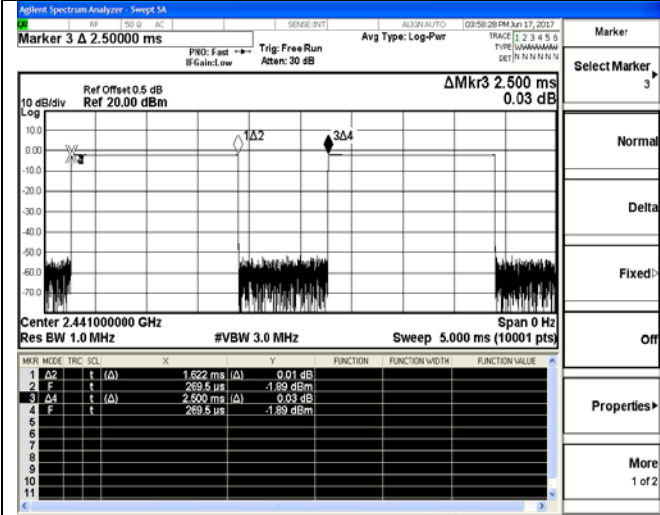

DH3

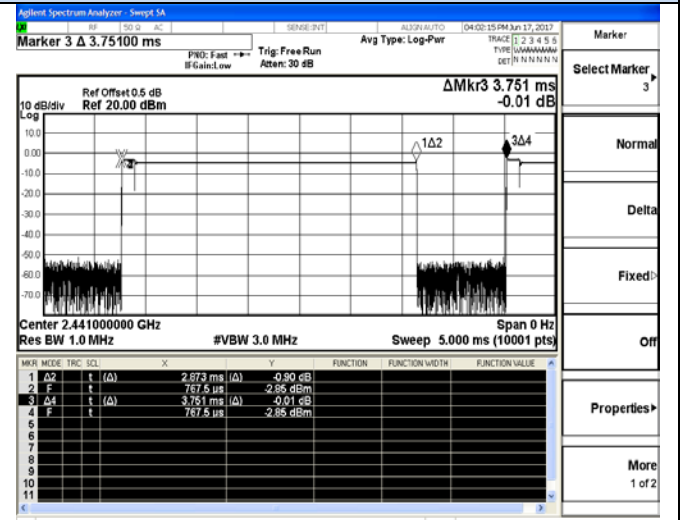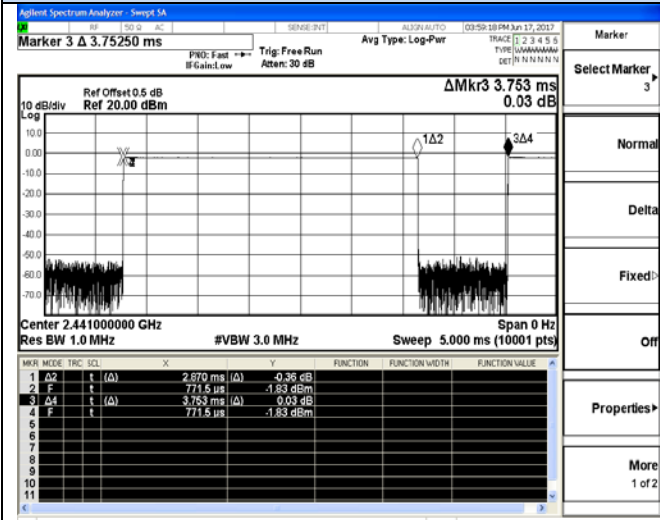

DH5




| Dwell time | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------|------|--------------|---------------|-----------|----------|----------------|----------------|----------------|---|------------|---|--------------|---------------|----------|--|--|--|---|---|---|--|---------------|-----------|--|--|--|---|------------|---|--------------|----------|----------|--|--|--|---|---|---|--|---------------|-----------|--|--|--|--|
| <p>8DPSK</p> <p>Channel 39 / 2441 MHz</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 3 Δ 1.25200 ms</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>ΔMkr3 1.252 ms 0.03 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts) Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>t</td> <td>(Δ)</td> <td>373.5 μs</td> <td>0.01 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td></td> <td>2.149 ms</td> <td>-2.80 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(Δ)</td> <td>1.252 ms</td> <td>0.03 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td></td> <td>2.149 ms</td> <td>-2.80 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ 2 | t | (Δ) | 373.5 μ s | 0.01 dB | | | | 2 | F | t | | 2.149 ms | -2.80 dBm | | | | 3 | Δ 4 | t | (Δ) | 1.252 ms | 0.03 dB | | | | 4 | F | t | | 2.149 ms | -2.80 dBm | | | | <p>Marker</p> <p>Select Marker 3</p> <p>Normal</p> <p>Delta</p> <p>Fixed</p> <p>Off</p> <p>Properties</p> <p>More 1 of 2</p> |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ 2 | t | (Δ) | 373.5 μ s | 0.01 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | t | | 2.149 ms | -2.80 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Δ 4 | t | (Δ) | 1.252 ms | 0.03 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | F | t | | 2.149 ms | -2.80 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>3DH1</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 3 Δ 2.49950 ms</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>ΔMkr3 2.500 ms -0.44 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts) Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>t</td> <td>(Δ)</td> <td>1.620 ms</td> <td>-0.07 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td></td> <td>1.444 ms</td> <td>-3.09 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(Δ)</td> <td>2.500 ms</td> <td>-0.44 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td></td> <td>1.444 ms</td> <td>-2.83 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ 2 | t | (Δ) | 1.620 ms | -0.07 dB | | | | 2 | F | t | | 1.444 ms | -3.09 dBm | | | | 3 | Δ 4 | t | (Δ) | 2.500 ms | -0.44 dB | | | | 4 | F | t | | 1.444 ms | -2.83 dBm | | | | <p>Marker</p> <p>Select Marker 3</p> <p>Normal</p> <p>Delta</p> <p>Fixed</p> <p>Off</p> <p>Properties</p> <p>More 1 of 2</p> |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ 2 | t | (Δ) | 1.620 ms | -0.07 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | t | | 1.444 ms | -3.09 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Δ 4 | t | (Δ) | 2.500 ms | -0.44 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | F | t | | 1.444 ms | -2.83 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>3DH3</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 3 Δ 3.74950 ms</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>ΔMkr3 3.750 ms -0.18 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts) Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>t</td> <td>(Δ)</td> <td>2.889 ms</td> <td>-0.38 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td></td> <td>638.0 μs</td> <td>-2.97 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(Δ)</td> <td>3.750 ms</td> <td>-0.18 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td></td> <td>638.0 μs</td> <td>-2.87 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ 2 | t | (Δ) | 2.889 ms | -0.38 dB | | | | 2 | F | t | | 638.0 μ s | -2.97 dBm | | | | 3 | Δ 4 | t | (Δ) | 3.750 ms | -0.18 dB | | | | 4 | F | t | | 638.0 μ s | -2.87 dBm | | | | <p>Marker</p> <p>Select Marker 3</p> <p>Normal</p> <p>Delta</p> <p>Fixed</p> <p>Off</p> <p>Properties</p> <p>More 1 of 2</p> |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ 2 | t | (Δ) | 2.889 ms | -0.38 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | t | | 638.0 μ s | -2.97 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Δ 4 | t | (Δ) | 3.750 ms | -0.18 dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | F | t | | 638.0 μ s | -2.87 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>3DH5</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

5.5 Conducted Spurious Emissions

5.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.2 Block Diagram of Test Setup

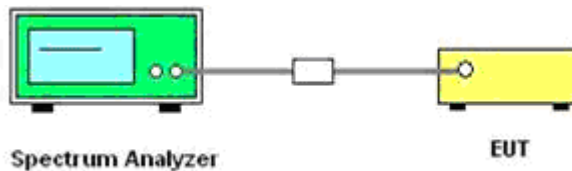

5.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9 KHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

5.5.4 Test Results of Conducted Spurious Emissions



No non-compliance noted. Only record the worst test result (TX-GFSK) in this report. The test data refer to the following page.

| Test Mode | Channel | Frequency (MHz) | Spurious RF Conducted Emission (dBc) | Limits (dBc) | Verdict |
|-----------|---------|-----------------|--------------------------------------|--------------|---------|
| GFSK | 0 | 2402 | <-20 | -20 | PASS |
| | 39 | 2441 | <-20 | | |
| | 78 | 2480 | <-20 | | |
| π/4-DQPSK | 0 | 2402 | <-20 | -20 | PASS |
| | 39 | 2441 | <-20 | | |
| | 78 | 2480 | <-20 | | |
| 8DPSK | 0 | 2402 | <-20 | -20 | PASS |
| | 39 | 2441 | <-20 | | |
| | 78 | 2480 | <-20 | | |

Remark:

1. *Test results including cable loss;*
2. *Please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded worst case for each mode.*
4. *Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ -DQPSK, 3DH5 for 8DPSK modulation type;*



RF Conducted Spurious Emissions GFSK – Channel 0 / 2402 MHz

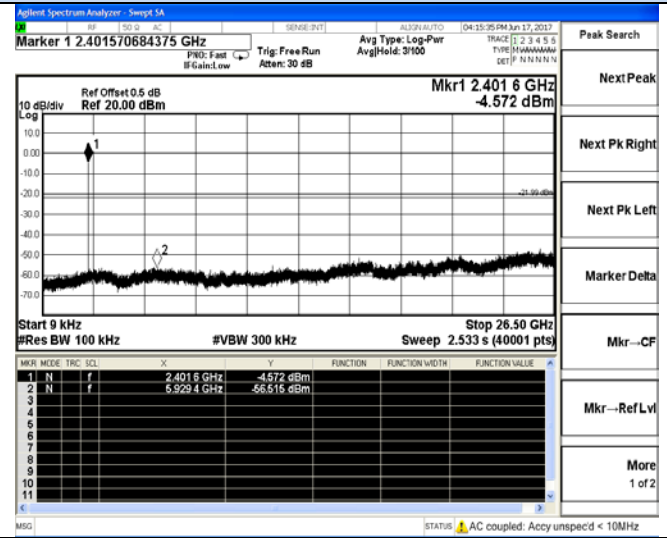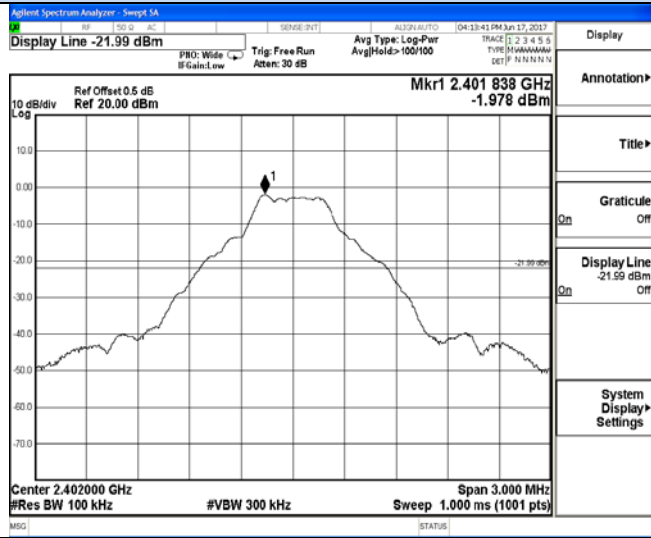

2399.5 MHz – 2404.5 MHz

9 KHz – 26.5 GHz



GFSK – Channel 39 / 2441 MHz

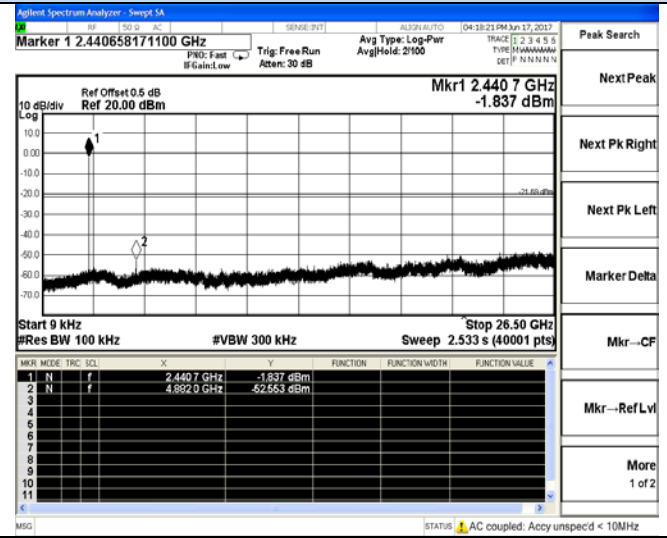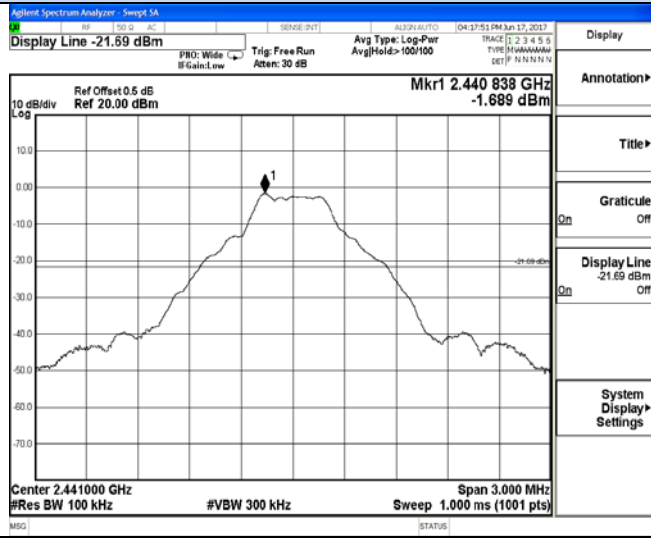

2438.5 MHz – 2443.5 MHz

9 KHz – 26.5 GHz



GFSK – Channel 78 / 2480 MHz

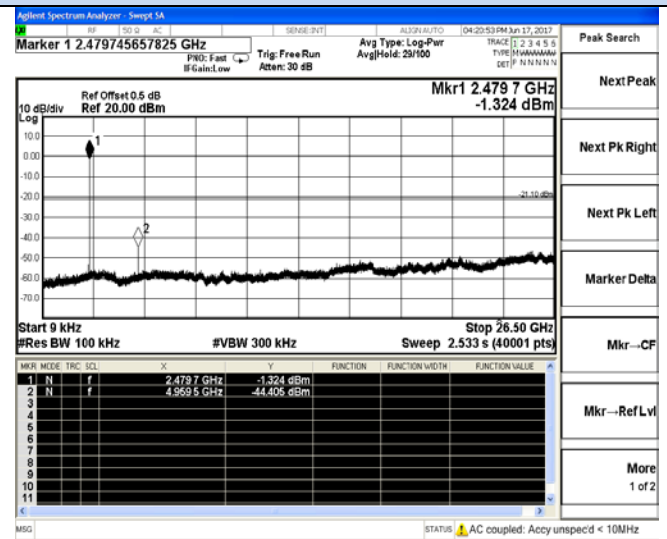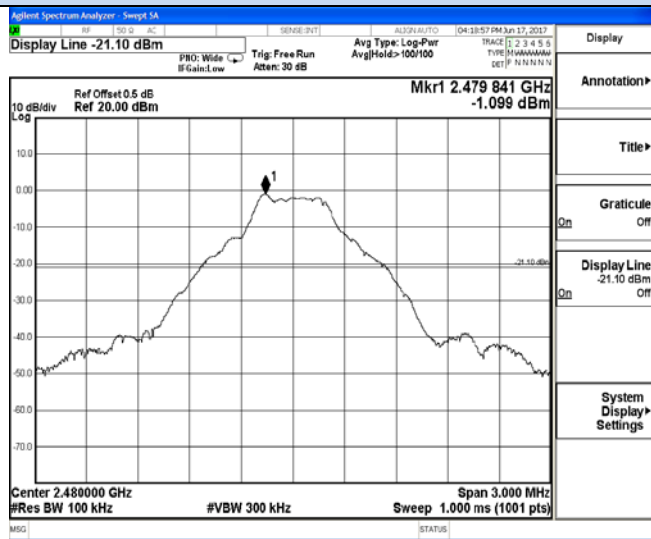

2477.5 MHz – 2482.5 MHz

9 KHz – 26.5 GHz



RF Conducted Spurious Emissions
 $\pi/4$ -DQPSK – Channel 0 / 2402 MHz

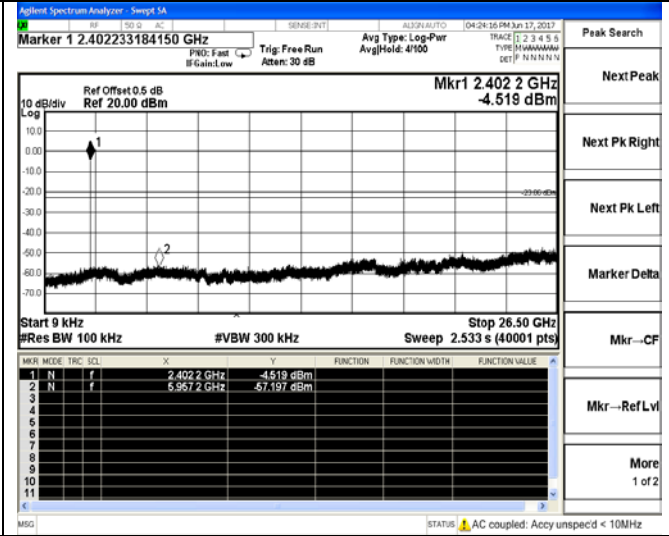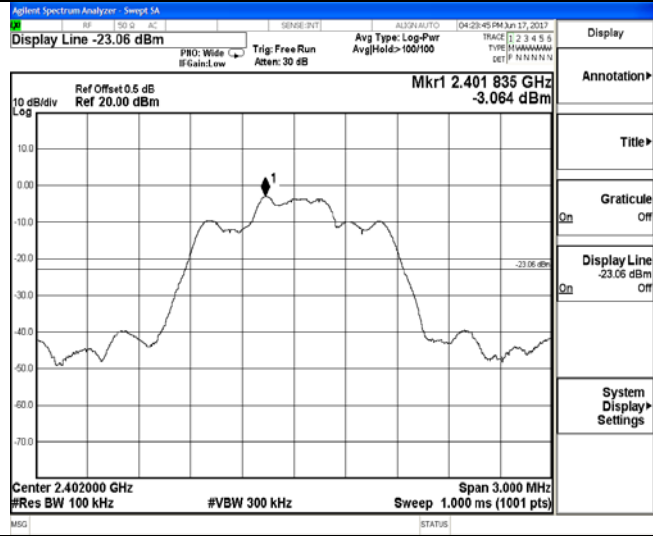

2399.5 MHz – 2404.5 MHz

9 KHz – 26.5 GHz



$\pi/4$ -DQPSK – Channel 39 / 2441 MHz

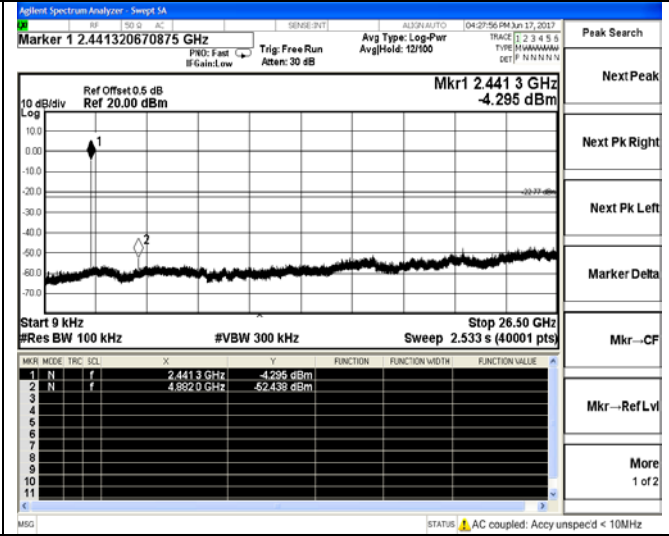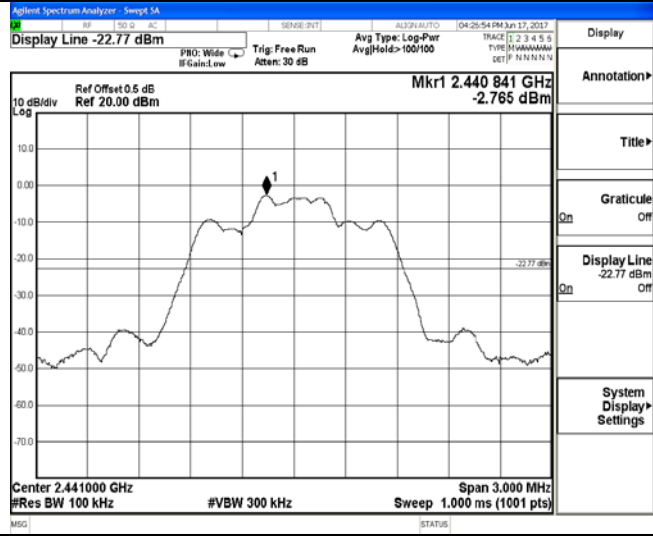

2438.5 MHz – 2443.5 MHz

9 KHz – 26.5 GHz



$\pi/4$ -DQPSK – Channel 78 / 2480 MHz

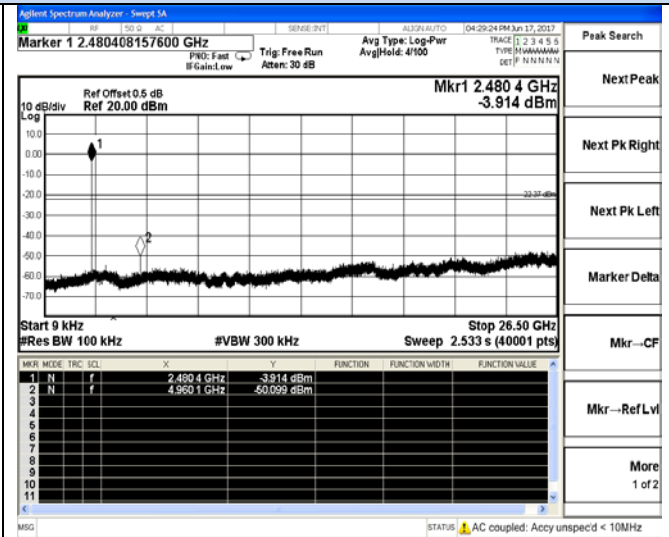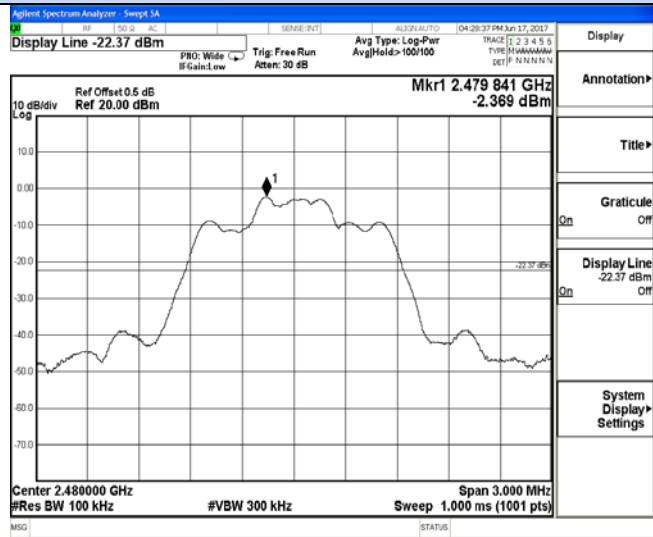

2477.5 MHz – 2482.5 MHz

9 KHz – 26.5 GHz



RF Conducted Spurious Emissions 8DPSK – Channel 0 / 2402 MHz

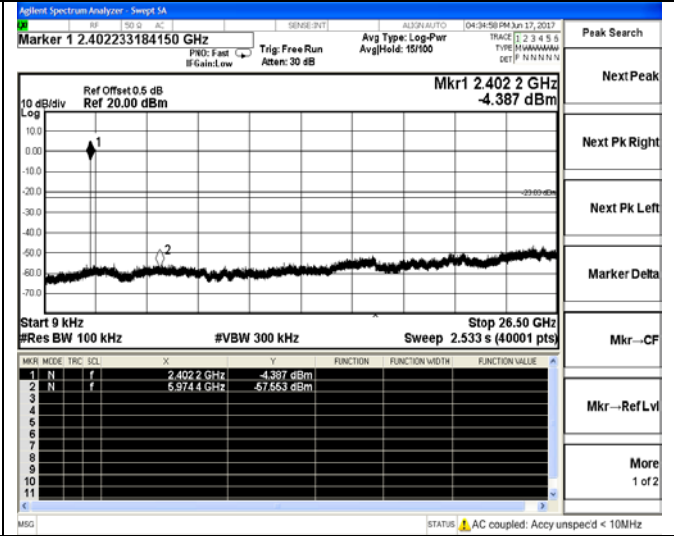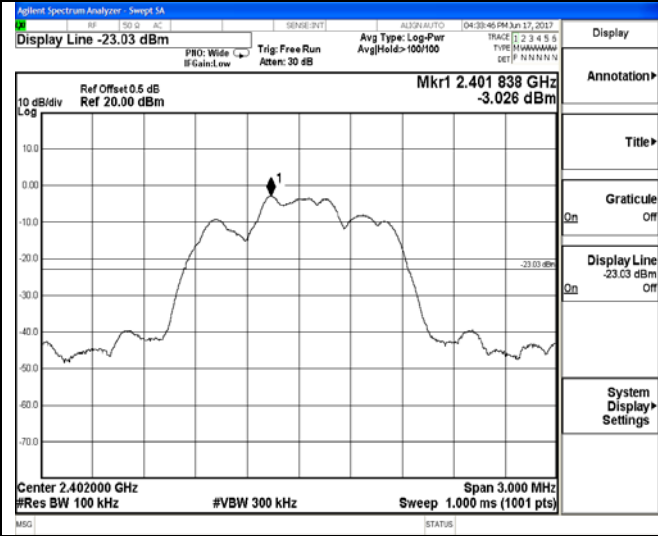

2399.5 MHz – 2404.5 MHz

9 KHz – 26.5 GHz



8DPSK – Channel 39 / 2441 MHz

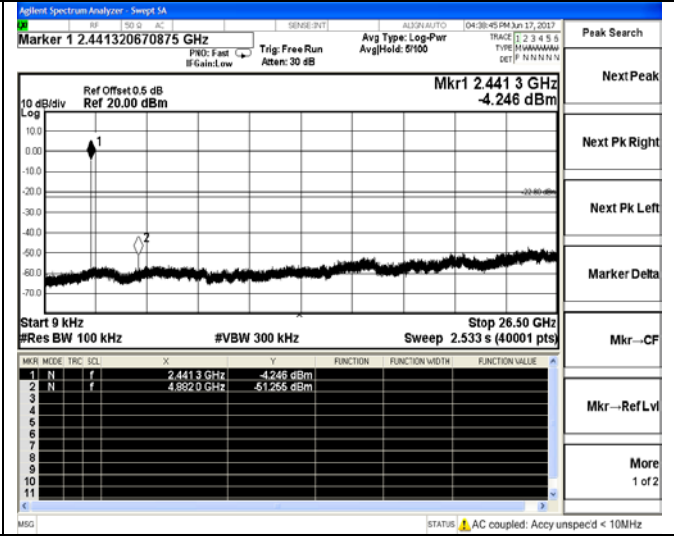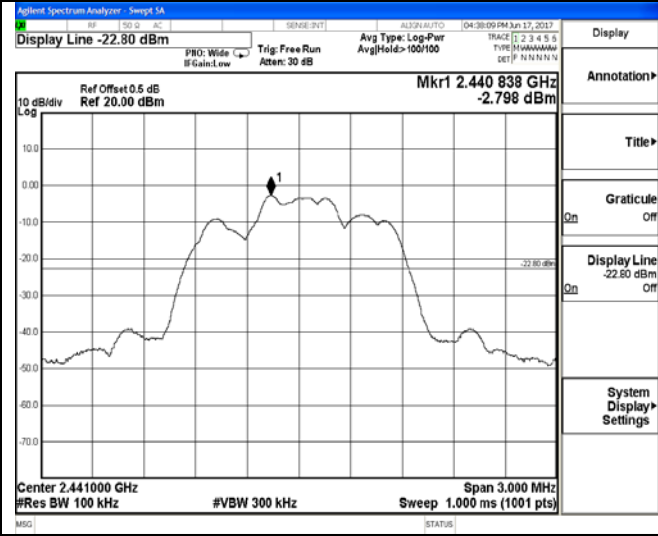

2438.5 MHz – 2443.5 MHz

9 KHz – 26.5 GHz

8DPSK – Channel 78 / 2480 MHz

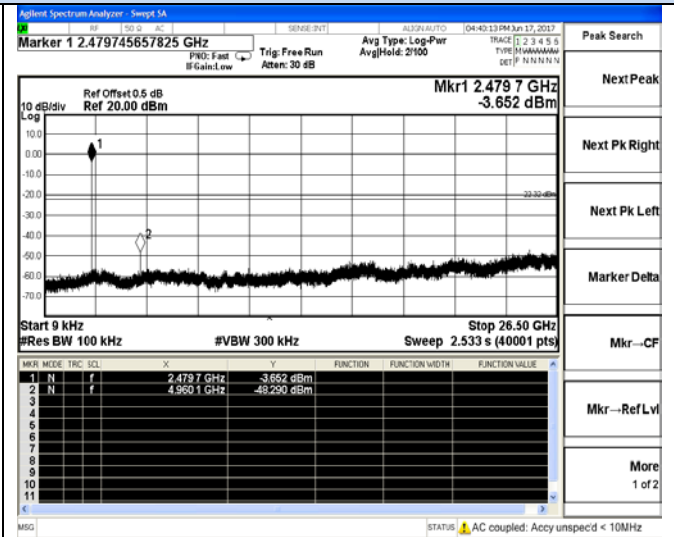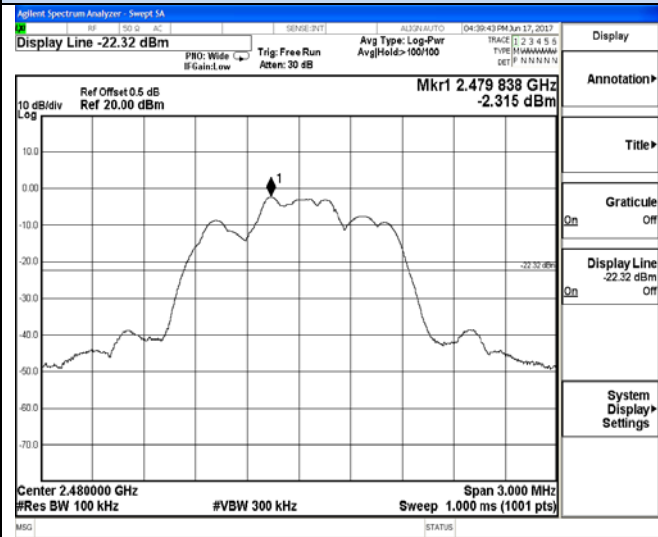


2477.5 MHz – 2482.5 MHz


9 KHz – 26.5 GHz

Band-edge for RF conducted emissions


GFSK

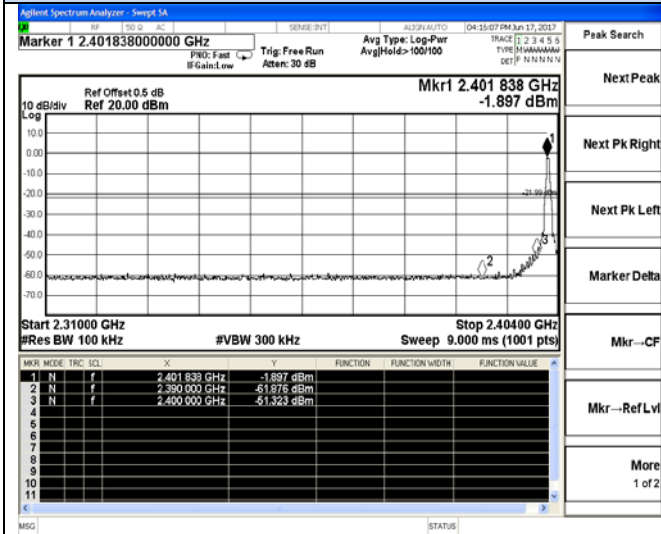


$\pi/4$ -DQPSK

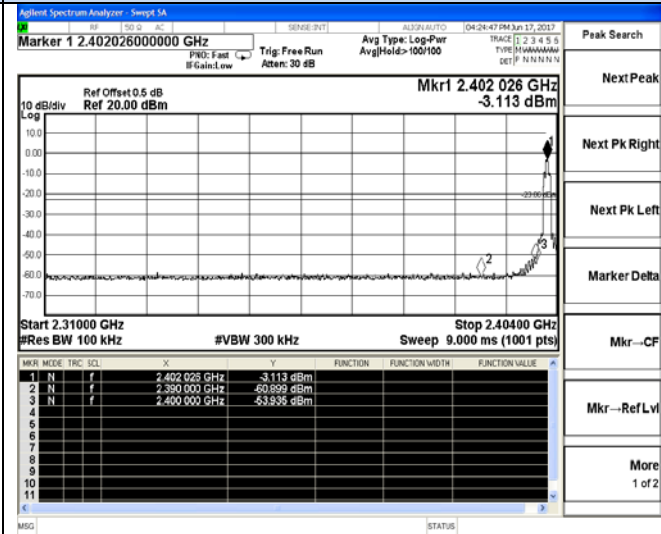


Channel 0 / 2402 MHz – Non-Hopping

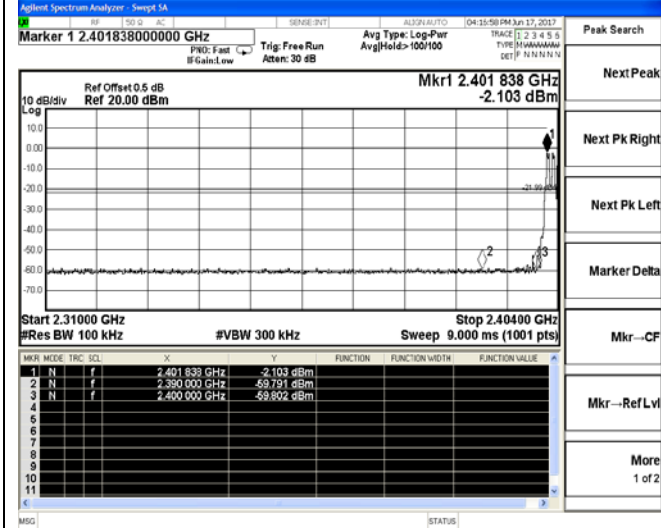


Channel 0 / 2402 MHz – Non-Hopping

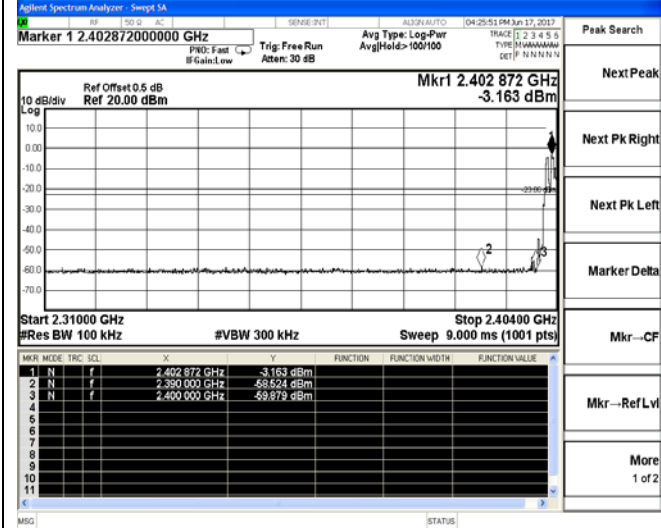

Channel 0 / 2402 MHz – Hopping

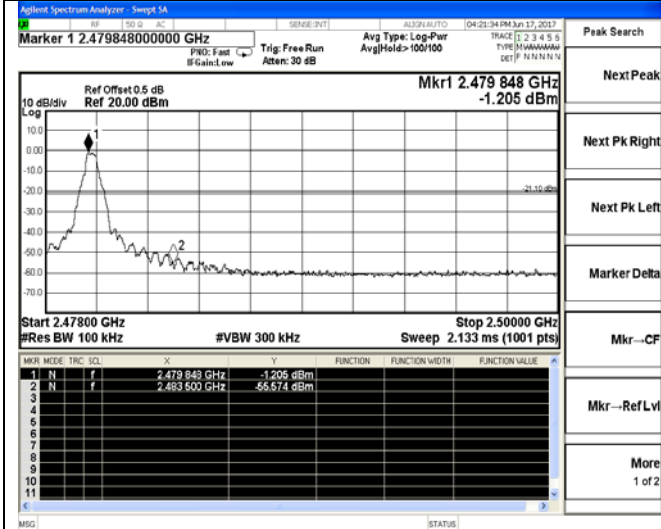

Channel 0 / 2402 MHz – Hopping

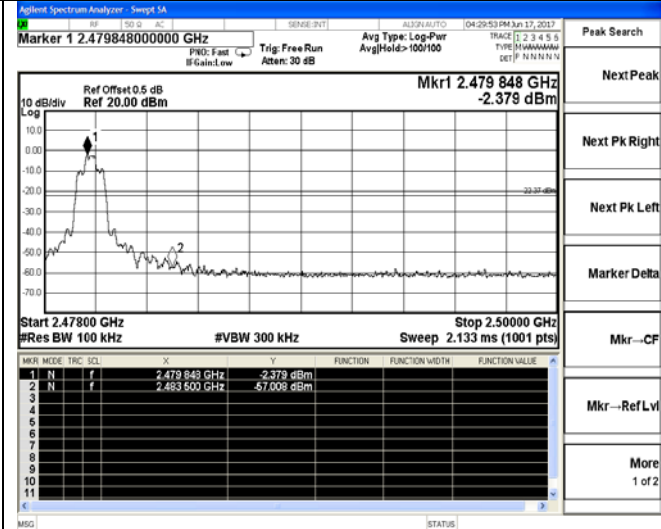

Channel 78 / 2480 MHz – Non-Hopping




Channel 78 / 2480 MHz – Non-Hopping




Band-edge for RF conducted emissions

GFSK

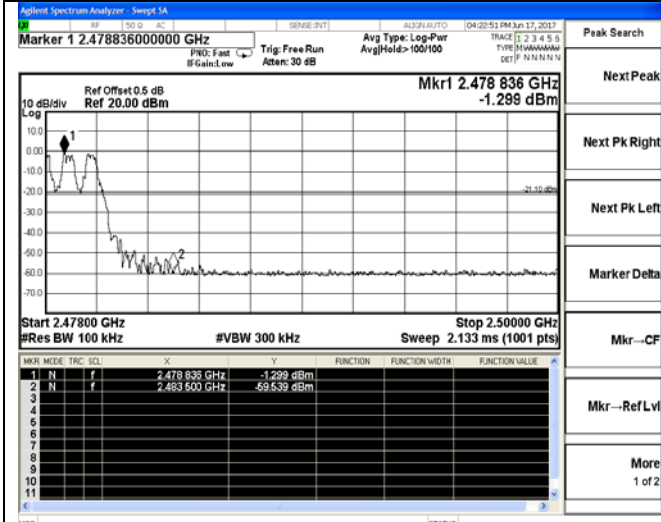


$\pi/4$ -DQPSK

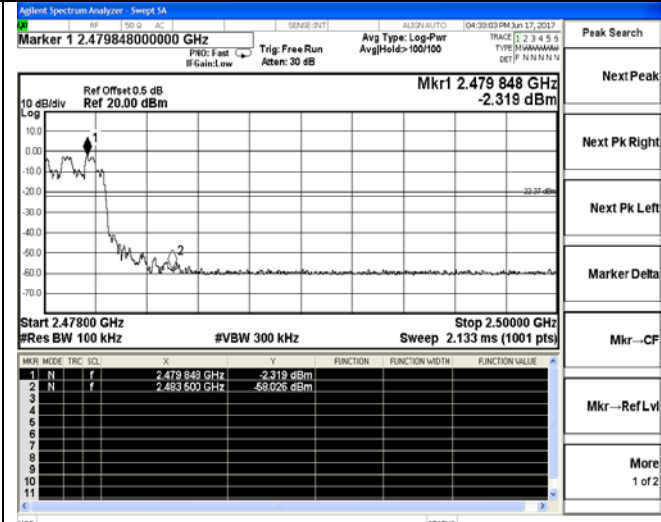


Channel 78 / 2480 MHz – Hopping

8DPSK

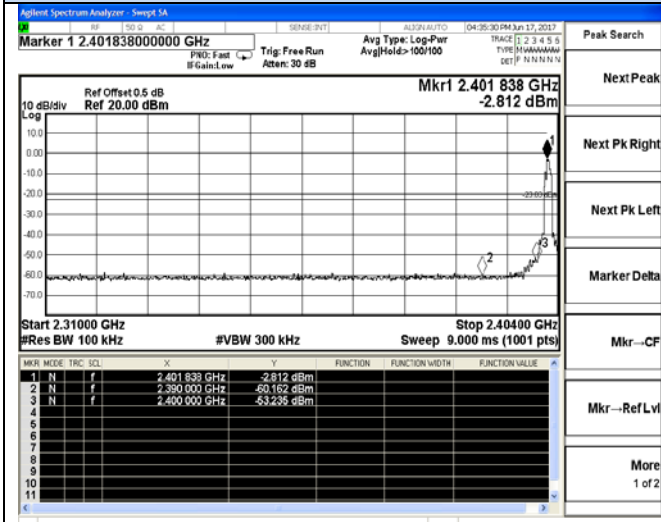


Channel 78 / 2480 MHz – Hopping


8DPSK

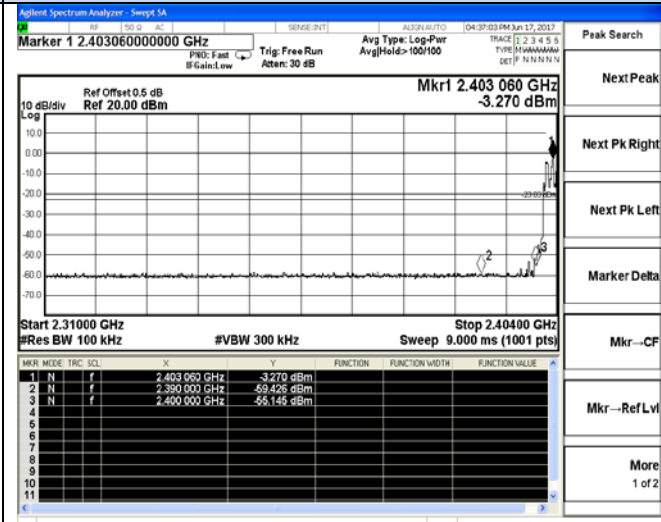


Channel 0 / 2402 MHz – Non-Hopping

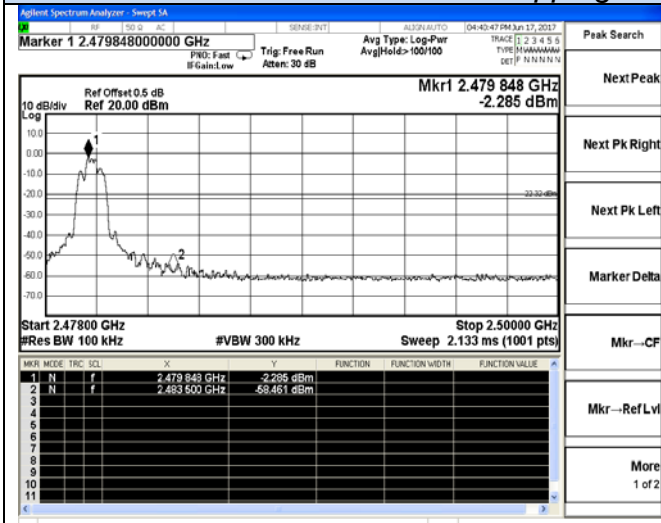


Channel 0 / 2402 MHz – Hopping

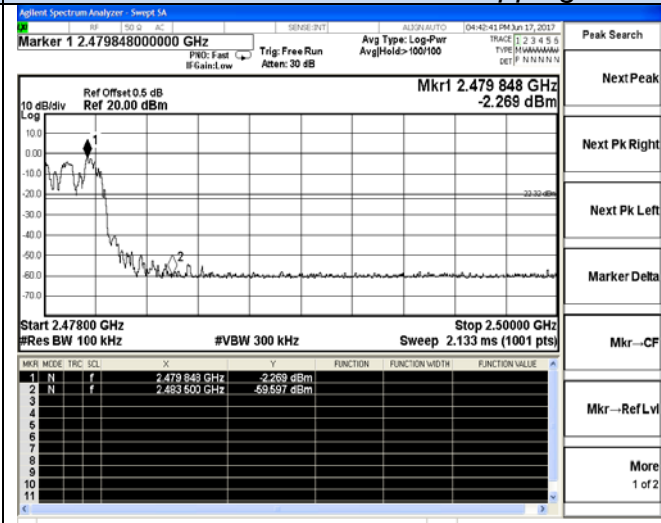

Channel 78 / 2480 MHz – Non-Hopping



Channel 78 / 2480 MHz – Hopping



6. RADIATED MEASUREMENT

6.6.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293. | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2\) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10 th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

6.6.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

6.6.4. Test Setup Layout

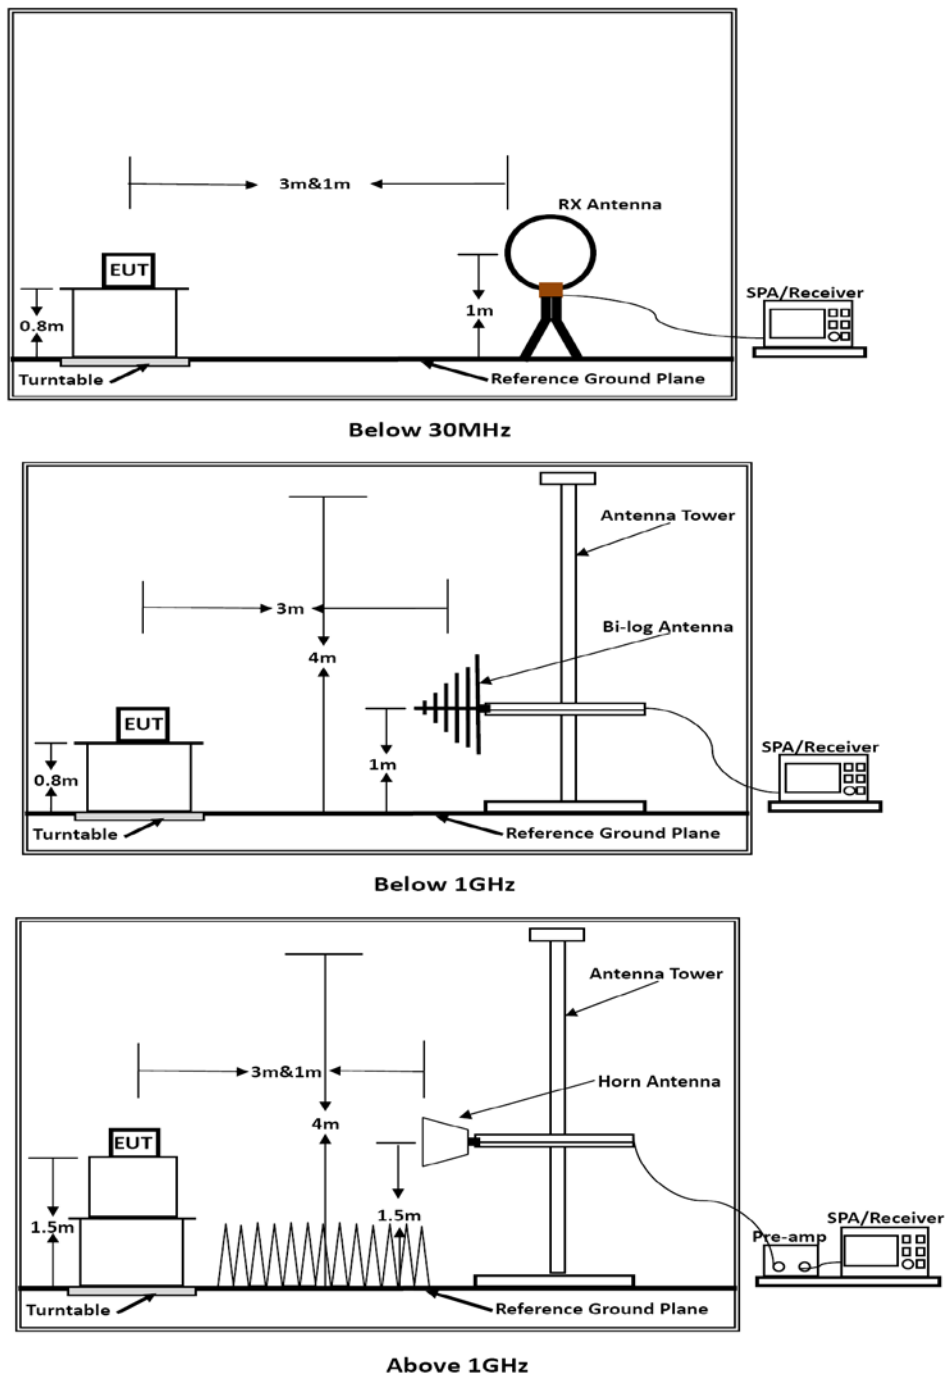

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

6.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.6.6. Results of Radiated Emissions (9 KHz~30MHz)

| | | | |
|---------------|------|----------------|-----|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Chaz | Configurations | BT |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log$ (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


PASS.

Only record the worst test result in this report.

The test data please refer to following page.

Below 1GHz


Horizontal:

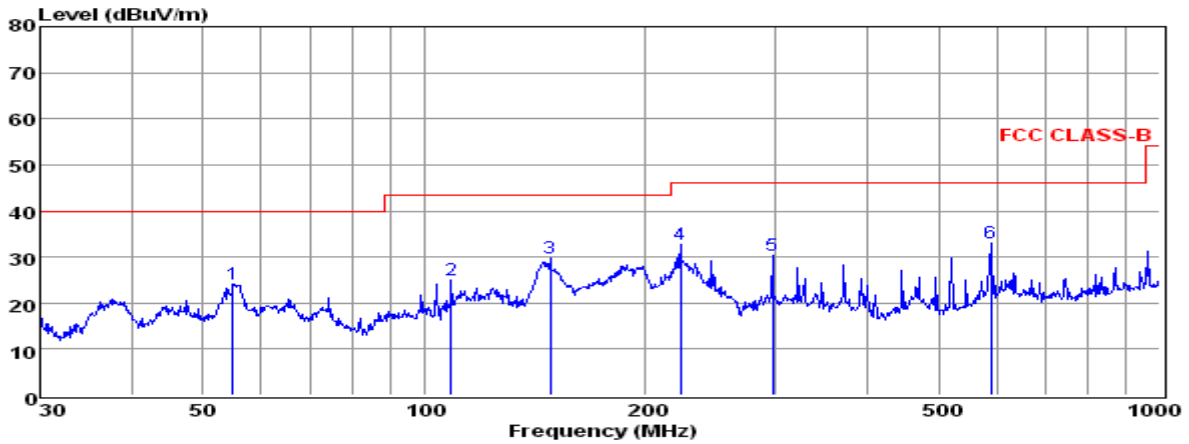

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 54.83 | 10.55 | 0.46 | 13.03 | 24.04 | 40.00 | -15.96 | Peak |
| 2 | 108.65 | 11.80 | 0.68 | 12.37 | 24.85 | 43.50 | -18.65 | Peak |
| 3 | 148.44 | 20.52 | 0.86 | 8.25 | 29.63 | 43.50 | -13.87 | Peak |
| 4 | 222.95 | 20.33 | 0.95 | 11.33 | 32.61 | 46.00 | -13.39 | Peak |
| 5 | 297.22 | 16.23 | 1.12 | 13.01 | 30.36 | 46.00 | -15.64 | Peak |
| 6 | 588.91 | 13.34 | 1.40 | 18.24 | 32.98 | 46.00 | -13.02 | Peak |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Vertical:

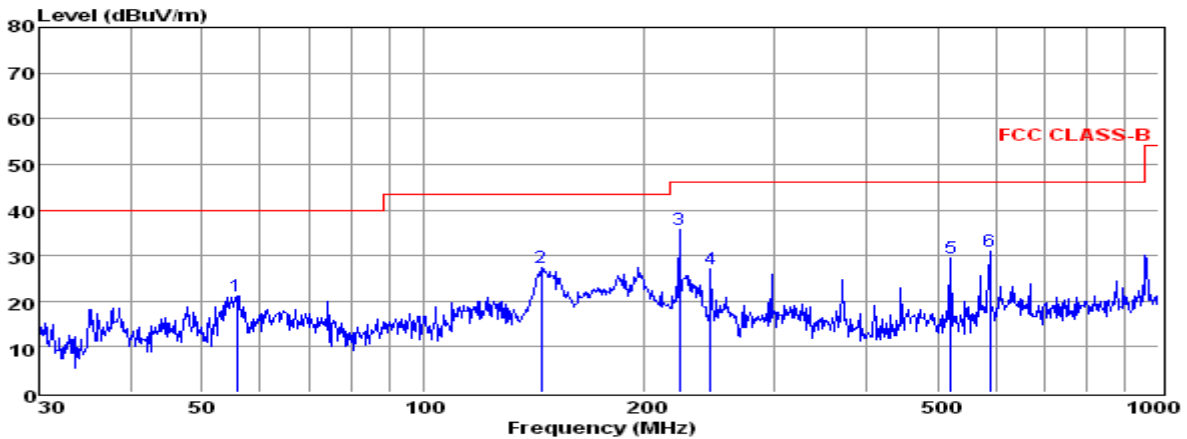

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 55.80 | 7.64 | 0.47 | 12.97 | 21.08 | 40.00 | -18.92 | QP |
| 2 | 144.84 | 18.28 | 0.77 | 8.22 | 27.27 | 43.50 | -16.23 | QP |
| 3 | 222.95 | 23.38 | 0.95 | 11.33 | 35.66 | 46.00 | -10.34 | QP |
| 4 | 245.95 | 13.92 | 0.97 | 12.08 | 26.97 | 46.00 | -19.03 | QP |
| 5 | 520.89 | 11.13 | 1.47 | 16.97 | 29.57 | 46.00 | -16.43 | QP |
| 6 | 588.91 | 11.15 | 1.40 | 18.24 | 30.79 | 46.00 | -15.21 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

***Note:

Pre-scan all modes and recorded the worst case results in this report (TX-High Channel (1Mbps)).
 Emission level (dBUV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.

Above 1GHz

Note: Only recorded the worst test result.

The worst test result for GFSK, TX-Low Channel:

The worst test result for GFSK, Channel 0 / 2402 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.0 | 48.02 | 33.06 | 35.04 | 3.94 | 49.98 | 74.00 | -24.02 | Peak | Horizontal |
| 4804.0 | 32.17 | 33.06 | 35.04 | 3.94 | 34.13 | 54.00 | -19.87 | Average | Horizontal |
| 4804.0 | 48.43 | 33.06 | 35.04 | 3.94 | 50.39 | 74.00 | -23.61 | Peak | Vertical |
| 4804.0 | 33.42 | 33.06 | 35.04 | 3.94 | 35.38 | 54.00 | -18.62 | Average | Vertical |

The worst test result for GFSK, Channel 39 / 2441 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4882.0 | 48.58 | 33.16 | 35.15 | 3.96 | 50.55 | 74.00 | -23.45 | Peak | Horizontal |
| 4882.0 | 33.84 | 33.16 | 35.15 | 3.96 | 35.81 | 54.00 | -18.19 | Average | Horizontal |
| 4882.0 | 49.11 | 33.16 | 35.15 | 3.96 | 51.08 | 74.00 | -22.92 | Peak | Vertical |
| 4882.0 | 35.75 | 33.16 | 35.15 | 3.96 | 37.72 | 54.00 | -16.28 | Average | Vertical |

The worst test result for GFSK, Channel 78 / 2480 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.0 | 49.55 | 33.26 | 35.14 | 3.98 | 51.65 | 74.00 | -22.35 | Peak | Horizontal |
| 4960.0 | 32.52 | 33.26 | 35.14 | 3.98 | 34.62 | 54.00 | -19.38 | Average | Horizontal |
| 4960.0 | 49.56 | 33.26 | 35.14 | 3.98 | 51.66 | 74.00 | -22.34 | Peak | Vertical |
| 4960.0 | 35.95 | 33.26 | 35.14 | 3.98 | 38.05 | 54.00 | -15.95 | Average | Vertical |

Notes:

- 1). Measuring frequencies from 9 KHz - 10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz - 10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
- 3). 18~25GHz at least have 20dB margin. No recording in the test report.

7. AC POWER LINE CONDUCTED EMISSIONS


7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

7.2 Block Diagram of Test Setup

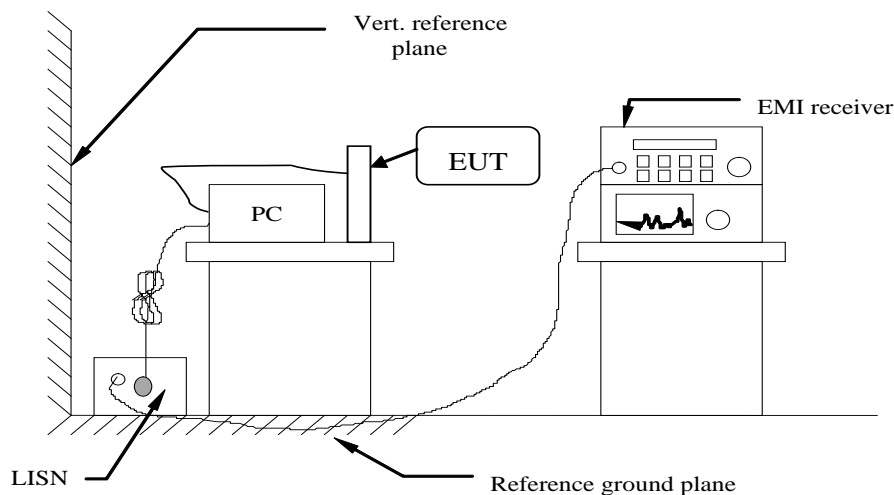


7.3 Test Results

PASS.

The test data please refer to following page.

AC Conducted Emission of power adapter @ AC 120V/60Hz @ GFSK (worst case)


Line:

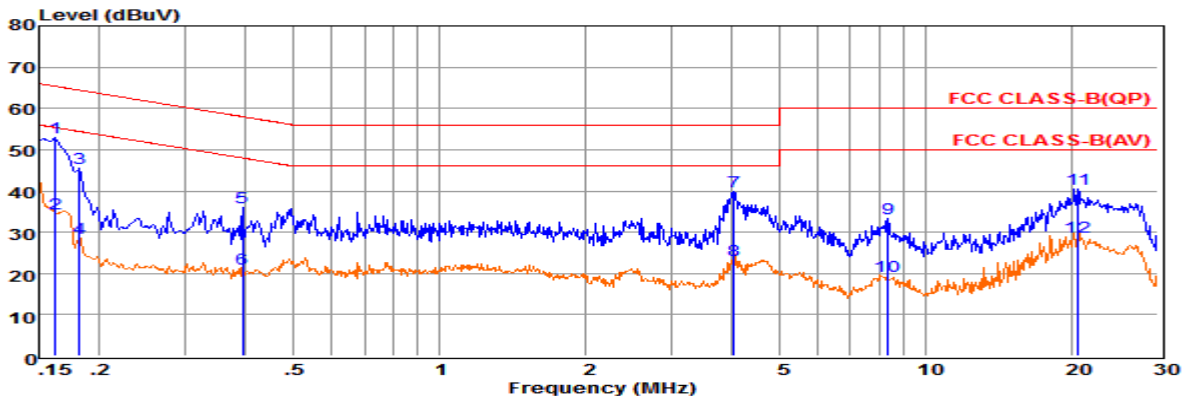

| Line | Freq MHz | Reading dBuV | LISNFac dB | CabLos dB | Aux2Fac dB | Measured dB | Limit dBuV | Over dBuV | Remark |
|------|----------|--------------|------------|-----------|------------|-------------|------------|-----------|---------|
| 1 | 0.16 | 33.30 | 9.59 | 0.02 | 10.00 | 52.91 | 65.34 | -12.43 | QP |
| 2 | 0.16 | 14.93 | 9.59 | 0.02 | 10.00 | 34.54 | 55.33 | -20.79 | Average |
| 3 | 0.18 | 25.89 | 9.61 | 0.02 | 10.00 | 45.52 | 64.42 | -18.90 | QP |
| 4 | 0.18 | 8.85 | 9.61 | 0.02 | 10.00 | 28.48 | 54.41 | -25.93 | Average |
| 5 | 0.39 | 16.37 | 9.62 | 0.04 | 10.00 | 36.03 | 57.99 | -21.96 | QP |
| 6 | 0.39 | 1.56 | 9.62 | 0.04 | 10.00 | 21.22 | 47.99 | -26.77 | Average |
| 7 | 4.03 | 20.13 | 9.65 | 0.06 | 10.00 | 39.84 | 56.00 | -16.16 | QP |
| 8 | 4.03 | 3.48 | 9.65 | 0.06 | 10.00 | 23.19 | 46.00 | -22.81 | Average |
| 9 | 8.37 | 13.49 | 9.69 | 0.07 | 10.00 | 33.25 | 60.00 | -26.75 | QP |
| 10 | 8.37 | -0.45 | 9.69 | 0.07 | 10.00 | 19.31 | 50.00 | -30.69 | Average |
| 11 | 20.59 | 20.69 | 9.74 | 0.12 | 10.00 | 40.55 | 60.00 | -19.45 | QP |
| 12 | 20.60 | 9.09 | 9.74 | 0.12 | 10.00 | 28.95 | 50.00 | -21.05 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

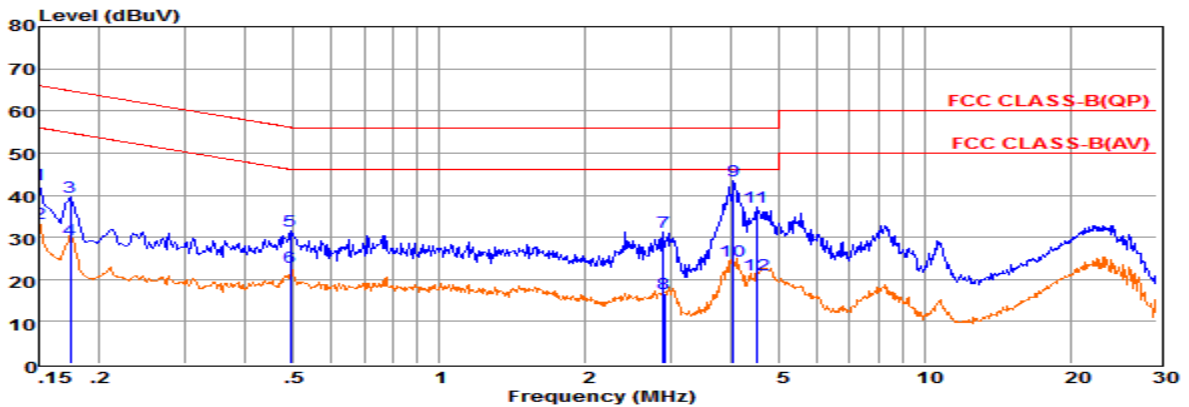

| Line | Freq MHz | Reading dBuV | LISNFac dB | CabLos dB | Aux2Fac dB | Measured dB | Limit dBuV | Over dBuV | Remark |
|------|----------|--------------|------------|-----------|------------|-------------|------------|-----------|---------|
| 1 | 0.15 | 22.68 | 9.70 | 0.02 | 10.00 | 42.40 | 66.00 | -23.60 | QP |
| 2 | 0.15 | 13.69 | 9.70 | 0.02 | 10.00 | 33.41 | 55.99 | -22.58 | Average |
| 3 | 0.17 | 19.95 | 9.64 | 0.02 | 10.00 | 39.61 | 64.77 | -25.16 | QP |
| 4 | 0.17 | 9.80 | 9.64 | 0.02 | 10.00 | 29.46 | 54.76 | -25.30 | Average |
| 5 | 0.49 | 11.87 | 9.62 | 0.04 | 10.00 | 31.53 | 56.10 | -24.57 | QP |
| 6 | 0.49 | 3.18 | 9.62 | 0.04 | 10.00 | 22.84 | 46.10 | -23.26 | Average |
| 7 | 2.90 | 11.57 | 9.64 | 0.06 | 10.00 | 31.27 | 56.00 | -24.73 | QP |
| 8 | 2.90 | -3.01 | 9.64 | 0.06 | 10.00 | 16.69 | 46.00 | -29.31 | Average |
| 9 | 4.03 | 23.69 | 9.65 | 0.06 | 10.00 | 43.40 | 56.00 | -12.60 | QP |
| 10 | 4.03 | 4.55 | 9.65 | 0.06 | 10.00 | 24.26 | 46.00 | -21.74 | Average |
| 11 | 4.50 | 17.37 | 9.66 | 0.06 | 10.00 | 37.09 | 56.00 | -18.91 | QP |
| 12 | 4.50 | 1.33 | 9.66 | 0.06 | 10.00 | 21.05 | 46.00 | -24.95 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


***Note: Pre-scan all modes and recorded the worst case results in this report;

8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS

8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 Block Diagram of Test Setup

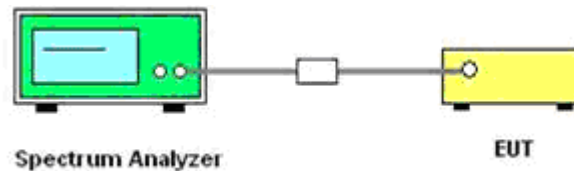

8.3 Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

8.4. Test Procedures

According to KDB 412172 section 1.1 Field Strength Approach (linear terms):

$$\text{eirp} = p_t \times g_t = (E \times d)^2/30$$

Where:

p_t = transmitter output power in watts,

g_t = numeric gain of the transmitting antenna (unitless),

E = electric field strength in V/m,

d = measurement distance in meters (m).

$$\text{erp} = \text{eirp}/1.64 = (E \times d)^2/(30 \times 1.64)$$

Where all terms are as previously defined.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies \leq 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Compare the resultant electric field strength level to the applicable regulatory limit.
11. Perform radiated spurious emission test duress until all measured frequencies were complete.

8.5. Test Results

| GFSK – Non-Hopping | | | | | | | |
|---------------------------|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -50.146 | 2.000 | 0.000 | 47.082 | Peak | 74.00 | PASS |
| 2390.000 | -50.849 | 2.000 | 0.000 | 46.379 | Peak | 74.00 | PASS |
| 2483.500 | -37.628 | 2.000 | 0.000 | 59.600 | Peak | 74.00 | PASS |
| 2500.000 | -50.526 | 2.000 | 0.000 | 46.702 | Peak | 74.00 | PASS |

| $\pi/4$DQPSK – Non-Hopping | | | | | | | |
|--|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -51.584 | 2.000 | 0.000 | 45.644 | Peak | 74.00 | PASS |
| 2390.000 | -51.307 | 2.000 | 0.000 | 45.921 | Peak | 74.00 | PASS |
| 2483.500 | -38.980 | 2.000 | 0.000 | 58.248 | Peak | 74.00 | PASS |
| 2500.000 | -50.663 | 2.000 | 0.000 | 46.565 | Peak | 74.00 | PASS |

| 8DPSK – Non-Hopping | | | | | | | |
|----------------------------|-----------------------|--------------------|-------------------------------|--|----------|----------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
| 2310.000 | -50.106 | 2.000 | 0.000 | 47.122 | Peak | 74.00 | PASS |
| 2390.000 | -51.861 | 2.000 | 0.000 | 45.367 | Peak | 74.00 | PASS |
| 2483.500 | -39.448 | 2.000 | 0.000 | 57.780 | Peak | 74.00 | PASS |
| 2500.000 | -50.435 | 2.000 | 0.000 | 46.793 | Peak | 74.00 | PASS |

Remark:


1. Measured at difference Packet Type for each mode and recorded worst case for each mode.
2. Worst case data at DH5 for GFSK, 2DH5 for $\pi/4$ DQPSK, 3DH5 for 8DPSK modulation type;
3. Measured at Hopping and Non-Hopping mode, recorded worst at Non-Hopping mode.
4. The other emission levels were very low against the limit.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=330KHz/Sweep time=Auto/Detector=Peak;
7. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever

is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.


- 8. Please refer to following test plots;*

Band-edge measurements for radiated emissions


GFSK

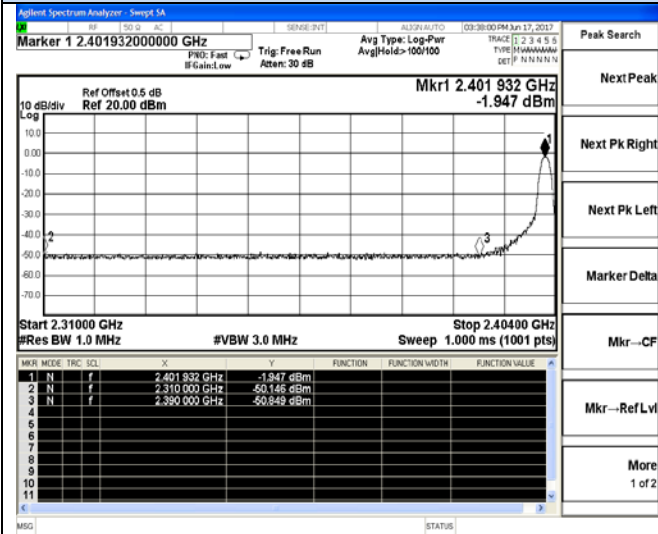


$\pi/4$ DQPSK

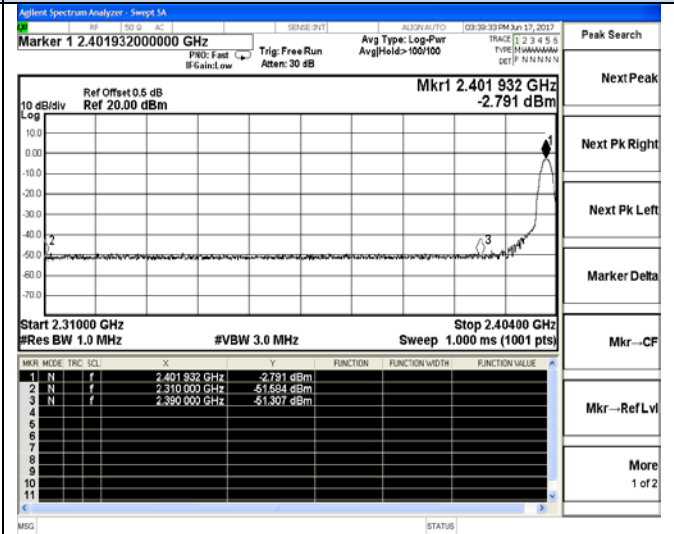


Channel 0 / 2402 MHz – Non-Hopping – Peak

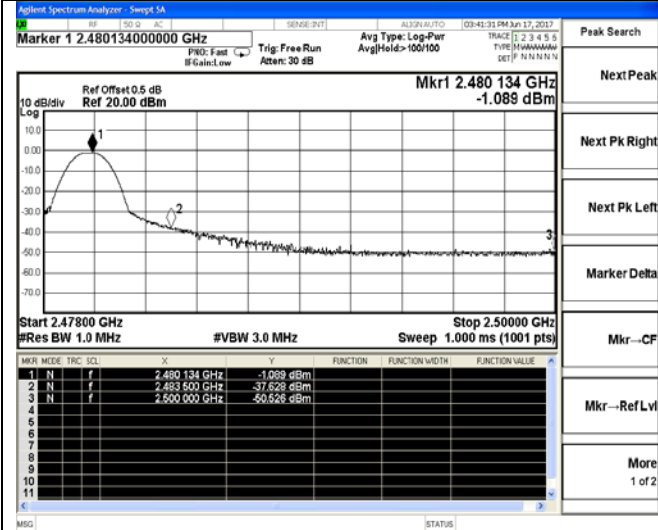


Channel 0 / 2402 MHz – Non-Hopping – Peak

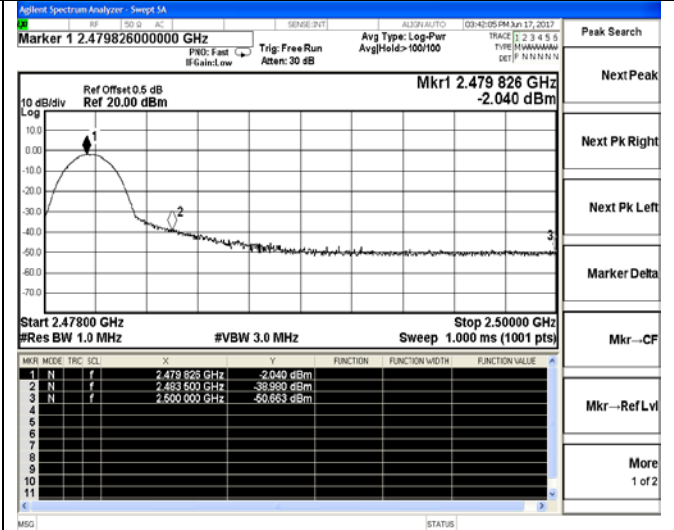

Channel 78 / 2480 MHz – Non-Hopping – Peak

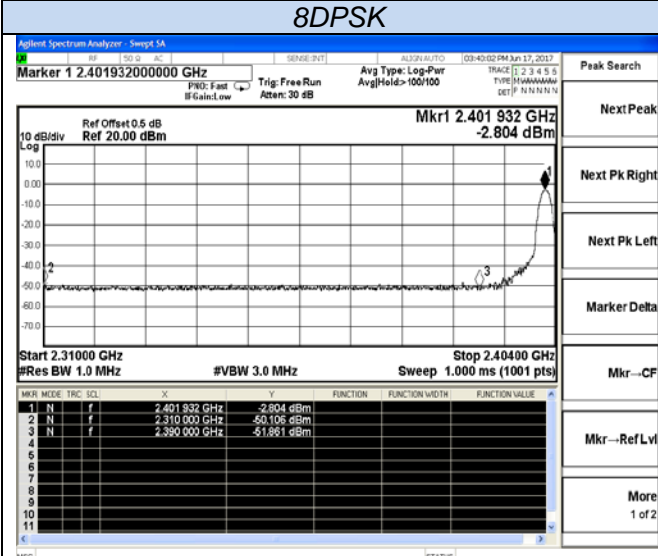

Channel 78 / 2480 MHz – Non-Hopping – Peak

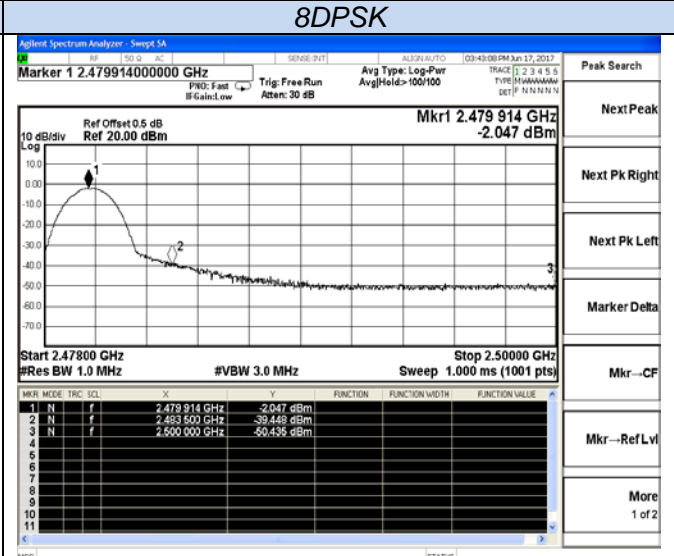

Channel 0 / 2402 MHz – Non-Hopping – Peak

Channel 78 / 2480 MHz – Non-Hopping – Peak

9. ANTENNA REQUIREMENT

9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

9.2 Antenna Connected Construction

9.2.1. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

The BT and WLAN share same PIFA antenna, the maximum gain is -1.00dBi for BT; more information as follows.

9.2.2. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep Time: | Auto |
| Resolution bandwidth: | 1MHz |
| Video bandwidth: | 3MHz |
| Trace-Mode: | Max hold |

Limits

| FCC | ISED |
|--------------|------|
| Antenna Gain | |
| 6 dBi | |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the GFSK mode is used.

| T _{nom} | V _{nom} | Lowest Channel 2402 MHz | Middle Channel 2441 MHz | Highest Channel 2480 MHz |
|---|------------------|----------------------------|------------------------------------|-----------------------------|
| Conducted power [dBm] Measured with GFSK modulation | | -1.993 | -1.752 | -1.183 |
| Radiated power [dBm] Measured with GFSK modulation | | -3.225 | -3.083 | -2.874 |
| Gain [dBi] Calculated | | -1.232 | -1.331 | -1.691 |
| Measurement uncertainty | | | ± 1.6 dB (cond.) / ± 3.8 dB (rad.) | |

10. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

11. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

12. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----