

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

CHOICE FORTUNE HOLDINGS LIMITED

LED TV

Model Number: SC-60UK850N

FCC ID: 2AMYC-SC-60UK850N

Prepared for:	CHOICE FORTUNE HOLDINGS LIMITED
	Room 1315, 13/F, Tin King Estate, Tin Lok House,
	Tuen Mun, N.T., HongKong
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808




Report Number:	ESTE-R1809070
Date of Test:	Aug. 31 ~ Sep. 18, 2018
Date of Report:	Sep. 20, 2018

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test mode.....	9
2.7. Channel List.....	9
2.8. Test Equipment.....	10
3. POWER LINE CONDUCTED EMISSION TEST.....	12
3.1. Limit.....	12
3.2. Test Procedure.....	12
3.3. Test Result.....	12
3.4. Test data.....	13
4. RADIATED EMISSION TEST.....	15
4.1. Limit.....	15
4.2. Block Diagram of Test setup.....	16
4.3. Test Procedure.....	17
4.4. Test Result.....	17
4.5. Test Data.....	18
5. BAND EDGE COMPLIANCE TEST.....	58
5.1. Limit.....	58
5.2. Block Diagram of Test setup.....	58
5.3. Test Procedure.....	58
5.4. Test Result.....	58
5.5. Test Data.....	59
6. 6dB & 20dB Bandwidth Test.....	83
6.1. Limit.....	83
6.2. Test Procedure for 6dB.....	83
6.3. Test Procedure for 20dB.....	83
6.4. Test Result.....	85
6.5. 6dB Test Data.....	86
6.6. 20dB Test Data.....	102
7. OUTPUT POWER TEST.....	118
7.1. Limit.....	118
7.2. Test Procedure.....	118
7.3. Test Result.....	119
7.4. Test Data.....	120
8. POWER SPECTRAL DENSITY TEST.....	136
8.1. Limit.....	136

8.2	Test Procedure	136
8.3	Test Result	137
8.4	Test Data	138
9	ANTENNA REQUIREMENTS	154
9.1	Limit	154
9.2	Result	154
10	TEST SETUP PHOTO	155
11	PHOTOS OF EUT	157

EST Technology Co., Ltd.

Applicant:	CHOICE FORTUNE HOLDINGS LIMITED		
Address:	Room 1315, 13/F,T in King Estate, Tin Lok House, Tuen Mun, N.T., HongKong		
Manufacturer	CHOICE FORTUNE HOLDINGS LIMITED		
Address:	Room 1315, 13/F, Tin King Estate, Tin Lok House, Tuen Mun, N.T., HongKong		
E.U.T:	LED TV		
Model Number:	SC-60UK850N		
Power Supply:	AC 120V ~ 50/60Hz		
Test Voltage:	AC 120V/60Hz		
Trade Name:	SEIKI; SEIKI pro; SEIKI HOME	Serial No.:	-----
Date of Receipt:	Aug. 22, 2018	Date of Test:	Aug. 31 ~ Sep. 18, 2018
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2017 ANSI C63.10:2013		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
Prepared by:		Reviewed by:	
 _____ Ring / Assistant		 _____ Tony / Engineer	
		Date: Sep. 20, 2018 Approved by:  _____ Iceman Hu / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	LED TV		
Model Number	:	SC-60UK850N		
FCC ID	:	2AMYC-SC-60UK850N		
Modulation	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 mode: OFDM (BPSK/QPSK/16QAM/64QAM)		
Operation Frequency	:	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40: 2422 ~ 2452 MHz		
Number of channel	:	IEEE 802.11b 2412 ~ 2462 MHz: 11 Channels IEEE 802.11g 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT20 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT40 2422 ~ 2452 MHz: 7 Channels		
Antenna	:	Internal antenna		
		Frequency Range	Antenna 0	Antenna 1
		2400~2483.5 MHz	2.94 dBi	2.94 dBi
		Directional gain	5.95dBi	
		Note: 11b,g,n uses Antenna 0 / Antenna 1 11n uses MIMO		
Sample Type	:	Prototype production		

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 15.247 Meas Guidance v05		

2.2. Test Facilities

EMC Lab	:	<p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2017</p> <p>Certificated by A2LA, USA Registration No.: 4366.01 Date of registration: November 07, 2017</p> <p>Certificated by FCC, USA Designation Number: CN1215 Registration No.: 722932 Date of registration: November 21, 2017</p> <p>Certificated by Industry Canada Registration No.: 9405A Date of registration: December 03, 2015</p> <p>Certificated by VCCI, Japan Registration No.: R-13663; C-14103 Date of registration: July 25, 2017 This Certificate is valid until: July 24, 2020</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L2-64 Date of registration: April 28, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p>
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 18GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4. Assistant equipment used for test

2.4.1. N/A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 or 1.5 meter high above ground. EUT was be set into Wi-Fi test mode by software before test.



(EUT: LED TV)

2.6. Test mode

A special test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Test mode	Lower channel	Center channel	Upper channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Transmitting	2412MHz	2437MHz	2462MHz
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Receiving	2412MHz	2437MHz	2462MHz
IEEE 802.11n HT40 Transmitting	2422MHz	2437MHz	2452MHz
IEEE 802.11n HT40 Receiving	2422MHz	2437MHz	2452MHz

2.7. Channel List

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB1519	1519-038	CEPREI	October 08,17	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA912 0D1002	CEPREI	June 18,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA917 0242	CEPREI	June 18,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 18,18	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spertrum Analyzer	Agilent	E4447A	MY50180 031	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.5. For connect EUT antenna terminal test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211 139	CEPREI	June 15,18	1 Year

3 POWER LINE CONDUCTED EMISSION TEST

3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.


3.3. Test Result

PASS.

3.4. Test data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

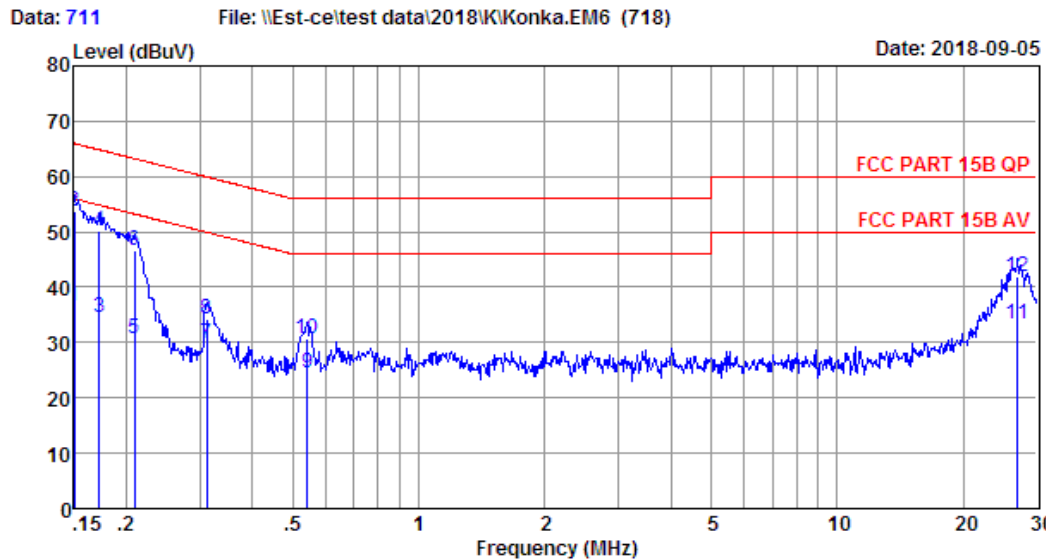

Site no. : 844 Shield Room Data no. : 711
 Limit : FCC PART 15B QP LINE Phase: LINE
 Env. / Ins. : Temp:24.1'C Humi:52% Press:101.50kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.73	9.69	17.20	36.62	56.00	19.38	Average
2	0.15	9.73	9.69	34.37	53.79	66.00	12.21	QP
3	0.17	9.73	9.69	15.20	34.62	54.86	20.24	Average
4	0.17	9.73	9.69	30.91	50.33	64.86	14.53	QP
5	0.21	9.73	9.84	11.17	30.74	53.23	22.49	Average
6	0.21	9.73	9.84	27.04	46.61	63.23	16.62	QP
7	0.31	9.72	9.92	10.30	29.94	49.93	19.99	Average
8	0.31	9.72	9.92	14.69	34.33	59.93	25.60	QP
9	0.54	9.72	9.92	4.80	24.44	46.00	21.56	Average
10	0.54	9.72	9.92	10.99	30.63	56.00	25.37	QP
11	26.98	10.01	10.17	13.31	33.49	50.00	16.51	Average
12	26.98	10.01	10.17	21.88	42.06	60.00	17.94	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 713 File: \\Est-ce\test data\2018\K\Konka.EM6 (718) Date: 2018-09-05

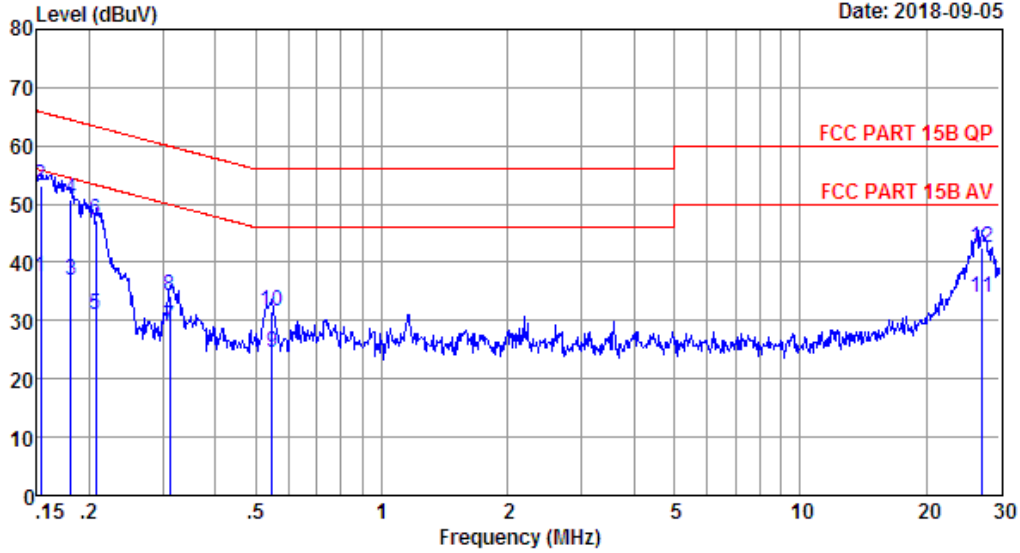

Site no. : 844 Shield Room Data no. : 713
 Limit : FCC PART 15B QP LINE Phase: NEUTRAL
 Env. / Ins. : Temp:24.1°C Humi:52% Press:101.50kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.61	9.69	18.20	37.50	55.82	18.32	Average
2	0.15	9.61	9.69	33.79	53.09	65.82	12.73	QP
3	0.18	9.62	9.77	17.43	36.82	54.46	17.64	Average
4	0.18	9.62	9.77	31.50	50.89	64.46	13.57	QP
5	0.21	9.62	9.84	11.67	31.13	53.32	22.19	Average
6	0.21	9.62	9.84	27.89	47.35	63.32	15.97	QP
7	0.31	9.63	9.92	9.30	28.85	49.93	21.08	Average
8	0.31	9.63	9.92	14.58	34.13	59.93	25.80	QP
9	0.55	9.66	9.92	4.80	24.38	46.00	21.62	Average
10	0.55	9.66	9.92	11.93	31.51	56.00	24.49	QP
11	27.13	10.22	10.16	13.46	33.84	50.00	16.16	Average
12	27.13	10.22	10.16	22.02	42.40	60.00	17.60	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4 RADIATED EMISSION TEST

4.1 Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2. Block Diagram of Test setup

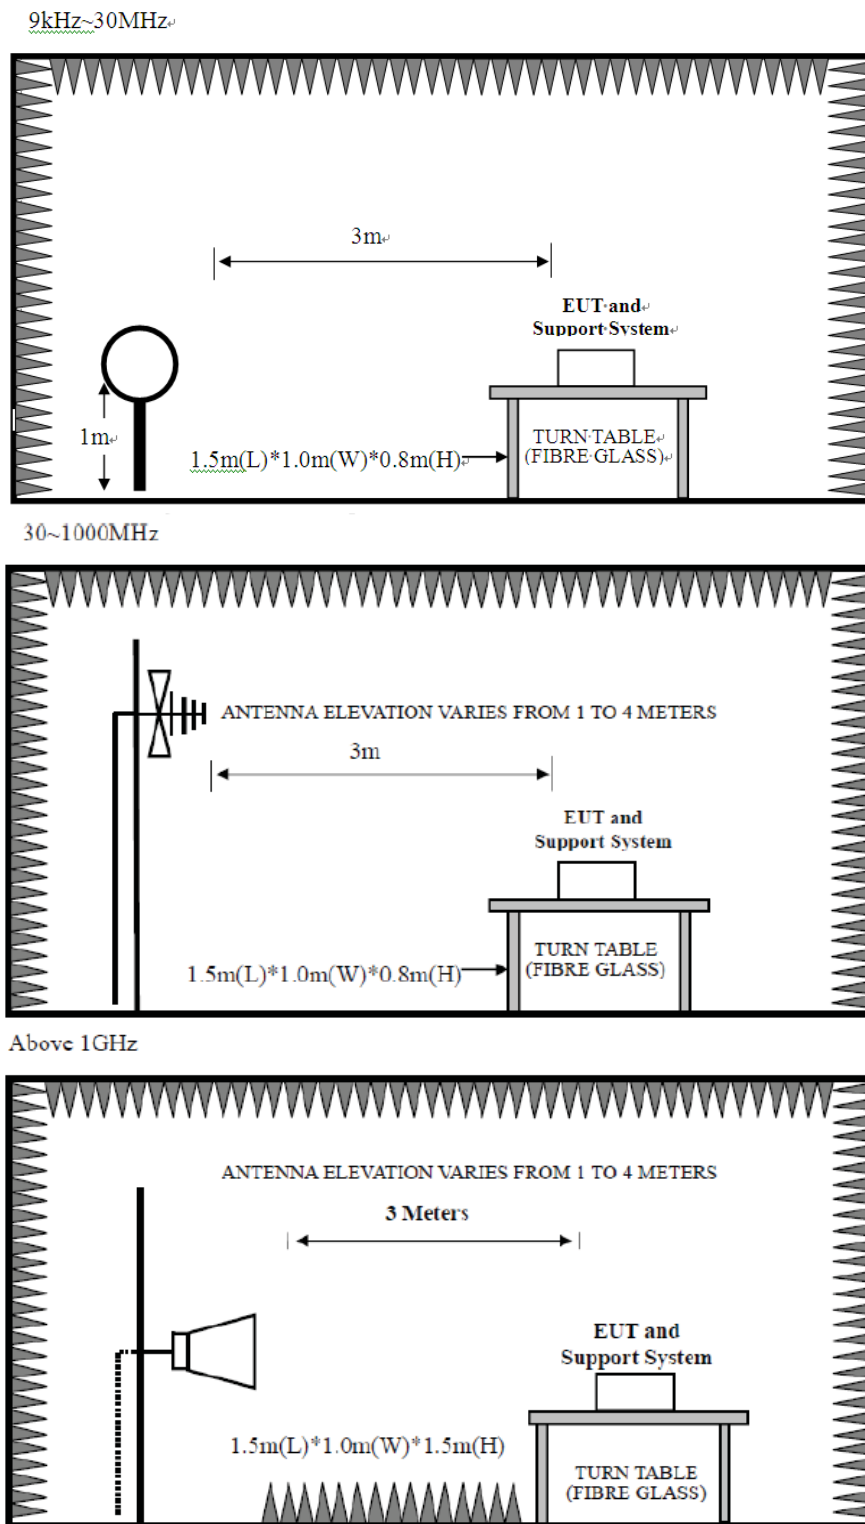

4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

4.4. Test Result

PASS.

- Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- 2、 The frequency 2412MHz 、 2422MHz、 2437 MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

4.5. Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 501 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

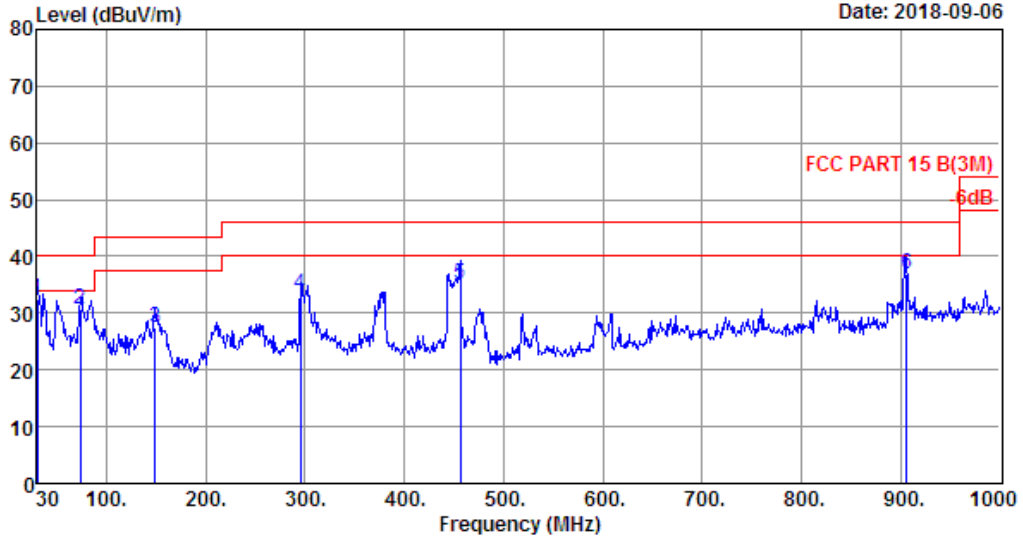

Site no. : 1# 966 Chamber Data no. : 501
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.10	0.31	13.99	32.40	40.00	7.60	QP
2	73.65	6.50	0.75	23.44	30.69	40.00	9.31	QP
3	149.31	11.64	1.30	14.66	27.60	43.50	15.90	QP
4	295.78	13.64	2.04	17.67	33.35	46.00	12.65	QP
5	456.80	17.31	2.76	15.19	35.26	46.00	10.74	QP
6	905.91	24.02	4.06	8.78	36.86	46.00	9.14	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 502 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

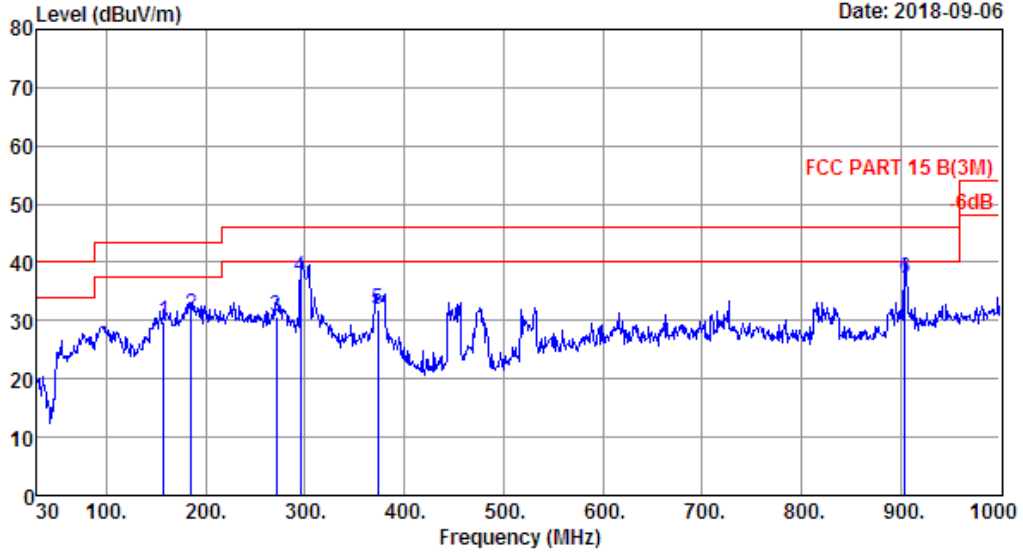

Site no. : 1# 966 Chamber Data no. : 502
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : TX Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	158.04	11.32	1.35	17.25	29.92	43.50	13.58	QP
2	185.20	9.00	1.42	20.71	31.13	43.50	12.37	QP
3	271.53	12.97	1.94	15.83	30.74	46.00	15.26	QP
4	295.78	13.64	2.04	21.82	37.50	46.00	8.50	QP
5	373.38	15.36	2.38	14.12	31.86	46.00	14.14	QP
6	903.97	23.98	4.04	9.28	37.30	46.00	8.70	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000 MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

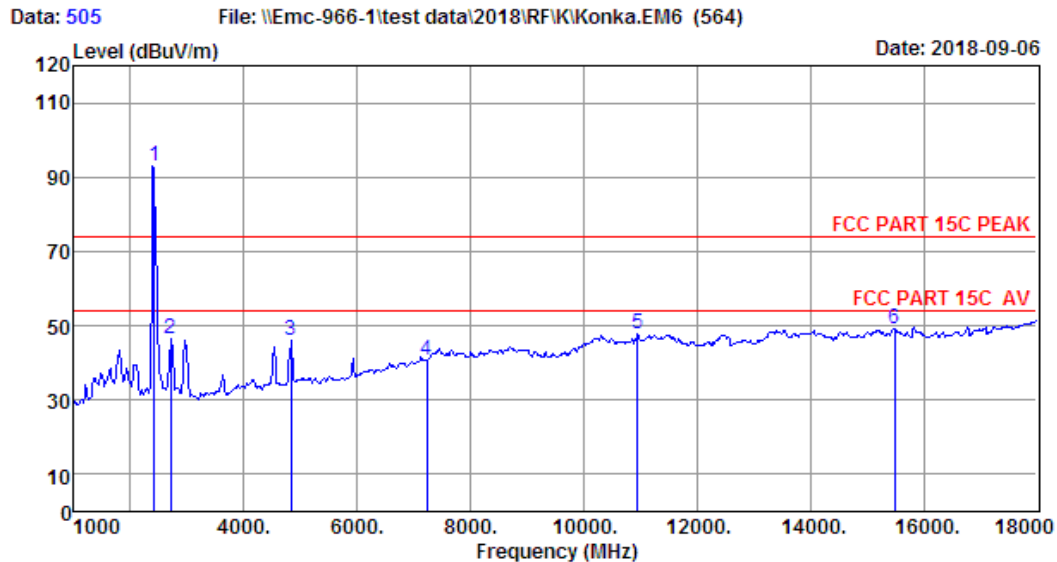

Site no. : 1# 966 Chamber Data no. : 505
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	97.46	93.14	74.00	-19.14	Peak
2	2700.00	27.92	3.45	36.02	51.14	46.49	74.00	27.51	Peak
3	4824.00	32.09	4.69	35.08	44.36	46.06	74.00	27.94	Peak
4	7236.00	36.63	6.03	33.42	31.66	40.90	74.00	33.10	Peak
5	10945.00	39.84	8.61	33.52	32.92	47.85	74.00	26.15	Peak
6	15484.00	39.53	10.87	32.41	31.30	49.29	74.00	24.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

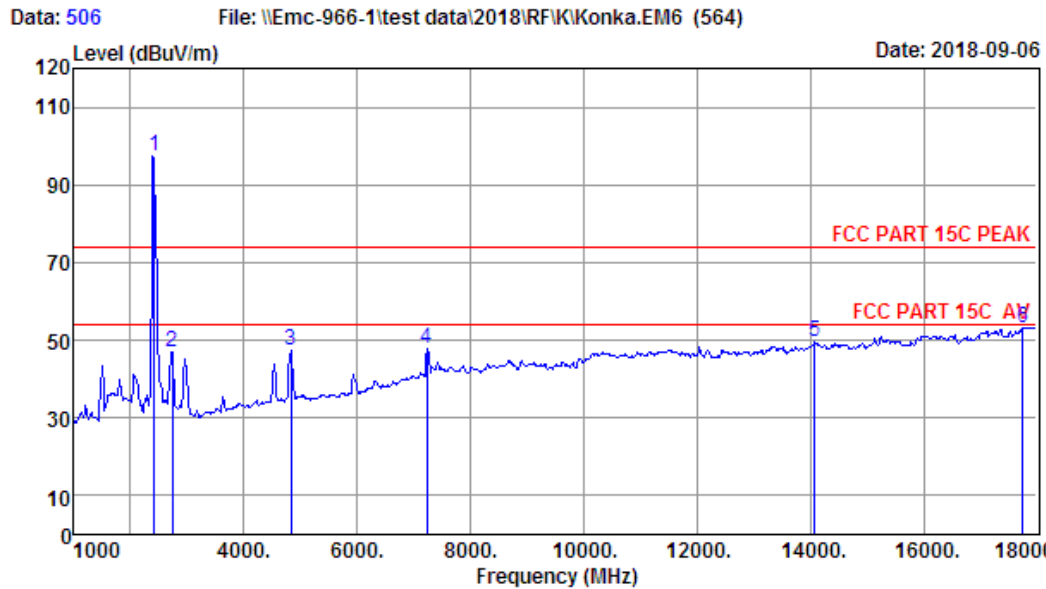


Site no. : 1# 966 Chamber Data no. : 506
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	101.94	97.62	74.00	-23.62	Peak
2	2734.00	27.97	3.47	36.15	51.64	46.93	74.00	27.07	Peak
3	4824.00	32.09	4.69	35.08	45.80	47.50	74.00	26.50	Peak
4	7236.00	36.63	6.03	33.42	38.37	47.61	74.00	26.39	Peak
5	14073.00	41.63	10.14	32.97	30.72	49.52	74.00	24.48	Peak
6	17745.00	44.03	12.08	31.18	28.30	53.23	74.00	20.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

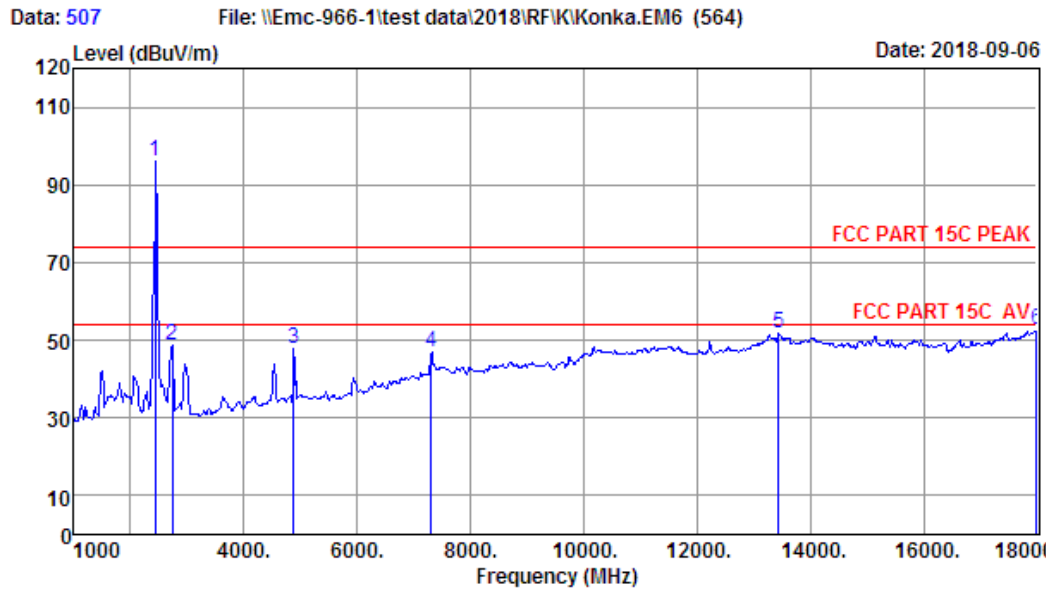


Site no. : 1# 966 Chamber Data no. : 507
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	100.45	96.12	74.00	-22.12	Peak
2	2734.00	27.97	3.47	36.15	53.44	48.73	74.00	25.27	Peak
3	4874.00	32.18	4.73	35.14	46.19	47.96	74.00	26.04	Peak
4	7311.00	36.78	6.09	33.31	37.31	46.87	74.00	27.13	Peak
5	13444.00	41.18	9.59	32.59	33.59	51.77	74.00	22.23	Peak
6	18000.00	44.70	12.64	31.56	26.75	52.53	74.00	21.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

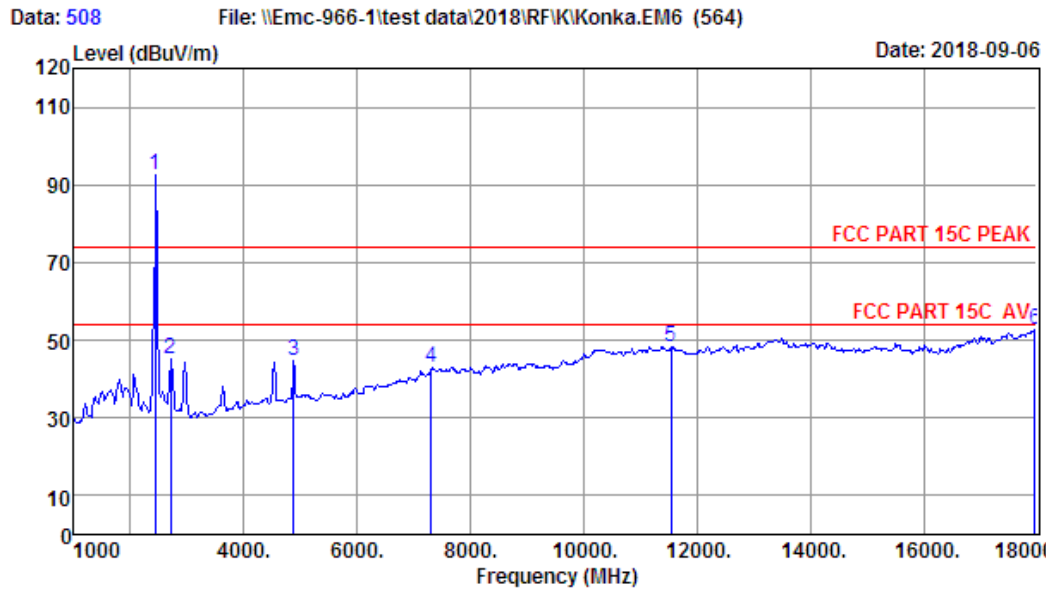

Site no. : 1# 966 Chamber Data no. : 508
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	96.97	92.64	74.00	-18.64	Peak
2	2700.00	27.92	3.45	36.02	49.67	45.02	74.00	28.98	Peak
3	4874.00	32.18	4.73	35.14	43.07	44.84	74.00	29.16	Peak
4	7311.00	36.78	6.09	33.31	33.24	42.80	74.00	31.20	Peak
5	11540.00	40.05	8.27	32.49	32.48	48.31	74.00	25.69	Peak
6	17966.00	44.61	12.57	31.48	27.15	52.85	74.00	21.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 509 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

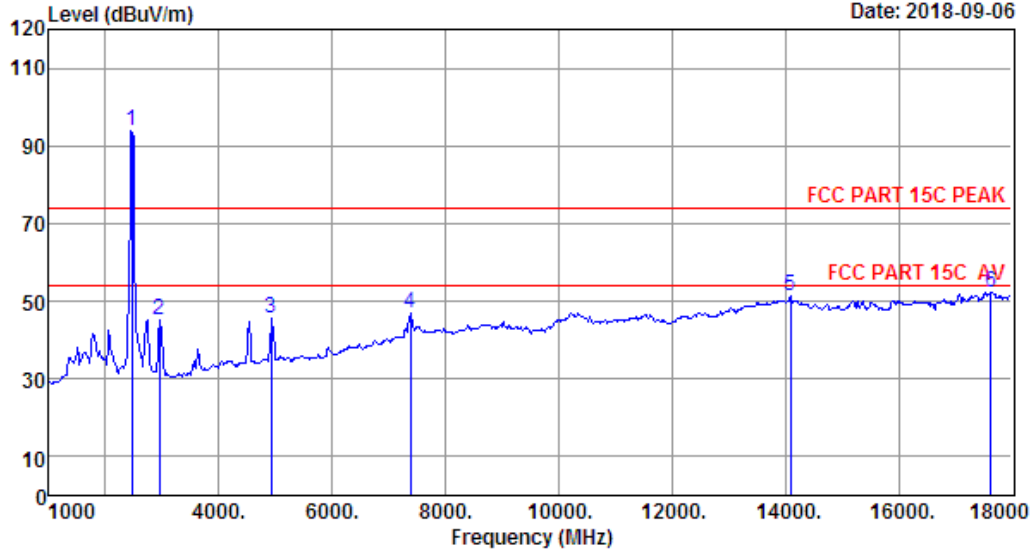


Site no. : 1# 966 Chamber Data no. : 509
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	98.25	93.90	74.00	-19.90	Peak
2	2955.00	28.32	3.60	36.97	50.08	45.03	74.00	28.97	Peak
3	4924.00	32.28	4.77	35.20	43.55	45.40	74.00	28.60	Peak
4	7386.00	36.97	6.12	33.17	37.04	46.96	74.00	27.04	Peak
5	14090.00	41.61	10.14	32.99	32.70	51.46	74.00	22.54	Peak
6	17626.00	43.71	11.82	31.28	28.04	52.29	74.00	21.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

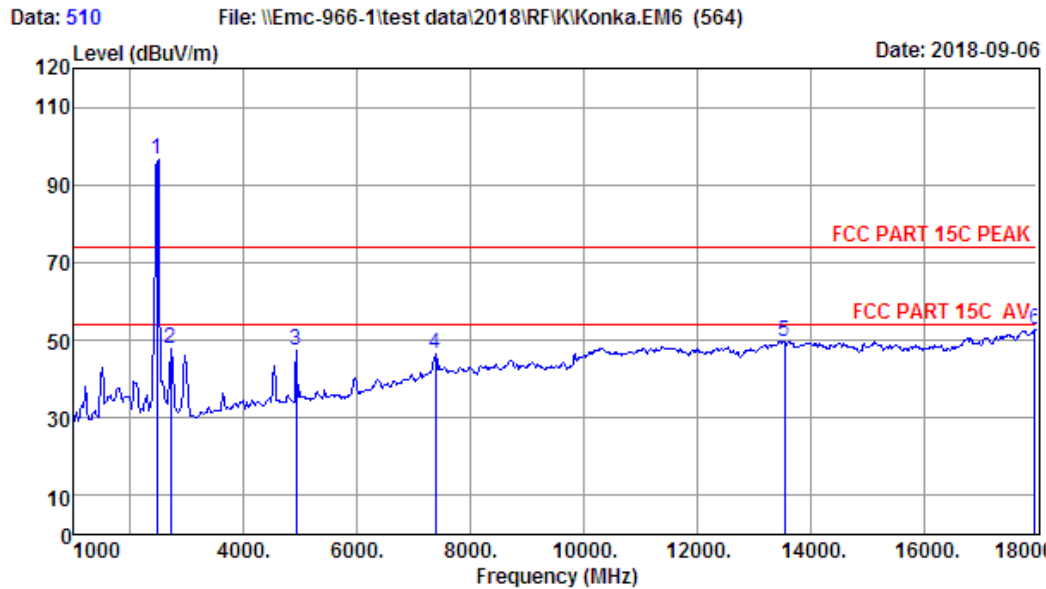

Site no. : 1# 966 Chamber Data no. : 510
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	100.83	96.48	74.00	-22.48	Peak
2	2700.00	27.92	3.45	36.02	52.63	47.98	74.00	26.02	Peak
3	4924.00	32.28	4.77	35.20	45.50	47.35	74.00	26.65	Peak
4	7386.00	36.97	6.12	33.17	36.78	46.70	74.00	27.30	Peak
5	13546.00	41.34	9.73	32.54	31.11	49.64	74.00	24.36	Peak
6	17966.00	44.61	12.57	31.48	26.99	52.69	74.00	21.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 511 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

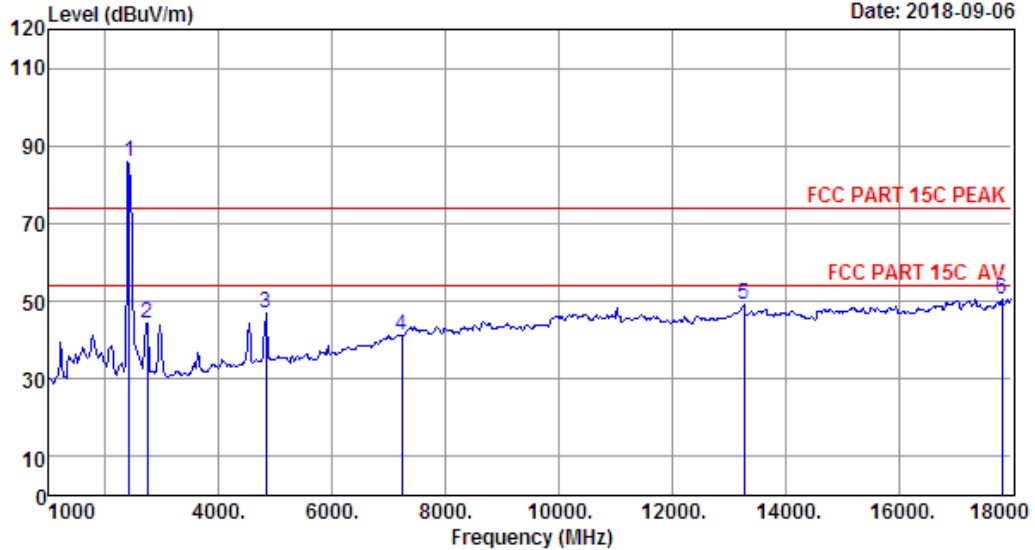


Site no. : 1# 966 Chamber Data no. : 511
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	90.25	85.93	74.00	-11.93	Peak
2	2734.00	27.97	3.47	36.15	49.18	44.47	74.00	29.53	Peak
3	4824.00	32.09	4.69	35.08	45.10	46.80	74.00	27.20	Peak
4	7236.00	36.63	6.03	33.42	32.12	41.36	74.00	32.64	Peak
5	13274.00	40.76	9.36	32.66	31.61	49.07	74.00	24.93	Peak
6	17830.00	44.25	12.27	31.21	25.16	50.47	74.00	23.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

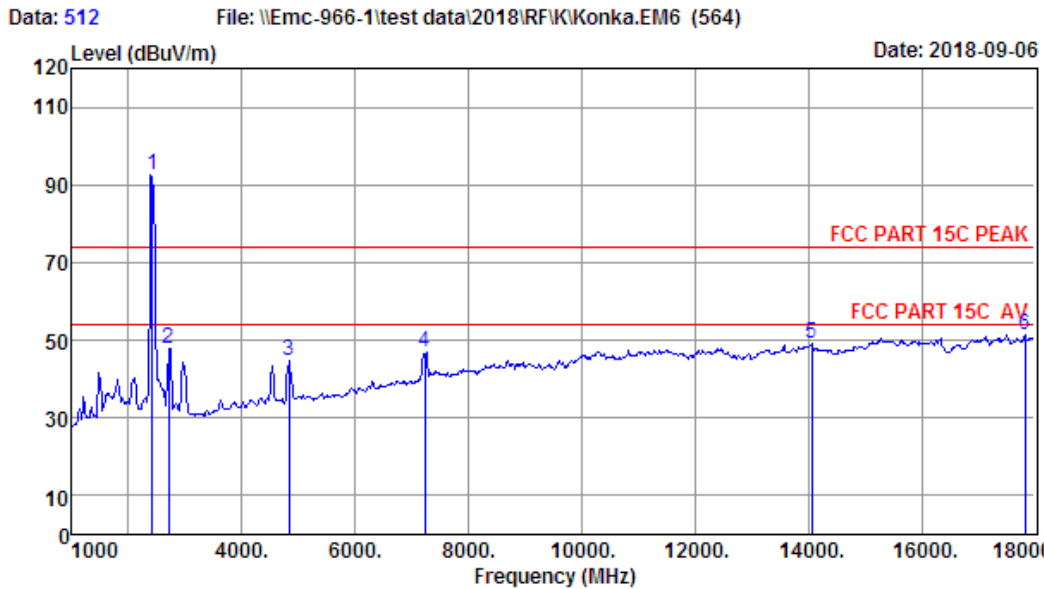

Site no. : 1# 966 Chamber Data no. : 512
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	96.71	92.39	74.00	-18.39	Peak
2	2700.00	27.92	3.45	36.02	52.34	47.69	74.00	26.31	Peak
3	4824.00	32.09	4.69	35.08	42.83	44.53	74.00	29.47	Peak
4	7236.00	36.63	6.03	33.42	37.88	47.12	74.00	26.88	Peak
5	14056.00	41.65	10.13	32.95	30.20	49.03	74.00	24.97	Peak
6	17830.00	44.25	12.27	31.21	25.97	51.28	74.00	22.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 513 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

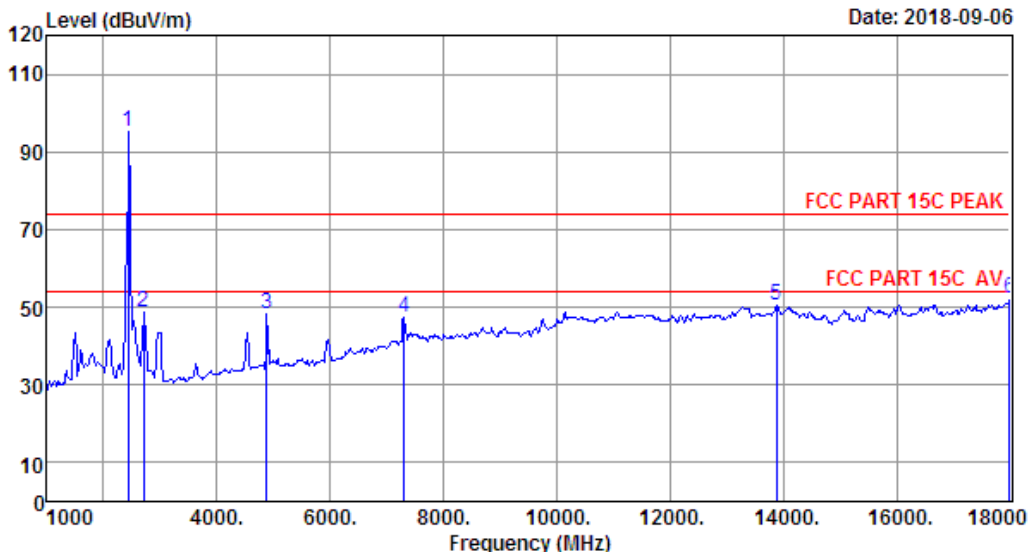


Site no. : 1# 966 Chamber Data no. : 513
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	99.38	95.05	74.00	-21.05	Peak
2	2700.00	27.92	3.45	36.02	53.50	48.85	74.00	25.15	Peak
3	4874.00	32.18	4.73	35.14	46.51	48.28	74.00	25.72	Peak
4	7311.00	36.78	6.09	33.31	37.84	47.40	74.00	26.60	Peak
5	13886.00	41.61	10.11	32.80	31.44	50.36	74.00	23.64	Peak
6	18000.00	44.70	12.64	31.56	26.43	52.21	74.00	21.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

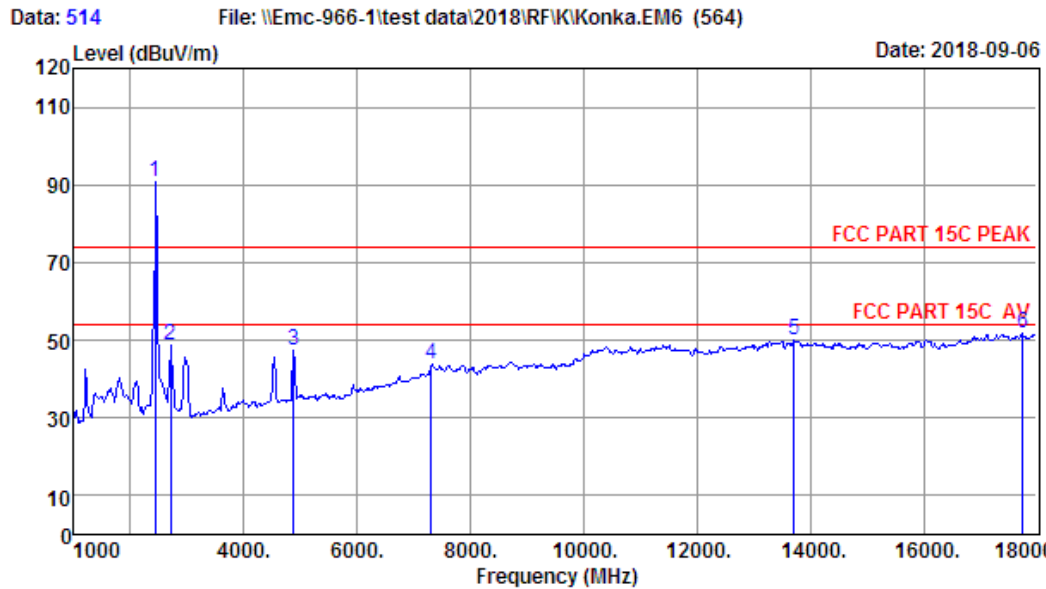


Site no. : 1# 966 Chamber Data no. : 514
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	94.92	90.59	74.00	-16.59	Peak
2	2700.00	27.92	3.45	36.02	53.42	48.77	74.00	25.23	Peak
3	4874.00	32.18	4.73	35.14	45.66	47.43	74.00	26.57	Peak
4	7311.00	36.78	6.09	33.31	34.12	43.68	74.00	30.32	Peak
5	13716.00	41.47	9.96	32.66	31.07	49.84	74.00	24.16	Peak
6	17745.00	44.03	12.08	31.18	27.05	51.98	74.00	22.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

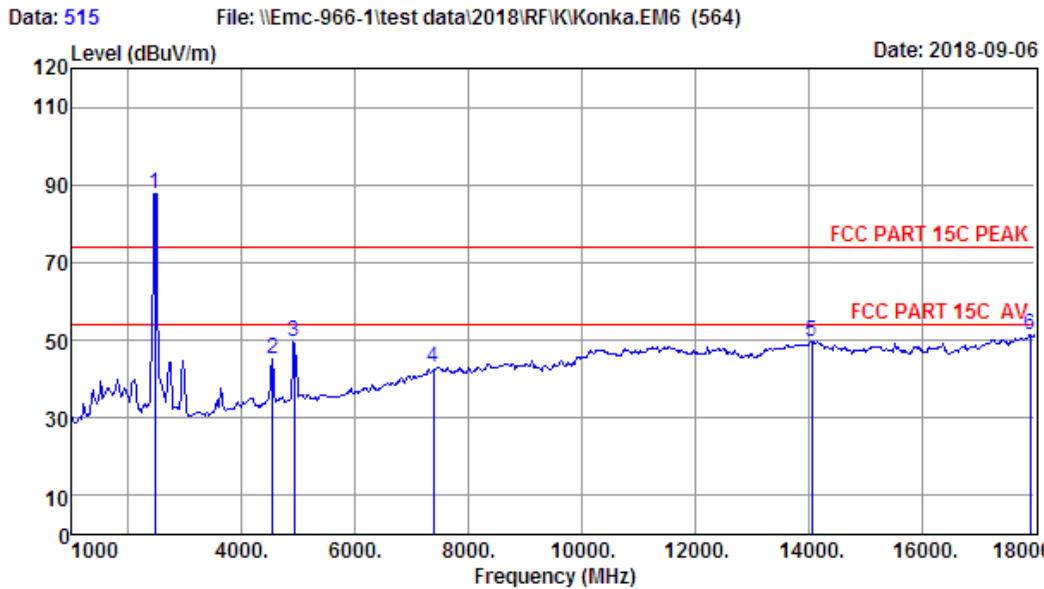


Site no. : 1# 966 Chamber Data no. : 515
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	92.18	87.83	74.00	-13.83	Peak
2	4536.00	31.56	4.68	35.57	44.56	45.23	74.00	28.77	Peak
3	4924.00	32.28	4.77	35.20	47.61	49.46	74.00	24.54	Peak
4	7386.00	36.97	6.12	33.17	32.96	42.88	74.00	31.12	Peak
5	14056.00	41.65	10.13	32.95	30.83	49.66	74.00	24.34	Peak
6	17915.00	44.48	12.45	31.40	26.01	51.54	74.00	22.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

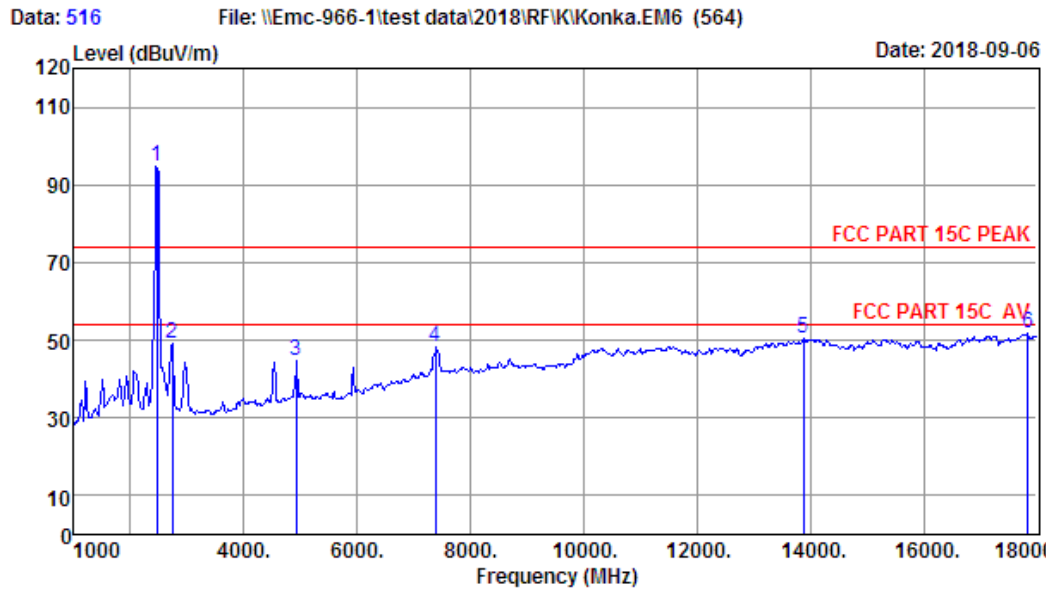

Site no. : 1# 966 Chamber Data no. : 516
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	99.26	94.91	74.00	-20.91	Peak
2	2734.00	27.97	3.47	36.15	53.65	48.94	74.00	25.06	Peak
3	4924.00	32.28	4.77	35.20	42.87	44.72	74.00	29.28	Peak
4	7386.00	36.97	6.12	33.17	38.28	48.20	74.00	25.80	Peak
5	13886.00	41.61	10.11	32.80	31.64	50.56	74.00	23.44	Peak
6	17847.00	44.30	12.30	31.25	26.26	51.61	74.00	22.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 517 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

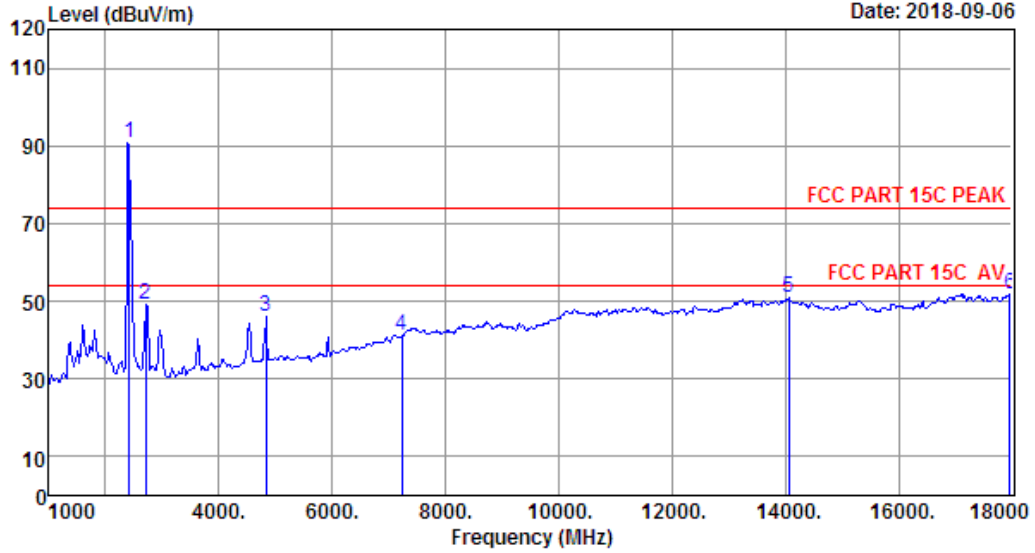


Site no. : 1# 966 Chamber Data no. : 517
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	95.31	90.99	74.00	-16.99	Peak
2	2700.00	27.92	3.45	36.02	53.89	49.24	74.00	24.76	Peak
3	4824.00	32.09	4.69	35.08	44.43	46.13	74.00	27.87	Peak
4	7236.00	36.63	6.03	33.42	31.83	41.07	74.00	32.93	Peak
5	14056.00	41.65	10.13	32.95	32.14	50.97	74.00	23.03	Peak
6	17966.00	44.61	12.57	31.48	26.25	51.95	74.00	22.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

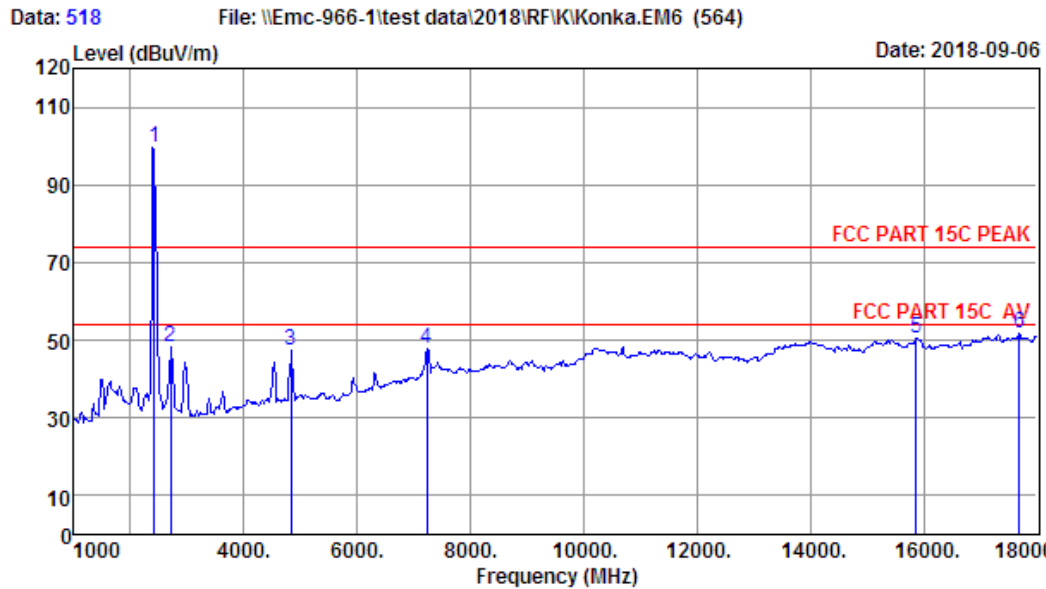


Site no. : 1# 966 Chamber Data no. : 518
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	103.95	99.63	74.00	-25.63	Peak
2	2700.00	27.92	3.45	36.02	52.71	48.06	74.00	25.94	Peak
3	4824.00	32.09	4.69	35.08	45.48	47.18	74.00	26.82	Peak
4	7236.00	36.63	6.03	33.42	38.80	48.04	74.00	25.96	Peak
5	15875.00	38.21	10.66	32.13	33.76	50.50	74.00	23.50	Peak
6	17694.00	43.89	11.97	31.22	27.01	51.65	74.00	22.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

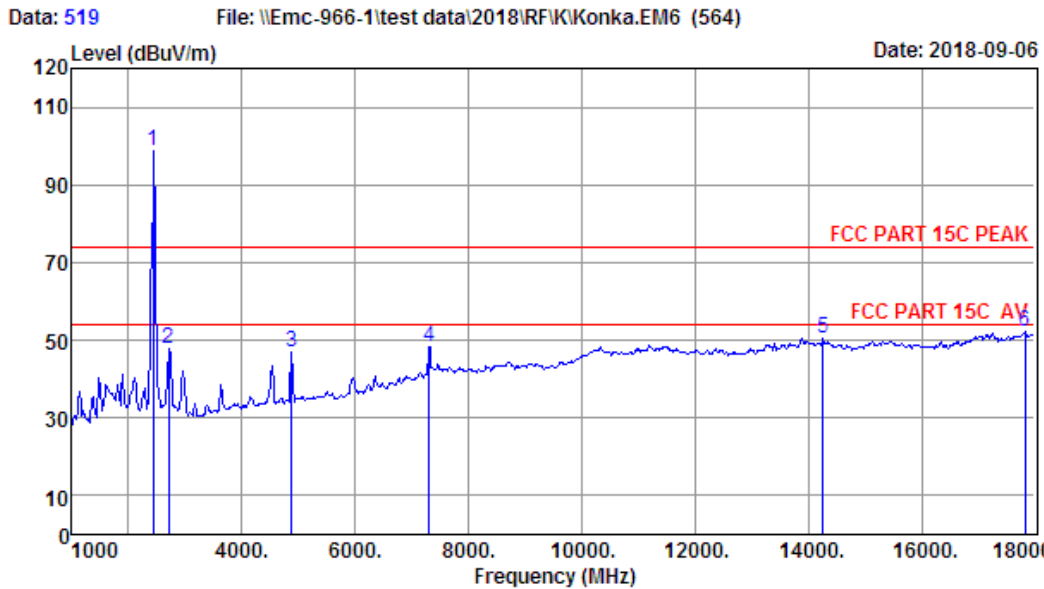

Site no. : 1# 966 Chamber Data no. : 519
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	103.14	98.81	74.00	-24.81	Peak
2	2700.00	27.92	3.45	36.02	52.53	47.88	74.00	26.12	Peak
3	4874.00	32.18	4.73	35.14	45.19	46.96	74.00	27.04	Peak
4	7311.00	36.78	6.09	33.31	38.90	48.46	74.00	25.54	Peak
5	14260.00	41.44	10.16	33.20	32.01	50.41	74.00	23.59	Peak
6	17830.00	44.25	12.27	31.21	26.96	52.27	74.00	21.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 520 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

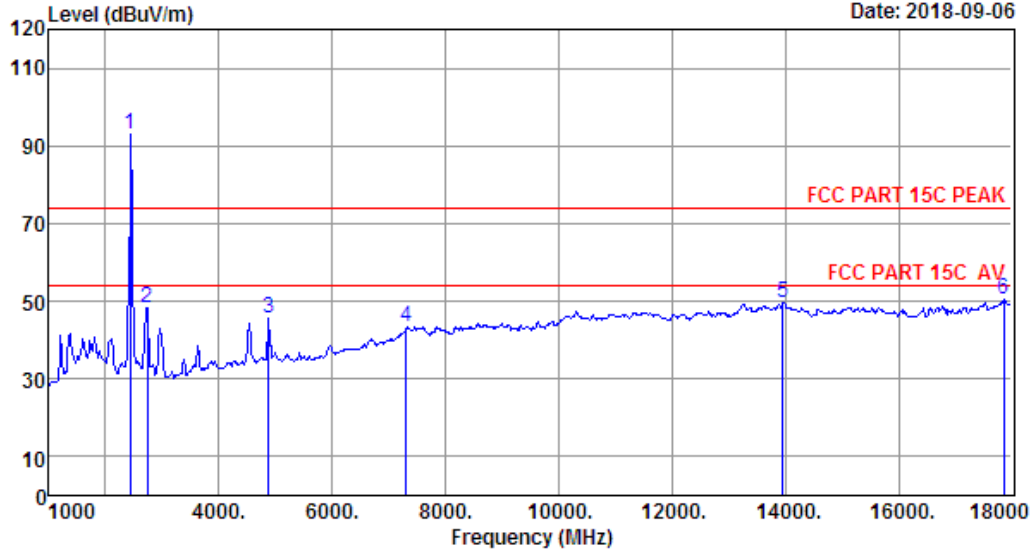

Site no. : 1# 966 Chamber Data no. : 520
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	97.19	92.86	74.00	-18.86	Peak
2	2734.00	27.97	3.47	36.15	53.04	48.33	74.00	25.67	Peak
3	4874.00	32.18	4.73	35.14	44.01	45.78	74.00	28.22	Peak
4	7311.00	36.78	6.09	33.31	33.88	43.44	74.00	30.56	Peak
5	13954.00	41.66	10.12	32.84	30.60	49.54	74.00	24.46	Peak
6	17864.00	44.34	12.34	31.29	25.08	50.47	74.00	23.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 521 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

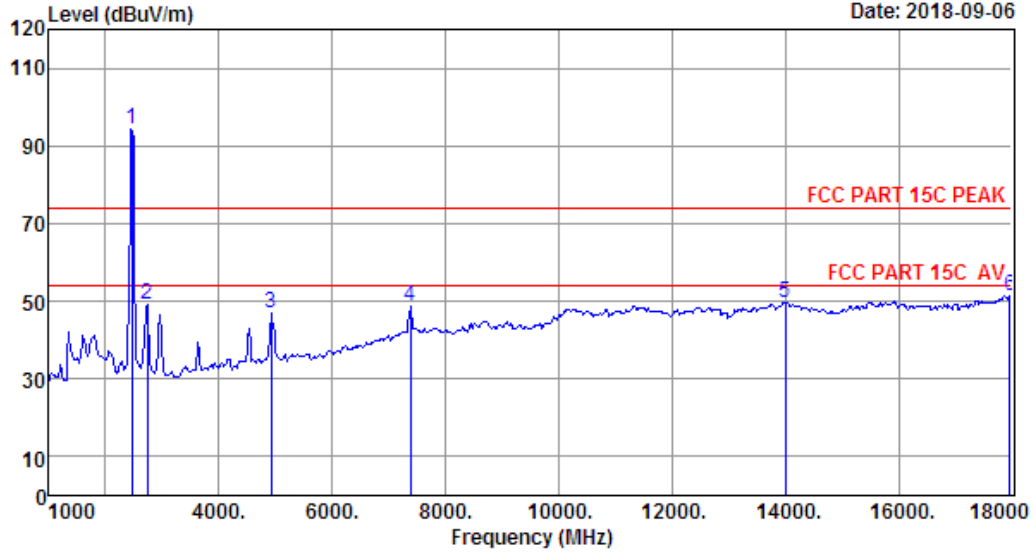


Site no. : 1# 966 Chamber Data no. : 521
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	98.80	94.45	74.00	-20.45	Peak
2	2734.00	27.97	3.47	36.15	53.94	49.23	74.00	24.77	Peak
3	4924.00	32.28	4.77	35.20	45.10	46.95	74.00	27.05	Peak
4	7386.00	36.97	6.12	33.17	38.77	48.69	74.00	25.31	Peak
5	14005.00	41.70	10.13	32.88	30.86	49.81	74.00	24.19	Peak
6	17966.00	44.61	12.57	31.48	25.88	51.58	74.00	22.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

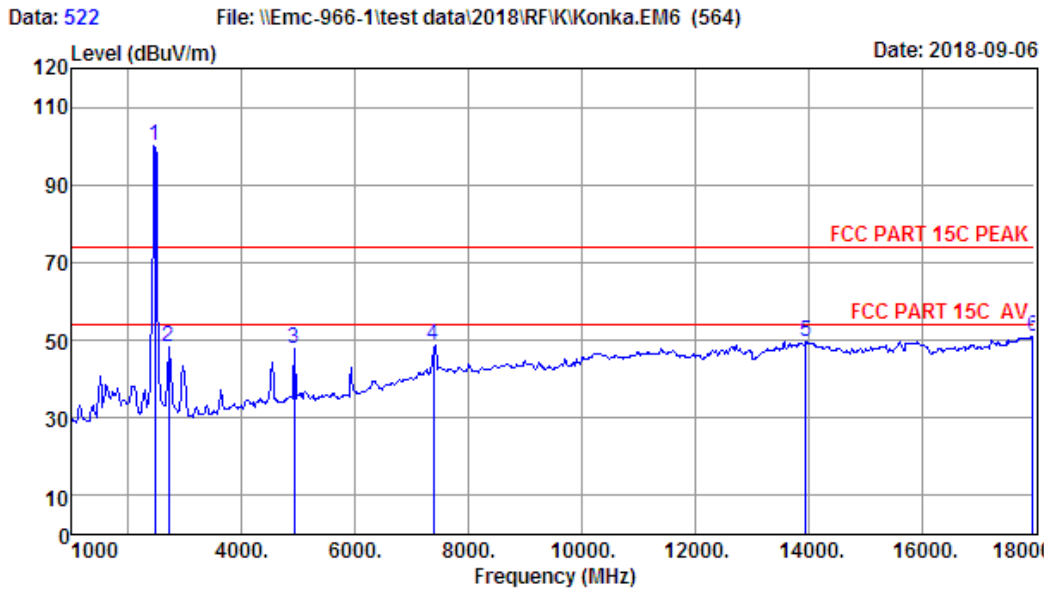

Site no. : 1# 966 Chamber Data no. : 522
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	104.41	100.06	74.00	-26.06	Peak
2	2700.00	27.92	3.45	36.02	53.02	48.37	74.00	25.63	Peak
3	4924.00	32.28	4.77	35.20	46.12	47.97	74.00	26.03	Peak
4	7386.00	36.97	6.12	33.17	38.64	48.56	74.00	25.44	Peak
5	13954.00	41.66	10.12	32.84	30.66	49.60	74.00	24.40	Peak
6	17966.00	44.61	12.57	31.48	25.43	51.13	74.00	22.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 523 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

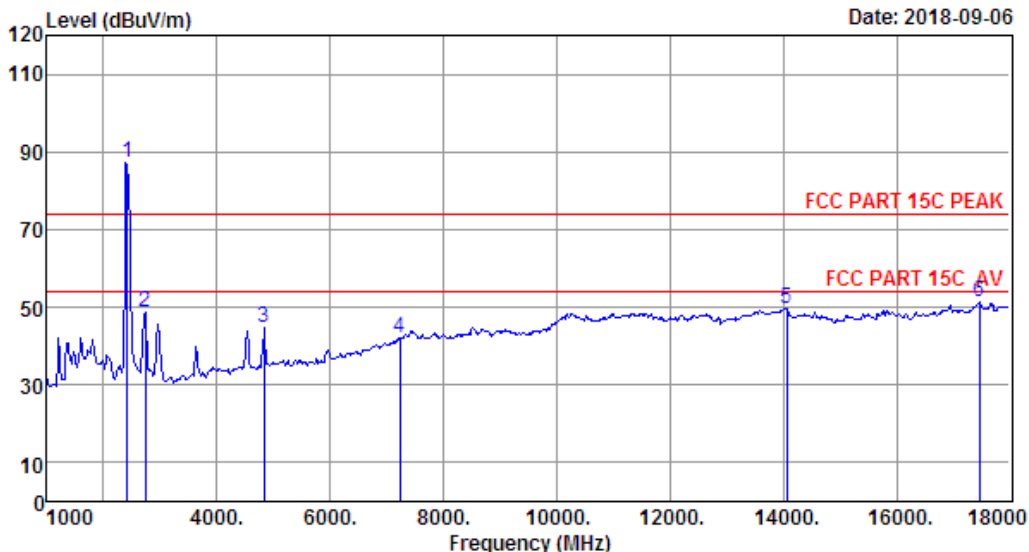

Site no. : 1# 966 Chamber Data no. : 523
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	91.42	87.10	74.00	-13.10	Peak
2	2734.00	27.97	3.47	36.15	53.39	48.68	74.00	25.32	Peak
3	4824.00	32.09	4.69	35.08	42.99	44.69	74.00	29.31	Peak
4	7236.00	36.63	6.03	33.42	32.73	41.97	74.00	32.03	Peak
5	14056.00	41.65	10.13	32.95	30.83	49.66	74.00	24.34	Peak
6	17456.00	43.21	11.44	31.05	27.61	51.21	74.00	22.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 524 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

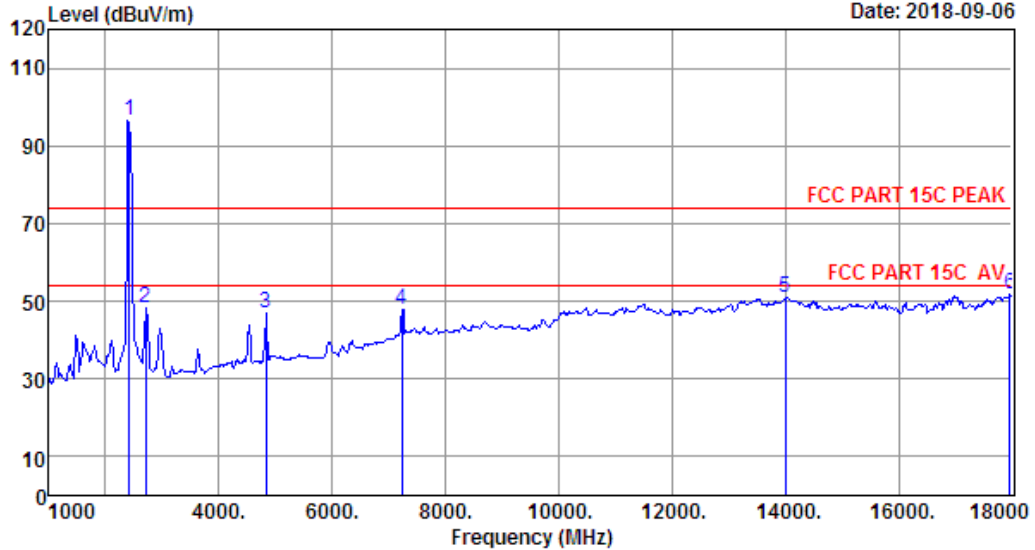

Site no. : 1# 966 Chamber Data no. : 524
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	100.66	96.34	74.00	-22.34	Peak
2	2700.00	27.92	3.45	36.02	52.80	48.15	74.00	25.85	Peak
3	4824.00	32.09	4.69	35.08	45.34	47.04	74.00	26.96	Peak
4	7236.00	36.63	6.03	33.42	38.57	47.81	74.00	26.19	Peak
5	14005.00	41.70	10.13	32.88	31.91	50.86	74.00	23.14	Peak
6	17966.00	44.61	12.57	31.48	26.05	51.75	74.00	22.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 525 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

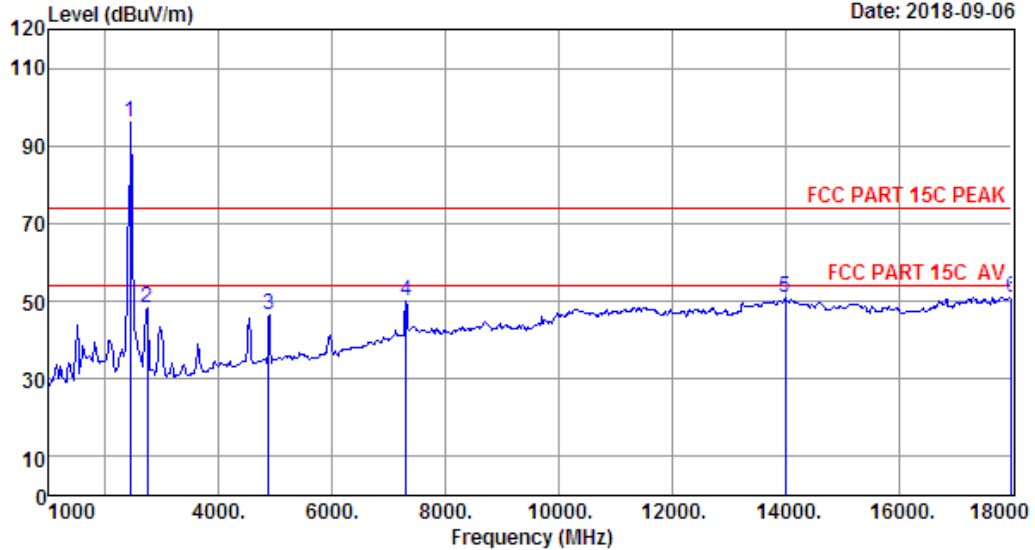

Site no. : 1# 966 Chamber Data no. : 525
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	100.49	96.16	74.00	-22.16	Peak
2	2734.00	27.97	3.47	36.15	53.14	48.43	74.00	25.57	Peak
3	4874.00	32.18	4.73	35.14	44.59	46.36	74.00	27.64	Peak
4	7311.00	36.78	6.09	33.31	40.58	50.14	74.00	23.86	Peak
5	14005.00	41.70	10.13	32.88	31.87	50.82	74.00	23.18	Peak
6	18000.00	44.70	12.64	31.56	25.34	51.12	74.00	22.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 526 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

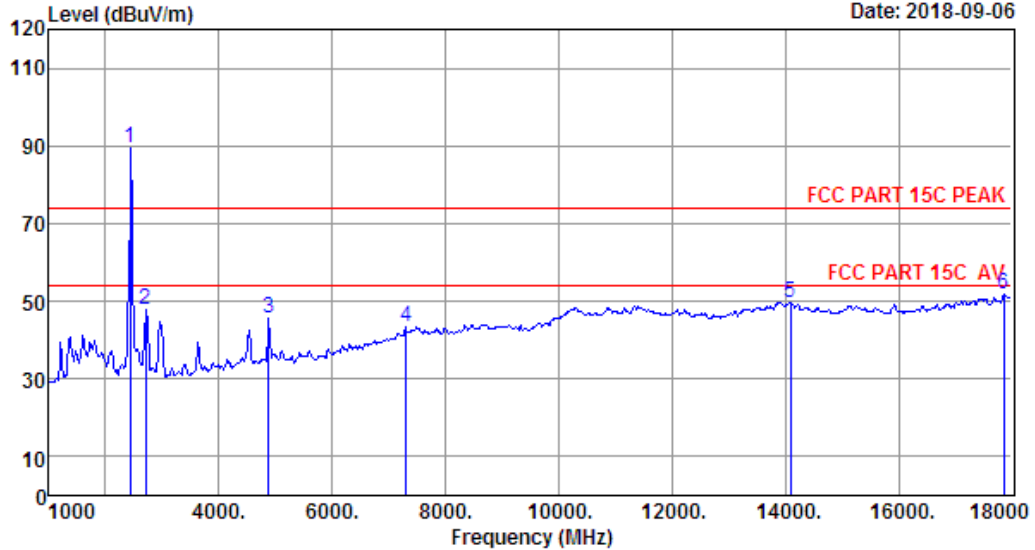


Site no. : 1# 966 Chamber Data no. : 526
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	93.68	89.35	74.00	-15.35	Peak
2	2700.00	27.92	3.45	36.02	52.69	48.04	74.00	25.96	Peak
3	4874.00	32.18	4.73	35.14	43.91	45.68	74.00	28.32	Peak
4	7311.00	36.78	6.09	33.31	33.78	43.34	74.00	30.66	Peak
5	14090.00	41.61	10.14	32.99	30.91	49.67	74.00	24.33	Peak
6	17864.00	44.34	12.34	31.29	26.44	51.83	74.00	22.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

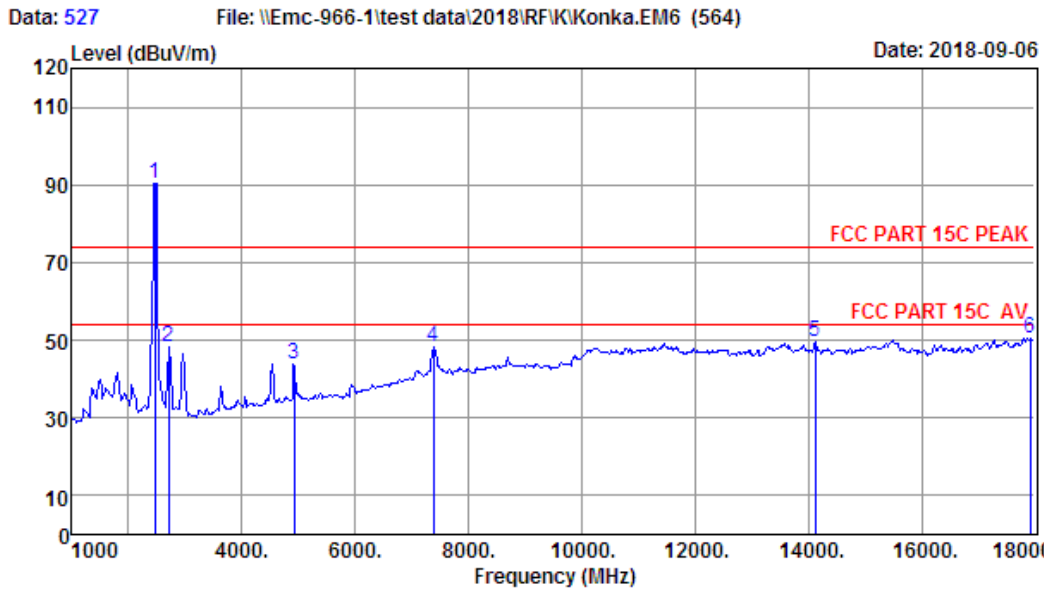


Site no. : 1# 966 Chamber Data no. : 527
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	94.65	90.30	74.00	-16.30	Peak
2	2700.00	27.92	3.45	36.02	53.12	48.47	74.00	25.53	Peak
3	4924.00	32.28	4.77	35.20	42.15	44.00	74.00	30.00	Peak
4	7386.00	36.97	6.12	33.17	38.52	48.44	74.00	25.56	Peak
5	14124.00	41.58	10.14	33.04	30.80	49.48	74.00	24.52	Peak
6	17915.00	44.48	12.45	31.40	25.02	50.55	74.00	23.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

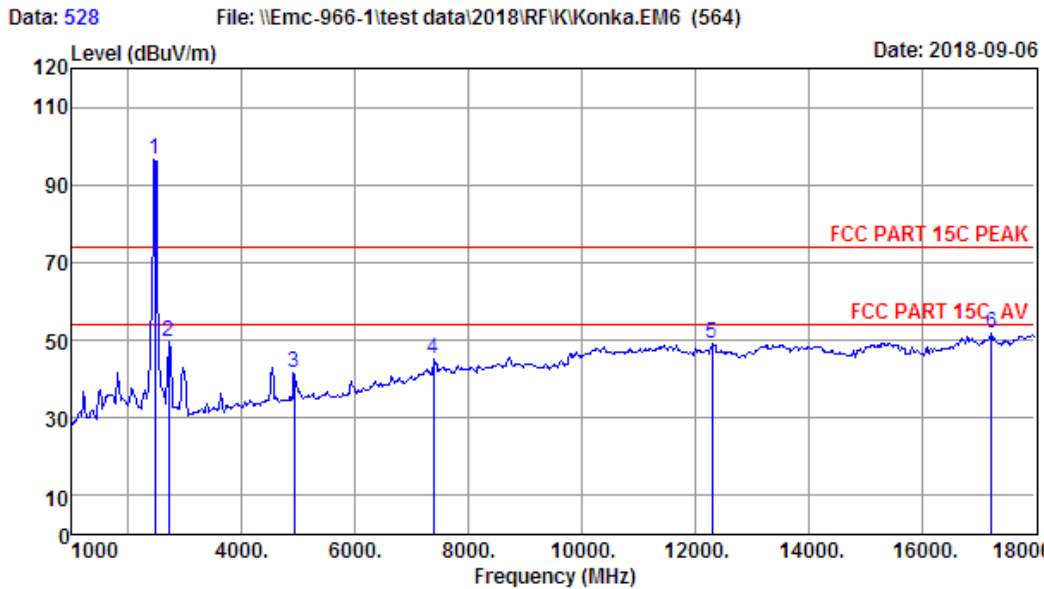

Site no. : 1# 966 Chamber Data no. : 528
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	100.69	96.34	74.00	-22.34	Peak
2	2700.00	27.92	3.45	36.02	54.09	49.44	74.00	24.56	Peak
3	4924.00	32.28	4.77	35.20	39.86	41.71	74.00	32.29	Peak
4	7386.00	36.97	6.12	33.17	35.45	45.37	74.00	28.63	Peak
5	12305.00	39.34	8.45	32.64	33.93	49.08	74.00	24.92	Peak
6	17235.00	42.39	10.94	31.21	29.77	51.89	74.00	22.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 529 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

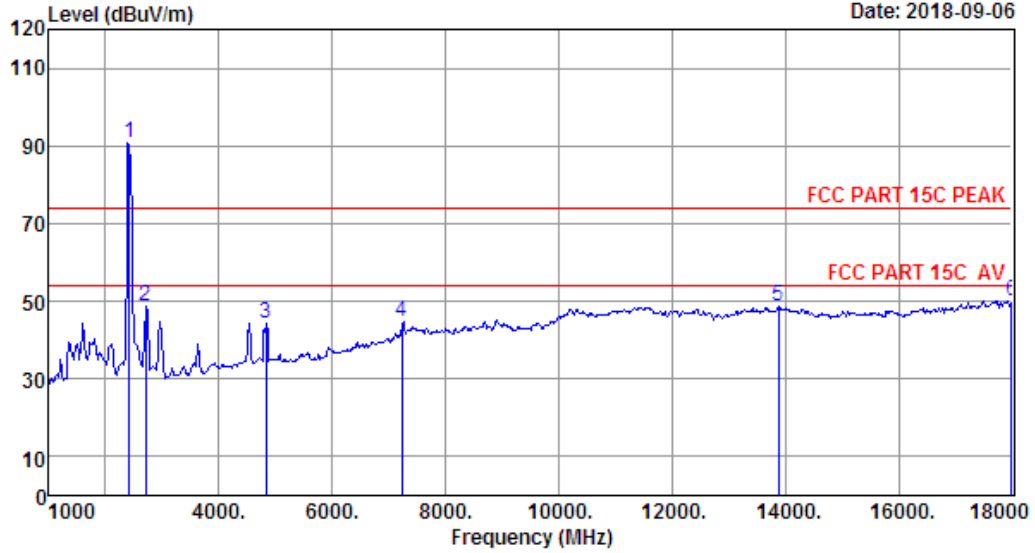


Site no. : 1# 966 Chamber Data no. : 529
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	95.20	90.88	74.00	-16.88	Peak
2	2700.00	27.92	3.45	36.02	53.35	48.70	74.00	25.30	Peak
3	4824.00	32.09	4.69	35.08	42.41	44.11	74.00	29.89	Peak
4	7236.00	36.63	6.03	33.42	35.51	44.75	74.00	29.25	Peak
5	13886.00	41.61	10.11	32.80	29.60	48.52	74.00	25.48	Peak
6	18000.00	44.70	12.64	31.56	24.33	50.11	74.00	23.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

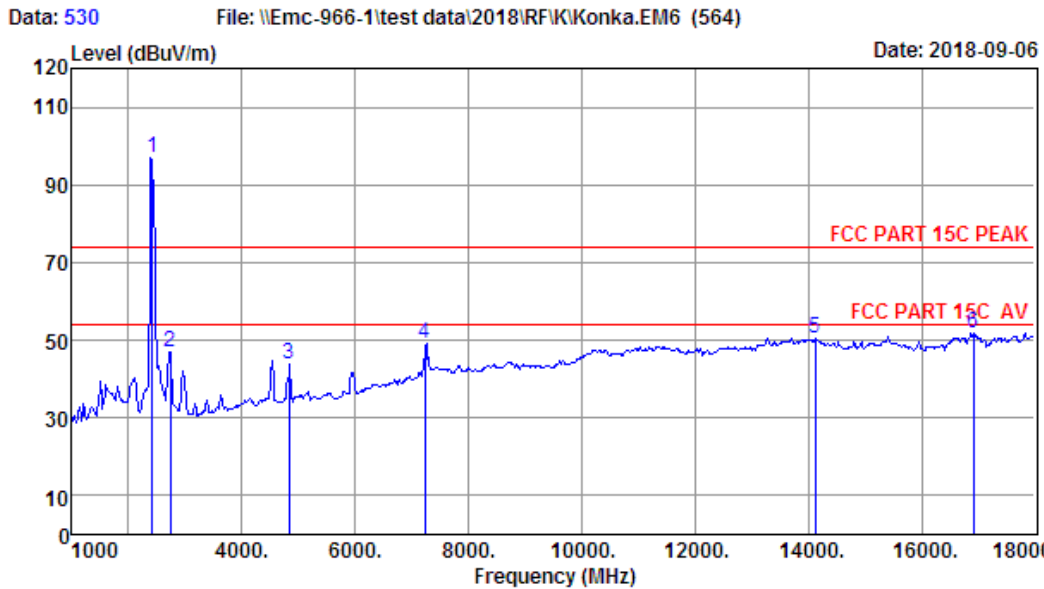

Site no. : 1# 966 Chamber Data no. : 530
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.39	3.23	34.94	101.29	96.97	74.00	-22.97	Peak
2	2734.00	27.97	3.47	36.15	51.68	46.97	74.00	27.03	Peak
3	4824.00	32.09	4.69	35.08	42.13	43.83	74.00	30.17	Peak
4	7236.00	36.63	6.03	33.42	39.80	49.04	74.00	24.96	Peak
5	14124.00	41.58	10.14	33.04	32.00	50.68	74.00	23.32	Peak
6	16912.00	40.86	10.44	31.22	31.59	51.67	74.00	22.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 531 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

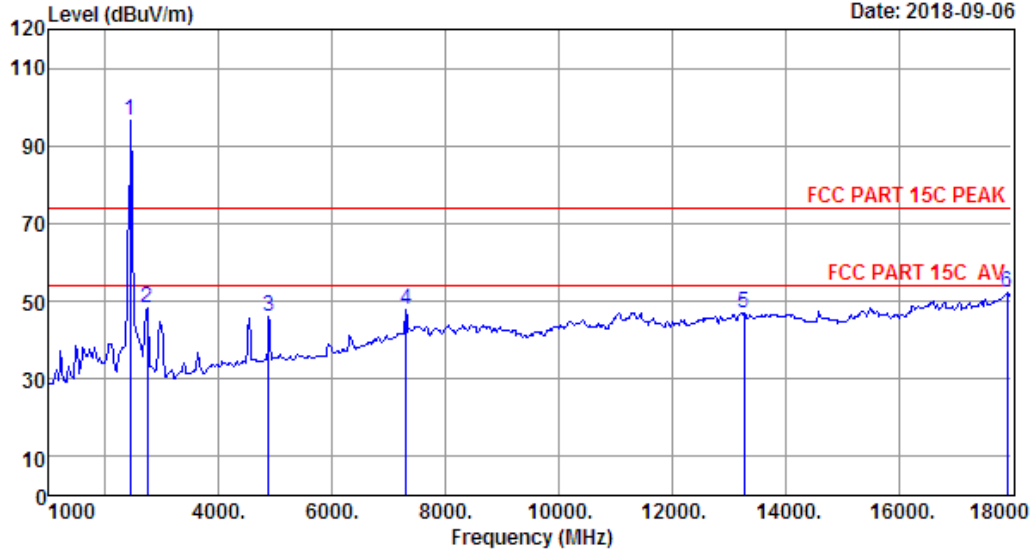

Site no. : 1# 966 Chamber Data no. : 531
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH6 2437TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	100.82	96.49	74.00	-22.49	Peak
2	2734.00	27.97	3.47	36.15	52.84	48.13	74.00	25.87	Peak
3	4874.00	32.18	4.73	35.14	44.07	45.84	74.00	28.16	Peak
4	7311.00	36.78	6.09	33.31	38.09	47.65	74.00	26.35	Peak
5	13274.00	40.76	9.36	32.66	29.66	47.12	74.00	26.88	Peak
6	17915.00	44.48	12.45	31.40	26.58	52.11	74.00	21.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 532 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

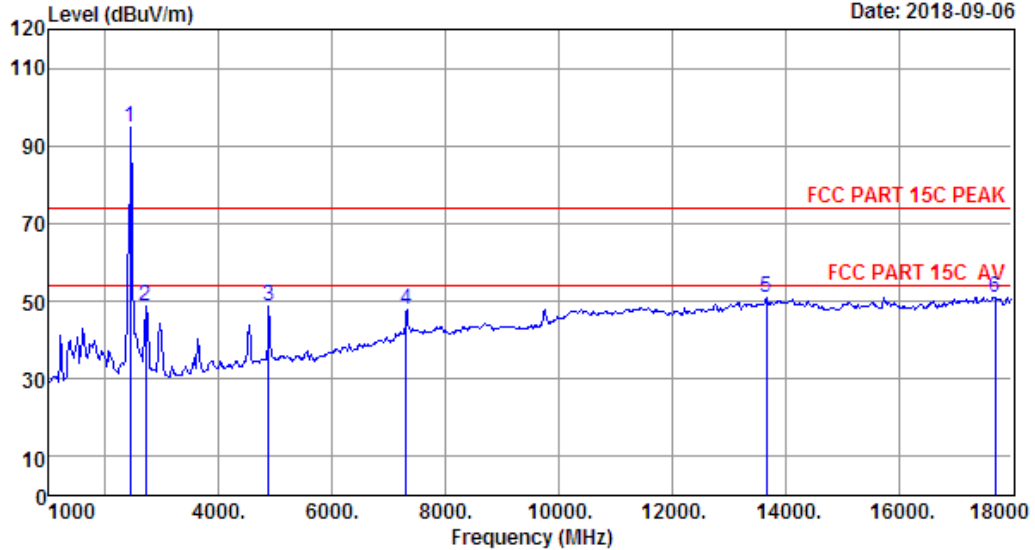

Site no. : 1# 966 Chamber Data no. : 532
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH6 2437TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	98.90	94.57	74.00	-20.57	Peak
2	2700.00	27.92	3.45	36.02	53.52	48.87	74.00	25.13	Peak
3	4874.00	32.18	4.73	35.14	46.98	48.75	74.00	25.25	Peak
4	7311.00	36.78	6.09	33.31	38.47	48.03	74.00	25.97	Peak
5	13665.00	41.43	9.89	32.62	32.06	50.76	74.00	23.24	Peak
6	17711.00	43.94	12.01	31.21	26.34	51.08	74.00	22.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 533 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

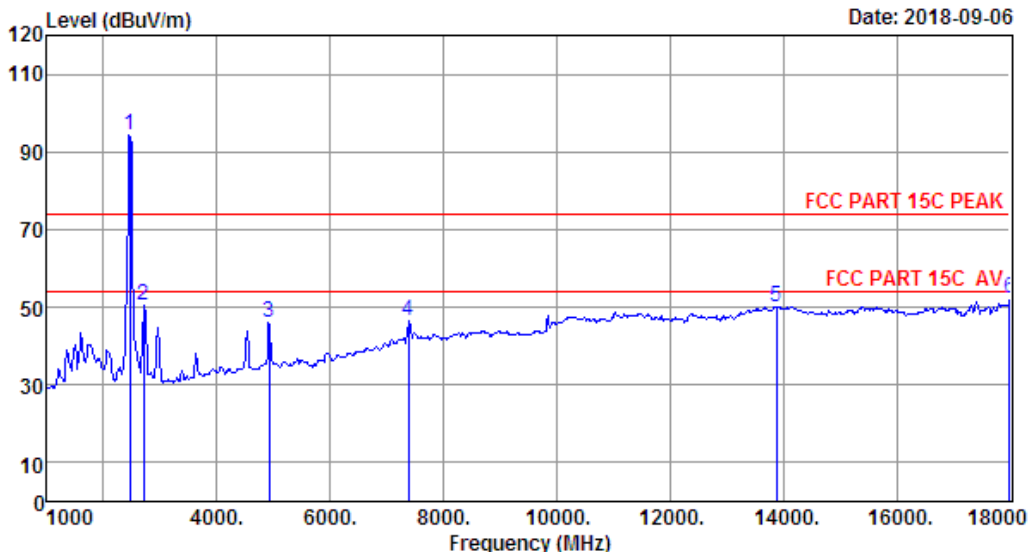

Site no. : 1# 966 Chamber Data no. : 533
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	98.76	94.41	74.00	-20.41	Peak
2	2700.00	27.92	3.45	36.02	55.08	50.43	74.00	23.57	Peak
3	4924.00	32.28	4.77	35.20	44.00	45.85	74.00	28.15	Peak
4	7386.00	36.97	6.12	33.17	36.37	46.29	74.00	27.71	Peak
5	13886.00	41.61	10.11	32.80	31.08	50.00	74.00	24.00	Peak
6	18000.00	44.70	12.64	31.56	26.34	52.12	74.00	21.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 534 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

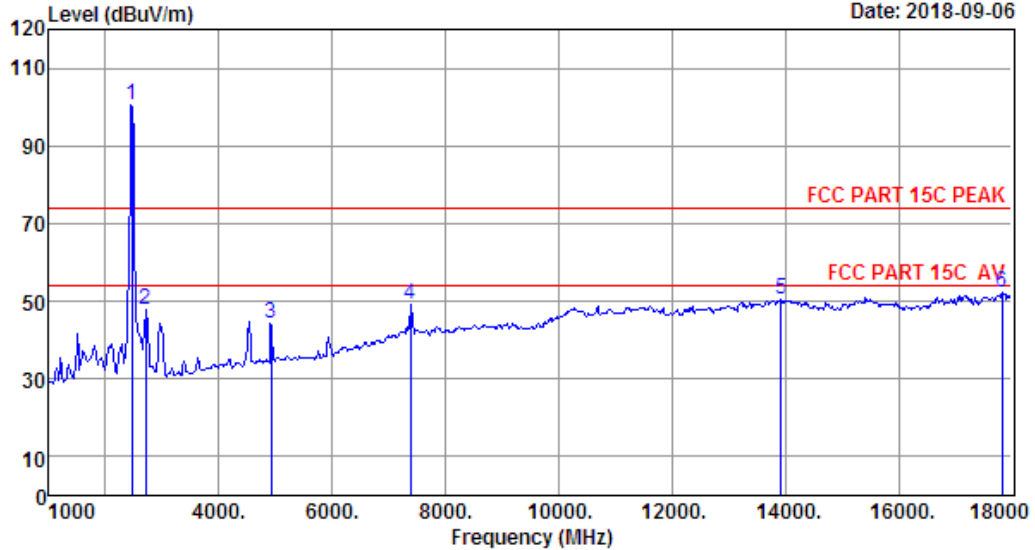

Site no. : 1# 966 Chamber Data no. : 534
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.52	3.27	35.14	104.73	100.38	74.00	-26.38	Peak
2	2700.00	27.92	3.45	36.02	52.61	47.96	74.00	26.04	Peak
3	4924.00	32.28	4.77	35.20	42.26	44.11	74.00	29.89	Peak
4	7386.00	36.97	6.12	33.17	39.03	48.95	74.00	25.05	Peak
5	13920.00	41.63	10.11	32.83	31.60	50.51	74.00	23.49	Peak
6	17830.00	44.25	12.27	31.21	27.05	52.36	74.00	21.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 535 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

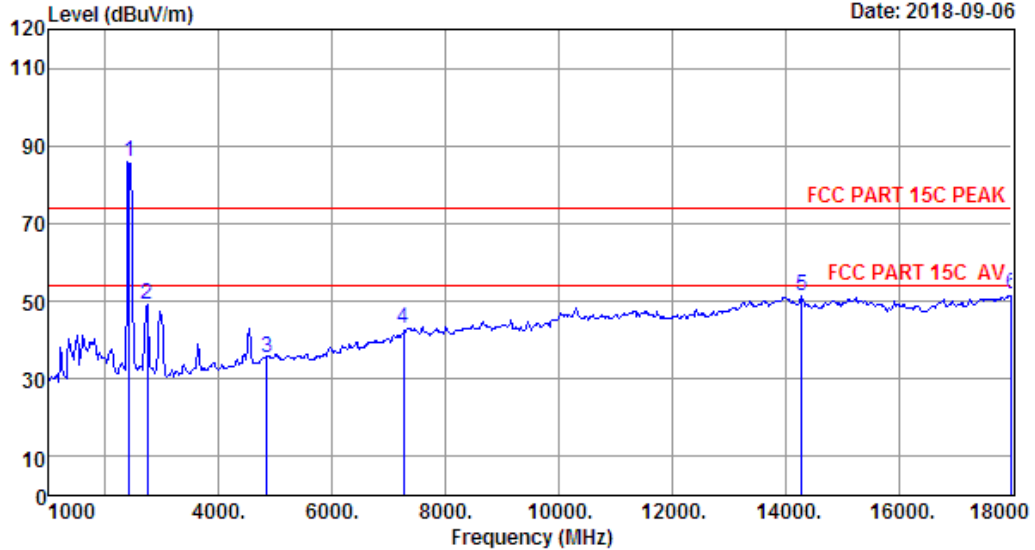

Site no. : 1# 966 Chamber Data no. : 535
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.43	3.24	35.00	90.31	85.98	74.00	-11.98	Peak
2	2734.00	27.97	3.47	36.15	53.72	49.01	74.00	24.99	Peak
3	4844.00	32.12	4.70	35.10	33.65	35.37	74.00	38.63	Peak
4	7266.00	36.71	6.05	33.36	33.71	43.11	74.00	30.89	Peak
5	14294.00	41.41	10.17	33.25	32.88	51.21	74.00	22.79	Peak
6	18000.00	44.70	12.64	31.56	26.20	51.98	74.00	22.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 536 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

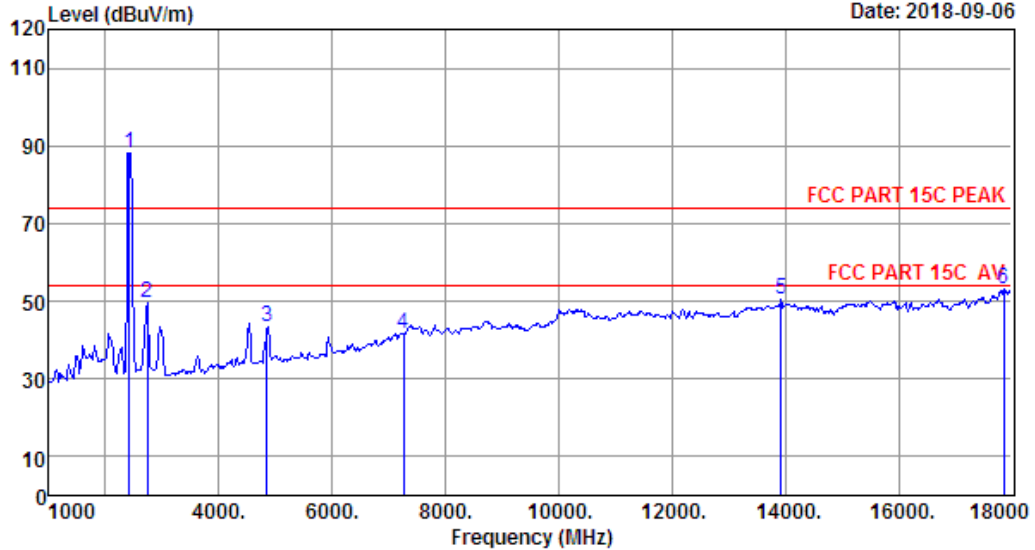

Site no. : 1# 966 Chamber Data no. : 536
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.43	3.24	35.00	92.29	87.96	74.00	-13.96	Peak
2	2734.00	27.97	3.47	36.15	54.39	49.68	74.00	24.32	Peak
3	4844.00	32.12	4.70	35.10	41.86	43.58	74.00	30.42	Peak
4	7266.00	36.71	6.05	33.36	32.33	41.73	74.00	32.27	Peak
5	13920.00	41.63	10.11	32.83	31.39	50.30	74.00	23.70	Peak
6	17864.00	44.34	12.34	31.29	27.74	53.13	74.00	20.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 537 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

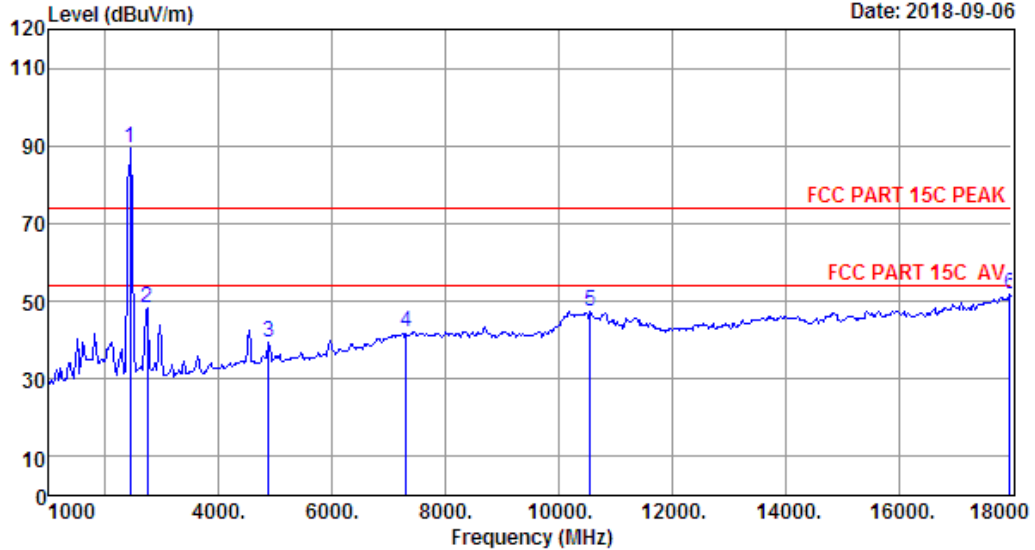

Site no. : 1# 966 Chamber Data no. : 537
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH6 2437TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	93.73	89.40	74.00	-15.40	Peak
2	2734.00	27.97	3.47	36.15	52.83	48.12	74.00	25.88	Peak
3	4874.00	32.18	4.73	35.14	37.67	39.44	74.00	34.56	Peak
4	7311.00	36.78	6.09	33.31	32.47	42.03	74.00	31.97	Peak
5	10554.00	39.36	9.50	34.05	32.54	47.35	74.00	26.65	Peak
6	17966.00	44.61	12.57	31.48	26.30	52.00	74.00	22.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 538 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

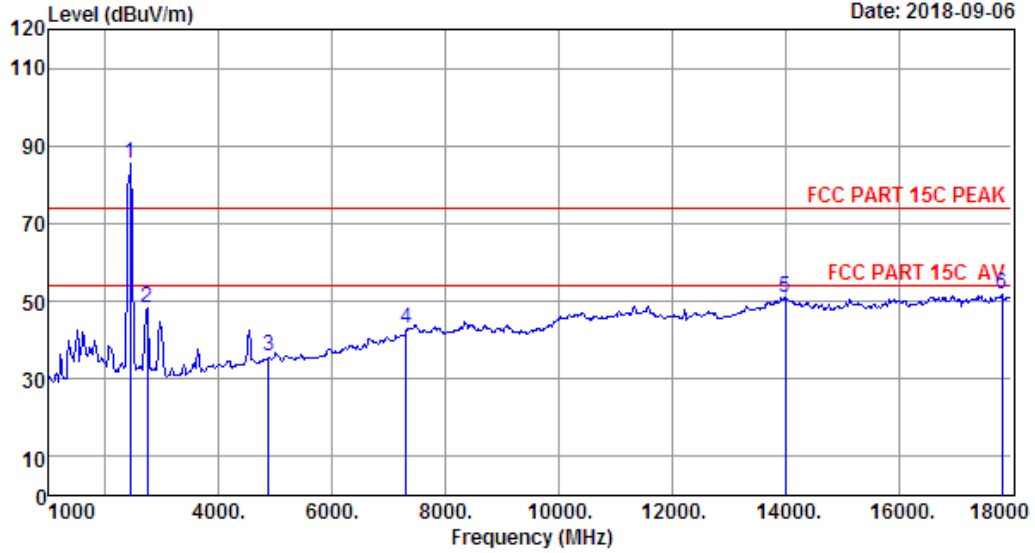

Site no. : 1# 966 Chamber Data no. : 538
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH6 2437TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.48	3.26	35.07	89.80	85.47	74.00	-11.47	Peak
2	2734.00	27.97	3.47	36.15	52.83	48.12	74.00	25.88	Peak
3	4874.00	32.18	4.73	35.14	33.89	35.66	74.00	38.34	Peak
4	7311.00	36.78	6.09	33.31	33.32	42.88	74.00	31.12	Peak
5	14005.00	41.70	10.13	32.88	32.18	51.13	74.00	22.87	Peak
6	17830.00	44.25	12.27	31.21	26.63	51.94	74.00	22.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 539 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

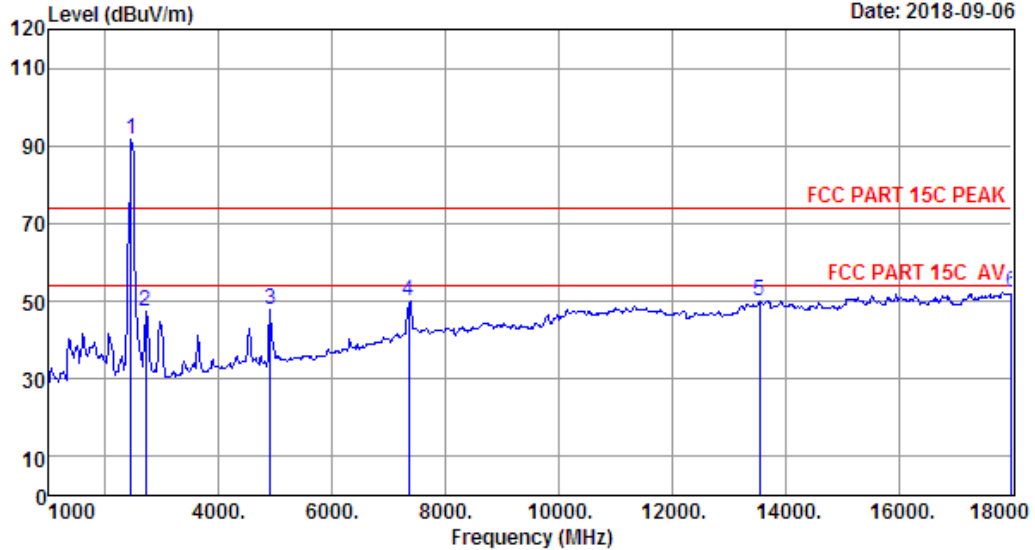


Site no. : 1# 966 Chamber Data no. : 539
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.48	3.26	35.07	95.92	91.59	74.00	-17.59	Peak
2	2700.00	27.92	3.45	36.02	51.83	47.18	74.00	26.82	Peak
3	4904.00	32.24	4.76	35.18	45.86	47.68	74.00	26.32	Peak
4	7356.00	36.90	6.11	33.22	40.35	50.14	74.00	23.86	Peak
5	13546.00	41.34	9.73	32.54	31.59	50.12	74.00	23.88	Peak
6	18000.00	44.70	12.64	31.56	26.65	52.43	74.00	21.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

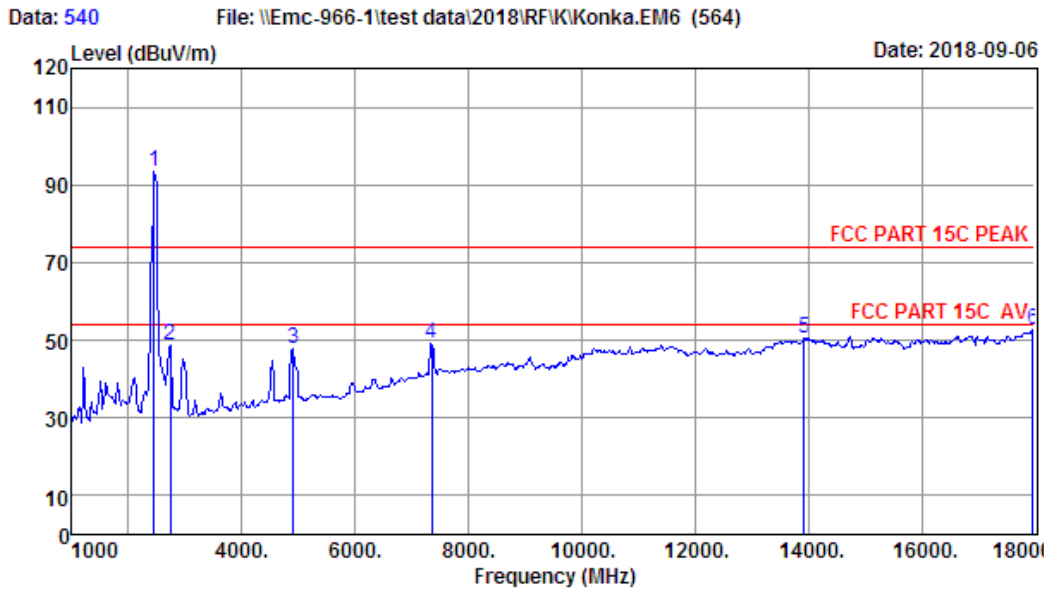

Site no. : 1# 966 Chamber Data no. : 540
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.48	3.26	35.07	97.90	93.57	74.00	-19.57	Peak
2	2734.00	27.97	3.47	36.15	53.53	48.82	74.00	25.18	Peak
3	4904.00	32.24	4.76	35.18	46.22	48.04	74.00	25.96	Peak
4	7356.00	36.90	6.11	33.22	39.30	49.09	74.00	24.91	Peak
5	13920.00	41.63	10.11	32.83	31.52	50.43	74.00	23.57	Peak
6	17966.00	44.61	12.57	31.48	26.78	52.48	74.00	21.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

5 BAND EDGE COMPLIANCE TEST

5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

5.2 Block Diagram of Test setup

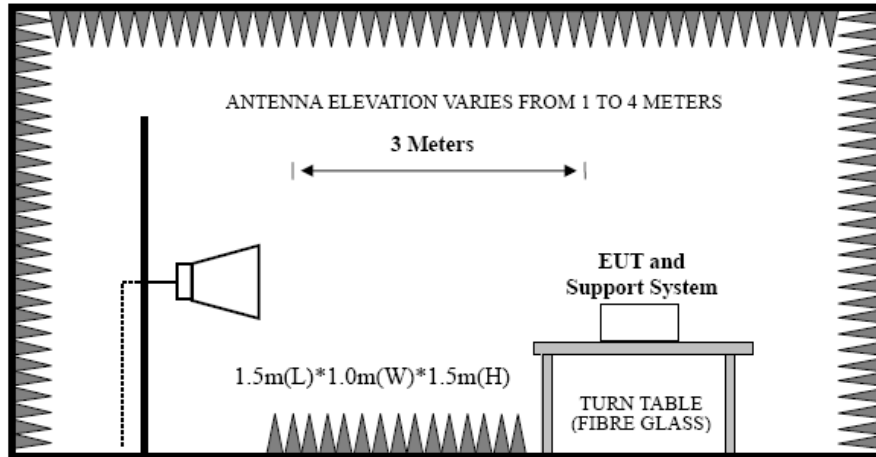

5.3 Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

5.4 Test Result

Pass (The testing data was attached in the next pages.)


Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412 MHz 、 2422MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

5.5 Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

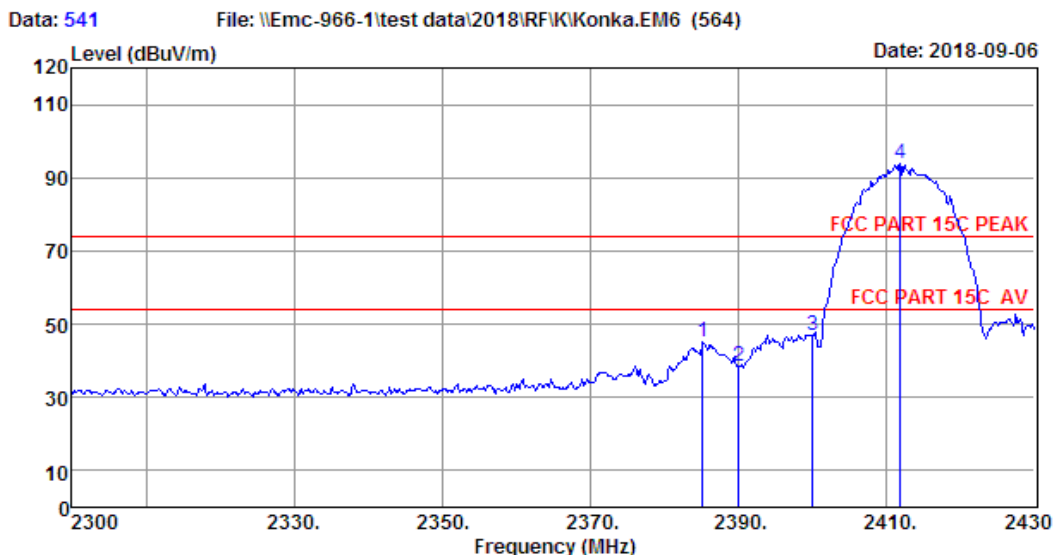


Site no. : 1# 966 Chamber Data no. : 541
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.15	27.31	3.20	34.87	49.43	45.07	74.00	28.93	Peak
2	2390.00	27.35	3.21	34.87	42.75	38.44	74.00	35.56	Peak
3	2400.00	27.35	3.21	34.94	51.25	46.87	74.00	27.13	Peak
4	2411.80	27.39	3.23	34.94	98.20	93.88	74.00	-19.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

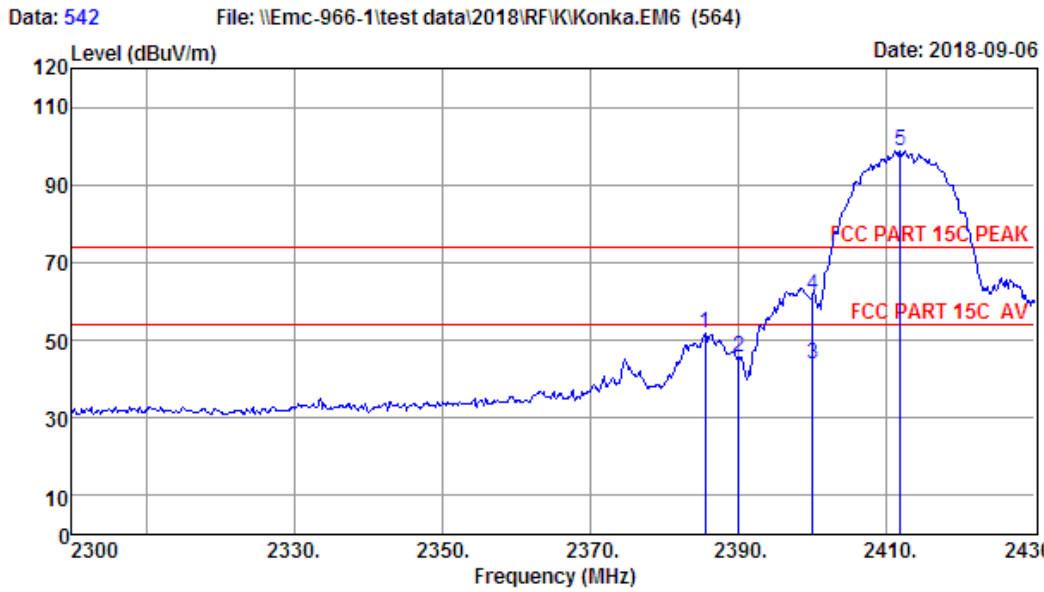

Site no. : 1# 966 Chamber Data no. : 542
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.54	27.35	3.21	34.87	56.07	51.76	74.00	22.24	Peak
2	2390.00	27.35	3.21	34.87	49.87	45.56	74.00	28.44	Peak
3	2400.00	27.35	3.21	34.94	48.25	43.87	54.00	10.13	Average
4	2400.00	27.35	3.21	34.94	66.12	61.74	74.00	12.26	Peak
5	2411.80	27.39	3.23	34.94	103.24	98.92	74.00	-24.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 543 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

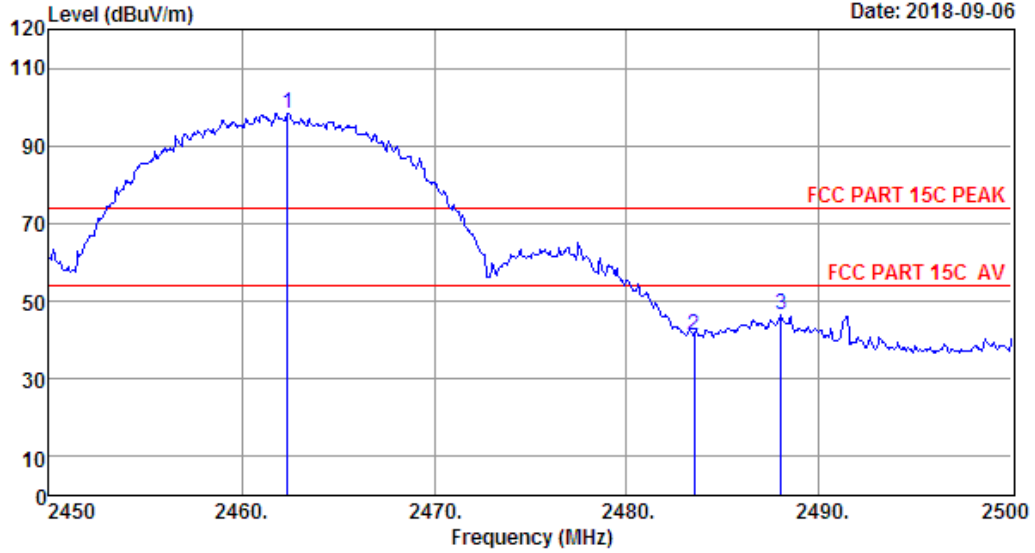


Site no. : 1# 966 Chamber Data no. : 543
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.40	27.52	3.27	35.14	102.75	98.40	74.00	-24.40	Peak
2	2483.50	27.56	3.29	35.21	45.48	41.12	74.00	32.88	Peak
3	2488.00	27.60	3.30	35.21	50.80	46.49	74.00	27.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

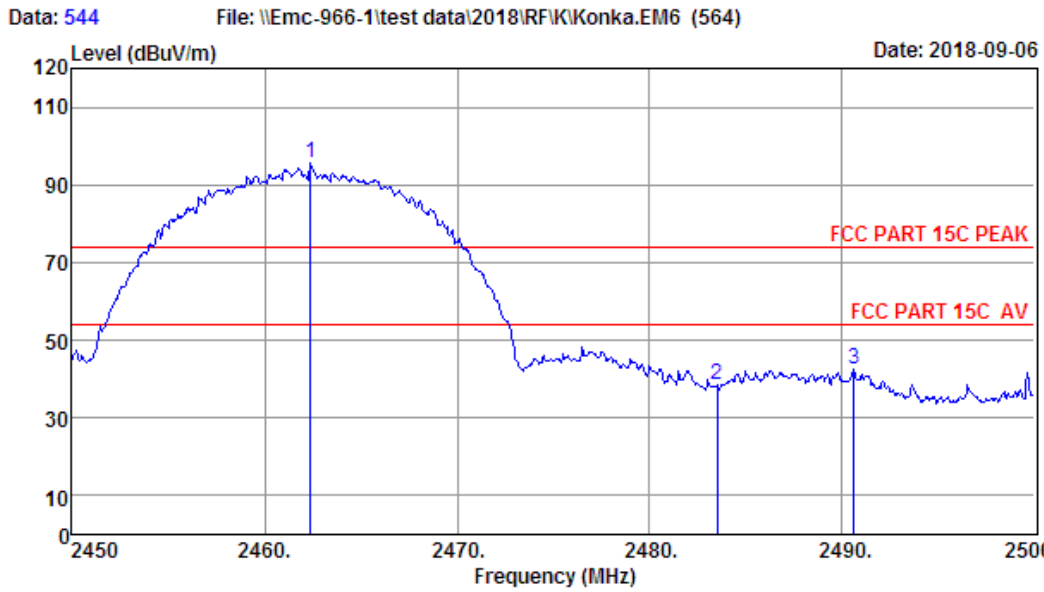

Site no. : 1# 966 Chamber Data no. : 544
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.40	27.52	3.27	35.14	100.16	95.81	74.00	-21.81	Peak
2	2483.50	27.56	3.29	35.21	42.89	38.53	74.00	35.47	Peak
3	2490.60	27.60	3.30	35.27	46.79	42.42	74.00	31.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 545 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

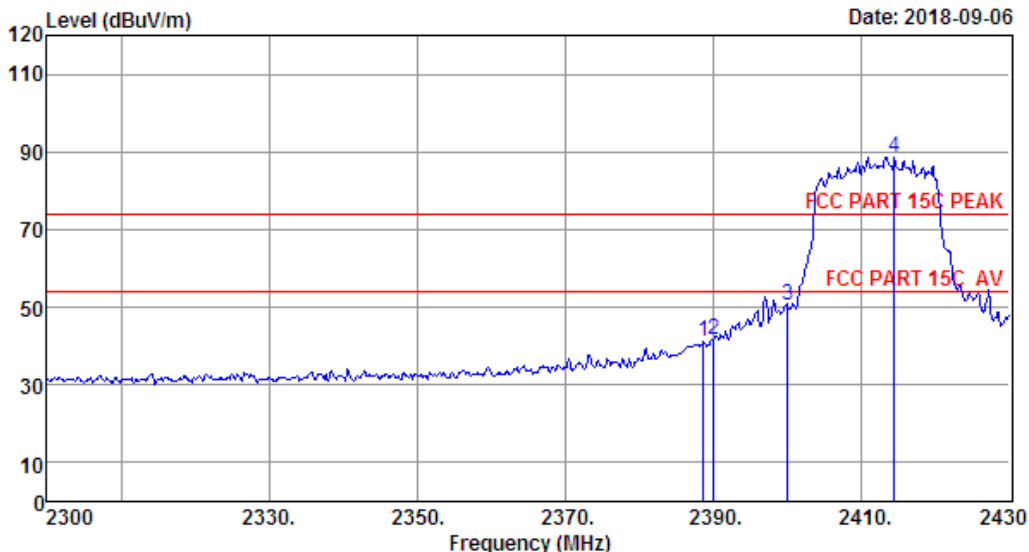


Site no. : 1# 966 Chamber Data no. : 545
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.66	27.35	3.21	34.87	45.28	40.97	74.00	33.03	Peak
2	2390.00	27.35	3.21	34.87	46.02	41.71	74.00	32.29	Peak
3	2400.00	27.35	3.21	34.94	54.70	50.32	74.00	23.68	Peak
4	2414.40	27.39	3.23	34.94	93.06	88.74	74.00	-14.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

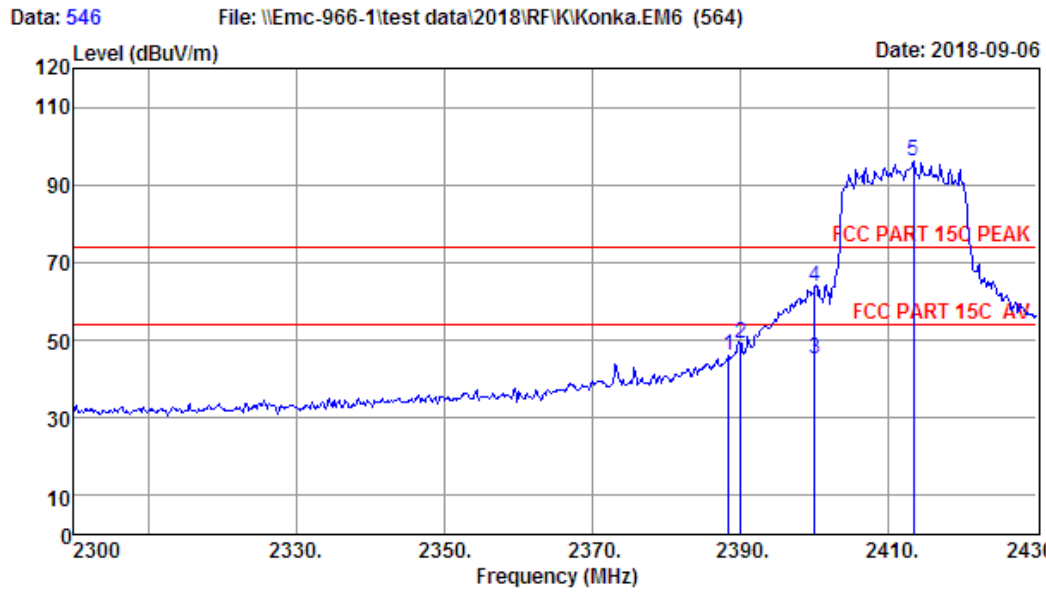


Site no. : 1# 966 Chamber Data no. : 546
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.40	27.35	3.21	34.87	50.41	46.10	74.00	27.90	Peak
2	2390.00	27.35	3.21	34.87	53.56	49.25	74.00	24.75	Peak
3	2400.00	27.35	3.21	34.94	49.46	45.08	54.00	8.92	Average
4	2400.00	27.35	3.21	34.94	68.19	63.81	74.00	10.19	Peak
5	2413.36	27.39	3.23	34.94	100.44	96.12	74.00	-22.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

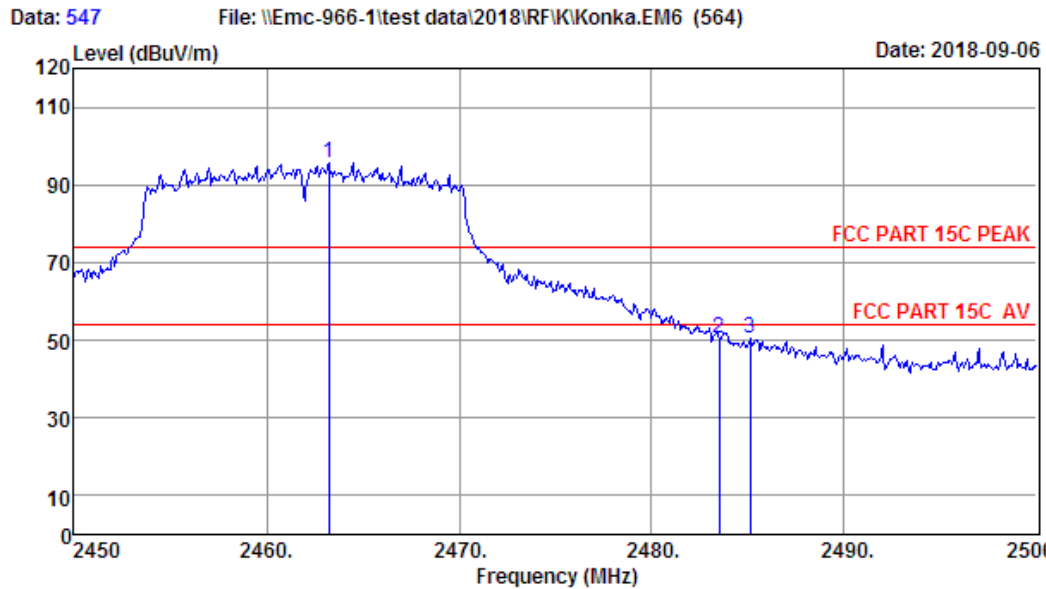

```

Site no.       : 1# 966 Chamber           Data no.  : 547
Dis. / Ant.    : 3m ANT9120D 1-18G       Ant. pol. : HORIZONTAL
Limit         : FCC PART 15C PEAK
Env. / Ins.    : Temp:23.8';Humi:51%;Press:101.52kPa
Engineer      : Viking
EUT           : LED TV
Power         : AC 120V/60Hz
M/N          : SC-60UK850N
Test Mode     : IEEE 802.11g CH11 2462TX
                Antenna 0
    
```


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.52	3.27	35.14	99.94	95.59	74.00	-21.59	Peak
2	2483.50	27.56	3.29	35.21	54.94	50.58	74.00	23.42	Peak
3	2485.10	27.56	3.29	35.21	54.80	50.44	74.00	23.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 548 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

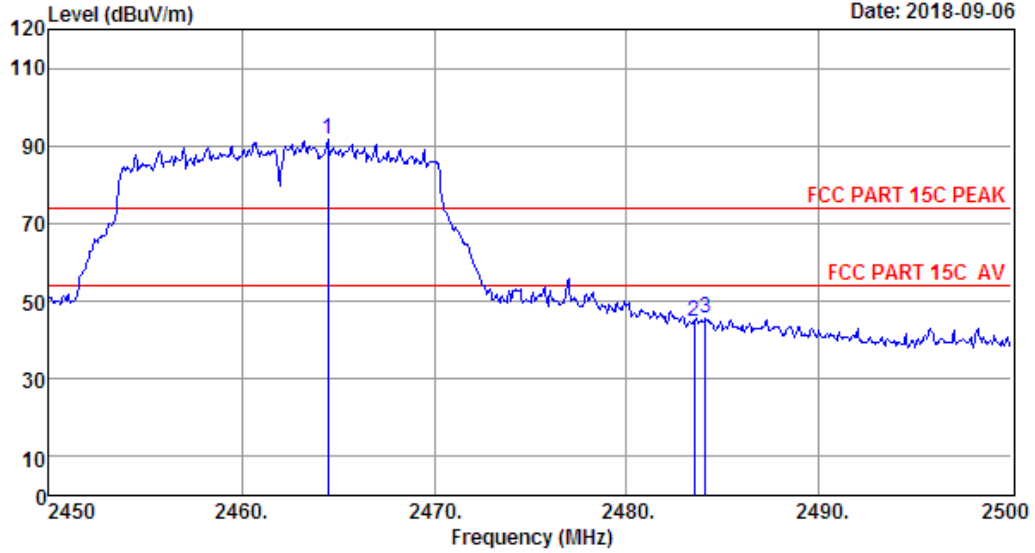

Site no. : 1# 966 Chamber Data no. : 548
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.50	27.52	3.27	35.14	95.98	91.63	74.00	-17.63	Peak
2	2483.50	27.56	3.29	35.21	49.13	44.77	74.00	29.23	Peak
3	2484.10	27.56	3.29	35.21	49.83	45.47	74.00	28.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 549 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

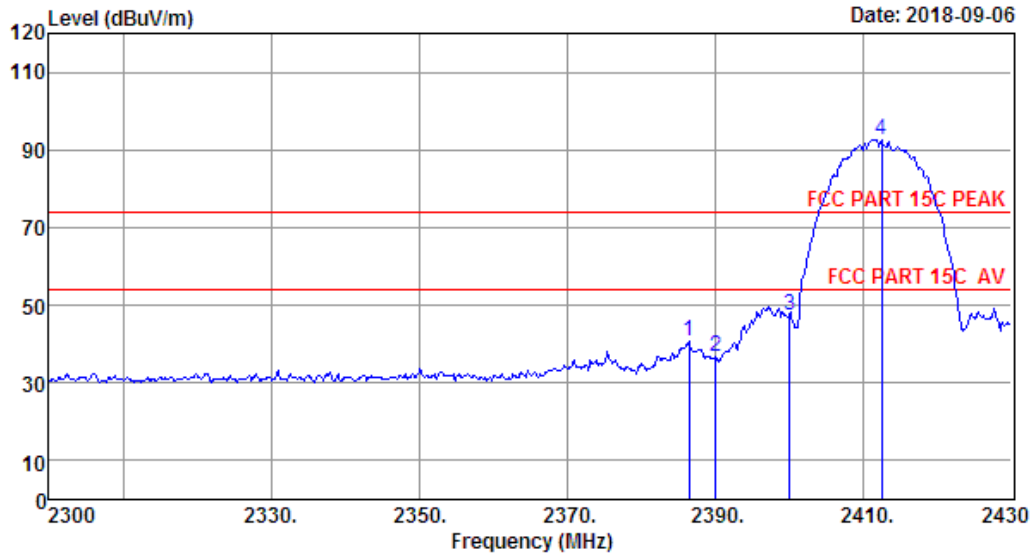

Site no. : 1# 966 Chamber Data no. : 549
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.45	27.35	3.21	34.87	44.94	40.63	74.00	33.37	Peak
2	2390.00	27.35	3.21	34.87	40.87	36.56	74.00	37.44	Peak
3	2400.00	27.35	3.21	34.94	51.95	47.57	74.00	26.43	Peak
4	2412.45	27.39	3.23	34.94	97.08	92.76	74.00	-18.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 550 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

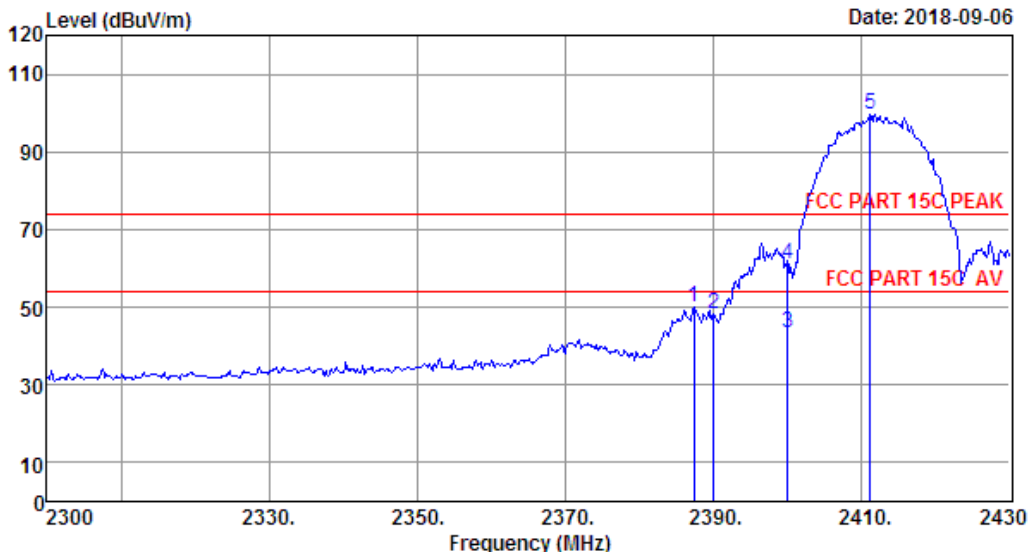

Site no. : 1# 966 Chamber Data no. : 550
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.36	27.35	3.21	34.87	54.14	49.83	74.00	24.17	Peak
2	2390.00	27.35	3.21	34.87	52.50	48.19	74.00	25.81	Peak
3	2400.00	27.35	3.21	34.94	47.61	43.23	54.00	10.77	Average
4	2400.00	27.35	3.21	34.94	65.40	61.02	74.00	12.98	Peak
5	2411.15	27.39	3.23	34.94	104.12	99.80	74.00	-25.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 551 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

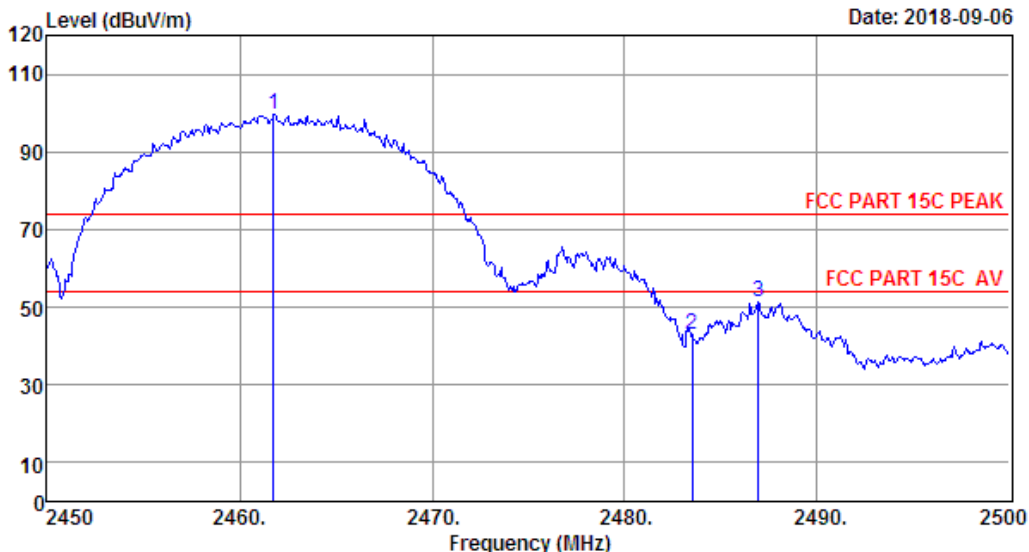

Site no. : 1# 966 Chamber Data no. : 551
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.75	27.52	3.27	35.14	104.00	99.65	74.00	-25.65	Peak
2	2483.50	27.56	3.29	35.21	47.36	43.00	74.00	31.00	Peak
3	2486.95	27.56	3.29	35.21	55.80	51.44	74.00	22.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 552 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

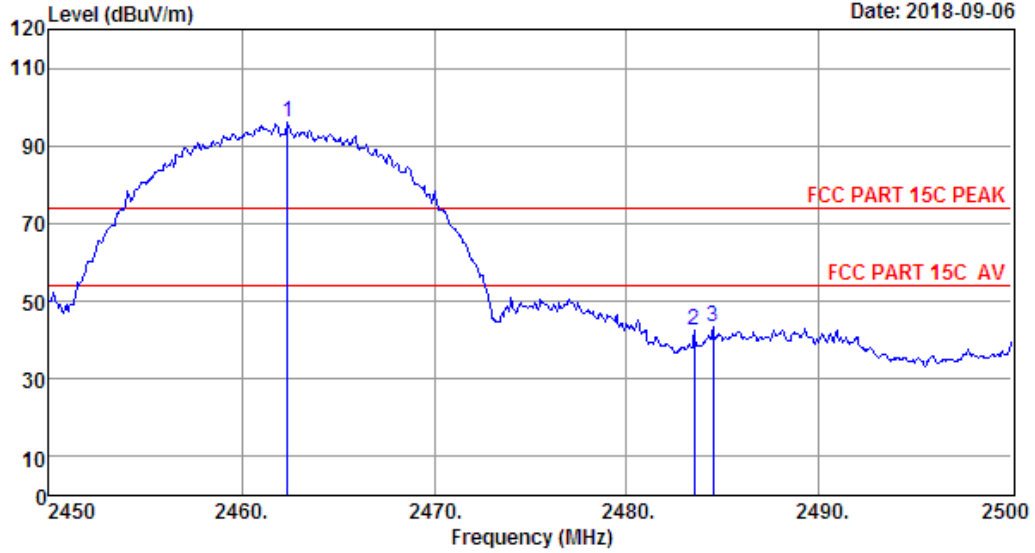


Site no. : 1# 966 Chamber Data no. : 552
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.40	27.52	3.27	35.14	100.32	95.97	74.00	-21.97	Peak
2	2483.50	27.56	3.29	35.21	47.00	42.64	74.00	31.36	Peak
3	2484.50	27.56	3.29	35.21	47.55	43.19	74.00	30.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

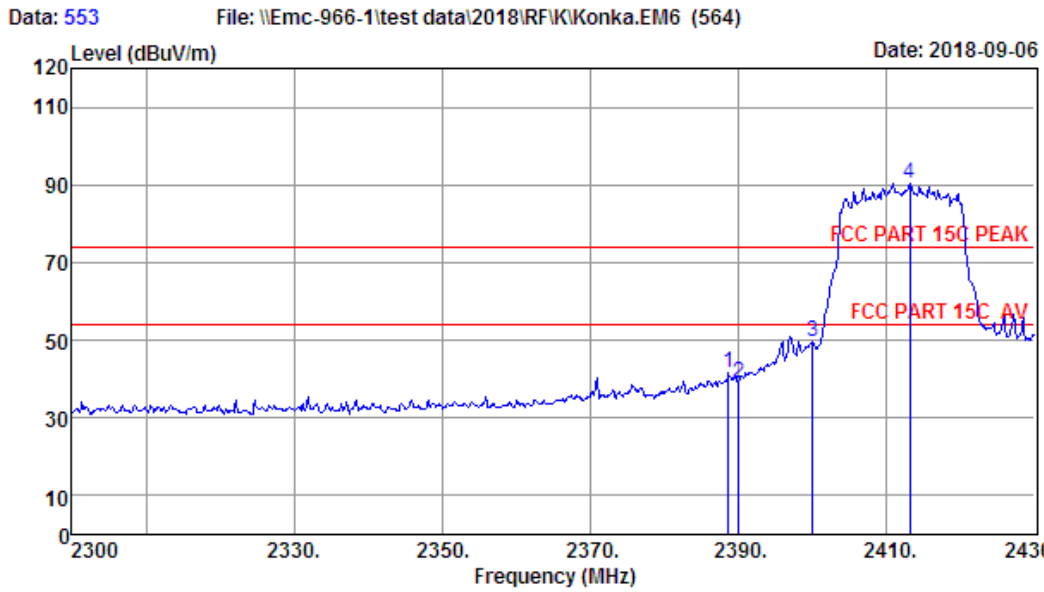


Site no. : 1# 966 Chamber Data no. : 553
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.66	27.35	3.21	34.87	45.82	41.51	74.00	32.49	Peak
2	2390.00	27.35	3.21	34.87	43.45	39.14	74.00	34.86	Peak
3	2400.00	27.35	3.21	34.94	53.87	49.49	74.00	24.51	Peak
4	2413.10	27.39	3.23	34.94	94.62	90.30	74.00	-16.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

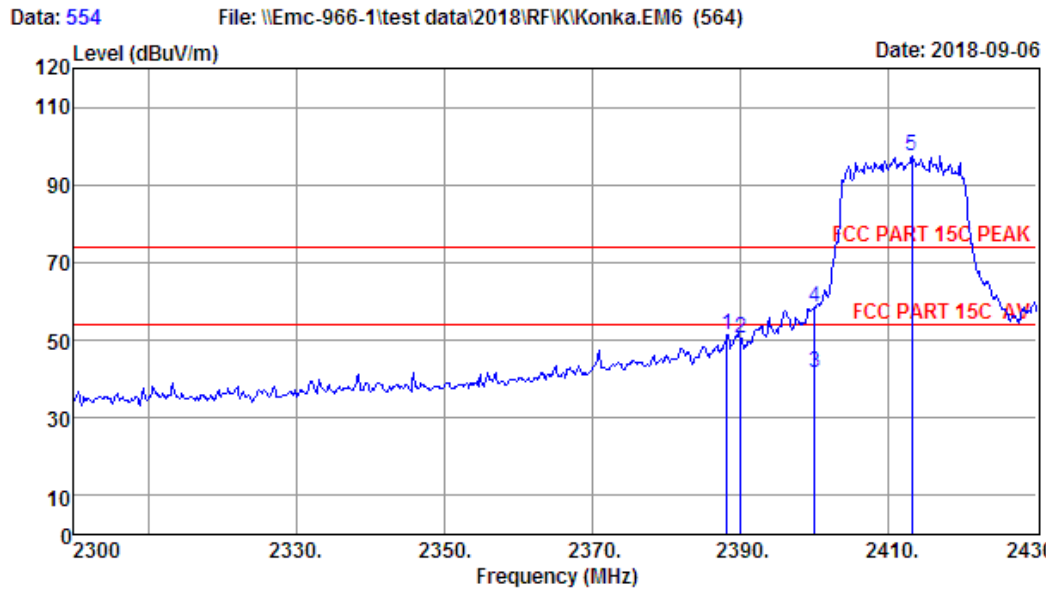

Site no. : 1# 966 Chamber Data no. : 554
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.14	27.35	3.21	34.87	55.63	51.32	74.00	22.68	Peak
2	2390.00	27.35	3.21	34.87	54.76	50.45	74.00	23.55	Peak
3	2400.00	27.35	3.21	34.94	45.98	41.60	54.00	12.40	Average
4	2400.00	27.35	3.21	34.94	62.91	58.53	74.00	15.47	Peak
5	2413.10	27.39	3.23	34.94	101.84	97.52	74.00	-23.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 555 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

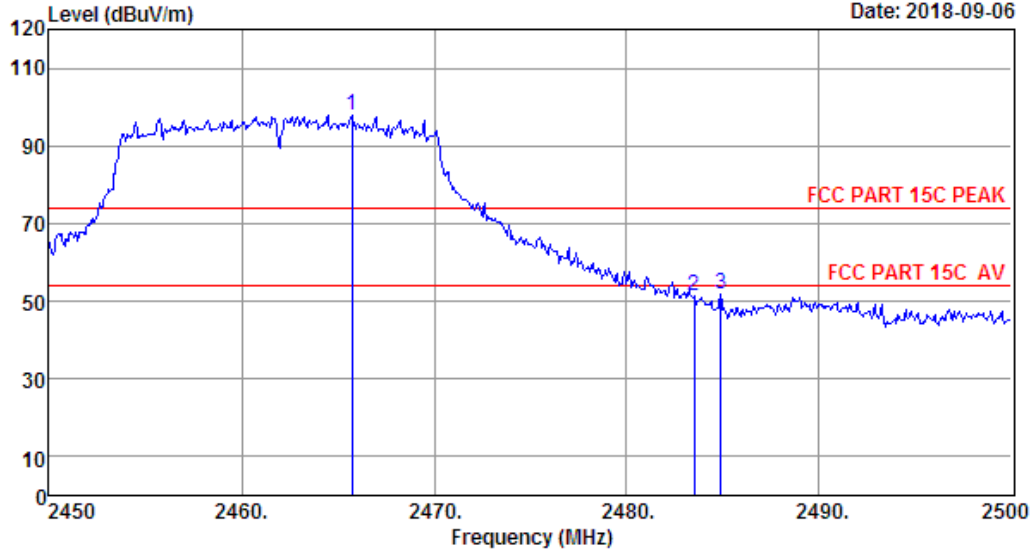

Site no. : 1# 966 Chamber Data no. : 555
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2465.75	27.52	3.27	35.14	102.41	98.06	74.00	-24.06	Peak
2	2483.50	27.56	3.29	35.21	55.65	51.29	74.00	22.71	Peak
3	2484.90	27.56	3.29	35.21	56.32	51.96	74.00	22.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 556 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

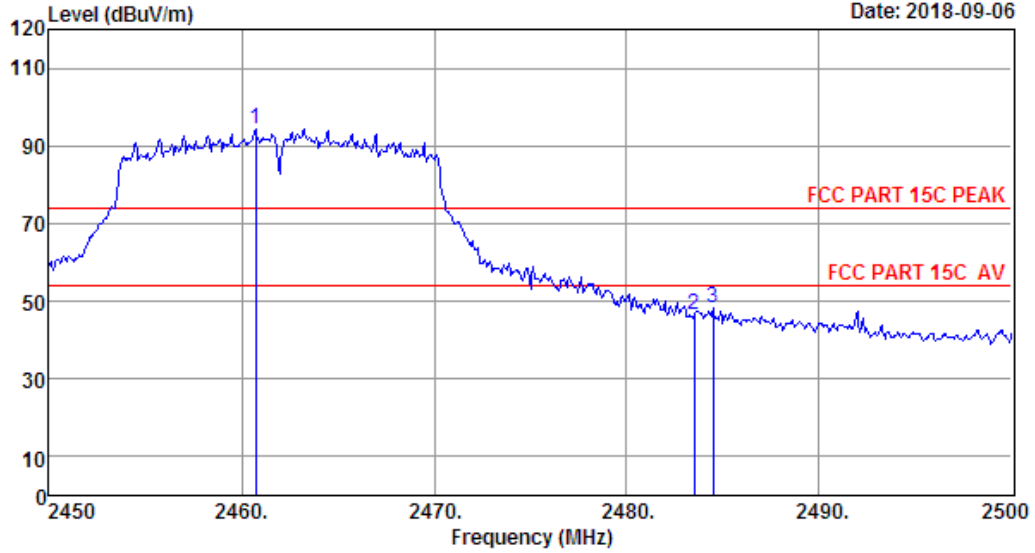


Site no. : 1# 966 Chamber Data no. : 556
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.75	27.52	3.27	35.14	98.65	94.30	74.00	-20.30	Peak
2	2483.50	27.56	3.29	35.21	50.71	46.35	74.00	27.65	Peak
3	2484.50	27.56	3.29	35.21	52.67	48.31	74.00	25.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

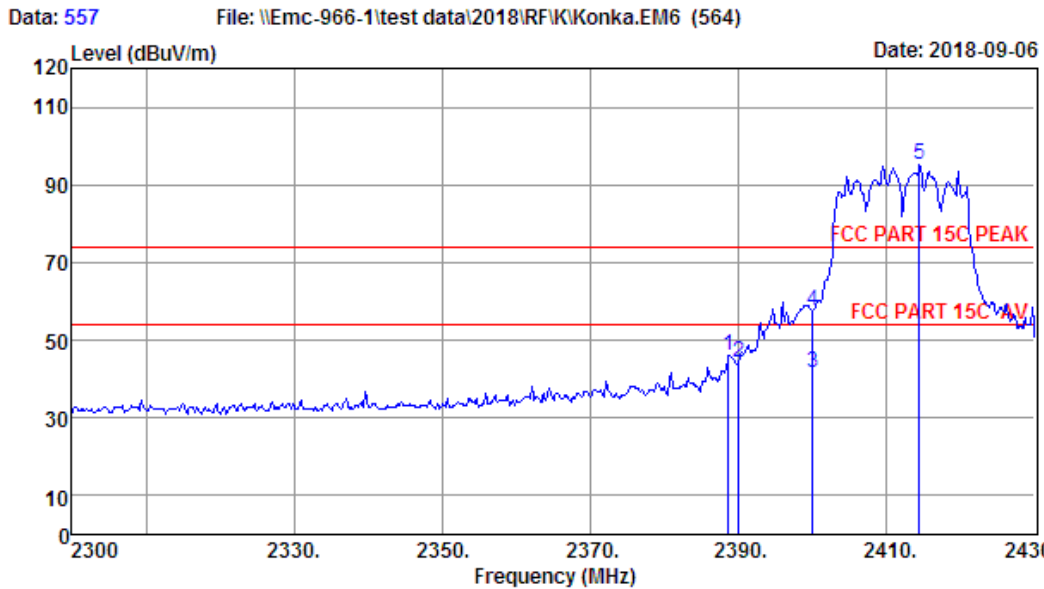

Site no. : 1# 966 Chamber Data no. : 557
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.66	27.35	3.21	34.87	50.42	46.11	74.00	27.89	Peak
2	2390.00	27.35	3.21	34.87	48.75	44.44	74.00	29.56	Peak
3	2400.00	27.35	3.21	34.94	45.80	41.42	54.00	12.58	Average
4	2400.00	27.35	3.21	34.94	62.11	57.73	74.00	16.27	Peak
5	2414.40	27.39	3.23	34.94	99.56	95.24	74.00	-21.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 558 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

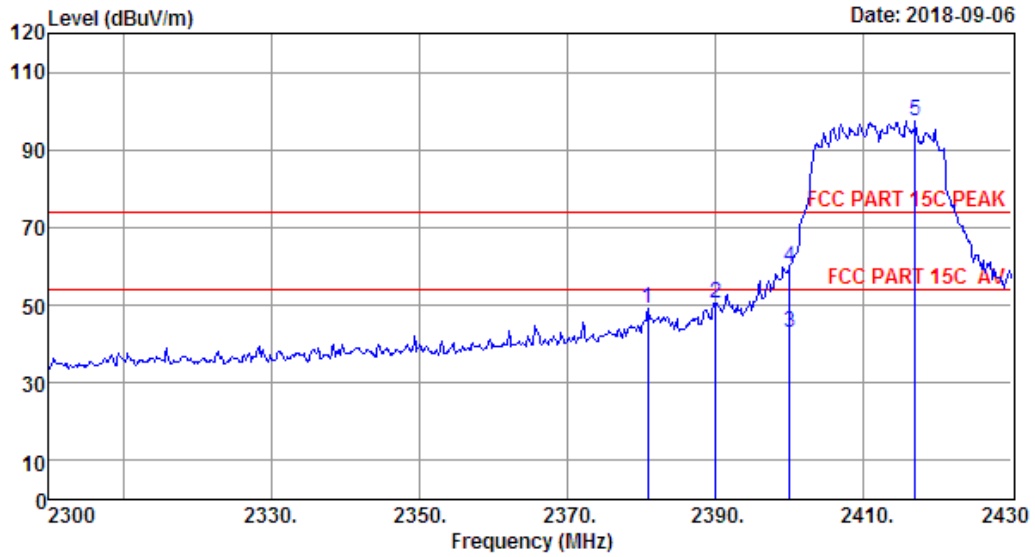

Site no. : 1# 966 Chamber Data no. : 558
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2380.86	27.31	3.20	34.80	53.43	49.14	74.00	24.86	Peak
2	2390.00	27.35	3.21	34.87	54.82	50.51	74.00	23.49	Peak
3	2400.00	27.35	3.21	34.94	47.16	42.78	54.00	11.22	Average
4	2400.00	27.35	3.21	34.94	64.37	59.99	74.00	14.01	Peak
5	2417.00	27.39	3.23	34.94	101.65	97.33	74.00	-23.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 559 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

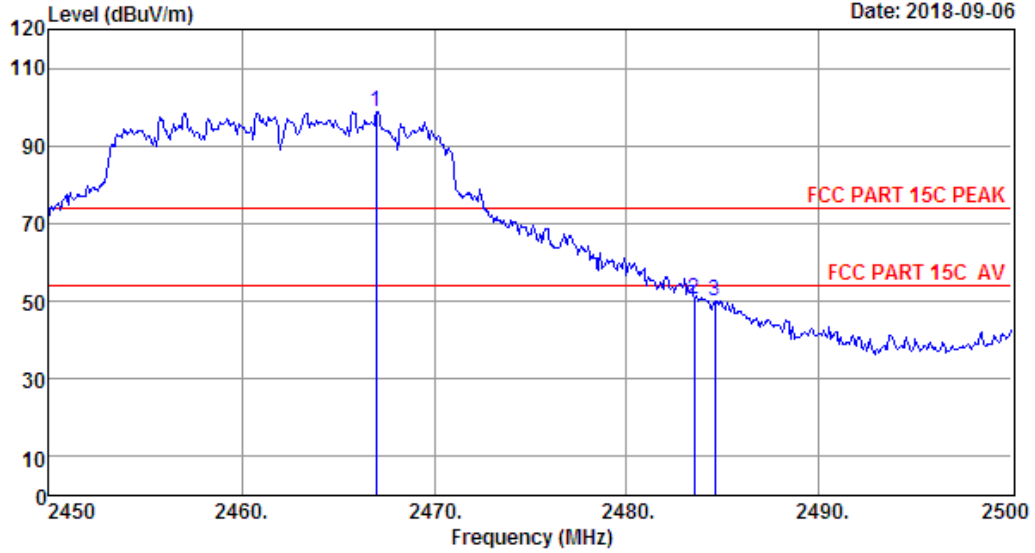

Site no. : 1# 966 Chamber Data no. : 559
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.00	27.52	3.27	35.14	103.29	98.94	74.00	-24.94	Peak
2	2483.50	27.56	3.29	35.21	54.63	50.27	74.00	23.73	Peak
3	2484.60	27.56	3.29	35.21	54.52	50.16	74.00	23.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 560 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

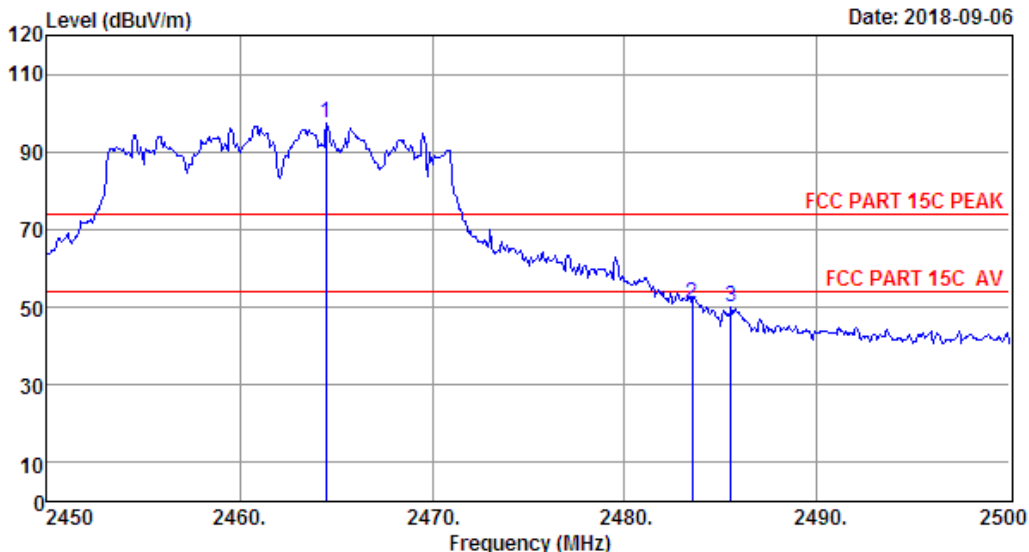

Site no. : 1# 966 Chamber Data no. : 560
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.50	27.52	3.27	35.14	101.88	97.53	74.00	-23.53	Peak
2	2483.50	27.56	3.29	35.21	55.19	50.83	74.00	23.17	Peak
3	2485.50	27.56	3.29	35.21	54.20	49.84	74.00	24.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 561 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

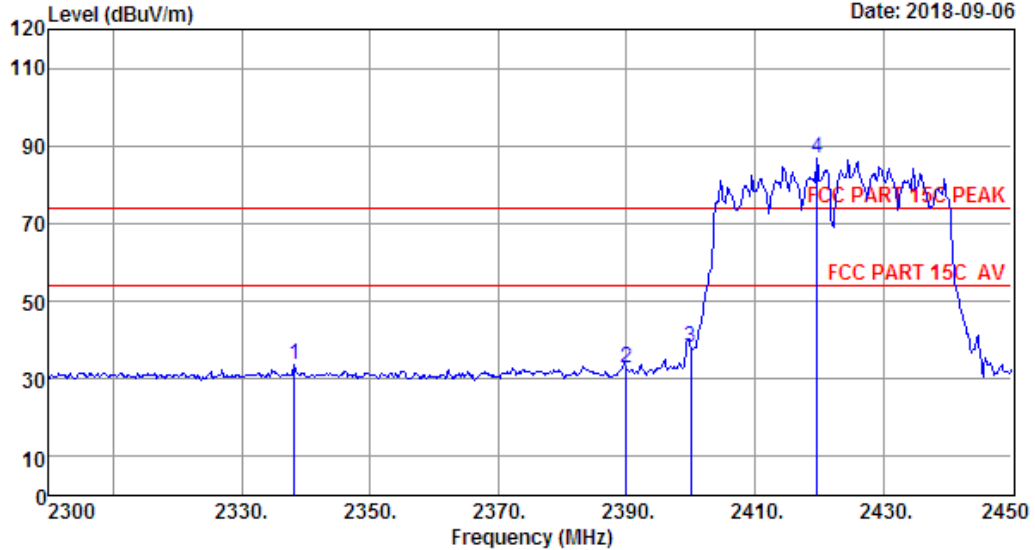

Site no. : 1# 966 Chamber Data no. : 561
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2338.25	27.23	3.17	34.67	37.82	33.55	74.00	40.45	Peak
2	2390.00	27.35	3.21	34.87	36.94	32.63	74.00	41.37	Peak
3	2400.00	27.35	3.21	34.94	42.30	37.92	74.00	36.08	Peak
4	2419.70	27.43	3.24	35.00	90.95	86.62	74.00	-12.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 562 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

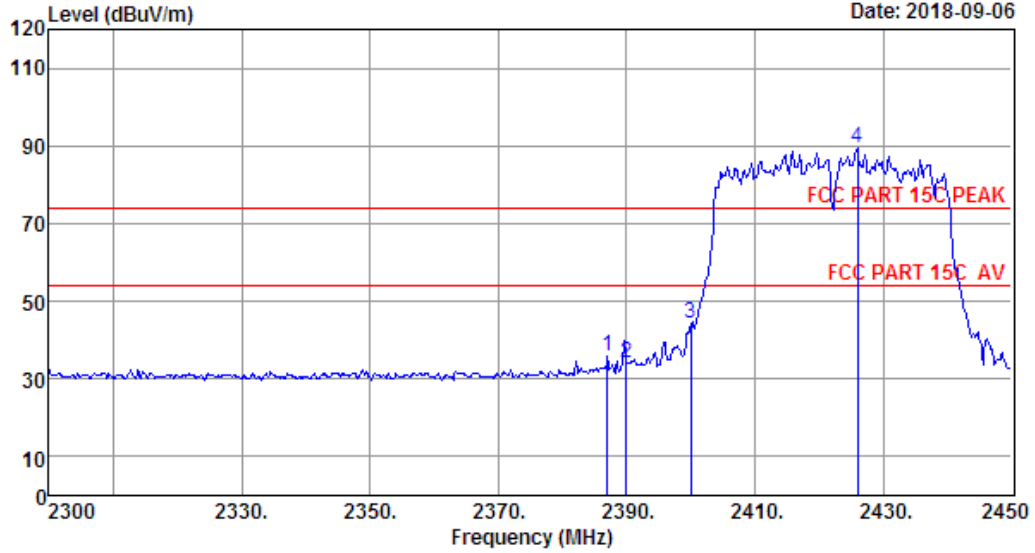

Site no. : 1# 966 Chamber Data no. : 562
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.00	27.35	3.21	34.87	40.24	35.93	74.00	38.07	Peak
2	2390.00	27.35	3.21	34.87	38.27	33.96	74.00	40.04	Peak
3	2400.00	27.35	3.21	34.94	48.48	44.10	74.00	29.90	Peak
4	2426.00	27.43	3.24	35.00	93.81	89.48	74.00	-15.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 563 File: \\Emc-966-1\test data\2018\RF\K\Konka.EM6 (564) Date: 2018-09-06

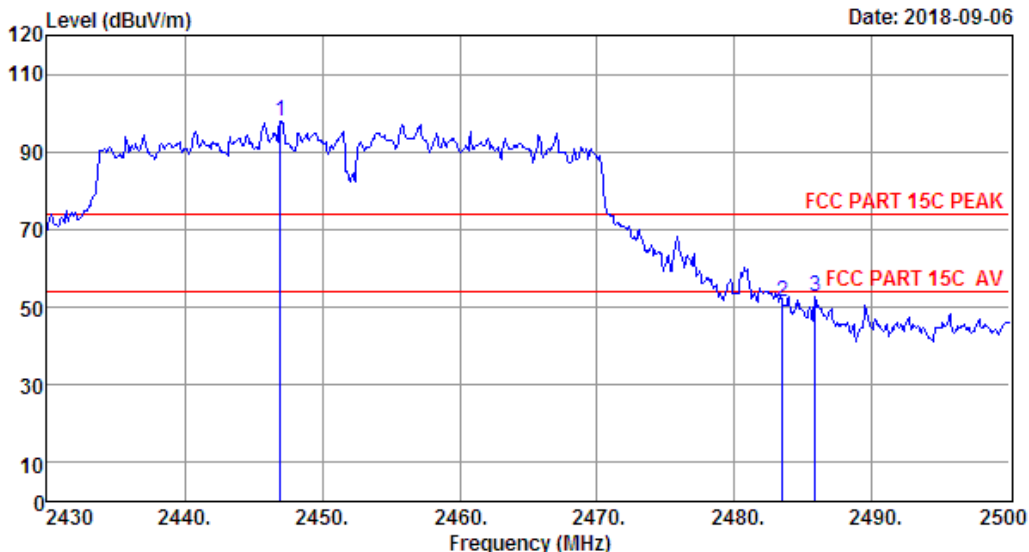


Site no. : 1# 966 Chamber Data no. : 563
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2446.94	27.48	3.26	35.07	102.14	97.81	74.00	-23.81	Peak
2	2483.50	27.56	3.29	35.21	55.60	51.24	74.00	22.76	Peak
3	2485.86	27.56	3.29	35.21	56.95	52.59	74.00	21.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

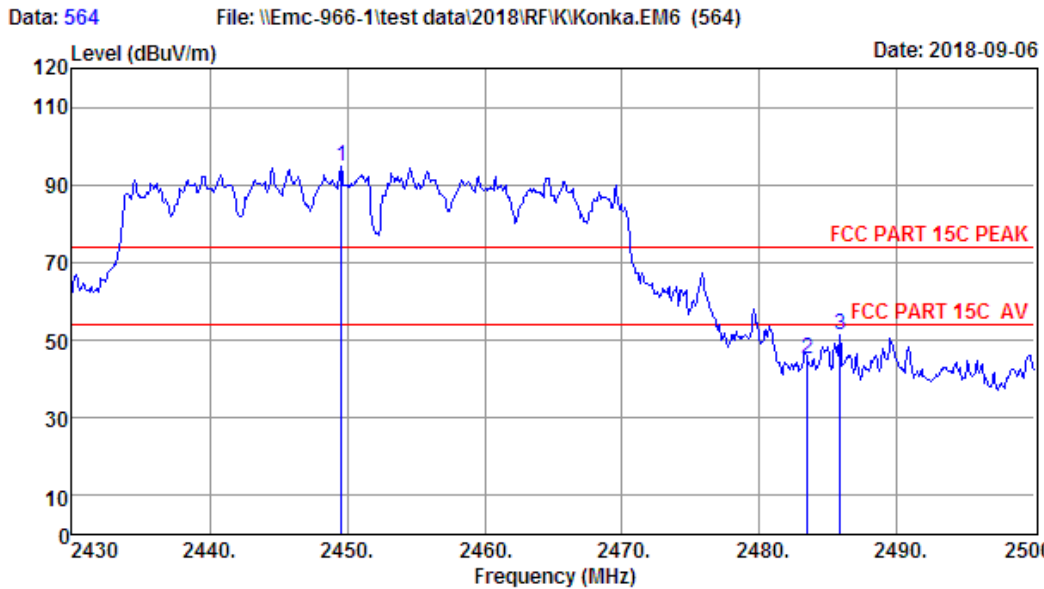

Site no. : 1# 966 Chamber Data no. : 564
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.8';Humi:51%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-60UK850N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.60	27.48	3.26	35.07	99.20	94.87	74.00	-20.87	Peak
2	2483.50	27.56	3.29	35.21	49.54	45.18	74.00	28.82	Peak
3	2485.86	27.56	3.29	35.21	55.56	51.20	74.00	22.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

6 6dB & 20dB Bandwidth Test

6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2 Test Procedure for 6dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set resolution bandwidth (RBW) = 100 kHz.
 - (2). Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - (3). Detector = Peak.
 - (4). Trace mode = max hold.
 - (5). Sweep = auto couple.
 - (6). Allow the trace to stabilize.
 - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Test Procedure for 20dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in C63.10
 - (1). The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
 - (2). The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
 - (3). Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - (4). Steps a) through c) might require iteration to adjust within the specified tolerances.
 - (5). The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
 - (6). Set detection mode to peak and trace mode to max hold.
 - (7). Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - (8). Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
 - (9). If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
 - (10). Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “_xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value,

then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “_xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

(11). The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


6.4 Test Result

EUT: LED TV					
M/N: SC-60UK850N					
Test date: 2018.09.13		Test site: RF Site		Tested by: Viking	
Test Mode	CH	6dB bandwidth (MHz)	20dB bandwidth (MHz)	Limit	
				6dB BW (KHz)	20dB BW
Antenna 0					
IEEE 802.11 b	CH1	9.501	16.356	>500	/
	CH6	9.512	16.414	>500	/
	CH11	9.578	16.375	>500	/
IEEE 802.11 g	CH1	15.227	18.342	>500	/
	CH6	15.232	18.429	>500	/
	CH11	15.226	18.381	>500	/
IEEE 802.11 n HT 20	CH1	15.823	19.400	>500	/
	CH6	15.805	19.405	>500	/
	CH11	15.832	19.473	>500	/
IEEE 802.11 n HT 40	CH3	35.150	39.723	>500	/
	CH6	35.152	39.838	>500	/
	CH9	35.154	39.876	>500	/
Antenna 1					
IEEE 802.11 b	CH1	9.478	16.328	>500	/
	CH6	9.588	16.352	>500	/
	CH11	9.576	16.324	>500	/
IEEE 802.11 g	CH1	15.216	18.580	>500	/
	CH6	15.239	18.403	>500	/
	CH11	15.233	18.357	>500	/
IEEE 802.11 n HT 20	CH1	15.446	19.190	>500	/
	CH6	15.457	19.388	>500	/
	CH11	15.219	19.313	>500	/
IEEE 802.11 n HT 40	CH3	35.173	39.440	>500	/
	CH6	35.160	39.758	>500	/
	CH9	35.135	39.751	>500	/
Conclusion : PASS					


6.5 6dB Test Data

Antenna 0

Test Mode: IEEE 802.11b 2412MHz

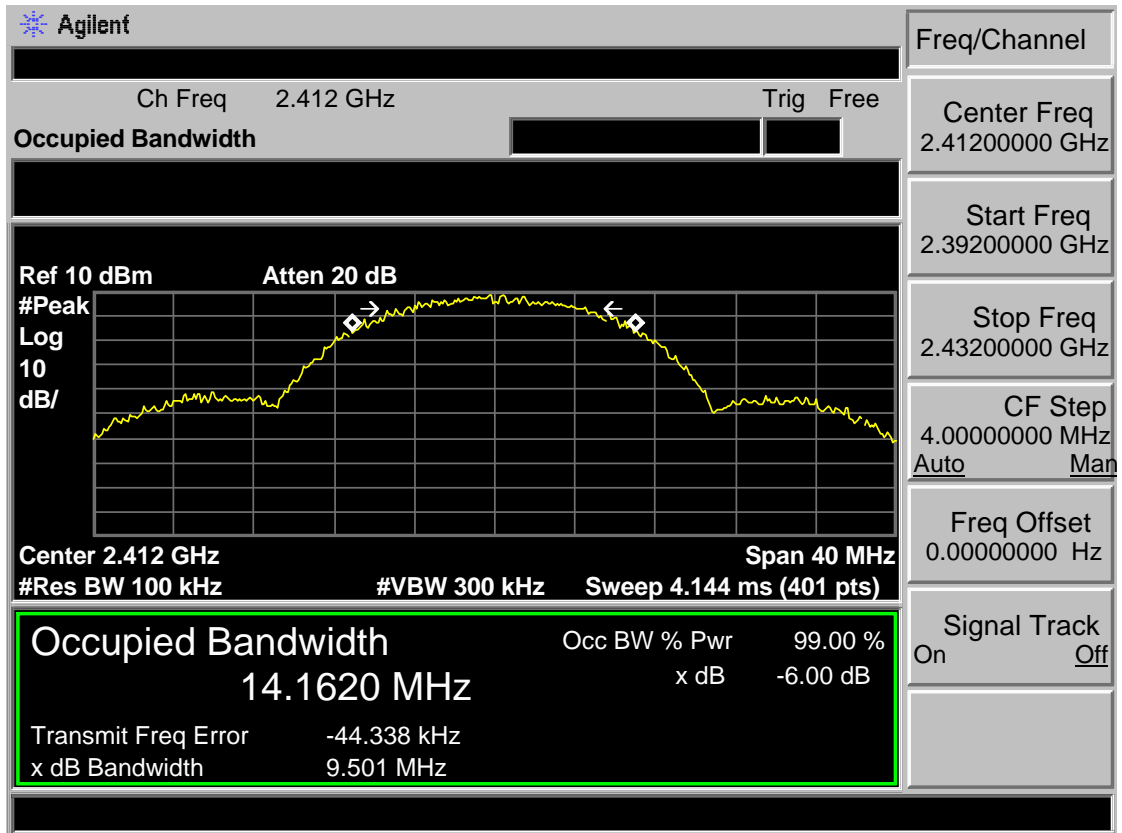

Test Mode: IEEE 802.11b 2437MHz

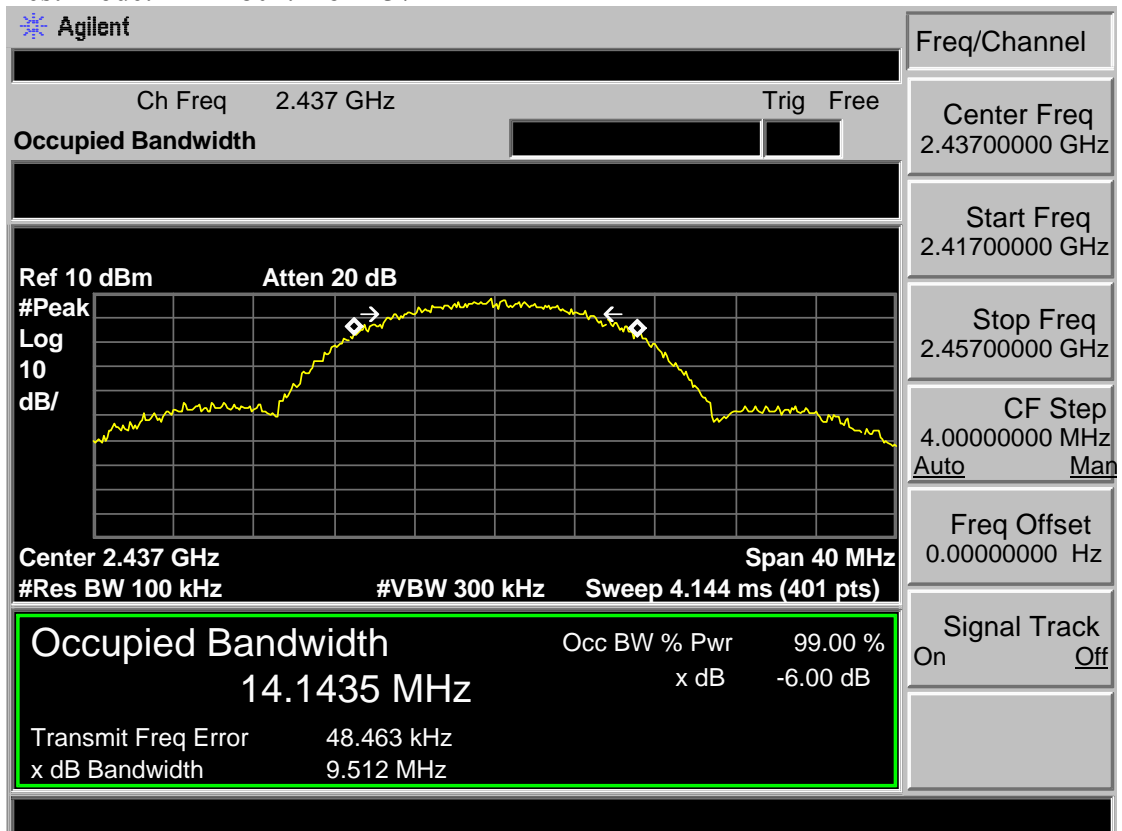

Test Mode: IEEE 802.11b 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Center 2.462 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
14.0543 MHz		x dB	-6.00 dB
Transmit Freq Error	-61.018 kHz		
x dB Bandwidth	9.578 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off


Test Mode: IEEE 802.11g 2412MHz

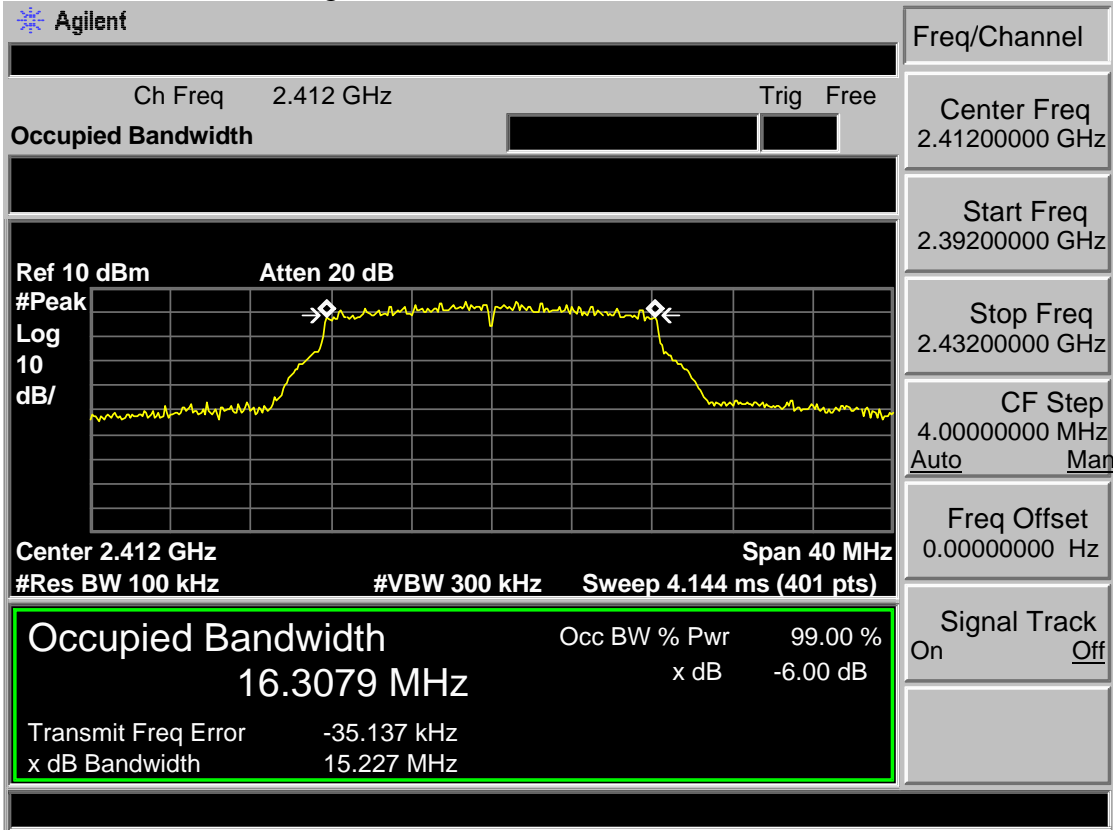


Test Mode: IEEE 802.11g 2437MHz

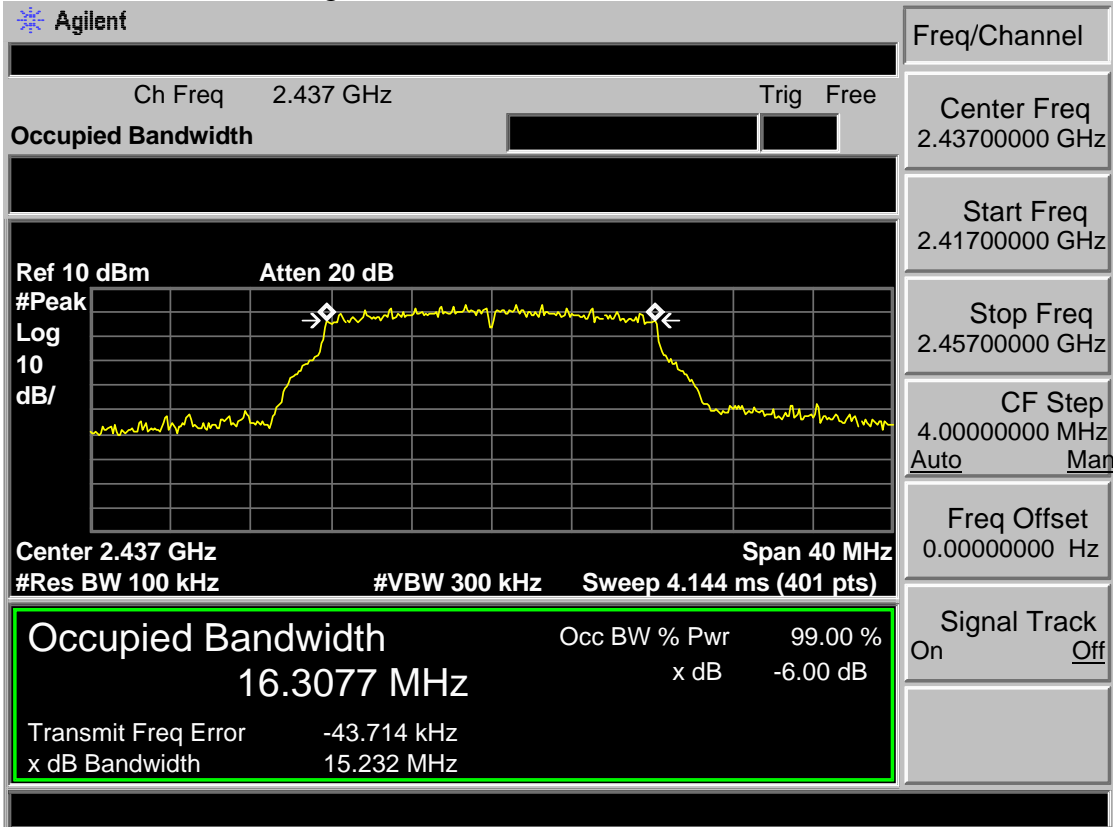


Test Mode: IEEE 802.11g 2462MHz

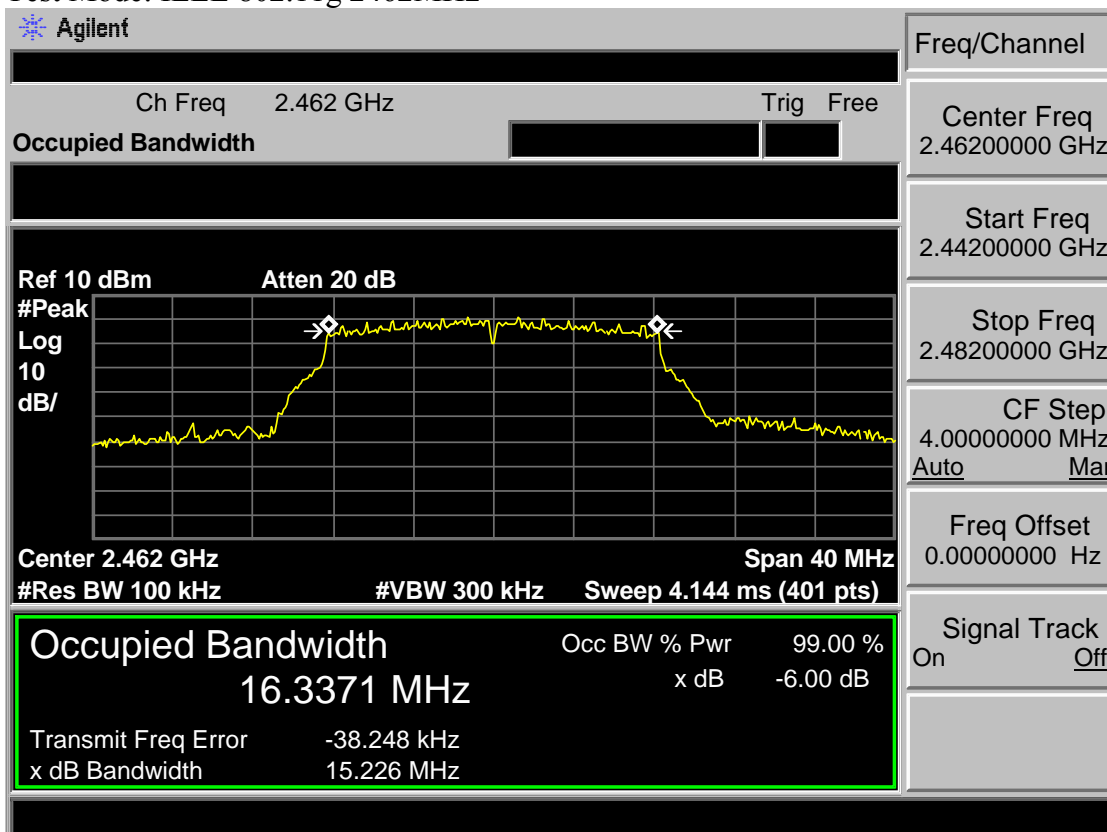

Test Mode: IEEE 802.11n HT20 2412MHz

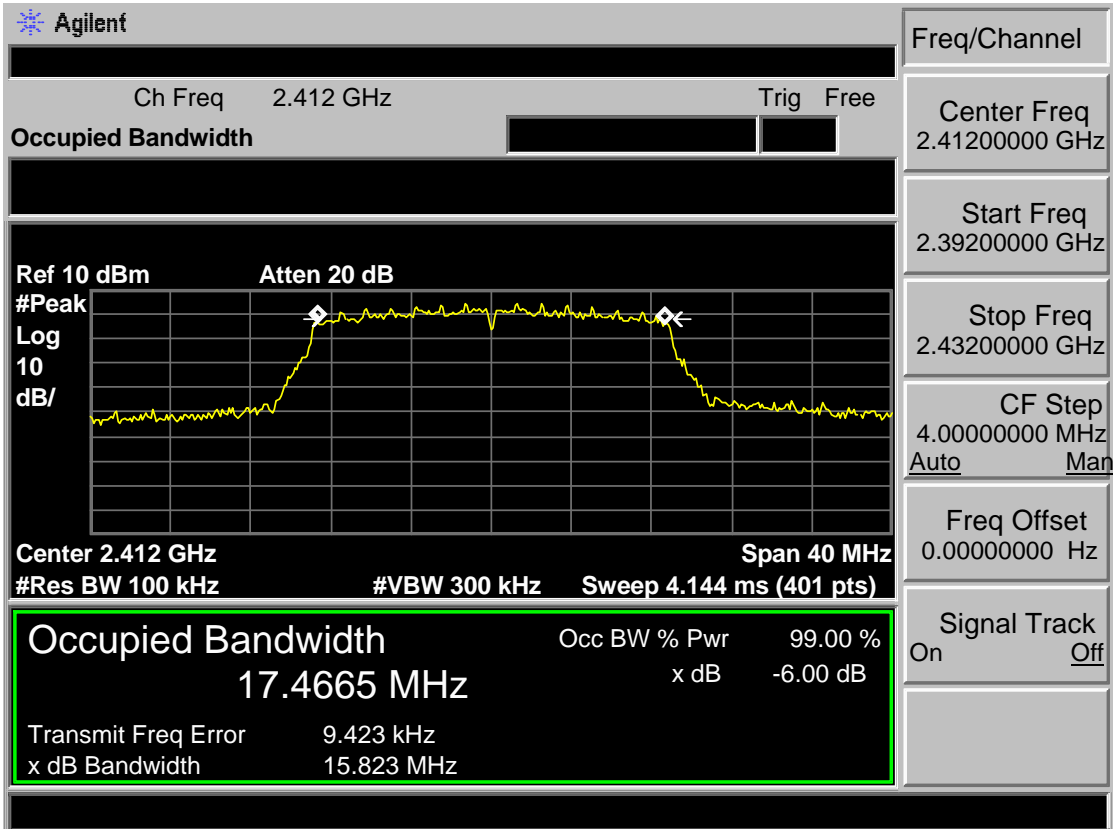

Test Mode: IEEE 802.11n HT20 2437MHz

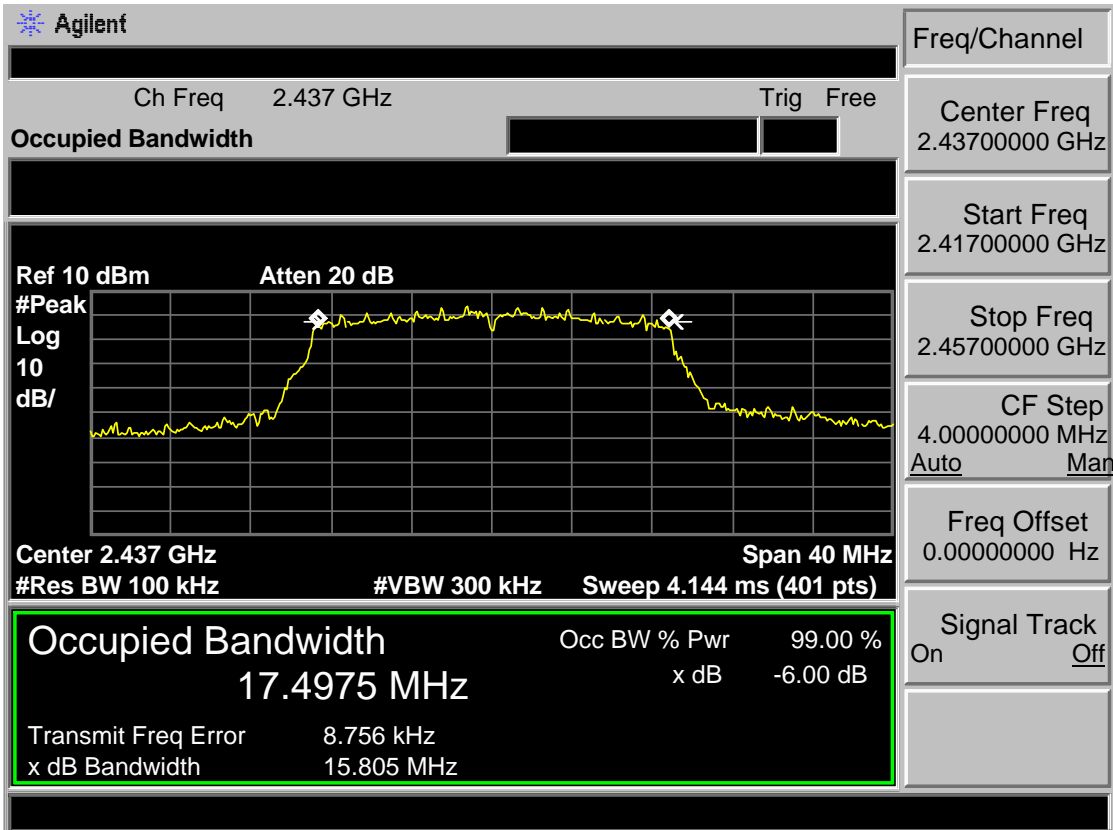

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Center 2.462 GHz Span 40 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
17.5239 MHz		x dB	-6.00 dB
Transmit Freq Error	19.665 kHz		
x dB Bandwidth	15.832 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off


Test Mode: IEEE 802.11n HT40 2422MHz

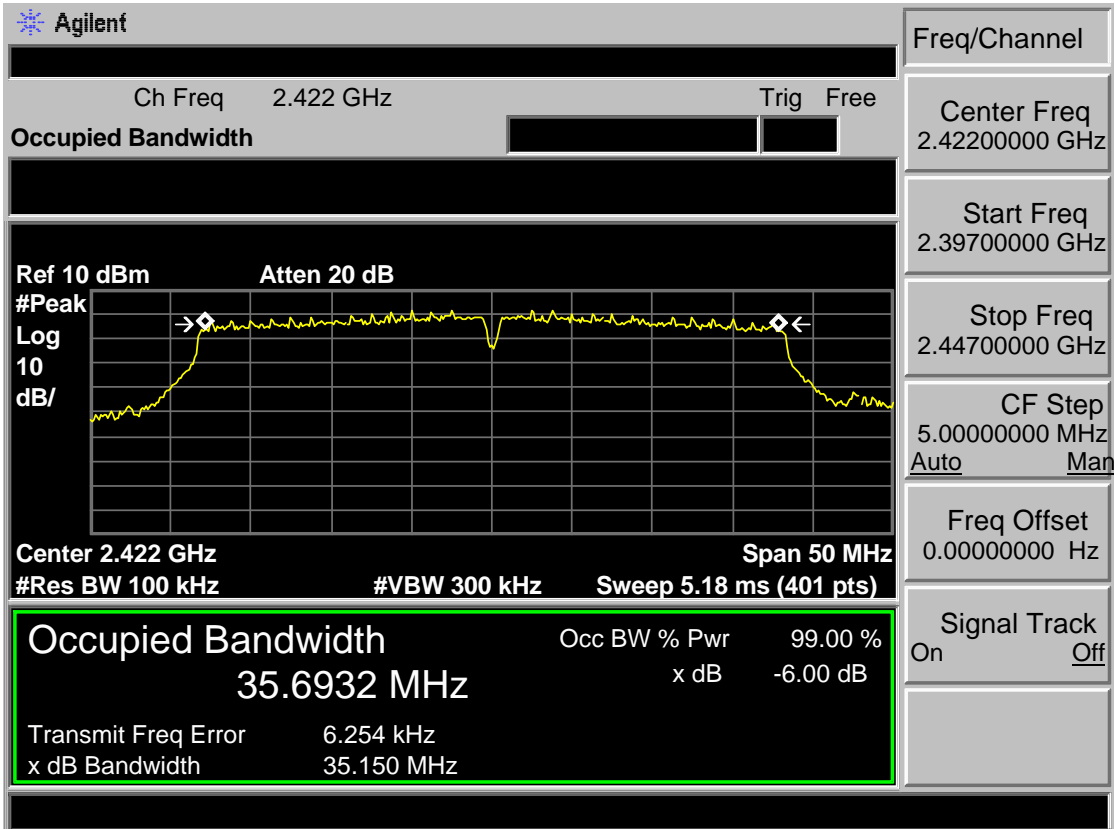

Test Mode: IEEE 802.11n HT40 2437MHz

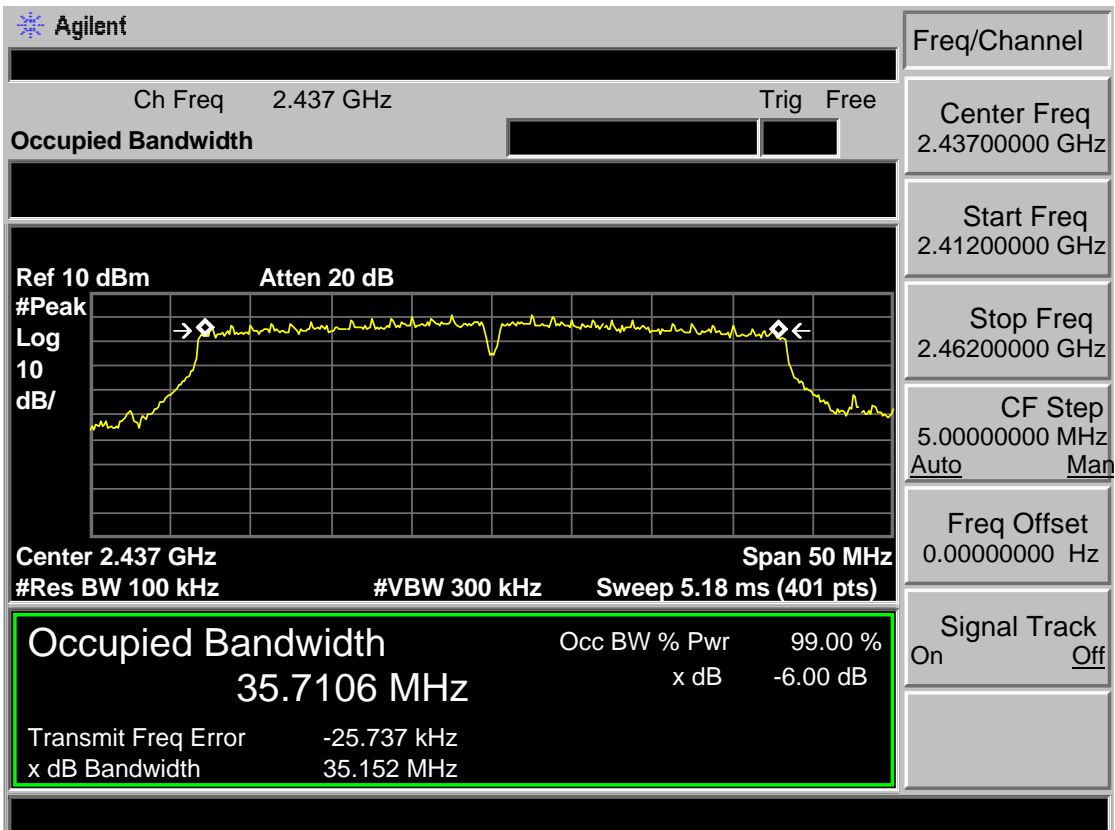

Test Mode: IEEE 802.11n HT40 2452MHz

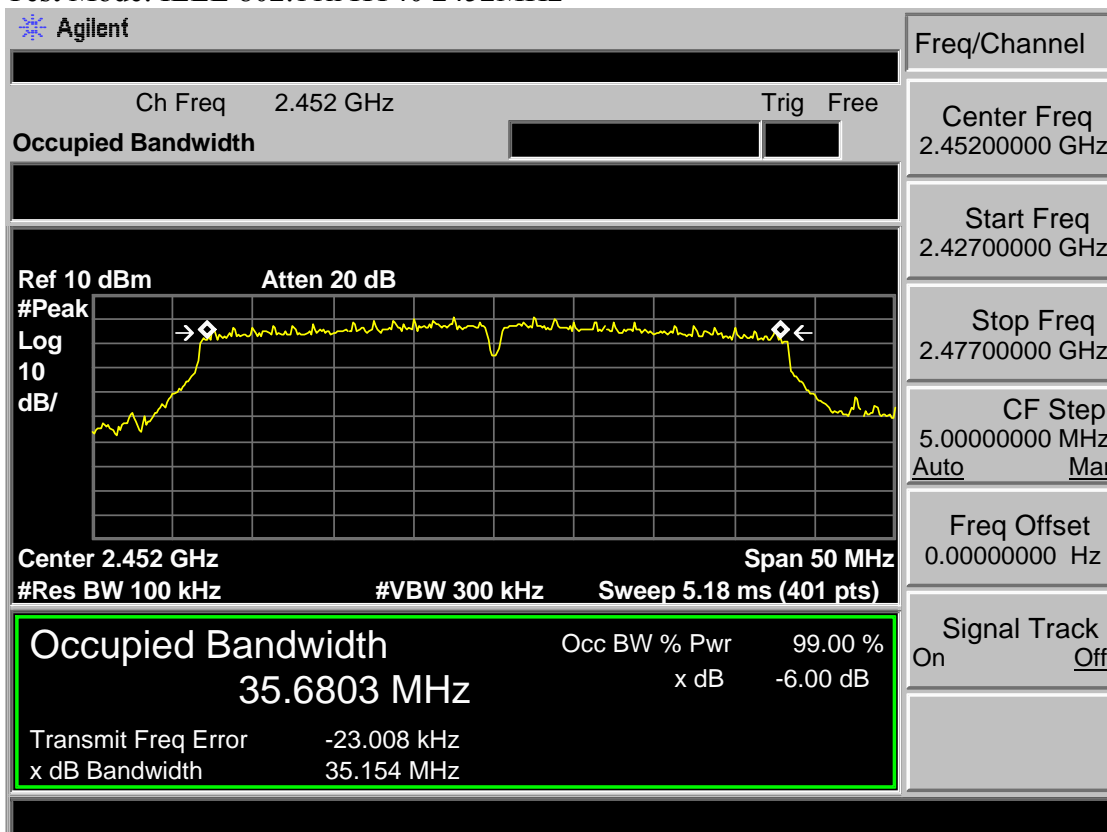

Antenna 1

Test Mode: IEEE 802.11b 2412MHz

Agilent

Freq/Channel
 Center Freq 2.41200000 GHz
 Start Freq 2.39200000 GHz
 Stop Freq 2.43200000 GHz
 CF Step 4.00000000 MHz
 Auto Man
 Freq Offset 0.00000000 Hz
 Signal Track On Off

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

Center 2.412 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

14.1231 MHz

x dB -6.00 dB

Transmit Freq Error 108.267 kHz

x dB Bandwidth 9.478 MHz

Test Mode: IEEE 802.11b 2437MHz

Agilent

Freq/Channel
 Center Freq 2.43700000 GHz
 Start Freq 2.41700000 GHz
 Stop Freq 2.45700000 GHz
 CF Step 4.00000000 MHz
 Auto Man
 Freq Offset 0.00000000 Hz
 Signal Track On Off

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

Center 2.437 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

14.1490 MHz

x dB -6.00 dB

Transmit Freq Error 56.467 kHz

x dB Bandwidth 9.588 MHz

Test Mode: IEEE 802.11b 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak
Log
10
dB/

Center 2.462 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
14.1235 MHz		x dB	-6.00 dB
Transmit Freq Error	20.760 kHz		
x dB Bandwidth	9.576 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz

Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11g 2412MHz

Agilent

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak

Center 2.412 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.3122 MHz	x dB	-6.00 dB
Transmit Freq Error	-20.799 kHz	
x dB Bandwidth	15.216 MHz	

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39200000 GHz

Stop Freq 2.43200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2437MHz

Agilent

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak

Center 2.437 GHz Span 40 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.3169 MHz	x dB	-6.00 dB
Transmit Freq Error	-32.262 kHz	
x dB Bandwidth	15.239 MHz	

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41700000 GHz

Stop Freq 2.45700000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Center 2.462 GHz Span 40 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
16.3071 MHz		x dB	-6.00 dB
Transmit Freq Error	-44.594 kHz		
x dB Bandwidth	15.233 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT20 2412MHz

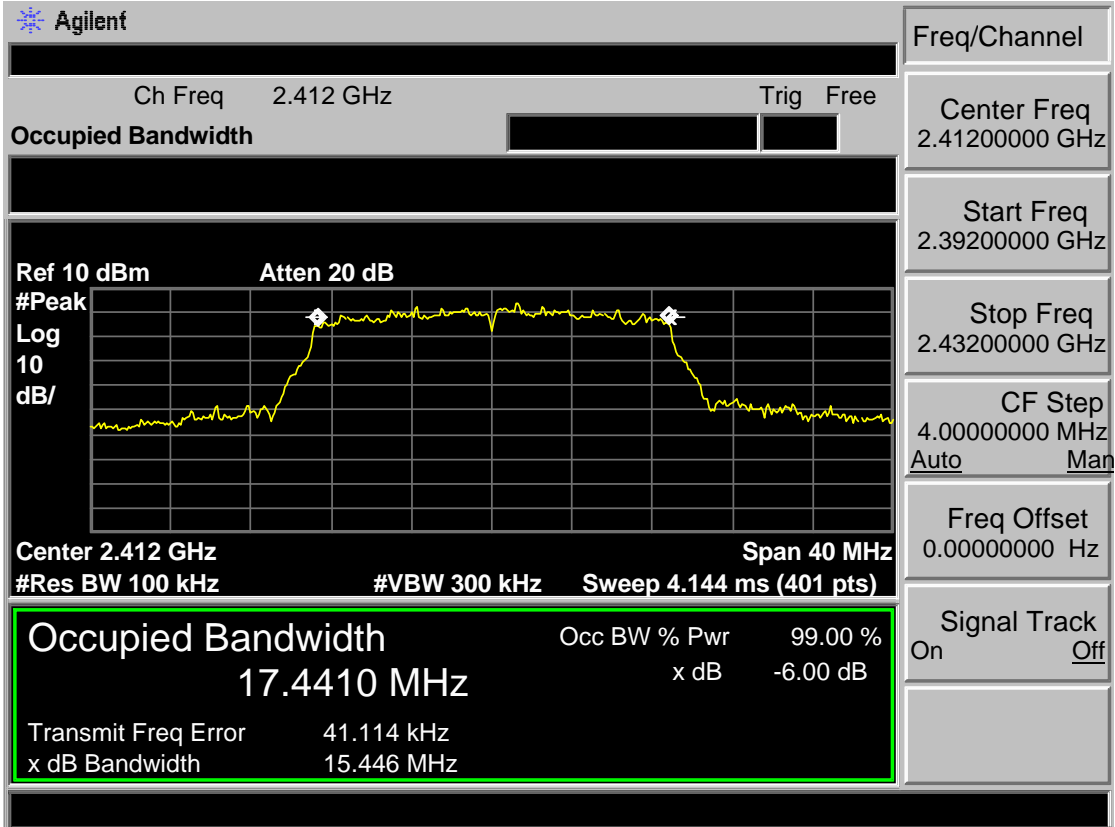

Test Mode: IEEE 802.11n HT20 2437MHz

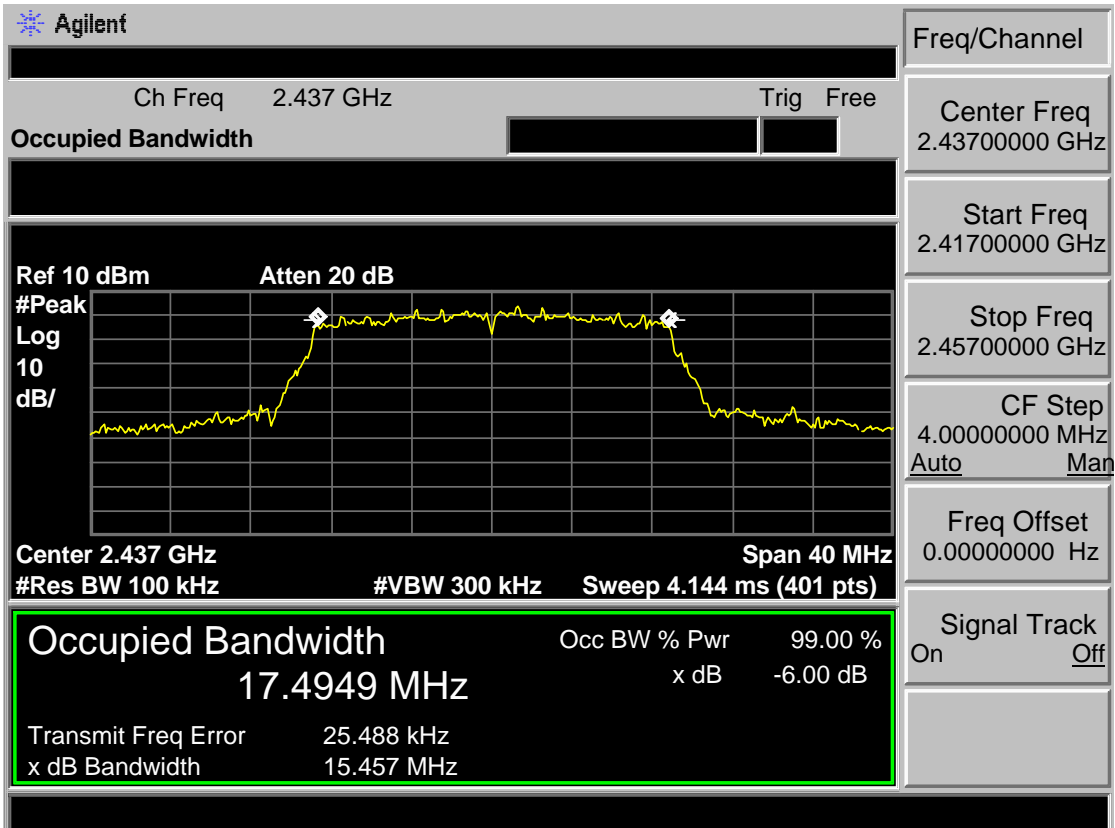

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Center 2.462 GHz Span 40 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
17.5204 MHz	x dB	-6.00 dB
Transmit Freq Error	13.558 kHz	
x dB Bandwidth	15.219 MHz	

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT40 2422MHz

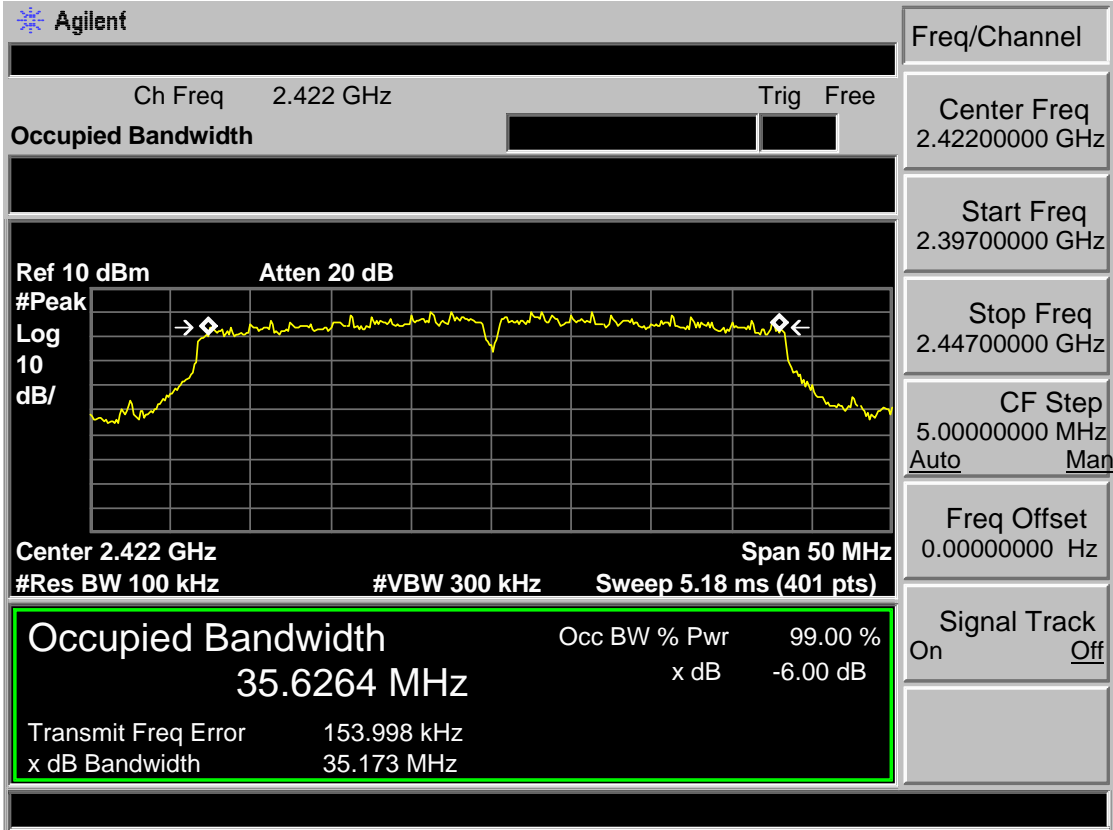

Test Mode: IEEE 802.11n HT40 2437MHz

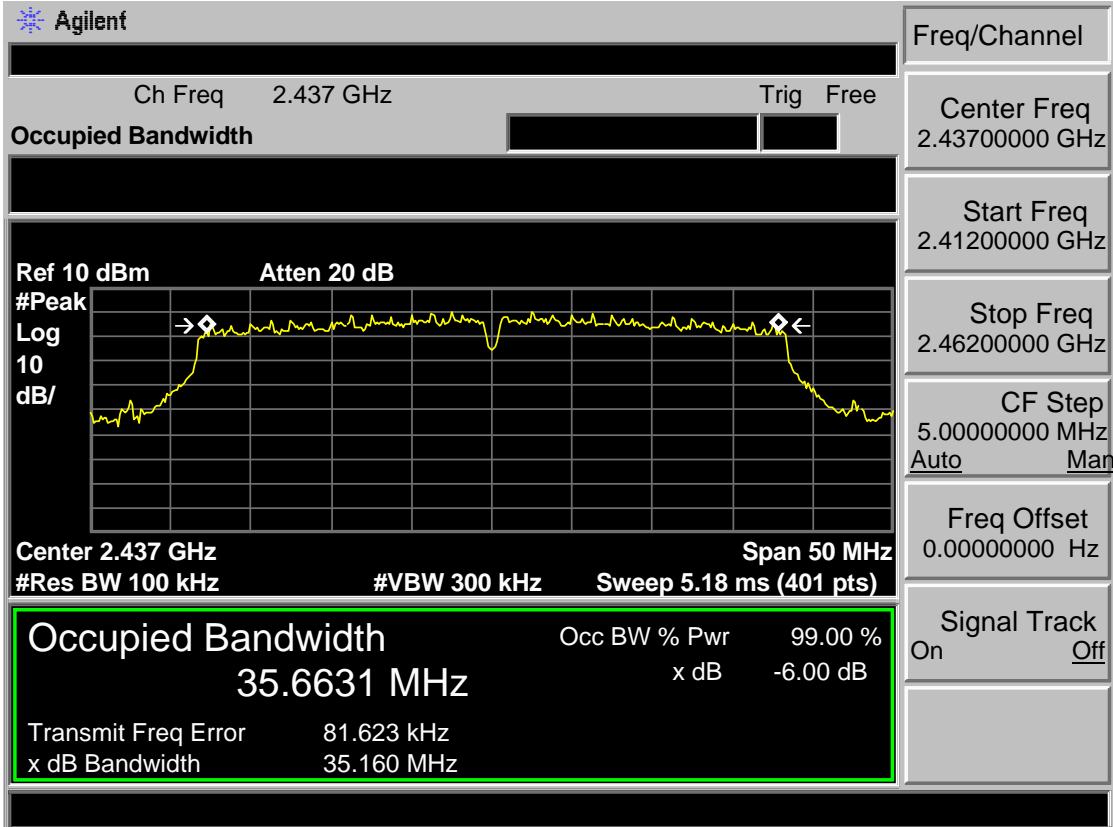

Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak
Log
10
dB/

Center 2.452 GHz Span 50 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
35.6033 MHz		x dB	-6.00 dB
Transmit Freq Error	74.515 kHz		
x dB Bandwidth	35.135 MHz		

Freq/Channel

Center Freq
2.45200000 GHz

Start Freq
2.42700000 GHz

Stop Freq
2.47700000 GHz

CF Step
5.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off


6.6 20dB Test Data

Antenna 0

Test Mode: IEEE 802.11b 2412MHz

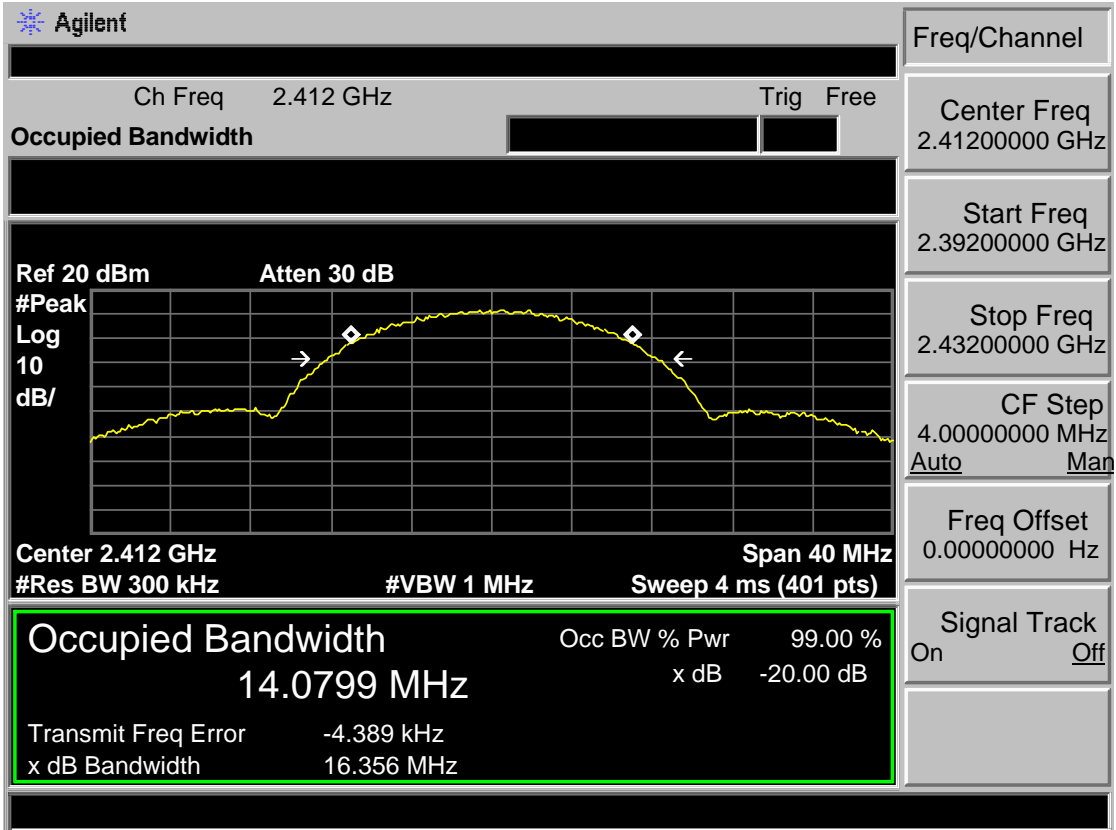

Test Mode: IEEE 802.11b 2437MHz

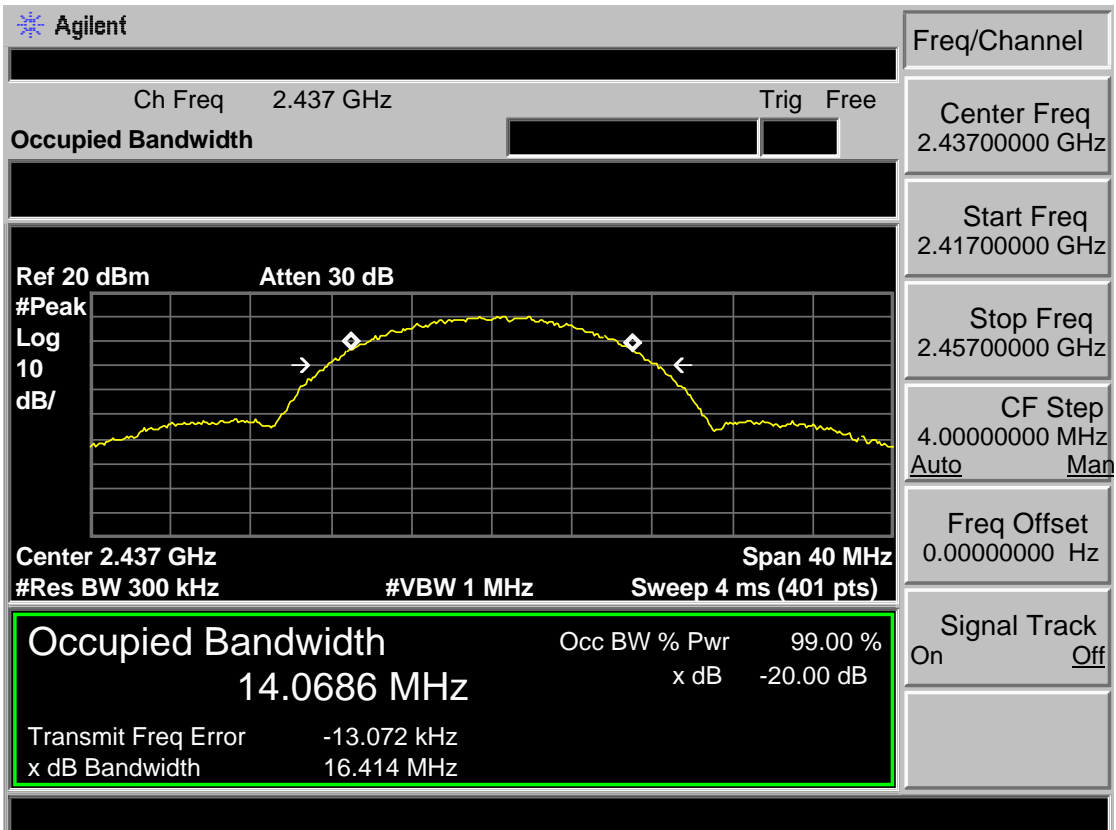

Test Mode: IEEE 802.11b 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
14.0322 MHz		x dB	-20.00 dB
Transmit Freq Error	-15.286 kHz		
x dB Bandwidth	16.375 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz

Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11g 2412MHz

Agilent

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Center 2.412 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
16.5113 MHz		x dB	-20.00 dB
Transmit Freq Error	-32.171 kHz		
x dB Bandwidth	18.342 MHz		

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39200000 GHz

Stop Freq 2.43200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2437MHz

Agilent

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Center 2.437 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
16.5067 MHz		x dB	-20.00 dB
Transmit Freq Error	-51.656 kHz		
x dB Bandwidth	18.429 MHz		

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41700000 GHz

Stop Freq 2.45700000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
16.4944 MHz		x dB	-20.00 dB
Transmit Freq Error	-55.792 kHz		
x dB Bandwidth	18.381 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT20 2412MHz

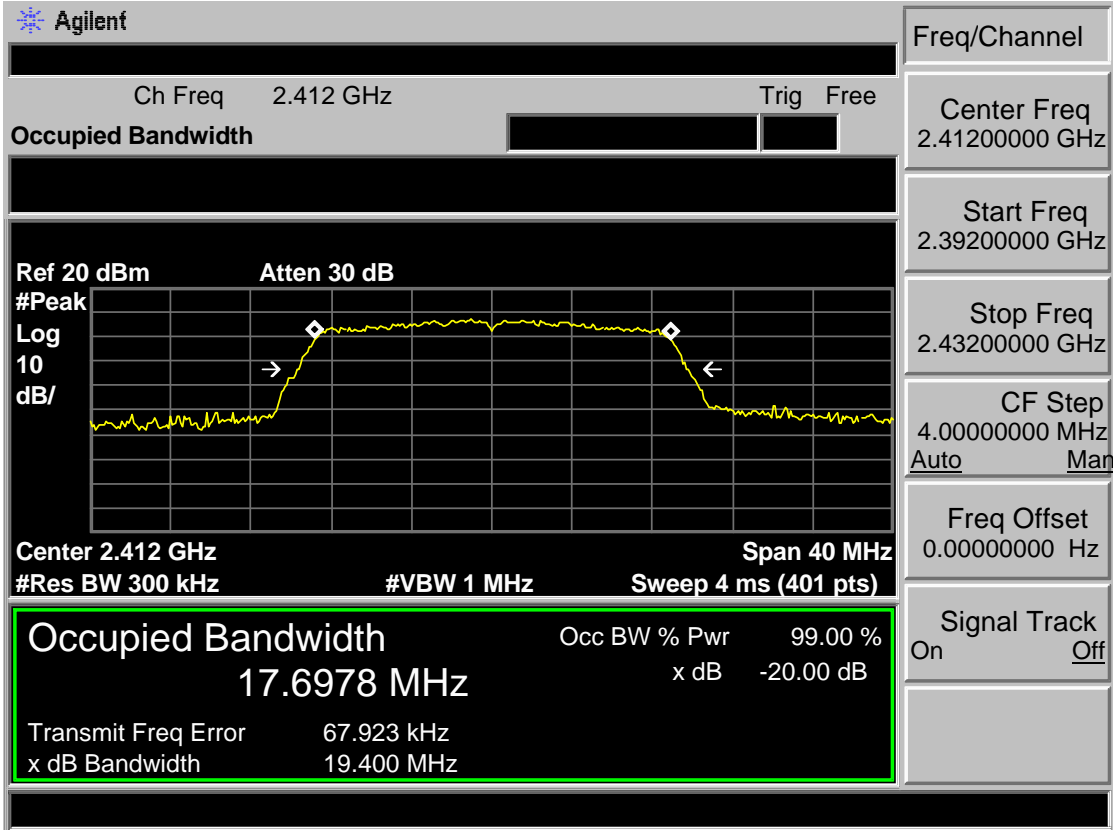

Test Mode: IEEE 802.11n HT20 2437MHz

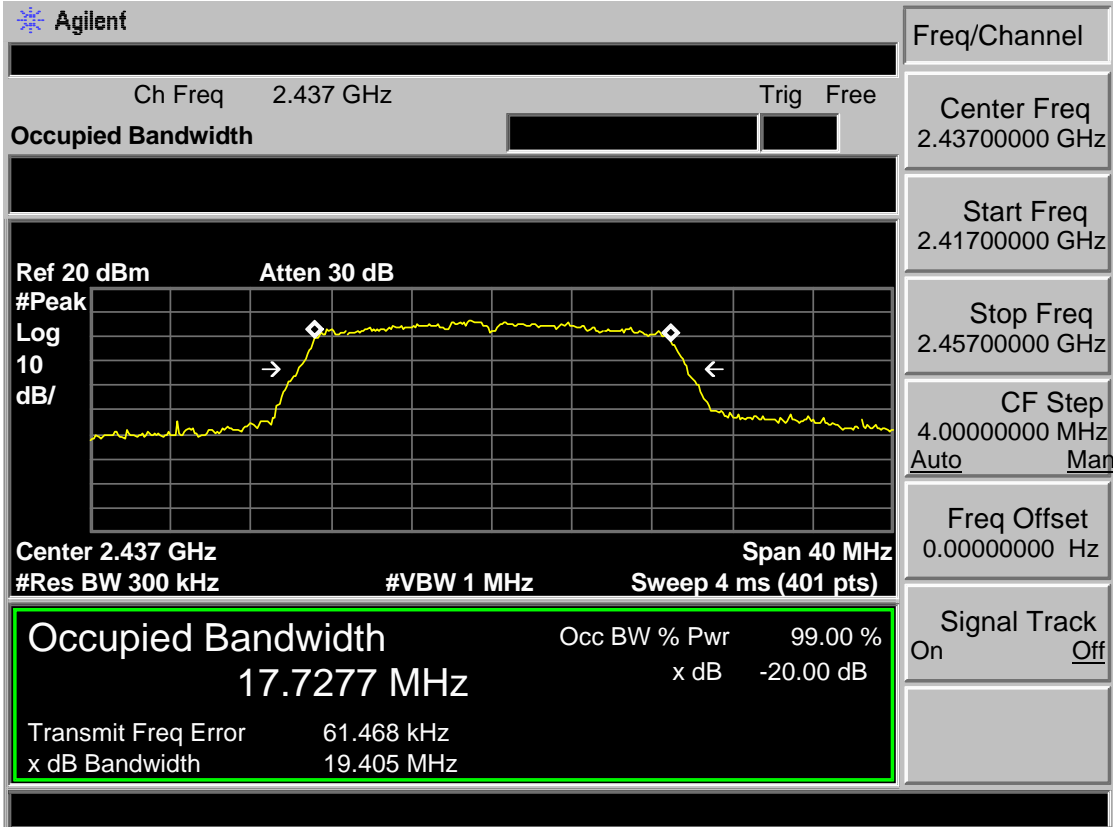

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off


Occupied Bandwidth Occ BW % Pwr 99.00 %

17.7544 MHz x dB -20.00 dB


Transmit Freq Error 44.916 kHz

x dB Bandwidth 19.473 MHz

Test Mode: IEEE 802.11n HT40 2422MHz

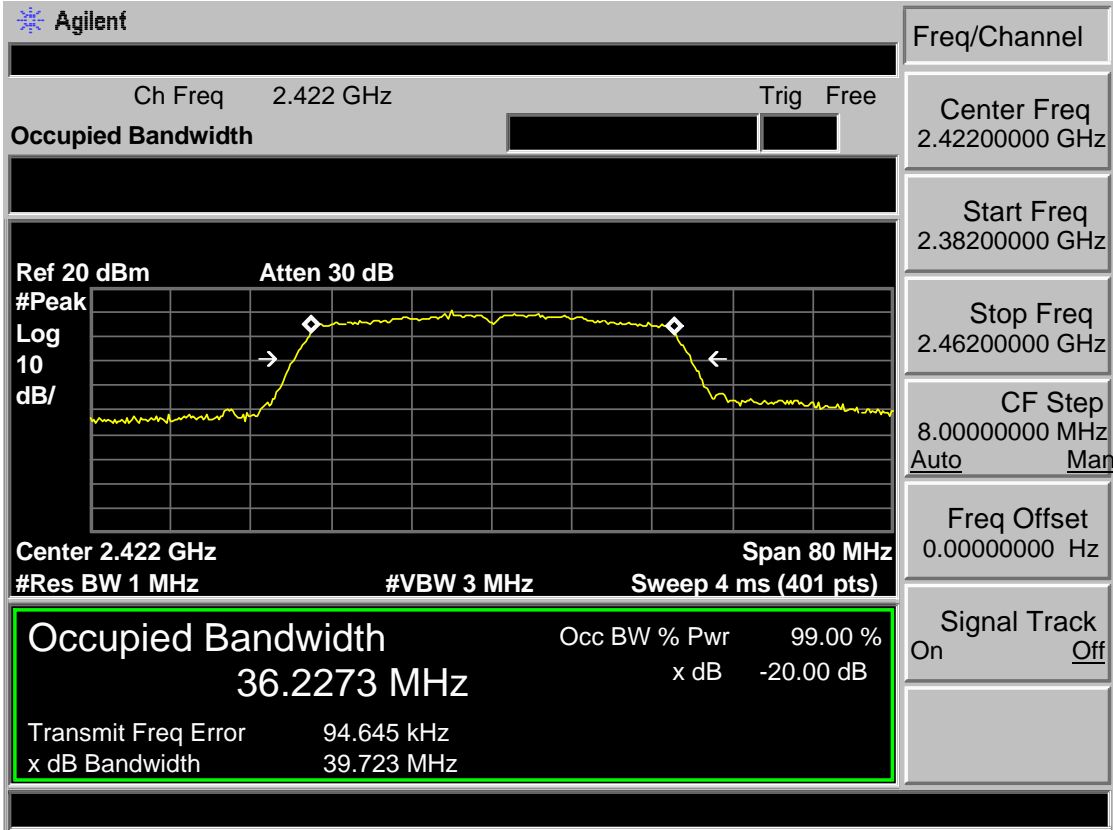

Test Mode: IEEE 802.11n HT40 2437MHz

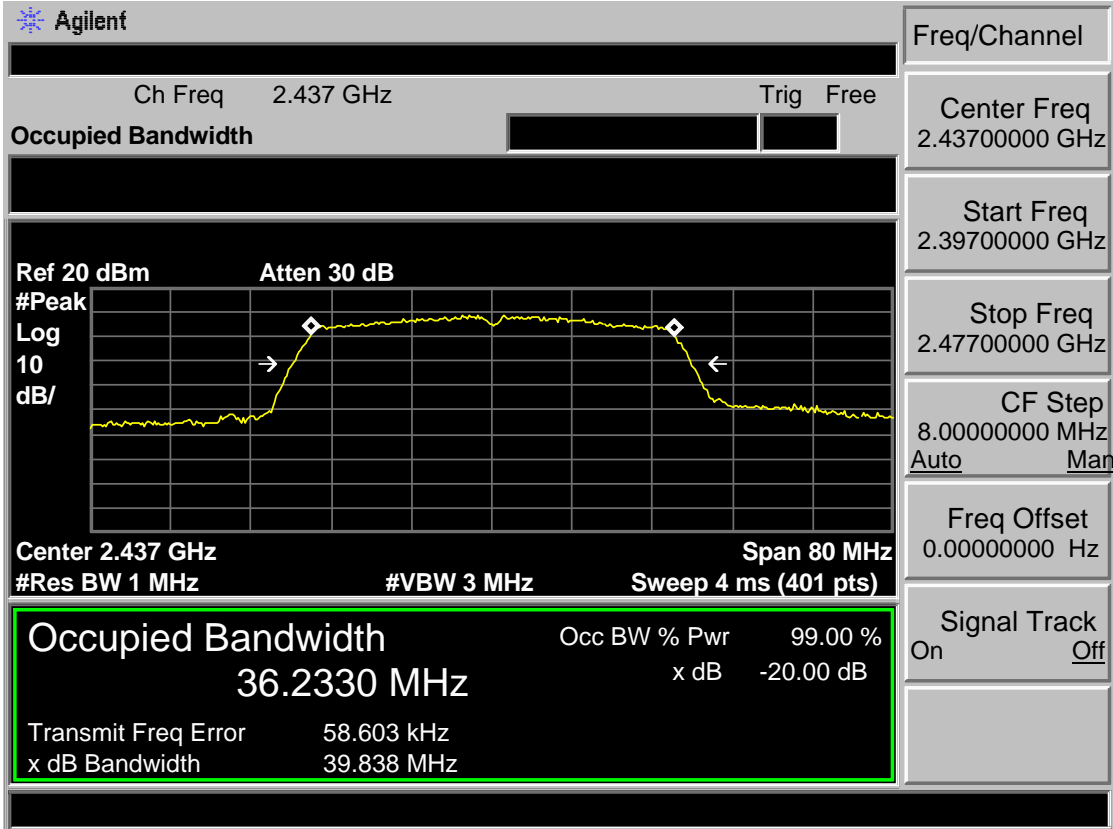

Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak

Log 10 dB/

Center 2.452 GHz Span 80 MHz

#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
36.2703 MHz		x dB	-20.00 dB
Transmit Freq Error	48.211 kHz		
x dB Bandwidth	39.876 MHz		

Freq/Channel

Center Freq
2.45200000 GHz

Start Freq
2.41200000 GHz

Stop Freq
2.49200000 GHz

CF Step
8.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Antenna 1

Test Mode: IEEE 802.11b 2412MHz

Agilent		Freq/Channel	
Ch Freq	2.412 GHz	Trig	Free
Occupied Bandwidth		Center Freq 2.41200000 GHz	
Ref 20 dBm Atten 30 dB		Start Freq 2.39200000 GHz	
#Peak Log 10 dB/		Stop Freq 2.43200000 GHz	
Center 2.412 GHz Span 40 MHz		CF Step 4.00000000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)		Freq Offset 0.00000000 Hz	
Occupied Bandwidth 14.0652 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 59.242 kHz x dB Bandwidth 16.328 MHz		Signal Track On Off	

Test Mode: IEEE 802.11b 2437MHz

Agilent		Freq/Channel	
Ch Freq	2.437 GHz	Trig	Free
Occupied Bandwidth		Center Freq 2.43700000 GHz	
Ref 20 dBm Atten 30 dB		Start Freq 2.41700000 GHz	
#Peak Log 10 dB/		Stop Freq 2.45700000 GHz	
Center 2.437 GHz Span 40 MHz		CF Step 4.00000000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)		Freq Offset 0.00000000 Hz	
Occupied Bandwidth 14.0232 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 19.589 kHz x dB Bandwidth 16.352 MHz		Signal Track On Off	

Test Mode: IEEE 802.11b 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak Log 10 dB/

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
14.0079 MHz		x dB	-20.00 dB
Transmit Freq Error	-21.675 kHz		
x dB Bandwidth	16.324 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz

Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11g 2412MHz

Agilent

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Center 2.412 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5322 MHz	x dB	-20.00 dB
Transmit Freq Error	11.258 kHz	
x dB Bandwidth	18.580 MHz	

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39200000 GHz

Stop Freq 2.43200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2437MHz

Agilent

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Center 2.437 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5281 MHz	x dB	-20.00 dB
Transmit Freq Error	-26.671 kHz	
x dB Bandwidth	18.403 MHz	

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41700000 GHz

Stop Freq 2.45700000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
16.5430 MHz		x dB	-20.00 dB
Transmit Freq Error	-33.283 kHz		
x dB Bandwidth	18.357 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT20 2412MHz

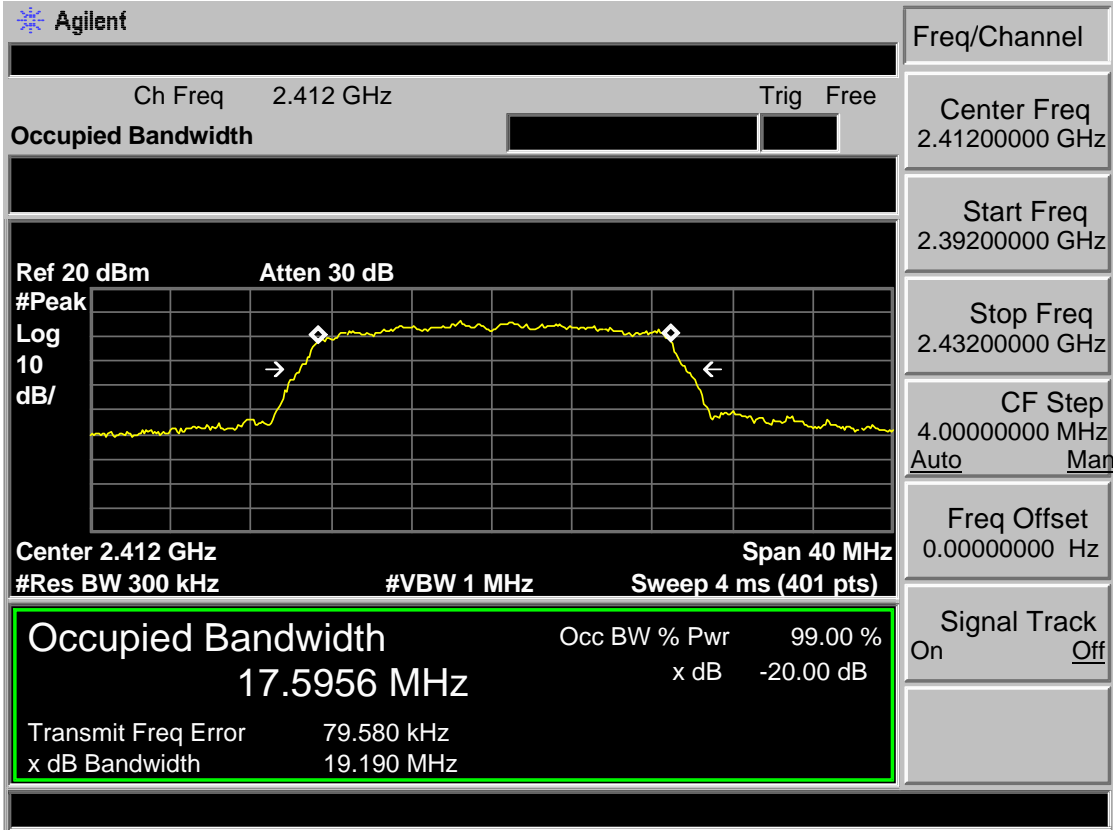

Test Mode: IEEE 802.11n HT20 2437MHz

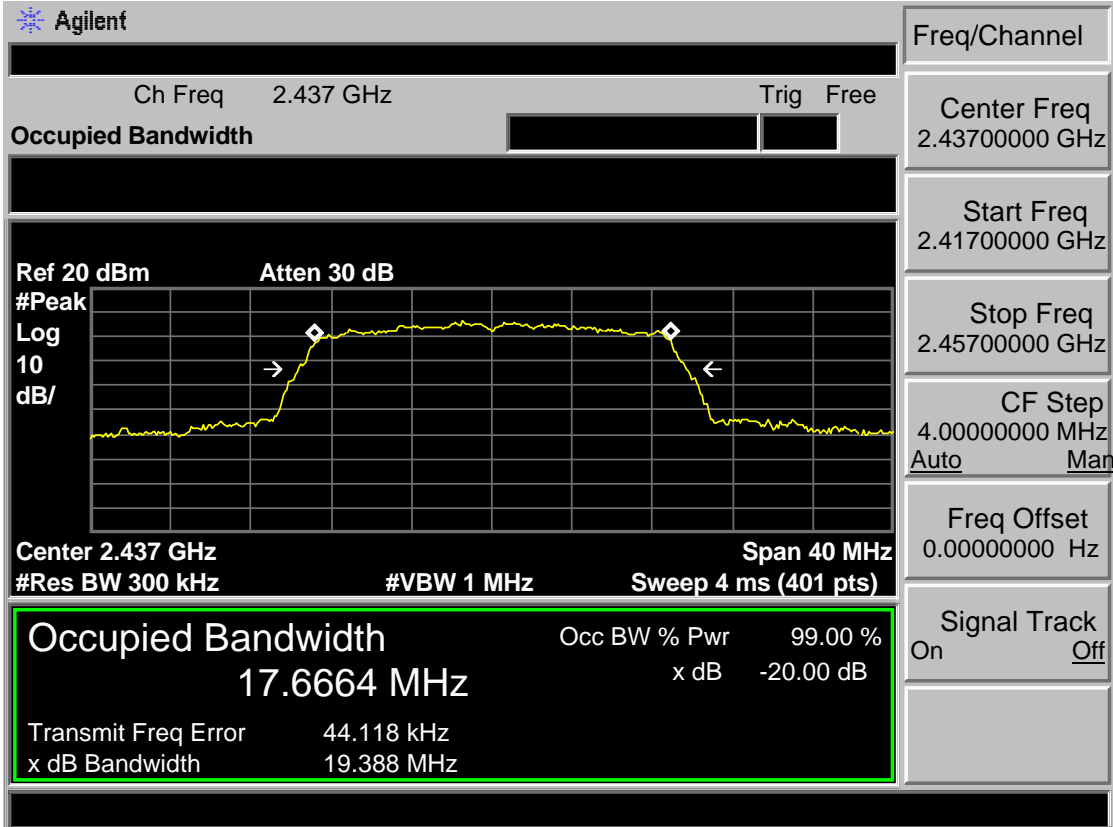

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
17.6064 MHz		x dB	-20.00 dB
Transmit Freq Error	6.115 kHz		
x dB Bandwidth	19.313 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT40 2422MHz

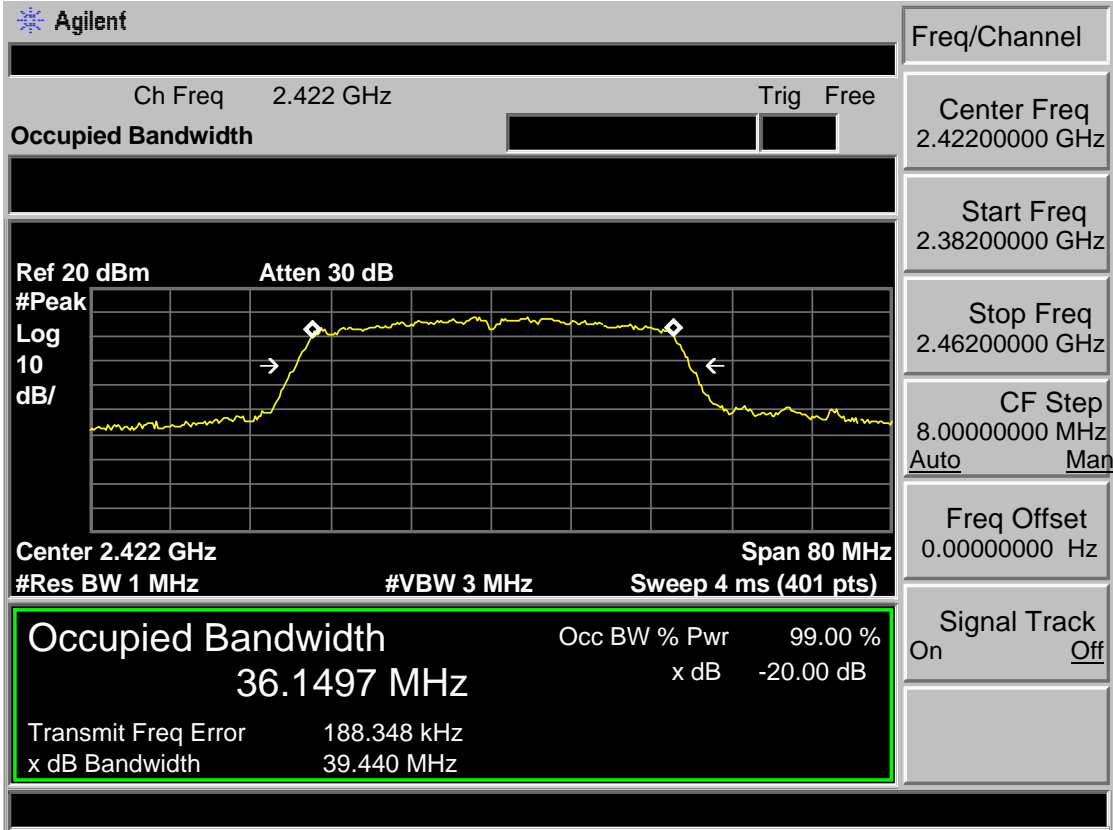

Test Mode: IEEE 802.11n HT40 2437MHz

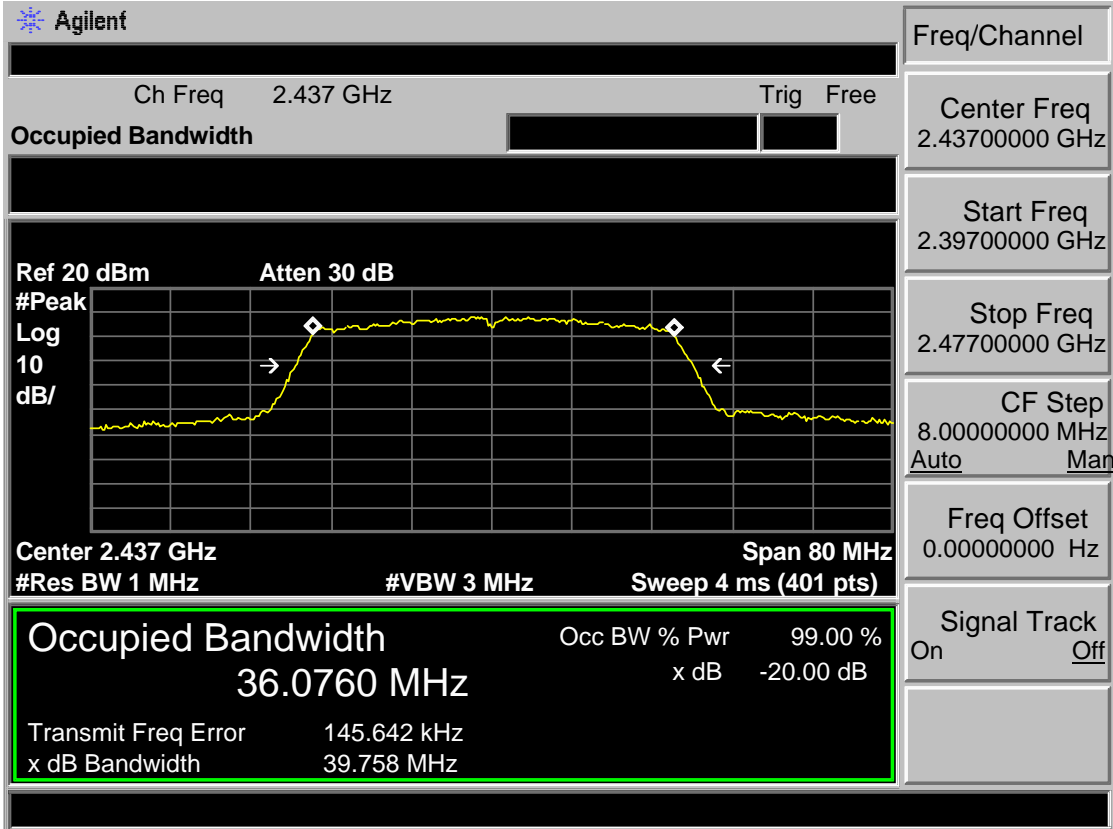

Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak

Log 10 dB/

Center 2.452 GHz Span 80 MHz

#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

36.0935 MHz x dB -20.00 dB

Transmit Freq Error 50.285 kHz

x dB Bandwidth 39.751 MHz

Freq/Channel

Center Freq 2.45200000 GHz

Start Freq 2.41200000 GHz

Stop Freq 2.49200000 GHz

CF Step 8.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

7 OUTPUT POWER TEST

7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

7.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1)Set span to at least 1.5 times the OBW.
 - (2)Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
 - (3)Set VBW $\geq 3 \times$ RBW.
 - (4)Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
 - (4)Sweep time = auto.
 - (5)Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
 - (6)If transmit duty cycle $< 98 \%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
 - (7)Trace average at least 100 traces in power averaging (i.e., RMS) mode.
 - (8)Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


7.3 Test Result

EUT: LED TV					
M/N: SC-60UK850N					
Test date: 2018.09.13		Test site: RF Site			Tested by: Viking
Pass					
Test Mode	CH	Conducted Power (dBm)			Limit (dBm)
		Ant 0	Ant 1	Total	
IEEE 802.11 b	CH1	16.31	15.48	/	30
	CH6	15.30	15.24	/	30
	CH11	13.91	13.45	/	30
IEEE 802.11 g	CH1	12.98	11.19	/	30
	CH6	11.80	11.23	/	30
	CH11	9.80	9.12	/	30
IEEE 802.11 n HT 20	CH1	12.38	10.72	14.64	30
	CH6	11.40	10.62	14.04	30
	CH11	9.36	8.82	12.11	30
IEEE 802.11 n HT 40	CH3	10.59	8.83	12.81	30
	CH6	9.33	8.32	11.86	30
	CH9	9.41	8.70	12.08	30
Conclusion : PASS					


7.4 Test Data

Antenna 0



Test Mode: IEEE 802.11b 2412MHz

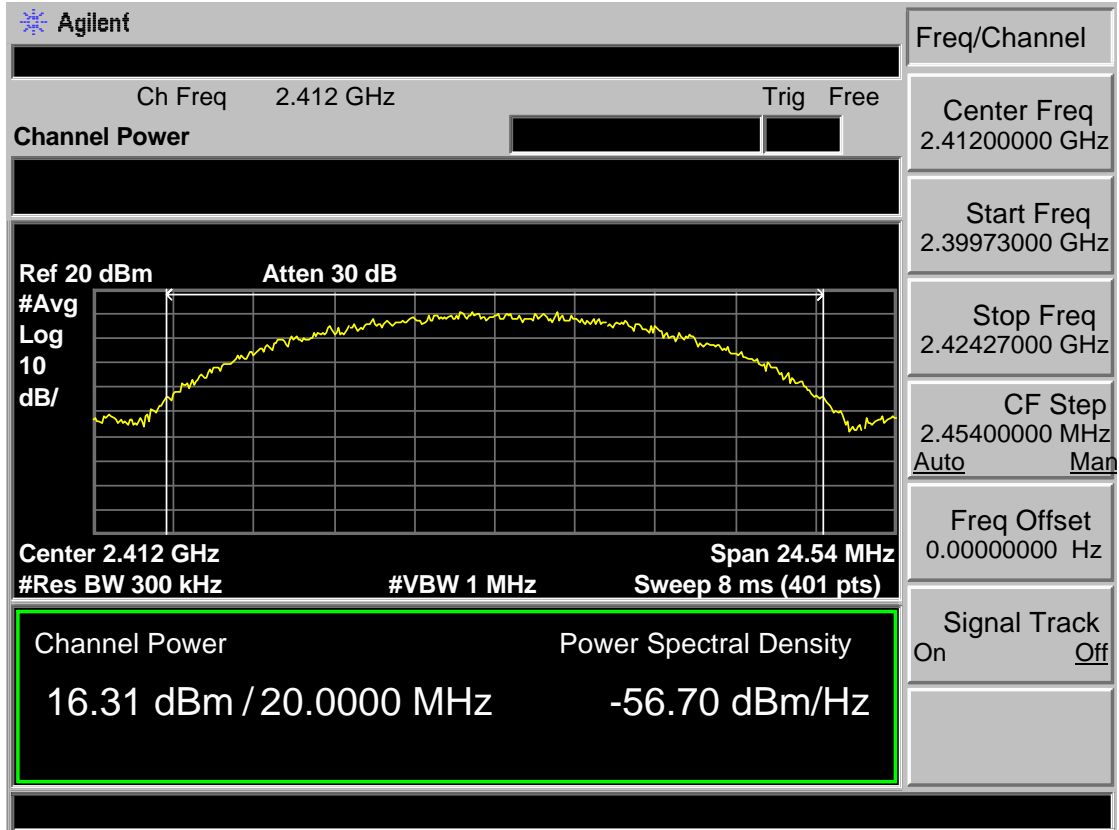

Test Mode: IEEE 802.11b 2437MHz

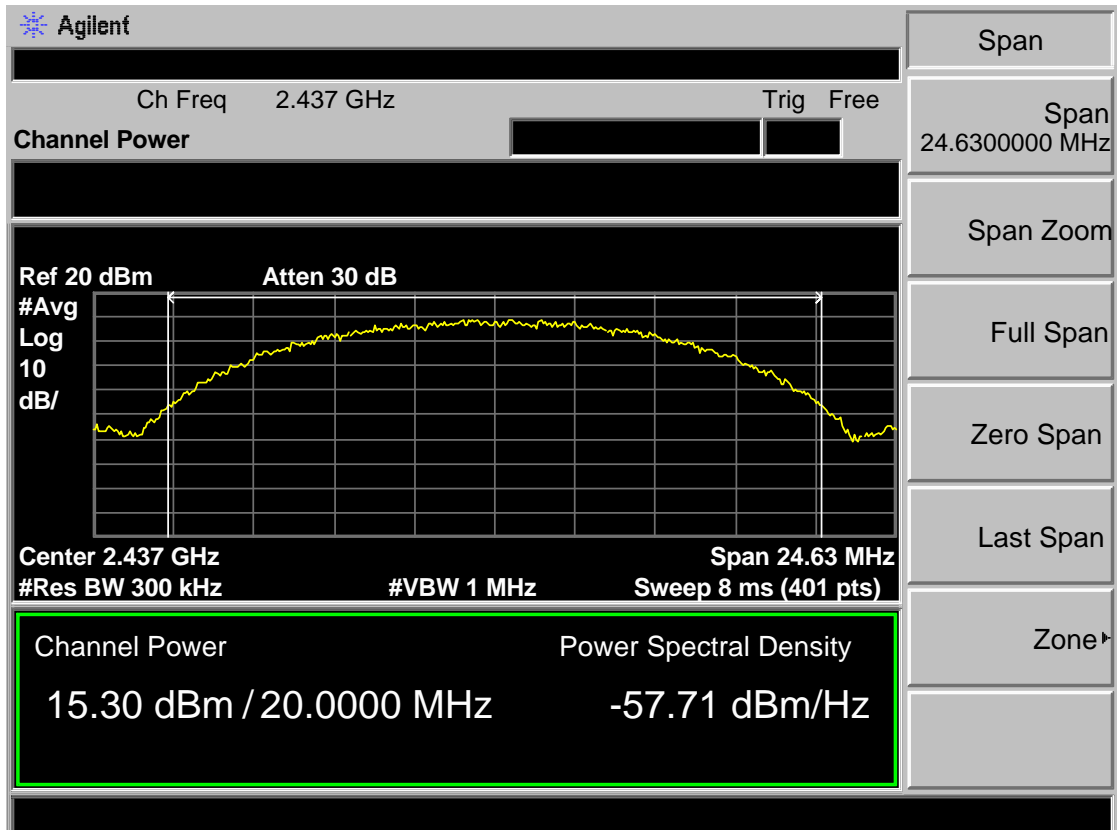

Test Mode: IEEE 802.11b 2462MHz

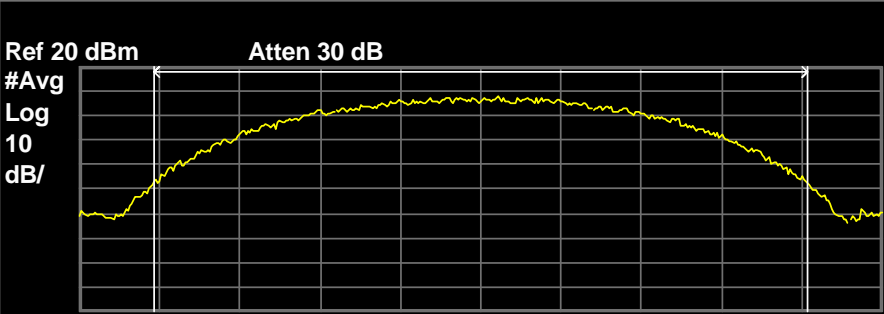		Freq/Channel	
Ch Freq 2.462 GHz		Trig Free	
Channel Power		Center Freq 2.46200000 GHz	
Ref 20 dBm Atten 30 dB		Start Freq 2.44971500 GHz	
#Avg Log 10 dB/		Stop Freq 2.47428500 GHz	
		CF Step 2.45700000 MHz Auto Man	
Center 2.462 GHz		Span 24.57 MHz	
#Res BW 300 kHz		#VBW 1 MHz Sweep 8 ms (401 pts)	
Channel Power		Power Spectral Density	
13.91 dBm / 20.0000 MHz		-59.10 dBm/Hz	
		Signal Track On Off	


Test Mode: IEEE 802.11g 2412MHz

		Freq/Channel	
Ch Freq 2.412 GHz Trig Free		Center Freq 2.41200000 GHz	
Channel Power		Start Freq 2.39824000 GHz	
		Stop Freq 2.42576000 GHz	
Center 2.412 GHz Span 27.52 MHz		CF Step 2.75200000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)		Freq Offset 0.00000000 Hz	
Channel Power 12.98 dBm / 20.0000 MHz		Power Spectral Density -60.03 dBm/Hz	
		Signal Track On Off	


Test Mode: IEEE 802.11g 2437MHz

		Freq/Channel	
Ch Freq 2.437 GHz Trig Free		Center Freq 2.43700000 GHz	
Channel Power		Start Freq 2.42317500 GHz	
		Stop Freq 2.45082500 GHz	
Center 2.437 GHz Span 27.65 MHz		CF Step 2.76500000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)		Freq Offset 0.00000000 Hz	
Channel Power 11.80 dBm / 20.0000 MHz		Power Spectral Density -61.21 dBm/Hz	
		Signal Track On Off	


Test Mode: IEEE 802.11g 2462MHz

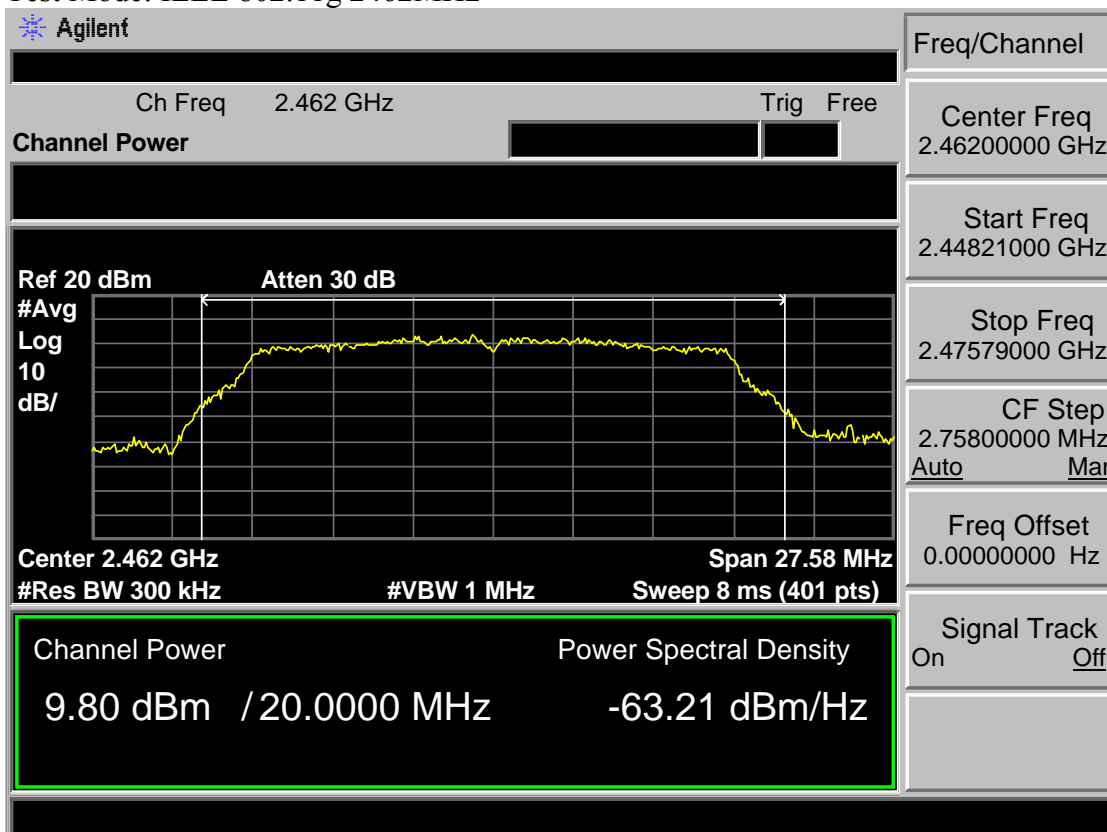

Test Mode: IEEE 802.11n HT20 2412MHz

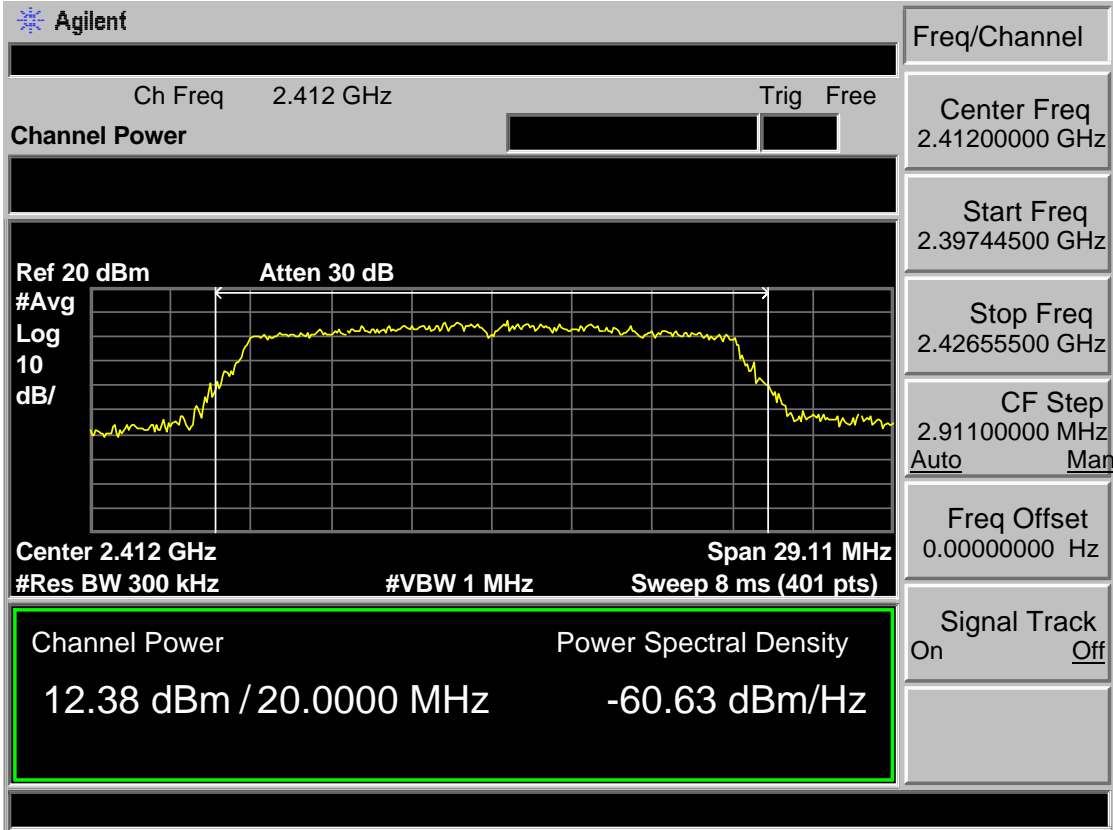

Test Mode: IEEE 802.11n HT20 2437MHz

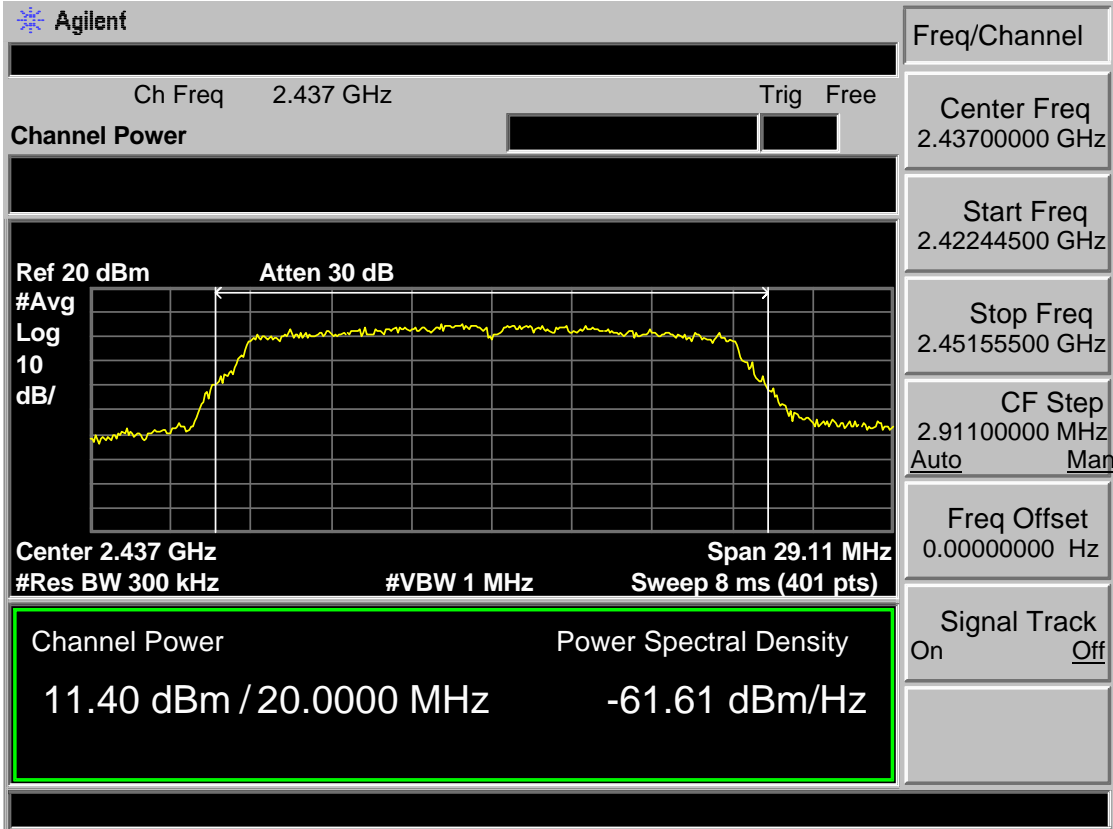

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Channel Power

Center 2.462 GHz Span 29.21 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)

Channel Power

9.36 dBm / 20.0000 MHz

Power Spectral Density

-63.65 dBm/Hz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44739500 GHz


Stop Freq 2.47660500 GHz

CF Step 2.92100000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off


Test Mode: IEEE 802.11n HT40 2422MHz

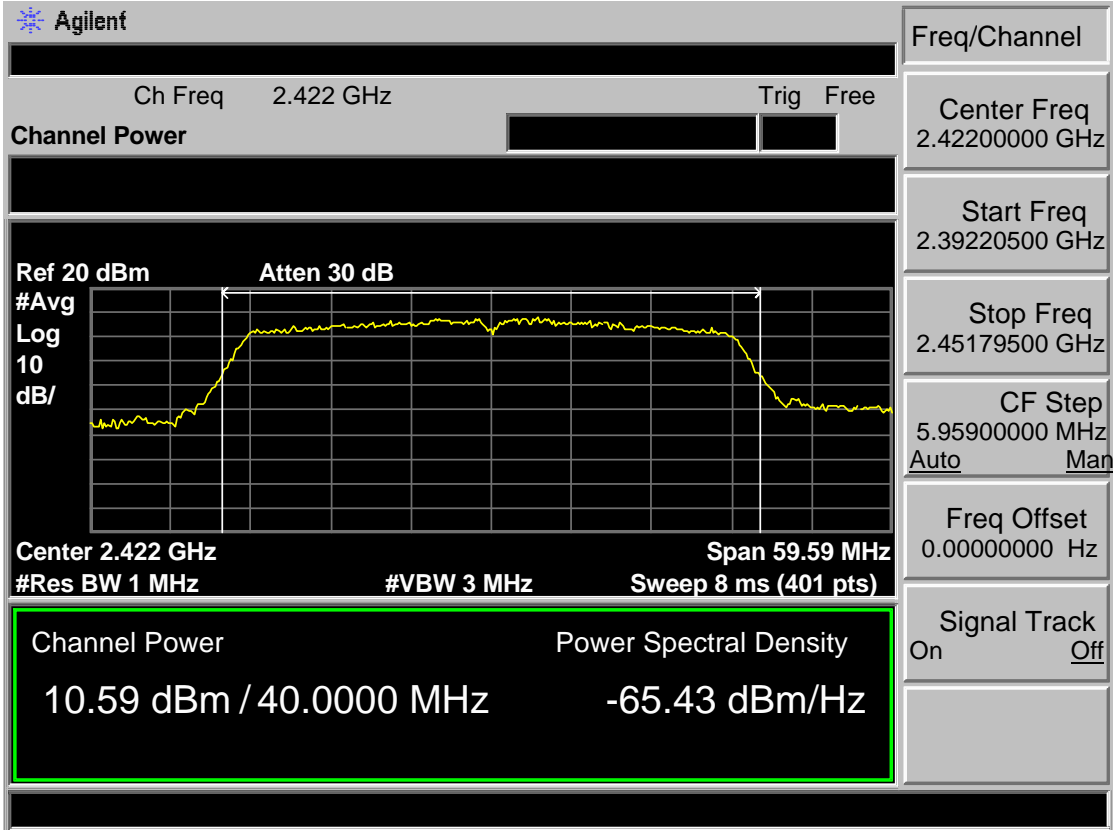

Test Mode: IEEE 802.11n HT40 2437MHz

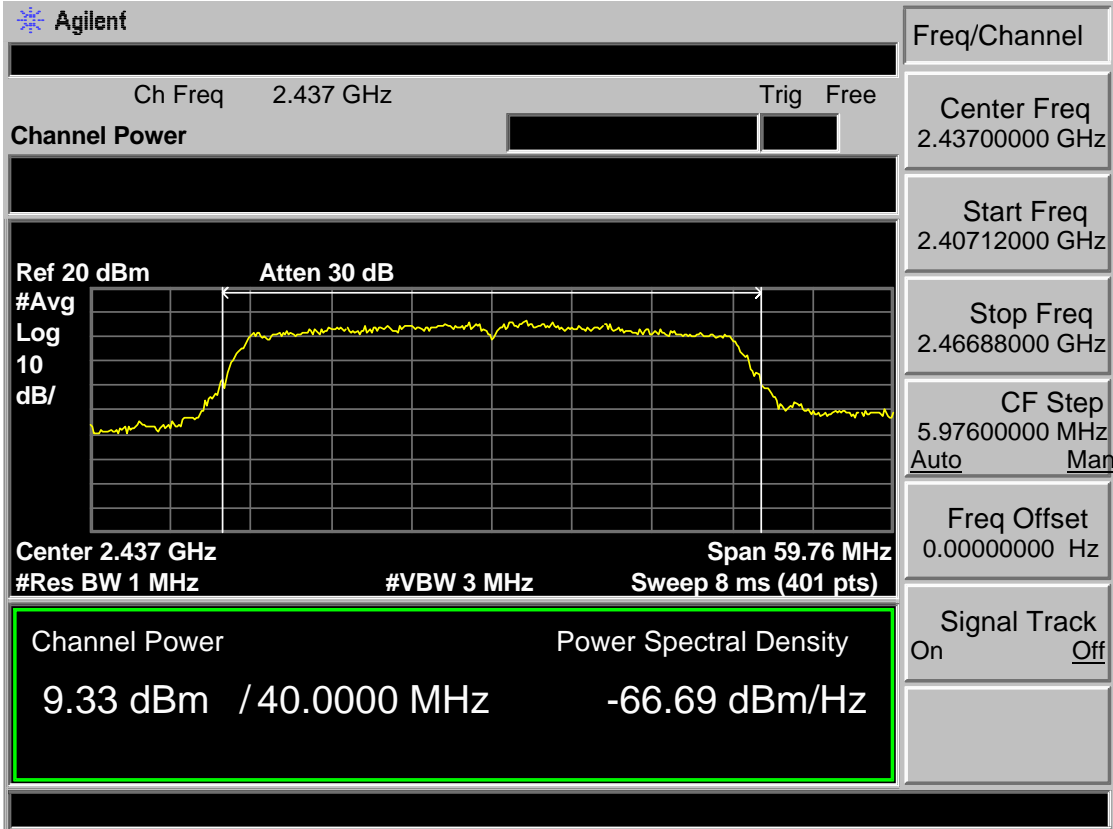

Test Mode: IEEE 802.11n HT40 2452MHz

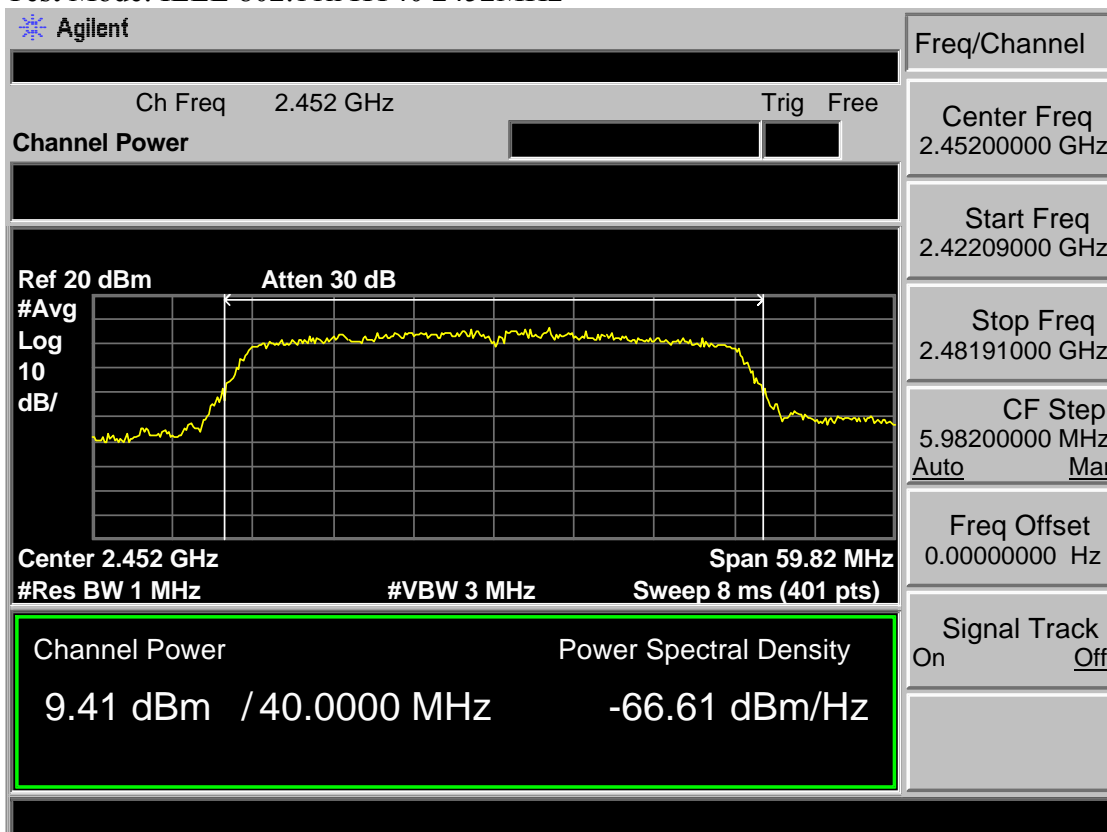

Antenna 1

Test Mode: IEEE 802.11b 2412MHz

		Freq/Channel	
Ch Freq 2.412 GHz Trig Free		Center Freq 2.41200000 GHz	
Channel Power		Start Freq 2.39975000 GHz	
Ref 20 dBm Atten 30 dB		Stop Freq 2.42425000 GHz	
#Avg Log 10 dB/		CF Step 2.45000000 MHz Auto Man	
		Freq Offset 0.00000000 Hz	
Center 2.412 GHz Span 24.5 MHz		Signal Track On Off	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)			
Channel Power 15.48 dBm / 20.0000 MHz		Power Spectral Density -57.53 dBm/Hz	

Test Mode: IEEE 802.11b 2437MHz

		Freq/Channel	
Ch Freq 2.437 GHz Trig Free		Center Freq 2.43700000 GHz	
Channel Power		Start Freq 2.42473500 GHz	
Ref 20 dBm Atten 30 dB		Stop Freq 2.44926500 GHz	
#Avg Log 10 dB/		CF Step 2.45300000 MHz Auto Man	
		Freq Offset 0.00000000 Hz	
Center 2.437 GHz Span 24.53 MHz		Signal Track On Off	
#Res BW 300 kHz #VBW 3 MHz Sweep 8 ms (401 pts)			
Channel Power 15.24 dBm / 20.0000 MHz		Power Spectral Density -57.77 dBm/Hz	

Test Mode: IEEE 802.11b 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Channel Power

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 24.49 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)

Channel Power Power Spectral Density

13.45 dBm / 20.0000 MHz -59.56 dBm/Hz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44975500 GHz

Stop Freq 2.47424500 GHz

CF Step 2.44900000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off


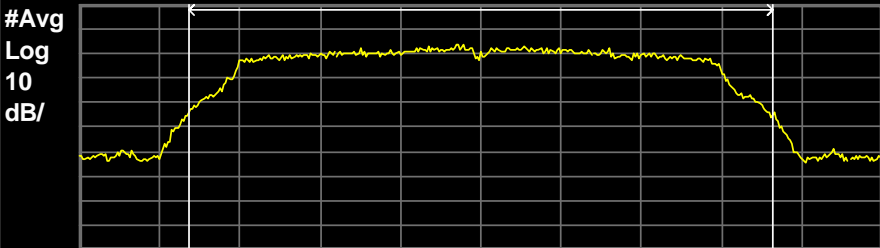
Test Mode: IEEE 802.11g 2412MHz

		Freq/Channel	
Ch Freq 2.412 GHz Trig Free		Center Freq 2.41200000 GHz	
Channel Power		Start Freq 2.39806000 GHz	
Ref 20 dBm Atten 30 dB		Stop Freq 2.42594000 GHz	
#Avg Log 10 dB/		CF Step 2.78800000 MHz Auto Man	
		Freq Offset 0.00000000 Hz	
Center 2.412 GHz Span 27.88 MHz		Signal Track On Off	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)			
Channel Power		Power Spectral Density	
11.19 dBm / 20.0000 MHz		-61.82 dBm/Hz	


Test Mode: IEEE 802.11g 2437MHz

		Freq/Channel	
Ch Freq 2.437 GHz Trig Free		Center Freq 2.43700000 GHz	
Channel Power		Start Freq 2.42319500 GHz	
Ref 20 dBm Atten 30 dB		Stop Freq 2.45080500 GHz	
#Avg Log 10 dB/		CF Step 2.76100000 MHz Auto Man	
		Freq Offset 0.00000000 Hz	
Center 2.437 GHz Span 27.61 MHz		Signal Track On Off	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)			
Channel Power		Power Spectral Density	
11.23 dBm / 20.0000 MHz		-61.78 dBm/Hz	


Test Mode: IEEE 802.11g 2462MHz

		Freq/Channel	
Ch Freq 2.462 GHz		Trig Free	
Channel Power		Center Freq 2.46200000 GHz	
Ref 20 dBm Atten 30 dB		Start Freq 2.44823000 GHz	
#Avg Log 10 dB/		Stop Freq 2.47577000 GHz	
		CF Step 2.75400000 MHz Auto Man	
Center 2.462 GHz		Span 27.54 MHz	
#Res BW 300 kHz		#VBW 1 MHz Sweep 8 ms (401 pts)	
Channel Power		Power Spectral Density	
9.12 dBm / 20.0000 MHz		-63.89 dBm/Hz	
		Signal Track On Off	


Test Mode: IEEE 802.11n HT20 2412MHz

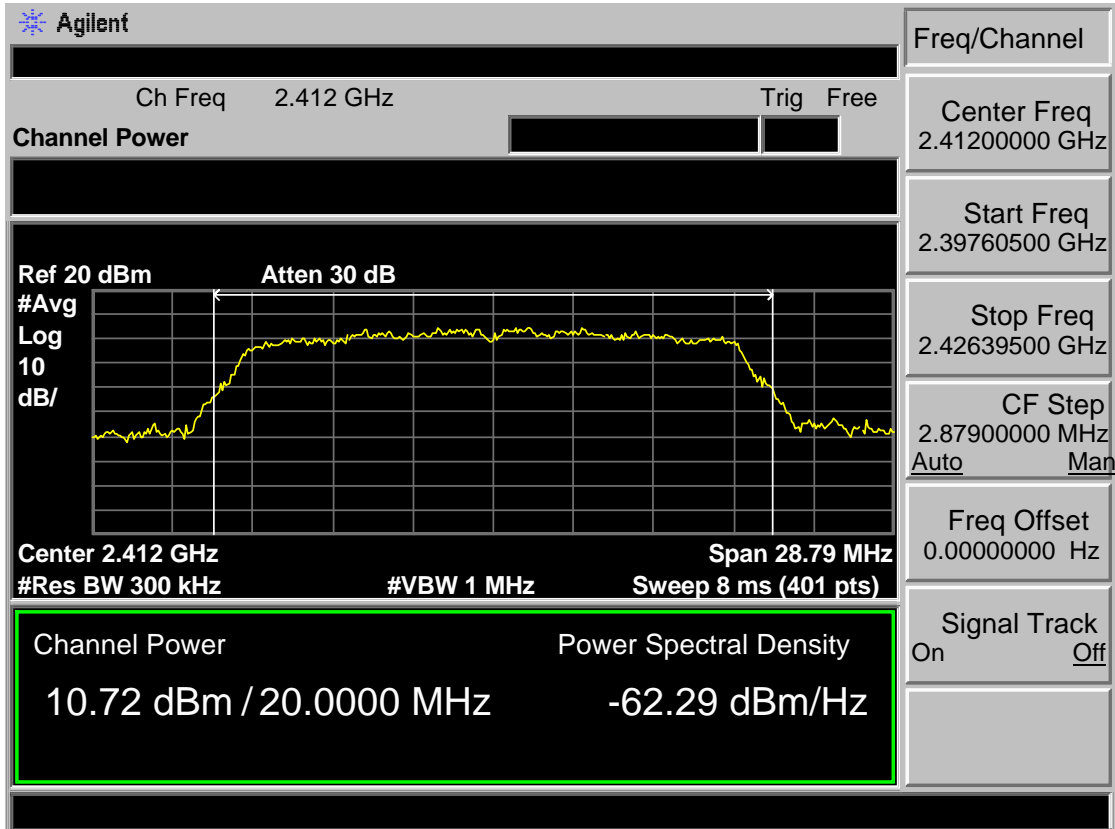


Test Mode: IEEE 802.11n HT20 2437MHz

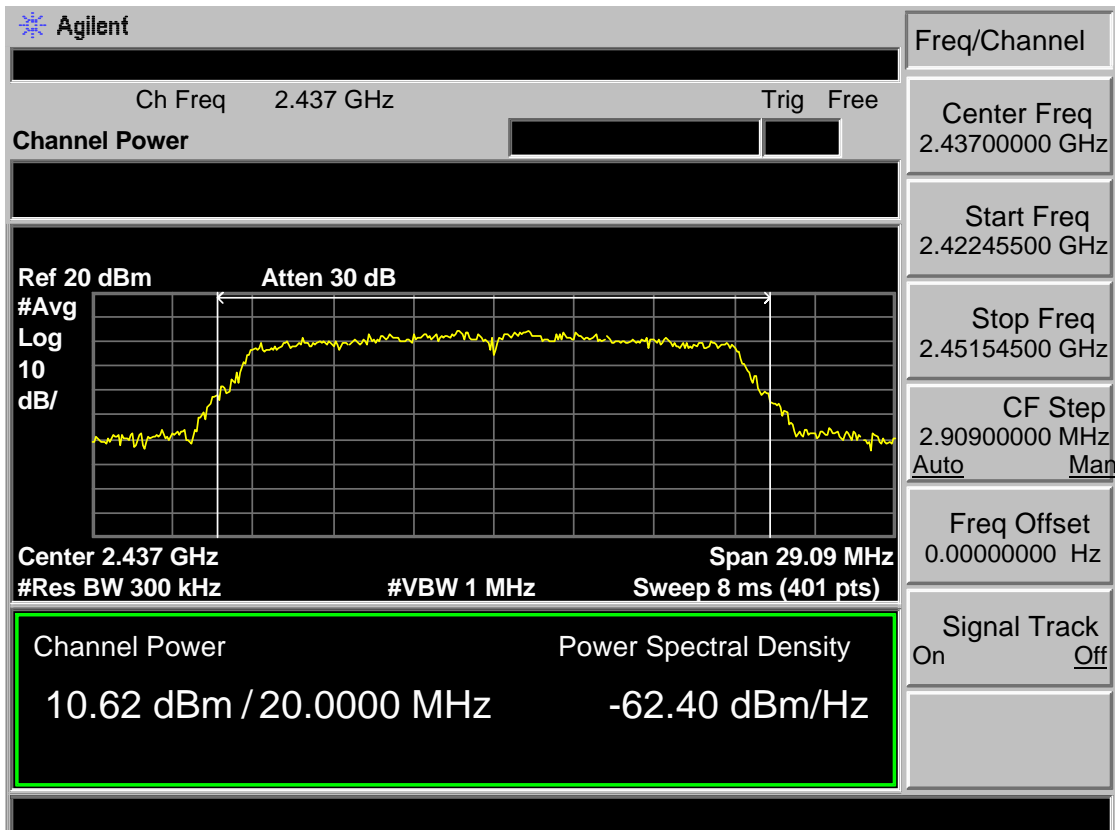


Test Mode: IEEE 802.11n HT20 2462MHz

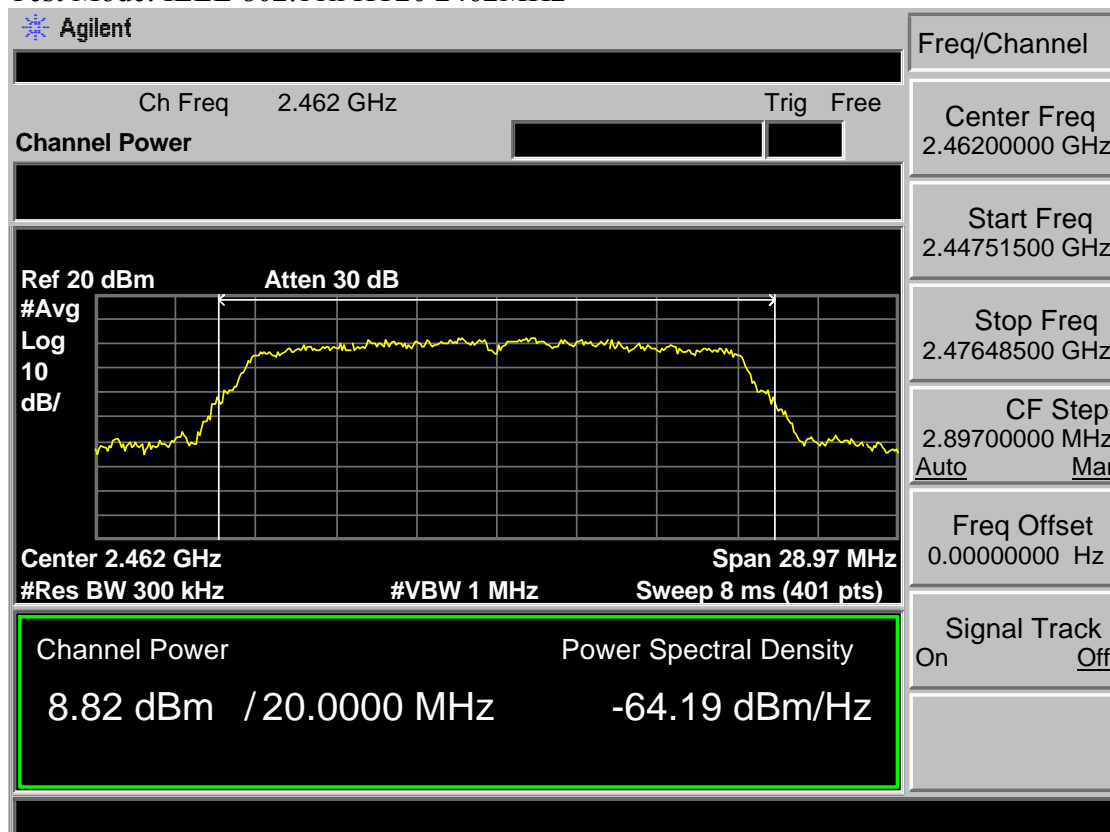

Test Mode: IEEE 802.11n HT40 2422MHz

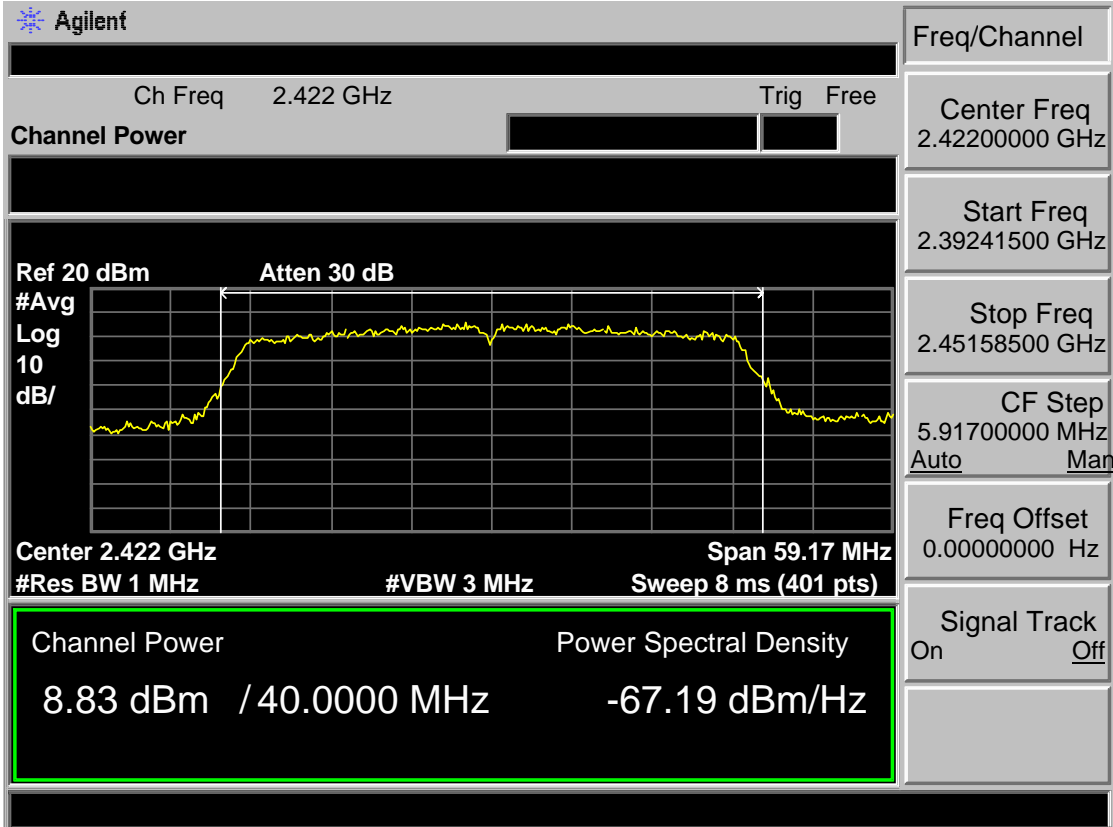

Test Mode: IEEE 802.11n HT40 2437MHz

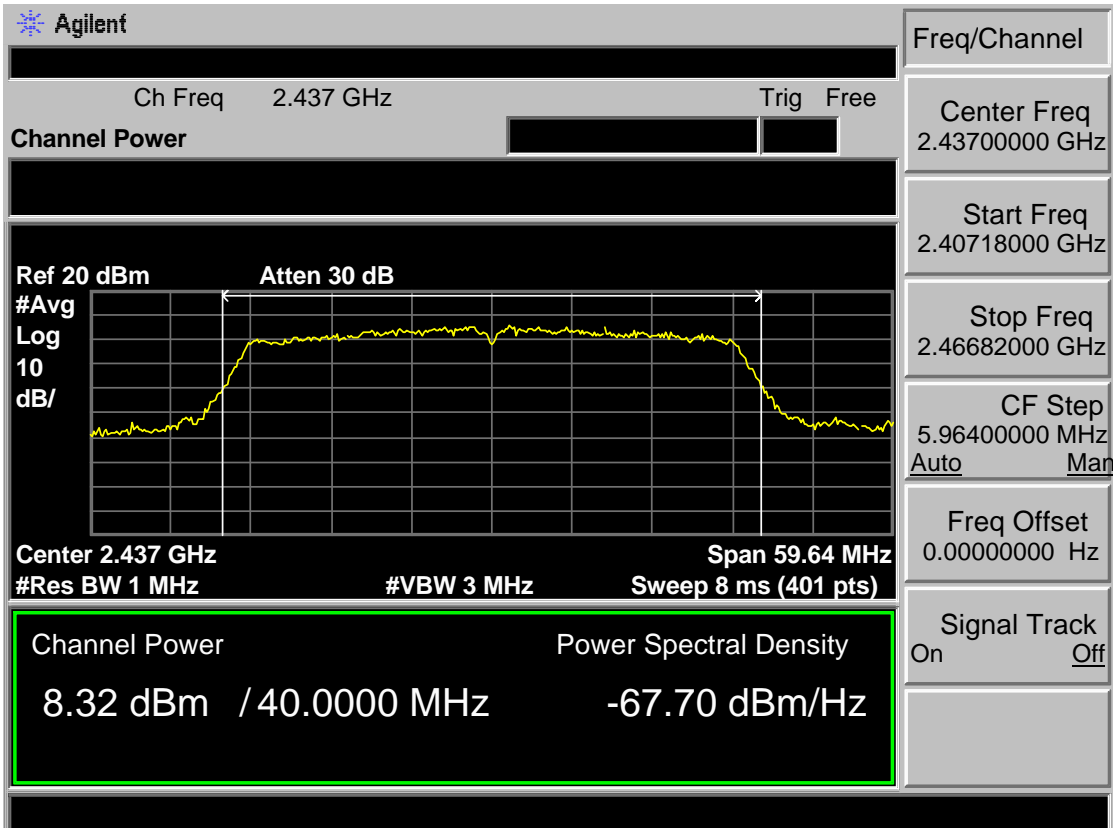

Test Mode: IEEE 802.11n HT40 2452MHz



8 POWER SPECTRAL DENSITY TEST

8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.

- 2, Follow the test procedure as described in KDB 558074
 - (1). Set analyzer center frequency to DTS channel center frequency.
 - (2). Set the span to 1.5 times the DTS bandwidth.
 - (3). Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - (4). Set the VBW $\geq 3 \text{ RBW}$.
 - (5). Detector = peak.
 - (6). Sweep time = auto couple.
 - (7). Trace mode = max hold.
 - (8). Allow trace to fully stabilize.
 - (9). Use the peak marker function to determine the maximum amplitude level.
 - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.3 Test Result

EUT: LED TV					
M/N: SC-60UK850N					
Test date: 2018.09.13		Test site: RF Site			Tested by: Viking
Pass					
Test Mode	CH	Power density (dBm/3kHz)			Limit (dBm/3kHz)
		Ant 0	Ant 1	Total	
IEEE 802.11 b	CH1	-5.353	-7.707	/	8
	CH6	-5.002	-7.101	/	8
	CH11	-9.664	-9.035	/	8
IEEE 802.11 g	CH1	-10.34	-12.40	/	8
	CH6	-11.70	-12.19	/	8
	CH11	-13.60	-13.66	/	8
IEEE 802.11 n HT 20	CH1	-9.638	-11.82	-7.58	8
	CH6	-10.79	-12.36	-8.49	8
	CH11	-13.06	-12.84	-9.94	8
IEEE 802.11 n HT 40	CH3	-13.27	-15.28	-11.15	8
	CH6	-14.60	-15.99	-12.23	8
	CH9	-13.50	-14.93	-11.15	8
Conclusion : PASS					


8.4 Test Data

Antenna 0


Test Mode: IEEE 802.11b 2412MHz

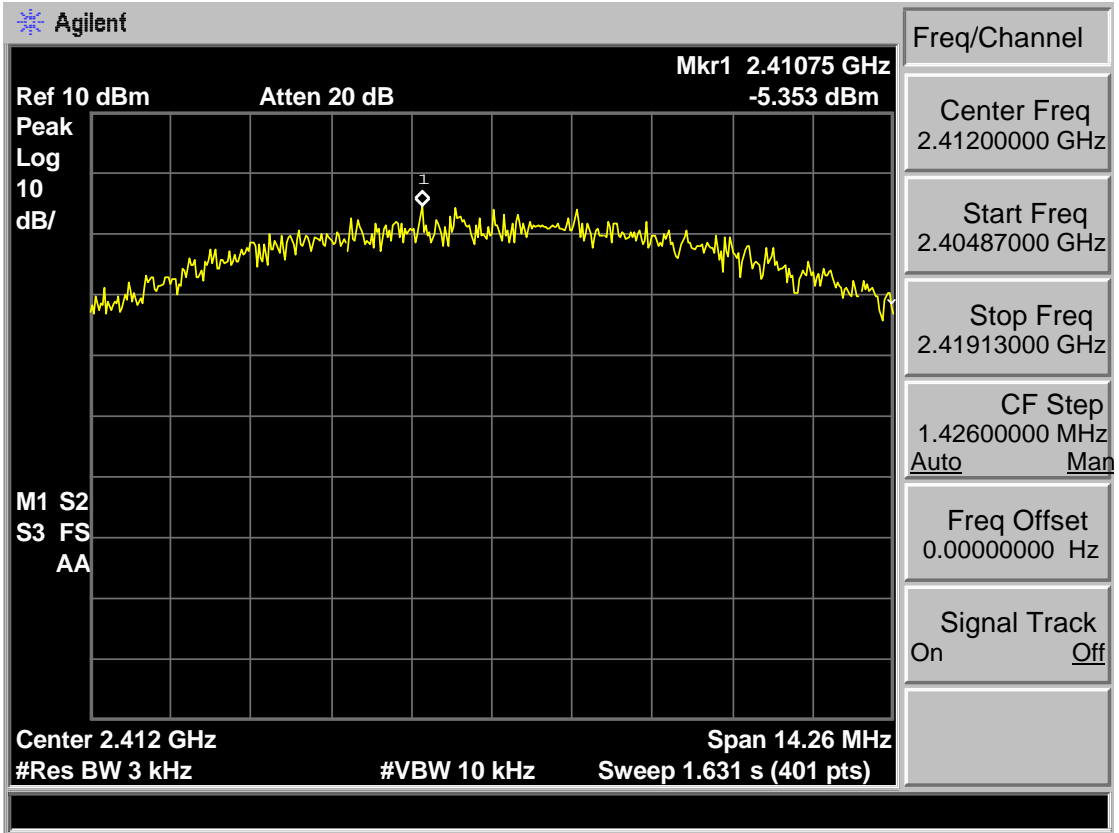


Test Mode: IEEE 802.11b 2437MHz

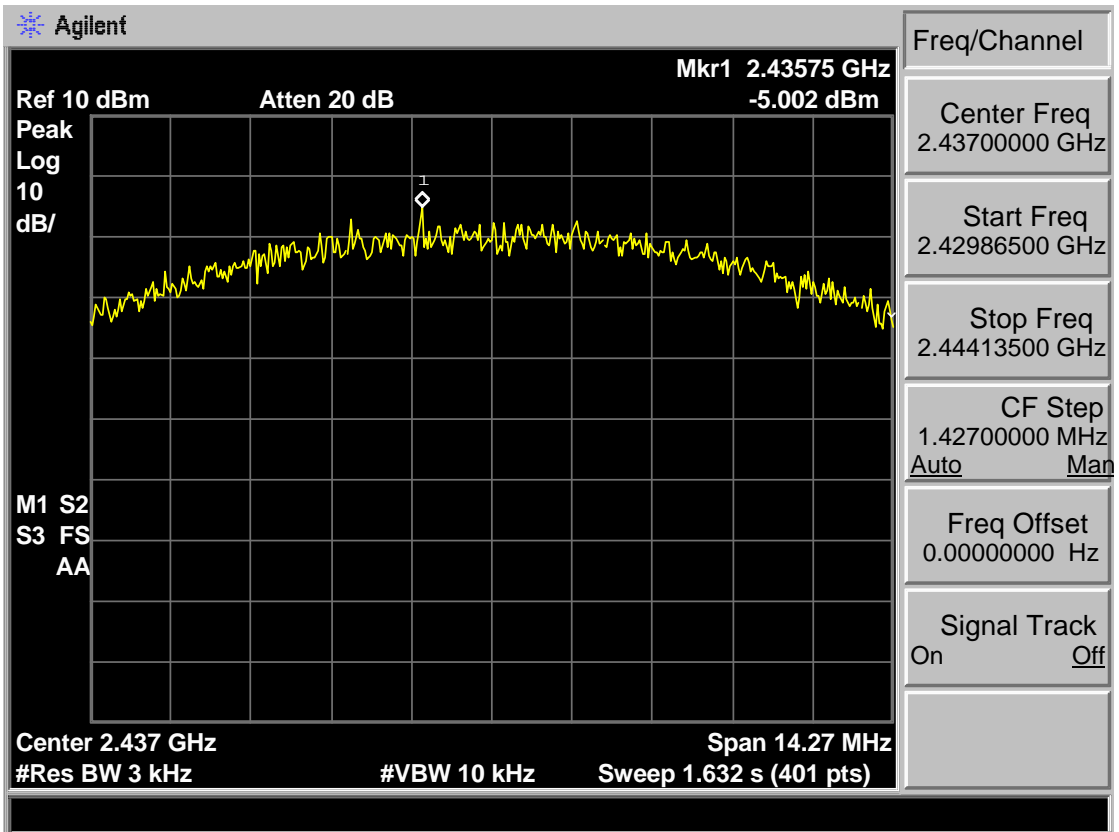


Test Mode: IEEE 802.11b 2462MHz

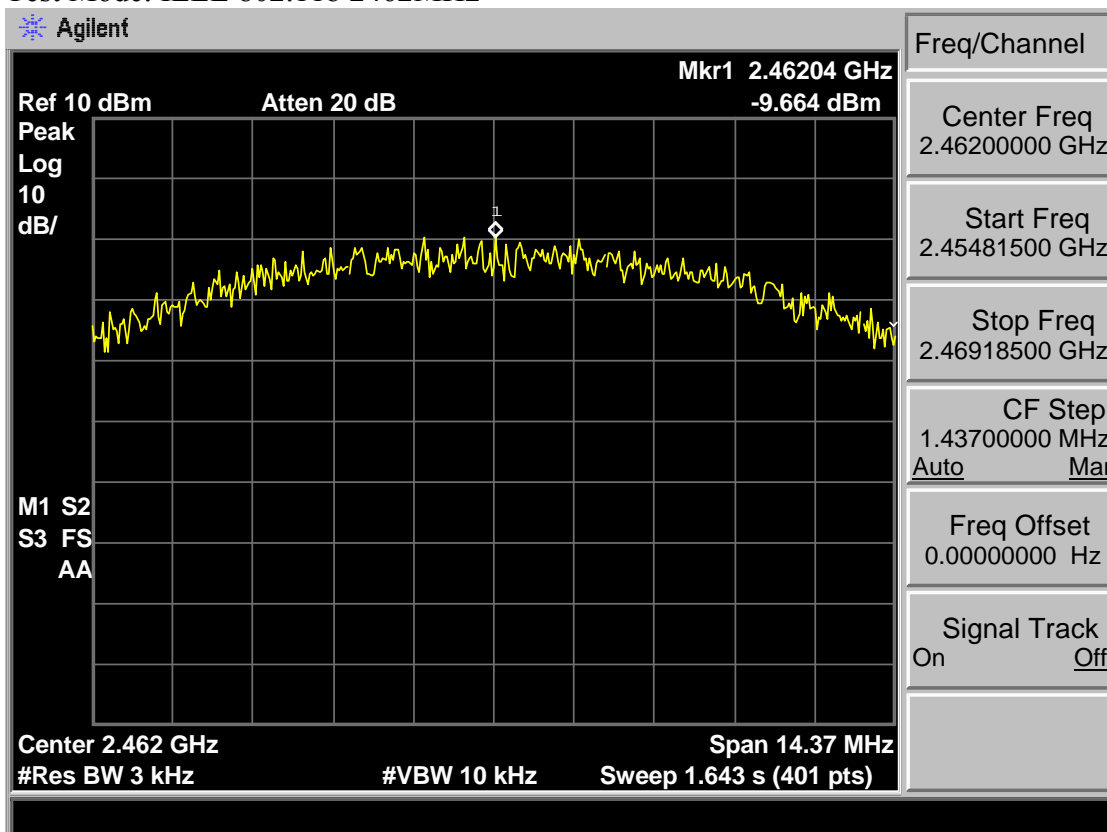


Test Mode: IEEE 802.11g 2412MHz

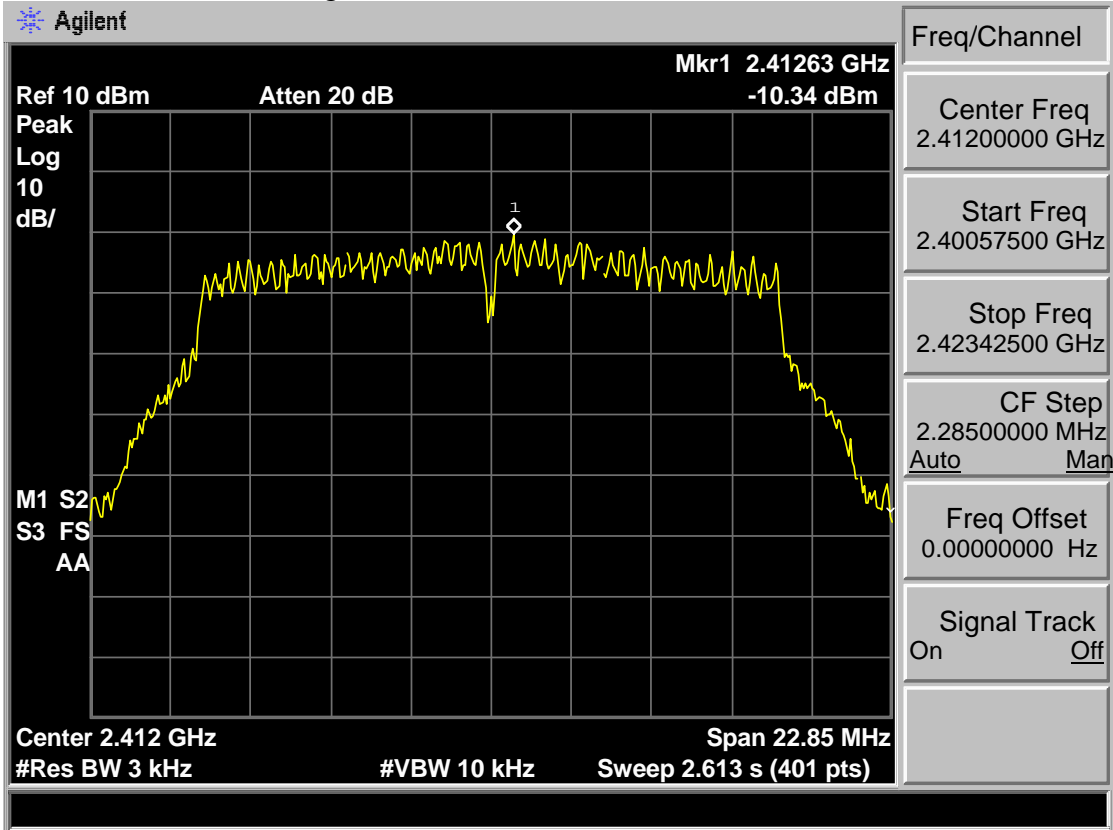


Test Mode: IEEE 802.11g 2437MHz

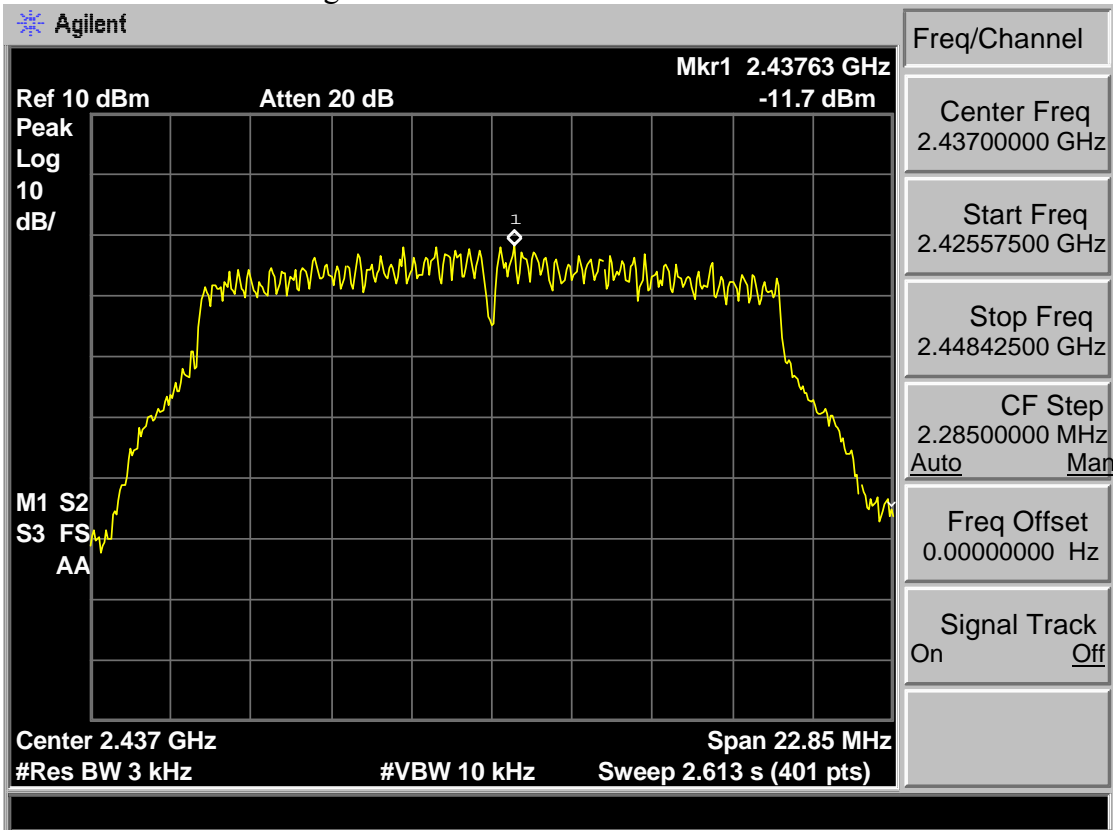


Test Mode: IEEE 802.11g 2462MHz

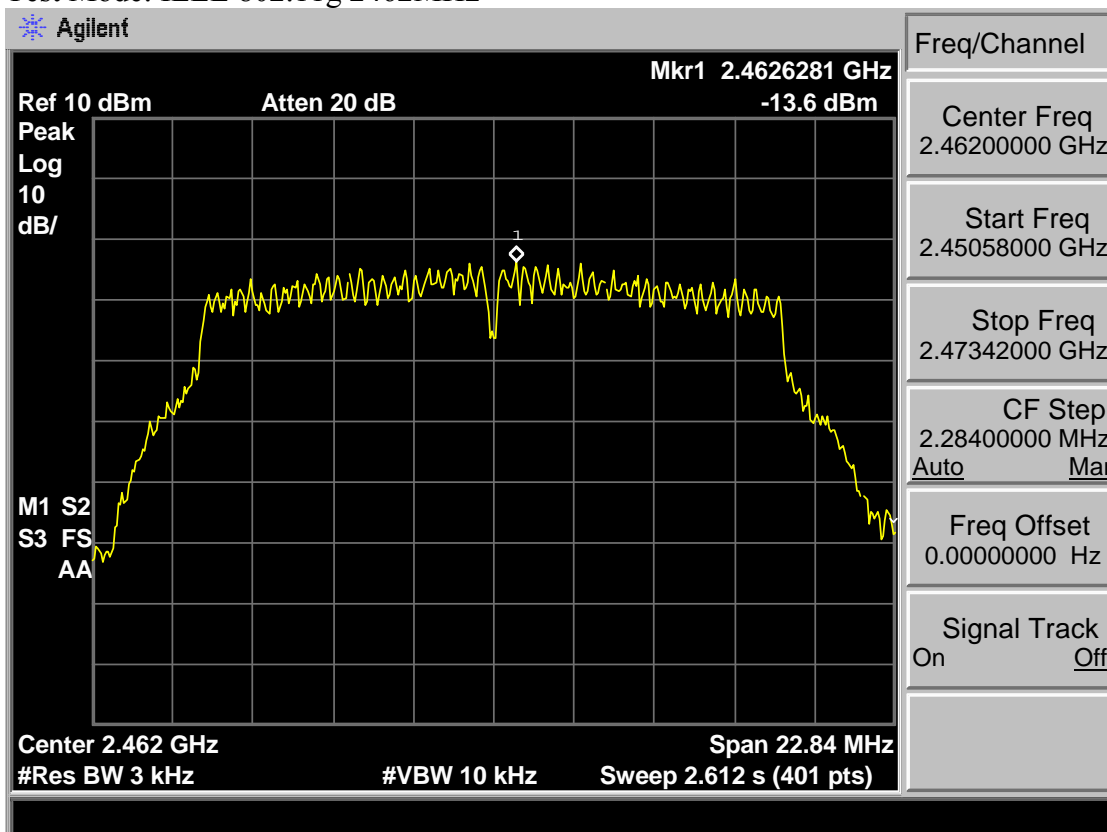


Test Mode: IEEE 802.11n HT20 2412MHz

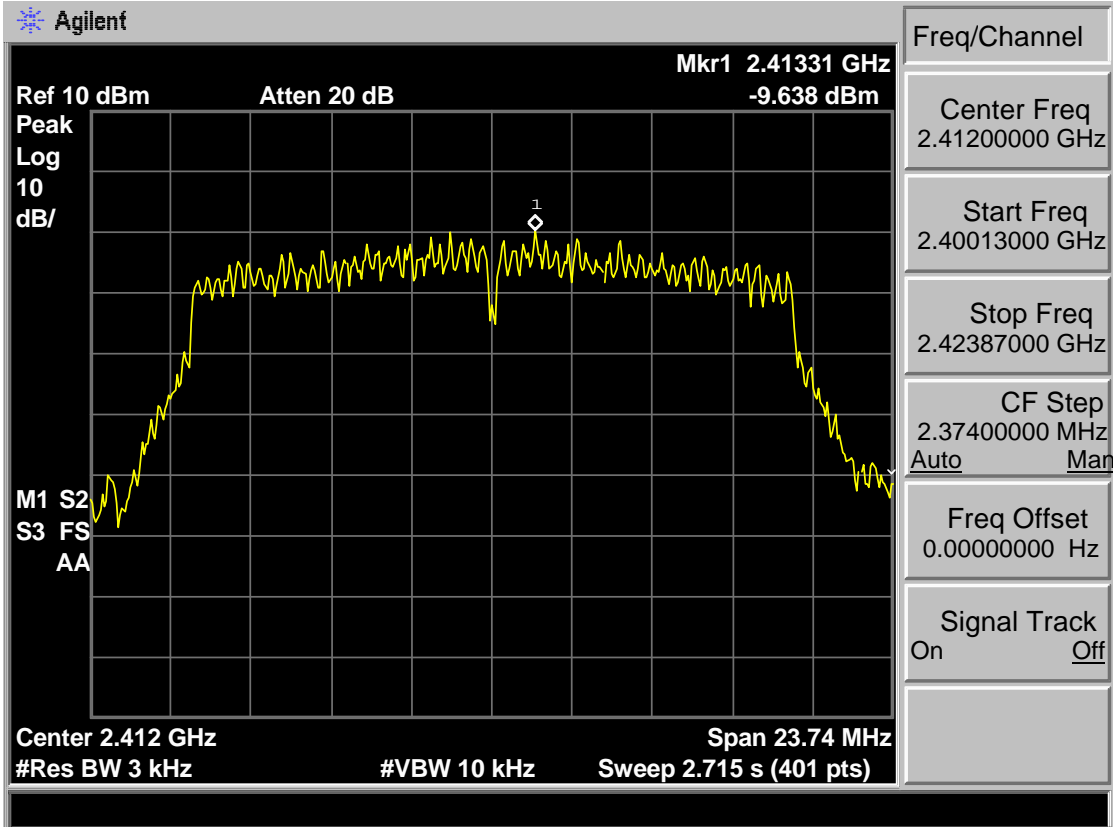


Test Mode: IEEE 802.11n HT20 2437MHz

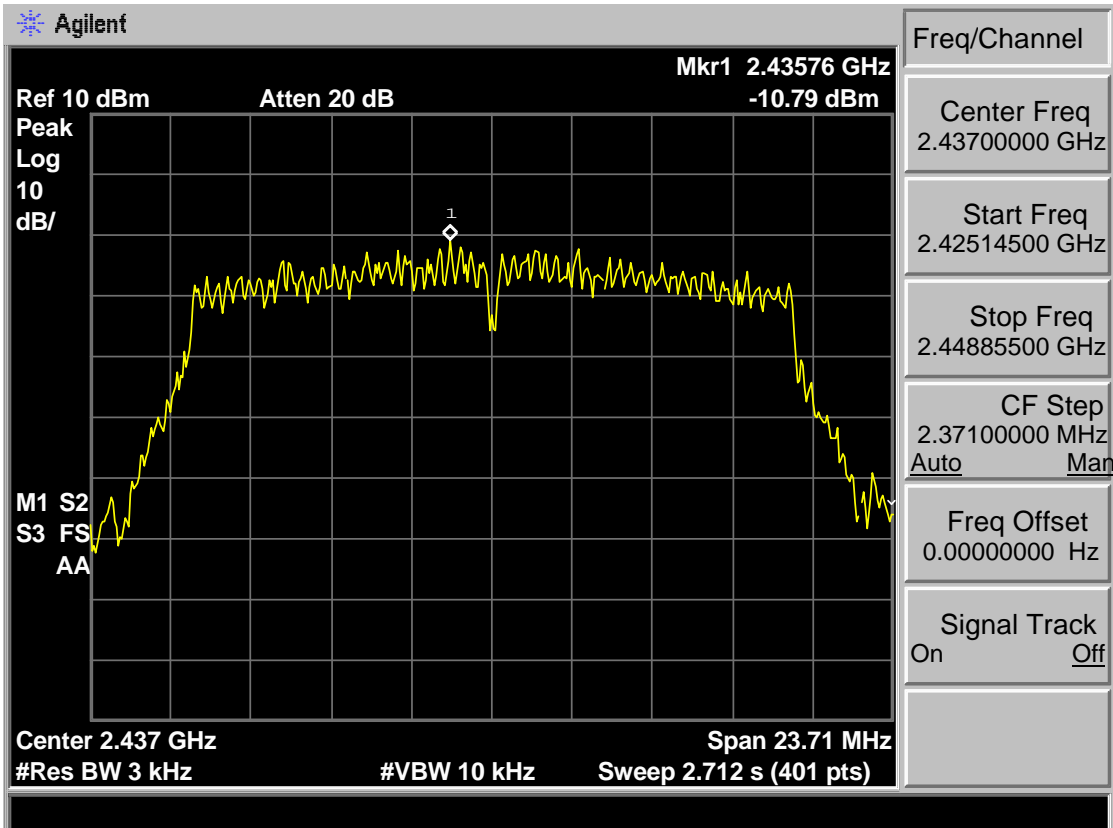


Test Mode: IEEE 802.11n HT20 2462MHz

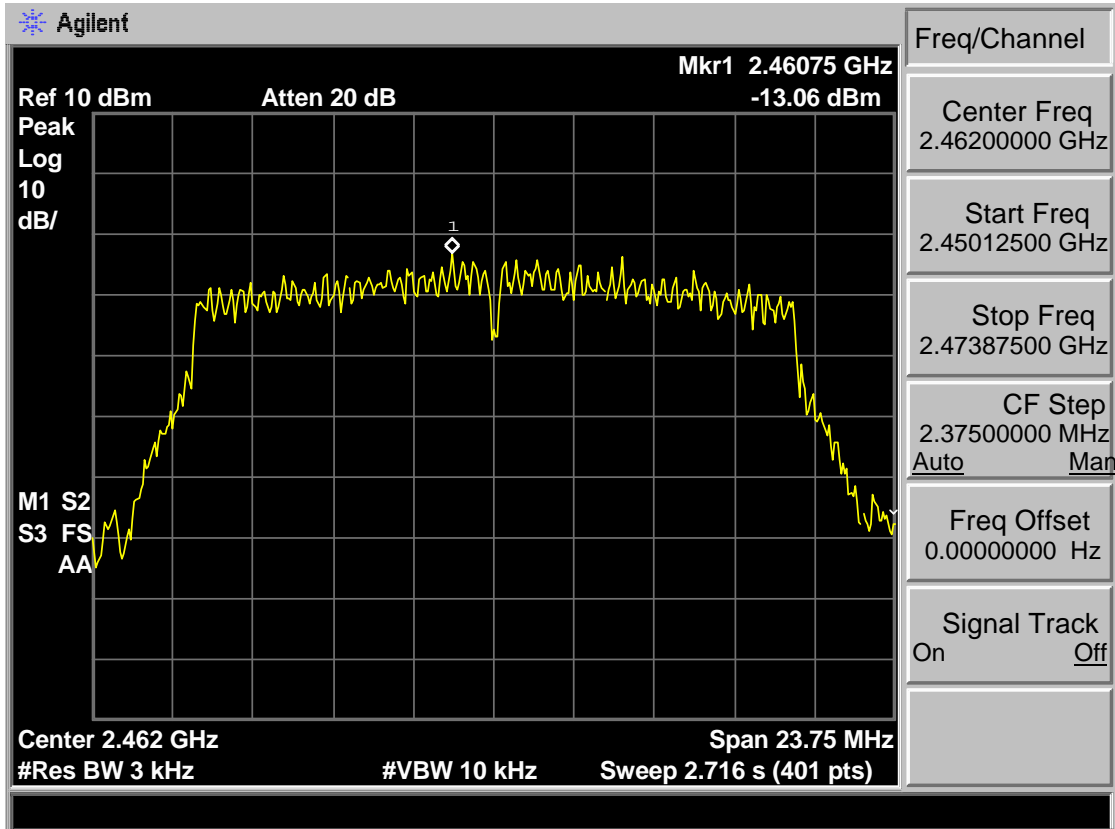


Test Mode: IEEE 802.11n HT40 2422MHz

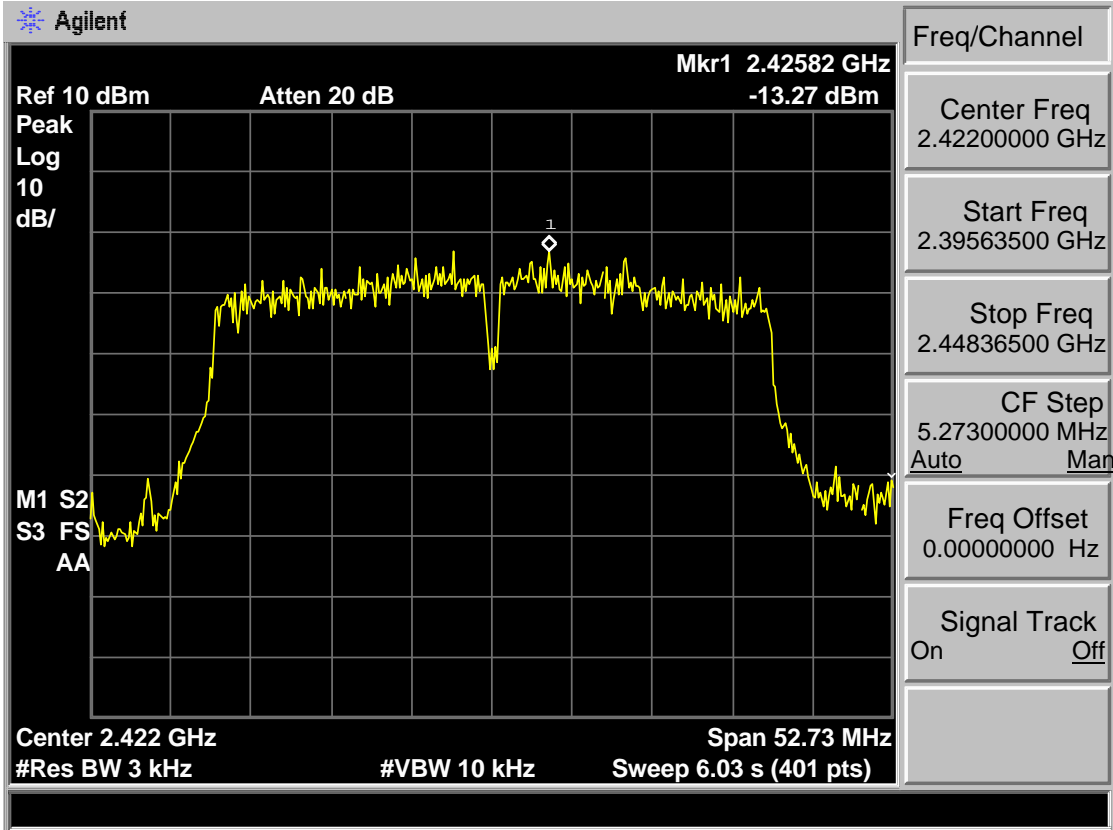

Test Mode: IEEE 802.11n HT40 2437MHz

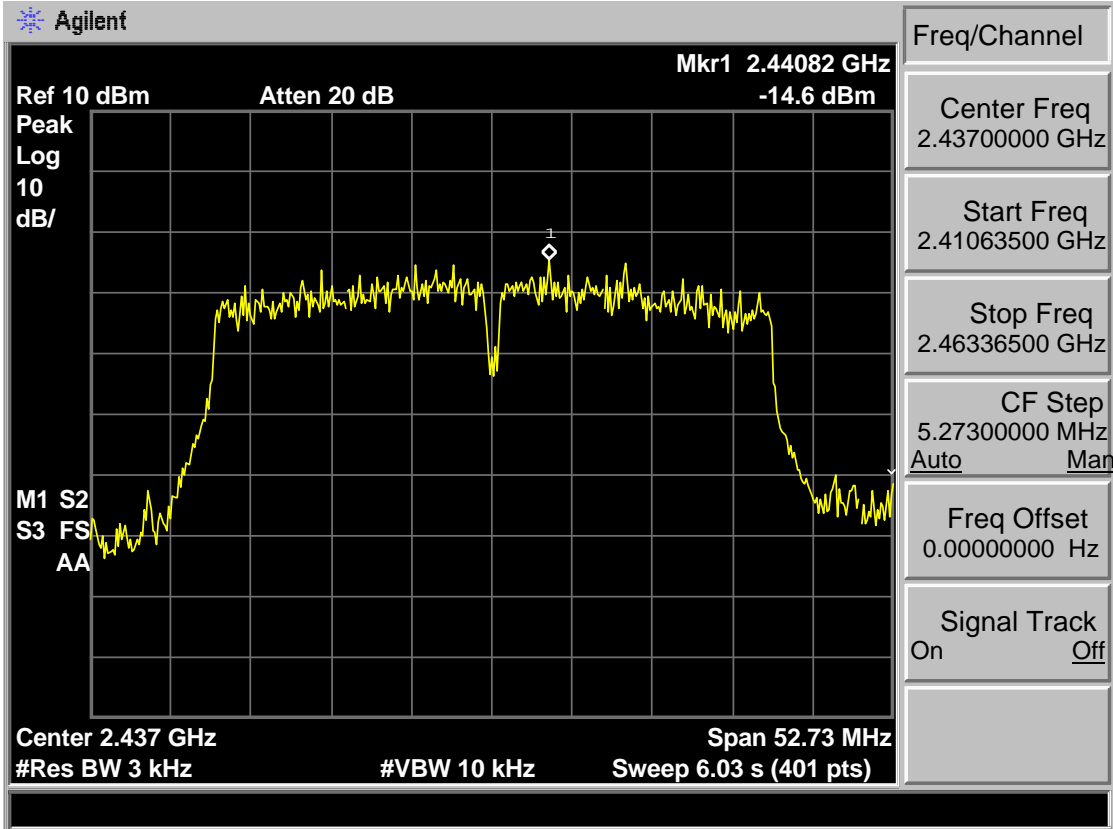


Test Mode: IEEE 802.11n HT40 2452MHz

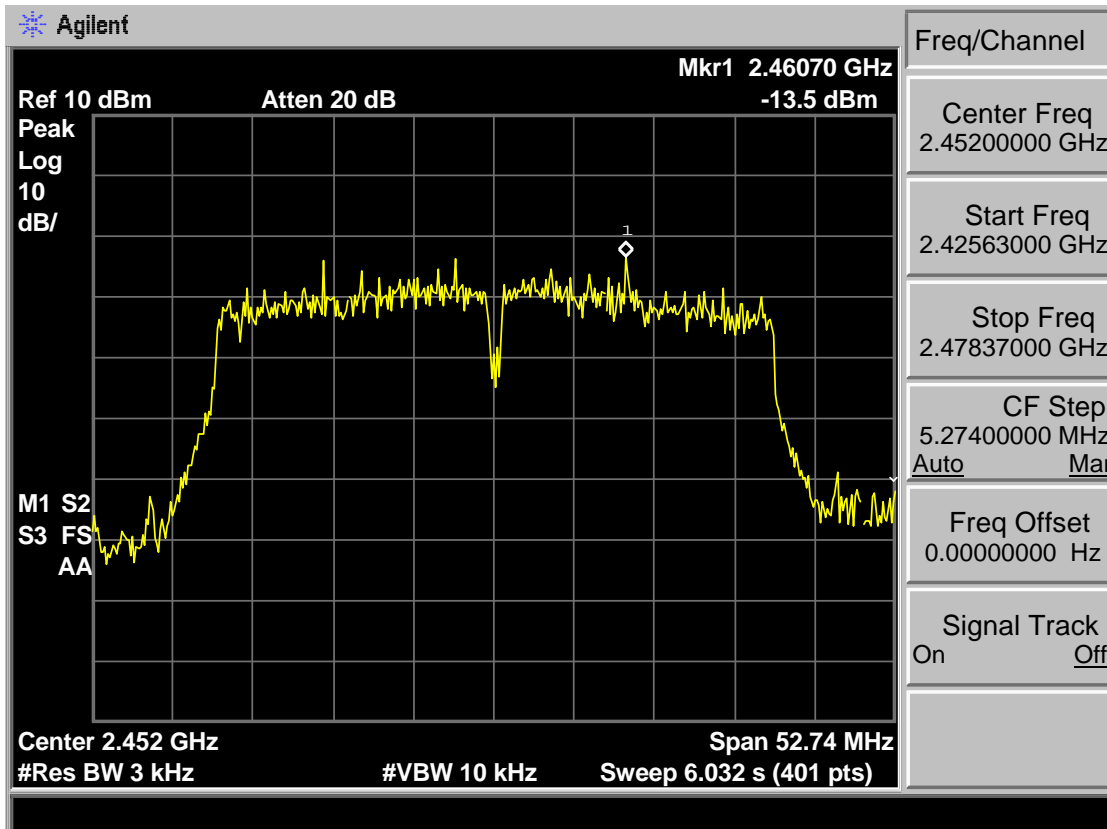


Antenna 1


Test Mode: IEEE 802.11b 2412MHz

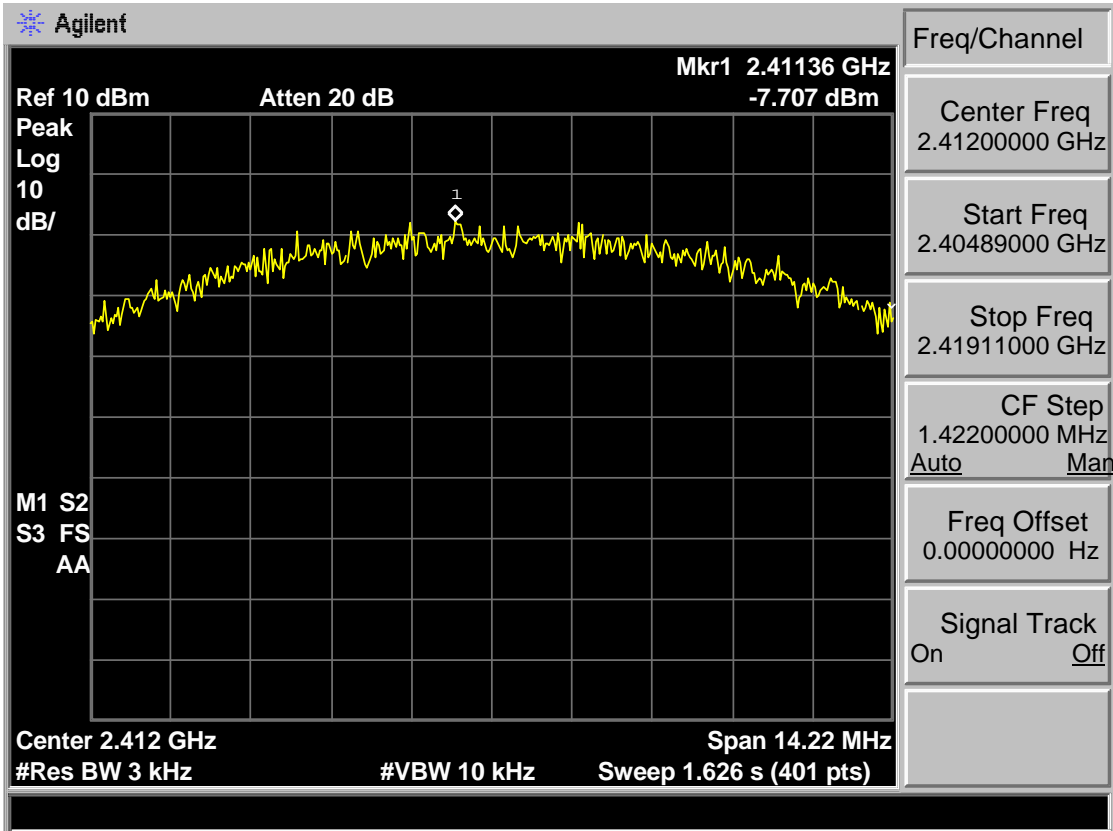


Test Mode: IEEE 802.11b 2437MHz

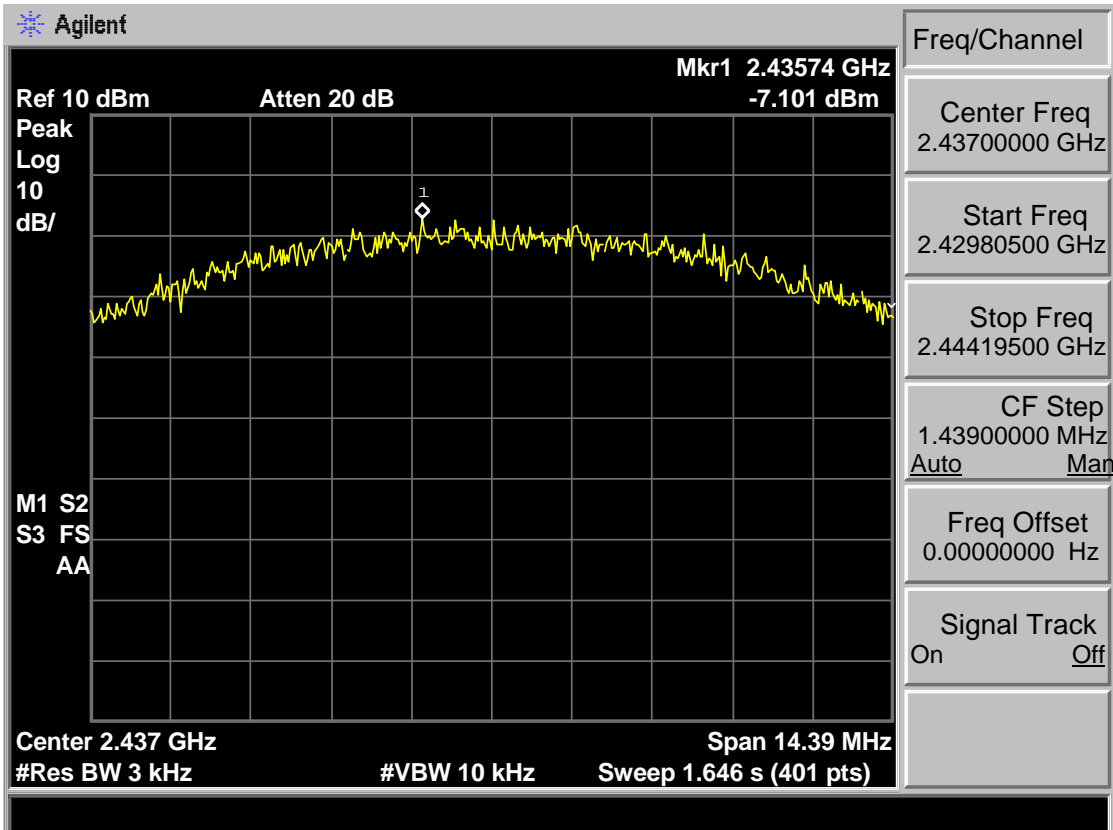


Test Mode: IEEE 802.11b 2462MHz

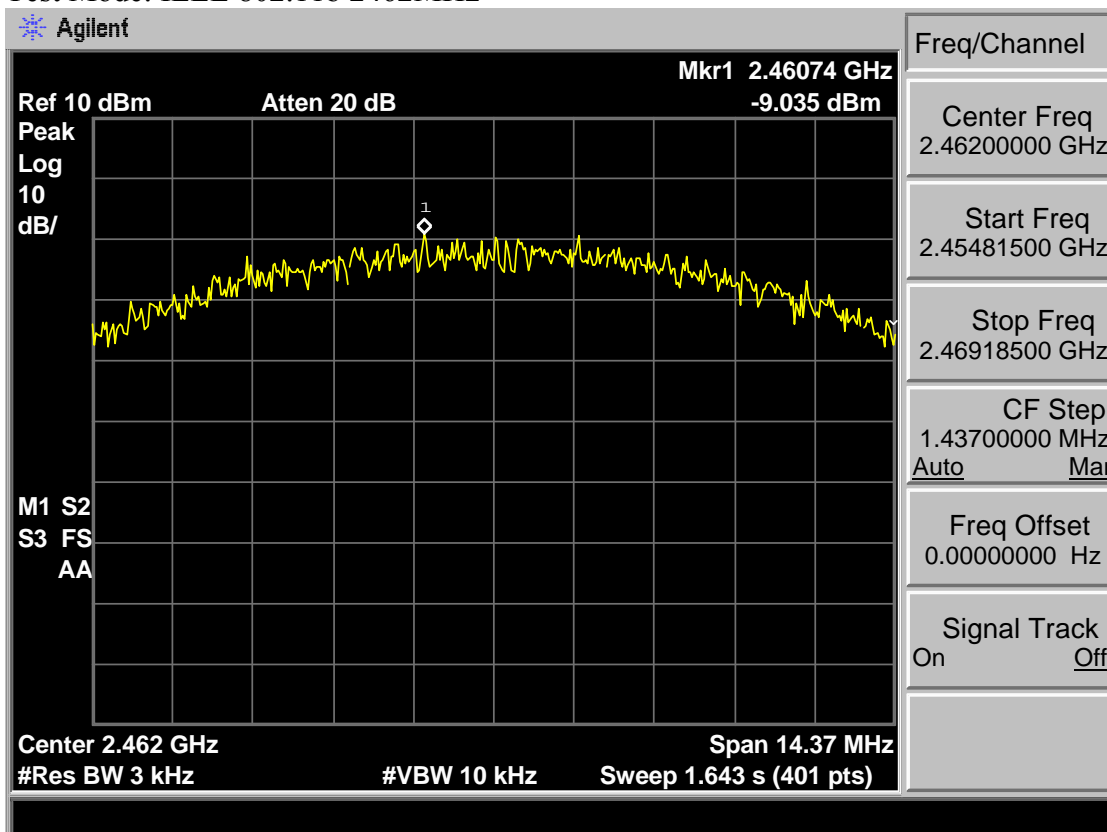


Test Mode: IEEE 802.11g 2412MHz

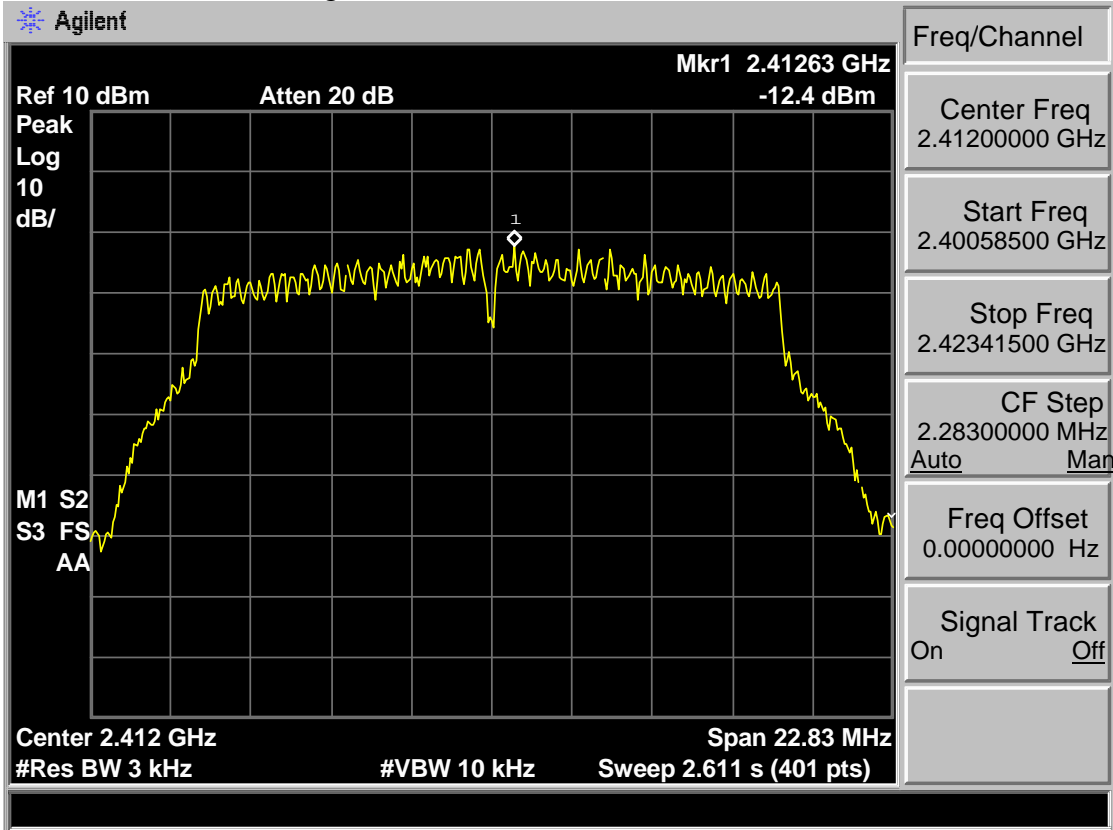


Test Mode: IEEE 802.11g 2437MHz

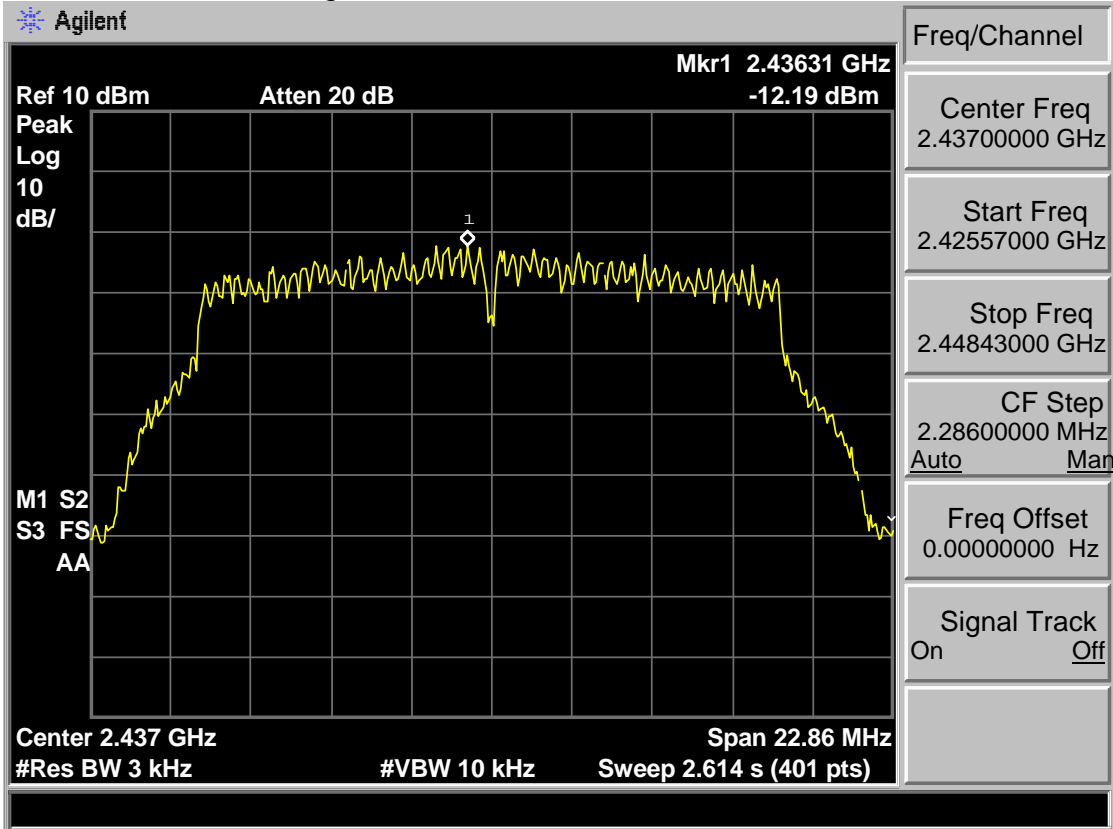


Test Mode: IEEE 802.11g 2462MHz

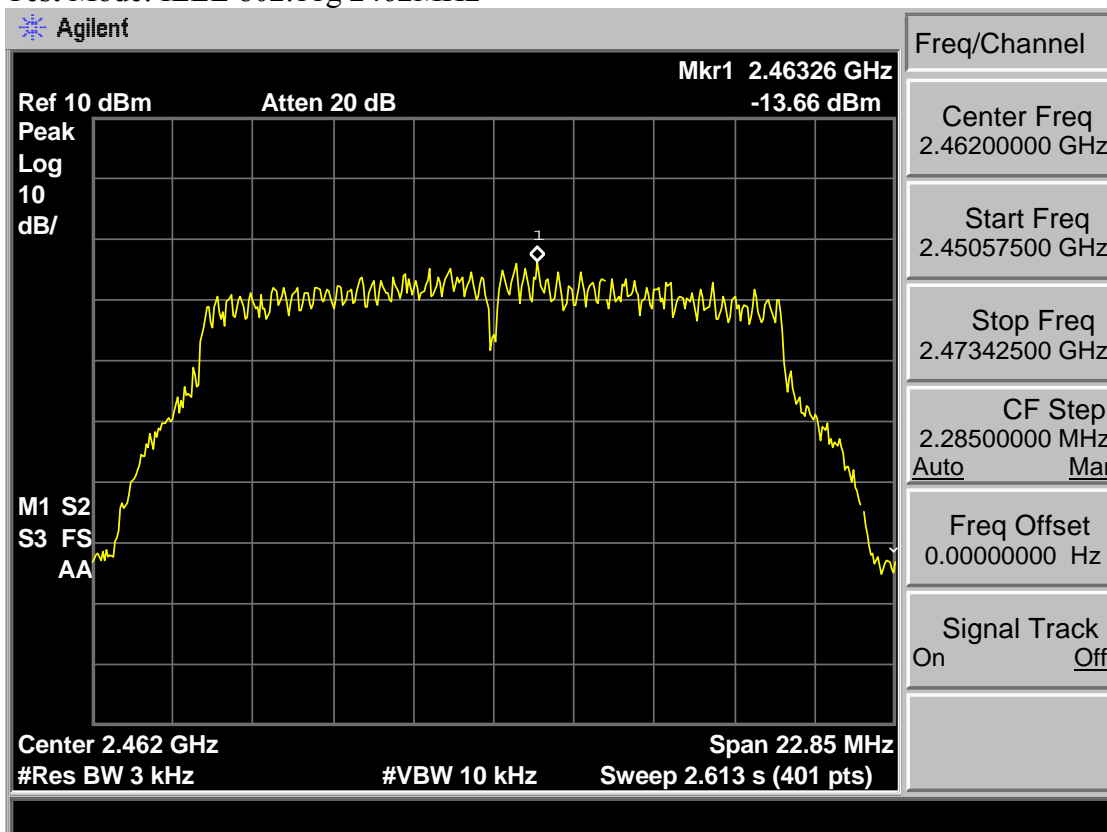


Test Mode: IEEE 802.11n HT20 2412MHz

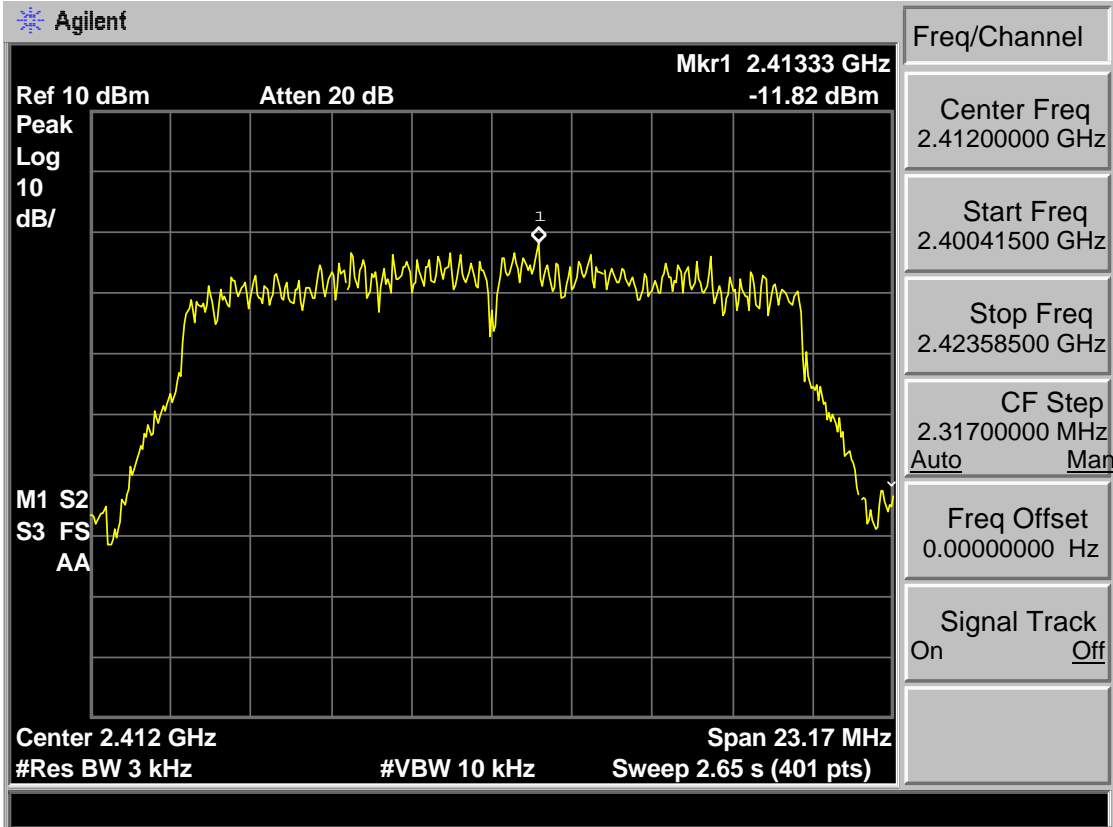


Test Mode: IEEE 802.11n HT20 2437MHz

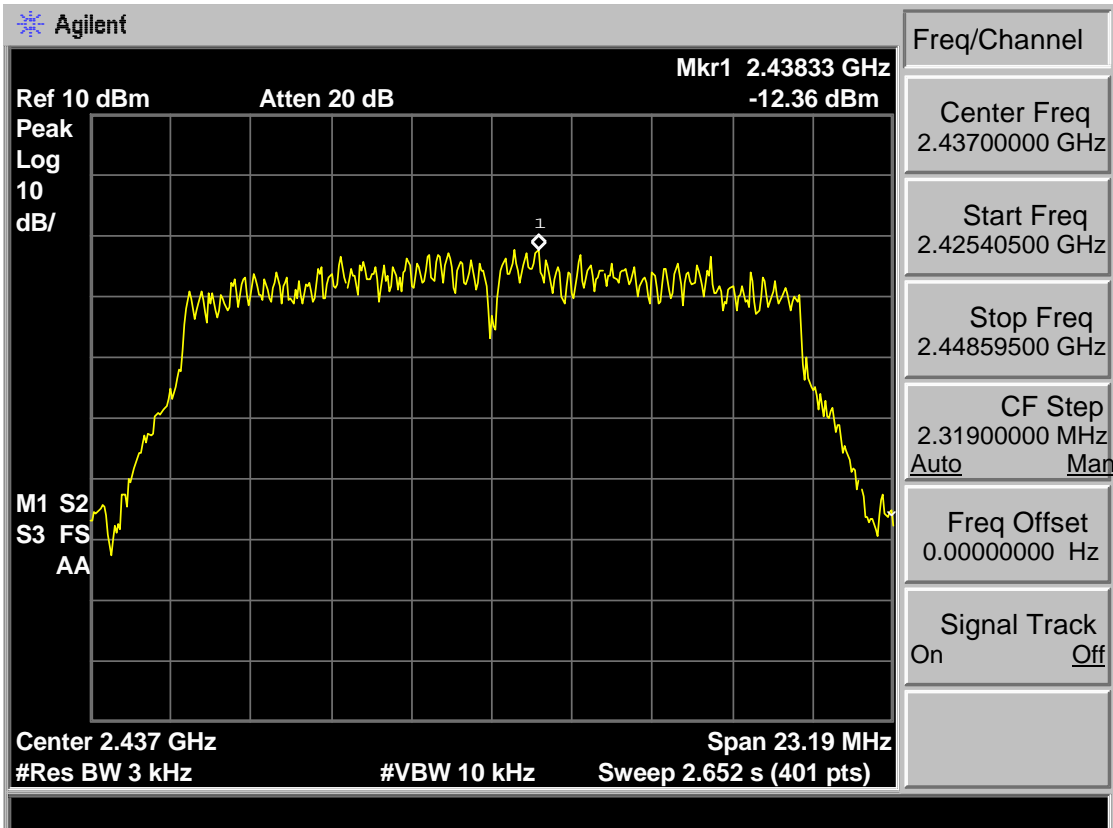


Test Mode: IEEE 802.11n HT20 2462MHz

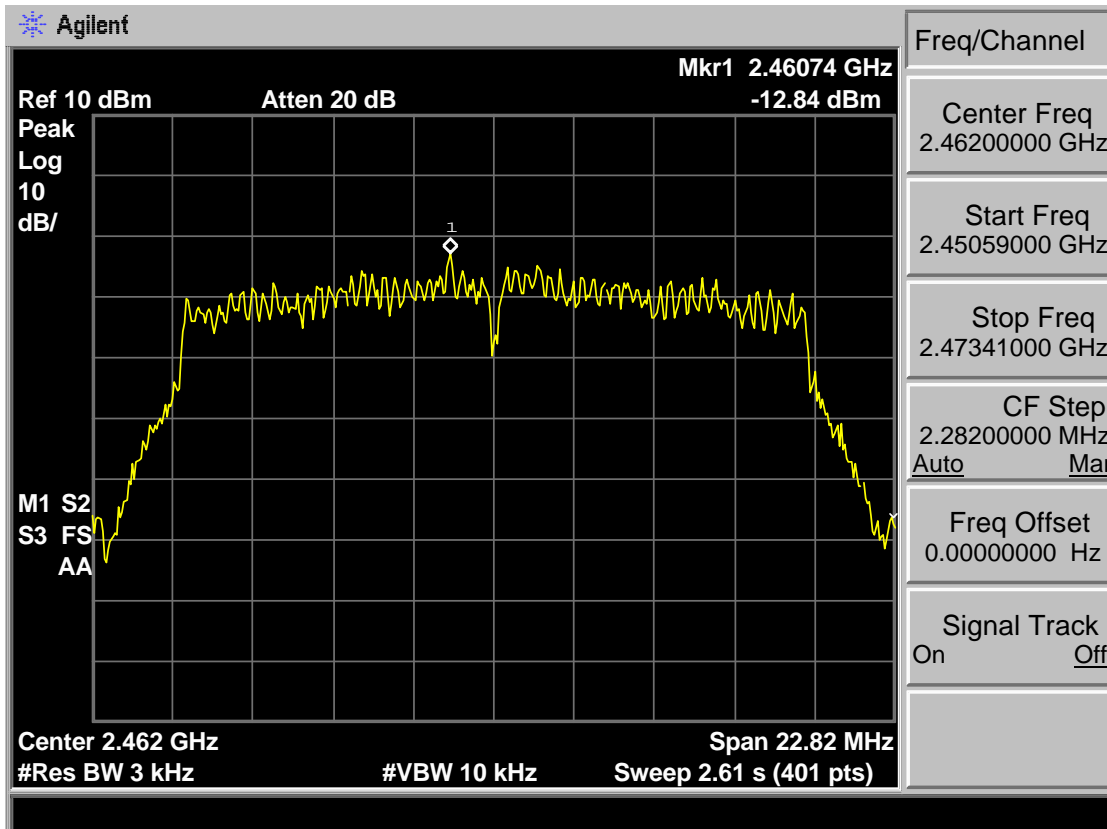


Test Mode: IEEE 802.11n HT40 2422MHz

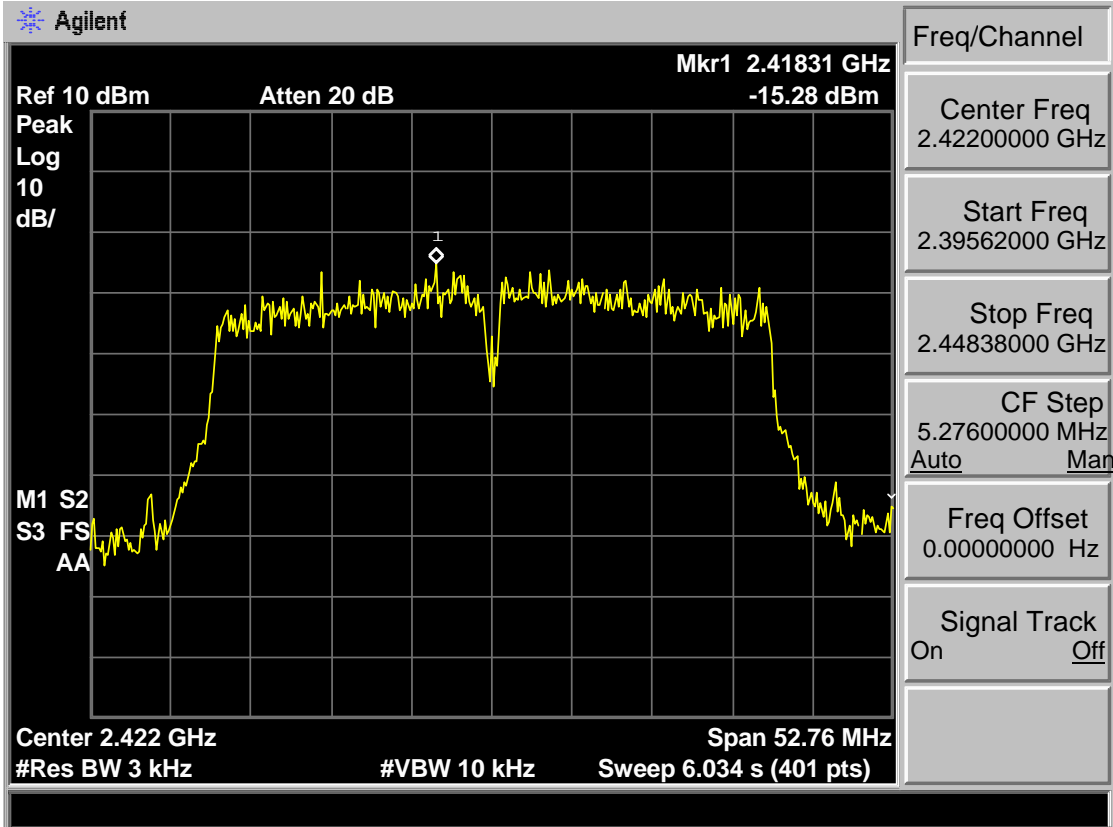

Test Mode: IEEE 802.11n HT40 2437MHz

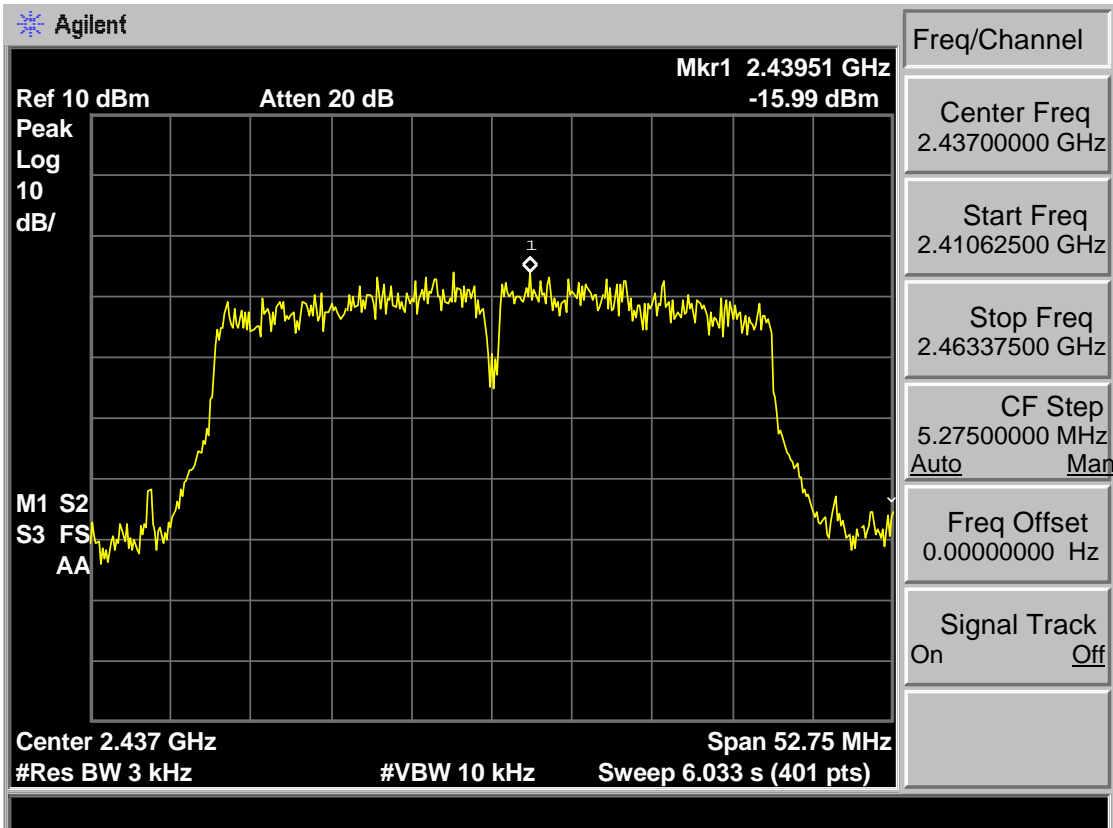

Test Mode: IEEE 802.11n HT40 2452MHz

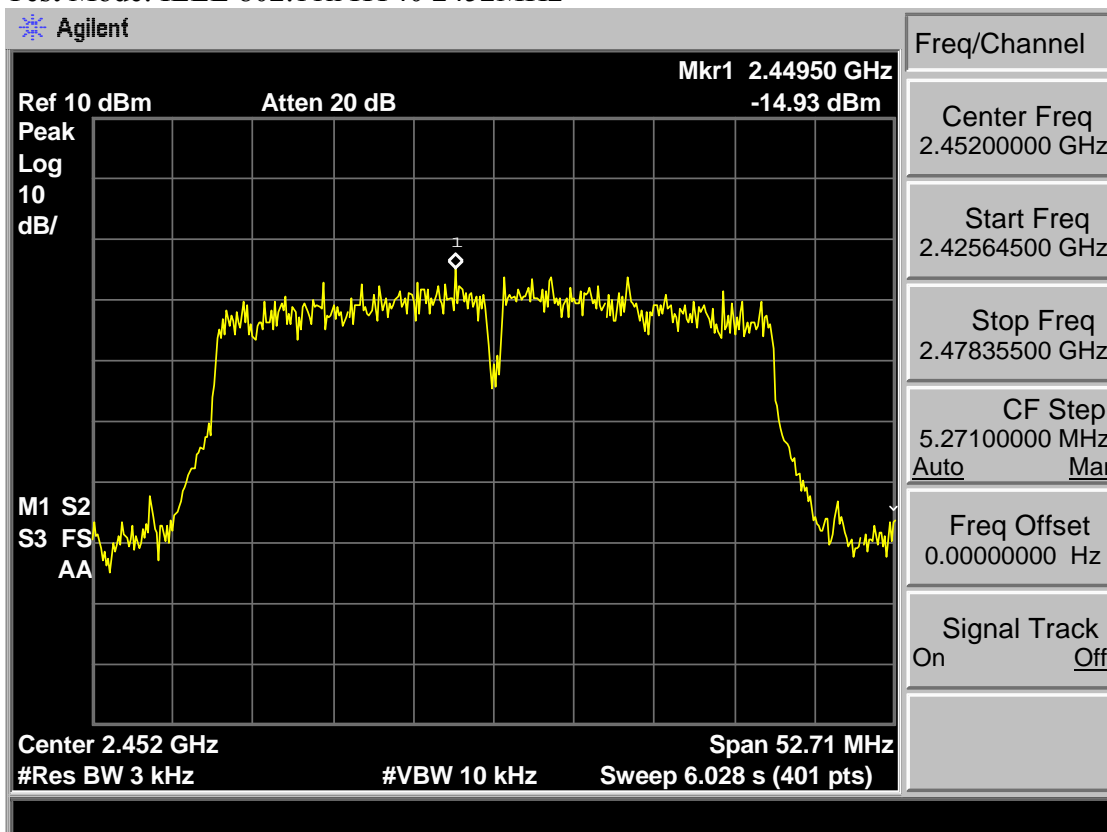

9 ANTENNA REQUIREMENTS

9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 Result

The antennas used for this product are Internal antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.94 dBi.

10 TEST SETUP PHOTO

Conducted Test



Radiated Test (30-1000 MHz)



Radiated Test (Above 1000 MHz)



11 PHOTOS OF EUT

External Photos
M/N: SC-60UK850N



External Photos
M/N: SC-60UK850N



External Photos
M/N: SC-60UK850N




External Photos
M/N: SC-60UK850N




Internal Photos
M/N: SC-60UK850N





Internal Photos
M/N: SC-60UK850N

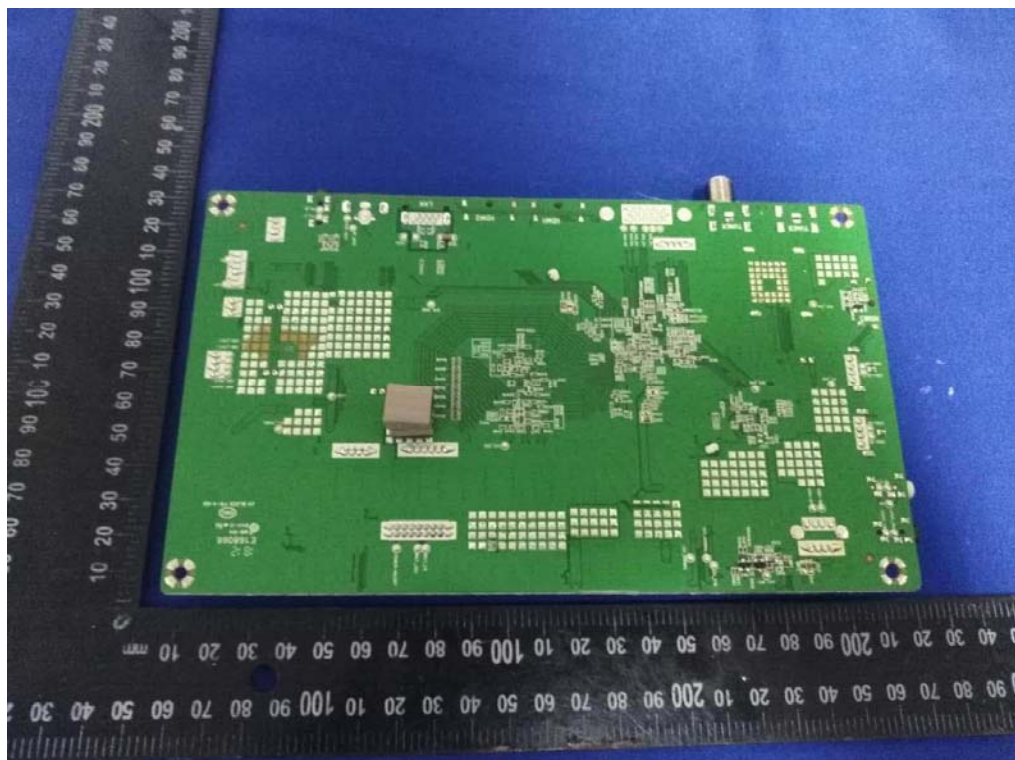


Internal Photos
M/N: SC-60UK850N

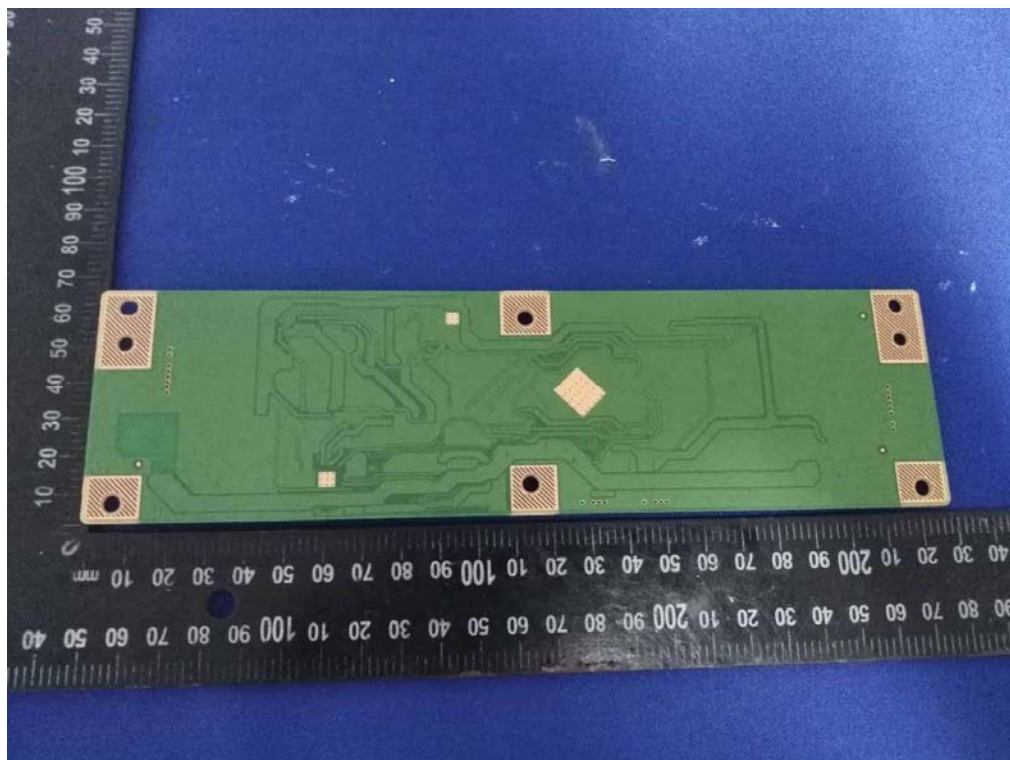



Internal Photos
M/N: SC-60UK850N

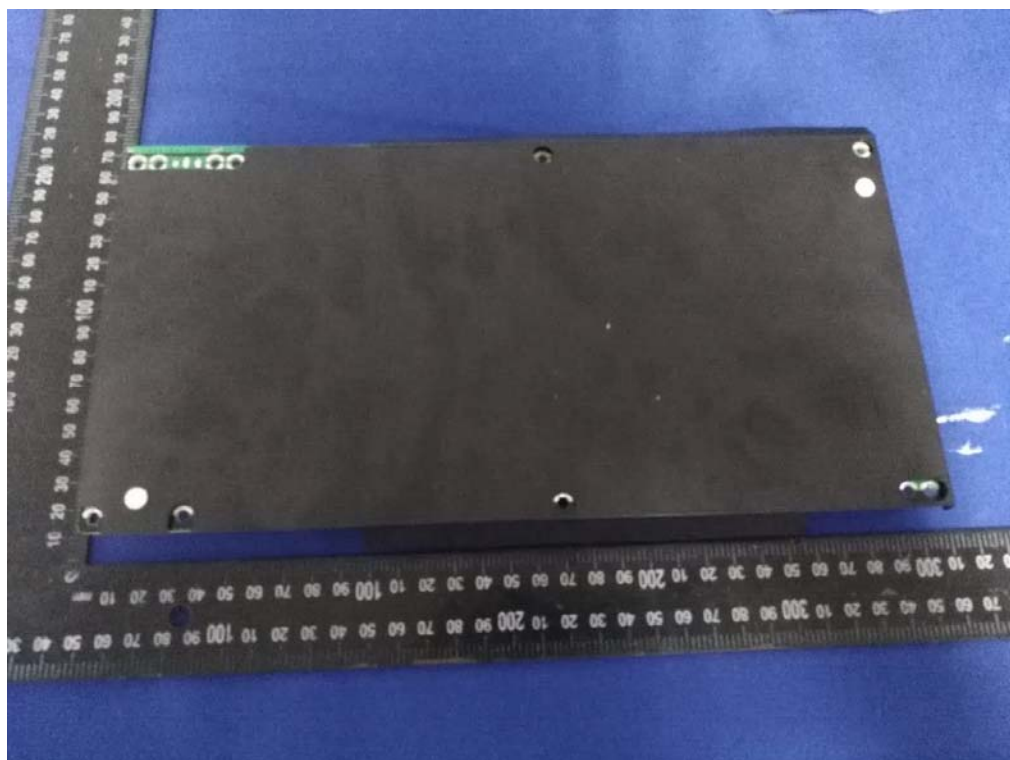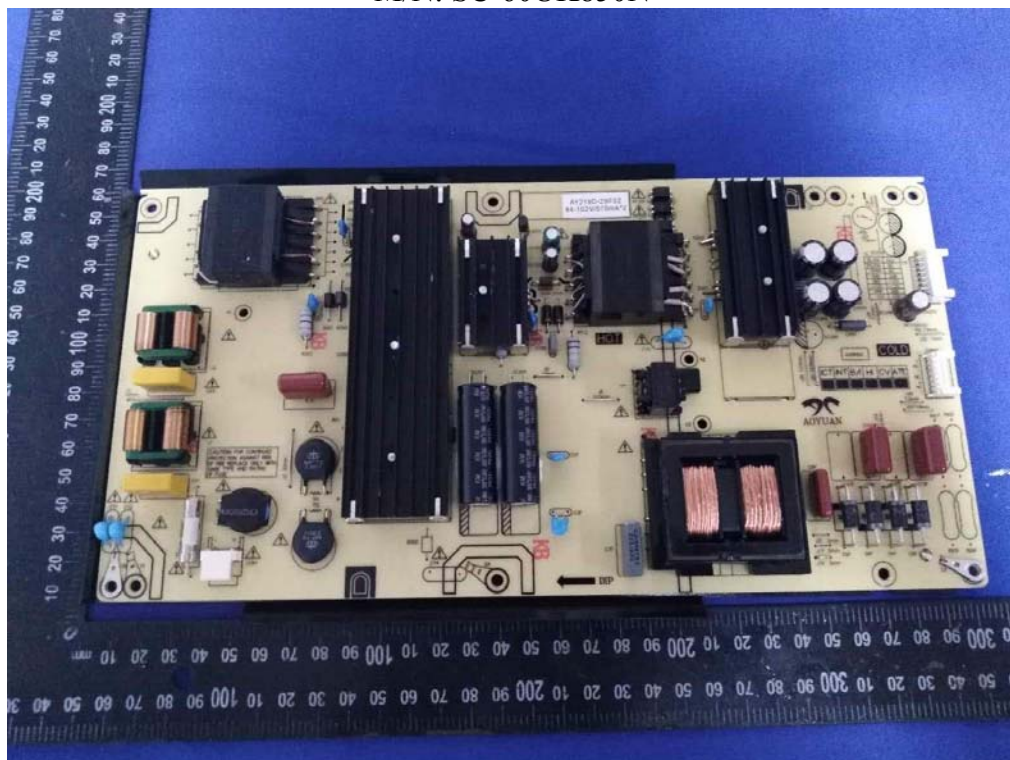

Internal Photos
M/N: SC-60UK850N

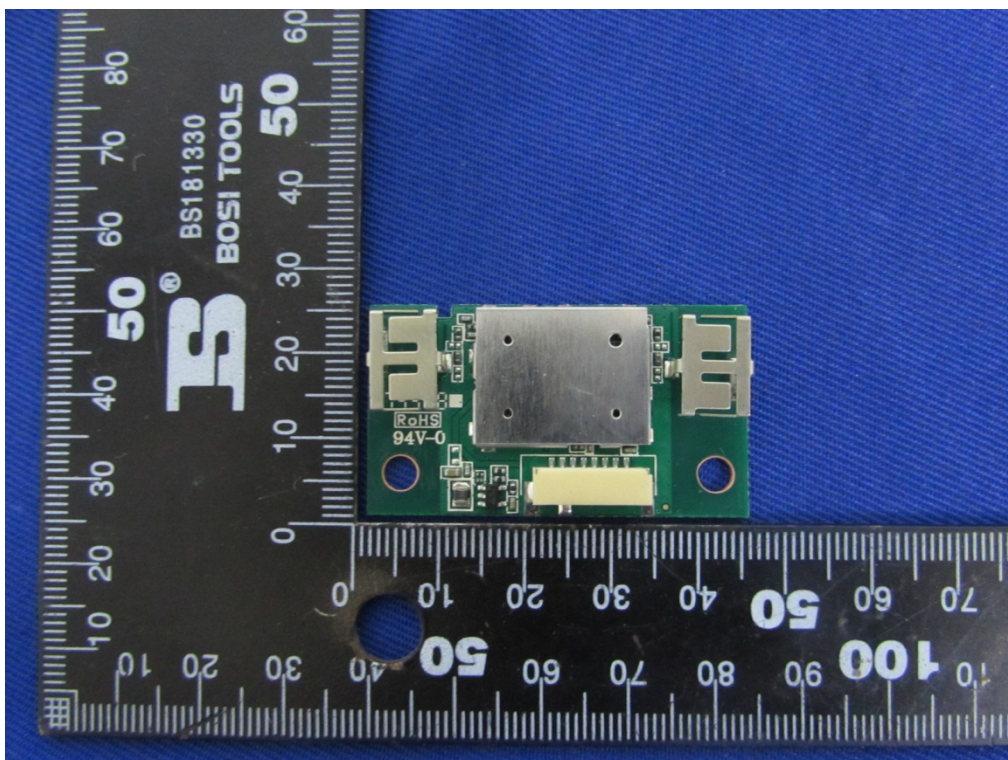

Internal Photos
M/N: SC-60UK850N

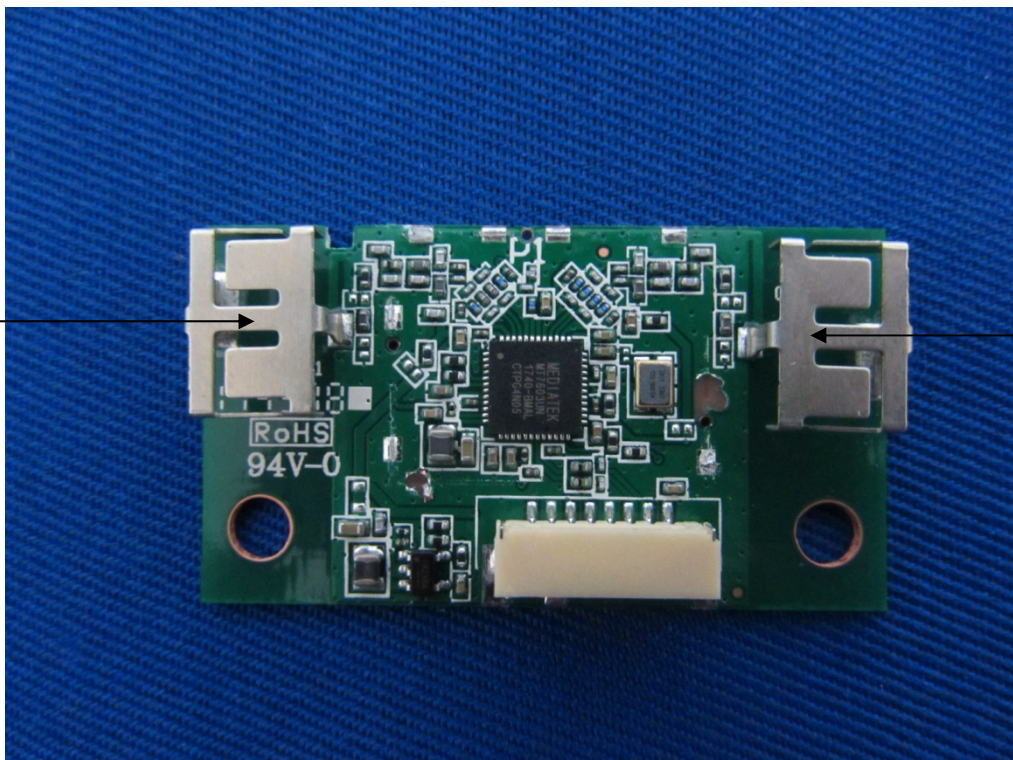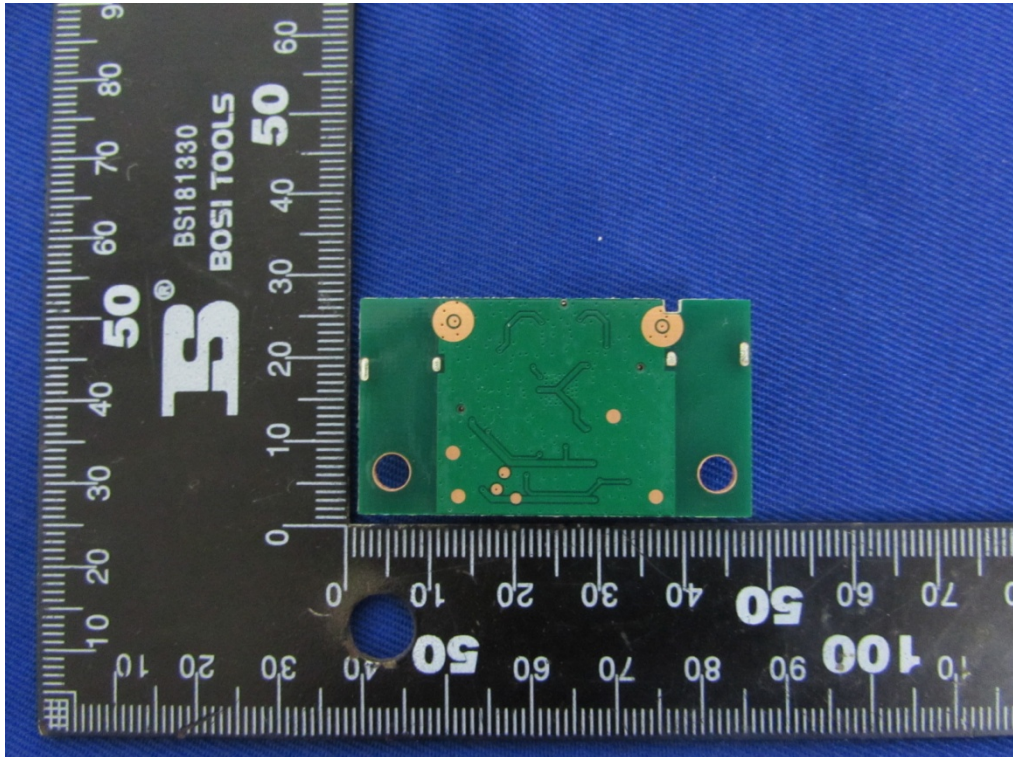

Wi-Fi
Antenna 1

Wi-Fi
Antenna 0