

FCC Part 15E Measurement and Test Report

For

Shenzhen Gauss Technology Co., Ltd

6th-7th Floor, 3th Building, 2th South District, Honghualing Industry

Park, Liuxian Avenue 1213, Xili Town, Nanshan, Shenzhen, P. R China

FCC ID: 2AN2I-011

FCC Rule(s):	<u>FCC Part 15E</u>
Product Description:	<u>Wireless Video Transmission System</u>
Tested Model:	<u>Cosmo2000</u>
Report No.:	<u>STR18078341I</u>
Sample Receipt Date:	<u>2018-07-27</u>
Tested Date:	<u>2018-07-28 to 2018-08-13</u>
Issued Date:	<u>2018-08-14</u>
Tested By:	<u>Mike Shi / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Mike Shi

Silin Chen

Jandy So



Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	4
1.5 EUT OPERATING DURING TEST	5
1.6 TEST FACILITY	5
1.7 EUT SETUP AND TEST MODE	5
1.8 MEASUREMENT UNCERTAINTY	6
1.9 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 SUMMARY OF TEST RESULTS/PLOTS	12
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. MAXIMUM CONDUCTED OUTPUT POWER	24
7.1 STANDARD APPLICABLE	24
7.2 TEST PROCEDURE	24
7.3 SUMMARY OF TEST RESULTS/PLOTS	25
8. RADIATED SPURIOUS EMISSIONS	30
8.1 STANDARD APPLICABLE	30
8.2 TEST PROCEDURE	30
8.3 TEST RECEIVER SETUP	31
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	31
8.5 SUMMARY OF TEST RESULTS/PLOTS	31
9. FREQUENCY STABILITY	52
9.1 STANDARD APPLICABLE	52
9.2 TEST PROCEDURE	52
9.3 SUMMARY OF TEST RESULTS/PLOTS	52

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Gauss Technology Co., Ltd
Address of applicant: 6th-7th Floor, 3th Building, 2th South District,
Honghualing Industry Park, Liuxian Avenue 1213,
Xili Town, Nanshan, Shenzhen, P. R China

Manufacturer: Shenzhen Gauss Technology Co., Ltd
Address of manufacturer: 6th-7th Floor, 3th Building, 2th South District,
Honghualing Industry Park, Liuxian Avenue 1213,
Xili Town, Nanshan, Shenzhen, P. R China

General Description of EUT	
Product Name:	Wireless Video Transmission System
Trade Name:	/
Model No.:	Cosmo2000
Adding Model(s):	Cosmo1500D
Rated Voltage:	DC7-36V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Cosmo2000 but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Wi-Fi(5G/5.8G)	
Support Standards:	802.11n(HT40)
Frequency Range:	5190-5230MHz, 5745-5825MHz
RF Output Power:	12.83dBm (Conducted)
Type of Modulation:	OFDM, 16-QAM
Data Rate:	6-54Mbps, up to 600Mbps
Channel Separation:	5MHz
Type of Antenna:	External Antenna
Antenna Gain:	Antenna Type 1: 5dBi Antenna Type 2: 2.57dBi
Wi-Fi(5G/5.8G) Only support 802.11n(HT40) mode	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

The test utility software used during testing was “RPTA1-71W.M4300.01.GD.2015Sep1”. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)									
Mode	NCB: 40MHz									
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795
802.11n-HT40 MCS0	10	10	/	/	/	/	/	/	10	10

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under WIN XP were executed.

1.6 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11n-HT40	5190MHz,5230MHz, 5745MHz,5785MHz, 5825 MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Battery	Shenzhen HongBo	/	/

	Power Technology Co.,LTD		
--	-----------------------------	--	--

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2017-08-15	2018-08-14
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	N/A
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3)	Conducted Spurious Emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA-reverse antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v01r02 section F, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and

integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.



5.3 Summary of Test Results/Plots




U-NII-1:5150-5250MHz		802.11n-HT40		
Test Channel MHz	Power Spectral Density dBm/MHz			Limit dBm/MHz
	ANT 0	ANT 1	Total	
5190	8.61	13.92	15.04	17
5230	10.14	14.04	15.52	17

U-NII-3: 5725-5850MHz				802.11n-HT40				
Test Channel	Power Spectral Density*							Limit dBm/500kHz
	ANT 0			ANT 1			Total	
	dBm/300kHz	Factor	dBm/500kHz	dBm/300kHz	Factor	dBm/500kHz	dBm/500kHz	
5745	11.05	2.22	13.27	9.16	2.22	11.38	15.44	30
5785	8.00	2.22	10.22	9.13	2.22	11.35	13.83	30
5825	12.38	2.22	14.6	12.82	2.22	15.04	17.84	30



*Note: $\text{Maximum PSD} = \text{PSD}(\text{dBm}/510\text{kHz}) + 10\log(500\text{kHz}/300\text{kHz}) = 2.22$


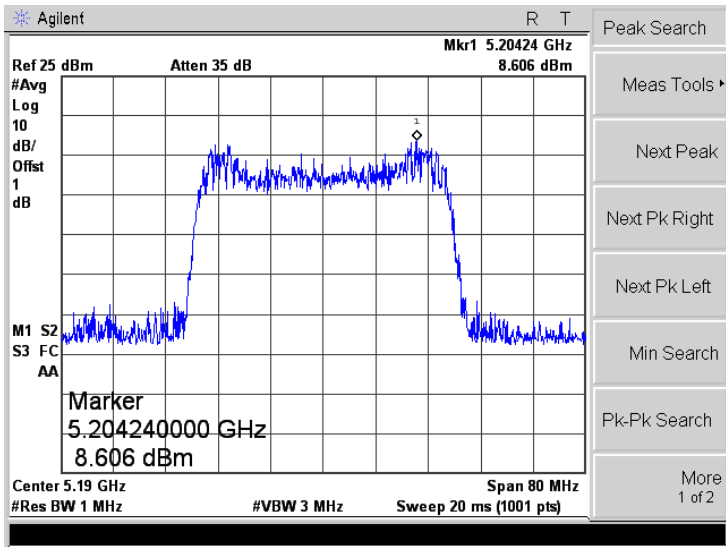
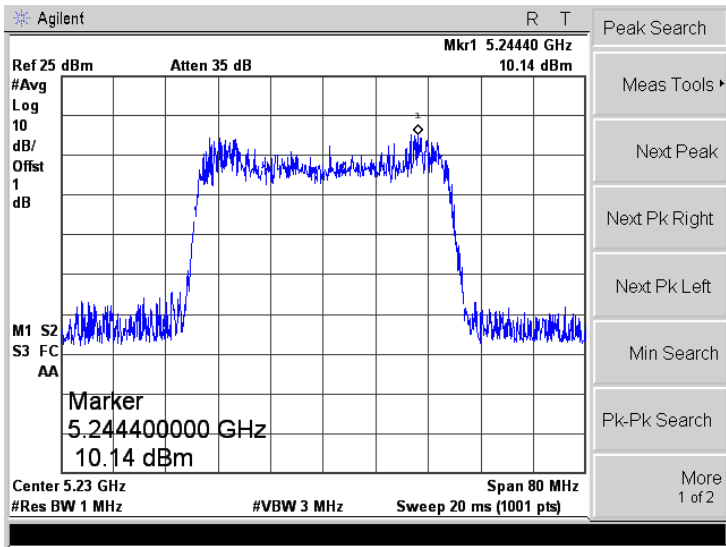
ANT0:

Mode:		802.11n-HT40
5190MHz		
5230MHz		

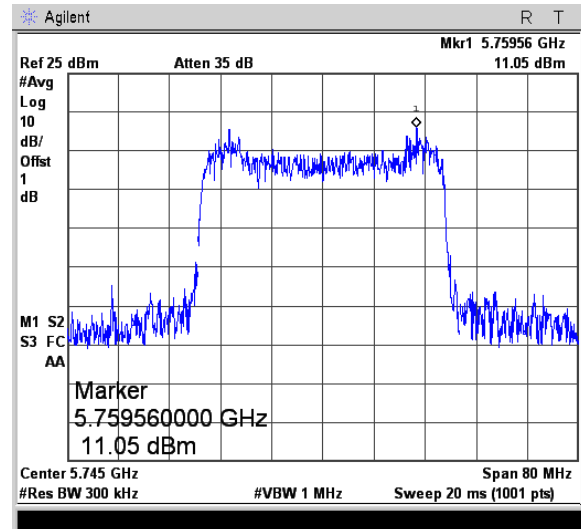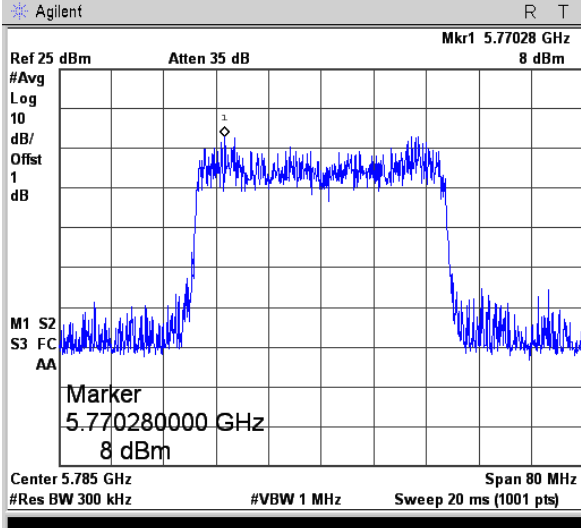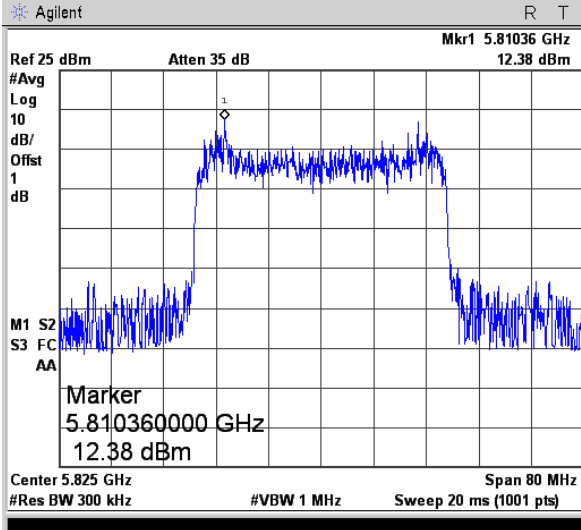Mode:		802.11n-HT40
5745MHz		
5785MHz		
5825MHz		

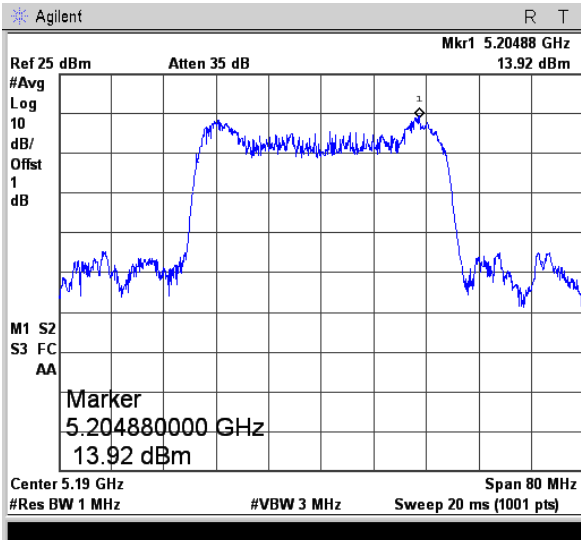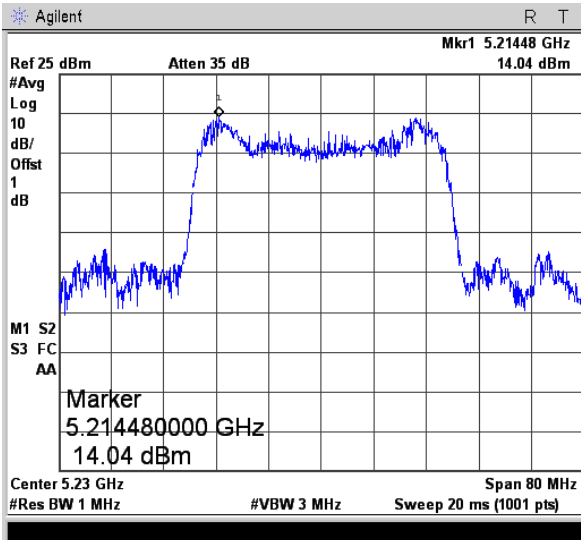ANT1

Mode:		802.11n-HT40
5190MHz		
5230MHz		

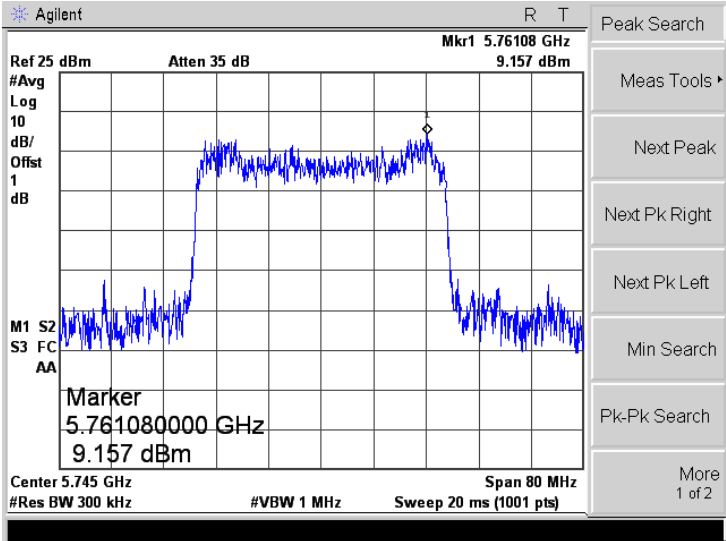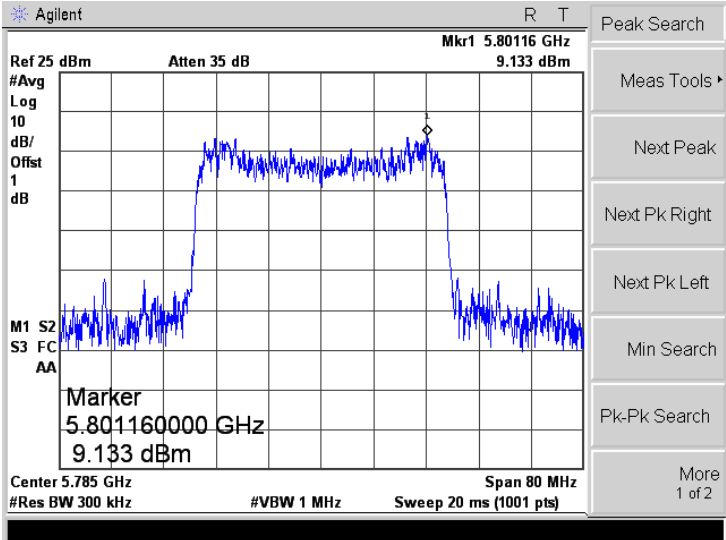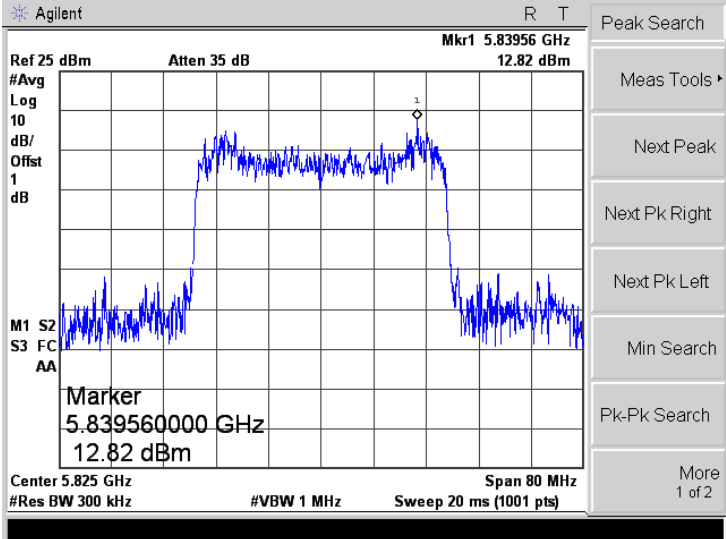Mode:	802.11n-HT40
5745MHz	
5785MHz	
5825MHz	

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 Test Procedure

According to 789033 D02 v01r02 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:



1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




6.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
ANT0	5190	38.847	37.0756	Pass
	5230	38.743	37.2218	Pass
ANT1	5190	38.727	37.2440	Pass
	5230	38.731	37.2320	Pass



U-NII-3:5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
ANT0	5745	35.176	37.1615	≥ 500
	5785	35.536	37.1950	≥ 500
	5825	37.1643	35.208	≥ 500
ANT1	5745	36.607	37.1359	≥ 500
	5785	34.708	37.2101	≥ 500
	5825	35.277	37.2359	≥ 500


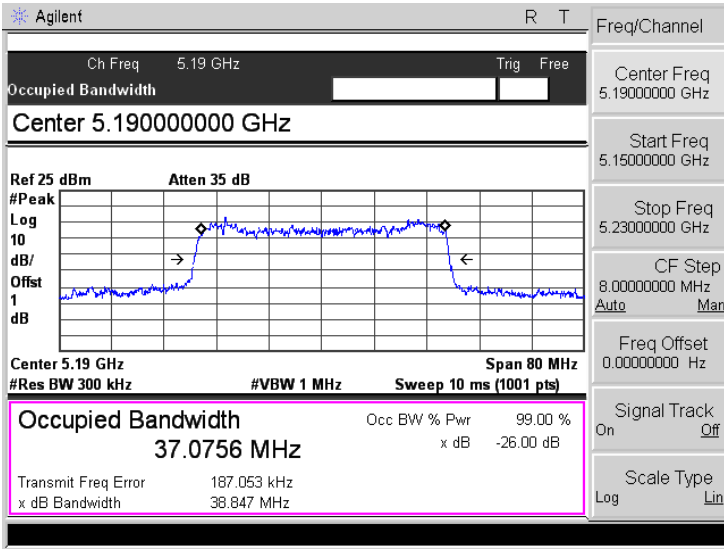
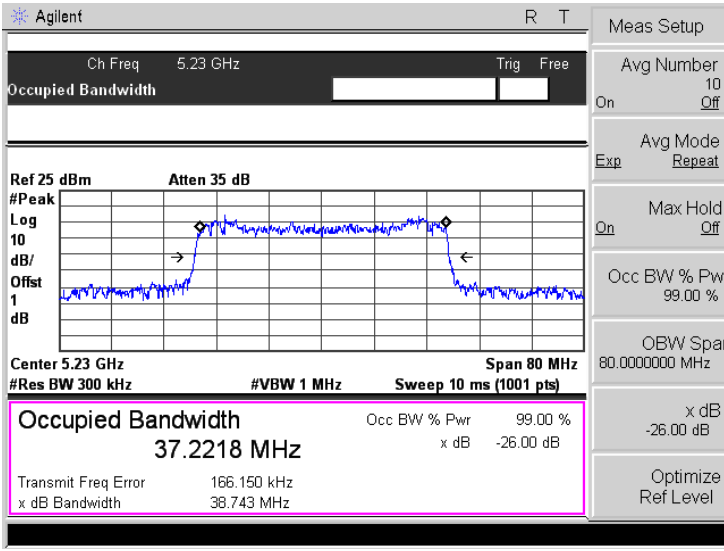
ANT0

Mode:		802.11n-HT40
5190MHz		
5230MHz		

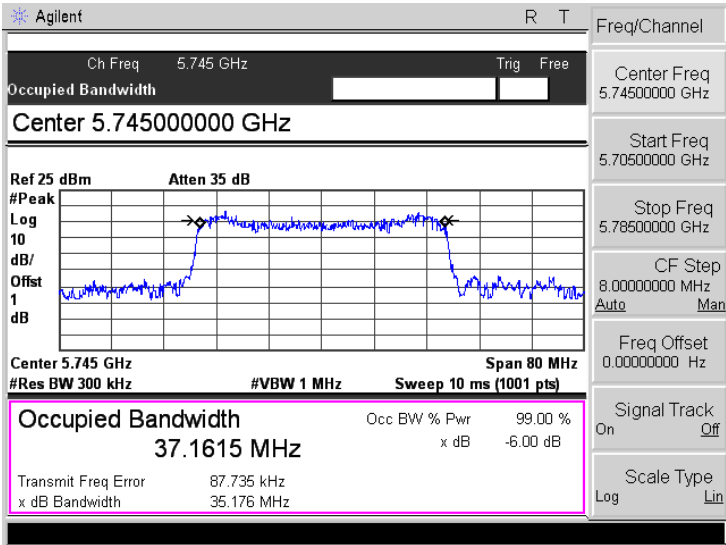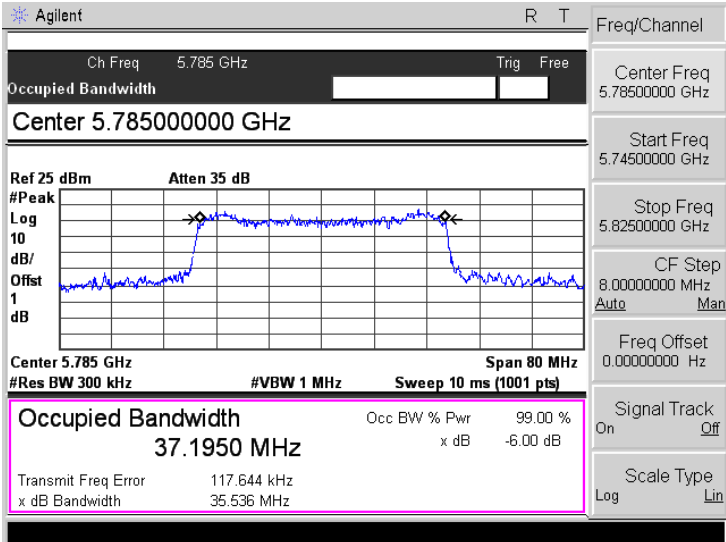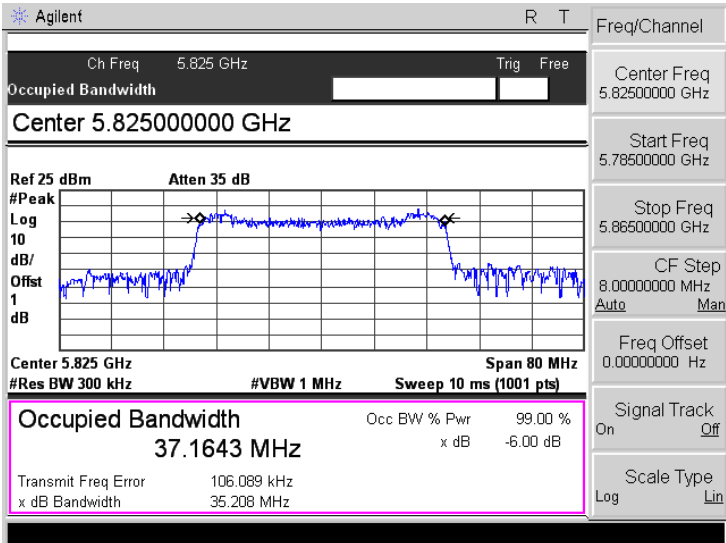Mode:	802.11n-HT40
5745MHz	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.1615 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 87.735 kHz x dB Bandwidth 35.176 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.70500000 GHz</p> <p>Stop Freq 5.78500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5785MHz	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.1950 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 117.644 kHz x dB Bandwidth 35.536 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.74500000 GHz</p> <p>Stop Freq 5.82500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825MHz	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.825 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.1643 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 106.089 kHz x dB Bandwidth 35.208 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.78500000 GHz</p> <p>Stop Freq 5.86500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

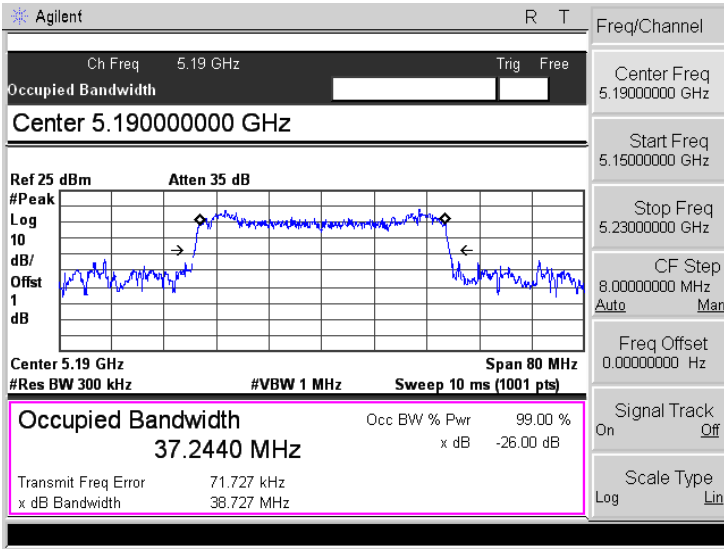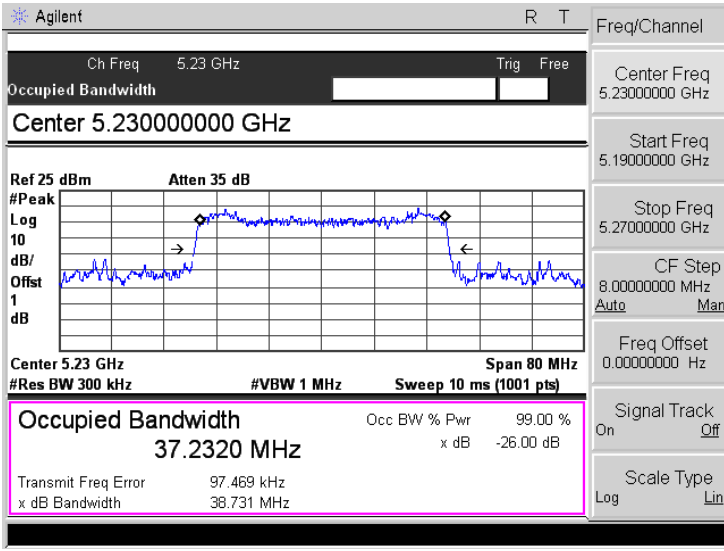ANT1

Mode:		802.11n-HT40
5190MHz		
5230MHz		

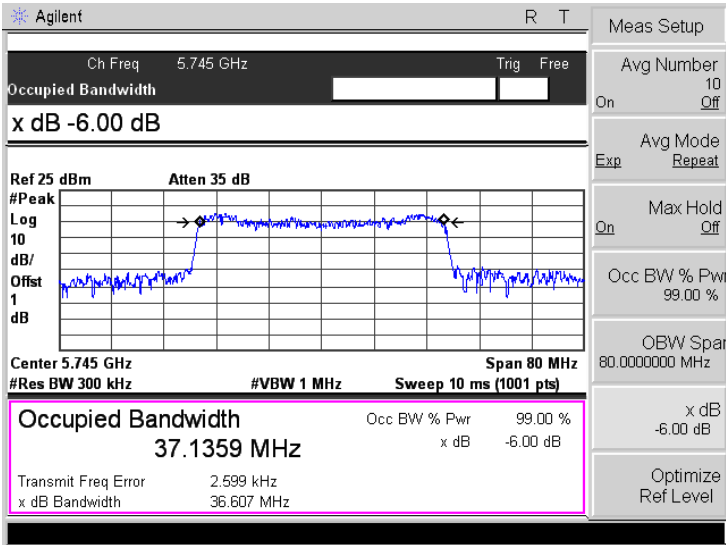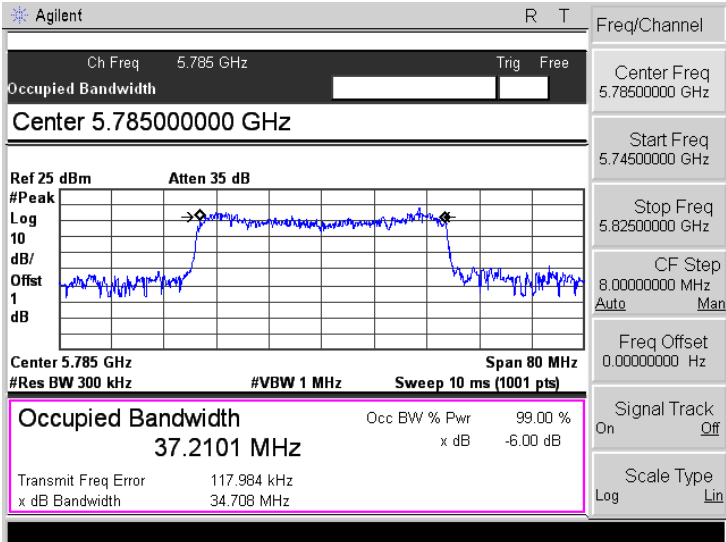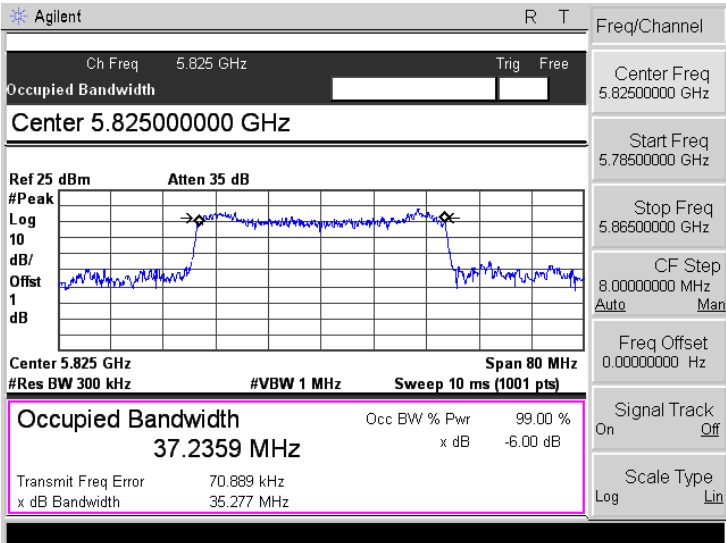Mode:	802.11n-HT40
5745MHz	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -6.00 dB</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.745 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.1359 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 2.599 kHz</p> <p>x dB Bandwidth 36.607 MHz</p> <p>Meas Setup</p> <p>Avg Number 10 On Off</p> <p>Avg Mode Exp Repeat</p> <p>Max Hold On Off</p> <p>Occ BW % Pwr 99.00 %</p> <p>OBW Spar 80.0000000 MHz</p> <p>x dB -6.00 dB</p> <p>Optimize Ref Level</p>
5785MHz	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.785 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.2101 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 117.984 kHz</p> <p>x dB Bandwidth 34.708 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.74500000 GHz</p> <p>Stop Freq 5.82500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.825 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 37.2359 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 70.889 kHz</p> <p>x dB Bandwidth 35.277 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.78500000 GHz</p> <p>Stop Freq 5.86500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. Maximum Conducted Output Power

7.1 Standard Applicable

According to 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v01r02 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)



- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz						
Frequency MHz	ANT0		ANT1		Total	Limit mW
	Output Power dBm	Output Power mW	Output Power dBm	Output Power mW	Output Power mW	
5190	4.89	3.08	9.54	8.99	12.08	250
5230	6.45	4.42	9.80	9.55	13.97	250


U-NII-3:5725-5850MHz						
Frequency MHz	ANT0		ANT1		Total	Limit mW
	Output Power dBm	Output Power mW	Output Power dBm	Output Power mW	Output Power mW	
5745	9.54	8.99	9.74	9.42	18.41	1000
5785	9.12	8.17	9.61	9.14	17.31	1000
5825	9.78	9.51	9.85	9.66	19.17	1000

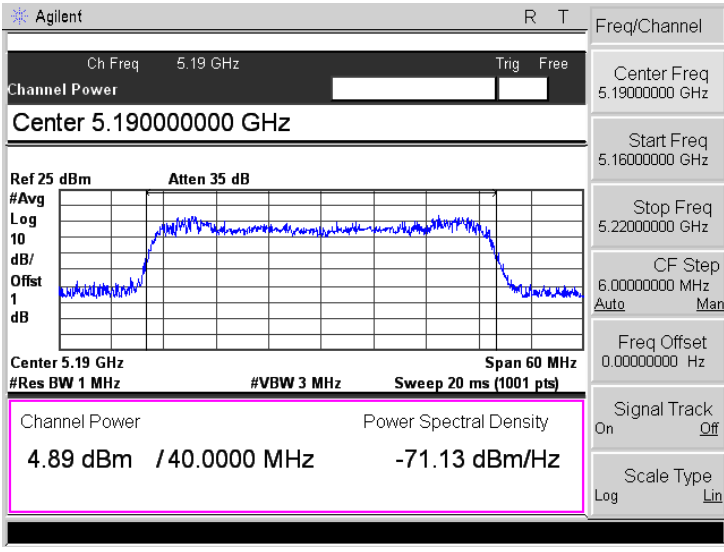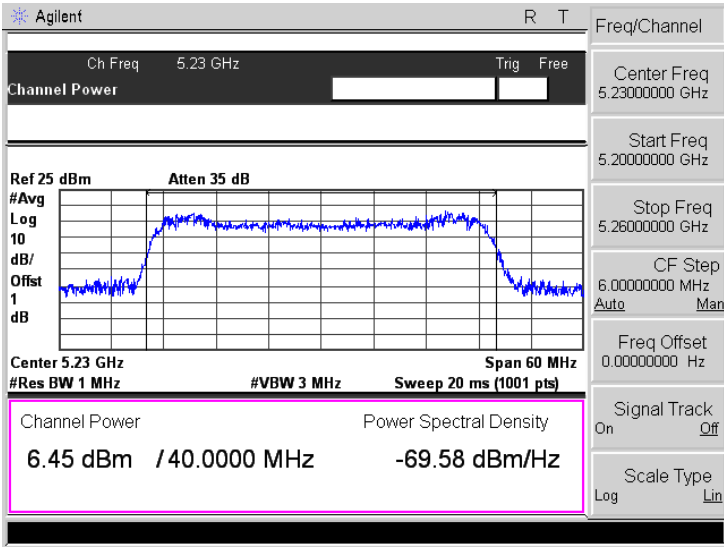ANT0


Mode:		802.11n-HT40
5190MHz		
5230MHz		

Mode: 802.11n-HT40

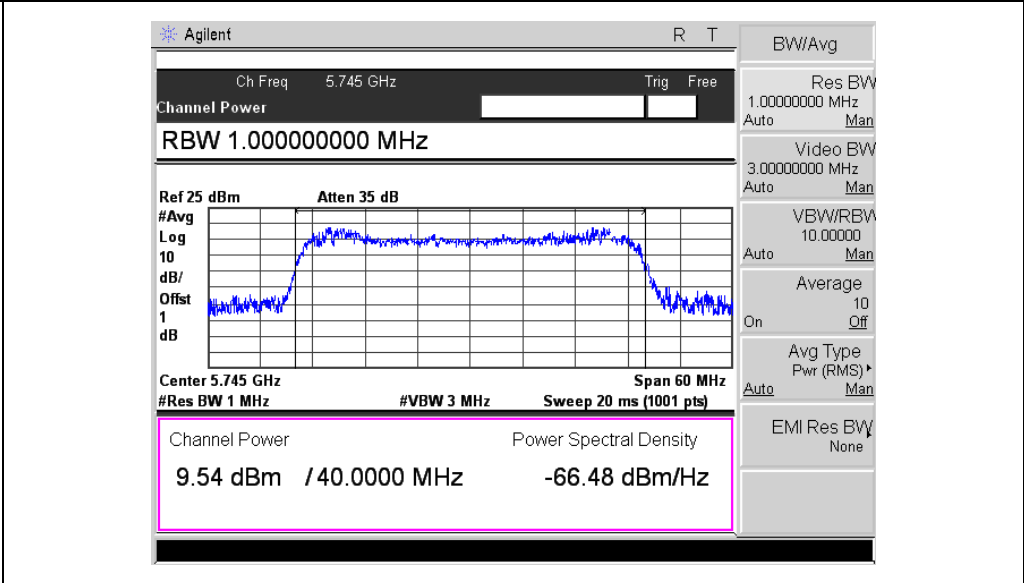
5745MHz





5785MHz



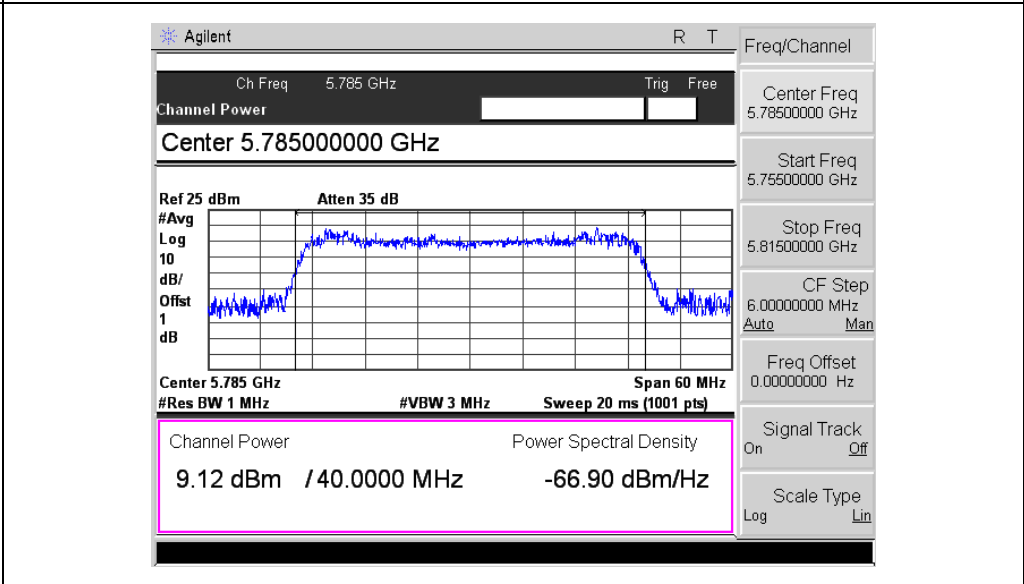


5825MHz

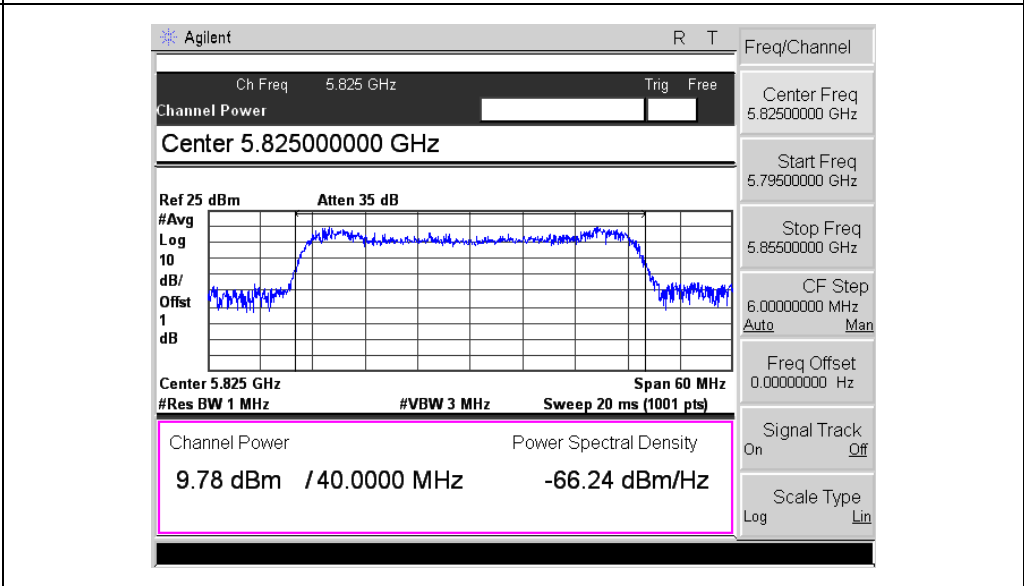

ANT1

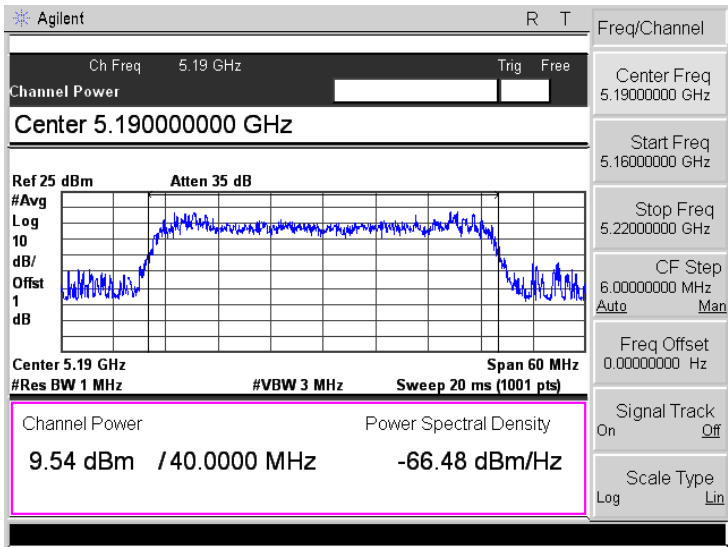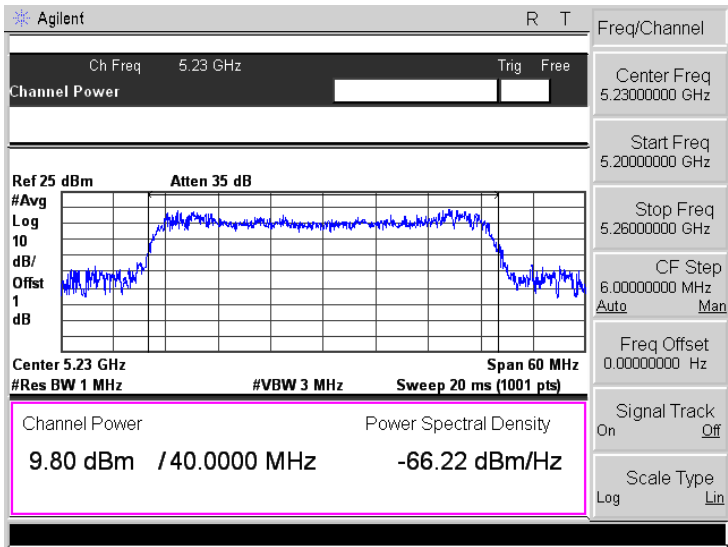Mode:		802.11n-HT40
5190MHz		
5230MHz		

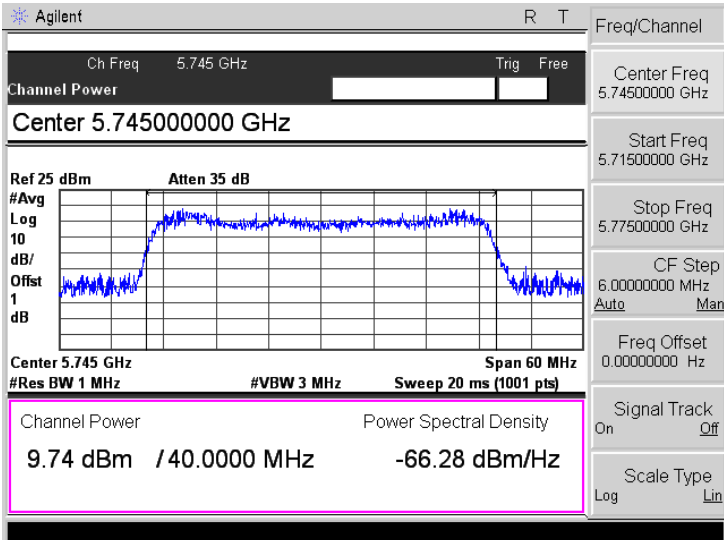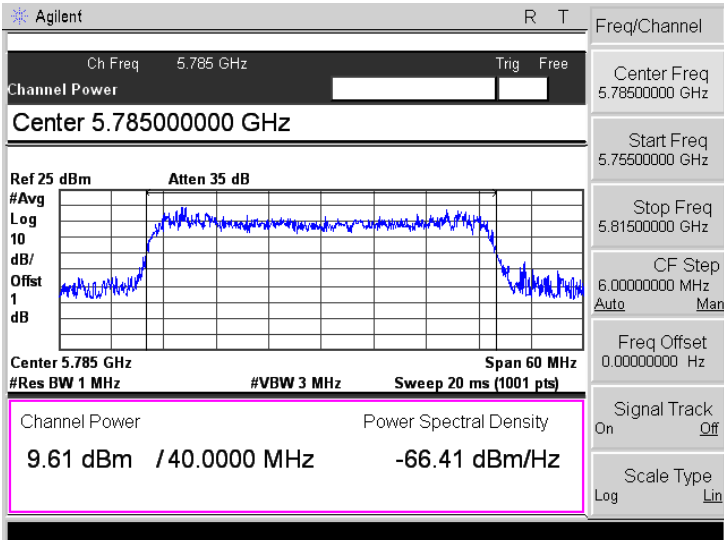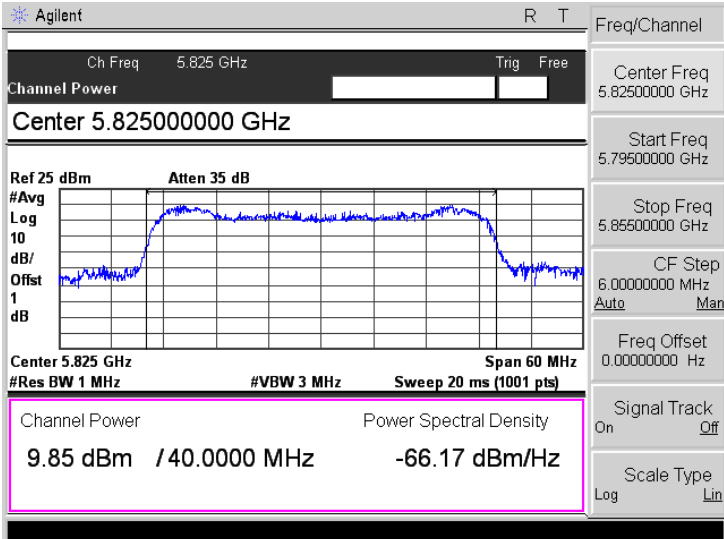Mode:	802.11n-HT40
5745MHz	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.74 dBm / 40.0000 MHz -66.28 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.77500000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5785MHz	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.61 dBm / 40.0000 MHz -66.41 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.81500000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825MHz	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.82500000 GHz</p> <p>Ref 25 dBm Atten 35 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.85 dBm / 40.0000 MHz -66.17 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.79500000 GHz</p> <p>Stop Freq 5.85500000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section. 789033 D02 v02r01 General UNII Test Procedures New Rules v02

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

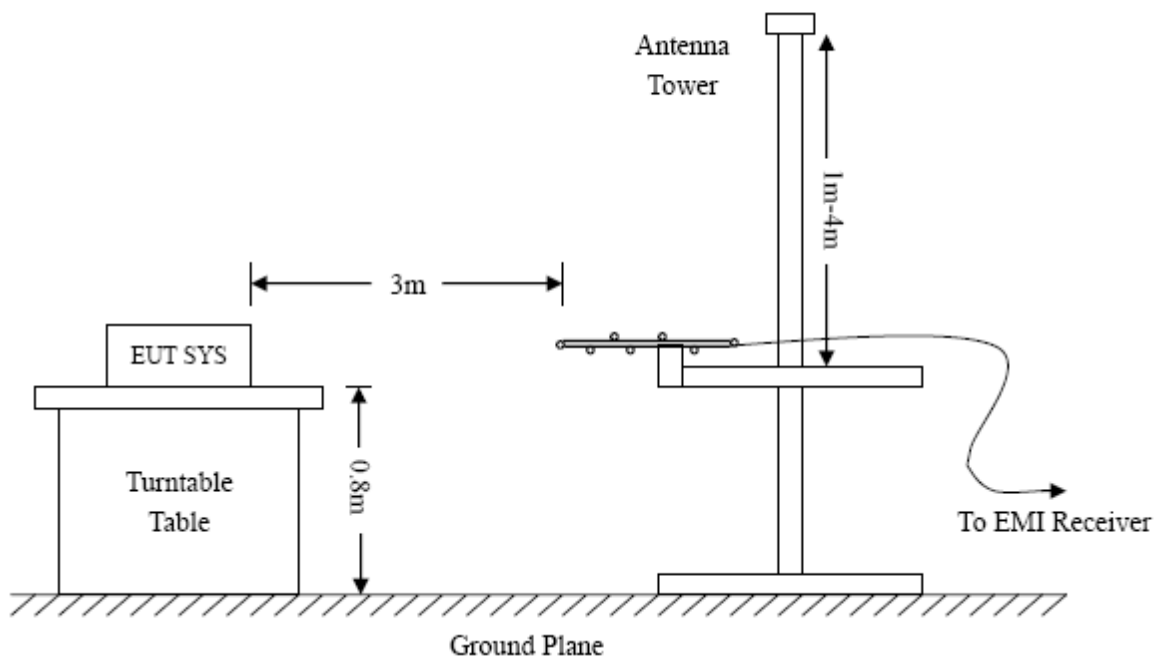
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

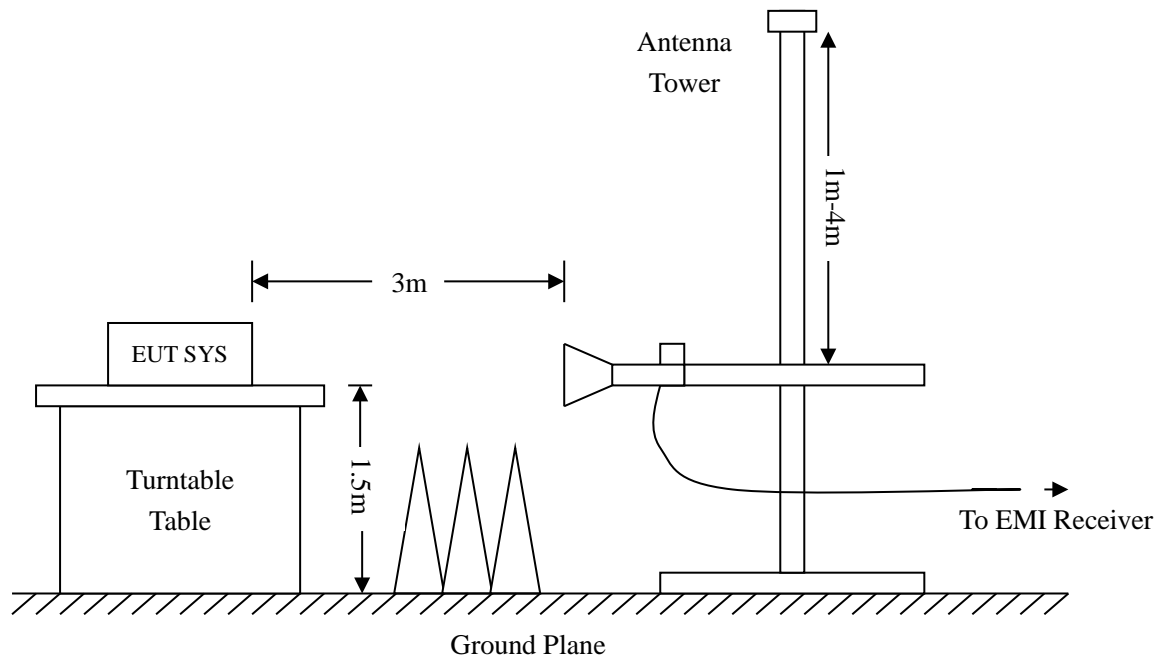
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.





8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.5 Summary of Test Results/Plots

Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. Testing is carried out with frequency rang 9kHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be recorded in the test report.


- Spurious Emission From 30 MHz to 1 GHz
- Worst case at MIMO
- Antenna Type 1

Test Channel	5190MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

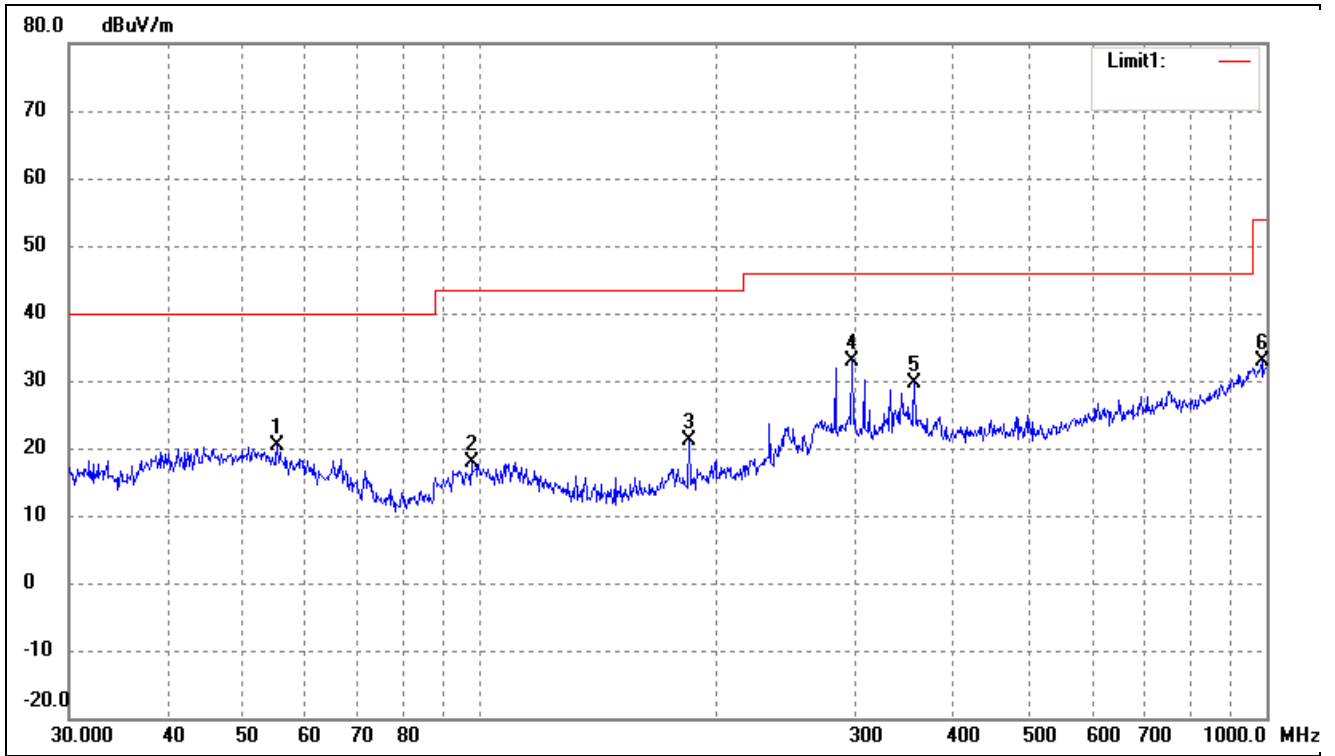


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.2207	33.62	-13.27	20.35	40.00	-19.65	249	100	peak
2	97.4560	32.77	-14.84	17.93	43.50	-25.57	232	100	peak
3	184.4898	34.93	-13.75	21.18	43.50	-22.32	92	100	peak
4	297.2241	40.27	-7.47	32.80	46.00	-13.20	337	100	peak
5	356.6758	36.37	-6.69	29.68	46.00	-16.32	69	100	peak
6	986.0717	29.00	3.82	32.82	54.00	-21.18	197	100	peak

Test Channel	5190MHz	Polarity:	Vertical
--------------	---------	-----------	----------

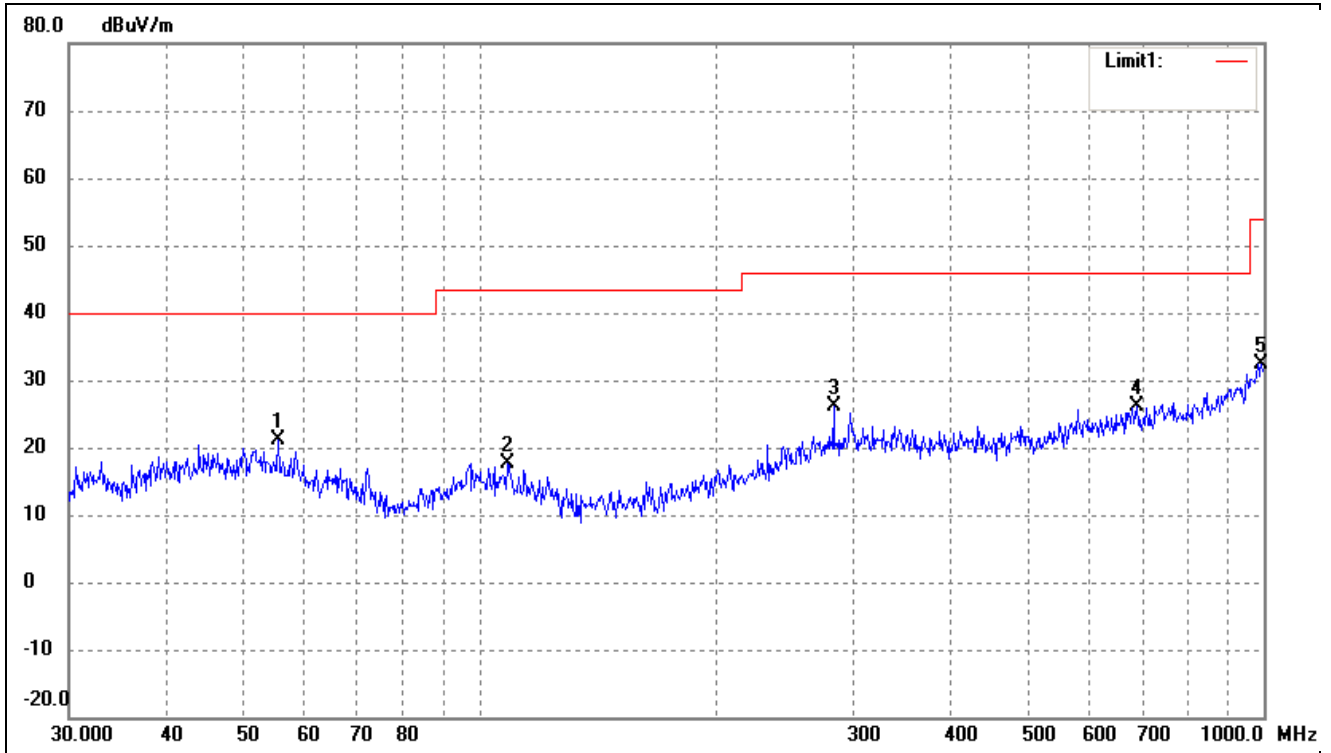


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.4147	34.35	-13.31	21.04	40.00	-18.96	81	100	peak
2	108.6470	31.57	-13.95	17.62	43.50	-25.88	103	100	peak
3	282.9852	34.47	-8.27	26.20	46.00	-19.80	133	100	peak
4	689.5644	28.93	-2.73	26.20	46.00	-19.80	101	100	peak
5	993.0114	28.39	3.93	32.32	54.00	-21.68	285	100	peak

Test Channel	5230MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

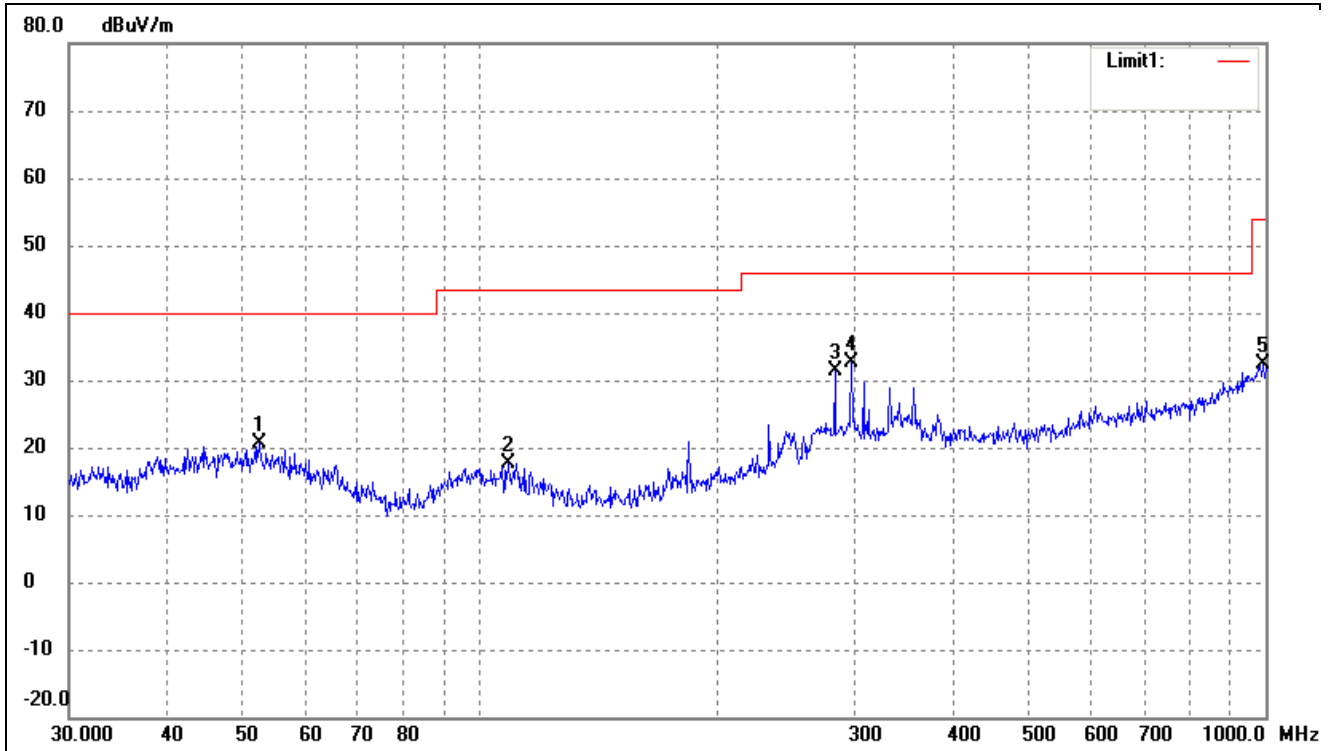


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.3913	33.38	-12.84	20.54	40.00	-19.46	350	100	peak
2	108.6470	31.66	-13.95	17.71	43.50	-25.79	329	100	peak
3	282.9852	39.56	-8.27	31.29	46.00	-14.71	76	100	peak
4	297.2241	40.05	-7.47	32.58	46.00	-13.42	280	100	peak
5	993.0114	28.47	3.93	32.40	54.00	-21.60	145	100	peak

Test Channel	5230MHz	Polarity:	Vertical
--------------	---------	-----------	----------

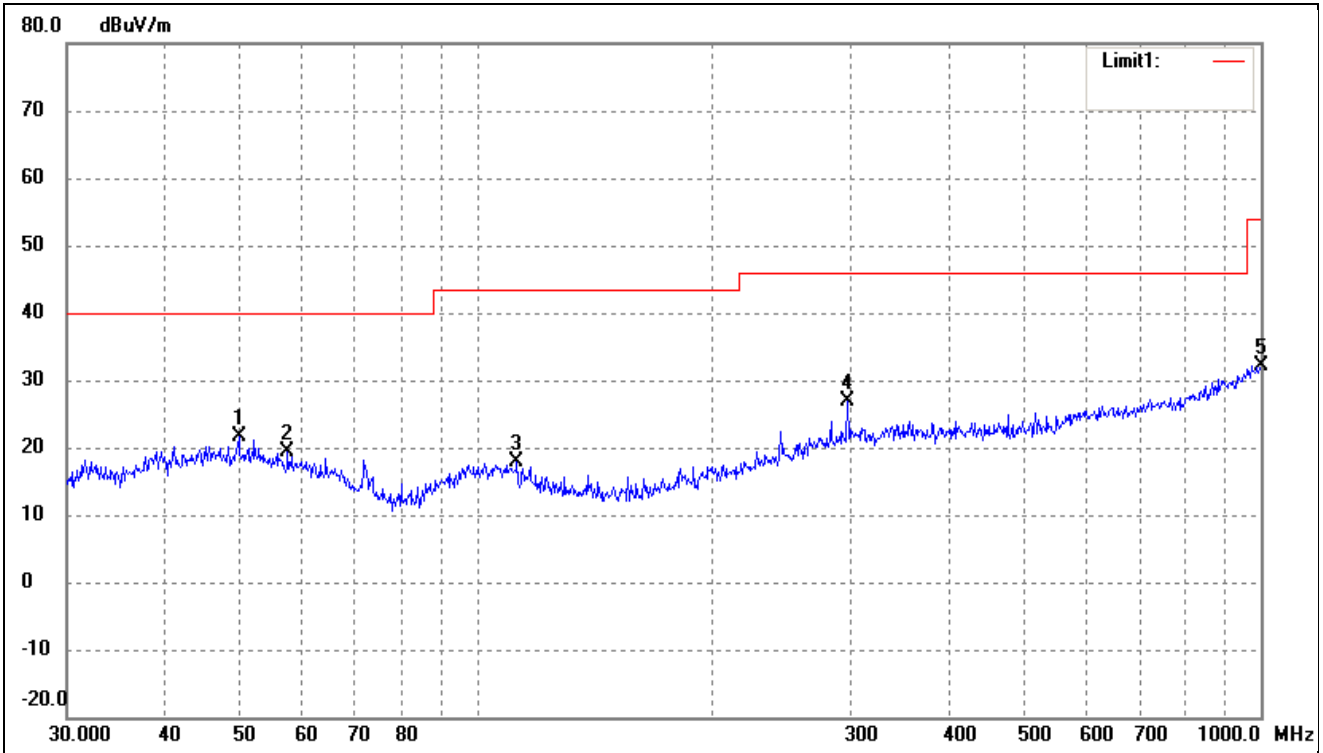


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7068	34.55	-12.91	21.64	40.00	-18.36	148	100	peak
2	57.3922	33.44	-14.00	19.44	40.00	-20.56	185	100	peak
3	112.5243	32.15	-14.35	17.80	43.50	-25.70	97	100	peak
4	297.2241	34.36	-7.47	26.89	46.00	-19.11	310	100	peak
5	1000.0000	28.15	4.04	32.19	54.00	-21.81	95	100	peak

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

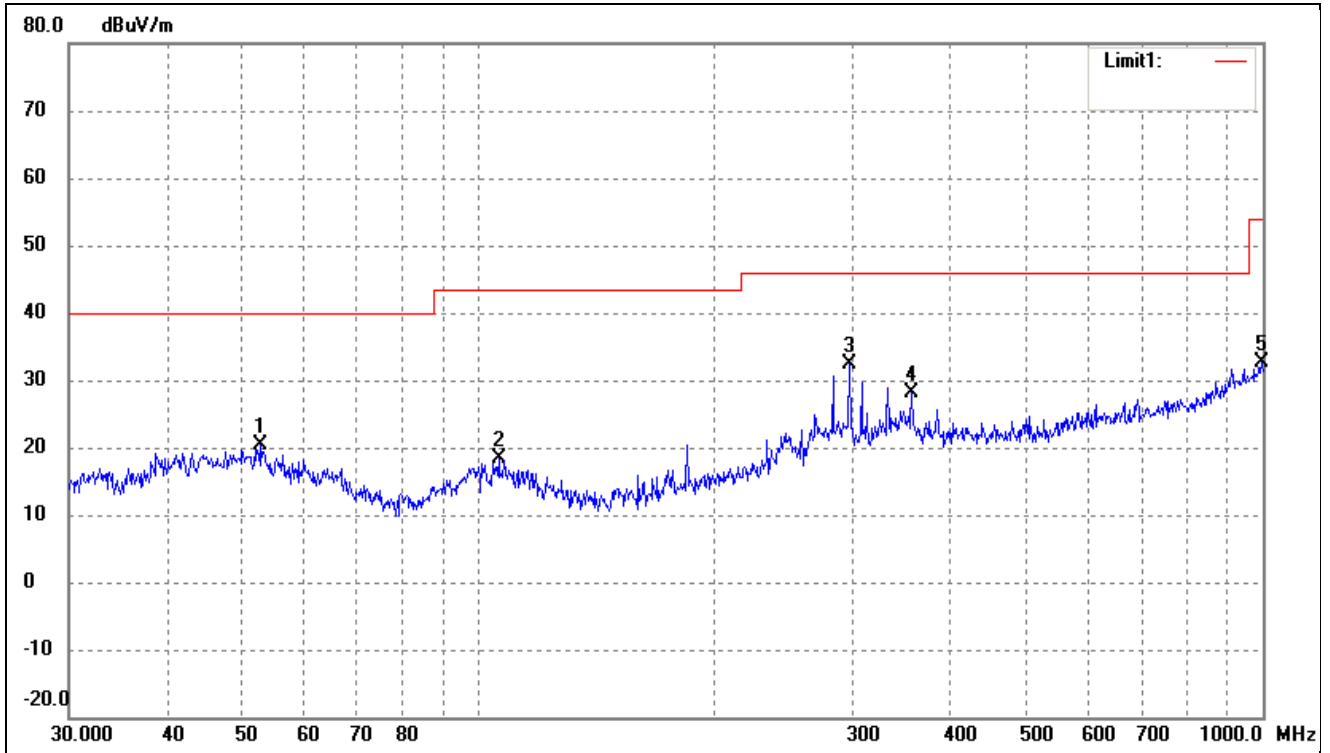


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.7600	33.28	-12.87	20.41	40.00	-19.59	125	100	peak
2	106.0126	32.45	-14.01	18.44	43.50	-25.06	166	100	peak
3	297.2241	39.81	-7.47	32.34	46.00	-13.66	108	100	peak
4	356.6758	34.71	-6.69	28.02	46.00	-17.98	115	100	peak
5	996.4996	28.75	3.98	32.73	54.00	-21.27	98	100	peak

Test Channel	5745MHz	Polarity:	Vertical
--------------	---------	-----------	----------

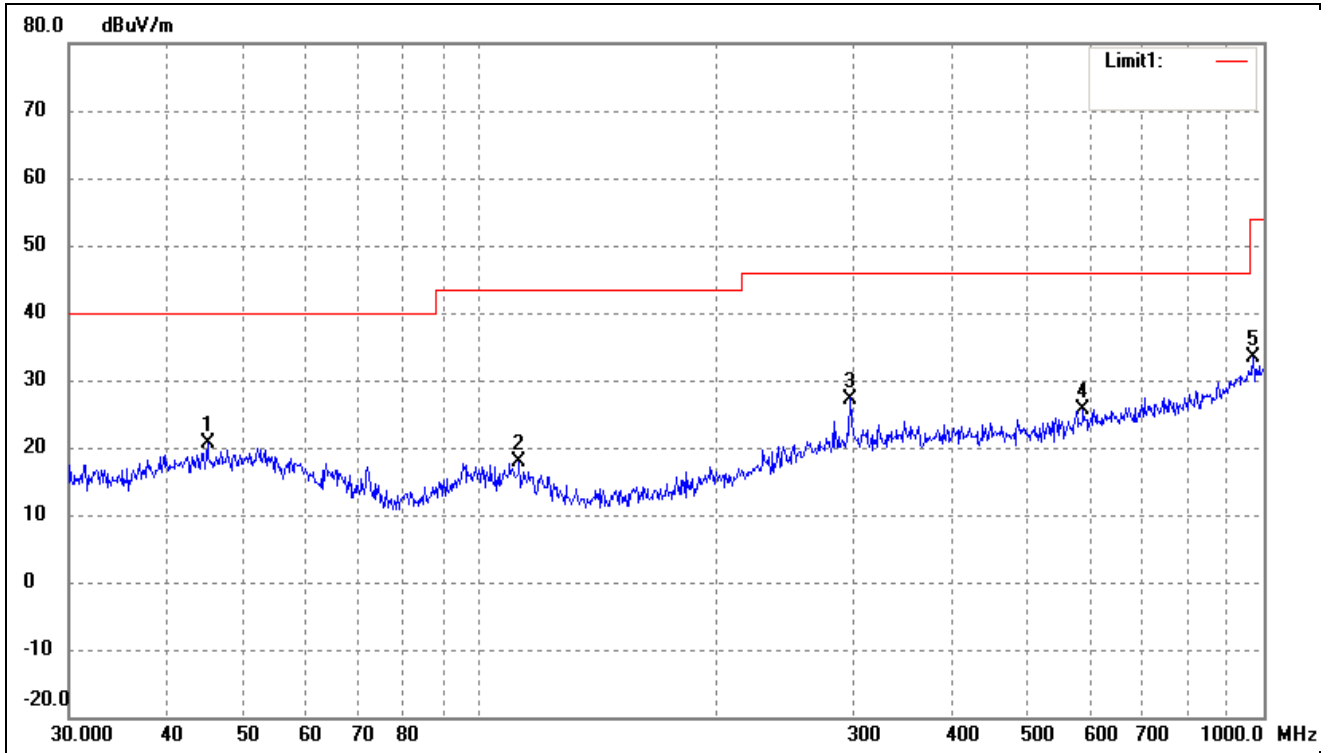


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.0583	33.68	-12.97	20.71	40.00	-19.29	157	100	peak
2	112.5244	32.22	-14.35	17.87	43.50	-25.63	189	100	peak
3	297.2241	34.72	-7.47	27.25	46.00	-18.75	89	100	peak
4	588.9051	29.59	-4.04	25.55	46.00	-20.45	294	100	peak
5	968.9338	30.22	3.25	33.47	54.00	-20.53	144	100	peak

Test Channel	5825MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

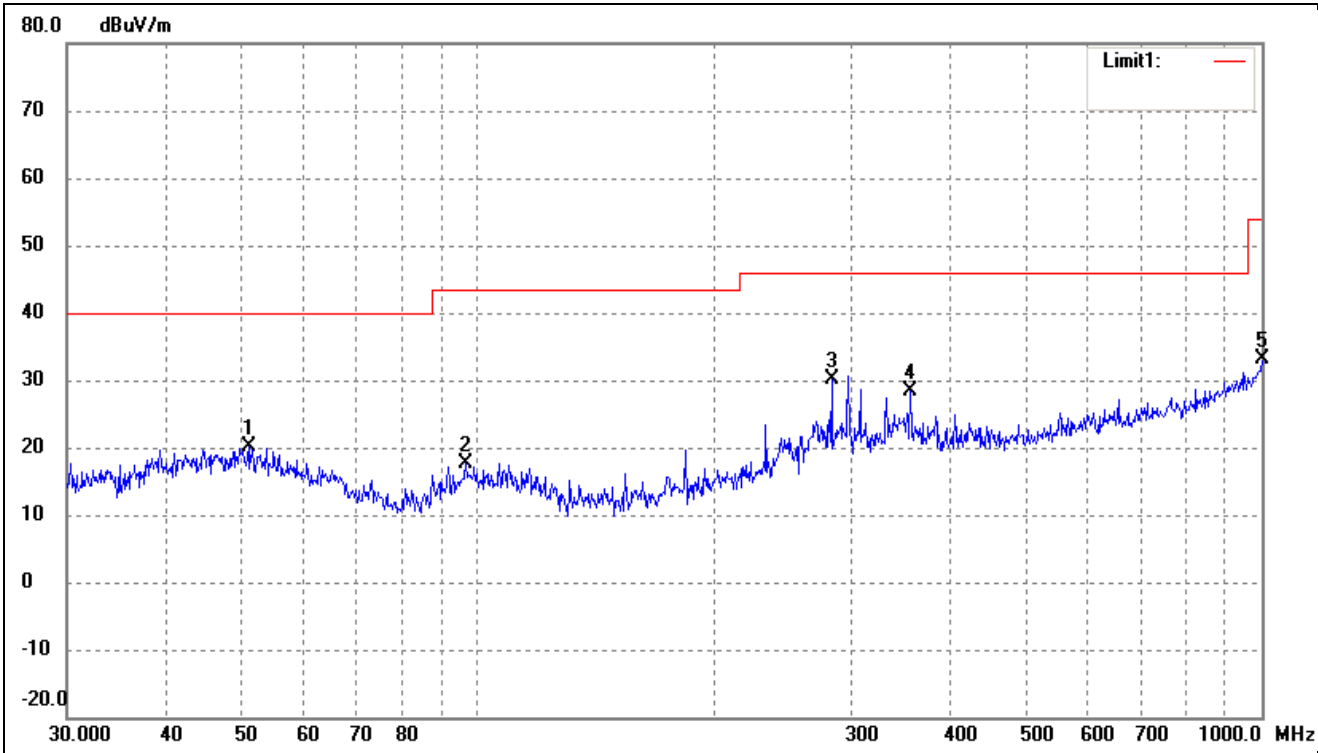

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	32.90	-12.86	20.04	40.00	-19.96	61	100	peak
2	96.7749	32.54	-14.94	17.60	43.50	-25.90	193	100	peak
3	282.9852	38.34	-8.27	30.07	46.00	-15.93	51	100	peak
4	356.6758	34.96	-6.69	28.27	46.00	-17.73	118	100	peak
5	1000.0000	28.97	4.04	33.01	54.00	-20.99	351	100	peak


Test Channel	5825MHz	Polarity:	Vertical
--------------	---------	-----------	----------

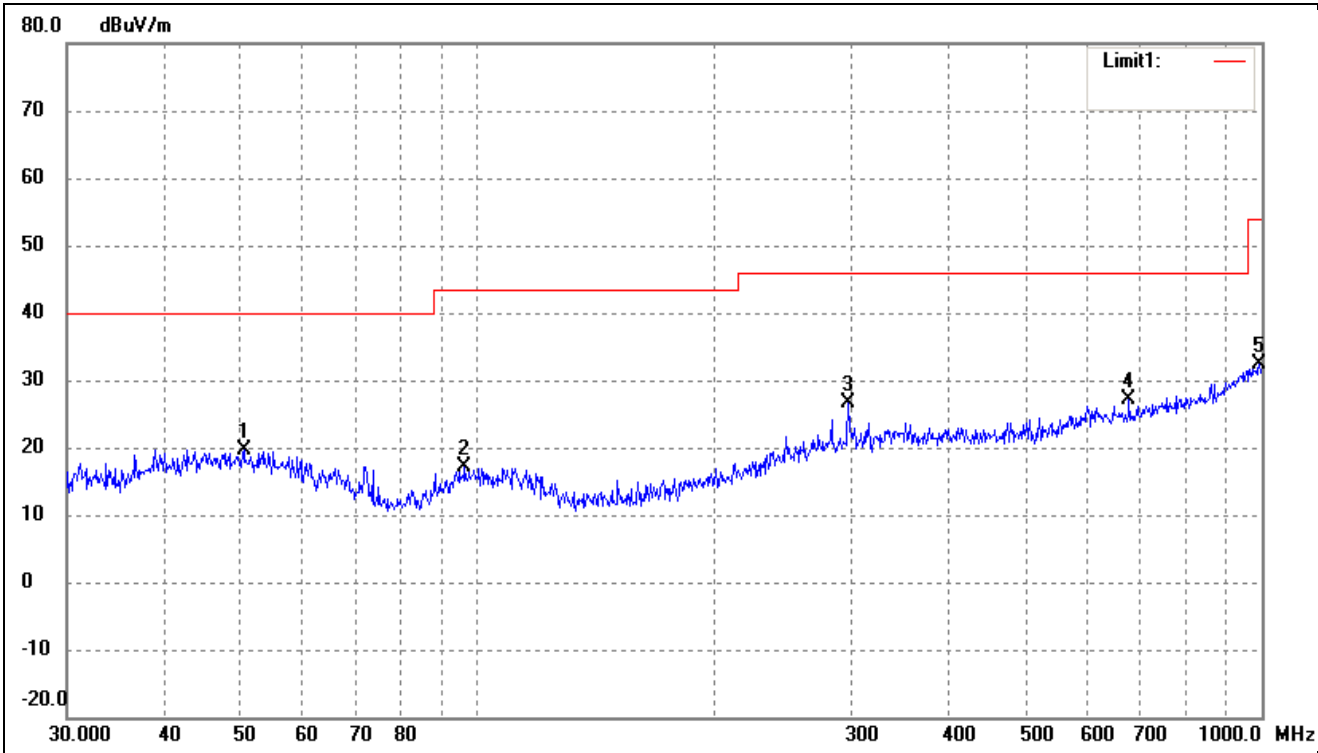

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.4089	32.58	-12.91	19.67	40.00	-20.33	147	100	peak
2	96.4362	32.13	-14.99	17.14	43.50	-26.36	99	100	peak
3	297.2241	34.09	-7.47	26.62	46.00	-19.38	146	100	peak
4	677.5798	30.00	-2.97	27.03	46.00	-18.97	117	100	peak
5	993.0114	28.43	3.93	32.36	54.00	-21.64	228	100	peak


Antenna Type 2

Test Channel	5190MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

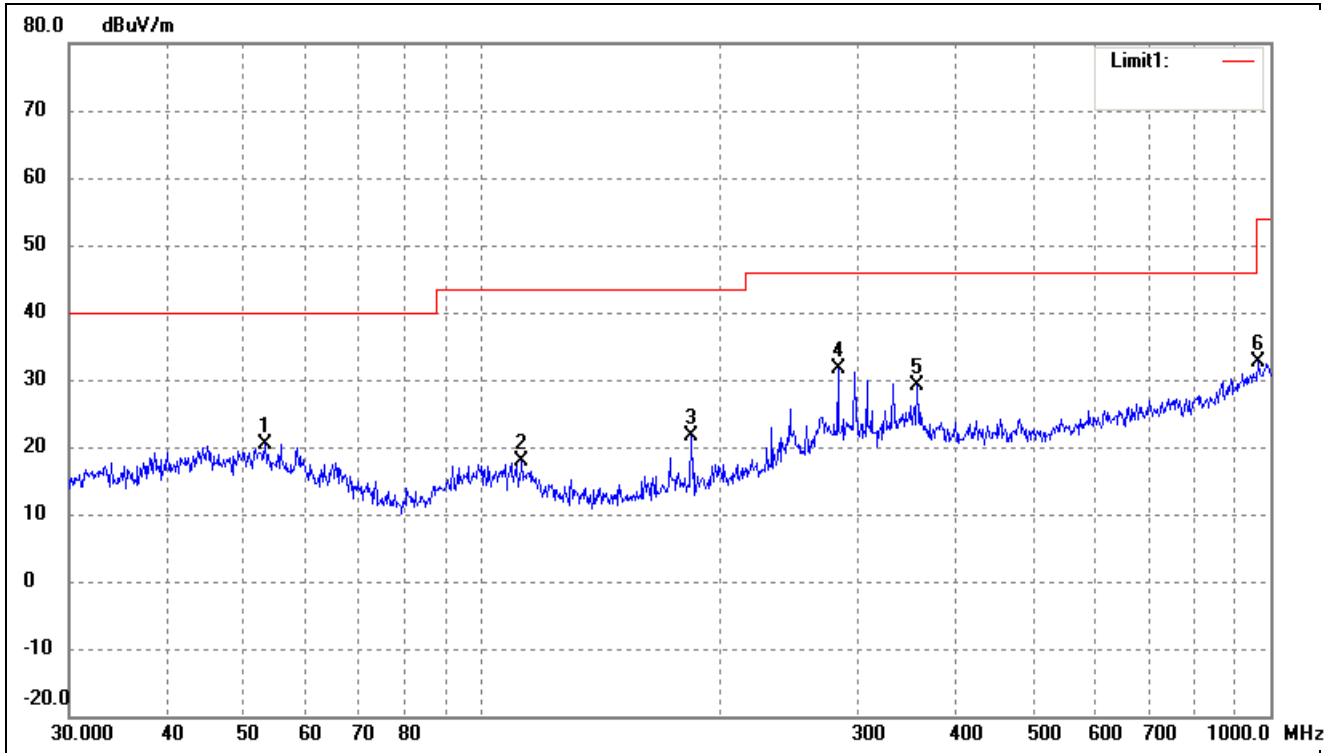


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.1313	33.36	-12.90	20.46	40.00	-19.54	204	100	peak
2	112.5244	32.19	-14.35	17.84	43.50	-25.66	231	100	peak
3	184.4898	35.33	-13.75	21.58	43.50	-21.92	86	100	peak
4	282.9852	39.92	-8.27	31.65	46.00	-14.35	137	100	peak
5	356.6758	35.85	-6.69	29.16	46.00	-16.84	56	100	peak
6	965.5421	29.34	3.20	32.54	54.00	-21.46	92	100	peak

Test Channel	5190MHz	Polarity:	Vertical
--------------	---------	-----------	----------

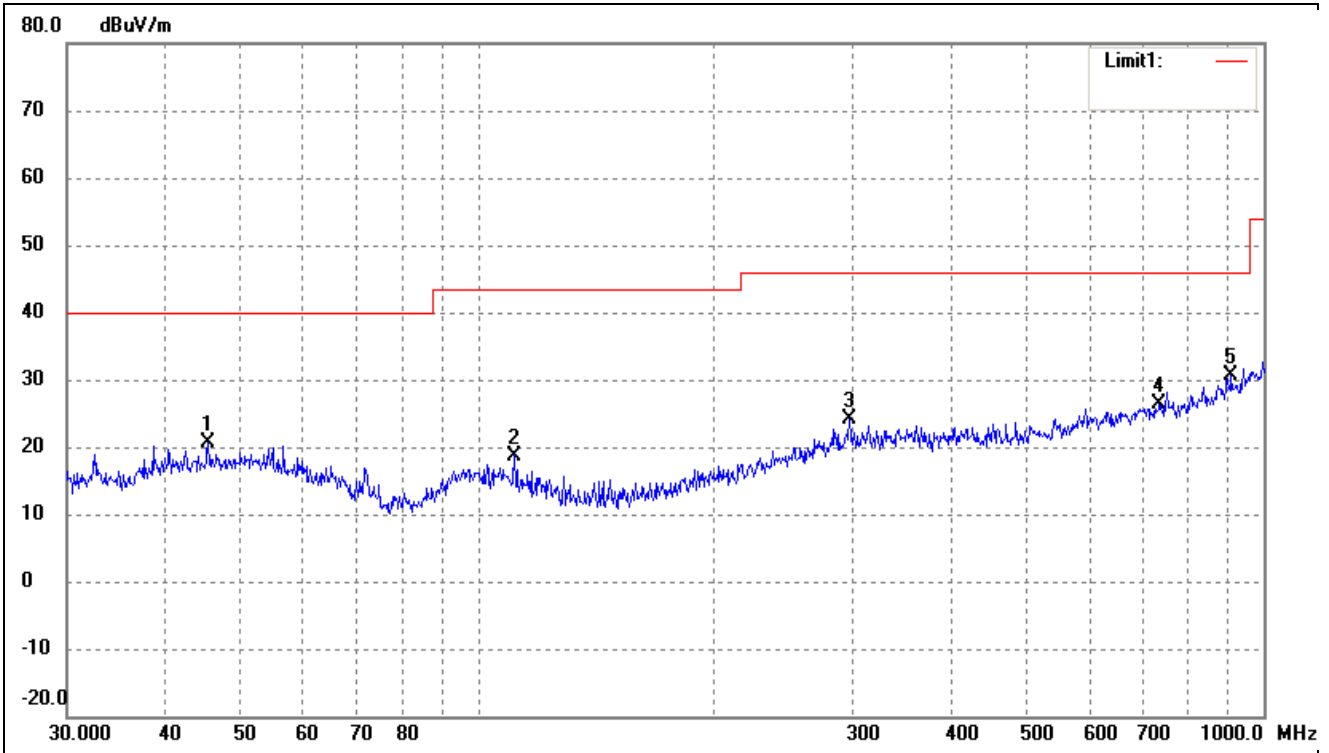


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.3755	33.48	-12.95	20.53	40.00	-19.47	330	100	peak
2	111.3468	32.89	-14.14	18.75	43.50	-24.75	203	100	peak
3	297.2241	31.68	-7.47	24.21	46.00	-21.79	82	100	peak
4	737.0714	28.15	-1.88	26.27	46.00	-19.73	161	100	peak
5	909.6667	29.01	1.64	30.65	46.00	-15.35	141	100	peak

Test Channel	5230MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

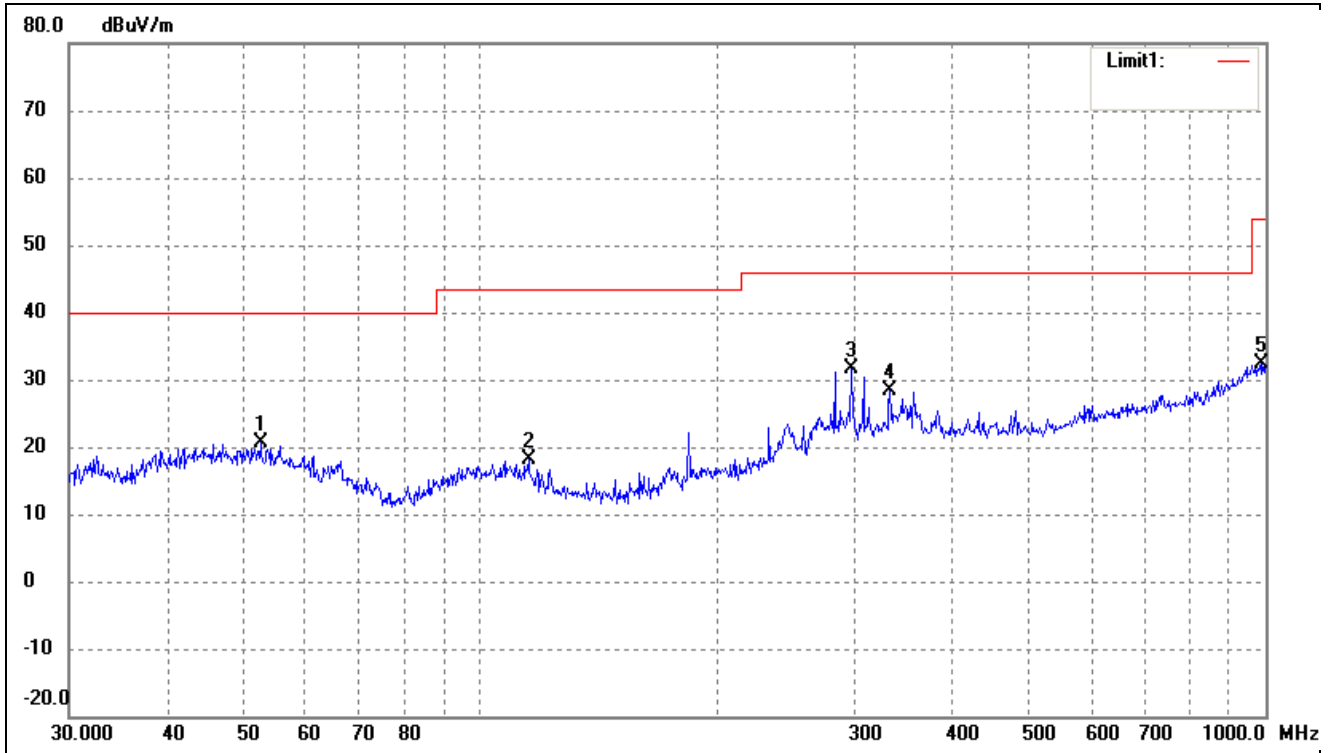


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.5753	33.39	-12.85	20.54	40.00	-19.46	74	100	peak
2	115.3205	32.90	-14.83	18.07	43.50	-25.43	192	100	peak
3	297.2241	39.05	-7.47	31.58	46.00	-14.42	101	100	peak
4	332.5187	35.09	-6.71	28.38	46.00	-17.62	134	100	peak
5	989.5355	28.62	3.88	32.50	54.00	-21.50	130	100	peak

Test Channel	5230MHz	Polarity:	Vertical
--------------	---------	-----------	----------

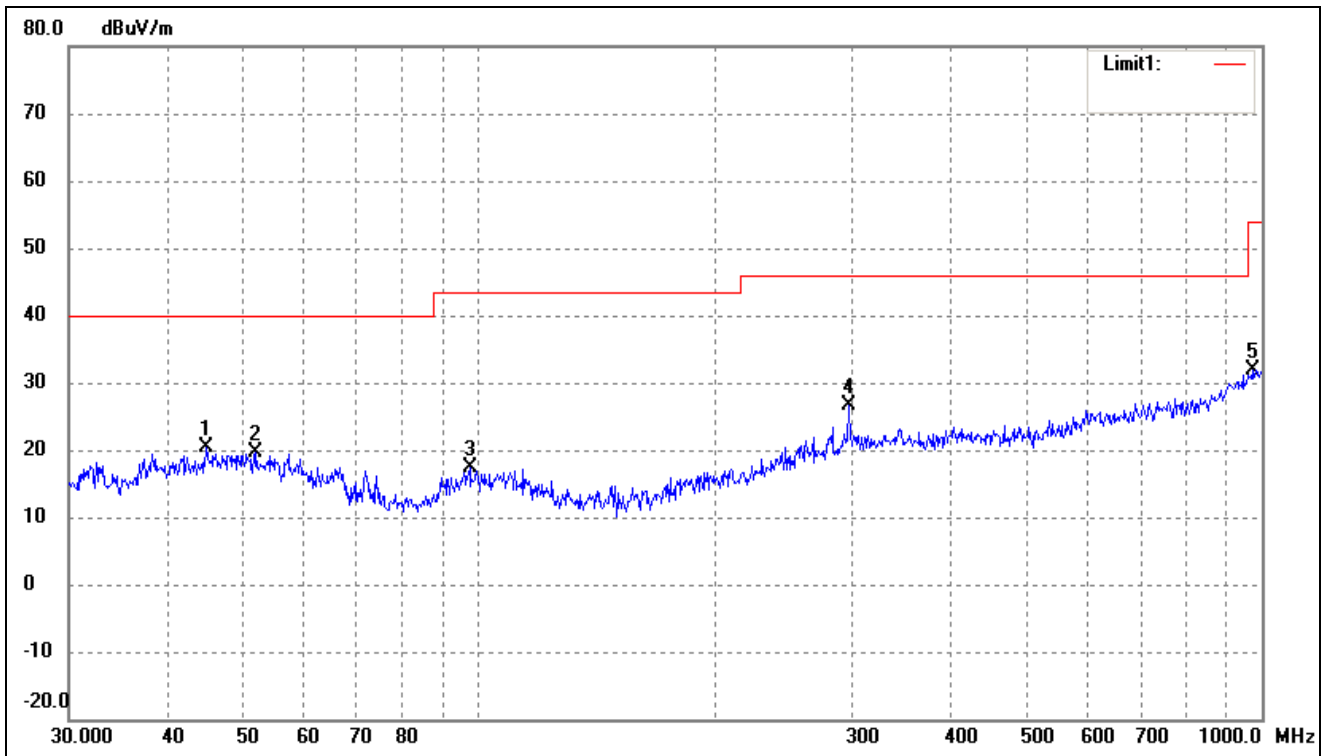


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	33.27	-12.98	20.29	40.00	-19.71	106	100	peak
2	52.0251	32.33	-12.80	19.53	40.00	-20.47	143	100	peak
3	97.4560	32.32	-14.84	17.48	43.50	-26.02	131	100	peak
4	297.2241	34.17	-7.47	26.70	46.00	-19.30	143	100	peak
5	972.3374	28.51	3.38	31.89	54.00	-22.11	261	100	peak

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

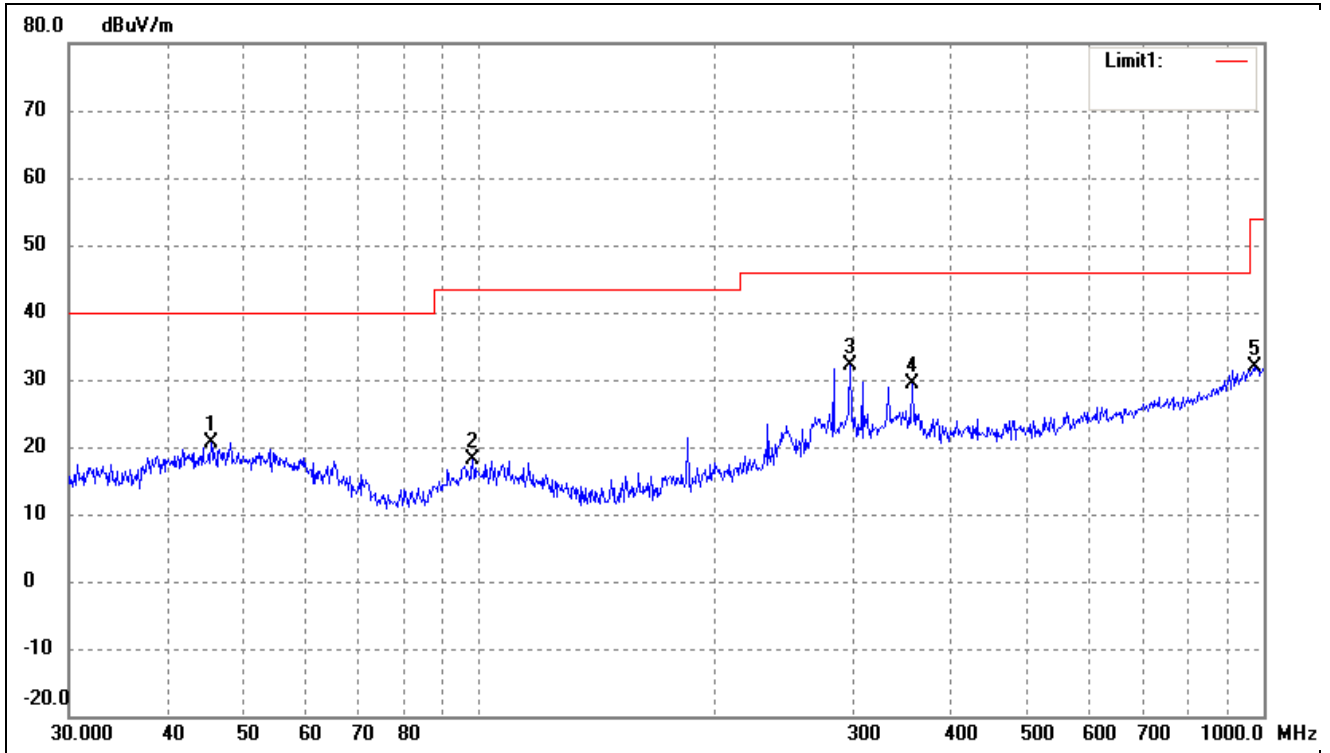


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.5348	33.67	-12.94	20.73	40.00	-19.27	333	100	peak
2	98.1419	32.83	-14.74	18.09	43.50	-25.41	308	100	peak
3	297.2241	39.56	-7.47	32.09	46.00	-13.91	72	100	peak
4	356.6758	35.98	-6.69	29.29	46.00	-16.71	255	100	peak
5	975.7529	28.37	3.53	31.90	54.00	-22.10	131	100	peak

Test Channel	5745MHz	Polarity:	Vertical
--------------	---------	-----------	----------

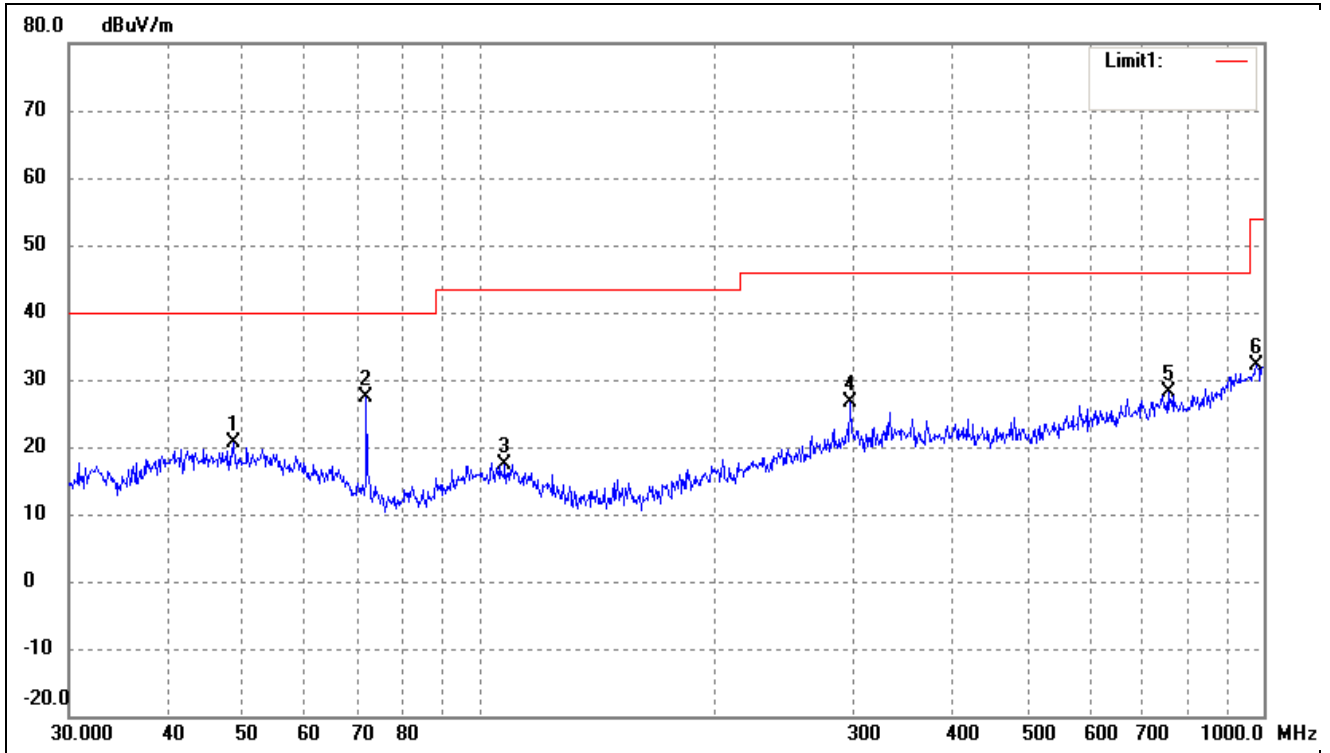


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.6719	33.54	-12.82	20.72	40.00	-19.28	336	100	peak
2	71.8320	44.97	-17.70	27.27	40.00	-12.73	159	100	peak
3	107.8877	31.44	-13.97	17.47	43.50	-26.03	75	100	peak
4	297.2241	34.19	-7.47	26.72	46.00	-19.28	176	100	peak
5	755.3873	29.73	-1.66	28.07	46.00	-17.93	134	100	peak
6	979.1804	28.37	3.69	32.06	54.00	-21.94	256	100	peak

Test Channel	5825MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

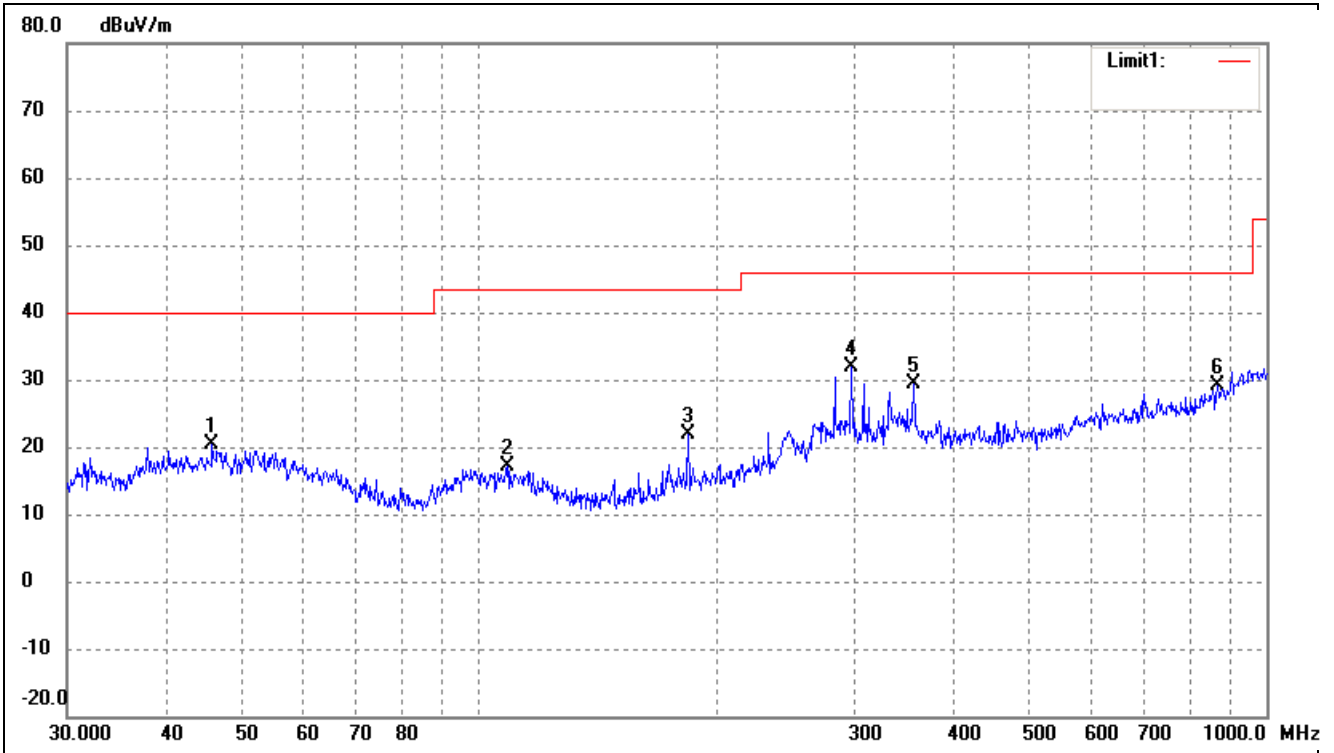

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	33.36	-12.92	20.44	40.00	-19.56	280	100	peak
2	108.6470	30.97	-13.95	17.02	43.50	-26.48	148	100	peak
3	184.4898	35.72	-13.75	21.97	43.50	-21.53	77	100	peak
4	297.2241	39.29	-7.47	31.82	46.00	-14.18	113	100	peak
5	356.6758	36.07	-6.69	29.38	46.00	-16.62	192	100	peak
6	866.0879	28.87	0.29	29.16	46.00	-16.84	104	100	peak

Test Channel	5825MHz	Polarity:	Vertical
--------------	---------	-----------	----------

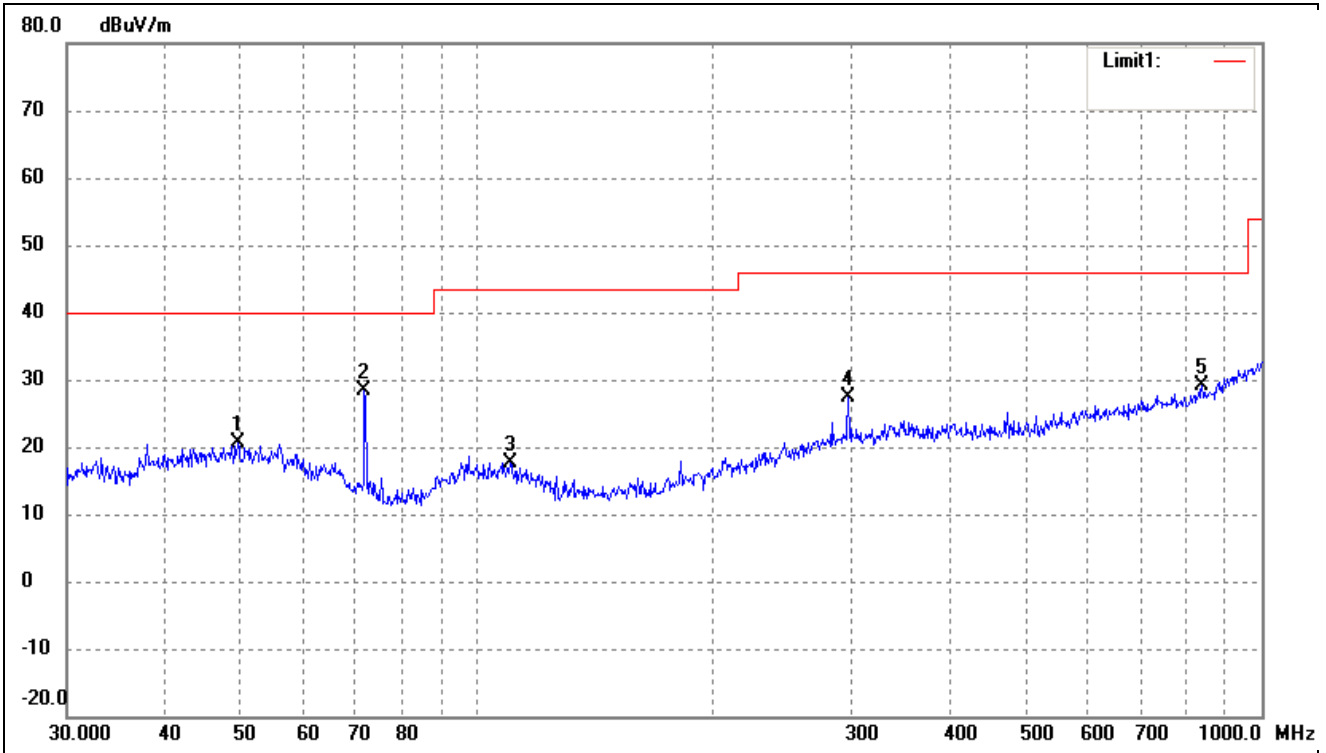

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	33.45	-12.89	20.56	40.00	-19.44	351	100	peak
2	71.8320	46.10	-17.70	28.40	40.00	-11.60	90	100	peak
3	110.1816	31.58	-13.94	17.64	43.50	-25.86	178	100	peak
4	297.2241	34.95	-7.47	27.48	46.00	-18.52	113	100	peak
5	839.1818	29.52	-0.38	29.14	46.00	-16.86	339	100	peak

- Spurious Emission above 1GHz
- Worst case at MIMO
- Antenna Type 1
- Harmonics And Spurious Emissions

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (5180MHz)										
10380	PK	53.2	250	V	40.7	8.9	39.6	64.7	74	-9.3
10380	PK	50.2	250	H	40.7	8.9	39.6	60.1	74	-13.9
10380	AV	37.8	250	V	40.7	8.9	39.6	49.3	54	-4.7
10380	AV	35.8	250	H	40.7	8.9	39.6	46.6	54	-7.4
High Channel (5230MHz)										
10460	PK	53.9	229	V	40.7	10.5	39.6	64.3	74	-9.7
10460	PK	52.4	229	H	40.7	10.5	39.6	65.1	74	-8.9
10460	AV	37.1	229	V	40.7	10.5	39.6	49.4	54	-4.6
10460	AV	35.9	229	H	40.7	10.5	39.6	48.2	54	-5.8

- Out of Band edge

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-46.21	-27
Highest	Above 5350	-43.45	-27

Note: the data just list the worst cases

➤ For the frequency band 5.725-5.850GHz

➤ Harmonics And Spurious Emissions

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (5725MHz)										
11490	PK	50.3	245	V	38.9	11.2	40.1	60.9	74	-13.1
11490	PK	51.9	245	H	38.9	11.2	40.1	61.1	74	-12.9
11490	AV	37.8	245	V	38.9	11.2	40.1	49.0	54	-5.0
11490	AV	39.2	245	H	38.9	11.2	40.1	49.9	54	-4.1
High Channel (5825MHz)										
11650	PK	49.6	151	V	38.9	11.5	40.1	59.8	74	-14.2
11650	PK	49.2	151	H	38.9	11.5	40.1	58.8	74	-15.2
11650	AV	37.5	151	V	38.9	11.5	40.1	48.9	54	-5.1
11650	AV	36.7	151	H	38.9	11.5	40.1	48.4	54	-5.6

➤ Out of Band edge

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.88	-27
	5715 to 5725	-25.87	-17
Highest	5850 to 5860	-26.12	-17
	Above 5860	-38.11	-27

Note: the data just list the worst cases

- Antenna Type 2
- Harmonics And Spurious Emissions

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (5180MHz)										
10380	PK	54.4	250	V	40.7	8.9	39.6	64.5	74	-9.5
10380	PK	51.4	250	H	40.7	8.9	39.6	61.3	74	-12.7
10380	AV	38.6	250	V	40.7	8.9	39.6	49.2	54	-4.8
10380	AV	36.6	250	H	40.7	8.9	39.6	47.9	54	-6.1
High Channel (5230MHz)										
10460	PK	54.2	229	V	40.7	10.5	39.6	66.5	74	-7.5
10460	PK	52.8	229	H	40.7	10.5	39.6	63.1	74	-10.9
10460	AV	37.4	229	V	40.7	10.5	39.6	49.2	54	-4.8
10460	AV	36.2	229	H	40.7	10.5	39.6	49.2	54	-4.8

- Out of Band edge

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-43.45	-27
Highest	Above 5350	-40.12	-27

Note: the data just list the worst cases

- For the frequency band 5.725-5.850GHz
- Harmonics And Spurious Emissions

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (5725MHz)										
11490	PK	51.4	245	V	38.9	11.2	40.1	61.4	74	-12.6
11490	PK	53.3	245	H	38.9	11.2	40.1	64.2	74	-9.8
11490	AV	37.7	245	V	38.9	11.2	40.1	48.1	54	-5.9
11490	AV	39.7	245	H	38.9	11.2	40.1	49.8	54	-4.2
High Channel (5825MHz)										
11650	PK	50.0	151	V	38.9	11.5	40.1	58.9	74	-15.1
11650	PK	50.1	151	H	38.9	11.5	40.1	60.5	74	-13.5
11650	AV	37.3	151	V	38.9	11.5	40.1	48.8	54	-5.2
11650	AV	38.1	151	H	38.9	11.5	40.1	48.6	54	-5.4

- Out of Band edge

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.22	-27
	5715 to 5725	-26.11	-17
Highest	5850 to 5860	-27.02	-17
	Above 5860	-39.05	-27

Note: the data just list the worst cases

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

9.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at frequency 5190MHz				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	14.8V	-30	87	0.0168
100%		-20	109	0.0211
100%		-10	102	0.0197
100%		0	102	0.0196
100%		+10	101	0.0194
100%		+20	85	0.0164
100%		+30	89	0.0171
100%		+40	102	0.0197
100%		+50	87	0.0168
Low Battery power		7	+20	87
High Battery power	36	+20	109	0.0211

U-NII-1:5725-5850MHz worst case at frequency 5745MHz				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	14.8V	-30	103	0.0180
100%		-20	114	0.0199
100%		-10	112	0.0196
100%		0	98	0.0170
100%		+10	101	0.0176
100%		+20	88	0.0153
100%		+30	107	0.0186
100%		+40	108	0.0187
100%		+50	91	0.0159
Low Battery power		7	+20	103
High Battery power	36	+20	114	0.0199

***** END OF REPORT *****