

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25QWCO 001	Auftrags-Nr.: <i>Order no.:</i>	P01739736	Seite 1 von 23 Page 1 of 23
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2024-12-11	
Auftraggeber: <i>Client:</i>	Beijing Roborock Technology Co., Ltd. Room 1001, Floor 10, Building 3, Yard 17, Anju Road, Changping District, Beijing, P.R. China			
Prüfgegenstand: <i>Test item:</i>	Robotic Vacuum Cleaner			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	RRW0PEP, RRE0PEE (Trademark: roborock)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5, Amendment 2, February 2021			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2024-12-11	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003886624-001~005 A003895735-001~002 A003888467-001~004			
Prüfzeitraum: <i>Testing period:</i>	2024-12-12 - 2025-01-16			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	X <u>Breeze Jiang</u>	genehmigt von: <i>authorized by:</i>	X <u>Bell Hu</u>	
Datum: <i>Date:</i>	2025-02-20 Signed by: Breeze Jiang	Ausstellungsdatum: <i>Issue date:</i>	2025-02-20 Signed by: Bell Hu	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2AN2O-RRE0PEE02 IC: 23317-RRE0PEE02, HVIN: RRE0PEE-BLM8			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25QWCO 001
Test report no.:

Seite 2 von 23
Page 2 of 23

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:

Seite 3 von 23
Page 3 of 23

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	8
2.5	MEASUREMENT UNCERTAINTY	8
2.6	LOCATION OF ORIGINAL DATA	8
2.7	STATUS OF FACILITY USED FOR TESTING	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5	SUBMITTED DOCUMENTS.....	11
4	TEST SET-UP AND OPERATION MODES.....	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1	Antenna Requirement.....	15
5.1.2	Maximum Peak Conducted Output Power	16
5.1.3	Conducted Power Spectral Density.....	17
5.1.4	6dB Bandwidth	18
5.1.5	99% Bandwidth.....	19
5.1.6	Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....	20
5.1.7	Radiated Spurious Emission	21
5.1.8	Conducted Emission on AC Mains.....	22
6	PHOTOGRAPHS OF THE TEST SET-UP	23
7	LIST OF TABLES.....	23

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:

Seite 5 von 23
Page 5 of 23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 2.4GHz Wi-Fi

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

1. TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, P. R. China.

FCC Accreditation Designation No.: 694916

ISED wireless device testing laboratory: 25069

2. TÜV Rheinland (Suzhou) Co., Ltd.

No.14 building and north half of No.10 workshop building, No.525, Yuewang Lingang South Road, Pingqian (Taicang) Modern Industrial Park, Shaxi Town, Taicang City, Jiangsu Province, China

A2LA accreditation certification number: 4301.04

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Radio Spectrum Testing (SRD-Tonscend)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2024-09-26	2025-09-25
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2024-09-26	2025-09-25
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2024-09-26	2025-09-25
DC power supply	Keysight	E3642A	MY61276100	2024-09-26	2025-09-25
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2024-09-26	2025-09-25
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2024-09-26	2025-09-25
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-09-29	2025-09-28
Signal Analyzer	R&S	FSV 40	101439	2024-09-29	2025-09-28
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2024-09-29	2025-09-28
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-09-29	2025-09-28
Amplifier	R&S	SCU-18F	180070	2024-09-29	2025-09-28
Amplifier	R&S	SCU40A	100475	2024-09-29	2025-09-28

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:

Seite 7 von 23

Page 7 of 23

Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2025-09-27
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-09-28	2025-09-27
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-09-28	2025-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2025-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

TÜV Rheinland (Suzhou) Co., Ltd.

Conducted Emissions					
Equip.	Description	Model No.	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
9061503	Shielded enclosure	10.055x3.605x3.000	Frankonia	08.11.2023	08.11.2028
9023229	EMI test receiver	ESR3	Rohde&Schwarz	03.08.2024	03.08.2025
G1824248	Dual display multimeter	F45	Fluke	28.06.2024	28.06.2025
9062744	EMI measurement software	EMC32-E+(10.60.20)	Rohde&Schwarz	NA*	NA*
G1811378	3m semi-anechoic chamber	SAC3	Frankonia	03.12.2023	03.12.2026
G1811391	EMI test receiver	ESCI	Rohde&Schwarz	17.10.2024	17.10.2025
G1811425	Bilog antenna	CBL 6112D	Teseq	20.04.2023	20.04.2026
9062745	EMI measurement software	EMC32-MEB (10.60.20)	Rohde&Schwarz	NA*	NA*
G1822702	Spectrum analyser	FSV40	Rohde&Schwarz	15.07.2024	15.07.2025
G1825371	Preamplifier	EMC051845SE	Taiwan EMCI	24.07.2024	24.07.2025
G1822694	Double ridged broadband horn antenna	BBHA 9120 D	Schwarzbeck	24.03.2021	24.03.2026

* No entry for devices that are not subject to regular calibration or require initial verification/calibration only.

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

TÜV Rheinland (Shenzhen) Co., Ltd.

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB

TÜV Rheinland (Suzhou) Co., Ltd.

Parameter	Uncertainty
Conducted Emission	2.33 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is Robotic Vacuum Cleaner, which supports 2.4GHz Wi-Fi wireless technology.

The EUT contains wireless module BL-M8189FS6.

The model RRE0PEE is identical with the test model RRW0PEP except the Mop motor and main PCB different as below:

Model	Robotic different
RRW0PEP	1. Mop motor stretchable: model: GM-RS385Y-24065 model: RS385PH-2466 2. Main brush motor: model: RS-385PH-2466 model: GM-RS385F-24065
RRE0PEE	1. Mop motor non-scalable: model: JL-385S-2270 model: GM-RS385Y-24065 model: KNRK-385SHP-2564 2. Main brush motor: model: RS-385PH-2466 model: GM-RS385-24065 3. RRE0PEE removes the side drag function on the basis of RRW0PEP motherboard and removes the corresponding electronic devices.

Based on the above differences in FCC SDOC report, this report test model RRW0PEP.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Robotic Vacuum Cleaner
Type Designation:	RRW0PEP, RRE0PEE
Trademark:	roborock
FCC ID:	2AN2O-RRE0PEE02
IC:	23317-RRE0PEE02
HVIN:	RRE0PEE-BLM8
Operating Voltage:	RRW0PEP: DC 20V@1.5A input via Empty Wash Fill Dock RRE0PEE: DC 20V@1.0A input via Empty Wash Fill Dock DC 14.4V@5200mAh(TYP) input via Lithium-ion battery
Testing Voltage:	AC 120V, 60Hz or Fully charged battery
Technical Specification of 2.4GHz Wi-Fi	
Operating Frequency:	2412 - 2462MHz for 802.11b/g/n(HT20) 2422 - 2452MHz for 802.11n(HT40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)

Prüfbericht - Nr.: CN25QWCO 001
*Test Report No.:*Seite 10 von 23
Page 10 of 23

Channel Separation:	5 MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	2.28 dBi (Provided by the Client)

Table 4: RF Channel and Frequency of Wi-Fi 802.11 b/g/n

RF Channel	802.11 b/g/n(HT20)	802.11 n(HT40)
	Frequency (MHz)	Frequency (MHz)
01	2412	/
02	2417	/
03	2422	2422
04	2427	2427
05	2432	2432
06	2437	2437
07	2442	2442
08	2447	2447
09	2452	2452
10	2457	/
11	2462	/

Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Test frequencies are lowest channel: 2422 MHz, middle channel: 2437 MHz and highest channel: 2452 MHz for 802.11n(HT40)

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 2.4GHz Wi-Fi wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Charging and Wireless link
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Operation Description
- PCB Layout
- User Manual
- Block Diagram
- FCC/IC Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model RRW0PEP in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Docking Station	roborock	EWFD28LRR	N/A	Input: AC 120V 60Hz, Output: DC 20V 2.5A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

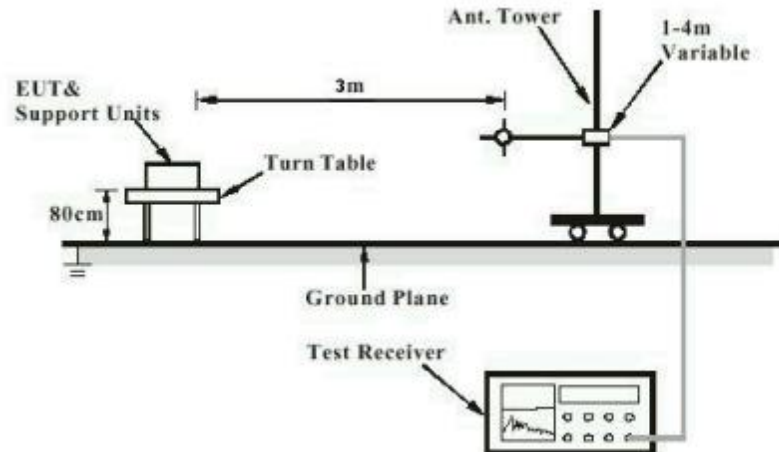


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

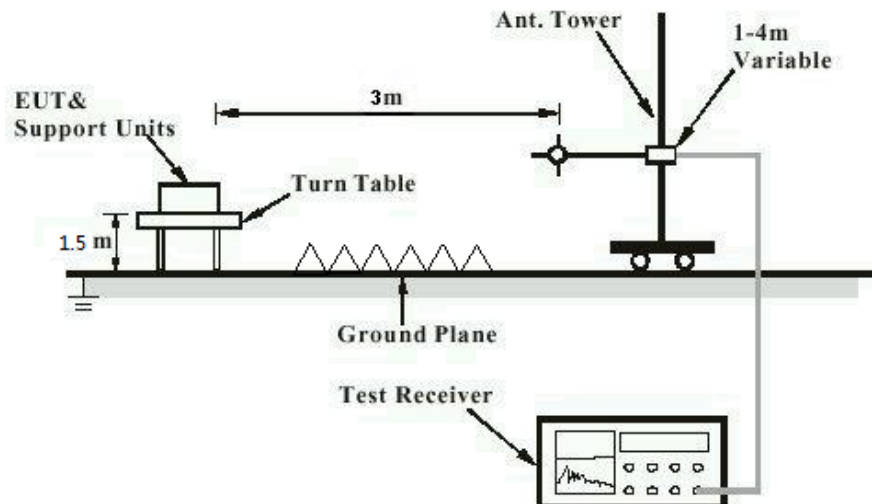


Diagram of Measurement Configuration for Mains Conduction Measurement


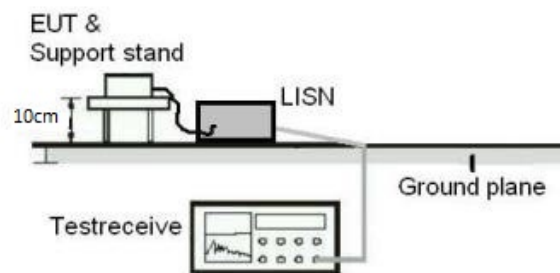


Diagram of Measurement Configuration for Conducted Transmitter Measurement

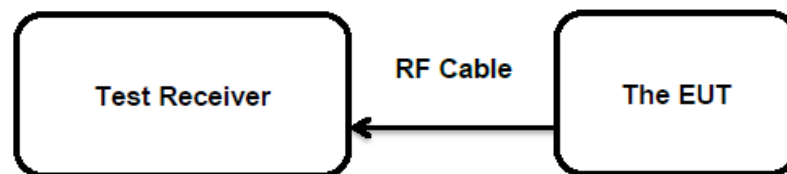

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has a PIFA Antenna, the directional gain of antenna is 2.28 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard	:	FCC Part 15.247(b)(3) RSS-247 Clause 5.4(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 1.0 W (Maximum Conducted Peak Power) <4 W (e.i.r.p.)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-07
Input voltage	:	Fully charged battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.5 °C
Relative humidity	:	55.2 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

Table 6: Test Result of Maximum Peak Conducted Output Power

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)	
			(dBm)	(W)		
802.11b	1 Mbps	2412	17.85	0.0610	< 1.0	
		2437	18.35	0.0684		
		2462	18.06	0.0640		
802.11g	6 Mbps	2412	22.00	0.1585		
		2437	21.58	0.1439		
		2462	22.49	0.1774		
802.11n (HT20)	MCS0	2412	21.94	0.1563		
		2437	21.50	0.1413		
		2462	21.93	0.1560		
802.11n (HT40)	MCS0	2422	21.96	0.1570		
		2437	21.61	0.1449		
		2452	21.96	0.1570		
Maximum Measured Value			22.49	0.1774		
Max. e.i.r.p.=22.49dBm+2.28dBi=24.77dBm, which is less than 36dBm=4W.						

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.28 dBi

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:Seite 17 von 23
Page 17 of 23

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e) RSS-247 Clause 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-01-07
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 55.2 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:Seite 18 von 23
Page 18 of 23

5.1.4 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(2)
RSS-247 Clause 5.2(a)

Basic standard : ANSI C63.10: 2013

Limits : > 500 kHz

Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-01-07

Input voltage : Fully charged battery

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : 24.5 °C

Relative humidity : 55.2 %

Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:

Seite 19 von 23
Page 19 of 23

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(a) RSS-Gen Clause 6.7
Basic standard	: ANSI C63.10: 2013
Limits	: Within assigned band 2400-2483.5MHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-01-07
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 55.2 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25QWCO 001

Test Report No.:

Seite 20 von 23

Page 20 of 23

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-01-07
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 55.2 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:Seite 21 von 23
Page 21 of 23

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(d) & FCC Part 15.205
RSS-247 Clause 3.3 & 5.5

Basic standard : ANSI C63.10: 2013

Limits : Refer to 15.209(a) of FCC part 15.247(d)
RSS-Gen Section 8.9 & 8.10

Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2025-01-11

Input voltage : Fully charged battery

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : Refer to test results

Relative humidity : Refer to test results

Atmospheric pressure : 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25QWCO 001
Test Report No.:Seite 22 von 23
Page 22 of 23

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Section 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-01-11
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: Refer to test results
Relative humidity	: Refer to test results
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	8
Table 3: Technical Specification of EUT.....	9
Table 4: RF Channel and Frequency of Wi-Fi 802.11 b/g/n.....	11
Table 5: List of Accessories and Auxiliary Equipment.....	12
Table 6: Test Result of Maximum Peak Conducted Output Power	16