


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

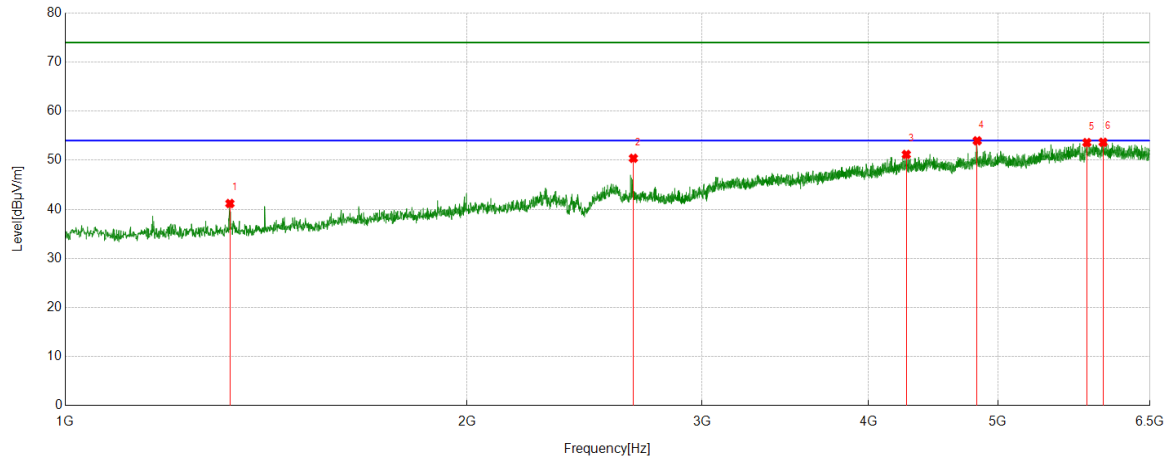


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1328.6661	42.27	-1.09	41.18	74.00	-32.82	Vertical
2	2665.3332	44.27	6.13	50.40	74.00	-23.60	Vertical
3	4268.7836	37.21	13.96	51.17	74.00	-22.83	Vertical
4	4824.3530	38.29	15.67	53.96	74.00	-20.04	Vertical
5	5829.6037	34.91	18.69	53.60	74.00	-20.40	Vertical
6	5994.6243	35.38	18.28	53.66	74.00	-20.34	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

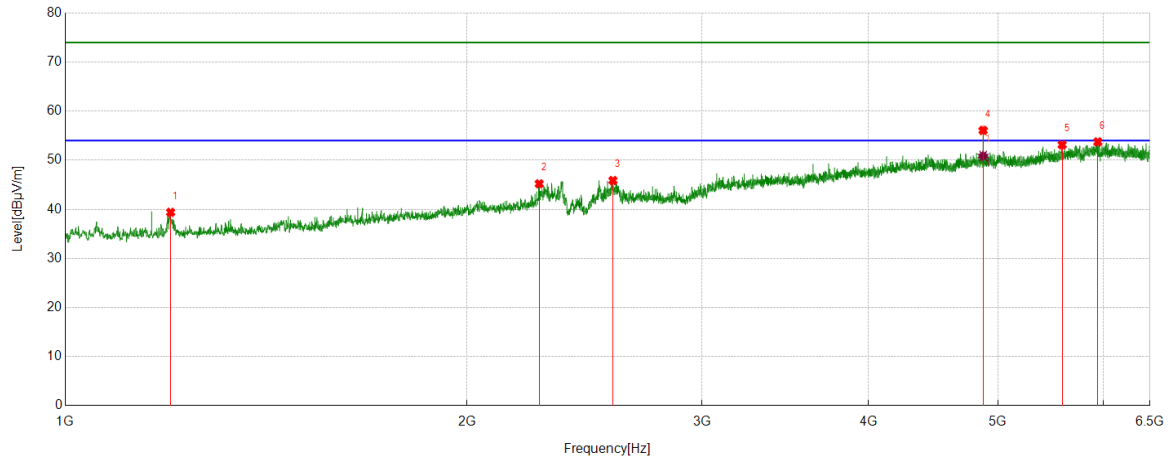

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1199.3999	41.67	-2.28	39.39	74.00	-34.61	Horizontal
2	2265.8457	41.02	4.18	45.20	74.00	-28.80	Horizontal
3	2573.1966	40.09	5.78	45.87	74.00	-28.13	Horizontal
4	4873.8592	41.00	15.08	56.08	74.00	-17.92	Horizontal
5	5586.1983	35.79	17.35	53.14	74.00	-20.86	Horizontal
6	5940.3050	35.31	18.43	53.74	74.00	-20.26	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4873.8592	35.80	15.08	50.88	54.00	-3.12	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

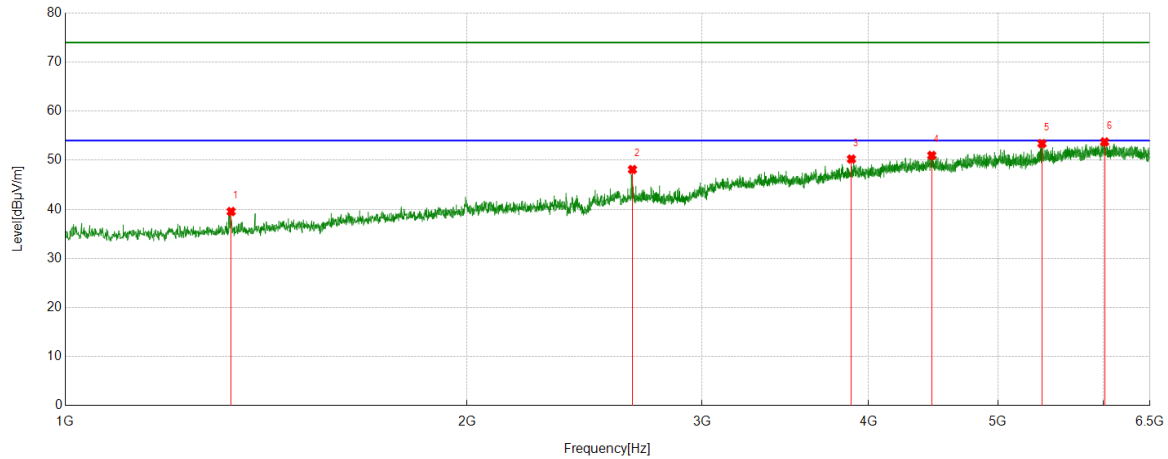


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.4164	40.64	-1.09	39.55	74.00	-34.45	Vertical
2	2661.2077	42.06	6.05	48.11	74.00	-25.89	Vertical
3	3883.0479	37.81	12.43	50.24	74.00	-23.76	Vertical
4	4460.6201	36.07	14.91	50.98	74.00	-23.02	Vertical
5	5395.0494	36.63	16.76	53.39	74.00	-20.61	Vertical
6	6010.4388	35.60	18.13	53.73	74.00	-20.27	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

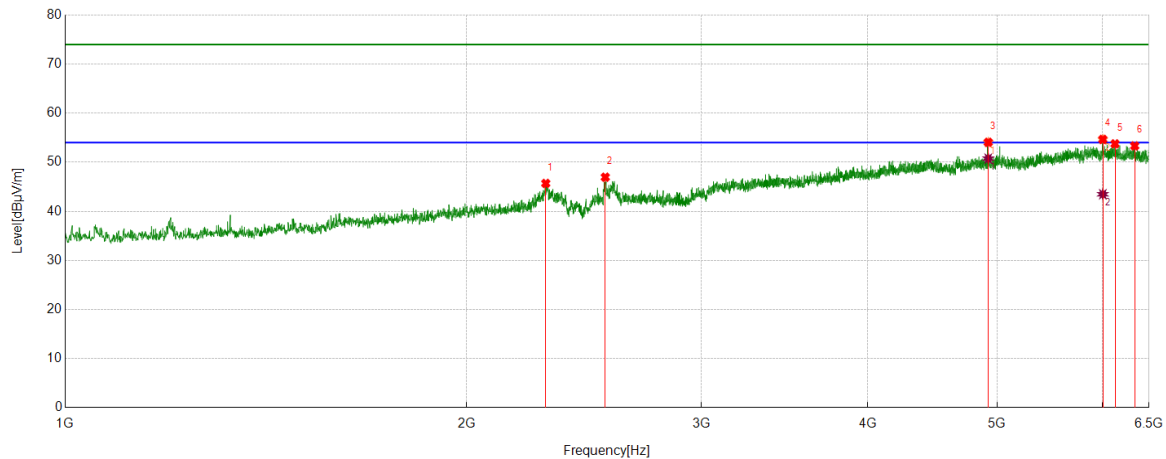

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2293.3492	41.38	4.31	45.69	74.00	-28.31	Horizontal
2	2541.5677	40.97	5.98	46.95	74.00	-27.05	Horizontal
3	4924.0530	38.72	15.34	54.06	74.00	-19.94	Horizontal
4	6001.5002	36.43	18.23	54.66	74.00	-19.34	Horizontal
5	6129.3912	35.50	18.25	53.75	74.00	-20.25	Horizontal
6	6341.1676	34.44	18.89	53.33	74.00	-20.67	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4924.0530	35.40	15.34	50.74	54.00	-3.26	Horizontal
2	6001.5002	25.25	18.23	43.48	54.00	-10.52	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

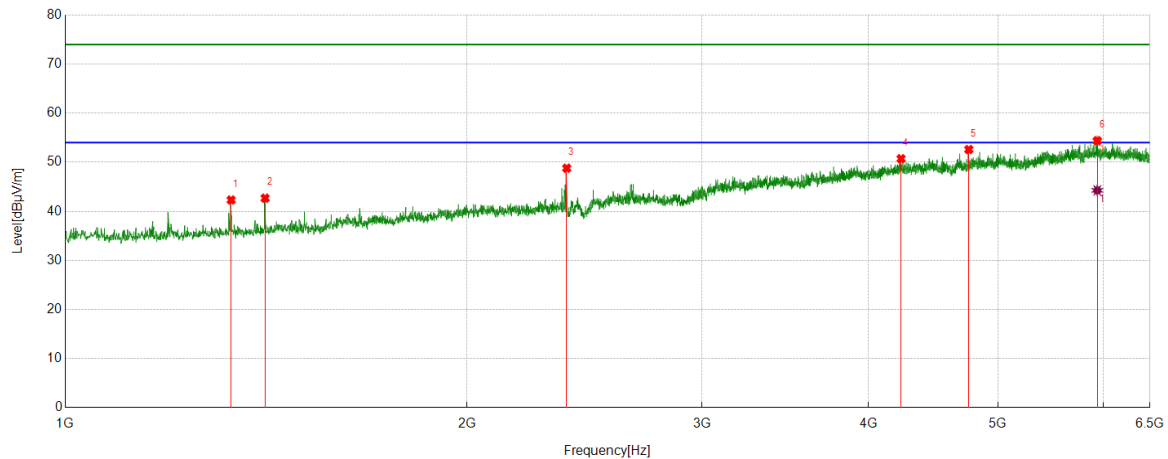

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1331.4164	43.40	-1.09	42.31	74.00	-31.69	Vertical
2	1411.8640	43.96	-1.28	42.68	74.00	-31.32	Vertical
3	2375.8595	43.96	4.83	48.79	74.00	-25.21	Vertical
4	4230.2788	36.84	13.88	50.72	74.00	-23.28	Vertical
5	4754.9069	38.09	14.50	52.59	74.00	-21.41	Vertical
6	5934.8044	35.71	18.68	54.39	74.00	-19.61	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5934.8044	25.59	18.68	44.27	54.00	-9.73	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

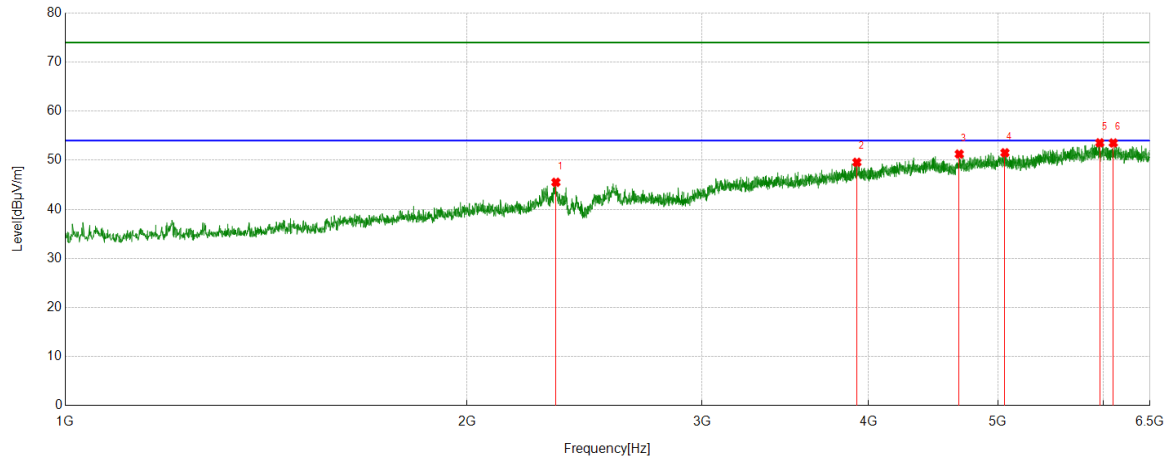


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.8540	40.48	5.03	45.51	74.00	-28.49	Horizontal
2	3920.1775	37.22	12.36	49.58	74.00	-24.42	Horizontal
3	4677.2097	36.32	14.94	51.26	74.00	-22.74	Horizontal
4	5060.8826	35.67	15.85	51.52	74.00	-22.48	Horizontal
5	5960.9326	35.06	18.49	53.55	74.00	-20.45	Horizontal
6	6101.2002	35.19	18.33	53.52	74.00	-20.48	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

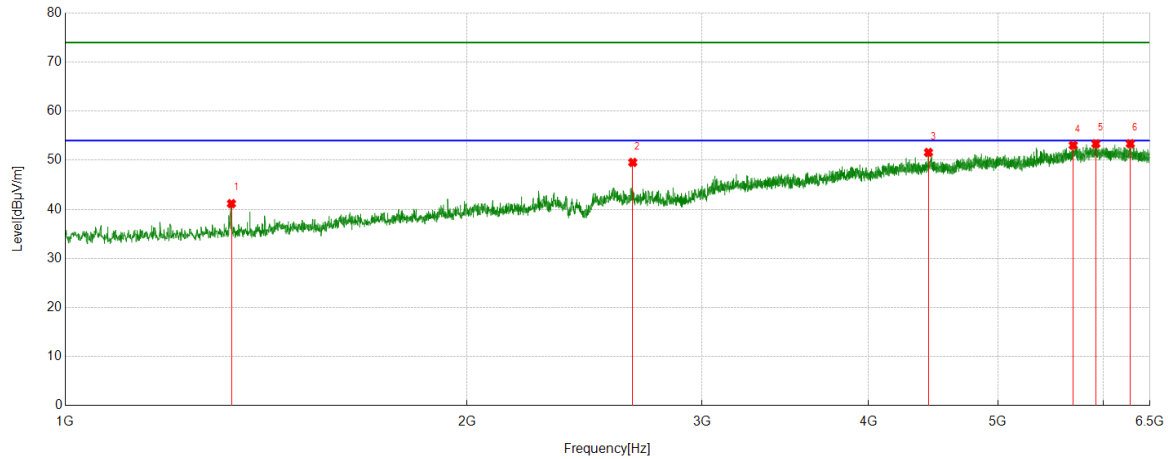


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1332.1040	42.27	-1.11	41.16	74.00	-32.84	Vertical
2	2662.5828	43.48	6.08	49.56	74.00	-24.44	Vertical
3	4435.1794	37.26	14.32	51.58	74.00	-22.42	Vertical
4	5693.4617	35.64	17.41	53.05	74.00	-20.95	Vertical
5	5921.0526	34.65	18.71	53.36	74.00	-20.64	Vertical
6	6283.4104	34.72	18.65	53.37	74.00	-20.63	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

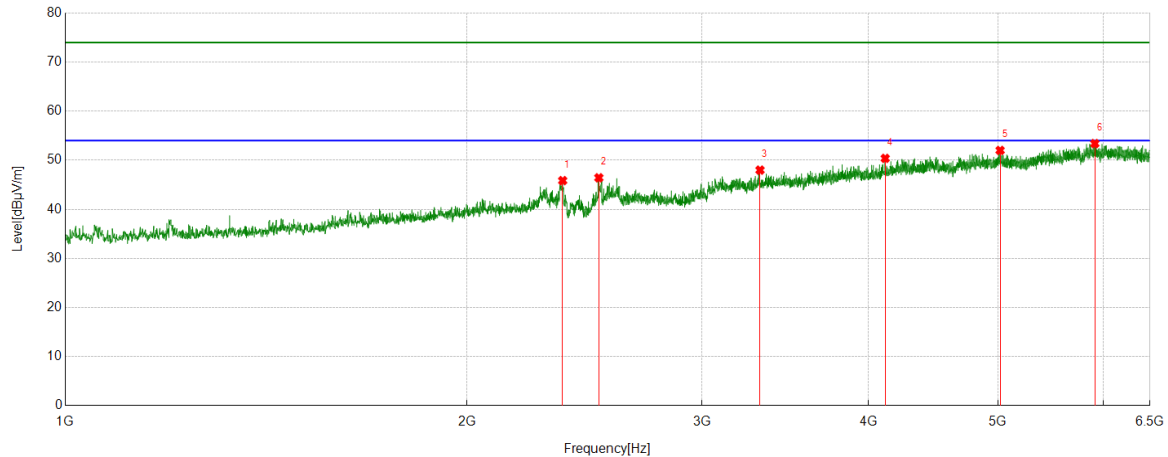


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2359.3574	41.07	4.78	45.85	74.00	-28.15	Horizontal
2	2511.3139	40.55	5.88	46.43	74.00	-27.57	Horizontal
3	3316.4771	37.79	10.20	47.99	74.00	-26.01	Horizontal
4	4116.1395	36.77	13.61	50.38	74.00	-23.62	Horizontal
5	5018.9399	36.52	15.49	52.01	74.00	-21.99	Horizontal
6	5910.0513	35.22	18.18	53.40	74.00	-20.60	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

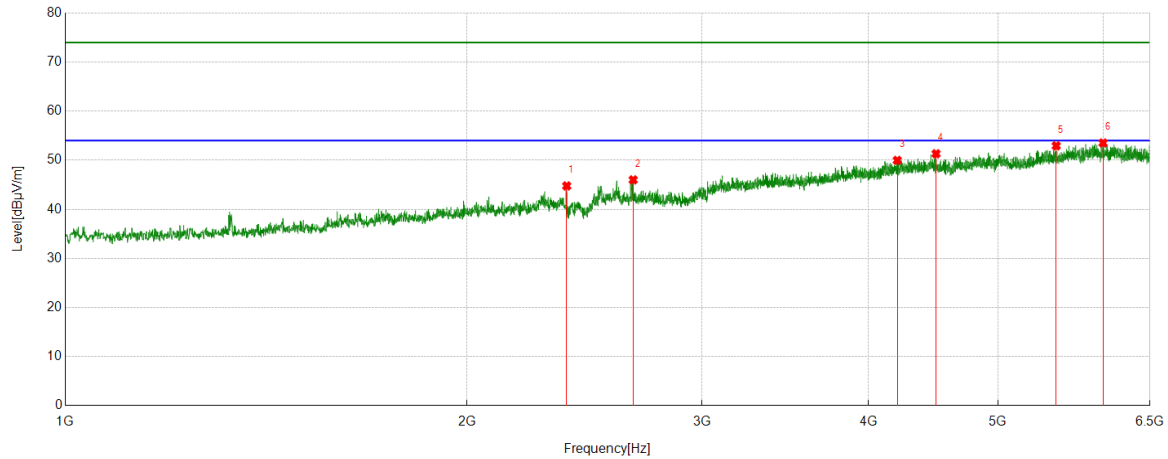


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2375.8595	39.94	4.83	44.77	74.00	-29.23	Vertical
2	2664.6456	39.88	6.12	46.00	74.00	-28.00	Vertical
3	4202.7753	36.74	13.23	49.97	74.00	-24.03	Vertical
4	4493.6242	37.13	14.19	51.32	74.00	-22.68	Vertical
5	5529.1286	36.18	16.75	52.93	74.00	-21.07	Vertical
6	5994.6243	35.24	18.28	53.52	74.00	-20.48	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

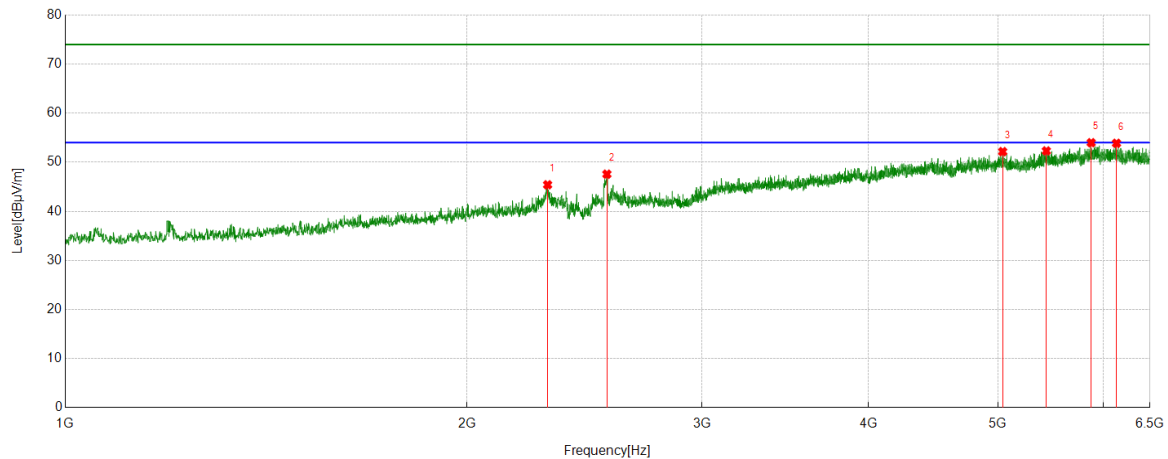


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2298.8499	41.28	4.13	45.41	74.00	-28.59	Horizontal
2	2546.3808	41.70	5.87	47.57	74.00	-26.43	Horizontal
3	5040.9426	36.49	15.67	52.16	74.00	-21.84	Horizontal
4	5435.617	34.89	17.42	52.31	74.00	-21.69	Horizontal
5	5872.9216	36.13	17.85	53.98	74.00	-20.02	Horizontal
6	6134.8919	35.57	18.29	53.86	74.00	-20.14	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

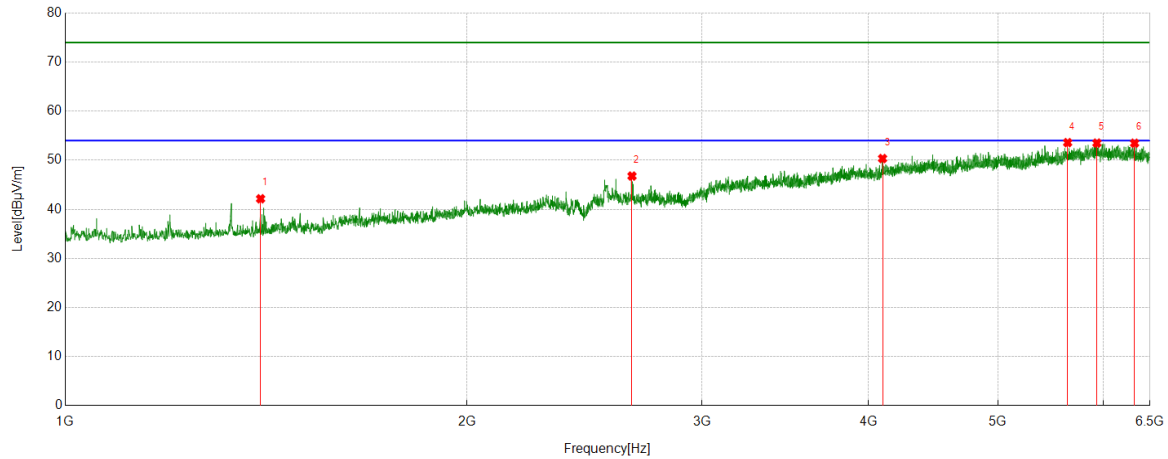


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1400.8626	43.54	-1.39	42.15	74.00	-31.85	Vertical
2	2659.1449	40.71	6.07	46.78	74.00	-27.22	Vertical
3	4097.5747	36.78	13.57	50.35	74.00	-23.65	Vertical
4	5639.1424	35.98	17.61	53.59	74.00	-20.41	Vertical
5	5931.3664	34.65	18.85	53.50	74.00	-20.50	Vertical
6	6329.4787	34.37	19.10	53.47	74.00	-20.53	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

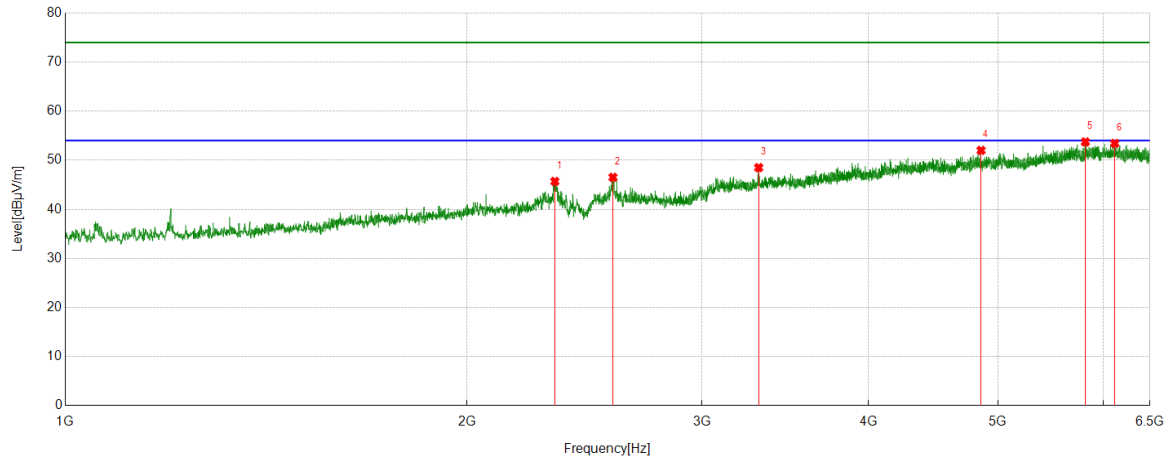


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2327.7285	40.70	4.99	45.69	74.00	-28.31	Horizontal
2	2573.1966	40.74	5.78	46.52	74.00	-27.48	Horizontal
3	3308.9136	37.97	10.53	48.50	74.00	-25.50	Horizontal
4	4856.6696	36.80	15.21	52.01	74.00	-21.99	Horizontal
5	5814.4768	35.39	18.35	53.74	74.00	-20.26	Horizontal
6	6117.0146	35.26	18.17	53.43	74.00	-20.57	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

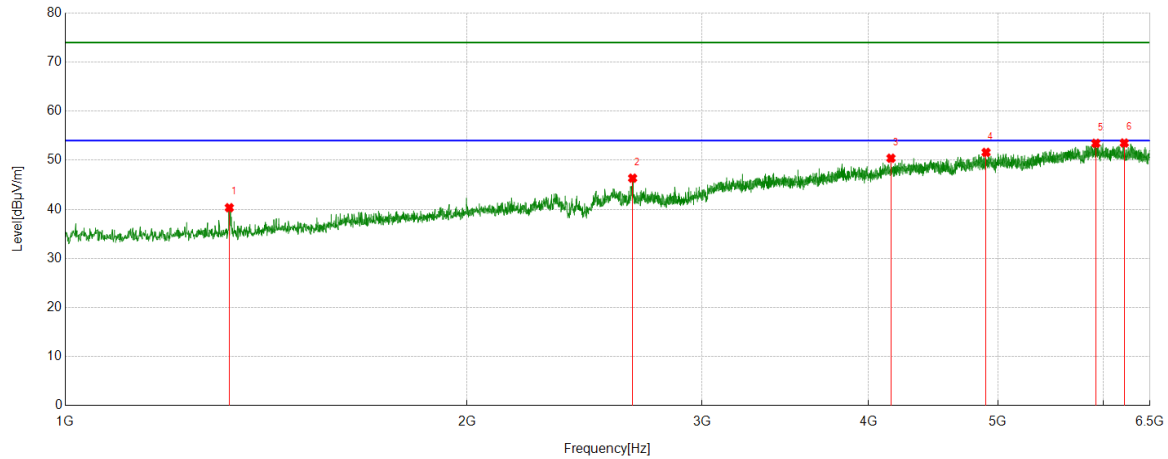


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1327.2909	41.46	-1.13	40.33	74.00	-33.67	Vertical
2	2661.8952	40.28	6.07	46.35	74.00	-27.65	Vertical
3	4157.3947	37.00	13.41	50.41	74.00	-23.59	Vertical
4	4898.6123	36.32	15.28	51.60	74.00	-22.40	Vertical
5	5920.3650	34.75	18.70	53.45	74.00	-20.55	Vertical
6	6218.0898	35.19	18.32	53.51	74.00	-20.49	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

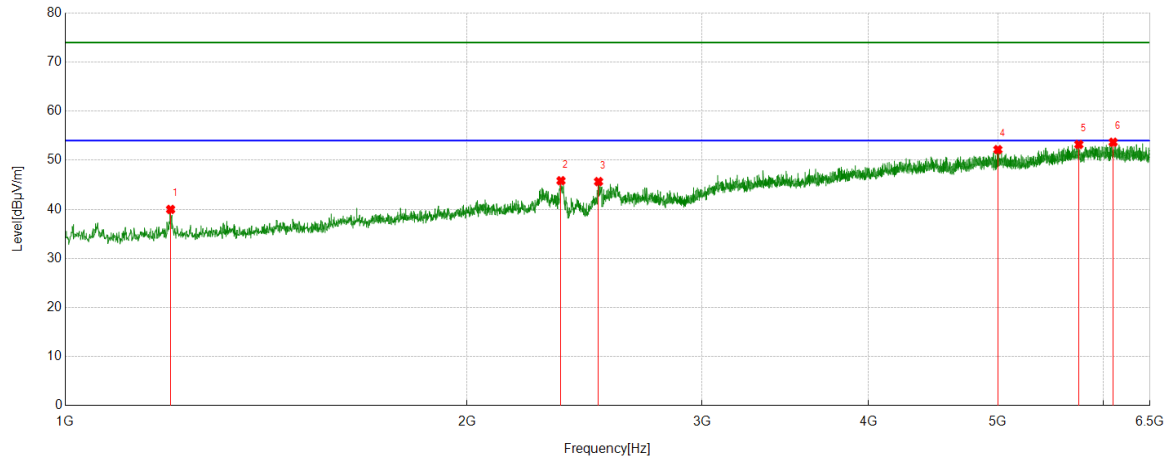


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1199.3999	42.26	-2.28	39.98	74.00	-34.02	Horizontal
2	2352.4816	41.05	4.78	45.83	74.00	-28.17	Horizontal
3	2509.9387	39.74	5.91	45.65	74.00	-28.35	Horizontal
4	4999.6875	36.87	15.29	52.16	74.00	-21.84	Horizontal
5	5749.1561	35.53	17.68	53.21	74.00	-20.79	Horizontal
6	6099.8250	35.29	18.38	53.67	74.00	-20.33	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

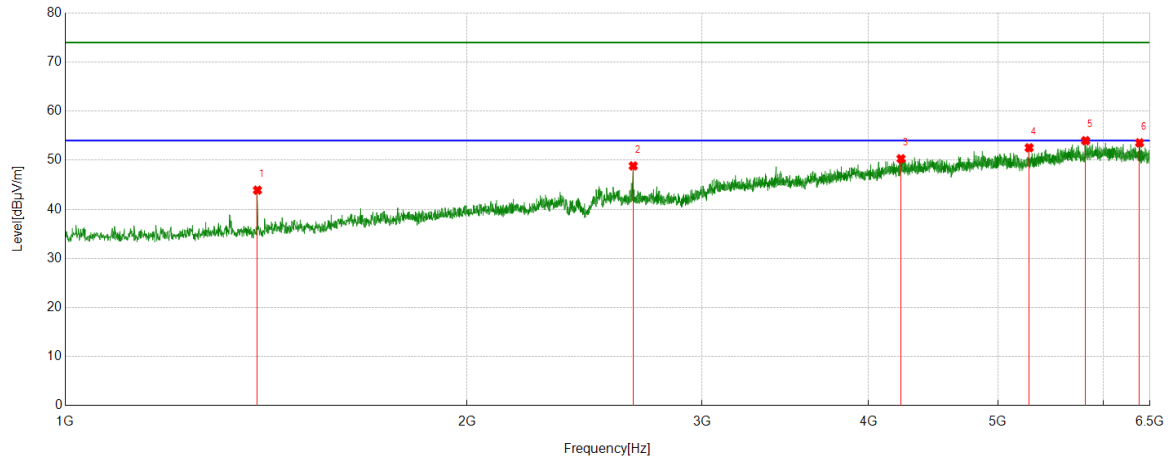


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1393.2992	45.23	-1.33	43.90	74.00	-30.10	Vertical
2	2664.6456	42.72	6.12	48.84	74.00	-25.16	Vertical
3	4230.2788	36.43	13.88	50.31	74.00	-23.69	Vertical
4	5276.7846	37.09	15.45	52.54	74.00	-21.46	Vertical
5	5816.5396	35.52	18.46	53.98	74.00	-20.02	Vertical
6	6384.4856	34.64	18.91	53.55	74.00	-20.45	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

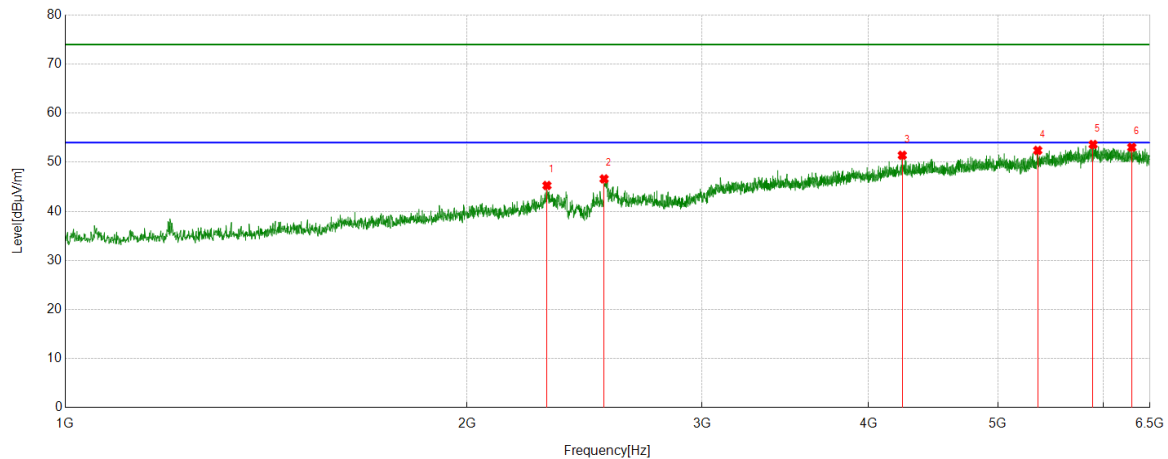


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2296.0995	41.05	4.21	45.26	74.00	-28.74	Horizontal
2	2534.0043	40.88	5.72	46.60	74.00	-27.40	Horizontal
3	4239.2174	37.46	13.95	51.41	74.00	-22.59	Horizontal
4	5355.8570	36.25	16.16	52.41	74.00	-21.59	Horizontal
5	5892.1740	35.64	17.97	53.61	74.00	-20.39	Horizontal
6	6299.2249	34.28	18.76	53.04	74.00	-20.96	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

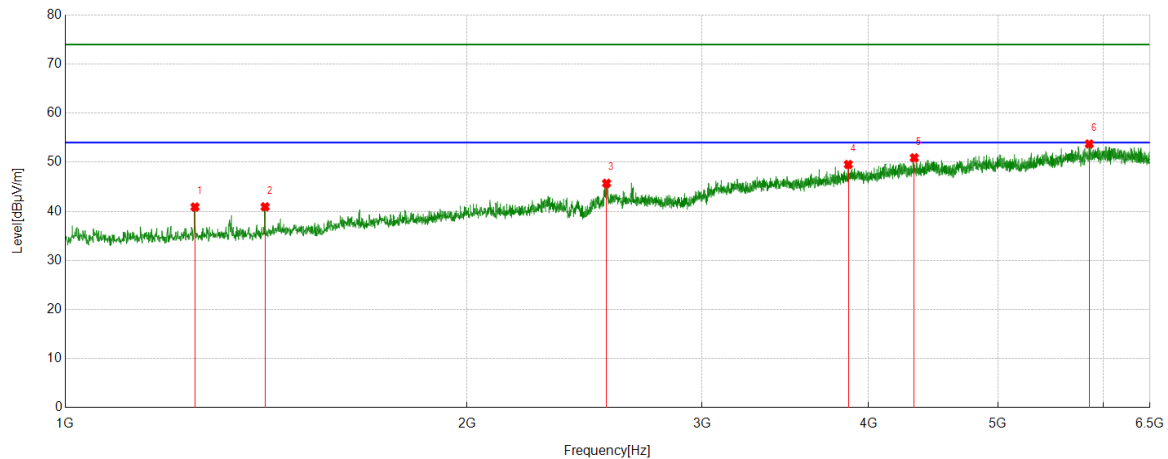


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1250.9689	42.41	-1.53	40.88	74.00	-33.12	Vertical
2	1411.8640	42.20	-1.28	40.92	74.00	-33.08	Vertical
3	2545.0056	39.81	5.90	45.71	74.00	-28.29	Vertical
4	3862.4203	37.48	12.07	49.55	74.00	-24.45	Vertical
5	4327.9160	37.25	13.65	50.90	74.00	-23.10	Vertical
6	5853.6692	35.77	17.95	53.72	74.00	-20.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

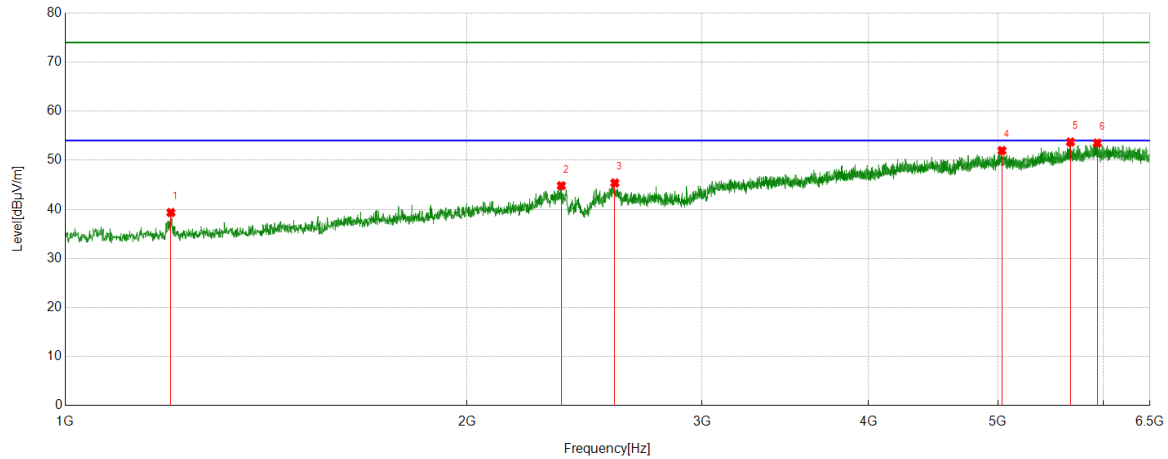


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1200.0875	41.63	-2.28	39.35	74.00	-34.65	Horizontal
2	2353.8567	40.03	4.77	44.80	74.00	-29.20	Horizontal
3	2581.4477	39.26	6.11	45.37	74.00	-28.63	Horizontal
4	5034.7543	36.24	15.72	51.96	74.00	-22.04	Horizontal
5	5666.6458	36.34	17.36	53.70	74.00	-20.30	Horizontal
6	5935.4919	34.84	18.65	53.49	74.00	-20.51	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

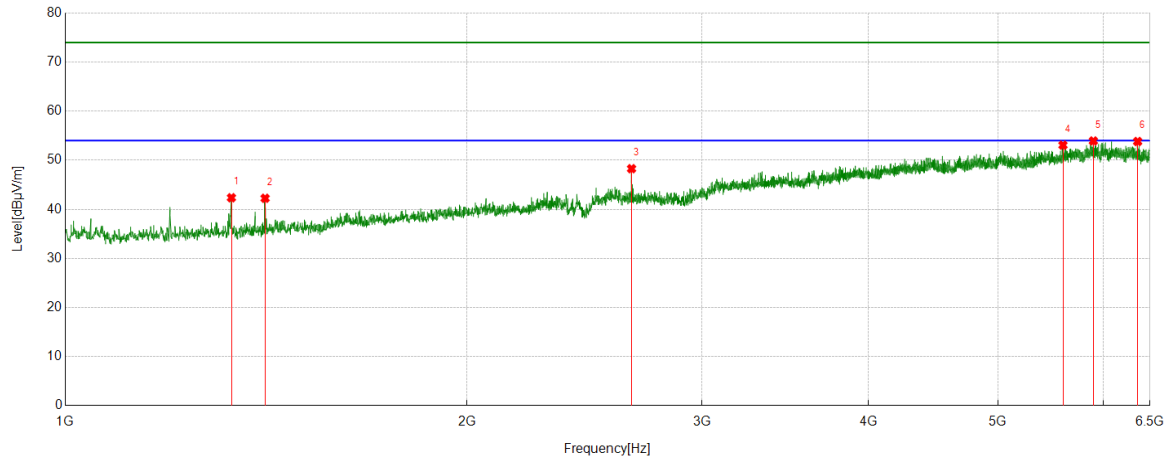


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1332.1040	43.47	-1.11	42.36	74.00	-31.64	Vertical
2	1411.8640	43.53	-1.28	42.25	74.00	-31.75	Vertical
3	2657.0821	42.12	6.16	48.28	74.00	-25.72	Vertical
4	5593.7617	35.66	17.41	53.07	74.00	-20.93	Vertical
5	5894.9244	35.97	17.96	53.93	74.00	-20.07	Vertical
6	6363.1704	34.83	18.99	53.82	74.00	-20.18	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

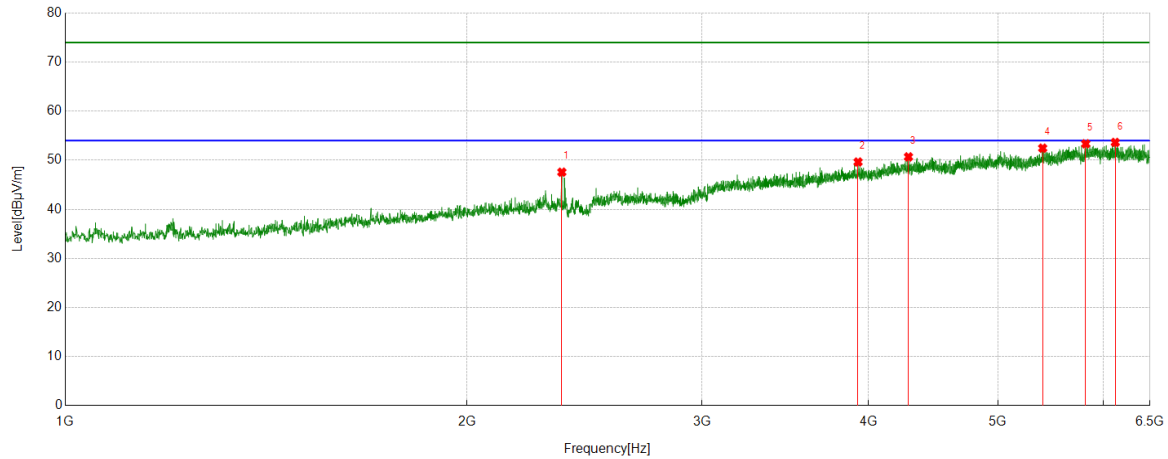


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2355.9195	42.79	4.78	47.57	74.00	-26.43	Horizontal
2	3927.7410	37.15	12.49	49.64	74.00	-24.36	Horizontal
3	4284.5981	37.04	13.65	50.69	74.00	-23.31	Horizontal
4	5401.2377	35.55	16.91	52.46	74.00	-21.54	Horizontal
5	5817.9147	34.81	18.54	53.35	74.00	-20.65	Horizontal
6	6121.8277	35.37	18.26	53.63	74.00	-20.37	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

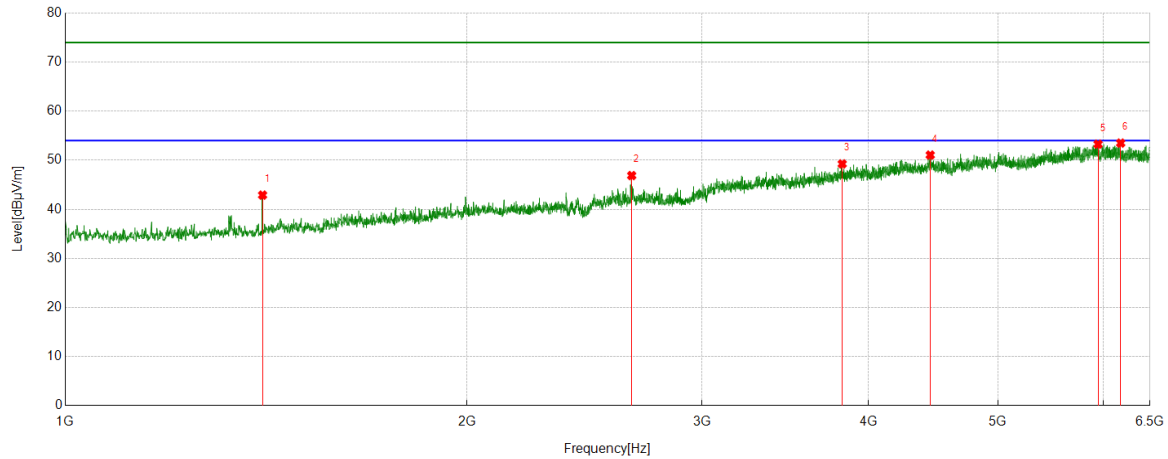


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1405.6757	44.25	-1.35	42.90	74.00	-31.10	Vertical
2	2657.7697	40.76	6.12	46.88	74.00	-27.12	Vertical
3	3821.8527	36.96	12.29	49.25	74.00	-24.75	Vertical
4	4448.9311	36.76	14.30	51.06	74.00	-22.94	Vertical
5	5943.0554	34.82	18.45	53.27	74.00	-20.73	Vertical
6	6179.5849	34.57	18.92	53.49	74.00	-20.51	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

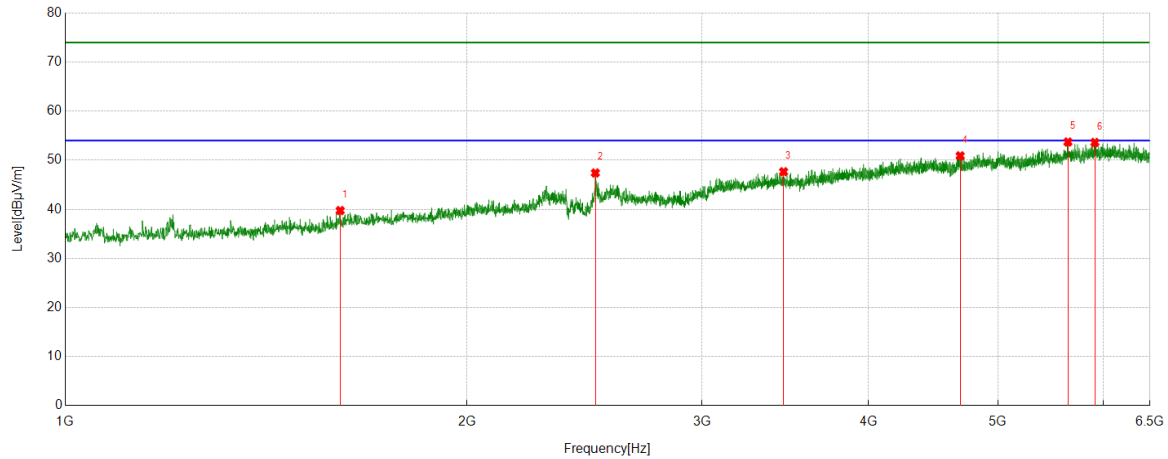


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1607.1384	38.95	0.80	39.75	74.00	-34.25	Horizontal
2	2496.1870	41.55	5.86	47.41	74.00	-26.59	Horizontal
3	3453.9942	37.00	10.66	47.66	74.00	-26.34	Horizontal
4	4684.7731	35.60	15.30	50.90	74.00	-23.10	Horizontal
5	5641.8927	36.14	17.58	53.72	74.00	-20.28	Horizontal
6	5910.0513	35.45	18.18	53.63	74.00	-20.37	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

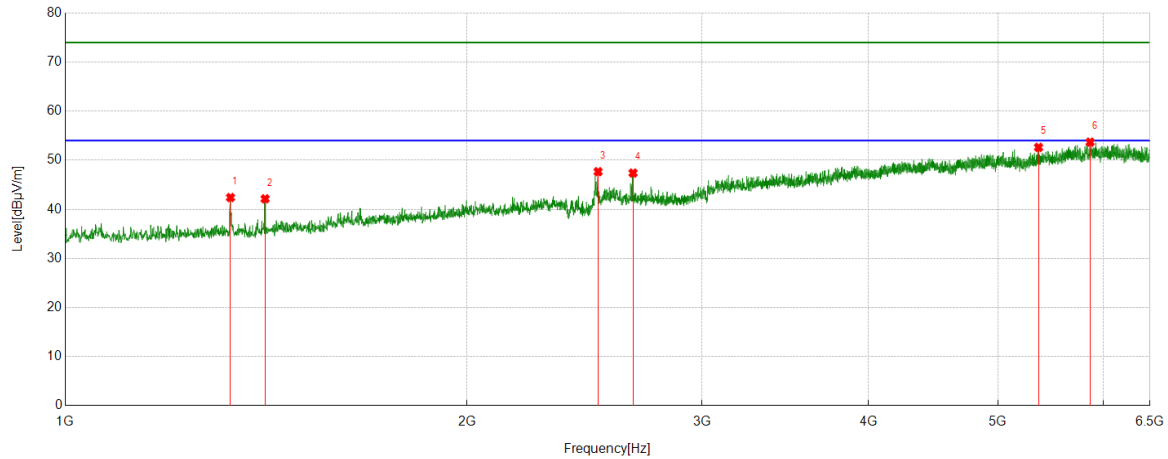

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1330.0413	43.48	-1.07	42.41	74.00	-31.59	Vertical
2	1411.8640	43.42	-1.28	42.14	74.00	-31.86	Vertical
3	2507.8760	41.76	5.91	47.67	74.00	-26.33	Vertical
4	2663.9580	41.28	6.11	47.39	74.00	-26.61	Vertical
5	5362.7328	36.31	16.31	52.62	74.00	-21.38	Vertical
6	5861.9202	35.87	17.81	53.68	74.00	-20.32	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

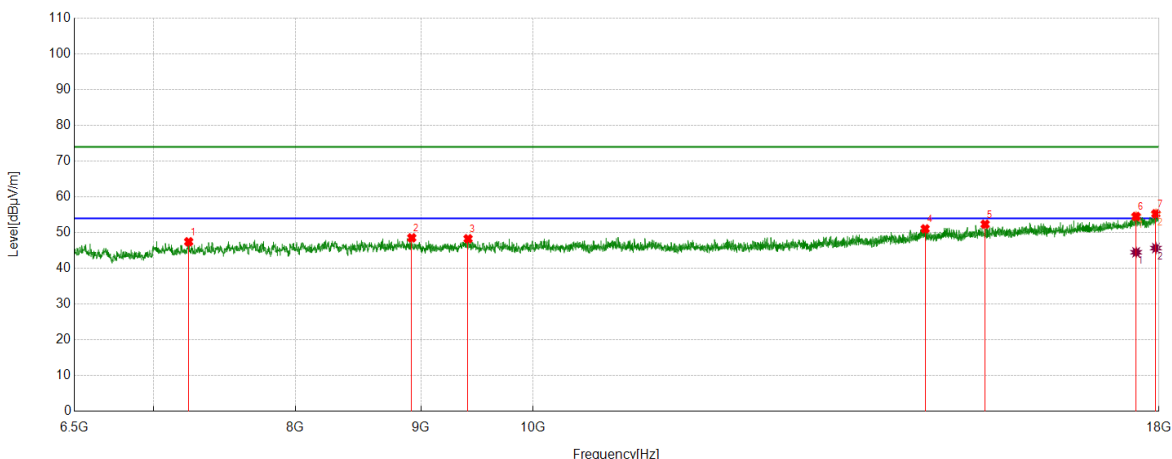

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7237.5297	43.67	3.78	47.45	74.00	-26.55	Horizontal
2	8923.9280	42.36	6.19	48.55	74.00	-25.45	Horizontal
3	9408.4261	41.76	6.53	48.29	74.00	-25.71	Horizontal
4	14451.8065	38.15	12.91	51.06	74.00	-22.94	Horizontal
5	15288.5361	38.87	13.48	52.35	74.00	-21.65	Horizontal
6	17617.5772	36.46	18.07	54.53	74.00	-19.47	Horizontal
7	17948.2435	35.80	19.48	55.28	74.00	-18.72	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17617.5772	26.43	18.07	44.50	54.00	-9.50	Horizontal
2	17948.2435	26.20	19.48	45.68	54.00	-8.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

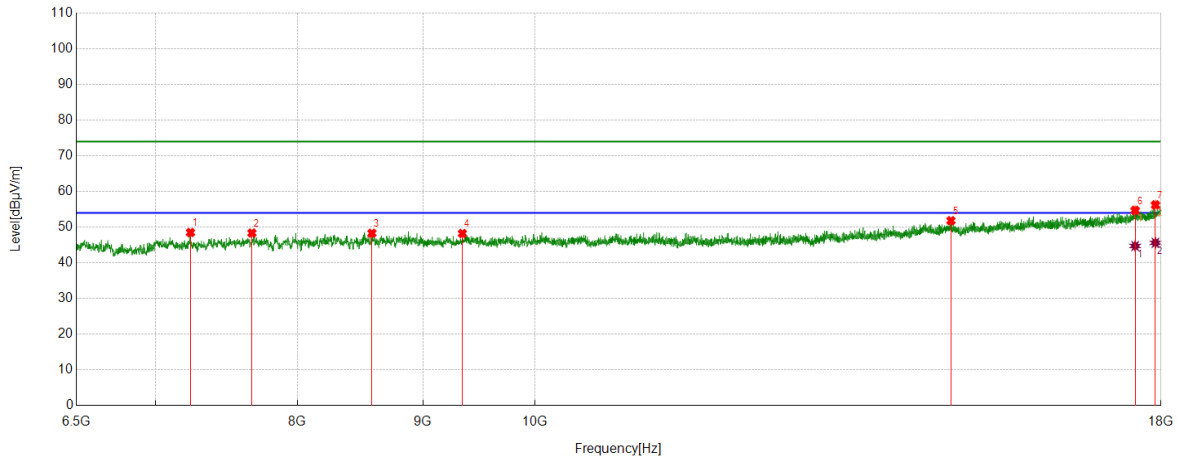

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7236.0920	44.70	3.81	48.51	74.00	-25.49	Vertical
2	7665.9582	43.19	5.17	48.36	74.00	-25.64	Vertical
3	8580.3225	41.87	6.43	48.30	74.00	-25.70	Vertical
4	9340.8551	41.88	6.35	48.23	74.00	-25.77	Vertical
5	14778.1598	38.97	12.86	51.83	74.00	-22.17	Vertical
6	17568.6961	36.82	17.89	54.71	74.00	-19.29	Vertical
7	17906.5508	37.01	19.23	56.24	74.00	-17.76	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17568.6961	26.84	17.89	44.73	54.00	-9.27	Vertical
2	17906.5508	26.40	19.23	45.63	54.00	-8.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

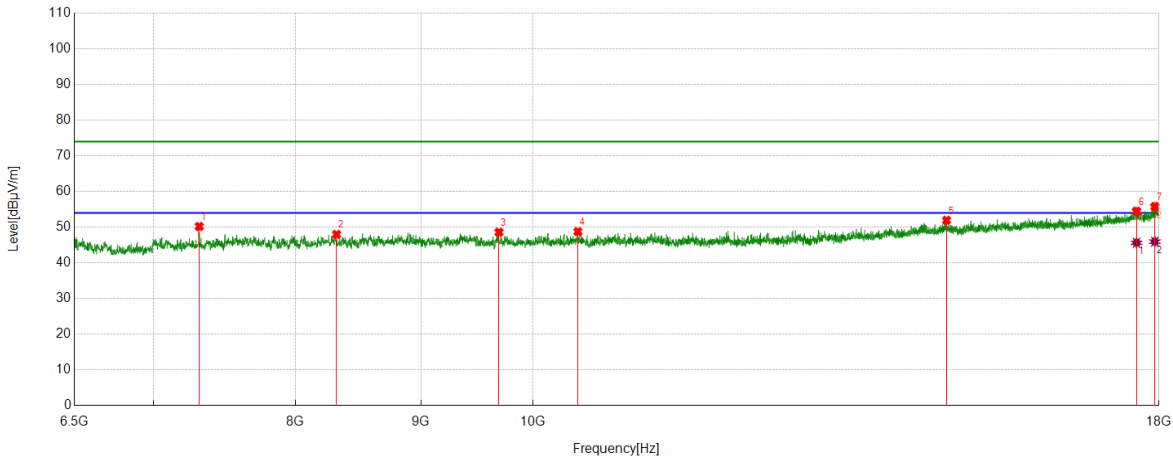

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7309.4137	46.35	3.85	50.20	74.00	-23.80	Horizontal
2	8315.7895	41.90	6.08	47.98	74.00	-26.02	Horizontal
3	9685.8982	42.09	6.51	48.60	74.00	-25.40	Horizontal
4	10430.6163	42.03	6.72	48.75	74.00	-25.25	Horizontal
5	14745.0931	39.04	12.88	51.92	74.00	-22.08	Horizontal
6	17624.7656	36.41	18.06	54.47	74.00	-19.53	Horizontal
7	17930.9914	36.41	19.37	55.78	74.00	-18.22	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17624.7656	27.57	18.06	45.63	54.00	-8.37	Horizontal
2	17930.9914	26.59	19.37	45.96	54.00	-8.04	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

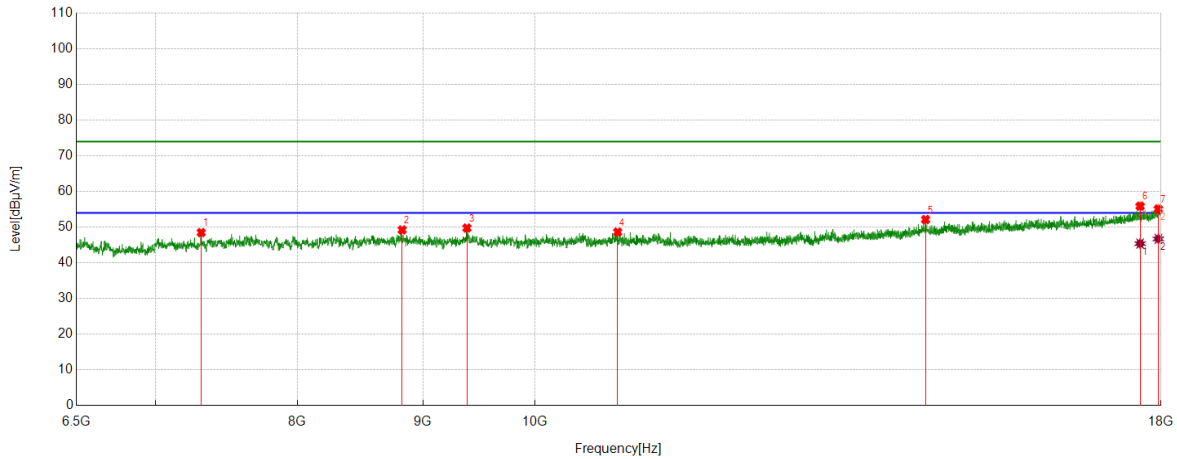

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7309.4137	44.64	3.85	48.49	74.00	-25.51	Vertical
2	8827.6034	42.98	6.26	49.24	74.00	-24.76	Vertical
3	9381.1101	43.29	6.47	49.76	74.00	-24.24	Vertical
4	10807.2884	41.70	6.93	48.63	74.00	-25.37	Vertical
5	14430.2413	39.27	12.87	52.14	74.00	-21.86	Vertical
6	17650.6438	37.86	18.03	55.89	74.00	-18.11	Vertical
7	17955.4319	35.54	19.57	55.11	74.00	-18.89	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17650.6438	27.37	18.03	45.40	54.00	-8.60	Vertical
2	17955.4319	27.15	19.57	46.72	54.00	-7.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

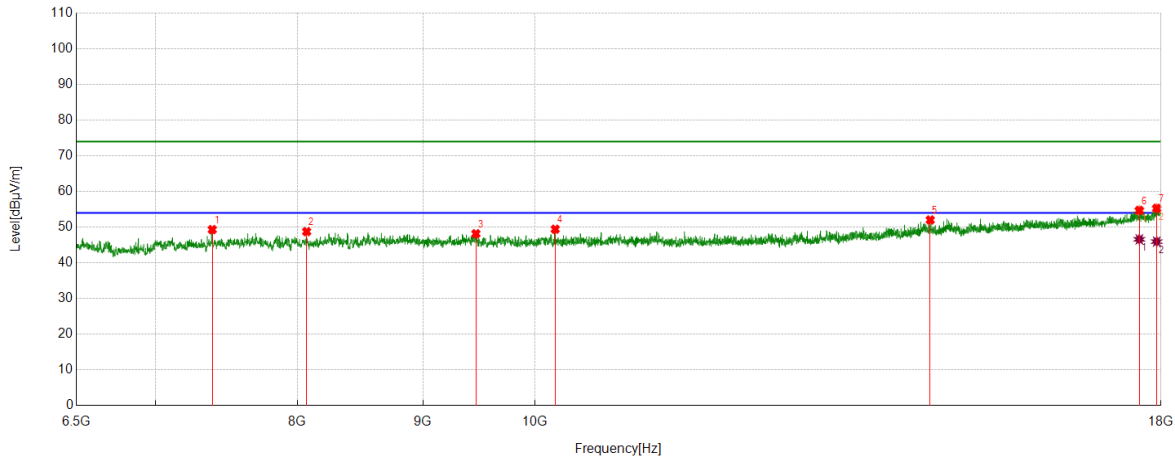

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7385.6107	45.16	4.16	49.32	74.00	-24.68	Horizontal
2	8069.9462	43.06	5.70	48.76	74.00	-25.24	Horizontal
3	9460.1825	41.61	6.55	48.16	74.00	-25.84	Horizontal
4	10191.9615	42.80	6.63	49.43	74.00	-24.57	Horizontal
5	14493.4992	39.20	12.82	52.02	74.00	-21.98	Horizontal
6	17637.7047	36.70	18.01	54.71	74.00	-19.29	Horizontal
7	17928.116	35.94	19.36	55.30	74.00	-18.70	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17637.7047	28.59	18.01	46.60	54.00	-7.40	Horizontal
2	17928.116	26.61	19.36	45.97	54.00	-8.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

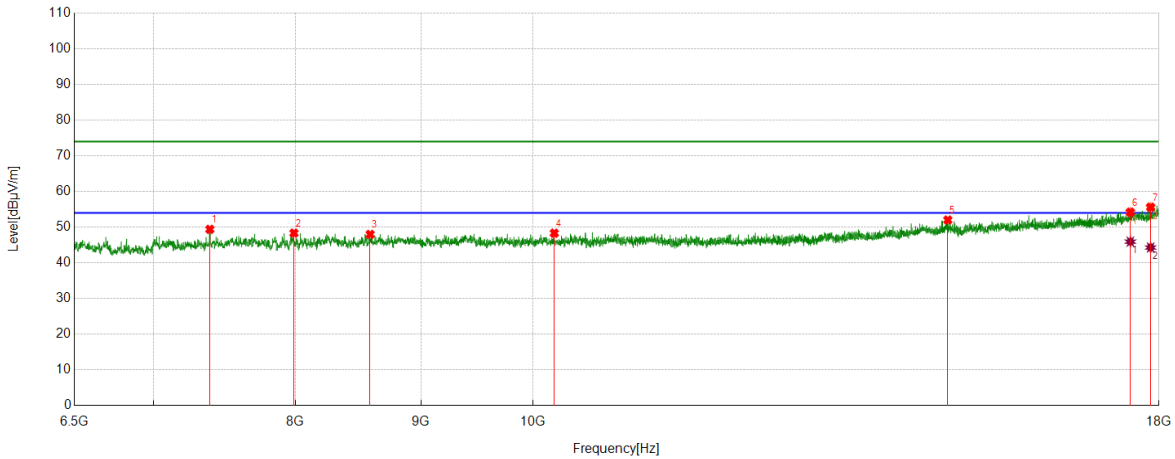

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7382.7353	45.23	4.17	49.40	74.00	-24.60	Vertical
2	7989.4362	42.74	5.60	48.34	74.00	-25.66	Vertical
3	8581.7602	41.63	6.35	47.98	74.00	-26.02	Vertical
4	10202.0253	41.67	6.65	48.32	74.00	-25.68	Vertical
5	14762.3453	39.05	12.95	52.00	74.00	-22.00	Vertical
6	17522.6903	36.59	17.61	54.20	74.00	-19.80	Vertical
7	17859.1074	36.35	19.26	55.61	74.00	-18.39	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17522.6903	28.33	17.61	45.94	54.00	-8.06	Vertical
2	17859.1074	25.05	19.26	44.31	54.00	-9.69	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

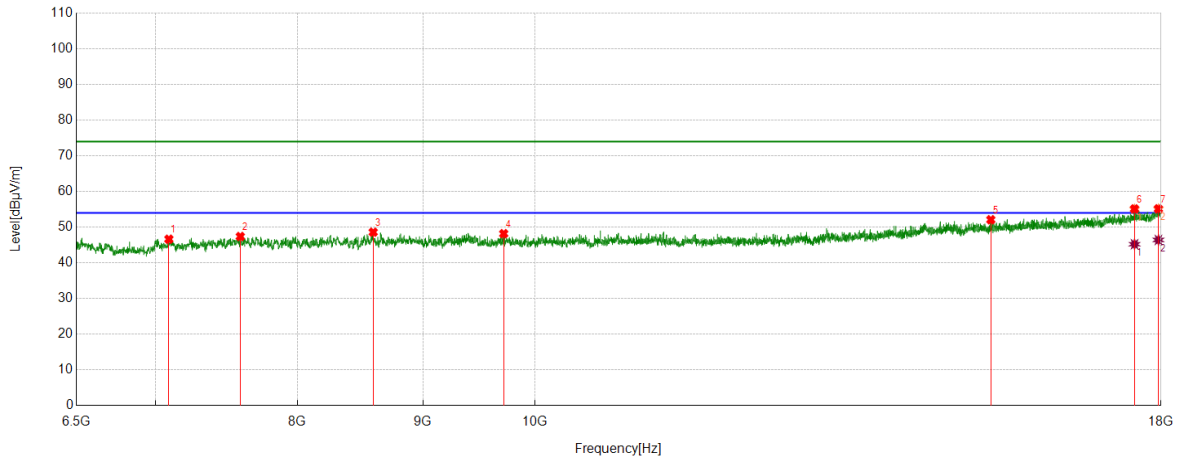

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7090.8864	42.80	3.84	46.64	74.00	-27.36	Horizontal
2	7582.5728	42.57	4.82	47.39	74.00	-26.61	Horizontal
3	8590.3863	42.68	5.92	48.60	74.00	-25.40	Horizontal
4	9710.3388	41.62	6.56	48.18	74.00	-25.82	Horizontal
5	15341.7302	38.54	13.55	52.09	74.00	-21.91	Horizontal
6	17558.6323	37.34	17.78	55.12	74.00	-18.88	Horizontal
7	17956.8696	35.55	19.59	55.14	74.00	-18.86	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17558.6323	27.45	17.78	45.23	54.00	-8.77	Horizontal
2	17956.8696	26.83	19.59	46.42	54.00	-7.58	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

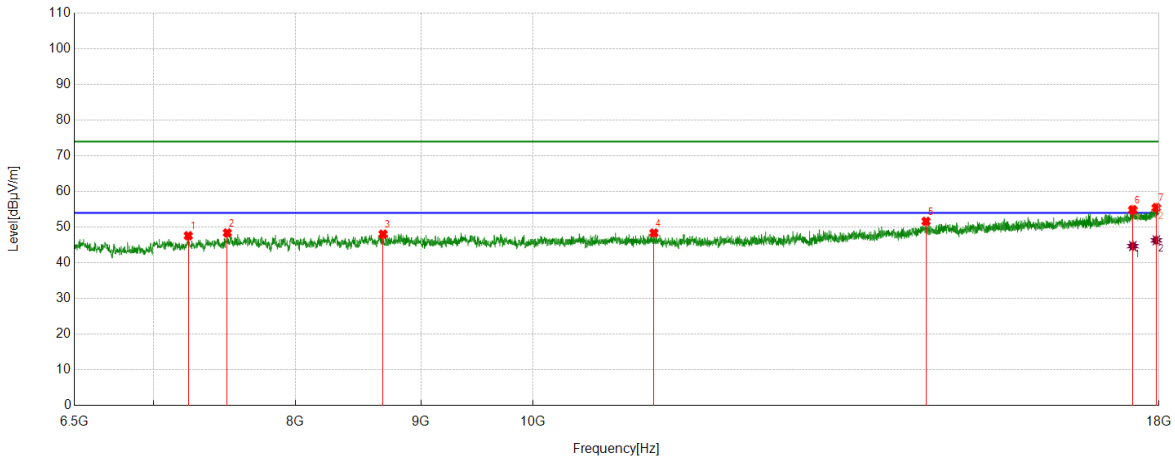

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7234.6543	43.76	3.84	47.60	74.00	-26.40	Vertical
2	7504.9381	44.06	4.34	48.40	74.00	-25.60	Vertical
3	8686.7108	41.84	6.20	48.04	74.00	-25.96	Vertical
4	11202.6503	41.05	7.31	48.36	74.00	-25.64	Vertical
5	14463.3079	38.81	12.83	51.64	74.00	-22.36	Vertical
6	17562.9454	37.05	17.82	54.87	74.00	-19.13	Vertical
7	17955.4319	35.91	19.57	55.48	74.00	-18.52	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17562.9454	26.88	17.82	44.70	54.00	-9.30	Vertical
2	17955.4319	26.75	19.57	46.32	54.00	-7.68	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

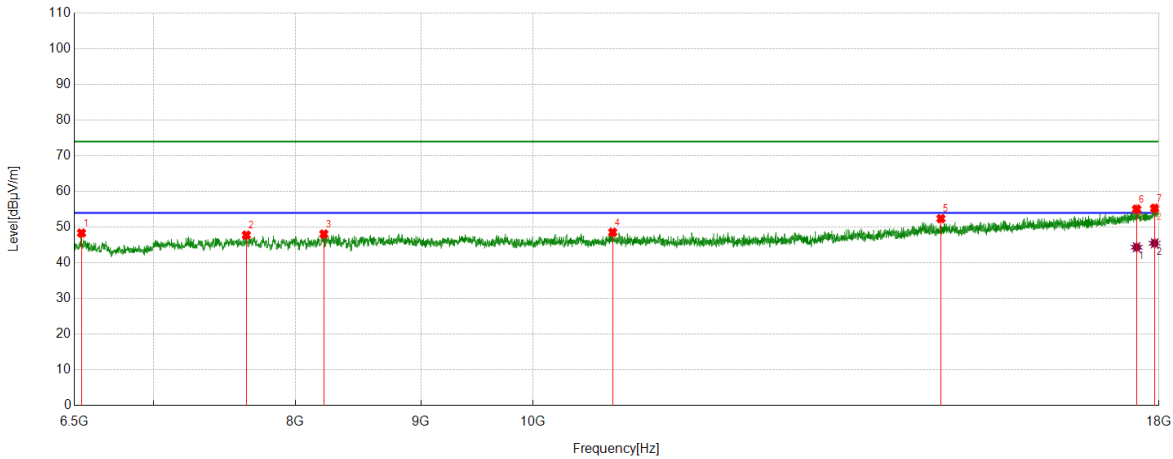

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	6544.5681	45.07	3.29	48.36	74.00	-25.64	Horizontal
2	7640.0800	42.60	5.18	47.78	74.00	-26.22	Horizontal
3	8216.5896	42.05	6.04	48.09	74.00	-25.91	Horizontal
4	10777.0971	41.58	6.99	48.57	74.00	-25.43	Horizontal
5	14667.4584	39.70	12.70	52.40	74.00	-21.60	Horizontal
6	17626.2033	37.01	18.06	55.07	74.00	-18.93	Horizontal
7	17926.6783	35.93	19.37	55.30	74.00	-18.70	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17626.2033	26.32	18.06	44.38	54.00	-9.62	Horizontal
2	17926.6783	26.13	19.37	45.50	54.00	-8.50	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

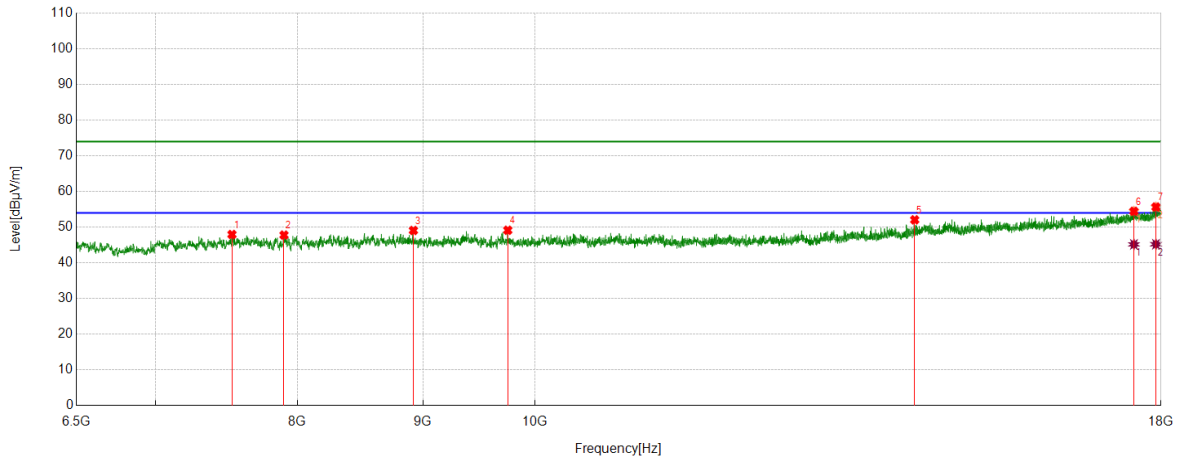

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7523.6280	43.45	4.51	47.96	74.00	-26.04	Vertical
2	7900.3000	42.20	5.59	47.79	74.00	-26.21	Vertical
3	8921.0526	42.84	6.24	49.08	74.00	-24.92	Vertical
4	9747.7185	42.67	6.48	49.15	74.00	-24.85	Vertical
5	14283.5980	39.88	12.17	52.05	74.00	-21.95	Vertical
6	17548.5686	36.71	17.74	54.45	74.00	-19.55	Vertical
7	17915.1769	36.35	19.31	55.66	74.00	-18.34	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17548.5686	27.44	17.74	45.18	54.00	-8.82	Vertical
2	17915.1769	25.91	19.31	45.22	54.00	-8.78	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

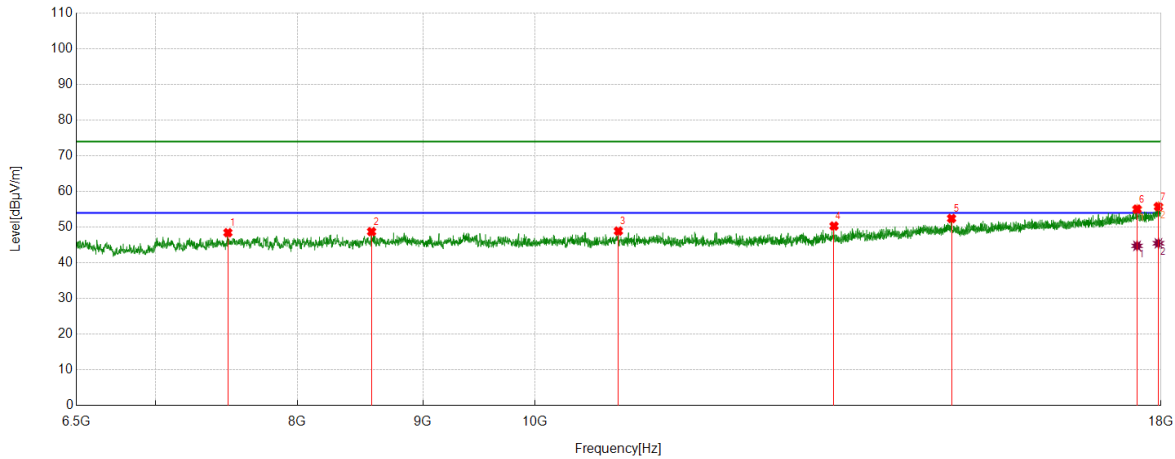

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7494.8744	44.04	4.42	48.46	74.00	-25.54	Horizontal
2	8577.4472	42.36	6.39	48.75	74.00	-25.25	Horizontal
3	10814.4768	42.02	6.89	48.91	74.00	-25.09	Horizontal
4	13241.2802	40.09	10.23	50.32	74.00	-23.68	Horizontal
5	14786.7858	39.58	12.86	52.44	74.00	-21.56	Horizontal
6	17600.3250	37.03	18.03	55.06	74.00	-18.94	Horizontal
7	17956.8696	36.16	19.59	55.75	74.00	-18.25	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17600.3250	26.74	18.03	44.77	54.00	-9.23	Horizontal
2	17956.8696	25.90	19.59	45.49	54.00	-8.51	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

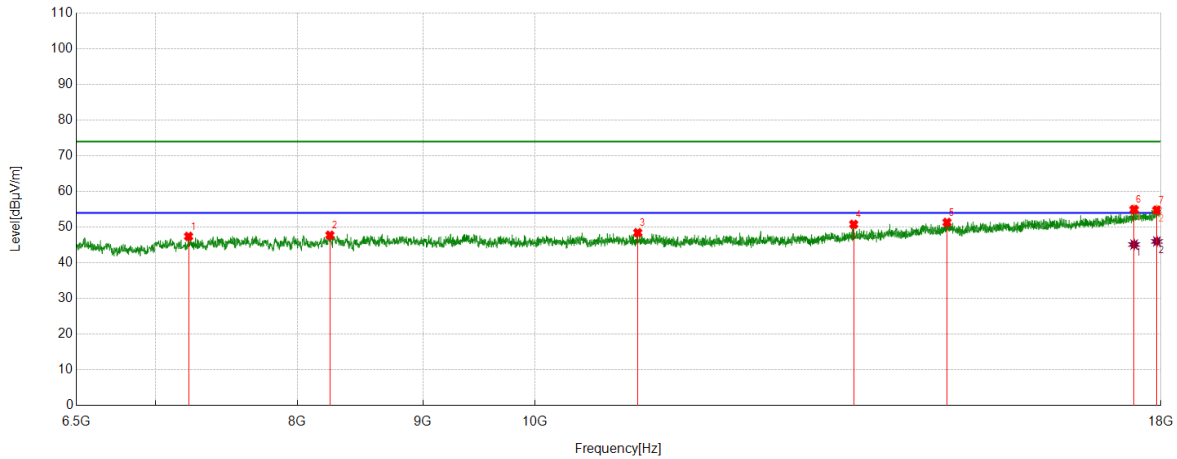

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7223.1529	43.64	3.78	47.42	74.00	-26.58	Vertical
2	8248.2185	41.52	6.24	47.76	74.00	-26.24	Vertical
3	11012.8766	41.21	7.24	48.45	74.00	-25.55	Vertical
4	13488.5611	40.24	10.56	50.80	74.00	-23.20	Vertical
5	14723.5279	38.53	12.81	51.34	74.00	-22.66	Vertical
6	17551.4439	37.22	17.74	54.96	74.00	-19.04	Vertical
7	17930.9914	35.42	19.37	54.79	74.00	-19.21	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17551.4439	27.40	17.74	45.14	54.00	-8.86	Vertical
2	17930.9914	26.64	19.37	46.01	54.00	-7.99	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

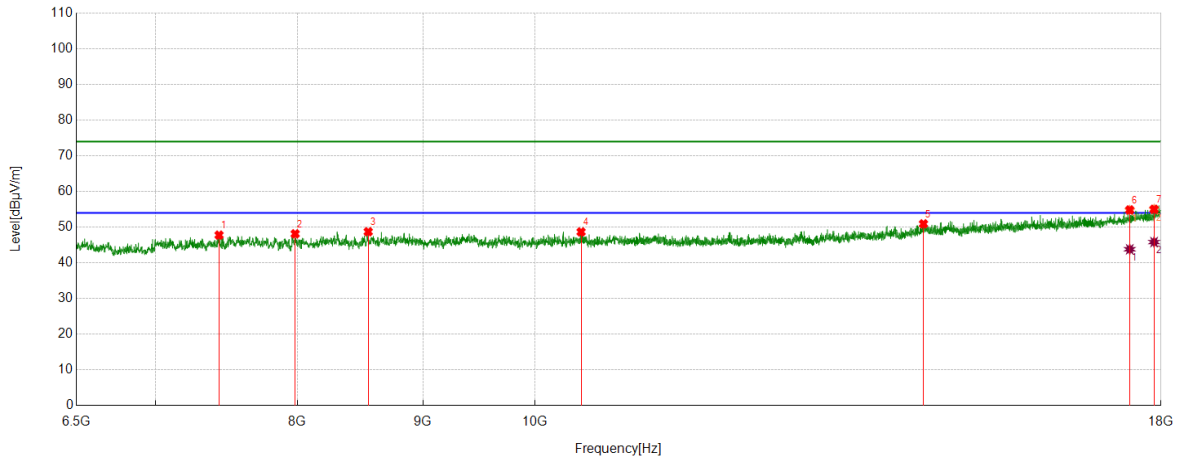

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7433.0541	43.54	4.24	47.78	74.00	-26.22	Horizontal
2	7983.6855	42.69	5.45	48.14	74.00	-25.86	Horizontal
3	8550.1313	42.21	6.51	48.72	74.00	-25.28	Horizontal
4	10442.1178	42.02	6.66	48.68	74.00	-25.32	Horizontal
5	14401.4877	38.18	12.75	50.93	74.00	-23.07	Horizontal
6	17479.5599	37.18	17.65	54.83	74.00	-19.17	Horizontal
7	17883.5479	35.79	19.23	55.02	74.00	-18.98	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17479.5599	26.16	17.65	43.81	54.00	-10.19	Horizontal
2	17883.5479	26.60	19.23	45.83	54.00	-8.17	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

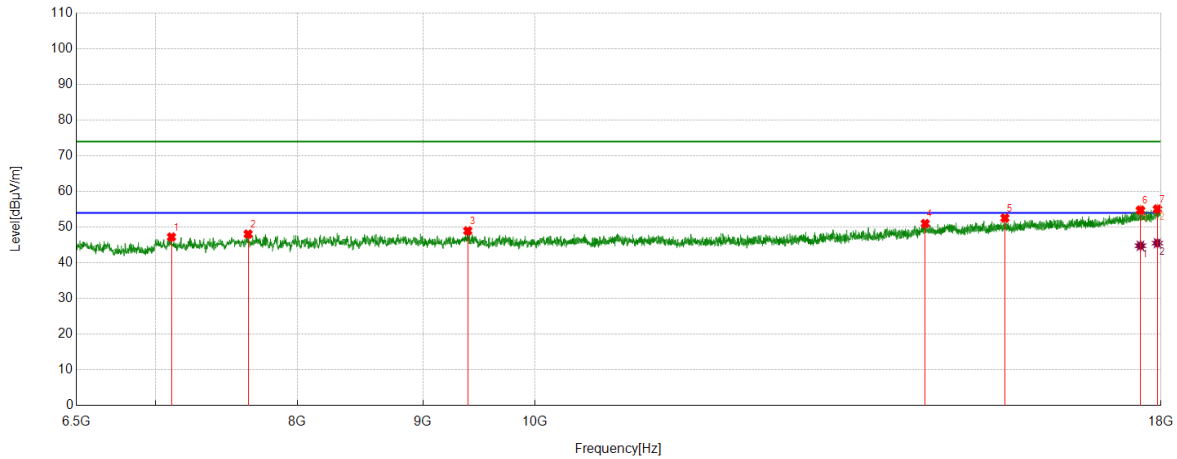

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7108.1385	43.36	3.89	47.25	74.00	-26.75	Vertical
2	7638.6423	42.90	5.17	48.07	74.00	-25.93	Vertical
3	9388.2985	42.44	6.54	48.98	74.00	-25.02	Vertical
4	14425.9282	38.13	12.89	51.02	74.00	-22.98	Vertical
5	15545.8807	38.77	13.78	52.55	74.00	-21.45	Vertical
6	17656.3945	36.72	18.06	54.78	74.00	-19.22	Vertical
7	17941.0551	35.63	19.45	55.08	74.00	-18.92	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17656.3945	26.74	18.06	44.80	54.00	-9.20	Vertical
2	17941.0551	26.08	19.45	45.53	54.00	-8.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

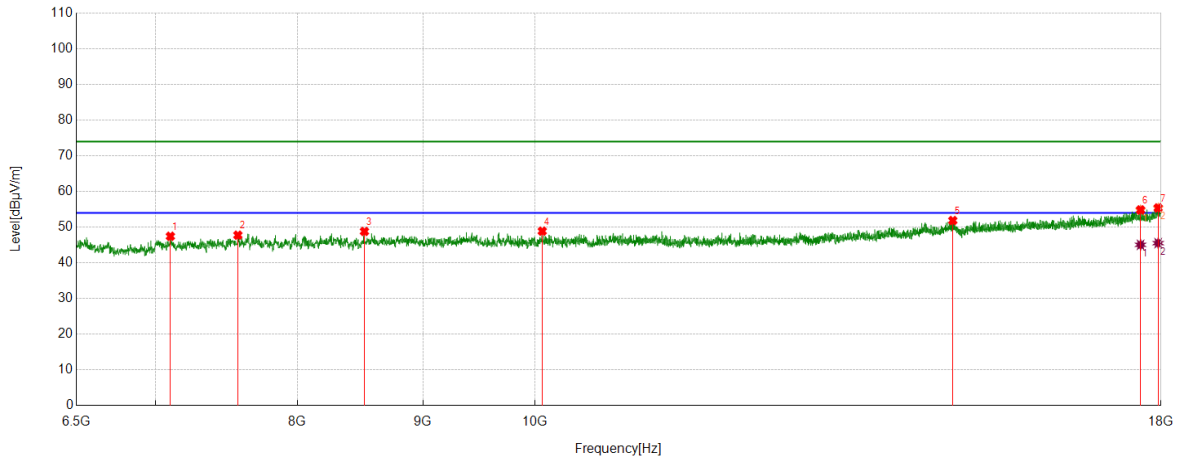

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7100.9501	43.55	3.90	47.45	74.00	-26.55	Horizontal
2	7565.3207	43.06	4.70	47.76	74.00	-26.24	Horizontal
3	8519.9400	42.27	6.54	48.81	74.00	-25.19	Horizontal
4	10068.3210	42.33	6.56	48.89	74.00	-25.11	Horizontal
5	14804.0380	39.03	12.83	51.86	74.00	-22.14	Horizontal
6	17657.8322	36.78	18.06	54.84	74.00	-19.16	Horizontal
7	17952.5566	35.87	19.53	55.40	74.00	-18.60	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17657.8322	27.00	18.06	45.06	54.00	-8.94	Horizontal
2	17952.5566	26.00	19.53	45.53	54.00	-8.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

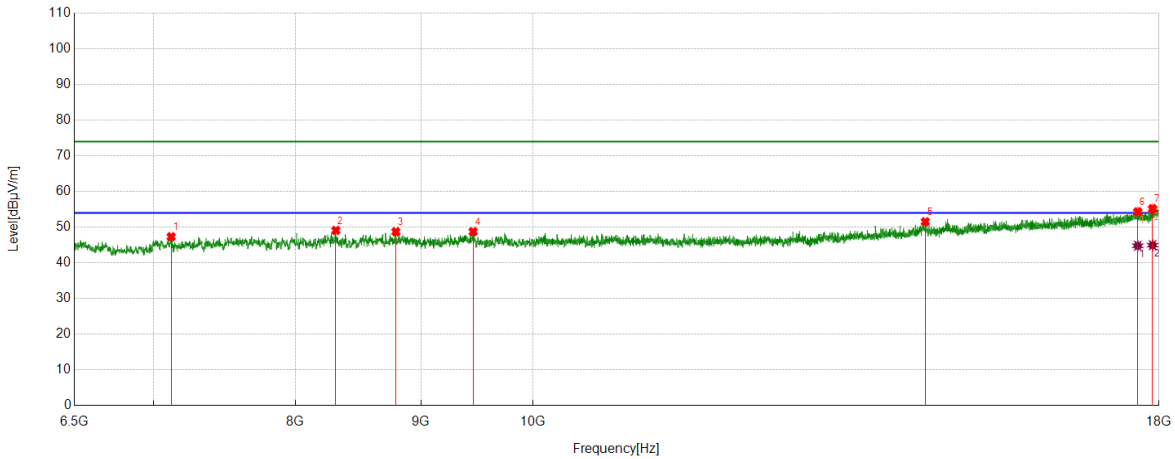

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7119.6400	43.34	3.98	47.32	74.00	-26.68	Vertical
2	8310.0388	42.74	6.34	49.08	74.00	-24.92	Vertical
3	8791.6615	42.49	6.23	48.72	74.00	-25.28	Vertical
4	9452.9941	42.17	6.58	48.75	74.00	-25.25	Vertical
5	14453.2442	38.63	12.89	51.52	74.00	-22.48	Vertical
6	17644.8931	36.30	18.01	54.31	74.00	-19.69	Vertical
7	17892.174	35.90	19.29	55.19	74.00	-18.81	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17644.8931	26.79	18.01	44.80	54.00	-9.20	Vertical
2	17892.174	25.67	19.29	44.96	54.00	-9.04	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

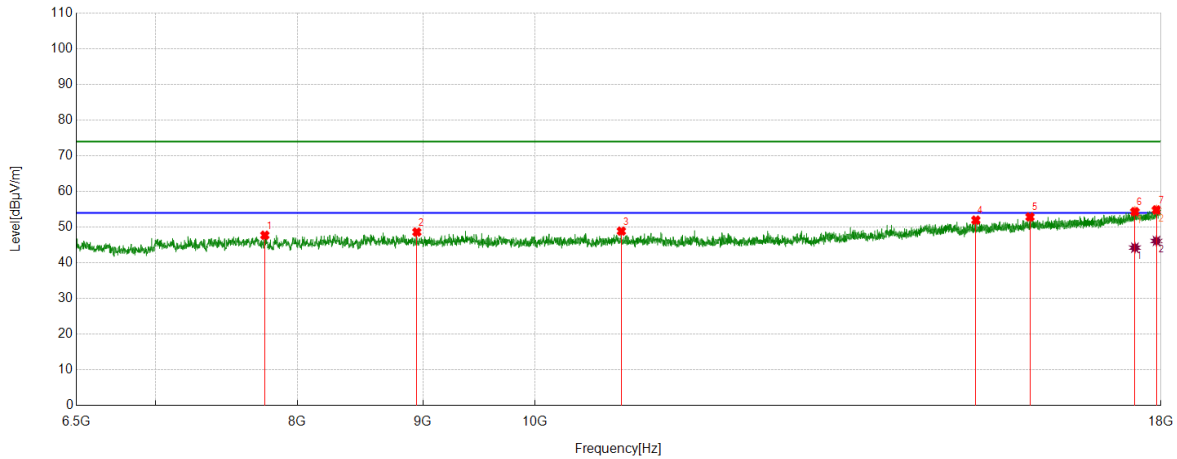

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7759.4074	42.47	5.27	47.74	74.00	-26.26	Horizontal
2	8949.8062	42.35	6.28	48.63	74.00	-25.37	Horizontal
3	10844.6681	41.88	7.01	48.89	74.00	-25.11	Horizontal
4	15127.5159	38.75	13.22	51.97	74.00	-22.03	Horizontal
5	15916.8021	38.36	14.50	52.86	74.00	-21.14	Horizontal
6	17564.3830	36.52	17.83	54.35	74.00	-19.65	Horizontal
7	17923.8030	35.48	19.36	54.84	74.00	-19.16	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17564.3830	26.43	17.83	44.26	54.00	-9.74	Horizontal
2	17923.8030	26.78	19.36	46.14	54.00	-7.86	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

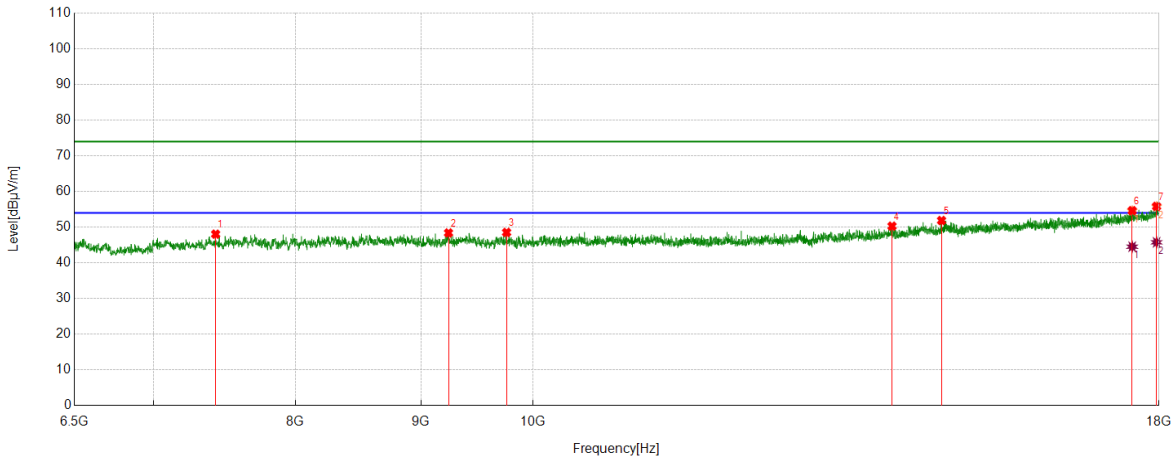

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7422.9904	43.80	4.25	48.05	74.00	-25.95	Vertical
2	9237.3422	42.28	6.11	48.39	74.00	-25.61	Vertical
3	9754.9069	42.04	6.49	48.53	74.00	-25.47	Vertical
4	14009.0011	38.49	11.80	50.29	74.00	-23.71	Vertical
5	14676.0845	39.14	12.73	51.87	74.00	-22.13	Vertical
6	17552.8816	36.88	17.75	54.63	74.00	-19.37	Vertical
7	17959.7450	36.20	19.63	55.83	74.00	-18.17	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17552.8816	26.78	17.75	44.53	54.00	-9.47	Vertical
2	17959.7450	26.13	19.63	45.76	54.00	-8.24	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

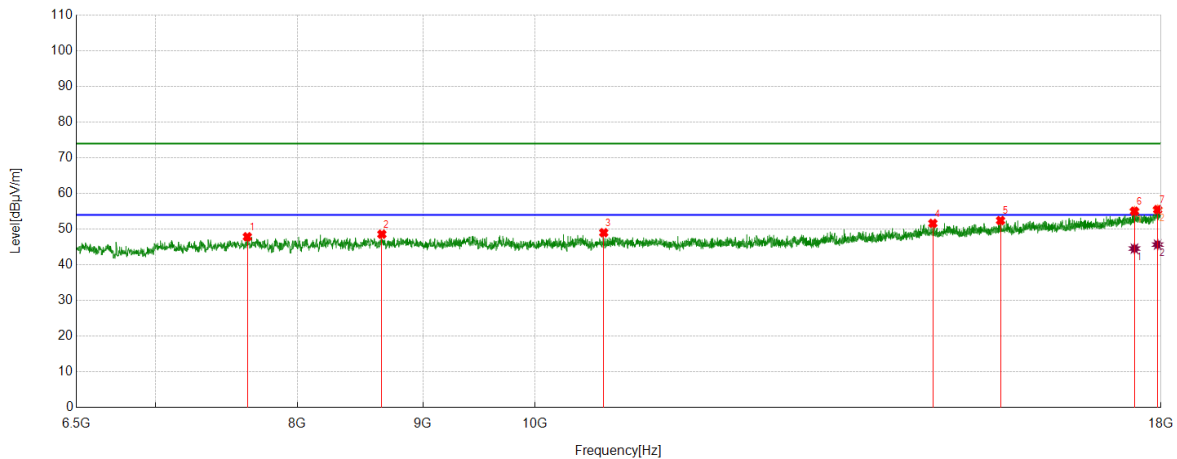

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7632.8916	42.70	5.17	47.87	74.00	-26.13	Horizontal
2	8660.8326	42.15	6.43	48.58	74.00	-25.42	Horizontal
3	10666.3958	42.10	6.91	49.01	74.00	-24.99	Horizontal
4	14529.4412	38.90	12.72	51.62	74.00	-22.38	Horizontal
5	15482.6228	38.47	13.96	52.43	74.00	-21.57	Horizontal
6	17557.1946	37.26	17.77	55.03	74.00	-18.97	Horizontal
7	17943.9305	36.02	19.46	55.48	74.00	-18.52	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17557.1946	26.79	17.77	44.56	54.00	-9.44	Horizontal
2	17943.9305	26.22	19.46	45.68	54.00	-8.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

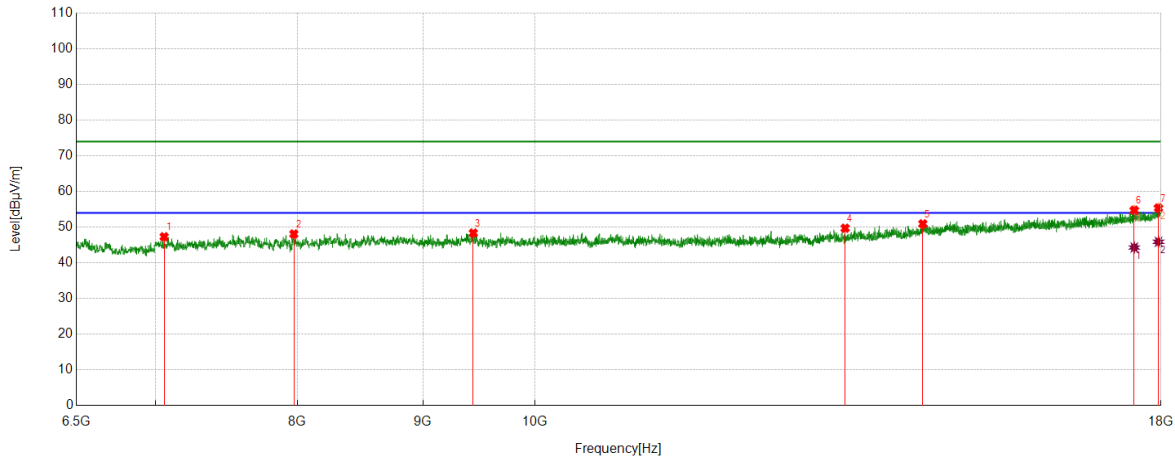

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7059.2574	43.54	3.78	47.32	74.00	-26.68	Vertical
2	7973.6217	42.71	5.39	48.10	74.00	-25.90	Vertical
3	9437.1796	41.75	6.60	48.35	74.00	-25.65	Vertical
4	13380.7351	39.67	10.04	49.71	74.00	-24.29	Vertical
5	14392.8616	38.17	12.77	50.94	74.00	-23.06	Vertical
6	17554.3193	36.99	17.75	54.74	74.00	-19.26	Vertical
7	17958.3073	35.78	19.60	55.38	74.00	-18.62	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17554.3193	26.56	17.75	44.31	54.00	-9.69	Vertical
2	17958.3073	26.30	19.60	45.90	54.00	-8.10	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

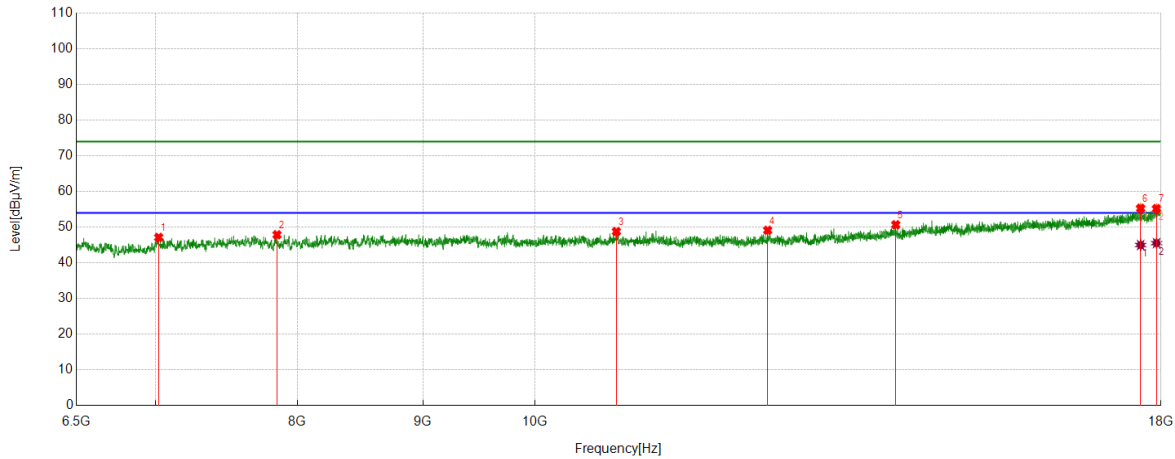

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7023.3154	43.41	3.72	47.13	74.00	-26.87	Horizontal
2	7848.5436	42.46	5.42	47.88	74.00	-26.12	Horizontal
3	10794.3493	41.82	6.96	48.78	74.00	-25.22	Horizontal
4	12441.9302	40.68	8.45	49.13	74.00	-24.87	Horizontal
5	14032.0040	38.72	11.95	50.67	74.00	-23.33	Horizontal
6	17659.2699	37.23	18.07	55.30	74.00	-18.70	Horizontal
7	17925.2407	35.82	19.37	55.19	74.00	-18.81	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17659.2699	26.93	18.07	45.00	54.00	-9.00	Horizontal
2	17925.2407	26.16	19.37	45.53	54.00	-8.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

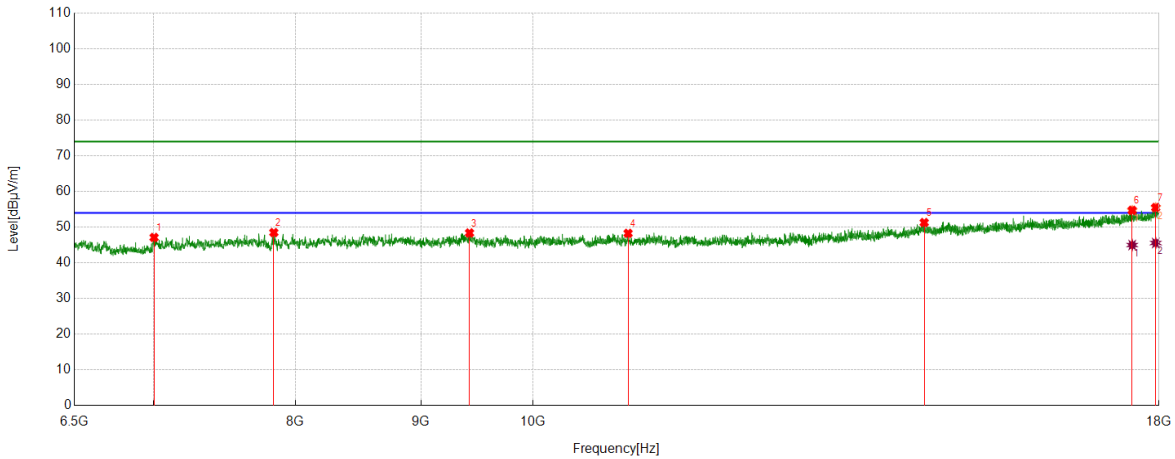

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7006.0633	43.63	3.49	47.12	74.00	-26.88	Vertical
2	7839.9175	43.15	5.34	48.49	74.00	-25.51	Vertical
3	9421.3652	41.70	6.68	48.38	74.00	-25.62	Vertical
4	10933.8042	41.01	7.26	48.27	74.00	-25.73	Vertical
5	14438.8674	38.42	12.87	51.29	74.00	-22.71	Vertical
6	17552.8816	36.97	17.75	54.72	74.00	-19.28	Vertical
7	17945.3682	36.01	19.48	55.49	74.00	-18.51	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17552.8816	27.25	17.75	45.00	54.00	-9.00	Vertical
2	17945.3682	26.09	19.48	45.57	54.00	-8.43	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

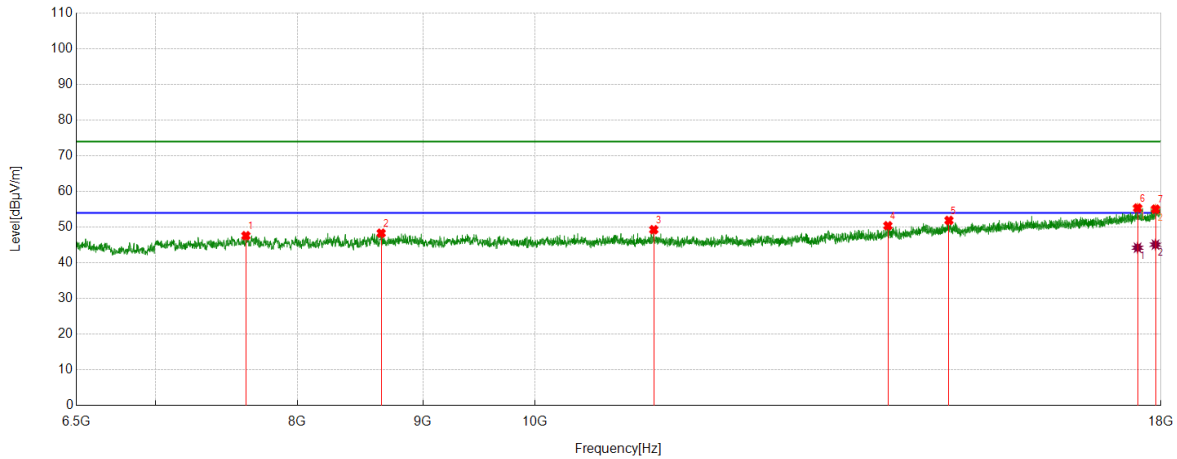

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7622.8279	42.43	5.18	47.61	74.00	-26.39	Horizontal
2	8655.0819	42.04	6.28	48.32	74.00	-25.68	Horizontal
3	11179.6475	41.90	7.39	49.29	74.00	-24.71	Horizontal
4	13928.4911	39.01	11.39	50.40	74.00	-23.60	Horizontal
5	14750.8439	39.03	12.87	51.90	74.00	-22.10	Horizontal
6	17608.9511	37.31	18.06	55.37	74.00	-18.63	Horizontal
7	17907.9885	35.82	19.23	55.05	74.00	-18.95	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17608.9511	26.19	18.06	44.25	54.00	-9.75	Horizontal
2	17907.9885	25.88	19.23	45.11	54.00	-8.89	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

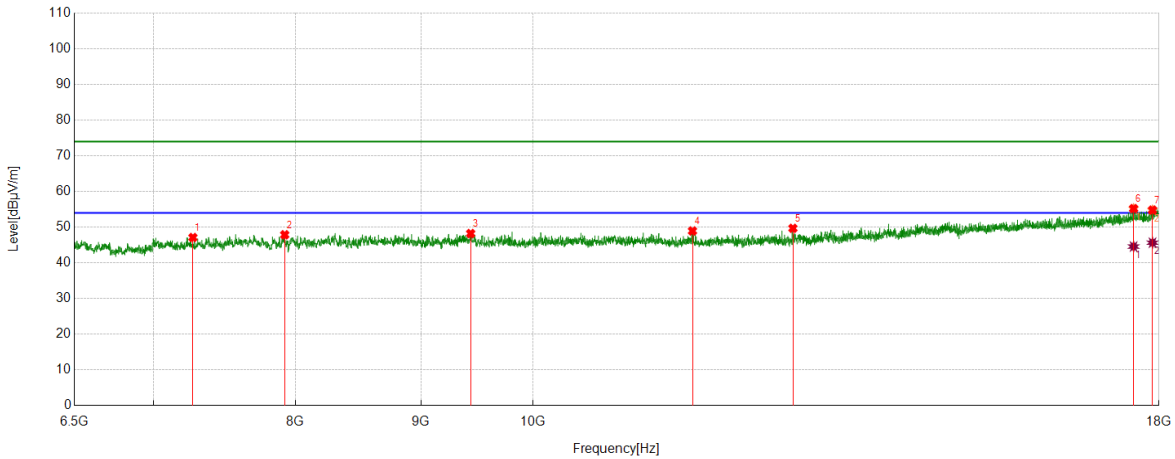

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7266.2833	43.29	3.82	47.11	74.00	-26.89	Vertical
2	7920.4276	42.45	5.42	47.87	74.00	-26.13	Vertical
3	9431.4289	41.63	6.59	48.22	74.00	-25.78	Vertical
4	11615.2644	41.40	7.54	48.94	74.00	-25.06	Vertical
5	12763.9705	40.72	8.96	49.68	74.00	-24.32	Vertical
6	17575.8845	37.28	17.93	55.21	74.00	-18.79	Vertical
7	17890.7363	35.50	19.30	54.80	74.00	-19.20	Vertical

AV Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17575.8845	26.64	17.93	44.57	54.00	-9.43	Vertical
2	17890.7363	26.35	19.30	45.65	54.00	-8.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 3: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

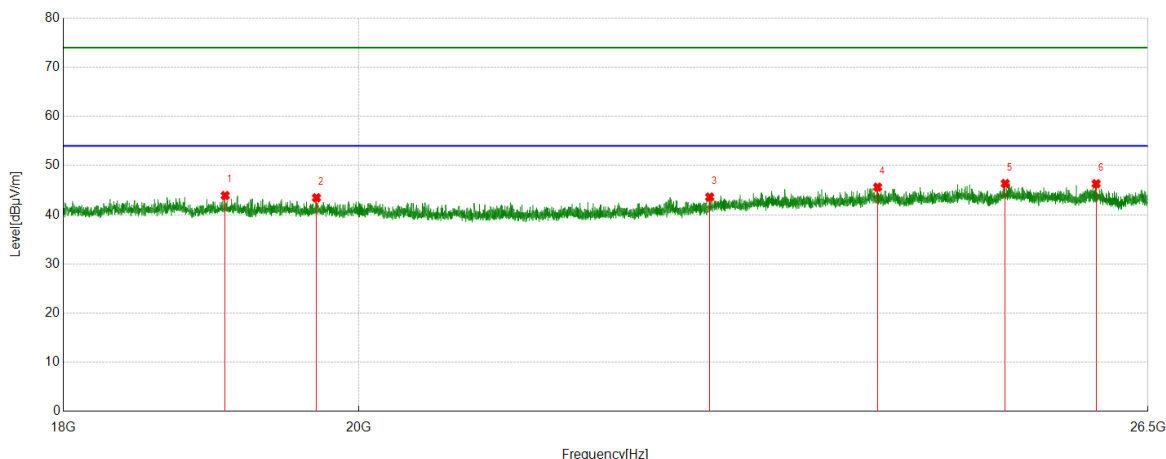


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	19070.2570	49.87	-5.96	43.91	74.00	-30.09	Horizontal
2	19701.0201	48.85	-5.40	43.45	74.00	-30.55	Horizontal
3	22666.1166	47.85	-4.25	43.60	74.00	-30.40	Horizontal
4	24064.5065	48.28	-2.67	45.61	74.00	-28.39	Horizontal
5	25185.7686	49.78	-3.42	46.36	74.00	-27.64	Horizontal
6	26014.6015	48.97	-2.66	46.31	74.00	-27.69	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

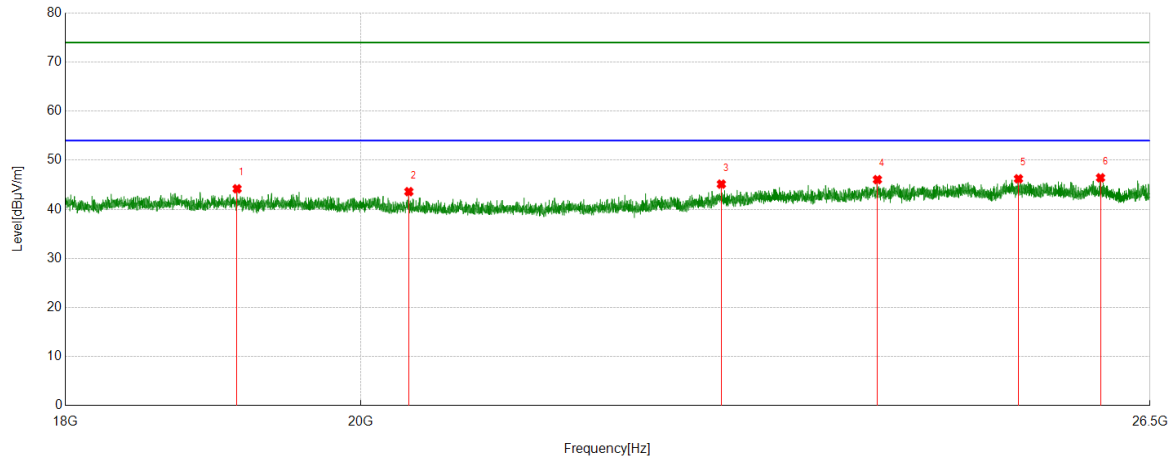

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	19137.4137	50.03	-5.85	44.18	74.00	-29.82	Vertical
2	20346.2346	49.09	-5.49	43.60	74.00	-30.40	Vertical
3	22744.3244	49.19	-4.06	45.13	74.00	-28.87	Vertical
4	24045.8046	48.70	-2.65	46.05	74.00	-27.95	Vertical
5	25286.0786	49.55	-3.33	46.22	74.00	-27.78	Vertical
6	26036.7037	49.05	-2.63	46.42	74.00	-27.58	Vertical

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 4: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

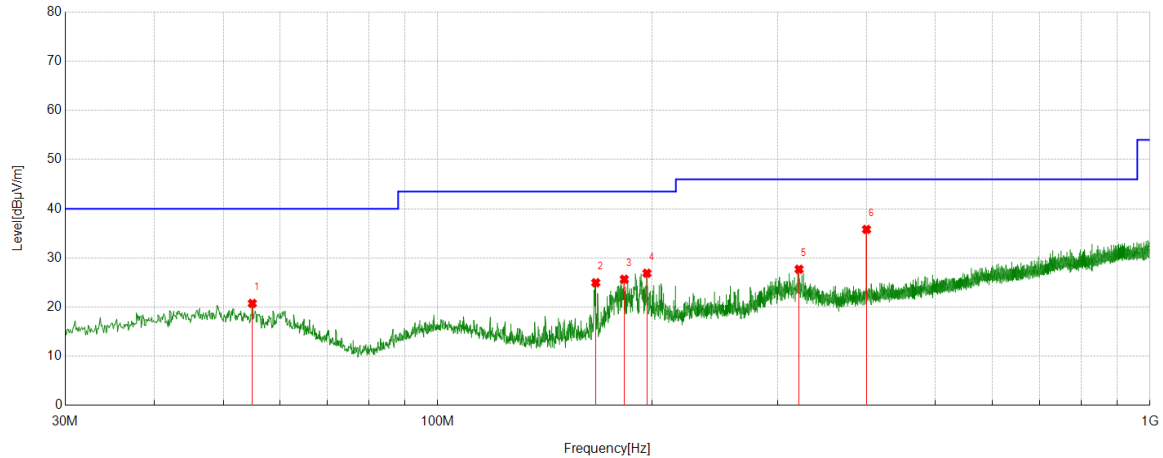

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	54.9315	0.01	20.75	20.76	40.00	-19.24	Peak
2	166.6867	8.97	15.99	24.96	43.50	-18.54	Peak
3	182.7903	8.73	16.93	25.66	43.50	-17.84	Peak
4	196.6627	8.01	18.88	26.89	43.50	-16.61	Peak
5	321.6112	6.08	21.62	27.70	46.00	-18.30	Peak
6	399.9950	12.01	23.79	35.80	46.00	-10.20	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable).

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

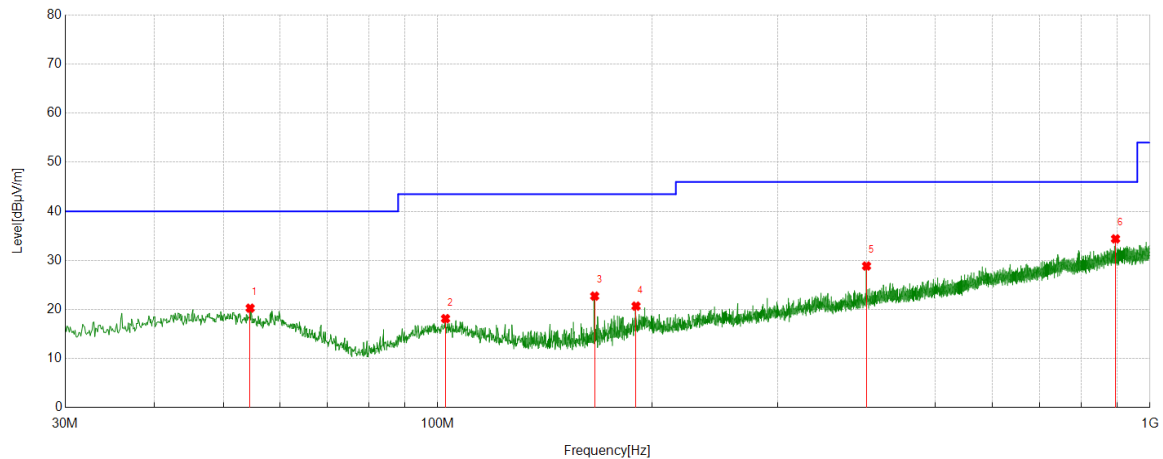


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	54.5435	-0.52	20.79	20.27	40.00	-19.73	Peak
2	102.5633	-0.82	18.96	18.14	43.50	-25.36	Peak
3	166.1046	6.75	15.98	22.73	43.50	-20.77	Peak
4	189.8720	2.81	17.88	20.69	43.50	-22.81	Peak
5	399.9950	5.07	23.79	28.86	46.00	-17.14	Peak
6	894.6475	2.82	31.57	34.39	46.00	-11.61	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable).

Part 5: 9kHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)


Test Mode	Channel	Frequency Range	Verdict
11B	MCH	9kHz~150kHz	PASS

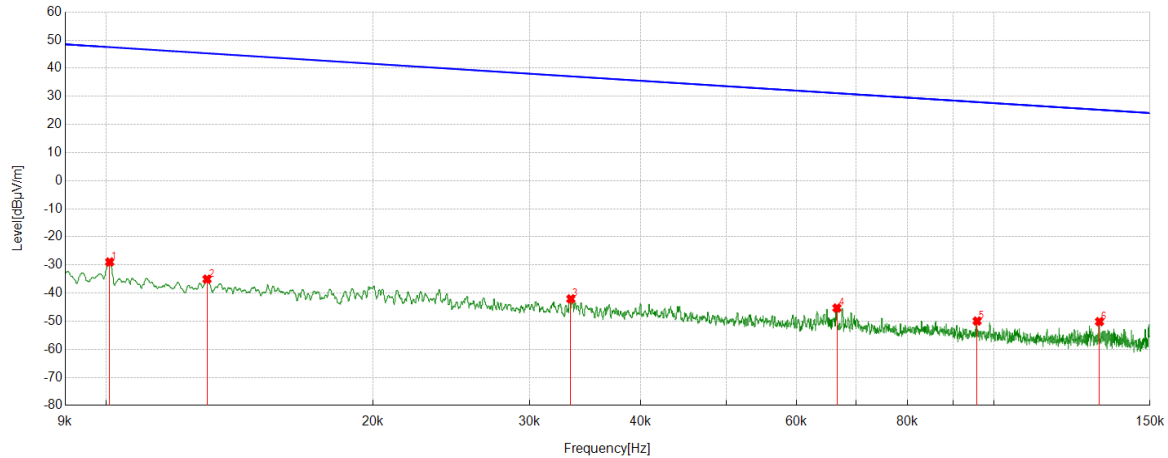

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	ISED Result [dBuA/m]	ISED Limit [dBuA/m]	Margin [dB]	Remark
1	0.0101	33.06	-62.00	-28.94	47.52	-80.44	-3.98	-76.46	Peak
2	0.0130	26.92	-61.97	-35.05	45.31	-86.55	-6.19	-80.36	Peak
3	0.0334	19.73	-61.80	-42.07	37.13	-93.57	-14.37	-79.20	Peak
4	0.0666	16.55	-61.87	-45.32	31.14	-96.82	-20.36	-76.46	Peak
5	0.0958	11.95	-61.91	-49.96	27.97	-101.46	-23.53	-77.93	Peak
6	0.1316	11.77	-61.93	-50.16	25.22	-101.66	-26.28	-75.38	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


Test Mode	Channel	Frequency Range	Verdict
11B	MCH	150kHz~490kHz	PASS

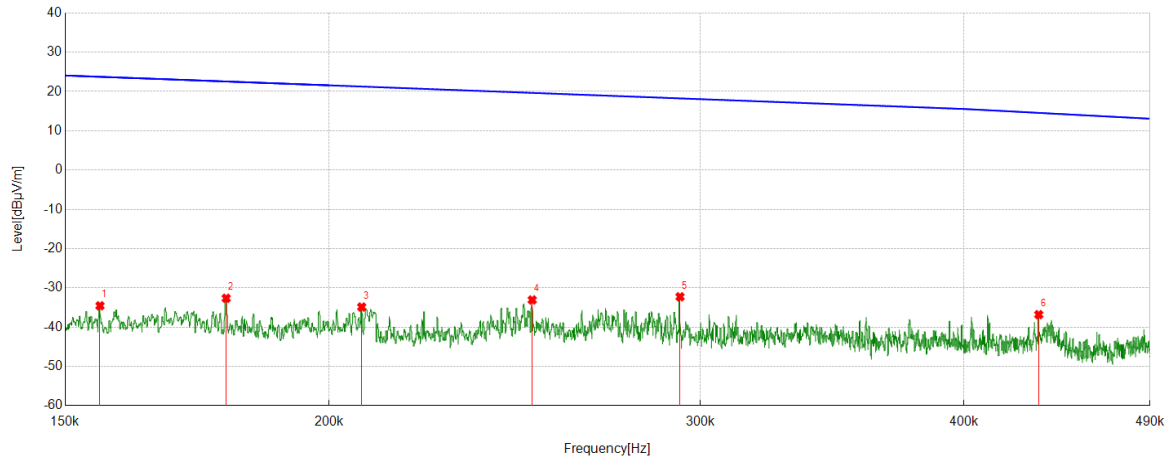

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	ISED Result [dBuA/m]	ISED Limit [dBuA/m]	Margin [dB]	Remark
1	0.1558	27.38	-61.94	-34.56	23.75	-86.06	-27.75	-58.31	Peak
2	0.1788	29.32	-61.96	-32.64	22.56	-84.14	-28.94	-55.20	Peak
3	0.2073	27.10	-61.97	-34.87	21.27	-86.37	-30.23	-56.14	Peak
4	0.2497	28.92	-61.99	-33.07	19.65	-84.57	-31.85	-52.72	Peak
5	0.2934	29.75	-62.02	-32.27	18.25	-83.77	-33.25	-50.52	Peak
6	0.4340	25.24	-62.05	-36.81	14.56	-88.31	-36.94	-51.37	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Test Mode	Channel	Frequency Range	Verdict
11B	MCH	490kHz~30MHz	PASS

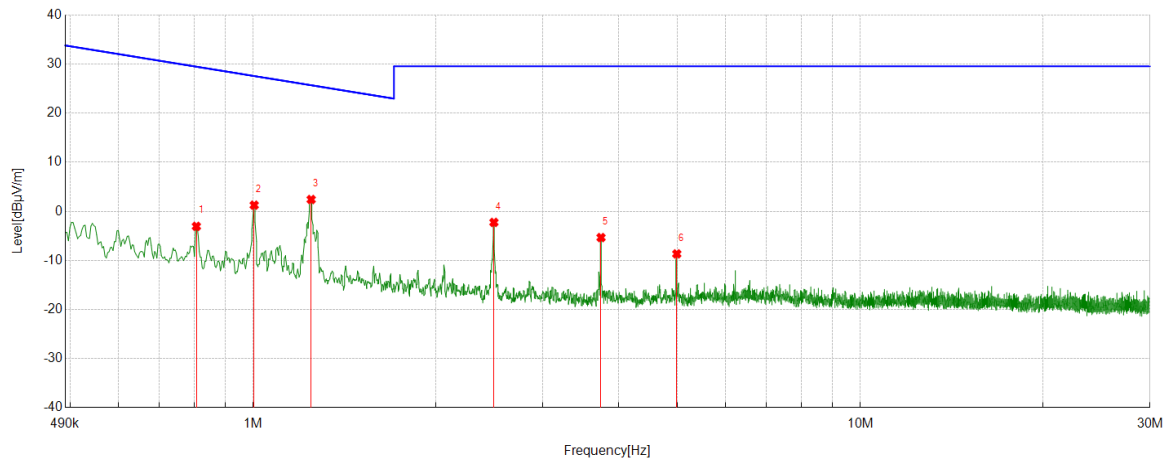

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	FCC Result [dBuV/m]	FCC Limit [dBuV/m]	ISED Result [dBuA/m]	ISED Limit [dBuA/m]	Margin [dB]	Remark
1	0.8058	19.01	-22.07	-3.06	29.48	-54.56	-22.02	-32.54	Peak
2	1.0035	23.33	-22.07	1.26	27.57	-50.24	-23.93	-26.31	Peak
3	1.2455	24.46	-22.05	2.41	25.70	-49.09	-25.80	-23.29	Peak
4	2.4910	19.76	-22.01	-2.25	29.54	-53.75	-21.96	-31.79	Peak
5	3.7394	16.62	-21.96	-5.34	29.54	-56.84	-21.96	-34.88	Peak
6	4.9848	13.29	-21.96	-8.67	29.54	-60.17	-21.96	-38.21	Peak

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable) + Distance Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

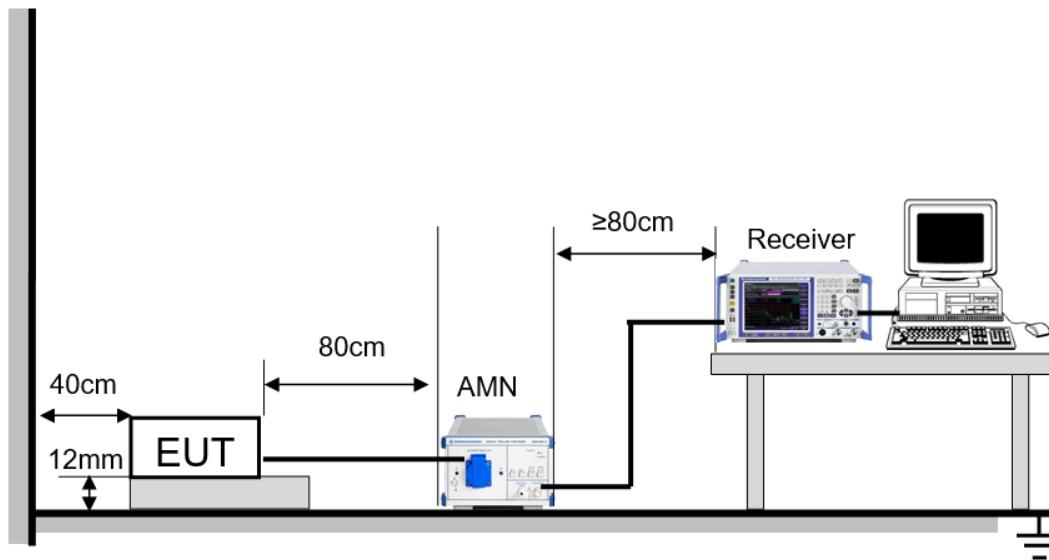


The EUT is put on a table of non-conducting material that is 12 mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz


LINE L RESULTS (WORST-CASE CONFIGURATION)

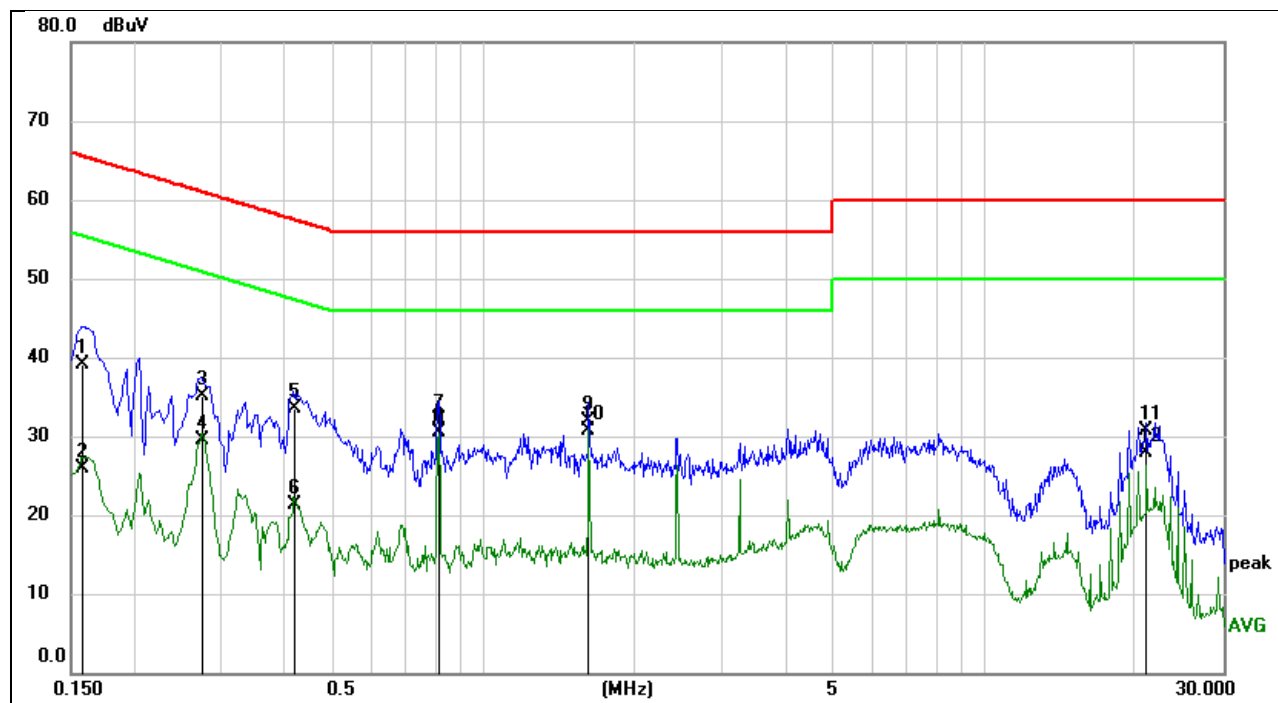

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1587	28.87	10.32	39.19	65.53	-26.34	QP
2	0.1587	15.58	10.32	25.90	55.53	-29.63	AVG
3	0.2746	24.85	10.24	35.09	60.98	-25.89	QP
4	0.2746	19.30	10.24	29.54	50.98	-21.44	AVG
5	0.4197	23.18	10.24	33.42	57.45	-24.03	QP
6	0.4197	11.04	10.24	21.28	47.45	-26.17	AVG
7	0.8118	21.92	10.16	32.08	56.00	-23.92	QP
8	0.8118	20.29	10.16	30.45	46.00	-15.55	AVG
9	1.6248	21.83	9.98	31.81	56.00	-24.19	QP
10	1.6248	20.77	9.98	30.75	46.00	-15.25	AVG
11	21.1233	19.84	10.84	30.68	60.00	-29.32	QP
12	21.1233	17.04	10.84	27.88	50.00	-22.12	AVG

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels, and find the HCH of 11B which is the worst case, so only the worst case is included in this test report.
6. Two models of docker will be collocated to the EUT, both of them have been test, only the worse case is recorded in this test report.

LINE N RESULTS (WORST-CASE CONFIGURATION)

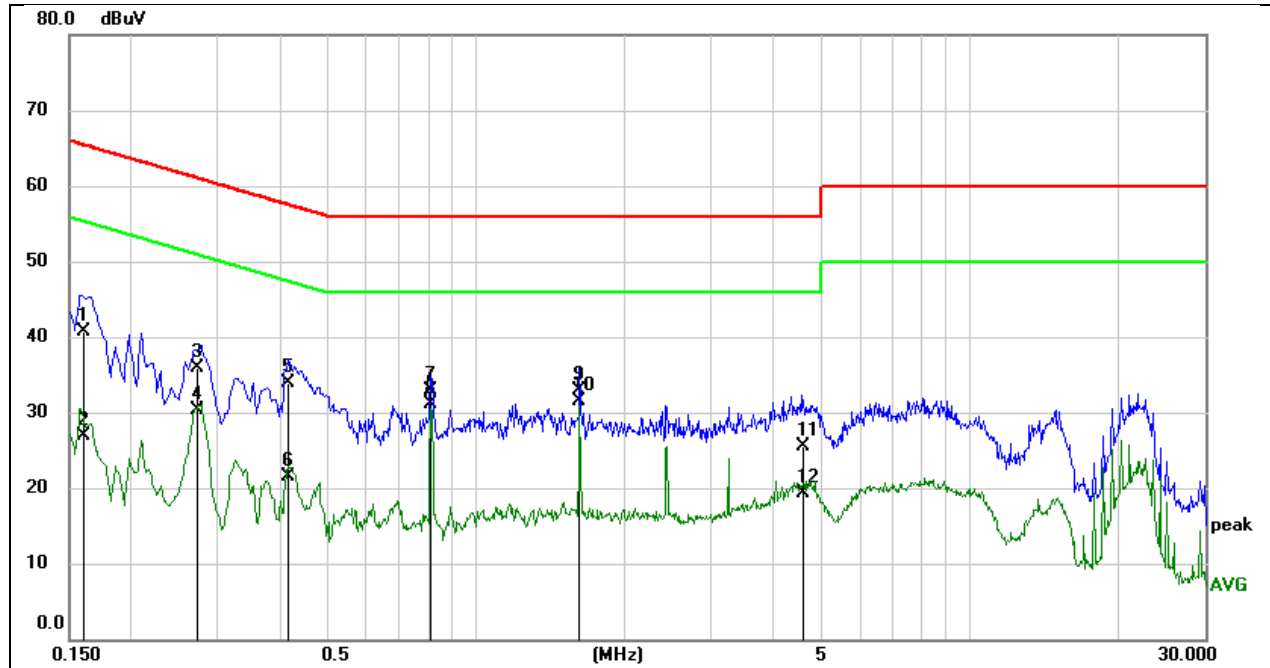

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1601	30.40	10.22	40.62	65.46	-24.84	QP
2	0.1601	16.76	10.22	26.98	55.46	-28.48	AVG
3	0.2740	25.80	10.12	35.92	61.00	-25.08	QP
4	0.2740	20.27	10.12	30.39	51.00	-20.61	AVG
5	0.4179	23.83	10.07	33.90	57.49	-23.59	QP
6	0.4179	11.45	10.07	21.52	47.49	-25.97	AVG
7	0.8117	22.91	9.96	32.87	56.00	-23.13	QP
8	0.8117	21.13	9.96	31.09	46.00	-14.91	AVG
9	1.6243	22.93	9.96	32.89	56.00	-23.11	QP
10	1.6243	21.55	9.96	31.51	46.00	-14.49	AVG
11	4.6114	15.19	10.35	25.54	56.00	-30.46	QP
12	4.6114	8.96	10.35	19.31	46.00	-26.69	AVG

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels, and find the HCH of 11B which is the worst case, so only the worst case is included in this test report.
6. Two models of docker will be collocated to the EUT, both of them have been test, only the worse case is recorded in this test report.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT