



FCC PART 15C


TEST REPORT

For

Sichuan E-power Technology Co., Ltd

Room B2 building, Xinxing industrial park, #916 Tiangong street,
Tianfu new district, Chengdu, Sichuan, 610217 China

FCC ID: 2AN3V-EPFA13

Report Type: Original Report	Product Name: Wireless Charger Dock
Report Number:	RSC170927002
Report Date:	2017-10-25
Reviewed By:	Sula Huang EMC Director 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65525123 Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
MECHANICAL DESCRIPTION OF EUT	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
MEASUREMENT UNCERTAINTY	3
TEST METHODOLOGY	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE.....	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE	5
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENTS LIST.....	7
SUMMARY OF TEST RESULTS	8
FCC§15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC §1.1307 & 1.1310 – RF EXPOSURE	10
APPLICABLE STANDARD.....	10
EUT SETUP.....	11
RESULT	11
FCC §15.207 – AC LINE CONDUCTED EMISSION	13
APPLICABLE STANDARD.....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205 & §15.209 - FIELD STRENGTH AND RADIATED EMISSIONS.....	17
APPLICABLE STANDARD.....	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP	17
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **Sichuan E-power Technology Co., Ltd**, model number: **FA13 (FCC ID: 2AN3V-EPFA13)** or the "EUT" as referred to in this report was the **Wireless Charger Dock**.

Mechanical Description of EUT

The EUT was measured approximately 100mm (D) x 10mm (H).

Rated input voltage: DC 9V from adapter.

Note: The products, test model: FA13, Multi-model: FA13-1, FA13-2. We selected model: FA13 to fully test, please refer to the Difference Declaration Letter provided by the manufacturer.

**All measurement and test data in this report was gathered from final production sample, serial number: 170927002/01 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-09-19, and EUT conformed to test requirement.*

Objective

This Type approval report is prepared on behalf of **Sichuan E-power Technology Co., Ltd** in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207 and 15.209.

Related Submittal(s)/Grant(s)

No

Measurement Uncertainty

Item		Uncertainty	
AC power line conducted emission		2.71dB	
Radiated Emission(Field Strength)	9kHz-30MHz	6.1dB	
	30MHz-200MHz	H	4.57dB
		V	4.81dB
	200MHz-1GHz	H	5.69dB
		V	6.07dB

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Chengdu). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by BACL to collect test data is located No. 5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China

BACL(Chengdu) is accredited by A2LA in accordance with the recognized international standard ISO/IEC 17025, A2LA cert No.: 4324.01. The Federal communications commission has on file and is listed under FCC Test Firm Registration No.: 910975.

BACL(Chengdu) has been fully described in reports on file and registered with the Innovation, Science and Economic Development Canada under Registration Numbers: 3062C-1.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user)

EUT Exercise Software

N/A

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Huawei	Mobile Phone	P7	No
Xinheyuan	Adapter	XHY0501WLC	No

External I/O Cable

Cable Description	Length (m)	From	To
Unshielded USB Cable	1.0	Adapter	EUT

Block Diagram of Test Setup

Conducted Emission Test

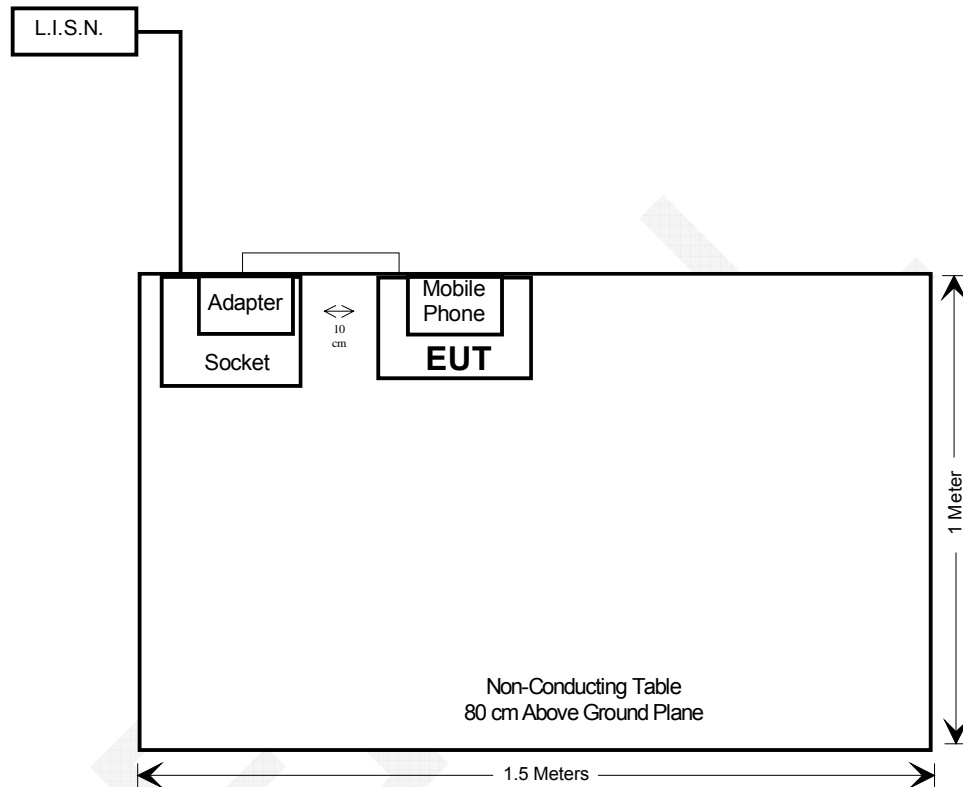

Test Equipments List

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2017-05-20	2018-05-19
Rohde & Schwarz	RF Limiter	ESH3Z2	DE14781	2016-12-02	2017-12-01
N/A	Conducted Cable	NO.5	N/A	2016-11-10	2017-11-09
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2017-05-20	2018-05-19
Rohde & Schwarz	EMI Test Receiver	ESIB 40	100215	2017-09-12	2018-09-11
A.H.Systems,inc	Loop Antenna	SAS-563B	365	2017-05-19	2020-05-18
Sunol Sciences	Broadband Antenna	JB3	A121808	2017-05-18	2020-05-17
INMET	Attenuator	N-6dB	/	2016-11-10	2017-11-09
Sonoma	Pre-Amplifier	310N	186684	2017-07-18	2018-07-17
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (Below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (Below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
Rohde & Schwarz	EMC32	N/A	V 8.52.0	N/A	N/A
RF Exposure					
NARDA	Magnetic field meter	ELT-400	423314	2017-04-24	2018-04-23
NARDA	E-field Probe	EF-0391	D-0607	2017-04-24	2018-04-23
NARDA	Magnetic Probe	HF-3061	D-0228	2017-04-24	2018-04-23

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§1.1307, §1.1310	RF Exposure	Compliance
§15.207	Conducted Emissions	Compliance
§15.209, §15.205	Radiated Emissions	Compliance

FEMVA

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has one integrated loop inductive antenna arrangement, which was permanently attached and fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FEMVA

FCC §1.1307 & 1.1310 – RF EXPOSURE

Applicable Standard

FCC §1.1307 & 1.1310

According to the item 5.2 of KDB 680106 D01 RF Exposure Wireless Charging Apps v02: Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF evaluation.

- a) Power transfer frequency is less than 1 MHz.
- b) Output power from each primary coil is less than 5 watts.
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- d) Client device is inserted in or placed directly in contact with the transmitter.
- e) The maximum coupling surface area of the transmit (charging) device is between 60 cm² and 400 cm².
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz

*= Plane-wave equivalent power density

EUT Setup

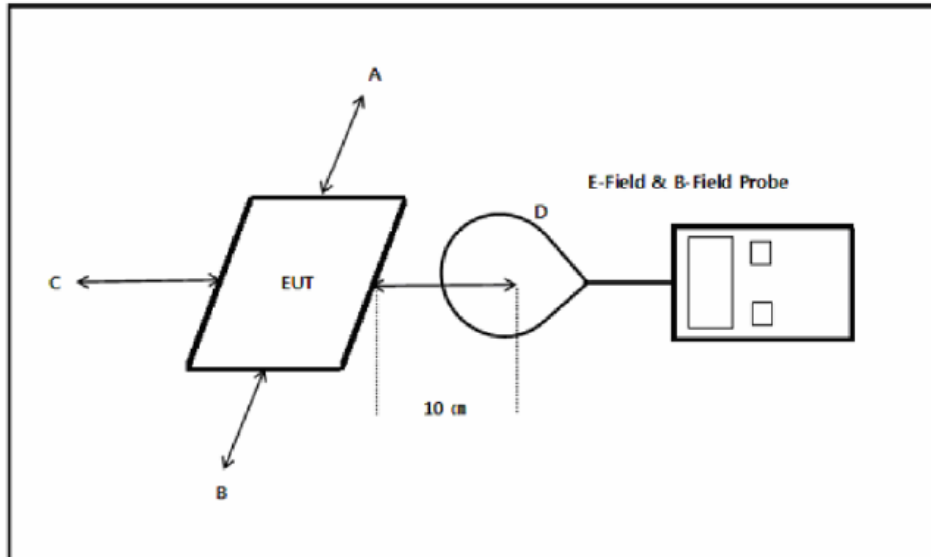

Result

- a) Power transfer frequency is less than 1 MHz.
The device operates in the frequency 110kHz-205kHz.
- b) Output power from each primary coil is less than 5 watts.
The maximum output power of the primary coil is 4.85W<5W.
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

The transfer system including a charging system with only single primary coils is to detect and allow only between individual of coils.
- d) Client device is inserted in or placed directly in contact with the transmitter.
Client device is placed directly in contact with the transmitter.
- e) The maximum coupling surface area of the transmit (charging) device is between 60 cm² and 400 cm².
The EUT Coupling surface area (Type: Cycle)
 $\pi * R^2 = 3.14 * 5^2 = 78.50 \text{ cm}^2 > 60 \text{ cm}^2$
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.
The EUT E-field Strength at 10cm & The EUT H-field Strength levels at 10cm are less than 30% the MPE limit.

Please refer the results below.

E-Filed Strength(10 cm)

Frequency Range (kHz)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limit Test (V/m)
110-205	1.75	1.71	1.94	1.66	5.74	614

H-Filed Strength(10 cm)

Frequency Range (kHz)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limit Test (A/m)
110-205	0.266	0.262	0.293	0.257	0.321	1.63

Note:


According with KDB 680106 D01 RF Exposure Wireless Charging Apps v02, Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614V/m and 1.63 A/m.

FCC §15.207 – AC LINE CONDUCTED EMISSION

Applicable Standard

FCC §15.207

EUT Setup

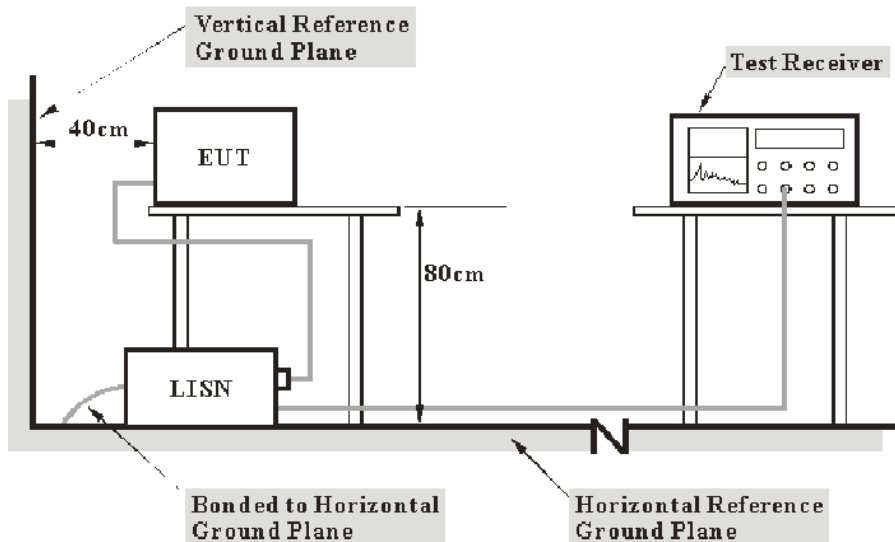

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	29 °C
Relative Humidity:	50 %
ATM Pressure:	94.9 kPa

The testing was performed by Lorin Bian on 2017-09-28.

Test mode: Charging and communication


AC120V/60Hz, Line:

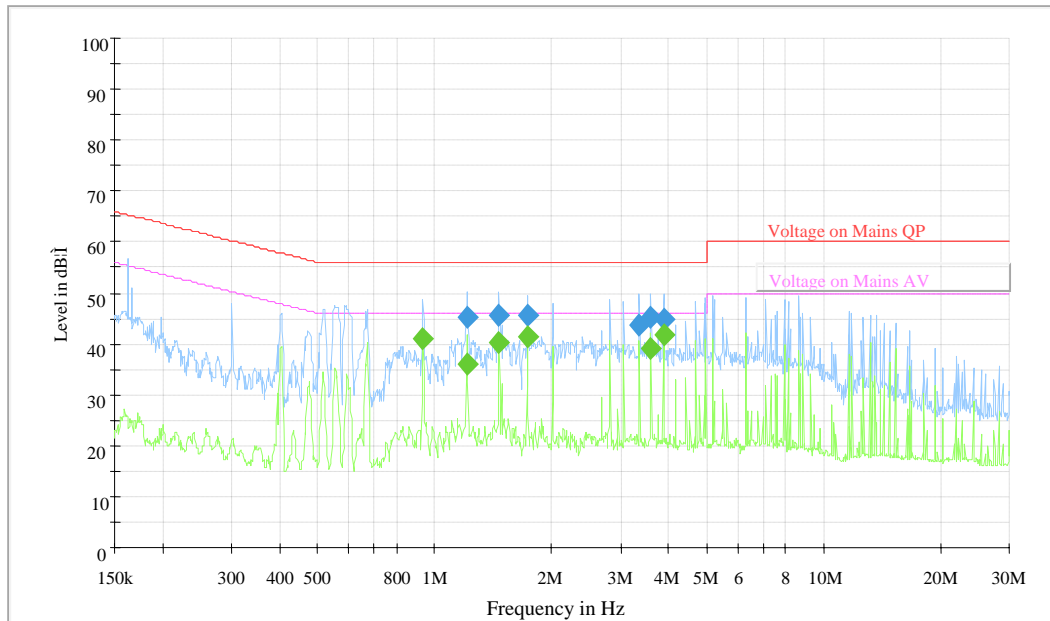

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.210106	45.3	200.0	9.000	L1	19.8	10.7	56.0
1.465688	45.5	200.0	9.000	L1	19.8	10.5	56.0
1.733235	45.4	200.0	9.000	L1	19.8	10.6	56.0
3.362434	43.6	200.0	9.000	L1	19.9	12.4	56.0
3.598545	45.4	200.0	9.000	L1	19.9	10.6	56.0
3.866640	44.7	200.0	9.000	L1	19.9	11.3	56.0

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.933538	41.2	200.0	9.000	L1	19.8	4.8	46.0
1.210106	35.9	200.0	9.000	L1	19.8	10.1	46.0
1.465688	40.2	200.0	9.000	L1	19.8	5.8	46.0
1.733235	41.3	200.0	9.000	L1	19.8	4.7	46.0
3.598545	39.0	200.0	9.000	L1	19.9	7.0	46.0
3.866640	41.9	200.0	9.000	L1	19.9	4.1	46.0

AC120V/60Hz, Neutral:

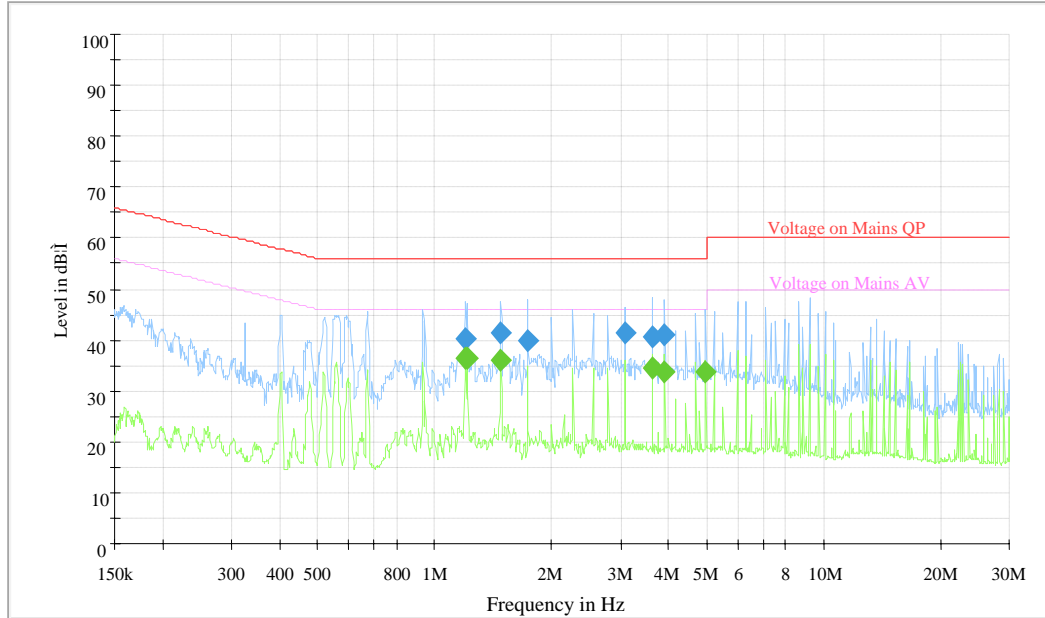

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.200483	40.1	200.0	9.000	N	19.6	15.9	56.0
1.477437	41.3	200.0	9.000	N	19.6	14.7	56.0
1.733235	39.9	200.0	9.000	N	19.6	16.1	56.0
3.092045	41.4	200.0	9.000	N	19.6	14.6	56.0
3.627391	40.7	200.0	9.000	N	19.6	15.3	56.0
3.897635	40.9	200.0	9.000	N	19.6	15.1	56.0

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.200483	36.2	200.0	9.000	N	19.6	9.8	46.0
1.210106	36.4	200.0	9.000	N	19.6	9.6	46.0
1.477437	36.0	200.0	9.000	N	19.6	10.0	46.0
3.627391	34.6	200.0	9.000	N	19.6	12.4	46.0
3.897635	33.5	200.0	9.000	N	19.6	12.5	46.0
4.972304	33.8	200.0	9.000	N	19.6	12.2	46.0

Note:


- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205 & §15.209 - FIELD STRENGTH AND RADIATED EMISSIONS

Applicable Standard

FCC§15.205, §15.209

EUT Setup

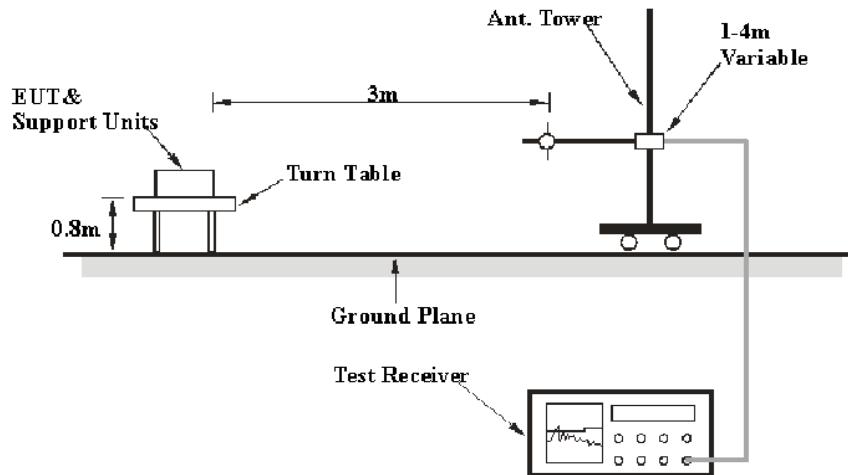

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to 120VAC/60Hz power source.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: The frequency bands 9-90 kHz and 110-490 kHz, the testing is based on average detector.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209.

Test Data


Environmental Conditions

Temperature:	28°C
Relative Humidity:	56 %
ATM Pressure:	94.9 kPa

* The testing was performed by Lorin Bian on 2017-10-24.


Test mode: Charging and communication

1) 9kHz-30 MHz

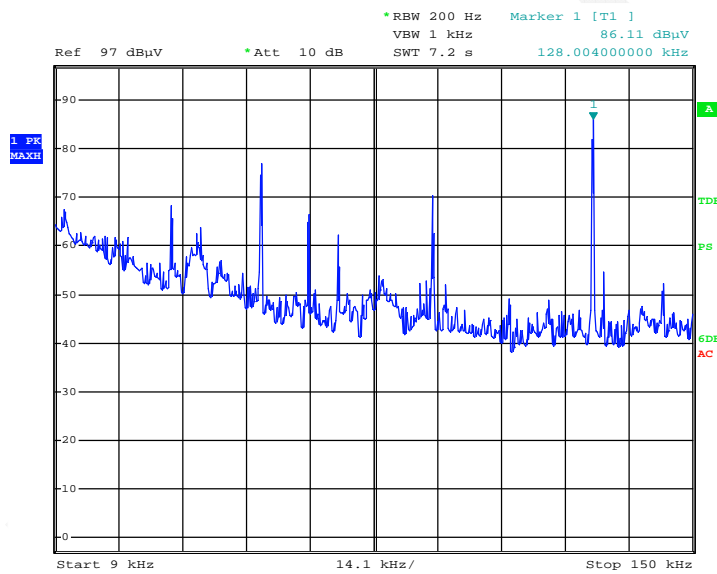

EUT

Date: 24.OCT.2017 21:40:14

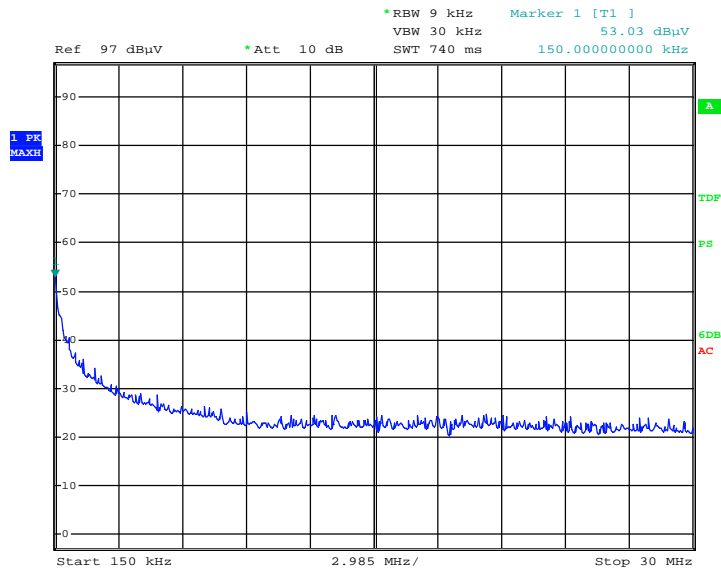


EUT
Date: 24.OCT.2017 21:58:47

Frequency	Receiver		Rx Antenna	Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Detector	Factor					
MHz	dBμV	PK/QP/AV	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dB
0.054	5.92	AV	72.39	6.37	29.11	55.57	112.96	57.39
0.092	25.32	QP	66.66	6.39	29.11	69.26	108.33	39.07
0.128*	42.79	AV	64.46	6.40	29.12	84.53	105.46	20.93
0.150	10.46	AV	63.33	6.47	29.12	51.14	104.08	52.94

Note:

1. "*" Means Fundamental frequency
2. Emission Level (dBμV/m) = Reading (dBμV) + Ant. Factor (dB/m) + Cable Loss (dB)
3. Margin [dB] = Limit (dBμV/m)- Corrected Amplitude
4. Limit calculation: Limit at specified distance + 40log (300/3) = Limit + 80 dB for up to 0.49 MHz
Limit at specified distance + 40log (30/3) = Limit + 40 dB for above 0.49 MHz up to 1.075 MHz
5. According to §15.209 (d), the measurements were tested by using Quasi peak detector except for the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1 GHz in these three bands on measurements employing an average detector.
6. Emissions more than 20dB below the limit are not recorded.

2) 30 MHz-1GHz:

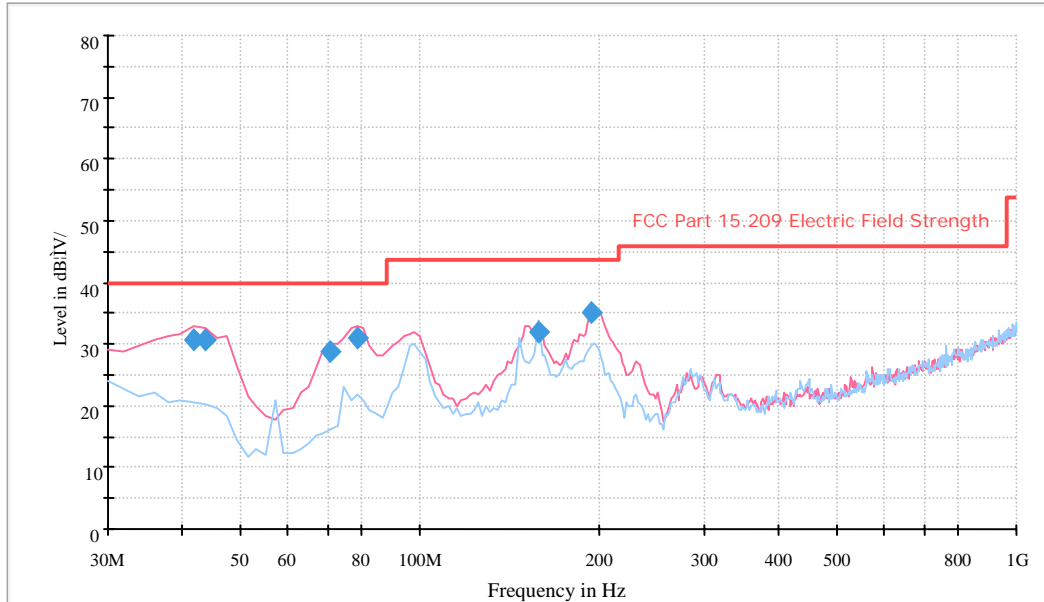

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
41.663327	30.8	200.0	120.000	100.0	V	313.0	-12.2	9.2	40.0
43.607214	30.6	200.0	120.000	112.0	V	16.0	-13.4	9.4	40.0
70.821643	28.9	200.0	120.000	153.0	V	181.0	-16.5	11.1	40.0
78.597194	31.0	200.0	120.000	100.0	V	189.0	-16.6	9.0	40.0
158.296593	31.9	200.0	120.000	162.0	H	352.0	-11.9	11.6	43.5
193.286573	35.1	200.0	120.000	100.0	V	298.0	-13.1	8.4	43.5

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude

Emissions more than 20dB below the limit are not recorded.

*****END OF REPORT*****