

Test Plot 1#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Up/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0370 W/kg


Horizontal-Up/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.472 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0317 W/kg

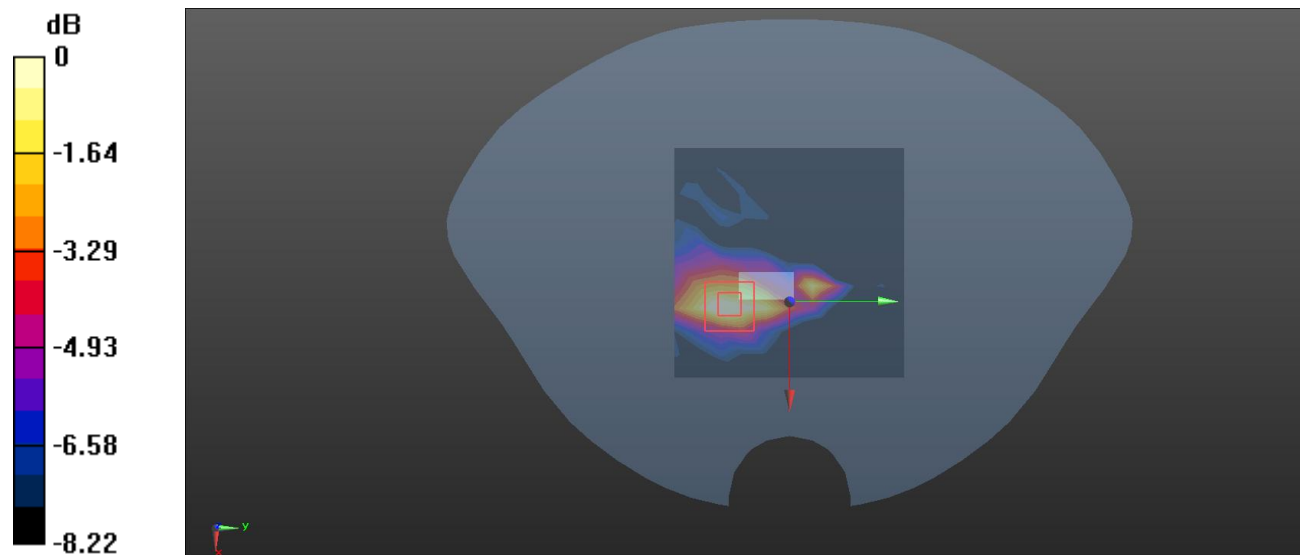

0 dB = 0.0317 W/kg = -14.99 dBW/kg

Test Plot 2#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Down/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0386 W/kg


Horizontal-Down/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.785 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0242 W/kg

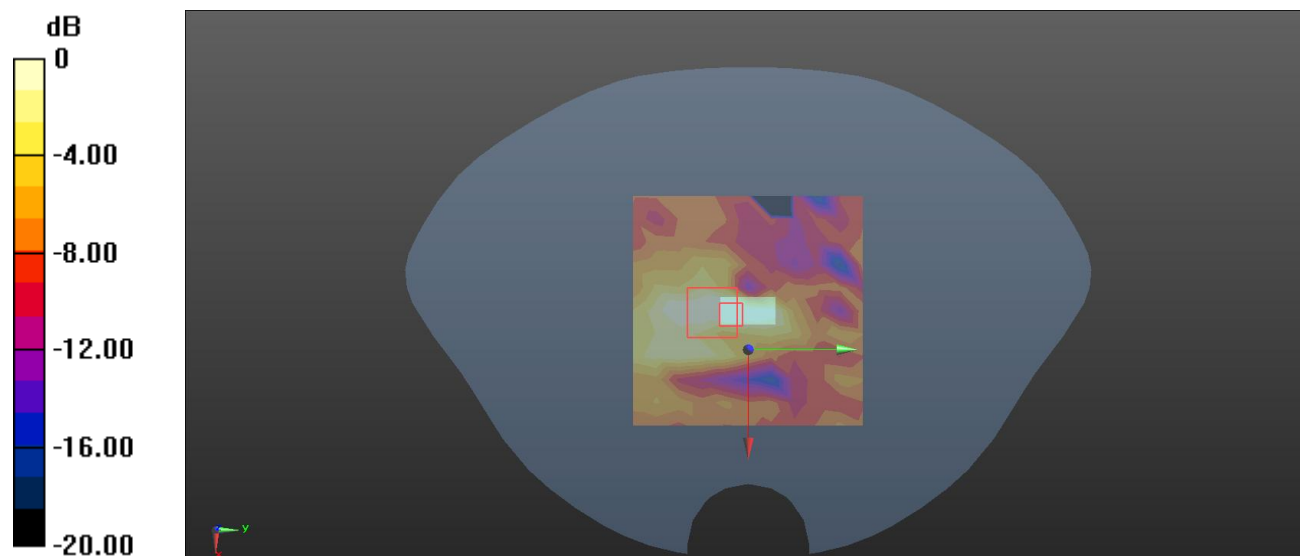

Test Plot 3#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Vertical-Front/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.101 W/kg


Vertical-Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.943 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

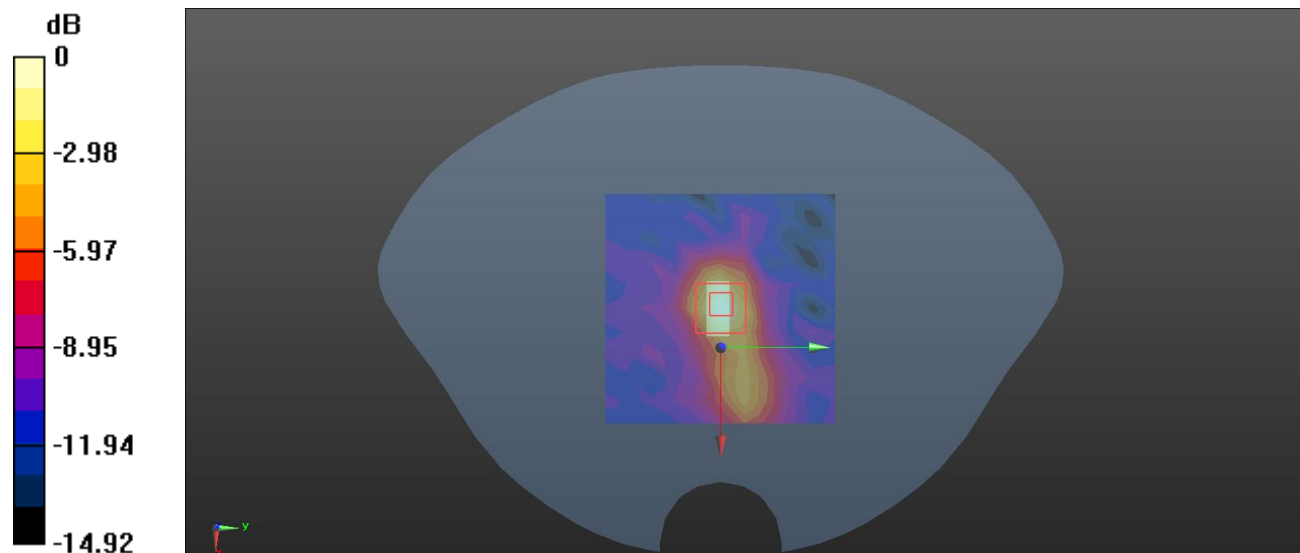

0 dB = 0.101 W/kg = -9.96 dBW/kg

Test Plot 4#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Vertical-Back/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0587 W/kg


Vertical-Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.558 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0650 W/kg

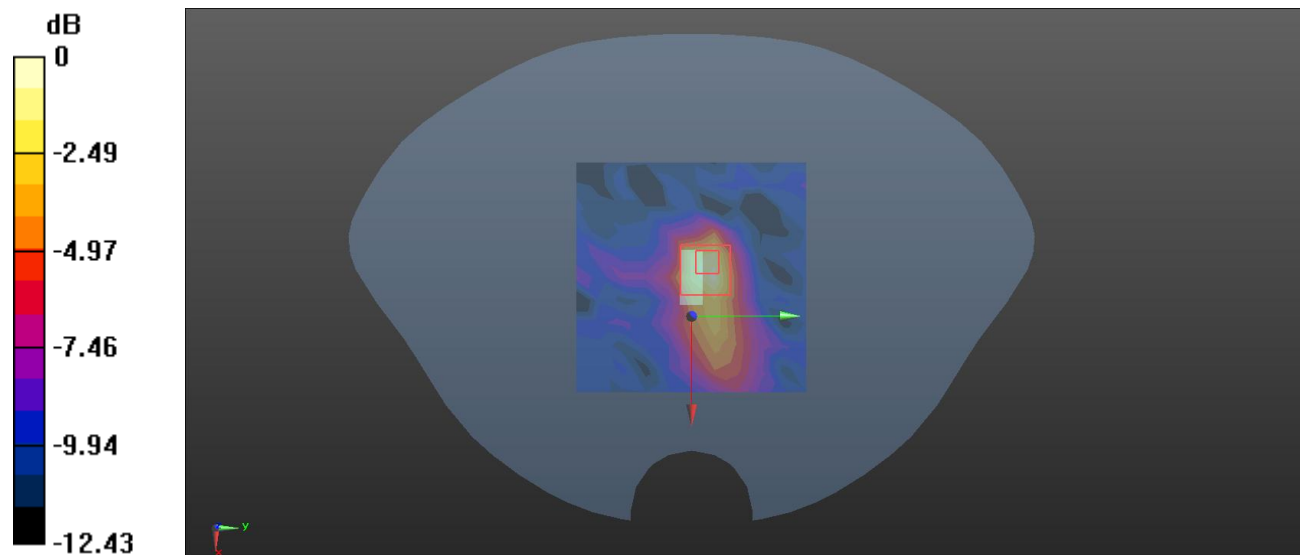

0 dB = 0.0650 W/kg = -11.87 dBW/kg

Test Plot 5#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.778$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Tip/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.126 W/kg


Tip/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.571 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

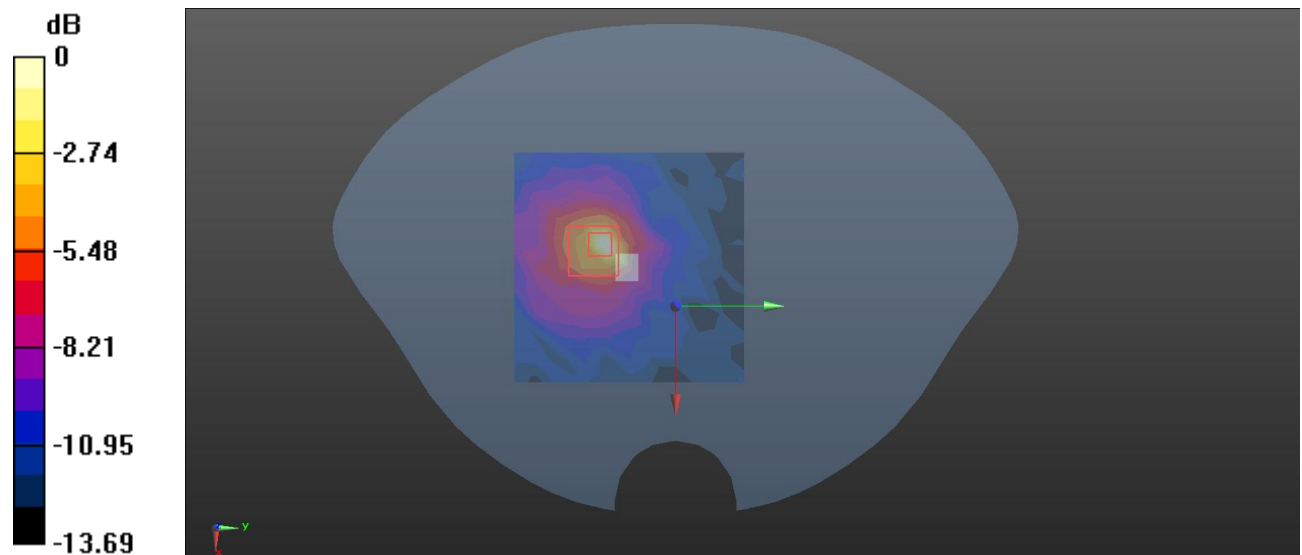

0 dB = 0.101 W/kg = -9.96 dBW/kg

Test Plot 6#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, BLE_1M (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Up/BLE_1M Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0352 W/kg


Horizontal-Up/BLE_1M Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.558 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0377 W/kg

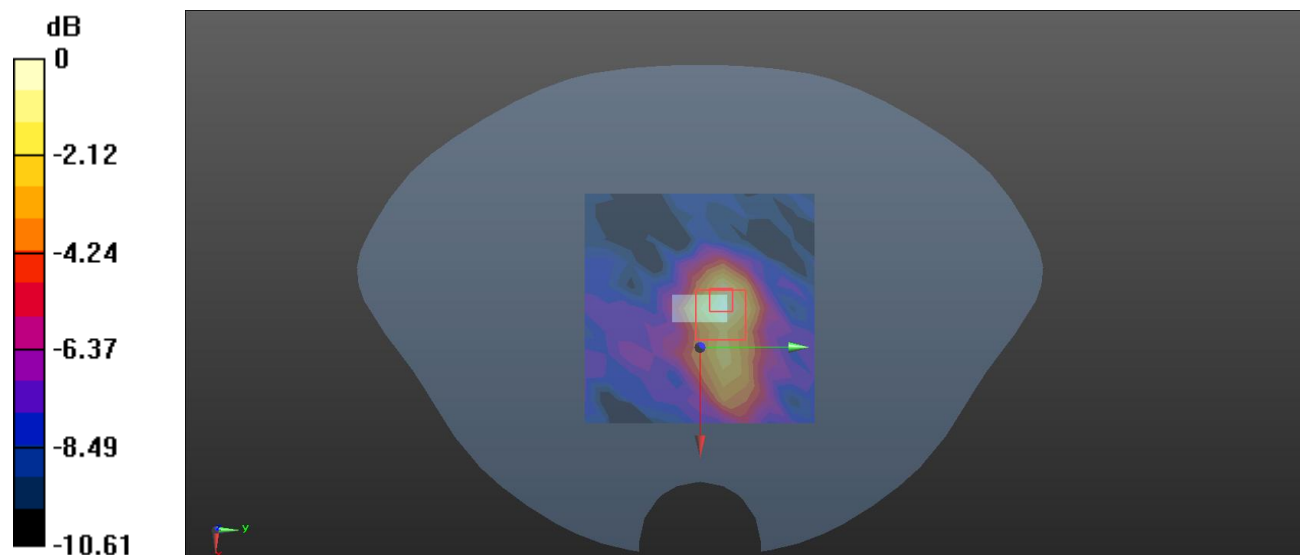

0 dB = 0.0377 W/kg = -14.24 dBW/kg

Test Plot 7#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, BLE_1M (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Down/BLE_1M Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0551 W/kg


Horizontal-Down/BLE_1M Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.865 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0623 W/kg

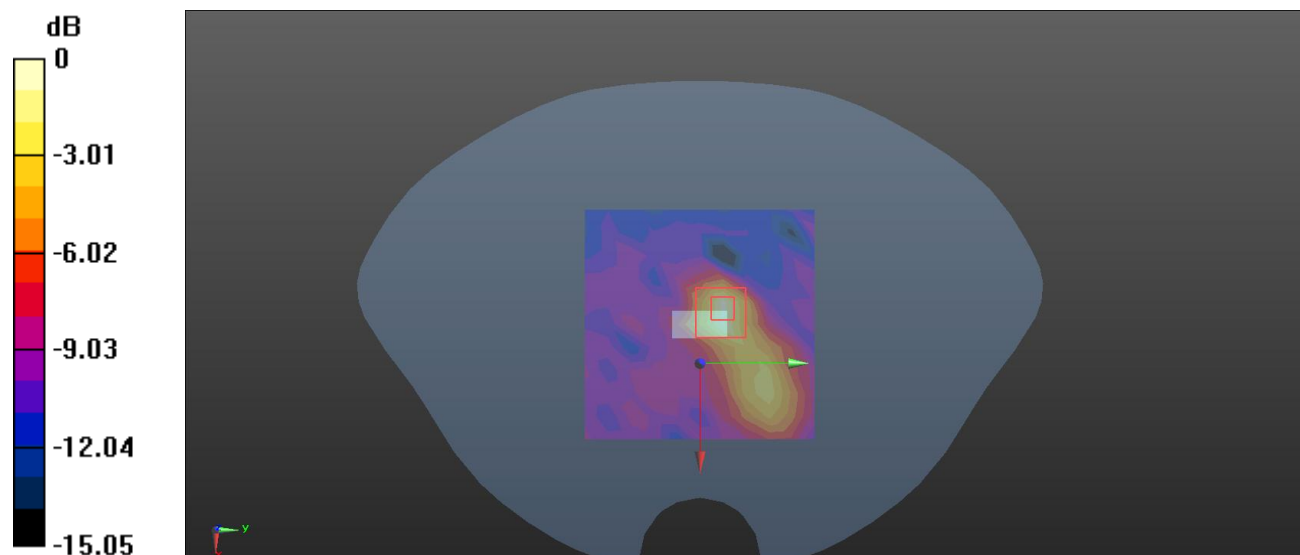

0 dB = 0.0623 W/kg = -12.06 dBW/kg

Test Plot 8#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, BLE_1M (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Verical-Front/BLE_1M Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0427 W/kg


Verical-Front/BLE_1M Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.660 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0535 W/kg

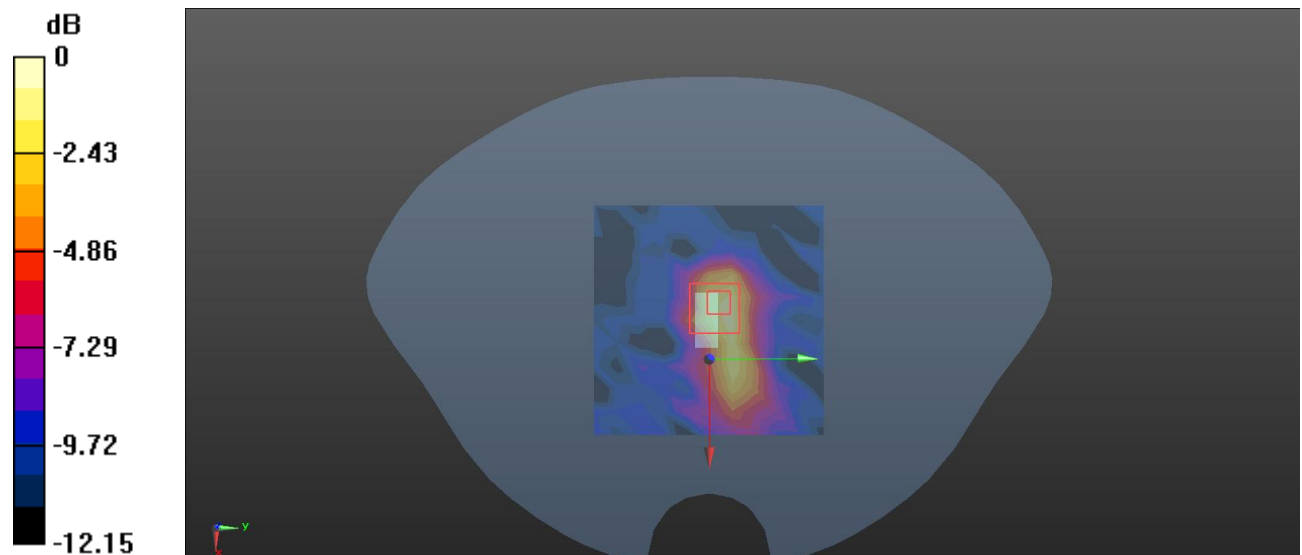

0 dB = 0.0535 W/kg = -12.72 dBW/kg

Test Plot 9#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, BLE_1M (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Verical-Back/BLE_1M Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0252 W/kg


Verical-Back/BLE_1M Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.057 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.011 W/kg.

Maximum value of SAR (measured) = 0.0256 W/kg

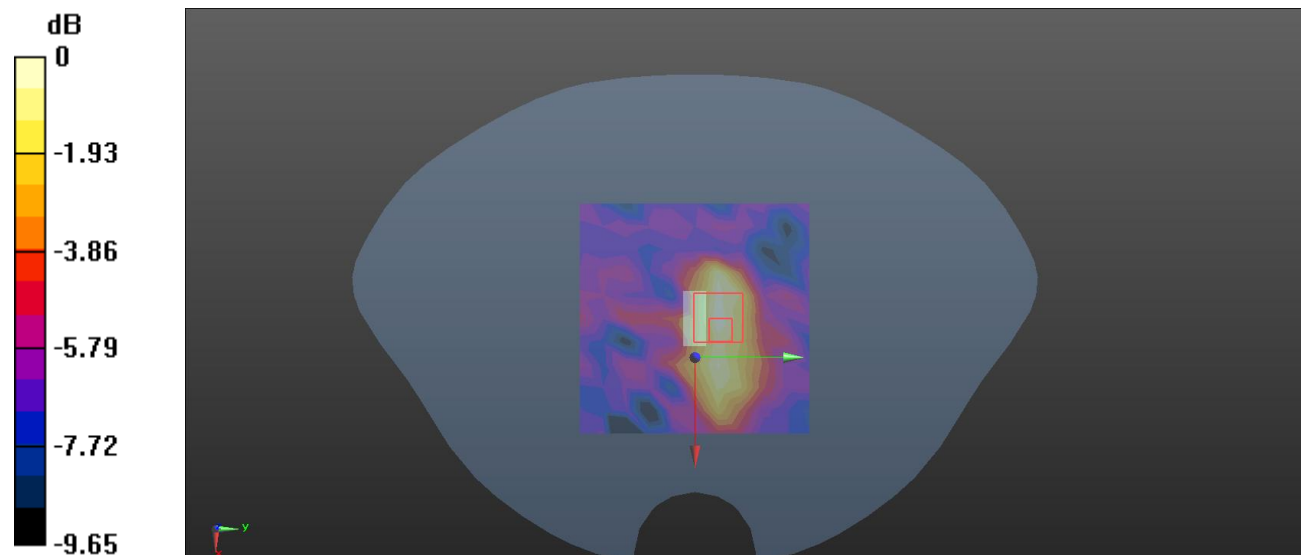

0 dB = 0.0256 W/kg = -15.92 dBW/kg

Test Plot 10#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, BLE_1M (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Tip/BLE_1M Mid/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0407 W/kg


Tip/BLE_1M Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.258 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0623 W/kg

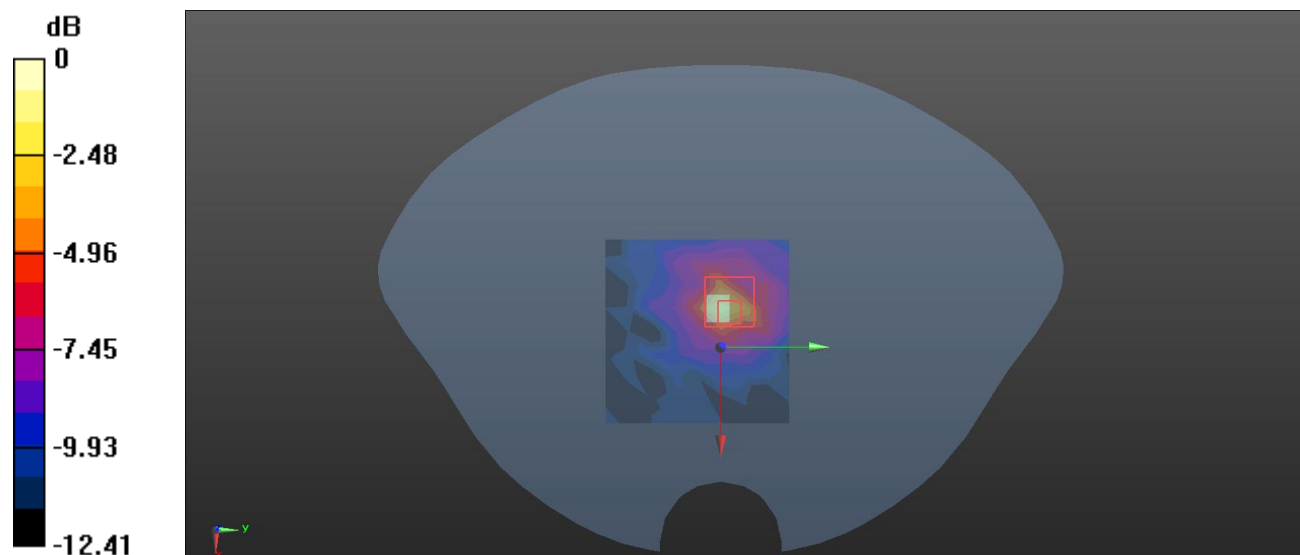

0 dB = 0.0623 W/kg = -12.06 dBW/kg

Test Plot 11#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, Thread (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Up/Thread Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0371 W/kg


Horizontal-Up/Thread Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.899 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.00891 W/kg; SAR(10 g) = 0.00264 W/kg

Maximum value of SAR (measured) = 0.0281 W/kg

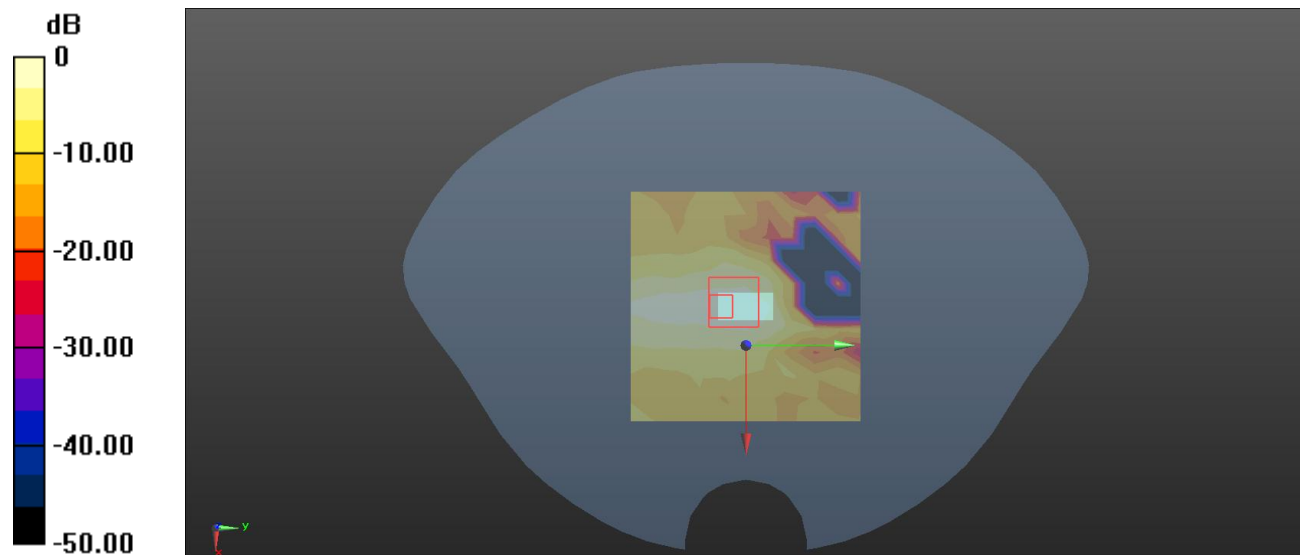

0 dB = 0.0281 W/kg = -15.51 dBW/kg

Test Plot 12#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, Thread (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Horizontal-Down/Thread Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0403 W/kg


Horizontal-Down/Thread Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.445 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00423 W/kg

Maximum value of SAR (measured) = 0.0363 W/kg

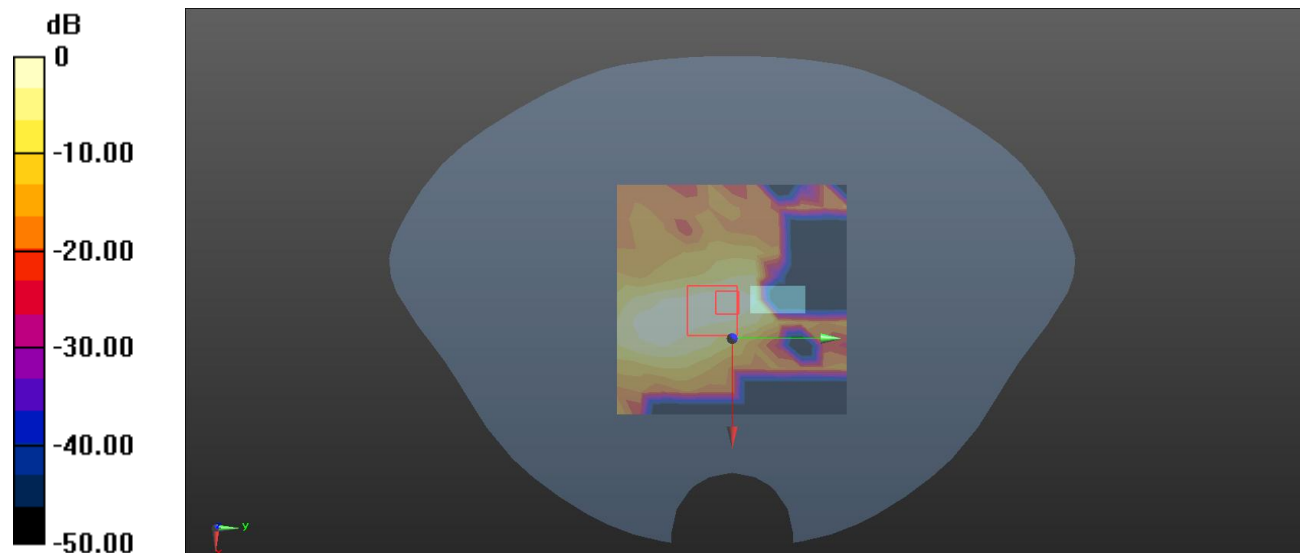

0 dB = 0.0363 W/kg = -14.40 dBW/kg

Test Plot 13#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, Thread (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Vertical-Front/Thread Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0271 W/kg


Vertical-Front/Thread Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.092 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00297 W/kg

Maximum value of SAR (measured) = 0.0290 W/kg

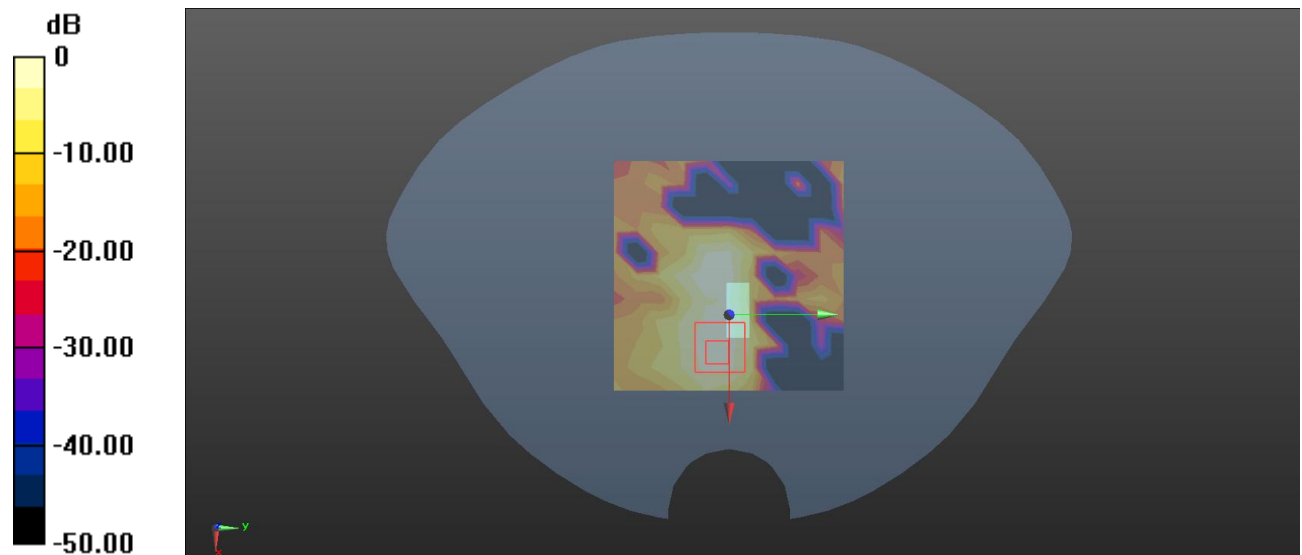

0 dB = 0.0290 W/kg = -15.38 dBW/kg

Test Plot 14#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, Thread (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Vertical-Back/Thread Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0307 W/kg


Vertical-Back/Thread Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.005 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00267 W/kg

Maximum value of SAR (measured) = 0.0302 W/kg

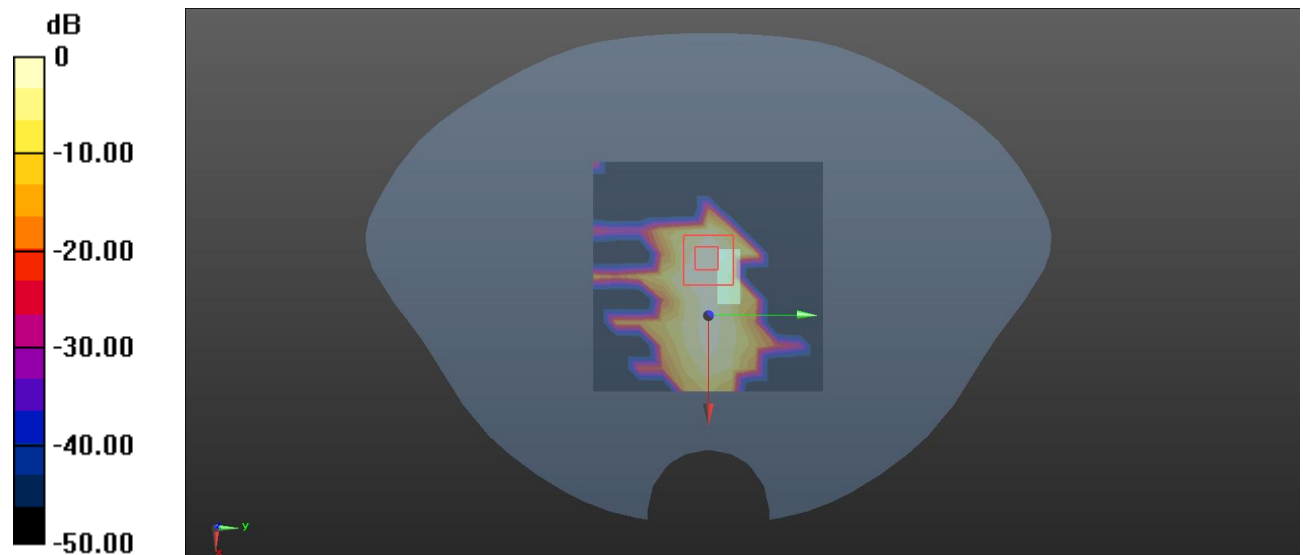

0 dB = 0.0302 W/kg = -15.20 dBW/kg

Test Plot 15#**DUT: NanoC6; Type: M5NanoC6; Serial: 2FDS-1;**

Communication System: UID 0, Thread (0); Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2440$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2440 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Tip/Thread Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0196 W/kg


Tip/Thread Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.00275 W/kg; SAR(10 g) = 0.000355 W/kg

Maximum value of SAR (measured) = 0.0171 W/kg

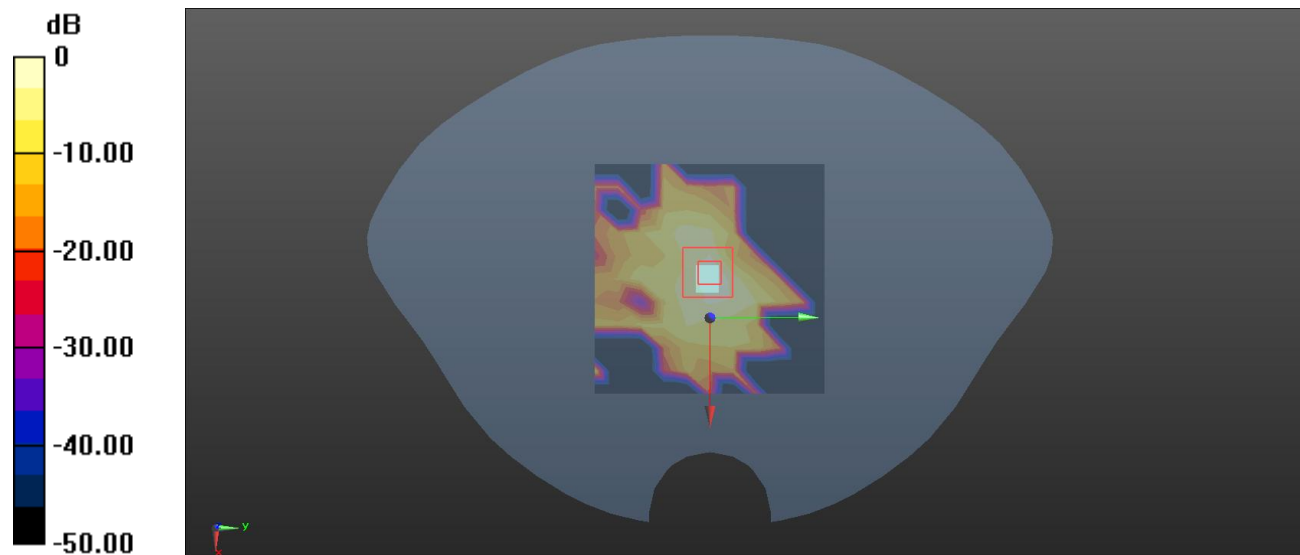

0 dB = 0.0171 W/kg = -17.67 dBW/kg