



Report No.: FCC 1902049-01 File reference No.: 2019-02-25

Applicant: Hipcam Ltd

Product: Doorbell

Model No.: HD008, HD009, HD010, HD011, HD012, HD015,

HD016, HD017, HD018, HD019, HD020

Trademark: Hipcam

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: February 25, 2019

Results appearing herein relate only to the sample tested

The technical r eports is issued err ors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1902049-01 Page 2 of 93

Date: 2019-02-25



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



### **Test Report Conclusion**

### Content

4
. 4
. 4
. 4
. 5
. 5
. 5
. 5
. 6
. 8
. 8
. 8
. 8
. 9
. 9
. 9
. 9
. 10
. 10
10
. 13
. 13
. 13
. 13
. 14
. 23
43
. 46
. 64
. 82
. 83
. 84

Report No.: FCC1902049-01 Page 4 of 93

Date: 2019-02-25



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

### 1.2 Applicant Details

Applicant: Hipcam Ltd

Address: 14th Altalef St' Yehud, 56101 Israel

Telephone: -Fax: --

### 1.3 Description of EUT

Product: Doorbell

Manufacturer: ShenZhen SiGo Electronics Company Limited

Address: No. 143 Huasheng Road, Dalong street, Longhua District, Shenzhen

Brand Name: Hipcam
Model Number: HD008
Hardware Version: 1.0.0
Software Version 1.0.0

Additional Model Number: HD009,HD010,HD011,HD012,HD015,HD016,HD017,HD018,HD019,HD020

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz, IEEE 802.11n (HT40): 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20/HT40)

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels. IEEE 802.11n (HT40): 7 Channels

Antenna: Integral antenna used. The gain of the antennas is 2.0dBi. Power Supply: Model: HP002U; Rating: Input: 110~240~, 50/60Hz, 0.35A;

Output: 5V,2A

### 1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1902049-01 Page 5 of 93

Date: 2019-02-25



1.5 Test Duration 2019-02-19 to 2019-02-25

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1902049-01 Page 7 of 93

Date: 2019-02-25



### 3. DESCRIPTION OF TEST MODES

### IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing, Dutycycle>98%.

### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing ,Dutycycle>98%.

Page 8 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



### 3.0 T echnical Details

### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted emission	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

### 3.2 T est Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

### **4.0 EUT** Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1902049-01

Date: 2019-02-25



### 5.0 Power Line Conducted Emission Test

### 5.1 Schematics of the test

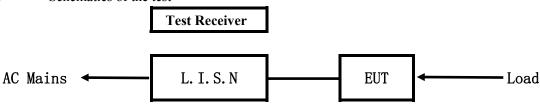


**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

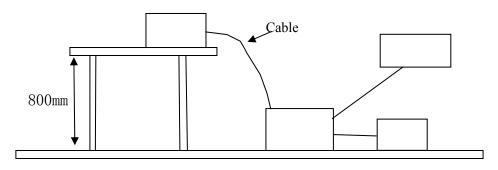

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model	FCC ID
Doorbell	ShenZhen SiGo Electronics	HD008 2AN5OHD0	
Doorbeil	Company Limited	110008	ZANSOHD006

### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

### C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1902049-01 Page 10 of 93

Date: 2019-02-25



### 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Limits (dB µ V)		Class B Lim	nits (dB µ V)
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5 00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1902049-01

Date: 2019-02-25



### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


**EUT set Condition: Keep WIFI Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

### 80.0 dBuV

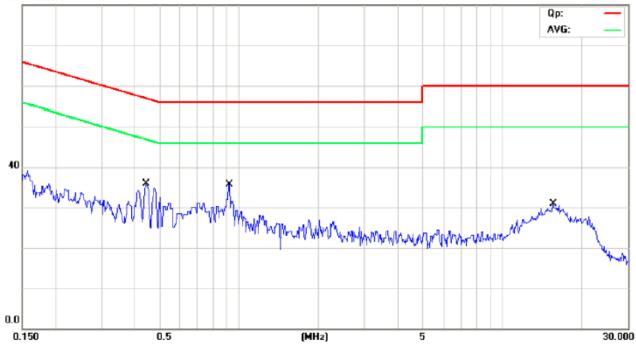

No. Mk.	Freq.	Measure- ment	Limit	Over	
	MHz	dBuV	dBuV	dB	Detector
1 *	0.4422	33.60	57.02	-23.42	QP
2	0.4422	-1.70	47.02	-48.72	AVG
3	0.9185	30.50	56.00	-25.50	QP
4	0.9185	3.40	46.00	-42.60	AVG
5	15.6223	24.50	60.00	-35.50	QP
6	15.6223	-2.30	50.00	-52.30	AVG

30.000

Report No.: FCC1902049-01

Date: 2019-02-25



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


**EUT set Condition: Keep WIFI Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

0.0

Please refer to following diagram for individual

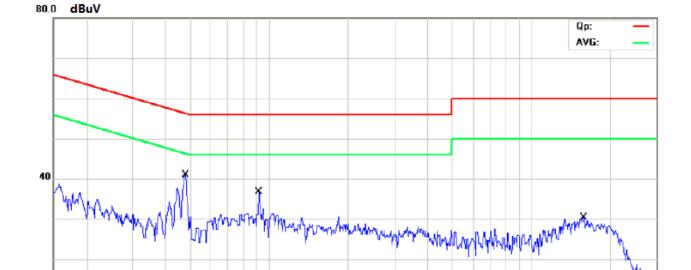

(MHz)

No.	Mk.	Freq.	Measure- ment	Limit	Over	
		MHz	dBuV	dBuV	dB	Detector
1	*	0.4775	37.90	56.38	-18.48	QP
2		0.4775	7.60	46.38	-38.78	AVG
3		0.9150	28.60	56.00	-27.40	QP
4		0.9150	3.10	46.00	-42.90	AVG
5		15.8464	23.00	60.00	-37.00	QP
6		15.8464	-4.00	50.00	-54.00	AVG

The report refers only to the sample tested and does not apply to the bulk.

0.5

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1902049-01 Page 13 of 93

Date: 2019-02-25



### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1902049-01 Page 14 of 93

Date: 2019-02-25



### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

		9 1
Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Report No.: FCC1902049-01 Page 15 of 93

Date: 2019-02-25




### Test result

### General Radiated Emission Data and Harmonics Radiated Emission Data

### Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results:** Pass

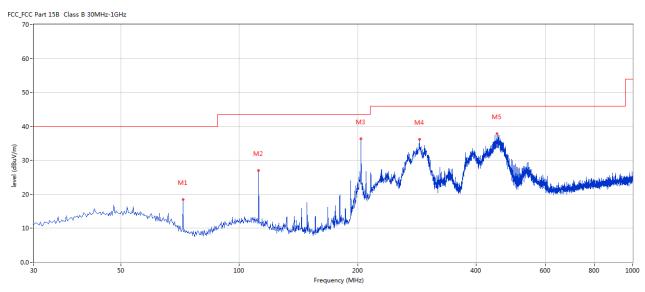

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	71.942	18.47	-16.53	40.0	-21.53	Peak	53.00	200	Н	Pass
2	111.945	27.07	-13.81	43.5	-16.43	Peak	310.00	200	Н	Pass
3	203.829	36.31	-13.50	43.5	-7.19	Peak	83.00	200	Н	Pass
4	287.228	36.15	-11.29	46.0	-9.85	Peak	94.00	100	Н	Pass
5	452.329	37.88	-7.87	46.0	-8.12	Peak	130.00	100	Н	Pass

Page 16 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




### Test result

### General Radiated Emission Data and Harmonics Radiated Emission Data

### Radiated Emission In Vertical (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results:** Pass

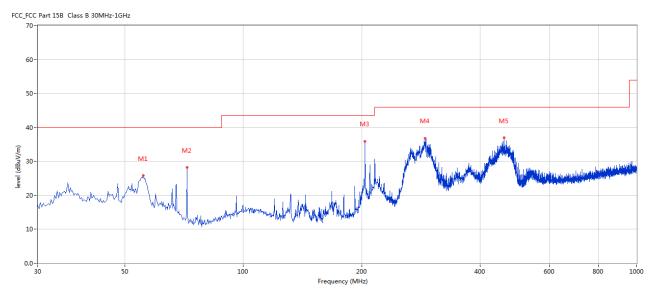

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	55.699	25.81	-11.94	40.0	-14.19	Peak	360.00	100	V	Pass
2	71.942	28.18	-16.53	40.0	-11.82	Peak	261.00	100	V	Pass
3	203.829	35.96	-13.50	43.5	-7.54	Peak	176.00	100	V	Pass
4	290.137	36.85	-11.22	46.0	-9.15	Peak	0.00	100	V	Pass
5	460.572	36.90	-7.86	46.0	-9.10	Peak	30.00	200	V	Pass


Page 17 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



Please refer to the following test plots for details:

# CH01 for 11g at 6Mbps: Horizontal

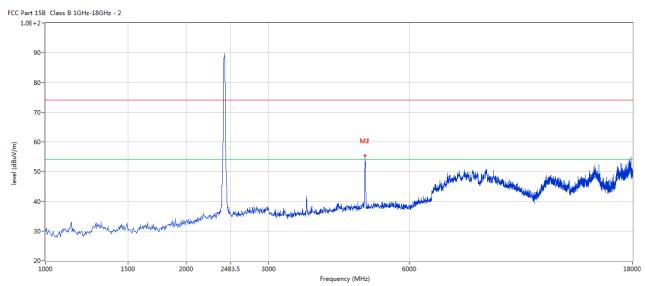


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	4824.044	55.29	3.14	74.0	-18.71	Peak	57.00	100	Н	Pass
2	4824.044	41.67	3.14	54.0	-12.33	AV	57.00	100	Н	Pass

Page 18 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### CH01 for 11g at 6Mbps: Vertical

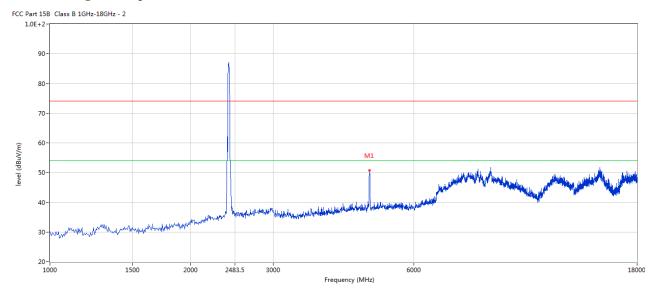


No	Ο.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
			)		)	(dB)					
1		4824.095	50.71	3.14	74.0	-23.29	Peak	128.00	100	V	Pass

Page 19 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### CH06 for 11g at 6Mbps: Vertical

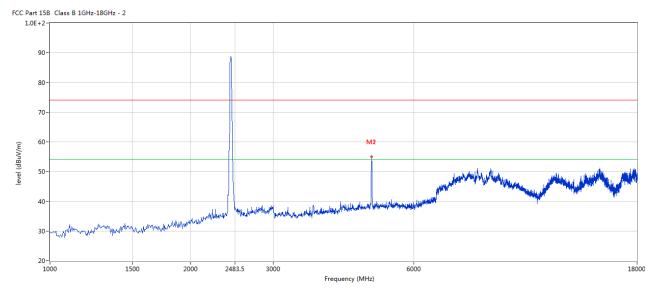


No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	4875.031	55.04	3.19	74.0	-18.96	Peak	149.00	100	V	Pass
2	4875.031	40.82	3.19	54.0	-13.18	AV	149.00	100	V	Pass

Page 20 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### CH06 for 11g at 6Mbps: Horizontal

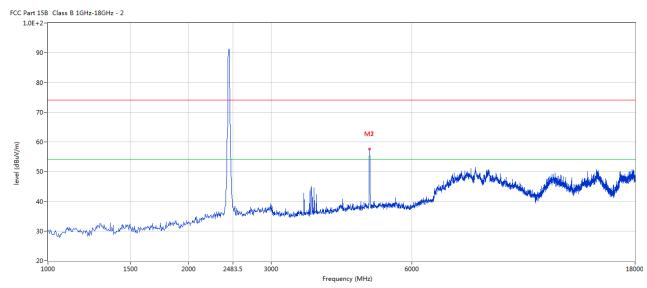


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	4875.031	57.68	3.19	74.0	-16.32	Peak	55.00	100	Н	Pass
2	4875.031	43.56	3.19	54.0	-10.44	AV	55.00	100	Н	Pass

Page 21 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### CH11 for 11g at 6Mbps: Vertical

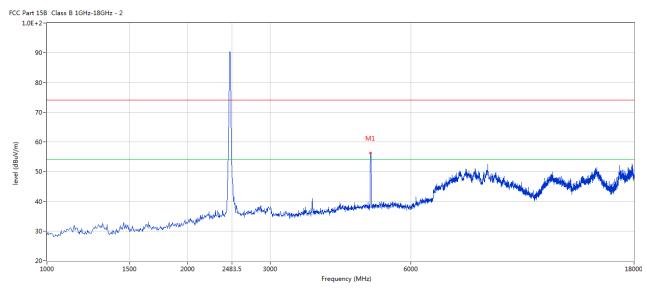


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	4923.770	56.21	3.27	74.0	-17.79	Peak	122.00	100	V	Pass
2	4923.770	42.19	3.27	54.0	-11.81	AV	122.00	100	V	Pass

Page 22 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### CH11 for 11g at 6Mbps: Horizontal

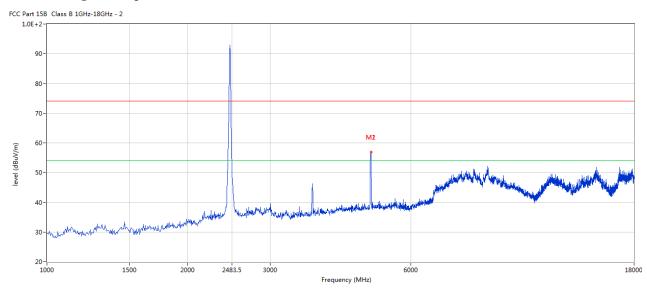

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	4924.018	56.88	3.28	74.0	-17.12	Peak	46.00	100	Н	Pass
2	4924.018	42.09	3.28	54.0	-11.91	AV	46.00	100	Н	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz, it is only the floor noise.

Page 23 of 93


Report No.: FCC1902049-01

Date: 2019-02-25



### 7.0 6dB Bandwidth Measurement

### 7.1 Test Setup



### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth  $(VBW) \ge 3 \times RBW$ .
- 3. Detector = Peak.
- 4. Trace mode =  $\max$  hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.4 Test Result

Page 24 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### 6dB Occupied Bandwidth


EUT		Γ	Doorbell		Model		HE	8000
Mode		8	302.11b		Input Vol	tage	12	0V~
Temperat	ure	24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2412		10.04			0.5	Pass
6		2437	1	10	.04		0.5	Pass
11		2462	1	10	.04		0.5	Pass
1		2412	11	10	.28	8 0.5		Pass
6		2437		10.28		28 0.5		Pass
11	2462		11	10.28		0.5		Pass

Report No.: FCC1902049-01 Page 25 of 93

Date: 2019-02-25



### 1. 802.11b at 1Mbps of CH01

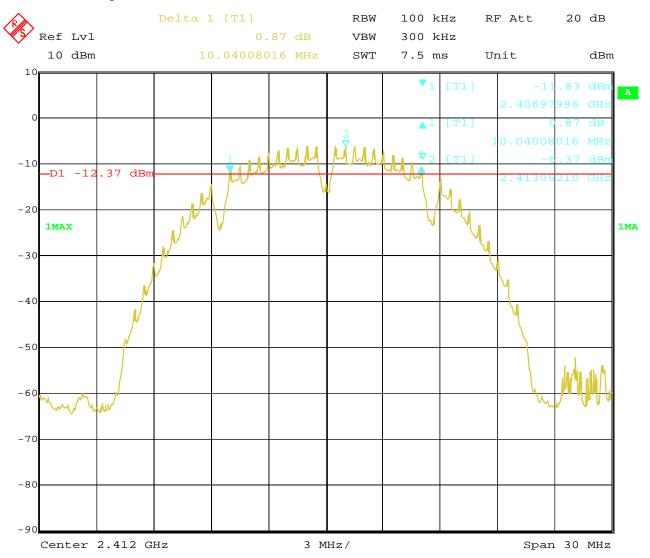


Report No.: FCC1902049-01 Page 26 of 93

Date: 2019-02-25



### 2. 802.11b at 1Mbps of CH06

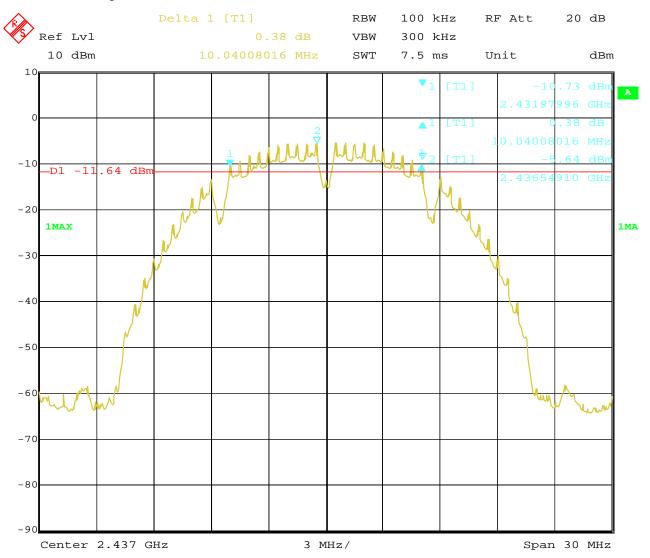


Report No.: FCC1902049-01 Page 27 of 93

Date: 2019-02-25



### 3. 802.11b at 1Mbps of CH11

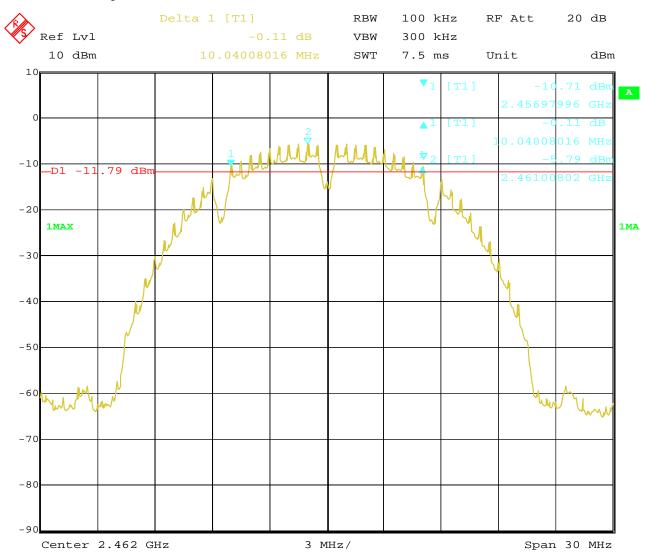


Report No.: FCC1902049-01 Page 28 of 93

Date: 2019-02-25



### 4. 802.11b at 11Mbps of CH01

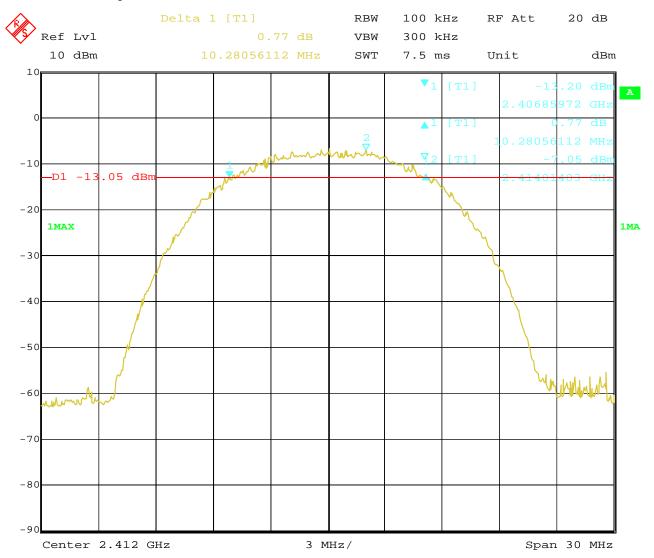


Report No.: FCC1902049-01 Page 29 of 93

Date: 2019-02-25



### 5. 802.11b at 11Mbps of CH06

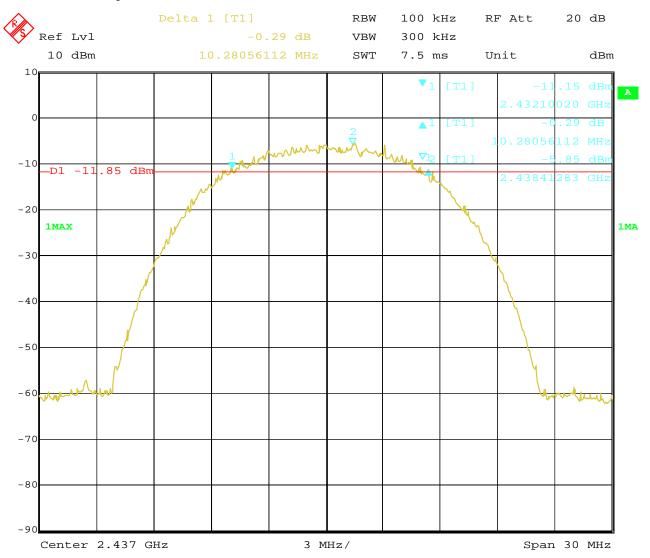


Report No.: FCC1902049-01 Page 30 of 93

Date: 2019-02-25



### 6. 802.11b at 11Mbps of CH11

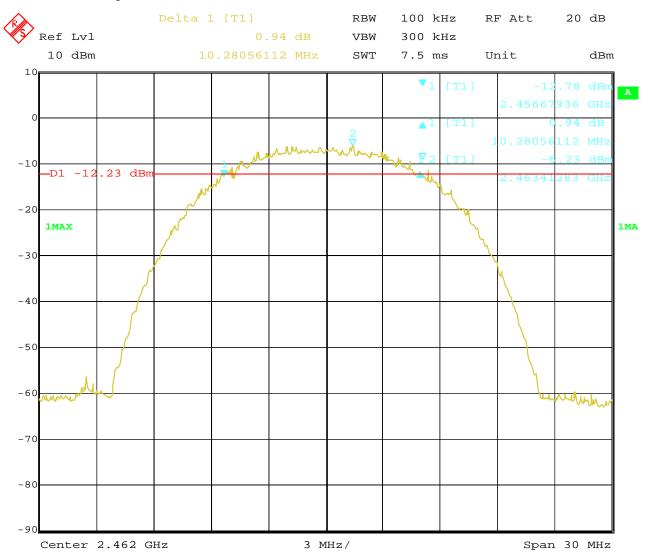

Page 31 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### 6dB Occupied Bandwidth

EUT		Γ	Doorbell		Model		]	HD008
Mode		8	302.11g		Input Vol	tage		120V~
Temperature		24	4 deg. C,		Humidity		56% RH	
Channel	Channel Channel (M		Data Transfer Rate (Mbps)		andwidth [Hz]	Minimum Limit (MHz)		Pass/ Fail
1		2412	6	16	5.41		0.5	Pass
6	2437		6	16	5.41		0.5	Pass
11	1 2462		6	16.41		0.5		Pass


Report No.: FCC1902049-01 Page 32 of 93

Date: 2019-02-25



### **Test Plots:**

### 1. 802.11g at 6Mbps of CH01

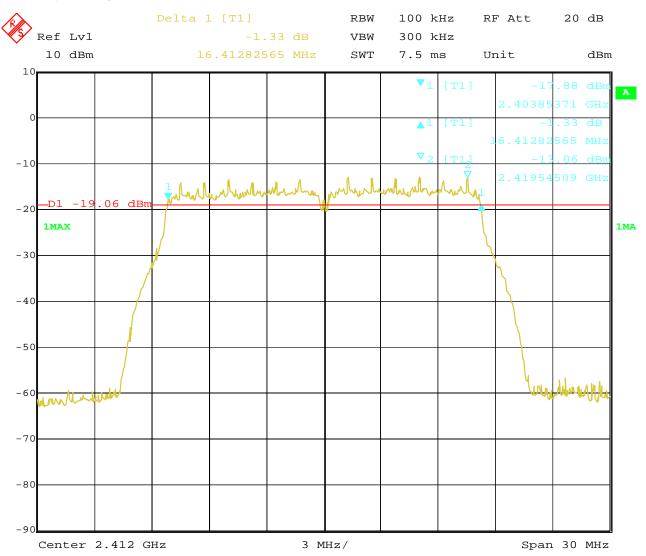


Report No.: FCC1902049-01 Page 33 of 93

Date: 2019-02-25



### 2. 802.11g at 6Mbps of CH06

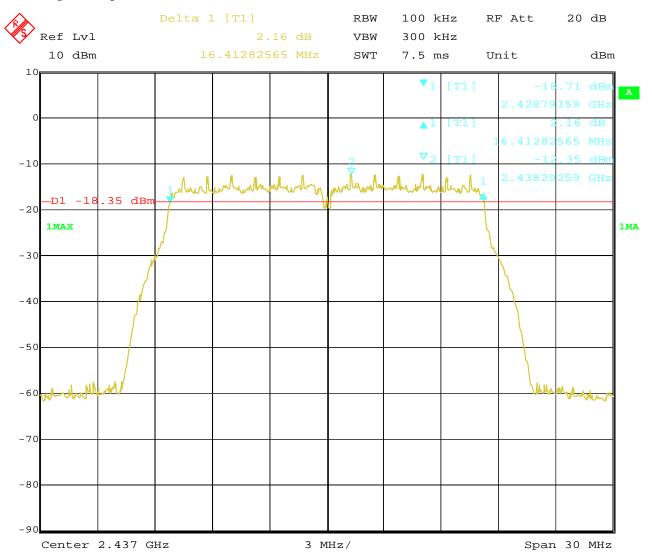


Report No.: FCC1902049-01 Page 34 of 93

Date: 2019-02-25



### 3. 802.11g at 6Mbps of CH11

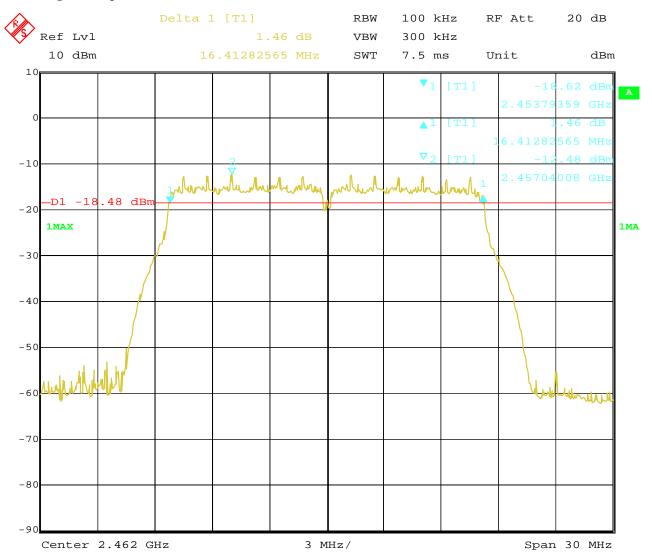

Page 35 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



### 6dB Occupied Bandwidth

EUT		Γ	Doorbell		Model		Н	8000
Mode		802	.11n HT20		Input Vol	tage	12	0V~
Temperature		24	4 deg. C,		Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			mum Limit MHz)	Pass/ Fail
1		2412		17	.56		0.5	Pass
6	2437		mcs0	17.56			0.5	Pass
11	2462		mcs0	17	.56		0.5	Pass


Report No.: FCC1902049-01 Page 36 of 93

Date: 2019-02-25



### **Test Plots:**


### 1. 802.11n at HT20 of CH01

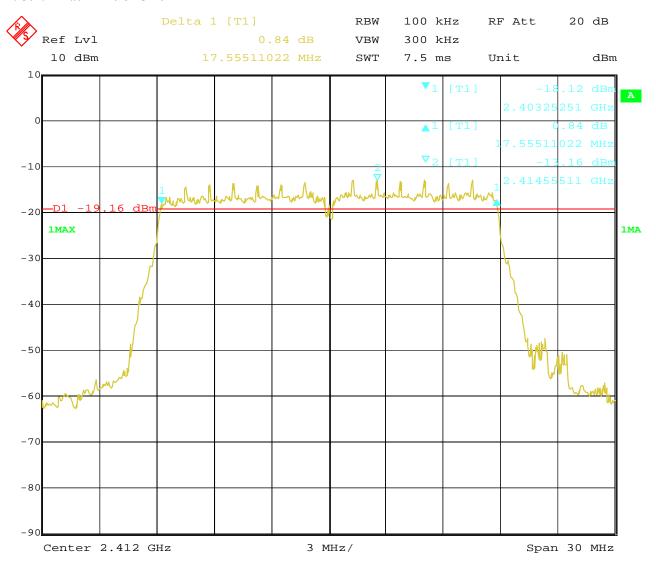

Report No.: FCC1902049-01 Page 37 of 93

Date: 2019-02-25




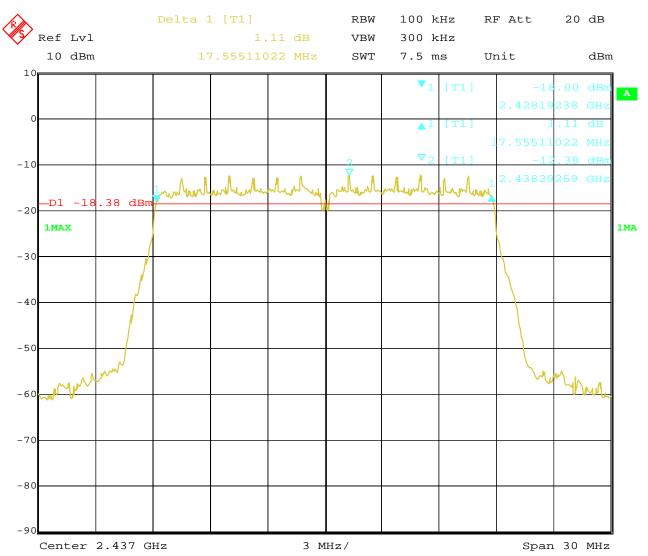

Report No.: FCC1902049-01 Page 38 of 93

Date: 2019-02-25



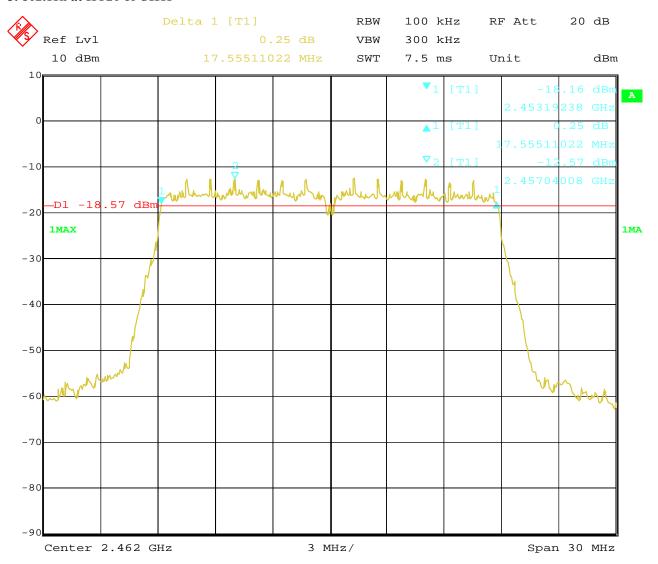

Page 39 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



# 6dB Occupied Bandwidth

EUT		Γ	Ooorbell		Model		HD008	
Mode		802	.11n HT40		Input Vol	tage	12	0V~
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
3		2422	mcs0	35	.89		0.5	Pass
6		2437	mcs0	35	.89		0.5	Pass
9		2452	mcs0	35	.89		0.5	Pass

Page 40 of 93


Report No.: FCC1902049-01

Date: 2019-02-25



## **Test Plots:**

# 1. 802.11n at HT40 of CH03

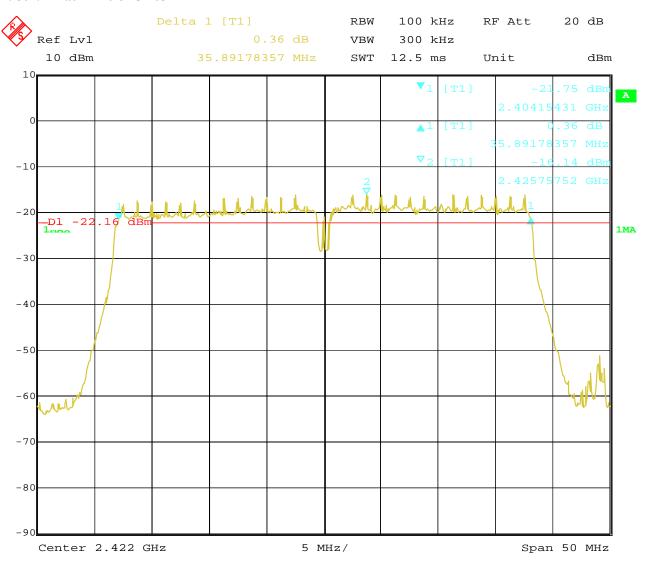


4

Report No.: FCC1902049-01 Page 41 of 93

Date: 2019-02-25




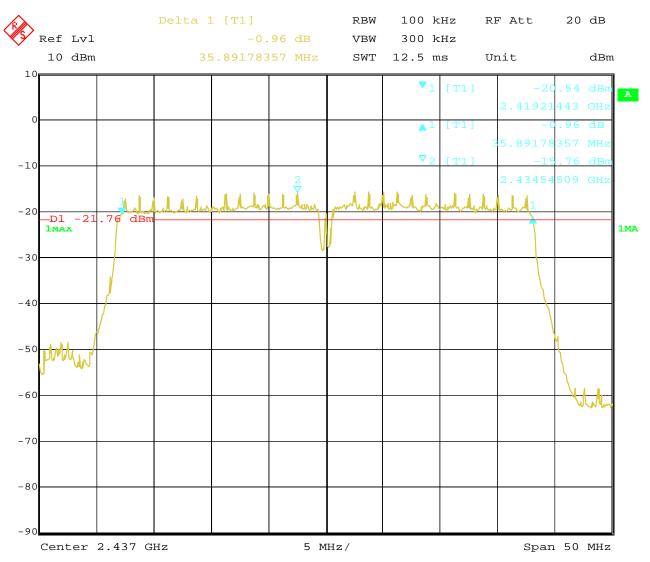

Report No.: FCC1902049-01 Page 42 of 93

Date: 2019-02-25



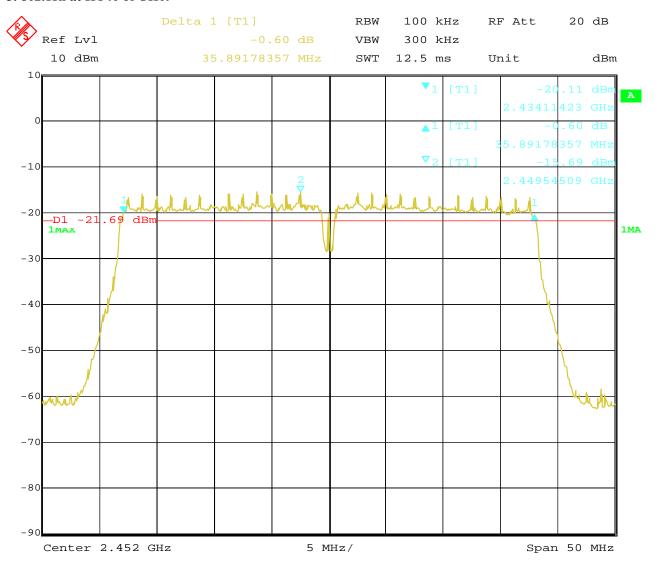

Report No.: FCC1902049-01


Date: 2019-02-25



Page 43 of 93

# 8. Maximum Output Power

# 8.1 Test Setup



## 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

## **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Page 44 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



## **8.4Test Results**

EUT	T Doort		bell Mo		odel		HD008
Mode	Mode 802.1		1b Input		Voltage		120V~
Temperat	ure	24 deg	g. C,	Hur	nidity 50		56% RH
Channel	Channel Frequency (MHz)		Max. Power (dBm)	Output	Power (dB		Pass/ Fail
		(1/1112)	Peak		(92)		
1		2412 8.07		30		Pass	
6		2437	8.95		30		Pass
11		2462	8.70		30	)	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	JT Doorb		pell Mo		odel		HD008
Mode	Mode 802.11		1g Input		out Voltage		120V~
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Channel Frequency (MHz)		Max. Power (dBm)	Output	Power Limit (dBm)		Pass/ Fail
			Peak				
1		2412	6.63		30		Pass
6		2437	7.52		30		Pass
11		2462	7.47		30	)	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



EUT	Doorb		bell Mo		odel		HD008	
Mode		802.11n (HT20) Input Voltage		Voltage		120V~		
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH	
Channel	Channel Frequency		Max. Power (dBm)	Output	Power (dB		Pass/ Fail	
		(MHz)	Peak		(ub	111)		
1		2412	6.66		30	)	Pass	
6		2437	7.51		30	)	Pass	
11		2462	7.38		30		Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	UT Doorbe		pell	ell Model		HD008	
Mode		802.11n (HT40) Input Voltage			120V~		
Temperat	ure	24 deg	g. C,	Hur	nidity		56% RH
Channel	Channel Frequency (MHz)		Max. Power (dBm)	Output	Power Limit (dBm)		Pass/ Fail
		(WILLE)	Peak	(dDill		111)	
3		2422	6.59		30	)	Pass
6		2437	7.13		30		Pass
9		2452	7.08		30		Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow: Max. Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: FCC1902049-01 Page 46 of 93

Date: 2019-02-25



# 9. Power Spectral Density Measurement

# 9.1 Test Setup



## 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

## 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8$  dBm.

Page 47 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



## 9.4Test Result

EUT	EUT Doorbell		pell	Model		HD008	
Mode		802.11b 1	802.11b 11Mbps Input Voltage			120V~	
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channel	Cha	annel Frequency (MHz)	Final RF Po Level (dB				Pass/ Fail
			11Mbps	S			
1		2412	-16.28		8		Pass
6		2437	-15.73	8			Pass
11		2462	-15.71	8			Pass

EUT	EUT Doorb		pell	pell Model		HD008	
Mode		802.11b	1 Mbps	Input Voltage			120V~
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Ch	annel Frequency	Final RF Po	Final RF Power M		n Limit	Pass/ Fail
Chamier		(MHz)	Level in (dl	3m)	(dB	m)	
			1Mbps	}			
1		2412	-15.99		8		Pass
6		2437	-15.09		8		Pass
11		2462	-15.57		8		Pass

Page 48 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



EUT	EUT Doorbe		pell	Model		HD008		
Mode		802.11g	6Mbps	Input Voltage		120V~		
Temperati	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail	
Chamie		(MHz)	Level in (dBm)		(dBm)			
			6Mbps					
1		2412	-19.89		8		Pass	
6		2437	-21.15		8		Pass	
11		2462	-20.69	8			Pass	

EUT	EUT Doorb		bell Mode		odel		HD008
Mode	Mode 802.11n HT20 mcs0 Input Vo		Voltage		120V~		
Temperat	ure	24 deg	g. C,	Hur	umidity		56% RH
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail
Chamilei		(MHz)	Level (dBm)		(dBm)		
			HT20				
1		2412	-21.65		8		Pass
6		2437	-21.56		8		Pass
11		2462	-20.29		8		Pass

EUT	EUT Doorbell		pell	Model		HD008		
Mode		802.11n HT	02.11n HT40 msc0 Input Voltage			120V~		
Temperat	ure	24 deg	g. C,	Hur	Iumidity		56% RH	
Channel	Cha	annel Frequency (MHz)		nal RF Power Max Level (dBm)		m Limit m)	Pass/ Fail	
			HT40			·		
1		2422	-23.95		8		Pass	
4		2437	-23.42		8		Pass	
7		2452	-23.55		8		Pass	


Report No.: FCC1902049-01 Page 49 of 93

Date: 2019-02-25



# 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

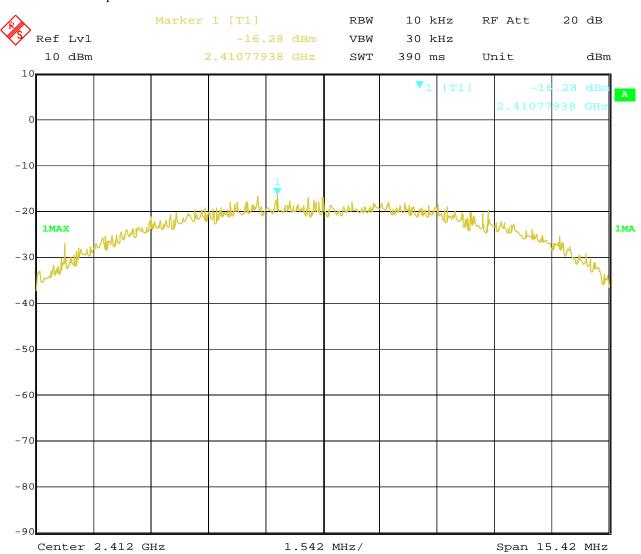


Page 50 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



## 2. 802.11b at 11Mbps at CH06

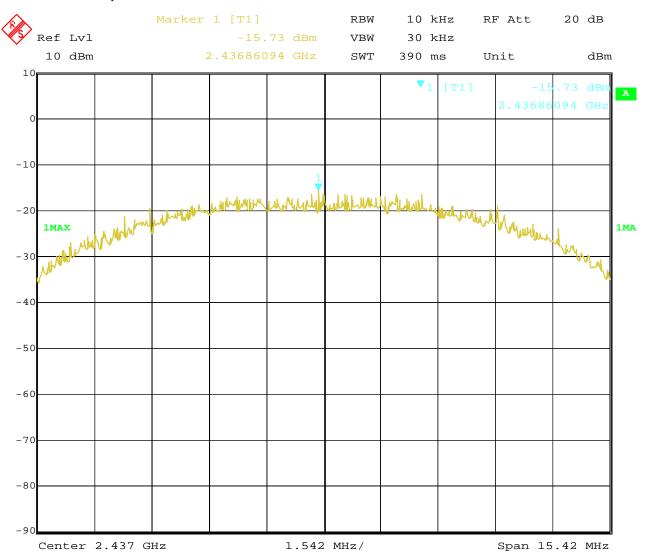


Page 51 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 3. 802.11b at 11Mbps of CH11

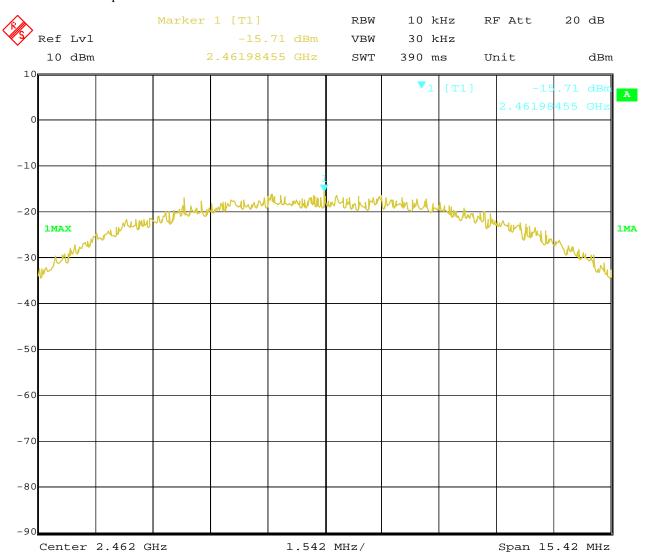


Page 52 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 4. 802.11b at 1Mbps of CH1

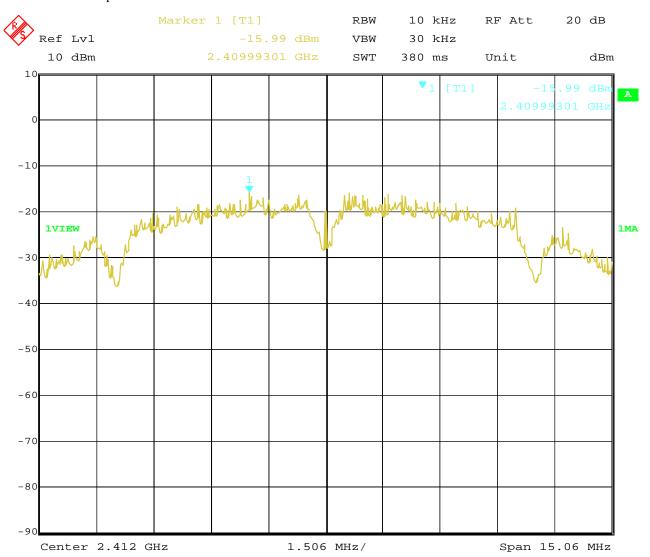


Page 53 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 5. 802.11b at 1Mbps of CH6

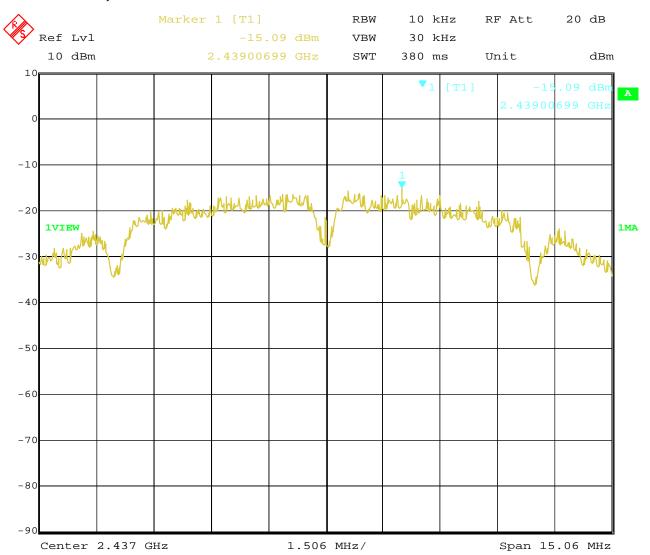


Page 54 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 6. 802.11b at 1Mbps of CH11

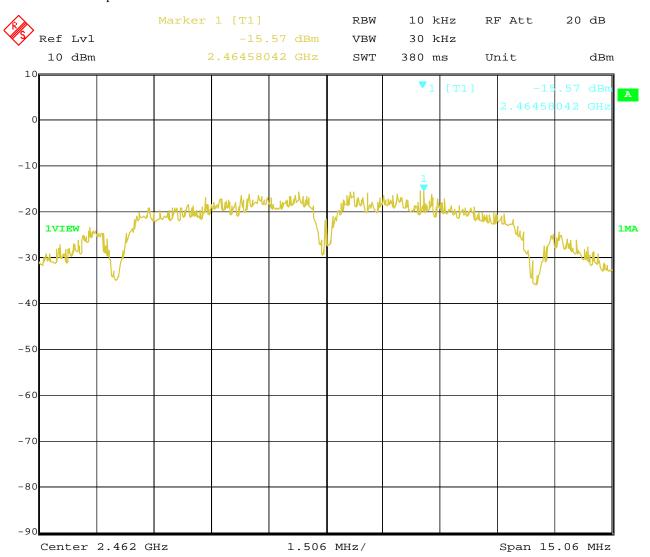


Page 55 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 7. 802.11g at 6Mbps of CH1

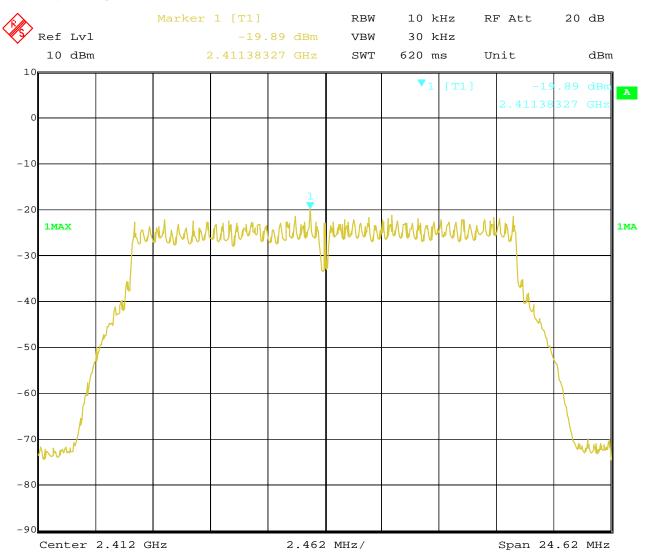


Page 56 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 8. 802.11g at 6Mbps of CH6

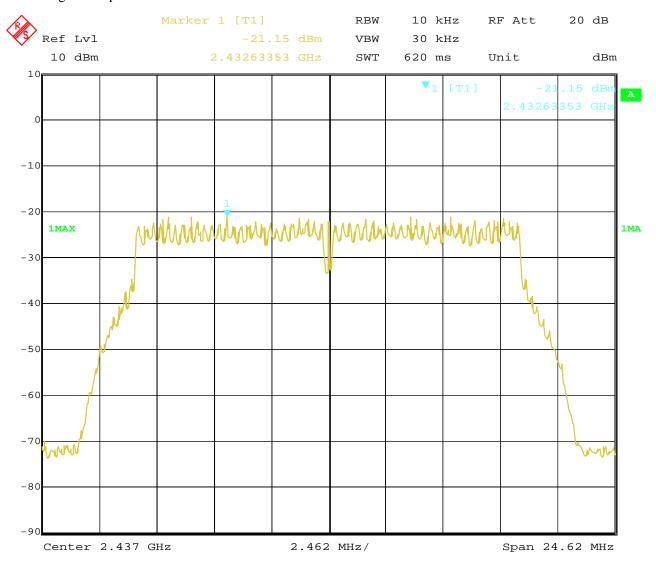


Page 57 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# 9. 802.11g at 6Mbps of CH11

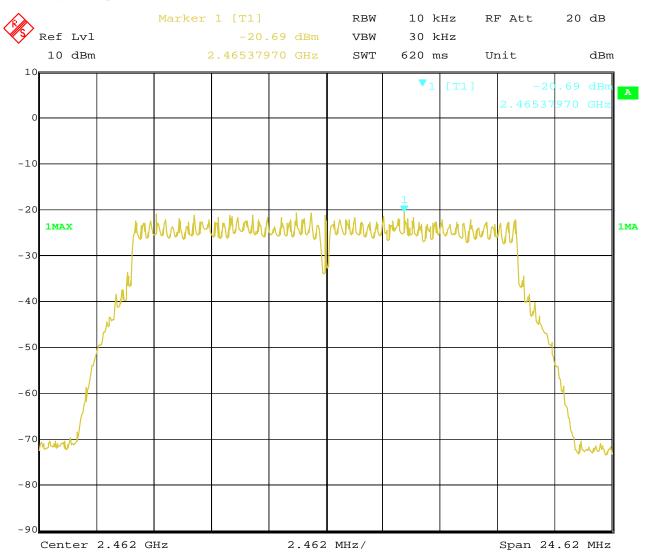


Page 58 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



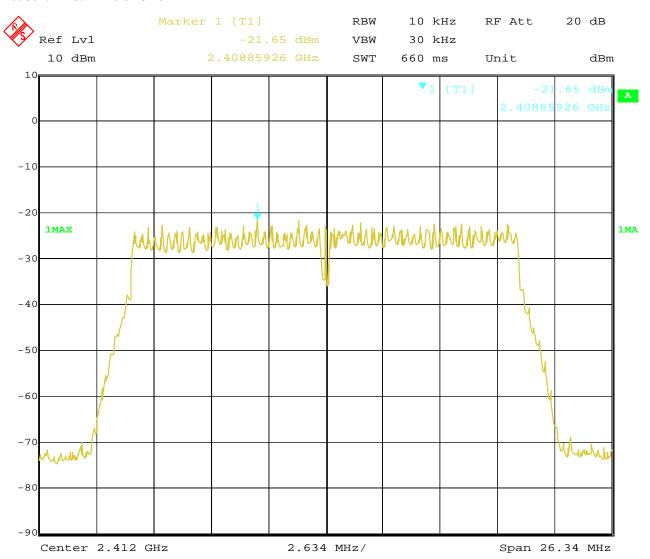


Page 59 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




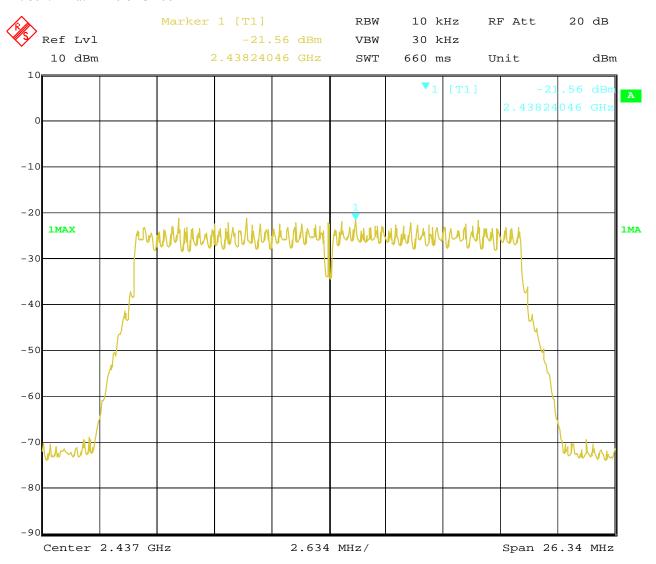

Report No.: FCC1902049-01 Page 60 of 93

Date: 2019-02-25




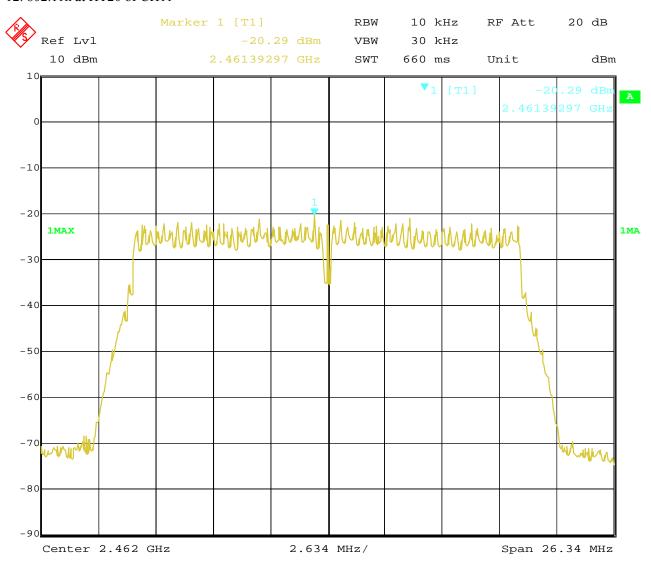

Report No.: FCC1902049-01 Page 61 of 93

Date: 2019-02-25




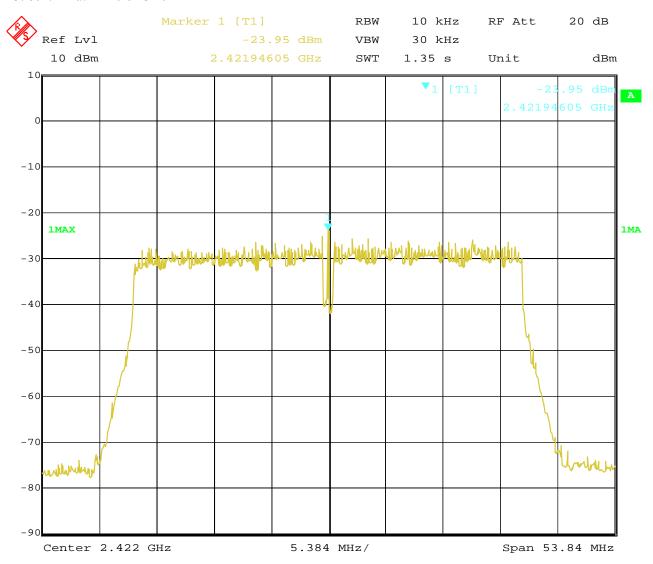

Report No.: FCC1902049-01 Page 62 of 93

Date: 2019-02-25



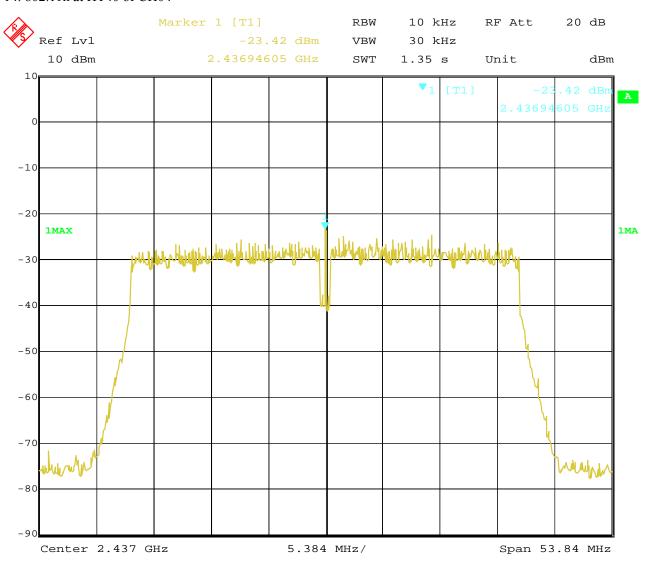


Page 63 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



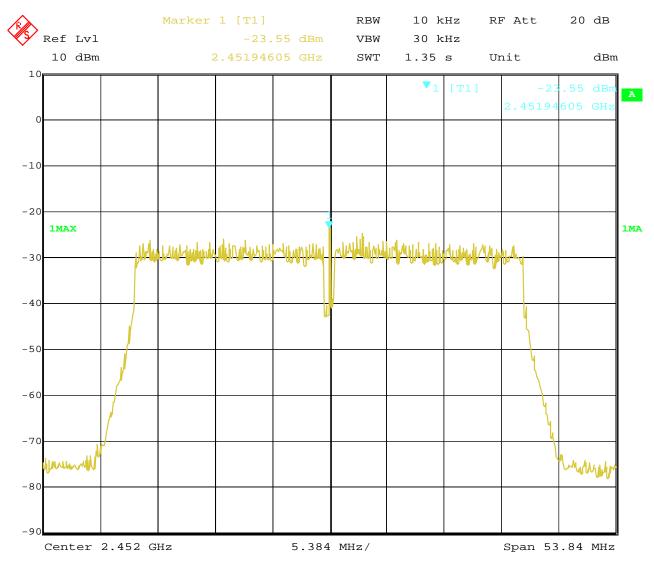

Report No.: FCC1902049-01


Date: 2019-02-25



Page 64 of 93

# **10 Out of Band Measurement**

# 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

## 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

## **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.( Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

## 10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 65 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




## For 802.11b mode

CH01 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	Temperature 24 deg. C,		56% RH
Test Result:	Pass	Detector	PK

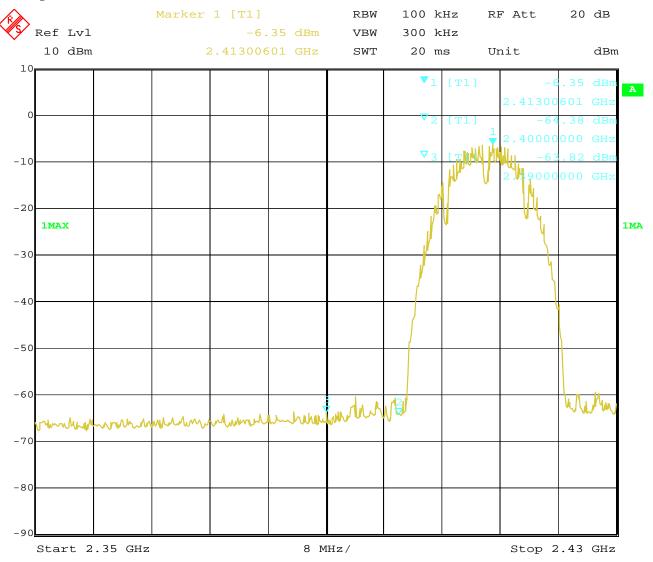

Page 66 of 93

Report No.: FCC1902049-01


Date: 2019-02-25



# CH11 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

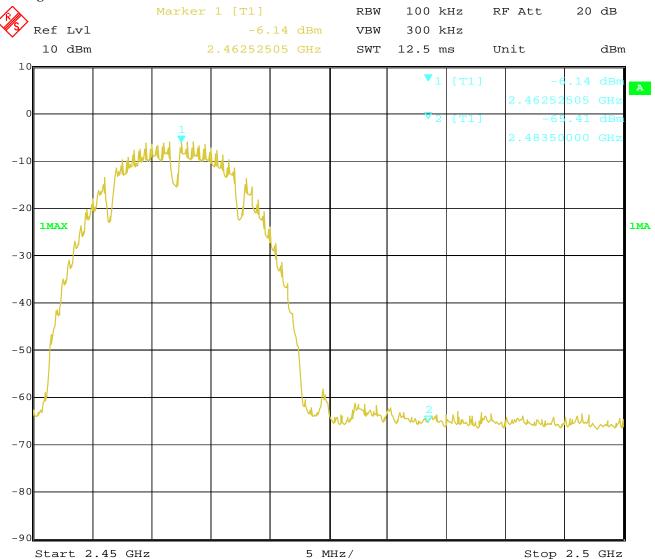

Page 67 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




## For 802.11b mode

CH01 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

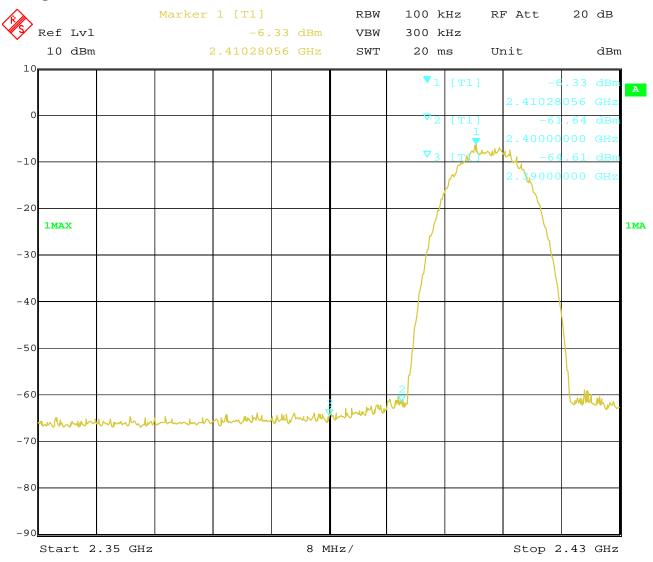

Page 68 of 93

Report No.: FCC1902049-01


Date: 2019-02-25



# CH11 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

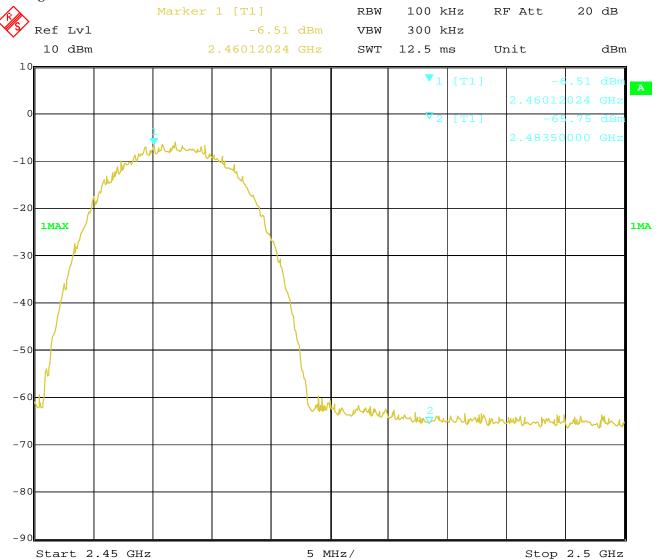

Page 69 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




## For 802.11g mode

CH01 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

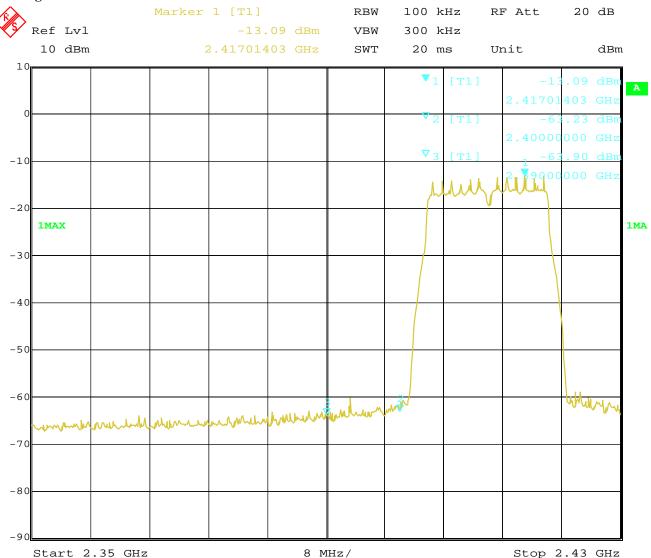

Page 70 of 93

Report No.: FCC1902049-01


Date: 2019-02-25



# CH11 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

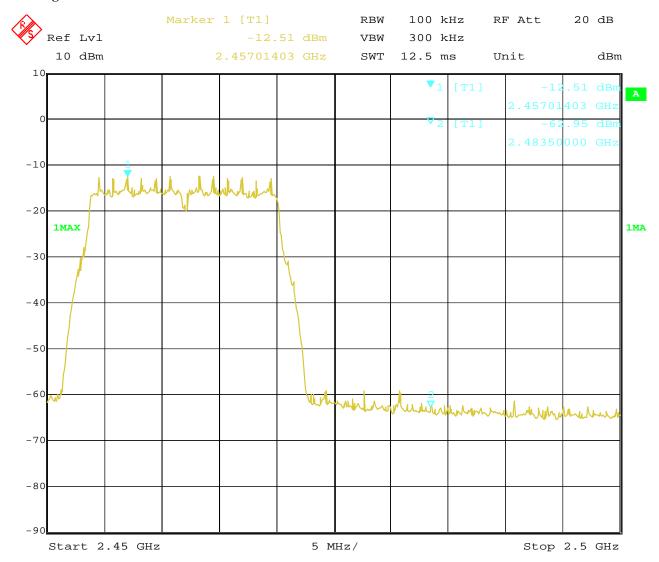

Page 71 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




## For 802.11n (HT20) mode

CH01 at mcs0

#### Band-edge Measurement 10.4

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

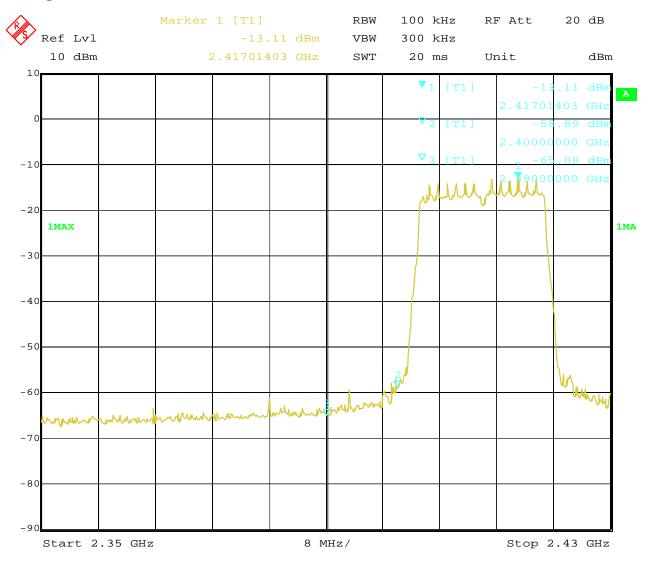

Page 72 of 93

Report No.: FCC1902049-01


Date: 2019-02-25



## CH11 at mcs0

#### 10.4 Band-edge Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

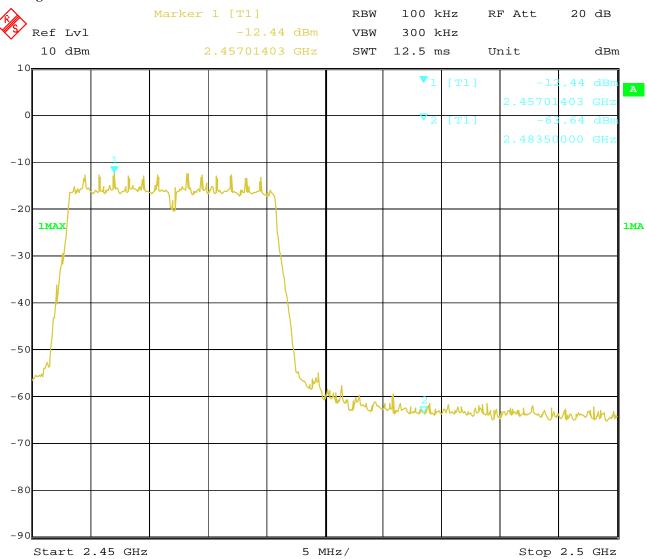

Page 73 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




### For 802.11n (HT40) mode

CH03 at msc0

# **10.4** Band-edge and Restricted band Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# Test Figure:

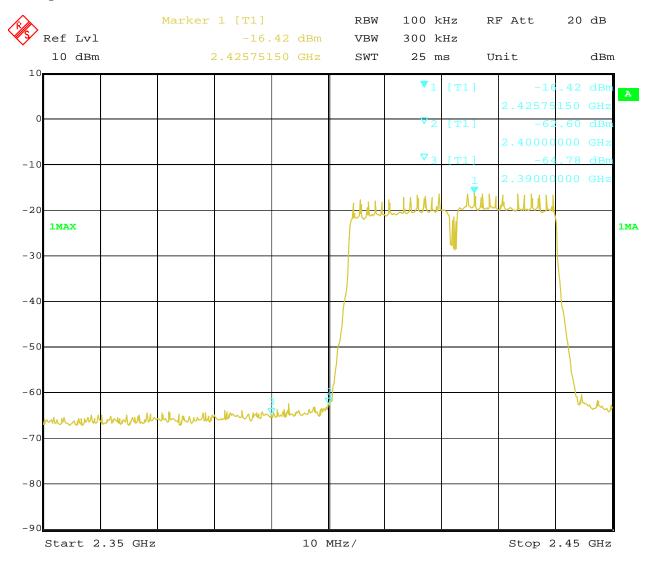

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 74 of 93

Report No.: FCC1902049-01

Date: 2019-02-25




### CH09 at msc0

#### 10.4 Band-edge and Restricted band Measurement

EUT	Doorbell	Model	HD008
Mode	Keeping Transmitting	Input Voltage	120V~
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# Test Figure:

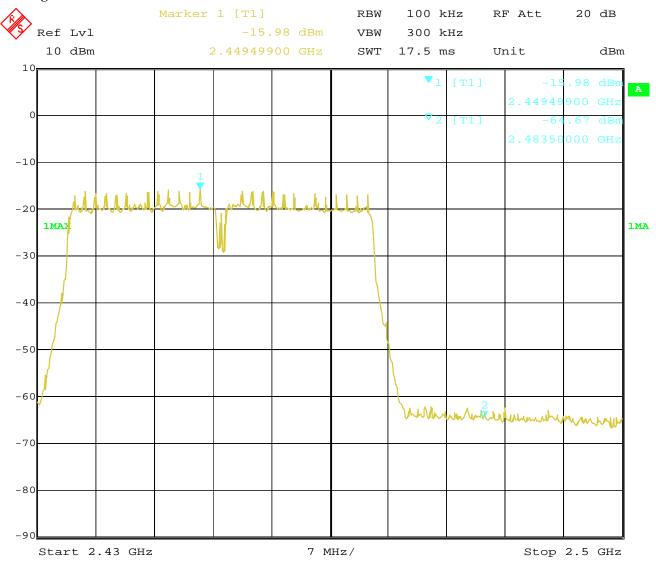

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 75 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



#### 10.5 Restricted band Measurement

EUT	Б	oorbell	Model	HD008					
Mode	Keeping	g Transmitting	Input Voltage	120V~					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11b mode, Low Channel, Horizontal									
2390	PK (dBμV/m)	50.21	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)		Limit	54(dBµV/m)					
	802.11b mode, Low Channel, Vertical								
2390	PK (dBµV/m)	47.39	Limit	74(dBµV/m)					
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$					

#### 10.5 Restricted band Measurement

10.5 Restricted to	ound incustrement								
EUT	D	oorbell	Model	HD008					
Mode	Keeping	Transmitting	Input Voltage	120V~					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11b mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	58.18	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	39.32	Limit	$54(dB\mu V/m)$					
	802.11b mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	55.81	T ::4	74(dBμV/m)					
	AV (dBμV/m)	37.18	Limit	$54(dB\mu V/m)$					

Page 76 of 93

Report No.: FCC1902049-01


Date: 2019-02-25



#### 10.5 Restricted band Measurement

EUT	Г	Ooorbell	Model	HD008				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11g mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	54.77	Limit	$74(dB\mu V/m)$				
	AV (dBμV/m)	36.29	Limit	54(dBµV/m)				
	802.11g mode,Low Channel, Vertical							
2390	PK (dBμV/m)	52.14	Limit	74(dBμV/m)				
	AV (dBμV/m)		Limit	54(dBµV/m)				

# **Test Plots**

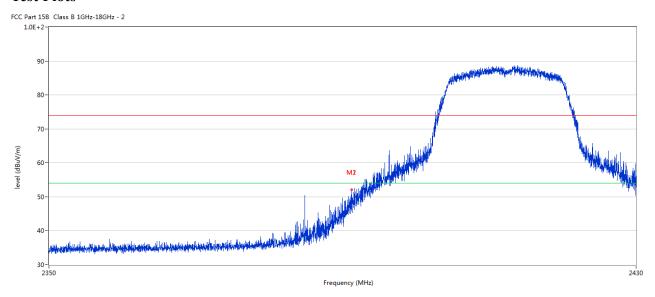

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	2390.000	52.14	-3.53	74.0	-21.86	Peak	122.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1902049-01 Page 77 of 93

Date: 2019-02-25



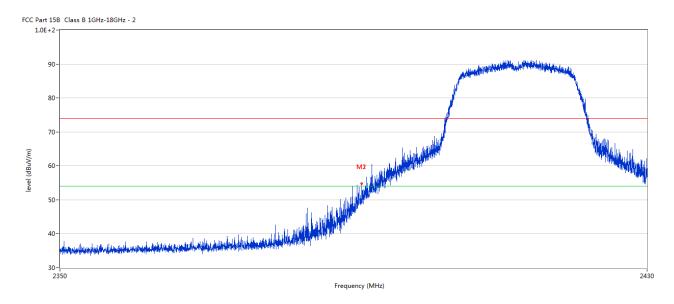

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	2390.000	54.77	-3.53	74.0	-19.23	Peak	14.00	100	Н	Pass
2	2390.000	36.29	-3.53	54.0	-17.71	AV	14.00	100	Н	Pass

Page 78 of 93


Report No.: FCC1902049-01

Date: 2019-02-25



#### 10.5 Restricted band Measurement

EUT	D	oorbell	Model	HD008					
Mode	Keeping	g Transmitting	Input Voltage	120V~					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
802.11g mode, High Channel, Horizontal									
2483.5	PK (dBµV/m)	62.26	T ::4	$74(dB\mu V/m)$					
	AV (dBμV/m)	43.57	Limit	$54(dB\mu V/m)$					
	802.11g mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	60.93	Limit	74(dBμV/m)					
	AV ( $dB\mu V/m$ )	41.25	Limit	54(dBμV/m)					

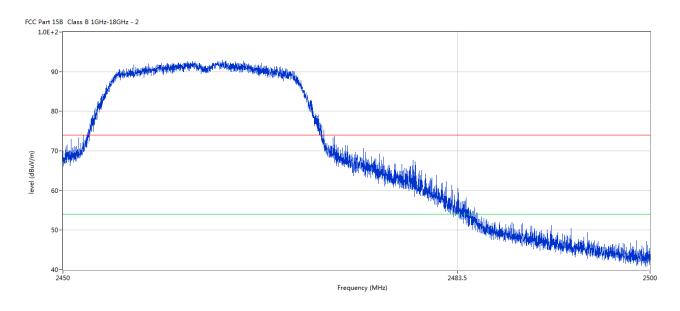


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
		)		)	(dB)					
1	2483.5	62.26	-3.57	74.0	-11.74	Peak	40.00	100	Н	Pass
2	2483.5	43.57	-3.57	54.0	-10.43	AV	40.00	100	Н	Pass

Report No.: FCC1902049-01 Page 79 of 93

Date: 2019-02-25

2450



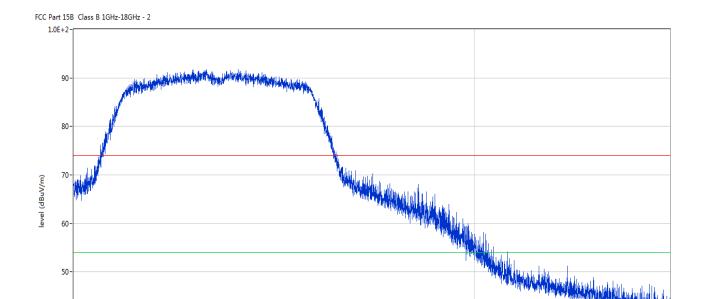

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2483.5	60.93	-3.57	74.0	-13.07	Peak	81.00	100	٧	Pass
2	2483.5	41.25	-3.57	54.0	-12.75	AV	81.00	100	V	Pass

Frequency (MHz)

2483.5

Page 80 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



#### 10.5 Restricted band Measurement

EUT	D	oorbell	Model	HD008				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11n HT20 mode, Low Channel, Horizontal								
2390	PK (dBµV/m)	53.92	T ::4	$74(dB\mu V/m)$				
	AV (dBμV/m)	34.56	Limit	$54(dB\mu V/m)$				
	{	302.11n HT20 mode, Lo	ow Channel, Vertice	cal				
2390	PK (dBµV/m)	51.65	Limit	74(dBμV/m)				
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				

#### 10.5 Restricted band Measurement

EUT	D	oorbell	Model	HD008				
Mode	Keeping	Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
802.11n HT20 mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	61.59	T ::4	74(dBμV/m)				
	AV (dBμV/m)	43.11	Limit	$54(dB\mu V/m)$				
	8	02.11n HT20 mode, Hi	igh Channel, Verti	cal				
2483.5	PK (dBµV/m)	58.76	Limit	74(dBμV/m)				
	AV (dBμV/m)	39.51	LIIIII	$54(dB\mu V/m)$				

Page 81 of 93 Report No.: FCC1902049-01

Date: 2019-02-25



#### 10.5 Restricted band Measurement

EUT	Doorbell		Model	HD008				
Mode	Keeping Transmitting		Input Voltage	120V~				
Temperature	24 deg. C,		Humidity	56% RH				
Test Result:	Pass		Detector	PK				
802.11n HT40 mode, Low Channel, Horizontal								
2390	PK (dBμV/m)	52.89	Limit	$74(dB\mu V/m)$				
	AV (dBμV/m)	33.70		54(dBµV/m)				
802.11n HT40 mode, Low Channel, Vertical								
2390	PK (dBμV/m)	50.75	Limit	74(dBμV/m)				
	AV (dBμV/m)			$54(dB\mu V/m)$				

#### 10.5 Restricted band Measurement

EUT	Doorbell		Model	HD008				
Mode	Keeping Transmitting		Input Voltage	120V~				
Temperature	24 deg. C,		Humidity	56% RH				
Test Result:	Pass		Detector	PK				
802.11n HT40 mode, High Channel, Horizontal								
2483.5	PK (dBµV/m)	60.07	T 114	74(dBμV/m)				
	AV (dBμV/m)	41.22	Limit	54(dBμV/m)				
802.11n HT40 mode, High Channel, Vertical								
2483.5	PK (dBµV/m)	57.27	Limit	74(dBμV/m)				
	AV (dBμV/m)	39.02		$54(dB\mu V/m)$				

Report No.: FCC1902049-01

Date: 2019-02-25



# Page 82 of 93

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is 2.0dBi.

Report No.: FCC1902049-01 Page 83 of 93

Date: 2019-02-25




### 12.0 FCC ID Label

# FCC ID: 2AN5OHD008

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### Mark Location:

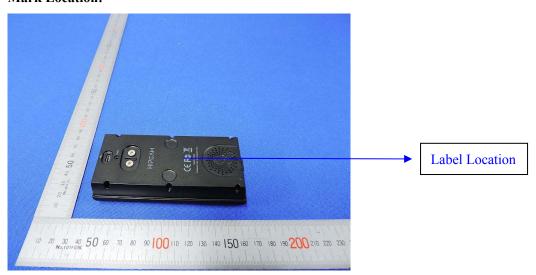

Page 84 of 93


Report No.: FCC1902049-01

Date: 2019-02-25



#### 13.0 **Photo of testing**

Conducted Emission Test Setup:

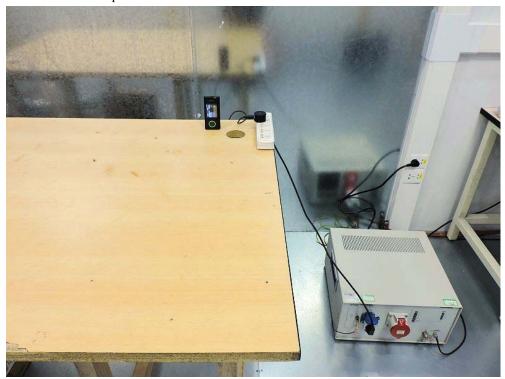


Page 85 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



# Radiated Emission Test Setup:

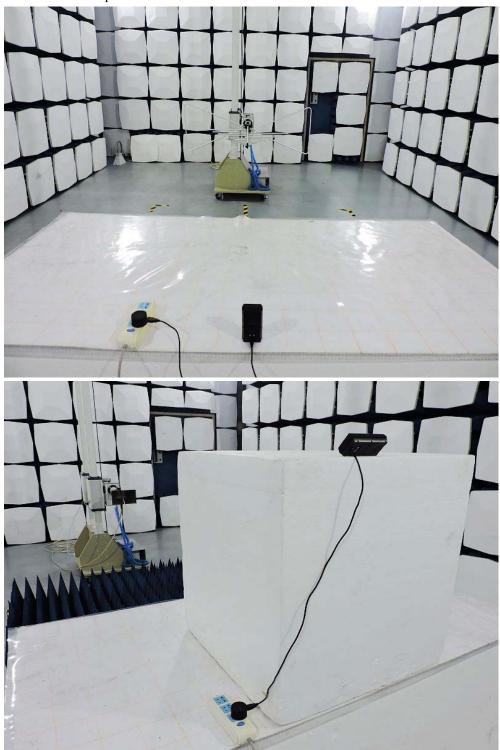

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1902049-01

Date: 2019-02-25



# Photographs - EUT

# Outside view



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 87 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



Outside view

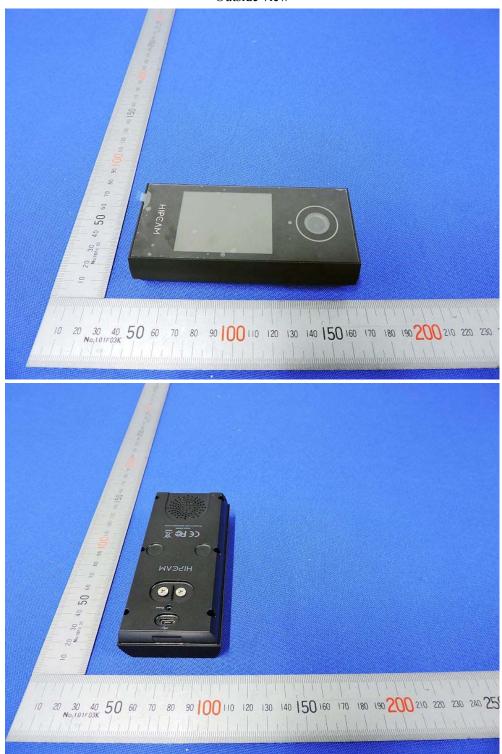

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 88 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



Outside view

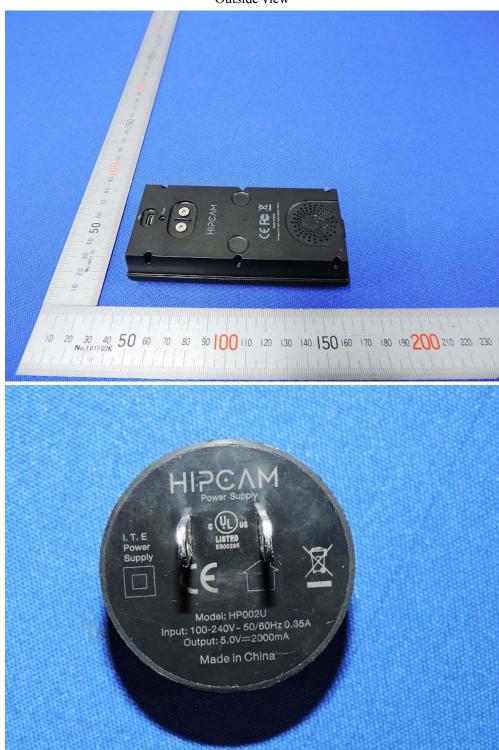

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 89 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



Inside view

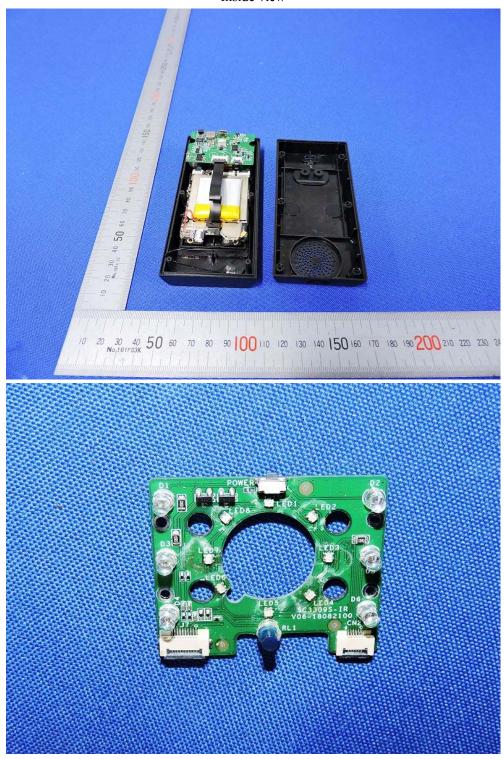

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 90 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



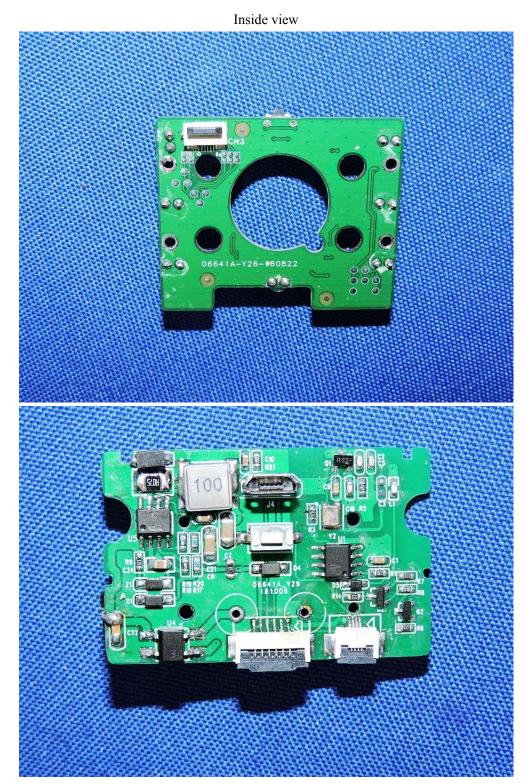

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 91 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



Inside view

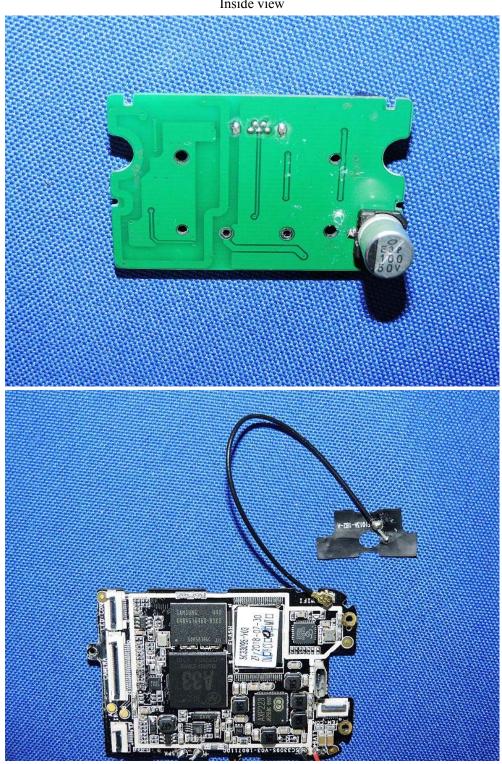

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 92 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



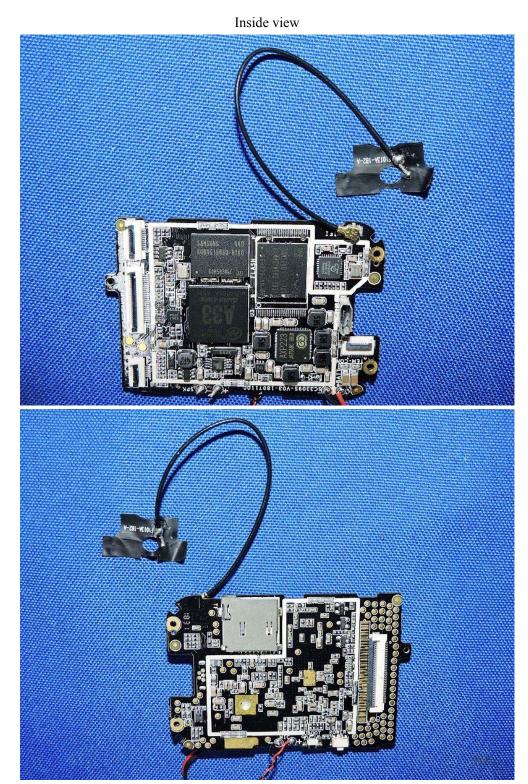

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 93 of 93

Report No.: FCC1902049-01

Date: 2019-02-25



Inside view

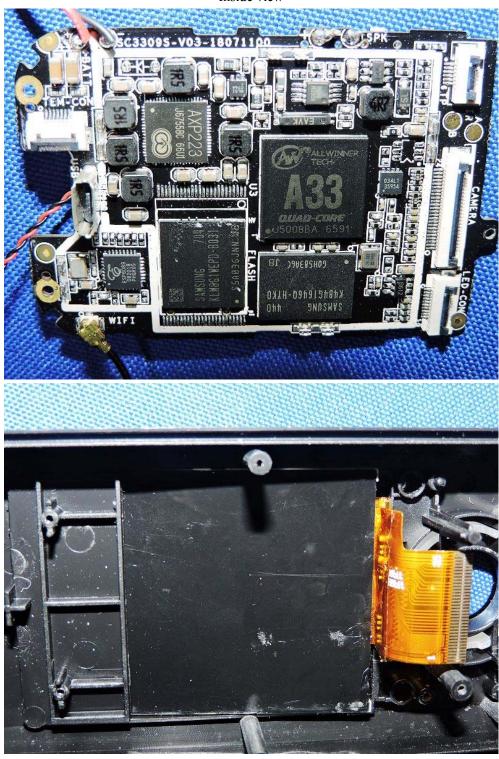

# **End of the report**

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.