

FCC TEST REPORT

(Part 15, Subpart E)



Applicant:	Mundo Reader S.L.
Address:	Calle Sofía 10, Parque Industrial y Tecnológico Európolis 28232 Las Rozas - Madrid SPAIN

Manufacturer or Supplier:	Mundo Reader S.L.
Address:	Calle Sofía 10, Parque Industrial y Tecnológico Európolis 28232 Las Rozas - Madrid SPAIN
Product:	Smartphone
Brand Name:	BQ
Model Name:	Aquaris C
FCC ID:	2AN87AQUARISC
Date of tests:	Jul. 09, 2018 ~ Aug. 07, 2018

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart E, Section 15.407

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
 Date: Aug. 10, 2018	 Date: Aug. 10, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

1.1 MEASUREMENT UNCERTAINTY 5

2 GENERAL INFORMATION 6

2.1 GENERAL DESCRIPTION OF EUT 6

2.2 DESCRIPTION OF TEST MODES 8

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

2.3 DUTY CYCLE OF TEST SIGNAL 13

2.4 DESCRIPTION OF SUPPORT UNITS 14

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST 15

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS 15

3 TEST TYPES AND RESULTS..... 16

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT 16

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT 16

3.1.2 LIMITS OF UNWANTED EMISSION 16

3.1.3 TEST INSTRUMENTS..... 17

3.1.4 TEST PROCEDURES 18

3.1.5 DEVIATION FROM TEST STANDARD 18

3.1.6 TEST SETUP 19

3.1.7 EUT OPERATING CONDITION 20

3.1.8 TEST RESULTS 21

3.2 CONDUCTED EMISSION MEASUREMENT 69

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 69

3.2.2 TEST INSTRUMENTS..... 69

3.2.3 TEST PROCEDURES 69

3.2.4 DEVIATION FROM TEST STANDARD 70

3.2.5 TEST SETUP 70

3.2.6 EUT OPERATING CONDITIONS 70

3.2.7 TEST RESULTS 71

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 73

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 73

3.3.2 TEST SETUP 74



3.3.3	TEST INSTRUMENTS.....	74
3.3.4	TEST PROCEDURE.....	75
3.3.5	DEVIATION FROM TEST STANDARD	77
3.3.6	EUT OPERATING CONDITIONS.....	77
3.3.7	TEST RESULTS	78
3.4	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT.....	91
3.4.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	91
3.4.2	TEST SETUP.....	91
3.4.3	TEST INSTRUMENTS.....	91
3.4.4	TEST PROCEDURES	92
3.4.5	DEVIATION FROM TEST STANDARD	92
3.4.6	EUT OPERATING CONDITIONS.....	92
3.4.7	TEST RESULTS	93
3.5	FREQUENCY STABILITY	100
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	100
3.5.2	TEST SETUP.....	100
3.5.3	TEST INSTRUMENTS.....	100
3.5.4	TEST PROCEDURE.....	101
3.5.5	DEVIATION FROM TEST STANDARD	101
3.5.6	EUT OPERATING CONDITION	101
3.5.7	TEST RESULTS	102
4	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	104
5	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	105



**BUREAU
VERITAS**

Test Report No.: RF180702W009-3

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180702W009-3	Original release	Aug. 10, 2018



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.38dB at 0.548000MHz.
15.407(b) (1/2/3/4/6)	Radiated Emission & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -4.46dB at 5150.00MHz.
15.407(a/1/2/3)	Maximum conducted output Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	Smartphone
MODEL NO.	Aquaris C
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-polymer, battery)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7 802.11ac: up to 390.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
AVERAGE POWER	17.620mW for 5180 ~ 5240MHz 17.498mW for 5260 ~ 5320MHz 17.620mW for 5500 ~ 5700MHz 17.140mW for 5745 ~ 5825MHz
ANTENNA TYPE	5180 ~ 5240MHz: LDS Antenna with 2.6dBi gain 5260 ~ 5320MHz: LDS Antenna with 2.6dBi gain 5500 ~ 5700MHz: LDS Antenna with 2.7dBi gain 5745 ~ 5825MHz: LDS Antenna with 2.8dBi gain
HW VERSION	MRS_M1000_B11_LLDM108C1-3
SW VERSION	1.0.0_20180723-1250
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: non-shielded, detachable, 1.0m



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT matched the following USB cable:

USB CABLE	
BRAND:	bq
MODEL:	HY-005015
SIGNAL LINE:	1.0 METER

3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11a	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX
802.11ac (80MHz)	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



2.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		



FOR 5500 ~ 5700MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz		

FOR 5745 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
155	5775 MHz		



2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0



RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5320	36 to 64	48	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5320	36 to 64	48	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
B	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
B	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
B	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
B	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
B	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
B	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
B	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
B	802.11a	5725-5825	149 to 165	149, 165	OFDM	BPSK	6.0
B	802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	MCS0
B	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 62%RH	DC 5V By Adapter	Rose Ma
RE≥1G	23deg. C, 62%RH	DC 5V By Adapter	Rose Ma
PLC	24deg. C, 61%RH	DC 5V By Adapter	John Wen
APCM	23.5deg. C, 60%RH	DC 3.85V By battery	Wenliang Wu



2.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 1.362/1.620 = 0.841, Duty factor = 10 * log(1/0.841) = 0.75

802.11n (20MHz): Duty cycle = 1.276/1.475 = 0.865, Duty factor = 10 * log(1/0.865) = 0.63

802.11n (40MHz): Duty cycle = 0.633/0.837 = 0.756, Duty factor = 10 * log(1/0.756) = 1.21

802.11ac (80MHz): Duty cycle = 0.245/0.456 = 0.537, Duty factor = 10 * log(1/0.537) = 2.70

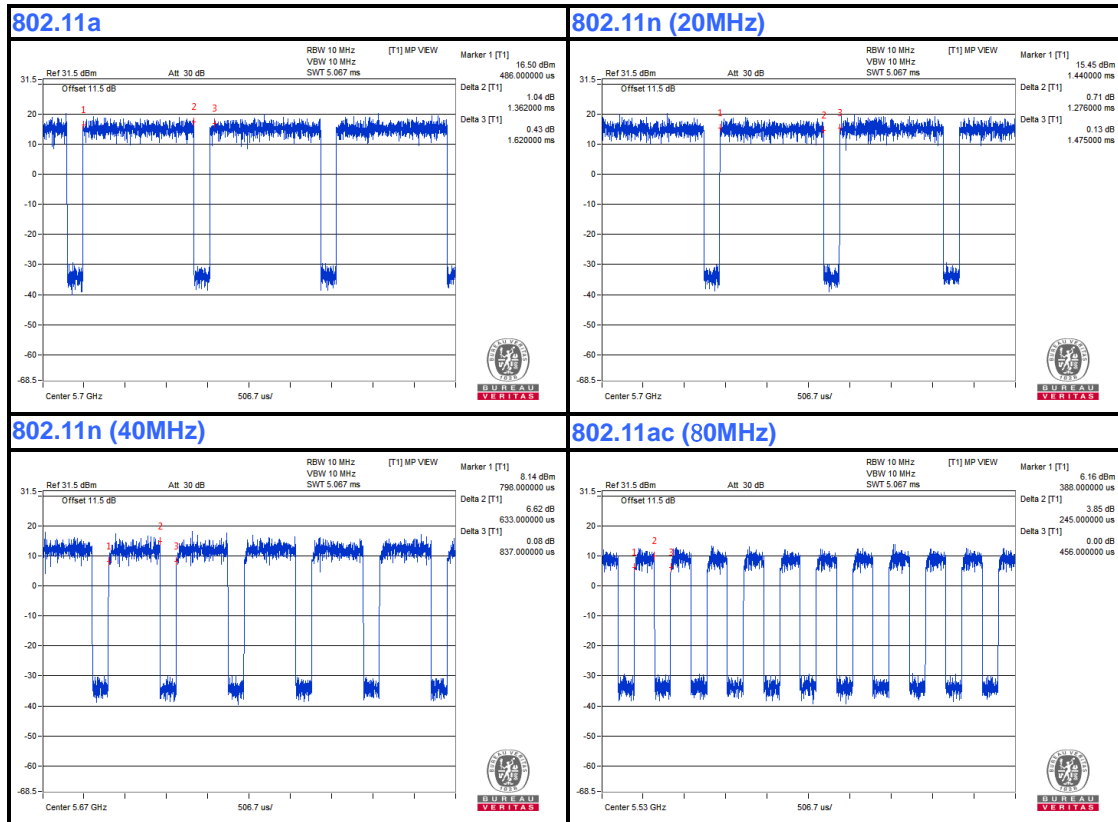



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).



2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

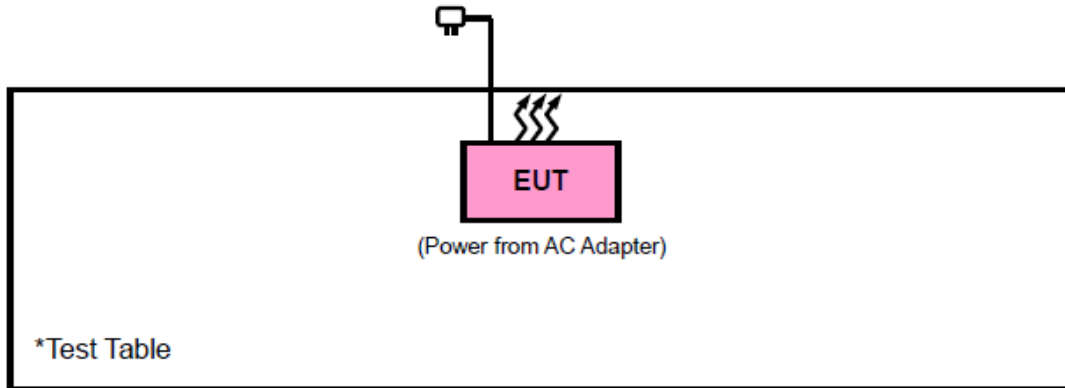

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General U-NII Test Procedures New Rules v01r04

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
	789033 D02 General UNII Test Procedures New Rules v01r02	FIELD STRENGTH AT 3m (dBµV/m)	
		PK : 74	AV : 54
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	15.407(b)(1)	PK : -27	PK : 68.3
	15.407(b)(2)		
	15.407(b)(3)		
15.407(b)(4)	See note 2 (FCC 16-24)		



NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Apr. 21,18	Apr. 20,19
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 20,17	Nov. 19,18
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Dec. 16,16	Dec. 15,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120.



3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


3.1.5 DEVIATION FROM TEST STANDARD

No deviation.




3.1.6 TEST SETUP

< Frequency Range below 30MHz >

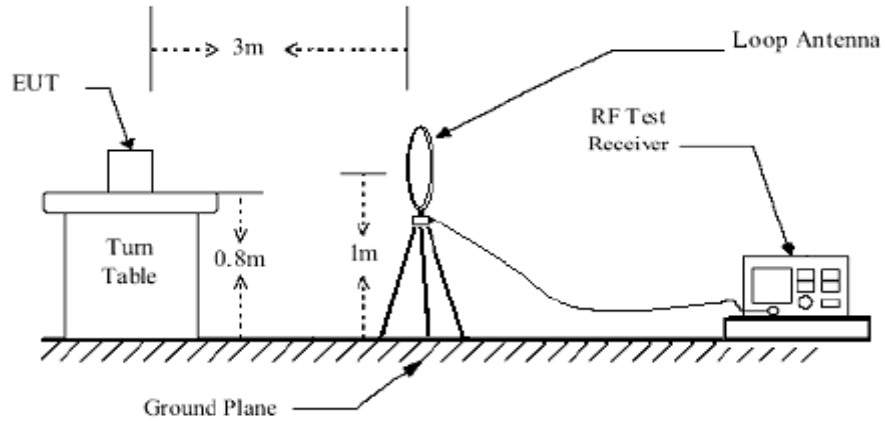


< Frequency Range 30MHz~1GHz >

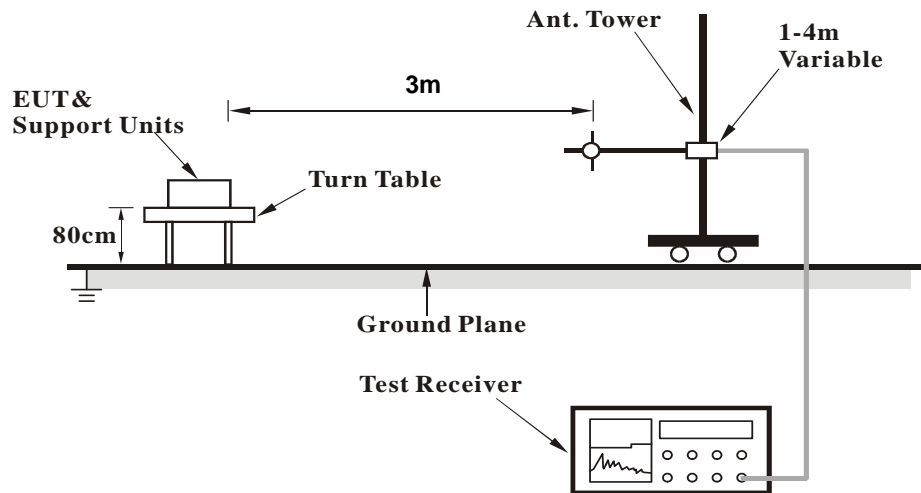



<Frequency Range above 1GHz>

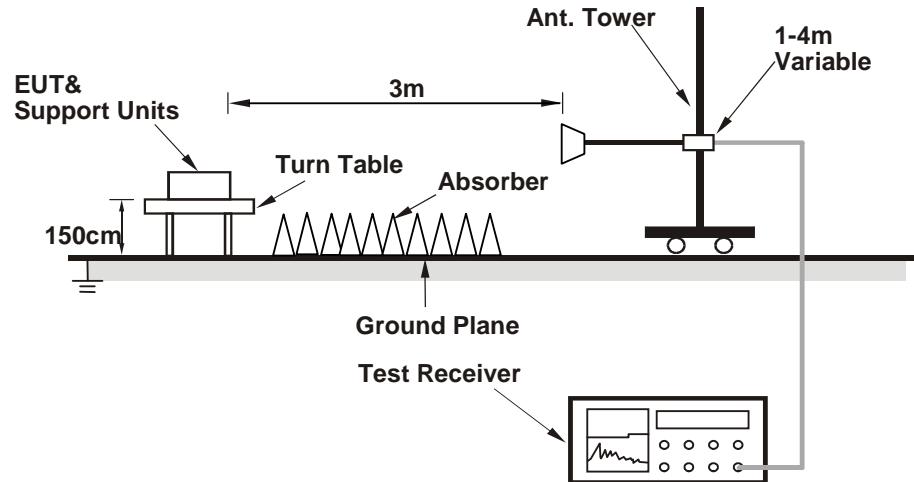

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
58.13	18.06	47.81	40	-21.94	6.42	1.16	37.33	100	248	QP
144.46	28.48	54.91	43.5	-15.02	8.54	1.85	36.82	100	15	QP
235.64	27.19	49.61	46	-18.81	11.74	2.37	36.53	100	31	QP
344.28	22.31	41.14	46	-23.69	14.86	2.91	36.6	100	222	QP
485.9	23.77	39.05	46	-22.23	18.23	3.42	36.93	100	289	QP
666.32	16.69	27.66	46	-29.31	22.16	4.19	37.32	100	321	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

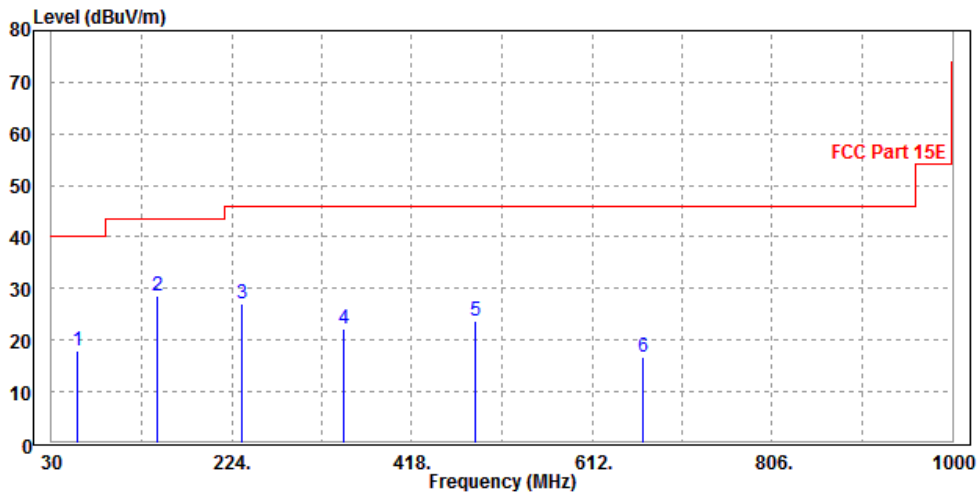




CHANNEL	Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
66.86	20.49	49.78	40	-19.51	6.74	1.25	37.28	100	124	QP
144.46	13.3	39.73	43.5	-30.2	8.54	1.85	36.82	100	302	QP
235.64	18.7	41.12	46	-27.3	11.74	2.37	36.53	100	196	QP
340.4	25.1	44.1	46	-20.9	14.7	2.89	36.59	100	269	QP
564.47	23.83	37.55	46	-22.17	19.62	3.81	37.15	100	33	QP
733.25	20.24	30.21	46	-25.76	23.07	4.41	37.45	100	114	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

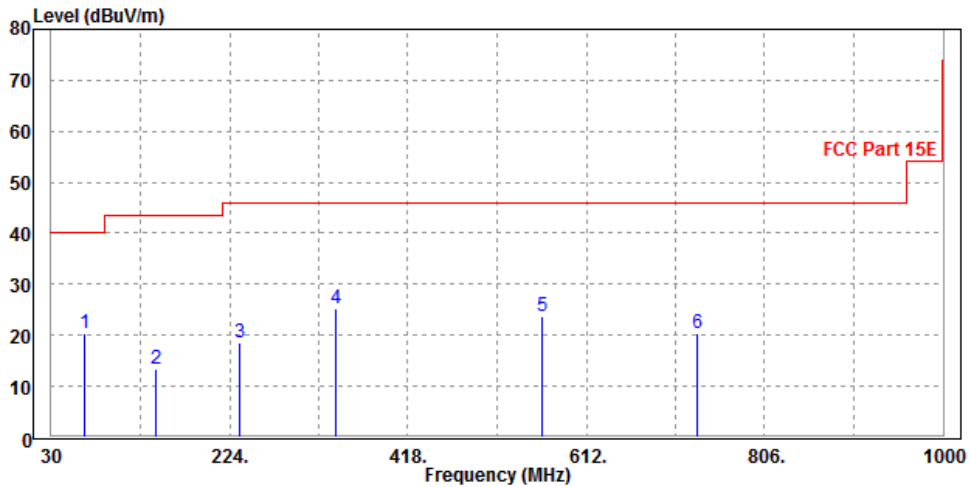



ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

Band 1
802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.45	51.12	54	-4.55	37.26	7.42	46.35	100	325	Average
5150	59.05	60.72	74	-14.95	37.26	7.42	46.35	100	325	Peak
5180	83.14	84.79			37.27	7.43	46.35	100	325	Average
5180	95.01	96.66			37.27	7.43	46.35	100	325	Peak
5350	48.16	49.65	54	-5.84	37.34	7.47	46.3	100	325	Average
5350	58.3	59.79	74	-15.7	37.34	7.47	46.3	100	325	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.41	51.08	54	-4.59	37.26	7.42	46.35	100	93	Average
5150	58.37	60.04	74	-15.63	37.26	7.42	46.35	100	93	Peak
5180	83.87	85.52			37.27	7.43	46.35	100	93	Average
5180	94.2	95.85			37.27	7.43	46.35	100	93	Peak
5350	48.18	49.67	54	-5.82	37.34	7.47	46.3	100	93	Average
5350	57.69	59.18	74	-16.31	37.34	7.47	46.3	100	93	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.44	51.11	54	-4.56	37.26	7.42	46.35	100	65	Average
5150	58.24	59.91	74	-15.76	37.26	7.42	46.35	100	65	Peak
5200	82.38	84.01			37.28	7.43	46.34	100	65	Average
5200	93.76	95.39			37.28	7.43	46.34	100	65	Peak
5350	48.22	49.71	54	-5.78	37.34	7.47	46.3	100	65	Average
5350	57.14	58.63	74	-16.86	37.34	7.47	46.3	100	65	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.47	51.14	54	-4.53	37.26	7.42	46.35	100	90	Average
5150	58.29	59.96	74	-15.71	37.26	7.42	46.35	100	90	Peak
5200	85.08	86.71			37.28	7.43	46.34	100	90	Average
5200	94.43	96.06			37.28	7.43	46.34	100	90	Peak
5350	48.24	49.73	54	-5.76	37.34	7.47	46.3	100	90	Average
5350	58.36	59.85	74	-15.64	37.34	7.47	46.3	100	90	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.54	51.21	54	-4.46	37.26	7.42	46.35	100	325	Average
5150	58.85	60.52	74	-15.15	37.26	7.42	46.35	100	325	Peak
5240	83.65	85.24			37.3	7.44	46.33	100	325	Average
5240	95.07	96.66			37.3	7.44	46.33	100	325	Peak
5350	48.28	49.77	54	-5.72	37.34	7.47	46.3	100	325	Average
5350	57.72	59.21	74	-16.28	37.34	7.47	46.3	100	325	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.49	51.16	54	-4.51	37.26	7.42	46.35	100	91	Average
5150	58.9	60.57	74	-15.1	37.26	7.42	46.35	100	91	Peak
5240	86.39	87.98			37.3	7.44	46.33	100	91	Average
5240	95.76	97.35			37.3	7.44	46.33	100	91	Peak
5350	48.25	49.74	54	-5.75	37.34	7.47	46.3	100	91	Average
5350	57.44	58.93	74	-16.56	37.34	7.47	46.3	100	91	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.54	49.21	54	-6.46	37.26	7.42	46.35	100	84	Average
5150	56.17	57.84	74	-17.83	37.26	7.42	46.35	100	84	Peak
5180	81.93	83.58			37.27	7.43	46.35	100	84	Average
5180	91.19	92.84			37.27	7.43	46.35	100	84	Peak
5350	46.45	47.94	54	-7.55	37.34	7.47	46.3	100	84	Average
5350	58.03	59.52	74	-15.97	37.34	7.47	46.3	100	84	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.52	49.19	54	-6.48	37.26	7.42	46.35	100	76	Average
5150	57.92	59.59	74	-16.08	37.26	7.42	46.35	100	76	Peak
5180	74.95	76.6			37.27	7.43	46.35	100	76	Average
5180	87.04	88.69			37.27	7.43	46.35	100	76	Peak
5350	46.47	47.96	54	-7.53	37.34	7.47	46.3	100	76	Average
5350	56.62	58.11	74	-17.38	37.34	7.47	46.3	100	76	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.36	51.03	54	-4.64	37.26	7.42	46.35	100	82	Average
5150	59.14	60.81	74	-14.86	37.26	7.42	46.35	100	82	Peak
5200	87.43	89.06			37.28	7.43	46.34	100	82	Average
5200	97.48	99.11			37.28	7.43	46.34	100	82	Peak
5350	48	49.49	54	-6	37.34	7.47	46.3	100	82	Average
5350	58.29	59.78	74	-15.71	37.34	7.47	46.3	100	82	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.45	51.12	54	-4.55	37.26	7.42	46.35	100	75	Average
5150	58.61	60.28	74	-15.39	37.26	7.42	46.35	100	75	Peak
5200	89.95	91.58			37.28	7.43	46.34	100	75	Average
5200	99.78	101.41			37.28	7.43	46.34	100	75	Peak
5350	47.98	49.47	54	-6.02	37.34	7.47	46.3	100	75	Average
5350	57.55	59.04	74	-16.45	37.34	7.47	46.3	100	75	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.



CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.25	50.92	54	-4.75	37.26	7.42	46.35	100	84	Average
5150	58.06	59.73	74	-15.94	37.26	7.42	46.35	100	84	Peak
5240	89.67	91.26			37.3	7.44	46.33	100	84	Average
5240	99.42	101.01			37.3	7.44	46.33	100	84	Peak
5350	47.97	49.46	54	-6.03	37.34	7.47	46.3	100	84	Average
5350	56.65	58.14	74	-17.35	37.34	7.47	46.3	100	84	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.28	50.95	54	-4.72	37.26	7.42	46.35	100	54	Average
5150	58.64	60.31	74	-15.36	37.26	7.42	46.35	100	54	Peak
5240	85.24	86.83			37.3	7.44	46.33	100	54	Average
5240	94.79	96.38			37.3	7.44	46.33	100	54	Peak
5350	48.2	49.69	54	-5.8	37.34	7.47	46.3	100	54	Average
5350	56.78	58.27	74	-17.22	37.34	7.47	46.3	100	54	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5240MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.39	49.06	54	-6.61	37.26	7.42	46.35	100	66	Average
5150	56.9	58.57	74	-17.1	37.26	7.42	46.35	100	66	Peak
5190	77.42	79.05			37.28	7.43	46.34	100	66	Average
5190	88.17	89.8			37.28	7.43	46.34	100	66	Peak
5350	46.34	47.83	54	-7.66	37.34	7.47	46.3	100	66	Average
5350	57.72	59.21	74	-16.28	37.34	7.47	46.3	100	66	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.48	49.15	54	-6.52	37.26	7.42	46.35	100	76	Average
5150	57.31	58.98	74	-16.69	37.26	7.42	46.35	100	76	Peak
5190	71.13	72.76			37.28	7.43	46.34	100	76	Average
5190	83.07	84.7			37.28	7.43	46.34	100	76	Peak
5350	46.44	47.93	54	-7.56	37.34	7.47	46.3	100	76	Average
5350	56.04	57.53	74	-17.96	37.34	7.47	46.3	100	76	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5190MHz: Fundamental frequency.



CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.24	50.91	54	-4.76	37.26	7.42	46.35	100	82	Average
5150	59.04	60.71	74	-14.96	37.26	7.42	46.35	100	82	Peak
5230	85.39	86.99			37.29	7.44	46.33	100	82	Average
5230	95.19	96.79			37.29	7.44	46.33	100	82	Peak
5350	47.97	49.46	54	-6.03	37.34	7.47	46.3	100	82	Average
5350	57.94	59.43	74	-16.06	37.34	7.47	46.3	100	82	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.10	50.77	54	-4.90	37.26	7.42	46.35	100	78	Average
5150	59.37	61.04	74	-14.63	37.26	7.42	46.35	100	78	Peak
5230	87.17	88.77			37.29	7.44	46.33	100	78	Average
5230	96.45	98.05			37.29	7.44	46.33	100	78	Peak
5350	48	49.49	54	-6	37.34	7.47	46.3	100	78	Average
5350	57.62	59.11	74	-16.38	37.34	7.47	46.3	100	78	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5230MHz: Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.34	49.01	54	-6.66	37.26	7.42	46.35	100	82	Average
5150	56.94	58.61	74	-17.06	37.26	7.42	46.35	100	82	Peak
5210	71.09	72.71			37.28	7.44	46.34	100	82	Average
5210	84.55	86.17			37.28	7.44	46.34	100	82	Peak
5350	46.47	47.96	54	-7.53	37.34	7.47	46.3	100	82	Average
5350	56.59	58.08	74	-17.41	37.34	7.47	46.3	100	82	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.46	49.13	54	-6.54	37.26	7.42	46.35	100	76	Average
5150	57.04	58.71	74	-16.96	37.26	7.42	46.35	100	76	Peak
5210	70.19	71.81			37.28	7.44	46.34	100	76	Average
5210	84.46	86.08			37.28	7.44	46.34	100	76	Peak
5350	46.57	48.06	54	-7.43	37.34	7.47	46.3	100	76	Average
5350	55.33	56.82	74	-18.67	37.34	7.47	46.3	100	76	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5210MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF180702W009-3

Band 2
802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	48.44	50.11	54	-5.56	37.26	7.42	46.35	100	0	Average
5150	57.99	59.66	74	-16.01	37.26	7.42	46.35	100	0	Peak
5260	82.91	84.48			37.3	7.45	46.32	100	0	Average
5260	92.18	93.75			37.3	7.45	46.32	100	0	Peak
5350	47.86	49.35	54	-6.14	37.34	7.47	46.3	100	0	Average
5350	57.6	59.09	74	-16.4	37.34	7.47	46.3	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.27	50.94	54	-4.73	37.26	7.42	46.35	100	0	Average
5150	58.42	60.09	74	-15.58	37.26	7.42	46.35	100	0	Peak
5260	80.54	82.11			37.3	7.45	46.32	100	0	Average
5260	91.24	92.81			37.3	7.45	46.32	100	0	Peak
5350	47.99	49.48	54	-6.01	37.34	7.47	46.3	100	0	Average
5350	58.16	59.65	74	-15.84	37.34	7.47	46.3	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.14	50.81	54	-4.86	37.26	7.42	46.35	100	0	Average
5150	60.71	62.38	74	-13.29	37.26	7.42	46.35	100	0	Peak
5300	83.32	84.85			37.32	7.46	46.31	100	0	Average
5300	93.34	94.87			37.32	7.46	46.31	100	0	Peak
5350	47.96	49.45	54	-6.04	37.34	7.47	46.3	100	0	Average
5350	59.02	60.51	74	-14.98	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.11	50.78	54	-4.89	37.26	7.42	46.35	100	114	Average
5150	58.4	60.07	74	-15.6	37.26	7.42	46.35	100	114	Peak
5300	83.43	84.96			37.32	7.46	46.31	100	114	Average
5300	93.44	94.97			37.32	7.46	46.31	100	114	Peak
5350	47.98	49.47	54	-6.02	37.34	7.47	46.3	100	114	Average
5350	57.64	59.13	74	-16.36	37.34	7.47	46.3	100	114	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.32	48.99	54	-6.68	37.26	7.42	46.35	100	0	Average
5150	59.15	60.82	74	-14.85	37.26	7.42	46.35	100	0	Peak
5320	82.54	84.05			37.33	7.46	46.3	100	0	Average
5320	93.21	94.72			37.33	7.46	46.3	100	0	Peak
5350	47.92	49.41	54	-6.08	37.34	7.47	46.3	100	0	Average
5350	57.26	58.75	74	-16.74	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	45.96	47.63	54	-8.04	37.26	7.42	46.35	100	112	Average
5150	58.54	60.21	74	-15.46	37.26	7.42	46.35	100	112	Peak
5320	84.17	85.68			37.33	7.46	46.3	100	112	Average
5320	94.07	95.58			37.33	7.46	46.3	100	112	Peak
5350	47.82	49.31	54	-6.18	37.34	7.47	46.3	100	112	Average
5350	57.24	58.73	74	-16.76	37.34	7.47	46.3	100	112	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5320MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.86	49.53	54	-6.14	37.26	7.42	46.35	100	0	Average
5150	58.48	60.15	74	-15.52	37.26	7.42	46.35	100	0	Peak
5260	82.49	84.06			37.3	7.45	46.32	100	0	Average
5260	93.31	94.88			37.3	7.45	46.32	100	0	Peak
5350	47.92	49.41	54	-6.08	37.34	7.47	46.3	100	0	Average
5350	57.72	59.21	74	-16.28	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.31	48.98	54	-6.69	37.26	7.42	46.35	100	0	Average
5150	58.02	59.69	74	-15.98	37.26	7.42	46.35	100	0	Peak
5260	80.66	82.23			37.3	7.45	46.32	100	0	Average
5260	92.14	93.71			37.3	7.45	46.32	100	0	Peak
5350	47.97	49.46	54	-6.03	37.34	7.47	46.3	100	0	Average
5350	58.1	59.59	74	-15.9	37.34	7.47	46.3	100	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.22	50.89	54	-4.78	37.26	7.42	46.35	100	115	Average
5150	59.5	61.17	74	-14.5	37.26	7.42	46.35	100	115	Peak
5300	83.19	84.72			37.32	7.46	46.31	100	115	Average
5300	92.34	93.87			37.32	7.46	46.31	100	115	Peak
5350	48.03	49.52	54	-5.97	37.34	7.47	46.3	100	115	Average
5350	58.87	60.36	74	-15.13	37.34	7.47	46.3	100	115	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.17	50.84	54	-4.83	37.26	7.42	46.35	100	114	Average
5150	58.97	60.64	74	-15.03	37.26	7.42	46.35	100	114	Peak
5300	82.95	84.48			37.32	7.46	46.31	100	114	Average
5300	93.24	94.77			37.32	7.46	46.31	100	114	Peak
5350	48.04	49.53	54	-5.96	37.34	7.47	46.3	100	114	Average
5350	58.02	59.51	74	-15.98	37.34	7.47	46.3	100	114	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.12	50.79	54	-4.88	37.26	7.42	46.35	100	113	Average
5150	58.71	60.38	74	-15.29	37.26	7.42	46.35	100	113	Peak
5320	83.55	85.06			37.33	7.46	46.3	100	113	Average
5320	93.37	94.88			37.33	7.46	46.3	100	113	Peak
5350	47.97	49.46	54	-6.03	37.34	7.47	46.3	100	113	Average
5350	58.02	59.51	74	-15.98	37.34	7.47	46.3	100	113	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.31	47.98	54	-7.69	37.26	7.42	46.35	100	114	Average
5150	59.19	60.86	74	-14.81	37.26	7.42	46.35	100	114	Peak
5320	82.8	84.31			37.33	7.46	46.3	100	114	Average
5320	93.31	94.82			37.33	7.46	46.3	100	114	Peak
5350	47.98	49.47	54	-6.02	37.34	7.47	46.3	100	114	Average
5350	57.54	59.03	74	-16.46	37.34	7.47	46.3	100	114	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.15	50.82	54	-4.85	37.26	7.42	46.35	100	0	Average
5150	59.04	60.71	74	-14.96	37.26	7.42	46.35	100	0	Peak
5270	78.37	79.93			37.31	7.45	46.32	100	0	Average
5270	88.15	89.71			37.31	7.45	46.32	100	0	Peak
5350	47.93	49.42	54	-6.07	37.34	7.47	46.3	100	0	Average
5350	57.13	58.62	74	-16.87	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.1	48.77	54	-6.9	37.26	7.42	46.35	150	353	Average
5150	59.96	61.63	74	-14.04	37.26	7.42	46.35	150	353	Peak
5270	79.36	80.92			37.31	7.45	46.32	150	353	Average
5270	88.17	89.73			37.31	7.45	46.32	150	353	Peak
5350	47.92	49.41	54	-6.08	37.34	7.47	46.3	150	353	Average
5350	59.65	61.14	74	-14.35	37.34	7.47	46.3	150	353	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5270MHz: Fundamental frequency.



CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.16	50.83	54	-4.84	37.26	7.42	46.35	100	0	Average
5150	59.17	60.84	74	-14.83	37.26	7.42	46.35	100	0	Peak
5310	79.09	80.62			37.32	7.46	46.31	100	0	Average
5310	88.93	90.46			37.32	7.46	46.31	100	0	Peak
5350	48.02	49.51	54	-5.98	37.34	7.47	46.3	100	0	Average
5350	58.44	59.93	74	-15.56	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.99	49.66	54	-6.01	37.26	7.42	46.35	100	114	Average
5150	58.87	60.54	74	-15.13	37.26	7.42	46.35	100	114	Peak
5310	79.1	80.63			37.32	7.46	46.31	100	114	Average
5310	89.6	91.13			37.32	7.46	46.31	100	114	Peak
5350	47.98	49.47	54	-6.02	37.34	7.47	46.3	100	114	Average
5350	58.05	59.54	74	-15.95	37.34	7.47	46.3	100	114	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5310MHz: Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.19	48.86	54	-6.81	37.26	7.42	46.35	100	0	Average
5150	60.26	61.93	74	-13.74	37.26	7.42	46.35	100	0	Peak
5290	73.5	75.04			37.32	7.45	46.31	100	0	Average
5290	86.48	88.02			37.32	7.45	46.31	100	0	Peak
5350	47.98	49.47	54	-6.02	37.34	7.47	46.3	100	0	Average
5350	58	59.49	74	-16	37.34	7.47	46.3	100	0	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.14	50.81	54	-4.86	37.26	7.42	46.35	100	112	Average
5150	59.59	61.26	74	-14.41	37.26	7.42	46.35	100	112	Peak
5290	73.73	75.27			37.32	7.45	46.31	100	112	Average
5290	86.24	87.78			37.32	7.45	46.31	100	112	Peak
5350	47.99	49.48	54	-6.01	37.34	7.47	46.3	100	112	Average
5350	58.1	59.59	74	-15.9	37.34	7.47	46.3	100	112	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5290MHz: Fundamental frequency.



Band 3

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.88	49.27	54	-6.12	37.38	7.49	46.26	100	196	Average
5460	58.18	59.57	74	-15.82	37.38	7.49	46.26	100	196	Peak
#5470	57.68	59.06	68.3	-10.62	37.39	7.49	46.26	100	196	Peak
5500	81.69	83.04			37.4	7.5	46.25	100	196	Average
5500	90.94	92.29			37.4	7.5	46.25	100	196	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.84	49.23	54	-6.16	37.38	7.49	46.26	100	0	Average
5460	57.4	58.79	74	-16.6	37.38	7.49	46.26	100	0	Peak
#5470	57.2	58.58	68.3	-11.1	37.39	7.49	46.26	100	0	Peak
5500	83.66	85.01			37.4	7.5	46.25	100	0	Average
5500	95.26	96.61			37.4	7.5	46.25	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.83	49.22	54	-6.17	37.38	7.49	46.26	100	69	Average
5460	57.88	59.27	74	-16.12	37.38	7.49	46.26	100	69	Peak
#5470	57.46	58.84	68.3	-10.84	37.39	7.49	46.26	100	69	Peak
5580	82.98	84.18			37.45	7.58	46.23	100	69	Average
5580	93.31	94.51			37.45	7.58	46.23	100	69	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.84	49.23	54	-6.16	37.38	7.49	46.26	100	0	Average
5460	57.4	58.79	74	-16.6	37.38	7.49	46.26	100	0	Peak
5470	57.2	58.58	68.3	-11.1	37.39	7.49	46.26	100	0	Peak
5500	83.66	85.01			37.4	7.5	46.25	100	0	Average
5500	95.26	96.61			37.4	7.5	46.25	100	0	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	84.82	85.79			37.52	7.7	46.19	109	79	Average
5700	95.51	96.48			37.52	7.7	46.19	109	79	Peak
#5725	59.85	60.78	68.3	-8.45	37.53	7.73	46.19	109	79	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	87.38	88.35			37.52	7.7	46.19	100	59	Average
5700	98.99	99.96			37.52	7.7	46.19	100	59	Peak
#5725	58.23	59.16	68.3	-10.07	37.53	7.73	46.19	100	59	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5700MHz: Fundamental frequency.
- #: Out of restricted band.



802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.92	49.31	54	-6.08	37.38	7.49	46.26	100	43	Average
5460	57.89	59.28	74	-16.11	37.38	7.49	46.26	100	43	Peak
#5470	57.83	59.21	68.3	-10.47	37.39	7.49	46.26	100	43	Peak
5500	81.19	82.54			37.4	7.5	46.25	100	43	Average
5500	92.49	93.84			37.4	7.5	46.25	100	43	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.89	49.28	54	-6.11	37.38	7.49	46.26	100	352	Average
5460	56.99	58.38	74	-17.01	37.38	7.49	46.26	100	352	Peak
#5470	58.18	59.56	68.3	-10.12	37.39	7.49	46.26	100	352	Peak
5500	84.22	85.57			37.4	7.5	46.25	100	352	Average
5500	95.11	96.46			37.4	7.5	46.25	100	352	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5500MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.86	49.25	54	-6.14	37.38	7.49	46.26	100	91	Average
5460	57.42	58.81	74	-16.58	37.38	7.49	46.26	100	91	Peak
5470	58.58	59.96	68.3	-9.72	37.39	7.49	46.26	100	91	Peak
5580	82.39	83.59			37.45	7.58	46.23	100	91	Average
5580	93.43	94.63			37.45	7.58	46.23	100	91	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.88	49.27	54	-6.12	37.38	7.49	46.26	100	114	Average
5460	58.04	59.43	74	-15.96	37.38	7.49	46.26	100	114	Peak
5470	57.33	58.71	68.3	-10.97	37.39	7.49	46.26	100	114	Peak
5580	86.43	87.63			37.45	7.58	46.23	100	114	Average
5580	99.14	100.34			37.45	7.58	46.23	100	114	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5580MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	83.5	84.47			37.52	7.7	46.19	109	79	Average
5700	94.1	95.07			37.52	7.7	46.19	109	79	Peak
#5725	59.14	60.07	68.3	-9.16	37.53	7.73	46.19	109	79	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	87.04	88.01			37.52	7.7	46.19	200	47	Average
5700	96.51	97.48			37.52	7.7	46.19	200	47	Peak
#5725	59.13	60.06	68.3	-9.17	37.53	7.73	46.19	200	47	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11n (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.89	49.28	54	-6.11	37.38	7.49	46.26	100	68	Average
5460	57.4	58.79	74	-16.6	37.38	7.49	46.26	100	68	Peak
#5470	57.36	58.74	68.3	-10.94	37.39	7.49	46.26	100	68	Peak
5510	76.58	77.91			37.41	7.51	46.25	100	68	Average
5510	86.12	87.45			37.41	7.51	46.25	100	68	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.95	49.34	54	-6.05	37.38	7.49	46.26	100	0	Average
5460	56.9	58.29	74	-17.1	37.38	7.49	46.26	100	0	Peak
#5470	57.19	58.57	68.3	-11.11	37.39	7.49	46.26	100	0	Peak
5510	77.92	79.25			37.41	7.51	46.25	100	0	Average
5510	90.99	92.32			37.41	7.51	46.25	100	0	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5510MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.87	49.26	54	-6.13	37.38	7.49	46.26	100	68	Average
5460	57.18	58.57	74	-16.82	37.38	7.49	46.26	100	68	Peak
#5470	57.96	59.34	68.3	-10.34	37.39	7.49	46.26	100	68	Peak
5550	76.61	77.87			37.43	7.55	46.24	100	68	Average
5550	85.6	86.86			37.43	7.55	46.24	100	68	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.92	49.31	54	-6.08	37.38	7.49	46.26	137	113	Average
5460	56.97	58.36	74	-17.03	37.38	7.49	46.26	137	113	Peak
#5470	58.87	60.25	68.3	-9.43	37.39	7.49	46.26	137	113	Peak
5550	82.15	83.41			37.43	7.55	46.24	137	113	Average
5550	91.62	92.88			37.43	7.55	46.24	137	113	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5550MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	78.18	79.21			37.5	7.67	46.2	100	86	Average
5670	87.88	88.91			37.5	7.67	46.2	100	86	Peak
#5725	59.89	60.82	68.3	-8.41	37.53	7.73	46.19	100	86	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	84.64	85.67			37.5	7.67	46.2	100	83	Average
5670	94.13	95.16			37.5	7.67	46.2	100	83	Peak
#5725	59.83	60.76	68.3	-8.47	37.53	7.73	46.19	100	83	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



802.11ac (80MHz)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.87	49.26	54	-6.13	37.38	7.49	46.26	100	86	Average
5460	57.48	58.87	74	-16.52	37.38	7.49	46.26	100	86	Peak
#5470	57.43	58.81	68.3	-10.87	37.39	7.49	46.26	100	86	Peak
5530	72.19	73.48			37.42	7.53	46.24	100	86	Average
5530	84.62	85.91			37.42	7.53	46.24	100	86	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.38	48.77	54	-6.62	37.38	7.49	46.26	100	84	Average
5460	57.99	59.38	74	-16.01	37.38	7.49	46.26	100	84	Peak
#5470	57.41	58.79	68.3	-10.89	37.39	7.49	46.26	100	84	Peak
5530	77.2	78.49			37.42	7.53	46.24	100	84	Average
5530	89.07	90.36			37.42	7.53	46.24	100	84	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5530MHz: Fundamental frequency.
- #: Out of restricted band.



Band 4

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	86.35	87.23			37.55	7.75	46.18	154	67	Average
5745	96.37	97.25			37.55	7.75	46.18	154	67	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	89.79	90.67			37.55	7.75	46.18	200	113	Average
5745	99.79	100.67			37.55	7.75	46.18	200	113	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.




OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5606.53	58.17	59.32	68.3	-10.13	37.46	7.61	46.22	154	67	Peak
5963.73	59.64	60.11	68.3	-8.66	37.68	7.97	46.12	154	67	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5612.7	57.57	58.71	68.3	-10.73	37.47	7.61	46.22	154	67	Peak
5953.75	58.17	58.66	68.3	-10.13	37.67	7.96	46.12	154	67	Peak

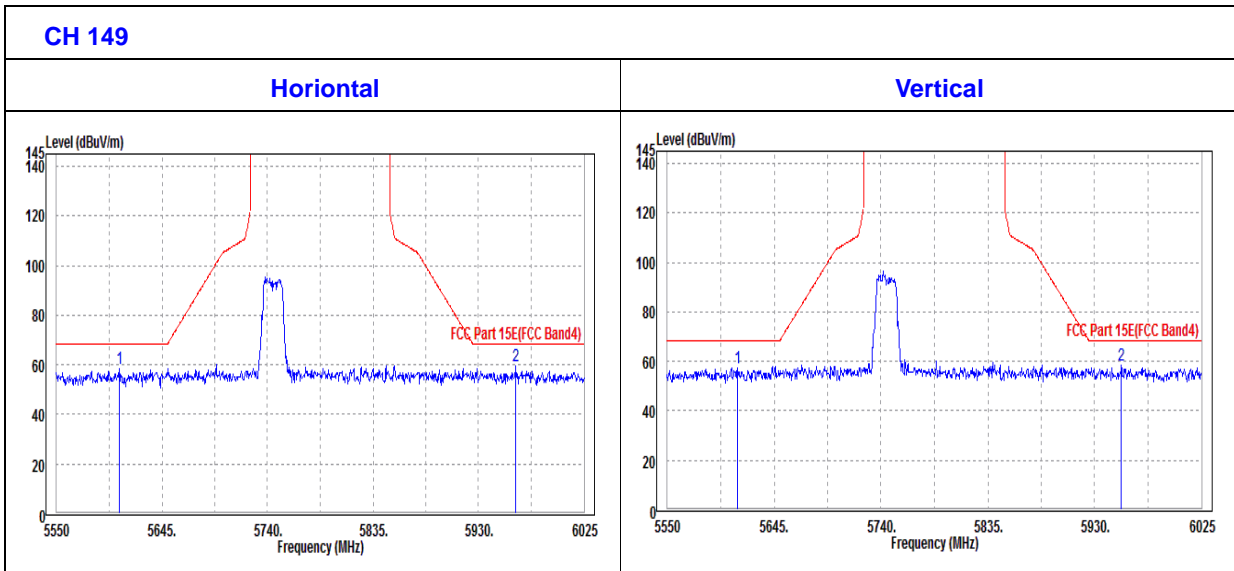



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	86.03	86.84			37.57	7.79	46.17	200	77	Average
5785	97.18	97.99			37.57	7.79	46.17	200	77	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	90.7	91.51			37.57	7.79	46.17	200	188	Average
5785	99.42	100.23			37.57	7.79	46.17	200	188	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.



OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5617.45	57.83	58.96	68.3	-10.47	37.47	7.62	46.22	154	67	Peak
5953.28	58.74	59.23	68.3	-9.56	37.67	7.96	46.12	154	67	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5618.88	58.4	59.53	68.3	-9.9	37.47	7.62	46.22	154	67	Peak
5940.45	57.57	58.09	68.3	-10.73	37.66	7.95	46.13	154	67	Peak

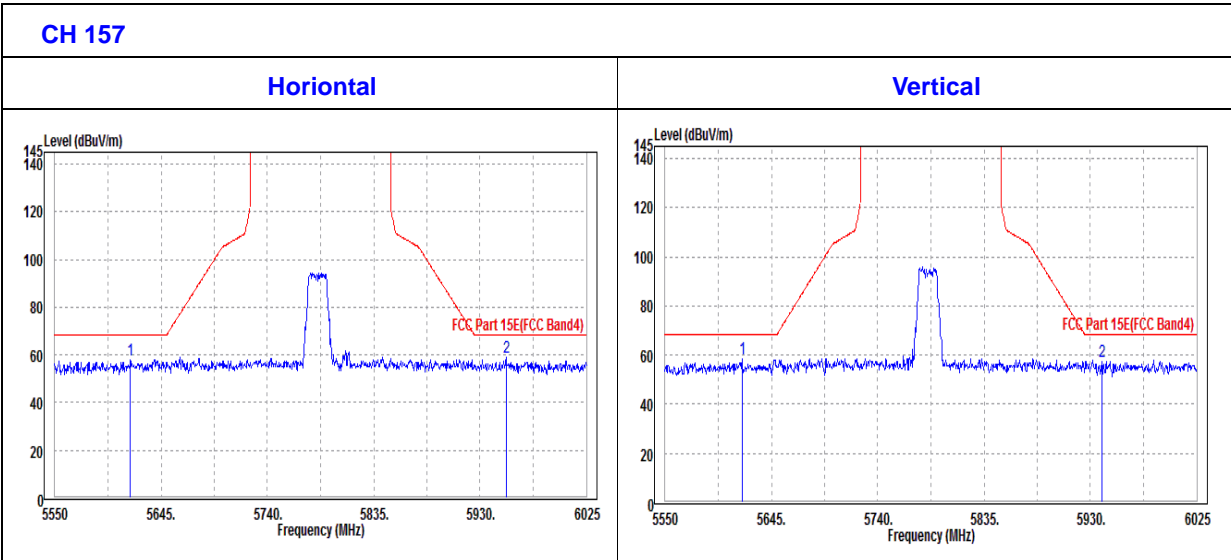



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	83.85	84.58			37.6	7.83	46.16	100	80	Average
5825	93.39	94.12			37.6	7.83	46.16	100	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	85.71	86.44			37.6	7.83	46.16	150	203	Average
5825	98.14	98.87			37.6	7.83	46.16	150	203	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.



OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5616.5	57.54	58.67	68.3	-10.76	37.47	7.62	46.22	100	81	Peak
5963.73	57.69	58.16	68.3	-10.61	37.68	7.97	46.12	100	81	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.55	60.12	61.21	68.3	-8.18	37.48	7.64	46.21	100	81	Peak
5934.75	59.21	59.74	68.3	-9.09	37.66	7.94	46.13	100	81	Peak

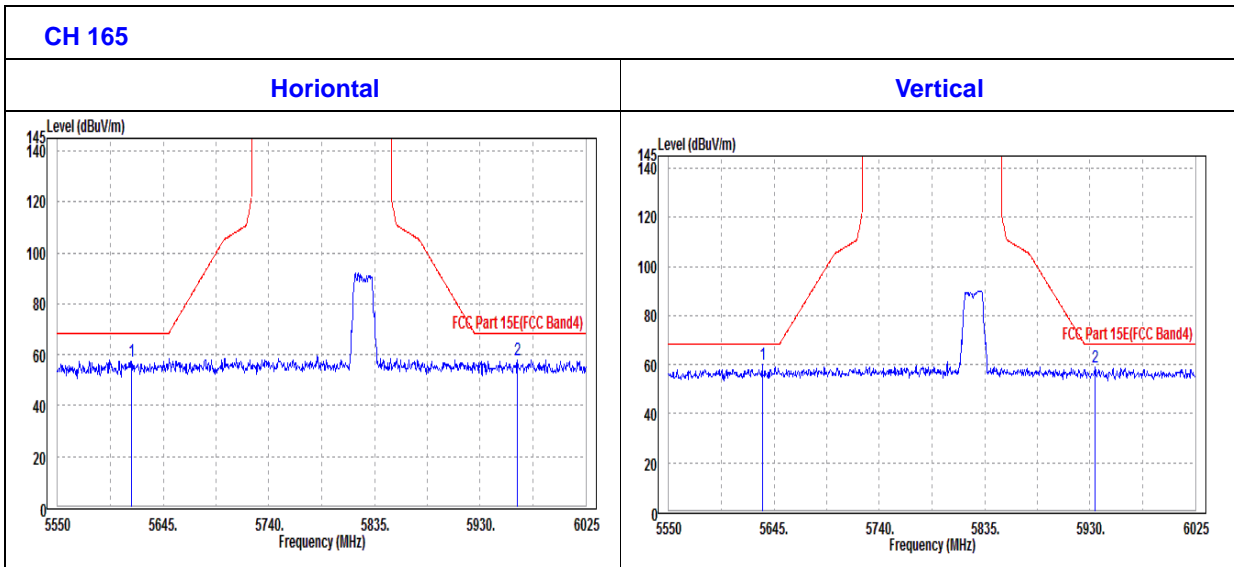



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	85.87	86.75			37.55	7.75	46.18	154	67	Average
5745	95.7	96.58			37.55	7.75	46.18	154	67	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	94.11	94.99			37.55	7.75	46.18	200	113	Average
5745	107.59	108.47			37.55	7.75	46.18	200	113	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5632.65	58.12	59.21	68.3	-10.18	37.48	7.64	46.21	100	81	Peak
5942.83	58.03	58.54	68.3	-10.27	37.67	7.95	46.13	100	81	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.38	56.54	57.64	68.3	-11.76	37.48	7.63	46.21	100	81	Peak
5958.5	57.73	58.2	68.3	-10.57	37.68	7.97	46.12	100	81	Peak

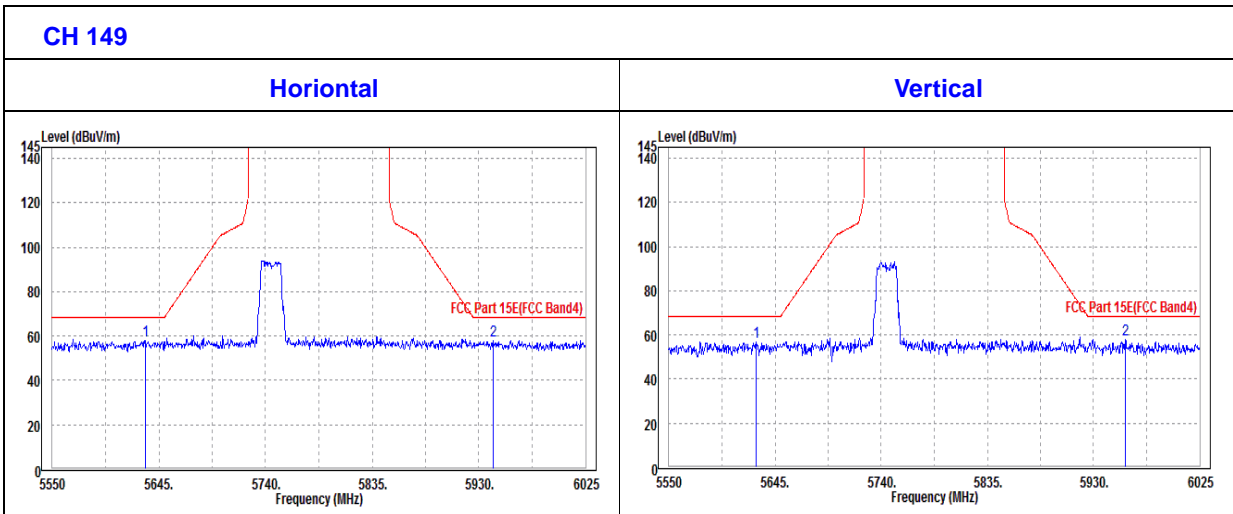



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	90.93	91.74			37.57	7.79	46.17	200	77	Average
5785	103.12	103.93			37.57	7.79	46.17	200	77	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	95.53	96.34			37.57	7.79	46.17	200	188	Average
5785	107.16	107.97			37.57	7.79	46.17	200	188	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5624.1	59.1	60.22	68.3	-9.2	37.47	7.63	46.22	200	77	Peak
5959.93	56.91	57.38	68.3	-11.39	37.68	7.97	46.12	200	77	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5633.13	58.04	59.13	68.3	-10.26	37.48	7.64	46.21	200	77	Peak
5982.25	58.14	58.57	68.3	-10.16	37.69	7.99	46.11	200	77	Peak

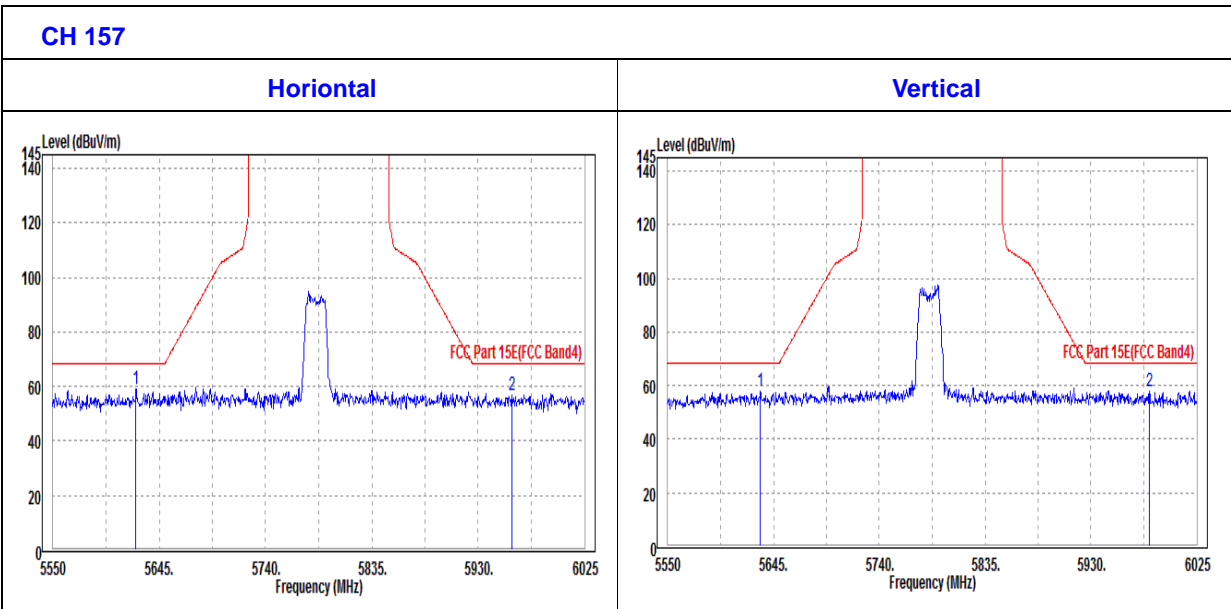



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	83.16	83.89			37.6	7.83	46.16	100	80	Average
5825	93.18	93.91			37.6	7.83	46.16	100	80	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	85.9	86.63			37.6	7.83	46.16	150	203	Average
5825	95.79	96.52			37.6	7.83	46.16	150	203	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.



OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5619.35	58.36	59.49	68.3	-9.94	37.47	7.62	46.22	200	77	Peak
5957.55	57.71	58.19	68.3	-10.59	37.67	7.97	46.12	200	77	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.78	58.35	59.48	68.3	-9.95	37.47	7.62	46.22	200	77	Peak
5960.88	58.19	58.66	68.3	-10.11	37.68	7.97	46.12	200	77	Peak

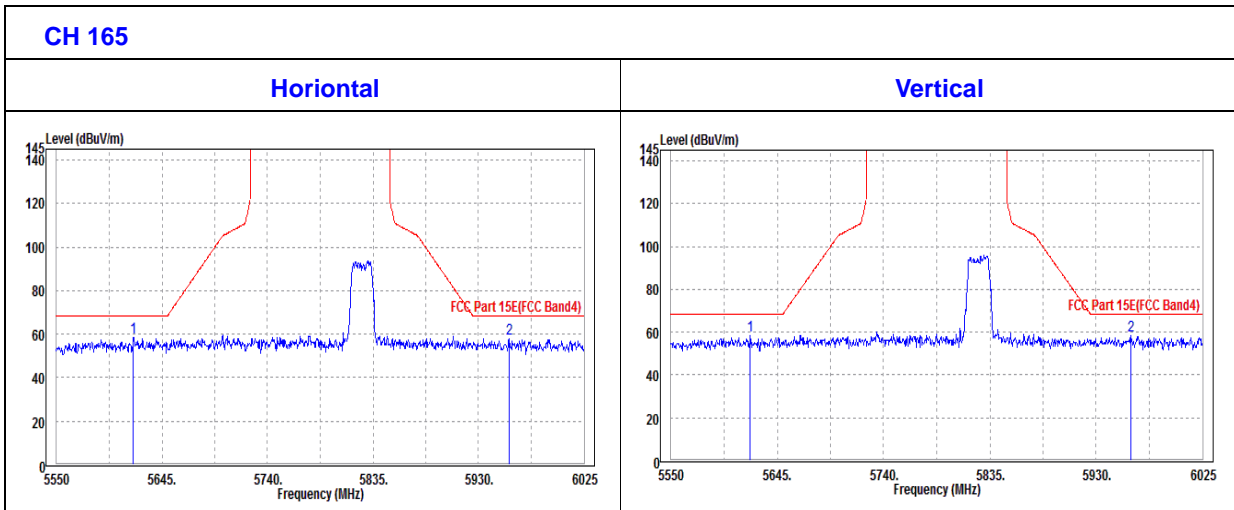



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	81.28	82.15			37.55	7.76	46.18	150	70	Average
5755	90.51	91.38			37.55	7.76	46.18	150	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	83.82	84.69			37.55	7.76	46.18	200	113	Average
5755	93.32	94.19			37.55	7.76	46.18	200	113	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.



OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5625.53	56.72	57.82	68.3	-11.58	37.48	7.63	46.21	154	67	Peak
5974.65	59.46	59.92	68.3	-8.84	37.68	7.98	46.12	154	67	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5634.08	57.46	58.55	68.3	-10.84	37.48	7.64	46.21	154	67	Peak
5965.63	57.67	58.14	68.3	-10.63	37.68	7.97	46.12	154	67	Peak

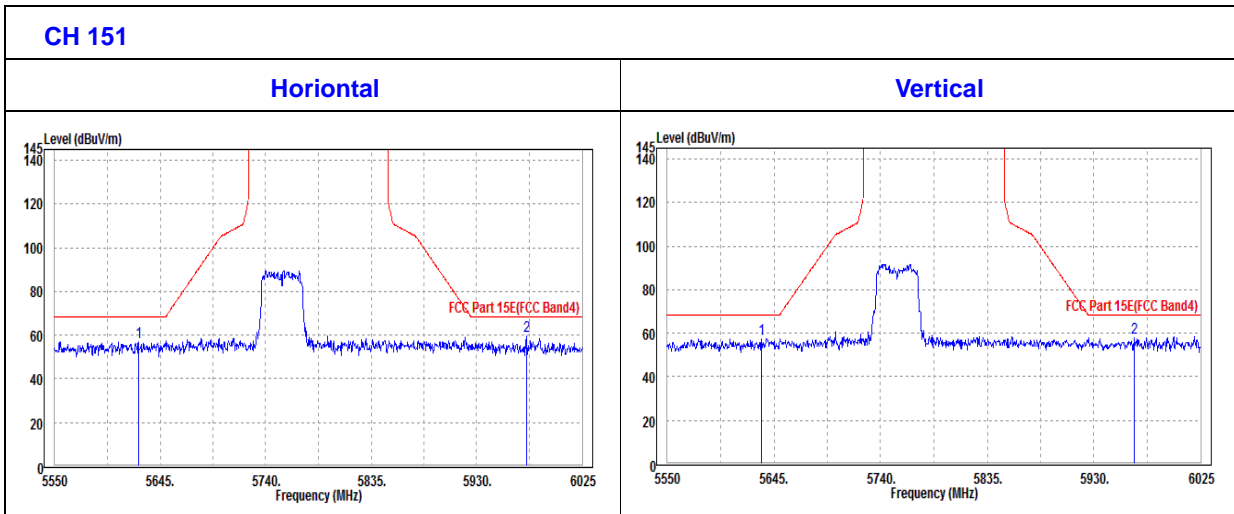



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	80.72	81.51			37.58	7.8	46.17	197	108	Average
5795	93.69	94.48			37.58	7.8	46.17	197	108	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	84.24	85.03			37.58	7.8	46.17	200	188	Average
5795	94.27	95.06			37.58	7.8	46.17	200	188	Peak

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.



OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5610.33	57.53	58.67	68.3	-10.77	37.47	7.61	46.22	154	67	Peak
5973.7	59.95	60.41	68.3	-8.35	37.68	7.98	46.12	154	67	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5644.05	57.73	58.8	68.3	-10.57	37.49	7.65	46.21	154	67	Peak
5952.8	58.07	58.56	68.3	-10.23	37.67	7.96	46.12	154	67	Peak

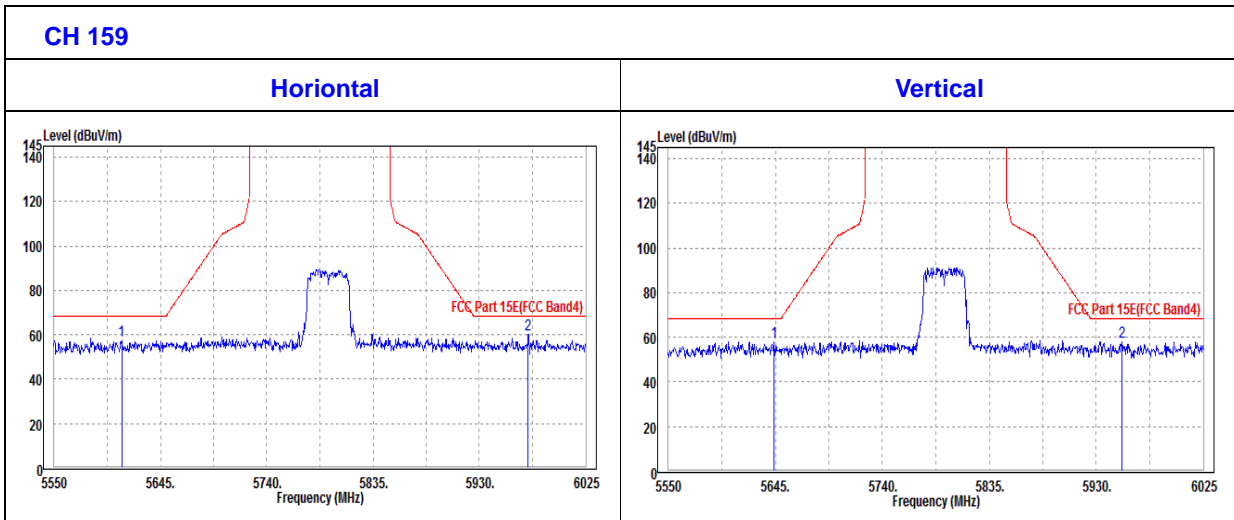



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	77.06	77.88			37.57	7.78	46.17	150	77	Average
5775	90.42	91.24			37.57	7.78	46.17	150	77	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	79.99	80.81			37.57	7.78	46.17	200	150	Average
5775	92.61	93.43			37.57	7.78	46.17	200	150	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5775MHz: Fundamental frequency.




OOBE DATA

802.11ac (80MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.85	58.38	59.48	68.3	-9.92	37.48	7.63	46.21	100	77	Peak
5977.03	57.01	57.45	68.3	-11.29	37.69	7.99	46.12	100	77	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5631.7	57.99	59.09	68.3	-10.31	37.48	7.63	46.21	100	77	Peak
5956.13	58.28	58.76	68.3	-10.02	37.67	7.97	46.12	100	77	Peak

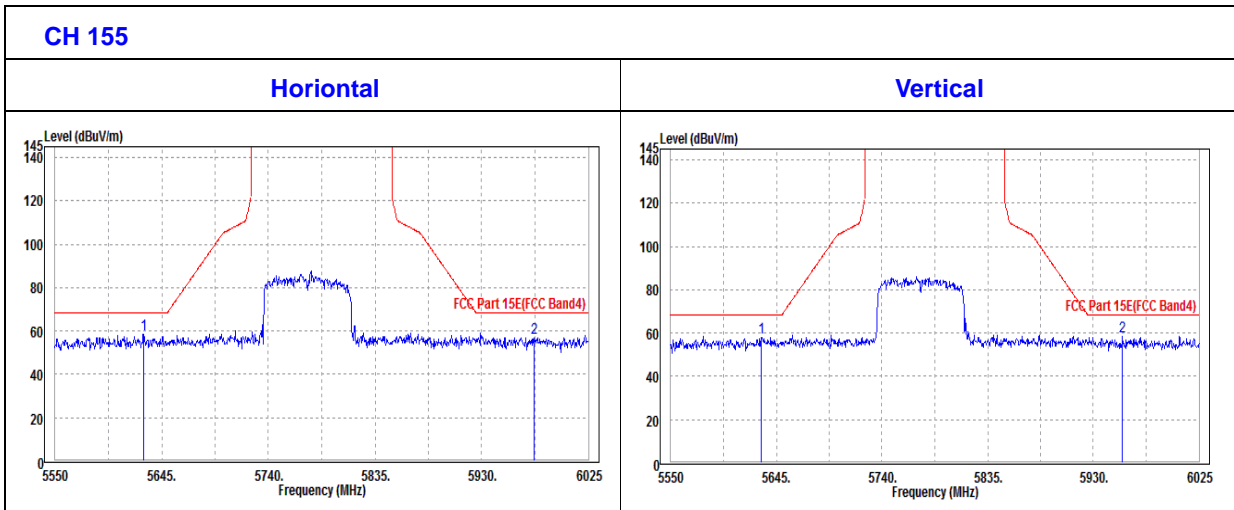



3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 15,18	Mar. 14,19
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Sep. 18,17	Sep. 17,18

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.



3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

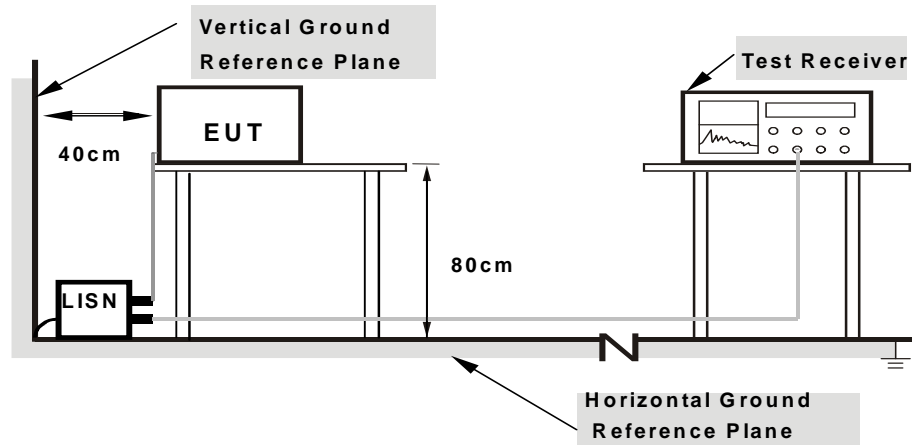

- Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6.



3.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/07/09

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	21.96	55.36	-33.40	L	ON	9.6
0.162000	36.77	---	65.36	-28.59	L	ON	9.6
0.552000	---	27.99	46.00	-18.01	L	ON	9.7
0.552000	35.59	---	56.00	-20.41	L	ON	9.7
1.192000	---	12.10	46.00	-33.90	L	ON	9.7
1.192000	19.01	---	56.00	-36.99	L	ON	9.7
4.892000	---	13.80	46.00	-32.20	L	ON	9.7
4.892000	22.52	---	56.00	-33.48	L	ON	9.7
10.332000	---	16.81	50.00	-33.19	L	ON	9.9
10.332000	26.35	---	60.00	-33.65	L	ON	9.9
12.288000	---	19.23	50.00	-30.77	L	ON	9.9
12.288000	27.64	---	60.00	-32.36	L	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

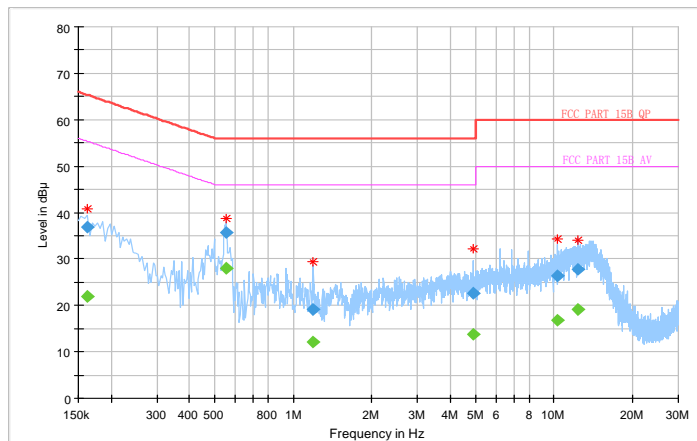




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/07/09

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.548000	---	36.62	46.00	-9.38	N	ON	10.1
0.548000	42.95	---	56.00	-13.05	N	ON	10.1
1.036000	---	20.44	46.00	-25.56	N	ON	9.9
1.036000	30.16	---	56.00	-25.84	N	ON	9.9
2.940000	---	18.08	46.00	-27.92	N	ON	9.8
2.940000	28.88	---	56.00	-27.12	N	ON	9.8
4.904000	---	19.72	46.00	-26.28	N	ON	9.8
4.904000	29.03	---	56.00	-26.97	N	ON	9.8
9.260000	---	20.64	50.00	-29.36	N	ON	9.9
9.260000	30.15	---	60.00	-29.85	N	ON	9.9
12.308000	---	22.84	50.00	-27.16	N	ON	9.9
12.308000	31.86	---	60.00	-28.14	N	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

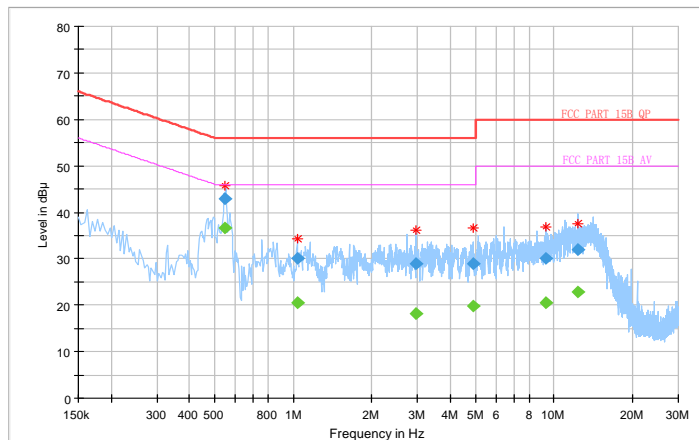



3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)


NOTE: Where B is the 26dB emission bandwidth in MHz.




3.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT


802.11a, 802.11n (20MHz), 802.11n (40MHz) TEST CONFIGURATION

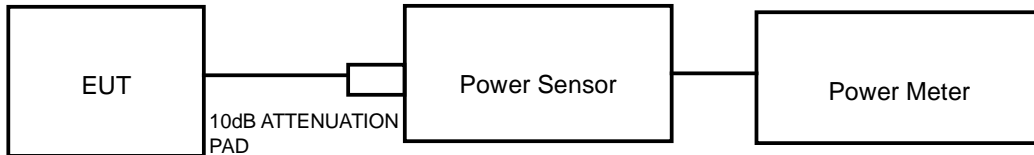

11ac TEST CONFIGURATION

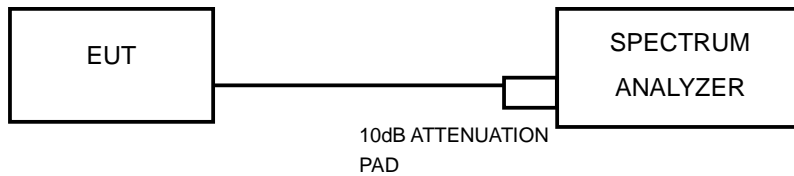

FOR 26dB BANDWIDTH

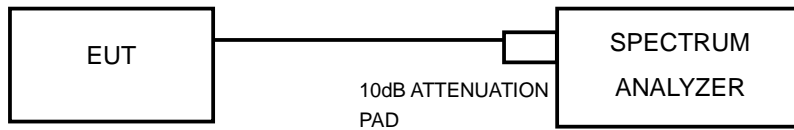

3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 02,18	Mar. 01,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 16,18	Mar. 15,19
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 16,18	Mar. 15,19

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.4 TEST PROCEDURE

FOR POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

1. Measure the duty cycle, x , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
8. Do not use sweep triggering. Allow the sweep to “free run.”
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.



FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



3.3.7 TEST RESULTS

OUTPUT POWER:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	12.22	16.672	24	PASS
40	5200	12.28	16.904	24	PASS
48	5240	12.34	17.140	24	PASS
52	5260	12.24	16.749	24	PASS
60	5300	12.14	16.368	24	PASS
64	5320	12.12	16.293	24	PASS
100	5500	12.07	16.106	24	PASS
116	5580	12.16	16.444	24	PASS
140	5700	12.03	15.959	24	PASS
149	5745	12.34	17.140	30	PASS
157	5785	12.21	16.634	30	PASS
165	5825	12.13	16.331	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	12.30	16.982	24	PASS
40	5200	12.43	17.498	24	PASS
48	5240	12.38	17.298	24	PASS
52	5260	12.23	16.711	24	PASS
60	5300	12.28	16.904	24	PASS
64	5320	12.04	15.996	24	PASS
100	5500	12.11	16.255	24	PASS
116	5580	12.32	17.061	24	PASS
140	5700	12.01	15.885	24	PASS
149	5745	12.34	17.140	30	PASS
157	5785	12.25	16.788	30	PASS
165	5825	12.18	16.520	30	PASS



802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	12.34	17.140	24	PASS
46	5230	12.46	17.620	24	PASS
54	5270	12.32	17.061	24	PASS
62	5310	12.43	17.498	24	PASS
102	5510	12.35	17.179	24	PASS
110	5550	12.46	17.620	24	PASS
134	5670	12.08	16.144	24	PASS
151	5755	12.33	17.100	30	PASS
165	5825	12.17	16.482	30	PASS

802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER w/o Duty Factor (dBm)	Duty Factor	AVERAGE POWER with Duty Factor (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
42	5210	9.59	2.70	12.29	16.943	24	PASS
58	5290	9.54	2.70	12.24	16.749	24	PASS
106	5530	9.45	2.70	12.15	16.406	24	PASS
155	5775	9.44	2.70	12.14	16.368	30	PASS



99% OCCUPIED BANDWIDTH & 26dB BANDWIDTH/6dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	17.04	22.34	PASS
40	5200	17.04	22.27	PASS
48	5240	16.98	22.02	PASS
52	5260	16.86	21.84	PASS
60	5300	16.98	21.74	PASS
64	5320	16.98	21.92	PASS
100	5500	16.98	21.63	PASS
116	5580	17.04	21.99	PASS
140	5700	16.92	21.88	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	17.04	16.32	PASS
157	5785	17.04	16.36	PASS
165	5825	16.98	16.35	PASS



802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	17.94	22.12	PASS
40	5200	18.00	22.57	PASS
48	5240	18.00	22.21	PASS
52	5260	17.94	22.45	PASS
60	5300	18.06	22.35	PASS
64	5320	17.94	21.95	PASS
100	5500	18.06	22.17	PASS
116	5580	17.94	22.16	PASS
140	5700	17.94	22.03	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
149	5745	17.94	17.60	PASS
157	5785	18.00	17.57	PASS
165	5825	17.94	17.58	PASS



802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
38	5190	36.30	44.63	PASS
46	5230	36.36	44.15	PASS
54	5270	36.36	44.75	PASS
62	5310	36.42	44.38	PASS
102	5510	36.36	44.88	PASS
110	5550	36.36	44.50	PASS
134	5670	36.36	44.75	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
151	5755	36.36	35.08	PASS
159	5795	36.36	35.10	PASS

802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
42	5210	74.52	83.16	PASS
58	5290	74.64	83.96	PASS
106	5530	74.64	83.80	PASS
CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	6dB BANDWIDTH (MHz)	PASS/FAIL
155	5775	74.64	71.42	PASS




For U-NII-1:

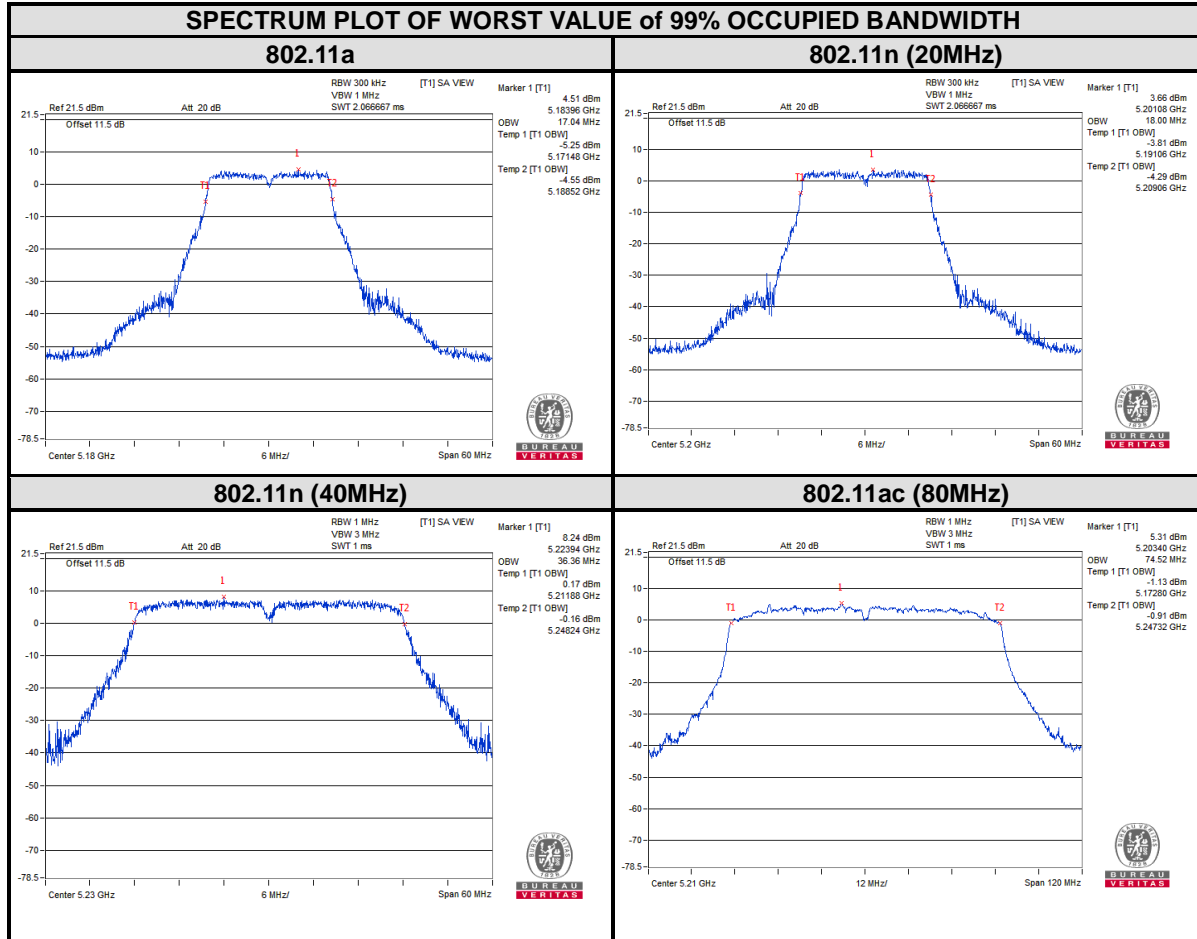



BUREAU VERITAS

Test Report No.: RF180702W009-3

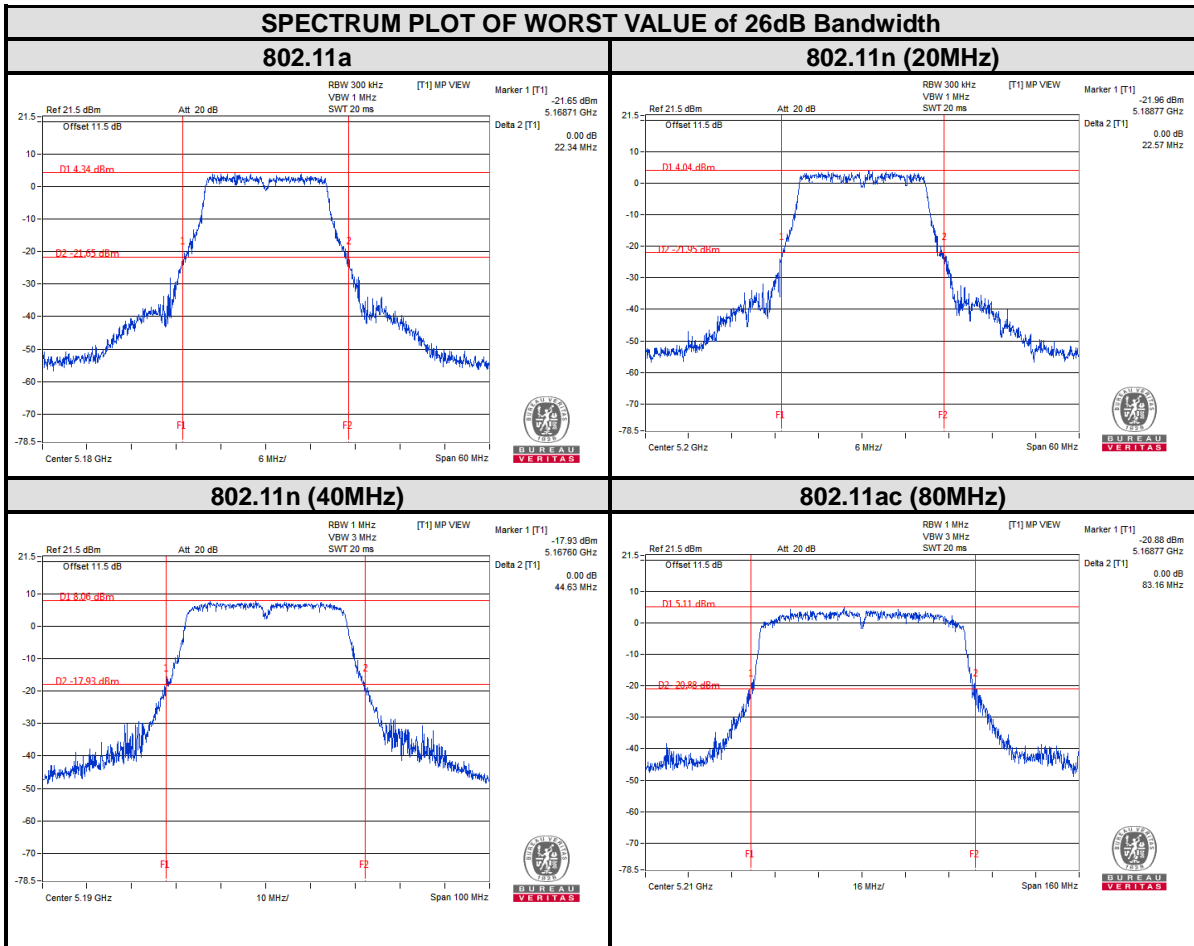




BUREAU VERITAS

Test Report No.: RF180702W009-3


For U-NII-2A:

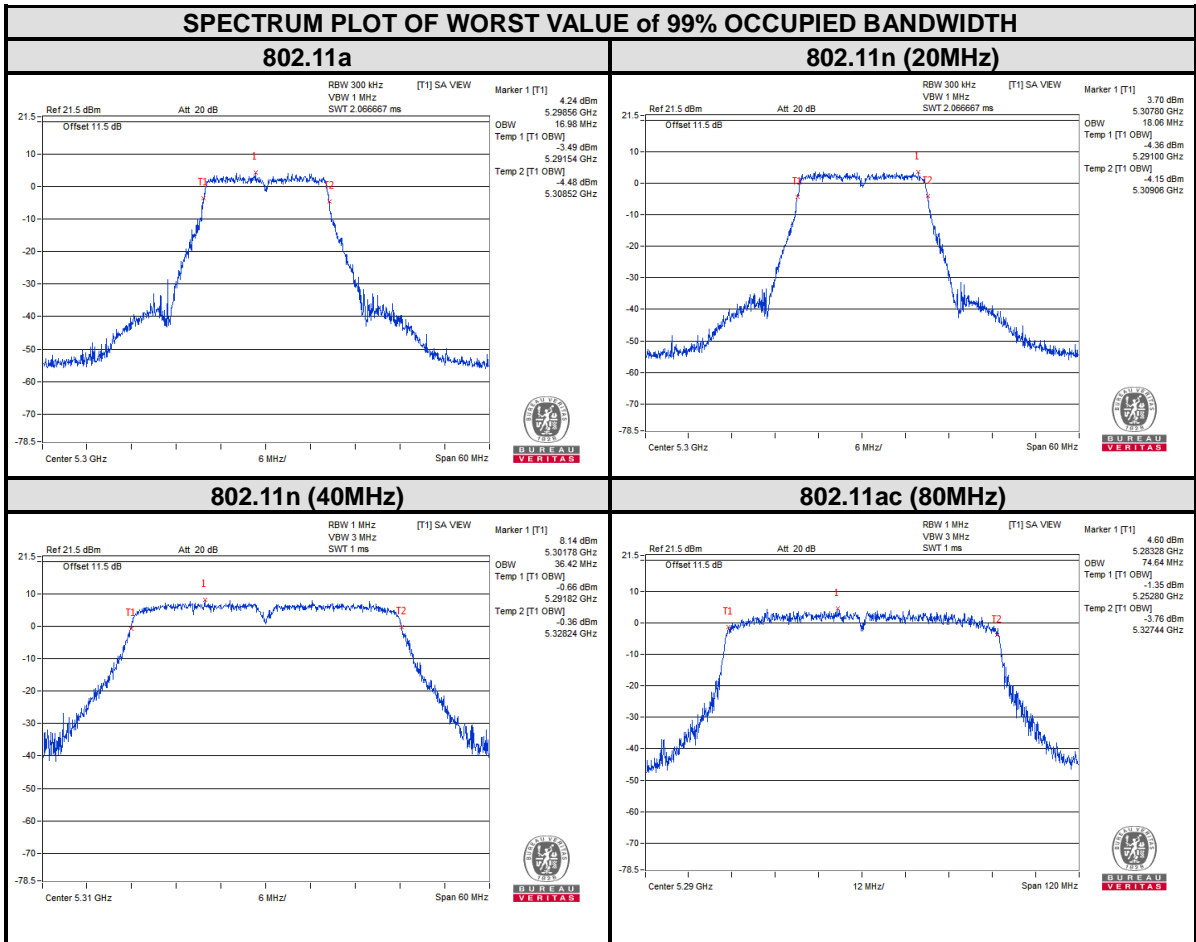




BUREAU VERITAS


Test Report No.: RF180702W009-3

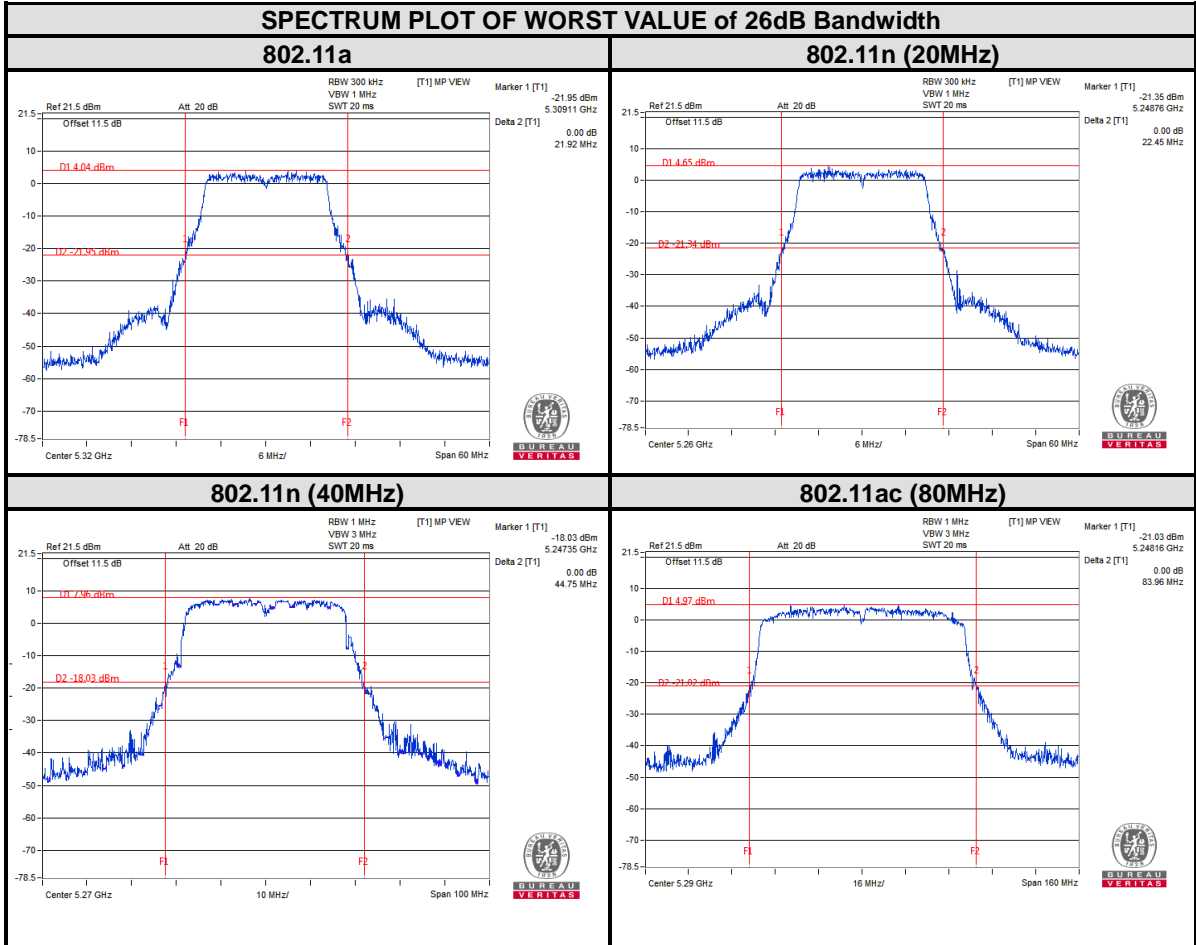



For U-NII-2C:

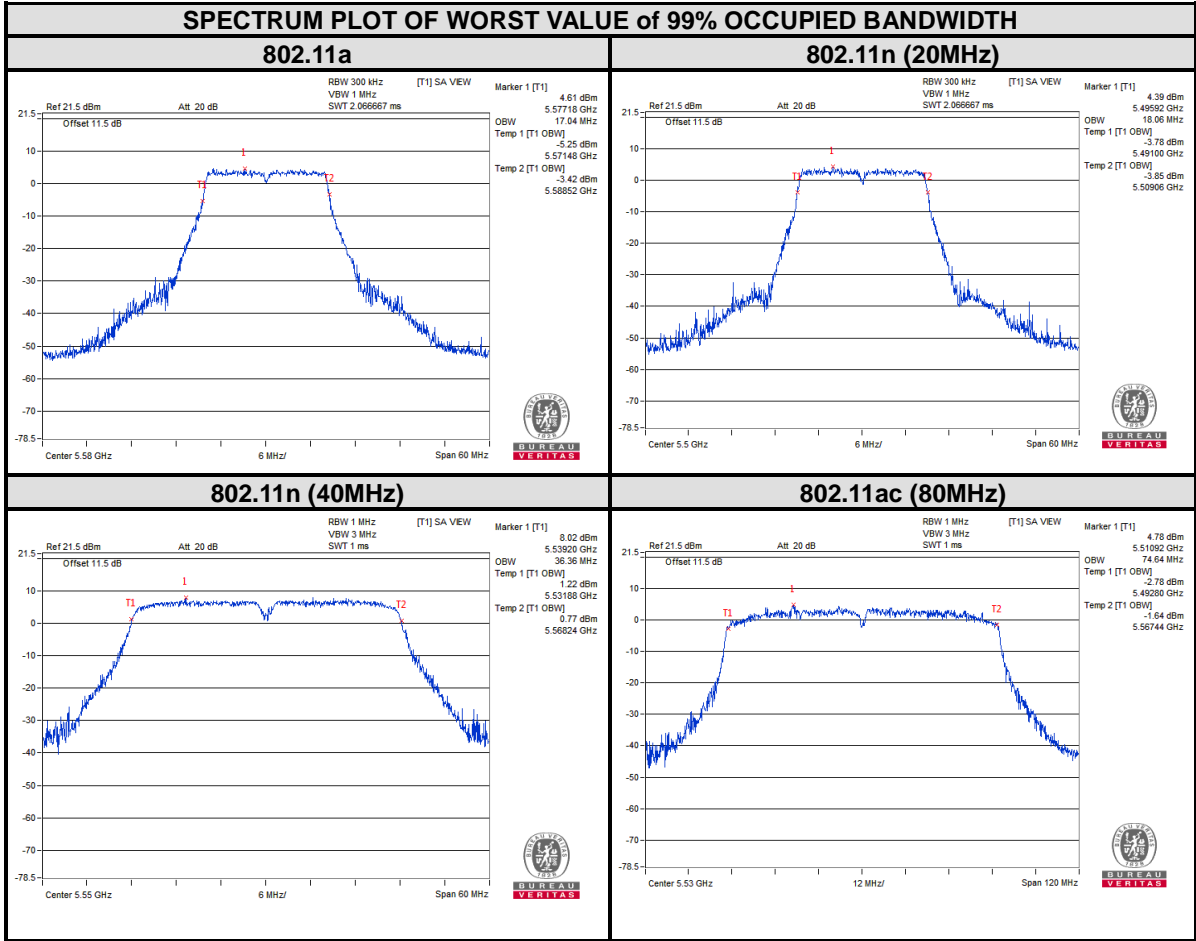

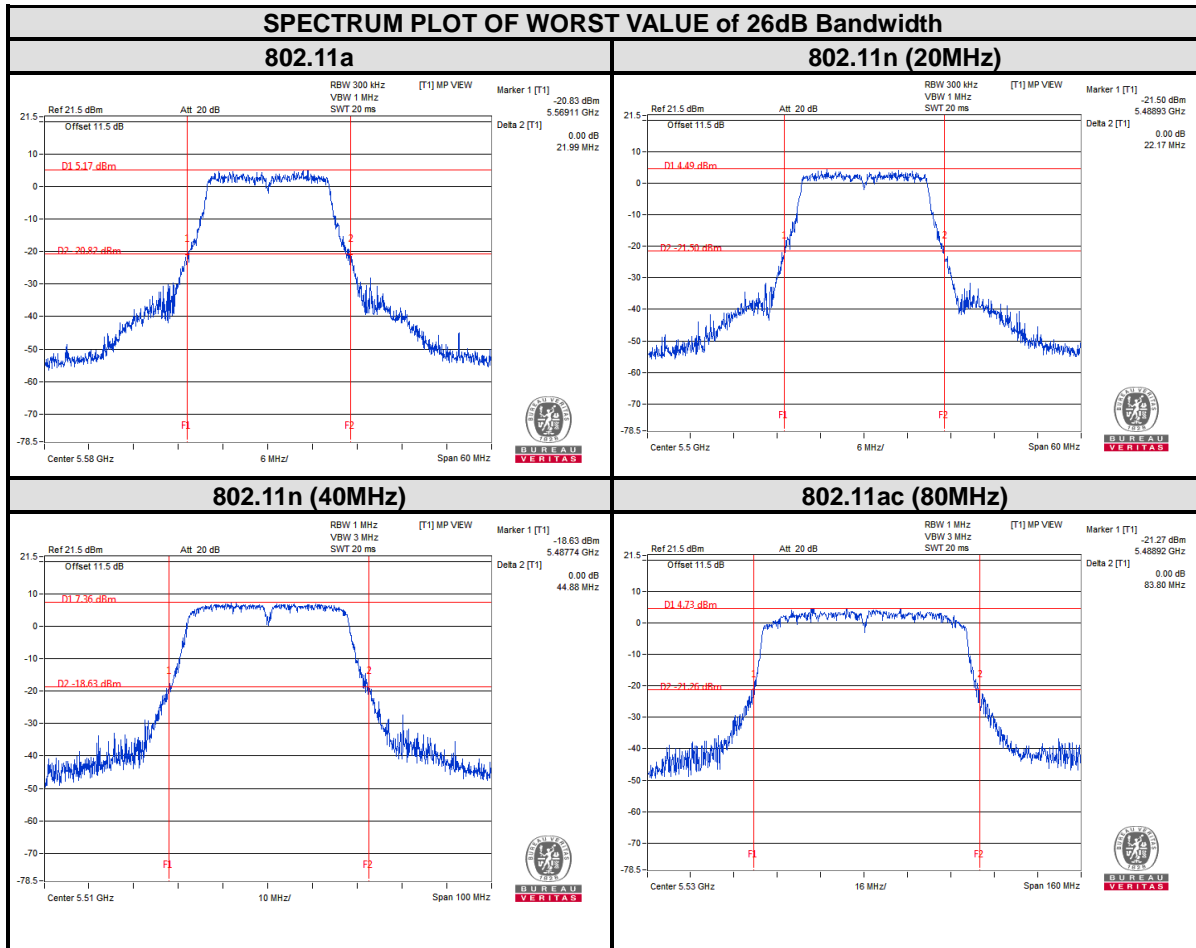




**BUREAU
VERITAS**

Test Report No.: RF180702W009-3


For U-NII-3:

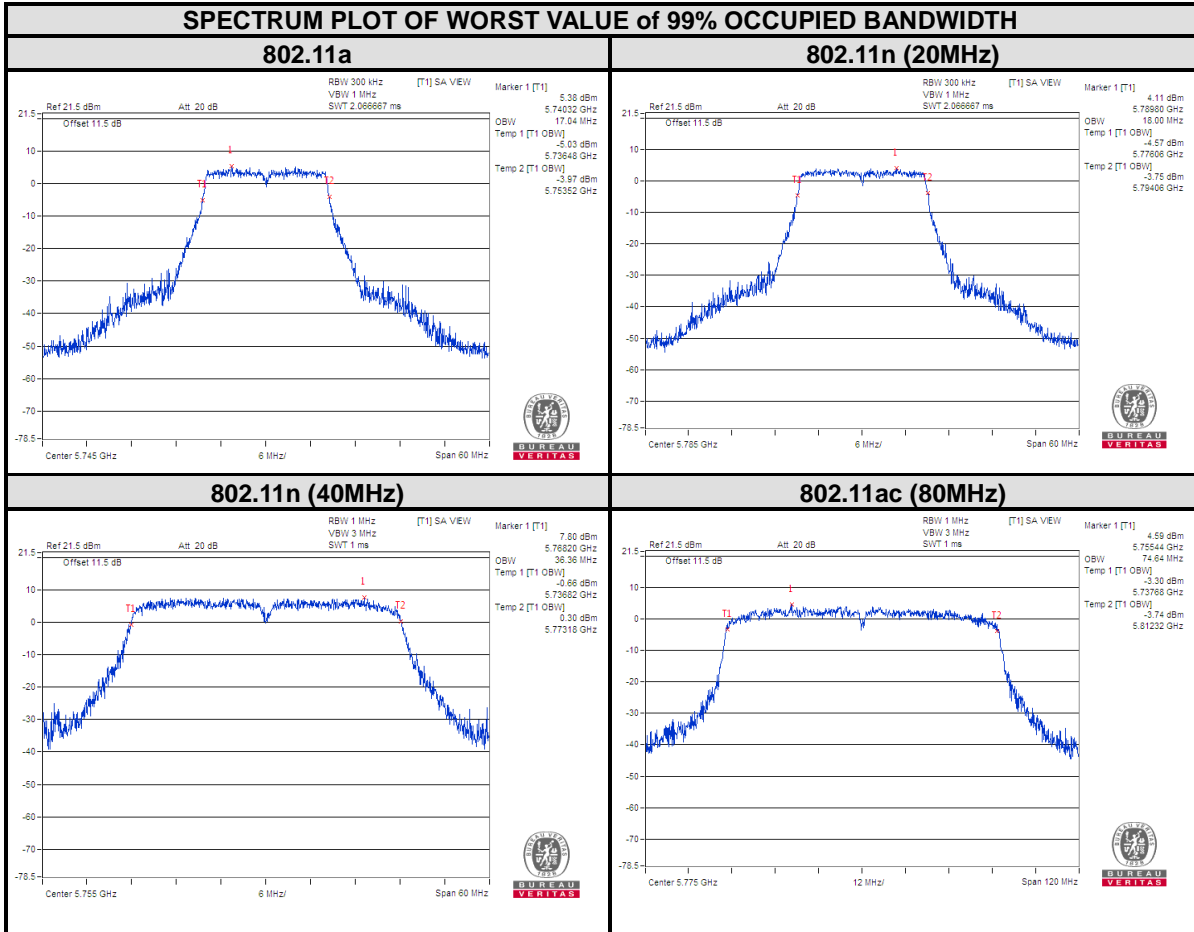



BUREAU VERITAS

Test Report No.: RF180702W009-3

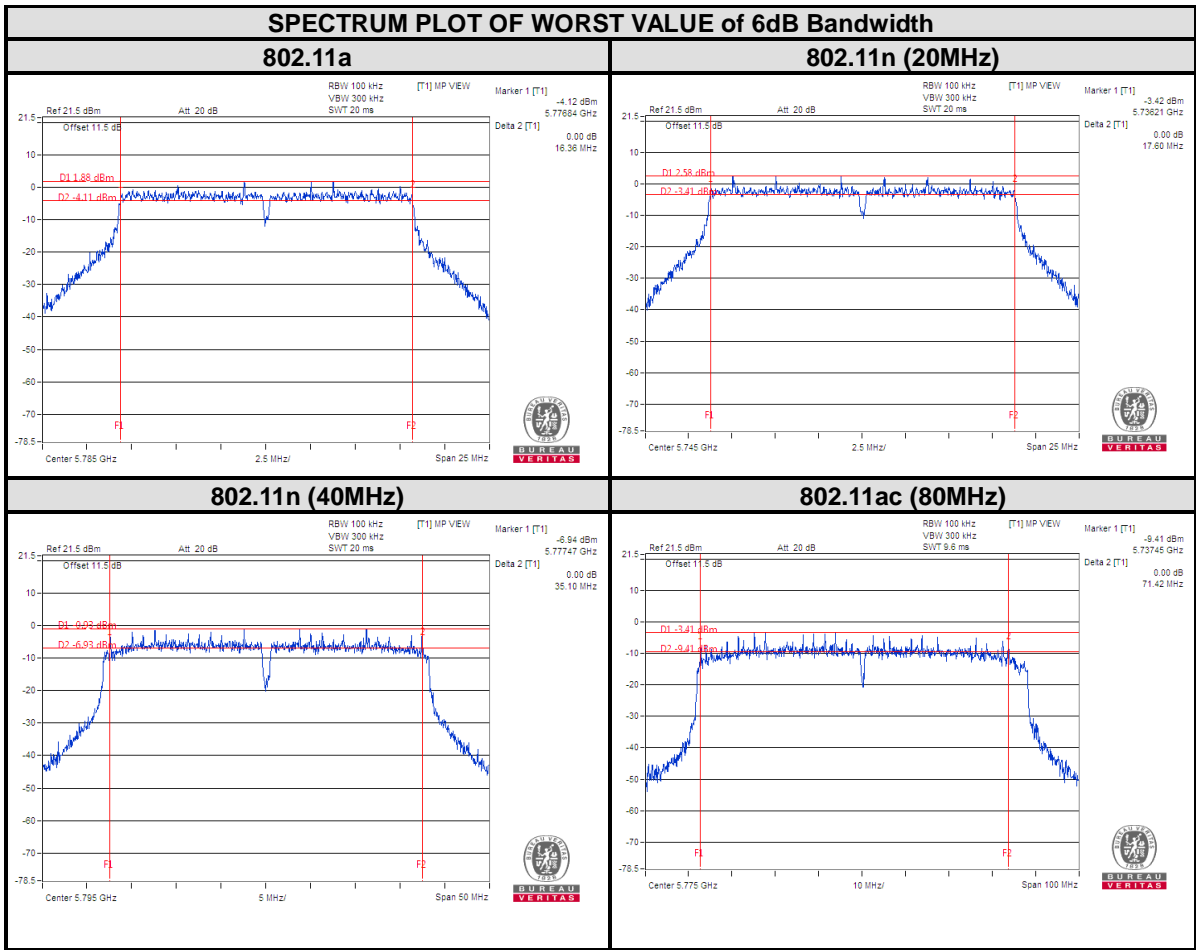




3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP

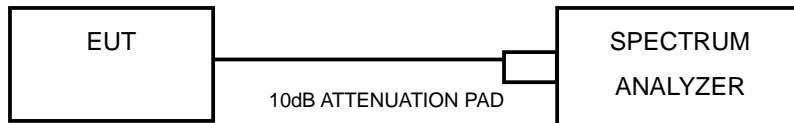

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



3.4.4 TEST PROCEDURES

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.6.



3.4.7 TEST RESULTS

For U-NII-1 & U-NII-2A:

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	7.25	0.75	8.00	11	PASS
40	5200	7.60	0.75	8.35	11	PASS
48	5240	7.30	0.75	8.05	11	PASS
52	5260	7.81	0.75	8.56	11	PASS
60	5300	6.97	0.75	7.72	11	PASS
64	5320	7.81	0.75	8.56	11	PASS
100	5500	7.17	0.75	7.92	11	PASS
116	5580	8.24	0.75	8.99	11	PASS
140	5700	7.63	0.75	8.38	11	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	6.81	0.63	7.44	11	PASS
40	5200	6.65	0.63	7.28	11	PASS
48	5240	6.55	0.63	7.18	11	PASS
52	5260	6.92	0.63	7.55	11	PASS
60	5300	6.98	0.63	7.61	11	PASS
64	5320	6.72	0.63	7.35	11	PASS
100	5500	7.21	0.63	7.84	11	PASS
116	5580	7.46	0.63	8.09	11	PASS
140	5700	7.76	0.63	8.39	11	PASS



802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
38	5190	5.22	1.21	6.43	11	PASS
46	5230	5.79	1.21	7.00	11	PASS
54	5270	4.46	1.21	5.67	11	PASS
62	5310	4.87	1.21	6.08	11	PASS
102	5510	4.09	1.21	5.30	11	PASS
110	5550	4.14	1.21	5.35	11	PASS
134	5670	4.99	1.21	6.20	11	PASS

802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
42	5210	2.21	2.70	4.91	11	PASS
58	5290	1.61	2.70	4.31	11	PASS
106	5530	2.01	2.70	4.71	11	PASS



For U-NII-3:

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	11.69	8.68	0.75	9.43	30	PASS
157	5785	10.93	7.92	0.75	8.67	30	PASS
165	5825	10.75	7.74	0.75	8.49	30	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	11.47	8.46	0.63	9.09	30	PASS
157	5785	10.97	7.96	0.63	8.59	30	PASS
165	5825	10.83	7.82	0.63	8.45	30	PASS

802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
151	5755	7.95	4.94	1.21	6.15	30	PASS
159	5795	7.78	4.77	1.21	5.98	30	PASS

802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
155	5775	4.79	1.78	2.70	4.48	30	PASS



For 5180~5240MHz

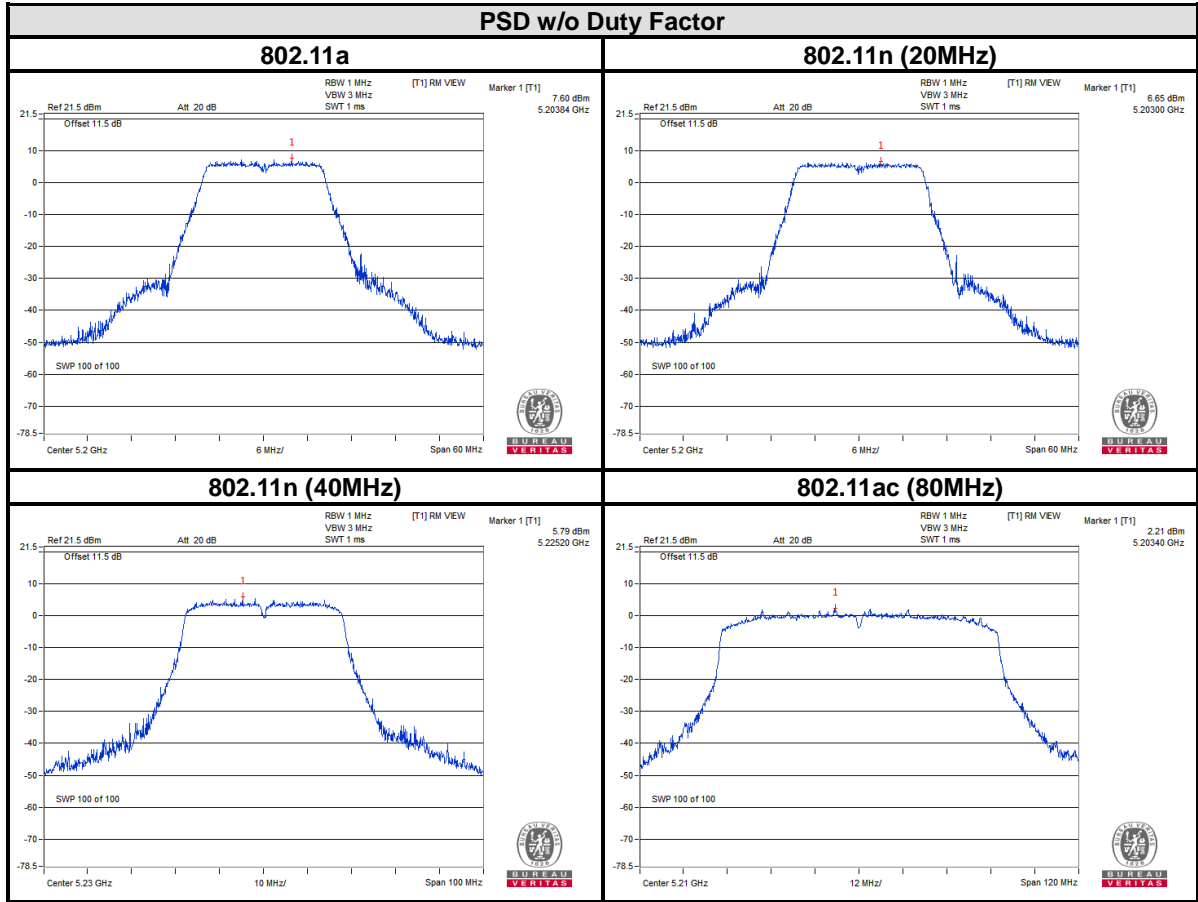




BUREAU VERITAS

Test Report No.: RF180702W009-3

For 5260~5320MHz

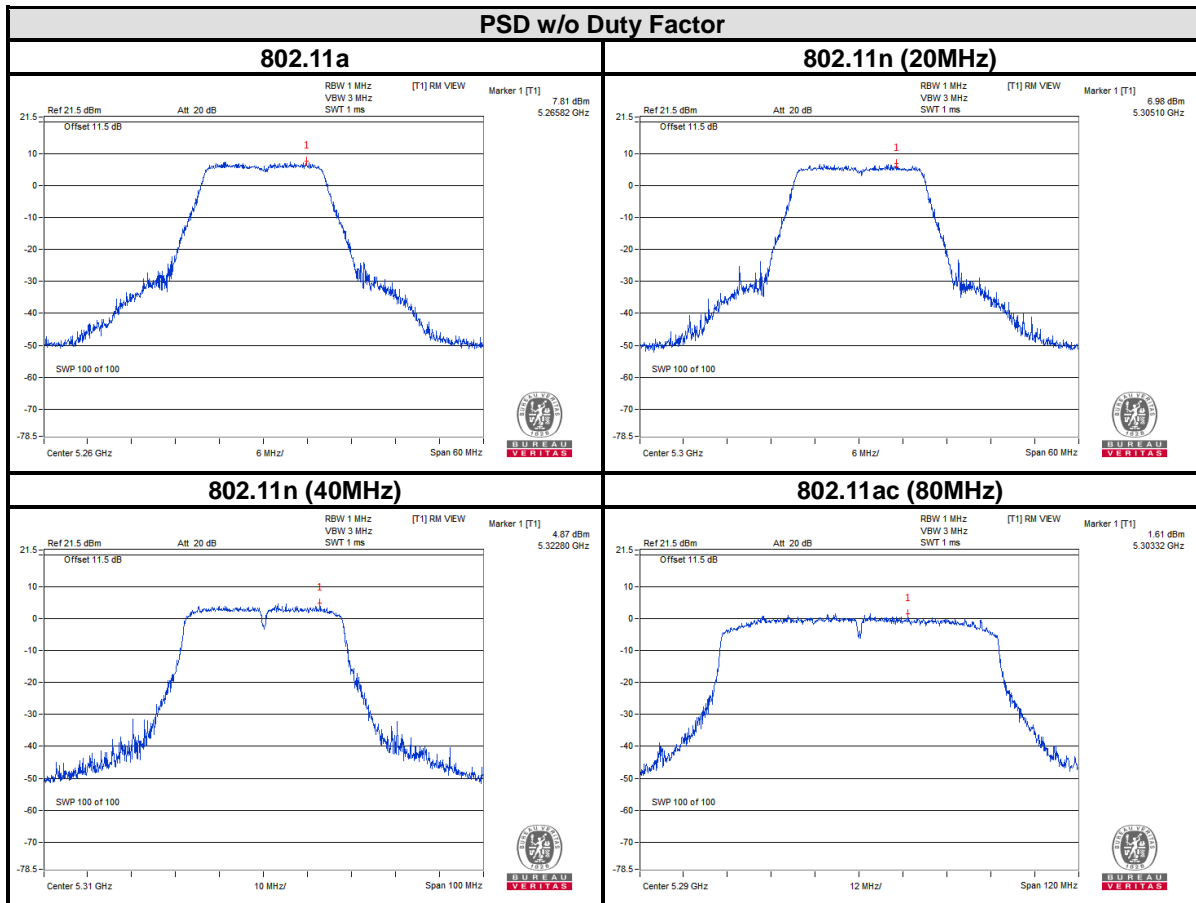




BUREAU
VERITAS

Test Report No.: RF180702W009-3

For 5500~5700MHz

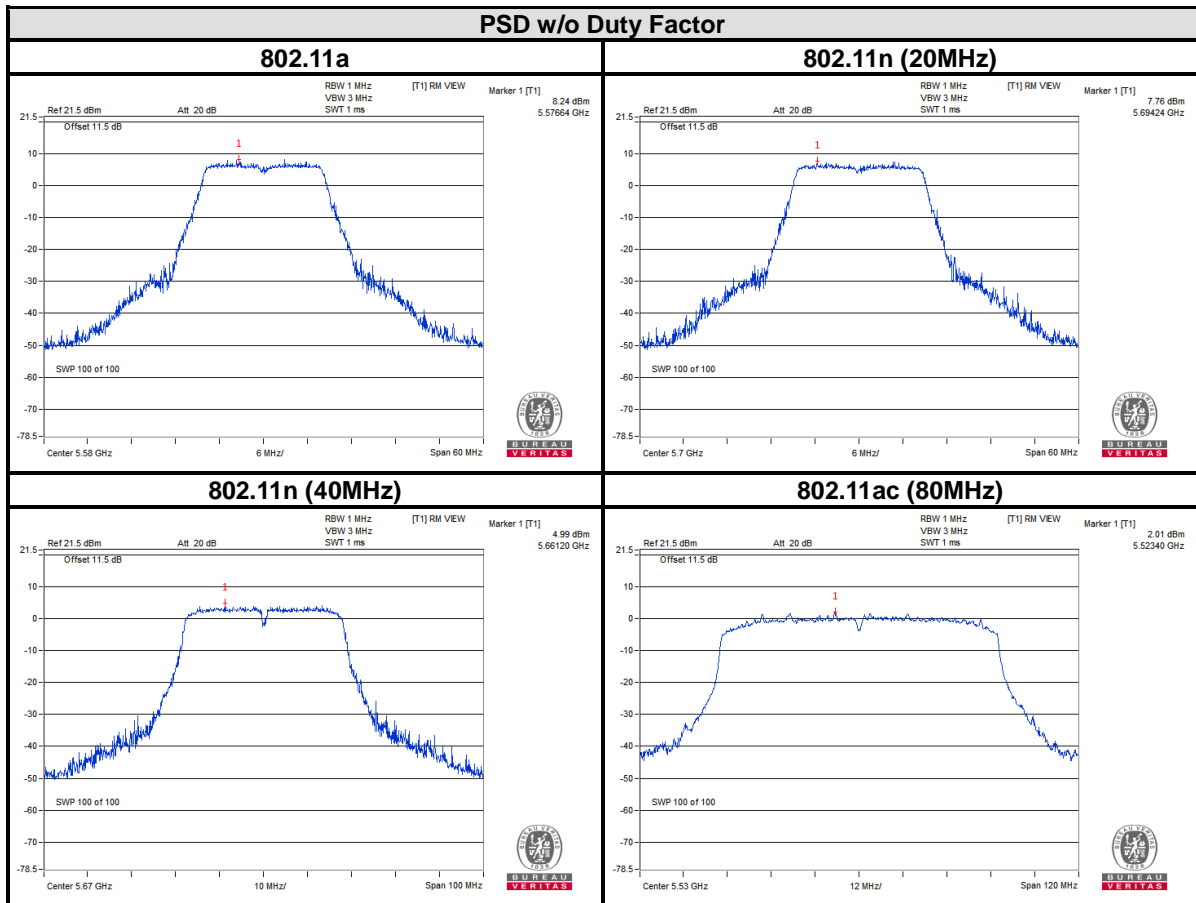




BUREAU
VERITAS

Test Report No.: RF180702W009-3

For 5745~5825MHz

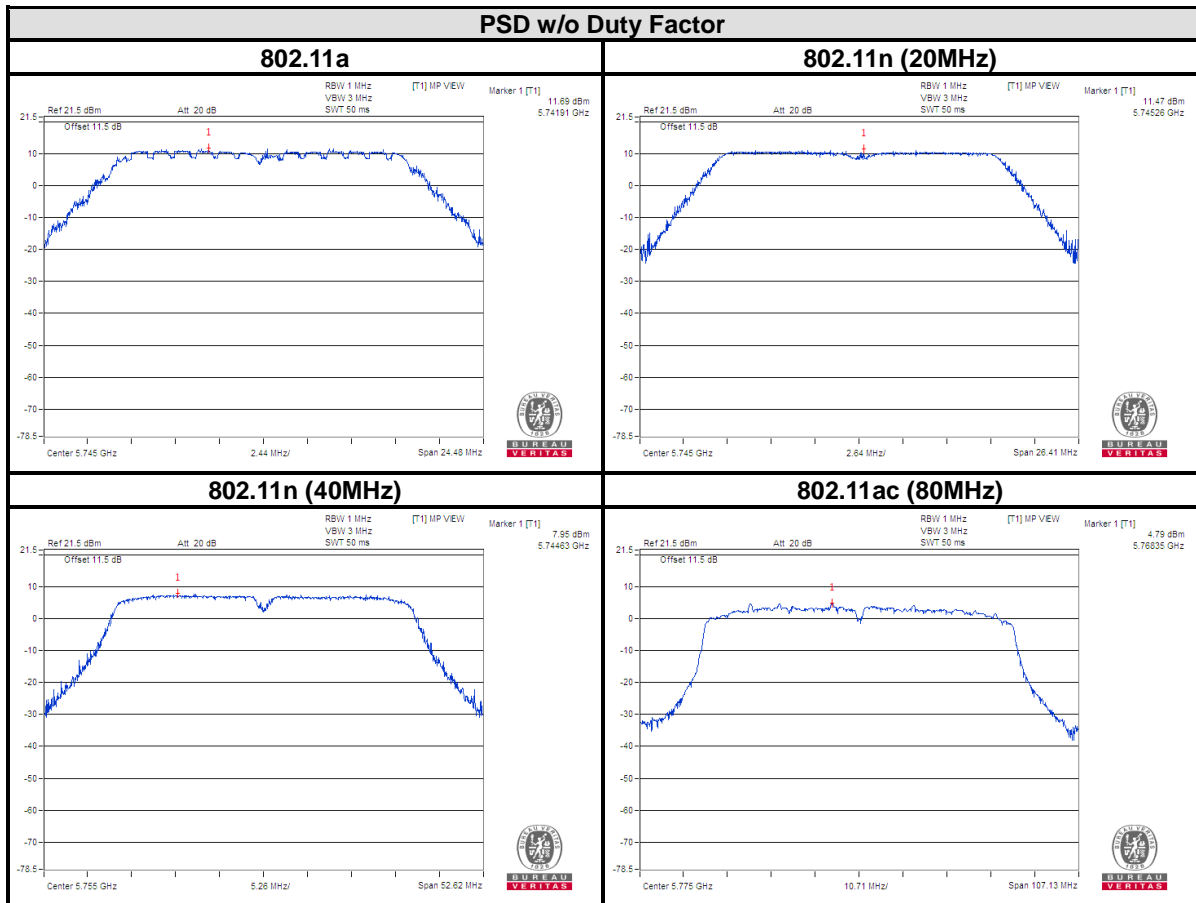




3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

3.5.2 TEST SETUP

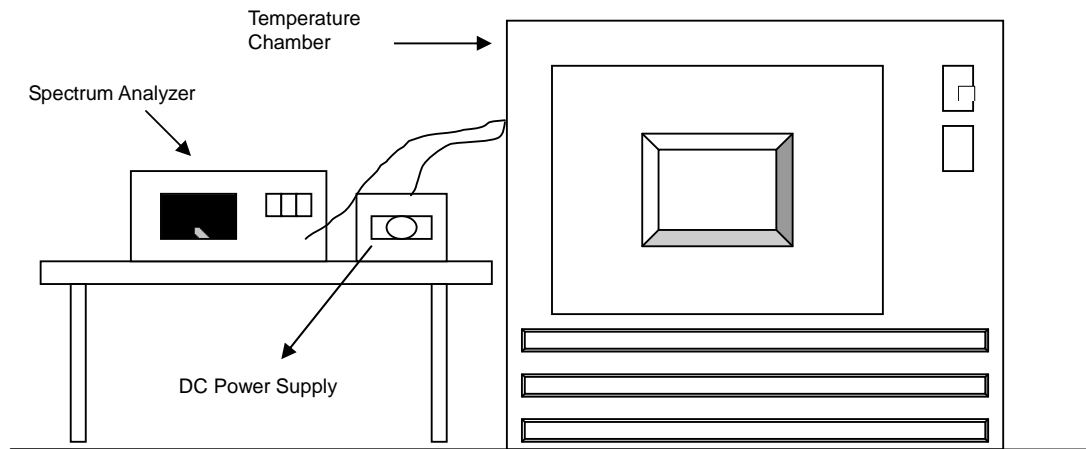

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5180.0098	1.892	5180.0109	2.104	5180.0015	0.290	5180.0036	0.695	PASS
40	120	5179.9955	-0.869	5179.9945	-1.062	5180.0006	0.116	5179.9939	-1.178	PASS
30	120	5180.0094	1.815	5180.0122	2.355	5180.0171	3.301	5180.0204	3.938	PASS
20	120	5179.9895	-2.027	5179.9935	-1.255	5179.9929	-1.371	5179.9899	-1.950	PASS
10	120	5180.0227	4.382	5180.0251	4.846	5180.0215	4.151	5180.0229	4.421	PASS
0	120	5180.0082	1.583	5179.9994	-0.116	5180.0053	1.023	5180.0054	1.042	PASS
-10	120	5180.0116	2.239	5180.0097	1.873	5180.0092	1.776	5180.0112	2.162	PASS
-20	120	5179.9799	-3.880	5179.9741	-5.000	5179.9729	-5.232	5179.979	-4.054	PASS
-30	120	5180.0241	4.653	5180.0173	3.340	5180.0265	5.116	5180.0202	3.900	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5179.9881	-2.297	5179.9931	-1.332	5179.9935	-1.255	5179.9902	-1.892	PASS
	120	5179.9895	-2.027	5179.9935	-1.255	5179.9929	-1.371	5179.9899	-1.950	PASS
	102	5179.9881	-2.297	5179.9931	-1.332	5179.9935	-1.255	5179.9913	-1.680	PASS



FREQUENCY STABILITY VERSUS TEMP.										
OPERATING FREQUENCY: 5825MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5825.0287	4.927	5825.0256	4.395	5825.017	2.918	5825.0187	3.210	PASS
40	120	5825.0172	2.953	5825.0148	2.541	5825.0065	1.116	5825.0172	2.953	PASS
30	120	5824.9909	-1.562	5824.995	-0.858	5824.9889	-1.906	5824.9889	-1.906	PASS
20	120	5824.9816	-3.159	5824.97	-5.150	5824.9741	-4.446	5824.9739	-4.481	PASS
10	120	5824.9927	-1.253	5825.0006	0.103	5824.9966	-0.584	5824.9948	-0.893	PASS
0	120	5824.981	-3.262	5824.9811	-3.245	5824.9824	-3.021	5824.9811	-3.245	PASS
-10	120	5825.0179	3.073	5825.0141	2.421	5825.0178	3.056	5825.0154	2.644	PASS
-20	120	5825.0077	1.322	5825.0103	1.768	5825.0071	1.219	5825.0137	2.352	PASS
-30	120	5824.9791	-3.588	5824.9769	-3.966	5824.9733	-4.584	5824.9764	-4.052	PASS

FREQUENCY STABILITY VERSUS VOLTAGE										
OPERATING FREQUENCY: 5180MHz										
TEMP. (°C)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		RESULT
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5824.9816	-3.159	5824.9704	-5.082	5824.9753	-4.240	5824.9731	-4.618	PASS
	120	5824.9816	-3.159	5824.97	-5.150	5824.9741	-4.446	5824.9739	-4.481	PASS
	102	5824.9819	-3.107	5824.9714	-4.910	5824.9756	-4.189	5824.9738	-4.498	PASS



**BUREAU
VERITAS**

Test Report No.: RF180702W009-3

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---