


FCC SAR Test Report

APPLICANT : Mundo Reader S.L.
EQUIPMENT : Mobile Phone
BRAND NAME : Suro, BQ
MODEL NAME : Carbon, Aquaris X3
FCC ID : 2AN87CARBON
STANDARD : FCC 47 CFR PART 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Oct. 14, 2019 and testing was started from Jan. 13, 2020 and completed on Jan. 25, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. RF Exposure Limits 11
5.1 Uncontrolled Environment 11
5.2 Controlled Environment 11
6. Specific Absorption Rate (SAR) 12
6.1 Introduction 12
6.2 SAR Definition 12
7. System Description and Setup 13
7.1 E-Field Probe 14
7.2 Data Acquisition Electronics (DAE) 14
7.3 Phantom 15
7.4 Device Holder 16
8. Measurement Procedures 17
8.1 Spatial Peak SAR Evaluation 17
8.2 Power Reference Measurement 18
8.3 Area Scan 18
8.4 Zoom Scan 19
8.5 Volume Scan Procedures 19
8.6 Power Drift Monitoring 19
9. Test Equipment List 20
10. System Verification 21
10.1 Tissue Simulating Liquids 21
10.2 Tissue Verification 22
10.3 System Performance Check Results 23
11. RF Exposure Positions 24
11.1 Ear and handset reference point 24
11.2 Definition of the cheek position 25
11.3 Definition of the tilt position 26
11.4 Body Worn Accessory 27
11.5 Product Specific 10g SAR Exposure 28
11.6 Wireless Router 28
12. Conducted RF Output Power (Unit: dBm) 29
13. Antenna Location 81
14. SAR Test Results 82
14.1 Head SAR 84
14.2 Hotspot SAR 88
14.3 Body Worn Accessory SAR 92
14.4 Product specific 10g SAR 95
14.5 Repeated SAR Measurement 96
15. Simultaneous Transmission Analysis 97
15.1 Head Exposure Conditions 98
15.2 Hotspot Exposure Conditions 100
15.3 Body-Worn Accessory Exposure Conditions 102
16. Uncertainty Assessment 103
17. References 104
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA901409	Rev. 01	Initial issue of report	Mar. 13, 2020



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Mundo Reader S.L., Mobile Phone, Carbon, Aquaris X3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
Licensed	GSM	GSM850	0.65	0.66	0.66	1.55
		GSM1900	0.89	0.98	0.98	
	WCDMA	Band V	0.31	0.25	0.25	
		Band IV	1.06	0.70	0.70	
		Band II	1.04	0.91	0.91	
	LTE	Band 12/Band 17	0.13	0.16	0.16	
		Band 13	0.13	0.30	0.19	
		Band 26/Band 5	0.24	0.27	0.22	
		Band 4	0.92	0.54	0.54	
		Band 2	0.76	0.73	0.73	
		Band 7	0.90	0.60	0.60	
		Band 41/Band 38	0.94	0.41	0.41	
DTS	WLAN	2.4GHz WLAN	1.02	0.40	0.40	1.55
NII		5GHz WLAN	0.75	0.71	0.50	1.54
DSS	Bluetooth	Bluetooth	0.10	<0.10	<0.10	1.54
Date of Testing:		2020/1/13~ 2020/1/25				

Highest 10g SAR Summary			
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)
NII	WLAN	5GHz WLAN	1.40

Remark: This device supports LTE B5 / B17 / B38 and B26 / B12 / B41. Since the supported frequency span for LTE B5 / B17 / B38 falls completely within the supports frequency span for LTE B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B26 / B12 / B41.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Mundo Reader S.L.
Address	Calle Sofia, 10, Parque Industrial y Tecnológico 28232 Las Rozas Europolis, Madrid, Spain

Manufacturer	
Company Name	Mundo Reader S.L.
Address	Calle Sofia, 10, Parque Industrial y Tecnológico 28232 Las Rozas Europolis, Madrid, Spain

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Suro, BQ
Model Name	Carbon, Aquaris X3
FCC ID	2AN87CARBON
IMEI Code	SIM1: 355379058091694 SIM2: 355379058097196
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM (Downlink only) WLAN 2.4GHz : 802.11b/g/n HT20/HT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40 Bluetooth BR/EDR/LE NFC:ASK
HW Version	1.A.1
SW Version	1.2.0_20200211-1558
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none"> WLAN operation in 5600 MHz ~ 5650 MHz is notched. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP) and LTE not support VoLTE operation. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). When the phone is in talking mode and receiver worked, power reduction will be implemented immediately in GSM1900, WCDMA band II/IV, LTE band 2/4/7/38/41 and WLAN2.4GHz/WLAN5GHz. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the top edge of the device and WWAN antenna 2 is located at the bottom edge of the device which can refer to antenna location



chapter. WWAN antenna 1 frequency bands include GSM1900, WCDMA Band II/IV, LTE Band 2/4/7/38/41, WWAN antenna 2 frequency bands include GSM850, WCDMA Band V, LTE Band 5/12/13/17/26. WWAN A antenna 1 and WWAN antenna 2 can't transmit simultaneously.

8. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AN87CARBON																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
Uplink Modulations used	QPSK / 16QAM / 64QAM (Downlink only)																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R10, Cat 7																																																														
CA Support	Supported, 7C uplink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 12.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for LTE 7C with component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICl, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band													
LTE Band 2													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860	
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900	
LTE Band 4													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720	
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745	
LTE Band 5													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829	
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844	
LTE Band 7													
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510	
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560	
LTE Band 12													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704	
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711	
LTE Band 13													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23205		779.5		23230		782		23230		782		23230
M	23230		782		23230		782		23230		782		23230
H	23255		784.5		23230		782		23230		782		23230
LTE Band 17													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23755		706.5		23780		709		23780		709		23780
M	23790		710		23790		710		23790		710		23790
H	23825		713.5		23800		711		23800		711		23800



LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5
LTE Band 38										
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580		
M	38000	2595	38000	2595	38000	2595	38000	2595		
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610		
LTE Band 41										
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545		
LM	40385	2569.5	40390	2570	40395	2570.5	40400	2571		
HM	40705	2601.5	40690	2600	40685	2599.5	40670	2598		
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645		



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

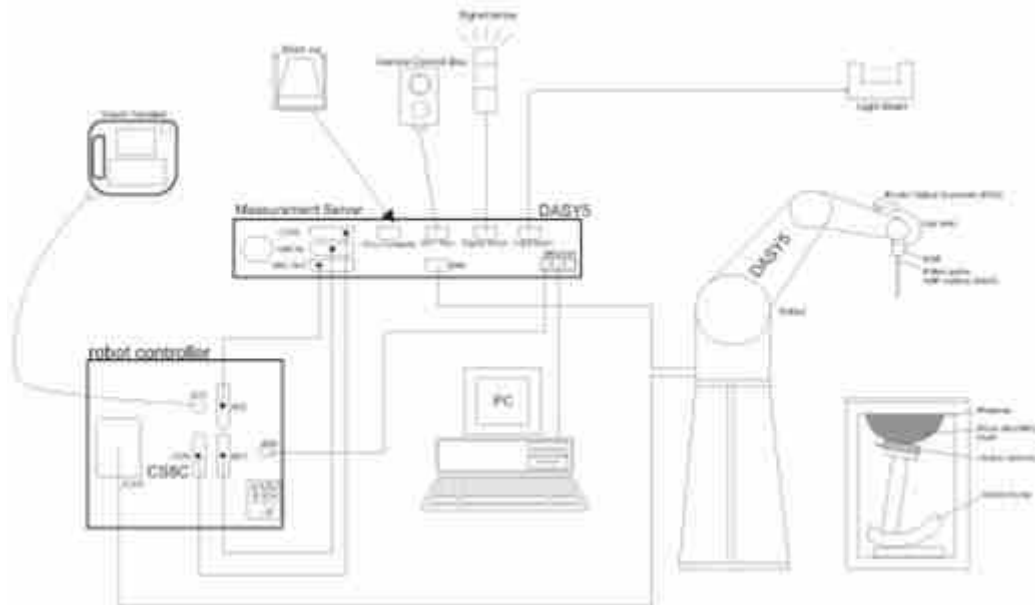


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1078	2019/3/6	2020/3/5
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2020/9/23
SPEAG	Data Acquisition Electronics	DAE4	1210	2019/7/23	2020/7/22
SPEAG	Dosimetric E-Field Probe	DAE4	1358	2019/4/17	2020/4/16
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2019/5/27	2020/5/26
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2019/10/28	2020/10/27
Anritsu	Vector Signal Generator	MG3710A	6201682672	2020/1/8	2021/1/7
Rohde & Schwarz	Power Meter	NRVD	102081	2019/8/15	2020/8/14
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2019/8/14	2020/8/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2019/8/14	2020/8/13
R&S	CBT BLUETOOTH TESTER	CBT	101641	2020/1/8	2021/1/7
EXA	Spectrum Analyzer	FSV7	101631	2020/1/8	2021/1/7
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/15	2020/8/14
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

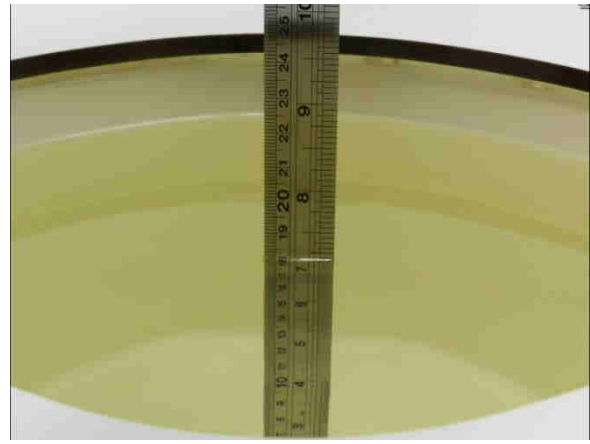


Fig 10.2 Photo of Liquid Height for Body SAR



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.871	41.153	0.89	41.90	-2.13	-1.78	±5	2020/1/13
835	Head	22.6	0.911	42.671	0.90	41.50	1.22	2.82	±5	2020/1/13
1750	Head	22.7	1.343	38.540	1.37	40.10	-1.97	-3.89	±5	2020/1/16
1900	Head	22.8	1.389	40.634	1.40	40.00	-0.79	1.59	±5	2020/1/16
2450	Head	22.9	1.871	40.800	1.80	39.20	3.94	4.08	±5	2020/1/21
2600	Head	22.7	2.054	40.197	1.96	39.00	4.80	3.07	±5	2020/1/18
5250	Head	22.8	4.600	36.384	4.71	35.90	-2.34	1.35	±5	2020/1/23
5600	Head	22.8	4.990	35.802	5.07	35.50	-1.58	0.85	±5	2020/1/24
5750	Head	22.8	5.167	35.552	5.22	35.40	-1.02	0.43	±5	2020/1/25

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/1/13	750	Head	250	1087	3279	1358	2.11	8.36	8.44	0.96
2020/1/13	835	Head	250	4d151	3279	1358	2.43	9.3	9.72	4.52
2020/1/16	1750	Head	250	1090	3279	1358	8.81	36.4	35.24	-3.19
2020/1/16	1900	Head	250	5d170	3279	1358	9.93	39	39.72	1.85
2020/1/21	2450	Head	250	908	3857	1210	12.8	52.8	51.2	-3.03
2020/1/18	2600	Head	250	1078	3279	1358	14.2	57.6	56.8	-1.39
2020/1/23	5250	Head	100	1113	3857	1210	7.78	80.5	77.8	-3.35
2020/1/24	5600	Head	100	1113	3857	1210	7.94	83.4	79.4	-4.80
2020/1/25	5750	Head	100	1113	3857	1210	7.53	80	75.3	-5.88

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/1/23	5250	Head	100	1113	3857	1210	2.26	23.1	22.6	-2.16
2020/1/24	5600	Head	100	1113	3857	1210	2.31	23.8	23.1	-2.94

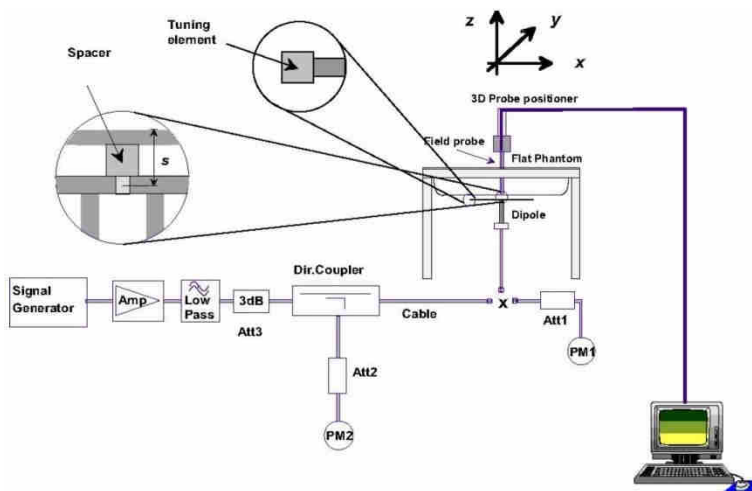


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

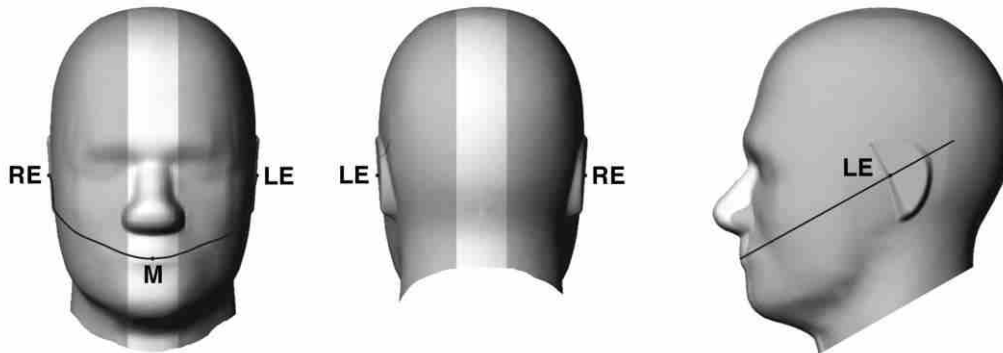


Fig 11.1.1 Front, back, and side views of SAM twin phantom

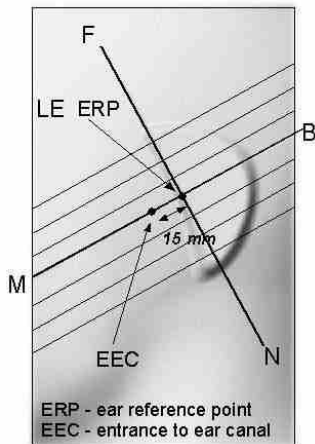


Fig 11.1.2 Close-up side view of phantom showing the ear region.

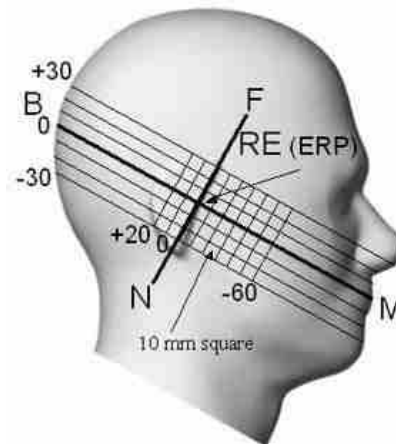


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

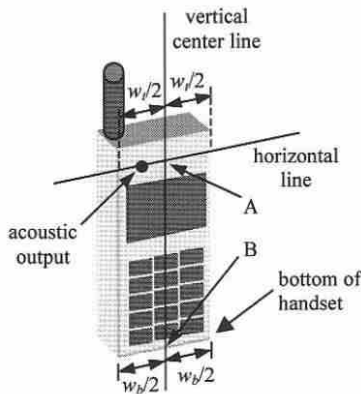


Fig 11.2.1 Handset vertical and horizontal reference lines—“fixed case”

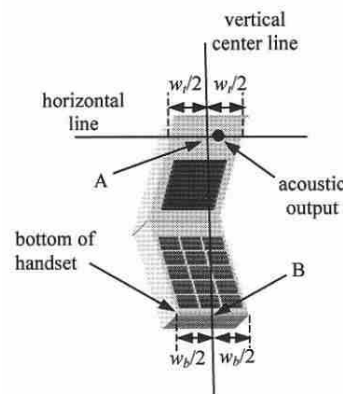


Fig 11.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

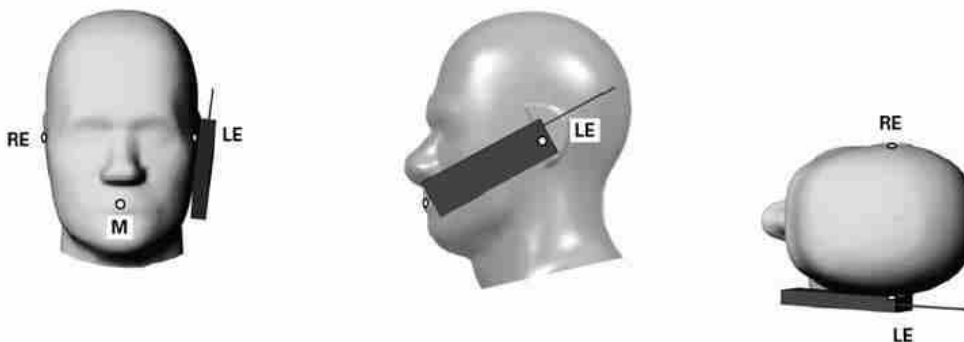


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point



Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

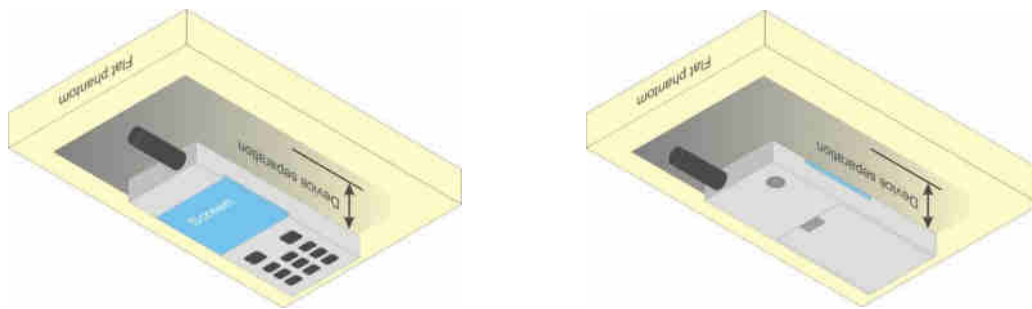


Fig 11.4 Body Worn Position



11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<Full Power>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.41	32.93	33.03	34.00	24.41	23.93	24.03	25.00
GPRS 1 Tx slot	33.40	32.91	32.99	34.00	24.40	23.91	23.99	25.00
GPRS 2 Tx slots	33.20	32.76	32.86	34.00	27.20	26.76	26.86	28.00
GPRS 3 Tx slots	32.89	32.44	32.49	33.50	28.63	28.18	28.23	29.24
GPRS 4 Tx slots	32.53	32.17	32.30	33.50	29.53	29.17	29.30	30.50
EDGE 1 Tx slot	26.58	26.49	26.57	27.50	17.58	17.49	17.57	18.50
EDGE 2 Tx slots	26.42	26.33	26.32	27.50	20.42	20.33	20.32	21.50
EDGE 3 Tx slots	26.16	26.11	26.13	27.50	21.90	21.85	21.87	23.24
EDGE 4 Tx slots	25.95	25.82	25.85	26.50	22.95	22.82	22.85	23.50
GSM1900								
Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	31.22	31.11	31.25	32.00	22.22	22.11	22.25	23.00
GPRS 1 Tx slot	31.18	31.09	31.22	32.00	22.18	22.09	22.22	23.00
GPRS 2 Tx slots	30.95	30.83	31.00	31.50	24.95	24.83	25.00	25.50
GPRS 3 Tx slots	29.39	29.37	29.58	30.00	25.13	25.11	25.32	25.74
GPRS 4 Tx slots	28.53	28.42	28.72	29.00	25.53	25.42	25.72	26.00
EDGE 1 Tx slot	26.19	26.00	26.20	27.00	17.19	17.00	17.20	18.00
EDGE 2 Tx slots	25.84	25.70	25.83	26.00	19.84	19.70	19.83	20.00
EDGE 3 Tx slots	25.42	25.21	25.37	25.50	21.16	20.95	21.11	21.24
EDGE 4 Tx slots	24.93	24.92	24.92	25.00	21.93	21.92	21.92	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



<Reduced Power>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.52	29.52	29.90	30.50	20.52	20.52	20.90	21.50
GPRS 1 Tx slot	29.52	29.51	29.88	30.50	20.52	20.51	20.88	21.50
GPRS 2 Tx slots	26.71	26.70	27.09	27.50	20.71	20.70	21.09	21.50
GPRS 3 Tx slots	25.45	25.36	25.67	26.00	21.19	21.10	21.41	21.74
GPRS 4 Tx slots	24.02	23.97	24.21	25.00	21.02	20.97	21.21	22.00
EDGE 1 Tx slot	26.23	25.90	26.03	27.00	17.23	16.90	17.03	18.00
EDGE 2 Tx slots	24.89	24.51	24.70	26.00	18.89	18.51	18.70	20.00
EDGE 3 Tx slots	23.53	23.22	23.32	24.00	19.27	18.96	19.06	19.74
EDGE 4 Tx slots	21.08	20.74	20.84	22.00	18.08	17.74	17.84	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{ES} (Note 1)	β_{EC}	β_{ED} (Note 4) (Note 5)	β_{ED} (SF)	β_{ED} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ED1} : 47/15 β_{ED2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{MS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{MS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{MS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ED} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

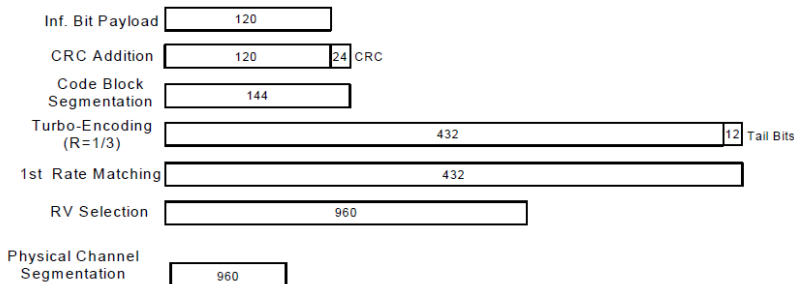


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parmes
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+

<Full Power>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	23.74	23.65	23.80	24.00	23.70	23.85	23.96	24.00	23.69	23.68	23.66	24.00
3GPP Rel 99	RMC 12.2Kbps	23.76	23.66	23.81	24.00	23.73	23.87	23.99	24.00	23.71	23.70	23.69	24.00
3GPP Rel 6	HSDPA Subtest-1	22.71	22.68	22.69	23.00	22.80	22.93	22.73	23.00	22.73	22.73	22.76	23.00
3GPP Rel 6	HSDPA Subtest-2	22.75	22.73	22.71	23.00	22.82	22.96	22.76	23.00	22.76	22.44	22.73	23.00
3GPP Rel 6	HSDPA Subtest-3	22.30	22.24	22.25	22.50	22.31	22.46	22.29	22.50	22.24	22.23	22.22	22.50
3GPP Rel 6	HSDPA Subtest-4	22.29	22.23	22.26	22.50	22.30	22.42	22.30	22.50	22.27	22.24	22.23	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.66	22.71	22.63	23.00	22.83	22.91	22.71	23.00	22.71	22.76	22.72	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.76	22.73	22.70	23.00	22.81	22.96	22.69	23.00	22.77	22.48	22.70	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.28	22.28	22.31	22.50	22.28	22.43	22.31	22.50	22.21	22.31	22.20	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.26	22.31	22.22	22.50	22.28	22.41	22.28	22.50	22.23	22.29	22.25	22.50
3GPP Rel 6	HSUPA Subtest-1	22.79	22.69	22.60	23.00	22.79	22.88	22.75	23.00	22.75	22.75	22.72	23.00
3GPP Rel 6	HSUPA Subtest-2	20.75	20.70	20.68	21.00	20.81	20.92	20.73	21.00	20.74	20.78	20.74	21.00
3GPP Rel 6	HSUPA Subtest-3	21.86	21.66	21.66	22.00	21.82	21.94	21.73	22.00	21.75	21.77	21.76	22.00
3GPP Rel 6	HSUPA Subtest-4	20.88	20.71	20.70	21.00	20.85	20.90	20.75	21.00	20.76	20.77	20.73	21.00
3GPP Rel 6	HSUPA Subtest-5	22.80	22.60	22.70	23.00	22.80	22.90	22.68	23.00	22.60	22.70	22.80	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	23.10	22.98	22.73	24.00	23.16	23.21	23.21	24.00	23.01	23.02	23.12	24.00



<Reduced Power>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	16.96	16.80	17.00	18.00	17.53	17.73	17.86	18.50
3GPP Rel 99	RMC 12.2Kbps	16.97	16.83	17.01	18.00	17.55	17.74	17.87	18.50
3GPP Rel 6	HSDPA Subtest-1	15.96	15.81	16.02	17.00	16.49	16.66	16.85	17.50
3GPP Rel 6	HSDPA Subtest-2	16.00	15.84	16.04	17.00	16.50	16.70	16.84	17.50
3GPP Rel 6	HSDPA Subtest-3	15.45	15.36	15.54	16.50	16.00	16.21	16.36	17.00
3GPP Rel 6	HSDPA Subtest-4	15.48	15.38	15.55	16.50	15.97	16.19	16.39	17.00
3GPP Rel 8	DC-HSDPA Subtest-1	15.91	15.86	16.01	17.00	16.48	16.69	16.81	17.50
3GPP Rel 8	DC-HSDPA Subtest-2	15.95	15.81	16.08	17.00	16.41	16.67	16.81	17.50
3GPP Rel 8	DC-HSDPA Subtest-3	15.41	15.39	15.51	16.50	16.01	16.18	16.35	17.00
3GPP Rel 8	DC-HSDPA Subtest-4	15.49	15.31	15.56	16.50	15.99	16.21	16.37	17.00
3GPP Rel 6	HSUPA Subtest-1	16.08	16.05	16.10	17.00	16.82	16.74	16.91	17.50
3GPP Rel 6	HSUPA Subtest-2	13.94	13.92	14.10	15.00	14.61	14.77	14.88	15.50
3GPP Rel 6	HSUPA Subtest-3	15.11	15.08	15.16	16.00	15.55	15.75	15.93	16.50
3GPP Rel 6	HSUPA Subtest-4	14.03	13.90	14.05	15.00	14.57	14.75	14.90	15.50
3GPP Rel 6	HSUPA Subtest-5	16.10	15.90	16.10	17.00	16.60	16.80	16.90	17.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	16.34	16.45	16.53	18.00	17.01	17.12	17.12	18.50



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE 4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 / 38 / 5 SAR test was covered by Band 12 / 41 / 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Full Power>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.69	22.70	22.62	23.5	0
20	QPSK	1	49	22.43	22.41	22.38		
20	QPSK	1	99	22.30	22.52	22.56		
20	QPSK	50	0	21.50	21.54	21.23	22.5	1
20	QPSK	50	24	21.53	21.45	21.28		
20	QPSK	50	50	21.41	21.29	21.45		
20	QPSK	100	0	21.44	21.45	21.41		
20	16QAM	1	0	21.98	21.73	21.70	22.5	1
20	16QAM	1	49	21.68	21.54	21.53		
20	16QAM	1	99	21.66	21.71	21.71		
20	16QAM	50	0	20.60	20.54	20.44	21.5	2
20	16QAM	50	24	20.53	20.52	20.38		
20	16QAM	50	50	20.50	20.52	20.55		
20	16QAM	100	0	20.51	20.47	20.54		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.58	22.38	22.43	23.5	0
15	QPSK	1	37	22.47	22.42	22.46		
15	QPSK	1	74	22.38	22.42	22.45		
15	QPSK	36	0	21.53	21.44	21.28	22.5	1
15	QPSK	36	20	21.46	21.45	21.46		
15	QPSK	36	39	21.48	21.37	21.49		
15	QPSK	75	0	21.54	21.40	21.42		
15	16QAM	1	0	21.62	21.52	21.56	22.5	1
15	16QAM	1	37	21.62	21.67	21.70		
15	16QAM	1	74	21.55	21.43	21.61		
15	16QAM	36	0	20.66	20.51	20.43	21.5	2
15	16QAM	36	20	20.68	20.57	20.51		
15	16QAM	36	39	20.61	20.53	20.55		
15	16QAM	75	0	20.63	20.59	20.43		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.66	22.53	22.38	23.5	0
10	QPSK	1	25	22.41	22.33	22.43		
10	QPSK	1	49	22.53	22.40	22.54		
10	QPSK	25	0	21.53	21.45	21.36	22.5	1
10	QPSK	25	12	21.48	21.41	21.51		
10	QPSK	25	25	21.51	21.41	21.41		
10	QPSK	50	0	21.46	21.36	21.43		
10	16QAM	1	0	21.80	21.66	21.61	22.5	1
10	16QAM	1	25	21.66	21.59	21.56		
10	16QAM	1	49	21.69	21.55	21.69		
10	16QAM	25	0	20.67	20.56	20.49	21.5	2
10	16QAM	25	12	20.58	20.52	20.64		
10	16QAM	25	25	20.61	20.52	20.55		
10	16QAM	50	0	20.63	20.44	20.53		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.53	22.47	22.45	23.5	0
5	QPSK	1	12	22.44	22.26	22.48		
5	QPSK	1	24	22.45	22.34	22.46		
5	QPSK	12	0	21.41	21.38	21.41	22.5	1
5	QPSK	12	7	21.42	21.44	21.55		
5	QPSK	12	13	21.44	21.40	21.49		
5	QPSK	25	0	21.50	21.41	21.41		
5	16QAM	1	0	21.65	21.59	21.56	22.5	1
5	16QAM	1	12	21.68	21.51	21.61		
5	16QAM	1	24	21.57	21.47	21.61		
5	16QAM	12	0	20.71	20.58	20.53	21.5	2
5	16QAM	12	7	20.53	20.54	20.69		
5	16QAM	12	13	20.55	20.53	20.63		
5	16QAM	25	0	20.59	20.52	20.55		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.30	22.28	22.44	23.5	0
3	QPSK	1	8	22.45	22.35	22.47		
3	QPSK	1	14	22.42	22.22	22.49		
3	QPSK	8	0	21.52	21.38	21.52	22.5	1
3	QPSK	8	4	21.56	21.44	21.53		
3	QPSK	8	7	21.50	21.39	21.55		
3	QPSK	15	0	21.46	21.34	21.53		
3	16QAM	1	0	21.44	21.31	21.54	22.5	1
3	16QAM	1	8	21.50	21.47	21.49		
3	16QAM	1	14	21.48	21.38	21.42		
3	16QAM	8	0	20.83	20.58	20.75	21.5	2
3	16QAM	8	4	20.76	20.64	20.76		
3	16QAM	8	7	20.70	20.60	20.68		
3	16QAM	15	0	20.60	20.60	20.61		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.32	22.17	22.31	23.5	0
1.4	QPSK	1	3	22.40	22.36	22.44		
1.4	QPSK	1	5	22.29	22.16	22.30		
1.4	QPSK	3	0	22.35	22.24	22.46		
1.4	QPSK	3	1	22.49	22.27	22.36		
1.4	QPSK	3	3	22.38	22.21	22.45	22.5	1
1.4	QPSK	6	0	21.42	21.39	21.54		
1.4	16QAM	1	0	21.47	21.30	21.43	22.5	1
1.4	16QAM	1	3	21.43	21.41	21.48		
1.4	16QAM	1	5	21.50	21.34	21.47		
1.4	16QAM	3	0	21.62	21.45	21.68		
1.4	16QAM	3	1	21.55	21.47	21.58		
1.4	16QAM	3	3	21.52	21.50	21.56		
1.4	16QAM	6	0	20.59	20.39	20.51	21.5	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.40	22.53	22.76	23.5	0
20	QPSK	1	49	22.29	22.61	22.66		
20	QPSK	1	99	22.47	22.68	22.49		
20	QPSK	50	0	21.63	21.76	21.68	22.5	1
20	QPSK	50	24	21.66	21.73	21.75		
20	QPSK	50	50	21.54	21.67	21.73		
20	QPSK	100	0	21.64	21.72	21.69	22.5	1
20	16QAM	1	0	21.56	21.97	21.73		
20	16QAM	1	49	21.81	21.74	21.68		
20	16QAM	1	99	21.70	21.59	21.91	21.5	2
20	16QAM	50	0	20.79	20.88	20.75		
20	16QAM	50	24	20.89	20.85	20.83		
20	16QAM	50	50	20.88	20.80	20.92	21.5	2
20	16QAM	100	0	20.82	20.70	20.74		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.40	22.65	22.67	23.5	0
15	QPSK	1	37	22.35	22.66	22.69		
15	QPSK	1	74	22.59	22.67	22.66		
15	QPSK	36	0	21.53	21.72	21.70	22.5	1
15	QPSK	36	20	21.64	21.68	21.80		
15	QPSK	36	39	21.66	21.63	21.71		
15	QPSK	75	0	21.72	21.66	21.78	22.5	1
15	16QAM	1	0	21.61	21.78	21.72		
15	16QAM	1	37	21.75	21.74	21.78		
15	16QAM	1	74	21.90	21.67	21.78	21.5	2
15	16QAM	36	0	20.62	20.81	20.83		
15	16QAM	36	20	20.89	20.78	20.95		
15	16QAM	36	39	20.91	20.75	20.87	21.5	2
15	16QAM	75	0	20.73	20.85	20.90		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.55	22.56	22.74	23.5	0
10	QPSK	1	25	22.57	22.66	22.74		
10	QPSK	1	49	22.62	22.62	22.75		
10	QPSK	25	0	21.55	21.76	21.82	22.5	1
10	QPSK	25	12	21.53	21.76	21.77		
10	QPSK	25	25	21.45	21.67	21.68		
10	QPSK	50	0	21.55	21.65	21.72		
10	16QAM	1	0	21.77	21.72	21.86	22.5	1
10	16QAM	1	25	21.83	21.70	21.97		
10	16QAM	1	49	21.83	21.81	22.17		
10	16QAM	25	0	20.55	20.92	20.99	21.5	2
10	16QAM	25	12	20.64	20.83	20.97		
10	16QAM	25	25	20.69	20.76	20.88		
10	16QAM	50	0	20.73	20.77	20.89		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.41	22.72	22.69	23.5	0
5	QPSK	1	12	22.48	22.72	22.63		
5	QPSK	1	24	22.42	22.74	22.71		
5	QPSK	12	0	21.57	21.74	21.76	22.5	1
5	QPSK	12	7	21.54	21.71	21.73		
5	QPSK	12	13	21.48	21.61	21.79		
5	QPSK	25	0	21.52	21.74	21.81		
5	16QAM	1	0	21.73	21.89	21.94	22.5	1
5	16QAM	1	12	21.77	21.88	22.01		
5	16QAM	1	24	21.69	21.76	21.98		
5	16QAM	12	0	20.73	20.89	21.04	21.5	2
5	16QAM	12	7	20.73	20.86	21.02		
5	16QAM	12	13	20.78	20.86	21.07		
5	16QAM	25	0	20.72	20.79	21.01		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.37	22.73	22.71	23.5	0
3	QPSK	1	8	22.41	22.72	22.73		
3	QPSK	1	14	22.39	22.59	22.72		
3	QPSK	8	0	21.41	21.56	21.76	22.5	1
3	QPSK	8	4	21.48	21.61	21.77		
3	QPSK	8	7	21.38	21.66	21.74		
3	QPSK	15	0	21.47	21.72	21.79		
3	16QAM	1	0	21.59	21.79	21.95	22.5	1
3	16QAM	1	8	21.80	21.85	22.08		
3	16QAM	1	14	21.67	21.72	21.78		
3	16QAM	8	0	20.67	20.87	21.09	21.5	2
3	16QAM	8	4	20.67	20.85	21.14		
3	16QAM	8	7	20.65	20.78	21.09		
3	16QAM	15	0	20.65	20.92	21.03		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.29	22.49	22.70	23.5	0
1.4	QPSK	1	3	22.36	22.60	22.71		
1.4	QPSK	1	5	22.32	22.58	22.57		
1.4	QPSK	3	0	22.43	22.63	22.75		
1.4	QPSK	3	1	22.32	22.68	22.74		
1.4	QPSK	3	3	22.40	22.55	22.73	22.5	1
1.4	QPSK	6	0	21.41	21.68	21.78		
1.4	16QAM	1	0	21.63	21.69	22.10	22.5	1
1.4	16QAM	1	3	21.80	21.80	22.09		
1.4	16QAM	1	5	21.64	21.76	21.99		
1.4	16QAM	3	0	21.52	21.75	21.99		
1.4	16QAM	3	1	21.53	21.69	22.01		
1.4	16QAM	3	3	21.59	21.68	21.93		
1.4	16QAM	6	0	20.50	20.78	20.85	21.5	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.28	22.27	22.37	23.5	0
10	QPSK	1	25	22.26	22.25	22.31		
10	QPSK	1	49	22.31	22.34	22.30		
10	QPSK	25	0	21.21	21.26	21.23	22.5	1
10	QPSK	25	12	21.24	21.33	21.31		
10	QPSK	25	25	21.29	21.23	21.28		
10	QPSK	50	0	21.30	21.23	21.19	22.5	1
10	16QAM	1	0	21.44	21.40	21.66		
10	16QAM	1	25	21.38	21.44	21.76		
10	16QAM	1	49	21.80	21.42	21.76	21.5	2
10	16QAM	25	0	20.25	20.44	20.35		
10	16QAM	25	12	20.38	20.28	20.38		
10	16QAM	25	25	20.33	20.39	20.39		
10	16QAM	50	0	20.42	20.36	20.26		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.33	22.32	22.36	23.5	0
5	QPSK	1	12	22.34	22.31	22.21		
5	QPSK	1	24	22.25	22.25	22.23		
5	QPSK	12	0	21.30	21.26	21.38	22.5	1
5	QPSK	12	7	21.38	21.29	21.37		
5	QPSK	12	13	21.32	21.20	21.31		
5	QPSK	25	0	21.26	21.32	21.25		
5	16QAM	1	0	21.69	21.70	21.75	22.5	1
5	16QAM	1	12	21.77	21.67	21.61		
5	16QAM	1	24	21.69	21.61	21.78		
5	16QAM	12	0	20.35	20.36	20.47	21.5	2
5	16QAM	12	7	20.39	20.30	20.38		
5	16QAM	12	13	20.38	20.30	20.34		
5	16QAM	25	0	20.35	20.32	20.34		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.36	22.32	22.33	23.5	0
3	QPSK	1	8	22.14	22.35	22.14		
3	QPSK	1	14	22.28	22.27	22.14		
3	QPSK	8	0	21.29	21.25	21.30	22.5	1
3	QPSK	8	4	21.28	21.28	21.31		
3	QPSK	8	7	21.27	21.32	21.25		
3	QPSK	15	0	21.27	21.26	21.26		
3	16QAM	1	0	21.66	21.64	21.90	22.5	1
3	16QAM	1	8	21.66	21.69	21.68		
3	16QAM	1	14	21.57	21.58	21.64		
3	16QAM	8	0	20.37	20.43	20.37	21.5	2
3	16QAM	8	4	20.48	20.46	20.40		
3	16QAM	8	7	20.37	20.39	20.36		
3	16QAM	15	0	20.25	20.25	20.25		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.20	22.20	22.21	23.5	0
1.4	QPSK	1	3	22.26	22.30	22.23		
1.4	QPSK	1	5	22.20	22.17	22.30		
1.4	QPSK	3	0	22.19	22.25	22.32		
1.4	QPSK	3	1	22.31	22.26	22.31		
1.4	QPSK	3	3	22.29	22.19	22.32	22.5	1
1.4	QPSK	6	0	21.25	21.28	21.53		
1.4	16QAM	1	0	21.52	21.54	21.71	22.5	1
1.4	16QAM	1	3	21.67	21.66	21.90		
1.4	16QAM	1	5	21.64	21.62	21.68		
1.4	16QAM	3	0	21.22	21.31	21.37		
1.4	16QAM	3	1	21.26	21.34	21.43		
1.4	16QAM	3	3	21.30	21.29	21.29		
1.4	16QAM	6	0	20.43	20.44	20.63	21.5	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.69	22.84	22.58	23.5	0
20	QPSK	1	49	22.76	22.50	22.81		
20	QPSK	1	99	22.61	22.62	22.68		
20	QPSK	50	0	21.70	21.73	21.71	22.5	1
20	QPSK	50	24	21.64	21.48	21.71		
20	QPSK	50	50	21.71	21.52	21.72		
20	QPSK	100	0	21.65	21.71	21.70		
20	16QAM	1	0	22.06	21.77	21.96	22.5	1
20	16QAM	1	49	22.13	21.88	22.15		
20	16QAM	1	99	21.98	22.02	22.04		
20	16QAM	50	0	20.81	20.48	20.73	21.5	2
20	16QAM	50	24	20.75	20.58	20.84		
20	16QAM	50	50	20.74	20.54	20.85		
20	16QAM	100	0	20.85	20.65	20.77		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.74	22.33	22.66	23.5	0
15	QPSK	1	37	22.74	22.58	22.59		
15	QPSK	1	74	22.83	22.63	22.80		
15	QPSK	36	0	21.81	21.48	21.74	22.5	1
15	QPSK	36	20	21.82	21.52	21.71		
15	QPSK	36	39	21.76	21.58	21.77		
15	QPSK	75	0	21.69	21.54	21.71		
15	16QAM	1	0	22.15	21.83	21.95	22.5	1
15	16QAM	1	37	22.21	21.82	21.92		
15	16QAM	1	74	22.20	22.03	21.98		
15	16QAM	36	0	20.90	20.57	20.82	21.5	2
15	16QAM	36	20	21.01	20.55	20.89		
15	16QAM	36	39	20.87	20.68	20.82		
15	16QAM	75	0	20.79	20.63	20.80		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.64	22.41	22.64	23.5	0
10	QPSK	1	25	22.65	22.39	22.56		
10	QPSK	1	49	22.72	22.45	22.60		
10	QPSK	25	0	21.76	21.51	21.66	22.5	1
10	QPSK	25	12	21.78	21.50	21.70		
10	QPSK	25	25	21.87	21.48	21.67		
10	QPSK	50	0	21.81	21.49	21.65		
10	16QAM	1	0	21.96	21.77	22.05	22.5	1
10	16QAM	1	25	22.02	21.77	22.00		
10	16QAM	1	49	22.10	21.84	21.94		
10	16QAM	25	0	20.84	20.59	20.82	21.5	2
10	16QAM	25	12	20.86	20.56	20.77		
10	16QAM	25	25	20.87	20.57	20.83		
10	16QAM	50	0	20.95	20.56	20.87		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.65	22.43	22.54	23.5	0
5	QPSK	1	12	22.73	22.41	22.48		
5	QPSK	1	24	22.67	22.42	22.54		
5	QPSK	12	0	21.75	21.43	21.61	22.5	1
5	QPSK	12	7	21.78	21.50	21.66		
5	QPSK	12	13	21.82	21.55	21.62		
5	QPSK	25	0	21.83	21.49	21.71		
5	16QAM	1	0	21.98	21.79	21.99	22.5	1
5	16QAM	1	12	21.98	21.70	21.86		
5	16QAM	1	24	22.02	21.78	21.83		
5	16QAM	12	0	20.75	20.46	20.65	21.5	2
5	16QAM	12	7	20.89	20.54	20.70		
5	16QAM	12	13	20.84	20.56	20.67		
5	16QAM	25	0	20.90	20.58	20.71		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.23	22.24	22.06	23.5	0
10	QPSK	1	25	22.06	22.21	22.00		
10	QPSK	1	49	22.12	22.00	22.03		
10	QPSK	25	0	21.14	21.32	21.17	22.5	1
10	QPSK	25	12	21.15	21.31	21.19		
10	QPSK	25	25	21.29	21.26	21.21		
10	QPSK	50	0	21.23	21.24	21.20	22.5	1
10	16QAM	1	0	21.30	21.25	21.44		
10	16QAM	1	25	21.37	21.47	21.30		
10	16QAM	1	49	21.44	21.29	21.29	21.5	2
10	16QAM	25	0	20.26	20.24	20.37		
10	16QAM	25	12	20.29	20.39	20.37		
10	16QAM	25	25	20.43	20.33	20.37	21.5	2
10	16QAM	50	0	20.26	20.39	20.34		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.23	22.01	22.01	23.5	0
5	QPSK	1	12	22.14	22.13	22.08		
5	QPSK	1	24	22.21	22.09	22.00		
5	QPSK	12	0	21.21	21.22	21.15	22.5	1
5	QPSK	12	7	21.23	21.26	21.24		
5	QPSK	12	13	21.17	21.18	21.22		
5	QPSK	25	0	21.21	21.24	21.17	22.5	1
5	16QAM	1	0	21.30	21.29	21.26		
5	16QAM	1	12	21.42	21.46	21.33		
5	16QAM	1	24	21.28	21.43	21.29	21.5	2
5	16QAM	12	0	20.29	20.29	20.31		
5	16QAM	12	7	20.31	20.34	20.30		
5	16QAM	12	13	20.28	20.37	20.19	21.5	2
5	16QAM	25	0	20.34	20.35	20.27		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.02	22.03	22.04	23.5	0
3	QPSK	1	8	22.03	22.13	22.23		
3	QPSK	1	14	22.10	22.11	22.01		
3	QPSK	8	0	21.08	21.24	21.11	22.5	1
3	QPSK	8	4	21.21	21.26	21.18		
3	QPSK	8	7	21.20	21.21	21.11		
3	QPSK	15	0	21.20	21.26	21.14		
3	16QAM	1	0	21.30	21.33	21.31	22.5	1
3	16QAM	1	8	21.31	21.46	21.25		
3	16QAM	1	14	21.36	21.41	21.60		
3	16QAM	8	0	20.28	20.35	20.28	21.5	2
3	16QAM	8	4	20.31	20.35	20.26		
3	16QAM	8	7	20.29	20.30	20.21		
3	16QAM	15	0	20.27	20.23	20.20		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.13	22.07	22.21	23.5	0
1.4	QPSK	1	3	22.08	22.17	22.06		
1.4	QPSK	1	5	22.14	22.08	22.12		
1.4	QPSK	3	0	22.14	22.16	22.00		
1.4	QPSK	3	1	22.01	22.18	22.13		
1.4	QPSK	3	3	22.15	22.09	22.04	22.5	1
1.4	QPSK	6	0	21.04	21.08	21.03		
1.4	16QAM	1	0	21.22	21.37	21.18	22.5	1
1.4	16QAM	1	3	21.65	21.40	21.29		
1.4	16QAM	1	5	21.19	21.30	21.25		
1.4	16QAM	3	0	21.13	21.25	21.10		
1.4	16QAM	3	1	21.18	21.28	21.15		
1.4	16QAM	3	3	21.06	21.21	21.14		
1.4	16QAM	6	0	20.14	20.18	20.14	21.5	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				3935				
Frequency (MHz)				393.5				
10	QPSK	1	0		23.29		23.5	0
10	QPSK	1	25		23.10			
10	QPSK	1	49		23.28			
10	QPSK	25	0		22.23		22.5	1
10	QPSK	25	12		22.25			
10	QPSK	25	25		22.15			
10	QPSK	50	0		22.22		22.5	1
10	16QAM	1	0		22.14			
10	16QAM	1	25		22.13			
10	16QAM	1	49		22.21		21.5	2
10	16QAM	25	0		21.36			
10	16QAM	25	12		21.39			
10	16QAM	25	25		21.32		21.5	2
10	16QAM	25	25		21.32			
10	16QAM	50	0		21.36			
Channel				25	3935	7845	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2.5	393.5	784.5		
5	QPSK	1	0	23.19	23.18	23.08	23.5	0
5	QPSK	1	12	23.25	23.12	23.22		
5	QPSK	1	24	23.09	23.13	23.17		
5	QPSK	12	0	22.19	22.22	22.20	22.5	1
5	QPSK	12	7	22.28	22.12	22.22		
5	QPSK	12	13	22.18	22.22	22.14		
5	QPSK	25	0	22.28	22.26	22.21	22.5	1
5	16QAM	1	0	22.15	22.13	22.13		
5	16QAM	1	12	22.10	22.16	22.19		
5	16QAM	1	24	22.14	22.09	22.11	21.5	2
5	16QAM	12	0	21.29	21.24	21.21		
5	16QAM	12	7	21.28	21.24	21.26		
5	16QAM	12	13	21.21	21.25	21.17	21.5	2
5	16QAM	12	13	21.21	21.25	21.17		
5	16QAM	25	0	21.36	21.26	21.31		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.03	22.19	22.14	23.5	0
10	QPSK	1	25	22.05	22.14	22.15		
10	QPSK	1	49	22.08	22.11	22.16		
10	QPSK	25	0	21.23	21.21	21.20	22.5	1
10	QPSK	25	12	21.20	21.19	21.14		
10	QPSK	25	25	21.13	21.16	21.13		
10	QPSK	50	0	21.20	21.22	21.23		
10	16QAM	1	0	21.60	21.58	21.63	22.5	1
10	16QAM	1	25	21.61	21.70	21.69		
10	16QAM	1	49	21.61	21.62	21.66		
10	16QAM	25	0	20.32	20.30	20.28	21.5	2
10	16QAM	25	12	20.29	20.29	20.33		
10	16QAM	25	25	20.33	20.26	20.23		
10	16QAM	50	0	20.29	20.34	20.31		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.04	22.03	22.12	23.5	0
5	QPSK	1	12	22.16	22.13	22.12		
5	QPSK	1	24	22.12	22.12	22.10		
5	QPSK	12	0	21.18	21.16	21.07	22.5	1
5	QPSK	12	7	21.25	21.16	21.15		
5	QPSK	12	13	21.24	21.11	21.13		
5	QPSK	25	0	21.20	21.21	21.08	22.5	1
5	16QAM	1	0	21.64	21.55	21.63		
5	16QAM	1	12	21.68	21.76	21.54		
5	16QAM	1	24	21.64	21.66	21.59		
5	16QAM	12	0	20.29	20.18	20.18	21.5	2
5	16QAM	12	7	20.28	20.17	20.17		
5	16QAM	12	13	20.17	20.22	20.15		
5	16QAM	25	0	20.30	20.21	20.18		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.15	22.39	22.37	23.5	0
15	QPSK	1	37	22.27	22.31	22.28		
15	QPSK	1	74	22.29	22.33	22.32		
15	QPSK	36	0	21.29	21.35	21.30	22.5	1
15	QPSK	36	20	21.27	21.28	21.27		
15	QPSK	36	39	21.34	21.27	21.27		
15	QPSK	75	0	21.39	21.40	21.30	22.5	1
15	16QAM	1	0	21.78	21.70	21.96		
15	16QAM	1	37	21.76	21.88	21.78		
15	16QAM	1	74	21.91	21.86	21.85	21.5	2
15	16QAM	36	0	20.40	20.35	20.42		
15	16QAM	36	20	20.43	20.39	20.40		
15	16QAM	36	39	20.36	20.36	20.30		
15	16QAM	75	0	20.41	20.37	20.33		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.20	22.30	22.34	23.5	0
10	QPSK	1	25	22.23	22.28	22.34		
10	QPSK	1	49	22.21	22.31	22.25		
10	QPSK	25	0	21.27	21.29	21.30	22.5	1
10	QPSK	25	12	21.30	21.34	21.33		
10	QPSK	25	25	21.28	21.25	21.34		
10	QPSK	50	0	21.33	21.29	21.28	22.5	1
10	16QAM	1	0	21.82	21.84	21.81		
10	16QAM	1	25	21.84	21.85	21.88		
10	16QAM	1	49	21.72	21.88	21.82	21.5	2
10	16QAM	25	0	20.44	20.46	20.37		
10	16QAM	25	12	20.46	20.40	20.40		
10	16QAM	25	25	20.33	20.40	20.42		
10	16QAM	50	0	20.36	20.38	20.31		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.20	22.26	22.35	23.5	0
5	QPSK	1	12	22.20	22.24	22.28		
5	QPSK	1	24	22.25	22.24	22.25		
5	QPSK	12	0	21.19	21.31	21.29	22.5	1
5	QPSK	12	7	21.34	21.31	21.41		
5	QPSK	12	13	21.29	21.24	21.31		
5	QPSK	25	0	21.28	21.22	21.29		
5	16QAM	1	0	21.79	21.79	21.94	22.5	1
5	16QAM	1	12	21.83	21.91	21.92		
5	16QAM	1	24	21.81	21.77	21.76		
5	16QAM	12	0	20.35	20.39	20.47	21.5	2
5	16QAM	12	7	20.52	20.48	20.50		
5	16QAM	12	13	20.47	20.42	20.41		
5	16QAM	25	0	20.45	20.38	20.45		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.27	22.26	22.34	23.5	0
3	QPSK	1	8	22.17	22.24	22.23		
3	QPSK	1	14	22.13	22.22	22.18		
3	QPSK	8	0	21.25	21.30	21.34	22.5	1
3	QPSK	8	4	21.25	21.27	21.31		
3	QPSK	8	7	21.21	21.24	21.38		
3	QPSK	15	0	21.23	21.27	21.35		
3	16QAM	1	0	21.81	21.42	21.90	22.5	1
3	16QAM	1	8	21.46	21.81	21.54		
3	16QAM	1	14	21.72	21.74	21.71		
3	16QAM	8	0	20.42	20.38	20.42	21.5	2
3	16QAM	8	4	20.34	20.45	20.48		
3	16QAM	8	7	20.40	20.41	20.47		
3	16QAM	15	0	20.40	20.46	20.45		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.08	22.20	22.13	23.5	0
1.4	QPSK	1	3	22.13	22.17	22.27		
1.4	QPSK	1	5	22.14	22.15	22.11		
1.4	QPSK	3	0	22.14	22.22	22.26		
1.4	QPSK	3	1	22.14	22.27	22.34		
1.4	QPSK	3	3	22.17	22.27	22.25		
1.4	QPSK	6	0	21.18	21.18	21.27	22.5	1
1.4	16QAM	1	0	21.25	21.34	21.35	22.5	1
1.4	16QAM	1	3	21.33	21.43	21.35		
1.4	16QAM	1	5	21.22	21.30	21.32		
1.4	16QAM	3	0	21.07	21.20	21.17		
1.4	16QAM	3	1	21.17	21.15	21.16		
1.4	16QAM	3	3	21.09	21.15	21.17		
1.4	16QAM	6	0	20.27	20.30	20.41	21.5	2



<Reduced Power>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	16.14	16.38	16.07	17.5	0
20	QPSK	1	49	16.08	15.90	16.08		
20	QPSK	1	99	16.06	16.14	16.00		
20	QPSK	50	0	16.29	16.34	16.15	17.5	0
20	QPSK	50	24	16.24	16.16	16.12		
20	QPSK	50	50	16.09	16.17	16.06		
20	QPSK	100	0	16.22	16.20	16.10	17.5	0
20	16QAM	1	0	16.33	16.33	16.22		
20	16QAM	1	49	16.00	16.21	16.19		
20	16QAM	1	99	16.15	15.78	15.85	17.5	0
20	16QAM	50	0	15.93	15.76	15.69		
20	16QAM	50	24	15.83	15.77	15.69		
20	16QAM	50	50	15.81	15.63	15.72	17.5	0
20	16QAM	100	0	15.90	15.76	15.78		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.37	16.04	16.01	17.5	0
15	QPSK	1	37	16.26	15.99	16.21		
15	QPSK	1	74	16.09	16.04	16.15		
15	QPSK	36	0	16.37	16.23	16.11	17.5	0
15	QPSK	36	20	16.33	16.26	16.17		
15	QPSK	36	39	16.17	16.15	16.21		
15	QPSK	75	0	16.28	16.21	16.16	17.5	0
15	16QAM	1	0	16.29	15.84	15.98		
15	16QAM	1	37	16.15	15.74	15.92		
15	16QAM	1	74	15.95	15.94	15.91	17.5	0
15	16QAM	36	0	15.90	15.79	15.67		
15	16QAM	36	20	15.95	15.86	15.77		
15	16QAM	36	39	15.88	15.72	15.84	17.5	0
15	16QAM	75	0	15.92	15.80	15.77		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.36	16.34	16.07	17.5	0
10	QPSK	1	25	16.34	16.03	16.11		
10	QPSK	1	49	16.09	16.15	16.08		
10	QPSK	25	0	16.32	16.16	16.11	17.5	0
10	QPSK	25	12	16.32	16.18	16.27		
10	QPSK	25	25	16.19	16.10	16.25		
10	QPSK	50	0	16.27	16.25	16.18		
10	16QAM	1	0	16.35	16.14	16.11	17.5	0
10	16QAM	1	25	16.36	15.75	16.32		
10	16QAM	1	49	16.16	15.93	16.29		
10	16QAM	25	0	15.97	15.72	15.78	17.5	0
10	16QAM	25	12	15.98	15.82	15.84		
10	16QAM	25	25	15.83	15.85	15.90		
10	16QAM	50	0	15.78	15.76	15.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	16.28	16.09	16.15	17.5	0
5	QPSK	1	12	16.27	16.03	16.18		
5	QPSK	1	24	16.25	16.04	16.12		
5	QPSK	12	0	16.24	16.19	16.22	17.5	0
5	QPSK	12	7	16.34	16.10	16.26		
5	QPSK	12	13	16.34	16.23	16.18		
5	QPSK	25	0	16.27	16.15	16.17		
5	16QAM	1	0	16.10	16.15	15.75	17.5	0
5	16QAM	1	12	16.30	16.23	16.09		
5	16QAM	1	24	16.38	15.84	15.95		
5	16QAM	12	0	15.97	15.84	15.83	17.5	0
5	16QAM	12	7	15.96	15.75	15.89		
5	16QAM	12	13	15.90	15.78	15.74		
5	16QAM	25	0	15.75	15.81	15.77		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.24	16.08	16.10	17.5	0
3	QPSK	1	8	16.19	15.93	16.14		
3	QPSK	1	14	16.31	15.94	16.08		
3	QPSK	8	0	16.30	16.07	16.17	17.5	0
3	QPSK	8	4	16.31	16.09	16.18		
3	QPSK	8	7	16.28	16.03	16.20		
3	QPSK	15	0	16.21	15.99	16.19		
3	16QAM	1	0	16.03	16.19	15.89	17.5	0
3	16QAM	1	8	16.01	16.08	16.02		
3	16QAM	1	14	16.30	15.50	16.24		
3	16QAM	8	0	15.89	15.70	15.83	17.5	0
3	16QAM	8	4	16.08	15.79	15.92		
3	16QAM	8	7	15.98	15.78	15.85		
3	16QAM	15	0	15.81	15.82	15.70		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	16.16	15.96	16.21	17.5	0
1.4	QPSK	1	3	16.22	16.06	16.19		
1.4	QPSK	1	5	16.21	16.02	16.08		
1.4	QPSK	3	0	16.12	15.96	16.16		
1.4	QPSK	3	1	16.24	16.01	16.17		
1.4	QPSK	3	3	16.21	15.95	16.15		
1.4	QPSK	6	0	16.29	15.94	16.20	17.5	0
1.4	16QAM	1	0	16.03	15.71	15.73	17.5	0
1.4	16QAM	1	3	16.29	15.78	15.78		
1.4	16QAM	1	5	16.01	15.58	15.64		
1.4	16QAM	3	0	15.91	15.67	15.84		
1.4	16QAM	3	1	15.93	15.74	15.82		
1.4	16QAM	3	3	15.84	15.60	15.85		
1.4	16QAM	6	0	15.89	15.65	15.87		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	16.96	17.30	17.11	18.5	0
20	QPSK	1	49	16.83	16.97	16.93		
20	QPSK	1	99	17.03	16.96	16.99		
20	QPSK	50	0	17.00	17.11	17.14	18.5	0
20	QPSK	50	24	17.05	17.17	17.11		
20	QPSK	50	50	17.09	17.09	17.10		
20	16QAM	1	0	16.59	16.88	16.81	18.5	0
20	16QAM	1	49	17.05	17.20	16.73		
20	16QAM	1	99	17.17	16.72	16.84		
20	16QAM	50	0	16.57	16.65	16.67	18.5	0
20	16QAM	50	24	16.62	16.66	16.63		
20	16QAM	50	50	16.70	16.57	16.81		
20	16QAM	100	0	16.64	16.71	16.66		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	16.89	16.94	16.97	18.5	0
15	QPSK	1	37	16.89	17.17	17.12		
15	QPSK	1	74	16.98	16.90	17.13		
15	QPSK	36	0	16.97	17.10	17.10	18.5	0
15	QPSK	36	20	17.08	17.09	17.17		
15	QPSK	36	39	17.04	17.12	17.09		
15	QPSK	75	0	17.10	17.13	17.04	18.5	0
15	16QAM	1	0	16.83	17.12	16.98		
15	16QAM	1	37	16.84	17.25	16.81		
15	16QAM	1	74	16.93	16.83	16.95	18.5	0
15	16QAM	36	0	16.64	16.97	16.88		
15	16QAM	36	20	16.83	16.85	16.93		
15	16QAM	36	39	16.79	16.87	16.92		
15	16QAM	75	0	16.90	16.91	16.79		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	16.99	17.12	17.15	18.5	0
10	QPSK	1	25	16.99	17.07	17.11		
10	QPSK	1	49	16.92	17.07	17.03		
10	QPSK	25	0	16.92	17.10	17.21	18.5	0
10	QPSK	25	12	17.01	17.10	17.16		
10	QPSK	25	25	16.93	17.07	17.16		
10	QPSK	50	0	16.93	17.07	17.16		
10	16QAM	1	0	17.15	16.90	17.03	18.5	0
10	16QAM	1	25	17.26	17.13	17.13		
10	16QAM	1	49	17.18	17.05	17.22		
10	16QAM	25	0	16.77	16.91	16.97	18.5	0
10	16QAM	25	12	16.65	16.85	16.97		
10	16QAM	25	25	16.73	16.82	16.91		
10	16QAM	50	0	16.68	16.84	17.02		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	16.85	16.91	17.23	18.5	0
5	QPSK	1	12	16.95	17.04	17.09		
5	QPSK	1	24	16.88	17.08	17.13		
5	QPSK	12	0	16.97	17.15	17.12	18.5	0
5	QPSK	12	7	16.96	17.14	17.15		
5	QPSK	12	13	16.96	17.09	17.11		
5	QPSK	25	0	16.88	17.08	17.10		
5	16QAM	1	0	17.14	17.17	17.16	18.5	0
5	16QAM	1	12	16.93	16.98	17.12		
5	16QAM	1	24	17.16	16.87	16.87		
5	16QAM	12	0	16.83	16.88	16.94	18.5	0
5	16QAM	12	7	16.78	16.99	16.91		
5	16QAM	12	13	16.72	16.89	17.04		
5	16QAM	25	0	16.70	16.94	16.91		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	16.79	17.03	17.22	18.5	0
3	QPSK	1	8	16.91	17.11	17.06		
3	QPSK	1	14	16.81	17.10	16.96		
3	QPSK	8	0	16.88	17.15	17.18	18.5	0
3	QPSK	8	4	16.93	17.16	17.20		
3	QPSK	8	7	16.89	17.09	17.10		
3	QPSK	15	0	16.88	17.05	17.13		
3	16QAM	1	0	16.57	16.73	16.84	18.5	0
3	16QAM	1	8	16.85	17.01	17.16		
3	16QAM	1	14	17.16	17.15	17.12		
3	16QAM	8	0	16.74	16.95	16.94	18.5	0
3	16QAM	8	4	16.79	16.94	16.96		
3	16QAM	8	7	16.69	16.95	16.99		
3	16QAM	15	0	16.80	16.93	17.01		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	16.75	16.99	17.02	18.5	0
1.4	QPSK	1	3	16.85	17.08	17.12		
1.4	QPSK	1	5	16.84	16.93	17.11		
1.4	QPSK	3	0	16.84	17.05	17.01		
1.4	QPSK	3	1	16.86	16.97	17.03		
1.4	QPSK	3	3	16.83	16.96	17.08	18.5	0
1.4	QPSK	6	0	16.89	17.08	17.13		
1.4	16QAM	1	0	16.87	17.11	16.97	18.5	0
1.4	16QAM	1	3	16.81	16.90	17.01		
1.4	16QAM	1	5	16.67	16.84	16.98		
1.4	16QAM	3	0	16.69	16.87	16.78		
1.4	16QAM	3	1	16.71	16.90	16.94		
1.4	16QAM	3	3	16.72	16.90	16.85		
1.4	16QAM	6	0	16.69	16.86	16.77	18.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	18.73	18.88	18.52	19	0
20	QPSK	1	49	18.62	18.52	18.56		
20	QPSK	1	99	18.47	18.40	18.70		
20	QPSK	50	0	18.70	18.79	18.63	19	0
20	QPSK	50	24	18.70	18.32	18.65		
20	QPSK	50	50	18.55	18.35	18.64		
20	QPSK	100	0	18.62	18.71	18.63	19	0
20	16QAM	1	0	18.27	18.60	18.31		
20	16QAM	1	49	18.28	18.56	18.38		
20	16QAM	1	99	18.36	18.26	18.61	19	0
20	16QAM	50	0	18.29	18.34	18.66		
20	16QAM	50	24	18.20	18.39	18.37		
20	16QAM	50	50	18.59	18.42	18.31	19	0
20	16QAM	100	0	18.67	18.36	18.70		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.75	18.35	18.54	19	0
15	QPSK	1	37	18.73	18.33	18.55		
15	QPSK	1	74	18.51	18.44	18.72		
15	QPSK	36	0	18.58	18.28	18.62	19	0
15	QPSK	36	20	18.76	18.35	18.64		
15	QPSK	36	39	18.61	18.35	18.66		
15	QPSK	75	0	18.71	18.31	18.61	19	0
15	16QAM	1	0	18.35	18.64	18.59		
15	16QAM	1	37	18.36	18.54	18.37		
15	16QAM	1	74	18.54	18.75	18.56	19	0
15	16QAM	36	0	18.39	18.35	18.66		
15	16QAM	36	20	18.77	18.43	18.71		
15	16QAM	36	39	18.70	18.42	18.72	19	0
15	16QAM	75	0	18.77	18.37	18.68		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.70	18.39	18.51	19	0
10	QPSK	1	25	18.69	18.22	18.51		
10	QPSK	1	49	18.65	18.26	18.65		
10	QPSK	25	0	18.72	18.54	18.54	19	0
10	QPSK	25	12	18.76	18.32	18.63		
10	QPSK	25	25	18.68	18.29	18.62		
10	QPSK	50	0	18.66	18.27	18.58		
10	16QAM	1	0	18.56	18.52	18.69	19	0
10	16QAM	1	25	18.57	18.51	18.83		
10	16QAM	1	49	18.37	18.59	18.59		
10	16QAM	25	0	18.81	18.34	18.63	19	0
10	16QAM	25	12	18.55	18.33	18.69		
10	16QAM	25	25	18.73	18.35	18.67		
10	16QAM	50	0	18.75	18.34	18.66		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.72	18.52	18.51	19	0
5	QPSK	1	12	18.71	18.43	18.64		
5	QPSK	1	24	18.74	18.43	18.64		
5	QPSK	12	0	18.46	18.24	18.56	19	0
5	QPSK	12	7	18.66	18.29	18.59		
5	QPSK	12	13	18.56	18.30	18.68		
5	QPSK	25	0	18.73	18.23	18.58		
5	16QAM	1	0	18.52	18.49	18.34	19	0
5	16QAM	1	12	18.52	18.52	18.58		
5	16QAM	1	24	18.56	18.54	18.55		
5	16QAM	12	0	18.79	18.31	18.64	19	0
5	16QAM	12	7	18.57	18.36	18.70		
5	16QAM	12	13	18.37	18.32	18.76		
5	16QAM	25	0	18.54	18.31	18.64		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

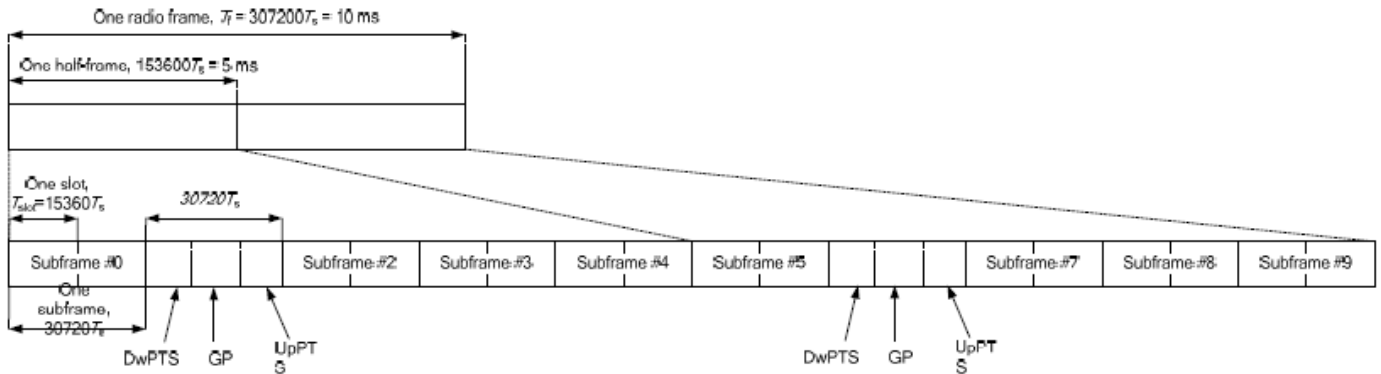


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-	-	-
9	13168 · Ts			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Full Power>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.49	22.68	22.45	23.5	0
20	QPSK	1	49	22.43	22.46	22.26		
20	QPSK	1	99	22.66	22.45	22.23		
20	QPSK	50	0	21.58	21.59	21.45	22.5	1
20	QPSK	50	24	21.58	21.44	21.43		
20	QPSK	50	50	21.54	21.50	21.31		
20	QPSK	100	0	21.53	21.55	21.39	22.5	1
20	16QAM	1	0	21.71	21.55	21.53		
20	16QAM	1	49	21.65	21.59	21.38		
20	16QAM	1	99	21.77	21.60	21.28	21.5	2
20	16QAM	50	0	20.57	20.59	20.57		
20	16QAM	50	24	20.67	20.66	20.55		
20	16QAM	50	50	20.59	20.62	20.44	21.5	2
20	16QAM	50	50	20.59	20.62	20.44		
20	16QAM	100	0	20.62	20.60	20.42		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.55	22.52	22.47	23.5	0
15	QPSK	1	37	22.65	22.50	22.31		
15	QPSK	1	74	22.67	22.64	22.31		
15	QPSK	36	0	21.59	21.47	21.42	22.5	1
15	QPSK	36	20	21.61	21.46	21.34		
15	QPSK	36	39	21.60	21.60	21.29		
15	QPSK	75	0	21.51	21.55	21.41	22.5	1
15	16QAM	1	0	21.69	21.56	21.62		
15	16QAM	1	37	21.71	21.65	21.42		
15	16QAM	1	74	21.83	21.71	21.37	21.5	2
15	16QAM	36	0	20.67	20.55	20.40		
15	16QAM	36	20	20.69	20.65	20.33		
15	16QAM	36	39	20.60	20.60	20.38	21.5	2
15	16QAM	75	0	20.64	20.68	20.44		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.59	22.67	22.27	23.5	0
10	QPSK	1	25	22.63	22.50	22.30		
10	QPSK	1	49	22.66	22.63	22.20		
10	QPSK	25	0	21.62	21.53	21.30	22.5	1
10	QPSK	25	12	21.63	21.52	21.29		
10	QPSK	25	25	21.65	21.61	21.40		
10	QPSK	50	0	21.61	21.59	21.36		
10	16QAM	1	0	21.86	21.74	21.43	22.5	1
10	16QAM	1	25	21.81	21.68	21.36		
10	16QAM	1	49	21.69	21.68	21.36		
10	16QAM	25	0	20.77	20.67	20.44	21.5	2
10	16QAM	25	12	20.88	20.67	20.48		
10	16QAM	25	25	20.69	20.66	20.44		
10	16QAM	50	0	20.74	20.62	20.49		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.67	22.53	22.23	23.5	0
5	QPSK	1	12	22.62	22.55	22.19		
5	QPSK	1	24	22.66	22.54	22.21		
5	QPSK	12	0	21.69	21.52	21.39	22.5	1
5	QPSK	12	7	21.66	21.47	21.37		
5	QPSK	12	13	21.75	21.46	21.36		
5	QPSK	25	0	21.70	21.52	21.39		
5	16QAM	1	0	21.80	21.66	21.36	22.5	1
5	16QAM	1	12	21.70	21.61	21.36		
5	16QAM	1	24	21.77	21.69	21.31		
5	16QAM	12	0	20.66	20.50	20.36	21.5	2
5	16QAM	12	7	20.75	20.56	20.32		
5	16QAM	12	13	20.75	20.55	20.31		
5	16QAM	25	0	20.75	20.57	20.43		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	22.22	22.41	22.53	22.12	23.5	0
20	QPSK	1	49	22.23	22.28	22.28	22.20		
20	QPSK	1	99	22.48	22.46	22.38	22.21		
20	QPSK	50	0	21.32	21.37	21.47	21.24	22.5	1
20	QPSK	50	24	21.44	21.36	21.37	21.35		
20	QPSK	50	50	21.46	21.37	21.39	21.38		
20	QPSK	100	0	21.42	21.37	21.43	21.32	22.5	1
20	16QAM	1	0	21.34	21.53	21.43	21.30		
20	16QAM	1	49	21.34	21.40	21.45	21.37		
20	16QAM	1	99	21.57	21.50	21.49	21.21	21.5	2
20	16QAM	50	0	20.35	20.45	20.45	20.31		
20	16QAM	50	24	20.49	20.46	20.46	20.47		
20	16QAM	50	50	20.47	20.46	20.48	20.50	21.5	2
20	16QAM	100	0	20.47	20.46	20.45	20.45		
Channel				40115	40395	40685	41165		
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	22.28	22.33	22.31	22.22	23.5	0
15	QPSK	1	37	22.25	22.30	22.34	22.16		
15	QPSK	1	74	22.42	22.43	22.41	22.15		
15	QPSK	36	0	21.31	21.35	21.35	21.25	22.5	1
15	QPSK	36	20	21.34	21.39	21.36	21.37		
15	QPSK	36	39	21.42	21.36	21.37	21.38		
15	QPSK	75	0	21.42	21.37	21.34	21.38	22.5	1
15	16QAM	1	0	21.36	21.45	21.48	21.35		
15	16QAM	1	37	21.34	21.39	21.46	21.33		
15	16QAM	1	74	21.51	21.64	21.56	21.23	21.5	2
15	16QAM	36	0	20.30	20.42	20.38	20.32		
15	16QAM	36	20	20.35	20.40	20.42	20.44		
15	16QAM	36	39	20.43	20.43	20.42	20.46	21.5	2
15	16QAM	75	0	20.48	20.47	20.47	20.46		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	22.26	22.32	22.29	22.21	23.5	0
10	QPSK	1	25	22.27	22.33	22.29	22.31		
10	QPSK	1	49	22.33	22.40	22.38	22.17		
10	QPSK	25	0	21.29	21.33	21.30	21.33	22.5	1
10	QPSK	25	12	21.32	21.35	21.34	21.39		
10	QPSK	25	25	21.33	21.38	21.34	21.37		
10	QPSK	50	0	21.32	21.38	21.36	21.38	22.5	1
10	16QAM	1	0	21.37	21.40	21.47	21.34		
10	16QAM	1	25	21.38	21.42	21.45	21.49		
10	16QAM	1	49	21.40	21.49	21.50	21.31	21.5	2
10	16QAM	25	0	20.36	20.44	20.42	20.45		
10	16QAM	25	12	20.37	20.47	20.45	20.47		
10	16QAM	25	25	20.35	20.44	20.45	20.50	21.5	2
10	16QAM	50	0	20.37	20.43	20.42	20.45		
Channel				40065	40385	40705	41215		
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	22.25	22.30	22.31	22.32	23.5	0
5	QPSK	1	12	22.28	22.29	22.33	22.30		
5	QPSK	1	24	22.26	22.31	22.29	22.35		
5	QPSK	12	0	21.29	21.36	21.35	21.36	22.5	1
5	QPSK	12	7	21.31	21.39	21.39	21.35		
5	QPSK	12	13	21.34	21.41	21.35	21.37		
5	QPSK	25	0	21.28	21.34	21.33	21.34	22.5	1
5	16QAM	1	0	21.28	21.41	21.42	21.45		
5	16QAM	1	12	21.27	21.41	21.49	21.47		
5	16QAM	1	24	21.33	21.43	21.47	21.51	21.5	2
5	16QAM	12	0	20.28	20.36	20.39	20.43		
5	16QAM	12	7	20.33	20.38	20.39	20.44		
5	16QAM	12	13	20.32	20.39	20.40	20.43	21.5	2
5	16QAM	25	0	20.31	20.44	20.46	20.49		



<Reduced Power>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.56	20.76	20.49	21	0
20	QPSK	1	49	20.47	20.52	20.33		
20	QPSK	1	99	20.73	20.53	20.32		
20	QPSK	50	0	20.67	20.65	20.52	21	0
20	QPSK	50	24	20.65	20.50	20.52		
20	QPSK	50	50	20.63	20.57	20.35		
20	QPSK	100	0	20.57	20.63	20.48	21	0
20	16QAM	1	0	20.38	20.61	20.57		
20	16QAM	1	49	20.72	20.66	20.47		
20	16QAM	1	99	20.36	20.66	20.55	21	0
20	16QAM	50	0	20.66	20.66	20.66		
20	16QAM	50	24	20.74	20.74	20.63		
20	16QAM	50	50	20.68	20.69	20.50	21	0
20	16QAM	100	0	20.66	20.66	20.49		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.66	20.75	20.31	21	0
15	QPSK	1	37	20.67	20.56	20.37		
15	QPSK	1	74	20.73	20.71	20.29		
15	QPSK	36	0	20.71	20.59	20.37	21	0
15	QPSK	36	20	20.70	20.58	20.38		
15	QPSK	36	39	20.74	20.68	20.44		
15	QPSK	75	0	20.65	20.67	20.45	21	0
15	16QAM	1	0	20.65	20.58	20.47		
15	16QAM	1	37	20.38	20.75	20.45		
15	16QAM	1	74	20.68	20.74	20.43	21	0
15	16QAM	36	0	20.36	20.74	20.53		
15	16QAM	36	20	20.53	20.75	20.56		
15	16QAM	36	39	20.58	20.73	20.50	21	0
15	16QAM	75	0	20.33	20.68	20.56		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.62	20.60	20.51	21	0
10	QPSK	1	25	20.69	20.56	20.38		
10	QPSK	1	49	20.74	20.72	20.40		
10	QPSK	25	0	20.68	20.53	20.49	21	0
10	QPSK	25	12	20.68	20.52	20.43		
10	QPSK	25	25	20.69	20.67	20.33		
10	QPSK	50	0	20.55	20.63	20.50	21	0
10	16QAM	1	0	20.48	20.62	20.66		
10	16QAM	1	25	20.38	20.72	20.51		
10	16QAM	1	49	20.52	20.57	20.44	21	0
10	16QAM	25	0	20.66	20.62	20.49		
10	16QAM	25	12	20.46	20.73	20.41		
10	16QAM	25	25	20.69	20.67	20.44	21	0
10	16QAM	50	0	20.68	20.74	20.51		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.74	20.61	20.27	21	0
5	QPSK	1	12	20.66	20.61	20.26		
5	QPSK	1	24	20.73	20.62	20.30		
5	QPSK	12	0	20.68	20.58	20.46	21	0
5	QPSK	12	7	20.73	20.53	20.46		
5	QPSK	12	13	20.44	20.53	20.40		
5	QPSK	25	0	20.74	20.60	20.48	21	0
5	16QAM	1	0	20.59	20.72	20.56		
5	16QAM	1	12	20.37	20.68	20.45		
5	16QAM	1	24	20.46	20.75	20.48	21	0
5	16QAM	12	0	20.75	20.57	20.45		
5	16QAM	12	7	20.42	20.64	20.40		
5	16QAM	12	13	20.42	20.62	20.37	21	0
5	16QAM	25	0	20.39	20.63	20.50		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	20.58	20.62	20.72	20.52	21	0
20	QPSK	1	49	20.43	20.51	20.55	20.32		
20	QPSK	1	99	20.36	20.50	20.57	20.30		
20	QPSK	50	0	20.48	20.40	20.60	20.35	21	0
20	QPSK	50	24	20.44	20.37	20.57	20.50		
20	QPSK	50	50	20.43	20.46	20.52	20.39		
20	QPSK	100	0	20.38	20.49	20.59	20.22		
20	16QAM	1	0	20.31	20.42	20.44	20.47	21	0
20	16QAM	1	49	20.47	20.62	20.59	20.50		
20	16QAM	1	99	20.21	20.36	20.33	20.24		
20	16QAM	50	0	20.44	20.36	20.54	20.13	21	0
20	16QAM	50	24	20.26	20.29	20.50	20.51		
20	16QAM	50	50	20.42	20.50	20.43	20.38		
20	16QAM	100	0	20.53	20.37	20.54	20.29		
Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	20.54	20.59	20.53	20.39	21	0
15	QPSK	1	37	20.57	20.54	20.59	20.45		
15	QPSK	1	74	20.60	20.70	20.63	20.46		
15	QPSK	36	0	20.32	20.45	20.42	20.33	21	0
15	QPSK	36	20	20.41	20.47	20.39	20.45		
15	QPSK	36	39	20.41	20.43	20.48	20.34		
15	QPSK	75	0	20.26	20.38	20.46	20.39		
15	16QAM	1	0	20.32	20.54	20.46	20.34	21	0
15	16QAM	1	37	20.45	20.46	20.50	20.28		
15	16QAM	1	74	20.40	20.54	20.61	20.61		
15	16QAM	36	0	20.55	20.52	20.55	20.52	21	0
15	16QAM	36	20	20.42	20.35	20.43	20.22		
15	16QAM	36	39	20.08	20.31	20.43	20.48		
15	16QAM	75	0	20.26	20.44	20.38	20.39		



Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	20.51	20.56	20.47	20.33	21	0
10	QPSK	1	25	20.43	20.53	20.55	20.48		
10	QPSK	1	49	20.49	20.62	20.54	20.62		
10	QPSK	25	0	20.45	20.45	20.45	20.27	21	0
10	QPSK	25	12	20.35	20.35	20.47	20.43		
10	QPSK	25	25	20.41	20.53	20.42	20.36		
10	QPSK	50	0	20.44	20.52	20.43	20.34		
10	16QAM	1	0	20.34	20.39	20.45	20.38	21	0
10	16QAM	1	25	20.39	20.49	20.39	20.45		
10	16QAM	1	49	20.54	20.54	20.56	20.51		
10	16QAM	25	0	20.41	20.54	20.62	20.71	21	0
10	16QAM	25	12	20.34	20.52	20.32	20.43		
10	16QAM	25	25	20.44	20.37	20.44	20.30		
10	16QAM	50	0	20.14	20.34	20.43	20.52		
Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	20.48	20.55	20.42	20.44	21	0
5	QPSK	1	12	20.50	20.51	20.55	20.52		
5	QPSK	1	24	20.40	20.44	20.53	20.51		
5	QPSK	12	0	20.34	20.45	20.33	20.38	21	0
5	QPSK	12	7	20.43	20.42	20.45	20.37		
5	QPSK	12	13	20.30	20.37	20.43	20.50		
5	QPSK	25	0	20.31	20.50	20.30	20.36		
5	16QAM	1	0	20.37	20.47	20.43	20.33	21	0
5	16QAM	1	12	20.32	20.36	20.53	20.48		
5	16QAM	1	24	20.39	20.55	20.50	20.51		
5	16QAM	12	0	20.35	20.34	20.38	20.24	21	0
5	16QAM	12	7	20.18	20.19	20.40	20.50		
5	16QAM	12	13	20.26	20.39	20.32	20.35		
5	16QAM	25	0	20.30	20.35	20.41	20.29		

<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on uplink for intra band. For the device supports combination bands and configurations are provided as follow table was according to 3GPP.
2. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_7C		No

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.



<Power Measurement Setup>



<Full Power>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	22.90	23.50
21100	20902	QPSK	1	0	0	0	2	0	22.31	23.50
21350	21152	QPSK	1	0	0	0	2	0	22.34	23.50

<Reduced Power>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	18.76	19.00
21100	20902	QPSK	1	0	0	0	2	0	18.22	19.00
21350	21152	QPSK	1	0	0	0	2	0	18.19	19.00

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Full Power>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.25	19.00	100.00
		6	2437	17.93	19.00	
		11	2462	18.40	19.00	
	802.11g 6Mbps	1	2412	16.33	18.00	95.24
		6	2437	16.14	18.00	
		11	2462	16.30	18.00	
	802.11n-HT20 MCS0	1	2412	16.71	18.00	94.91
		6	2437	16.41	18.00	
		11	2462	16.53	18.00	
	802.11n-HT40 MCS0	3	2422	18.13	18.50	89.51
		6	2437	17.70	18.50	
		9	2452	17.74	18.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.62	17.50	95.24
		40	5200	16.44	17.50	
		44	5220	16.47	17.50	
		48	5240	16.75	17.50	
	802.11n-HT20 MCS0	36	5180	16.44	17.50	95.60
		40	5200	16.32	17.50	
		44	5220	16.39	17.50	
	802.11n-HT40 MCS0	38	5190	16.91	17.50	90.78
		46	5230	16.94	17.50	
	802.11ac-VHT20 MCS0	36	5180	16.57	17.50	94.93
		40	5200	16.50	17.50	
		44	5220	16.42	17.50	
	802.11ac-VHT40 MCS0	38	5190	16.84	17.50	90.84
		46	5230	16.93	17.50	



5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	16.63	17.50	95.24
		56	5280	16.53	17.50	
		60	5300	16.24	17.50	
		64	5320	16.49	17.50	
	802.11n-HT20 MCS0	52	5260	16.65	17.50	95.60
		56	5280	16.42	17.50	
		60	5300	16.09	17.50	
		64	5320	16.35	17.50	
	802.11n-HT40 MCS0	54	5270	17.05	17.50	90.78
62		5310	16.79	17.50		
802.11ac-VHT20 MCS0	52	5260	16.62	17.50	94.93	
	56	5280	16.44	17.50		
	60	5300	16.19	17.50		
	64	5320	16.34	17.50		
802.11ac-VHT40 MCS0	54	5270	17.04	17.50	90.84	
	62	5310	16.80	17.50		

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	15.78	17.50	95.24
		116	5580	15.99	17.50	
		132	5660	16.27	17.50	
		140	5700	16.03	17.50	
	802.11n-HT20 MCS0	100	5500	15.69	17.50	95.60
		116	5580	15.72	17.50	
		132	5660	16.06	17.50	
		140	5700	15.82	17.50	
	802.11n-HT40 MCS0	102	5510	16.25	17.50	90.78
		110	5550	16.58	17.50	
		134	5670	16.56	17.50	
	802.11ac-VHT20 MCS0	100	5500	15.64	17.50	94.93
		116	5580	15.70	17.50	
		132	5660	16.04	17.50	
		140	5700	15.81	17.50	
	802.11ac-VHT40 MCS0	102	5510	16.20	17.50	90.84
		110	5550	16.54	17.50	
134		5670	16.47	17.50		



5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		149	5745	15.76	17.50
157			5785	16.07	17.50	
165			5825	16.04	17.50	
802.11n-HT20 MCS0		149	5745	15.54	17.50	95.60
		157	5785	15.98	17.50	
		165	5825	15.88	17.50	
802.11n-HT40 MCS0		151	5755	16.33	17.50	90.78
		159	5795	16.48	17.50	
802.11ac-VHT20 MCS0		149	5745	15.60	17.50	94.93
		157	5785	15.85	17.50	
		165	5825	15.91	17.50	
802.11ac-VHT40 MCS0		151	5755	16.29	17.50	90.84
		159	5795	16.36	17.50	

<Reduced Power>

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps		1	2412	15.82	16.50
6			2437	16.42	16.50	
11			2462	16.45	16.50	
802.11g 6Mbps		1	2412	14.56	16.50	95.24
		6	2437	14.93	16.50	
		11	2462	15.04	16.50	
802.11n-HT20 MCS0		1	2412	14.70	16.50	94.91
		6	2437	14.59	16.50	
		11	2462	14.76	16.50	
802.11n-HT40 MCS0		3	2422	15.91	16.50	89.51
		6	2437	15.95	16.50	
		9	2452	15.90	16.50	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.38	15.00	95.24
		40	5200	13.36	15.00	
		44	5220	13.29	15.00	
		48	5240	13.13	15.00	
	802.11n-HT20 MCS0	36	5180	13.19	15.00	95.60
		40	5200	13.14	15.00	
		44	5220	13.08	15.00	
		48	5240	13.47	15.00	
	802.11n-HT40 MCS0	38	5190	13.34	15.00	90.78
		46	5230	13.47	15.00	
	802.11ac-VHT20 MCS0	36	5180	13.48	15.00	94.93
		40	5200	13.50	15.00	
		44	5220	13.45	15.00	
		48	5240	13.24	15.00	
	802.11ac-VHT40 MCS0	38	5190	13.36	15.00	90.84
		46	5230	13.45	15.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	13.45	15.00	95.24
		56	5280	13.41	15.00	
		60	5300	13.17	15.00	
		64	5320	13.07	15.00	
	802.11n-HT20 MCS0	52	5260	13.31	15.00	95.60
		56	5280	13.27	15.00	
		60	5300	13.03	15.00	
		64	5320	13.31	15.00	
	802.11n-HT40 MCS0	54	5270	13.37	15.00	90.78
		62	5310	13.03	15.00	
	802.11ac-VHT20 MCS0	52	5260	13.11	15.00	94.93
		56	5280	13.21	15.00	
		60	5300	13.04	15.00	
		64	5320	13.19	15.00	
	802.11ac-VHT40 MCS0	54	5270	13.33	15.00	90.84
		62	5310	13.06	15.00	




5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	11.39	13.00	95.24
		116	5580	11.46	13.00	
		132	5660	11.40	13.00	
		140	5700	11.29	13.00	
	802.11n-HT20 MCS0	100	5500	11.21	13.00	95.60
		116	5580	11.21	13.00	
		132	5660	11.36	13.00	
		140	5700	11.06	13.00	
	802.11n-HT40 MCS0	102	5510	11.23	13.00	90.78
110		5550	11.17	13.00		
134		5670	11.41	13.00		
802.11ac-VHT20 MCS0	100	5500	11.19	13.00	94.93	
	116	5580	11.29	13.00		
	132	5660	11.39	13.00		
	140	5700	11.14	13.00		
802.11ac-VHT40 MCS0	102	5510	11.28	13.00	90.84	
	110	5550	11.25	13.00		
	134	5670	11.36	13.00		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	10.64	12.50	95.24
		157	5785	10.63	12.50	
		165	5825	10.62	12.50	
	802.11n-HT20 MCS0	149	5745	10.96	12.50	95.60
		157	5785	10.58	12.50	
		165	5825	10.93	12.50	
	802.11n-HT40 MCS0	151	5755	10.69	12.50	90.78
		159	5795	10.80	12.50	
	802.11ac-VHT20 MCS0	149	5745	10.90	12.50	94.93
157		5785	10.52	12.50		
165		5825	10.98	12.50		
802.11ac-VHT40 MCS0	151	5755	10.78	12.50	90.84	
	159	5795	10.63	12.50		

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.7 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

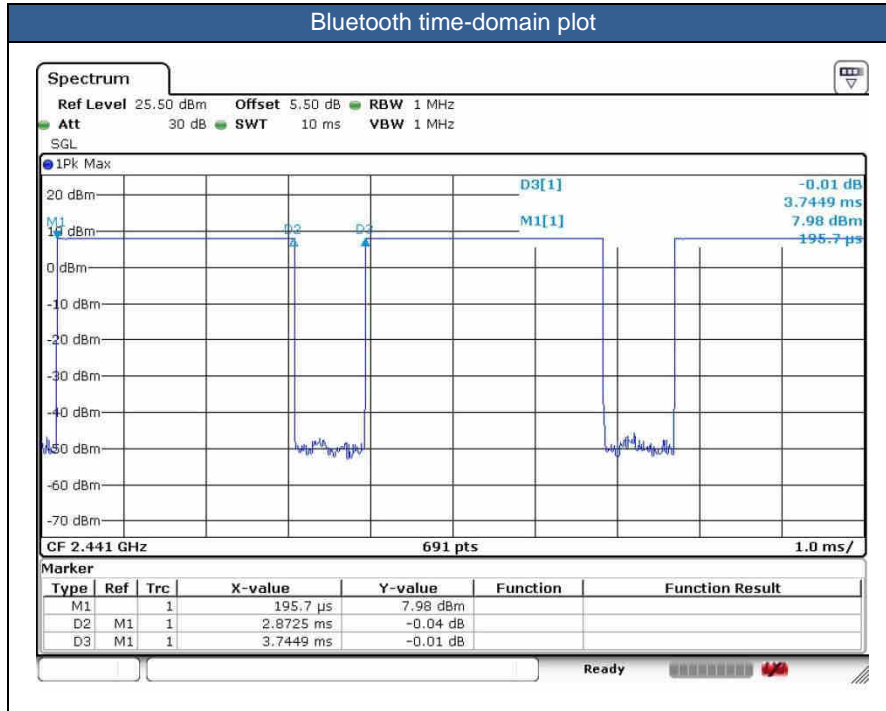


Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	9.07
	CH 39	2441	8.60
	CH 78	2480	7.86
Tune-up limit (dBm)			9.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0 LE	CH 00	2402	-2.18
	CH 19	2440	-2.39
	CH 39	2480	-1.98
Tune-up Limit			-1.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	-2.52
	CH 19	2440	-2.61
	CH 39	2480	-2.07
Tune-up Limit			-1.00

13. Antenna Location

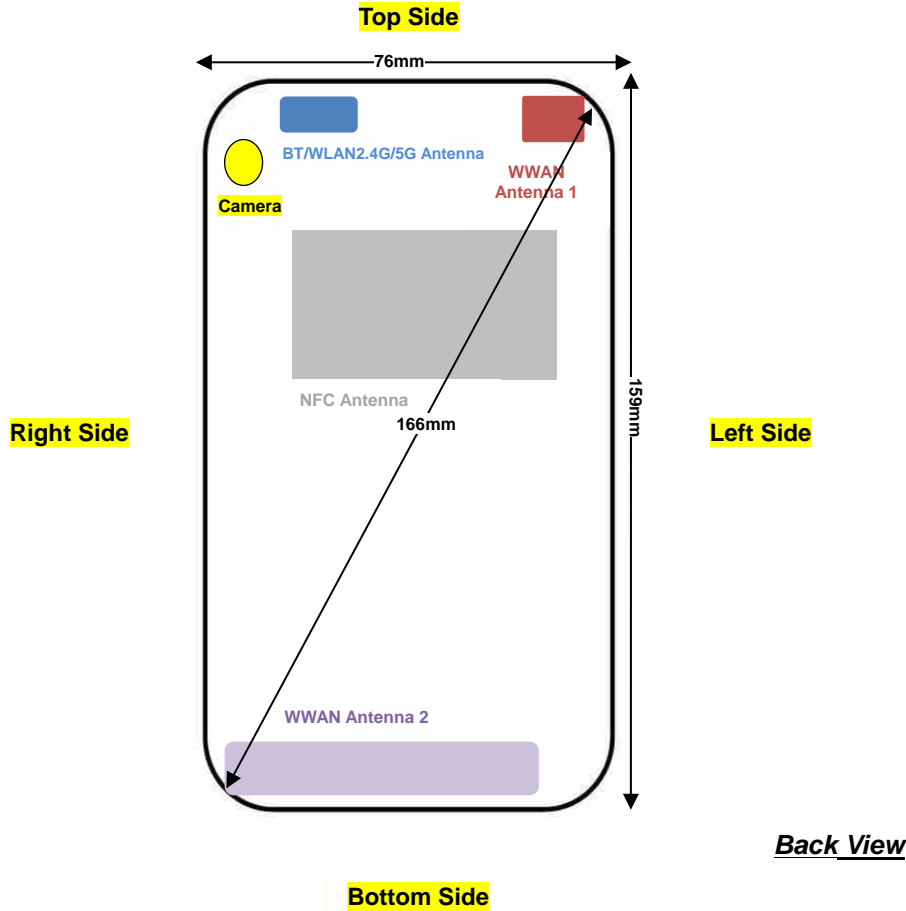

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN & 5GHz WLAN & BT	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	Yes	No	No	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	Yes	Yes
2.4GHz WLAN & 5GHz WLAN & BT	Yes	Yes	Yes	No	Yes	No

General Note:

- This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the top edge of the device and WWAN antenna 2 is located at the bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM1900, WCDMA Band II/IV, LTE Band 2/4/7/38/41, WWAN antenna 2 frequency bands include GSM850, WCDMA Band V, LTE Band 5/12/13/17/26.
- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15cm or an overall diagonal dimension > 16cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2W/kg.
6. For 5.3GHz / 5.5GHz WLAN product specific 10g SAR is necessary, due to an overall diagonal dimension is > 16cm and it has no hotspot mode.
7. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the top edge of the device and WWAN antenna 2 is located at the bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM1900, WCDMA Band II/IV, LTE Band 2/4/7/38/41, WWAN antenna 2 frequency bands include GSM850, WCDMA Band V, LTE Band 5/12/13/17/26.
8. When the phone is in talking mode and receiver worked, power reduction will be implemented immediately in GSM1900, WCDMA band II/IV, LTE band 2/4/7/38/41 and WLAN 2.4GHz/5GHz.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.



WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B 17 / 38 / 5 SAR test was covered by LTE B12 / 41 / 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Bluetooth and WLAN share the same antenna, with similar work frequency, so for Bluetooth SAR testing, we chose the worst position of WLAN to perform.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 4 Tx slots	Right Cheek	Full	128	824.2	32.53	33.50	1.250	0.1	0.519	0.649
	GSM850	GPRS 4 Tx slots	Right Tilted	Full	128	824.2	32.53	33.50	1.250	0.13	0.256	0.320
	GSM850	GPRS 4 Tx slots	Left Cheek	Full	128	824.2	32.53	33.50	1.250	0.01	0.356	0.445
	GSM850	GPRS 4 Tx slots	Left Tilted	Full	128	824.2	32.53	33.50	1.250	0.09	0.184	0.230
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Reduced	810	1909.8	24.21	25.00	1.199	0.04	0.715	0.858
	GSM1900	GPRS 4 Tx slots	Right Cheek	Reduced	512	1850.2	24.02	25.00	1.253	0.03	0.671	0.841
	GSM1900	GPRS 4 Tx slots	Right Cheek	Reduced	661	1880	23.97	25.00	1.268	-0.01	0.702	0.890
	GSM1900	GPRS 4 Tx slots	Right Tilted	Reduced	810	1909.8	24.21	25.00	1.199	0.02	0.250	0.300
	GSM1900	GPRS 4 Tx slots	Left Cheek	Reduced	810	1909.8	24.21	25.00	1.199	0.07	0.135	0.162
	GSM1900	GPRS 4 Tx slots	Left Tilted	Reduced	810	1909.8	24.21	25.00	1.199	0.09	0.131	0.157

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Full	4132	826.4	23.71	24.00	1.069	0.01	0.290	0.310	
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Full	4132	826.4	23.71	24.00	1.069	0.02	0.216	0.231	
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Full	4132	826.4	23.71	24.00	1.069	0.03	0.173	0.185	
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Full	4132	826.4	23.71	24.00	1.069	0.02	0.087	0.093	
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Reduced	1513	1752.6	17.87	18.50	1.156	0.02	0.833	0.963	
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Reduced	1513	1752.6	17.87	18.50	1.156	-0.04	0.465	0.538	
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Reduced	1513	1752.6	17.87	18.50	1.156	0.14	0.386	0.446	
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Reduced	1513	1752.6	17.87	18.50	1.156	0.17	0.327	0.378	
04	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Reduced	1413	1732.6	17.55	18.50	1.245	0.05	0.851	1.059	
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Reduced	1312	1712.4	17.74	18.50	1.191	0.04	0.796	0.948	
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Reduced	9538	1907.6	17.01	18.00	1.256	0.02	0.680	0.854	
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Reduced	9538	1907.6	17.01	18.00	1.256	0.07	0.417	0.524	
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Reduced	9538	1907.6	17.01	18.00	1.256	0.02	0.373	0.468	
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Reduced	9538	1907.6	17.01	18.00	1.256	0.14	0.320	0.402	
	05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Reduced	9262	1852.4	16.97	18.00	1.268	0.06	0.822	1.042
		WCDMA Band II	RMC 12.2Kbps	Right Cheek	Reduced	9400	1880	16.83	18.00	1.309	0.01	0.756	0.990



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 12	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.24	23.50	1.337	0.02	0.098	0.131
	LTE Band 12	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	21.32	22.50	1.312	0.02	0.066	0.087
	LTE Band 12	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.24	23.50	1.337	0.06	0.043	0.057
	LTE Band 12	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	21.32	22.50	1.312	-0.04	0.035	0.046
	LTE Band 12	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.24	23.50	1.337	0.01	0.066	0.089
	LTE Band 12	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	21.32	22.50	1.312	0.04	0.052	0.068
	LTE Band 12	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.24	23.50	1.337	0.06	0.036	0.047
	LTE Band 12	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	21.32	22.50	1.312	0.08	0.028	0.036
07	LTE Band 13	10M	QPSK	1	0	Right Cheek	Full	23230	782	23.29	23.50	1.050	0.08	0.128	0.134
	LTE Band 13	10M	QPSK	25	12	Right Cheek	Full	23230	782	22.25	22.50	1.059	0.01	0.097	0.102
	LTE Band 13	10M	QPSK	1	0	Right Tilted	Full	23230	782	23.29	23.50	1.050	-0.02	0.058	0.061
	LTE Band 13	10M	QPSK	25	12	Right Tilted	Full	23230	782	22.25	22.50	1.059	0.02	0.048	0.051
	LTE Band 13	10M	QPSK	1	0	Left Cheek	Full	23230	782	23.29	23.50	1.050	0.05	0.076	0.080
	LTE Band 13	10M	QPSK	25	12	Left Cheek	Full	23230	782	22.25	22.50	1.059	0.02	0.068	0.072
	LTE Band 13	10M	QPSK	1	0	Left Tilted	Full	23230	782	23.29	23.50	1.050	0.04	0.045	0.047
	LTE Band 13	10M	QPSK	25	12	Left Tilted	Full	23230	782	22.25	22.50	1.059	0.04	0.036	0.038
08	LTE Band 26	15M	QPSK	1	0	Right Cheek	Full	26865	831.5	22.39	23.50	1.291	0.08	0.187	0.241
	LTE Band 26	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	21.35	22.50	1.303	0.02	0.146	0.190
	LTE Band 26	15M	QPSK	1	0	Right Tilted	Full	26865	831.5	22.39	23.50	1.291	0.01	0.076	0.099
	LTE Band 26	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	21.35	22.50	1.303	-0.03	0.065	0.085
	LTE Band 26	15M	QPSK	1	0	Left Cheek	Full	26865	831.5	22.39	23.50	1.291	0.01	0.122	0.158
	LTE Band 26	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	21.35	22.50	1.303	0.02	0.102	0.133
	LTE Band 26	15M	QPSK	1	0	Left Tilted	Full	26865	831.5	22.39	23.50	1.291	0.01	0.056	0.072
	LTE Band 26	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	21.35	22.50	1.303	0.06	0.046	0.060
09	LTE Band 4	20M	QPSK	1	0	Right Cheek	Reduced	20175	1732.5	17.30	18.50	1.318	-0.02	0.649	0.856
	LTE Band 4	20M	QPSK	50	0	Right Cheek	Reduced	20175	1732.5	17.11	18.50	1.377	0.04	0.670	0.923
	LTE Band 4	20M	QPSK	100	0	Right Cheek	Reduced	20175	1732.5	17.13	18.50	1.371	0.07	0.652	0.894
	LTE Band 4	20M	QPSK	1	0	Right Tilted	Reduced	20175	1732.5	17.30	18.50	1.318	0.03	0.358	0.472
	LTE Band 4	20M	QPSK	50	0	Right Tilted	Reduced	20175	1732.5	17.11	18.50	1.377	0.01	0.366	0.504
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Reduced	20175	1732.5	17.30	18.50	1.318	0.09	0.336	0.443
	LTE Band 4	20M	QPSK	50	0	Left Cheek	Reduced	20175	1732.5	17.11	18.50	1.377	0.13	0.360	0.496
	LTE Band 4	20M	QPSK	1	0	Left Tilted	Reduced	20175	1732.5	17.30	18.50	1.318	0.01	0.275	0.363
10	LTE Band 2	20M	QPSK	50	0	Left Tilted	Reduced	20175	1732.5	17.11	18.50	1.377	0.15	0.283	0.390
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Reduced	18900	1880	16.38	17.50	1.294	0.04	0.580	0.751
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Reduced	18900	1880	16.34	17.50	1.306	0.02	0.581	0.759
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Reduced	18900	1880	16.38	17.50	1.294	0.03	0.379	0.491
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Reduced	18900	1880	16.34	17.50	1.306	0.01	0.385	0.503
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Reduced	18900	1880	16.38	17.50	1.294	0.18	0.381	0.493
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Reduced	18900	1880	16.34	17.50	1.306	0.09	0.386	0.504
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Reduced	18900	1880	16.38	17.50	1.294	0.03	0.284	0.368
LTE Band 2	20M	QPSK	50	0	Left Tilted	Reduced	18900	1880	16.34	17.50	1.306	0.1	0.280	0.366	



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Reduced	21100	2535	18.88	19.00	1.028	-0.02	0.859	0.883
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Reduced	20850	2510	18.73	19.00	1.064	0.08	0.672	0.715
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Reduced	21350	2560	18.52	19.00	1.117	0.03	0.730	0.815
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Reduced	21100	2535	18.79	19.00	1.050	-0.05	0.677	0.711
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Reduced	20850	2510	18.70	19.00	1.072	0.06	0.680	0.729
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Reduced	21350	2560	18.63	19.00	1.089	0.04	0.772	0.841
	LTE Band 7	20M	QPSK	100	0	Right Cheek	Reduced	21100	2535	18.71	19.00	1.069	0.1	0.692	0.740
11	LTE Band 7	20M	QPSK	1	0	Right Tilted	Reduced	21100	2535	18.88	19.00	1.028	0.03	0.876	0.901
	LTE Band 7C	20M	QPSK	1	0	Right Tilted	Reduced	21100+20902	2535+2515.2	18.22	19.00	1.197	-0.05	0.620	0.742
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Reduced	20850	2510	18.73	19.00	1.064	0.05	0.696	0.741
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Reduced	21350	2560	18.52	19.00	1.117	-0.05	0.748	0.835
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Reduced	21100	2535	18.79	19.00	1.050	0.04	0.710	0.745
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Reduced	20850	2510	18.70	19.00	1.072	-0.09	0.798	0.855
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Reduced	21350	2560	18.63	19.00	1.089	0.01	0.817	0.890
	LTE Band 7	20M	QPSK	100	0	Right Tilted	Reduced	21100	2535	18.71	19.00	1.069	0.01	0.763	0.816
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Reduced	21100	2535	18.88	19.00	1.028	0.04	0.417	0.429
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Reduced	21100	2535	18.79	19.00	1.050	0.01	0.415	0.436
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Reduced	21100	2535	18.88	19.00	1.028	0.09	0.515	0.529
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Reduced	21100	2535	18.79	19.00	1.050	0.01	0.506	0.531

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Reduced	40670	2598	20.72	21.00	1.067	62.9	1.006	0.15	0.684	0.734
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Reduced	40140	2545	20.58	21.00	1.102	62.9	1.006	0.14	0.652	0.723
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Reduced	40400	2571	20.62	21.00	1.091	62.9	1.006	0.07	0.676	0.742
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Reduced	40140	2545	20.52	21.00	1.117	62.9	1.006	0.07	0.708	0.795
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Reduced	40670	2598	20.60	21.00	1.096	62.9	1.006	0.09	0.656	0.724
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Reduced	40140	2545	20.48	21.00	1.127	62.9	1.006	0.01	0.551	0.625
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Reduced	40400	2571	20.40	21.00	1.148	62.9	1.006	0.17	0.624	0.721
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Reduced	41140	2645	20.35	21.00	1.161	62.9	1.006	0.05	0.681	0.796
	LTE Band 41	20M	QPSK	100	0	Right Cheek	Reduced	40670	2598	20.59	21.00	1.099	62.9	1.006	0.11	0.586	0.648
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Reduced	40670	2598	20.72	21.00	1.067	62.9	1.006	0.06	0.813	0.872
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Reduced	40140	2545	20.58	21.00	1.102	62.9	1.006	0.14	0.828	0.918
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Reduced	40400	2571	20.62	21.00	1.091	62.9	1.006	0.07	0.815	0.895
12	LTE Band 41	20M	QPSK	1	0	Right Tilted	Reduced	41140	2645	20.52	21.00	1.117	62.9	1.006	0.14	0.839	0.943
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Reduced	40670	2598	20.60	21.00	1.096	62.9	1.006	0.11	0.763	0.842
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Reduced	40140	2545	20.48	21.00	1.127	62.9	1.006	0.01	0.692	0.785
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Reduced	40400	2571	20.40	21.00	1.148	62.9	1.006	0.17	0.767	0.886
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Reduced	41140	2645	20.35	21.00	1.161	62.9	1.006	0.05	0.784	0.916
	LTE Band 41	20M	QPSK	100	0	Right Tilted	Reduced	40670	2598	20.59	21.00	1.099	62.9	1.006	0.05	0.688	0.761
	LTE Band 41	20M	QPSK	1	0	Left Cheek	Reduced	40670	2598	20.72	21.00	1.067	62.9	1.006	0.04	0.311	0.334
	LTE Band 41	20M	QPSK	50	0	Left Cheek	Reduced	40670	2598	20.60	21.00	1.096	62.9	1.006	0.07	0.288	0.318
	LTE Band 41	20M	QPSK	1	0	Left Tilted	Reduced	40670	2598	20.72	21.00	1.067	62.9	1.006	0.01	0.479	0.514
	LTE Band 41	20M	QPSK	50	0	Left Tilted	Reduced	40670	2598	20.60	21.00	1.096	62.9	1.006	0.05	0.464	0.512



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.16	0.489	0.495
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.01	0.428	0.433
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.15	1.010	1.022
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	6	2437	16.42	16.50	1.019	100	1.000	0.01	0.903	0.920
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.05	0.863	0.873
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	6	2437	16.42	16.50	1.019	100	1.000	-0.15	0.901	0.918

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	Reduced	54	5270	13.37	15.00	1.455	90.78	1.102	-0.09	0.225	0.361
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	Reduced	54	5270	13.37	15.00	1.455	90.78	1.102	-0.07	0.255	0.409
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	Reduced	54	5270	13.37	15.00	1.455	90.78	1.102	-0.07	0.342	0.549
14	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	Reduced	54	5270	13.37	15.00	1.455	90.78	1.102	-0.08	0.441	0.707
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Cheek	Reduced	134	5670	11.41	13.00	1.442	90.78	1.102	-0.09	0.251	0.399
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Tilted	Reduced	134	5670	11.41	13.00	1.442	90.78	1.102	-0.07	0.315	0.501
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	Reduced	134	5670	11.41	13.00	1.442	90.78	1.102	0.01	0.346	0.550
15	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	Reduced	134	5670	11.41	13.00	1.442	90.78	1.102	-0.01	0.474	0.753
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Cheek	Reduced	159	5795	10.80	12.50	1.479	90.78	1.102	-0.16	0.256	0.417
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Tilted	Reduced	159	5795	10.80	12.50	1.479	90.78	1.102	-0.05	0.307	0.500
	WLAN5.8GHz	802.11n-HT40 MCS0	Left Cheek	Reduced	159	5795	10.80	12.50	1.479	90.78	1.102	0.02	0.379	0.618
16	WLAN5.8GHz	802.11n-HT40 MCS0	Left Tilted	Reduced	159	5795	10.80	12.50	1.479	90.78	1.102	-0.07	0.445	0.725

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	Bluetooth	1Mbps	Left Cheek	Full	0	2402	9.07	9.50	1.104	76.7	1.086	0.01	0.080	0.095
	Bluetooth	1Mbps	Right Cheek	Full	0	2480	9.07	9.50	1.104	76.7	1.086	-0.01	0.013	0.015



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Full	128	824.2	32.53	33.50	1.250	0.02	0.493	0.616
18	GSM850	GPRS 4 Tx slots	Back	10	Full	128	824.2	32.53	33.50	1.250	0.04	0.529	0.661
	GSM850	GPRS 4 Tx slots	Left Side	10	Full	128	824.2	32.53	33.50	1.250	-0.05	0.207	0.259
	GSM850	GPRS 4 Tx slots	Right Side	10	Full	128	824.2	32.53	33.50	1.250	0.01	0.409	0.511
	GSM850	GPRS 4 Tx slots	Bottom Side	10	Full	128	824.2	32.53	33.50	1.250	0.05	0.510	0.638
	GSM1900	GPRS 4 Tx slots	Front	10	Full	810	1909.8	28.72	29.00	1.067	0.09	0.495	0.528
	GSM1900	GPRS 4 Tx slots	Back	10	Full	810	1909.8	28.72	29.00	1.067	-0.05	0.864	0.922
	GSM1900	GPRS 4 Tx slots	Back	10	Full	512	1850.2	28.53	29.00	1.114	-0.08	0.794	0.885
19	GSM1900	GPRS 4 Tx slots	Back	10	Full	661	1880	28.42	29.00	1.143	-0.09	0.858	0.981
	GSM1900	GPRS 4 Tx slots	Left Side	10	Full	810	1909.8	28.72	29.00	1.067	-0.07	0.421	0.449
	GSM1900	GPRS 4 Tx slots	Top Side	10	Full	810	1909.8	28.72	29.00	1.067	0.09	0.242	0.258

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	Full	4132	826.4	23.71	24.00	1.069	0.02	0.101	0.108
20	WCDMA Band V	RMC 12.2Kbps	Back	10	Full	4132	826.4	23.71	24.00	1.069	-0.03	0.237	0.253
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Full	4132	826.4	23.71	24.00	1.069	0.05	0.129	0.138
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	Full	4132	826.4	23.71	24.00	1.069	0.08	0.236	0.252
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	Full	4132	826.4	23.71	24.00	1.069	-0.03	0.192	0.205
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Full	1513	1752.6	23.99	24.00	1.002	-0.01	0.602	0.603
21	WCDMA Band IV	RMC 12.2Kbps	Back	10	Full	1513	1752.6	23.99	24.00	1.002	-0.14	0.698	0.700
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Full	1513	1752.6	23.99	24.00	1.002	0.01	0.588	0.589
	WCDMA Band IV	RMC 12.2Kbps	Top Side	10	Full	1513	1752.6	23.99	24.00	1.002	0.06	0.340	0.341
	WCDMA Band II	RMC 12.2Kbps	Front	10	Full	9538	1907.6	23.81	24.00	1.045	0.08	0.546	0.570
22	WCDMA Band II	RMC 12.2Kbps	Back	10	Full	9538	1907.6	23.81	24.00	1.045	0.01	0.868	0.907
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Full	9538	1907.6	23.81	24.00	1.045	0.09	0.602	0.629
	WCDMA Band II	RMC 12.2Kbps	Top Side	10	Full	9538	1907.6	23.81	24.00	1.045	0.01	0.393	0.411



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10	Full	23095	707.5	22.24	23.50	1.337	0.02	0.100	0.134
	LTE Band 12	10M	QPSK	25	0	Front	10	Full	23095	707.5	21.32	22.50	1.312	0.05	0.085	0.112
23	LTE Band 12	10M	QPSK	1	0	Back	10	Full	23095	707.5	22.24	23.50	1.337	-0.1	0.118	0.158
	LTE Band 12	10M	QPSK	25	0	Back	10	Full	23095	707.5	21.32	22.50	1.312	0.02	0.104	0.136
	LTE Band 12	10M	QPSK	1	0	Left Side	10	Full	23095	707.5	22.24	23.50	1.337	0.02	0.068	0.091
	LTE Band 12	10M	QPSK	25	0	Left Side	10	Full	23095	707.5	21.32	22.50	1.312	0.04	0.065	0.085
	LTE Band 12	10M	QPSK	1	0	Right Side	10	Full	23095	707.5	22.24	23.50	1.337	0.02	0.097	0.130
	LTE Band 12	10M	QPSK	25	0	Right Side	10	Full	23095	707.5	21.32	22.50	1.312	0.06	0.096	0.126
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10	Full	23095	707.5	22.24	23.50	1.337	0.01	0.077	0.103
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10	Full	23095	707.5	21.32	22.50	1.312	0.03	0.066	0.087
	LTE Band 13	10M	QPSK	1	0	Front	10	Full	23230	782	23.29	23.50	1.050	0.01	0.149	0.156
	LTE Band 13	10M	QPSK	25	12	Front	10	Full	23230	782	22.25	22.50	1.059	0.02	0.122	0.129
	LTE Band 13	10M	QPSK	1	0	Back	10	Full	23230	782	23.29	23.50	1.050	-0.01	0.178	0.187
	LTE Band 13	10M	QPSK	25	12	Back	10	Full	23230	782	22.25	22.50	1.059	0.02	0.141	0.149
	LTE Band 13	10M	QPSK	1	0	Left Side	10	Full	23230	782	23.29	23.50	1.050	-0.04	0.171	0.179
	LTE Band 13	10M	QPSK	25	12	Left Side	10	Full	23230	782	22.25	22.50	1.059	0.05	0.148	0.157
24	LTE Band 13	10M	QPSK	1	0	Right Side	10	Full	23230	782	23.29	23.50	1.050	0.12	0.286	0.300
	LTE Band 13	10M	QPSK	25	12	Right Side	10	Full	23230	782	22.25	22.50	1.059	0.05	0.243	0.257
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10	Full	23230	782	23.29	23.50	1.050	0.08	0.158	0.166
	LTE Band 13	10M	QPSK	25	12	Bottom Side	10	Full	23230	782	22.25	22.50	1.059	0.02	0.137	0.145
	LTE Band 26	15M	QPSK	1	0	Front	10	Full	26865	831.5	22.39	23.50	1.291	-0.06	0.162	0.209
	LTE Band 26	15M	QPSK	36	0	Front	10	Full	26865	831.5	21.35	22.50	1.303	0.02	0.136	0.177
	LTE Band 26	15M	QPSK	1	0	Back	10	Full	26865	831.5	22.39	23.50	1.291	-0.03	0.170	0.220
	LTE Band 26	15M	QPSK	36	0	Back	10	Full	26865	831.5	21.35	22.50	1.303	0.02	0.142	0.185
	LTE Band 26	15M	QPSK	1	0	Left Side	10	Full	26865	831.5	22.39	23.50	1.291	0.02	0.124	0.160
	LTE Band 26	15M	QPSK	36	0	Left Side	10	Full	26865	831.5	21.35	22.50	1.303	0.02	0.102	0.133
25	LTE Band 26	15M	QPSK	1	0	Right Side	10	Full	26865	831.5	22.39	23.50	1.291	0.13	0.207	0.267
	LTE Band 26	15M	QPSK	36	0	Right Side	10	Full	26865	831.5	21.35	22.50	1.303	0.03	0.186	0.242
	LTE Band 26	15M	QPSK	1	0	Bottom Side	10	Full	26865	831.5	22.39	23.50	1.291	0.02	0.207	0.267
	LTE Band 26	15M	QPSK	36	0	Bottom Side	10	Full	26865	831.5	21.35	22.50	1.303	-0.03	0.177	0.231
	LTE Band 4	20M	QPSK	1	0	Front	10	Full	20175	1732.5	22.53	23.50	1.250	0.03	0.277	0.346
	LTE Band 4	20M	QPSK	50	0	Front	10	Full	20175	1732.5	21.76	22.50	1.186	0.04	0.235	0.279
26	LTE Band 4	20M	QPSK	1	0	Back	10	Full	20175	1732.5	22.53	23.50	1.250	-0.17	0.428	0.535
	LTE Band 4	20M	QPSK	50	0	Back	10	Full	20175	1732.5	21.76	22.50	1.186	0.02	0.347	0.411
	LTE Band 4	20M	QPSK	1	0	Left Side	10	Full	20175	1732.5	22.53	23.50	1.250	0.02	0.315	0.394
	LTE Band 4	20M	QPSK	50	0	Left Side	10	Full	20175	1732.5	21.76	22.50	1.186	0.04	0.279	0.331
	LTE Band 4	20M	QPSK	1	0	Top Side	10	Full	20175	1732.5	22.53	23.50	1.250	0.03	0.215	0.269
	LTE Band 4	20M	QPSK	50	0	Top Side	10	Full	20175	1732.5	21.76	22.50	1.186	0.03	0.184	0.218



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10	Full	18900	1880	22.70	23.50	1.202	0.02	0.473	0.569
	LTE Band 2	20M	QPSK	50	0	Front	10	Full	18900	1880	21.54	22.50	1.247	-0.01	0.369	0.460
27	LTE Band 2	20M	QPSK	1	0	Back	10	Full	18900	1880	22.70	23.50	1.202	-0.09	0.607	0.730
	LTE Band 2	20M	QPSK	50	0	Back	10	Full	18900	1880	21.54	22.50	1.247	-0.13	0.491	0.612
	LTE Band 2	20M	QPSK	1	0	Left Side	10	Full	18900	1880	22.70	23.50	1.202	0.04	0.595	0.715
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Full	18900	1880	21.54	22.50	1.247	0.07	0.478	0.596
	LTE Band 2	20M	QPSK	1	0	Top Side	10	Full	18900	1880	22.70	23.50	1.202	0.13	0.311	0.374
	LTE Band 2	20M	QPSK	50	0	Top Side	10	Full	18900	1880	21.54	22.50	1.247	0.12	0.246	0.307
	LTE Band 7	20M	QPSK	1	0	Front	10	Full	21100	2535	22.84	23.50	1.164	0.01	0.321	0.374
	LTE Band 7	20M	QPSK	50	0	Front	10	Full	21100	2535	21.73	22.50	1.194	0.03	0.271	0.324
28	LTE Band 7	20M	QPSK	1	0	Back	10	Full	21100	2535	22.84	23.50	1.164	-0.03	0.512	0.596
	LTE Band 7C	20M	QPSK	1	0	Back	10	Full	21100+20902	2535+2515.2	22.31	23.50	1.315	0.09	0.336	0.442
	LTE Band 7	20M	QPSK	50	0	Back	10	Full	21100	2535	21.73	22.50	1.194	-0.02	0.410	0.490
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Full	21100	2535	22.84	23.50	1.164	0.01	0.228	0.265
	LTE Band 7	20M	QPSK	50	0	Left Side	10	Full	21100	2535	21.73	22.50	1.194	0.02	0.188	0.224
	LTE Band 7	20M	QPSK	1	0	Top Side	10	Full	21100	2535	22.84	23.50	1.164	0.08	0.381	0.444
	LTE Band 7	20M	QPSK	50	0	Top Side	10	Full	21100	2535	21.73	22.50	1.194	0.05	0.320	0.382

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.01	0.224	0.282
	LTE Band 41	20M	QPSK	50	0	Front	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.03	0.175	0.223
29	LTE Band 41	20M	QPSK	1	0	Back	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.08	0.326	0.410
	LTE Band 41	20M	QPSK	50	0	Back	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.04	0.265	0.338
	LTE Band 41	20M	QPSK	1	0	Left Side	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.03	0.175	0.220
	LTE Band 41	20M	QPSK	50	0	Left Side	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.01	0.139	0.177
	LTE Band 41	20M	QPSK	1	0	Top Side	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.05	0.260	0.327
	LTE Band 41	20M	QPSK	50	0	Top Side	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.05	0.206	0.263



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	Full	11	2462	18.40	19.00	1.148	100	1.000	0.03	0.265	0.304
30	WLAN2.4GHz	802.11b 1Mbps	Back	10	Full	11	2462	18.40	19.00	1.148	100	1.000	-0.09	0.348	0.400
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	Full	11	2462	18.40	19.00	1.148	100	1.000	-0.09	0.042	0.048
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	Full	11	2462	18.40	19.00	1.148	100	1.000	0.03	0.143	0.164

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	-0.01	0.102	0.128
31	WLAN5.2GHz	802.11n-HT40 MCS0	Back	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	-0.09	0.330	0.414
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	-0.08	0.075	0.094
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	0.07	0.306	0.384
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	0.03	0.129	0.180
	WLAN5.8GHz	802.11n-HT40 MCS0	Back	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	-0.09	0.360	0.502
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Side	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	-0.01	0.165	0.230
32	WLAN5.8GHz	802.11n-HT40 MCS0	Top Side	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	-0.04	0.507	0.707

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
33	Bluetooth	1Mbps	Back	10	Full	0	2402	9.07	9.50	1.104	76.7	1.086	-0.03	0.037	0.044

14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Full	128	824.2	32.53	33.50	1.250	0.02	0.493	0.616
34	GSM850	GPRS 4 Tx slots	Back	10	Full	128	824.2	32.53	33.50	1.250	0.04	0.529	0.661
	GSM1900	GPRS 4 Tx slots	Front	10	Full	810	1909.8	28.72	29.00	1.067	0.09	0.495	0.528
	GSM1900	GPRS 4 Tx slots	Back	10	Full	810	1909.8	28.72	29.00	1.067	-0.05	0.864	0.922
	GSM1900	GPRS 4 Tx slots	Back	10	Full	512	1850.2	28.53	29.00	1.114	-0.08	0.794	0.885
35	GSM1900	GPRS 4 Tx slots	Back	10	Full	661	1880	28.42	29.00	1.143	-0.09	0.858	0.981

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	Full	4132	826.4	23.71	24.00	1.069	0.02	0.101	0.108
36	WCDMA Band V	RMC 12.2Kbps	Back	10	Full	4132	826.4	23.71	24.00	1.069	-0.03	0.237	0.253
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Full	1513	1752.6	23.99	24.00	1.002	-0.01	0.602	0.603
37	WCDMA Band IV	RMC 12.2Kbps	Back	10	Full	1513	1752.6	23.99	24.00	1.002	-0.14	0.698	0.700
	WCDMA Band II	RMC 12.2Kbps	Front	10	Full	9538	1907.6	23.81	24.00	1.045	0.08	0.546	0.570
38	WCDMA Band II	RMC 12.2Kbps	Back	10	Full	9538	1907.6	23.81	24.00	1.045	0.01	0.868	0.907

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	10	Full	23095	707.5	22.24	23.50	1.337	0.02	0.100	0.134
	LTE Band 12	10M	QPSK	25	0	Front	10	Full	23095	707.5	21.32	22.50	1.312	0.05	0.085	0.112
39	LTE Band 12	10M	QPSK	1	0	Back	10	Full	23095	707.5	22.24	23.50	1.337	-0.1	0.118	0.158
	LTE Band 12	10M	QPSK	25	0	Back	10	Full	23095	707.5	21.32	22.50	1.312	0.02	0.104	0.136
	LTE Band 13	10M	QPSK	1	0	Front	10	Full	23230	782	23.29	23.50	1.050	0.01	0.149	0.156
	LTE Band 13	10M	QPSK	25	12	Front	10	Full	23230	782	22.25	22.50	1.059	0.02	0.122	0.129
40	LTE Band 13	10M	QPSK	1	0	Back	10	Full	23230	782	23.29	23.50	1.050	-0.01	0.178	0.187
	LTE Band 13	10M	QPSK	25	12	Back	10	Full	23230	782	22.25	22.50	1.059	0.02	0.141	0.149
	LTE Band 26	15M	QPSK	1	0	Front	10	Full	26865	831.5	22.39	23.50	1.291	-0.06	0.162	0.209
	LTE Band 26	15M	QPSK	36	0	Front	10	Full	26865	831.5	21.35	22.50	1.303	0.02	0.136	0.177
41	LTE Band 26	15M	QPSK	1	0	Back	10	Full	26865	831.5	22.39	23.50	1.291	-0.03	0.170	0.220
	LTE Band 26	15M	QPSK	36	0	Back	10	Full	26865	831.5	21.35	22.50	1.303	0.02	0.142	0.185
	LTE Band 4	20M	QPSK	1	0	Front	10	Full	20175	1732.5	22.53	23.50	1.250	0.03	0.277	0.346
	LTE Band 4	20M	QPSK	50	0	Front	10	Full	20175	1732.5	21.76	22.50	1.186	0.04	0.235	0.279
42	LTE Band 4	20M	QPSK	1	0	Back	10	Full	20175	1732.5	22.53	23.50	1.250	-0.17	0.428	0.535
	LTE Band 4	20M	QPSK	50	0	Back	10	Full	20175	1732.5	21.76	22.50	1.186	0.02	0.347	0.411



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10	Full	18900	1880	22.70	23.50	1.202	0.02	0.473	0.569
	LTE Band 2	20M	QPSK	50	0	Front	10	Full	18900	1880	21.54	22.50	1.247	-0.01	0.369	0.460
43	LTE Band 2	20M	QPSK	1	0	Back	10	Full	18900	1880	22.70	23.50	1.202	-0.09	0.607	0.730
	LTE Band 2	20M	QPSK	50	0	Back	10	Full	18900	1880	21.54	22.50	1.247	-0.13	0.491	0.612
	LTE Band 7	20M	QPSK	1	0	Front	10	Full	21100	2535	22.84	23.50	1.164	0.01	0.321	0.374
	LTE Band 7	20M	QPSK	50	0	Front	10	Full	21100	2535	21.73	22.50	1.194	0.03	0.271	0.324
44	LTE Band 7	20M	QPSK	1	0	Back	10	Full	21100	2535	22.84	23.50	1.164	-0.03	0.512	0.596
	LTE Band 7C	20M	QPSK	1	0	Back	10	Full	21100+20902	2535+2515.2	22.31	23.50	1.315	0.09	0.336	0.442
	LTE Band 7	20M	QPSK	50	0	Back	10	Full	21100	2535	21.73	22.50	1.194	-0.02	0.410	0.490

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.01	0.224	0.282
	LTE Band 41	20M	QPSK	50	0	Front	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.03	0.175	0.223
45	LTE Band 41	20M	QPSK	1	0	Back	10	Full	40670	2598	22.53	23.50	1.250	62.9	1.006	0.08	0.326	0.410
	LTE Band 41	20M	QPSK	50	0	Back	10	Full	40670	2598	21.47	22.50	1.268	62.9	1.006	0.04	0.265	0.338

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	Full	11	2462	18.40	19.00	1.148	100	1.000	0.03	0.265	0.304
46	WLAN2.4GHz	802.11b 1Mbps	Back	10	Full	11	2462	18.40	19.00	1.148	100	1.000	-0.09	0.348	0.400

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	-0.01	0.102	0.128
47	WLAN5.2GHz	802.11n-HT40 MCS0	Back	10	Full	46	5230	16.94	17.50	1.138	90.78	1.102	-0.09	0.330	0.414
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	10	Full	54	5270	17.05	17.50	1.109	90.78	1.102	0.01	0.108	0.132
48	WLAN5.3GHz	802.11n-HT40 MCS0	Back	10	Full	54	5270	17.05	17.50	1.109	90.78	1.102	-0.09	0.384	0.469
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	10	Full	110	5550	16.58	17.50	1.236	90.78	1.102	0.01	0.113	0.154
49	WLAN5.5GHz	802.11n-HT40 MCS0	Back	10	Full	110	5550	16.58	17.50	1.236	90.78	1.102	-0.09	0.370	0.504
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	0.03	0.129	0.180
50	WLAN5.8GHz	802.11n-HT40 MCS0	Back	10	Full	159	5795	16.48	17.50	1.265	90.78	1.102	-0.09	0.360	0.502

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
51	Bluetooth	1Mbps	Back	10	Full	0	2402	9.07	9.50	1.104	76.7	1.086	-0.03	0.037	0.044



14.4 Product specific 10g SAR

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0	Full	54	5270	17.05	17.50	1.109	90.78	1.102	0.01	0.271	0.331
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0	Full	54	5270	17.05	17.50	1.109	90.78	1.102	0.01	0.543	0.664
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0	Full	54	5270	17.05	17.50	1.109	90.78	1.102	-0.05	0.196	0.24
52	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0	Full	54	5270	17.05	17.50	1.109	90.78	1.102	0.04	0.807	0.986
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0	Full	110	5550	16.58	17.50	1.236	90.78	1.102	0.01	0.291	0.396
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0	Full	110	5550	16.58	17.50	1.236	90.78	1.102	0.06	0.715	0.974
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0	Full	110	5550	16.58	17.50	1.236	90.78	1.102	0	0.203	0.276
53	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0	Full	110	5550	16.58	17.50	1.236	90.78	1.102	0.09	1.030	1.403



14.5 Repeated SAR Measurement

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Reduced	1413	1638	17.55	18.50	1.245	-	1.000	0.05	0.851	1	1.059
2nd	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Reduced	1413	1638	17.55	18.50	1.245	-	1.000	-0.02	0.849	1.002	1.057
1st	LTE Band 7	-	20M	QPSK	1	0	Right Tilted	0	Reduced	21100	2535	18.88	19.00	1.028	-	1.000	0.03	0.876	1	0.901
2nd	LTE Band 7	-	20M	QPSK	1	0	Right Tilted	0	Reduced	21100	2535	18.88	19.00	1.028	-	1.000	-0.02	0.871	1.006	0.895
1st	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.15	1.010	1	1.022
2nd	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Left Cheek	0	Reduced	11	2462	16.45	16.50	1.012	100	1.000	-0.01	0.988	1.022	0.999
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	10	Full	9538	1907.6	23.81	24.00	1.045	-	1.000	0.01	0.868	1	0.907
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Back	10	Full	9538	1907.6	23.81	24.00	1.045	-	1.000	-0.03	0.867	1.001	0.906

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		Yes
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + Bluetooth	Yes	Yes		Yes
14.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
15.	WCDMA+ Bluetooth	Yes	Yes	Yes	Yes
16.	LTE + Bluetooth	Yes	Yes	Yes	Yes
17.	GSM Voice + 5.3/5.5GHz WLAN + Bluetooth	Yes	Yes		Yes
18.	GPRS/EDGE + 5.3/5.5GHz WLAN + Bluetooth	Yes	Yes		Yes
19.	WCDMA + 5.3/5.5GHz WLAN + Bluetooth	Yes	Yes		Yes
20.	LTE + 5.3/5.5GHz WLAN + Bluetooth	Yes	Yes		Yes
21.	GSM Voice + 5.2/5.8GHz WLAN + Bluetooth	Yes	Yes		Yes
22.	GPRS/EDGE + 5.2/5.8GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
23.	WCDMA + 5.2/5.8GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
24.	LTE + 5.2/5.8GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
25.	5.3/5.5GHz WLAN + Bluetooth	Yes	Yes		Yes
26.	5.2/5.8GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), and LTE supports VoLTE function.
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WWAN A antenna 1 and WWAN antenna 2 can't transmit simultaneously.
- This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- WLAN 5GHz can transmit simultaneously with Bluetooth.
- This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- For Bluetooth SAR testing only perform the worst position of WLAN, so other position use this SAR value to do co-located with WWAN analysis.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- The reported SAR summation is calculated based on the same configuration and test position
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.649	0.495	0.417	0.015	1.14	1.08
		Right Tilted	0.320	0.433	0.501	0.095	0.75	0.92
		Left Cheek	0.445	1.022	0.618	0.095	1.47	1.16
		Left Tilted	0.230	0.918	0.753	0.095	1.15	1.08
	GSM1900	Right Cheek	0.890	0.495	0.417	0.015	1.39	1.32
		Right Tilted	0.300	0.433	0.501	0.095	0.73	0.90
		Left Cheek	0.162	1.022	0.618	0.095	1.18	0.88
		Left Tilted	0.157	0.918	0.753	0.095	1.08	1.01
WCDMA	Band II	Right Cheek	1.042	0.495	0.417	0.015	1.54	1.47
		Right Tilted	0.524	0.433	0.501	0.095	0.96	1.12
		Left Cheek	0.468	1.022	0.618	0.095	1.49	1.18
		Left Tilted	0.402	0.918	0.753	0.095	1.32	1.25
	Band IV	Right Cheek	1.059	0.495	0.417	0.015	1.55	1.49
		Right Tilted	0.538	0.433	0.501	0.095	0.97	1.13
		Left Cheek	0.446	1.022	0.618	0.095	1.47	1.16
		Left Tilted	0.378	0.918	0.753	0.095	1.30	1.23
	Band V	Right Cheek	0.310	0.495	0.417	0.015	0.81	0.74
		Right Tilted	0.231	0.433	0.501	0.095	0.66	0.83
		Left Cheek	0.185	1.022	0.618	0.095	1.21	0.90
		Left Tilted	0.093	0.918	0.753	0.095	1.01	0.94
LTE	Band 2	Right Cheek	0.759	0.495	0.417	0.015	1.25	1.19
		Right Tilted	0.503	0.433	0.501	0.095	0.94	1.10
		Left Cheek	0.504	1.022	0.618	0.095	1.53	1.22
		Left Tilted	0.368	0.918	0.753	0.095	1.29	1.22
	Band 4	Right Cheek	0.923	0.495	0.417	0.015	1.42	1.36
		Right Tilted	0.504	0.433	0.501	0.095	0.94	1.10
		Left Cheek	0.496	1.022	0.618	0.095	1.52	1.21
		Left Tilted	0.390	0.918	0.753	0.095	1.31	1.24
	Band 7	Right Cheek	0.883	0.495	0.417	0.015	1.38	1.32
		Right Tilted	0.901	0.433	0.501	0.095	1.33	1.50
		Left Cheek	0.436	1.022	0.618	0.095	1.46	1.15
		Left Tilted	0.531	0.918	0.753	0.095	1.45	1.38
	Band 12	Right Cheek	0.131	0.495	0.417	0.015	0.63	0.56
		Right Tilted	0.057	0.433	0.501	0.095	0.49	0.65
		Left Cheek	0.089	1.022	0.618	0.095	1.11	0.80
		Left Tilted	0.047	0.918	0.753	0.095	0.97	0.90



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 13	Right Cheek	0.134	0.495	0.417	0.015	0.63	0.57
		Right Tilted	0.061	0.433	0.501	0.095	0.49	0.66
		Left Cheek	0.080	1.022	0.618	0.095	1.10	0.79
		Left Tilted	0.047	0.918	0.753	0.095	0.97	0.90
	Band 26	Right Cheek	0.241	0.495	0.417	0.015	0.74	0.67
		Right Tilted	0.099	0.433	0.501	0.095	0.53	0.70
		Left Cheek	0.158	1.022	0.618	0.095	1.18	0.87
		Left Tilted	0.072	0.918	0.753	0.095	0.99	0.92
	Band 41	Right Cheek	0.796	0.495	0.417	0.015	1.29	1.23
		Right Tilted	0.943	0.433	0.501	0.095	1.38	1.54
		Left Cheek	0.334	1.022	0.618	0.095	1.36	1.05
		Left Tilted	0.514	0.918	0.753	0.095	1.43	1.36



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Front	0.616	0.304	0.180	0.044	0.92	0.84
		Back	0.661	0.400	0.502	0.044	1.06	1.21
		Left side	0.259				0.26	0.26
		Right side	0.511	0.048	0.230	0.044	0.56	0.79
		Top side		0.164	0.707	0.044	0.16	0.75
		Bottom side	0.638				0.64	0.64
	GSM1900	Front	0.528	0.304	0.180	0.044	0.83	0.75
		Back	0.981	0.400	0.502	0.044	1.38	1.53
		Left side	0.449				0.45	0.45
		Right side		0.048	0.230	0.044	0.05	0.27
Top side		0.258	0.164	0.707	0.044	0.42	1.01	
WCDMA	Band II	Front	0.570	0.304	0.180	0.044	0.87	0.79
		Back	0.907	0.400	0.502	0.044	1.31	1.45
		Left side	0.629				0.63	0.63
		Right side		0.048	0.230	0.044	0.05	0.27
		Top side	0.411	0.164	0.707	0.044	0.58	1.16
	Band IV	Front	0.603	0.304	0.180	0.044	0.91	0.83
		Back	0.700	0.400	0.502	0.044	1.10	1.25
		Left side	0.589				0.59	0.59
		Right side		0.048	0.230	0.044	0.05	0.27
		Top side	0.341	0.164	0.707	0.044	0.51	1.09
	Band V	Front	0.108	0.304	0.180	0.044	0.41	0.33
		Back	0.253	0.400	0.502	0.044	0.65	0.80
		Left side	0.138				0.14	0.14
		Right side	0.252	0.048	0.230	0.044	0.30	0.53
		Top side		0.164	0.707	0.044	0.16	0.75
Bottom side		0.205				0.21	0.21	
LTE	Band 2	Front	0.569	0.304	0.180	0.044	0.87	0.79
		Back	0.730	0.400	0.502	0.044	1.13	1.28
		Left side	0.715				0.72	0.72
		Right side		0.048	0.230	0.044	0.05	0.27
		Top side	0.374	0.164	0.707	0.044	0.54	1.13



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 4	Front	0.346	0.304	0.180	0.044	0.65	0.57
		Back	0.535	0.400	0.502	0.044	0.94	1.08
		Left side	0.394				0.39	0.39
		Right side		0.048	0.230	0.044	0.05	0.27
		Top side	0.269	0.164	0.707	0.044	0.43	1.02
	Band 7	Front	0.374	0.304	0.180	0.044	0.68	0.60
		Back	0.596	0.400	0.502	0.044	1.00	1.14
		Left side	0.265				0.27	0.27
		Right side		0.048	0.230	0.044	0.05	0.27
		Top side	0.444	0.164	0.707	0.044	0.61	1.20
	Band 12	Front	0.134	0.304	0.180	0.044	0.44	0.36
		Back	0.158	0.400	0.502	0.044	0.56	0.70
		Left side	0.091				0.09	0.09
		Right side	0.130	0.048	0.230	0.044	0.18	0.40
		Top side		0.164	0.707	0.044	0.16	0.75
		Bottom side	0.103				0.10	0.10
	Band 13	Front	0.156	0.304	0.180	0.044	0.46	0.38
		Back	0.187	0.400	0.502	0.044	0.59	0.73
		Left side	0.179				0.18	0.18
		Right side	0.300	0.048	0.230	0.044	0.35	0.57
		Top side		0.164	0.707	0.044	0.16	0.75
		Bottom side	0.166				0.17	0.17
	Band 26	Front	0.209	0.304	0.180	0.044	0.51	0.43
		Back	0.220	0.400	0.502	0.044	0.62	0.77
		Left side	0.160				0.16	0.16
		Right side	0.267	0.048	0.230	0.044	0.32	0.54
		Top side		0.164	0.707	0.044	0.16	0.75
		Bottom side	0.267				0.27	0.27
	Band 41	Front	0.282	0.304	0.180	0.044	0.59	0.51
		Back	0.410	0.400	0.502	0.044	0.81	0.96
Left side		0.220				0.22	0.22	
Right side			0.048	0.230	0.044	0.05	0.27	
Top side		0.327	0.164	0.707	0.044	0.49	1.08	



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.616	0.304	0.180	0.044	0.92	0.84
		Back	0.661	0.400	0.504	0.044	1.06	1.21
	GSM1900	Front	0.528	0.304	0.180	0.044	0.83	0.75
		Back	0.981	0.400	0.504	0.044	1.38	1.53
WCDMA	Band II	Front	0.570	0.304	0.180	0.044	0.87	0.79
		Back	0.907	0.400	0.504	0.044	1.31	1.46
	Band IV	Front	0.603	0.304	0.180	0.044	0.91	0.83
		Back	0.700	0.400	0.504	0.044	1.10	1.25
	Band V	Front	0.108	0.304	0.180	0.044	0.41	0.33
		Back	0.253	0.400	0.504	0.044	0.65	0.80
LTE	Band 2	Front	0.569	0.304	0.180	0.044	0.87	0.79
		Back	0.730	0.400	0.504	0.044	1.13	1.28
	Band 4	Front	0.346	0.304	0.180	0.044	0.65	0.57
		Back	0.535	0.400	0.504	0.044	0.94	1.08
	Band 7	Front	0.374	0.304	0.180	0.044	0.68	0.60
		Back	0.596	0.400	0.504	0.044	1.00	1.14
	Band 12	Front	0.134	0.304	0.180	0.044	0.44	0.36
		Back	0.158	0.400	0.504	0.044	0.56	0.71
	Band 13	Front	0.156	0.304	0.180	0.044	0.46	0.38
		Back	0.187	0.400	0.504	0.044	0.59	0.74
	Band 26	Front	0.209	0.304	0.180	0.044	0.51	0.43
		Back	0.220	0.400	0.504	0.044	0.62	0.77
	Band 41	Front	0.282	0.304	0.180	0.044	0.59	0.51
		Back	0.410	0.400	0.504	0.044	0.81	0.96

Test Engineer : Nick Hu, Yuan Zhao, Jiaying Chang, Yuankai Kong



16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [8] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [9] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3 - SN:1087

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 41.153$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.58, 6.58, 6.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.64 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 49.31 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.11 W/kg ; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.67 W/kg

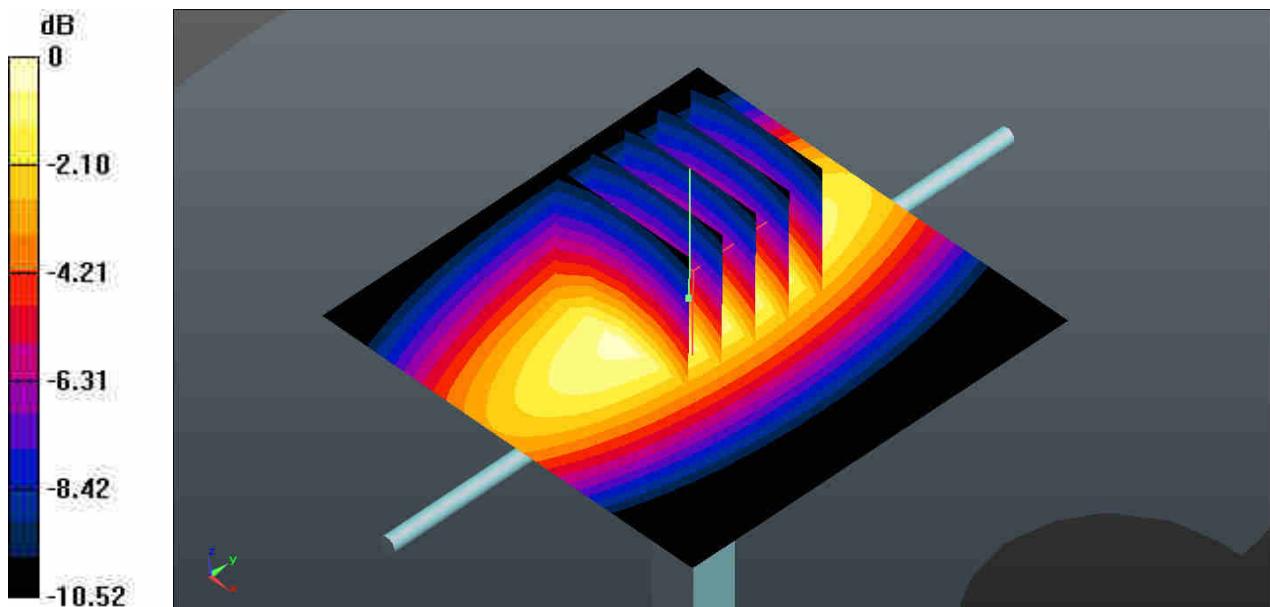

0 dB = $2.67 \text{ W/kg} = 4.27 \text{ dBW/kg}$

System Check_Head_835MHz

DUT: D835V2 - SN: 4d151

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.671$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.38, 6.38, 6.38); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.08 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.73 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 2.43 W/kg ; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 3.06 W/kg

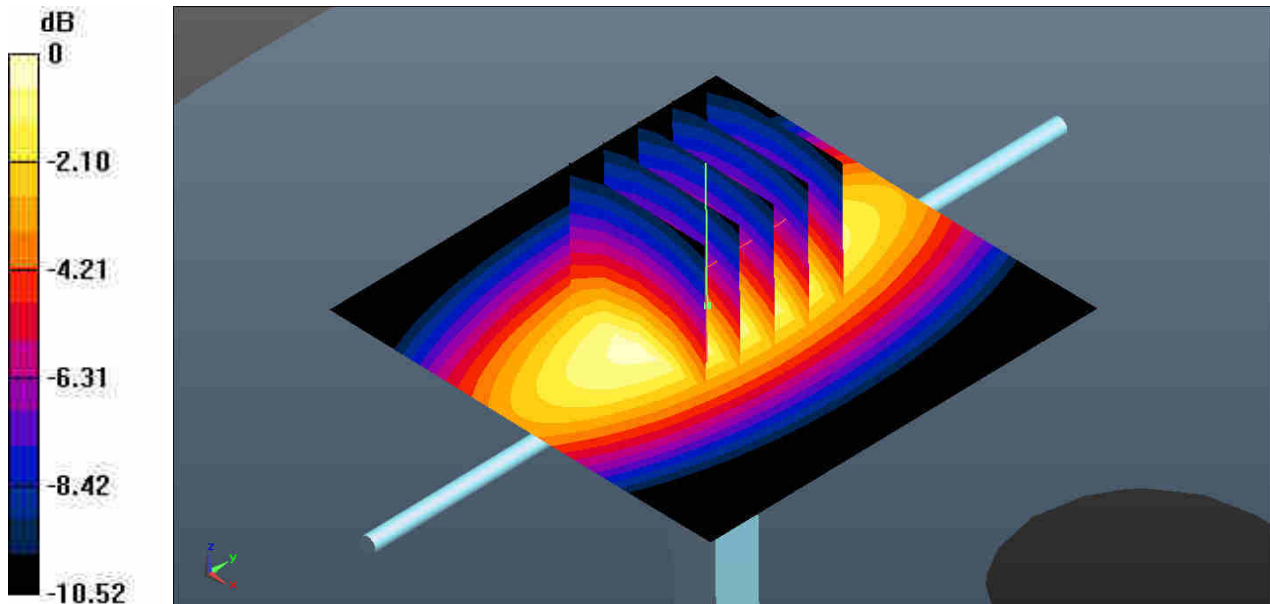

0 dB = 3.06 W/kg = 4.86 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2 - SN:1090

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 38.54$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.59, 5.59, 5.59); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.30 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 8.81 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 12.2 W/kg

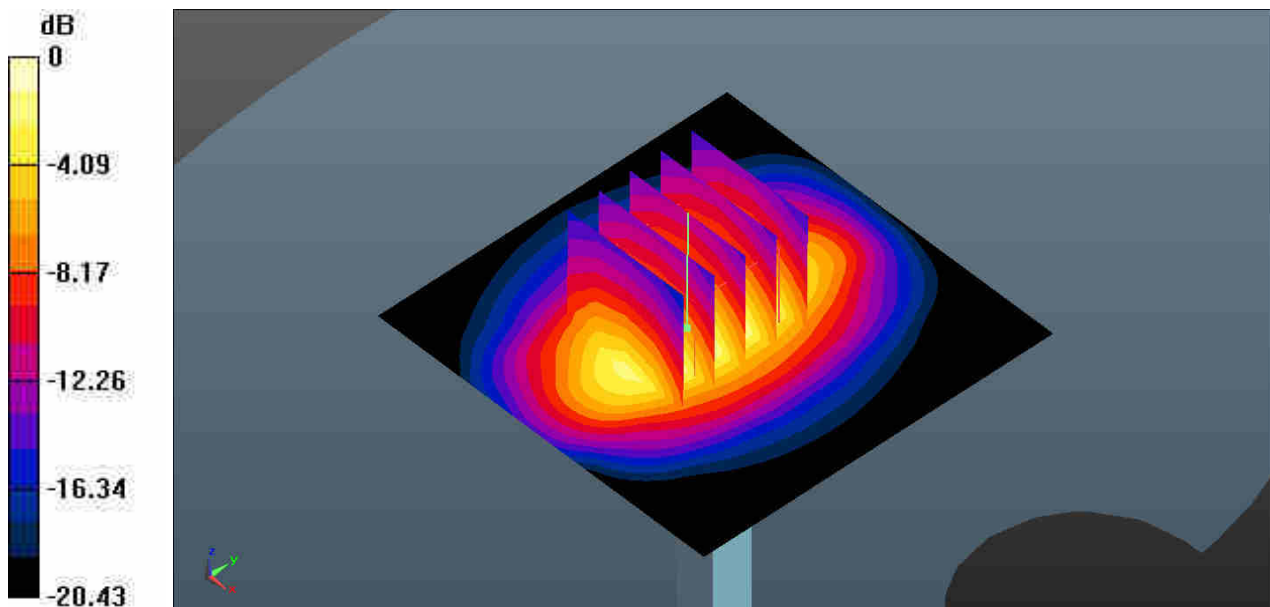

0 dB = 12.2 W/kg = 10.86 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2 - SN: 5d170

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 40.634$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 14.1 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 99.16 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.93 W/kg; SAR(10 g) = 5.23 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

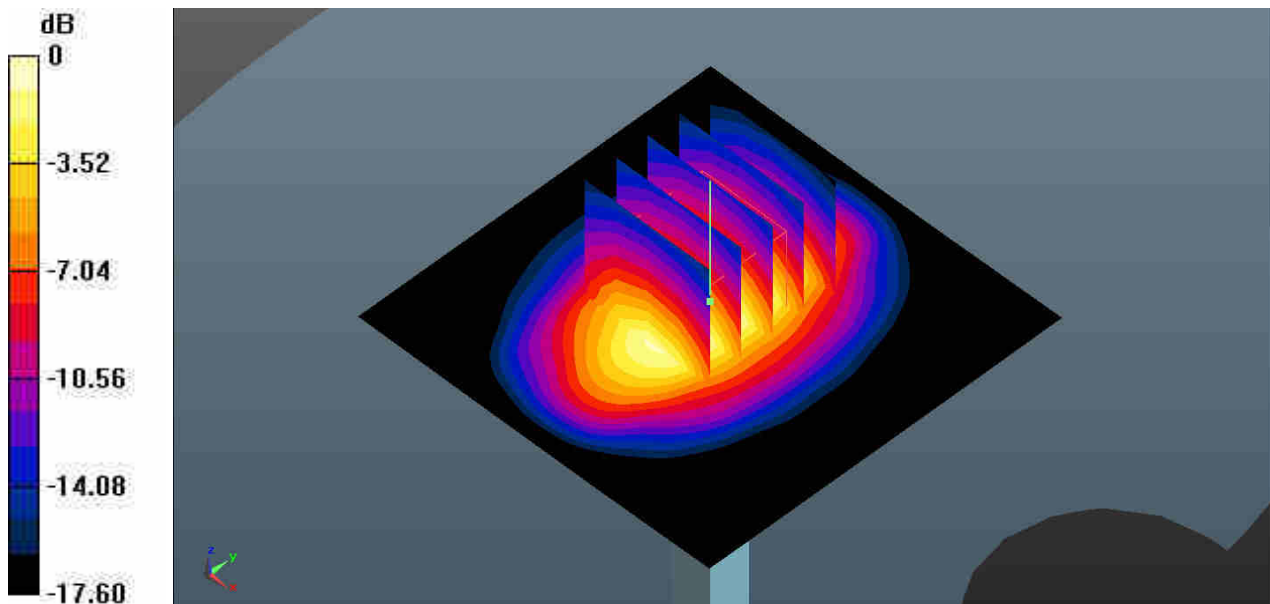

0 dB = 13.8 W/kg = 11.40 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN:908


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 40.8$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.50, 7.50, 7.50); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 17.1 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 83.31 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 19.8 W/kg
SAR(1 g) = 12.8 W/kg; SAR(10 g) = 6.08 W/kg
Maximum value of SAR (measured) = 17.0 W/kg

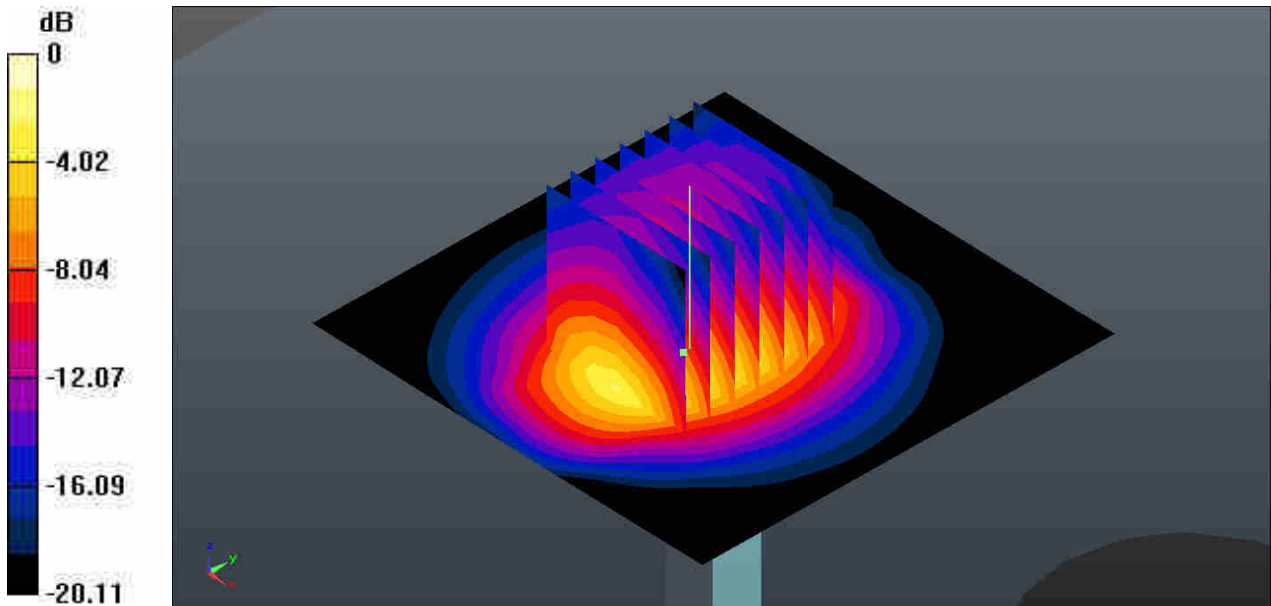

0 dB = 17.0 W/kg = 12.30 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2 - SN:1078

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.054$ S/m; $\epsilon_r = 40.197$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.58, 4.58, 4.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.4 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.60 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 34.5 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 23.3 W/kg

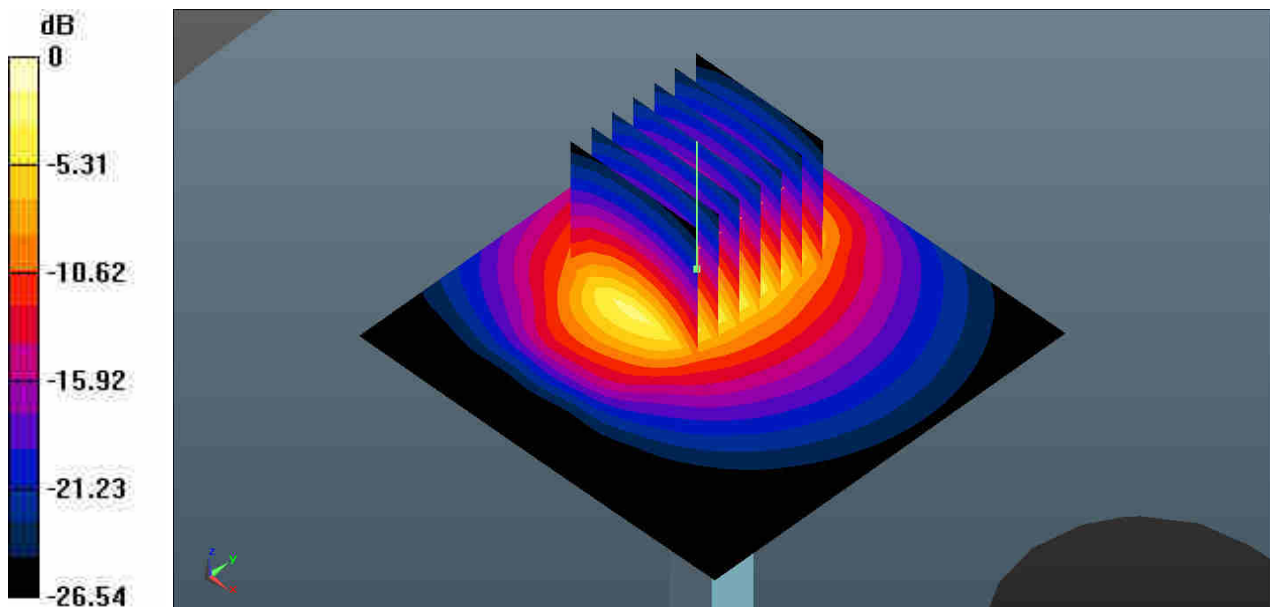

0 dB = 23.3 W/kg = 13.67 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.6$ S/m; $\epsilon_r = 36.384$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.19, 5.19, 5.19); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.6 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 43.27 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 30.4 W/kg
SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.26 W/kg
Maximum value of SAR (measured) = 18.0 W/kg

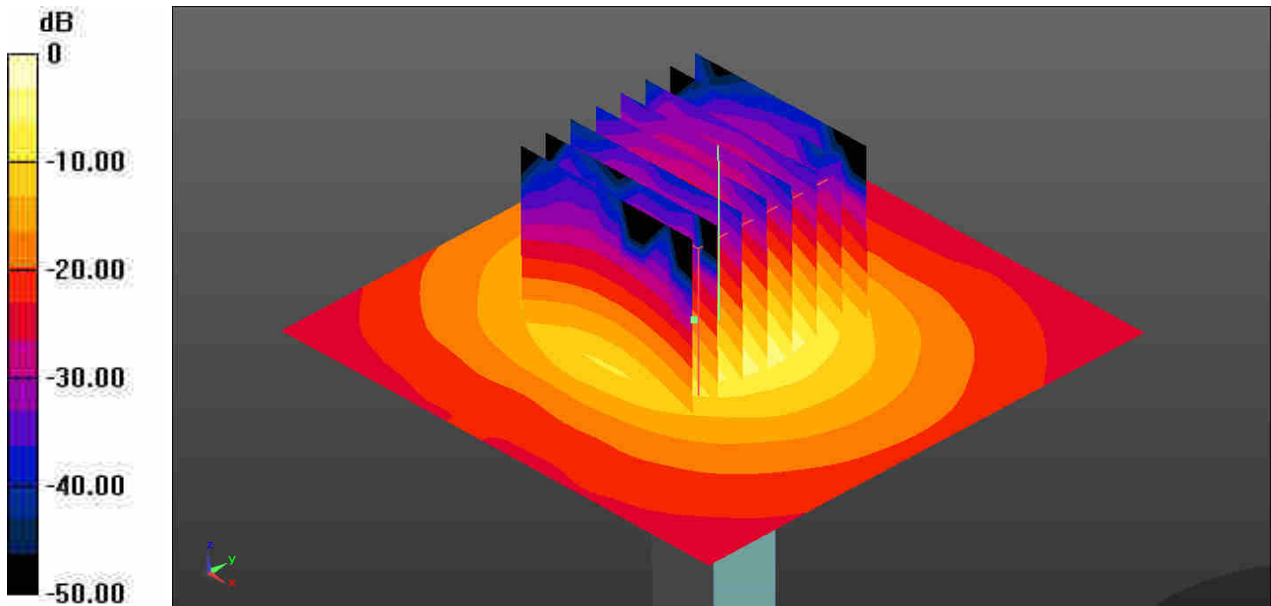

0 dB = 18.0 W/kg = 12.55 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2 - SN:1113

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 35.802$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.92, 4.92, 4.92); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.2 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.55 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

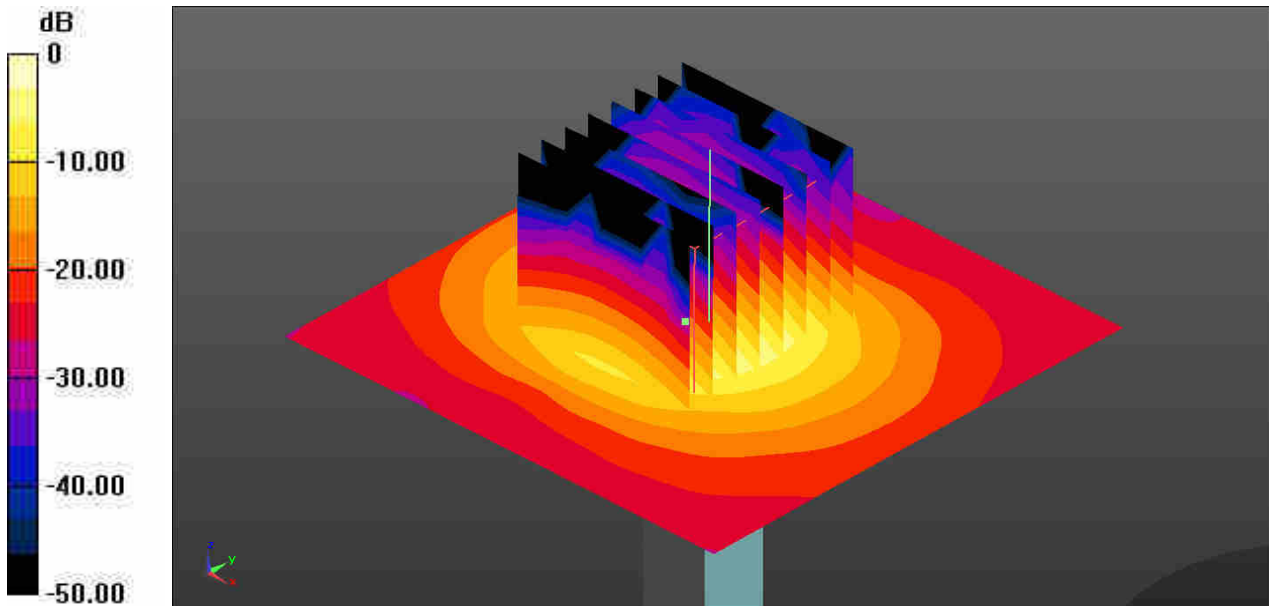

0 dB = 18.7 W/kg = 12.72 dBW/kg

System Check_Head_5750MHz

DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.167$ S/m; $\epsilon_r = 35.552$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.17, 5.17, 5.17); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 17.9 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 38.16 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.22 W/kg
Maximum value of SAR (measured) = 17.8 W/kg

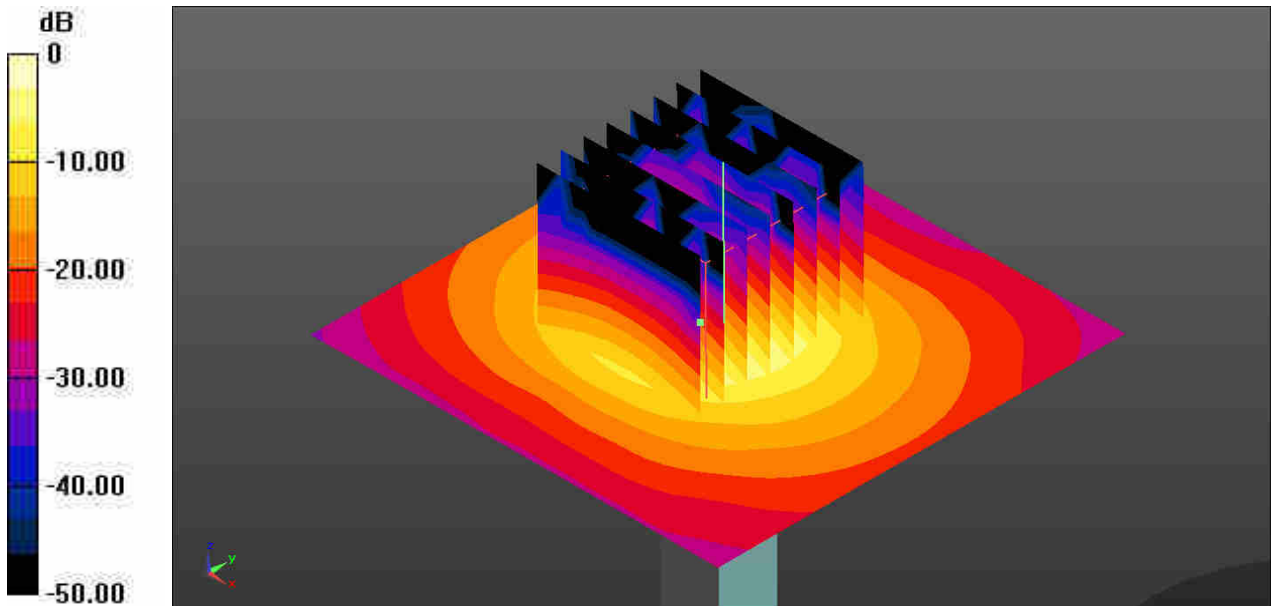

0 dB = 17.8 W/kg = 12.50 dBW/kg



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

01_GSM850_GPRS 4 Tx slots_Right Cheek_0mm_Ch128

Communication System: UID 0, GSM850 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_835 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.794$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.38, 6.38, 6.38); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch128/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.597 W/kg


Ch128/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.044 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 0.574 W/kg

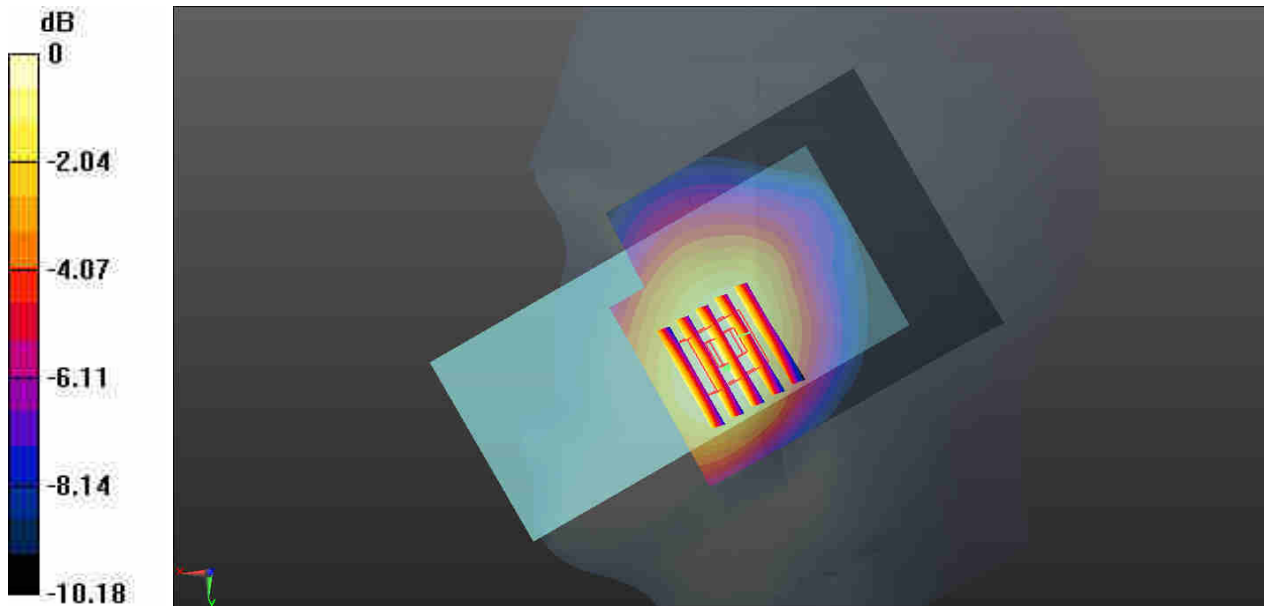

0 dB = 0.574 W/kg = -2.41 dBW/kg

02_GSM1900_GPRS 4 Tx slots_Right Cheek_0mm_Ch661

Communication System: UID 0, PCS-4UP (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch661/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.26 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.352 W/kg

Maximum value of SAR (measured) = 0.890 W/kg

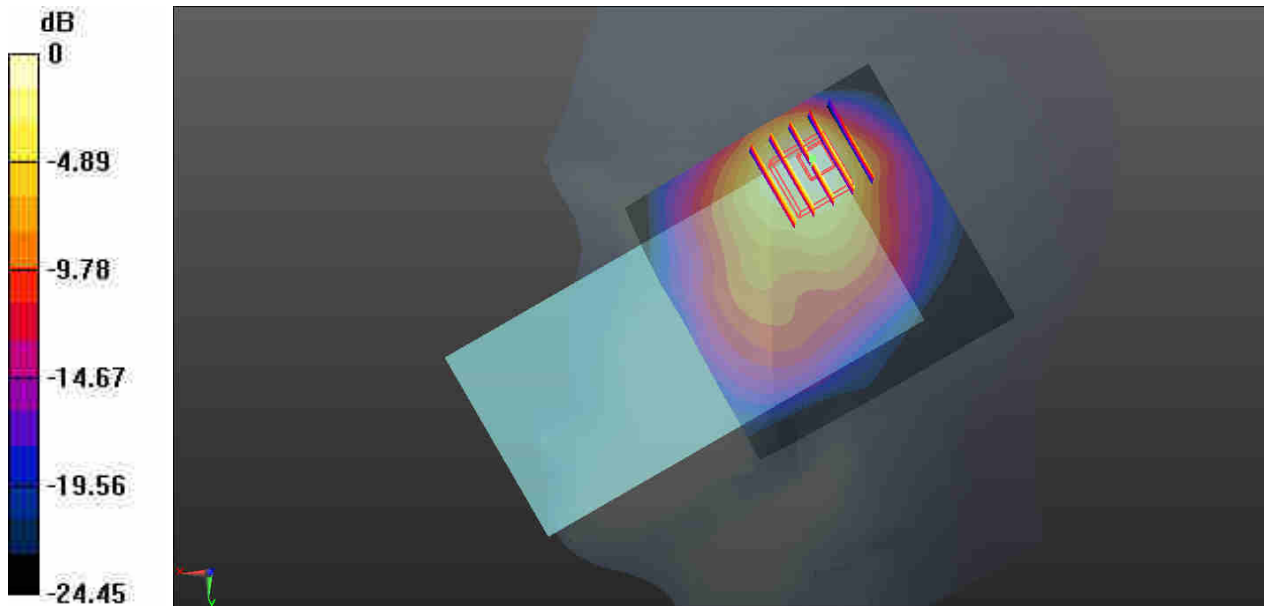

0 dB = 0.890 W/kg = -0.51 dBW/kg

03_WCDMA Band V_RMC 12.2Kbps_Right Cheek_0mm_Ch4132

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_835 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.768$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.38, 6.38, 6.38); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch4132/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.334 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.658 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

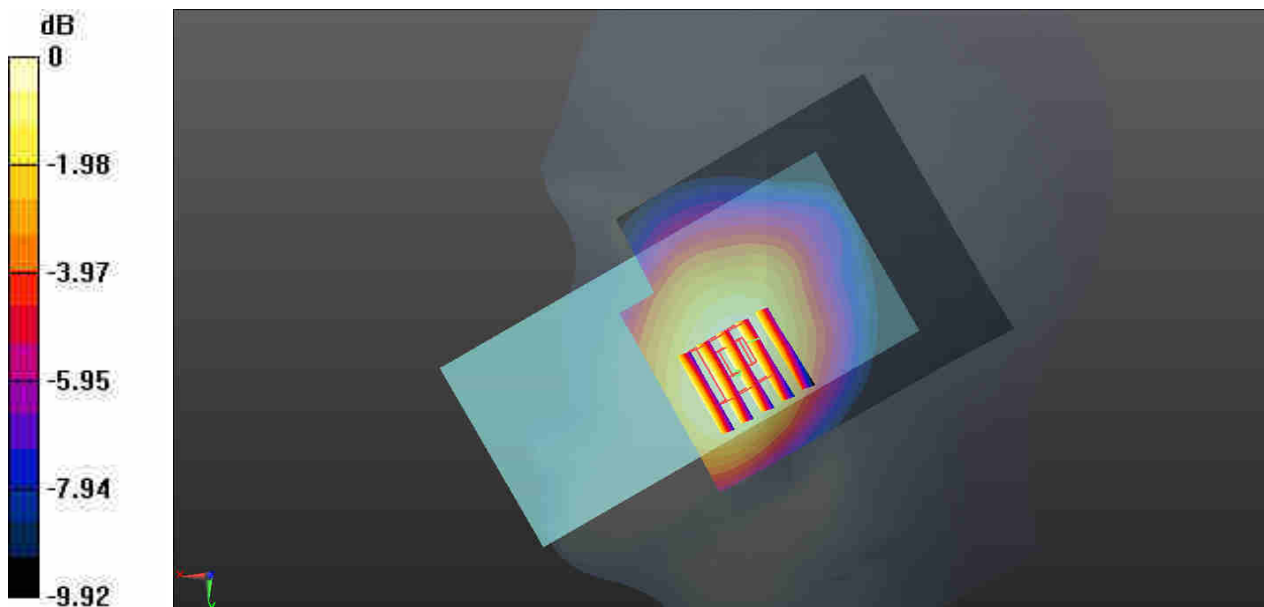

0 dB = 0.315 W/kg = -5.02 dBW/kg

04_WCDMA Band IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 38.619$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.59, 5.59, 5.59); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch1413/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.680 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.457 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

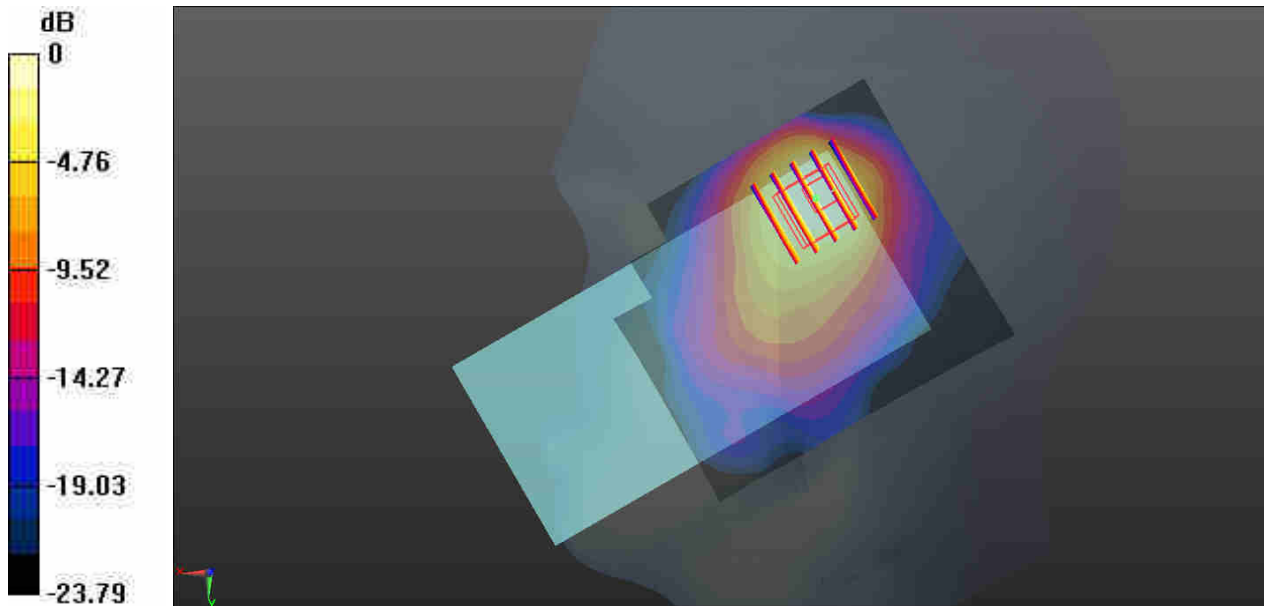

0 dB = 1.23 W/kg = 0.90 dBW/kg

05_WCDMA Band II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.82$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch9262/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


Ch9262/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.59 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.448 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

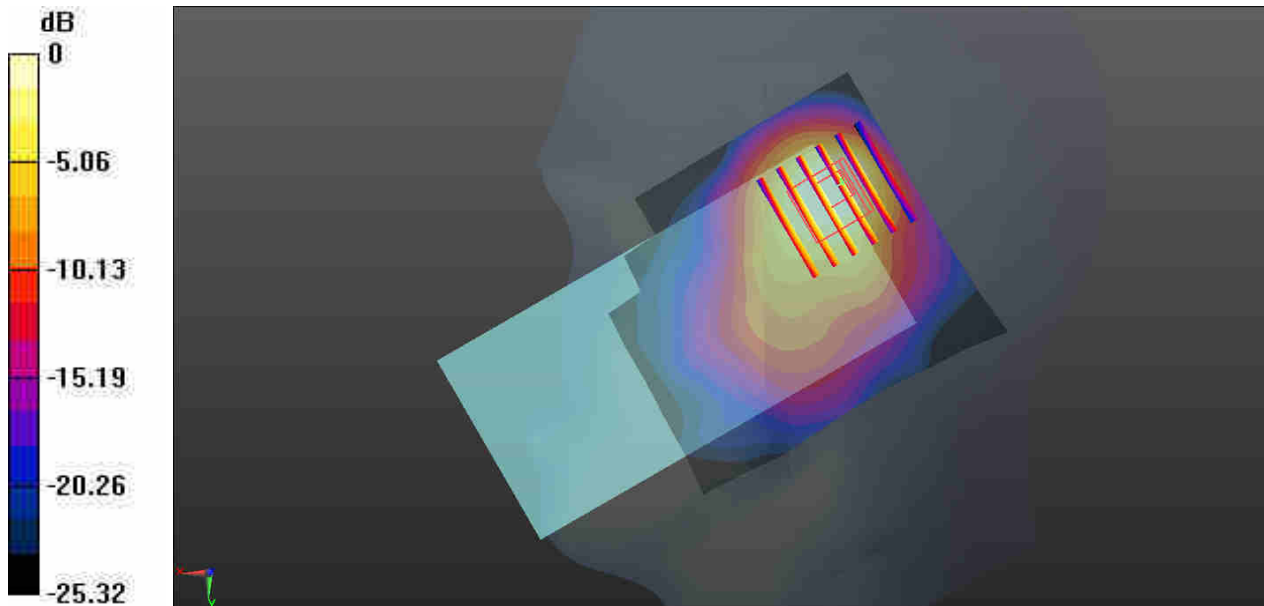

0 dB = 1.22 W/kg = 0.86 dBW/kg

06_LTE Band 12_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.831$ S/m; $\epsilon_r = 41.717$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.58, 6.58, 6.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch23095/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Ch23095/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.124 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

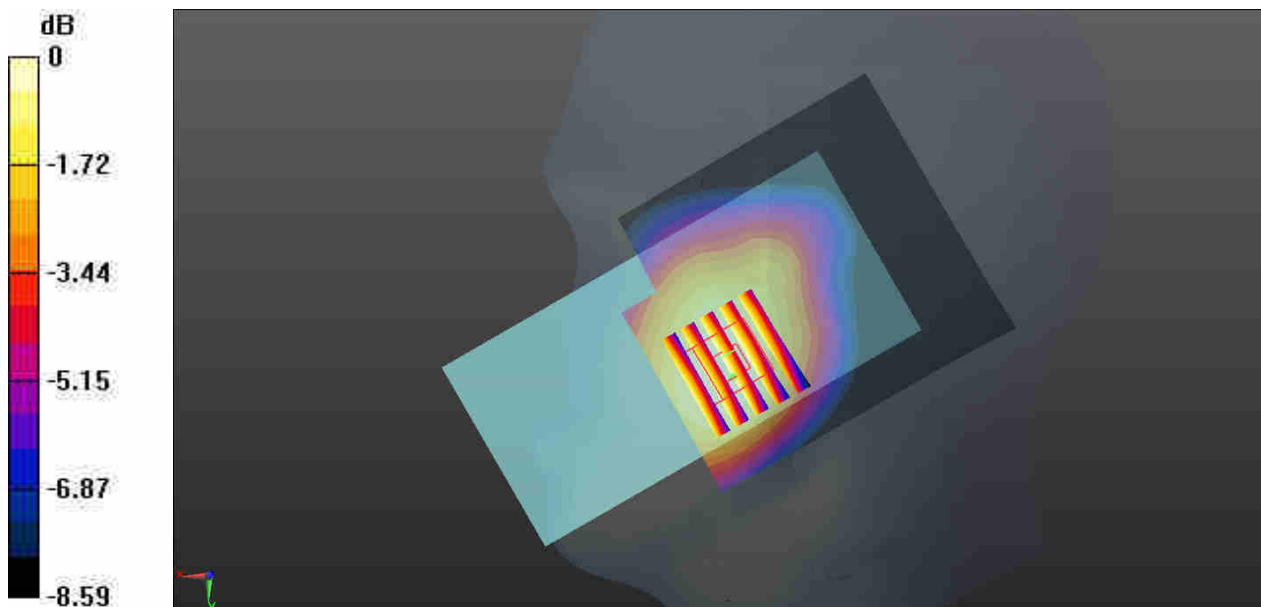

0 dB = 0.105 W/kg = -9.79 dBW/kg

07_LTE Band 13_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 40.762$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.58, 6.58, 6.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch23230/Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.139 W/kg


Ch23230/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.440 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.128 W/kg ; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

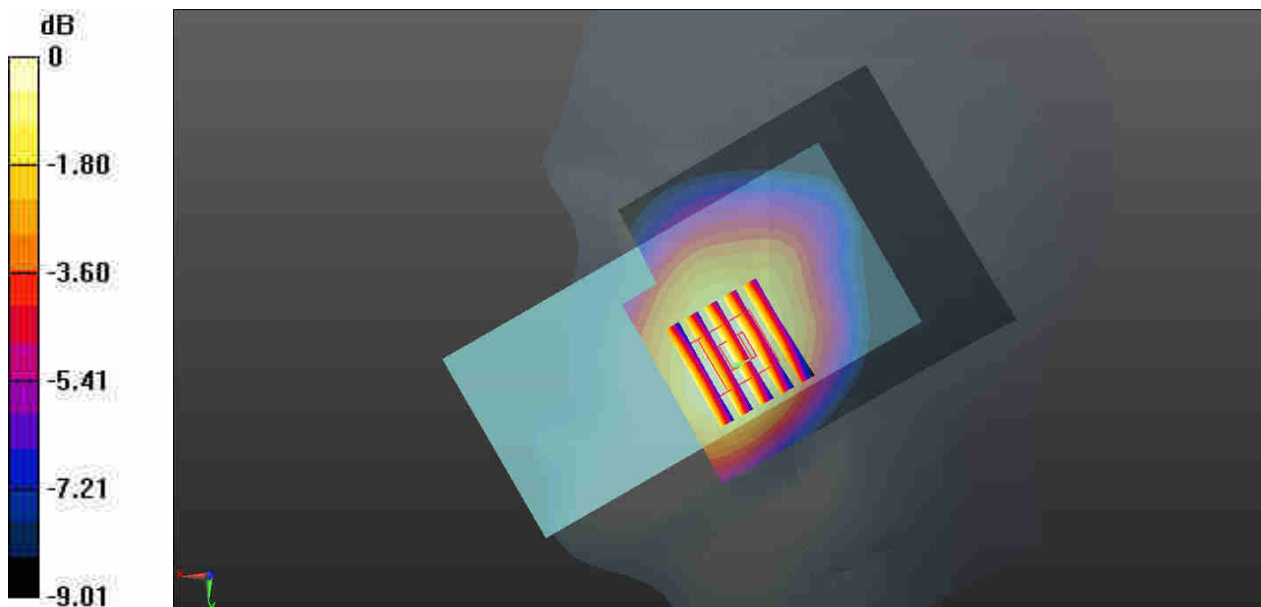

0 dB = $0.139 \text{ W/kg} = -8.57 \text{ dBW/kg}$

08_LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.712$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.38, 6.38, 6.38); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch26865/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.213 W/kg


Ch26865/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.931 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

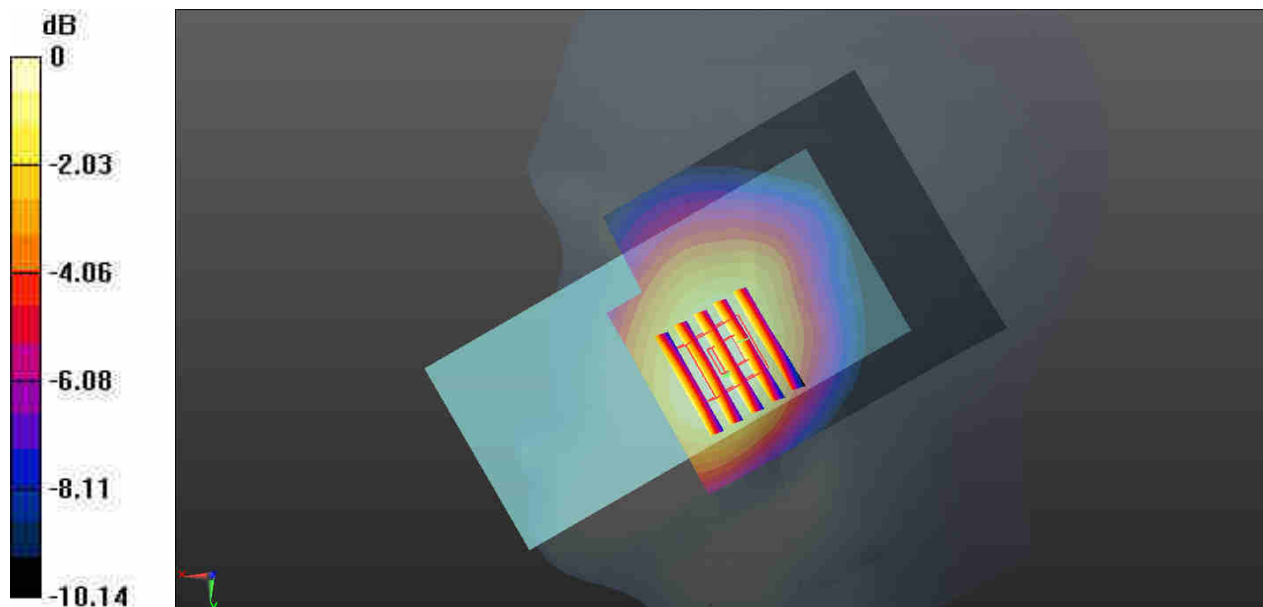

0 dB = 0.207 W/kg = -6.84 dBW/kg

09_LTE Band 4_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 38.619$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.59, 5.59, 5.59); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch20175/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.68 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 0.906 W/kg

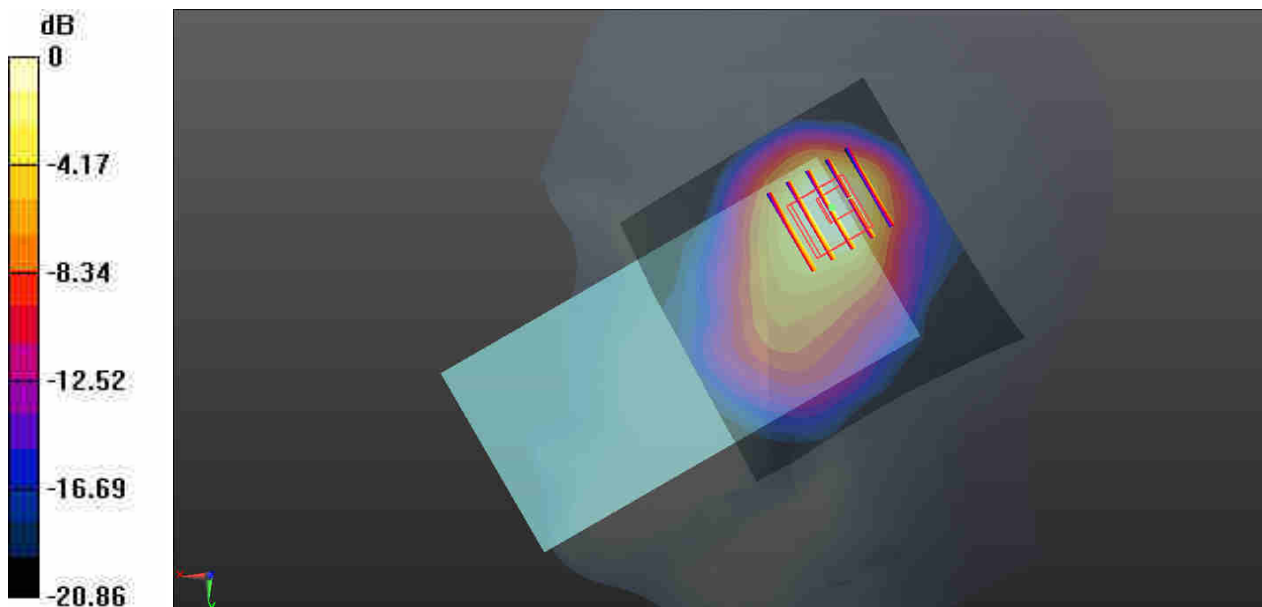

0 dB = 0.906 W/kg = -0.43 dBW/kg

10_LTE Band 2_20M_QPSK_50RB_0Offset_Right Cheek_0mm_Ch18900

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.717$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch18900/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.31 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.857 W/kg

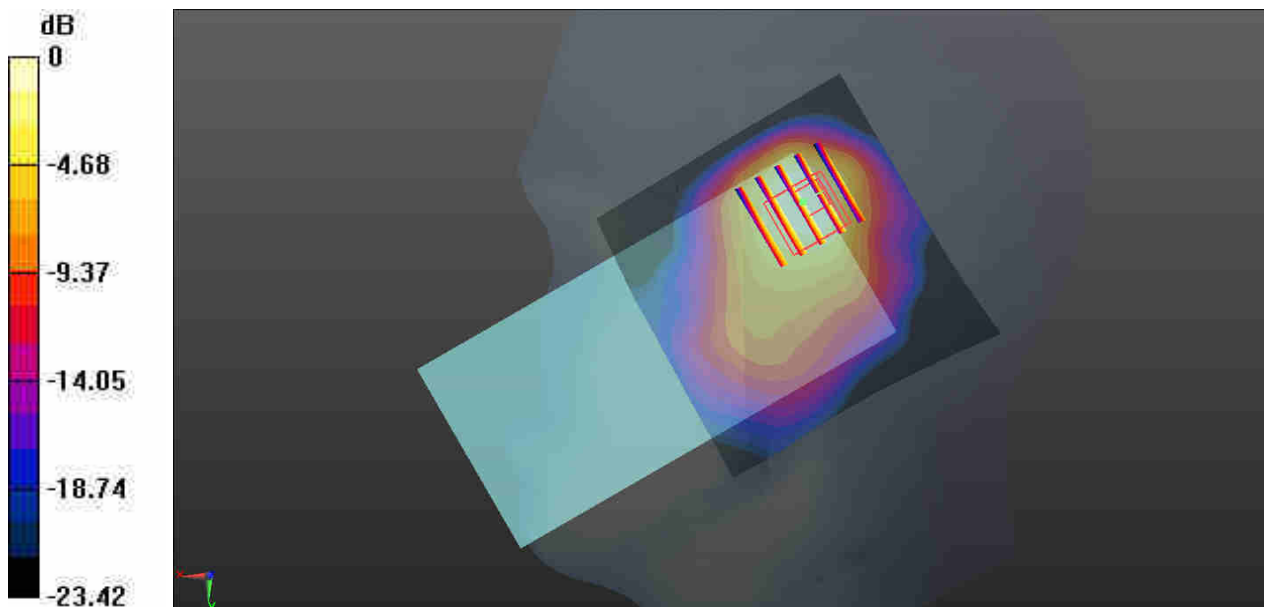

0 dB = 0.857 W/kg = -0.67 dBW/kg

11_LTE Band 7_20M_QPSK_1RB_0offset_Right Tilted_0mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 38.129$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.58, 4.58, 4.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch21100/Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.46 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

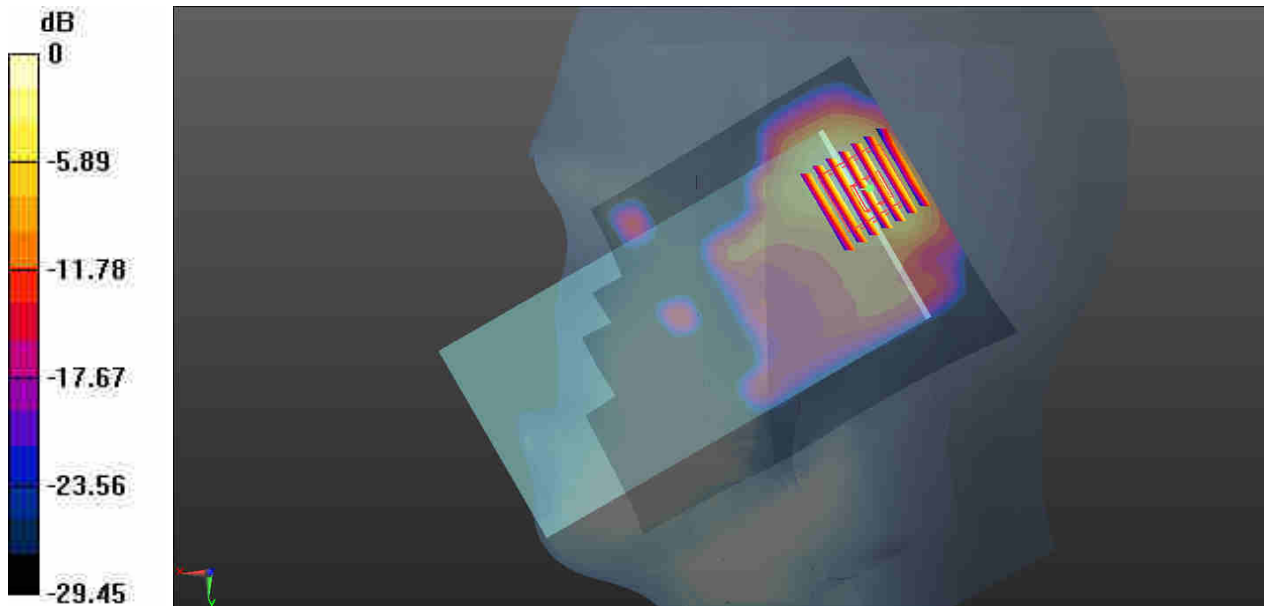

0 dB = 1.17 W/kg = 0.68 dBW/kg

12_LTE Band 41_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ch41140

Communication System: UID 0, LTE-TDD (0); Frequency: 2645 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600 Medium parameters used: $f = 2645$ MHz; $\sigma = 2.11$ S/m; $\epsilon_r = 40.007$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.58, 4.58, 4.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2019.4.17
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch41140/Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.53 W/kg


Ch41140/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.88 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

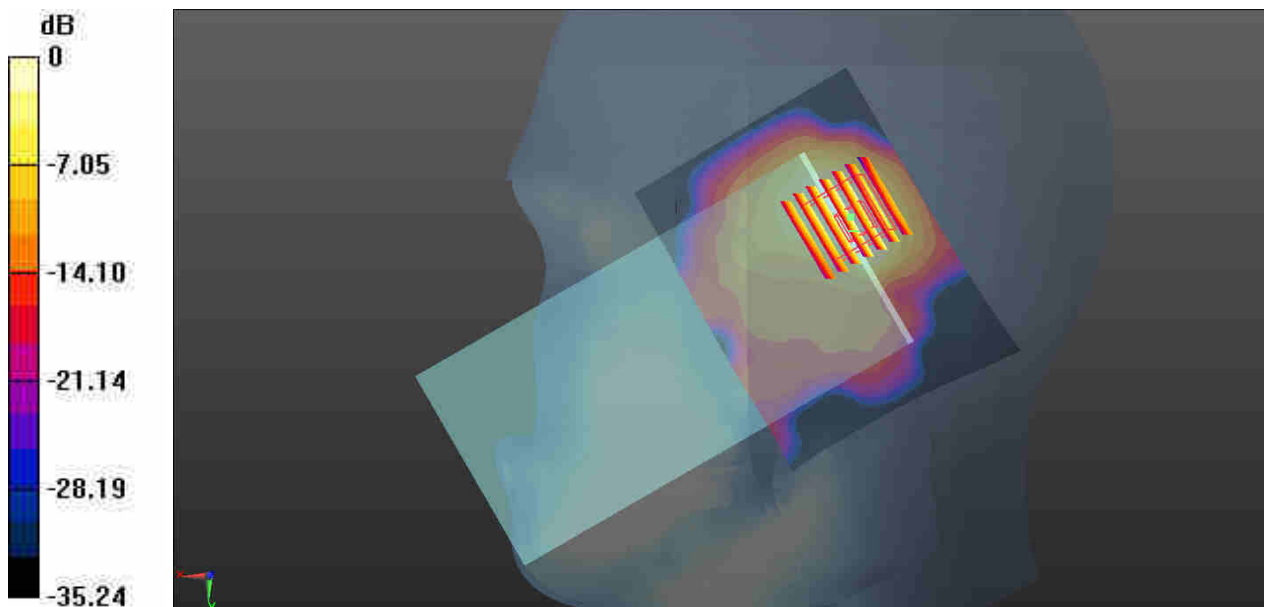

0 dB = 1.44 W/kg = 1.58 dBW/kg

13_WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 40.762$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.50, 7.50, 7.50); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch11/Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.03 W/kg


Ch11/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.62 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.583 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

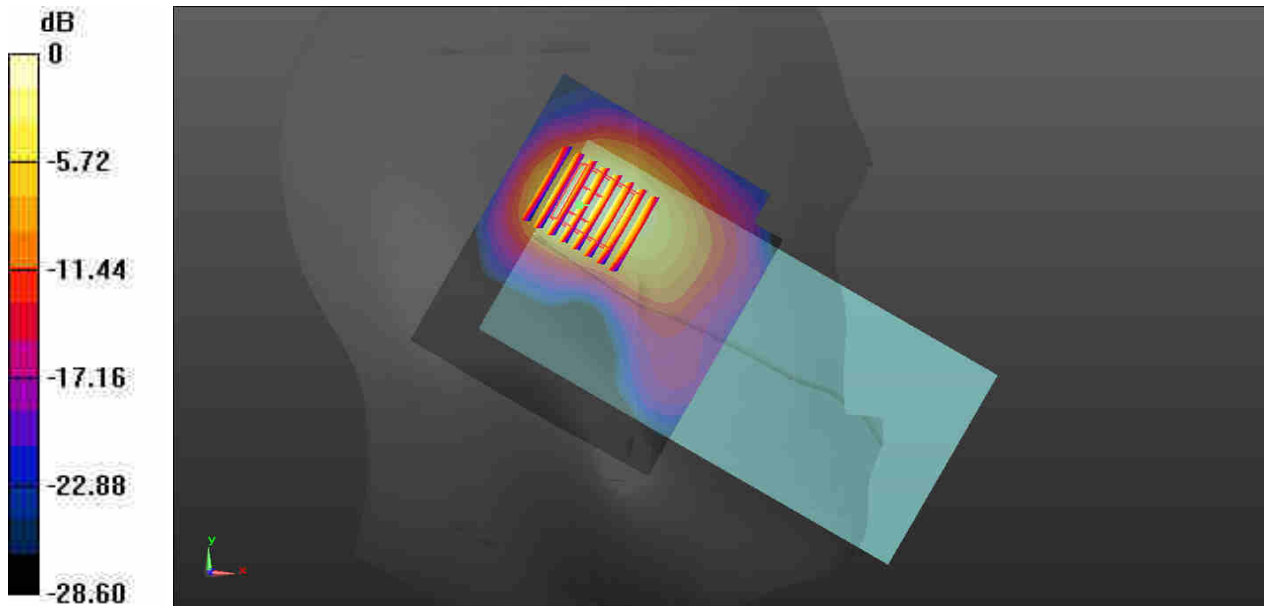

0 dB = 1.93 W/kg = 2.86 dBW/kg

14_WLAN 5.3GHz_802.11n-HT40 MCS0_Left Tilted_0mm_Ch54

Communication System: UID 0, 802.11n (0); Frequency: 5270 MHz; Duty Cycle: 1:1.102
Medium: HSL_5000 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.627$ S/m; $\epsilon_r = 36.374$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.19, 5.19, 5.19); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch54/Area Scan (111x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.966 W/kg


Ch54/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.712 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

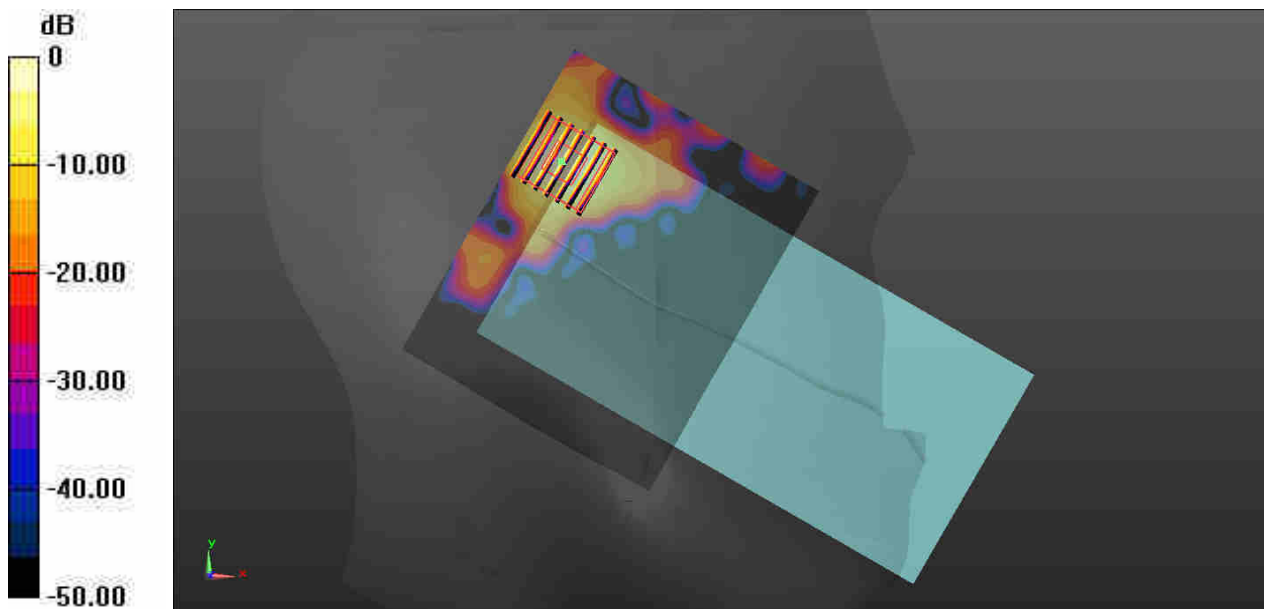

0 dB = 1.11 W/kg = 0.45 dBW/kg

15_WLAN 5.5GHz_802.11n-HT40 MCS0_Left Tilted_0mm_Ch134

Communication System: UID 0, 802.11n (0); Frequency: 5670 MHz; Duty Cycle: 1:1.102
Medium: HSL_5000 Medium parameters used: $f = 5670$ MHz; $\sigma = 5.081$ S/m; $\epsilon_r = 35.707$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.92, 4.92, 4.92); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch134/Area Scan (111x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Ch134/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.936 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

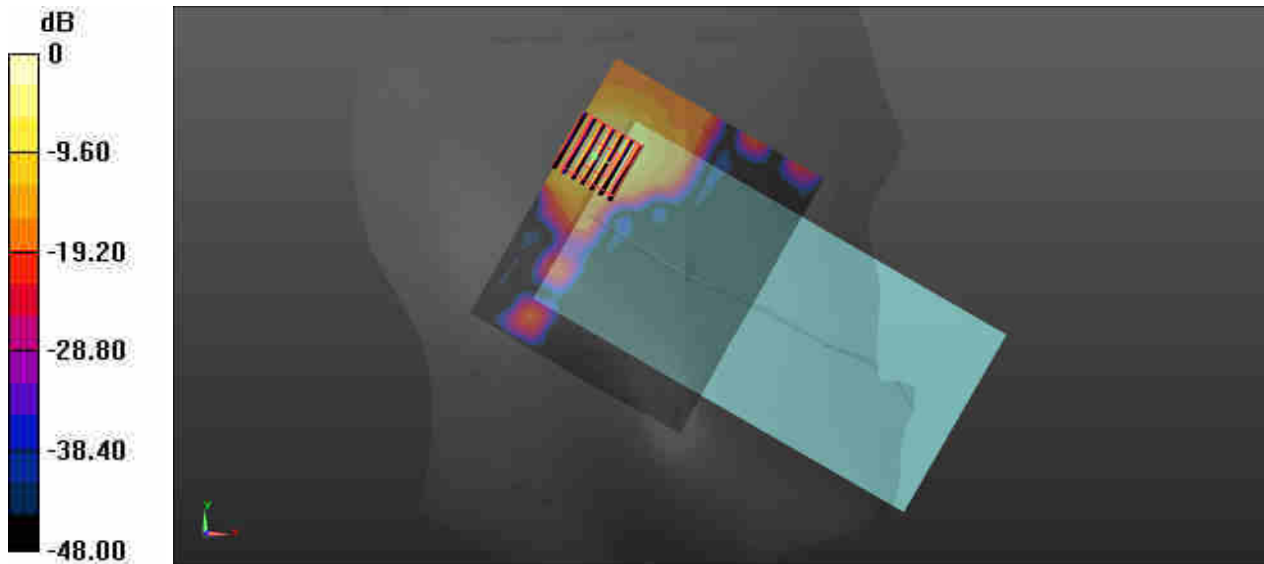

0 dB = 1.05 W/kg = 0.21 dBW/kg

16_WLAN 5.8GHz_802.11n-HT40 MCS0_Left Tilted_0mm_Ch159

Communication System: UID 0, 802.11n (0); Frequency: 5795 MHz; Duty Cycle: 1:1.102
Medium: HSL_5000 Medium parameters used: $f = 5795$ MHz; $\sigma = 5.213$ S/m; $\epsilon_r = 35.493$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.17, 5.17, 5.17); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch159/Area Scan (111x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Ch159/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.280 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

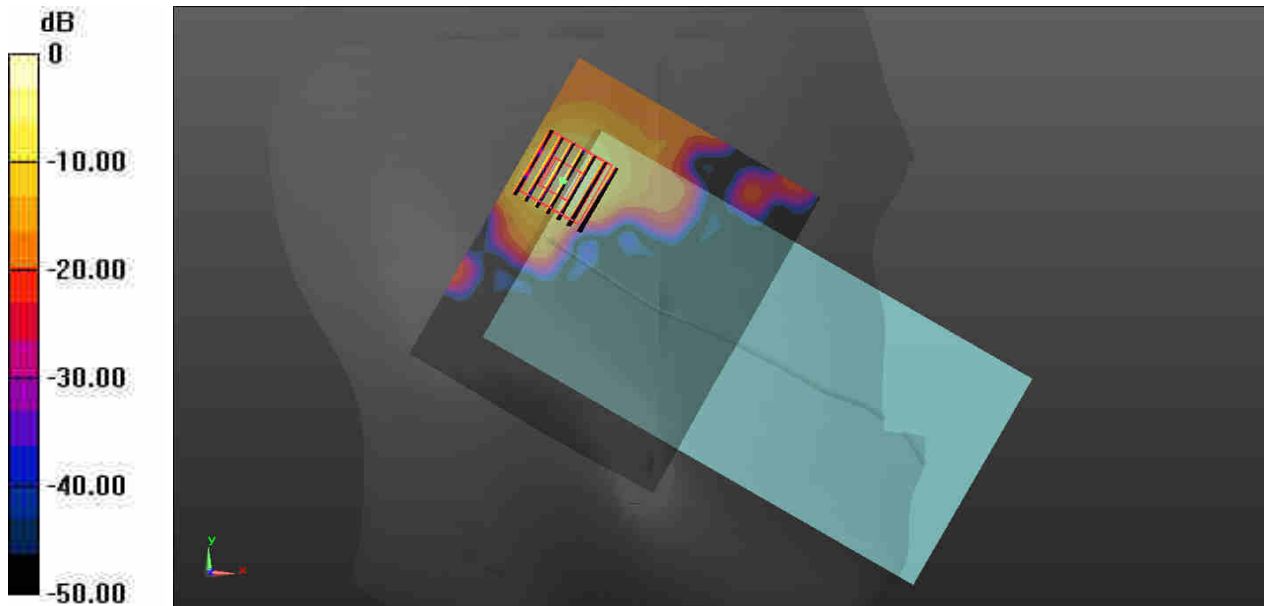

0 dB = 1.34 W/kg = 1.27 dBW/kg