

FCC TEST REPORT

FCC ID: 2AN8F-M2008Q

Product Name:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI
Trademark:	N/A
Model Number:	M2008Q EPB-ES20BK
Prepared For :	Shenzhen Mossloo Industrial Co., Ltd
Address :	Road One No.4, Science Industrial Park, Shangxue Village, Bantian Street, Longgang District, Shenzhen, China
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Aug. 10, 2020 - Aug. 21, 2020
Date of Report :	Aug. 21, 2020
Report No.:	BCTC2008000614-2E

TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1.GENERAL INFORMATION	4
1.1. Report information	4
1.2. Measurement Uncertainty.....	4
1.3. Test Facility.....	4
1.4. Test Uncertainty	4
2.PRODUCT DESCRIPTION.....	5
2.1. EUT Description	5
2.2. Test mode	5
2.3. Block Diagram of EUT Configuration.....	5
2.4. Test Conditions.....	6
2.5. Description Of Support Units (Conducted Mode).....	6
3.TEST RESULTS SUMMARY	7
4. TEST EQUIPMENT USED.....	8
4.1. For Conducted Emission Test.....	8
4.2. For Radiated Emission Measurement	8
5.CONDUCTED EMISSION TEST.....	9
5.1. Block Diagram of Test Setup.....	9
5.2. Test Standard	9
5.3. Conducted Emission Limit	9
5.4. EUT Configuration on Test.....	9
5.5. Operating Condition of EUT	10
5.6. Test Procedure	10
5.7. Test Result.....	10
6.RADIATED EMISSION MEASUREMENT	13
6.1. Block Diagram of Test Setup.....	13
6.2. Test Standard and Limit.....	14
6.3. EMI Test Receiver Setup.....	15
6.4. Test Procedure	15
6.5. Test Result.....	15
7.EUT TEST PHOTOS.....	19
8.EUT PHOTOS.....	21

TEST REPORT DECLARATION

Applicant : Shenzhen Mossloo Industrial Co., Ltd
Address : Road One No.4, Science Industrial Park, Shangxue Village,
Bantian Street, Longgang District, Shenzhen, China
EUT Description : Esquire 5000mAh Power Bank+Wireless Charger with Cable BI
Model Number : M2008Q
EPB-ES20BK
Test Model : M2008Q

Test Standards:

FCC Part 15 C

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Willem Wang

Willem Wang

Reviewer(Supervisor): Eric Yang

Eric Yang

Approved(Manager): Zero Zhou



1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

1.2. Measurement Uncertainty

Available upon request.

1.3. Test Facility

Site Description
Name of Firm : Shenzhen BCTC Testing Co., Ltd.

Site Location : BCTC Building & 1-2F, East of B Building,
Pengzhou Industrial, Fuyuan 1st Road, Qiaotou
Community, Fuyong Street, Bao'an District,
Shenzhen, China

1.4. Test Uncertainty

Conducted Emission = $\pm 2.66\text{dB}$
Uncertainty
Radiated Emission Uncertainty = $\pm 4.15\text{dB}$

2. PRODUCT DESCRIPTION

2.1.EUT Description

Description	: Esquire 5000mAh Power Bank+Wireless Charger with Cable BI
Applicant	: Shenzhen Mossloo Industrial Co., Ltd Road One No.4, Science Industrial Park, Shangxue Village, Bantian Street, Longgang District, Shenzhen, China
Manufacturer	: Shenzhen Mossloo Industrial Co., Ltd Road One No.4, Science Industrial Park, Shangxue Village, Bantian Street, Longgang District, Shenzhen, China
Model Number	: M2008Q EPB-ES20BK
Model Difference	: All the model are the same circuit and RF module, except model names .
Power Supply	: DC 3.7V From Battery USB Input: DC 5V/2A USB Ouput: DC 5V/2A Built-in Cable Output: DC 5V/2A Wireless Charging Output: 5W Total Output: 10W(Max)
Work Frequency	: 112-220KHz

2.2.Test mode


Test Modes	keeping TX+Charging mode(full load) *
Test Modes	keeping TX+Charging mode(half load)
Test Modes	keeping TX+Charging mode(null load)

Note:

All test mode were tested and passed, only Conducted Emissions, Radiated Emissions shows (*) is the worst case mode which were recorded in this report.

2.3.Block Diagram of EUT Configuration

Conducted Emission/Radiated Emission:



2.4. Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

2.5. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	N/A	M2008Q	N/A	EUT
E2	Adapter	N/A	BCTC-002	N/A	Auxiliary
E3	Dummy load	N/A	DL01	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

Remark: "N/A" means "Not applicable."

4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 08, 2020	Jun. 07, 2021
2	LISN	SCHWARZBEC K	NSLK8127	8127739	Jun. 13, 2020	Jun. 12, 2021
3	LISN	R&S	ENV216	101375	Jun. 04, 2020	Jun. 03, 2021
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	Jun. 08, 2020	Jun. 07, 2021
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 08, 2020	Jun. 07, 2021
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 08, 2020	Jun. 07, 2021
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	Jun. 08, 2020	Jun. 07, 2021
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Jun. 10, 2020	Jun. 09, 2021
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	822	Jun. 10, 2020	Jun. 09, 2021
6	Amplifier (9kHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	Jun. 04, 2020	Jun. 03, 2021
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	Jun. 04, 2020	Jun. 03, 2021
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35- HG	2034381	Jun. 08, 2020	Jun. 07, 2021
9	Loop Antenna (9kHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Jun. 08, 2020	Jun. 07, 2021
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 08, 2020	Jun. 07, 2021
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 08, 2020	Jun. 07, 2021
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 08, 2020	Jun. 07, 2021
13	Power Metter	Keysight	E4419B	\	Jun. 08, 2020	Jun. 07, 2021
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 08, 2020	Jun. 07, 2021
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 04, 2020	Jun. 03, 2021
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100363	Jun. 13, 2020	Jun. 12, 2021
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

5. CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

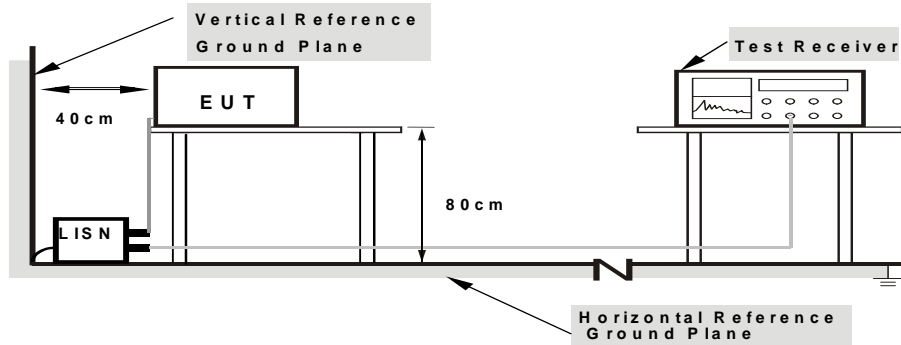

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

5.2. Test Standard

FCC§15.207

5.3. Conducted Emission Limit

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulators as shown in Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in test modes (EUT Working) and test it.

5.6. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.


The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

5.7. Test Result

PASS


EUT:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	Model Name :	M2008Q
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode:	Charging

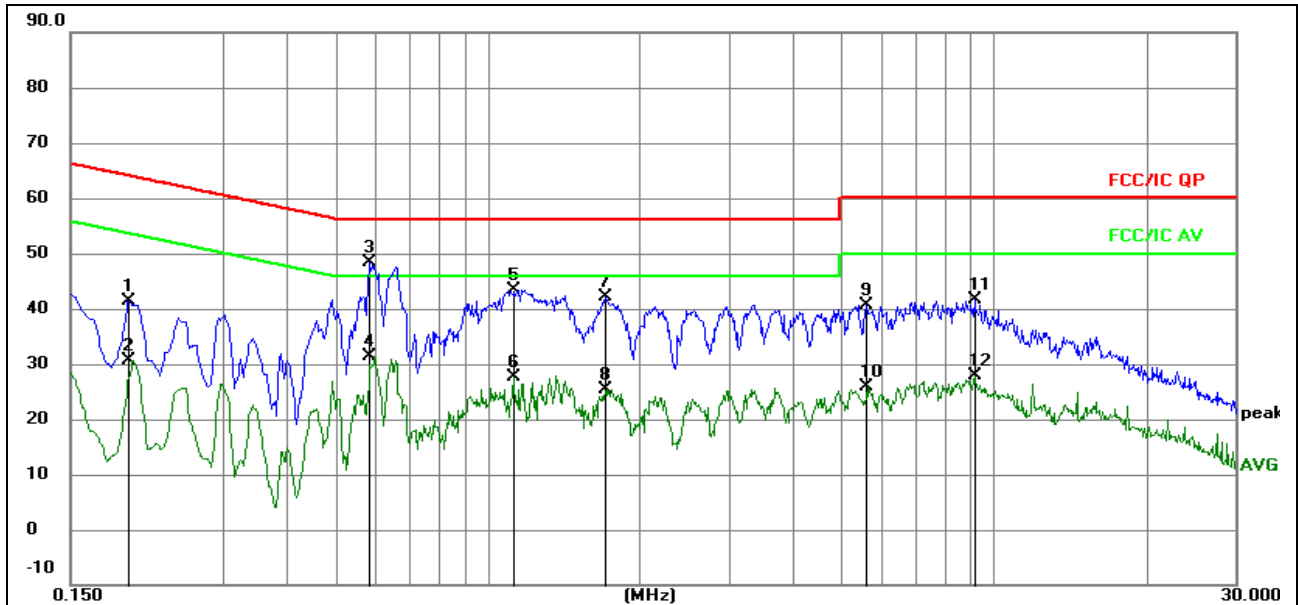
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
				dB	dBuV	dBuV	dB		
1		0.1945	32.02	9.47	41.49	63.84	-22.35	QP	
2		0.1945	21.14	9.47	30.61	53.84	-23.23	AVG	
3	*	0.5854	38.38	9.94	48.32	56.00	-7.68	QP	
4		0.5854	21.52	9.94	31.46	46.00	-14.54	AVG	
5		1.1233	33.91	9.57	43.48	56.00	-12.52	QP	
6		1.1233	18.08	9.57	27.65	46.00	-18.35	AVG	
7		1.7071	32.61	9.58	42.19	56.00	-13.81	QP	
8		1.7071	15.84	9.58	25.42	46.00	-20.58	AVG	
9		5.5936	30.83	9.78	40.61	60.00	-19.39	QP	
10		5.5936	15.99	9.78	25.77	50.00	-24.23	AVG	
11		9.1557	31.88	9.70	41.58	60.00	-18.42	QP	
12		9.1557	18.22	9.70	27.92	50.00	-22.08	AVG	

EUT:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	Model Name :	M2008Q
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode:	Charging

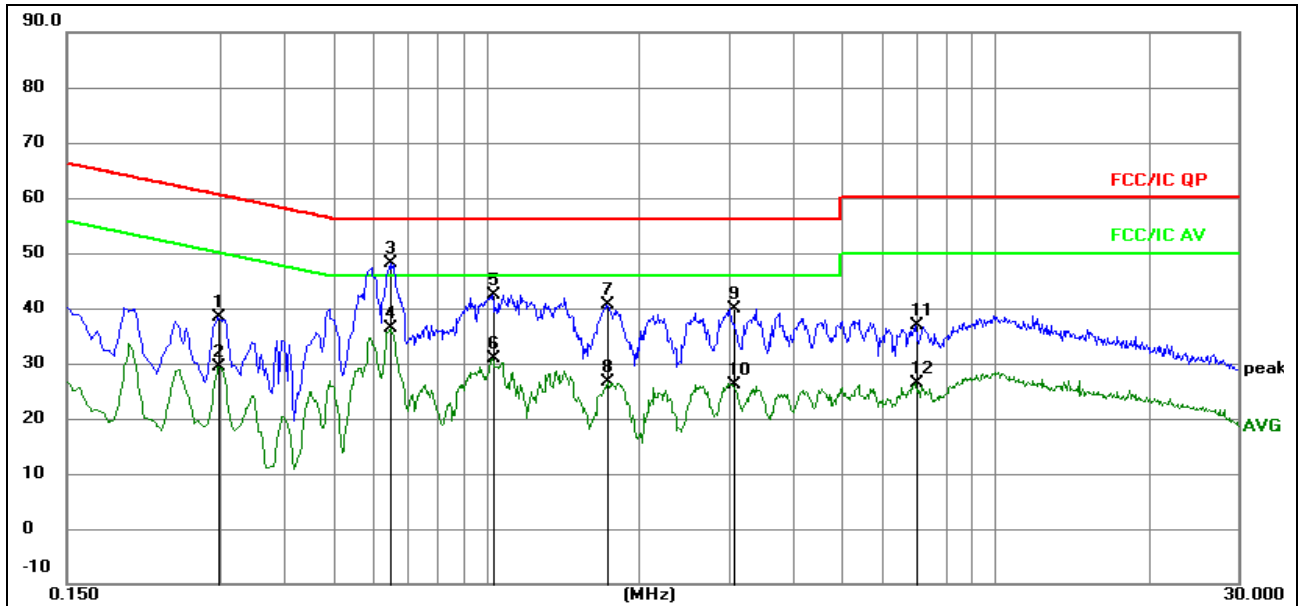
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2985	28.75	9.58	38.33	60.28	-21.95	QP	
2		0.2985	19.69	9.58	29.27	50.28	-21.01	AVG	
3	*	0.6493	38.35	9.83	48.18	56.00	-7.82	QP	
4		0.6493	26.64	9.83	36.47	46.00	-9.53	AVG	
5		1.0274	32.89	9.57	42.46	56.00	-13.54	QP	
6		1.0274	21.39	9.57	30.96	46.00	-15.04	AVG	
7		1.7339	31.00	9.58	40.58	56.00	-15.42	QP	
8		1.7339	17.14	9.58	26.72	46.00	-19.28	AVG	
9		3.0705	30.23	9.66	39.89	56.00	-16.11	QP	
10		3.0705	16.42	9.66	26.08	46.00	-19.92	AVG	
11		6.9900	27.18	9.72	36.90	60.00	-23.10	QP	
12		6.9900	16.57	9.72	26.29	50.00	-23.71	AVG	

6. RADIATED EMISSION MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of connection between the EUT and the simulators




6.1.2. Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

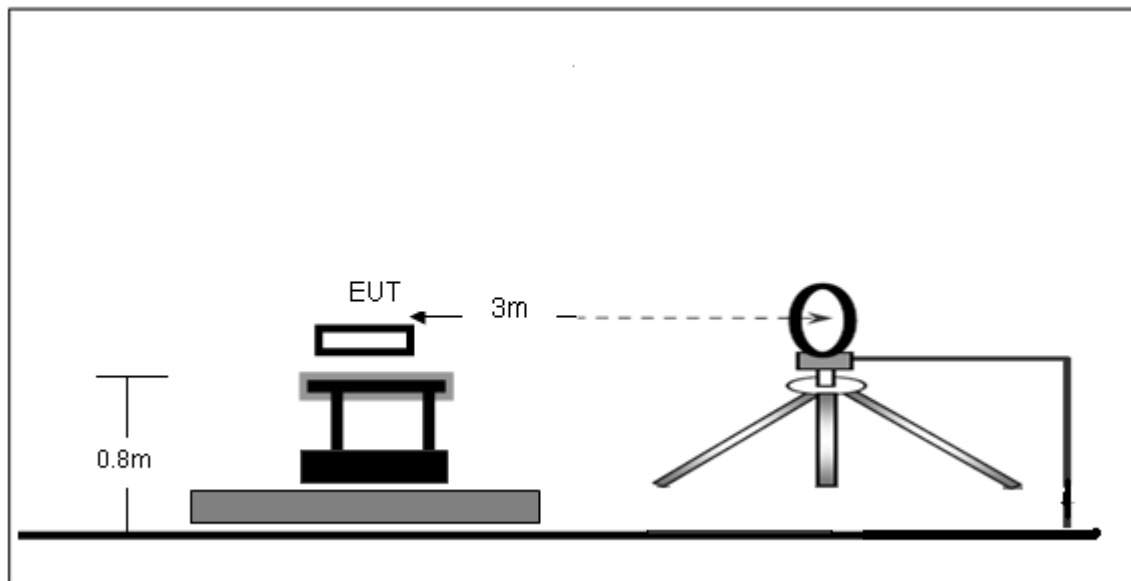

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

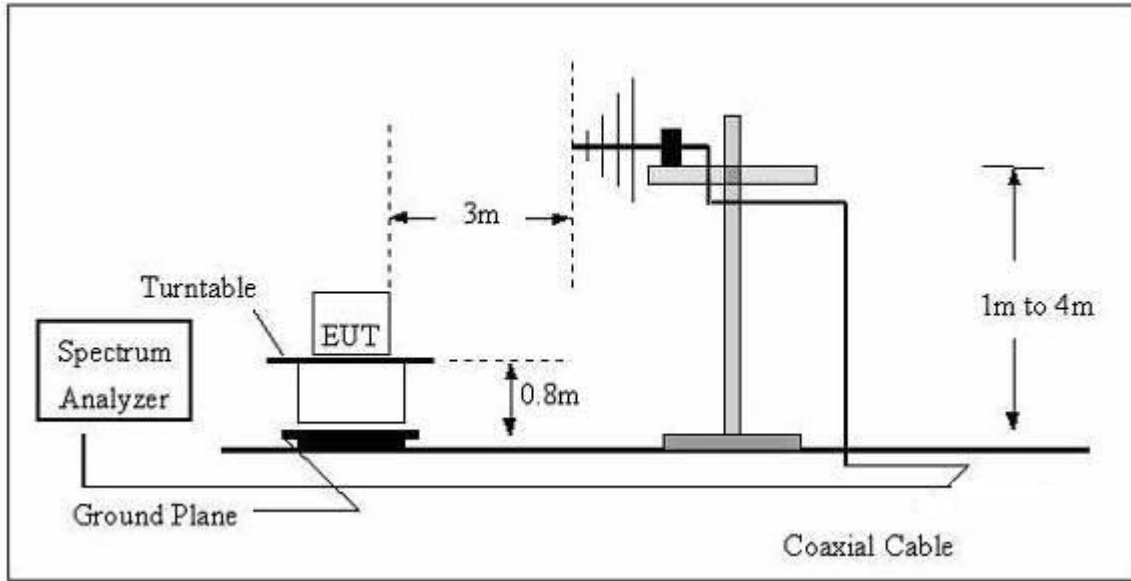

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.2. Test Standard and Limit

FCC §15.209; §15.205

Test Standard	FCC Part15 C Section 15.209 and 15.205				
	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
Test Limit	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

6.3.EMI Test Receiver Setup

The system was investigated from 9kHz to1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 kHz	1 kHz	QP
150 kHz – 30MHz	9kHz	30kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

6.4.Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.5.Test Result

PASS

9kHz-30MHz

EUT:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	Model Name :	M2008Q
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Normal		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
24.8000	35.45	20.15	55.60	139.72	-84.12	PK
24.8000	37.33	20.15	57.48	119.72	-62.24	AV
52.3000	43.54	20.33	63.87	133.23	-69.36	PK
52.3000	48.32	20.33	68.65	113.23	-44.58	AV
126.4000	54.66	20.55	75.21	125.57	-50.36	PK
126.4000	52.74	20.55	73.29	105.57	-32.28	AV
681.9000	34.31	20.64	54.95	70.93	-15.98	QP
962.5300	32.08	21.26	53.34	67.94	-14.60	QP
1228.6200	25.69	22.32	48.01	65.82	-17.81	QP

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

30MHz-1GHz

EUT:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	Model Name :	M2008Q
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Wireless charging		

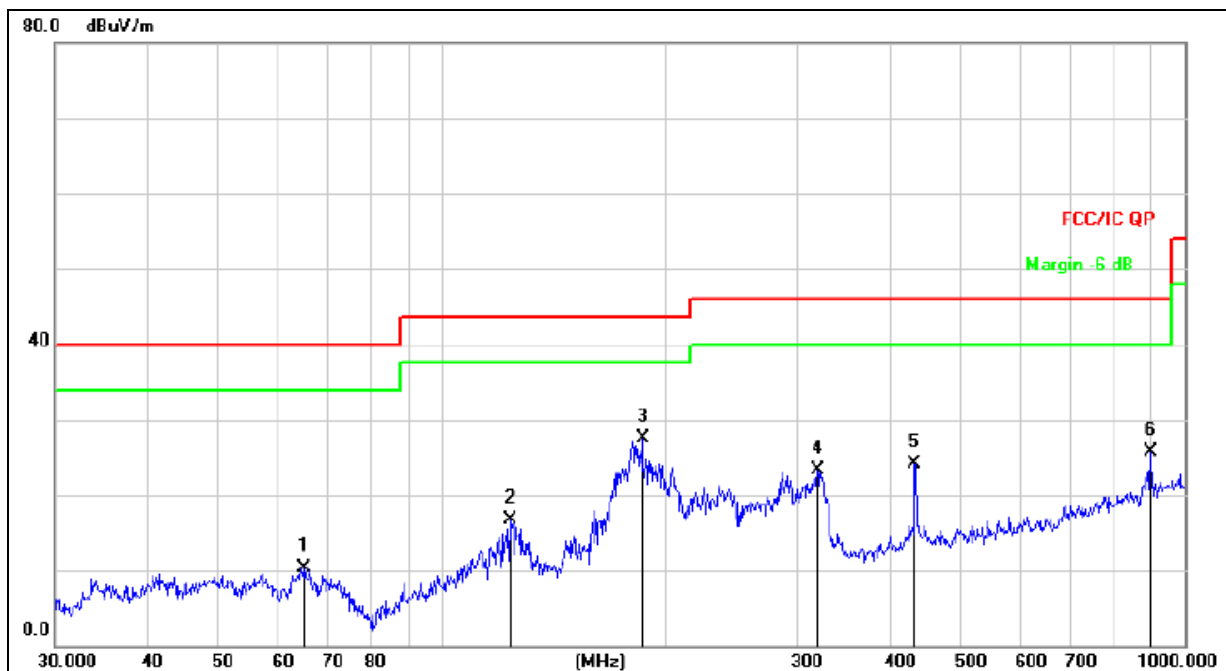


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		65.1145	27.31	-17.08	10.23	40.00	-29.77	QP
2		123.2655	34.43	-17.78	16.65	43.50	-26.85	QP
3	*	185.7882	44.71	-17.21	27.50	43.50	-16.00	QP
4		319.9370	36.32	-13.05	23.27	46.00	-22.73	QP
5		432.5457	34.40	-10.36	24.04	46.00	-21.96	QP
6		900.1474	27.20	-1.50	25.70	46.00	-20.30	QP

EUT:	Esquire 5000mAh Power Bank+Wireless Charger with Cable BI	Model Name :	M2008Q
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Wireless charging		

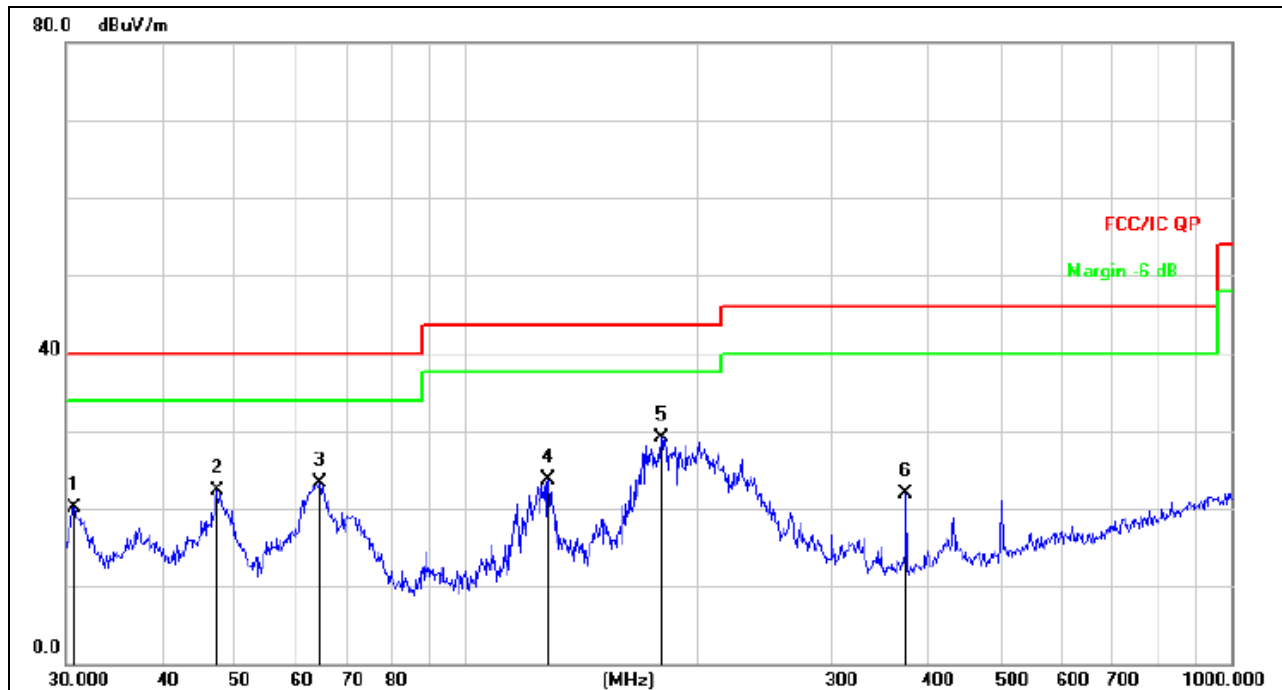

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		30.7455	37.31	-17.14	20.17	40.00	-19.83	QP
2		47.3255	37.25	-15.00	22.25	40.00	-17.75	QP
3		64.4331	40.14	-16.92	23.22	40.00	-16.78	QP
4		128.1130	41.82	-18.09	23.73	43.50	-19.77	QP
5	*	180.0165	46.77	-17.58	29.19	43.50	-14.31	QP
6		375.9385	33.59	-11.64	21.95	46.00	-24.05	QP

7. EUT TEST PHOTOS

Conducted Measurement Photos




Radiated Measurement Photos
9KHz-30MHz

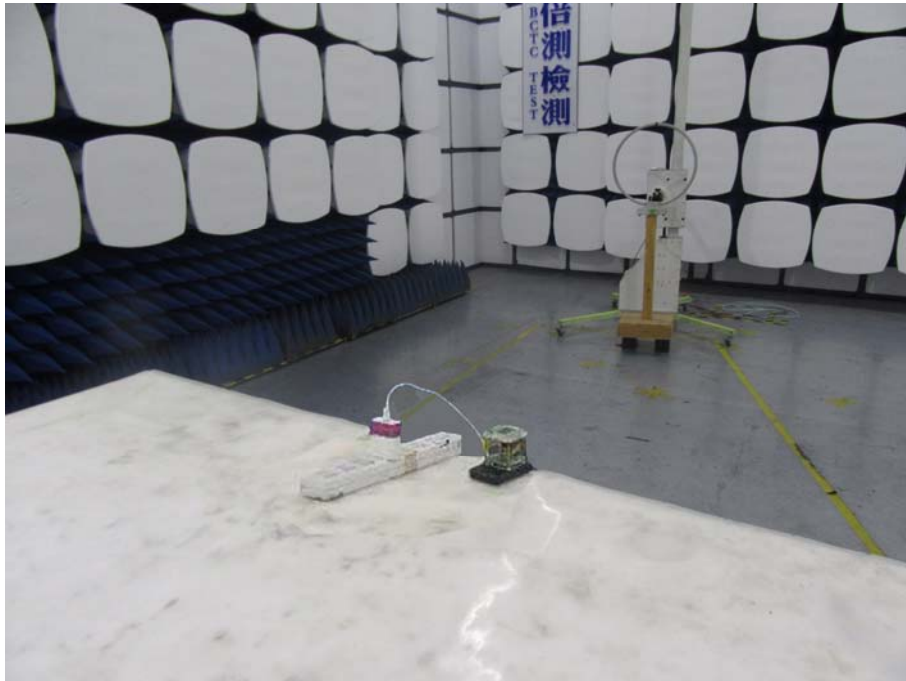

30MHz-1GHz



8. EUT PHOTOS

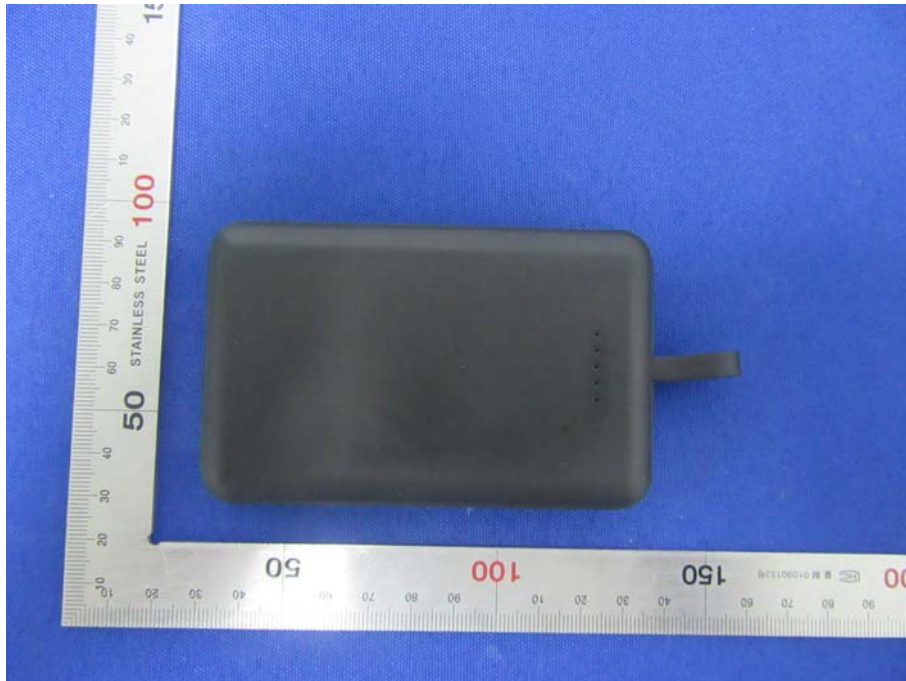

***** END OF REPORT *****