

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Hangzhou iMagic Technology Co.,Ltd

iMagic Lock

Model No.: iSL2S

FCC ID: 2AN8YISL2S

Prepared for : Hangzhou iMagic Technology Co.,Ltd
Address : 11th Floor, building A, Tiantang Software Park, Xihu District,
Hangzhou, china.

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry
Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20172480
Date of Test : Dec. 01, 2017--Dec. 06, 2017
Date of Report : Dec. 07, 2017

TABLE OF CONTENTS

Description

Page

Test Report Certification

1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	7
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 6DB BANDWIDTH MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(2).....	11
5.3. The Requirement for 5.2(1)	11
5.4. EUT Configuration on Measurement	11
5.5. Operating Condition of EUT	11
5.6. Test Procedure	12
5.7. Test Result	12
6. MAXIMUM PEAK OUTPUT POWER	14
6.1. Block Diagram of Test Setup.....	14
6.2. The Requirement For Section 15.247(b)(3).....	14
6.3. EUT Configuration on Measurement	14
6.4. Operating Condition of EUT	14
6.5. Test Procedure	14
6.6. Test Result	15
7. POWER SPECTRAL DENSITY MEASUREMENT	17
7.1. Block Diagram of Test Setup.....	17
7.2. The Requirement For Section 15.247(e).....	17
7.3. EUT Configuration on Measurement	17
7.4. Operating Condition of EUT	17
7.5. Test Procedure	18
7.6. Test Result	19
8. BAND EDGE COMPLIANCE TEST	21
8.1. Block Diagram of Test Setup.....	21
8.2. The Requirement For Section 15.247(d)	21
8.3. EUT Configuration on Measurement	21
8.4. Operating Condition of EUT	21
8.5. Test Procedure	22
8.6. Test Result	22
9. RADIATED SPURIOUS EMISSION TEST	28

9.1.	Block Diagram of Test Setup.....	28
9.2.	Restricted bands of operation	29
9.3.	Configuration of EUT on Measurement	30
9.4.	Operating Condition of EUT	30
9.5.	Test Procedure	30
9.6.	The Field Strength of Radiation Emission Measurement Results	31
10.	99% OCCUPIED BANDWIDTH	51
10.1.	Block Diagram of Test Setup.....	51
10.2.	EUT Configuration on Measurement	51
10.3.	Operating Condition of EUT	51
10.4.	Test Procedure	51
10.5.	Measurement Result	52
11.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	54
11.1.	Block Diagram of Test Setup.....	54
11.2.	The Requirement For Section 15.247(d)	54
11.3.	EUT Configuration on Measurement	54
11.4.	Operating Condition of EUT	54
11.5.	Test Procedure	55
11.6.	Test Result	55
12.	ANTENNA REQUIREMENT.....	57
12.1.	The Requirement	57
12.2.	Antenna Construction	57

Test Report Certification

Applicant : Hangzhou iMagic Technology Co.,Ltd
Address : 11th Floor, building A, Tiantang Software Park, Xihu District,
Hangzhou, china
Manufacturer : Hangzhou iMagic Technology Co.,Ltd
Address : 11th Floor, building A, Tiantang Software Park, Xihu District,
Hangzhou, china
Product : iMagic Lock
Model No. : iSL2S
Trade name : n.a

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements.

The device described above is tested by Shenzhen ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247. The measurement results are contained in this test report and Shenzhen ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Dec. 01, 2017-Dec. 06, 2017
Date of Report: Dec. 07, 2017

Prepared by :

Tim Zhang

(Tim Zhang, Engineer)

Approved & Authorized Signer :

Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	iMagic Lock
Model Number	:	iSL2S
Trade Name	:	n.a
Bluetooth version	:	BT V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	0dBi
Antenna type	:	PCB Antenna
Power Supply	:	DC 6V via Battery
Modulation mode	:	GFSK
Applicant	:	Hangzhou iMagic Technology Co.,Ltd
Address	:	11th Floor, building A, Tiantang Software Park, Xihu District, Hangzhou, china
Manufacturer	:	Hangzhou iMagic Technology Co.,Ltd
Address	:	11th Floor, building A, Tiantang Software Park, Xihu District, Hangzhou, china
Date of sample received	:	Dec. 01, 2017
Date of Test	:	Dec. 01, 2017-Dec. 06, 2017

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

PC Manufacturer: LENOVO
M/N: 4290-RT8
S/N: R9-FW93G 11/08

1.4. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
	Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
	Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
	Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 07, 2017	Jan. 06, 2018
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 07, 2017	Jan. 06, 2018
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 07, 2017	Jan. 06, 2018
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 07, 2017	Jan. 06, 2018
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 07, 2017	Jan. 06, 2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	Jan. 12, 2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	Jan. 12, 2018
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 07, 2017	Jan. 06, 2018
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 07, 2017	Jan. 06, 2018
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 07, 2017	Jan. 06, 2018
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 07, 2017	Jan. 06, 2018
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 07, 2017	Jan. 06, 2018

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2. Configuration and peripherals

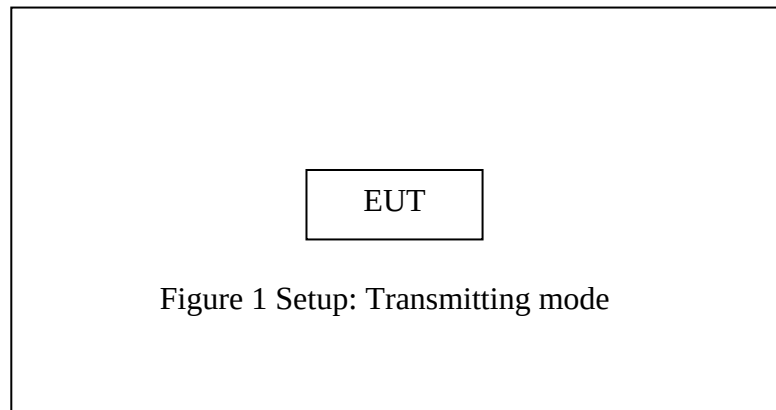


4. TEST PROCEDURES AND RESULTS

FCC&IC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test & 99% Occupied Bandwidth	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

Note: The power supply mode of the EUT is DC 6V, According to the FCC standard requirements, conducted emission is not applicable.

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup



(EUT: iMagic Lock)

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. The Requirement for 5.2(1)

The minimum -6 dB bandwidth shall be 500 kHz.

5.4. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulator as shown as Section 5.1.

5.5.2. Turn on the power of all equipment.

5.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

5.6. Test Procedure

5.6.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.6.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


5.6.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.7. Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.738	0.5	PASS
19	2440	0.738	0.5	PASS
39	2480	0.738	0.5	PASS


The spectrum analyzer plots are attached as below.

channel 0

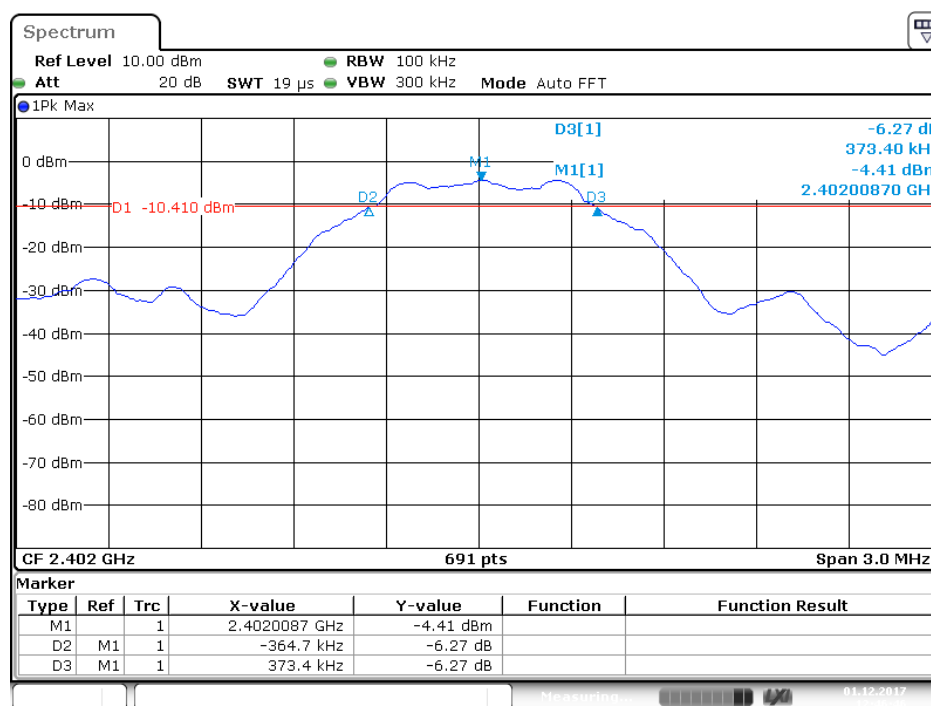


Date: 1. DEC. 2017 12:46:46

channel 19

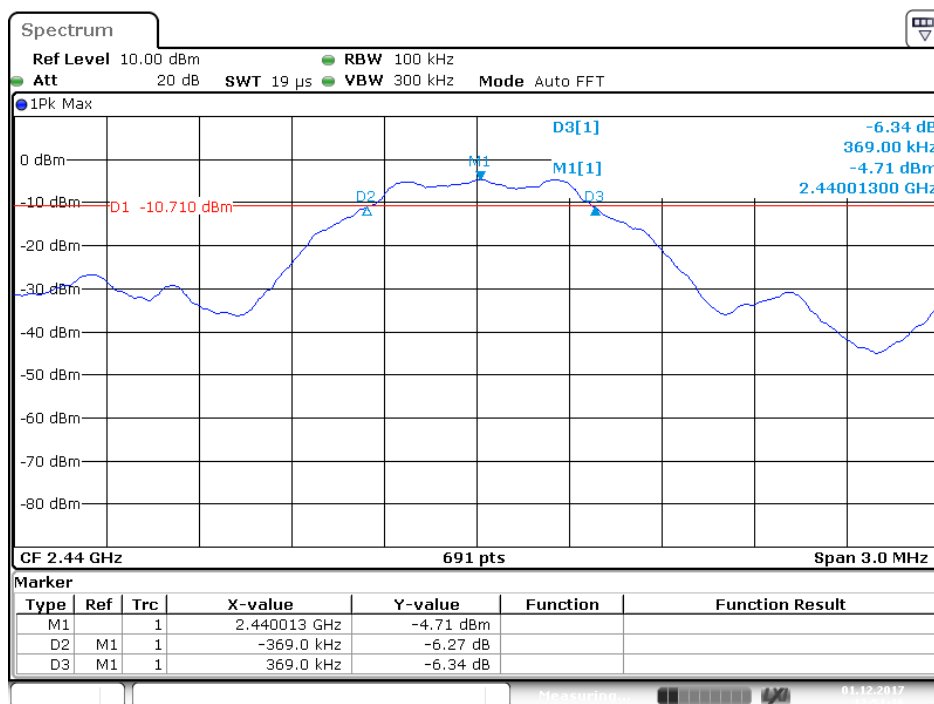

Date: 1.DEC.2017 12:51:16


channel 39

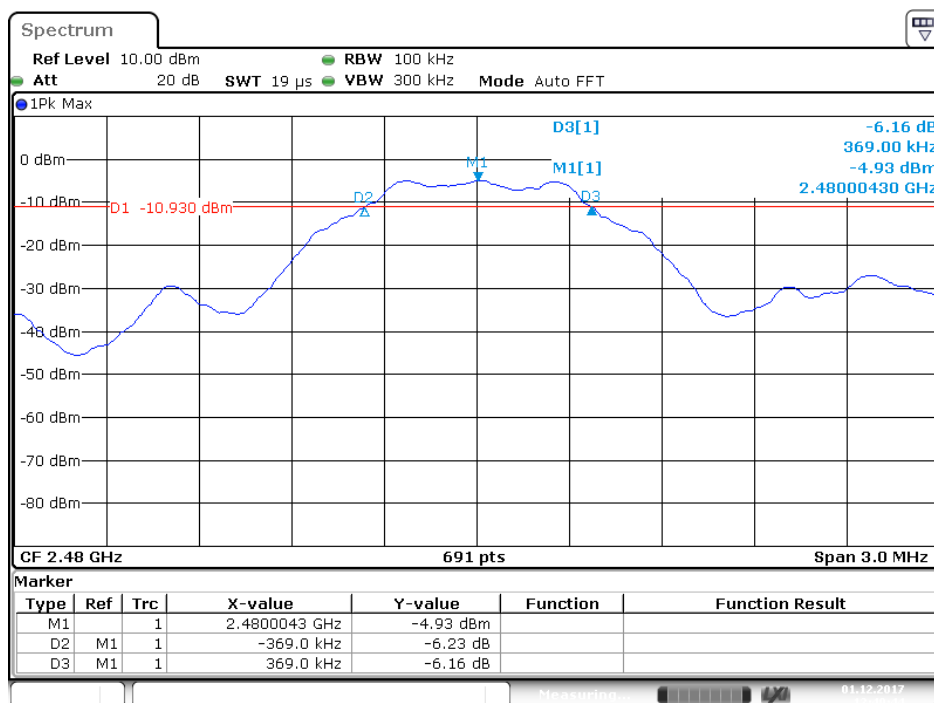

Date: 1.DEC.2017 12:49:44

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



(EUT: iMagic Lock)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.


6.5.3. Measurement the maximum peak output power.

6.6.Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Antenna gain (dBi)	E.I.P.R. (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-3.81	0	-3.81	30	PASS
19	2440	-4.02	0	-4.02	30	PASS
39	2480	-4.24	0	-4.24	30	PASS


The spectrum analyzer plots are attached as below.

channel 0

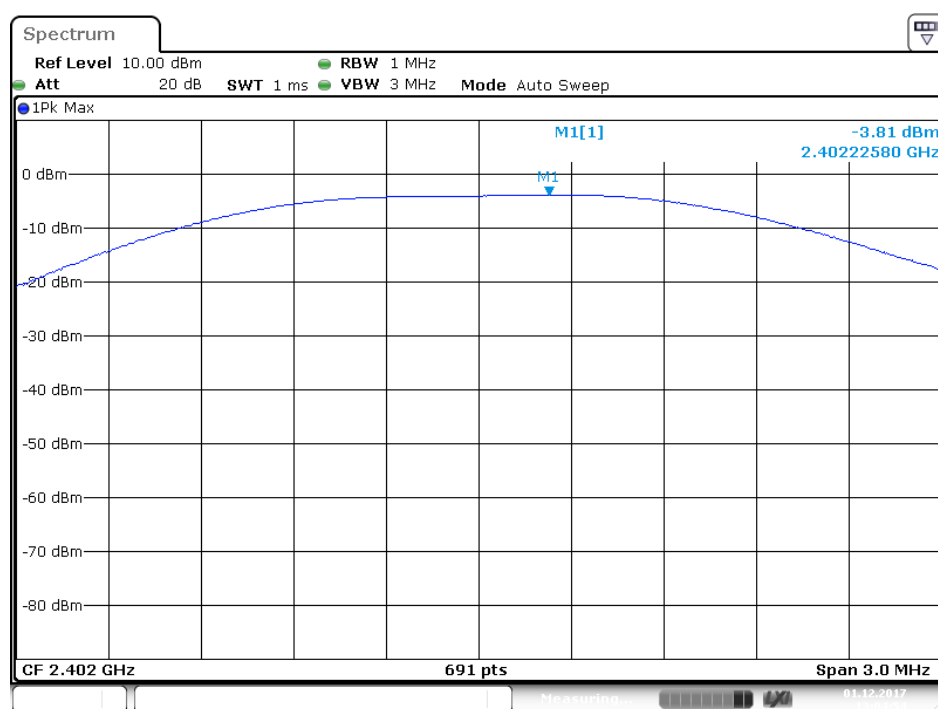


Date: 1.DEC.2017 13:04:54

channel 19

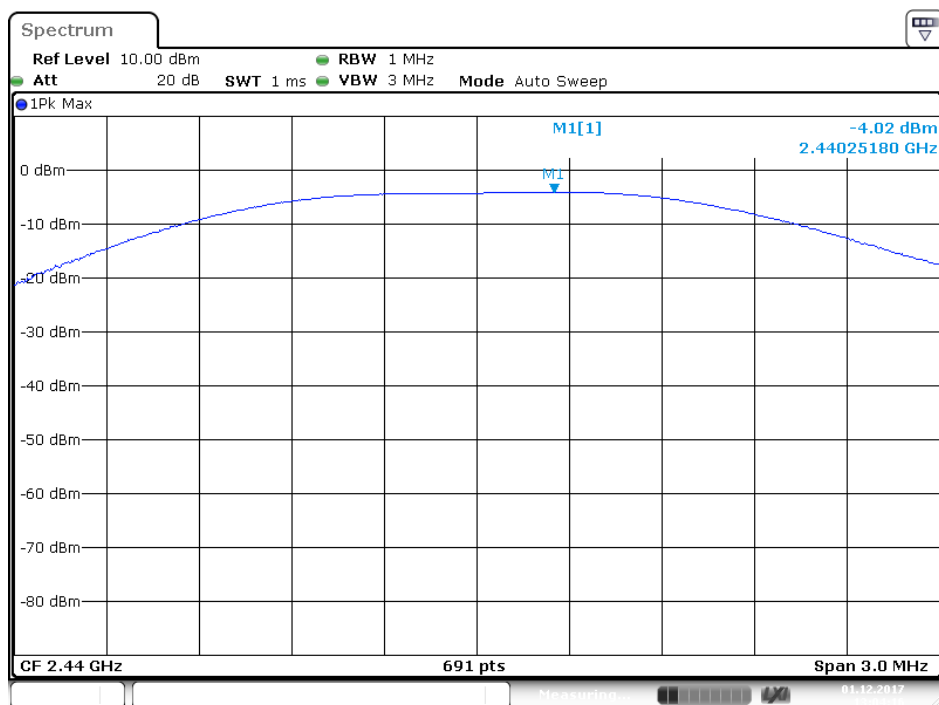

Date: 1.DEC.2017 13:04:16


channel 39

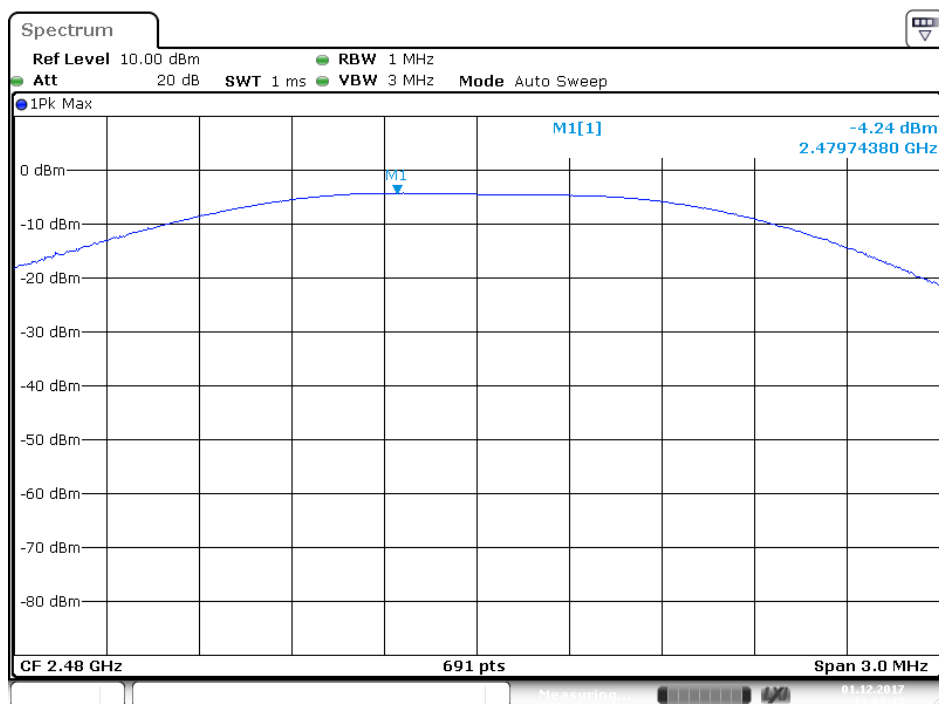

Date: 1.DEC.2017 13:03:37

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: iMagic Lock)

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

7.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.


7.5.4. Measurement the maximum power spectral density.

7.6. Test Result

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS/FAIL
0	2402	-17.88	8	PASS
19	2440	-18.15	8	PASS
39	2480	-18.34	8	PASS


The spectrum analyzer plots are attached as below.

channel 0

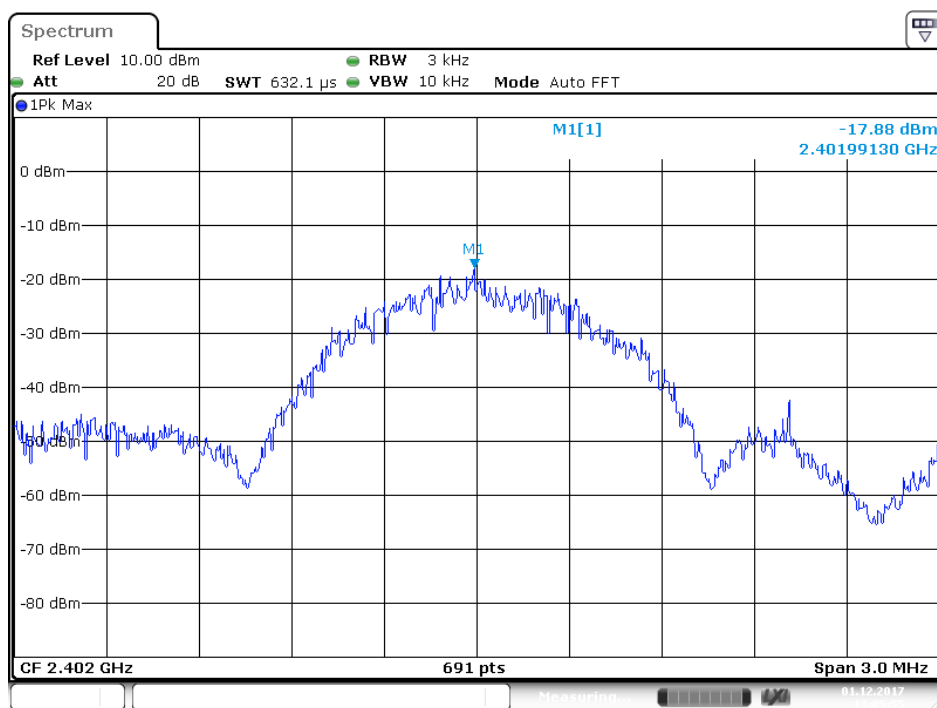


Date: 1.DEC.2017 13:05:55

channel 19

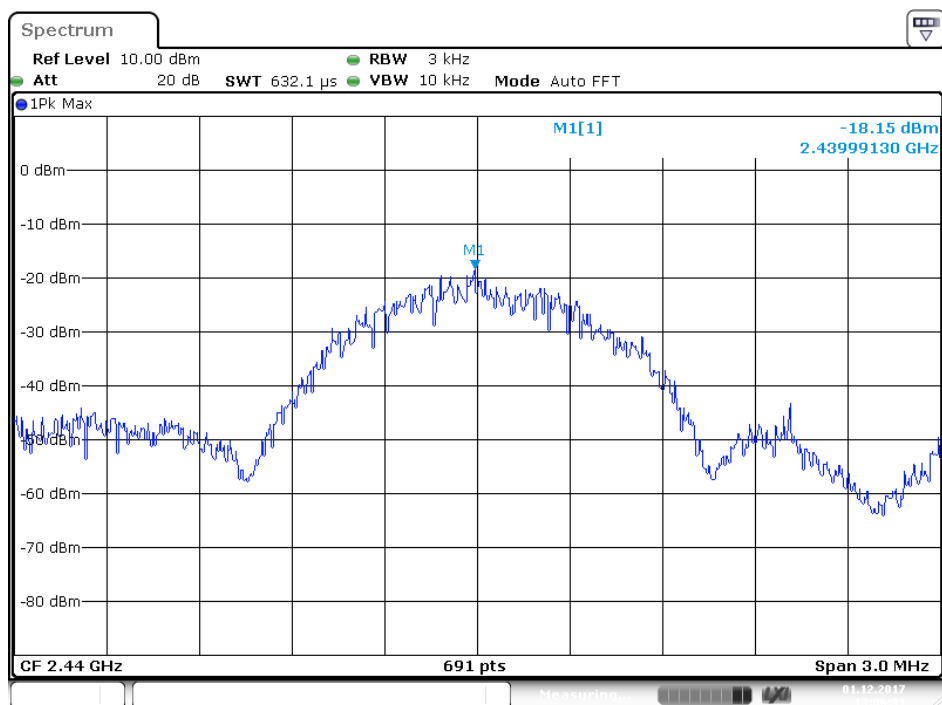

Date: 1.DEC.2017 13:06:32


channel 39

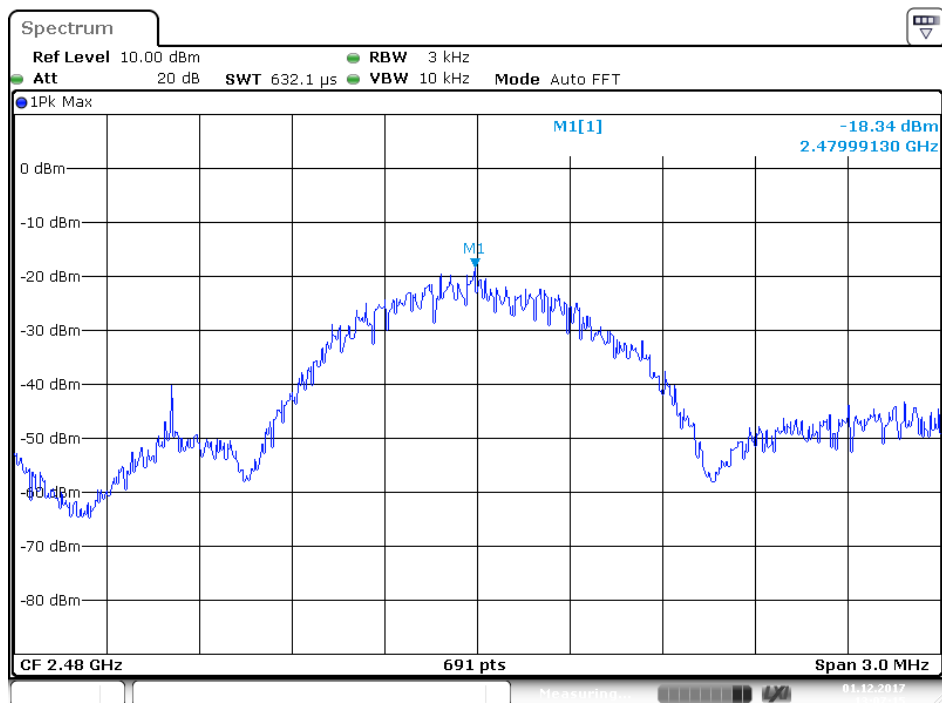

Date: 1.DEC.2017 13:07:15

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



(EUT: iMagic Lock)

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

8.5.3. Radiate Band Edge:

8.5.4. The EUT is placed on a turntable, which is 0.1m above the ground plane and worked at highest radiated power.

8.5.5. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.6. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.7. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

8.5.8. RBW=1MHz, VBW=1MHz


8.5.9. The band edges was measured and recorded.

8.6. Test Result

Pass


Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	31.69	20
39	2.485784GHz	39.43	20

channel 0

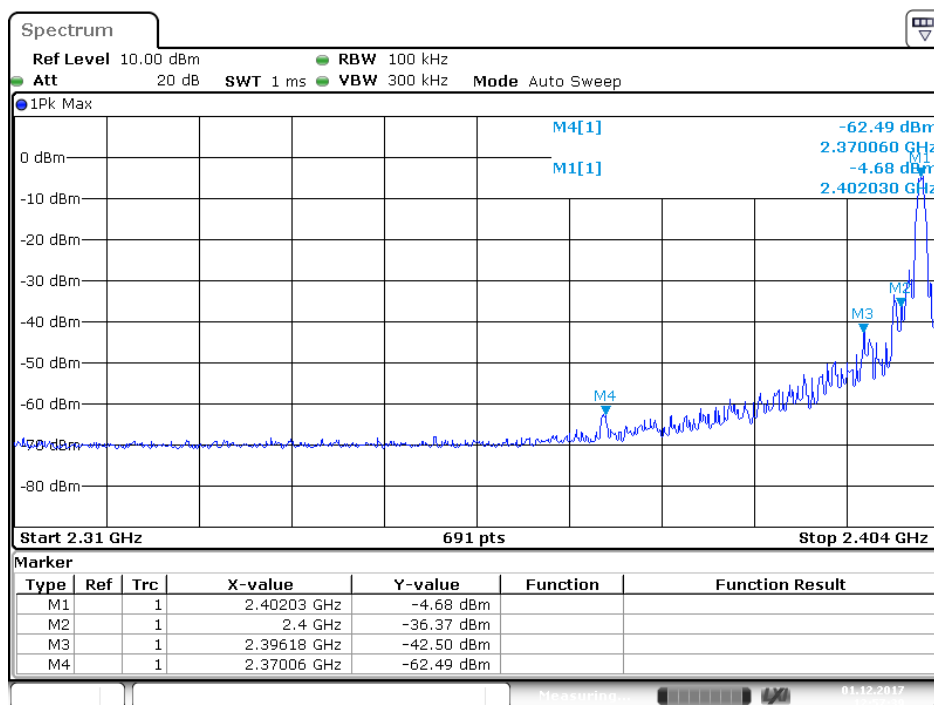

Date: 1.DEC.2017 12:57:39

channel 39

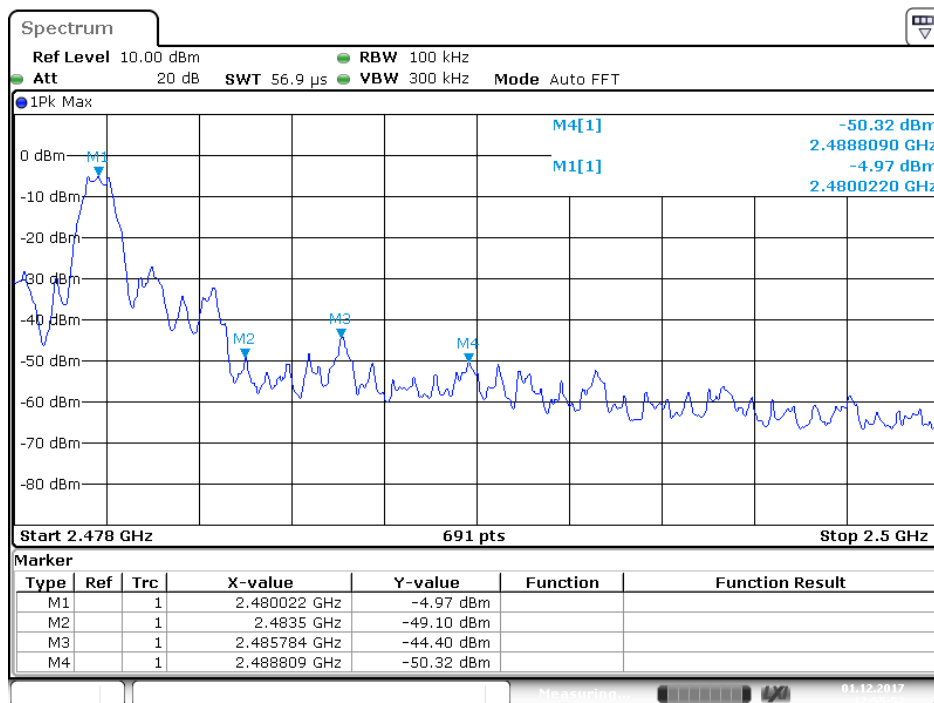

Date: 1.DEC.2017 12:55:52

Radiated Band Edge Result



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #5228

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

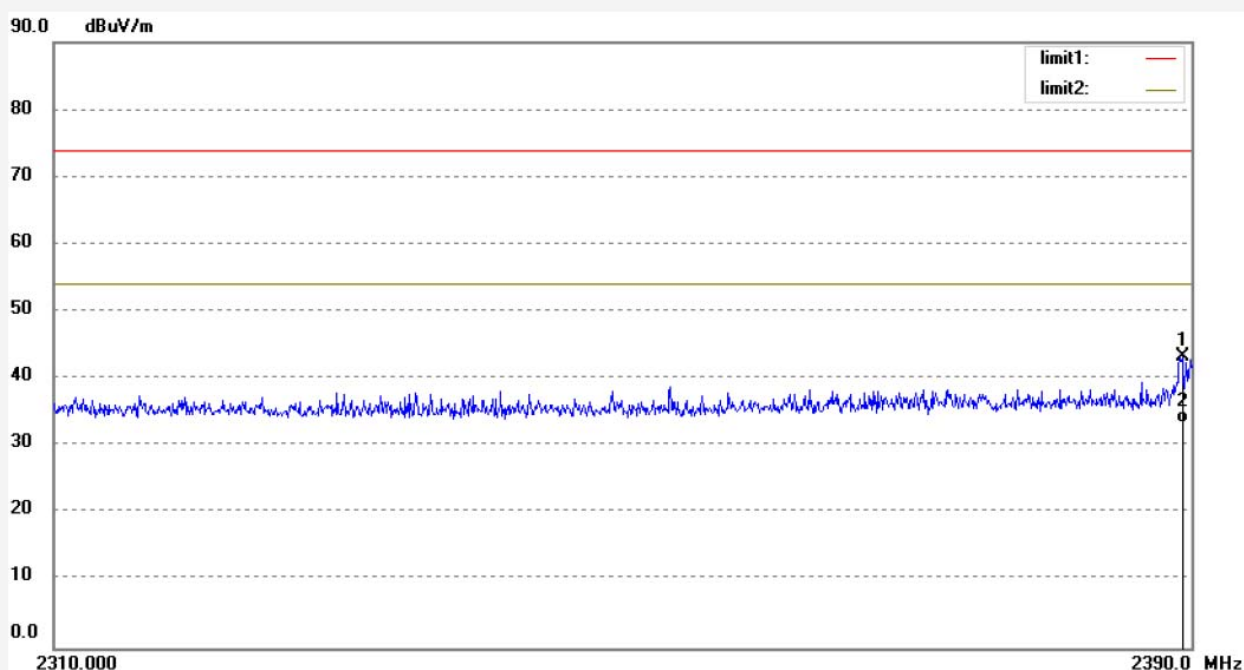

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.360	42.59	0.79	43.38	74.00	-30.62	peak			
2	2389.360	32.62	0.79	33.41	54.00	-20.59	AVG			

Job No.: LGW2017 #5227

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

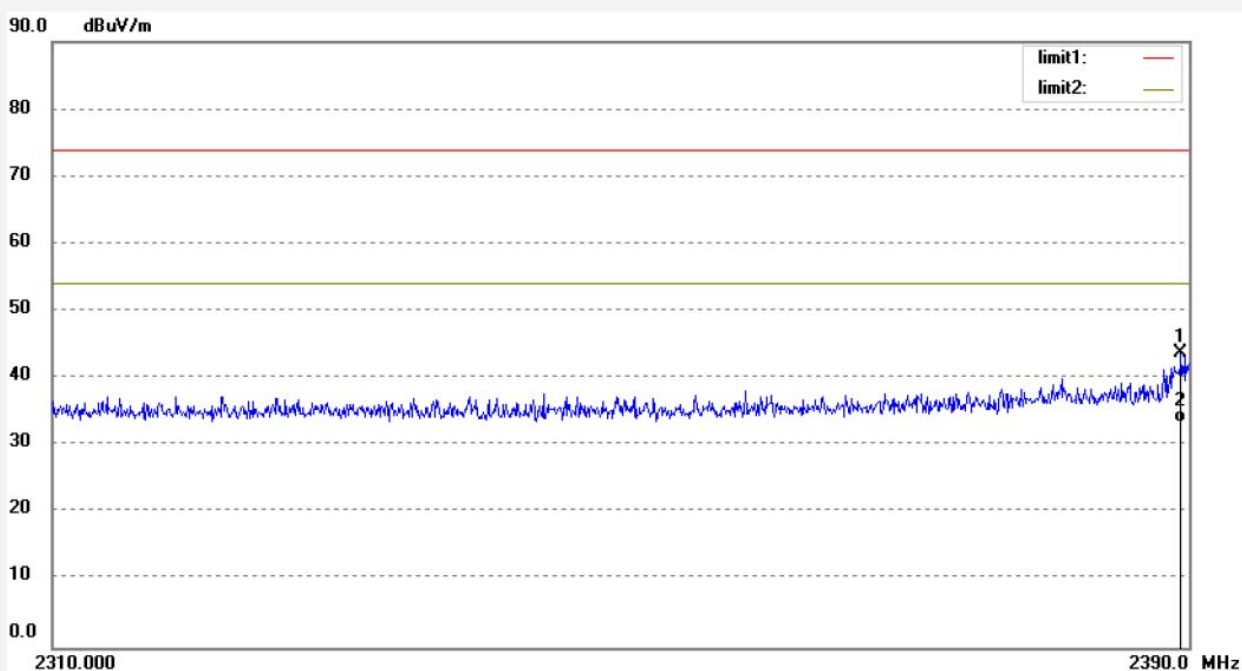

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.440	42.95	0.79	43.74	74.00	-30.26	peak			
2	2389.440	32.62	0.79	33.41	54.00	-20.59	AVG			

Job No.: LGW2017 #5233

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

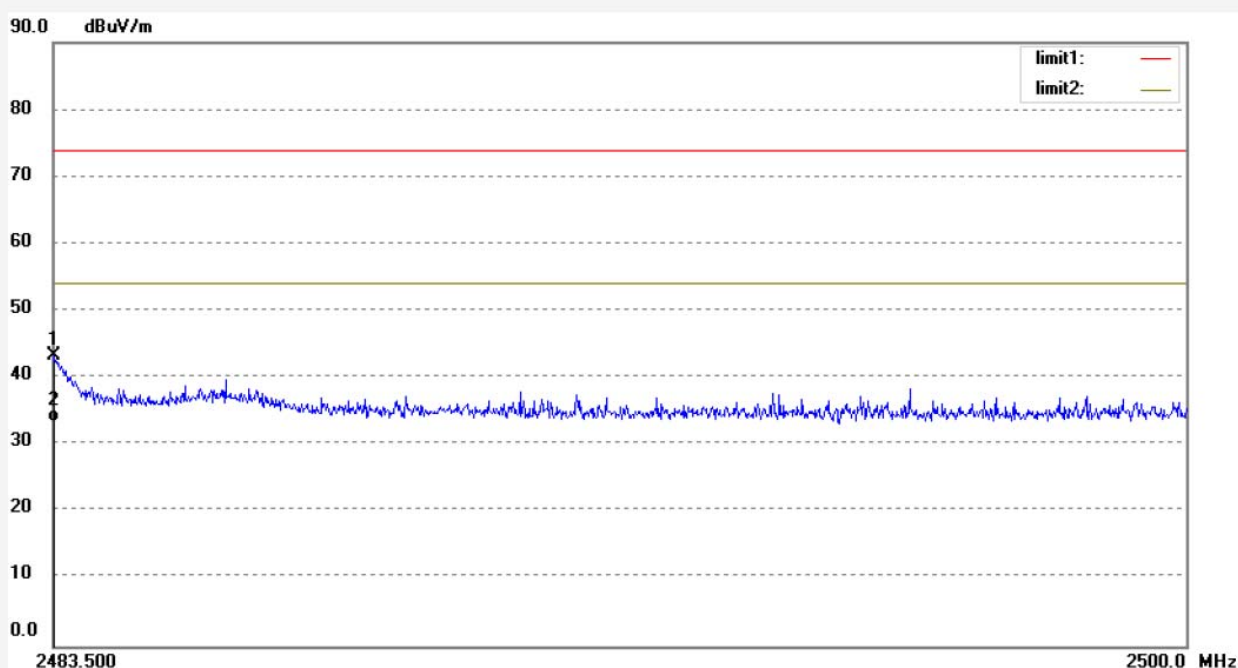

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	42.10	1.10	43.20	74.00	-30.80	peak			
2	2483.517	32.21	1.10	33.31	54.00	-20.69	AVG			

Job No.: LGW2017 #5234

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

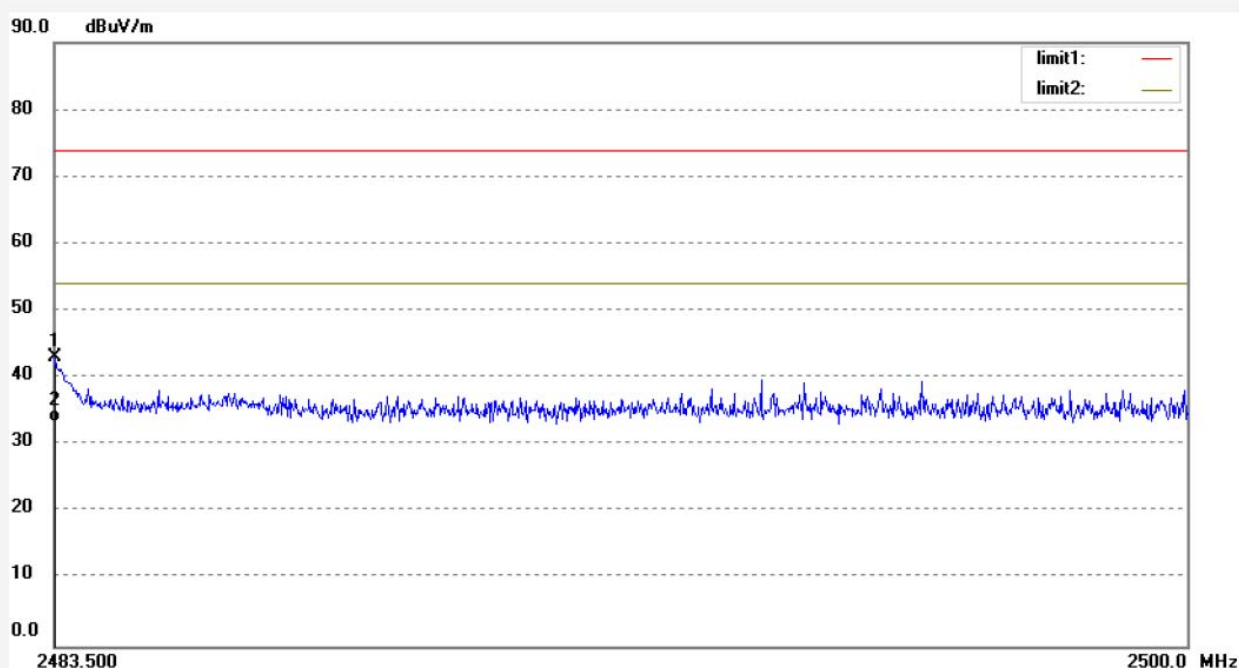

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	41.95	1.10	43.05	74.00	-30.95	peak			
2	2483.517	32.38	1.10	33.48	54.00	-20.52	AVG			


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor

9. RADIATED SPURIOUS EMISSION TEST


9.1. Block Diagram of Test Setup

9.1.1. Block diagram of connection between the EUT and peripherals

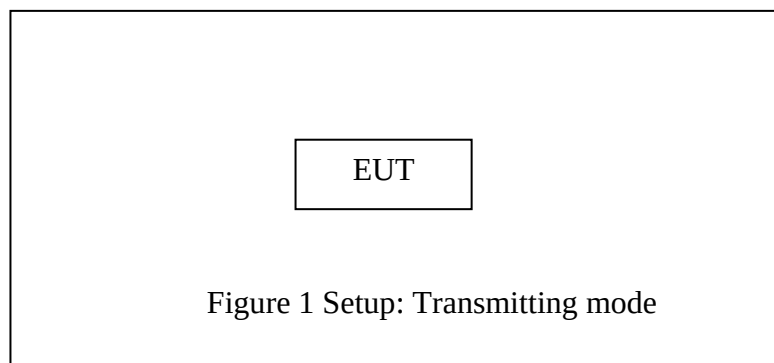


9.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

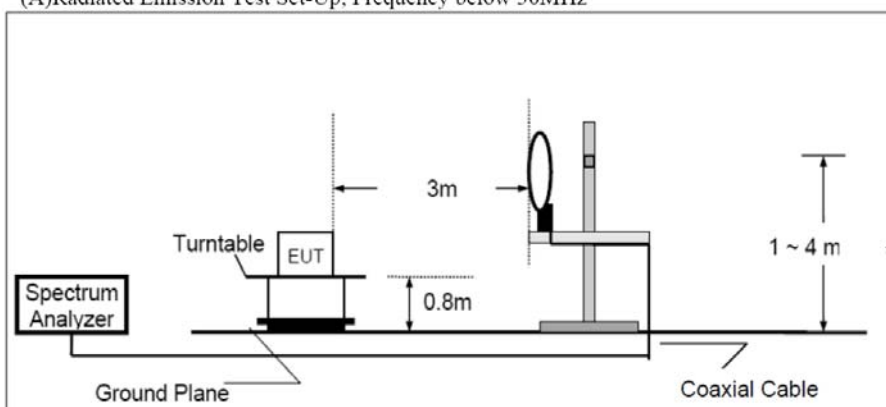

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

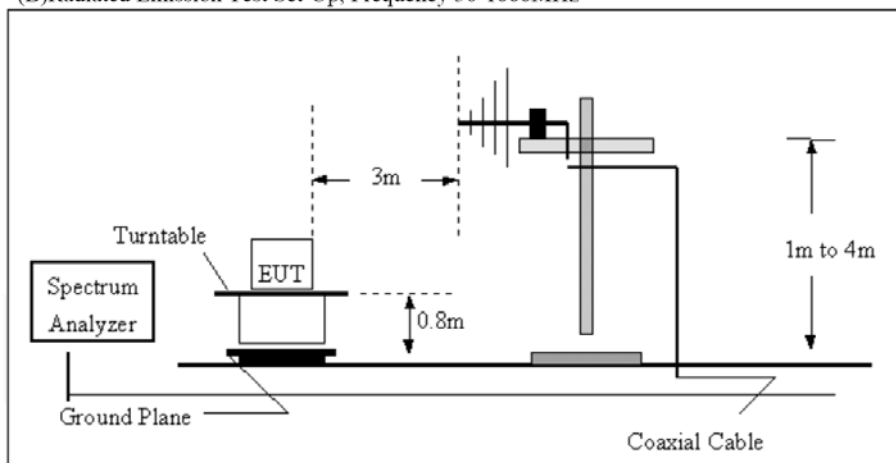

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

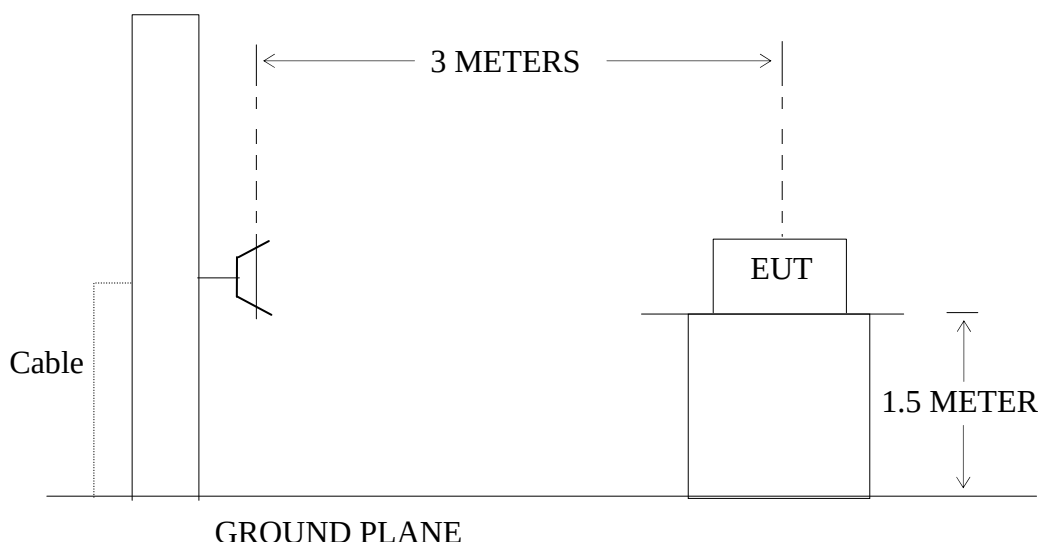

9.2.Restricted bands of operation

9.2.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement

instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.3. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

9.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain


9.6.The Field Strength of Radiation Emission Measurement Results

PASS.


Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.


FCC PART15C(9K-30MHz)(Worse case data)

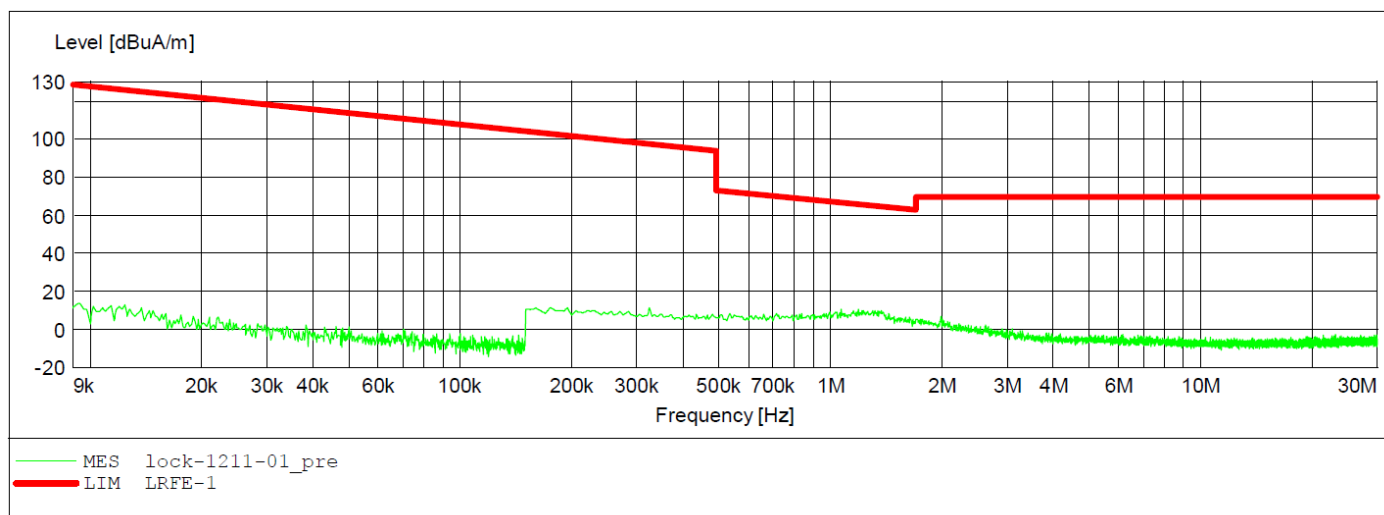

X(Antenna Polarization)

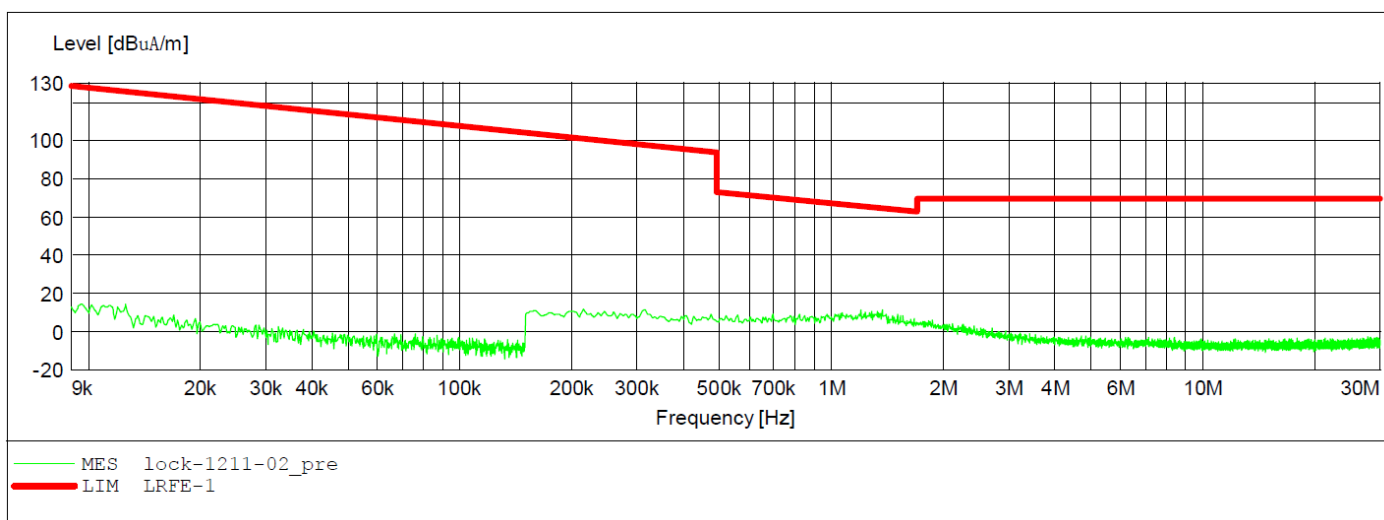

Y(Antenna Polarization)

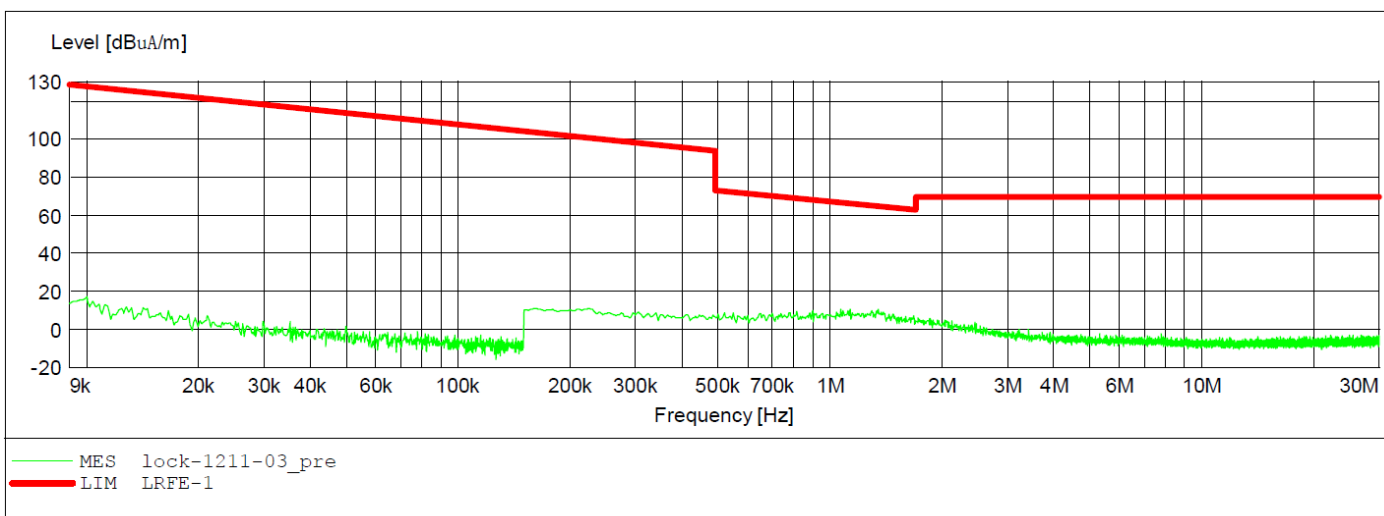

Z(Antenna Polarization)

Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

FCC PART 15C(30MHz-1000MHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #5241

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

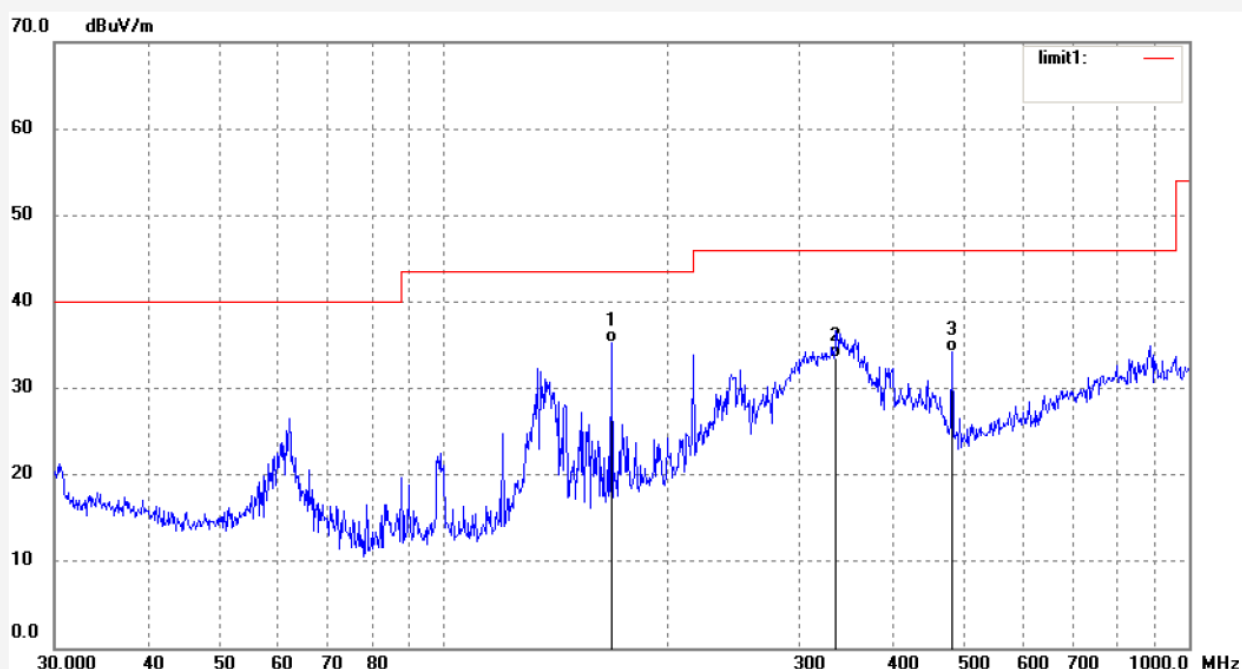

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	167.8241	49.23	-13.88	35.35	43.50	-8.15	QP			
2	336.0350	41.50	-7.91	33.59	46.00	-12.41	QP			
3	480.5276	39.12	-4.88	34.24	46.00	-11.76	QP			

Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #5242

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

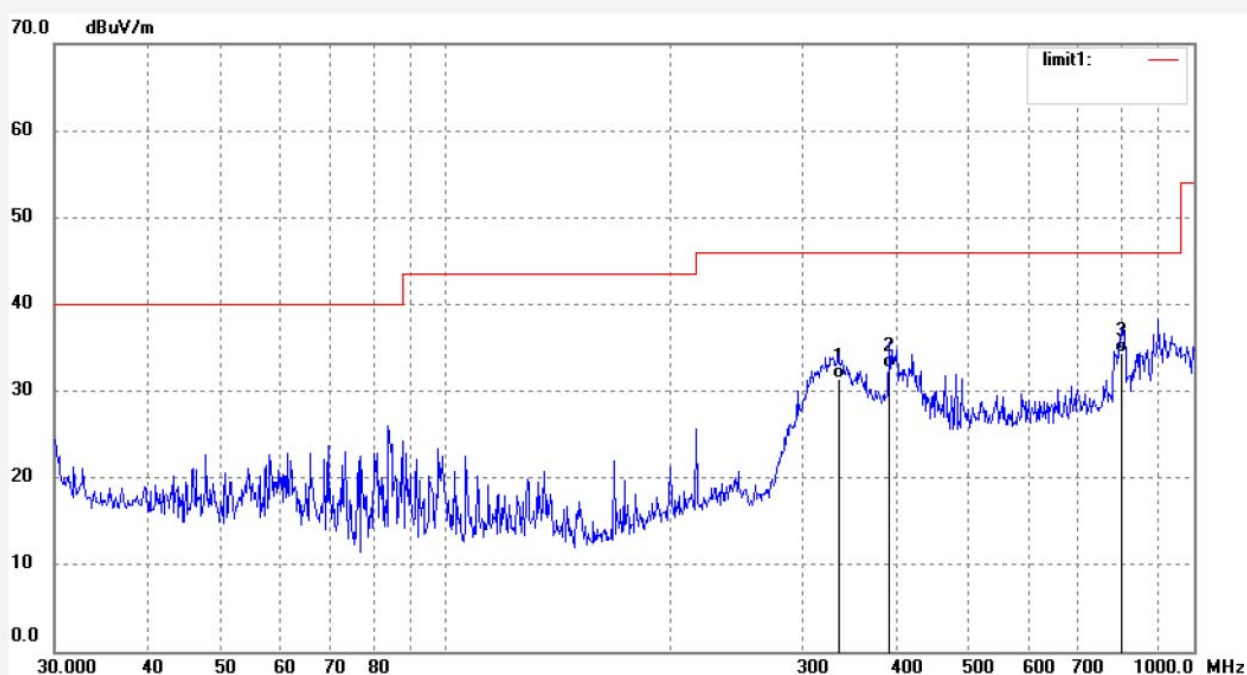

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	334.8589	39.41	-7.95	31.46	46.00	-14.54	QP			
2	392.0951	39.39	-6.77	32.62	46.00	-13.38	QP			
3	801.7862	33.46	0.87	34.33	46.00	-11.67	QP			

Job No.: LGW2017 #5244

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

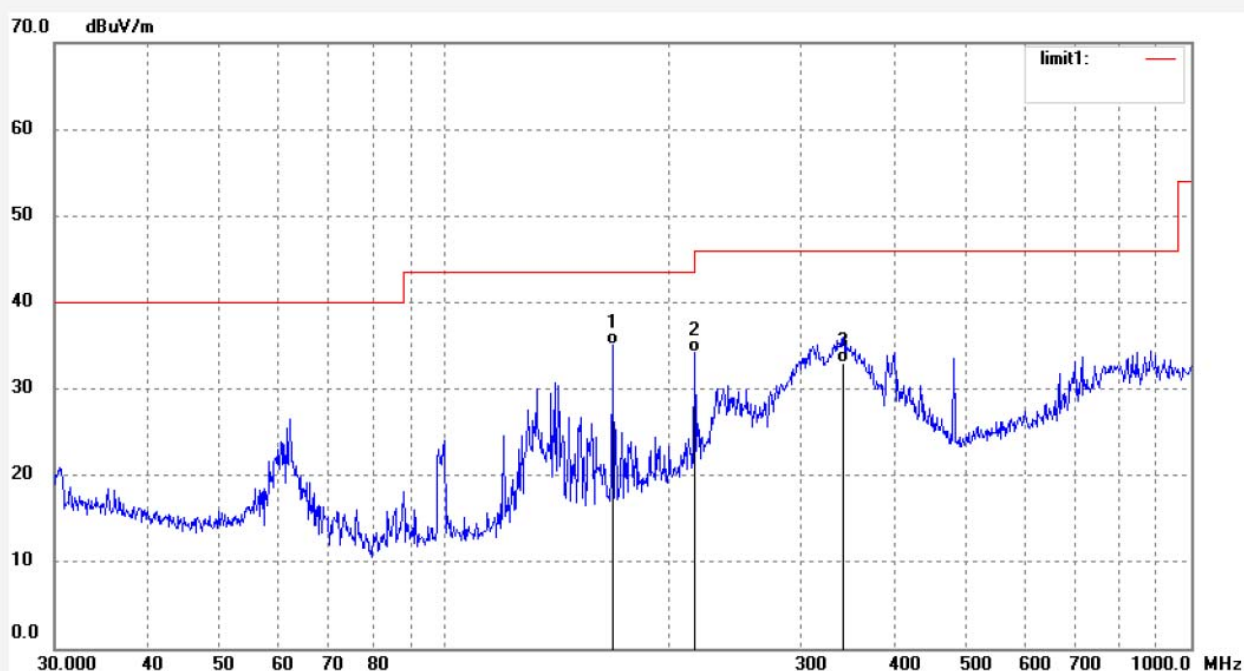

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	167.8242	48.93	-13.88	35.05	43.50	-8.45	QP			
2	216.0240	45.86	-11.66	34.20	46.00	-11.80	QP			
3	341.9786	40.71	-7.68	33.03	46.00	-12.97	QP			

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #5243

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

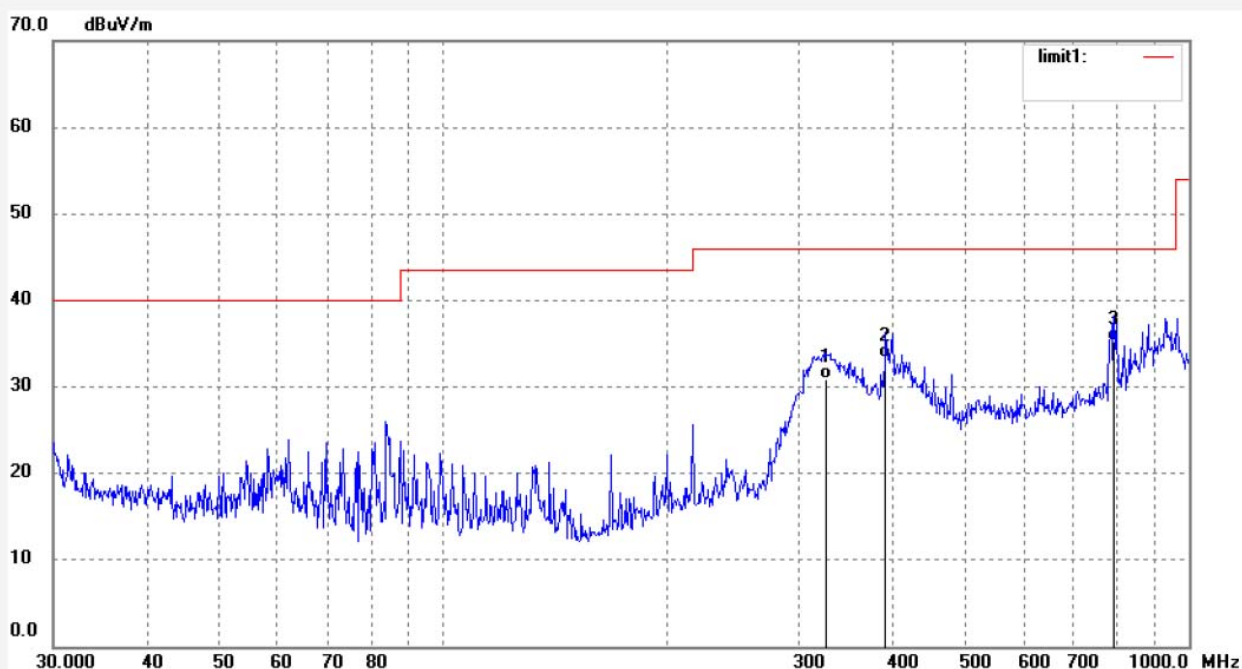

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	325.5957	39.17	-8.21	30.96	46.00	-15.04	QP			
2	392.0951	40.14	-6.77	33.37	46.00	-12.63	QP			
3	793.3958	34.53	0.67	35.20	46.00	-10.80	QP			

Job No.: LGW2017 #5245

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

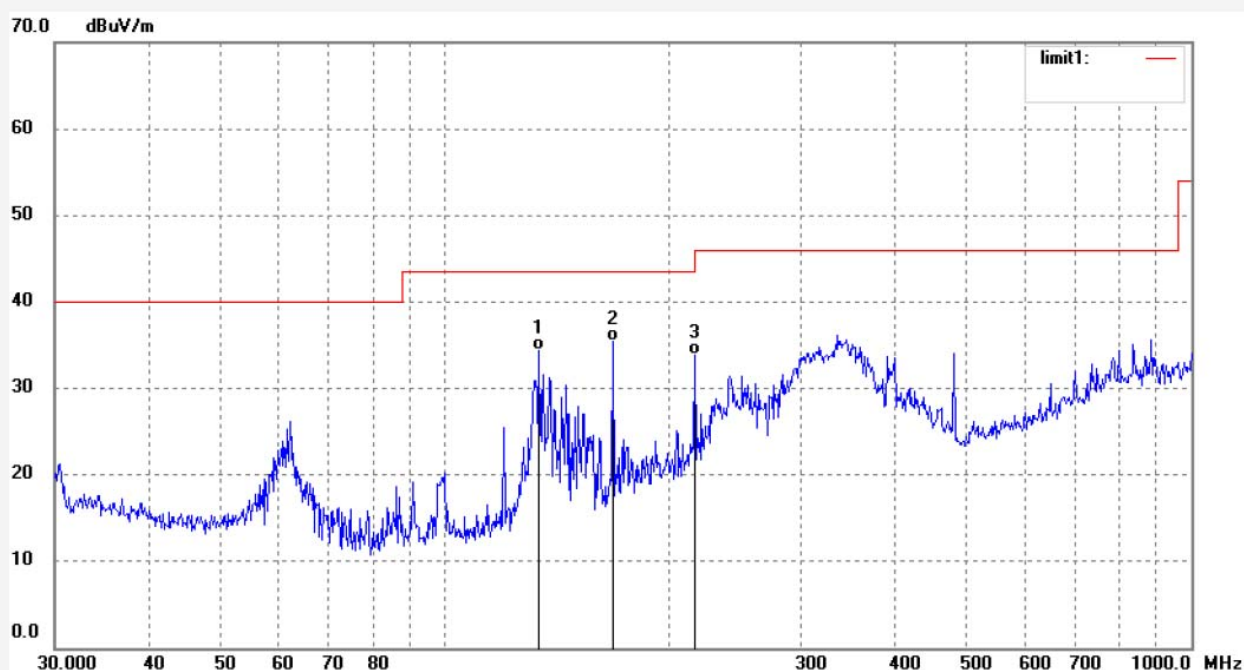

Job No.: LGW2017 #5246

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

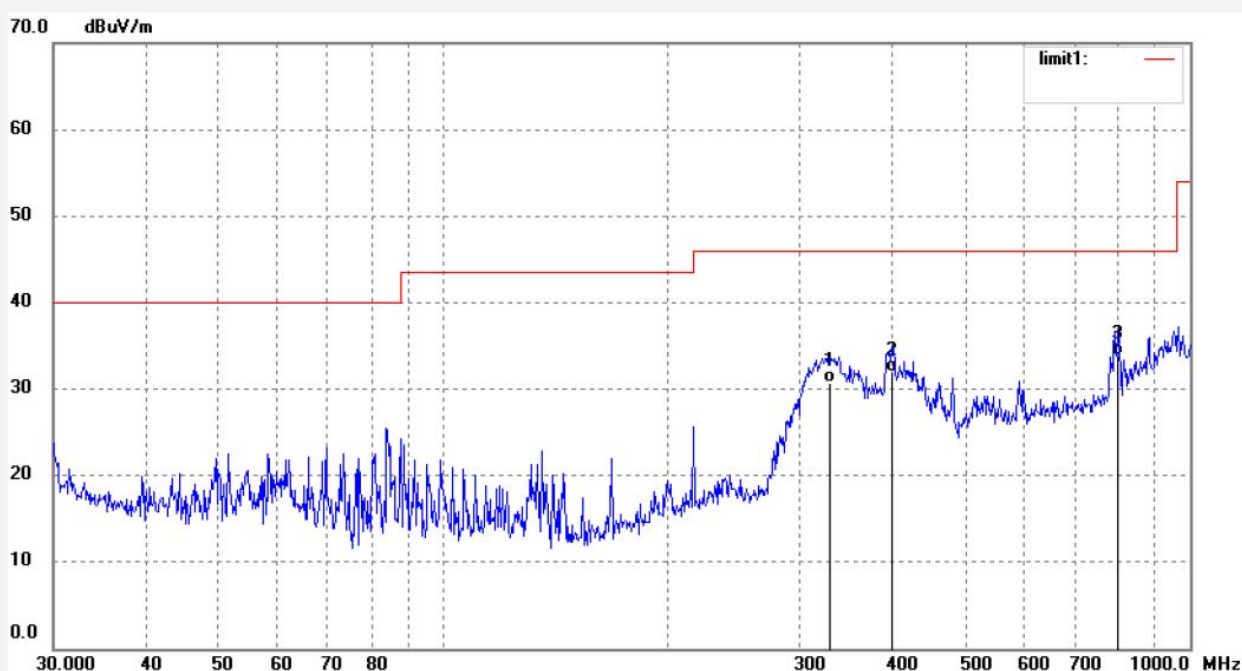

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	329.0389	38.81	-8.07	30.74	46.00	-15.26	QP			
2	399.0300	38.43	-6.48	31.95	46.00	-14.05	QP			
3	801.7862	32.98	0.87	33.85	46.00	-12.15	QP			

FCC PART 15C(1GHz-18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #5225

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

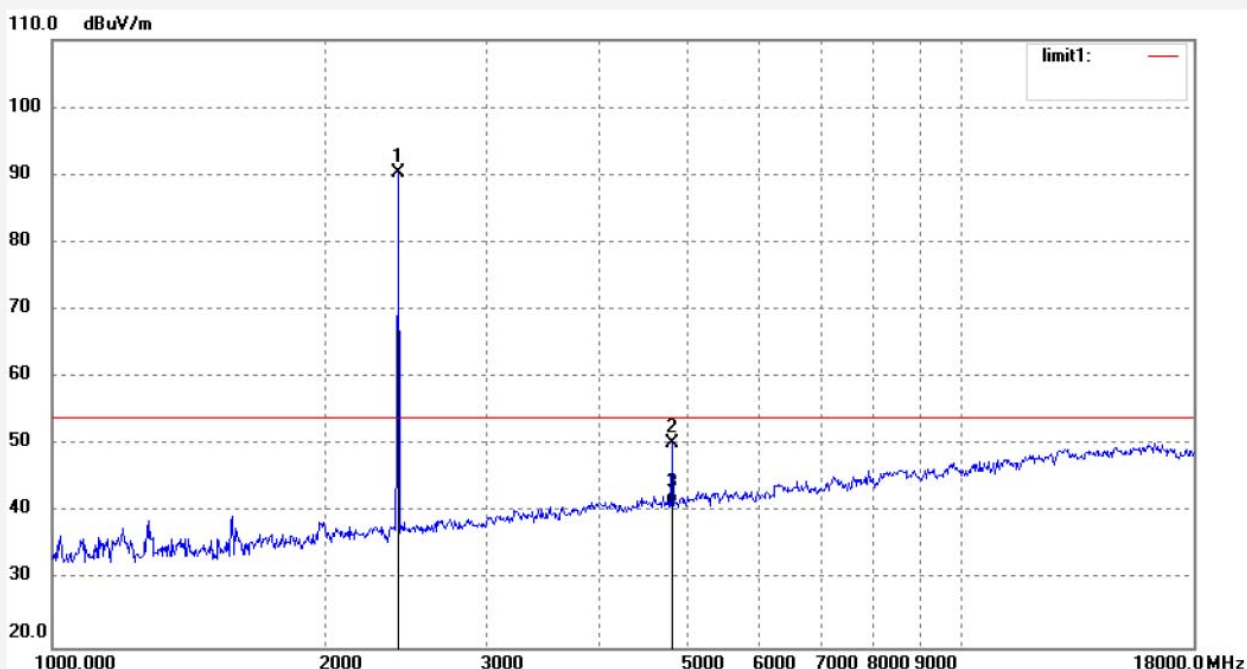

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	89.32	0.89	90.21	/	/	peak			
2	4804.026	42.76	7.40	50.16	74.00	-23.84	peak			
3	4804.026	33.95	7.40	41.35	54.00	-12.65	AVG			

Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #5226

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

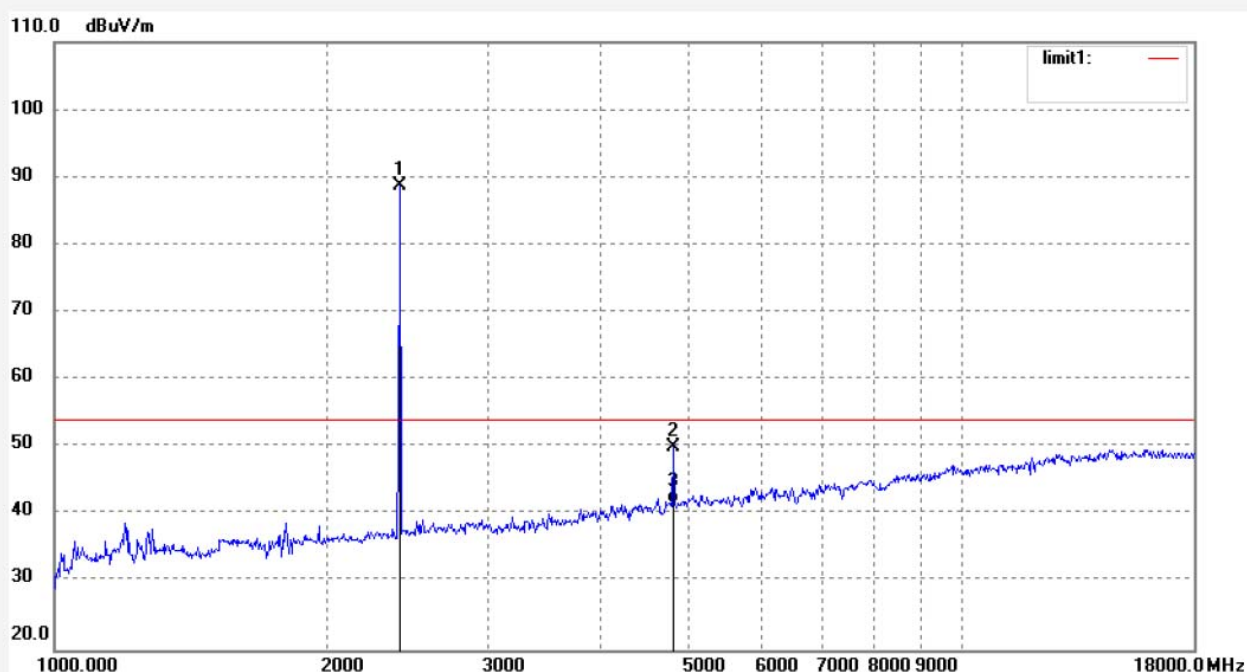

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	87.77	0.89	88.66	/	/	peak			
2	4804.026	42.58	7.40	49.98	74.00	-24.02	peak			
3	4804.026	34.25	7.40	41.65	54.00	-12.35	AVG			

Job No.: LGW2017 #5229

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

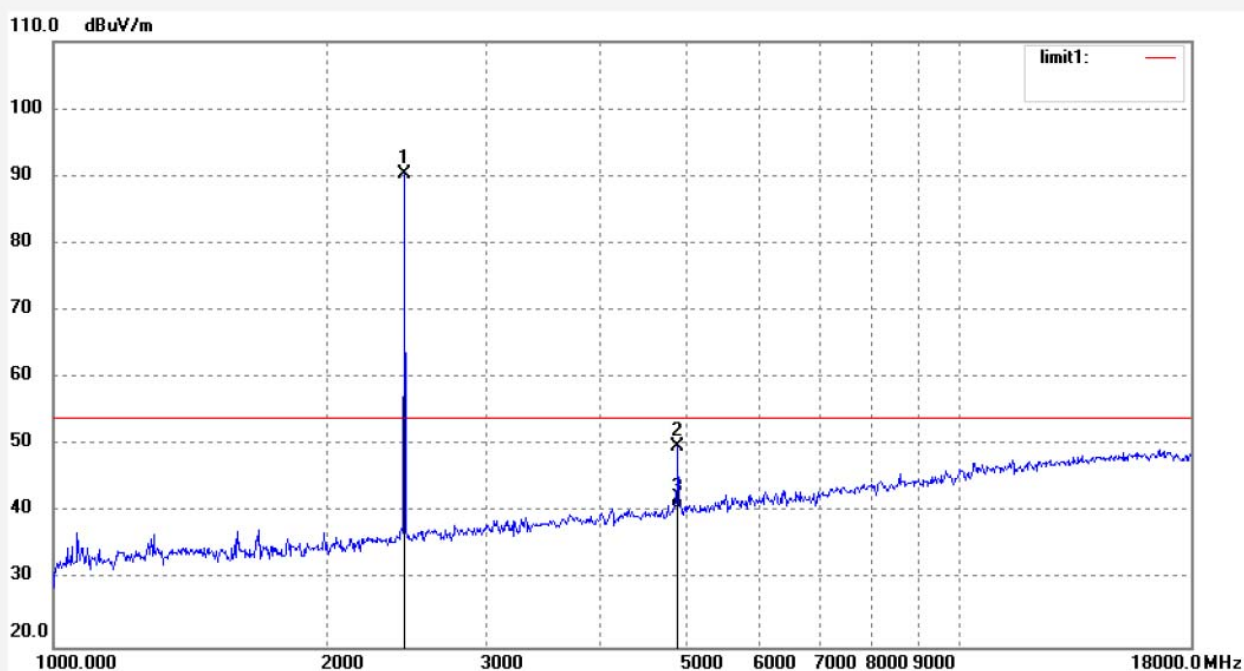

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	89.29	1.04	90.33	/	/	peak			
2	4880.027	41.81	8.10	49.91	74.00	-24.09	peak			
3	4880.027	32.47	8.10	40.57	54.00	-13.43	AVG			

Job No.: LGW2017 #5230

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

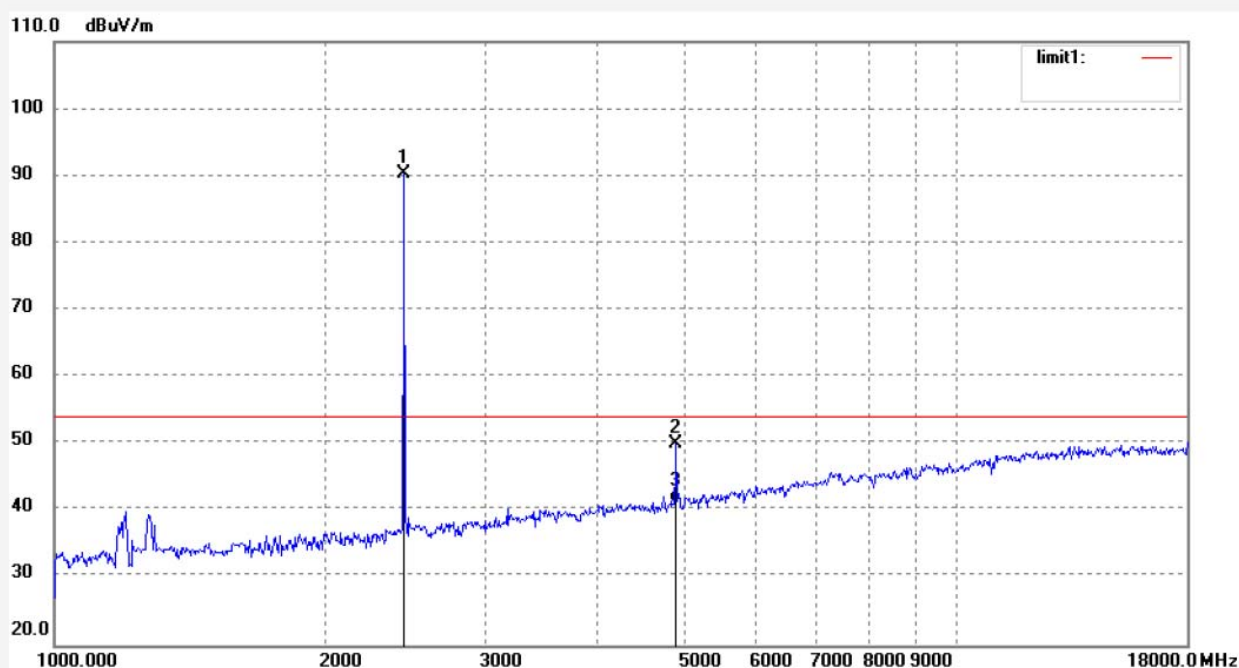

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	89.37	1.04	90.41	/	/	peak			
2	4880.028	41.90	8.10	50.00	74.00	-24.00	peak			
3	4880.028	33.25	8.10	41.35	54.00	-12.65	AVG			

Job No.: LGW2017 #5232

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

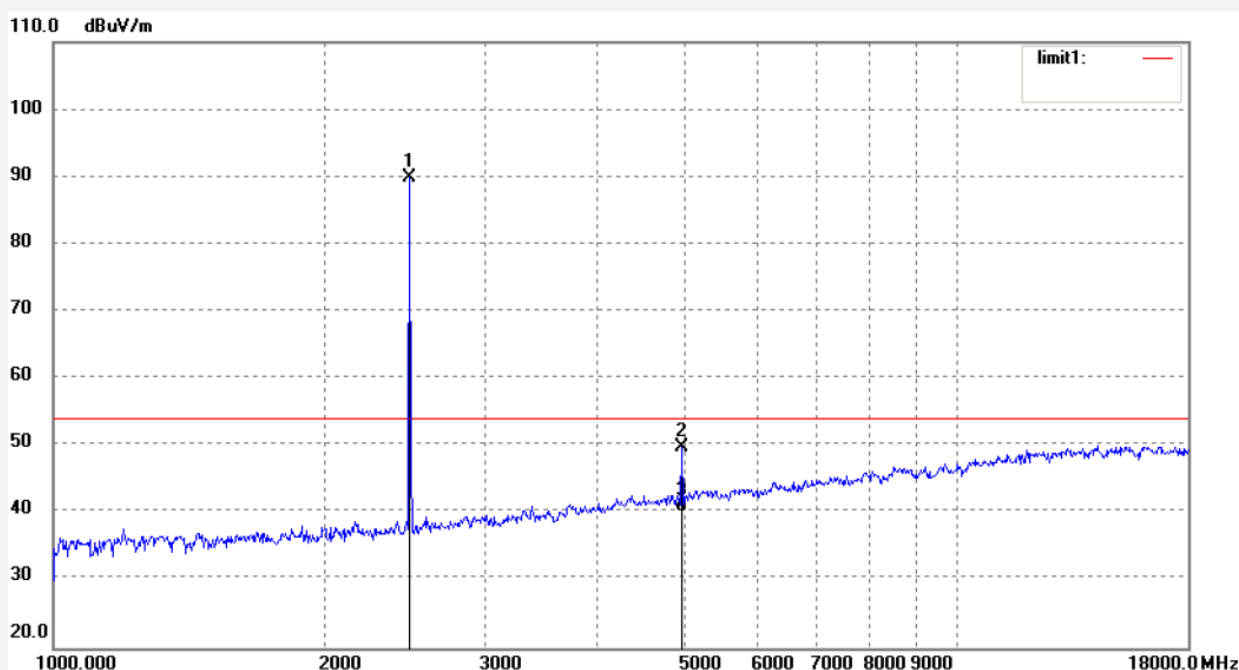

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	88.80	1.10	89.90	/	/	peak			
2	4960.027	41.31	8.60	49.91	74.00	-24.09	peak			
3	4960.027	31.63	8.60	40.23	54.00	-13.77	AVG			

Job No.: LGW2017 #5231

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

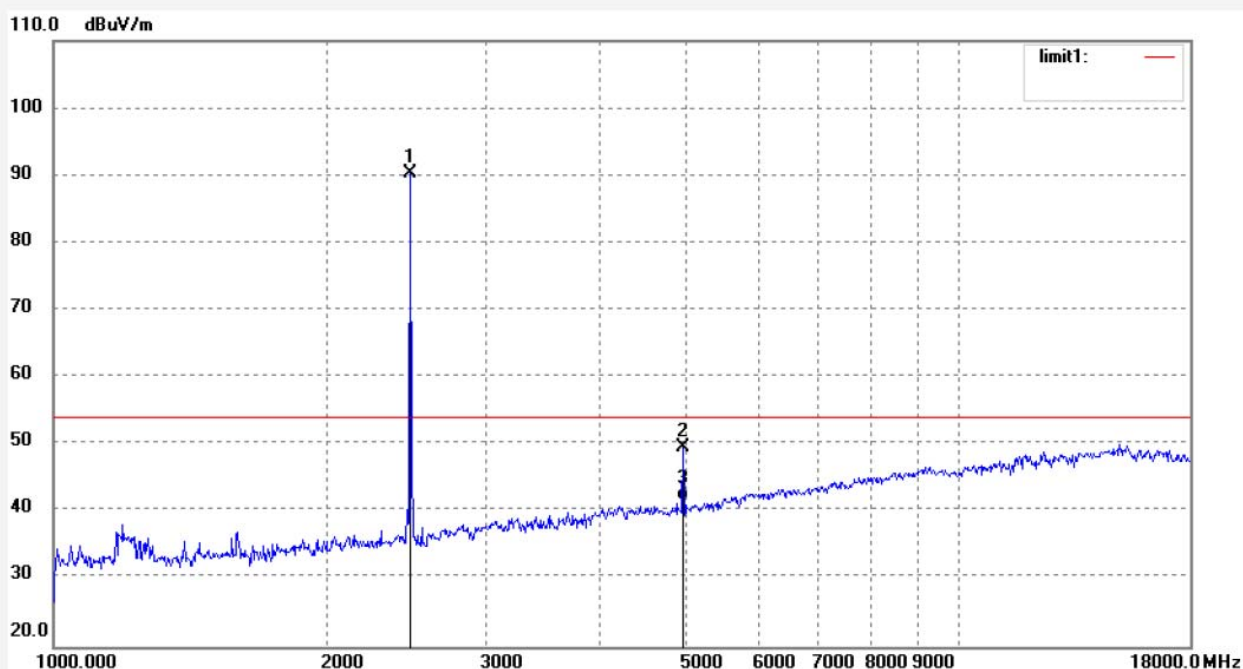

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	89.26	1.10	90.36	/	/	peak			
2	4960.029	41.04	8.60	49.64	74.00	-24.36	peak			
3	4960.029	33.05	8.60	41.65	54.00	-12.35	AVG			

FCC PART 15C(18GHz-26.5GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #5236

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

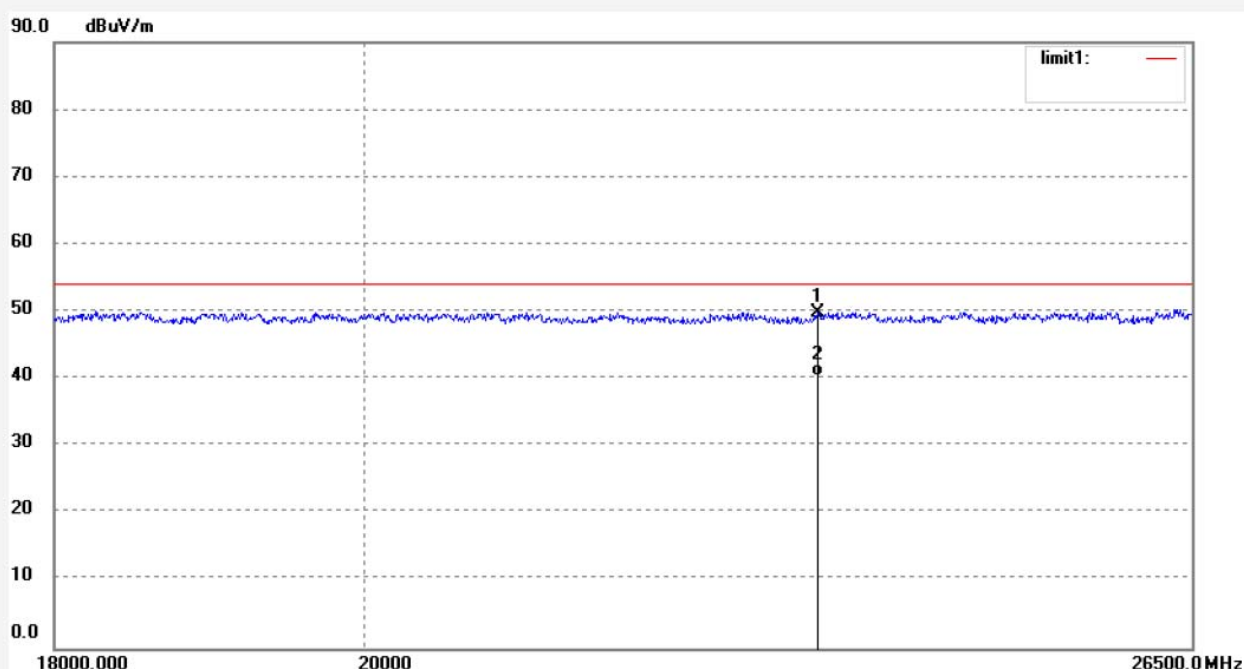

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23333.648	9.93	39.89	49.82	74.00	-24.18	peak			
2	23333.648	0.55	39.89	40.44	54.00	-13.56	AVG			

Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2017 #5235

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2402MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

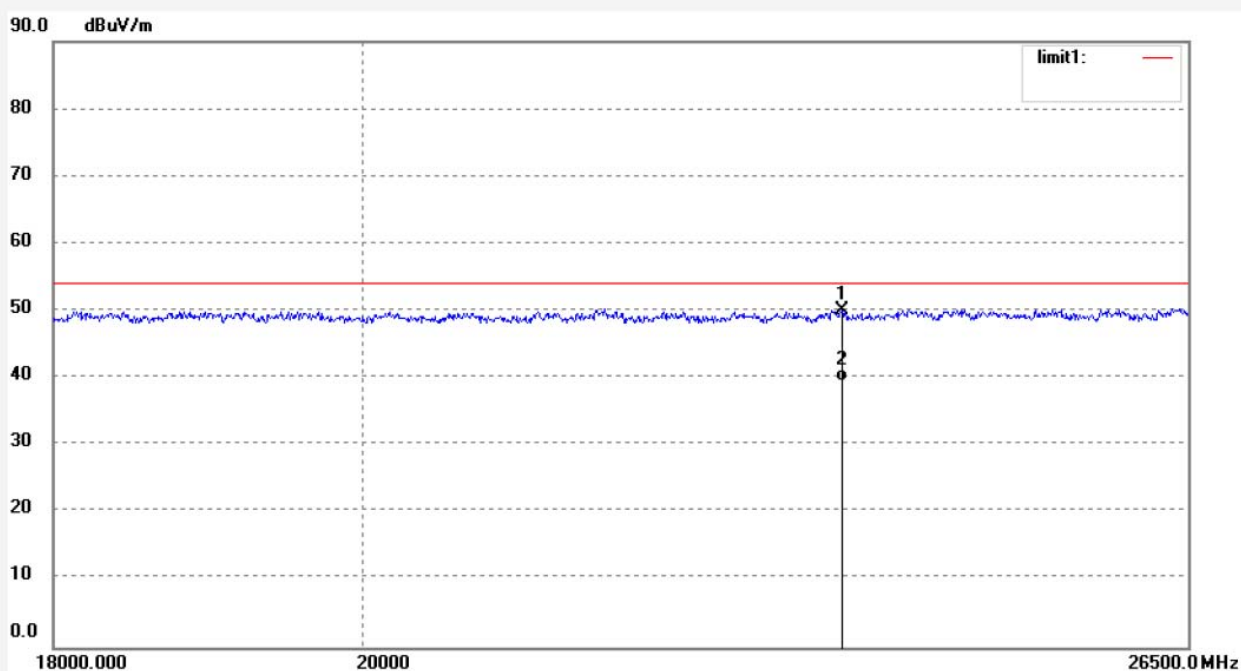

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23551.252	10.29	39.69	49.98	74.00	-24.02	peak			
2	23551.252	-0.28	39.69	39.41	54.00	-14.59	AVG			

Job No.: LGW2017 #5237

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

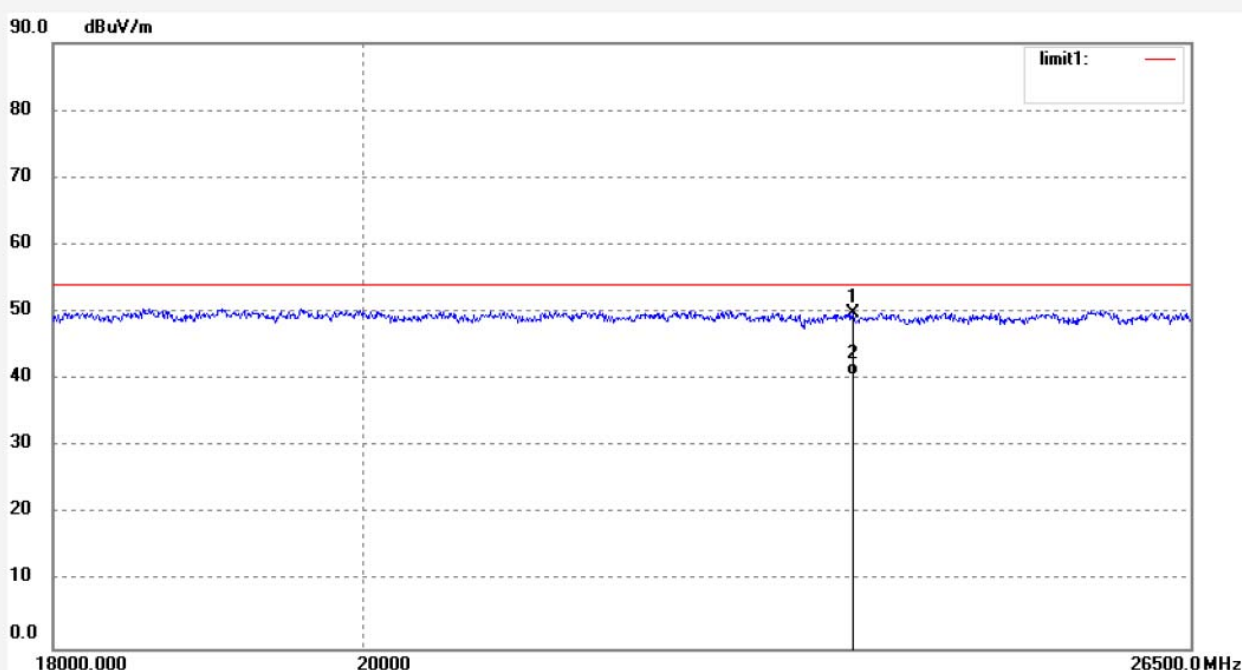

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23624.237	9.63	40.13	49.76	74.00	-24.24	peak			
2	23624.237	0.52	40.13	40.65	54.00	-13.35	AVG			

Job No.: LGW2017 #5238

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2440MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

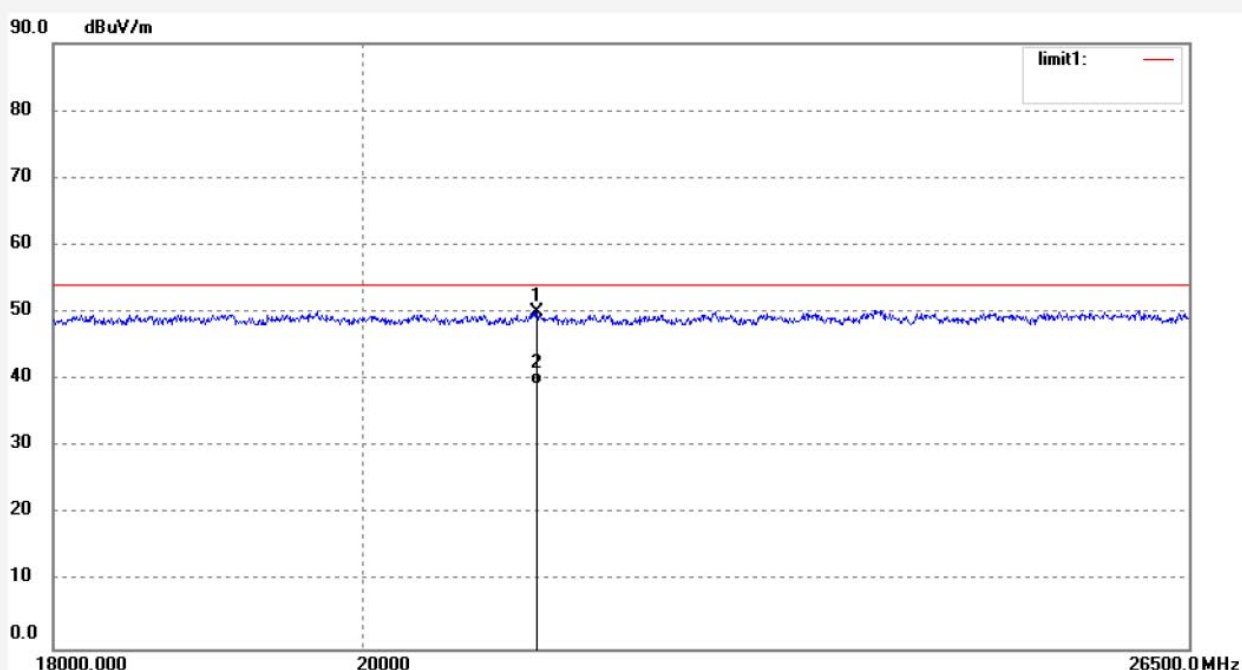

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	21215.887	10.64	39.35	49.99	74.00	-24.01	peak			
2	21215.887	-0.01	39.35	39.34	54.00	-14.66	AVG			

Job No.: LGW2017 #5240

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Horizontal

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Report No.:ATE20172480

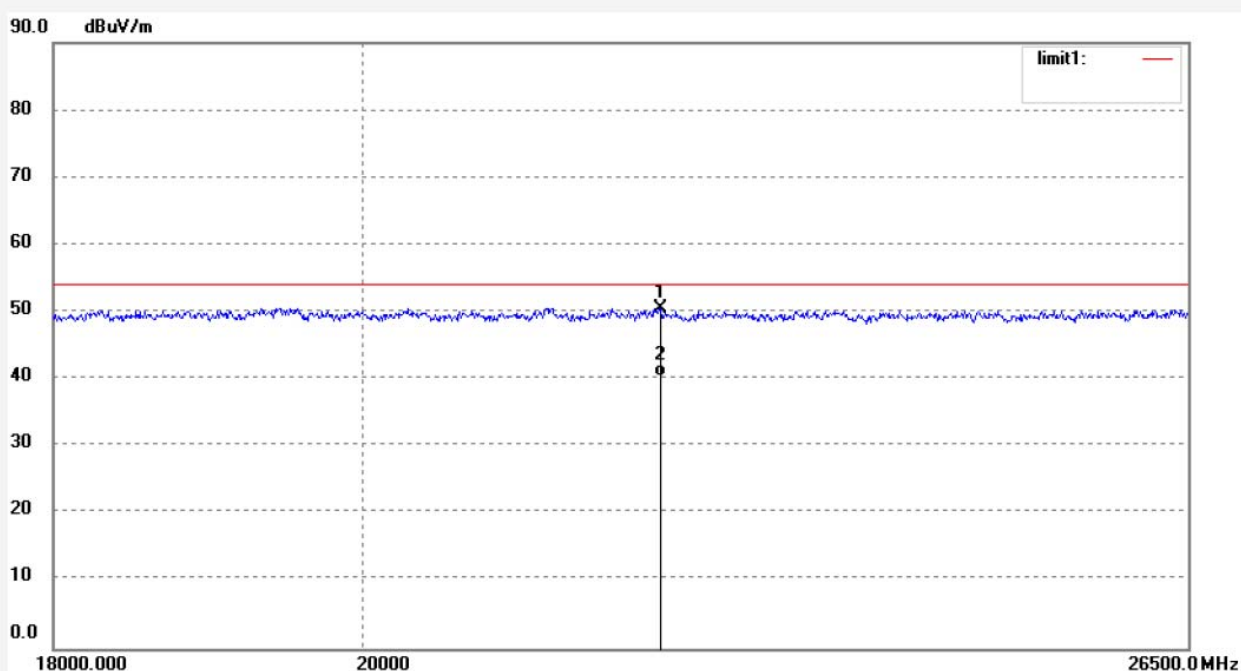

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22137.994	11.04	39.52	50.56	74.00	-23.44	peak			
2	22137.994	0.94	39.52	40.46	54.00	-13.54	AVG			

Job No.: LGW2017 #5239

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: iMagic Lock

Mode: TX 2480MHz

Model: iSL2S

Manufacturer: Hangzhou iMagic Technology Co.,Ltd

Polarization: Vertical

Power Source: DC 6V


Date: 17/12/02/

Time:

Engineer Signature: WADE

Distance: 3m


Note: Report No.:ATE20172480

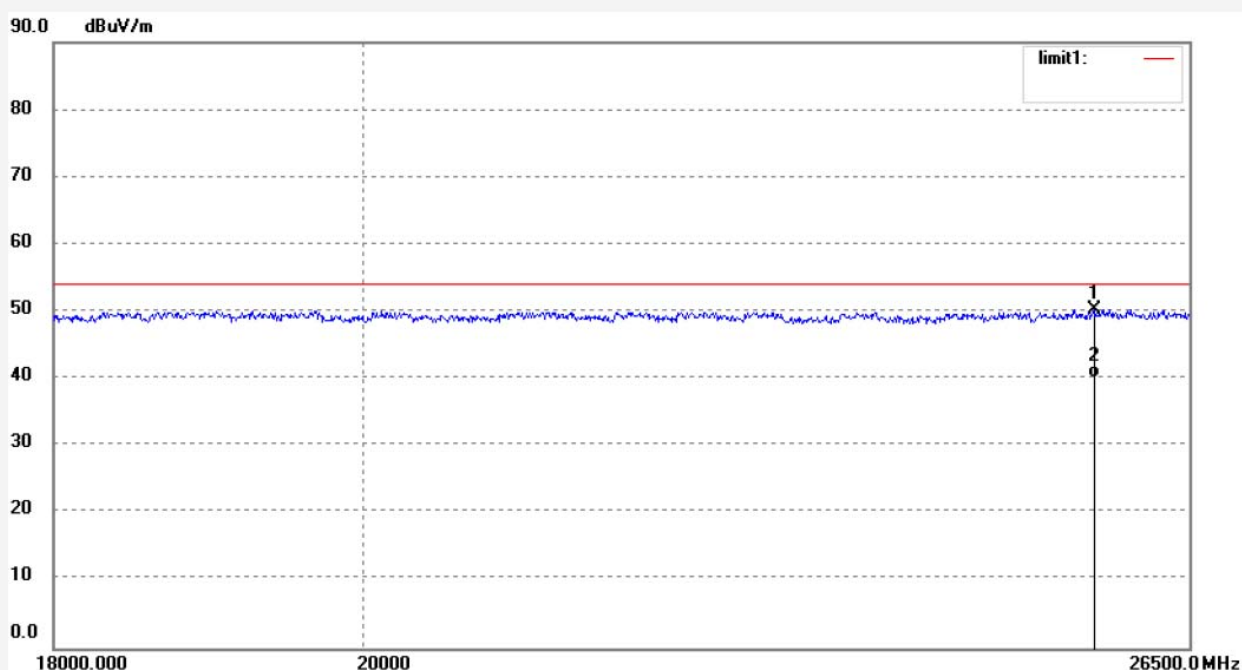

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25662.803	9.26	41.04	50.30	74.00	-23.70	peak			
2	25662.803	-0.81	41.04	40.23	54.00	-13.77	AVG			

10.99% OCCUPIED BANDWIDTH

10.1. Block Diagram of Test Setup



(EUT: iMagic Lock)

10.2. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3. Operating Condition of EUT

10.3.1. Setup the EUT and simulator as shown as Section 10.1.

10.3.2. Turn on the power of all equipment.

10.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.4. Test Procedure

10.4.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

10.4.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.


10.4.3. Set SPA “Meas” function, Select “Occupied Bandwidth” function, Select “99% Power Bandwidth”. The frequency of the upper and lower markers indicating the edges of the transmitters “99% Power” emission bandwidth shall be recorded to automate by SPA.

10.5.Measurement Result

Frequency (MHz)	99% Occupied Bandwidth (MHz)
2402	1.0707
2440	1.0941
2480	1.1027


The spectrum analyzer plots are attached as below.

Low Channel 2402MHz

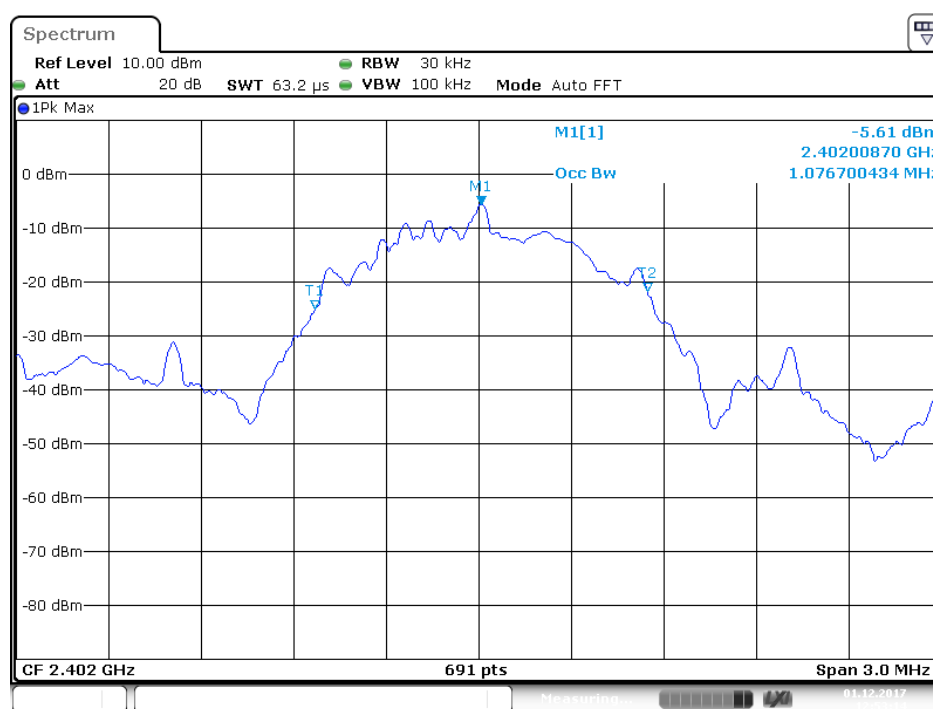


Date: 1.DEC.2017 12:53:14

Middle Channel 2440MHz

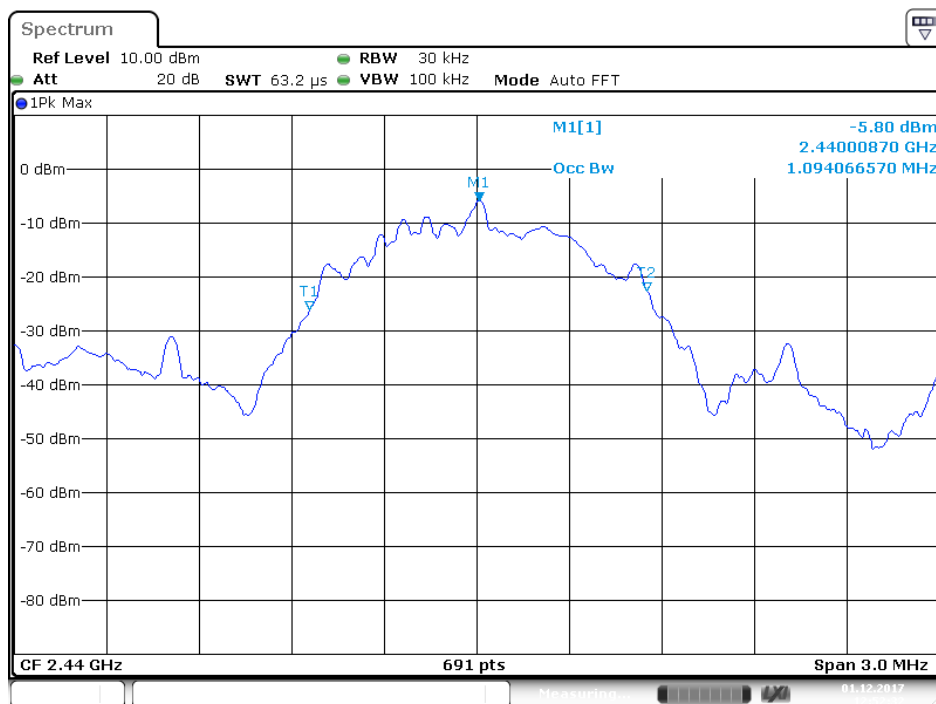

Date: 1.DEC.2017 12:52:32


High Channel 2480MHz

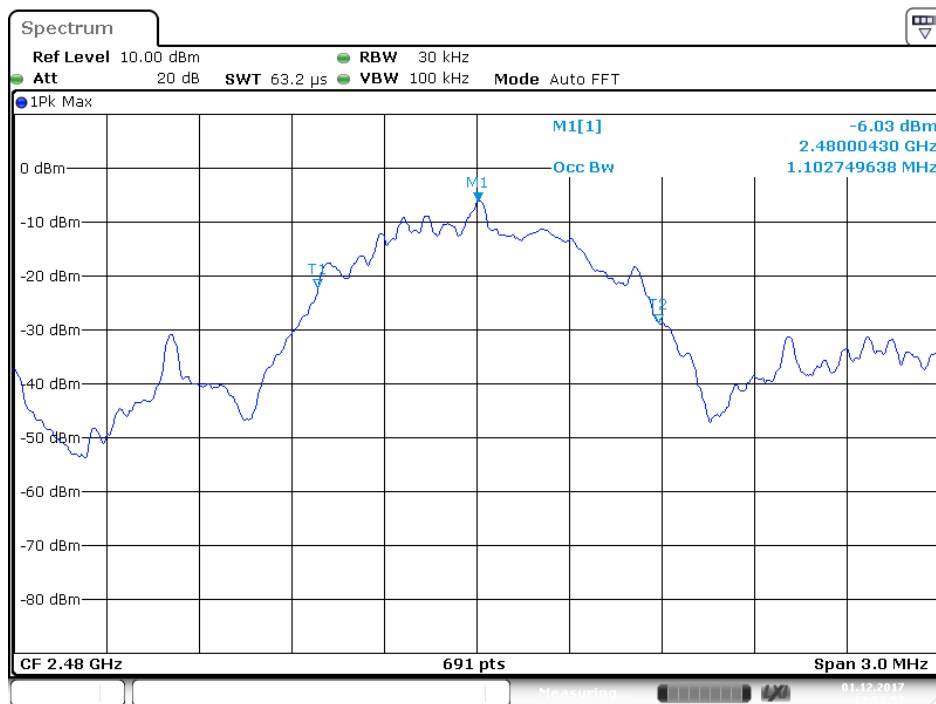

Date: 1.DEC.2017 12:53:57

11.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: iMagic Lock)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


11.5.3. The Conducted Spurious Emission was measured and recorded.

11.6. Test Result

Pass.


The spectrum analyzer plots are attached as below.

Low Channel 2402MHz

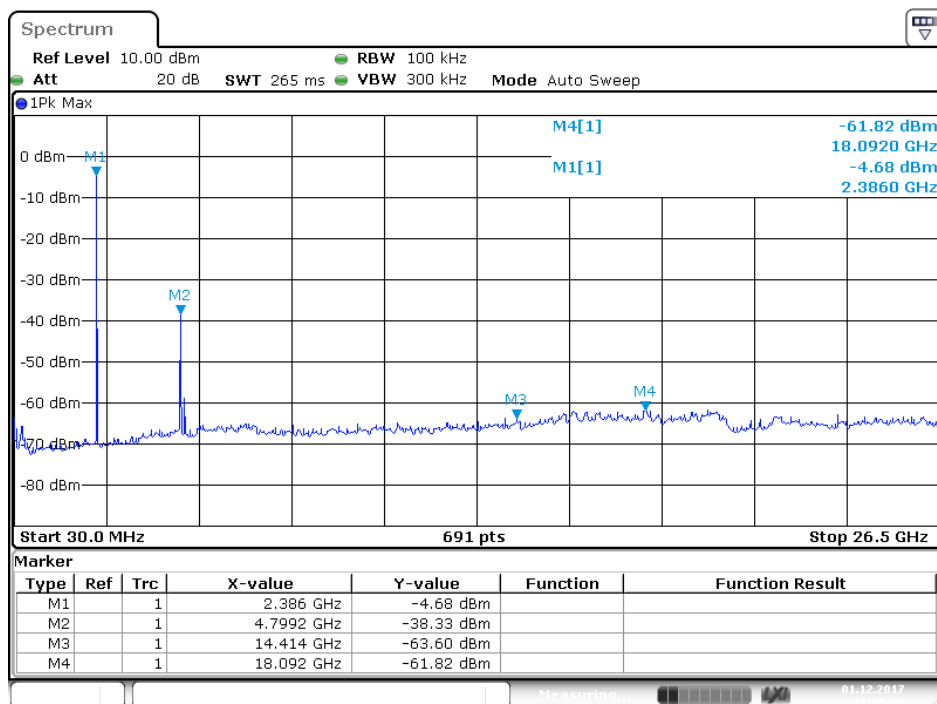


Date: 1. DEC. 2017 13:00:00

Middle Channel 2440MHz

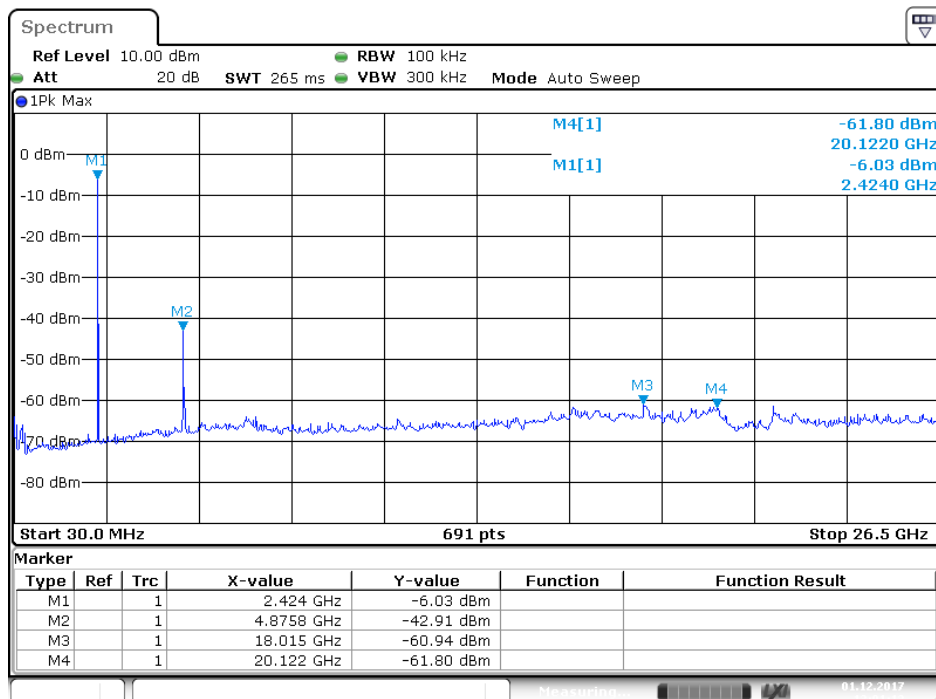

Date: 1.DEC.2017 13:01:13

High Channel 2480MHz

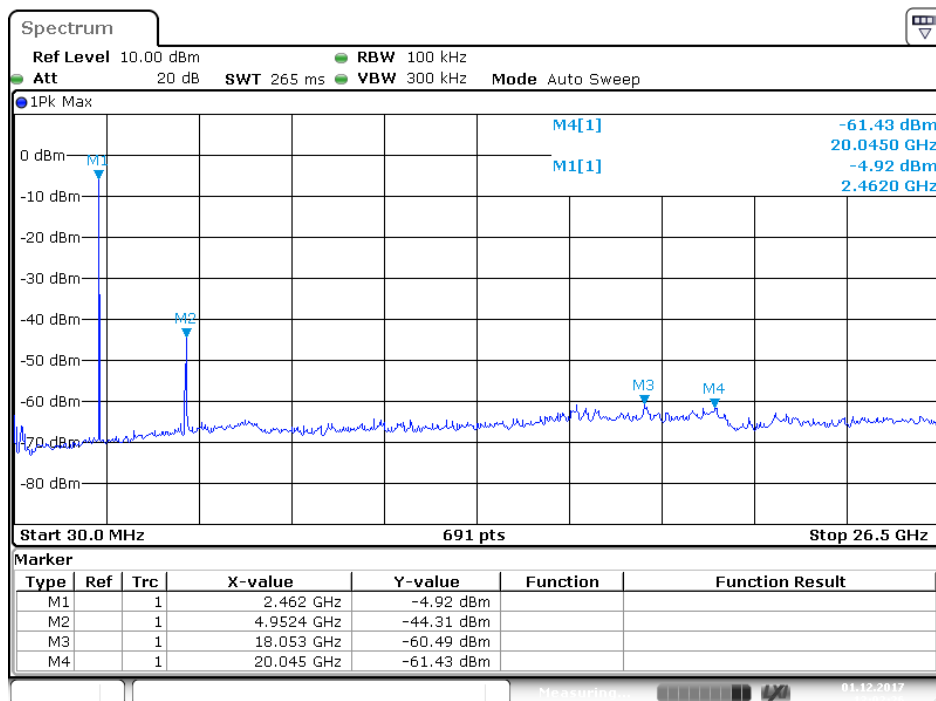

Date: 1.DEC.2017 13:02:26

12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of FCC part 15C Section 15.203.