

FCC RADIO TEST REPORT

FCC ID: 2AN8Z- SONNET

Product : Sonnet

Trade Name : Sonnet

Model Name : Sonnet

Serial Model : N/A

Report No. : UNIA2018081011-1FR-01

Prepared for

Sonnet Labs Inc.

8 The Green Suite #6290, Dover, DE 19901, United States

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name: Sonnet Labs Inc.
 Address: 8 The Green Suite #6290, Dover, DE 19901, United States
Manufacture's Name: Sonnet Labs Inc.
 Address: 8 The Green Suite #6290, Dover, DE 19901, United States

Product description
 Product name: Sonnet
 Trade Mark: Sonnet
 Model and/or type reference .: Sonnet

Standards.....: FCC Rules and Regulations Part 15 Subpart C Section 15.249
 ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test.....:
 Date (s) of performance of tests.....: Aug. 10, 2018 ~ Sep. 07, 2018
 Date of Issue: Sep. 07, 2018
 Test Result.....: Pass

Prepared by:

Kahn Yang

Kahn yang/Editor

Reviewer:

Sherwin Qian

Sherwin Qian/Supervisor

Approved & Authorized Signer:

Liuze

Liuze/Manager

Table of Contents	Page
1 TEST SUMMARY	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 Carrier Frequency of Channels	6
2.3 Operation of EUT during testing	6
2.4 DESCRIPTION OF TEST SETUP	6
2.5 MEASUREMENT INSTRUMENTS LIST	7
3 CONDUCTED EMISSION TEST	8
3.1 Test Limit	8
3.2 Test Setup	8
3.3 Test Procedure	8
3.4 Test Result	8
4 RADIATED EMISSION TEST	13
4.1 Test Limit	13
4.2 Test Setup	13
4.3 Test Procedure	15
4.4 Test Result	15
5 OCCUPIED BANDWIDTH TEST	22
5.1 Test Setup	22
5.2 Rules and specifications	22
5.3 Test Procedure	22
5.4 Test Result	22
6 ANTENNA REQUIREMENT	24
7 PHOTOGRAPH OF TEST	25
7.1 Radiated Emission	25
7.2 Conducted Emission	26

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
AC Power Line Conducted Emission	COMPLIANT
Field Strength of Fundamental	COMPLIANT
Spurious Emissions	COMPLIANT
Band Edge	COMPLIANT
20dB Occupied Bandwidth	COMPLIANT
Antenna requirement	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
 Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Sonnet
Trade Mark	Sonnet
Model Name	Sonnet
Serial No.	N/A
Model Difference	N/A
FCC ID	2AN8Z- SONNET
Antenna Type	Antenna port 1: Internal Antenna Antenna port 2: External Antenna
Antenna Gain	Antenna port 1: 3.7dBi Antenna port 2: 0dBi
Operation frequency	915MHz
Number of Channels	1CH
Modulation Type	LORA
Battery	DC 3.7V, 4200mAh
Power Source	DC 3.7V from Battery or DC 5V from adapter with AC 120(240)V/60Hz
Adapter Model	M/N: PS06H050K1000UU Input: AC 100-240V, 50/60Hz, 0.25A Output: DC 5V, 1A

2.2 Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
01	915MHz

2.3 Operation of EUT during testing

Operating Mode

The mode is used:

Mode 1: Transmitting mode (Internal Antenna)

Mode 2: Transmitting mode (External Antenna)

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation and Above1GHz Radiation testing:



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2018.9.9
2	AMN	ETS	3810/2	00020199	2018.9.9
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2018.9.9
4	AAN	TESEQ	T8-Cat6	38888	2018.9.9
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2018.9.29
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2018.9.29
3	PREAMP	HP	8449B	3008A00160	2018.9.9
4	PREAMP	HP	8447D	2944A07999	2018.9.9
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2018.9.9
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2018.9.28
7	Signal Generator	Agilent	E4421B	MY4335105	2018.9.28
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2018.9.28
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2018.9.9
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2018.9.28
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2018.9.9
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2018.9.9
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2019.3.14
14	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2019.3.14
15	RF power divider	Anritsu	K241B	992289	2018.9.28
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2018.9.28
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2018.9.8
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2018.9.8
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2018.9.8
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2019.1.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2018.11.02
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2019.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2018.10.24
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2019.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2019.05.10

3 CONDUCTED EMISSION TEST

3.1 Test Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

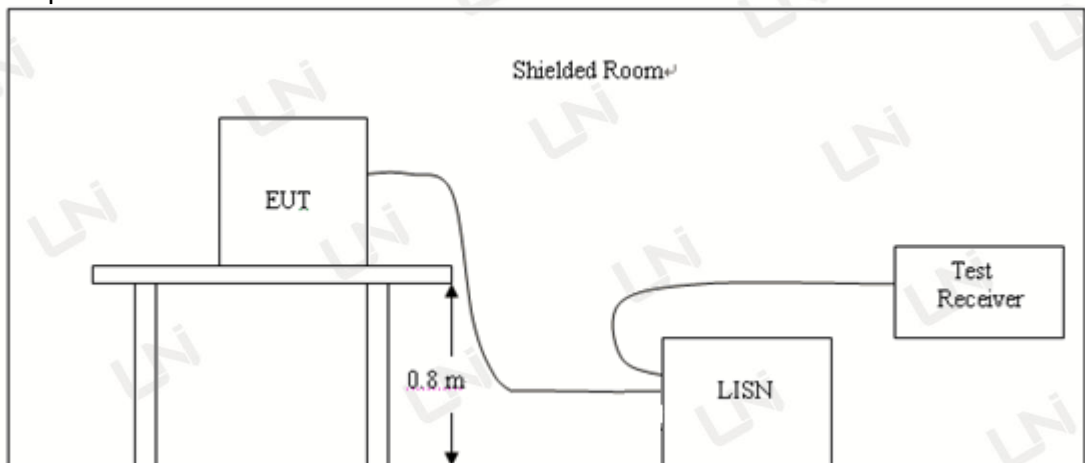

3.3 Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer/Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.


Temperature:	25°C	Relative Humidity:	49%
Test Date:	Sep. 05, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Mode 1: Transmitting mode (Internal Antenna)		

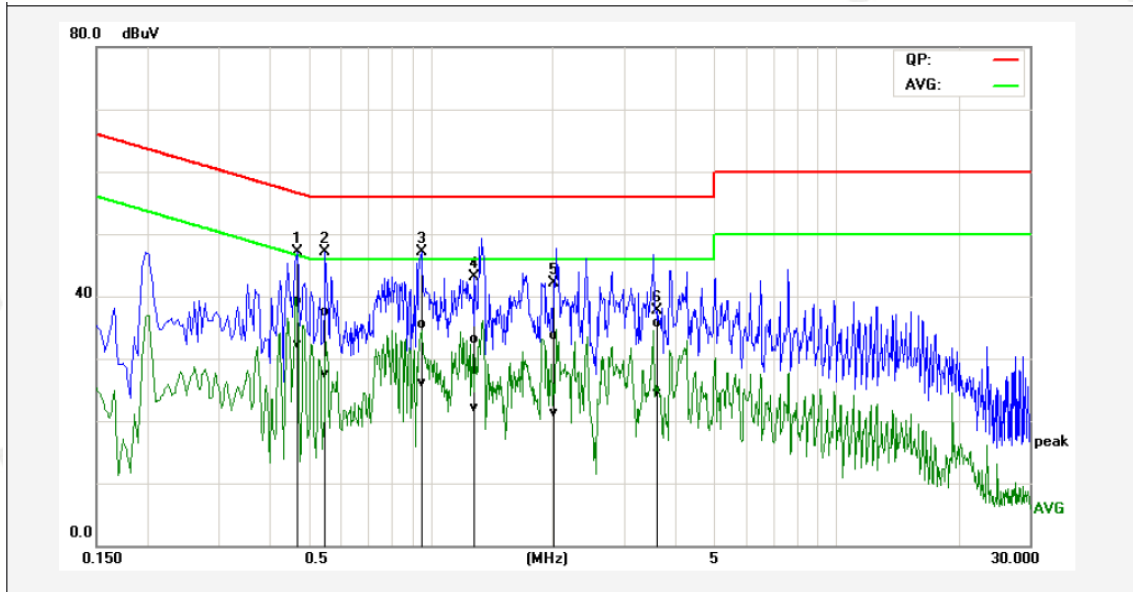

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.4711	29.45	22.57	9.80	39.25	32.37	56.49	46.49	-17.24	-14.12	Pass
2P	0.5526	27.63	17.62	9.81	37.44	27.43	56.00	46.00	-18.56	-18.57	Pass
3P	0.9503	25.58	16.18	9.85	35.43	26.03	56.00	46.00	-20.57	-19.97	Pass
4P	1.2848	23.33	12.31	9.84	33.17	22.15	56.00	46.00	-22.83	-23.85	Pass
5P	1.9871	23.83	11.46	9.88	33.71	21.34	56.00	46.00	-22.29	-24.66	Pass
6P	3.6143	25.82	14.52	9.92	35.74	24.44	56.00	46.00	-20.26	-21.56	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.


Temperature:	25°C	Relative Humidity:	49%
Test Date:	Sep. 05, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Mode 1: Transmitting mode (Internal Antenna)		

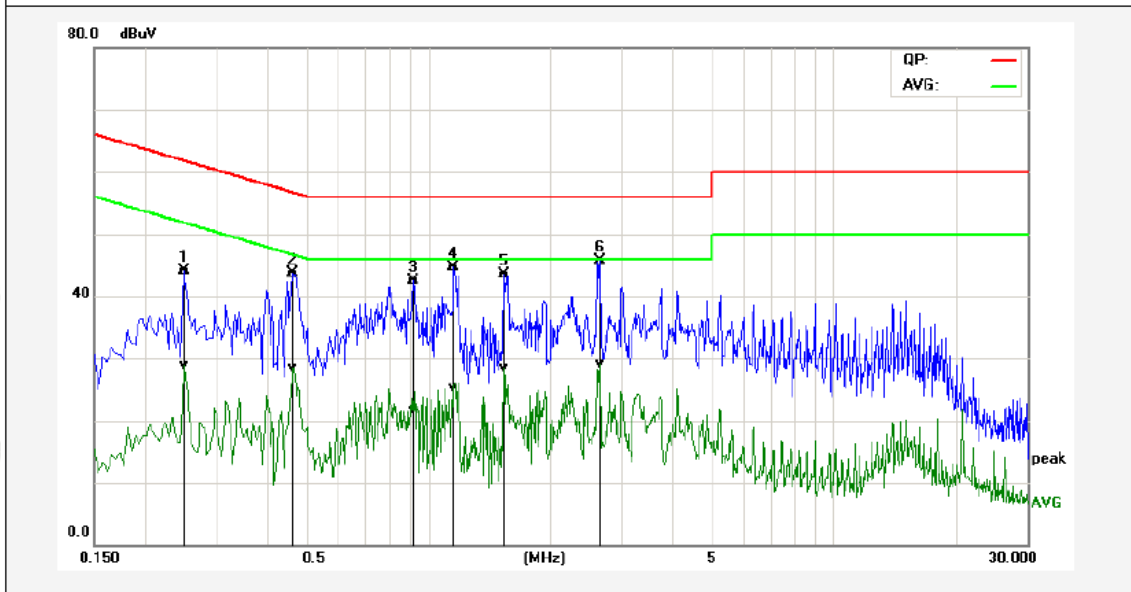

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2500	34.36	19.31	9.67	44.03	28.98	61.75	51.76	-17.72	-22.78	Pass
2P	0.4660	34.00	18.89	9.69	43.69	28.58	56.58	46.58	-12.89	-18.00	Pass
3P	0.9220	32.74	11.89	9.75	42.49	21.64	56.00	46.00	-13.51	-24.36	Pass
4P	1.1580	34.88	15.53	9.75	44.63	25.28	56.00	46.00	-11.37	-20.72	Pass
5P	1.5420	33.79	18.65	9.77	43.56	28.42	56.00	46.00	-12.44	-17.58	Pass
6*	2.6540	35.95	19.29	9.82	45.77	29.11	56.00	46.00	-10.23	-16.89	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.


Temperature:	25°C	Relative Humidity:	49%
Test Date:	Sep. 05, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Mode 2: Transmitting mode (External Antenna)		

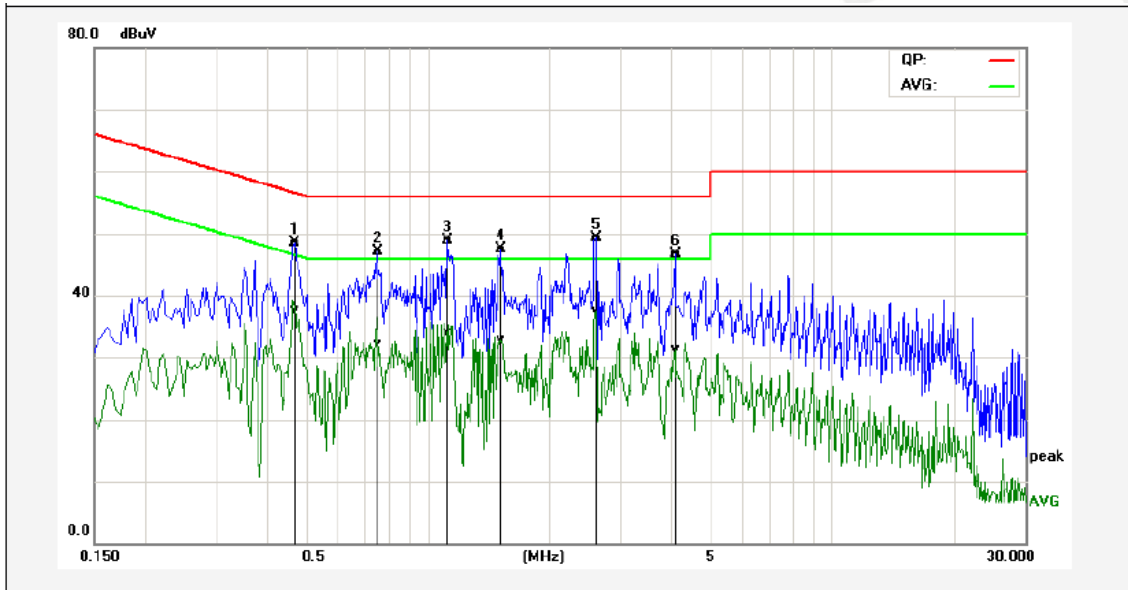

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4700	38.64	27.96	9.80	48.44	37.76	56.51	46.51	-8.07	-8.75	Pass
2P	0.7539	37.19	22.41	9.83	47.02	32.24	56.00	46.00	-8.98	-13.76	Pass
3P	1.1180	39.14	24.29	9.85	48.99	34.14	56.00	46.00	-7.01	-11.86	Pass
4P	1.5140	37.58	23.07	9.86	47.44	32.93	56.00	46.00	-8.56	-13.07	Pass
5*	2.6180	39.32	27.56	9.92	49.24	37.48	56.00	46.00	-6.76	-8.52	Pass
6P	4.1060	36.70	21.30	9.95	46.65	31.25	56.00	46.00	-9.35	-14.75	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	25°C	Relative Humidity:	49%
Test Date:	Sep. 05, 2018	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Mode 2: Transmitting mode (External Antenna)		

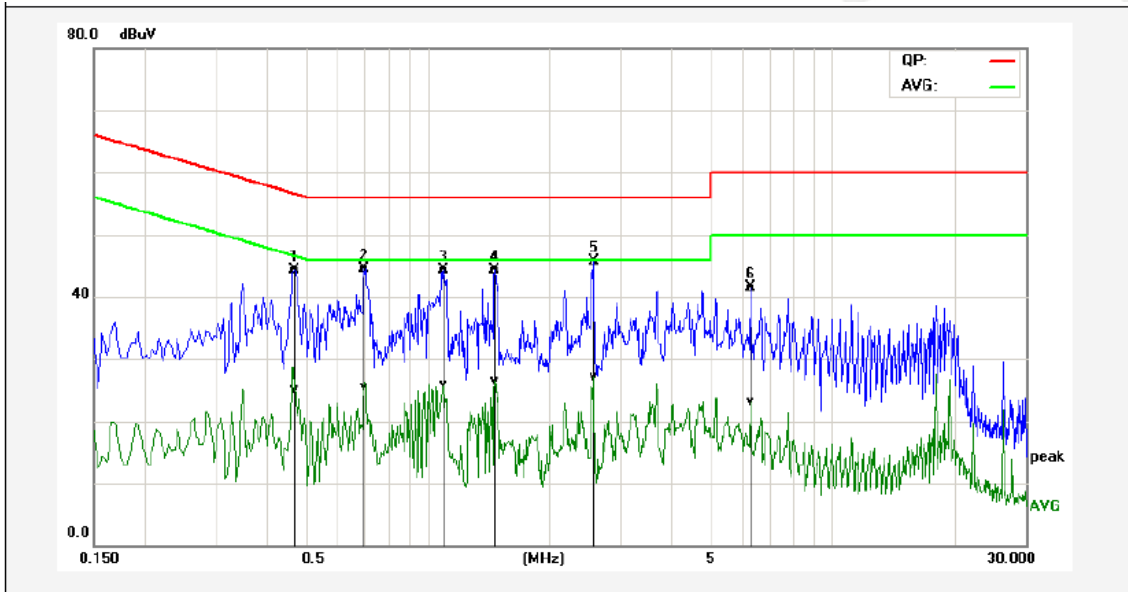

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4700	34.58	15.34	9.80	44.38	25.14	56.51	46.51	-12.13	-21.37	Pass
2P	0.6980	34.61	15.64	9.81	44.42	25.45	56.00	46.00	-11.58	-20.55	Pass
3P	1.0980	34.42	16.10	9.85	44.27	25.95	56.00	46.00	-11.73	-20.05	Pass
4P	1.4660	34.40	16.67	9.88	44.28	26.55	56.00	46.00	-11.72	-19.45	Pass
5*	2.5700	35.85	17.10	9.92	45.77	27.02	56.00	46.00	-10.23	-18.98	Pass
6P	6.2780	31.53	13.13	9.95	41.48	23.08	60.00	50.00	-18.52	-26.92	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION TEST

4.1 Test Limit

4. Limit (Field strength of the fundamental signal):

Frequency	Limit(dBuV/m@3m)	Remark
902MHz-928MHz	94.00	Average Value
	114.00	Peak Value

2. Limit (Spurious Emissions):


Frequency	Limit(dBuV/m@3m)	Remark
0.009-0.490	2400/F(KHz)	Quasi-peak Value
0.490-1.705	24000/F(KHz)	Quasi-peak Value
1.705-30	30	Quasi-peak Value
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

3. Limit (Band edge):


Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

4.2 Test Setup


4. Radiated Emission Test-Up Frequency Below 30MHz

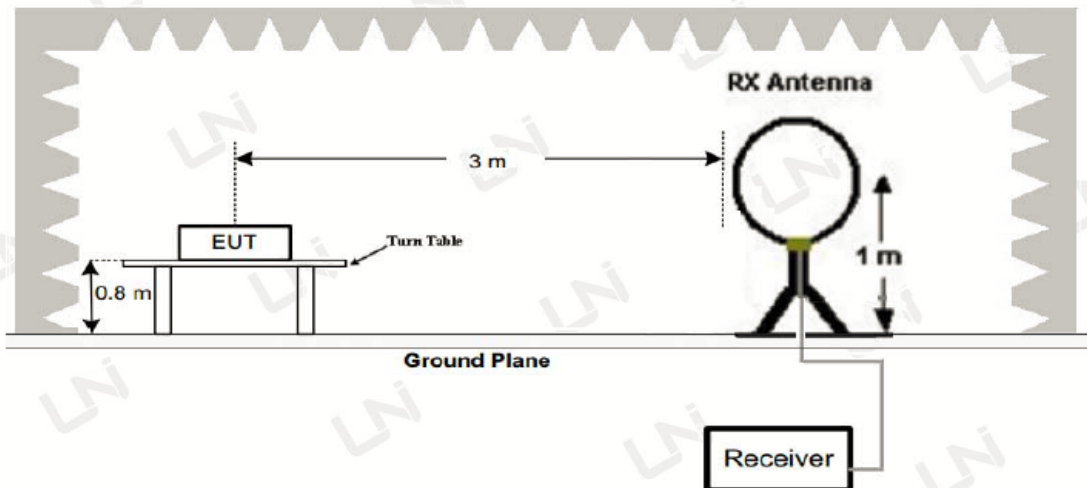

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

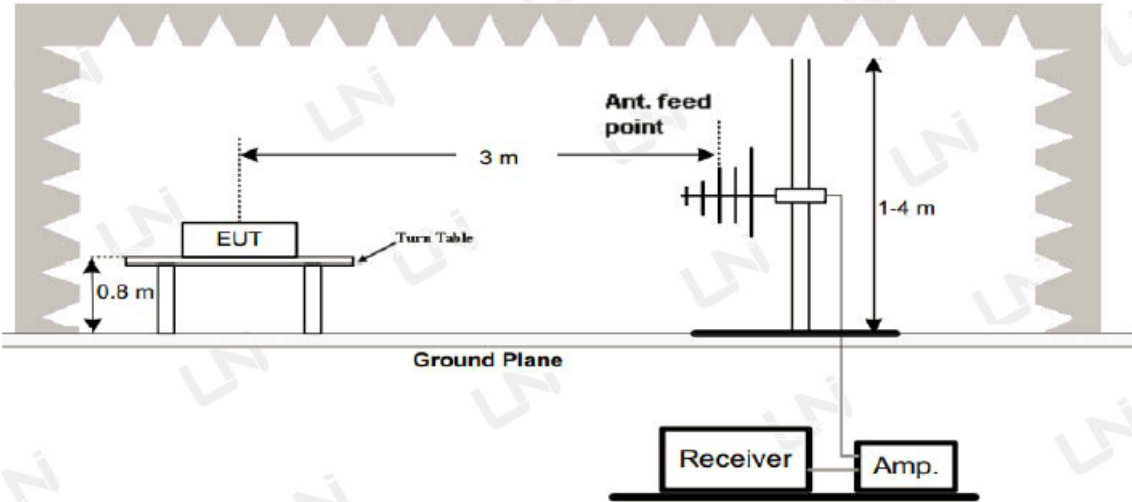

3. Radiated Emission Test-Up Frequency Above 1GHz

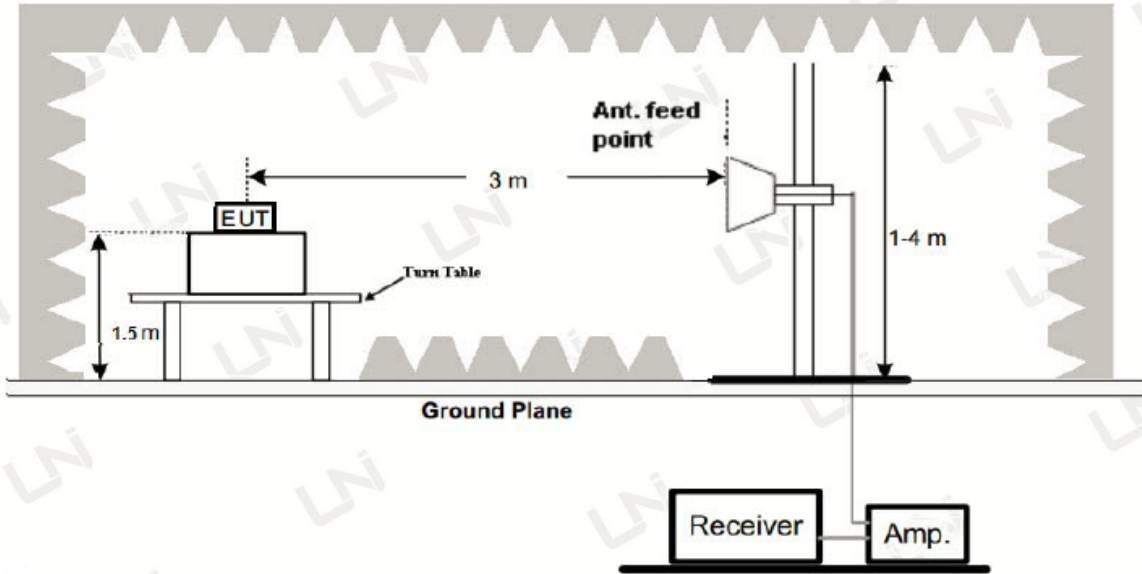

4. Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

4.3 Test Procedure

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

4.4 Test Result

PASS

Field Strength of Fundamental:

Mode 1: Transmitting mode (Internal Antenna)

Frequency (MHz)	Emission PK/AV (dBuV/m)	Ant. Pol.	Limits PK/AV (dBuV/m)	Margin (dB)
915	109.17(PK)	H	114/94	-4.83
915	92.79(AV)	H	114/94	-1.21
915	106.80(PK)	V	114/94	-7.20
915	89.65(AV)	V	114/94	-4.32

Mode 2: Transmitting mode (External Antenna)

Frequency (MHz)	Emission PK/AV (dBuV/m)	Ant. Pol.	Limits PK/AV (dBuV/m)	Margin (dB)
915	108.10(PK)	H	114/94	-5.90
915	90.57(AV)	H	114/94	-3.43
915	104.72(PK)	V	114/94	-9.28
915	87.83(AV)	V	114/94	-6.17


Spurious Emissions:

For 9 kHz-30MHz Test Results:

Note: The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

For 30MHz-1GHz Test Results:


Temperature:	23°C	Relative Humidity:	42%
Test Date:	Sep. 04, 2018	Pressure:	1010hPa
Test Voltage:	DC 3.7V from Battery	Polarization:	Horizontal
Test Mode:	Mode 1: Transmitting mode (Internal Antenna)		

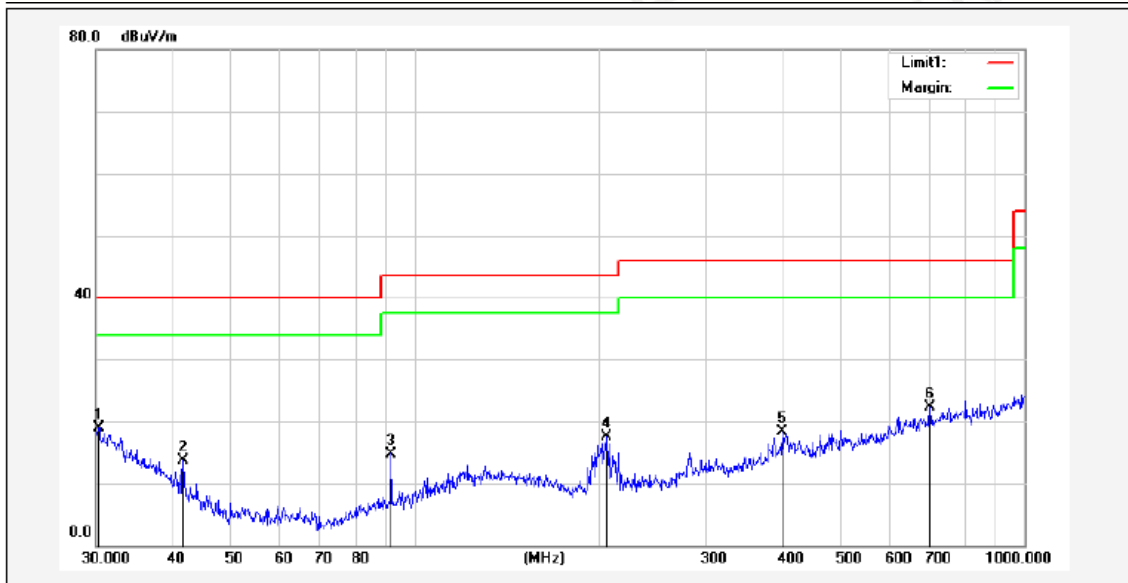

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	30.3173	26.37	-7.43	18.94	40.00	-21.06			peak
2	41.7130	30.35	-16.73	13.62	40.00	-26.38			peak
3	91.4950	34.89	-20.09	14.80	43.50	-28.70			peak
4	206.3976	34.54	-17.05	17.49	43.50	-26.01			peak
5	400.4320	31.97	-13.57	18.40	46.00	-27.60			peak
6	699.3046	31.08	-8.83	22.25	46.00	-23.75			peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	23°C	Relative Humidity:	42%
Test Date:	Sep. 04, 2018	Pressure:	1010hPa
Test Voltage:	DC 3.7V from Battery	Polarization:	Vertical
Test Mode:	Mode 1: Transmitting mode (Internal Antenna)		

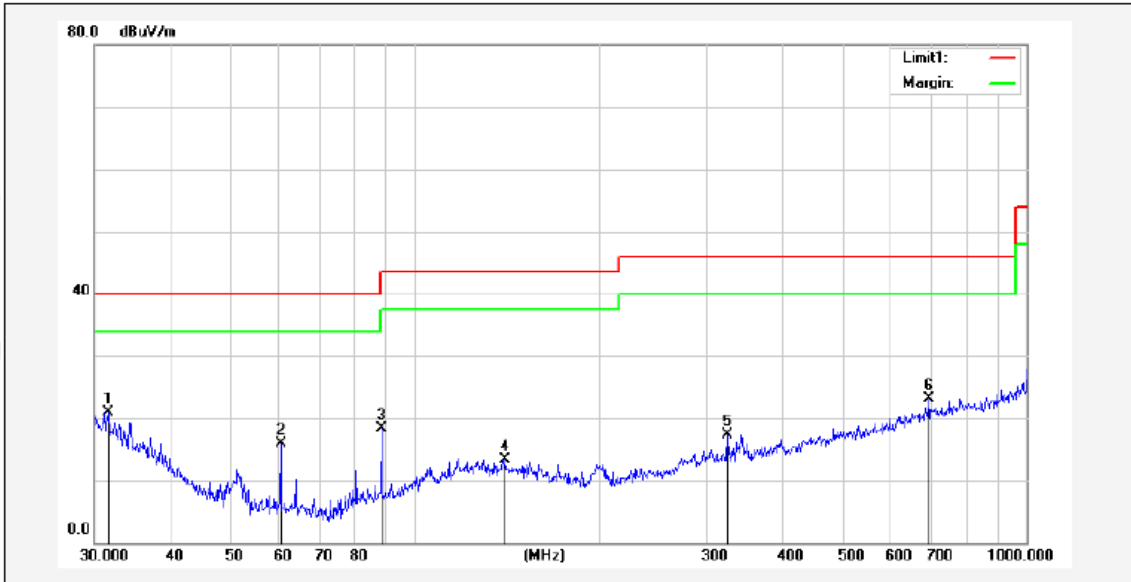


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	31.6202	29.54	-8.63	20.91	40.00	-19.09			peak
2	60.4920	37.59	-21.75	15.84	40.00	-24.16			peak
3	88.3421	38.55	-20.30	18.25	43.50	-25.25			peak
4	140.3420	28.79	-15.40	13.39	43.50	-30.11			peak
5	324.4560	31.50	-14.13	17.37	46.00	-28.63			peak
6	691.9867	32.04	-9.01	23.03	46.00	-22.97			peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

For 30MHz-1GHz Test Results:


Temperature:	23°C	Relative Humidity:	42%
Test Date:	Sep. 04, 2018	Pressure:	1010hPa
Test Voltage:	DC 3.7V from Battery	Polarization:	Horizontal
Test Mode:	Mode 2: Transmitting mode (External Antenna)		

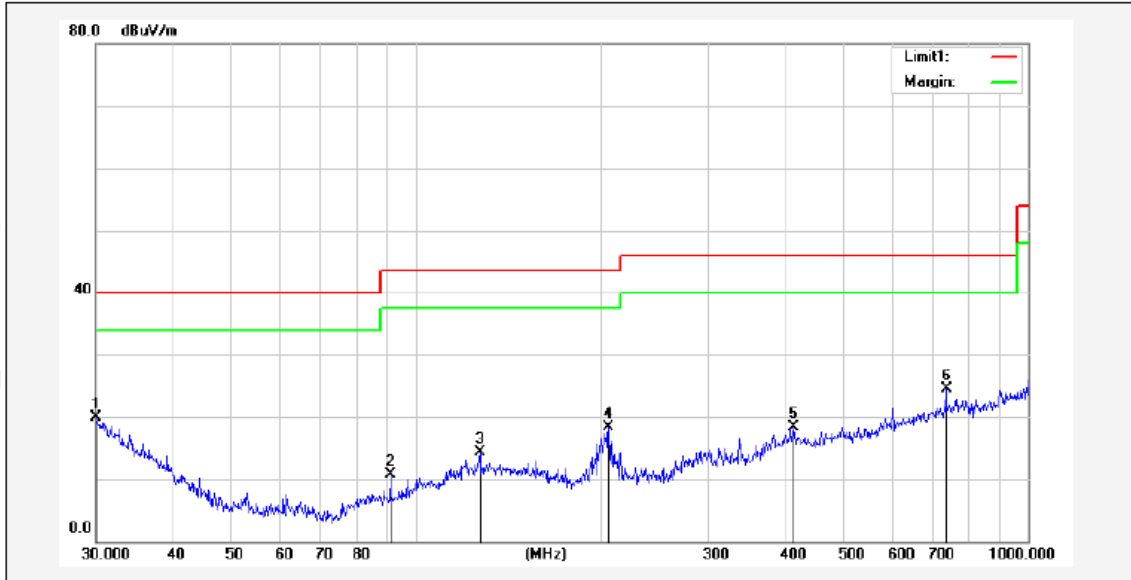

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	30.1054	27.05	-7.23	19.82	40.00	-20.18			peak
2	90.8554	30.76	-20.15	10.61	43.50	-32.89			peak
3	127.2176	29.76	-15.49	14.27	43.50	-29.23			peak
4	206.3976	35.36	-17.05	18.31	43.50	-25.19			peak
5	414.7223	31.65	-13.40	18.25	46.00	-27.75			peak
6	734.4913	32.96	-8.43	24.53	46.00	-21.47			peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	23°C	Relative Humidity:	42%
Test Date:	Sep. 04, 2018	Pressure:	1010hPa
Test Voltage:	DC 3.7V from Battery	Polarization:	Vertical
Test Mode:	Mode 2: Transmitting mode (External Antenna)		

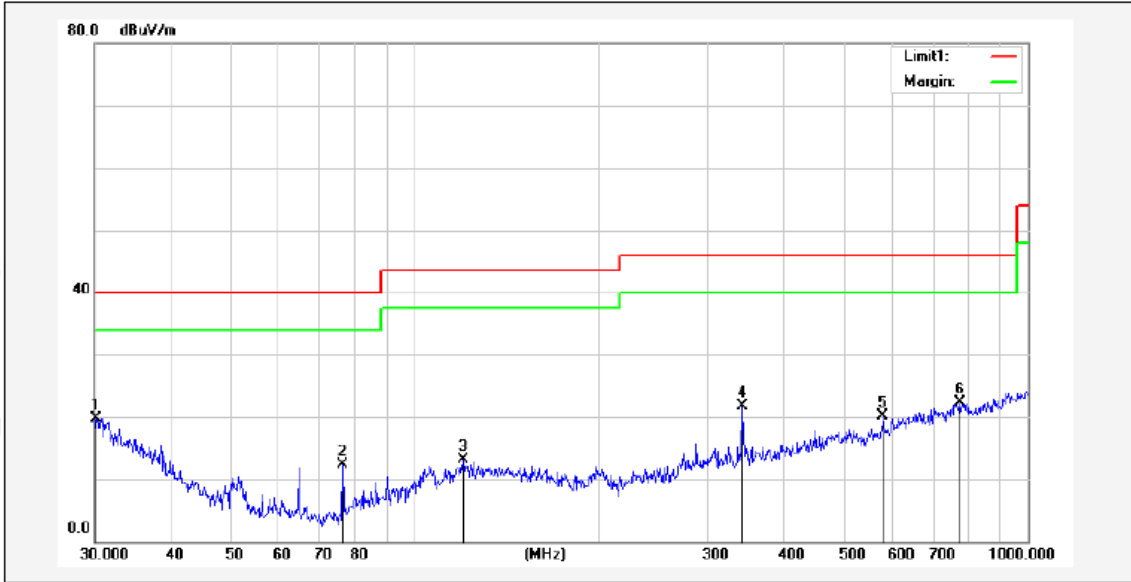

No.	Frequency (MHz)	Reading (dBUV)	Correction factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	30.2111	27.10	-7.33	19.77	40.00	-20.23			peak
2	76.2442	34.77	-22.52	12.25	40.00	-27.75			peak
3	119.8556	28.80	-15.71	13.09	43.50	-30.41			peak
4	341.9786	36.10	-14.36	21.74	46.00	-24.26			peak
5	580.7026	31.07	-10.99	20.08	46.00	-25.92			peak
6	774.1584	30.21	-7.91	22.30	46.00	-23.70			peak

Remark: Absolute Level = Reading Level + Factor, Margin = Absolute Level – Limit
 Factor = Ant. Factor + Cable Loss – Pre-amplifier

For Above 1GHz Test Results:

Mode 1: Transmitting mode (Internal Antenna)

Frequency (MHz)	Ant. Pol.	PK Reading (dBμV)	AV Reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin Peak (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
1830	H	55.37	---	-4.12	51.25	---	74	54	-22.75
2745	H	54.62	---	-0.58	54.04	---	74	54	-19.96
1830	V	58.45	---	-4.17	54.28	---	74	54	-19.72
2745	V	59.69	---	-0.58	59.11	---	74	54	-14.89

Mode 2: Transmitting mode (External Antenna)

Frequency (MHz)	Ant. Pol.	PK Reading (dBμV)	AV Reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin Peak (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
1830	H	51.32	---	-4.12	47.2	---	74	54	-26.8
2745	H	50.20	---	-0.58	49.62	---	74	54	-24.38
1830	V	54.65	---	-4.17	50.48	---	74	54	-23.52
2745	V	55.31	---	-0.58	54.73	---	74	54	-19.27

Note:

1. Emission Level = Peak Reading + Correction Factor; Correction Factor = Antenna Factor + Cable loss – Pre-amplifier
2. Margin = Emission - Limit
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20dB below the limits or the field strength is too small to be measured.

Band Edge Requirement:

Mode 1: Transmitting mode (Internal Antenna)

Frequency (MHz)	Ant. Pol.	PK Reading (dBµV)	AV Reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin Peak (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
902	H	42.15	---	-6.94	35.21	---	74	---	---
928	H	42.90	---	-5.95	36.95	---	74	---	---
902	V	42.57	---	-6.94	35.63	---	74	---	---
928	V	43.09	---	-5.95	37.14	---	74	---	---

Mode 2: Transmitting mode (External Antenna)

Frequency (MHz)	Ant. Pol.	PK Reading (dBµV)	AV Reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin Peak (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
902	H	41.62	---	-6.94	34.68	---	74	---	---
928	H	42.75	---	-5.95	36.80	---	74	---	---
902	V	41.78	---	-6.94	34.84	---	74	---	---
928	V	43.07	---	-5.95	37.12	---	74	---	---

Note:

1. Emission Level = Peak Reading + Correction Factor; Correction Factor = Antenna Factor + Cable loss – Pre-amplifier
2. Margin = Emission - Limit
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20dB below the limits or the field strength is too small to be measured.

5 OCCUPIED BANDWIDTH TEST

5.1 Test Setup



5.2 Rules and specifications

CFR 47 Part 15.215(c)

ANSI C63.10: 2013


5.3 Test Procedure

1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; $RBW \geq 1\%$ of the 20dB bandwidth; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
4. Measure and record the results in the test report.


5.4 Test Result

PASS

Mode	Frequency (MHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Mode 1 TX	915	741.7	/	PASS

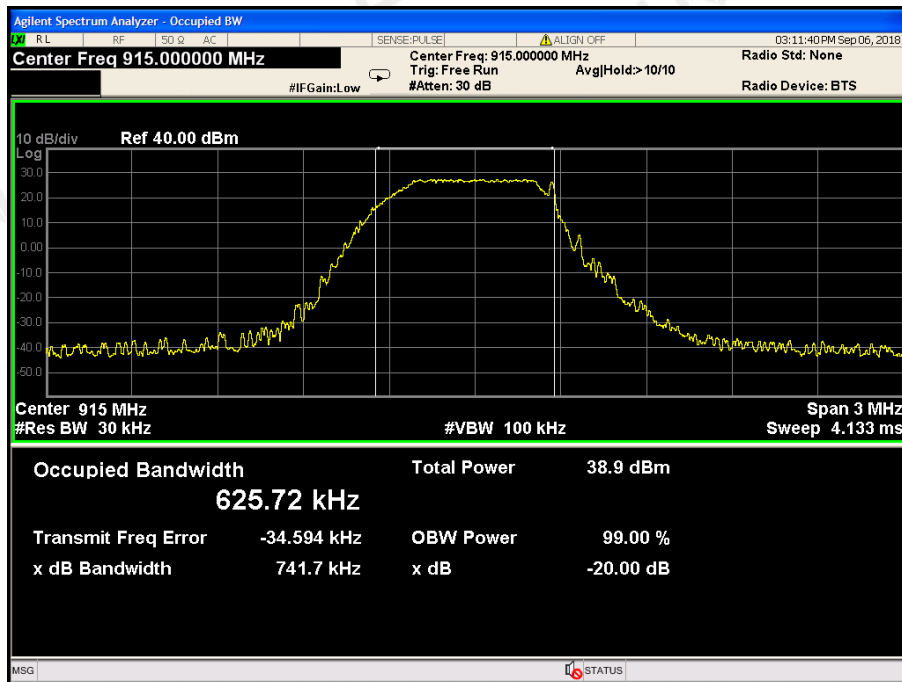

Mode	Frequency (MHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Mode 2 TX	915	738.3	/	PASS

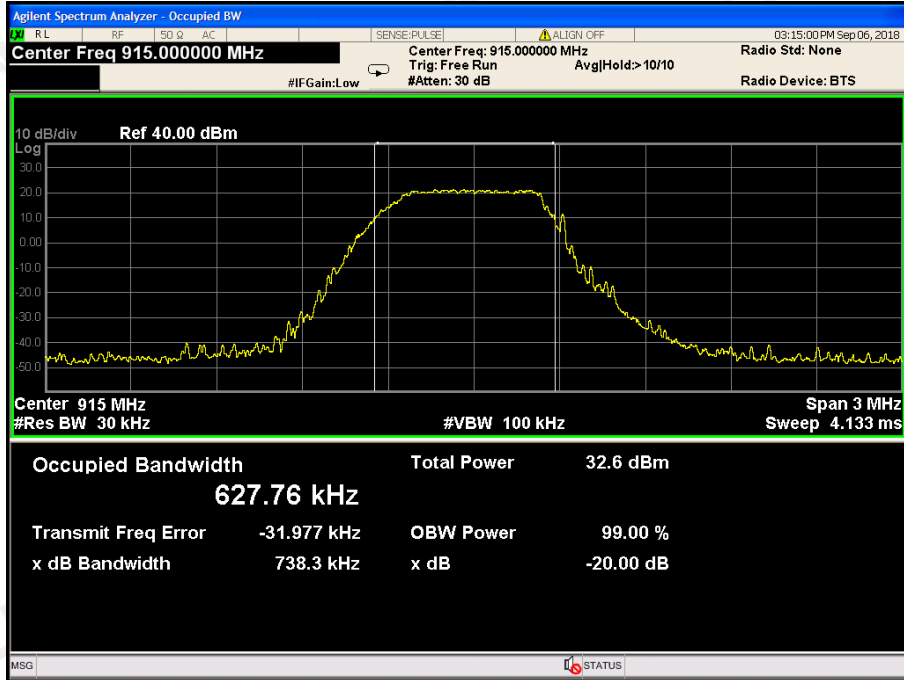

6 ANTENNA REQUIREMENT

Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

Antenna port 1:


The antenna used in this product is an Internal Antenna, the directional gains of antenna used for transmitting is 3.7dBi.

Antenna port 2:

The antenna used in this product is an External Antenna, the directional gains of antenna used for transmitting is 0dBi.

Antenna port 2

Antenna port 1

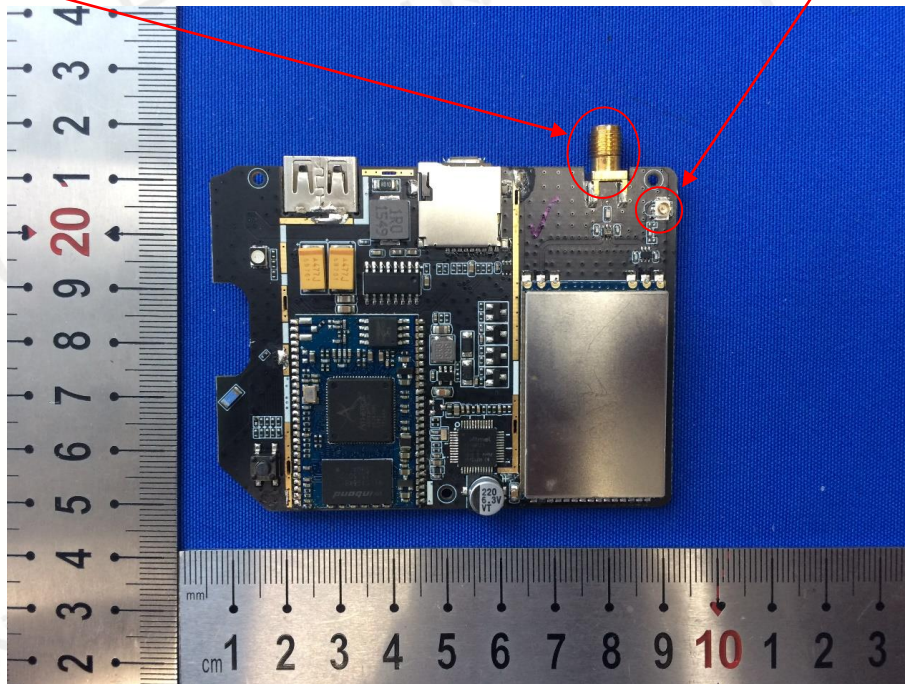

7 PHOTOGRAPH OF TEST

7.1 Radiated Emission



7.2 Conducted Emission



End of Report