



FCC PART 90

TEST REPORT

For

Quanzhou Feijie Electron Co., Ltd

No.6, Zi Hua Road, Jiangnan High-tech Park, Quanzhou, Fujian, China

FCC ID: 2AN96DM18301

Report Type: Original Report	Product Name: DMR Digital Transceiver
Report Number:	RXM171214054-00B
Report Date:	2017-12-28
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1310 & §2.1093 - RF EXPOSURE.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1046 &§90.205- RF OUTPUT POWER.....	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	10
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049 &§90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	15
APPLICABLE STANDARD	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
TEST DATA	16
FCC §2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	23
TEST DATA	23
FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	27
FCC §2.1055 & §90.213- FREQUENCY STABILITY.....	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28

TEST DATA	29
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30
TEST DATA	30

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	DMR Digital Transceiver
EUT Model:	LD-3800
Multiple Model:	LD-2100, LD-3000, LD-3900, LD-6000, LD-6800, LD-7000, LD-7800, LD-300, LD-500, LD-580, LD-600, LH-100, LH-200, LH-210, LD-6100PLUS, LD-1600, LD-2600, LD-3600, LD-5600, LD-6600, LD-7600, LD-8600, LD-9600
FCC ID:	2AN96DM18301
Rated Input Voltage:	DC7.4V or DC12V from adapter
Adapter Information	Model: NLA050120W1A6
	Input: AC 100-240V~50/60Hz , 0.2A Max
	Output: 12V, 500mA
External Dimension:	105mm(L)*53mm(W)*29.5mm(H)
Serial Number:	171214054
EUT Received Date:	2017.12.08

Note: The series product, models LD-3800, LD-2100, LD-3000, LD-3900, LD-6000, LD-6800, LD-7000, LD-7800, LD-300, LD-500, LD-580, LD-600, LH-100, LH-200, LH-210, LD-6100PLUS, LD-1600, LD-2600, LD-3600, LD-5600, LD-6600, LD-7600, LD-8600 and LD-9600 are electrically identical, we selected LD-3800 for fully testing .The differences between them just the model name and the details were explained in the attached declaration letter.

Objective

This test report is prepared on behalf of **Quanzhou Feijie Electron Co., Ltd** in accordance with Part 90 of the Federal Communications Commission rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – PRIVATE LAND MOBILE RADIO SERVICES

Applicable Standards: TIA-603-D.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode.


EUT Specification:

No software was used in test

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Terminal Load(50 Ω)	N/A	N/A
HP	RF Communications Test Set	8920A	00 235

Block Diagram of Test Setup

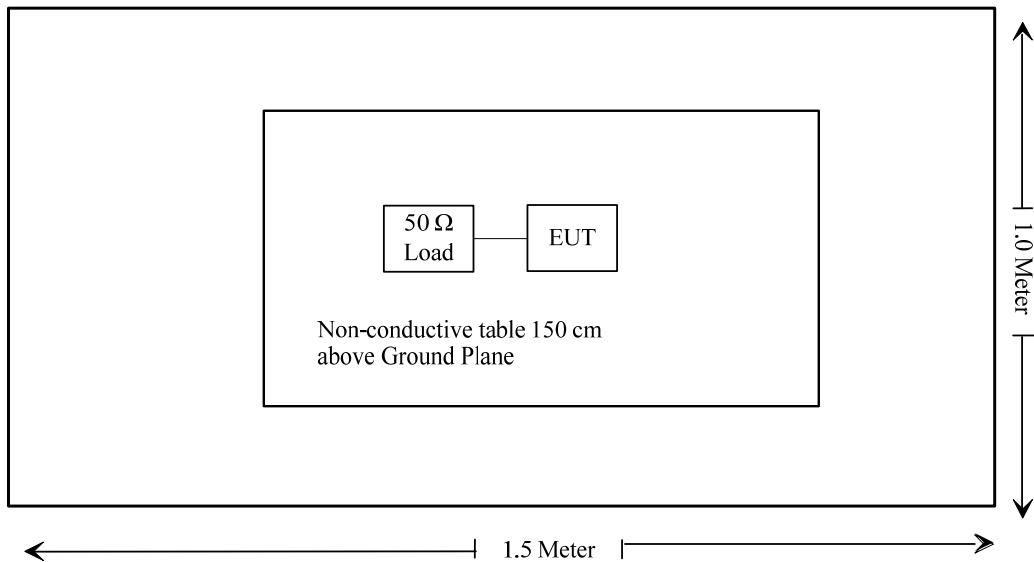

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC§1.1310 & §2.1093	RF Exposure	Compliant
FCC§2.1046 & §90.205	RF Output Power	Compliant
FCC§2.1047 & §90.207	Modulation Characteristic	Compliant
FCC§2.1049 & §90.209 & §90.210	Occupied Bandwidth & Emission Mask	Compliant
FCC§2.1051& §90.210	Spurious Emission at Antenna Terminal	Compliant
FCC§2.1053 & 90.210&	Spurious Radiated Emissions	Compliant
FCC§2.1055 & §90.213	Frequency Stability	Compliant
FCC§90.214	Transient Frequency Behavior	Compliant

FCC §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RXM171214054-20.

FCC §2.1046 &§90.205- RF OUTPUT POWER

Applicable Standard

FCC §2.1046 and §90.205.

Test Procedure

Conducted RF Output Power:

TIA-603-D section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

RBW	VBW
100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa

The testing was performed by Pean Zhu on 2017-12-20.

Test Result: Compliant. Please refer to following tables.

Modulation	Channel Spacing (kHz)	f_c (MHz)	Conducted Output Power (W)		Note
			High	Low	
FM	12.5	400.0125	4.97	1.21	Not for FCC Review
		453.2125	4.95	1.25	/
		479.9875	4.99	1.19	/
4FSK	12.5	400.0125	4.95	1.33	Not for FCC Review
		453.2125	4.97	1.41	/
		479.9875	4.98	1.39	/

Note: The high rated power is 5W, low rated power is 1.5W.

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC**Applicable Standard**

FCC§2.1047 & §90.207

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
LEADER	Millivoltmeter	LMV-181A	601788	2017-08-11	2018-08-10
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa


The testing was performed by Pean Zhu on 2017-12-20.

Test Result: Compliant. Please refer to following table and plots.

MODULATION LIMITING

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	0.977	0.113	0.972	0.107	2.5
400	1.178	0.123	1.176	0.117	2.5
500	1.582	0.145	1.536	0.131	2.5
600	1.737	0.161	1.717	0.146	2.5
700	1.757	0.169	1.755	0.154	2.5
800	1.868	0.172	1.836	0.169	2.5
900	1.954	0.18	1.912	0.178	2.5
1000	2.097	0.197	2.079	0.188	2.5
1200	2.118	0.228	2.101	0.218	2.5
1400	2.076	0.238	2.045	0.233	2.5
1600	1.984	0.267	1.968	0.248	2.5
1800	1.966	0.267	1.941	0.258	2.5
2000	1.926	0.292	1.903	0.269	2.5
2200	1.818	0.306	1.798	0.289	2.5
2400	1.971	0.342	1.957	0.319	2.5
2600	2.001	0.359	1.989	0.34	2.5
2800	1.988	0.35	1.951	0.342	2.5
3000	1.711	0.352	1.694	0.332	2.5

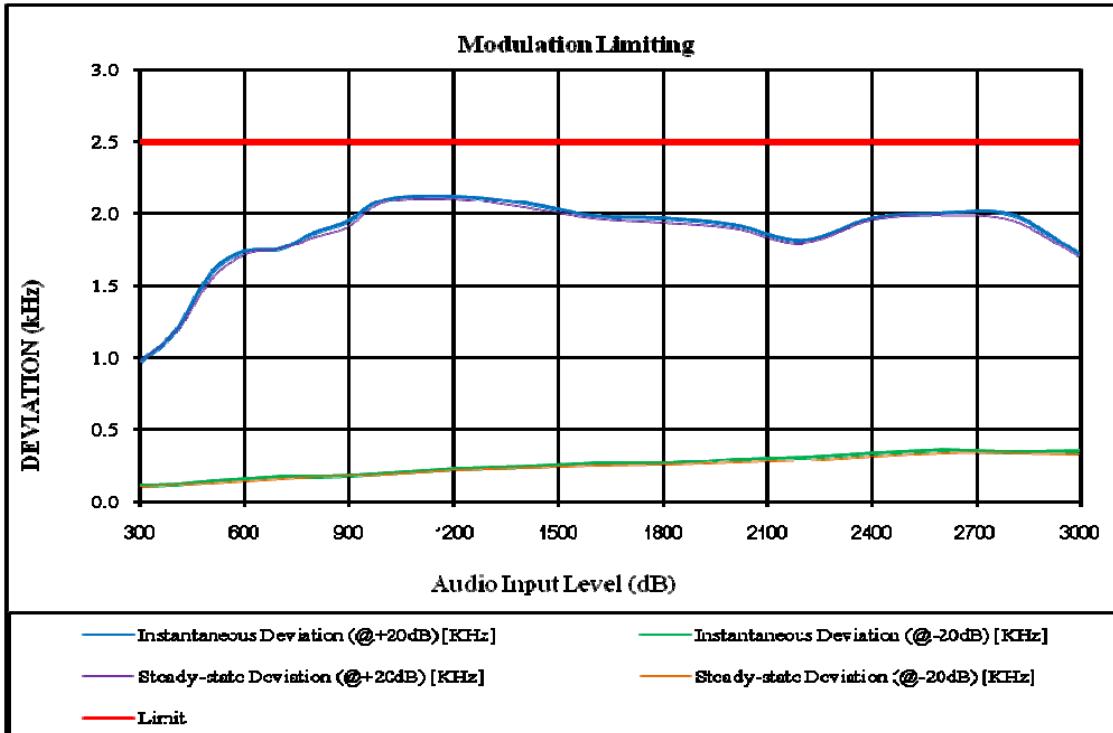

Audio Frequency Response

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz


Audio Frequency Hz	Response Attenuation dB
300	-11.85
400	-8.35
500	-6.17
600	-4.20
700	-2.47
800	-1.45
900	-0.61
1000	0.00
1200	1.75
1400	3.03
1600	4.17
1800	5.21
2000	6.09
2200	6.54
2400	6.58
2600	6.76
2800	7.09
3000	7.28

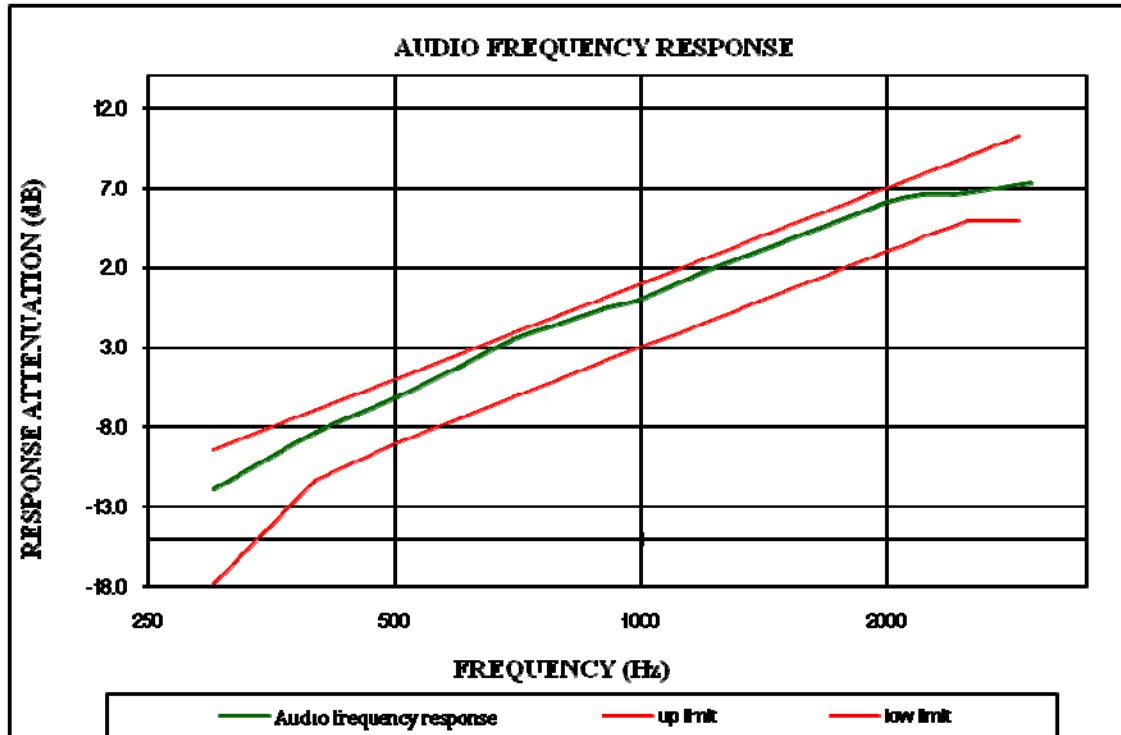

Audio Frequency Low Pass Filter Response

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz, high power level

Audio Frequency kHz	Response Attenuation dB	Limit dB
3.0	-2.6	0.0
3.5	-9.2	-6.7
4.0	-15.0	-12.5
5.0	-25.1	-22.2
7.0	-39.2	-36.8
10.0	-54.9	-52.3
15.0	-71.8	-69.9
20.0	-85.2	-82.5
30.0	-85.6	-82.5
50.0	-85.0	-82.5
70.0	-85.6	-82.5

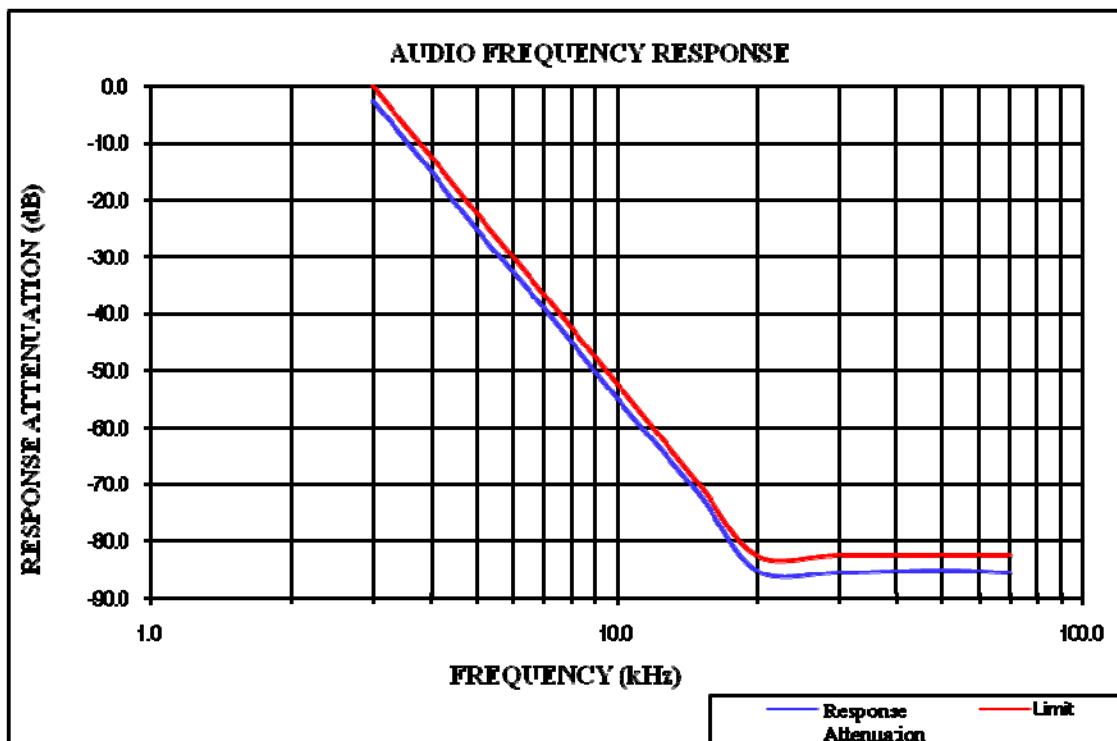

FCC §2.1049 &§90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Applicable Emission Masks

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-869	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	B	C

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(fd - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	Each Time	/
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test Data

Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa

The testing was performed by Pean Zhu on 2017-12-20.

Test Result: Compliant. Please refer to the following tables and plots.

Modulation Mode	Channel Spacing	f_c	99% Occupied Bandwidth	26 dB Bandwidth	Power Level
			kHz	MHz	
FM	12.5 kHz	453.2125	9.820	10.321	High
			9.820	10.321	Low
4FSK	12.5 kHz	453.2125	7.214	9.118	High
			7.315	9.018	Low

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator

Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11\text{K}$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)


Emission Designator 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).


F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.


Occupied Bandwidth – FM, 453.2125 MHz, High Power Level

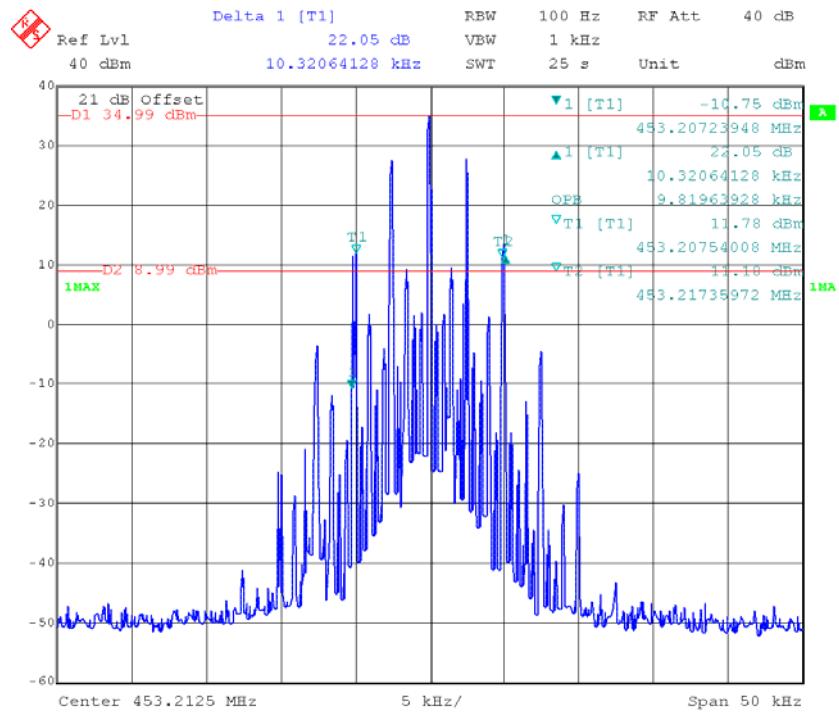


Emission Mask - Type D

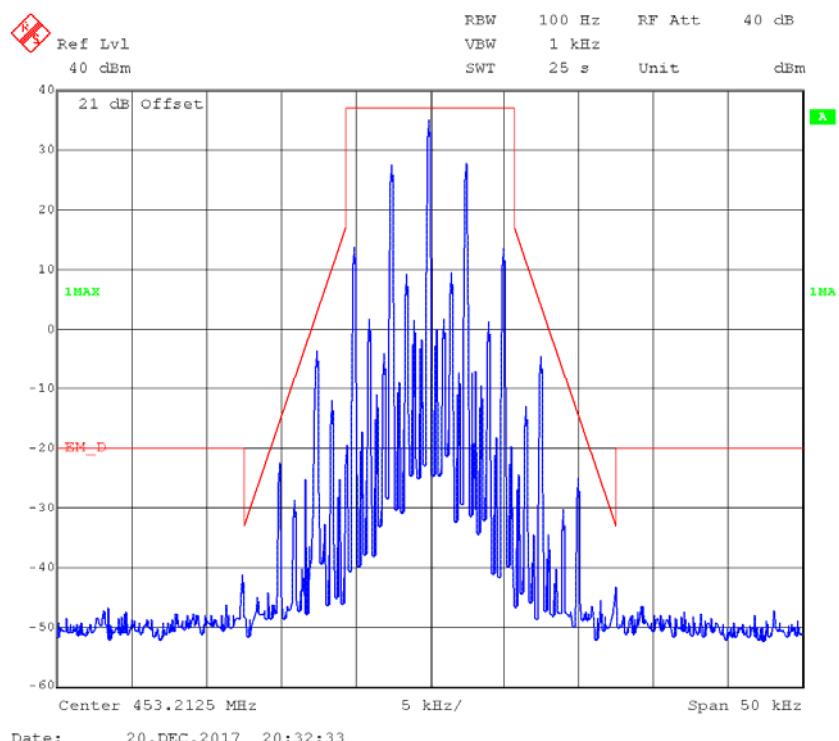


Occupied Bandwidth – FM, 453.2125 MHz, Low Power Level

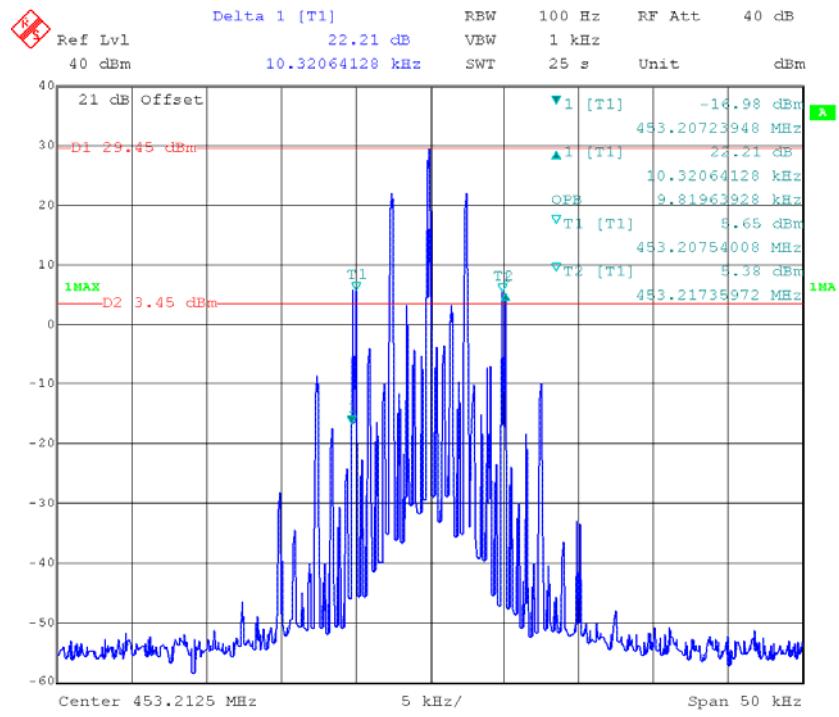


Emission Mask - Type D

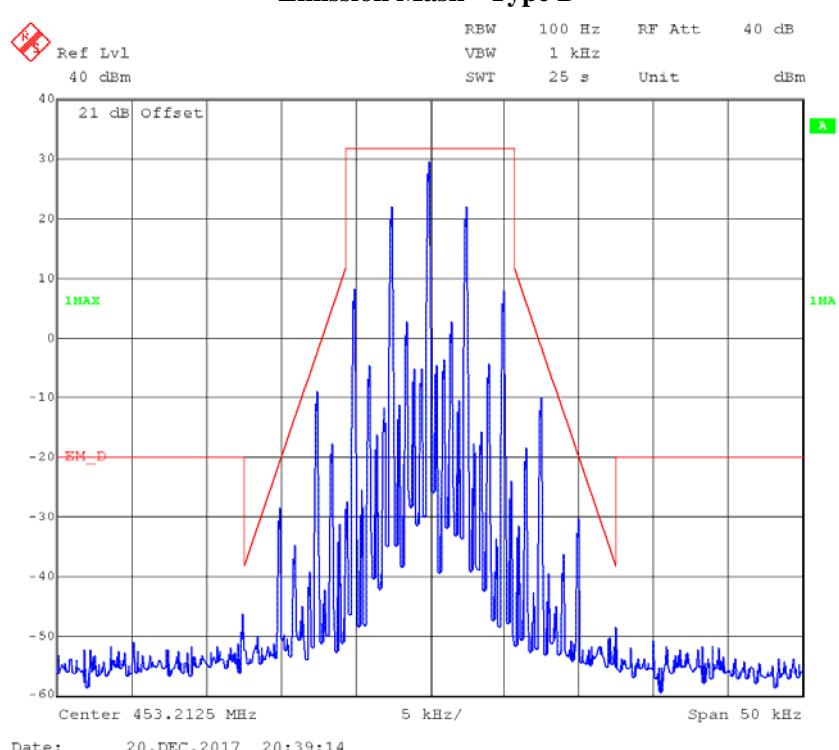


Occupied Bandwidth – 4FSK, 453.2125 MHz, High Power Level

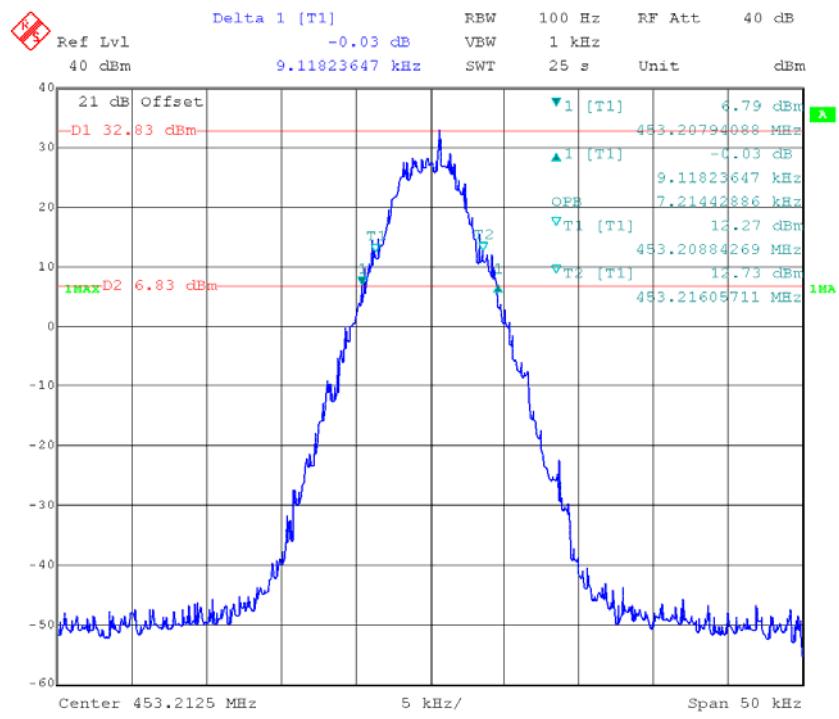


Emission Mask - Type D

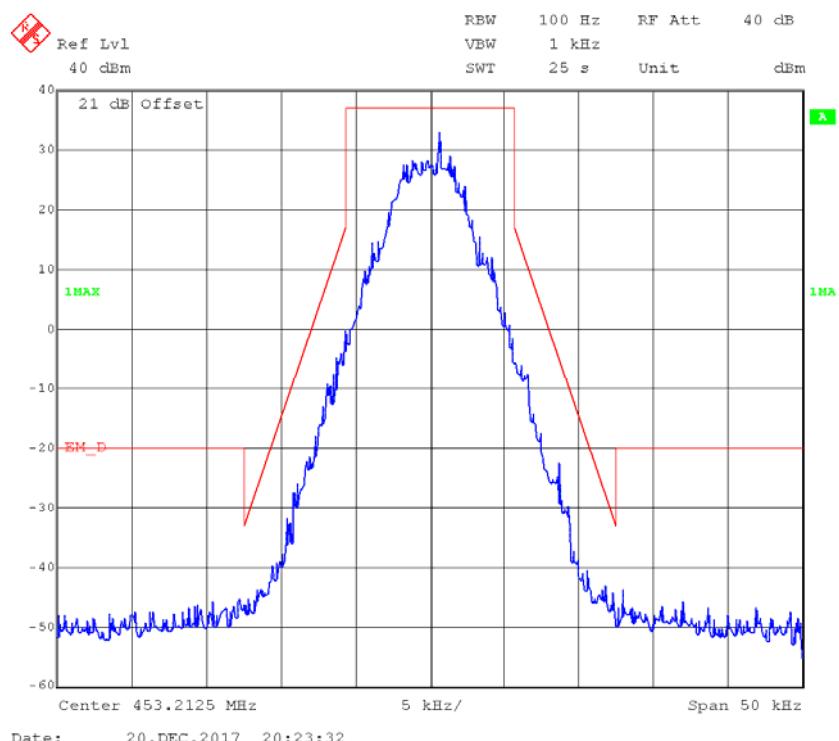

Occupied Bandwidth – 4FSK, 453.2125 MHz, Low Power Level

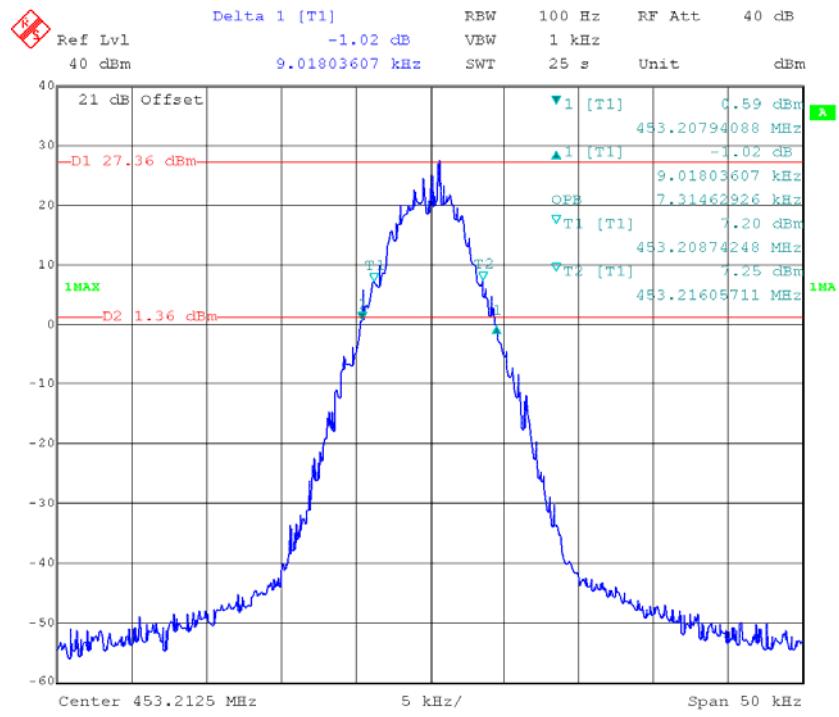

Emission Mask - Type D

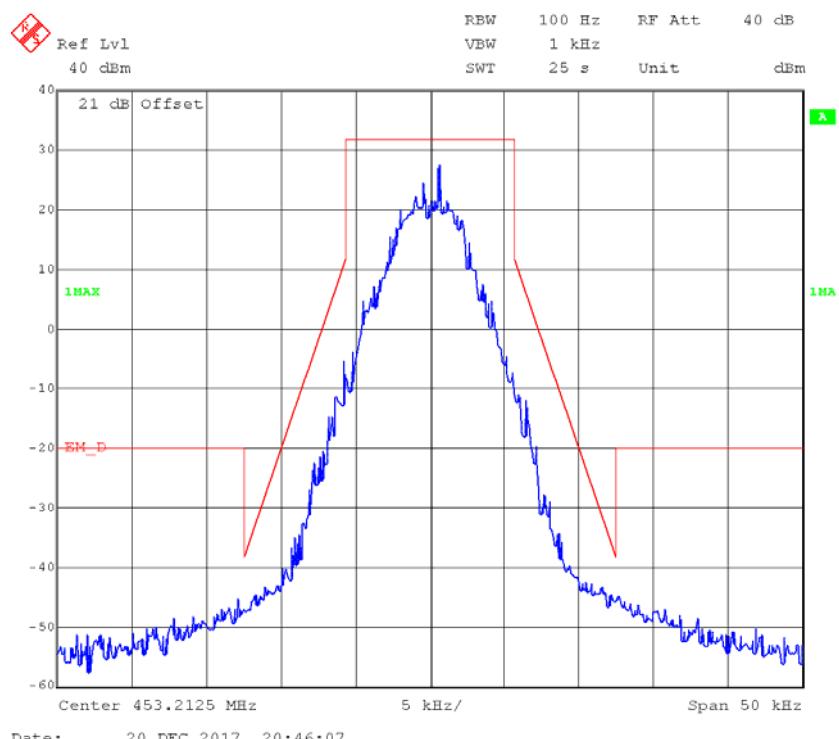

FCC §2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

§90.210 Emission limitations:

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(fd - 2.88\text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-2	Each Time	/
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Adjust the spectrum analyzer for the following settings:

- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
- 2) Video Bandwidth \geq 3 times the resolution bandwidth.
- 3) Sweep Speed \leq 2000 Hz per second.
- 4) Detector Mode = peak.

Test Data



Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa

The testing was performed by Pean Zhu on 2017-12-20.



453.2125 MHz – FM Mode, High Power

Fundamental

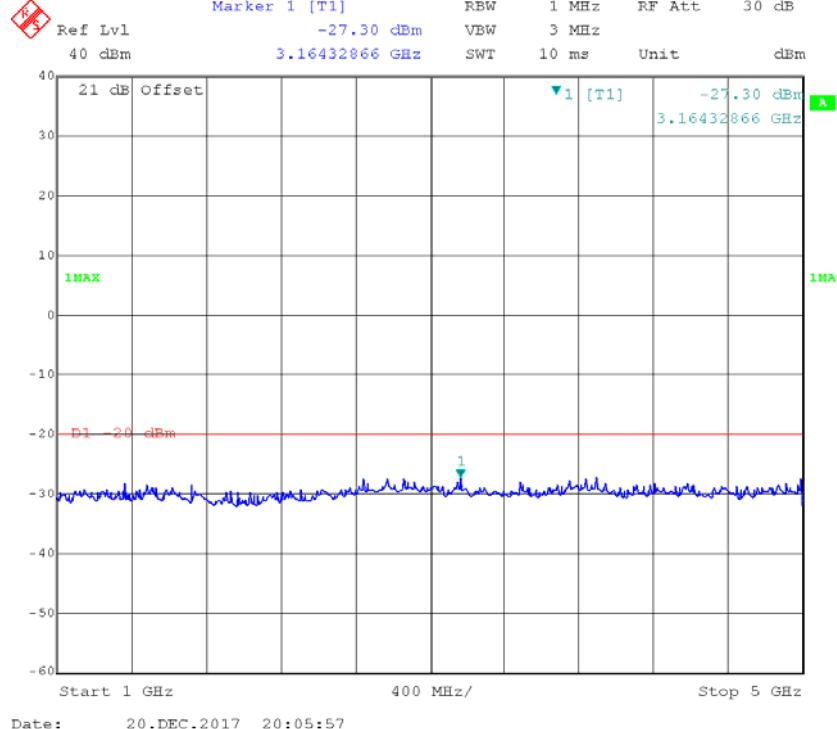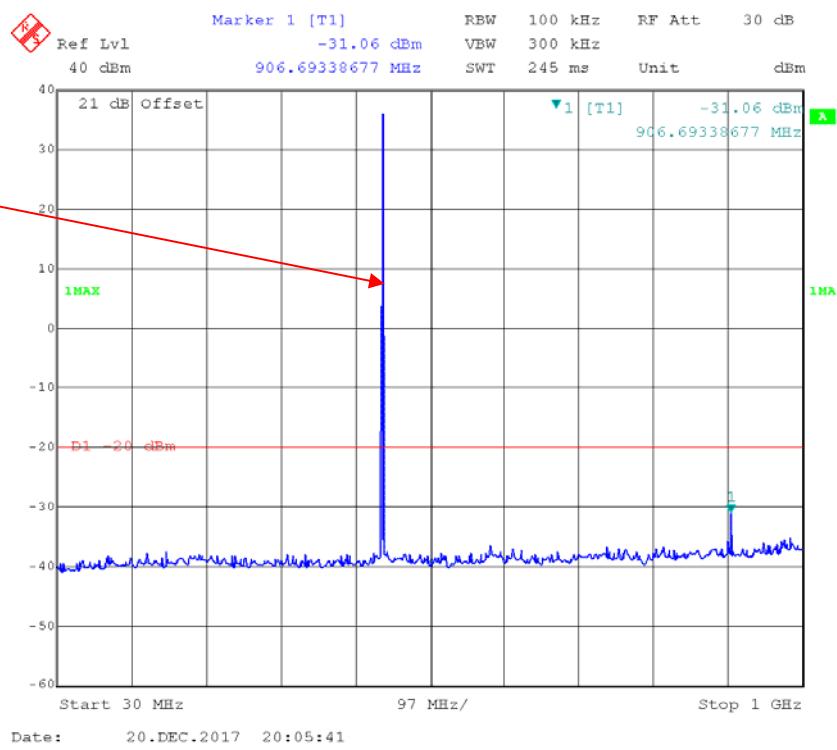

453.2125 MHz -4FSK Mode,High Power

Fundamental

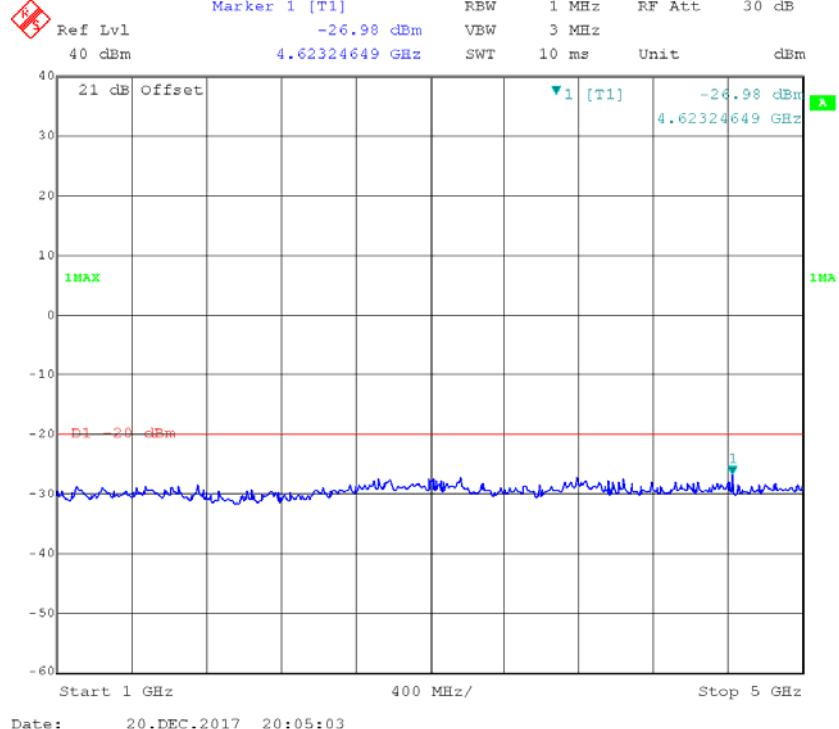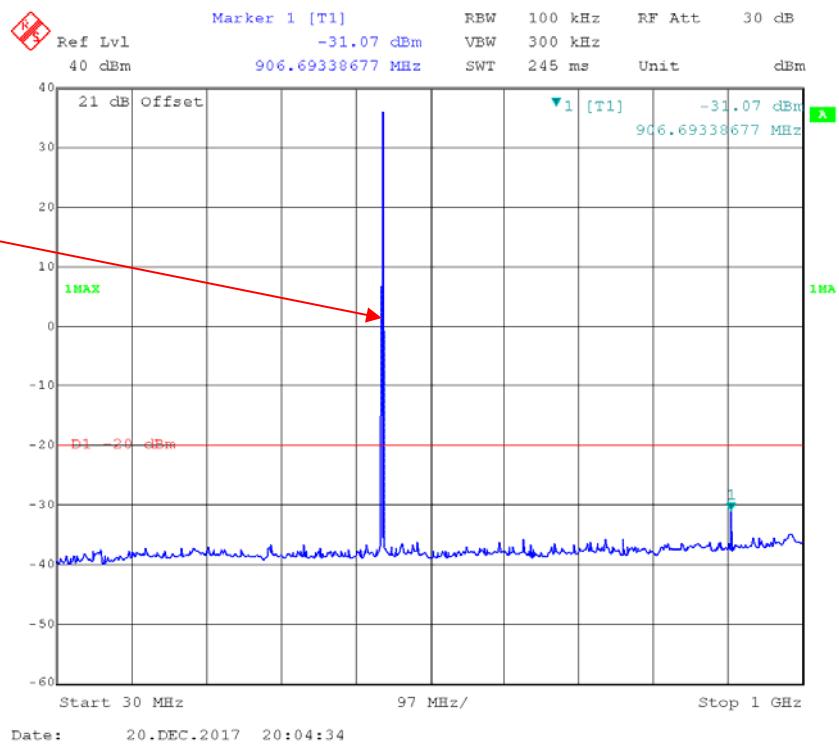

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447E	2434A02181	2017-09-01	2018-09-01
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
ETS LINDGREN	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
HP	Signal Generator	1026	320408	2017-12-14	2018-12-14
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

For part 90:

Spurious emissions in dB = $10 \log_{10}(\text{TXpwr in Watts}/0.001)$ -the absolute level

Spurious attenuation limit in dB = $50 + 10 \log_{10}$ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	20.3~22.1 °C
Relative Humidity:	31~37%
ATM Pressure:	102.2~102.7 kPa

The testing was performed by Steven Zuo and Blake Yang from 2017-12-21 to 2017-12-25.

Test Mode: Transmitting

Frequency (MHz)	Polar (H/V)	S.A. Reading (dB μ V)	Substituted Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
FM, 12.5 kHz, Frequency: 453.2125 MHz								
906.425	H	33.05	-41.2	0.0	1.1	-42.3	-20.0	22.3
906.425	V	34.45	-36.5	0.0	1.1	-37.6	-20.0	17.6
1359.638	H	51.28	-62.1	8.7	1.2	-54.6	-20.0	34.6
1359.638	V	51.95	-62.1	8.7	1.2	-54.6	-20.0	34.6
1812.850	H	50.28	-63.9	11.1	0.7	-53.5	-20.0	33.5
1812.850	V	57.31	-57.4	11.1	0.7	-47.0	-20.0	27.0
2266.063	H	49.80	-62.5	11.1	1.2	-52.6	-20.0	32.6
2266.063	V	57.83	-54.3	11.1	1.2	-44.4	-20.0	24.4
2719.275	H	49.70	-62.6	13.1	1.3	-50.8	-20.0	30.8
2719.275	V	56.06	-56.3	13.1	1.3	-44.5	-20.0	24.5
3172.488	H	48.56	-61.5	13.5	1.6	-49.6	-20.0	29.6
3172.488	V	54.08	-56.1	13.5	1.6	-44.2	-20.0	24.2
4FSK, 12.5kHz, Frequency: 453.2125 MHz								
906.425	H	33.54	-40.7	0.0	1.1	-41.8	-20.0	21.8
906.425	V	35.17	-35.8	0.0	1.1	-36.9	-20.0	16.9
1359.638	H	49.73	-63.6	8.7	1.2	-56.1	-20.0	36.1
1359.638	V	50.97	-63.1	8.7	1.2	-55.6	-20.0	35.6
1812.850	H	49.20	-65	11.1	0.7	-54.6	-20.0	34.6
1812.850	V	55.67	-59.1	11.1	0.7	-48.7	-20.0	28.7
2266.063	H	48.42	-63.8	11.1	1.2	-53.9	-20.0	33.9
2266.063	V	56.47	-55.7	11.1	1.2	-45.8	-20.0	25.8
2719.275	H	48.38	-63.9	13.1	1.3	-52.1	-20.0	32.1
2719.275	V	54.83	-57.6	13.1	1.3	-45.8	-20.0	25.8
3172.488	H	47.55	-62.5	13.5	1.6	-50.6	-20.0	30.6
3172.488	V	52.98	-57.2	13.5	1.6	-45.3	-20.0	25.3

FCC §2.1055 & §90.213- FREQUENCY STABILITY**Applicable Standard**

FCC §2.1055, §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-08-28	2018-08-28
UNI-T	Multimeter	UT39A	M130199938	2017-05-09	2018-05-09
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
Pro instrument	DC Power Supply	pps3300	N/A	N/A	N/A
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Test Data

Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa

The testing was performed by Pean Zhu on 2017-12-20.

Test Mode: Transmitting

FM, 12.5kHz, Reference Frequency: 453.2125 MHz, Limit: 2.5 ppm			
Temerature	Voltage	Measured	Frequency Error
°C	V_{DC}	MHz	ppm
-30	7.4	453.212490	-0.02
-20		453.212471	-0.06
-10		453.212486	-0.03
0		453.212486	-0.03
10		453.212473	-0.06
20		453.212481	-0.04
30		453.212483	-0.04
40		453.212474	-0.06
50		453.212482	-0.04
25	6.3	453.212478	-0.05
25	8.4	453.212477	-0.05

4FSK, 12.5kHz, Reference Frequency: 453.2125 MHz, Limit: 2.5 ppm			
Temerature	Voltage	Measured	Frequency Error
°C	V_{DC}	MHz	ppm
-30	7.4	453.212486	-0.03
-20		453.212473	-0.06
-10		453.212482	-0.04
0		453.212478	-0.05
10		453.212486	-0.03
20		453.212473	-0.06
30		453.212483	-0.04
40		453.212474	-0.06
50		453.212482	-0.04
25	6.3	453.212482	-0.04
25	8.4	453.212478	-0.05

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

FCC §90.214

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2017-08-31	2018-08-31
HP	RF Communications Test Set	8920A	00 235	2017-07-11	2018-07-11
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2017-05-06	2018-05-06
E-Microwave	RF Attenuator	20dB	20dB-1	Each Time	/
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The tests and measurements indicated in TIA-603-D.

Test Data



Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	32 %
ATM Pressure:	102.9 kPa

The testing was performed by Pean Zhu on 2017-12-20.

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	<10(t ₁)	±12.5 kHz	Pass
	<25(t ₂)	±6.25 kHz	
	<10(t ₃)	±12.5 kHz	

Please refer to the following plots.

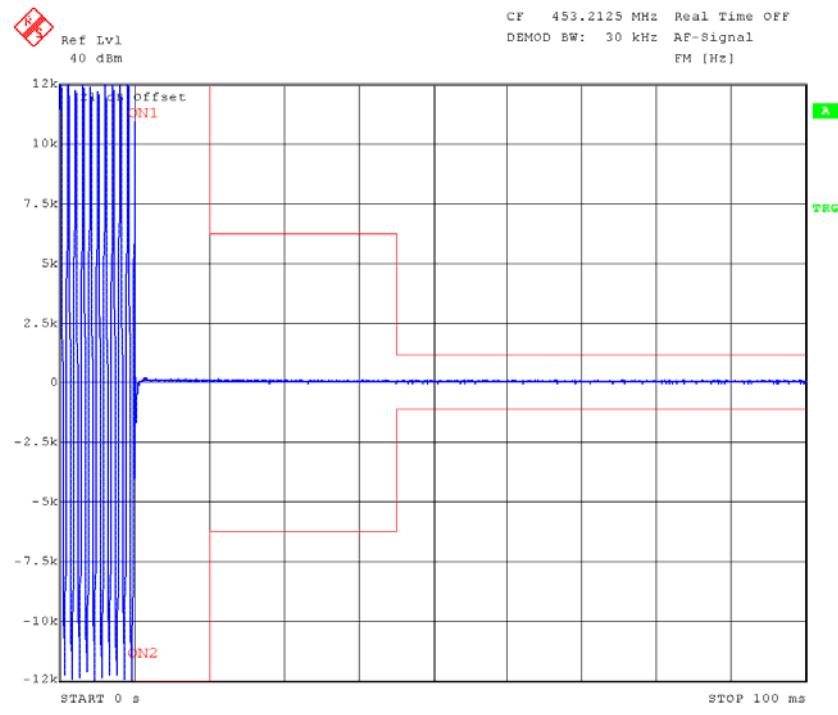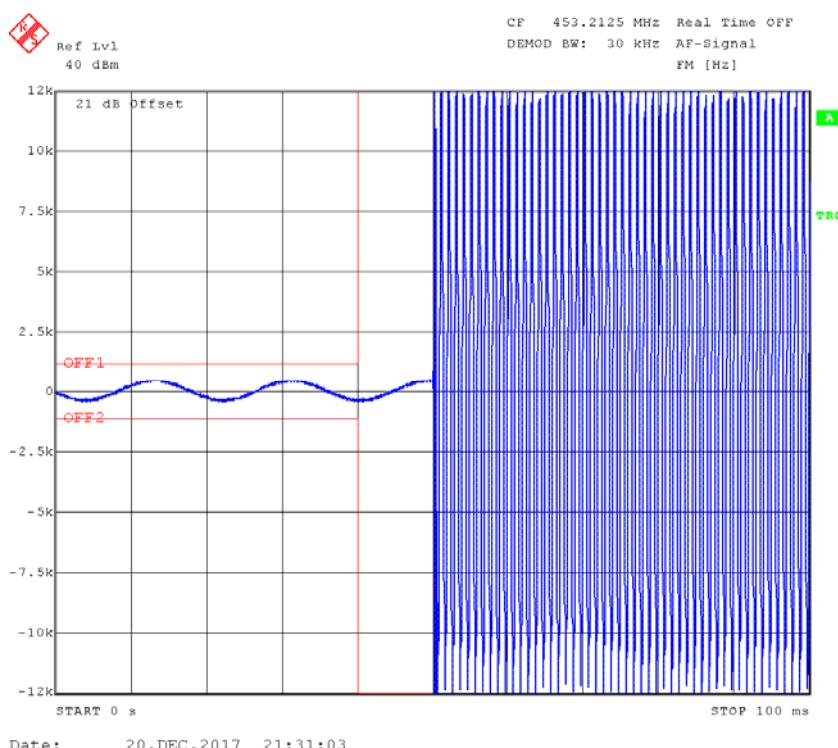Turn on – 453.2125 MHz, High power level**Turn off – 453.2125 MHz, High power level**

***** END OF REPORT *****