

RF EXPOSURE Test Report

Product: Q2.Mag Go

Trade Mark: momax

Model Number: UD31

FCC ID: 2ANBQ-UD31

Prepared for

Momax Technology (Shenzhen) Limited

4th Floor, Weiyu Long Buji Factory Building A, No. 2016, Xuegang Road,
Gangtou Community, Bantian Street, Longgang District, Shenzhen City

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

| | | |
|----------|---|-----------|
| 1 | GENERAL DESCRIPTION | 5 |
| 1.1 | DESCRIPTION OF EUT | 5 |
| 1.2 | TEST MODE..... | 5 |
| 1.3 | TEST SETUP | 5 |
| 1.4 | ANCILLARY EQUIPMENT | 6 |
| 2 | TEST FACILITIES AND ACCREDITATIONS | 7 |
| 2.1 | TEST LABORATORY | 7 |
| 2.2 | ENVIRONMENTAL CONDITIONS | 7 |
| 2.3 | MEASUREMENT UNCERTAINTY | 7 |
| 2.4 | TEST SOFTWARE | 7 |
| 3 | LIST OF TEST EQUIPMENT | 8 |
| 4 | RF EXPOSURE..... | 9 |
| 4.1 | MAXIMUM PERMISSIBLE EXPOSURE | 9 |
| 4.1.1. | <i>Limit</i> | <i>9</i> |
| 4.1.2. | <i>Test Procedures</i> | <i>9</i> |
| 4.1.3. | <i>Equipment Approval Considerations item 5 b) of KDB 680106 D01 Wireless</i> | <i>10</i> |
| 4.1.4. | <i>Test Setup.....</i> | <i>10</i> |
| 4.1.5. | <i>Test Result</i> | <i>11</i> |
| 5 | PHOTOGRAPHS OF THE TEST SETUP..... | 12 |

TEST RESULT CERTIFICATION

Applicant's Name : Momax Technology (Shenzhen) Limited
4th Floor, Weiyu Long Buji Factory Building A, No. 2016, Xuegang
Address : Road, Gangtou Community, Bantian Street, Longgang District,
Shenzhen City

Manufacturer's Name : iMX Electronic (Shenzhen) Co., LTD
F / 4, East Side Mech. Factory, EVOC Tech. Industrial Park, No.
Address : 11, Gaoxin Rd, Gaoxin Area, Dongzhou Community, Guangming
Street, Guangming District, Shenzhen City, Guangdong Province,
P. R. China

Product description

Product name : Q2.Mag Go

Model Number : UD31

Standards : FCC CFR 47 PART 1 , 1.1310

Test procedure : KDB 680106 D01 Wireless Power Transfer v04


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test :

Date (s) of performance of tests : June 06, 2024~June 12, 2024

Test Result : **Pass**

Testing Engineer :

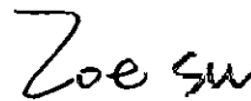


(Z o e S u)

Technical Manager :



(G a r y L u)

Authorized Signatory :



(L e o S u)

1 General Description

1.1 Description of EUT

| | |
|----------------------------|--|
| Product name: | Q2.Mag Go |
| Model name: | UD31 |
| Series Model: | N/A |
| Different of series model: | N/A |
| Operation frequency: | Watch: 326.5kHz, 1778kHz Air Pods: 115kHz~205kHz Phone: 115kHz~205kHz, 360kHz |
| Operational mode: | Wireless charging |
| Modulation type: | ASK |
| Antenna type: | Coil Antenna |
| Hardware version: | V1.0 |
| Software version: | V1.0 |
| Battery: | N/A |
| Power supply: | Input: DC 5V/3A, 9V/3A, 12V/3A Wireless Output (Phone): 5W, 7.5W, 15W (Max) Wireless Output (Air Pods): 5W (Max) Wireless Output (iWatch): 5W (Max) |
| Adapter information: | N/A |

1.2 Test Mode

| Pretest Test Mode | Description of Mode |
|-------------------|--|
| 1 | Wireless Output (Phone: 15W+Air Pods: 5W+Watch: 2.5W) |
| 2 | Wireless Output (Phone:15W+Air Pods: 5W+Watch: 5W) |
| 3 | Wireless Output (Phone: 7.5W+Air Pods: 5W+Watch: 2.5W) |
| 4 | Wireless Output (Phone: 7.5W+Air Pods: 5W+Watch: 5W) |
| 5 | Wireless Output (Phone: 5W+Air Pods: 5W+Watch: 2.5W) |
| 6 | Wireless Output (Phone: 5W+Air Pods: 5W+Watch: 5W) |

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

| Equipment | Model | S/N | Manufacturer |
|-----------|------------|--------------------------|---|
| Adapter | TA65B | 2S36003438 PL97T09582 | Nanjing Bolande Electronic Technology Co., Ltd |
| Load | YBZ3.1 | / | YBZ |
| Load | YBZ1.1 | / | YBZ |
| Earphone | Freebuds 3 | / | HUAWEI |
| Watch | NYYK2CH/A | H4HFR0ZHQ 1N2 | Apple Inc. |

2 Test Facilities and Accreditations

2.1 Test Laboratory

| | |
|-----------------------|---|
| Test Site | Shenzhen HongBiao Certification& Testing Co., Ltd |
| Test Site Location | Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China |
| Telephone: | (86-755) 2998 9321 |
| Fax: | (86-755) 2998 5110 |
| FCC Registration No.: | CN1341 |
| A2LA Certificate No.: | 6765.01 |

2.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|--------------------|--------------|
| Temperature: | 15°C~35°C |
| Relative Humidity: | 20%~75% |
| Air Pressure: | 98kPa~101kPa |

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| Measurement Frequency Range | U, (dB) | Note |
|-----------------------------|--------------------|------|
| RF frequency | 2×10^{-5} | |
| E-field | ± 2.5 dB | |
| H-field | ± 4.2 dB | |
| Temperature | ± 1 degree | |
| Humidity | ± 5 % | |

2.4 Test Software

| Software name | Manufacturer | Model | Version |
|---------------|--------------|----------|----------|
| EHP200-TS | Narda | EHP-200A | Rel 1.95 |

3 List of Test Equipment

| Item | Equipment No. | Equipment name | Manufacturer | Model | Serial No. | Calibration date | Due date |
|------|---------------|--------------------------------------|--------------|----------|------------|------------------|------------|
| 1 | HB-E073 | Electric and Magnetic Field Analyzer | Narda | EHP-200A | 180ZX11013 | 2024-05-21 | 2025-05-20 |

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4 RF Exposure

4.1 Maximum Permissible Exposure

4.1.1. Limit

| Frequency range(MHz) | Electric field strength(V/m) | Magnetic field strength(A/m) | Power density(mW/cm2) | Averaging time(minutes) |
|--|------------------------------|------------------------------|-----------------------|-------------------------|
| (A) Limits for Occupational/Controlled Exposure | | | | |
| 0.3-3.0 | 614 | 1.63 | *100 | 6 |
| 3.0-30 | 1842/f | 4.89/f | *900/f ² | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 6 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *100 | 30 |
| 1.34-30 | 824/f | 2.19/f | *180/f ² | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100000 | / | / | 1 | 30 |
| f = frequency in MHz * = Plane-wave equivalent power density | | | | |

4.1.2. Test Procedures

E and H-field measurements should be made with the center of the probe at a distance of 20 cm surrounding the device and 20 cm above the top surface of the primary/client pair.

These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.

Record the test results.

KDB 680106 D01 Wireless Power Transfer v04

(1) The power transfer frequency is below 1 MHz.

(2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

(3) A client device providing the maximum permitted load is placed in physical contact with the transmitter(i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)

(4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

(5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios

(i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.


(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the

design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.

4.1.3. Equipment Approval Considerations item 5 b) of KDB 680106 D01 Wireless Power Transfer v04

| Requirement | Device |
|---|--|
| 1. Power transfer frequency is less than 4 MHz. | Yes. The operating frequencies are: Watch: 326.5kHz, 1778kHz Air Pods: 115kHz~205kHz Phone: 115kHz~205kHz, 360kHz |
| 2. Output power from each primary coil is less than or equal to 15 watts | Yes. The maximum output power is: Wireless Output (Watch): 2.5W, 5W Wireless Output (Air Pods): 5W Wireless Output (Phone): 5W, 7.5W, 15W |
| 3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time. | Yes. The EUT has three source primary coils. |
| 4. Client device is placed directly in contact with the transmitter. | Yes. The client device is placed directly in contact with the transmitter. |
| 5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). | Yes. Mobile exposure conditions only. |
| 6. The aggregate H-field strengths anywhere at or beyond 20 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit. | Yes. See the test result in item 4.1.5 |

4.1.4. Test Setup

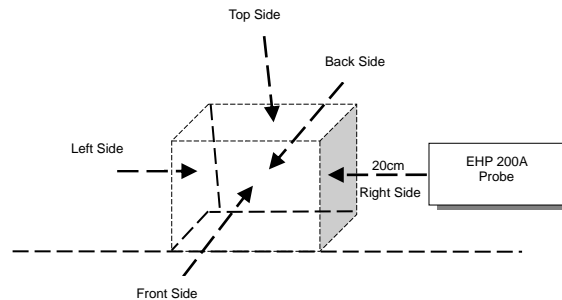

4.1.5. Test Result

Test condition: Mode 2 operating mode with client device (1 %, 50%, 99% battery status of client device)

-test distance: 20cm

| Maximum permissible Exposure | | | | |
|------------------------------|------------|-------------------|---------------|--------------|
| Battery levels | Test sides | Test distance(cm) | E -field(V/m) | H-field(A/m) |
| <1% | Top | 20 | 1.0529 | 0.0489 |
| <1% | Left | 20 | 0.8246 | 0.0489 |
| <1% | Right | 20 | 0.4353 | 0.0474 |
| <1% | Front | 20 | 1.0493 | 0.0474 |
| <1% | Back | 20 | 0.3984 | 0.0489 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 0.17% | 3.00% |

| Maximum permissible Exposure | | | | |
|------------------------------|------------|-------------------|---------------|--------------|
| Battery levels | Test sides | Test distance(cm) | E -field(V/m) | H-field(A/m) |
| <50% | Top | 20 | 1.0518 | 0.0485 |
| <50% | Left | 20 | 0.8235 | 0.0482 |
| <50% | Right | 20 | 0.4332 | 0.0474 |
| <50% | Front | 20 | 1.0441 | 0.0474 |
| <50% | Back | 20 | 0.3962 | 0.0478 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 0.17% | 2.98% |

| Maximum permissible Exposure | | | | |
|------------------------------|------------|-------------------|---------------|--------------|
| Battery levels | Test sides | Test distance(cm) | E -field(V/m) | H-field(A/m) |
| <99% | Top | 20 | 1.0487 | 0.0481 |
| <99% | Left | 20 | 0.8221 | 0.0477 |
| <99% | Right | 20 | 0.4325 | 0.0474 |
| <99% | Front | 20 | 1.0432 | 0.0474 |
| <99% | Back | 20 | 0.3951 | 0.0474 |
| Limit | | | 614 | 1.63 |
| Margin Limit (%) | | | 0.17% | 2.95% |

5 Photographs of the Test Setup

MPE



***** END OF REPORT *****