

	    CERTIFICATE 2518.08 SMM 825																										
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISSED TEST REPORT Report Revision : Rev.A																										
<table><tr><td>Dates Tested</td><td>: 02-May-2023 - 21-May-2023</td></tr><tr><td>Report Issue Date</td><td>: 29-July-2023</td></tr><tr><td>Manufacturer/Location</td><td>: Avigilon Corporation, Box 378, 101-1001 W. Broadway, Vancouver BC, V6H 4E4, Canada.</td></tr><tr><td>Requestor</td><td>: HOWKINS, SIMON</td></tr><tr><td>Product Type</td><td>: CAMERA</td></tr><tr><td>Certified Model Number</td><td>: ACDOSRNE</td></tr><tr><td>Frequency Band</td><td>: 902-928MHz</td></tr><tr><td>Maximum Field Strength at 3 meters</td><td>: 93.22 dBuV/m</td></tr><tr><td>Applicant Name</td><td>: Avigilon Corporation</td></tr><tr><td>Applicant Address</td><td>: Box 378, 101-1001 W. Broadway Vancouver, BC, V6H 4E4, Canada</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>ISSED Registrations</td><td>: MY0001</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>FCC Part 15.249 RSS 210 Issue 10, Annex B.10 RSS-Gen Issue 5</td><td>PASS</td></tr></table>		Dates Tested	: 02-May-2023 - 21-May-2023	Report Issue Date	: 29-July-2023	Manufacturer/Location	: Avigilon Corporation, Box 378, 101-1001 W. Broadway, Vancouver BC, V6H 4E4, Canada.	Requestor	: HOWKINS, SIMON	Product Type	: CAMERA	Certified Model Number	: ACDOSRNE	Frequency Band	: 902-928MHz	Maximum Field Strength at 3 meters	: 93.22 dBuV/m	Applicant Name	: Avigilon Corporation	Applicant Address	: Box 378, 101-1001 W. Broadway Vancouver, BC, V6H 4E4, Canada	FCC Registrations	: 461337	ISSED Registrations	: MY0001	FCC Part 15.249 RSS 210 Issue 10, Annex B.10 RSS-Gen Issue 5	PASS
Dates Tested	: 02-May-2023 - 21-May-2023																										
Report Issue Date	: 29-July-2023																										
Manufacturer/Location	: Avigilon Corporation, Box 378, 101-1001 W. Broadway, Vancouver BC, V6H 4E4, Canada.																										
Requestor	: HOWKINS, SIMON																										
Product Type	: CAMERA																										
Certified Model Number	: ACDOSRNE																										
Frequency Band	: 902-928MHz																										
Maximum Field Strength at 3 meters	: 93.22 dBuV/m																										
Applicant Name	: Avigilon Corporation																										
Applicant Address	: Box 378, 101-1001 W. Broadway Vancouver, BC, V6H 4E4, Canada																										
FCC Registrations	: 461337																										
ISSED Registrations	: MY0001																										
FCC Part 15.249 RSS 210 Issue 10, Annex B.10 RSS-Gen Issue 5	PASS																										
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																											
Prepared & Approved Signatory:  MAHESHWARAN A/L RAJAGOPAL Responsible Engineer																											

Table of Contents

1.0. General Information.....	3
1.1. Channel number and frequency information:	3
2.0. Summary of Test Results	4
3.0. Measurement Uncertainty	4
4.0. Equipment List.....	5
5.0. Transmitter Test Parameters	6
5.1. Maximum Radiated Output Power - Fundamental Frequencies.....	6
5.1.1. Test Limits:	6
5.1.2. Test Data:	6
5.2. 99% Occupied Bandwidth	7
5.2.1. Test Data:	7
5.3. 20 dB Bandwidth and Band Edge	9
5.3.1. Test Data	9
5.4. Radiated Emission	13
5.4.1. Test Limits:	13
5.4.2. Test Data:	14
5.5. Conducted Emissions on Power Supply Lines	38
5.5.1. Test Limit.....	38
5.5.1. Test Data	38

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	26-July-2023	Maheshvaran A/L Rajagopal

1.0. General Information

EUT Description:

Technologies	Z-Wave
TX Frequency range	902MHz – 928MHz
Modulation Type	CH0: 2GFSK & 100 kbit/s CH1: 2FSK & 40 kbit/s CH2: 2FSK & 9.6 kbit/s
Antenna Type	Flexible Printed Circuit (FPC)
Peak Antenna Gain	1.4 dBi

1.1. Channel number and frequency information:

Channel	Frequency (MHz)
0	916.00
1	908.40
2	908.42

General Description of Applied Standards

The EUT is an RF Product. The EUT is a security camera that will be used in fixed locations. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR FCC Part 15.249

ANSI C63.10-2013

FCC 47 CFR FCC Part 1.1310

RSS-210 Issue 10, Annex B.10

RSS-Gen Issue 5

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

No modifications were done to the device.

2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result
15.249(a)	RSS-210 Annex B.10(a)	Maximum Radiated Output Power - Fundamental Frequencies	Pass
-	RSS-GEN 6.7	99% Occupied Bandwidth	Pass
§15.215(c)	-	20 dB Bandwidth	Pass
§15.249(a), §15.205, §15.209	RSS-210 Annex B.10(a)&(b)	Radiated Emissions 9 kHz to 13.2GHz	Pass
§15.207(a)	RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	Pass

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150kHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	N7976A	MY53410110	30-Jun-22	30-Jun-23
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	05-Oct-22	05-Oct-23
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112B	2863	22-Jun-22	22-Jun-23
BILOG ANTENNA	CBL6112D	55546	23-Jun-22	23-Jun-23
DATA LOGGER THERMOHYGROMETER	SDL500	A.016785	23-Jun-22	23-Jun-23
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	18-Aug-22	18-Aug-23
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00208416	12-Oct-22	12-Oct-23
NOTCH FILTER	BRC50722	G034	No Cal. Req'd	No Cal. Req'd
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.5			

5.0. Transmitter Test Parameters Maximum Radiated Output Power - Fundamental Frequencies

5.1.1. Test Limits:

Frequency range [MHz]	Limit [mV/m]	Limit [dB μ V/m]	Detector
902 – 928	50	94	Quasi-peak
2400 – 2483.5	50	94	Average
5725 – 5875	50	94	Average
24000 – 24500	250	108	Average

5.1.2. Test Data:


Channel	Radiated Power/QP [dB μ V/m]	QP Limit [dB μ V/m]	Margin [dB]	Result
CH0	93.22	94.00	0.78	PASS
CH1	93.02	94.00	0.98	PASS
CH2	92.72	94.00	1.28	PASS

5.2. 99% Occupied Bandwidth


5.2.1. Test Data:

Channel	Limit	99 % BW [kHz]	Result
CH0	-	113.96	PASS
CH1	-	75.90	PASS
CH2	-	62.87	PASS

CH0: 916.00 MHz

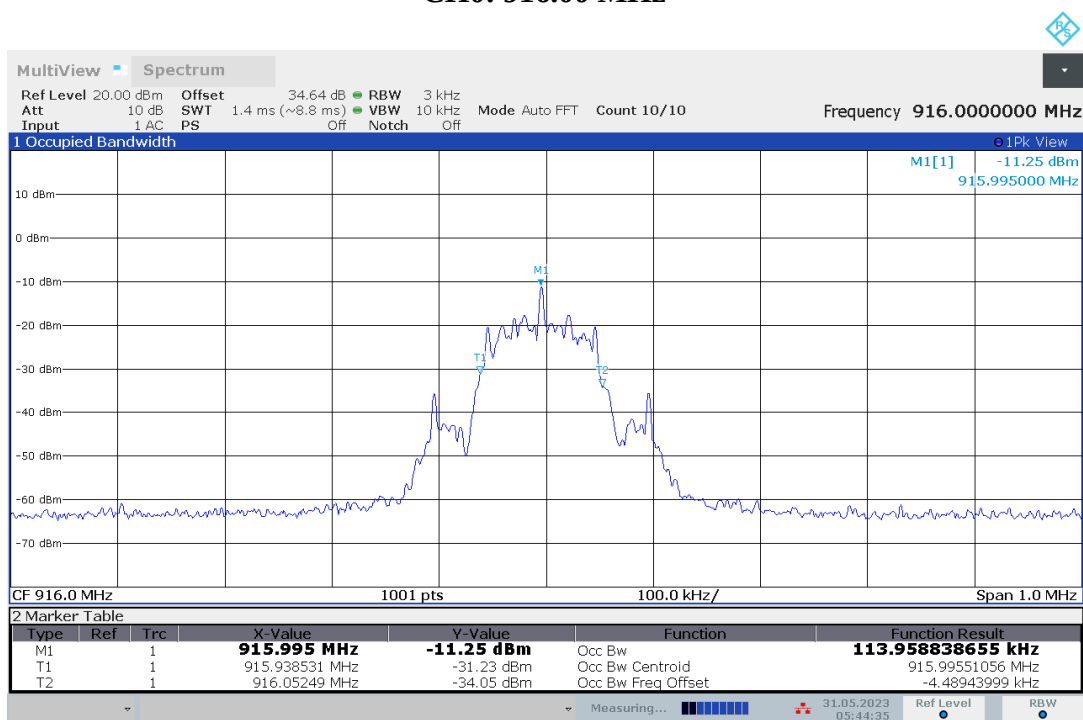


CH1: 908.40 MHz

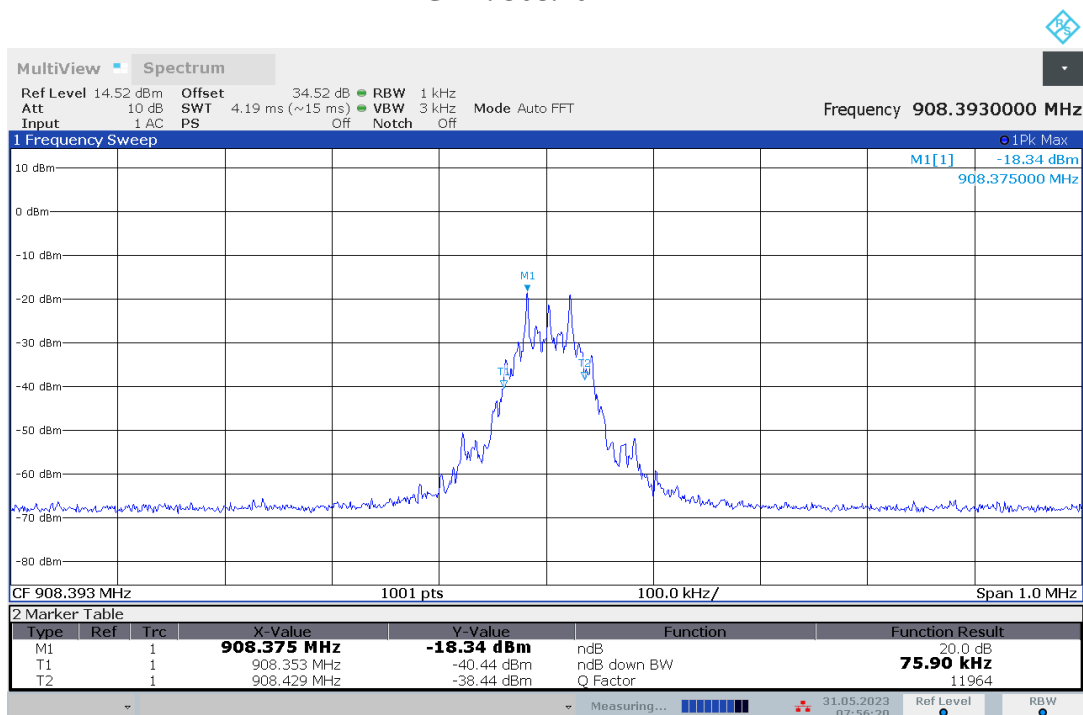

07:56:21 31.05.2023

CH2: 908.42 MHz

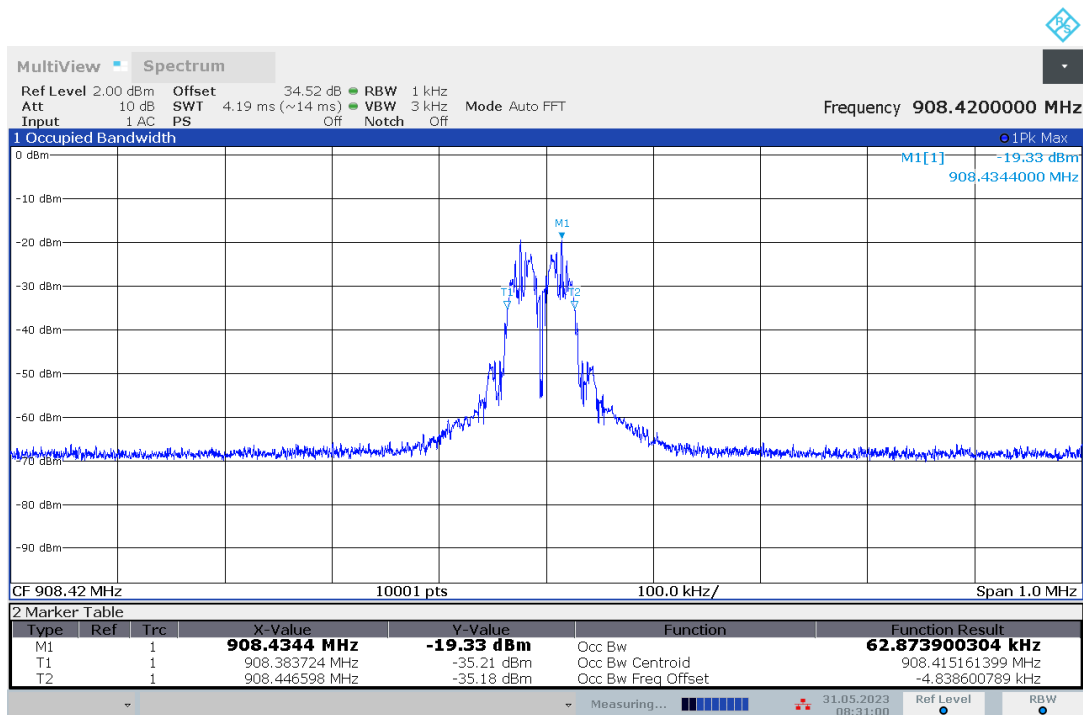


08:31:00 31.05.2023

5.3. 20 dB Bandwidth and Band Edge


5.3.1. Test Data

Channel	Limit	20dB BW [kHz]	Result
CH0	-	111.90	PASS
CH1	-	85.90	PASS
CH2	-	66.06	PASS


CH0: 916.00 MHz

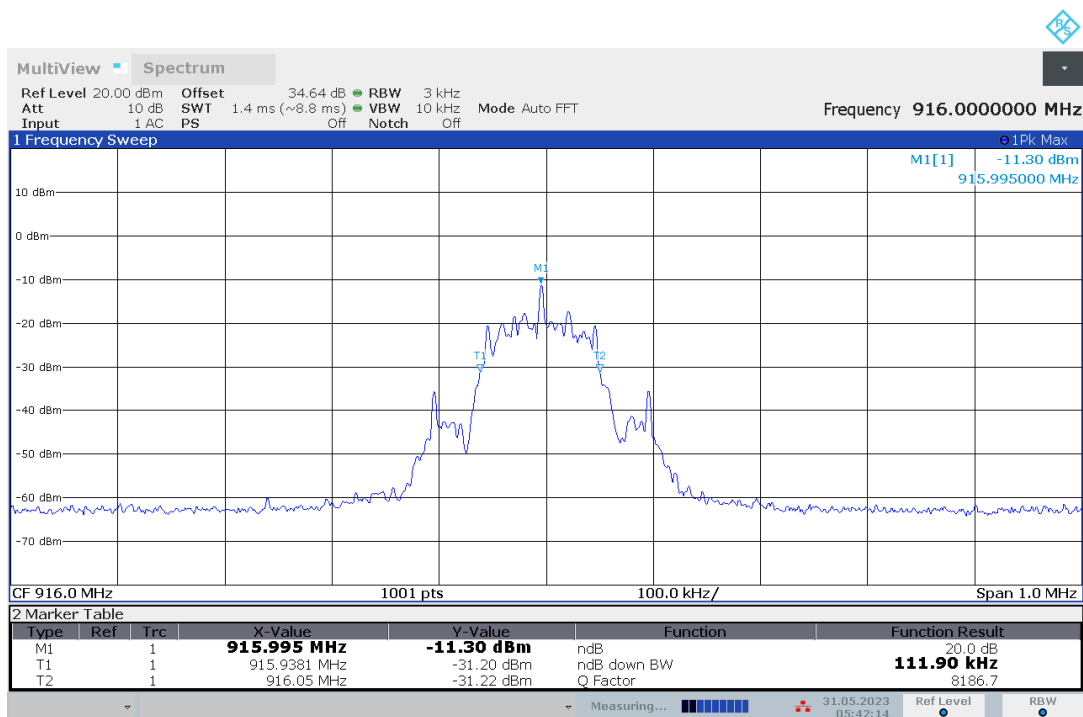


05:42:15 31.05.2023

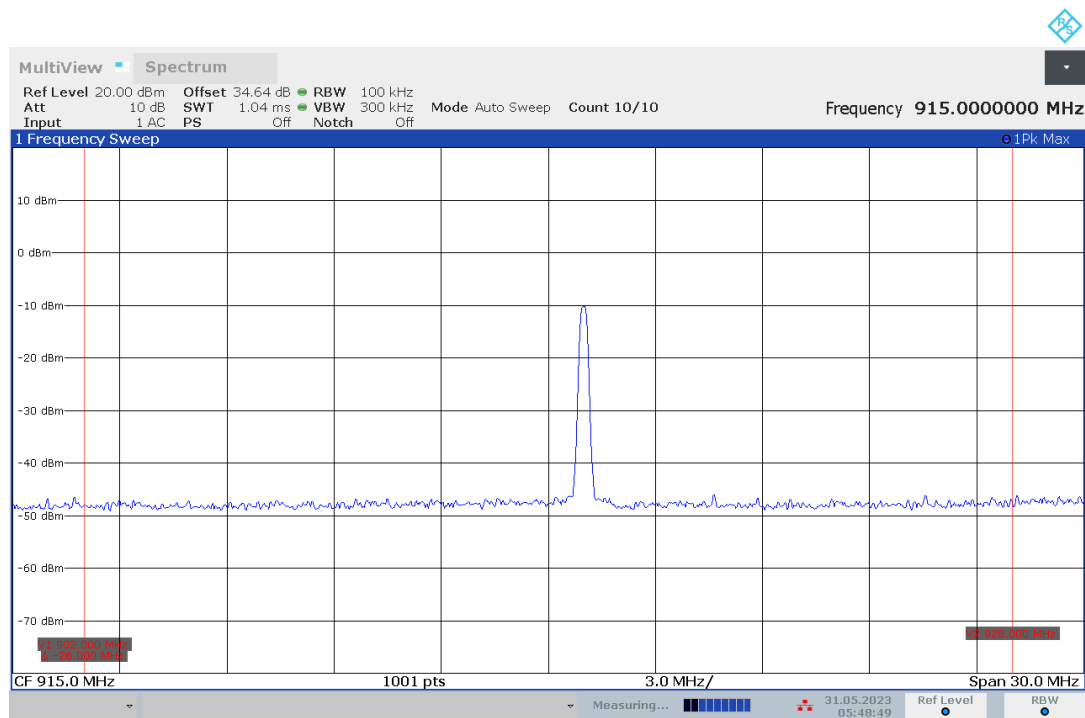

CH1: 908.40 MHz

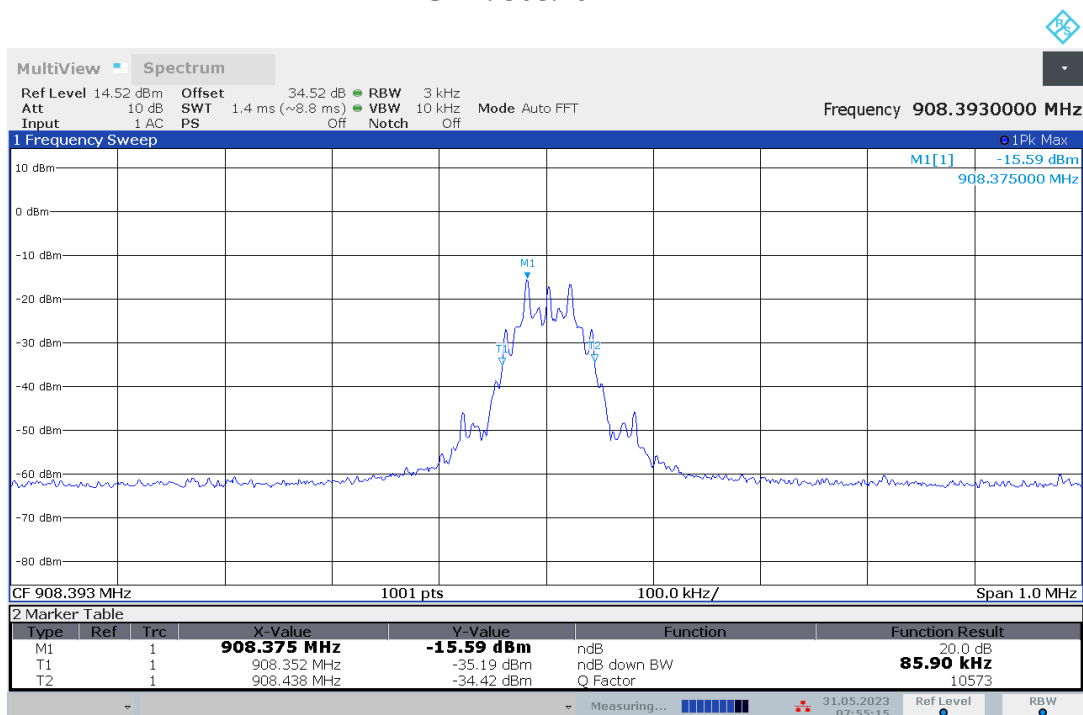


07:55:16 31.05.2023

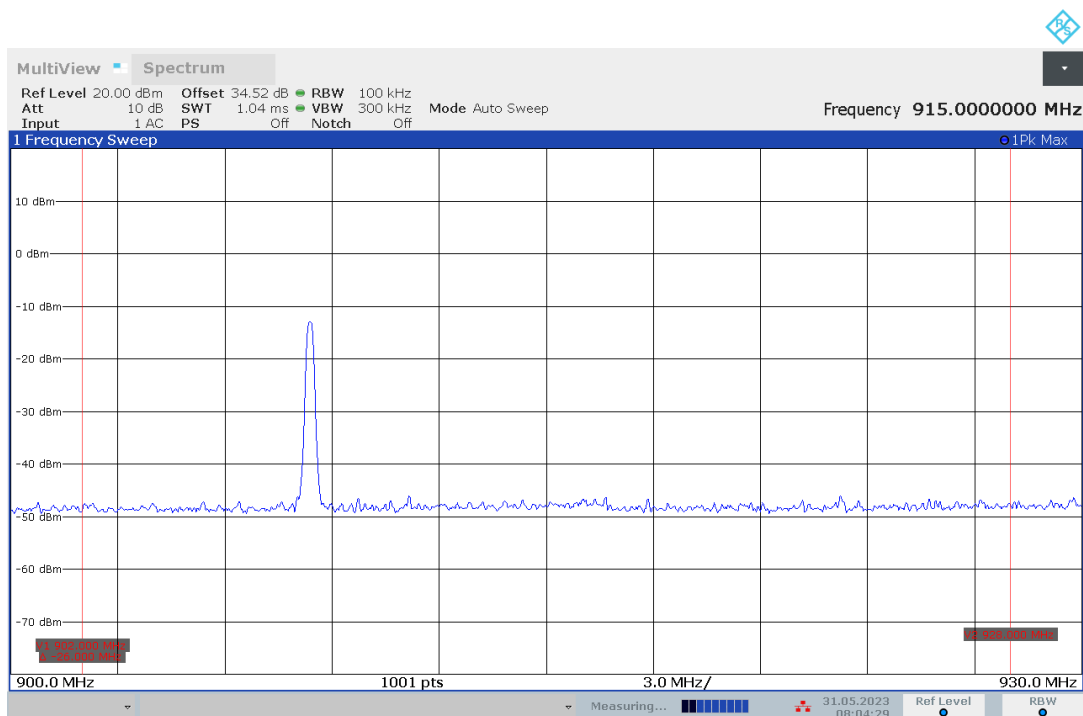


08:04:29 31.05.2023

CH2: 908.42 MHz

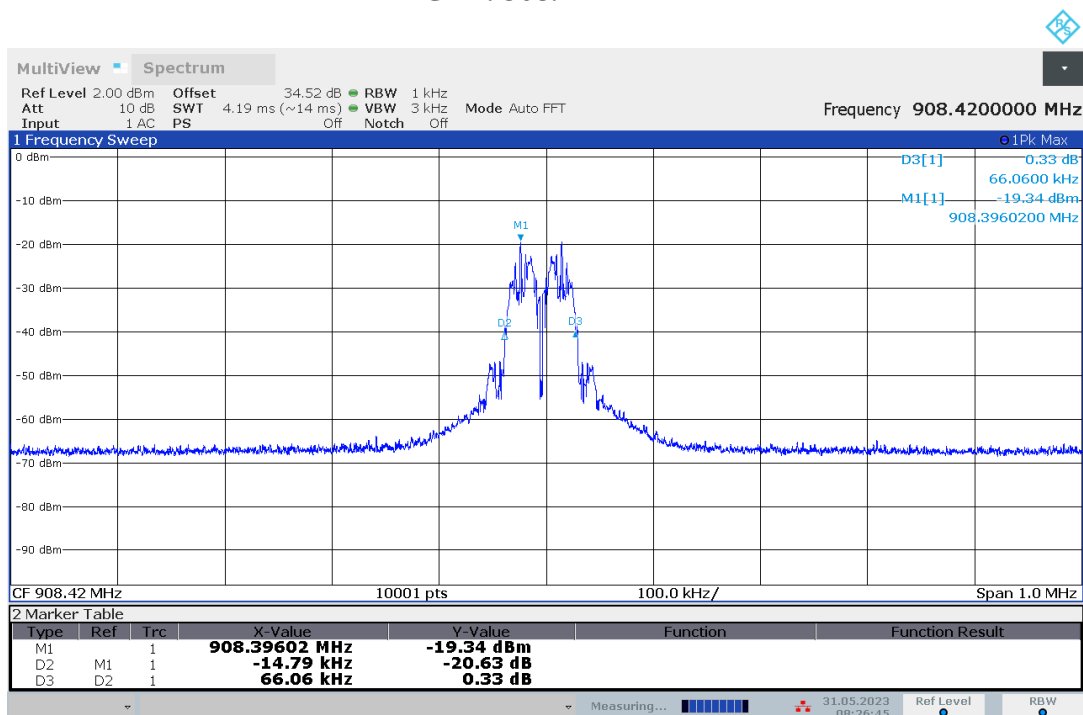

08:26:45 31.05.2023

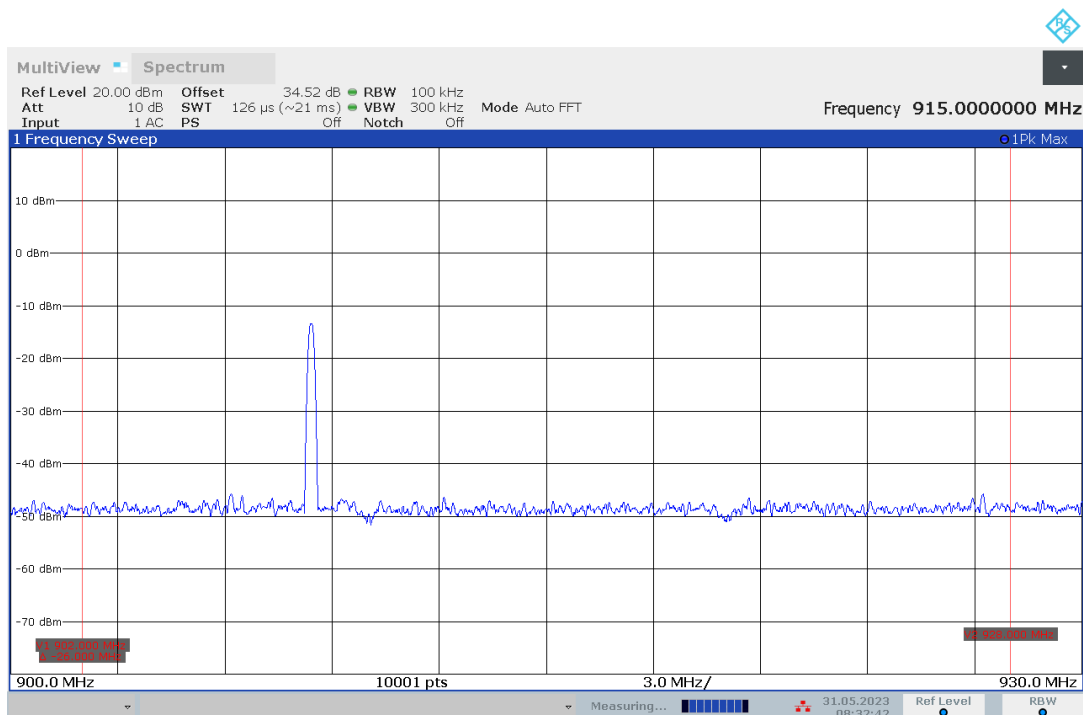

08:32:42 31.05.2023

5.4. Radiated Emission

5.4.1. Test Limits:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.


Field strength of harmonics shall comply with the following:

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
902 – 928	500	53.9	Quasi-peak
2400 – 2483.5	500	53.9	Average
5725 – 5875	500	53.9	Average
24000 – 24500	2500	67.9	Average


Radiated emission limits according to 15.209:

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
0.009-0.490	240	48.5-	Quasi-peak
0.490-1.705	240	33.8-	Quasi-peak
1.705-30.0	30	29.54	Quasi-peak
30 - 80	100	40.0	Quasi-peak
88 - 216	150	43.5	Quasi-peak
216 - 960	200	46.0	Quasi-peak
960 - 1000	500	53.9	Quasi-peak
Above 1000	500	53.9	Average
Above 1000	500	73.9	Peak


HORIZONTAL, QPK

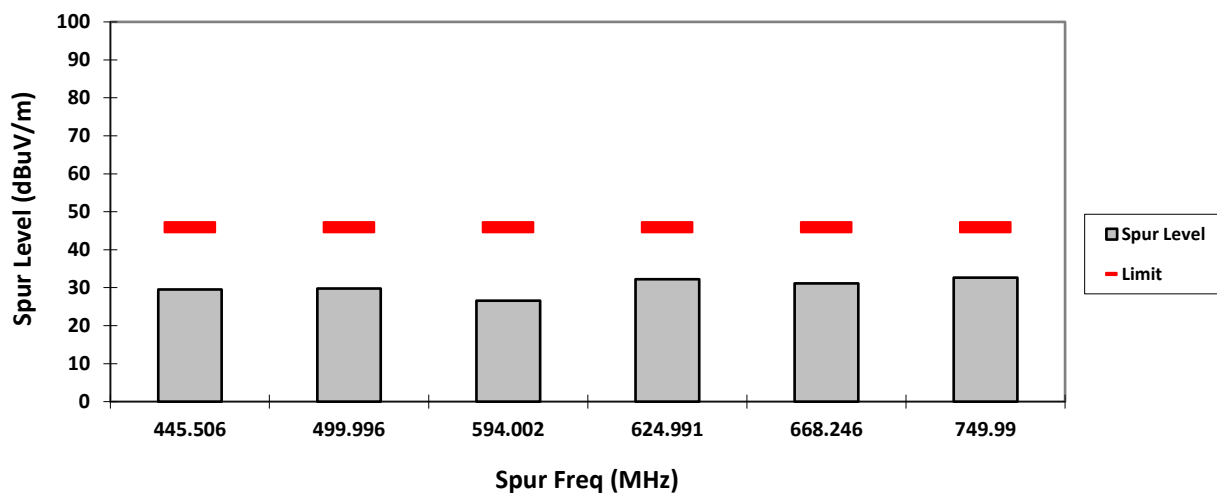

VERTICAL, QPK

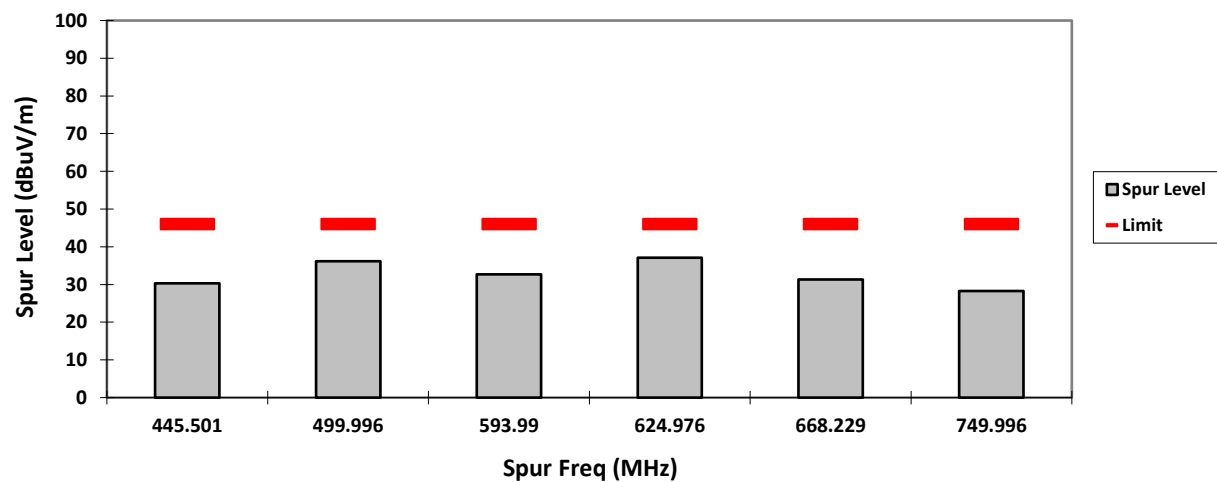


CH0: 916.00 MHz / 30MHz-1GHz / Horizontal

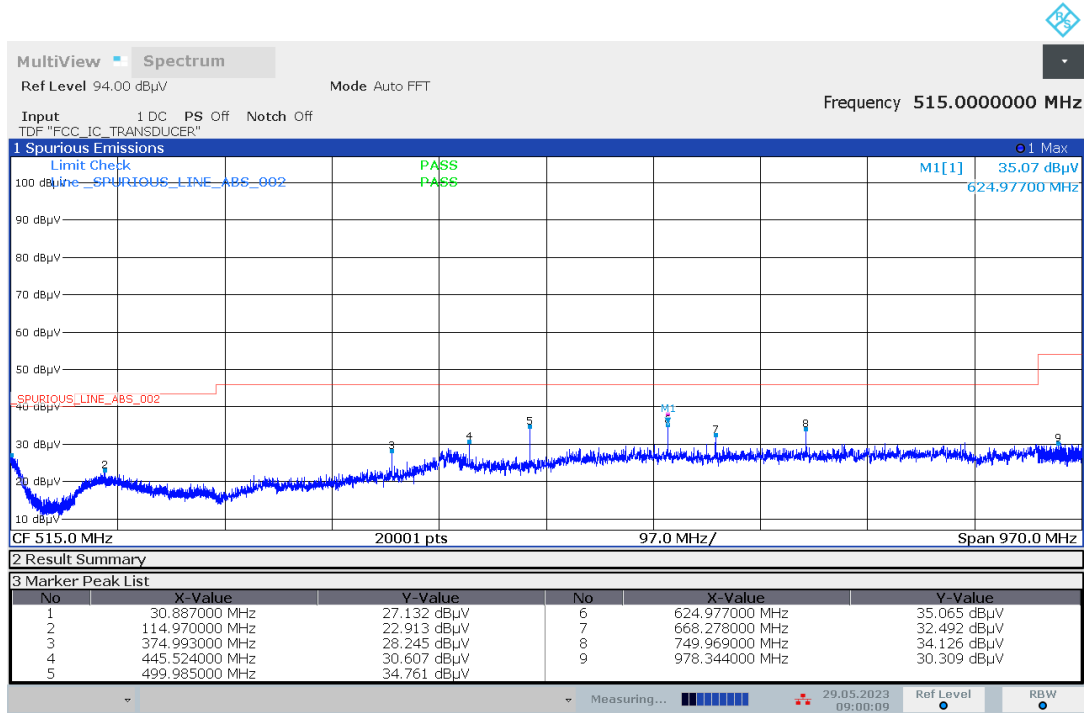


09:00:09 29.05.2023

CH0: 916.00 MHz / 30MHz-1GHz / Vertical

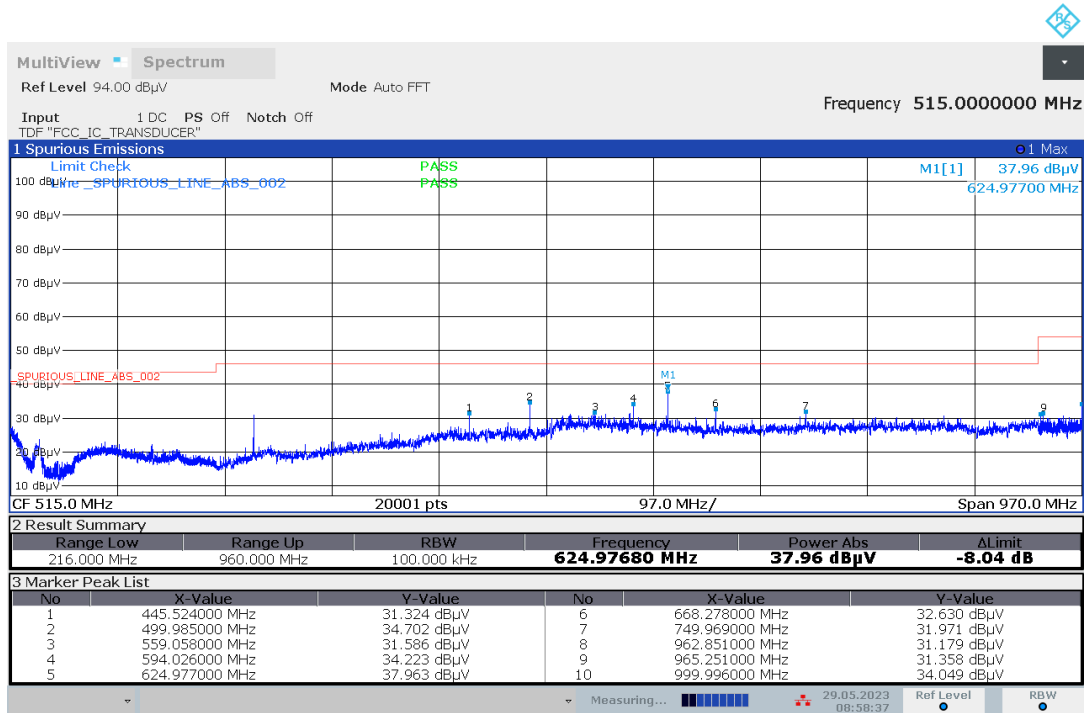


08:58:38 29.05.2023

CH0: 916.00 MHz / 1GHz-14GHz / Horizontal

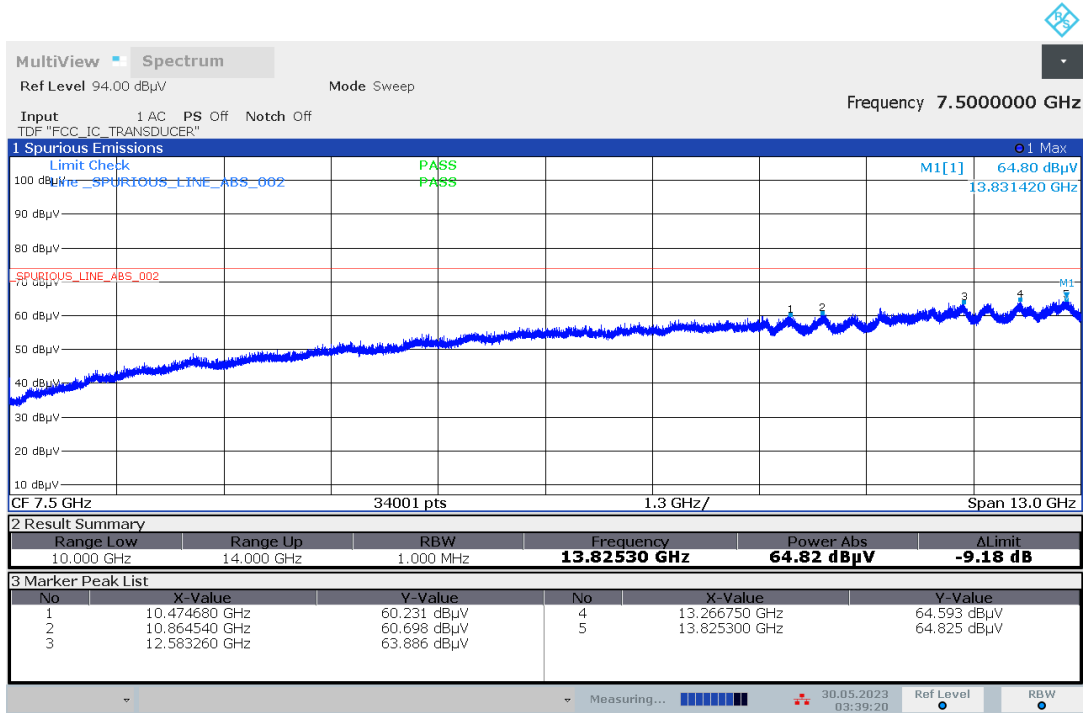

03:39:21 30.05.2023

CH0: 916.00 MHz / 1GHz-14GHz / Vertical

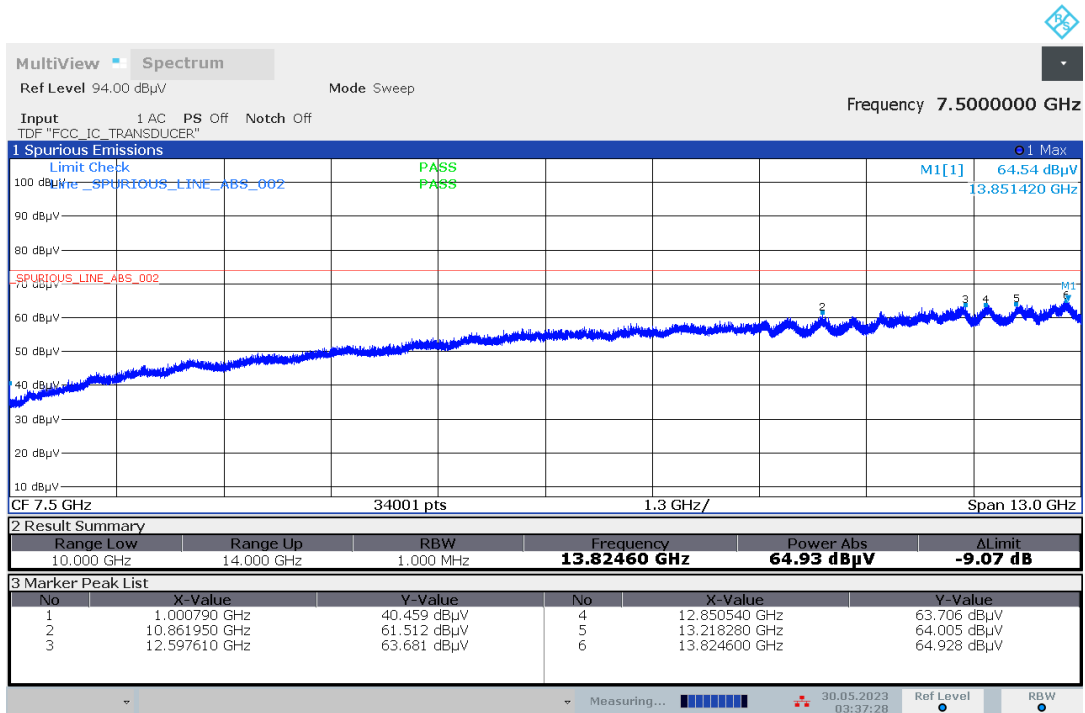

03:37:28 30.05.2023


Radiated Emission (Mid Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

18


VERTICAL, QPK

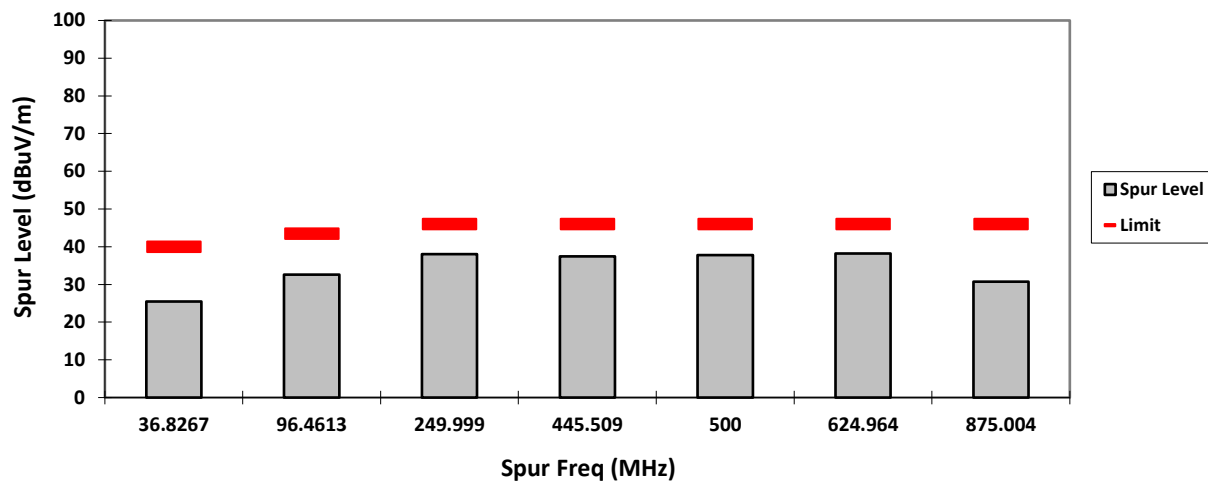

HORIZONTAL, QPK

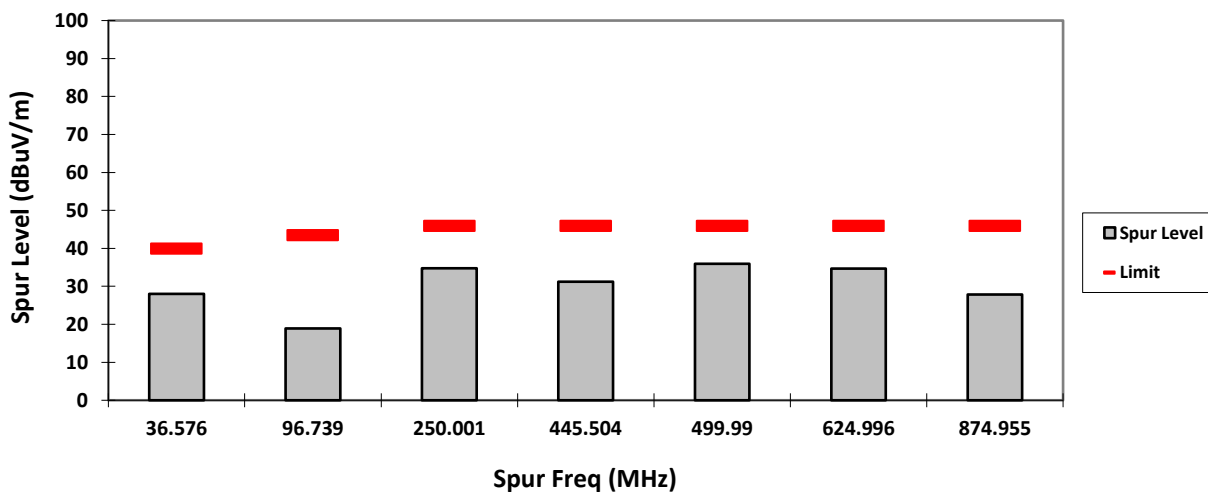


CH1: 908.40 MHz / 30MHz-1GHz / Horizontal

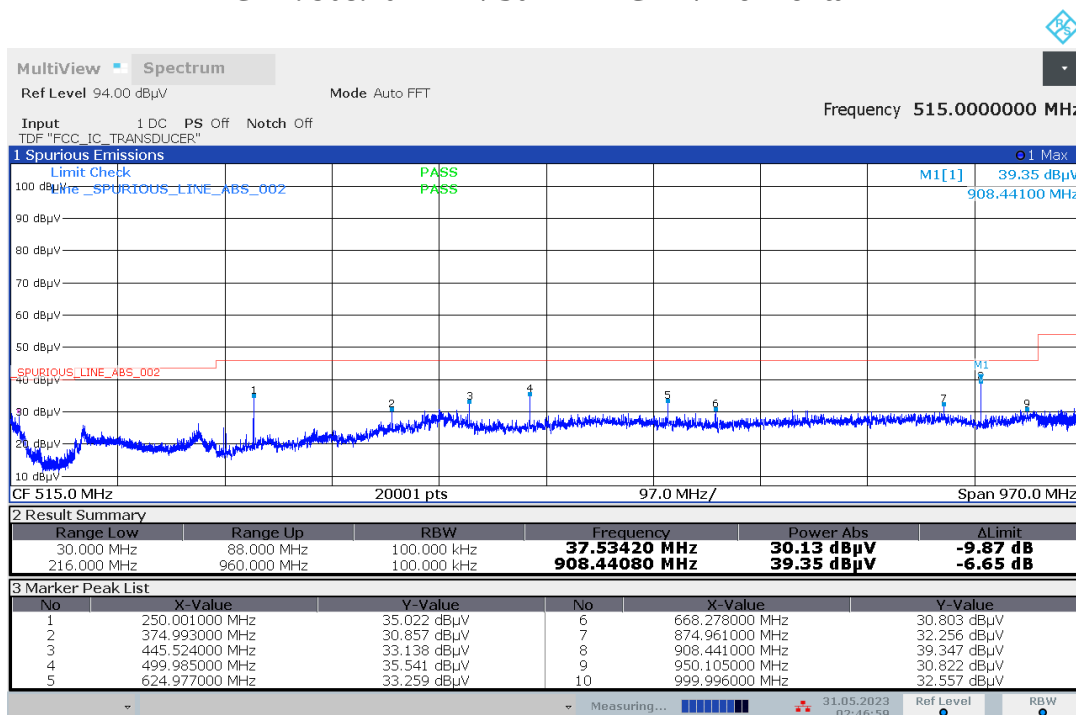

02:47:00 31.05.2023

Note: 908.4 MHz signal is the fundamental being attenuated by the notch filter


CH1: 908.40 MHz / 30MHz-1GHz / Vertical

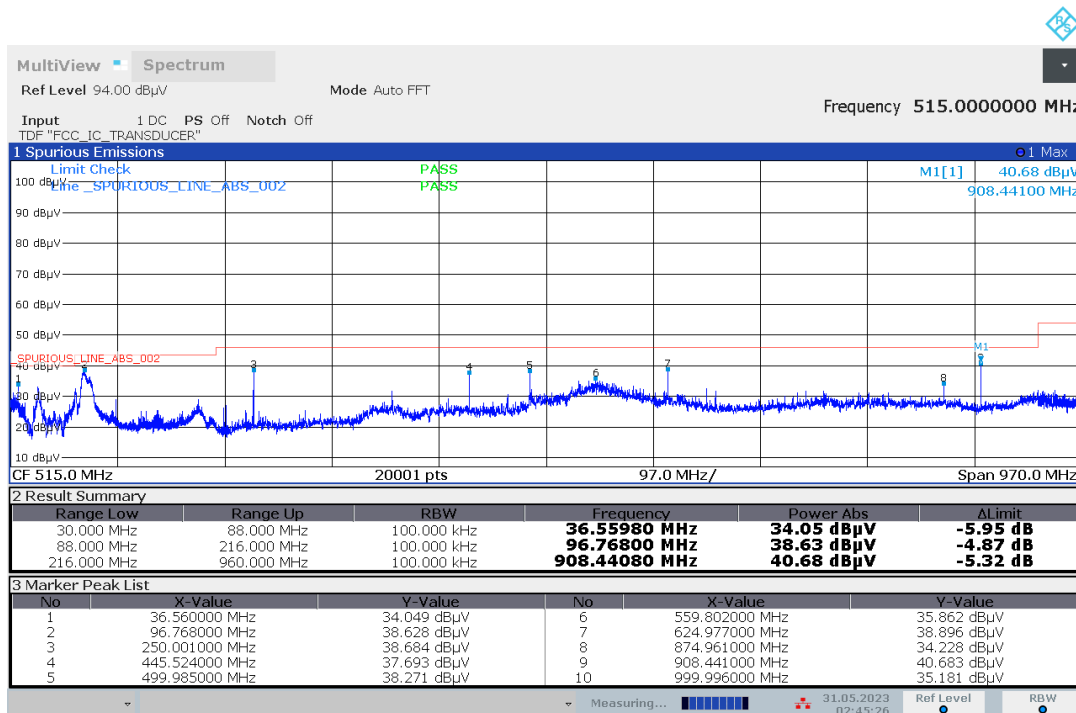

02:45:27 31.05.2023


Note: 908.4 MHz signal is the fundamental being attenuated by the notch filter

CH1: 908.40 MHz / 1GHz-14GHz / Horizontal

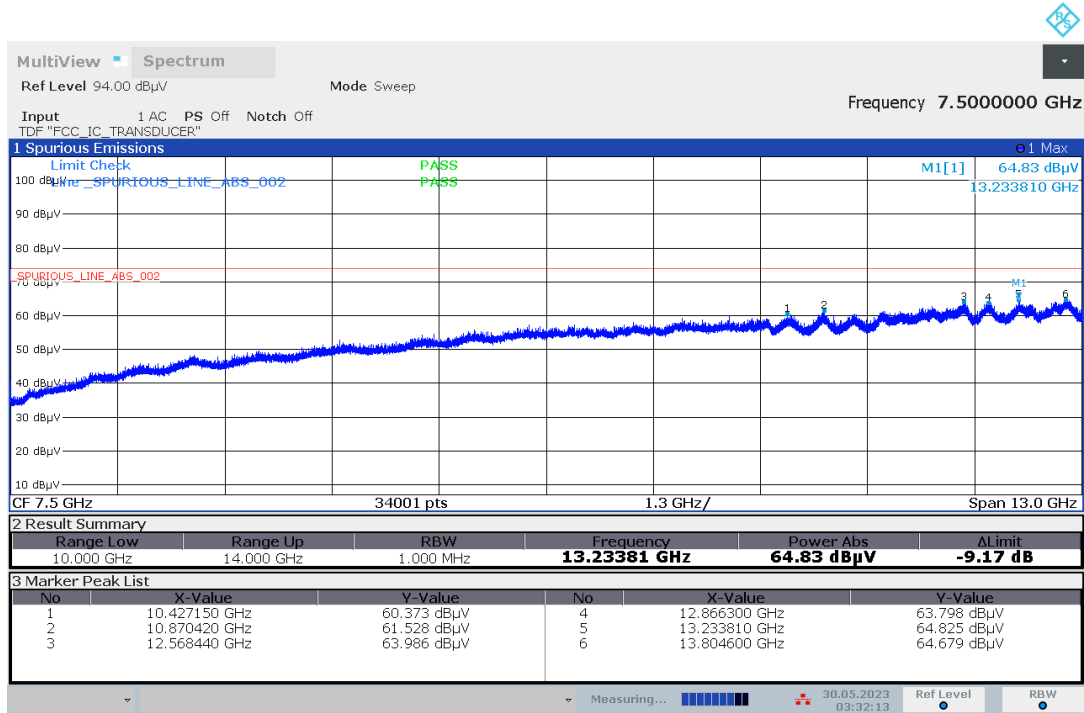

03:32:14 30.05.2023

CH1: 908.40 MHz / 1GHz-14GHz / Vertical

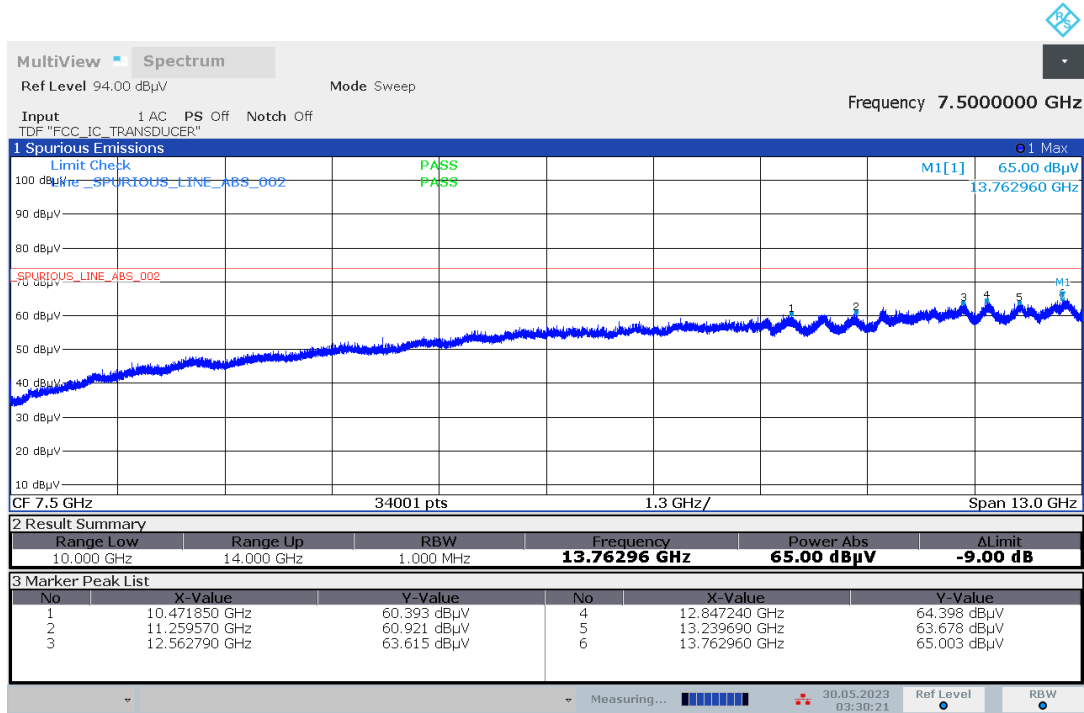

03:30:21 30.05.2023


Radiated Emission (High Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

22


VERTICAL, QPK

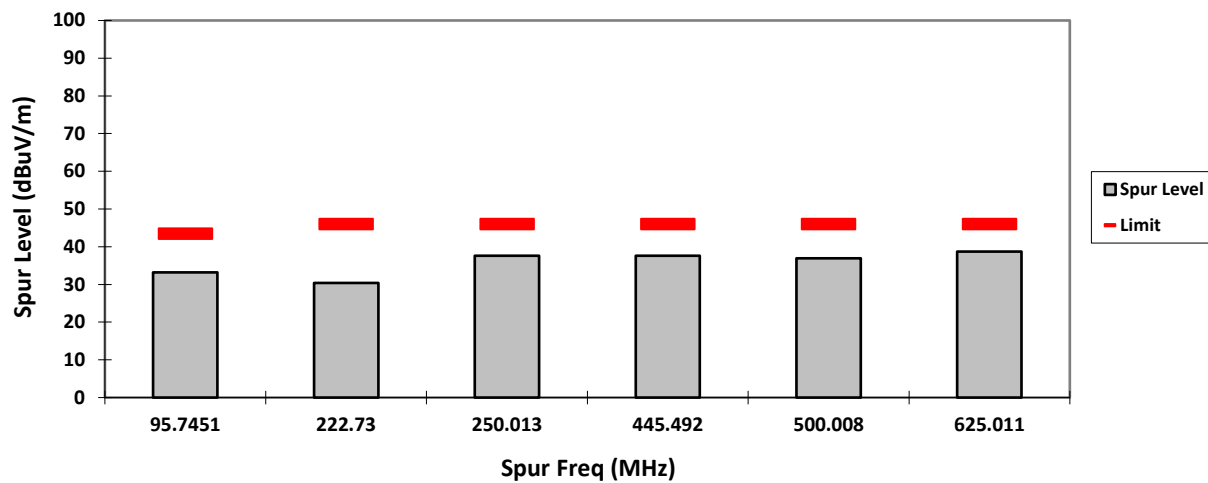

HORIZONTAL, QPK

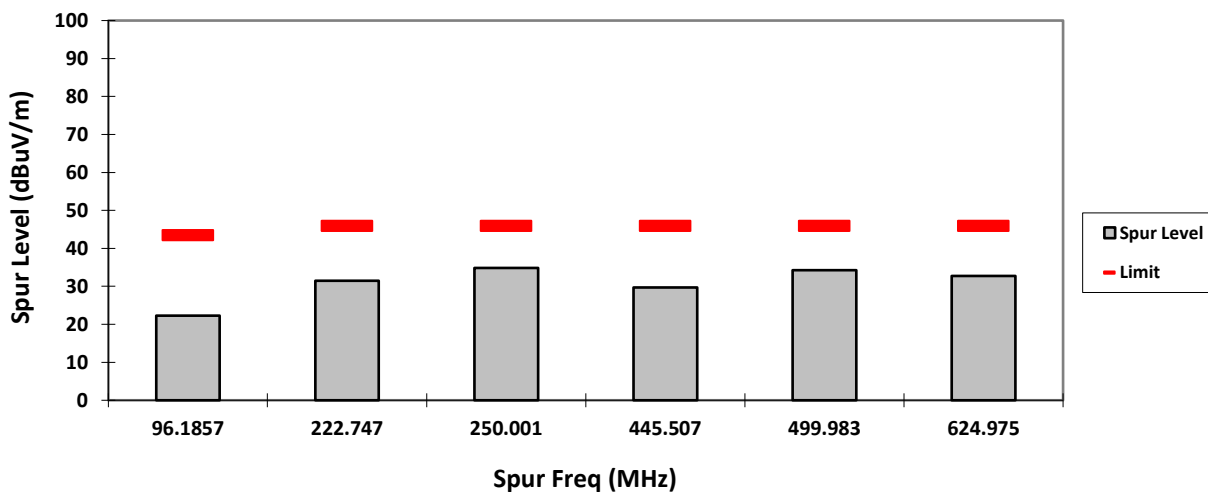


CH2: 908.42 MHz / 30MHz-1GHz / Horizontal

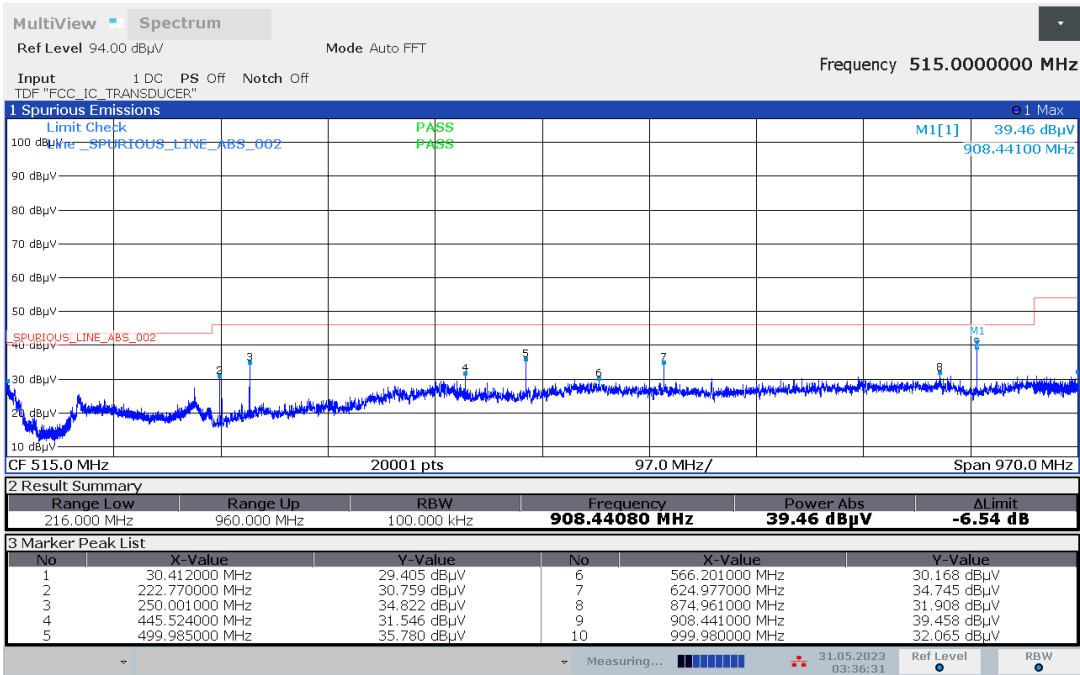

03:36:32 31.05.2023

Note: 908.4 MHz signal is the fundamental being attenuated by the notch filter


CH2: 908.42 MHz / 30MHz-1GHz / Vertical

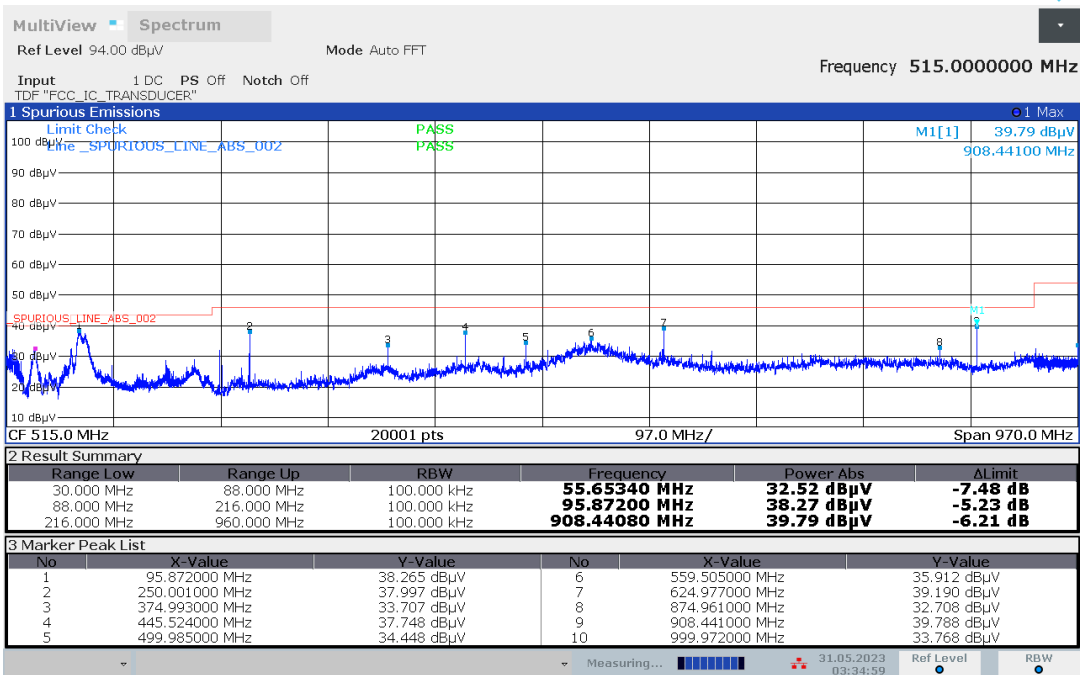

03:35:00 31.05.2023


Note: 908.4 MHz signal is the fundamental being attenuated by the notch filter

CH2: 908.42 MHz / 1GHz-14GHz / Horizontal

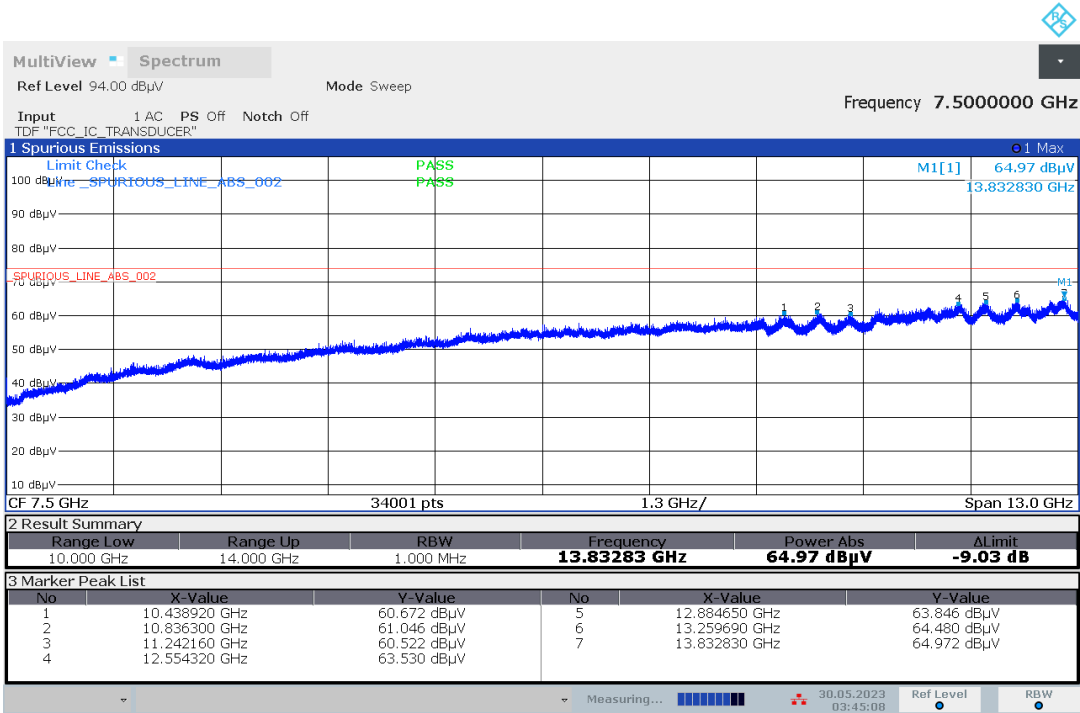

03:45:08 30.05.2023

CH2: 908.42 MHz / 1GHz-14GHz / Vertical

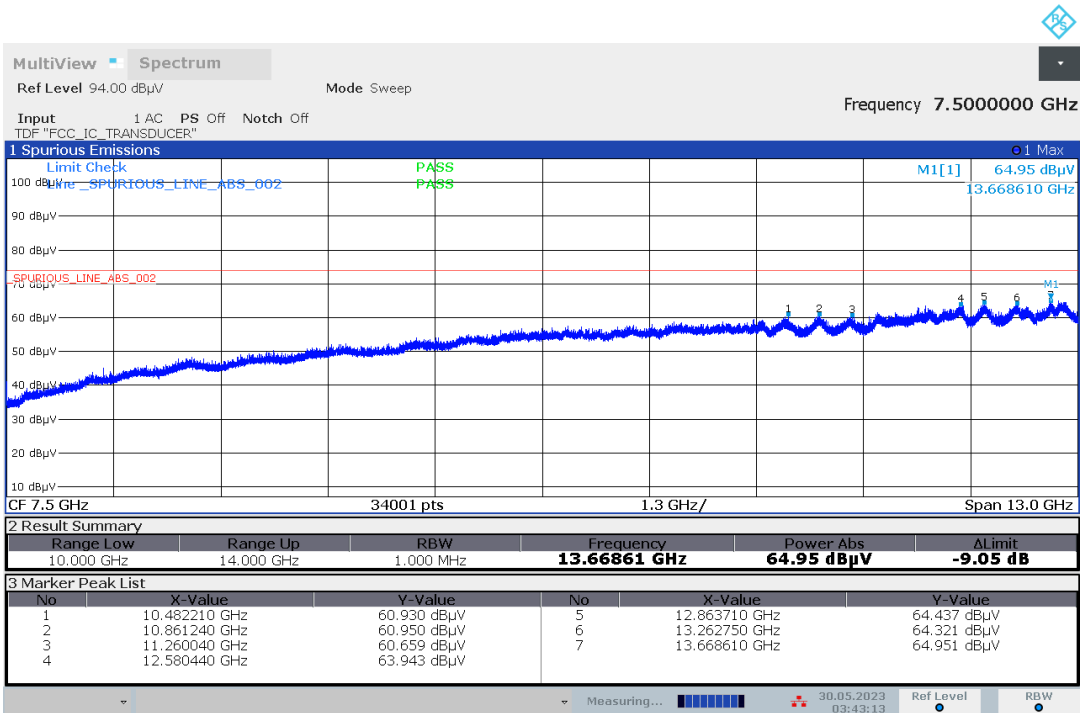


03:43:14 30.05.2023

Radiated Emission tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, QPK

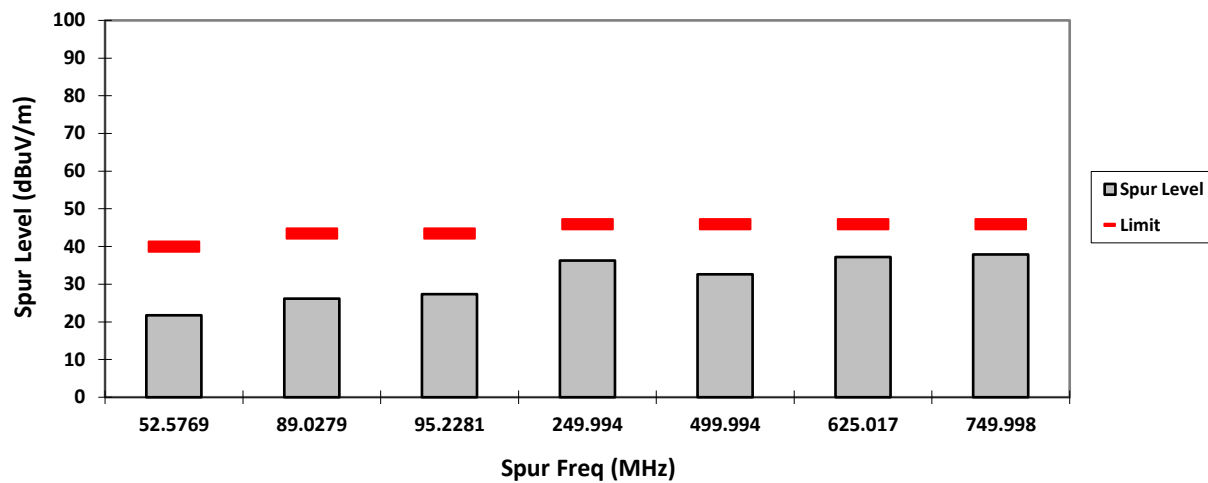

HORIZONTAL, QPK

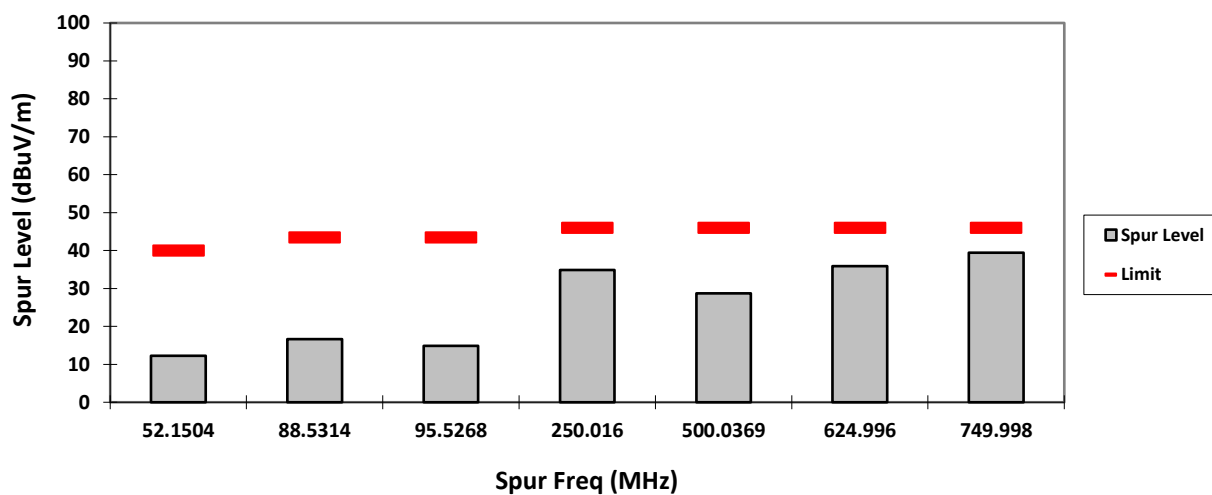


CH0: 916.00 MHz / 30MHz-1GHz / Horizontal

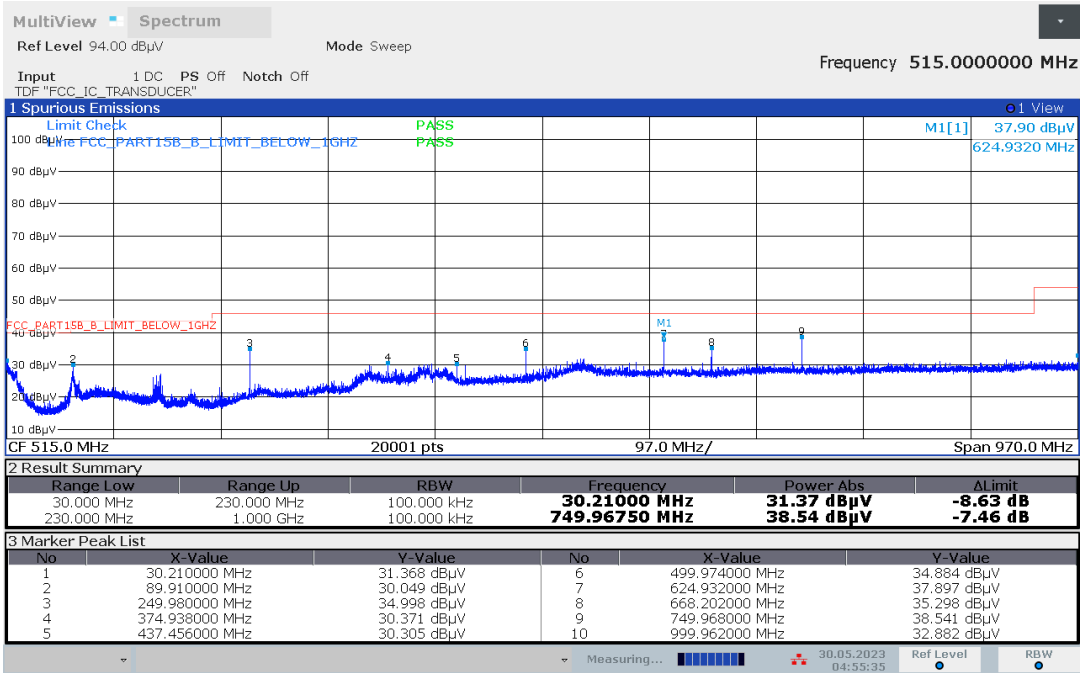


04:55:36 30.05.2023

CH0: 916.00 MHz / 30MHz-1GHz / Vertical

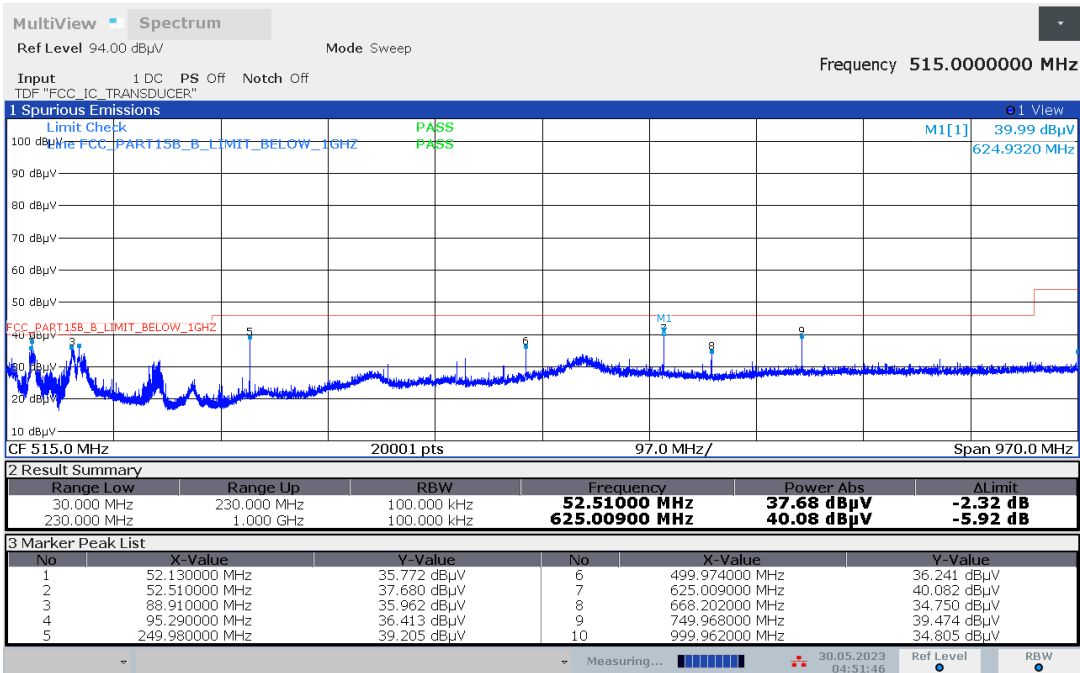


04:51:46 30.05.2023

CH0: 916.00 MHz / 1GHz-14GHz / Horizontal

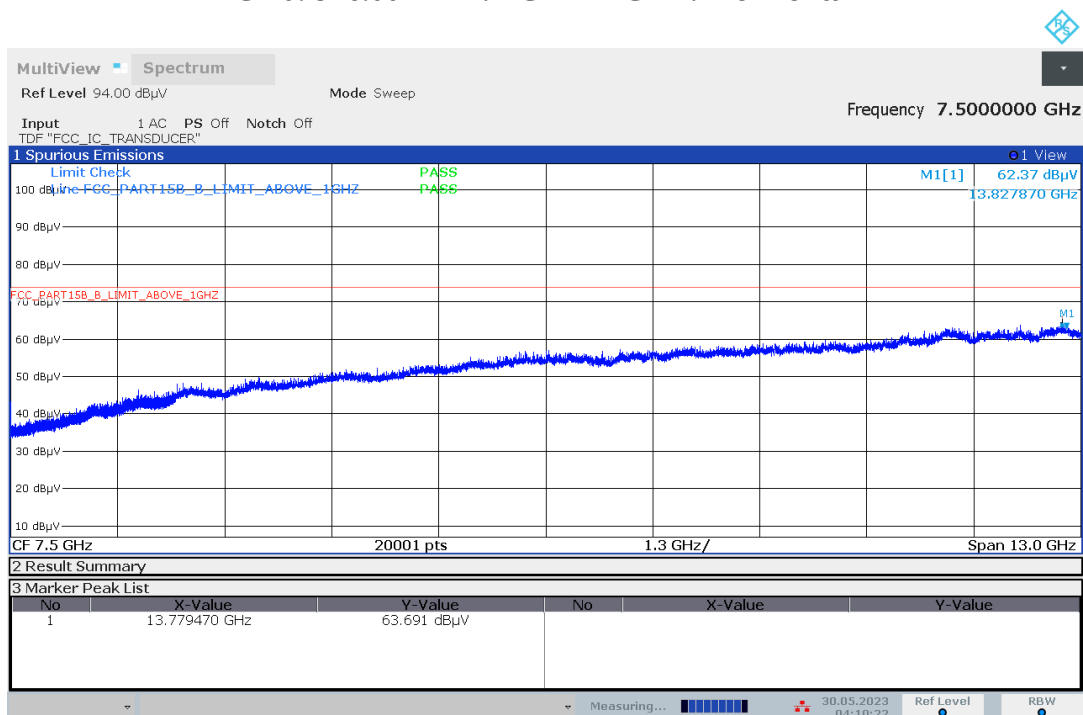

04:10:23 30.05.2023

CH0: 916.00 MHz / 1GHz-14GHz / Vertical

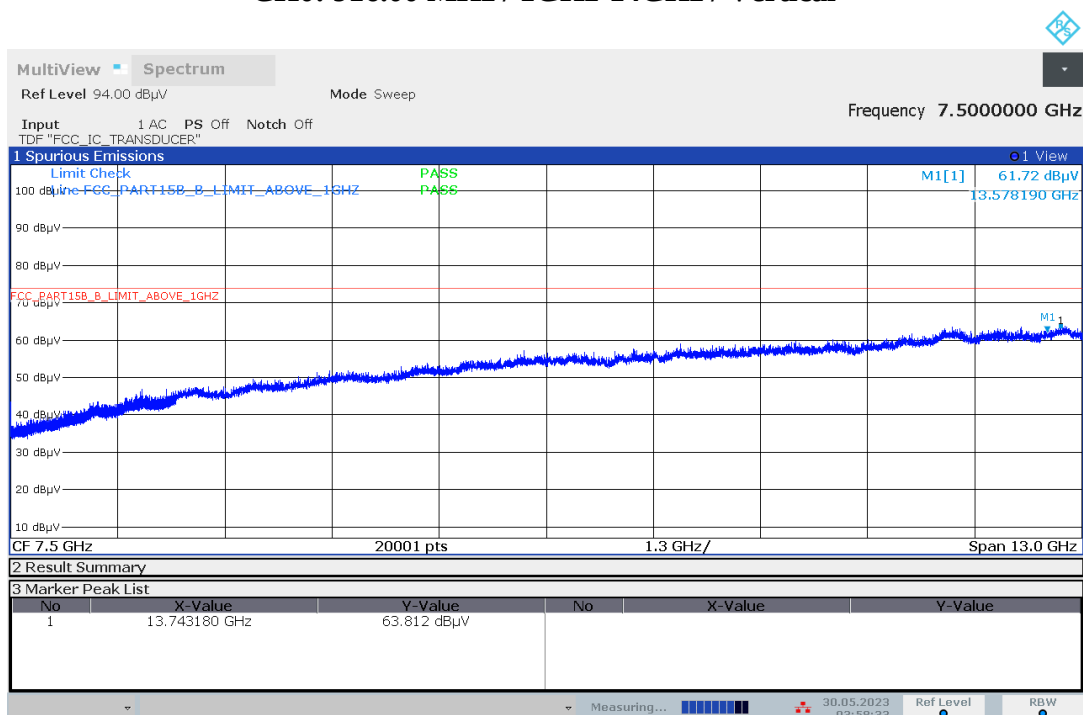


03:58:34 30.05.2023

Radiated Emission tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, QPK

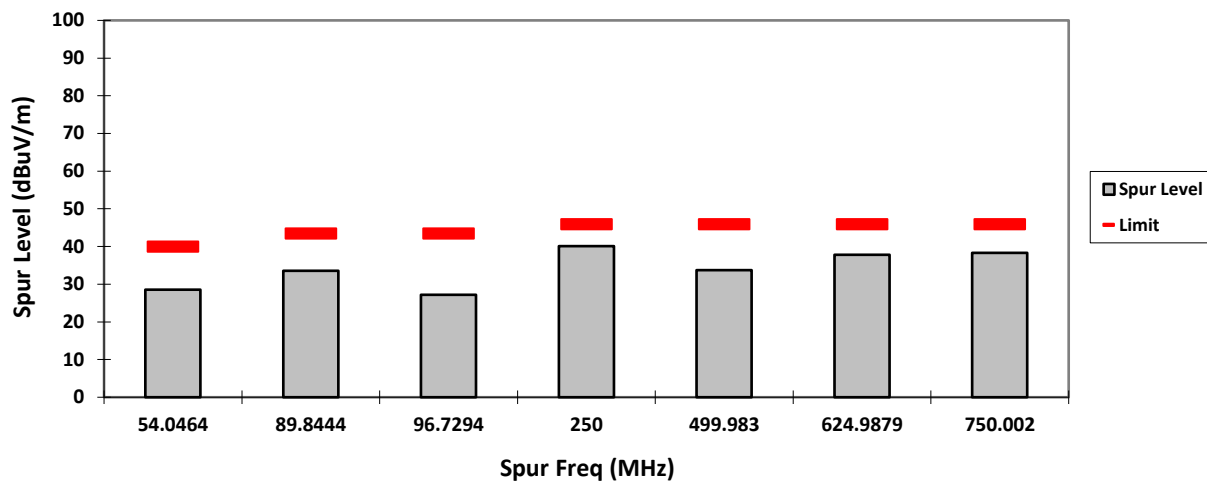

HORIZONTAL, QPK

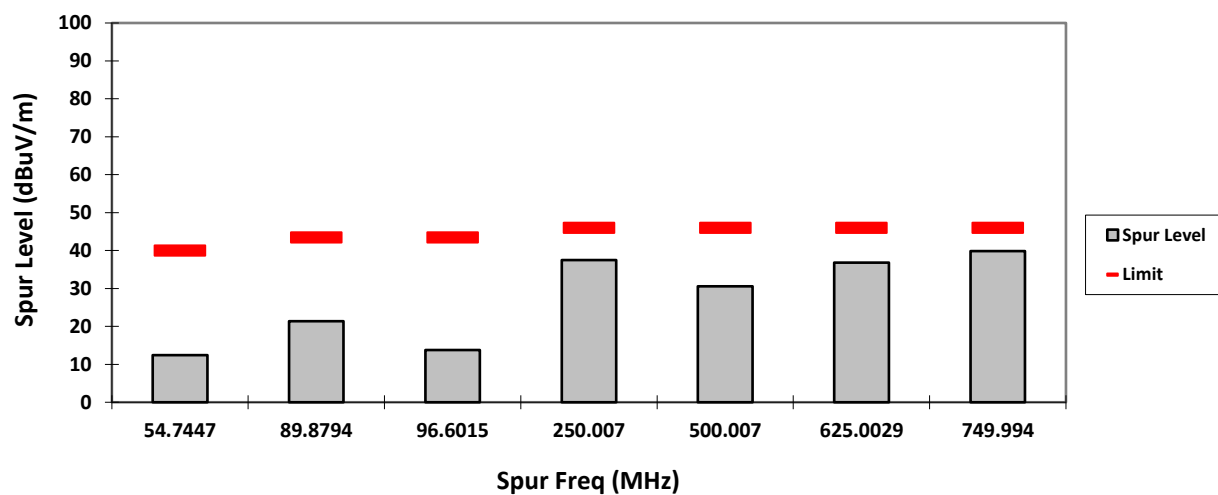


CH1: 908.40 MHz / 30MHz-1GHz / Horizontal

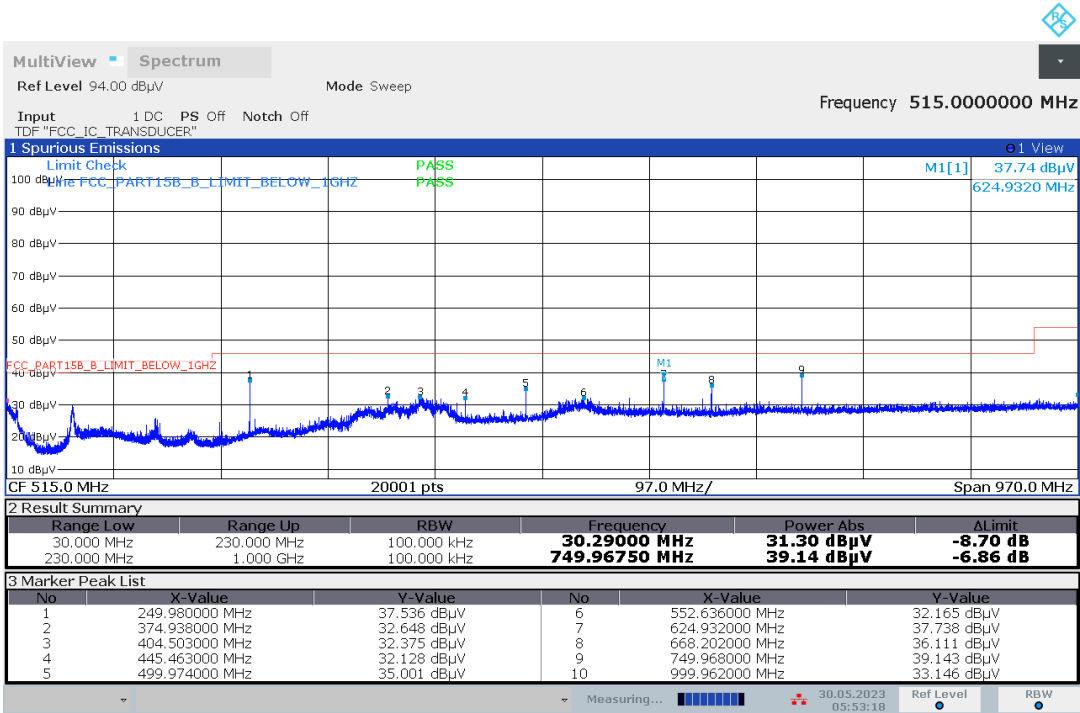


05:53:19 30.05.2023

CH1: 908.40 MHz / 30MHz-1GHz / Vertical

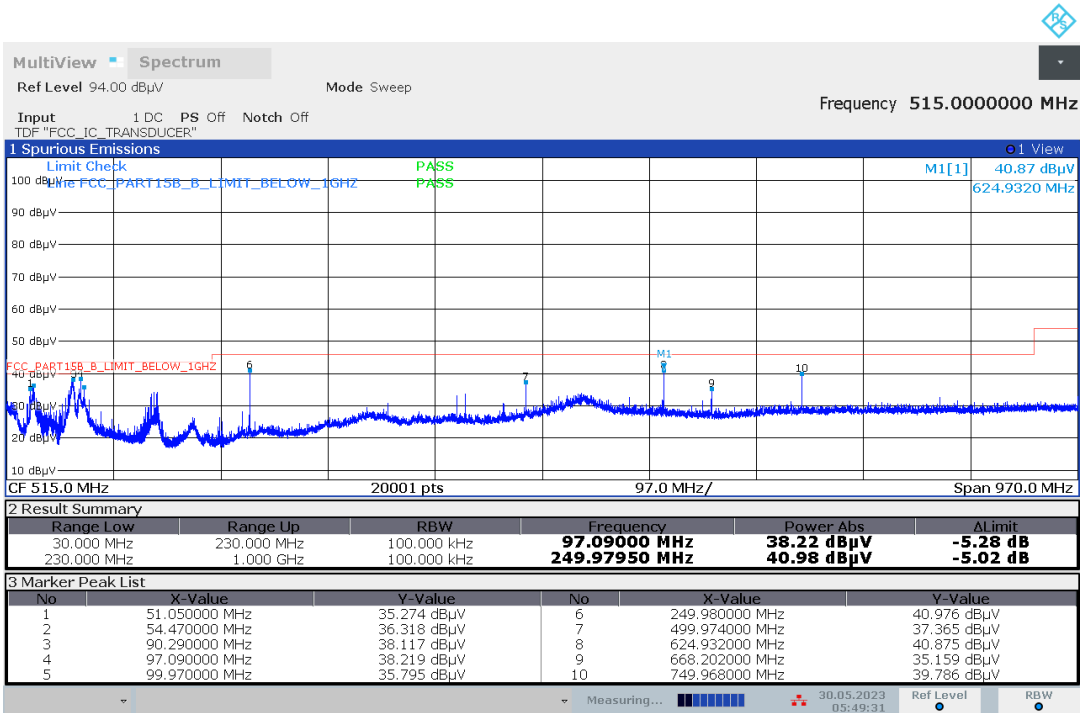


05:49:31 30.05.2023

CH1: 908.40 MHz / 1GHz-14GHz / Horizontal

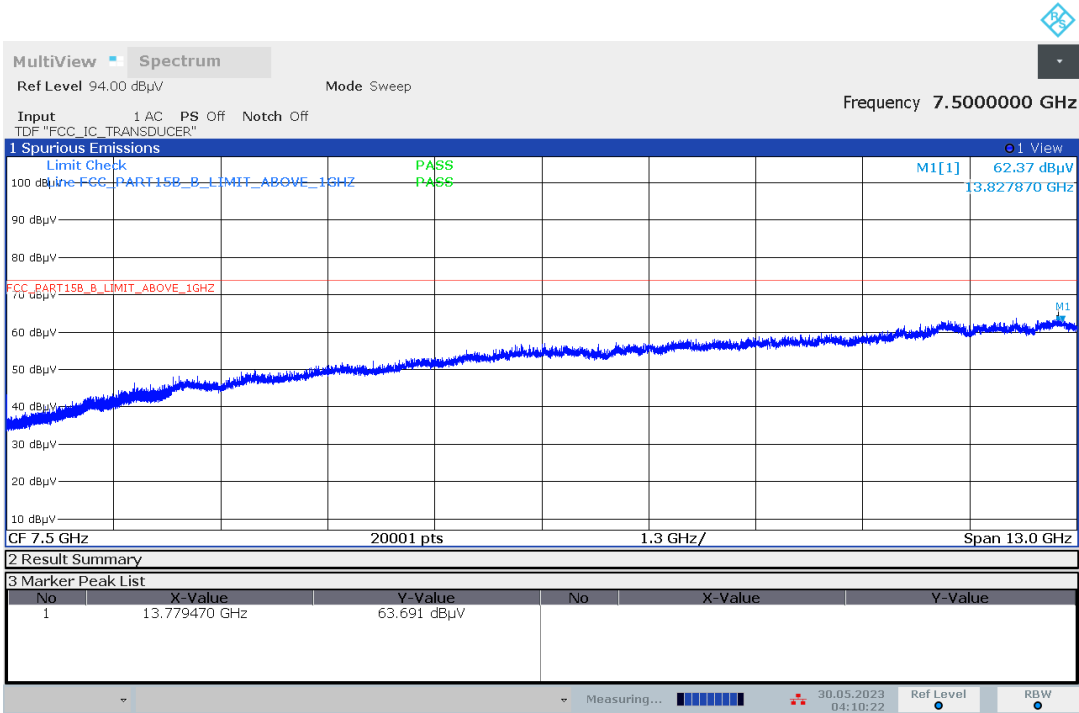

04:10:23 30.05.2023

CH1: 908.40 MHz / 1GHz-14GHz / Vertical

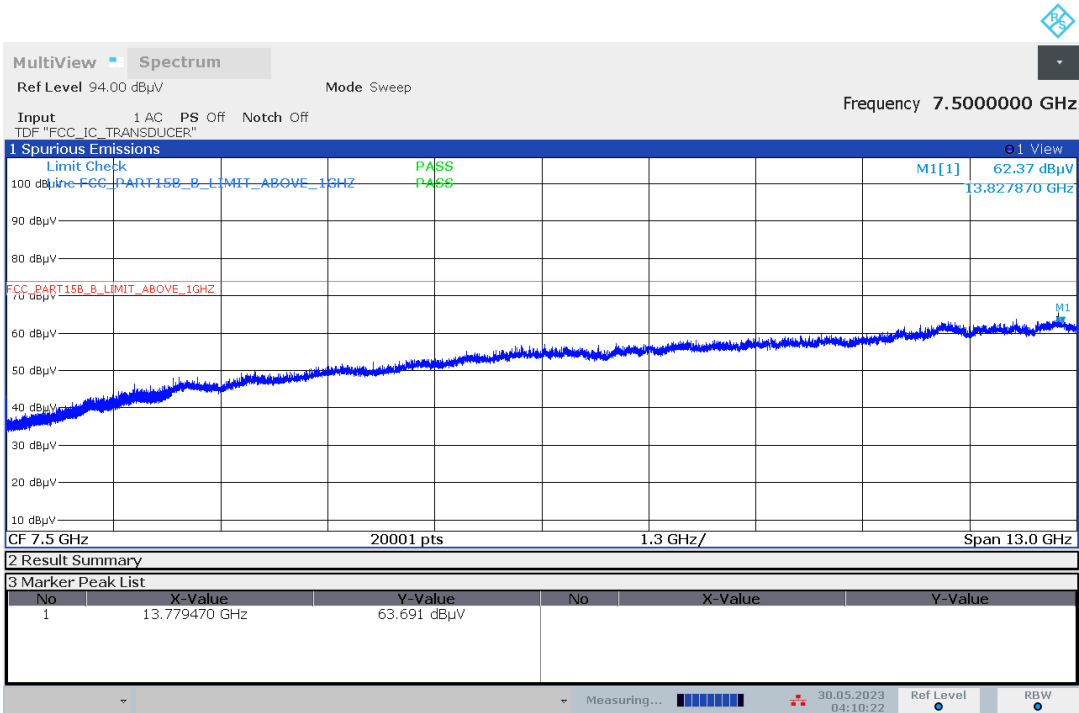


04:10:23 30.05.2023

Radiated Emission tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

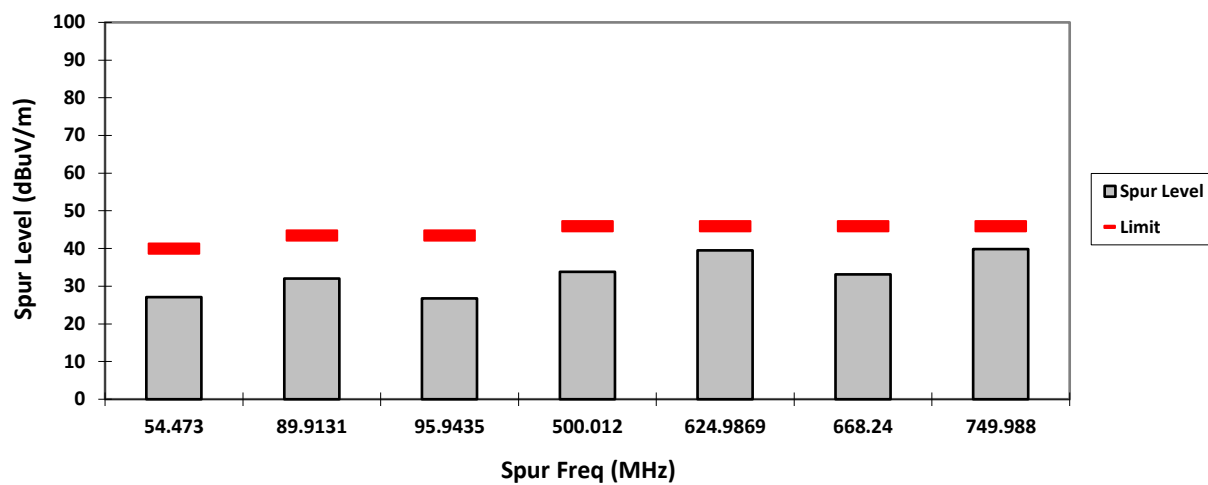

HORIZONTAL, QPK

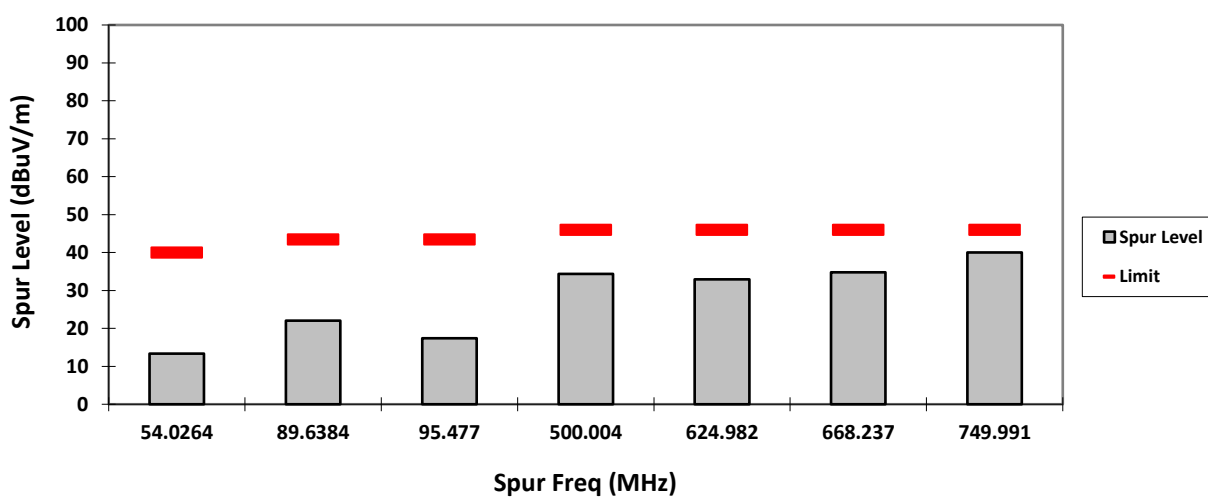


CH2: 908.42 MHz / 30MHz-1GHz / Horizontal

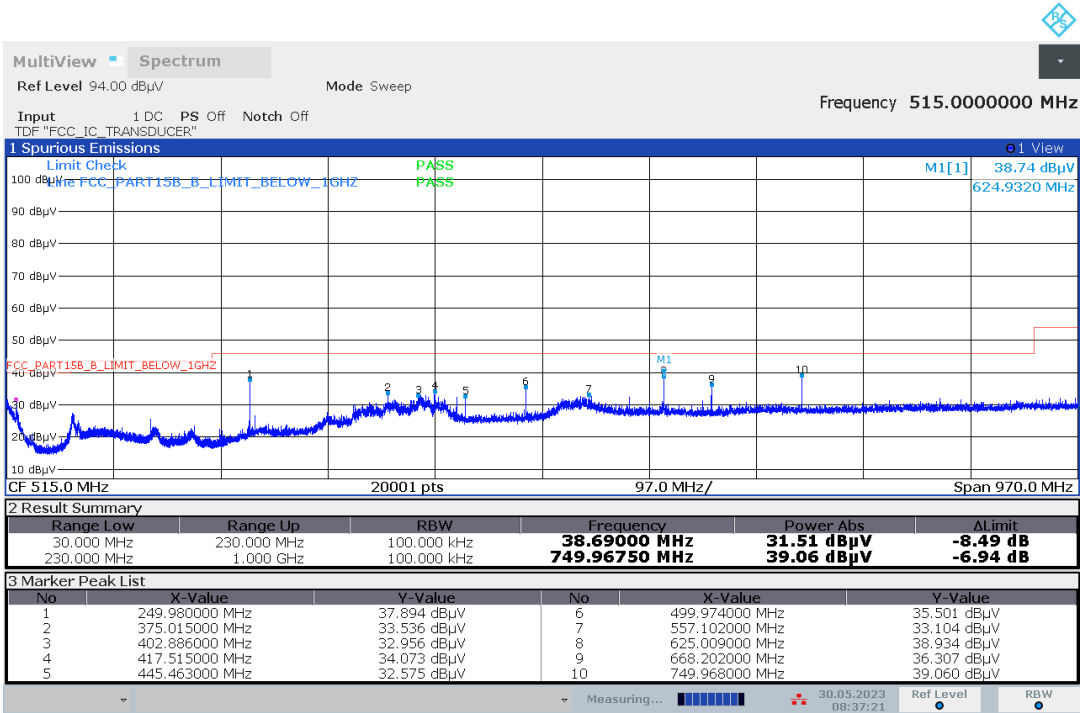


08:37:21 30.05.2023

CH2: 908.42 MHz / 30MHz-1GHz / Vertical

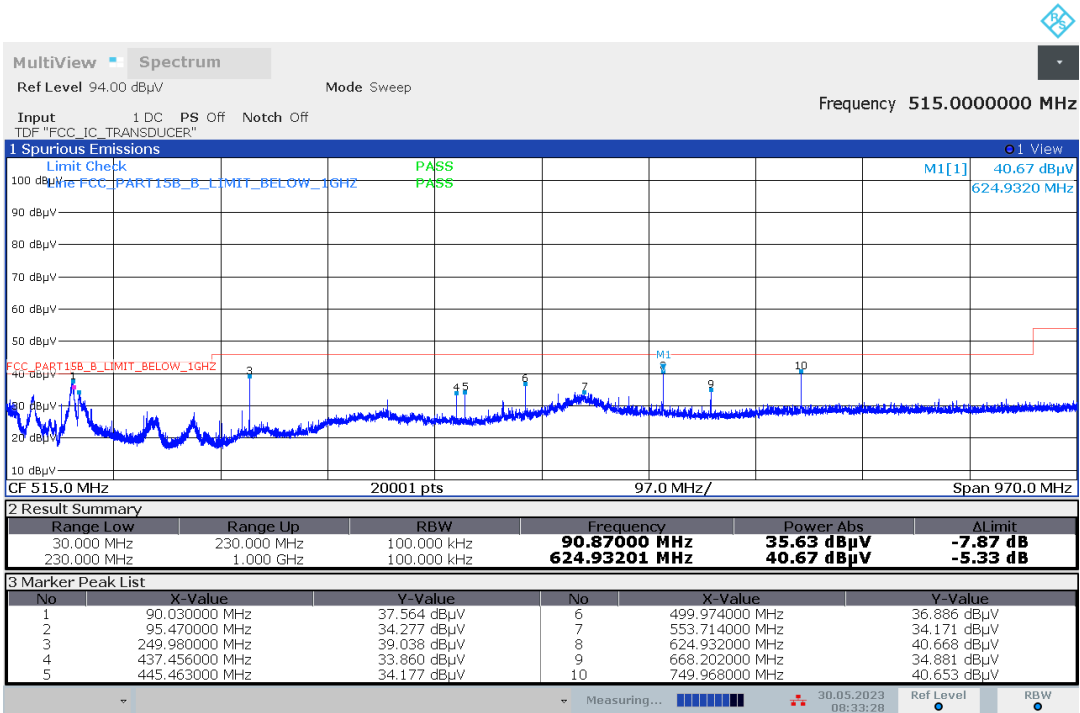


08:33:29 30.05.2023

CH2: 908.42 MHz / 1GHz-14GHz / Horizontal

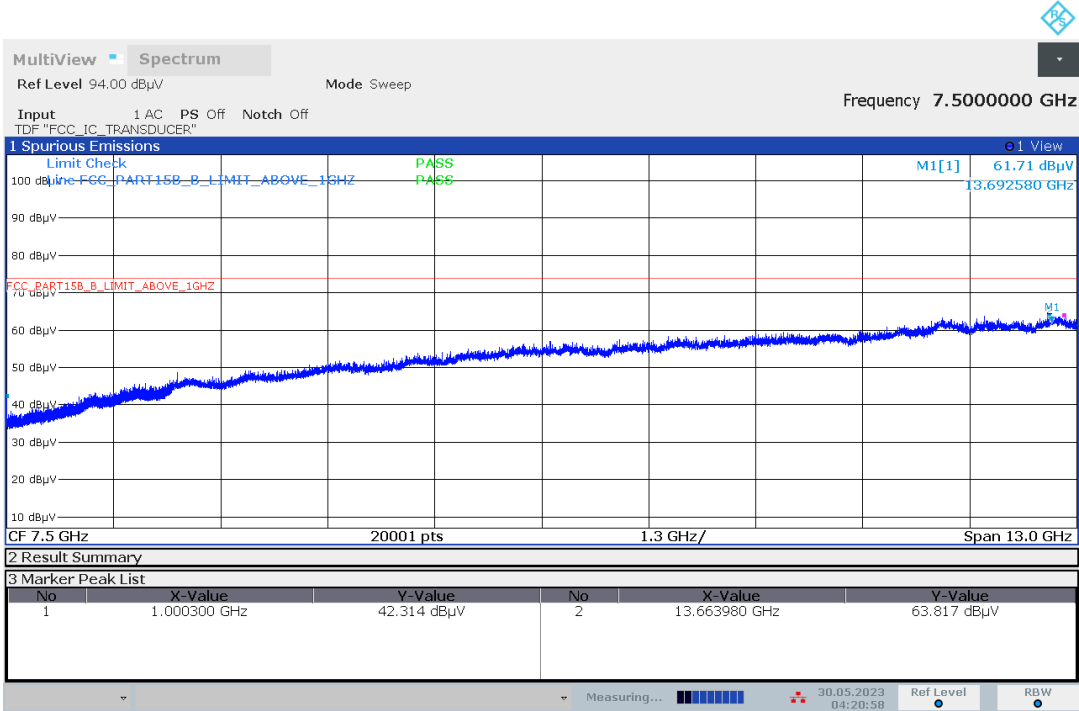

04:20:58 30.05.2023

CH2: 908.42 MHz / 1GHz-14GHz / Vertical

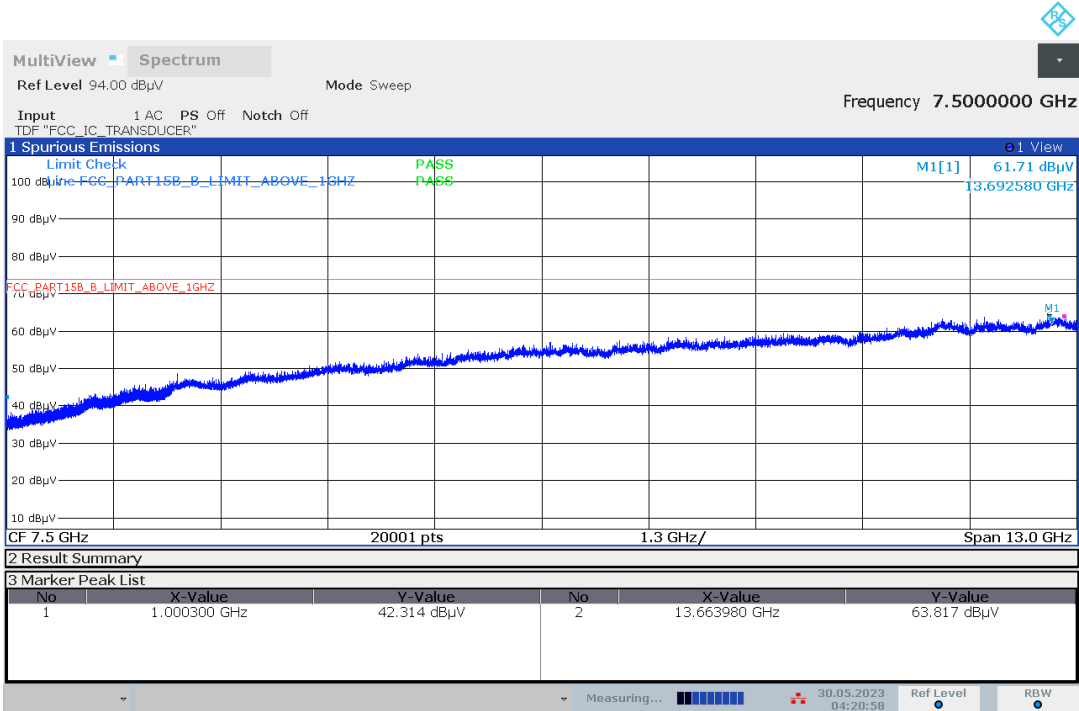

04:20:58 30.05.2023

5.5. Conducted Emissions on Power Supply Lines

5.5.1. Test Limit


Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

5.5.1. Test Data

Report ID.:	:	38611-EMC-00003
Ambient Temperature:	:	20.1 °C
Humidity:	:	59.5 %RH
Tester:	:	Alif
Date of test:	:	6 June 2023

1) Ambient 120V


Full Spectrum

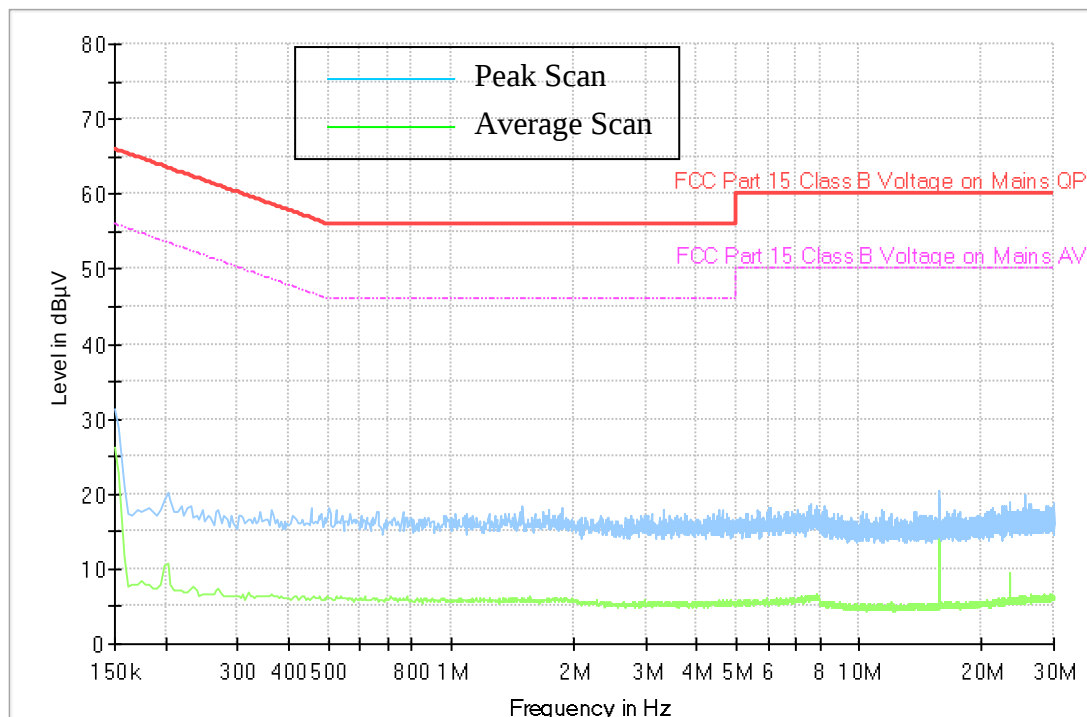

120 VAC, 60Hz

2) EUT Rx CH: 0

Full Spectrum

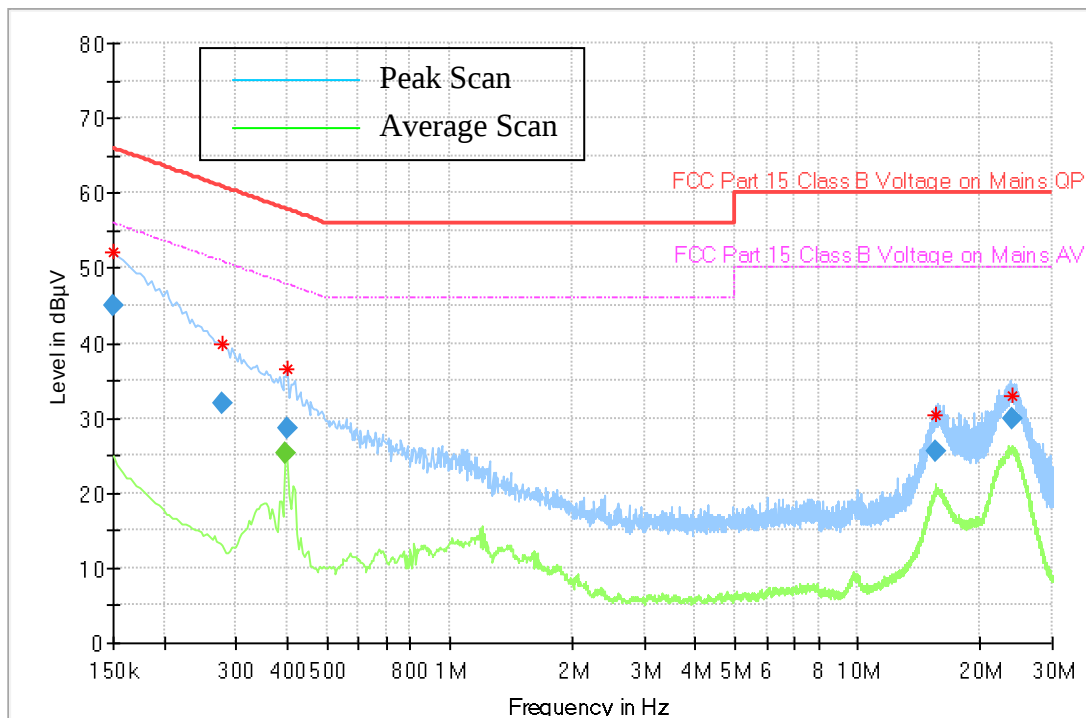


Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	44.97	---	66.00	21.03	1000.0	9.000	N	ON	10.3	Pass
0.278000	32.06	---	60.88	28.82	1000.0	9.000	L1	ON	10.2	Pass
0.398000	---	25.37	47.90	22.53	1000.0	9.000	L1	ON	10.3	Pass
0.402000	28.70	---	57.81	29.12	1000.0	9.000	L1	ON	10.3	Pass
15.538000	25.63	---	60.00	34.37	1000.0	9.000	L1	ON	10.3	Pass
23.858000	29.98	---	60.00	30.02	1000.0	9.000	L1	ON	10.4	Pass

* Expanded Uncertainty (U) = +/- 3.48dB

3) EUT Rx CH: 1

Full Spectrum

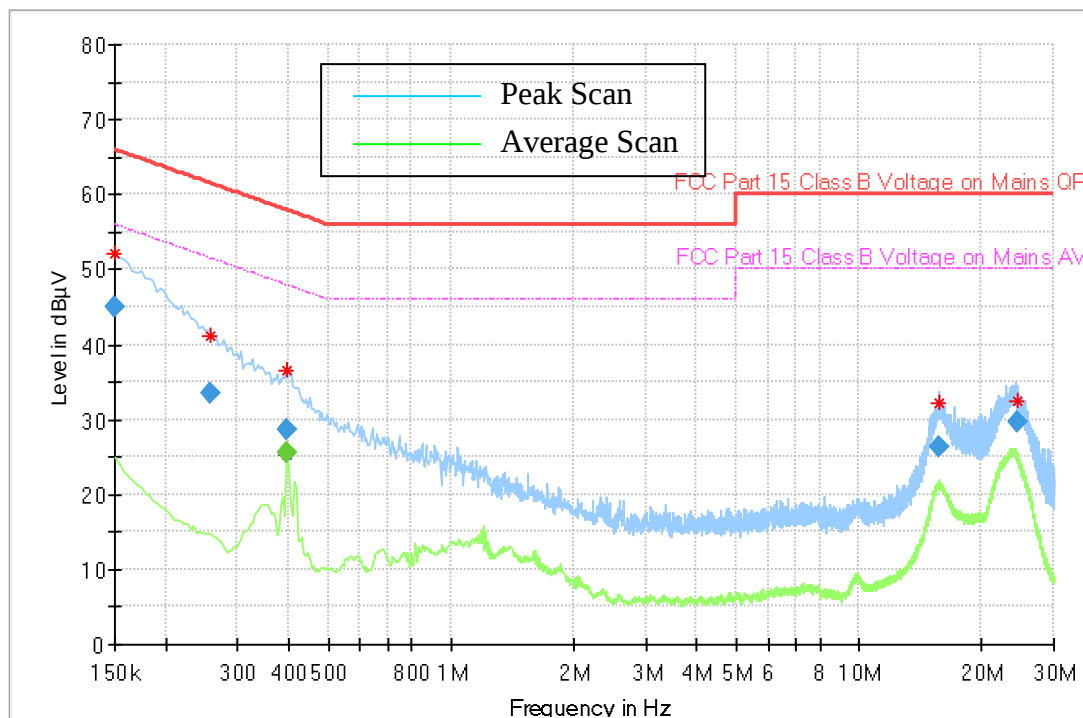


Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	45.07	---	66.00	20.93	1000.0	9.000	L1	ON	10.3	PASS
0.258000	33.48	---	61.50	28.02	1000.0	9.000	N	ON	10.2	PASS
0.398000	---	25.47	47.90	22.42	1000.0	9.000	L1	ON	10.3	PASS
0.398000	28.62	---	57.90	29.28	1000.0	9.000	L1	ON	10.3	PASS
15.734000	26.29	---	60.00	33.71	1000.0	9.000	N	ON	10.3	PASS
24.314000	29.58	---	60.00	30.42	1000.0	9.000	L1	ON	10.4	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

4) EUT Rx CH: 2

Full Spectrum

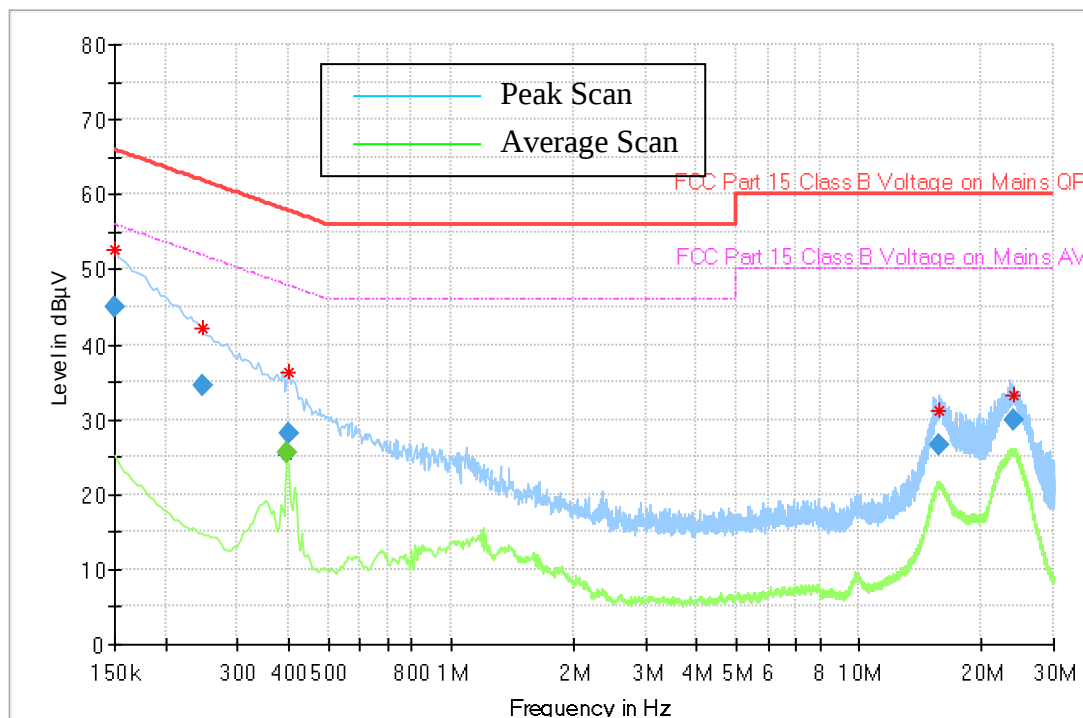


Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	45.08	---	66.00	20.92	1000.0	9.000	N	ON	10.3	PASS
0.246000	34.56	---	61.89	27.33	1000.0	9.000	L1	ON	10.2	PASS
0.398000	---	25.44	47.90	22.45	1000.0	9.000	L1	ON	10.3	PASS
0.402000	28.16	---	57.81	29.65	1000.0	9.000	N	ON	10.3	PASS
15.642000	26.59	---	60.00	33.41	1000.0	9.000	L1	ON	10.3	PASS
23.794000	29.90	---	60.00	30.10	1000.0	9.000	L1	ON	10.4	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

5) EUT Tx CH: 0

Full Spectrum

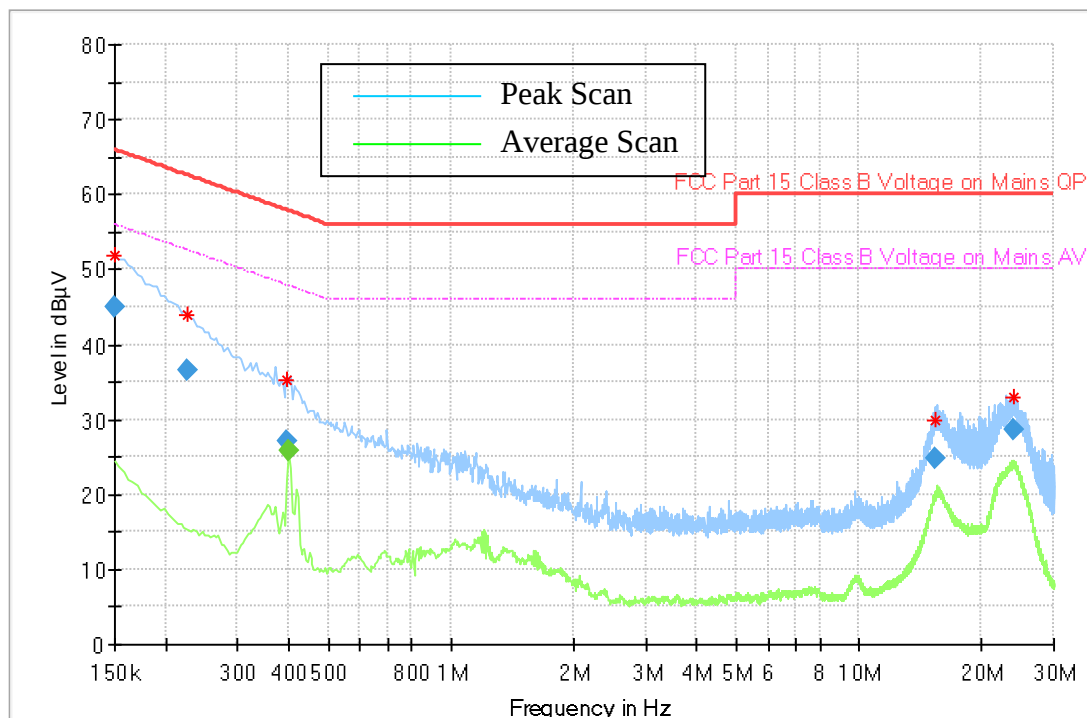


Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	45.01	---	66.00	20.99	1000.0	9.000	N	ON	10.3	PASS
0.226000	36.53	---	62.60	26.07	1000.0	9.000	L1	ON	10.3	PASS
0.398000	27.13	---	57.90	30.76	1000.0	9.000	N	ON	10.3	PASS
0.402000	---	25.85	47.81	21.96	1000.0	9.000	L1	ON	10.3	PASS
15.418000	24.87	---	60.00	35.13	1000.0	9.000	N	ON	10.3	PASS
24.014000	28.67	---	60.00	31.33	1000.0	9.000	L1	ON	10.4	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

6) EUT Tx CH: 1

Full Spectrum

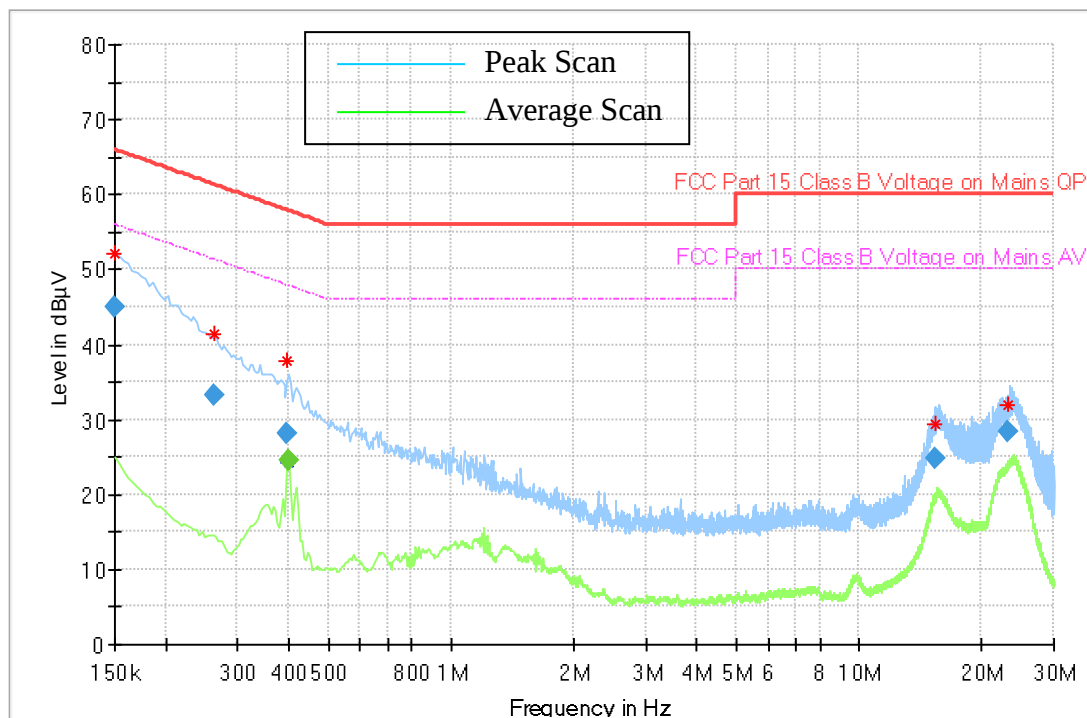


Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	44.92	---	66.00	21.08	1000.0	9.000	N	ON	10.3	PASS
0.262000	33.29	---	61.37	28.08	1000.0	9.000	L1	ON	10.2	PASS
0.398000	28.17	---	57.90	29.72	1000.0	9.000	L1	ON	10.3	PASS
0.402000	---	24.64	47.81	23.17	1000.0	9.000	L1	ON	10.3	PASS
15.398000	24.92	---	60.00	35.08	1000.0	9.000	N	ON	10.3	PASS
23.278000	28.32	---	60.00	31.68	1000.0	9.000	L1	ON	10.4	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

7) EUT Tx CH: 2

Full Spectrum

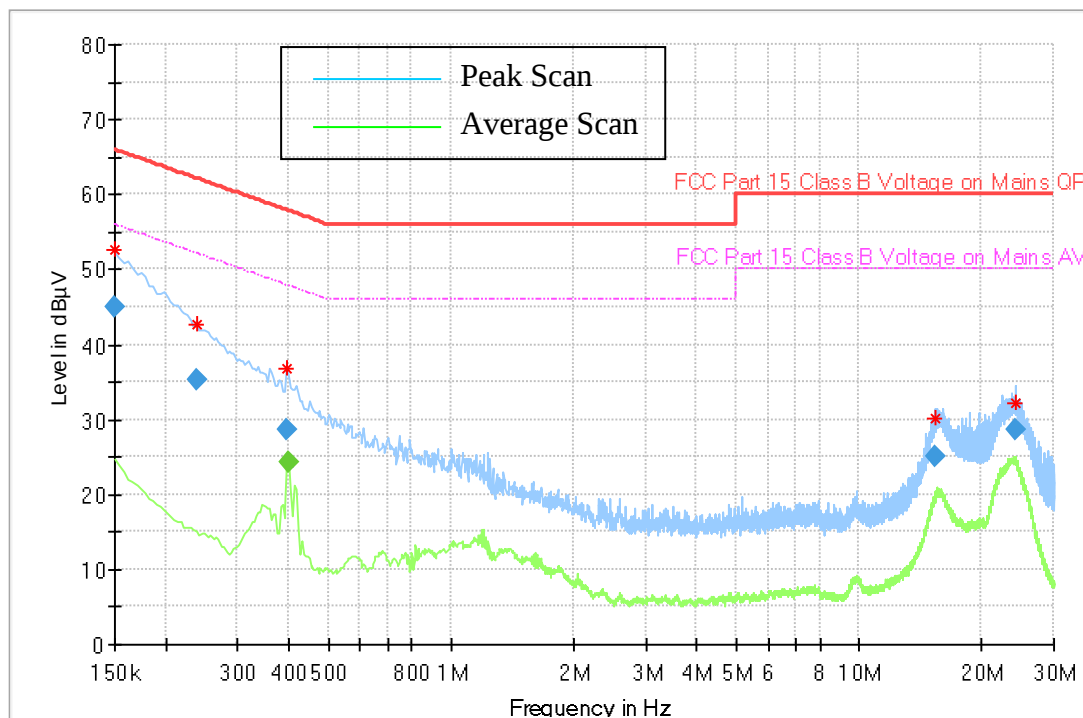

Quasi-Peak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.150000	45.01	---	66.00	20.99	1000.0	9.000	L1	ON	10.3	PASS
0.238000	35.28	---	62.17	26.88	1000.0	9.000	L1	ON	10.2	PASS
0.398000	28.54	---	57.90	29.36	1000.0	9.000	L1	ON	10.3	PASS
0.402000	---	24.40	47.81	23.42	1000.0	9.000	L1	ON	10.3	PASS
15.386000	25.05	---	60.00	34.96	1000.0	9.000	L1	ON	10.3	PASS
24.066000	28.67	---	60.00	31.33	1000.0	9.000	L1	ON	10.4	PASS

* Expanded Uncertainty (U) = +/- 3.48dB

END OF TEST REPORT