

## FCC - TEST REPORT

Report Number : **68.950.18.0239.01** Date of Issue: **June 15, 2018**

Model : **GO360**

Product Type : **GUARDZILLA 360 ALL-IN-ONE HD OUTDOOR VIDEO CAMERA**

Applicant : **Practecol, LLC**

Address : **3155 Sutton Blvd, Suite 202 St. Louis, MO 63143, USA**

Production Facility : **SKY LIGHT Electronic (ShenZhen) Limited**

Address : **No. 1, 5 and 6 Building, JinBi Industrial Area, HuangTian, BaoAn,  
Shenzhen, China**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including  
Appendices

: **49**

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval*

## 1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration .....	9
9	Technical Requirement .....	10
9.1	Conducted Emission .....	10
9.2	Conducted peak output power .....	13
9.3	6dB bandwidth and 99% Occupied Bandwidth.....	14
9.4	Power spectral density .....	24
9.5	Spurious RF conducted emissions .....	25
9.6	Band edge testing .....	40
9.7	Spurious radiated emissions for transmitter .....	44
10	Test Equipment List .....	48
11	System Measurement Uncertainty .....	49

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12&13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Nanshan District,  
Shenzhen City, 518052,  
P. R. China

FCC Registration No.: 514049

IC Registration No.: 10320A

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

### 3 Description of the Equipment Under Test

Product:	GUARDZILLA 360 ALL-IN-ONE HD OUTDOOR VIDEO CAMERA
Model no.:	GO360
FCC ID:	2AND3-GO360
IC:	23183-GO360
Options and accessories:	Adapter and USB Cable
Rating:	3.6Vdc 5200mAh Li-ion Rechargeable battery charged by an external adapter
Adapter information:	Adapter Model: ASSA65a-053200 Adapter Input: 100-240Vac, 50/60Hz; 0.45A Adapter Output: 5.3Vdc, 2.0A
RF Transmission Frequency:	2412MHz-2462MHz
No. of Operated Channel:	11
Modulation:	DSSS, OFDM
Antenna Type:	Integrated antenna
Antenna Gain:	1.3dBi
Description of the EUT:	The Equipment Under Test (EUT) is a wireless camera which support WiFi and Bluetooth function operated at 2.4GHz

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2017 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 DTS Measurement Guidance v04 DTS Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C/ RSS-247 Issue 2/RSS-Gen Issue 5						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	10	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1) & RSS-247 5.4(d)	Conducted peak output power	13	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1) & RSS-247 5.1(b)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1) & RSS-247 5.1(b)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	14	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e) & RSS-247 5.2(b)	Power spectral density	24	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	25	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Band edge	40	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	44	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an internal antenna, which gain is 1.3dBi. In accordance to §15.203 and RSS-Gen 6.8, It is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AND3-GO360, IC: 23183-GO360, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

### SUMMARY:

All tests according to the regulations cited on page 5 were

n - Performed

o - **Not** Performed

The Equipment Under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: June 7, 2018

Testing Start Date: June 7, 2018

Testing End Date: June 14, 2018

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:

Tested by:



John Zhi  
Section Manager




Alan Xiong  
Project Engineer



Tree Zhan  
Test Engineer


## 7 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

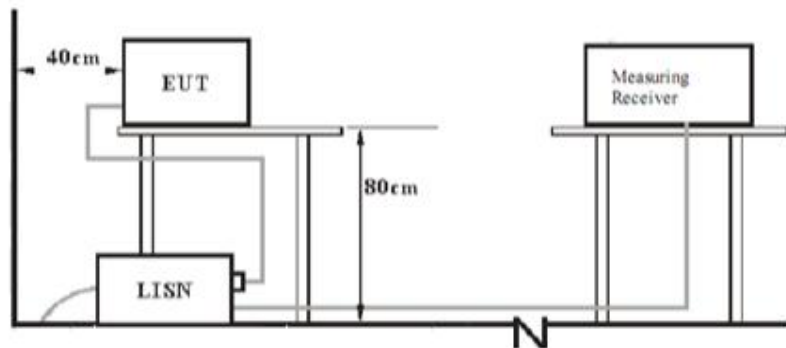


### 7.2 Radiated test setups


Below 1GHz

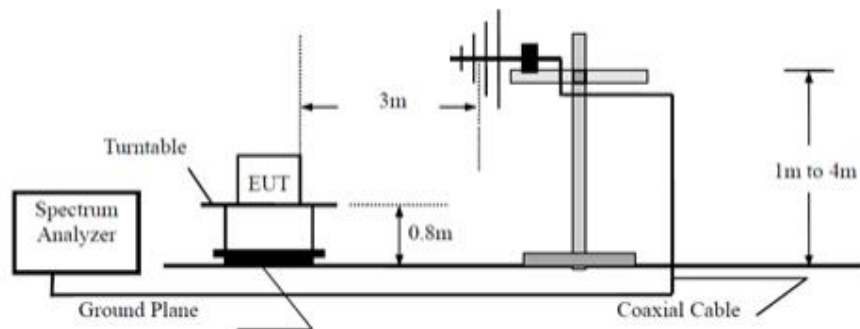

### Above 1GHz

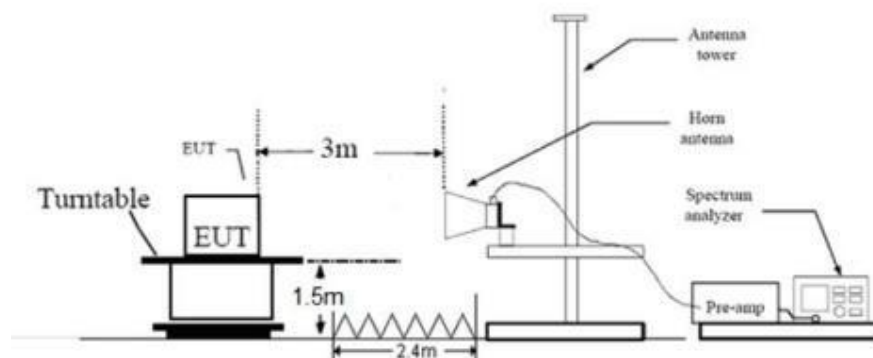

### 7.3 Conducted RF test setups





## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
--	--	--	--

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

Through pre-scan all kind of modulation and all kind of rates, find the 1Mbps of rate is the worst case of 802.11b; the 6Mbps of rate is the worst case of 802.11g; the 6.5Mbps of rate is the worst case of 802.11N20, only the worst case transmitter rate data mode is recorded in the report.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit


According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

## Conducted Emission

Product Type : GUARDZILLA 360 ALL-IN-ONE HD OUTDOOR VIDEO CAMERA  
 M/N : GO360  
 Operating Condition : Charging and normal working Mode  
 Test Specification : Line  
 Comment : AC 120V/60Hz

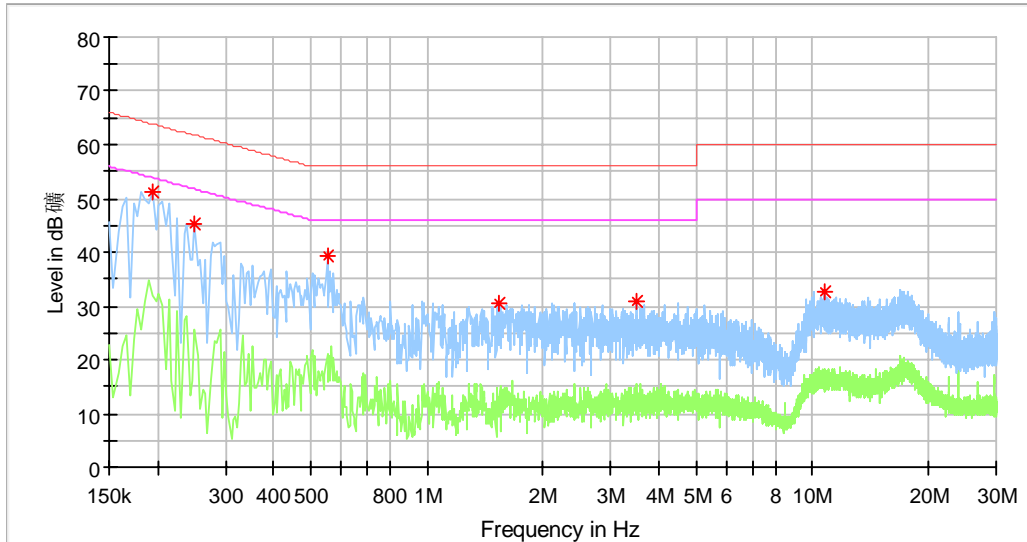


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.194000	51.38	---	63.86	12.48	L1	10.2
0.250000	45.32	---	61.76	16.44	L1	10.2
0.550000	39.21	---	56.00	16.79	L1	10.2
1.538000	30.64	---	56.00	25.36	L1	10.2
3.502000	30.84	---	56.00	25.16	L1	10.3
10.786000	32.73	---	60.00	27.27	L1	10.6

\*Correct factor=cable loss + LISN factor



Conducted Emission

Product Type : GUARDZILLA 360 ALL-IN-ONE HD OUTDOOR VIDEO CAMERA  
M/N : GO360  
Operating Condition : Charging and normal working Mode  
Test Specification : Neutral  
Comment : AC 120V/60Hz

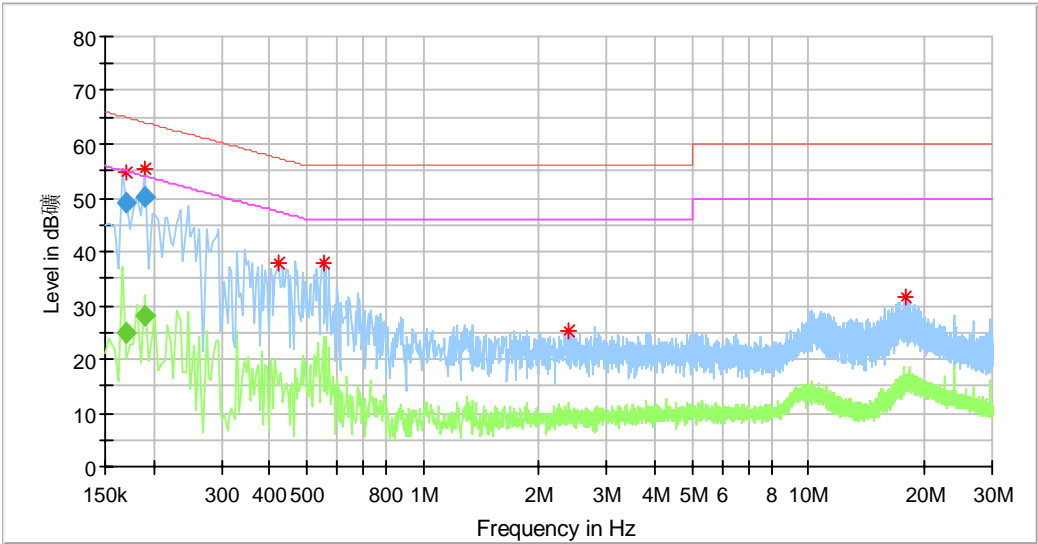

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.169500	---	24.96	54.98	30.02	N	10.3
0.169500	49.01	---	64.98	15.97	N	10.3
0.189500	---	28.02	54.06	26.04	N	10.3
0.189500	50.24	---	64.06	13.82	N	10.3
0.422000	37.99	---	57.41	19.42	N	10.3
0.550000	38.03	---	56.00	17.97	N	10.4
2.382000	25.37	---	56.00	30.63	N	10.4
17.858000	31.57	---	60.00	28.43	N	11.4

\*Correct factor=cable loss + LISN factor

## 9.2 Conducted peak output power

### Test Method

1. Use the following spectrum analyzer settings:  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,  
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

### Limits

According to §15.247 (b) (1) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low channel 2412MHz	18.3	30	Pass
Middle channel 2437MHz	18.3	30	Pass
High channel 2462MHz	18.1	30	Pass

802.11g modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low channel 2412MHz	17.1	30	Pass
Middle channel 2437MHz	17.5	30	Pass
High channel 2462MHz	17.1	30	Pass

802.11n20 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low channel 2412MHz	17.3	30	Pass
Middle channel 2437MHz	17.3	30	Pass
High channel 2462MHz	16.9	30	Pass

### 9.3 6dB bandwidth and 99% Occupied Bandwidth

#### Test Method for 6 dB Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Test Method for 99 % Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit

Limit [kHz]

$\geq 500$

802.11b modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	9.120	13.946	0.5	Pass
Middle channel 2437MHz	9.120	13.866	0.5	Pass
High channel 2462MHz	10.120	13.906	0.5	Pass

802.11g modulation Test Result


Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	15.200	17.143	0.5	Pass
Middle channel 2437MHz	15.440	17.103	0.5	Pass
High channel 2462MHz	15.200	17.103	0.5	Pass


802.11n-HT20 modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	15.200	18.102	0.5	Pass
Middle channel 2437MHz	15.200	18.142	0.5	Pass
High channel 2462MHz	15.200	18.142	0.5	Pass




6 dB Bandwidth

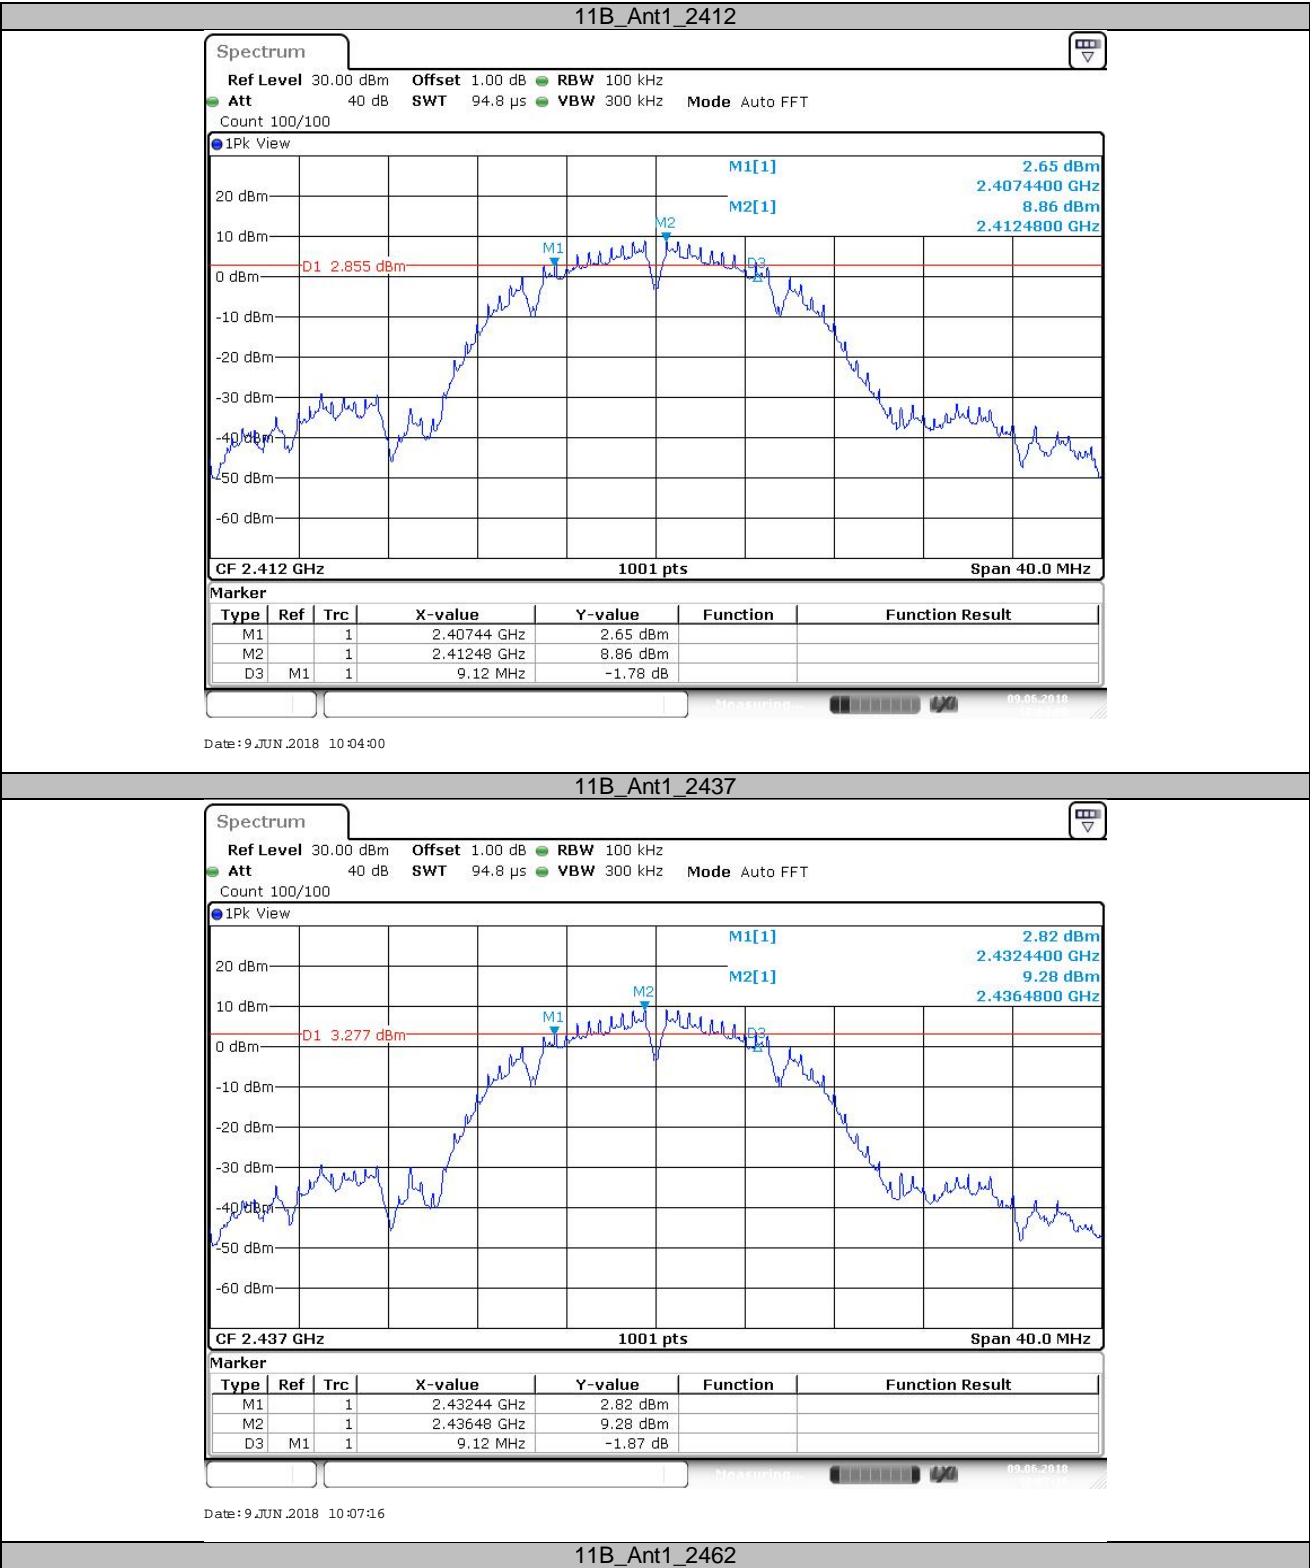

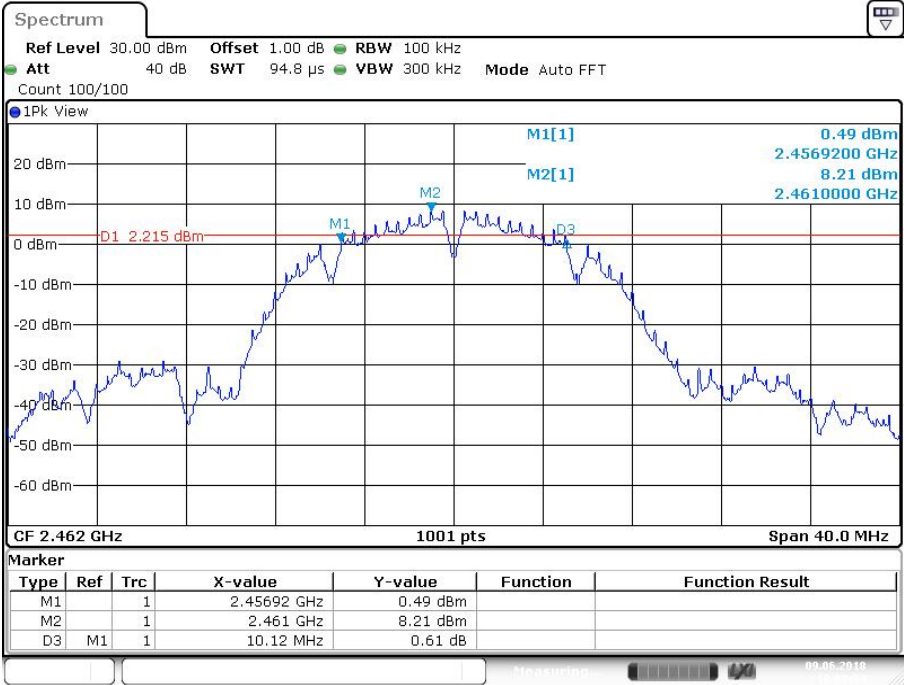

Date: 9 JUN 2018 10:09:54


11G\_Ant1\_2412

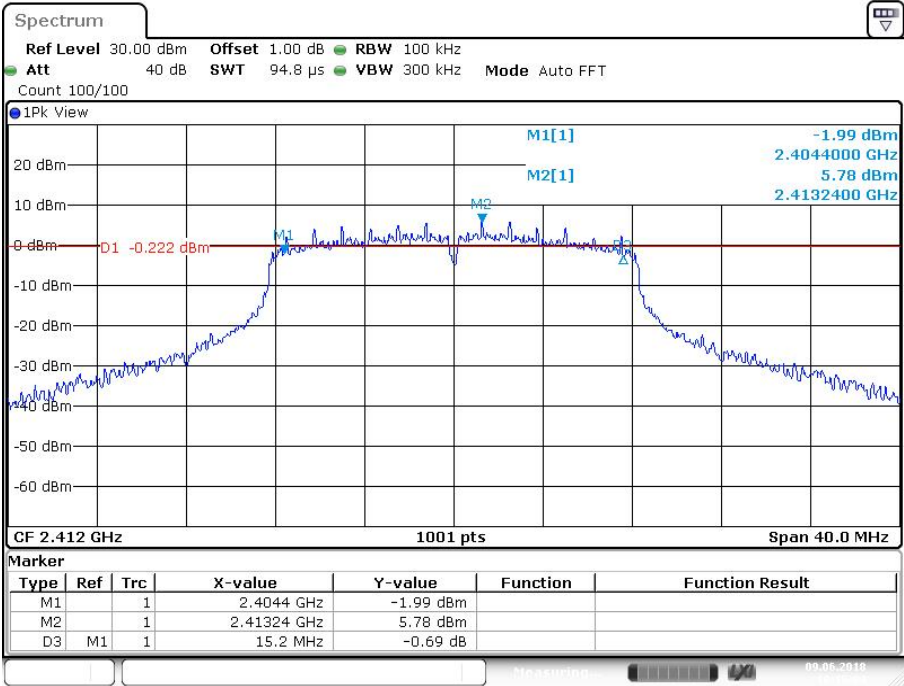

Date: 9 JUN 2018 10:15:05


11G\_Ant1\_2437



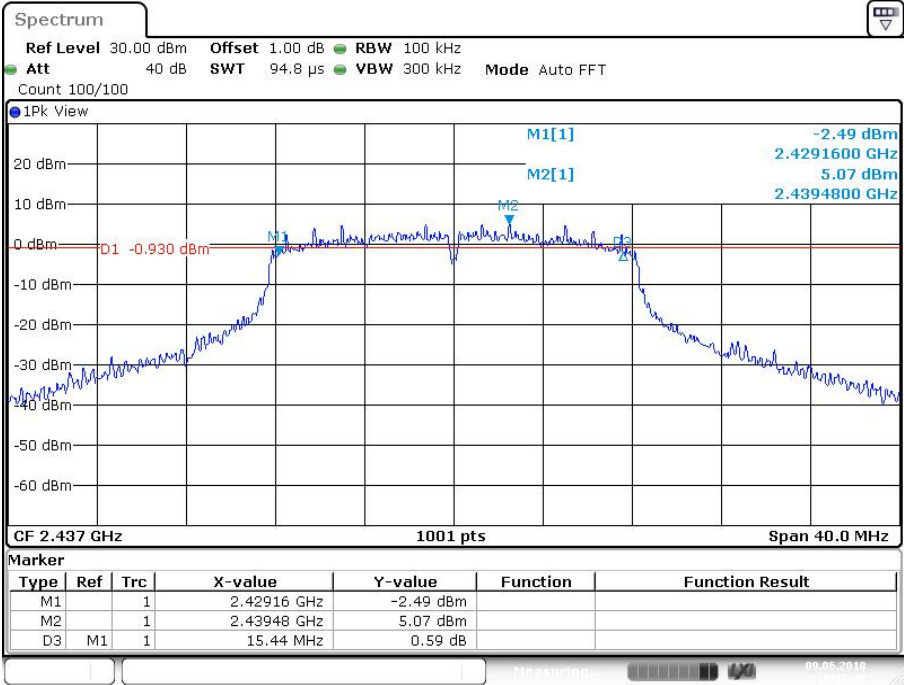



Date: 9 JUN 2018 10:17:47


11G\_Ant1\_2462

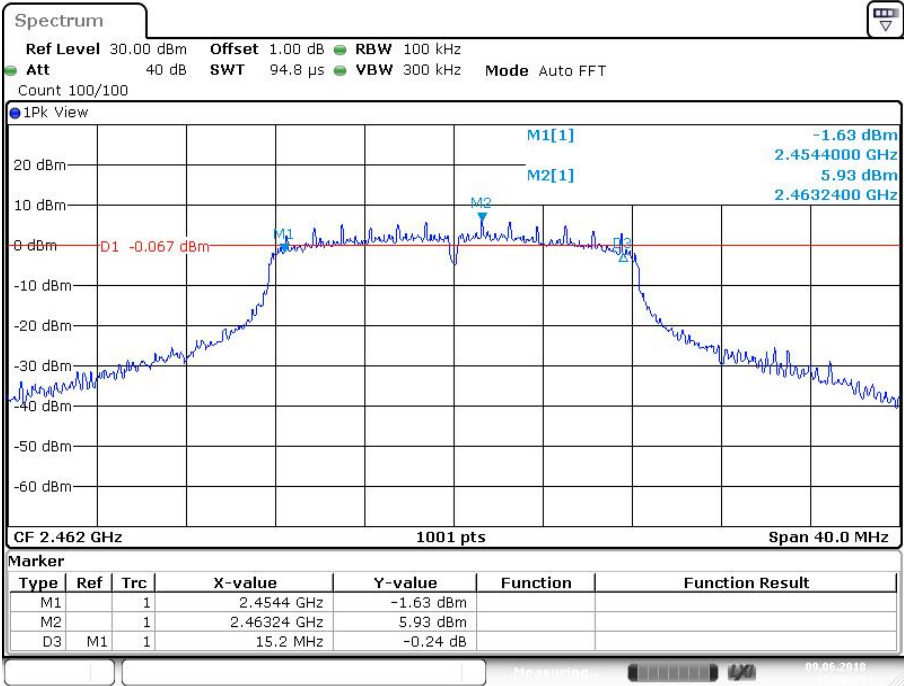


Date: 9 JUN 2018 10:20:36


11N20SISO\_Ant1\_2412

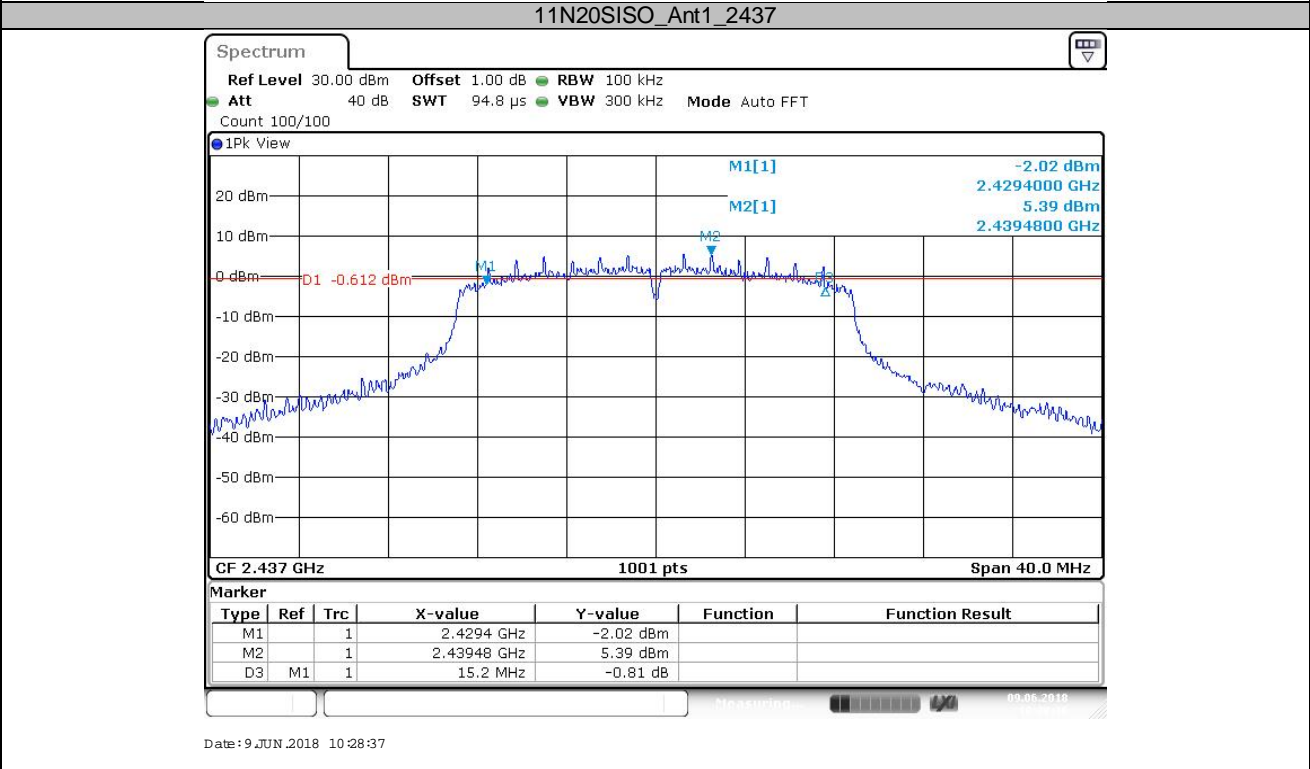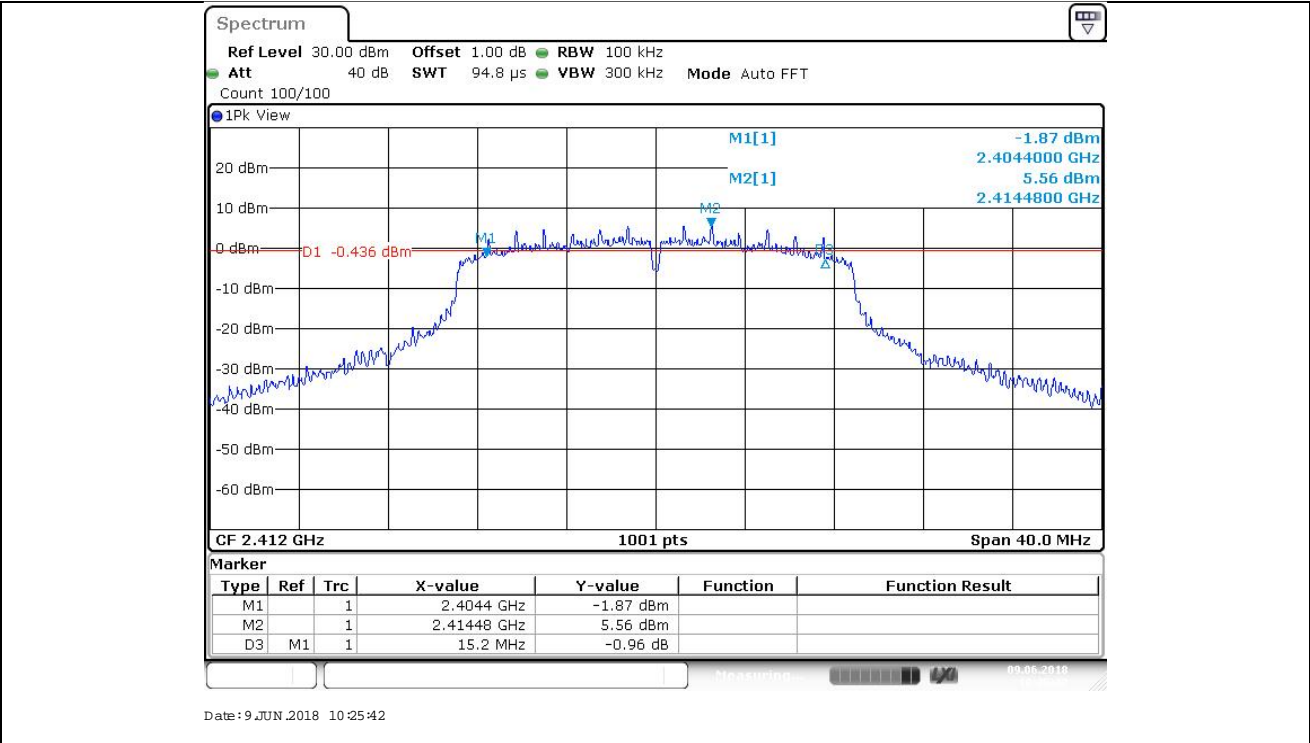

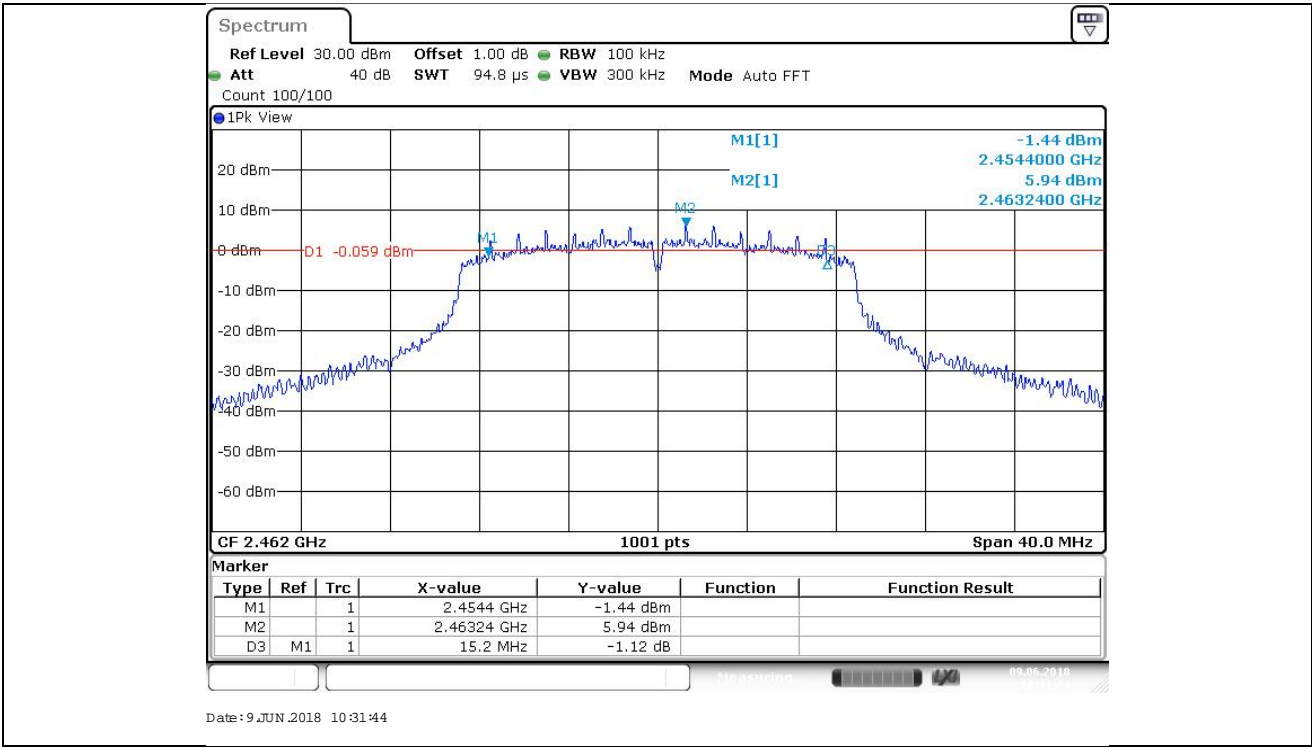


99% Bandwidth

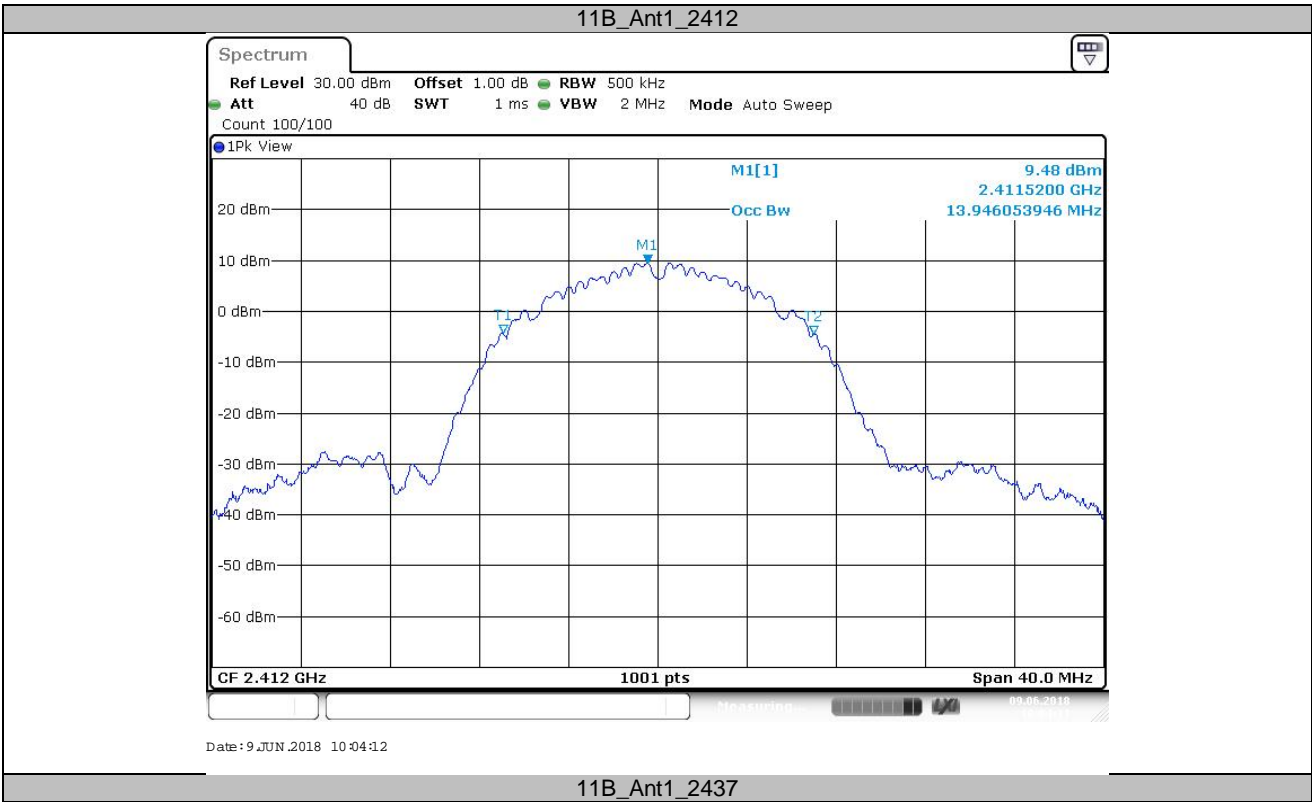


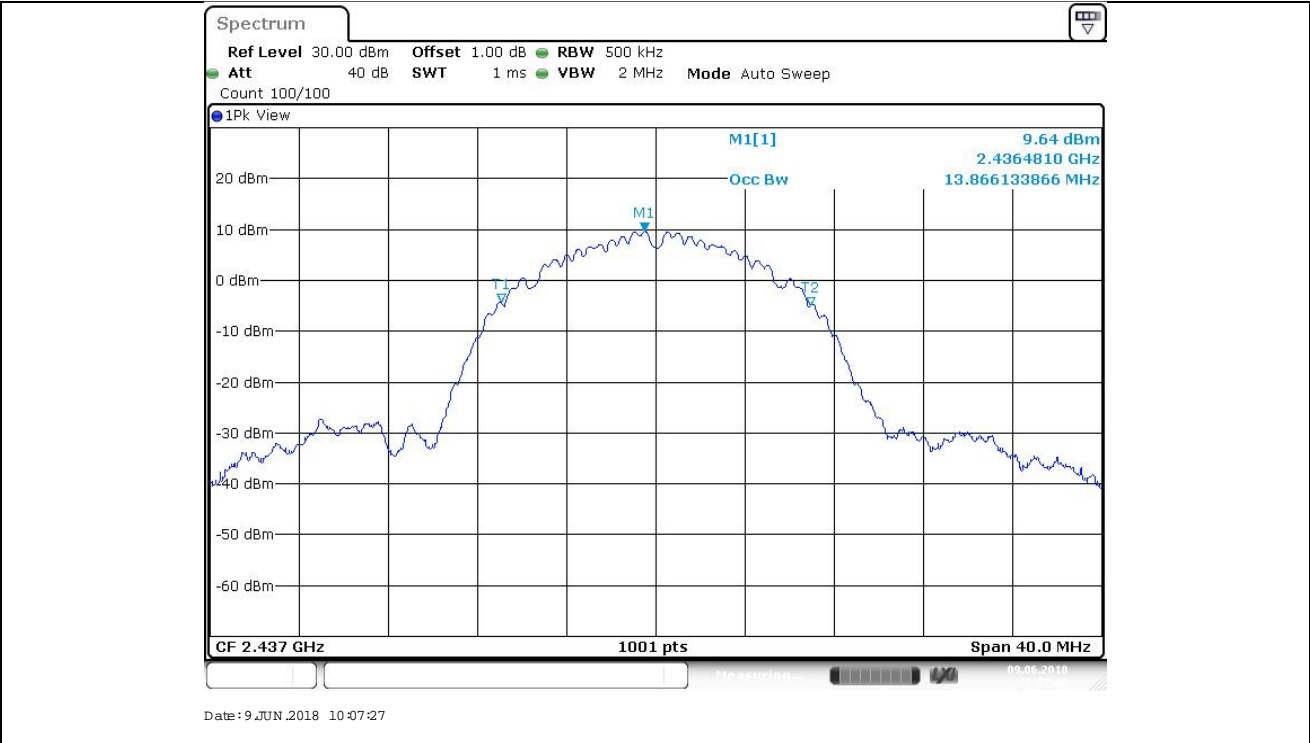

11B\_Ant1\_2462

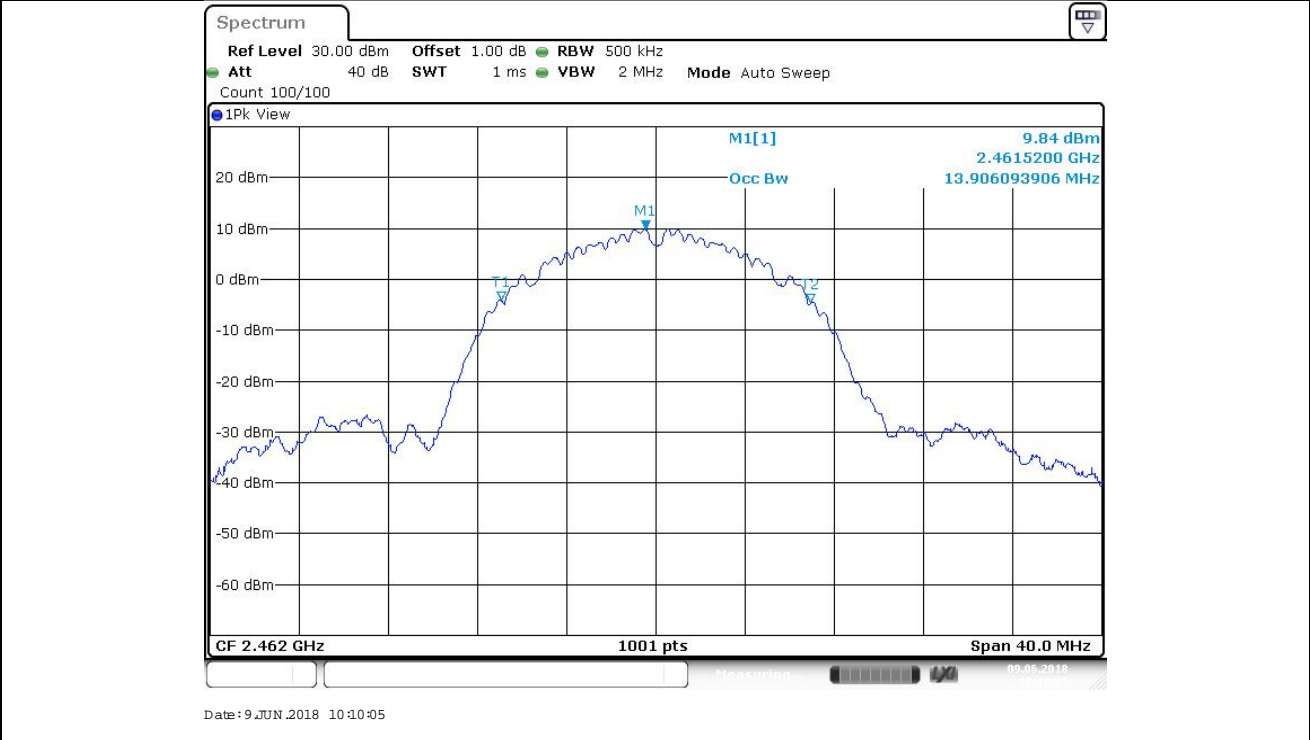


11G\_Ant1\_2412

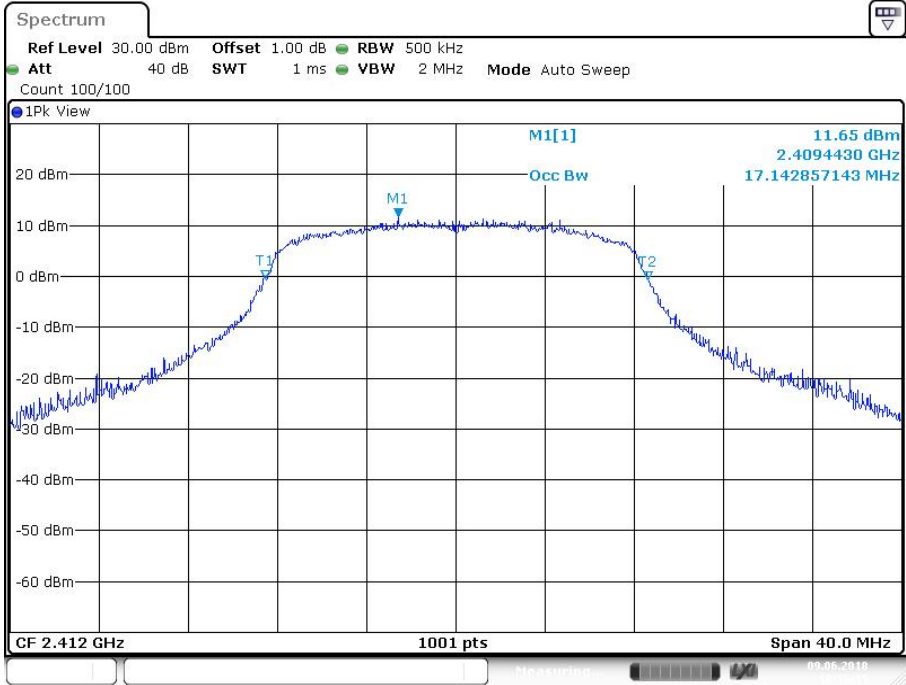


Date: 9 JUN 2018 10:15:16

11G\_Ant1\_2437

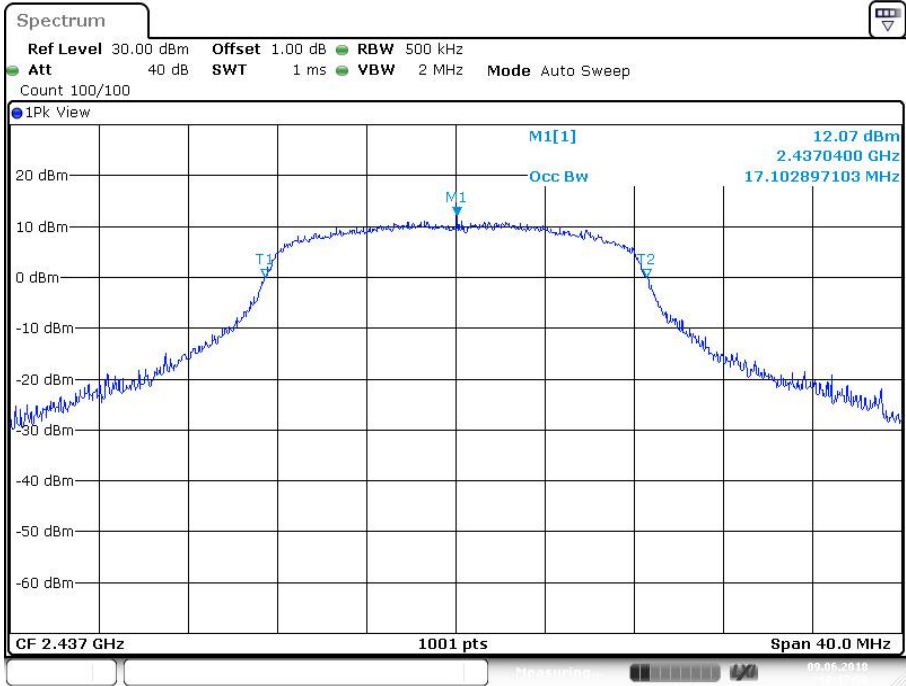


Date: 9 JUN 2018 10:17:58

11G\_Ant1\_2462

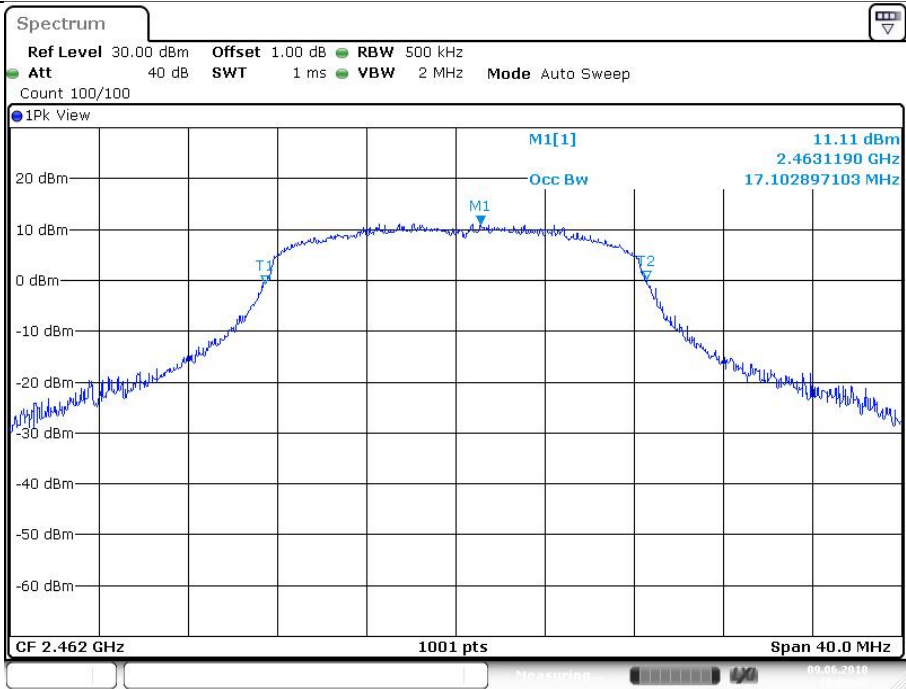



Date: 9 JUN 2018 10:20:47

11N20SISO\_Ant1\_2412

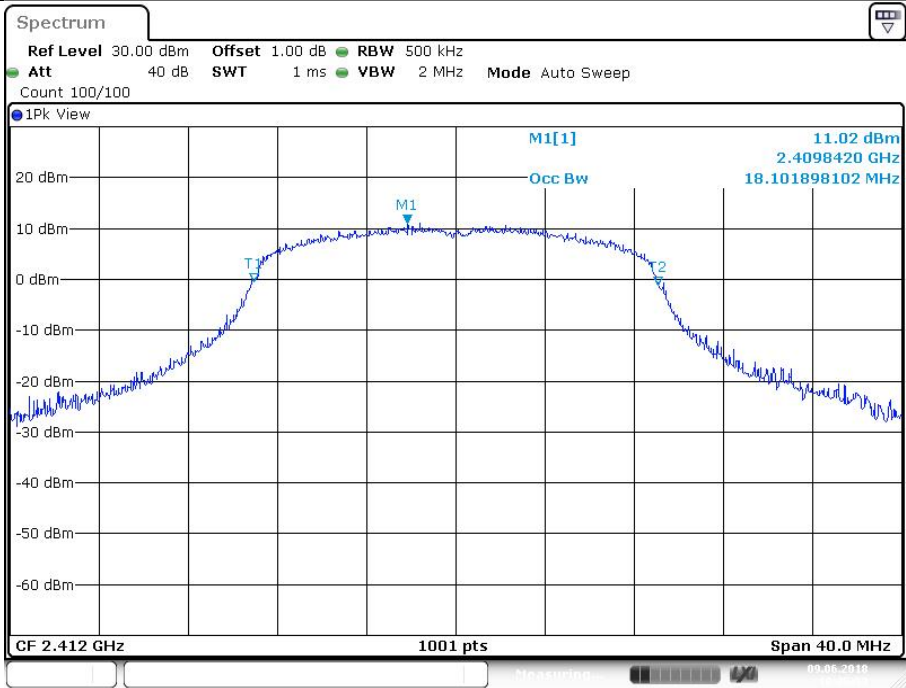

Date: 9 JUN 2018 10:25:54

11N20SISO\_Ant1\_2437

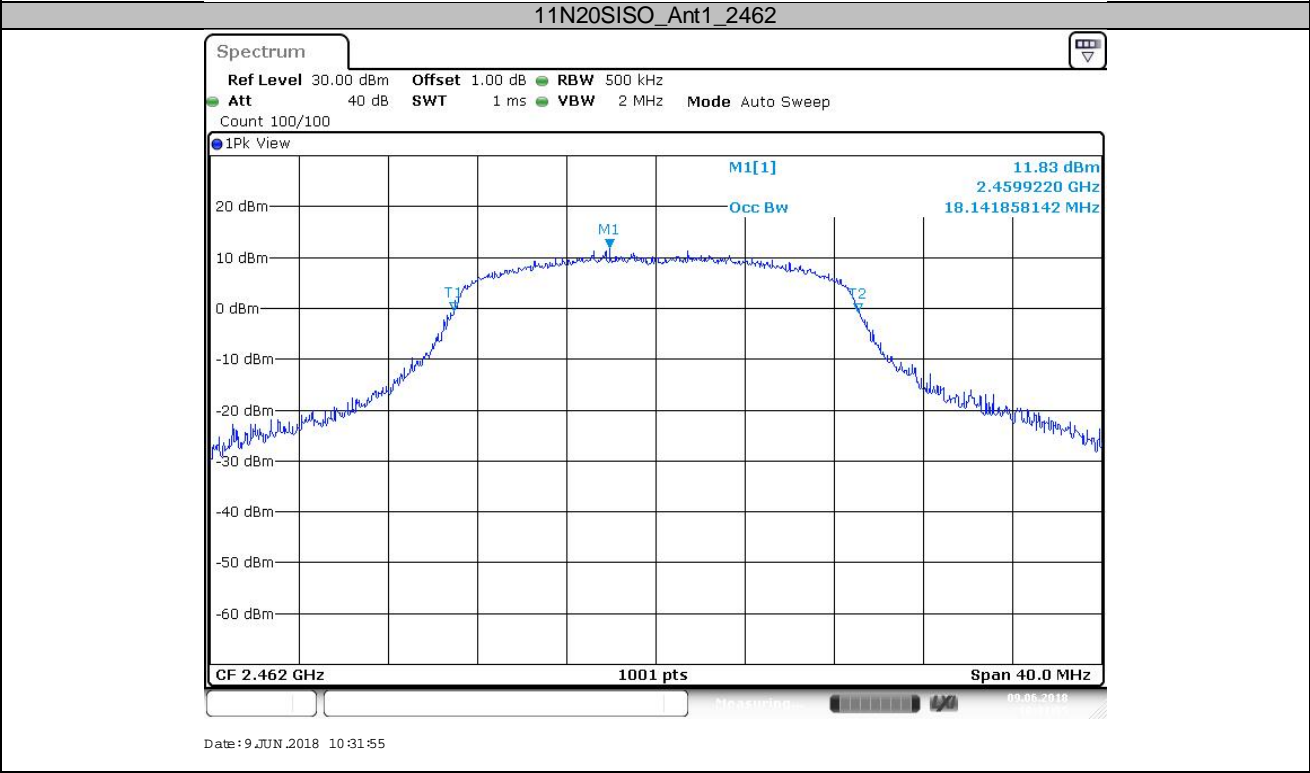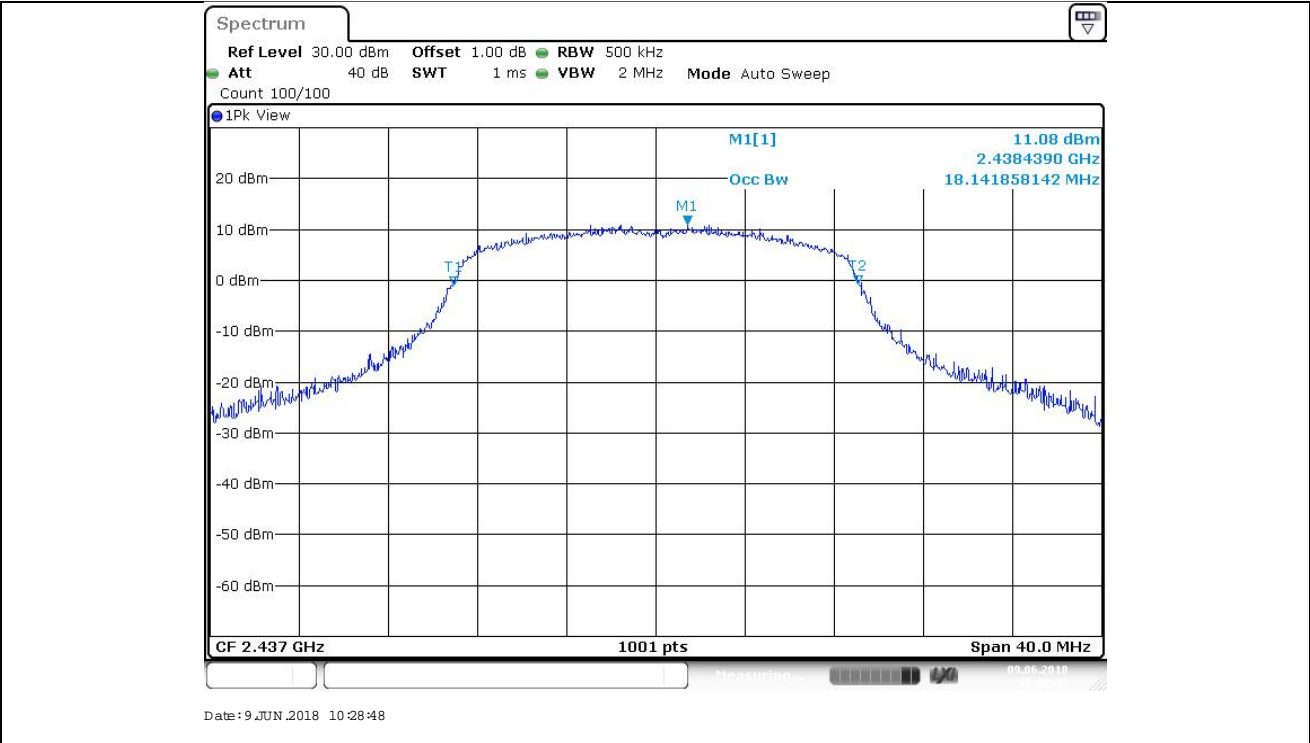

## 9.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.  
RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

### Limit

Limit [dBm]

≤8

802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm)	Limit (dBm)	Result
Low channel 2412MHz	4.36	8	Pass
Middle channel 2437MHz	4.72	8	Pass
High channel 2462MHz	3.66	8	Pass

802.11g modulation Test Result

Frequency (MHz)	Power spectral density (dBm)	Limit (dBm)	Result
Low channel 2412MHz	0.93	8	Pass
Middle channel 2437MHz	1.2	8	Pass
High channel 2462MHz	1.34	8	Pass

802.11n-HT20 modulation Test Result

Frequency (MHz)	Power spectral density (dBm)	Limit (dBm)	Result
Low channel 2412MHz	1.2	8	Pass
Middle channel 2437MHz	0.91	8	Pass
High channel 2462MHz	0.46	8	Pass



## 9.5 Spurious RF conducted emissions

### Test Method


1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.


### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




Spurious RF conducted emissions

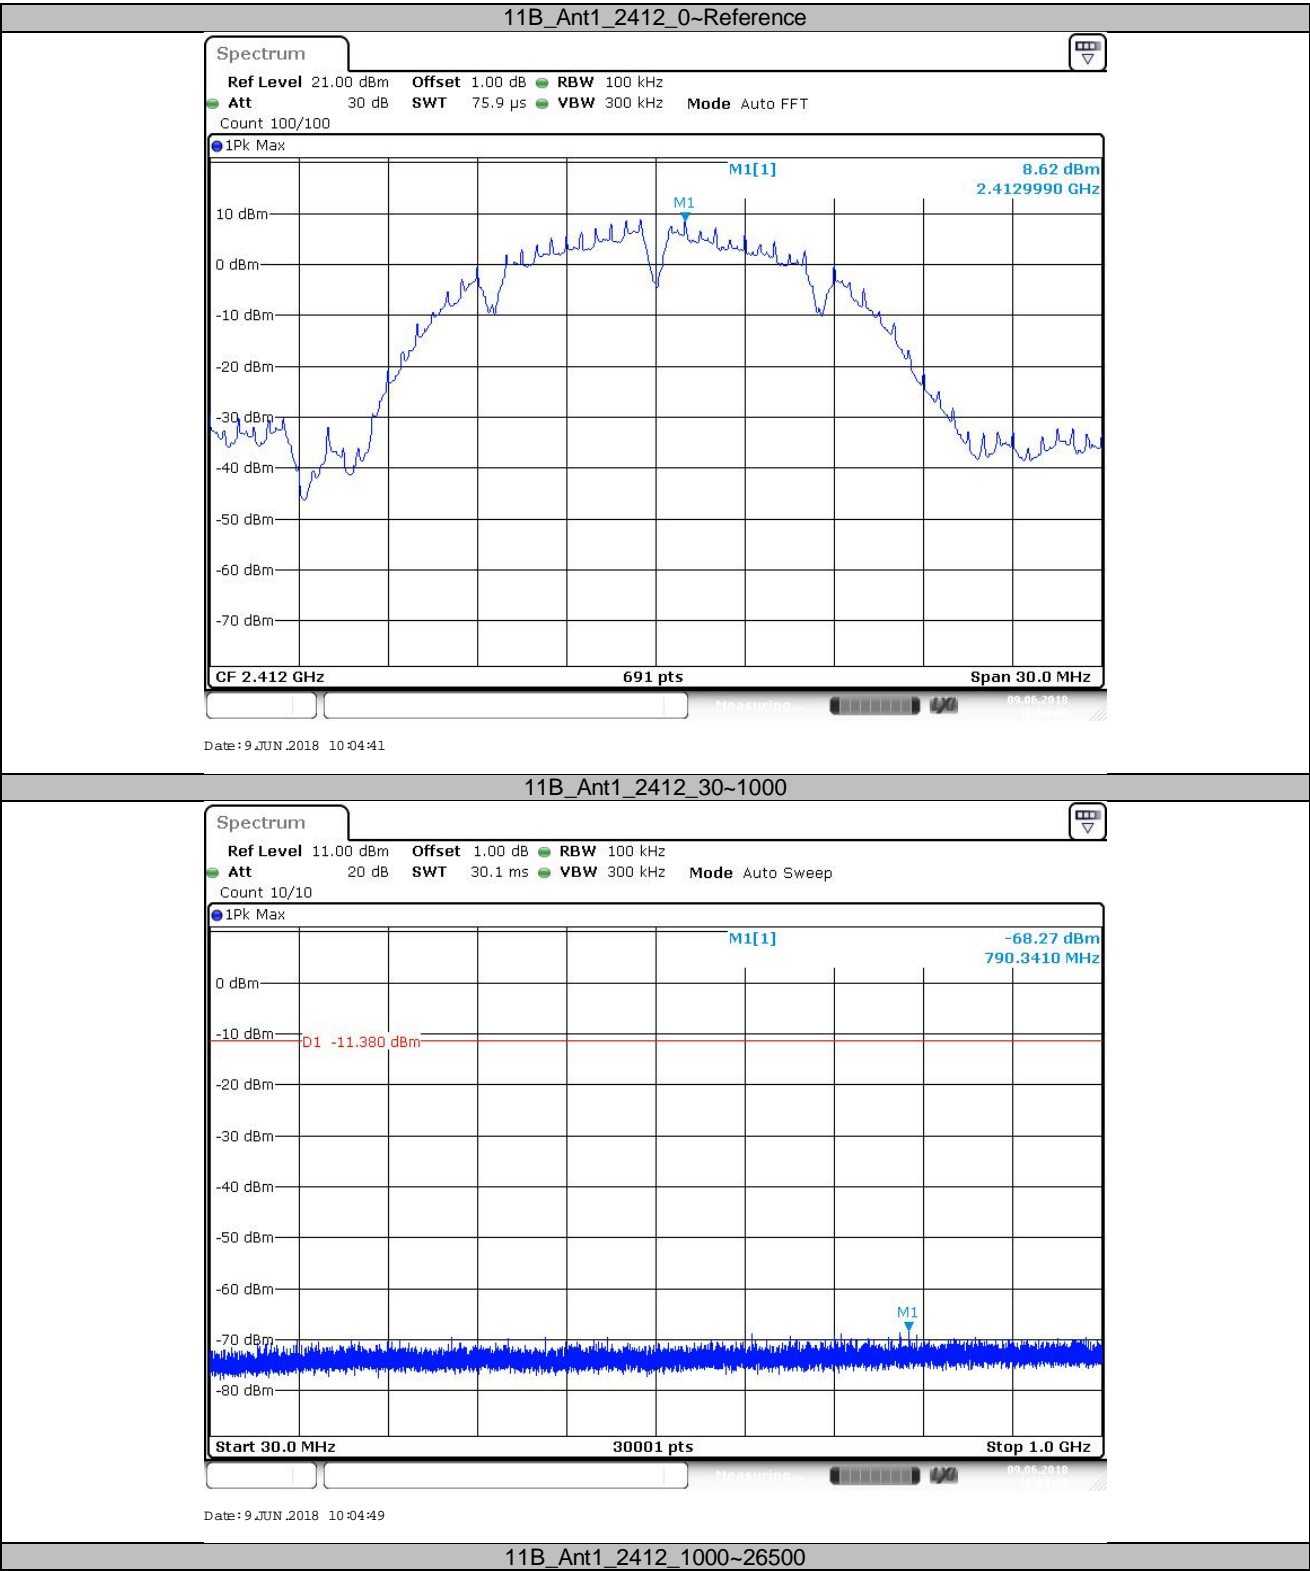

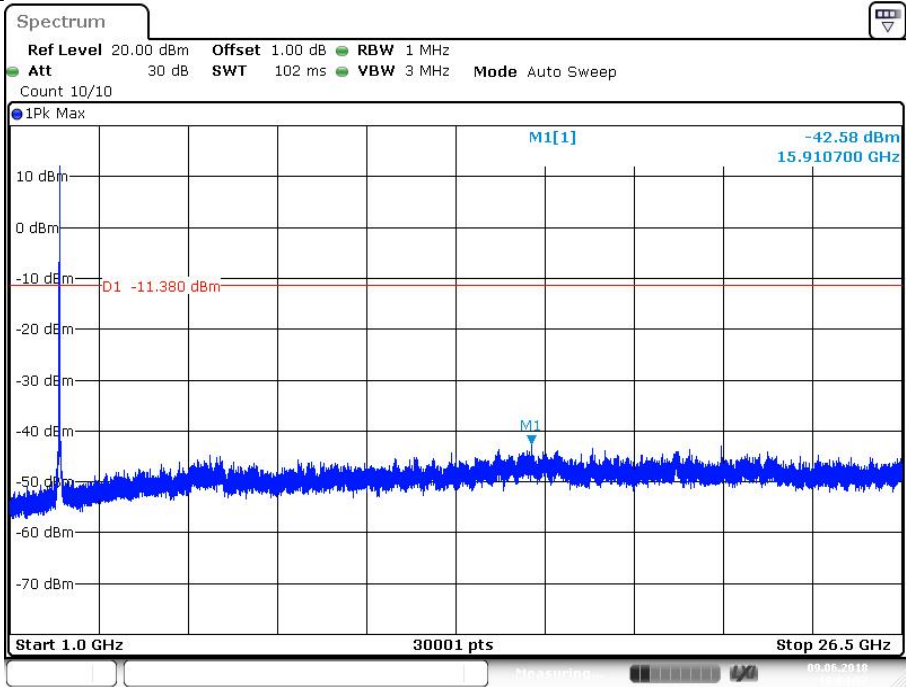


Date: 9 JUN 2018 10:04:58

11B\_Ant1\_2437\_0~Reference

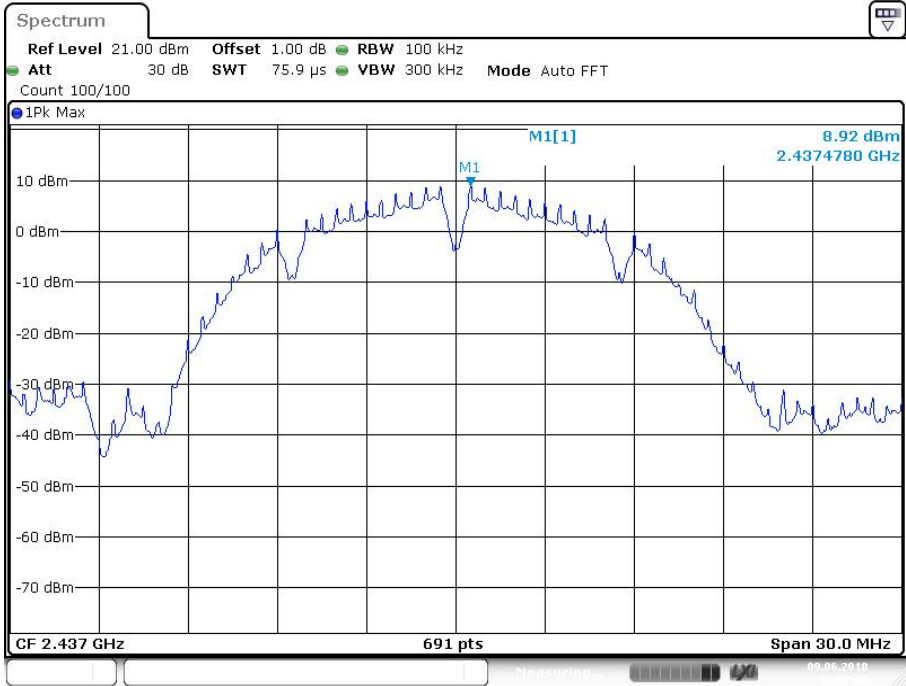


Date: 9 JUN 2018 10:07:46

11B\_Ant1\_2437\_30~1000

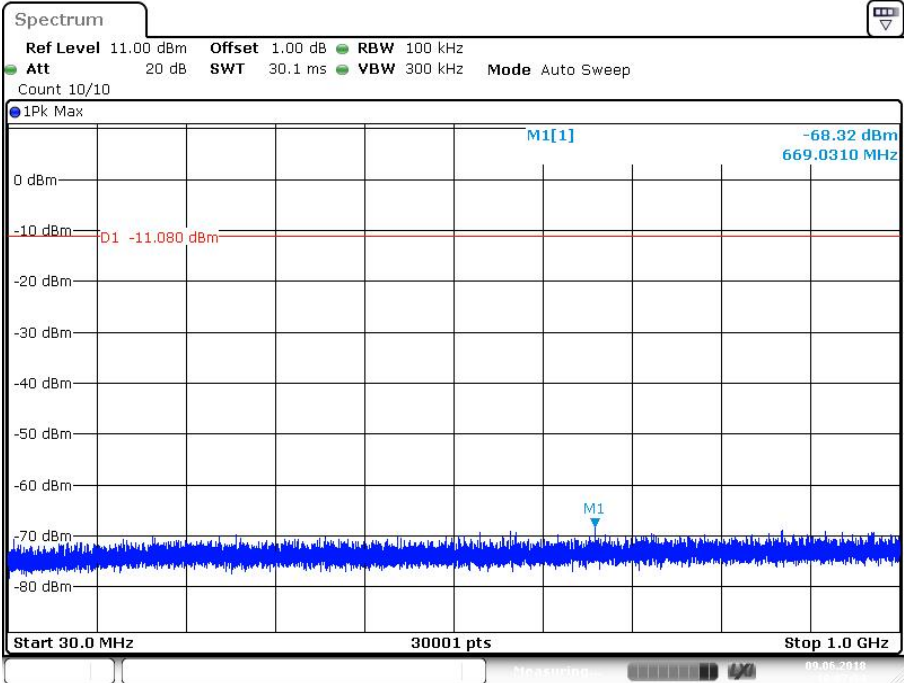


Date: 9 JUN 2018 10:07:54

11B\_Ant1\_2437\_1000~26500

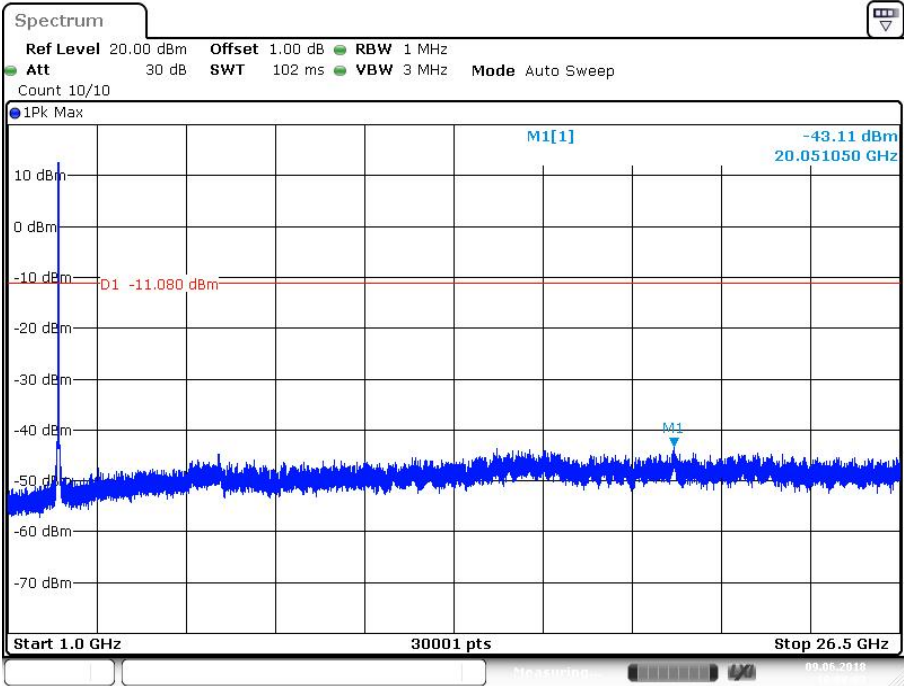


Date: 9 JUN 2018 10:08:03

11B\_Ant1\_2462\_0~Reference

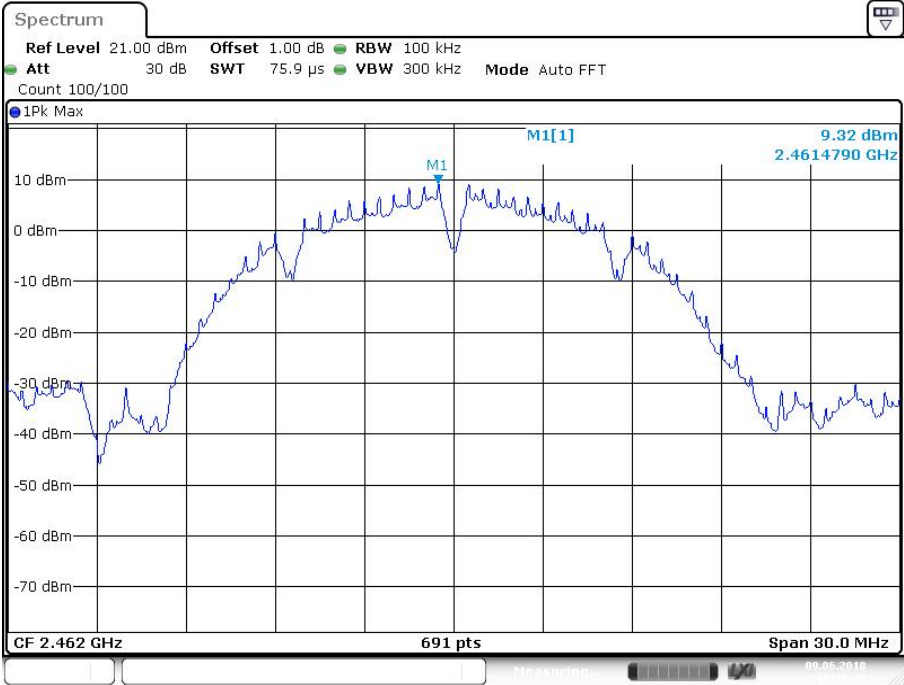


Date: 9 JUN 2018 10:10:34

11B\_Ant1\_2462\_30~1000

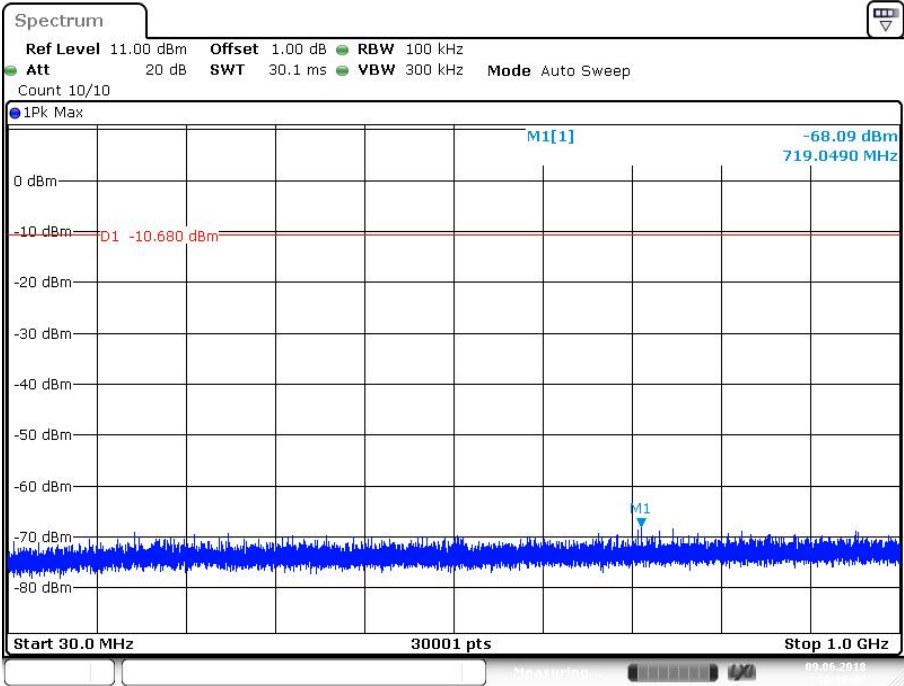


Date: 9 JUN 2018 10:10:42

11B\_Ant1\_2462\_1000~26500

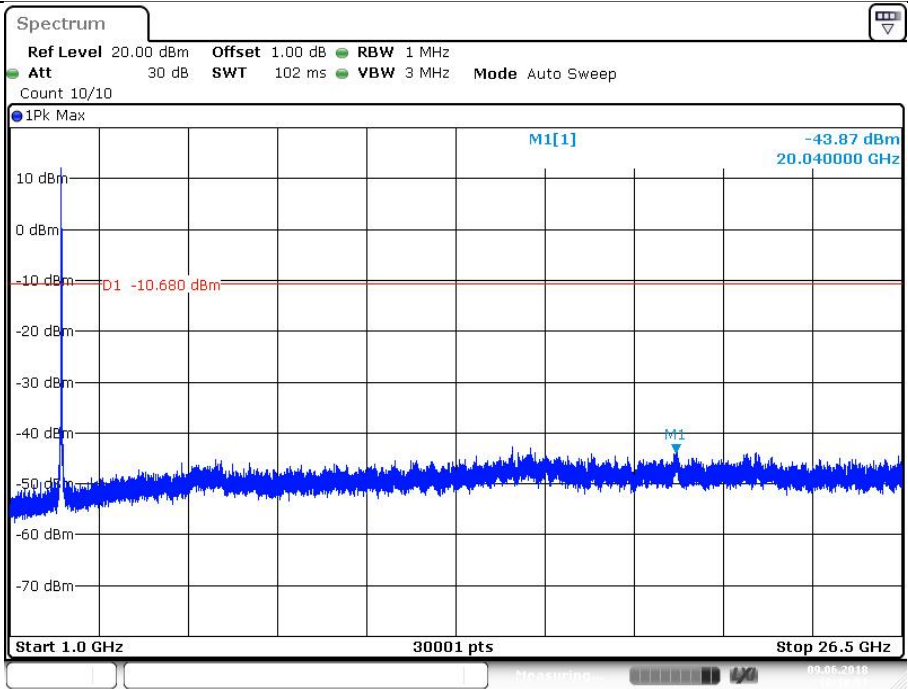


Date: 9 JUN 2018 10:10:51

11G\_Ant1\_2412\_0~Reference

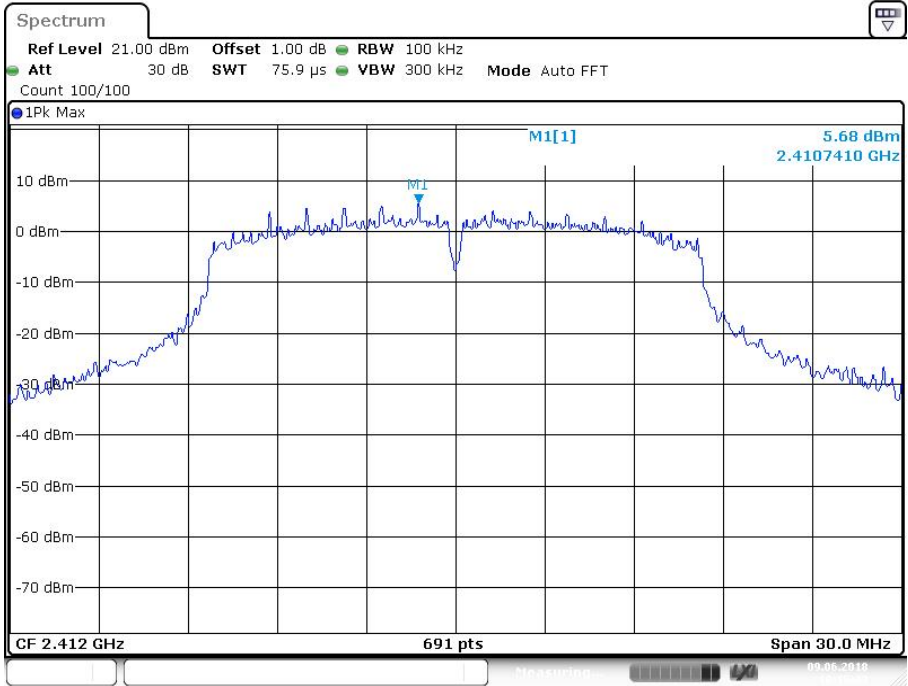


Date: 9 JUN 2018 10:15:44

11G\_Ant1\_2412\_30~1000

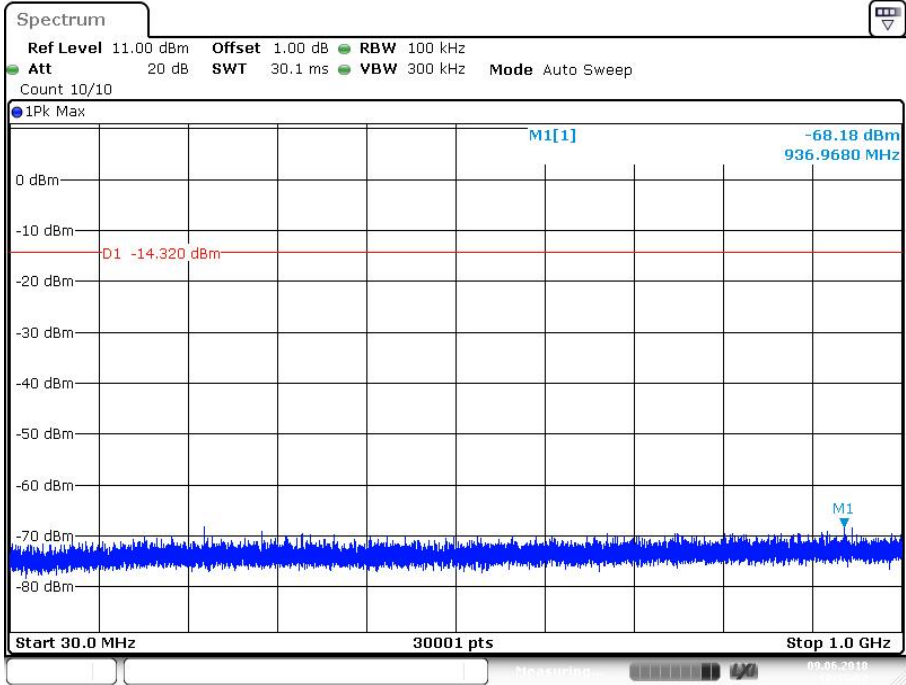


Date: 9 JUN 2018 10:15:53

11G\_Ant1\_2412\_1000~26500

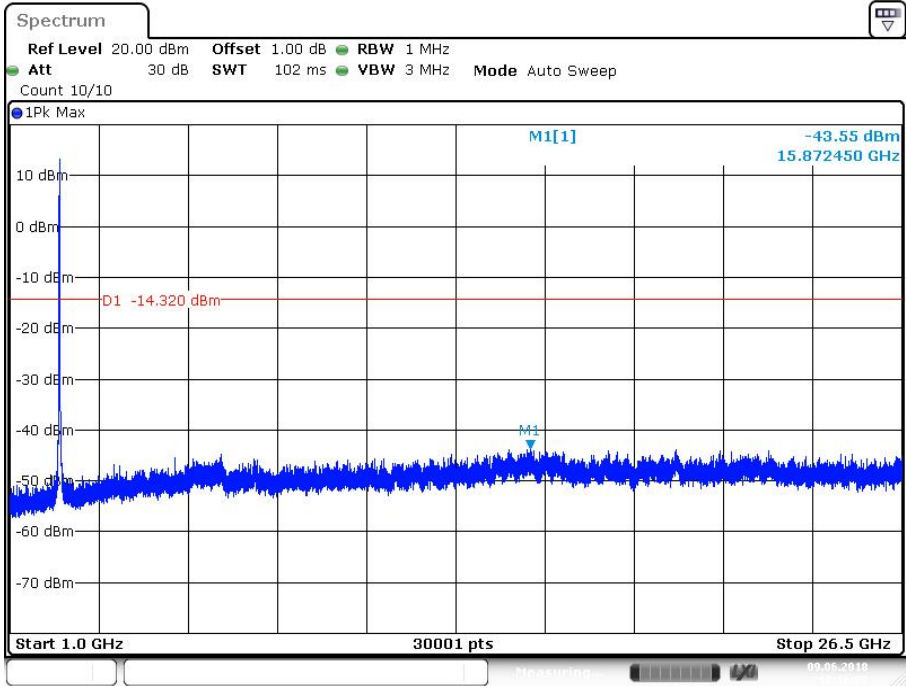


Date: 9 JUN 2018 10:16:02

11G\_Ant1\_2437\_0~Reference

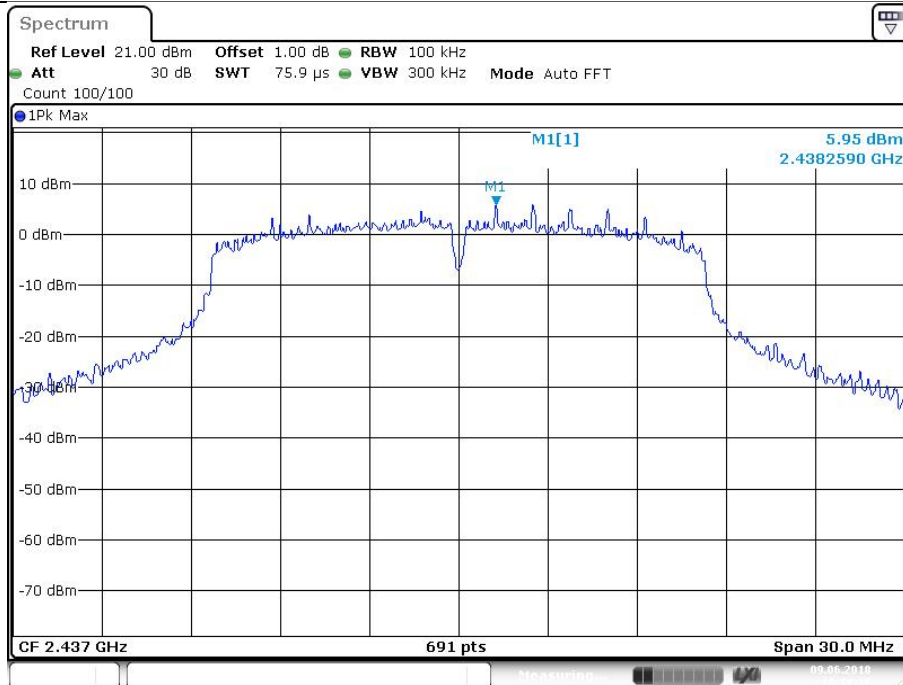

Date: 9 JUN 2018 10:18:17


## 11G\_Ant1\_2437\_30~1000

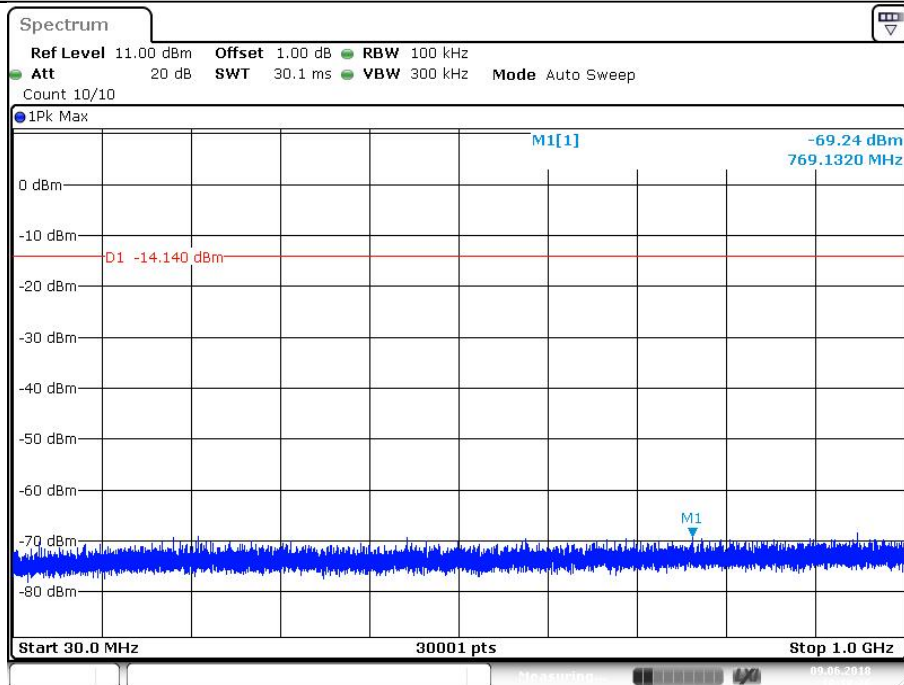

Date: 9 JUN 2018 10:18:26


## 11G\_Ant1\_2437\_1000~26500



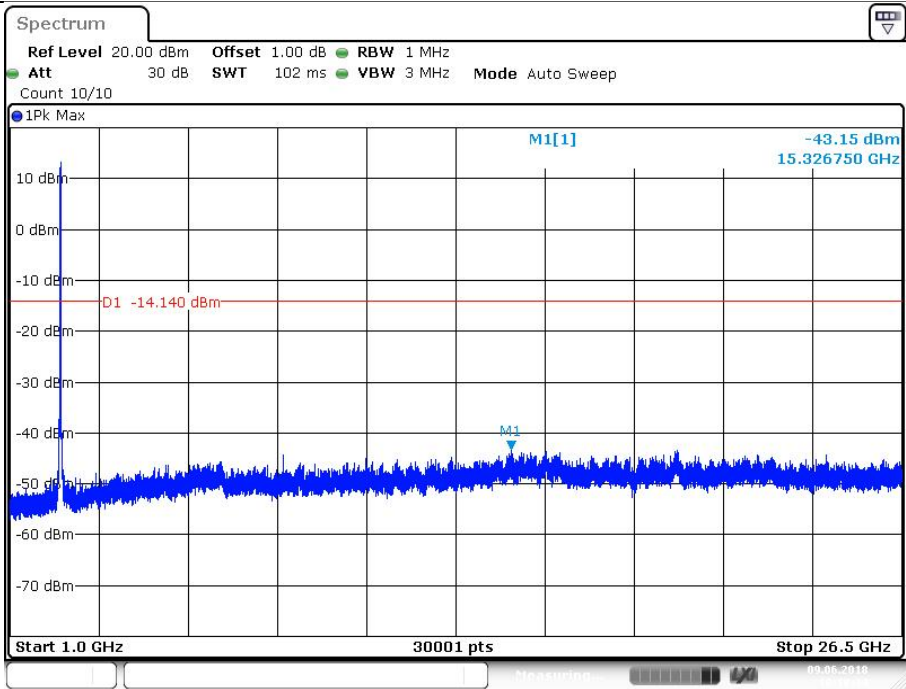


Date: 9 JUN 2018 10:18:34

11G\_Ant1\_2462\_0~Reference

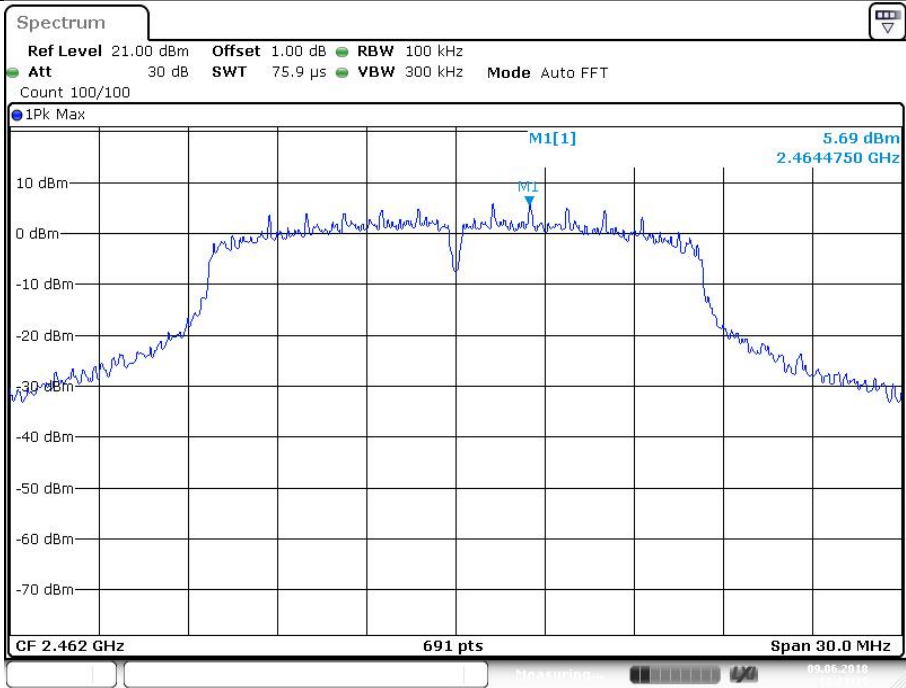


Date: 9 JUN 2018 10:21:15

11G\_Ant1\_2462\_30~1000

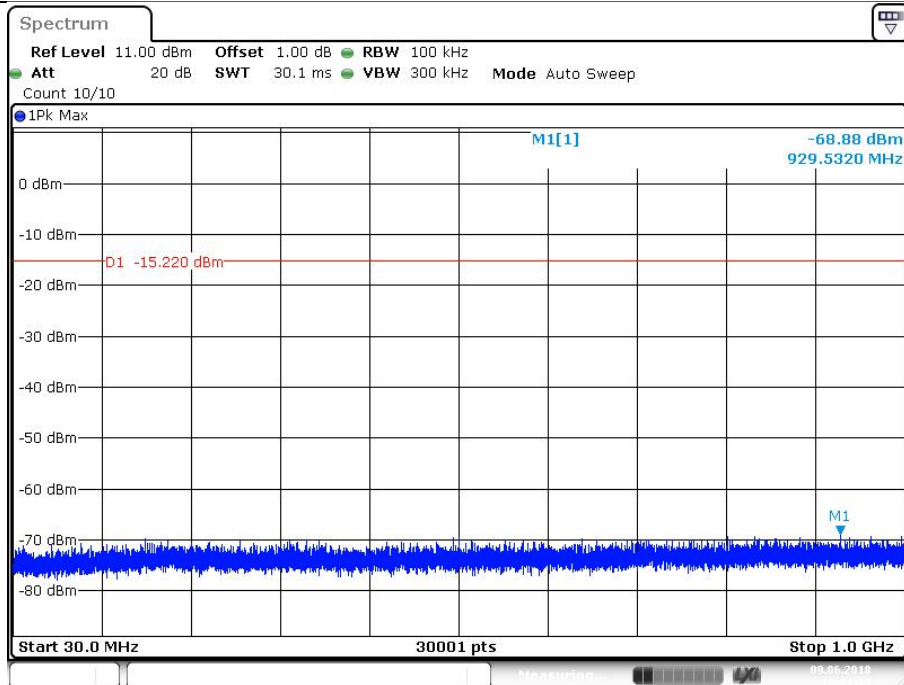


Date: 9 JUN 2018 10:21:24

## 11G\_Ant1\_2462\_1000-26500

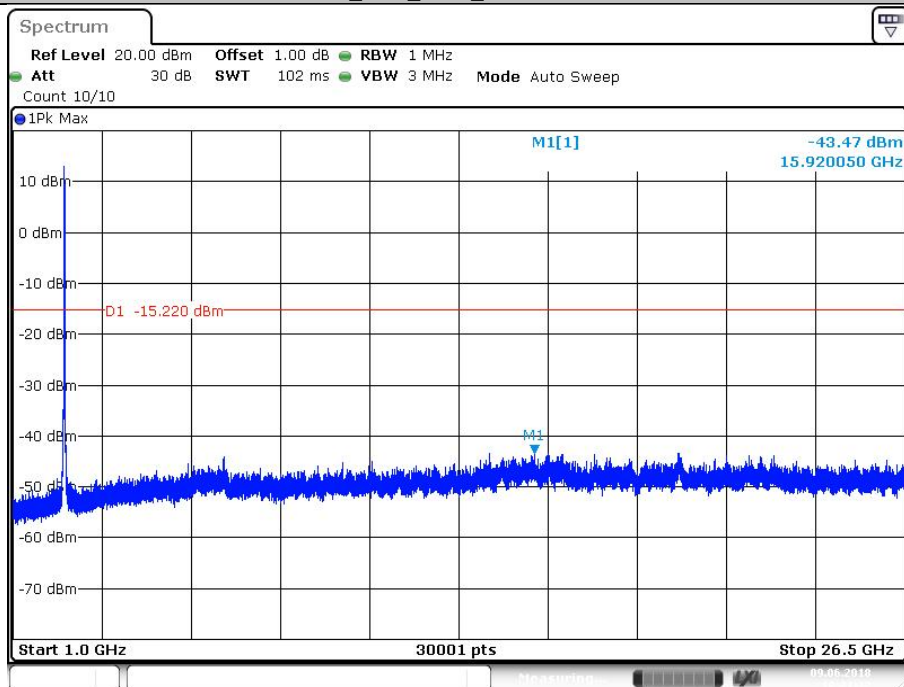


Date: 9 JUN 2018 10:21:33

## 11N20SISO\_Ant1\_2412\_0-Reference

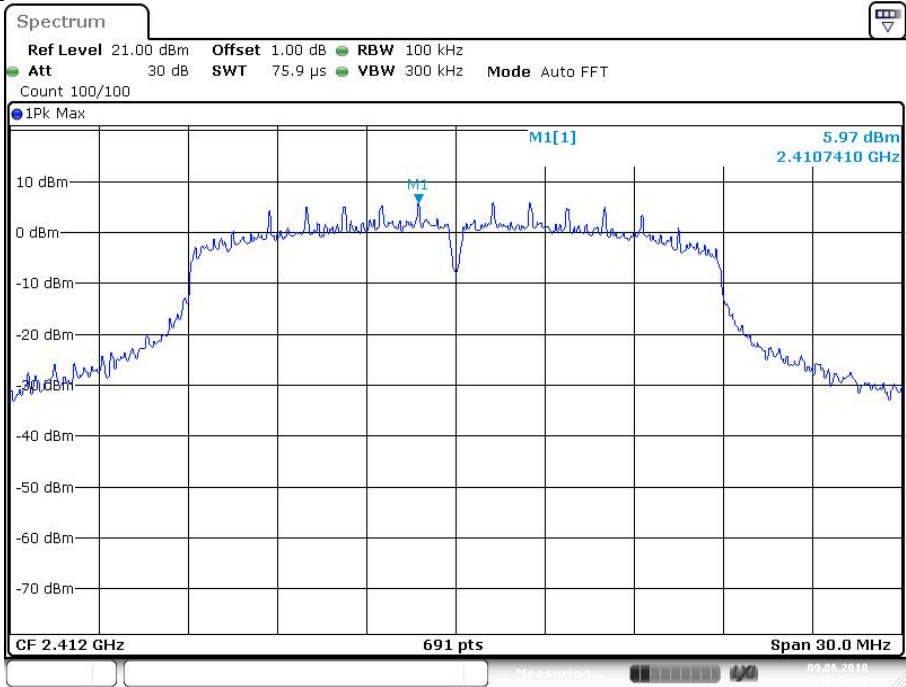


Date: 9 JUN 2018 10:26:22

11N20SISO\_Ant1\_2412\_30~1000

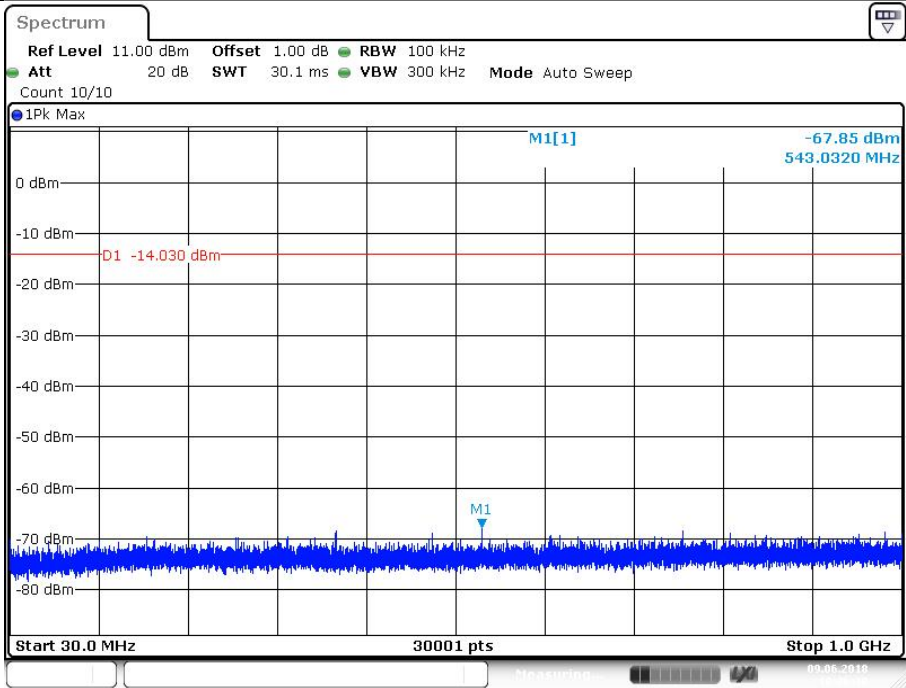


Date: 9 JUN 2018 10:26:31

11N20SISO\_Ant1\_2412\_1000~26500

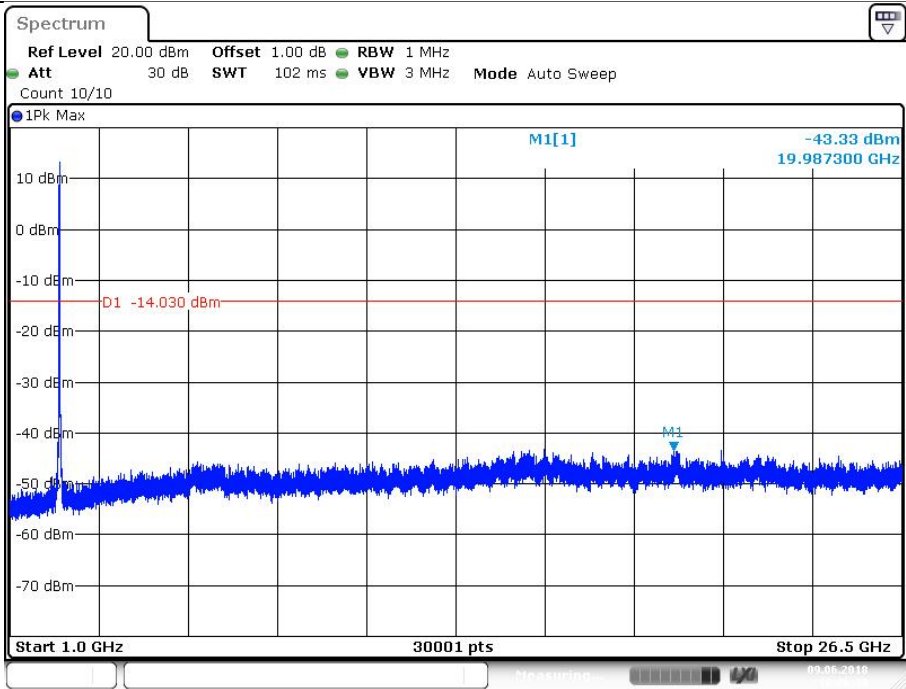


Date: 9 JUN 2018 10:26:39

11N20SISO\_Ant1\_2437\_0~Reference

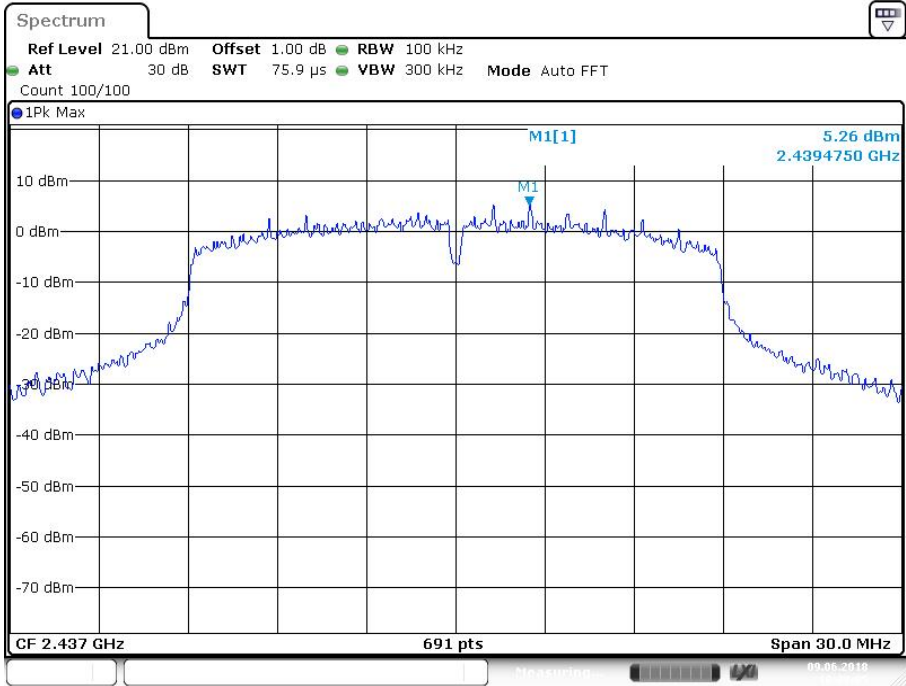


Date: 9 JUN 2018 10:29:06

11N20SISO\_Ant1\_2437\_30~1000

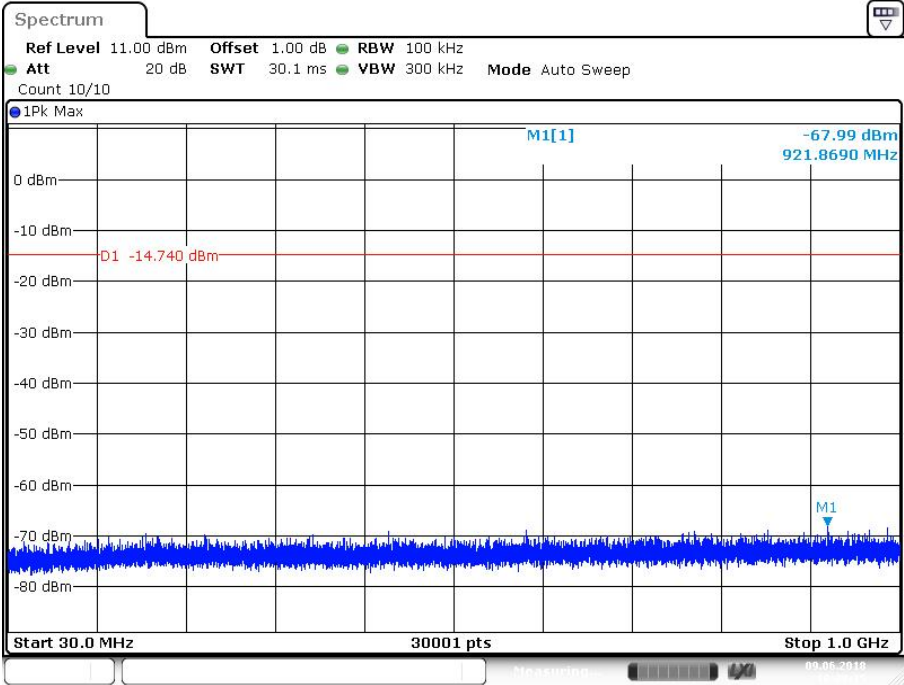


Date: 9 JUN 2018 10:29:15

11N20SISO\_Ant1\_2437\_1000~26500

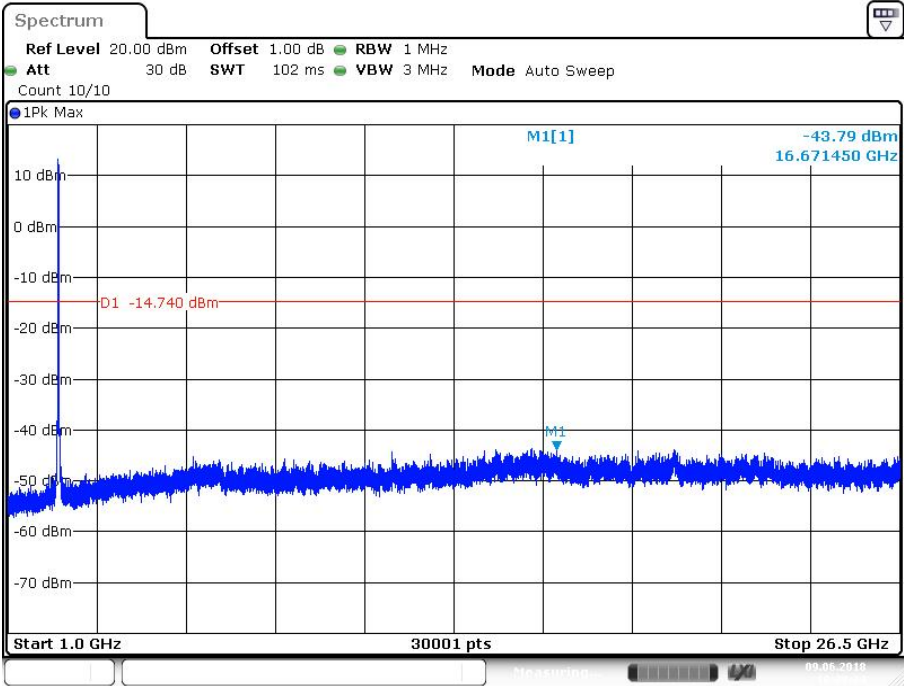


Date: 9 JUN 2018 10:29:24

11N20SISO\_Ant1\_2462\_0~Reference

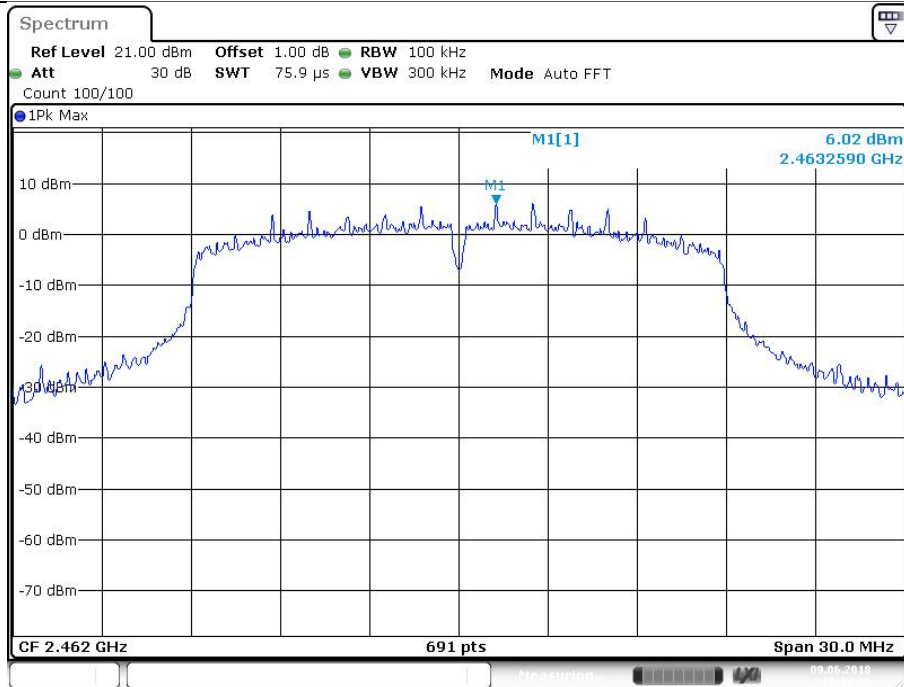


Date: 9 JUN 2018 10:32:23

## 11N20SISO\_Ant1\_2462\_30~1000

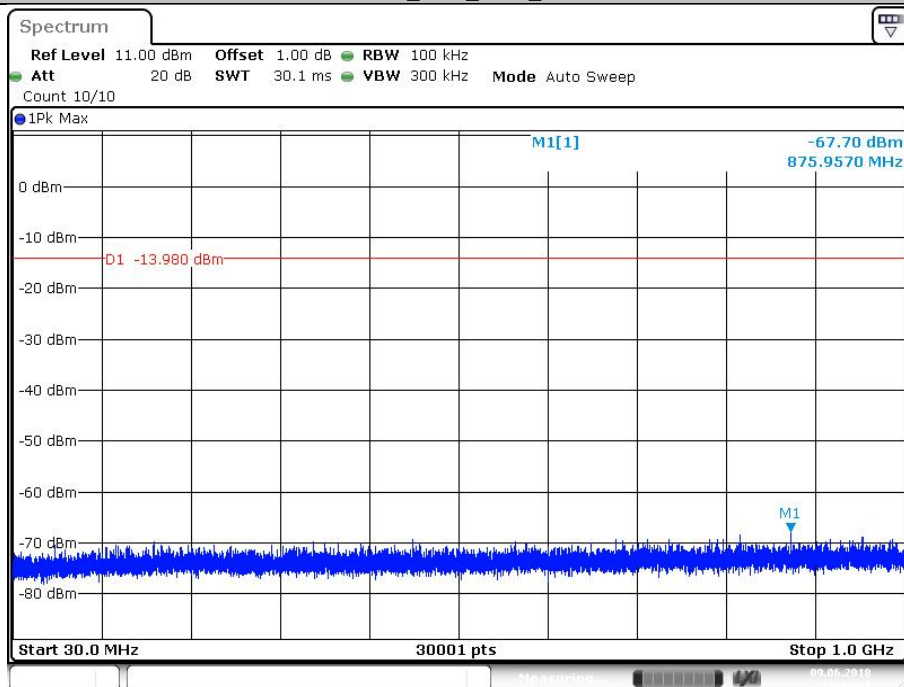

Date: 9 JUN 2018 10:32:32

## 11N20SISO\_Ant1\_2462\_1000~26500

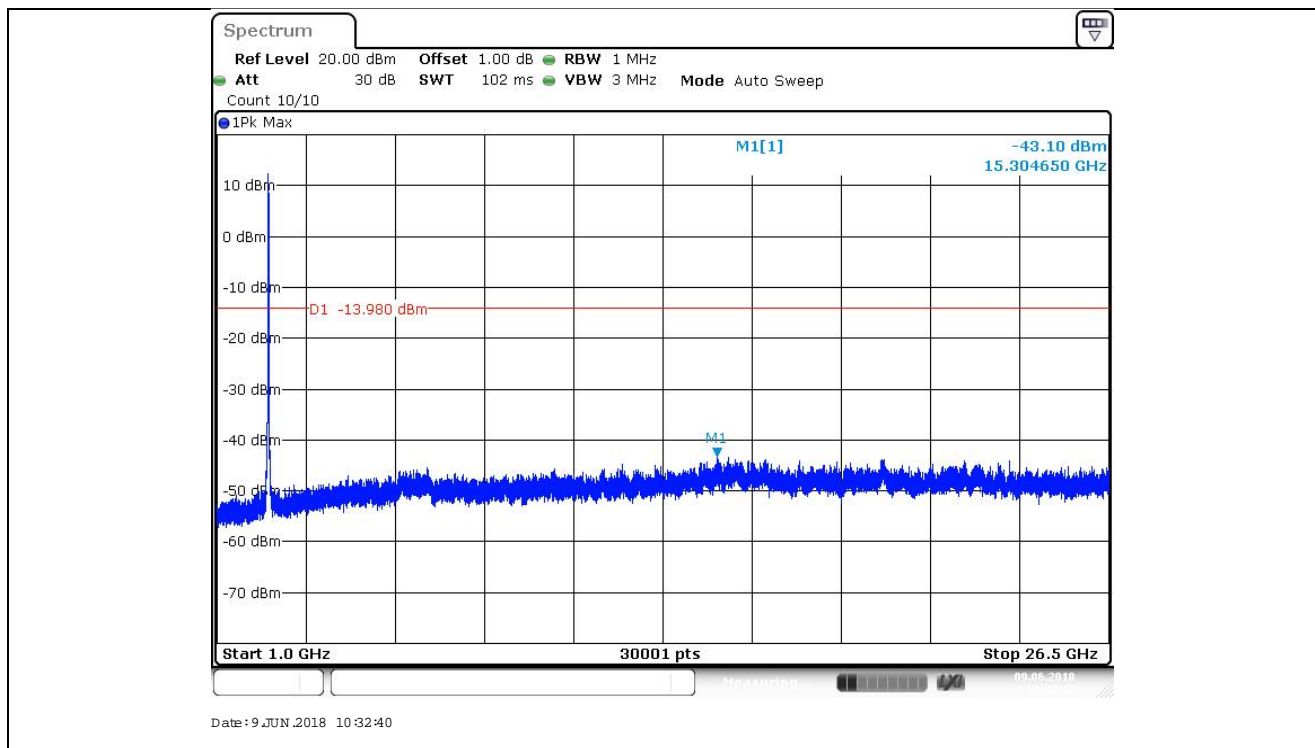

Remark: Test of above 1GHz were performed with 1MHz RBW, we can't find any burst, so they are considered to fulfill the requirement with 100KHz RBW without further testing.

## 9.6 Band edge testing

### Test Method

- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.

### Limit:


According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.


Frequency Range MHz	Limit (dBc)
30-25000	-20






Band edge testing

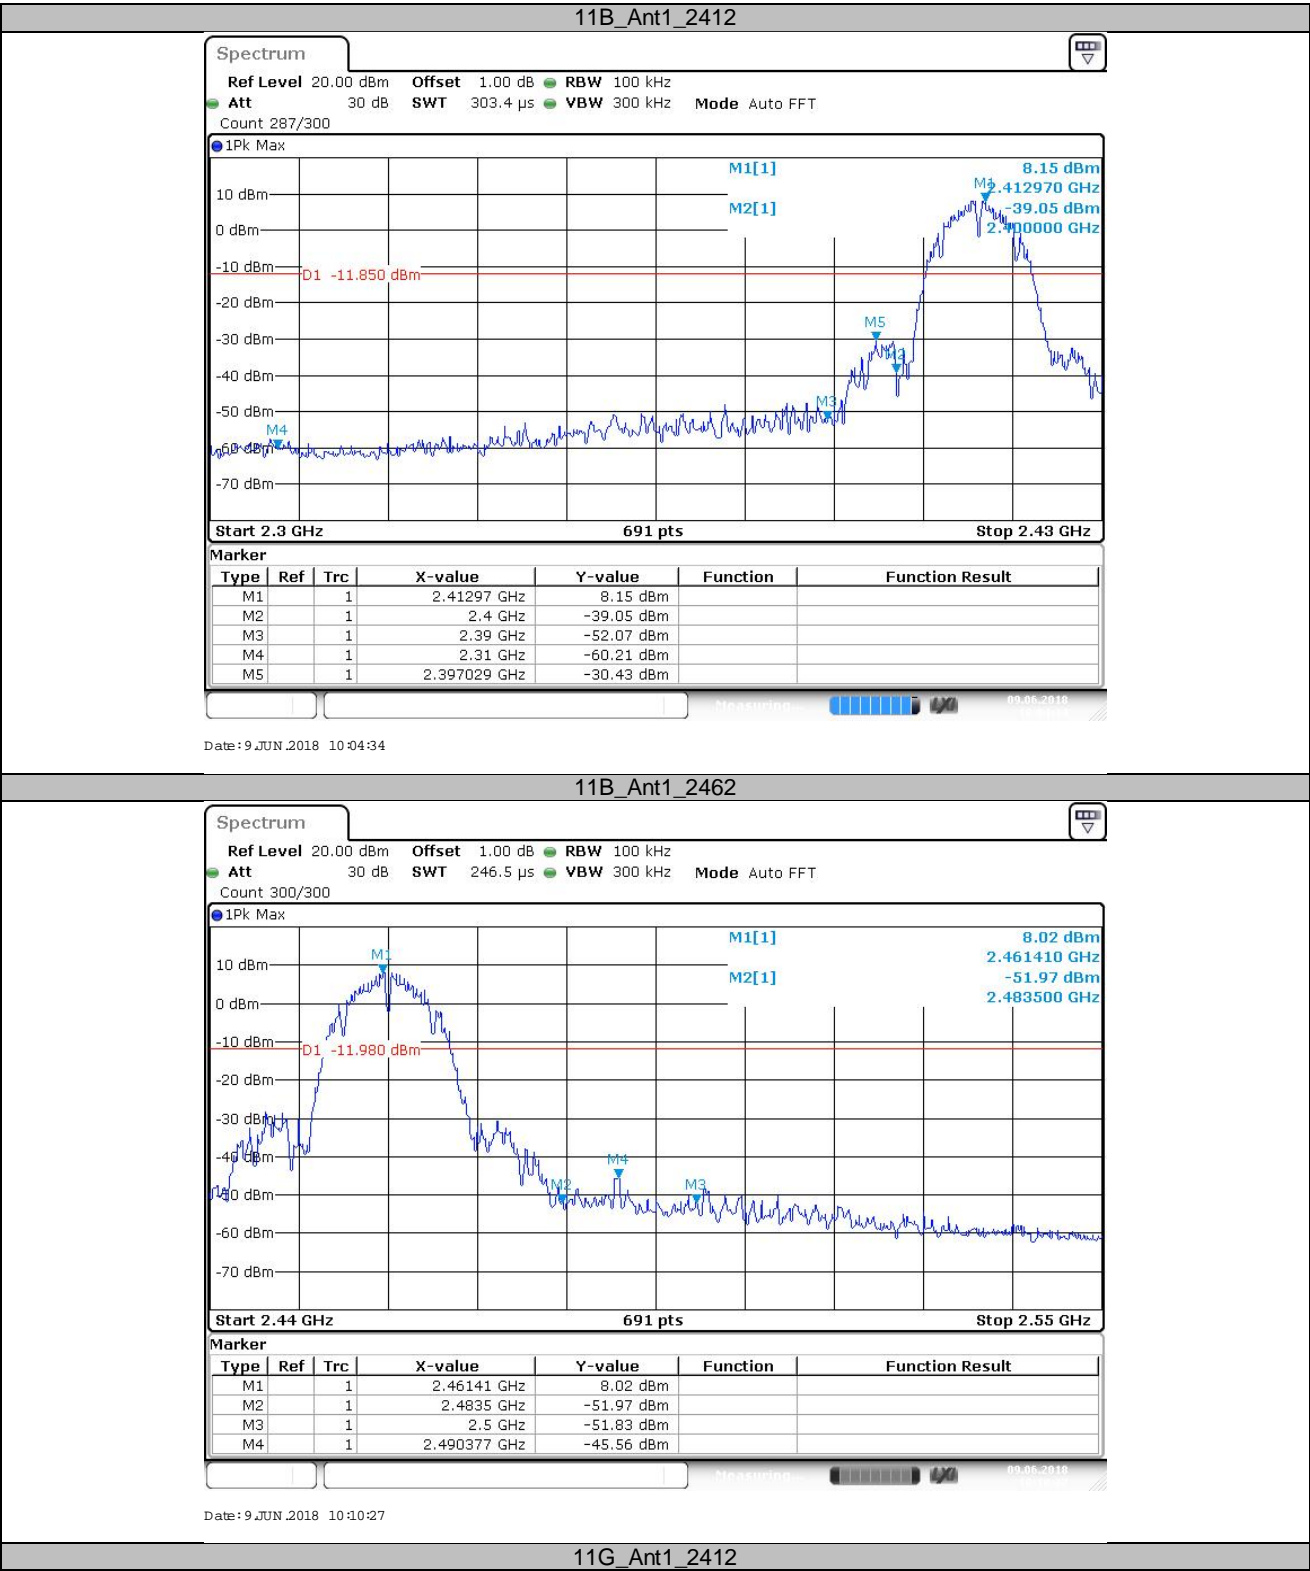

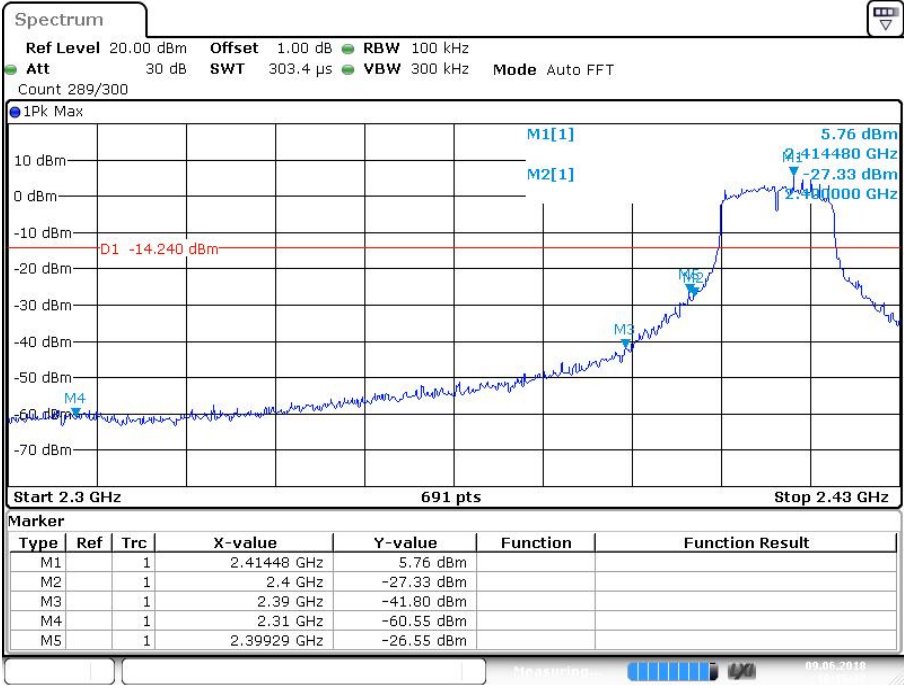


Date: 9 JUN 2018 10:15:38

11G\_Ant1\_2462

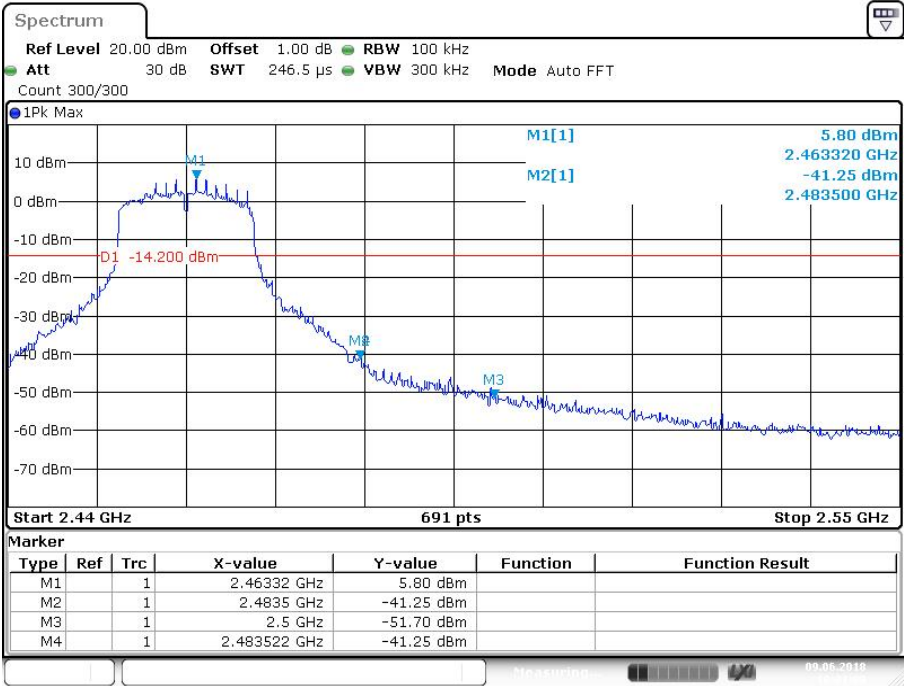


Date: 9 JUN 2018 10:21:09

11N20SISO\_Ant1\_2412

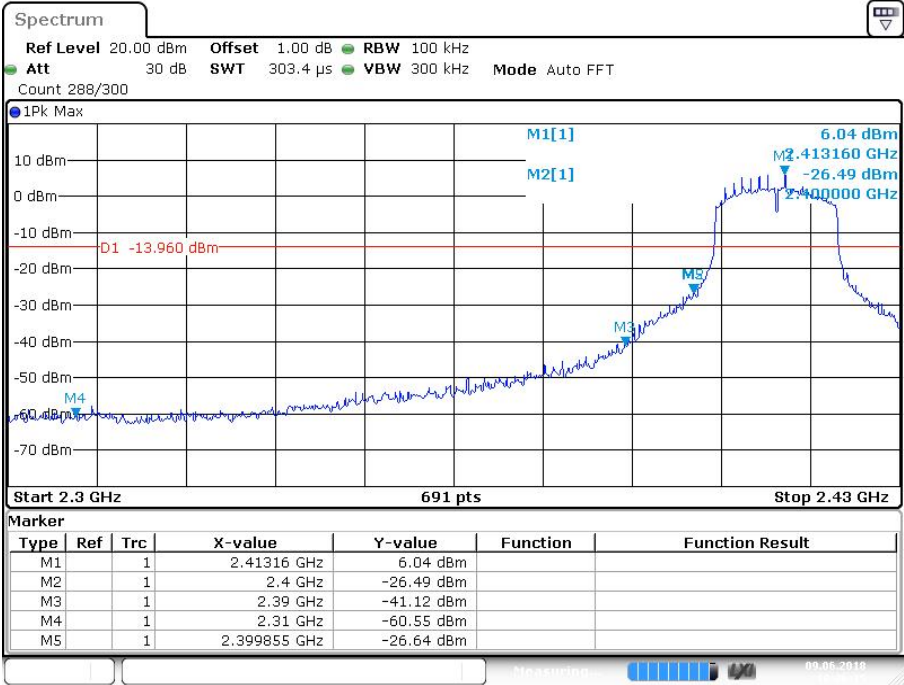

Date: 9 JUN 2018 10:26:16

11N20SISO\_Ant1\_2462

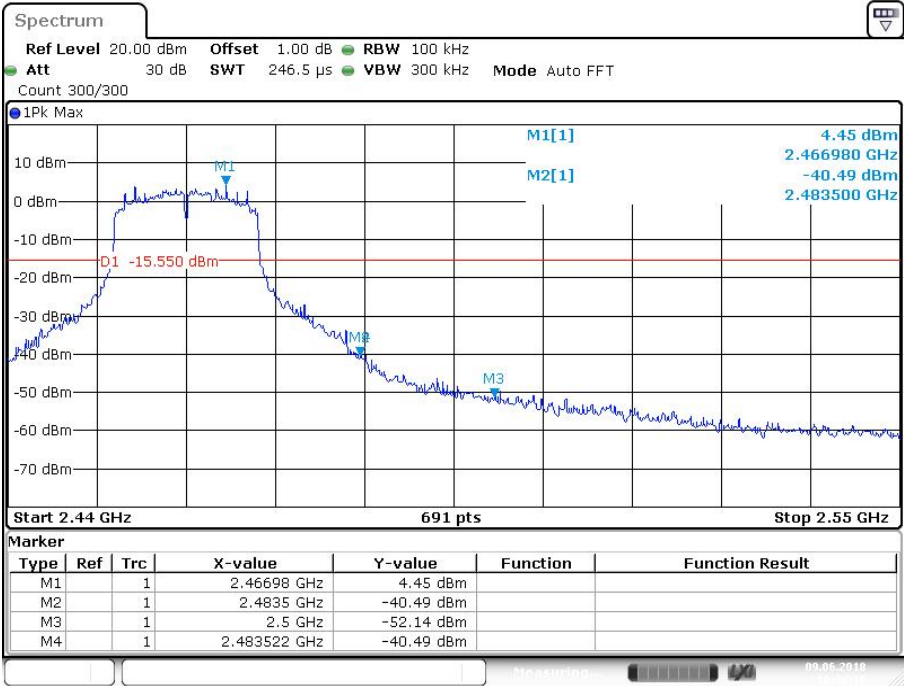

Date: 9 JUN 2018 10:32:17

## 9.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned
5. Use the following spectrum analyzer settings According to C63.10:  
For Above 1GHz  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.  
For Below 1GHz  
Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205 and RSS-GEN 8.10, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (802.11B mode) test result is listed in the report.

### Transmitting spurious emission test result as below:

#### 802.11B Modulation 2412MHz Test Result

Frequency Band	Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Margin dBuV/m	Correct factor (dB)	Result
30-1000MHz	602.14	26.31	H	46	QP	19.69	-19.1	Pass
	861.67	27.69	H	46	QP	18.31	-16.1	Pass
	Other Frequency	---	H	---	---	---	---	Pass
	38.89	22.18	V	40	QP	17.82	-25.1	Pass
	864.58	31.76	V	46	QP	14.24	-15.7	Pass
	Other Frequency	---	V	---	---	---	---	Pass
1000-2500MHz	*1592.69	37.82	H	74	PK	36.18	-9.7	Pass
	*2207.50	40.52	H	74	PK	33.48	-6.5	Pass
	*7237.03	41.06	H	74	PK	32.94	5.2	Pass
	Other Frequency	---	H	74	---	---	---	Pass
	*7236.56	39.38	V	74	PK	34.62	5.3	Pass
	Other Frequency	---	V	74	---	---	---	Pass

#### 802.11B Modulation 2437MHz Test Result

Frequency Band	Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Margin dBuV/m	Correct factor (dB)	Result
1000-2500MHz	*1599.69	37.64	H	74	PK	36.36	-9.6	Pass
	*2227.569	36.47	H	74	PK	37.53	-6.5	Pass
	*7313.91	43.14	H	74	PK	30.86	5.7	Pass
	Other Frequency	---	H	74	---	---	---	Pass
	*7311.56	41.19	V	74	PK	32.81	5.9	Pass
	Other Frequency	---	V	74	---	---	---	Pass

#### 802.11B Modulation 2462MHz Test Result

Frequency Band	Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Margin dBuV/m	Correct factor (dB)	Result
1000-2500MHz	*1592.56	33.98	H	74	PK	40.02	-9.7	Pass
	*2253.19	34.42	H	74	PK	39.58	-6.4	Pass
	*7384.22	45.72	H	74	PK	28.28	6.1	Pass
	Other Frequency	--	H	--	--	--	--	Pass
	*7387.03	43.66	V	74	PK	30.34	6.3	Pass
	Other	--	V	--	--	--	--	Pass

	Frequency							
--	-----------	--	--	--	--	--	--	--

## Remark:

- (1) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

## 10 Test Equipment List

### Radiated Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2018-7-14
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2018-7-14
Horn Antenna	Rohde & Schwarz	HF907	102294	2018-7-14
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2018-7-14
Signal Generator	Rohde & Schwarz	SMY01	839369/005	2018-7-7
Attenuator	Agilent	8491A	MY39264334	2018-7-7
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

### TS8997 Test System

Description	Manufacturer	Model no.	Serial no.	cal. due date
Signal Generator	Rohde & Schwarz	SMB100A	108272	2018-7-7
Vector Signal Generator	Rohde & Schwarz	SMBV100A	262825	2018-7-23
Communication Synthetical Test Instrument	Rohde & Schwarz	CMW 270	101251	2019-2-15
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2018-7-7
Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	2018-7-7
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2018-7-7
Power Splitter	Weinschel	1580	SC319	2018-7-7
10dB Attenuator	Weinschel	56-10	58764	2018-7-14
10dB Attenuator	R&S	DNF	DNF-001	2018-7-14
10dB Attenuator	R&S	DNF	DNF-002	2018-7-14
10dB Attenuator	R&S	DNF	DNF-003	2018-7-14
10dB Attenuator	R&S	DNF	DNF-004	2018-7-14
Test software	Rohde & Schwarz	EMC32	Version 10.38.00	N/A
Test software	Tonscend	System for BT/WIFI	Version 2.6	N/A



## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

### System Measurement Uncertainty

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.98dB; Vertical: 5.06dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.95dB; Vertical: 4.94dB;
Uncertainty for Conducted RF test with TS 8997	Power level test involved: 2.06dB Frequency test involved: $1.16 \times 10^{-7}$