


## FCC ID: 2AND8-72XXL RF Exposure Report

### Test Requirement:

Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310  
According KDB 680106 D01 RF Exposure Wireless Charging App v03 and FCC CFR 47 Part 2.1091(d)(4)

### Test Setup

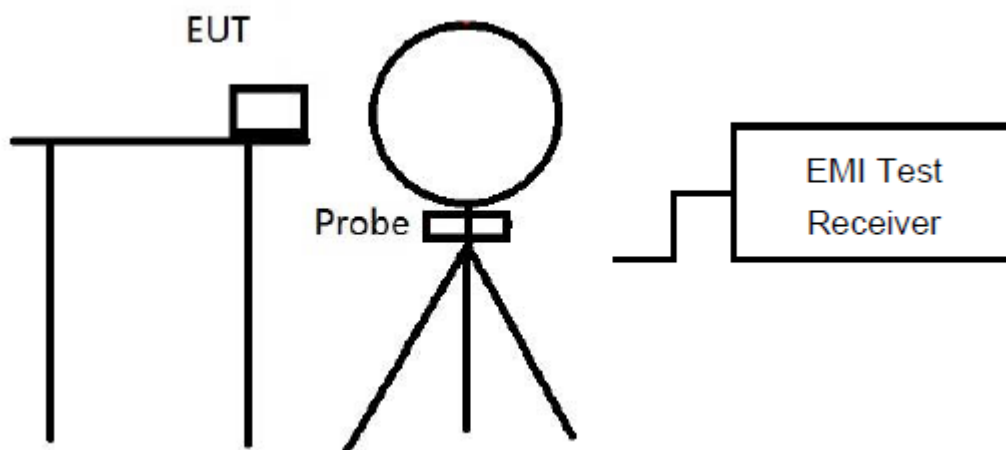

These testing were performed at test configuration as above diagram.

EUT was placed on a table, and the measure probe was placed at a measurement distance of 15cm from the EUT (Left, Right, Front, Rear, Bottom) to the center of the probe and 20cm from the EUT (Top) to the center of the probe.

### Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Test channel
Transmitting with Full load*	175.75 kHz
Transmitting with Half load	175.75 kHz
Transmitting with No load	175.75 kHz
All test mode were tested and passed, "*" show the worst case mode which were recorded in this report.	

## The procedures / limit

### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz; \*Plane-wave equivalent power density

## RF Exposure Evaluations

Test Side	Separation Distance(cm)	Measured Result(A/m)	Limit(A/m)	Result
Left	15	0.19	1.63	Compliance
Right	15	0.21	1.63	Compliance
Front	15	0.18	1.63	Compliance
Rear	15	0.19	1.63	Compliance
Top	20	0.22	1.63	Compliance
Bottom	15	0.21	1.63	Compliance
Max Margin (%)	13.50		Limit (%)	50

## **EQUIPMENT APPROVAL CONSIDERATIONS**

(1) Power transfer frequency is less than 1 MHz

**Re: This device power transfer frequency range from 112~205 kHz is less than 1MHz.**

(2) Output power from each primary coil is less than or equal to 15 watts.

**Re: This device Maximum Output power is 5W less than 15W.**

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

**Re: The transfer system includes only single primary and secondary coils.**

(4) Client device is placed directly in contact with the transmitter.

**Re: Client device is placed directly in contact with the transmitter.**

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

**Re: Mobile exposure conditions only.**

(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

**Re: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.**

### Test Setup Photos

Left



Right




Front



Rear



Top

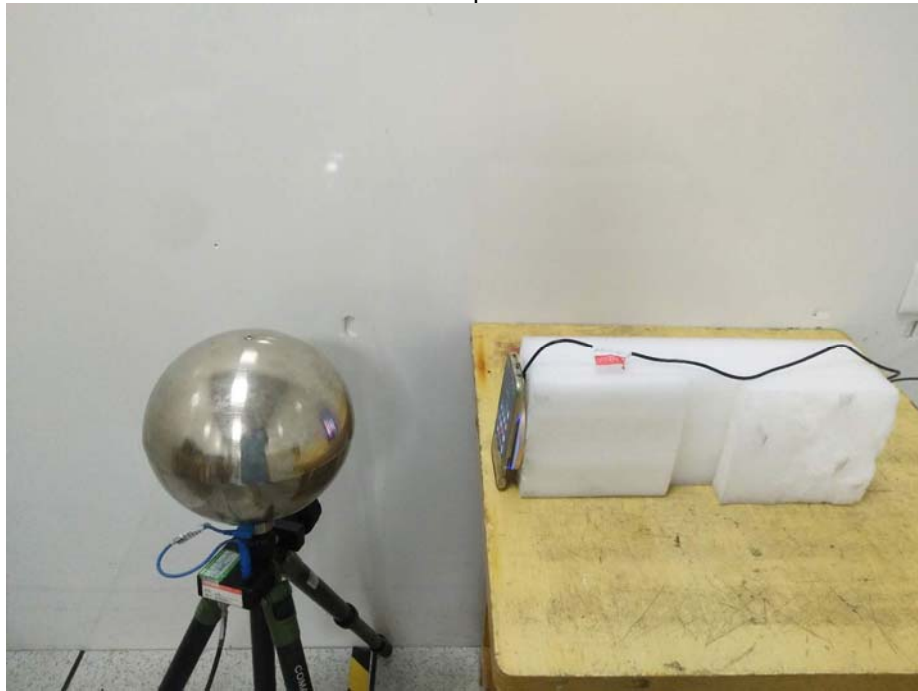

Bottom



====End====