



Certificate No.: 3745.01



China

FCC/IC - TEST REPORT

Report Number : **709502303495-00A** Date of Issue: June 23, 2023

Model : MDWBRCU1

Product Type : Smart Kit

Applicant : Hangzhou Tuya Information Technology Co.,Ltd

Address : Room701,Building3,More Center,No.87 GuDun
Road,Hangzhou,Zhejiang China

Manufacturer : Hangzhou Tuya Information Technology Co.,Ltd

Address : Room701,Building3,More Center,No.87 GuDun
Road,Hangzhou,Zhejiang China

Test Result : **Positive** **Negative**

Total pages including Appendices : 59



TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	6
5	Summary of Test Results	7
6	General Remarks	8
7	Test Setups	9
8	Systems test configuration	12
9	Technical Requirement	13
9.1	Conducted Emission	13
9.2	Conducted peak output power and e.i.r.p.	18
9.3	6dB bandwidth and 99% Occupied Bandwidth	19
9.4	Power spectral density	26
9.5	Spurious RF conducted emissions	30
9.6	Band edge	40
9.7	Spurious radiated emissions for transmitter	47
10	Test Equipment List	56
11	System Measurement Uncertainty	57
12	Photographs of Test Set-ups	58
13	Photographs of EUT	59



2 Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Test Firm FCC
Registration
Number: 820234

Designation
number: CN1183

IC Company
Number: 25988

CAB identifier: CN0101

Telephone: +86 21 6141 0123
Fax: +86 21 6140 8600



3 Description of the Equipment under Test

Product: Smart Kit

PMN / HVIN / Model no.: MDWBRCU1

FCC ID: 2ANDL-MDWBRCU1

IC: 23243-MDWBRCU1

Rating: 4.5-5.5V DC

RF Transmission Frequency: For 802.11b/g/n-HT20: 2412~2462 MHz

No. of Operated Channel: 2.4GHz WIFI: 11 for 802.11b/802.11g/802.11(H20)

Modulation: For 2.4GHz WIFI:
 Direct Sequence Spread Spectrum (DSSS) for 802.11b
 Orthogonal Frequency Division Multiplexing (OFDM) for 802.11g/n
 For 2.4GHz BLE: GFSK

Channel list:

802.11b/g/n(HT20)				
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch
1	2412	7	2442	3
2	2417	8	2447	4
3	2422	9	2452	5
4	2427	10	2457	6
5	2432	11	2462	7
6	2437			

Bluetooth Low Energy							
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



China

Antenna Type: PCB Antenna

Antenna Gain: 0.29dBi

Description of the EUT: The Equipment Under Test (EUT) is a Smart Kit which support 2.4GHz Wi-Fi and BLE 4.2(only support 1Mbps data rate). We tested it and listed the worst data in this report.

Test sample no.: SHA-731275-2

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	13-17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1) & RSS-247 5.4(d)	Conducted peak output power and e.i.r.p.	18	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1) & RSS-247 5.1(b)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1) & RSS-247 5.1(b)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii) & RSS-247 5.1(d)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	19-25	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e) & RSS-247 5.2(b)	Power spectral density	26-29	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	30-39	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Band edge	40-46	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	47-56	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses PCB antenna, which gain is 0.29dBi. In accordance to §15.203 and RSS-Gen 6.8, It is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ANDL-MDWBRCU1, IC: 23243-MDWBRCU1 complies with Section 15.205,15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules and RSS-247, RSS-GEN.

This report is only for the 2.4GHz Wi-Fi test report, for the 2.4GHz BLE test report please refer to 709502303495-00B.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed
- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.
- **Does not** fulfill the general approval requirements.

Sample Received Date: May 24, 2023

Testing Start Date: May 24, 2023

Testing End Date: June 20, 2023

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch


Reviewed by: _____ Prepared by: _____ Tested by: _____

Hui Tong

Jiayi Xu

Cheng Huali

 Hui TONG
 Review Engineer




 Jiayi XU
 Project Engineer

 Cheng Huali
 Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

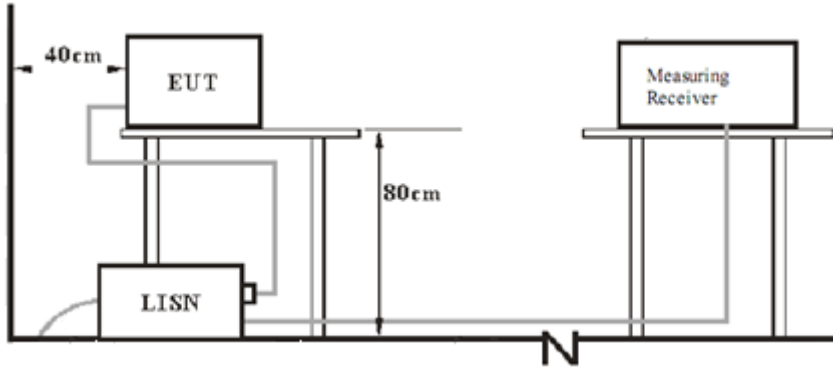


7.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

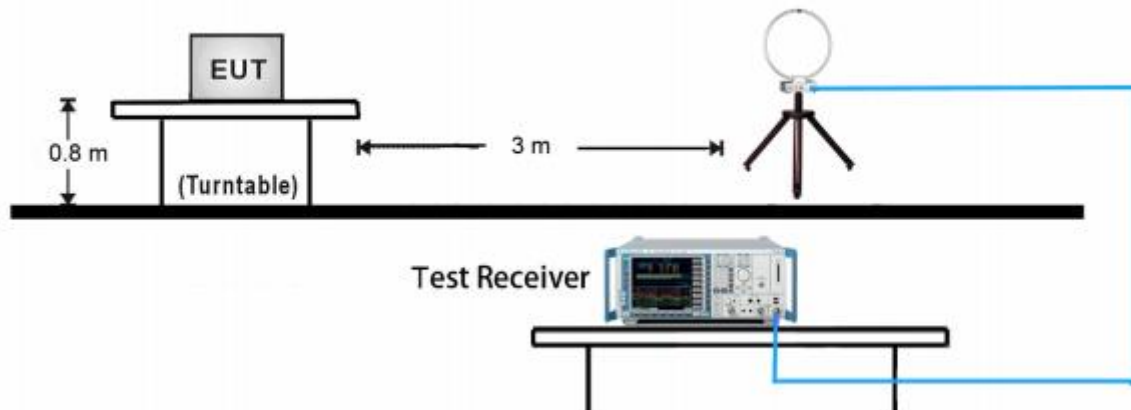


30MHz ~ 1GHz Test Setup:

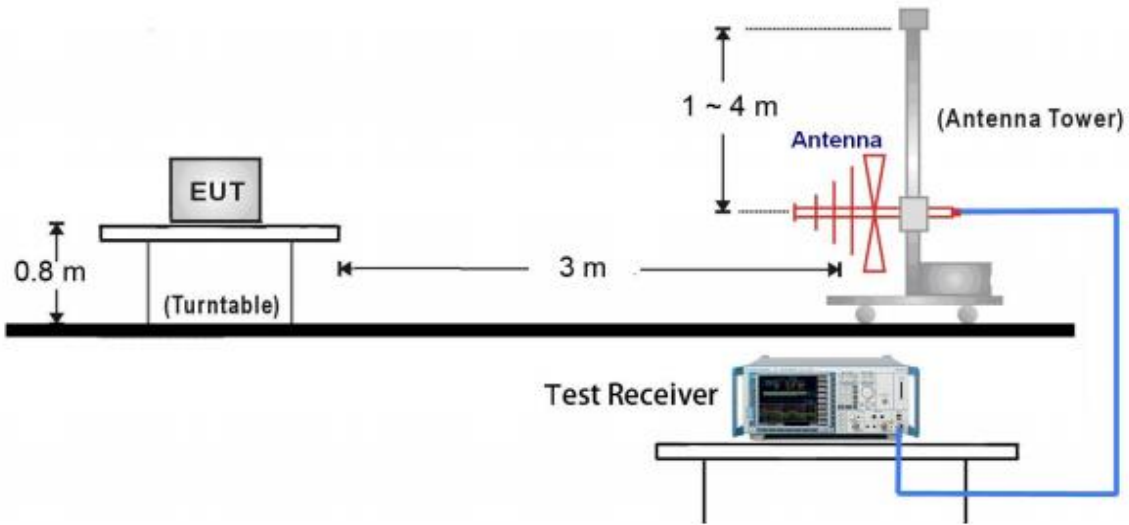


1GHz ~ 18GHz Test Setup:

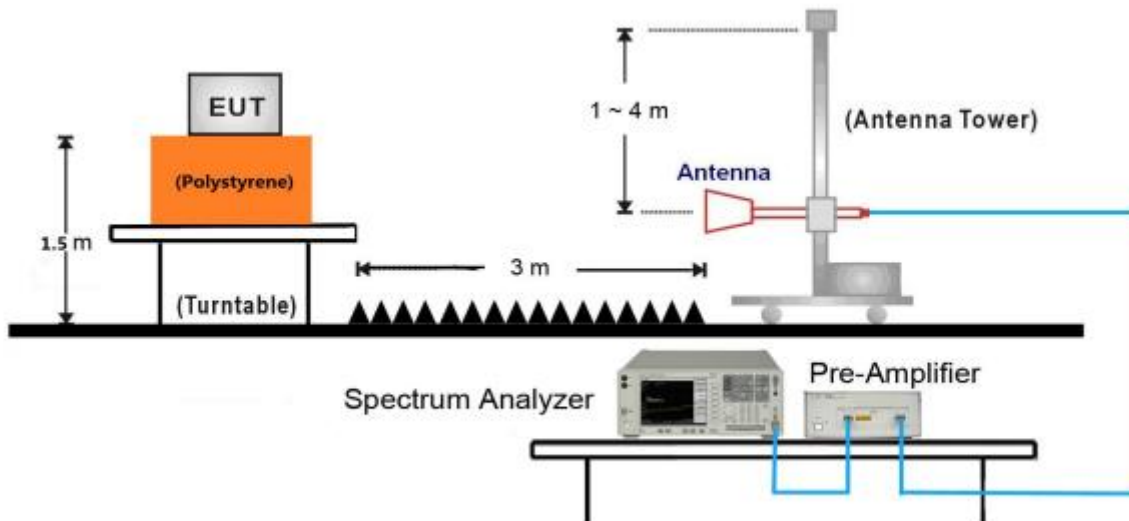

18GHz ~ 25GHz Test Setup:

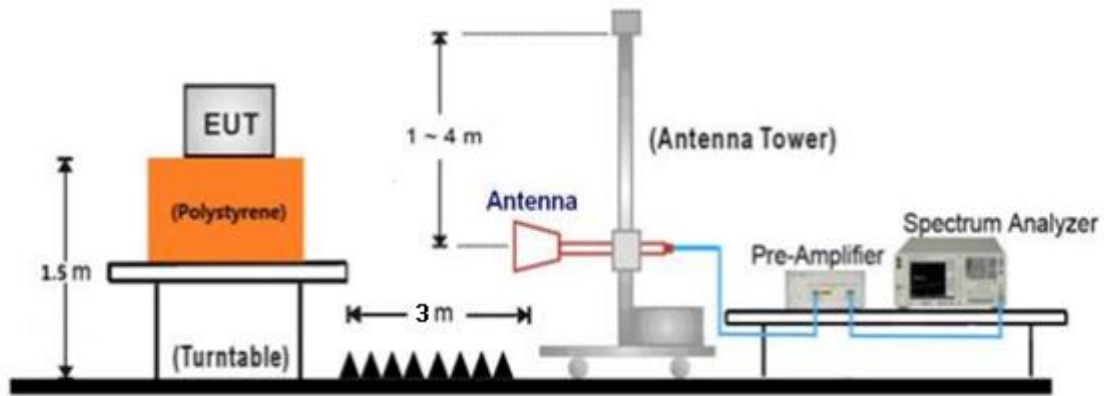

7.3 Conducted RF test setups





8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenove	E470	PF-OU5TS7 17/09

Test software: mptool 1v16

The system was configured to channel 1(2412MHz), 6(2437MHz), and 11(2462MHz) for 802.11 b/g/n HT20 test.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

150k-30MHz Conducted Emission Test


EUT Information

EUT Name:	Smart Kit
Model:	MDWBRCU1
Client:	Huangzhou Tuya Information Technology Co.,Ltd
Op Cond:	Power on, TX_2462MHz_N20, AC 120V/60Hz, T20.3, H55.3%, P101.1kPa
Operator:	Cheng Huali
Standard:	FCC Part 15.207(a); RSS-GEN
Comment:	Phase L
Sample No.:	SHA-731275-2

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

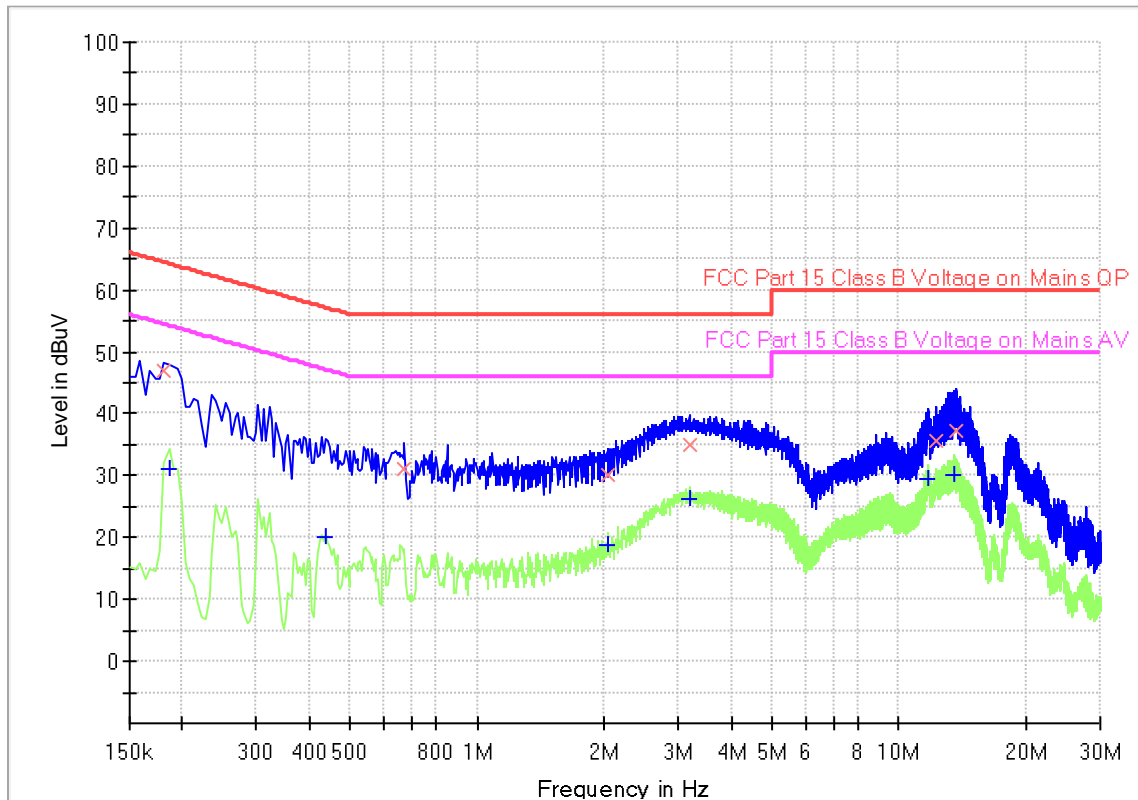

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.181500	47.06	---	64.42	17.36	1000.0	9.000	L1	19.6
0.186000	---	31.01	54.21	23.20	1000.0	9.000	L1	19.6
0.438000	---	20.05	47.10	27.05	1000.0	9.000	L1	19.6
0.672000	31.21	---	56.00	24.79	1000.0	9.000	L1	19.6
2.035500	30.07	---	56.00	25.93	1000.0	9.000	L1	19.6
2.035500	---	18.65	46.00	27.35	1000.0	9.000	L1	19.6
3.178500	34.91	---	56.00	21.09	1000.0	9.000	L1	19.6
3.178500	---	26.09	46.00	19.91	1000.0	9.000	L1	19.6
11.728500	---	29.56	50.00	20.44	1000.0	9.000	L1	19.8
12.291000	35.63	---	60.00	24.37	1000.0	9.000	L1	19.8
13.506000	---	30.03	50.00	19.97	1000.0	9.000	L1	19.8
13.663500	37.39	---	60.00	22.61	1000.0	9.000	L1	19.8

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator



150k-30MHz Conducted Emission Test


EUT Information

EUT Name: Smart Kit
 Model: MDWBRCU1
 Client: Huangzhou Tuya Information Technology Co.,Ltd
 Op Cond: Power on, TX_2462MHz_N20, AC 120V/60Hz, T20.3, H55.3%, P101.1kPa
 Operator: Cheng Huali
 Standard: FCC Part 15.207(a);RSS-GEN
 Comment: Phase N
 Sample No.: SHA-731275-2

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN
 Receiver: [ESR 3]
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

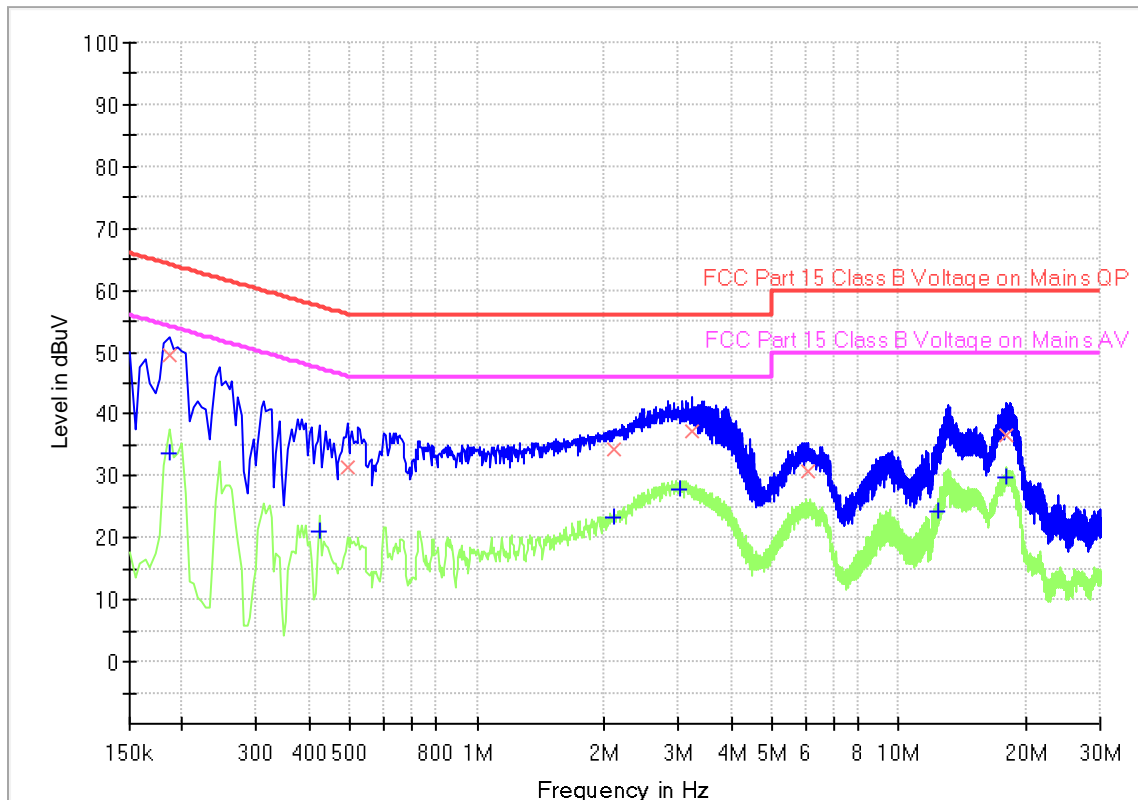

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.186000	---	33.59	54.21	20.62	1000.0	9.000	N	19.6
0.186000	49.49	---	64.21	14.72	1000.0	9.000	N	19.6
0.424500	---	21.06	47.36	26.30	1000.0	9.000	N	19.6
0.492000	31.45	---	56.13	24.68	1000.0	9.000	N	19.6
2.098500	---	23.31	46.00	22.69	1000.0	9.000	N	19.6
2.098500	34.25	---	56.00	21.75	1000.0	9.000	N	19.6
3.021000	---	27.89	46.00	18.11	1000.0	9.000	N	19.6
3.219000	37.17	---	56.00	18.83	1000.0	9.000	N	19.6
6.067500	30.91	---	60.00	29.09	1000.0	9.000	N	19.7
12.403500	---	24.26	50.00	25.74	1000.0	9.000	N	19.9
18.006000	---	29.69	50.00	20.31	1000.0	9.000	N	19.9
18.037500	36.62	---	60.00	23.38	1000.0	9.000	N	19.9

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator



9.2 Conducted peak output power and e.i.r.p.

Test Method

1. Use the following spectrum analyzer settings:
 RBW > the 6 dB bandwidth of the emission being measured, VBW≥3RBW, Span≥3RBW
 Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Use a power meter to measure the conducted peak output power.

Limits

According to §15.247 (b) (1) & RSS-247 5.4(d), conducted peak output power limit as below:

	Frequency Range	Limit	Limit
	MHz	W	dBm
Conducted peak output power	2400-2483.5	≤1	≤30
e.i.r.p.	2400-2483.5	≤4	≤36

Test result as below table

802.11b: Antenna gain= 0.29dBi						
Frequency (MHz)	Conducted Peak Output Power (dBm) §15.247 (b) (1)			e.i.r.p. (dBm) RSS-247 5.4(d)		
	Result	limit	Verdict	Result	limit	Verdict
2412MHz	18.26	≤30	Pass	18.55	≤36	Pass
2437MHz	18.41	≤30	Pass	18.70	≤36	Pass
2462MHz	18.32	≤30	Pass	18.61	≤36	Pass

802.11g: Antenna gain= 0.29dBi						
Frequency (MHz)	Conducted Peak Output Power (dBm) §15.247 (b) (1)			e.i.r.p. (dBm) RSS-247 5.4(d)		
	Result	limit	Verdict	Result	limit	Verdict
2412MHz	23.91	≤30	Pass	24.20	≤36	Pass
2437MHz	23.95	≤30	Pass	24.24	≤36	Pass
2462MHz	23.61	≤30	Pass	23.90	≤36	Pass

802.11n(HT20): Antenna gain= 0.29dBi						
Frequency (MHz)	Conducted Peak Output Power (dBm) §15.247 (b) (1)			e.i.r.p. (dBm) RSS-247 5.4(d)		
	Result	limit	Verdict	Result	limit	Verdict
2412MHz	23.27	≤30	Pass	23.56	≤36	Pass
2437MHz	23.37	≤30	Pass	23.66	≤36	Pass
2462MHz	23.14	≤30	Pass	23.43	≤36	Pass



9.3 6dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]

≥500

Test Method for 99 % Bandwidth

1. Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]

N/A


Test result

Test Mode	Frequency MHz	6dB bandwidth (MHz)		Result	99% occupied bandwidth MHz
		result	limit	verdict	
802.11b	2412	9.048	≥0.5	Pass	14.098
	2437	9.068	≥0.5	Pass	14.088
	2462	9.087	≥0.5	Pass	14.067
802.11g	2412	16.535	≥0.5	Pass	16.573
	2437	16.483	≥0.5	Pass	16.585
	2462	16.512	≥0.5	Pass	16.571
802.11n(HT20)	2412	17.734	≥0.5	Pass	17.787
	2437	17.805	≥0.5	Pass	17.775
	2462	17.748	≥0.5	Pass	17.767


6 dB Bandwidth




11G_Ant1_2412

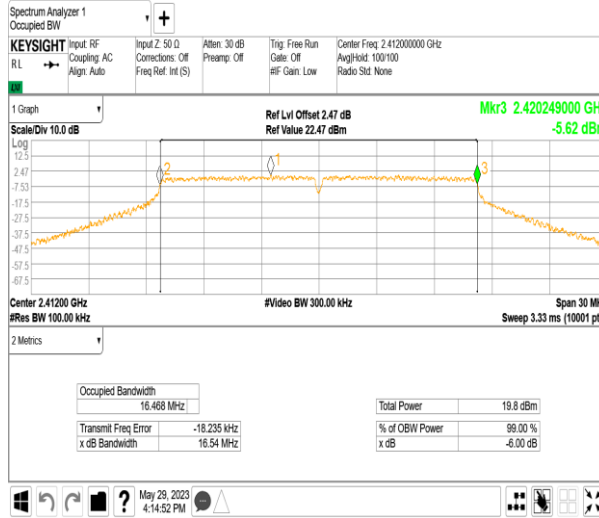

11G_Ant1_2437

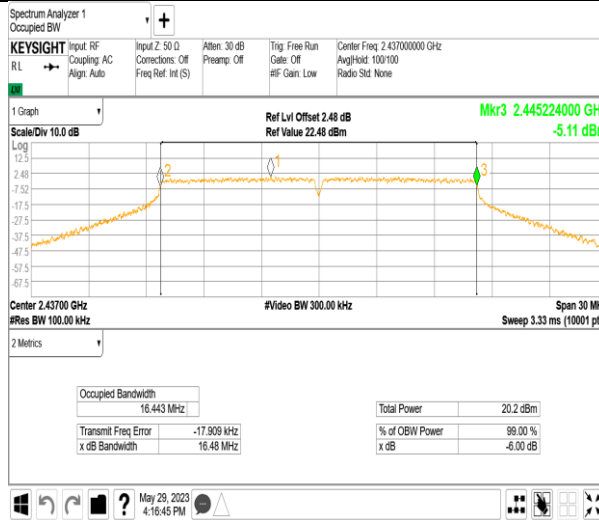


11G_Ant1_2462

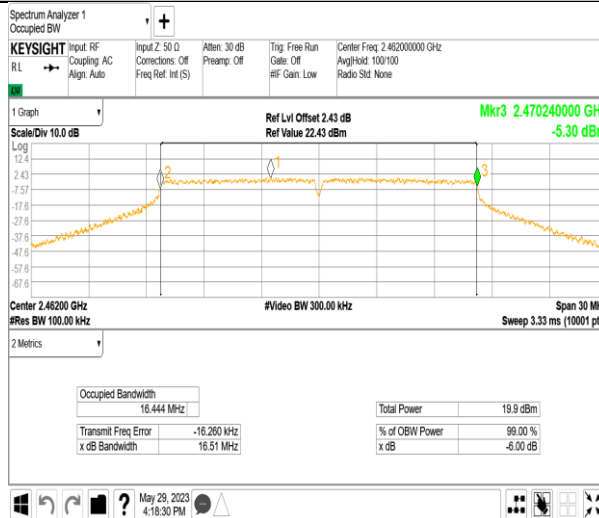





11N20_Ant1_2412

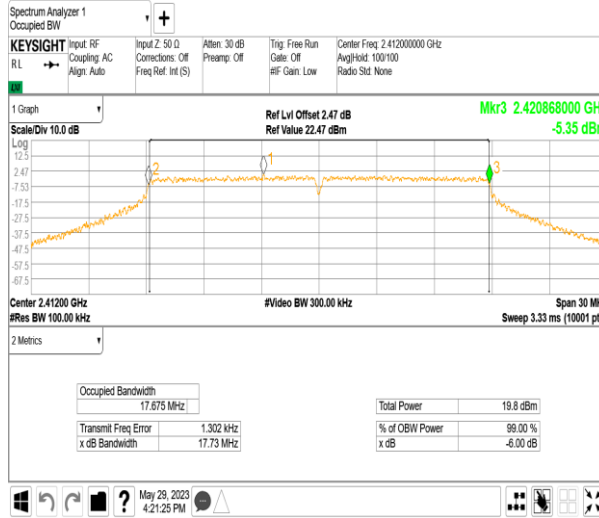

11N20_Ant1_2437

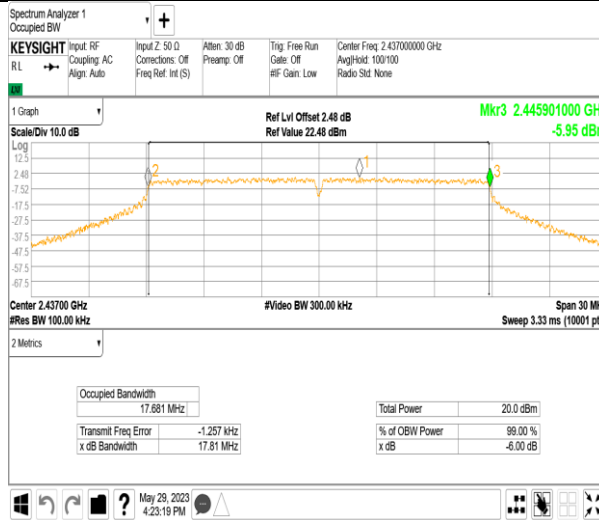



11N20_Ant1_2462

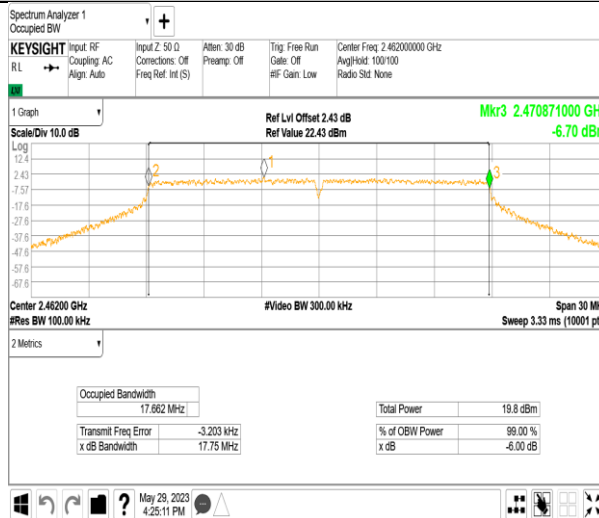




99% Bandwidth

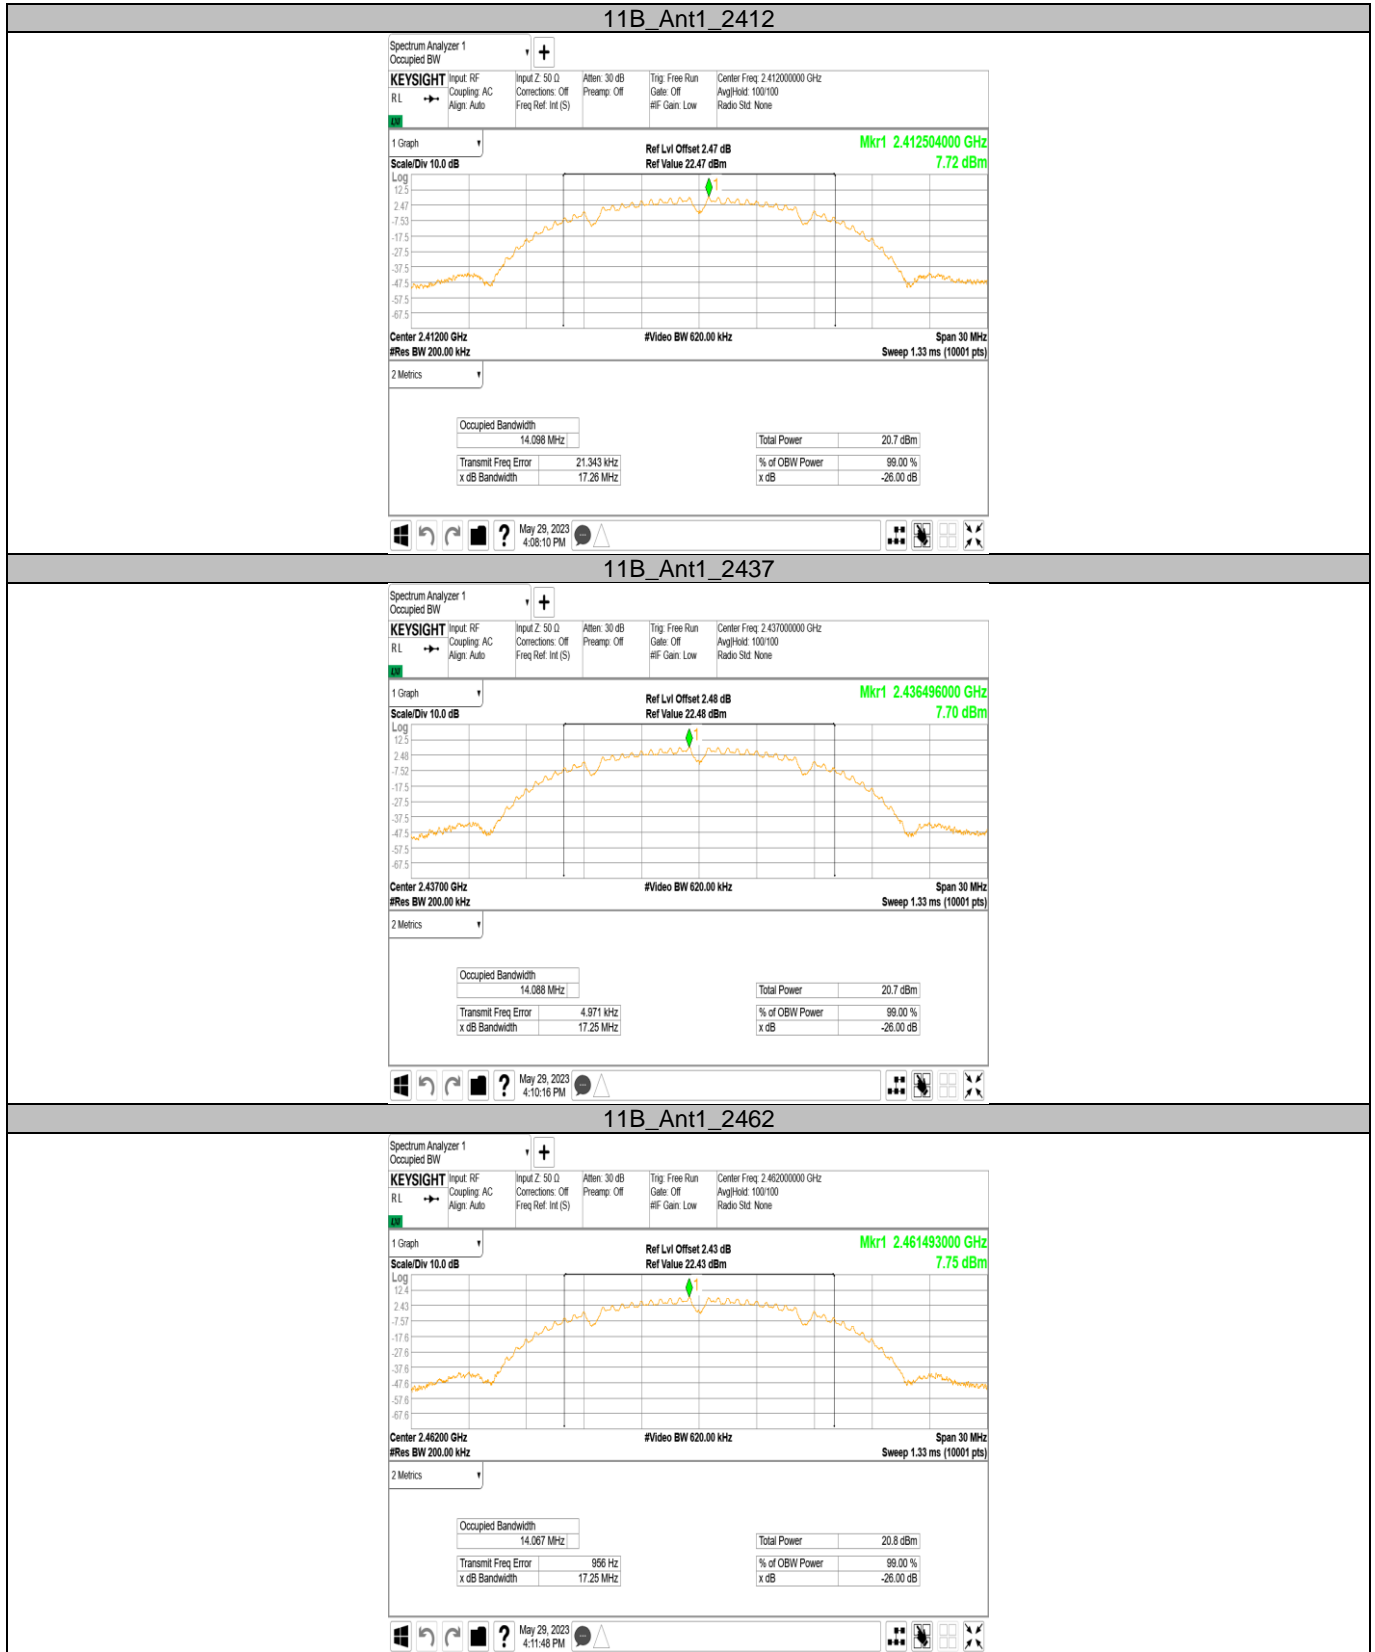

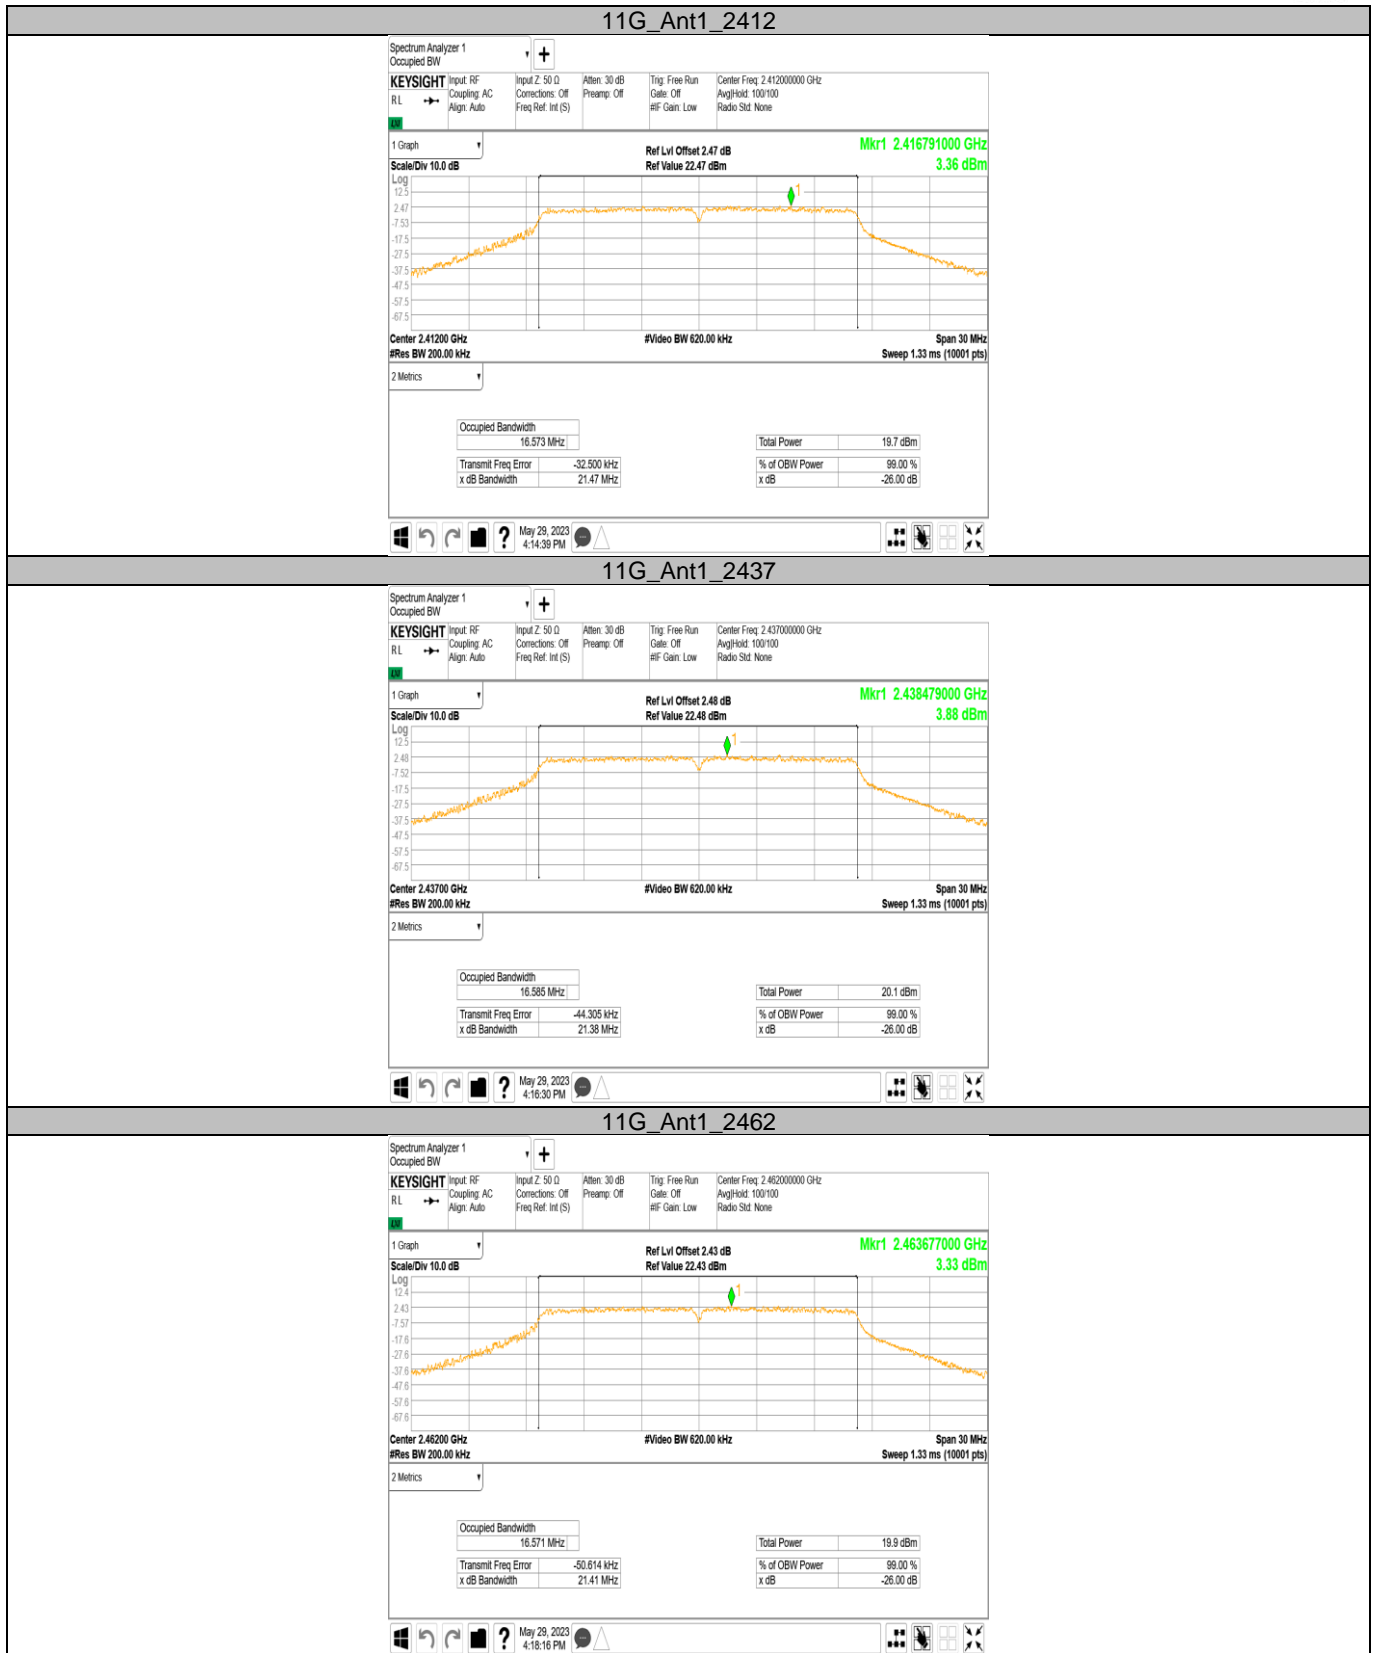





11N20_Ant1_2412

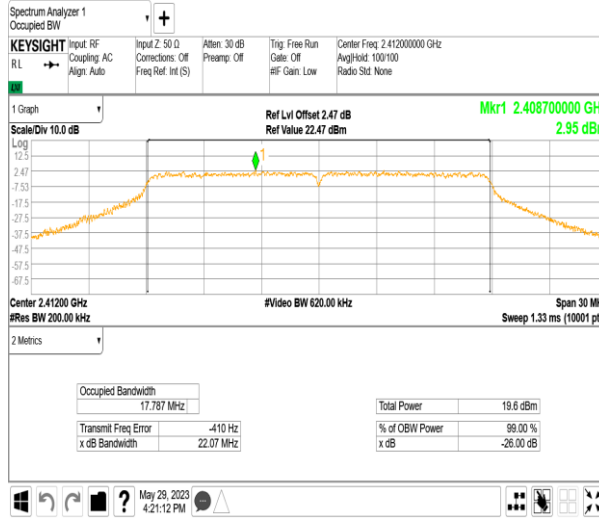

11N20_Ant1_2437

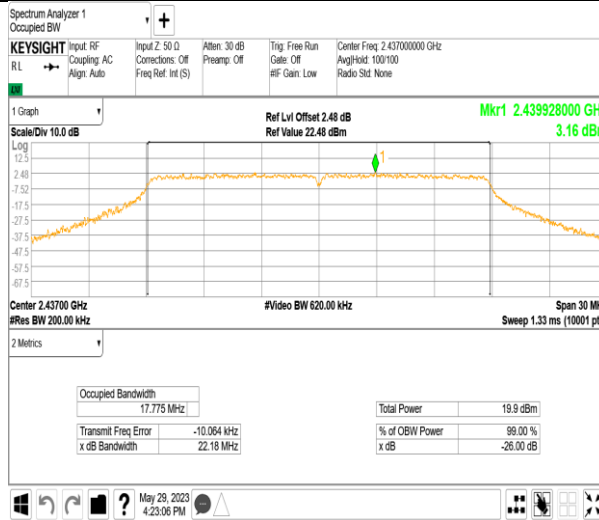

11N20_Ant1_2462

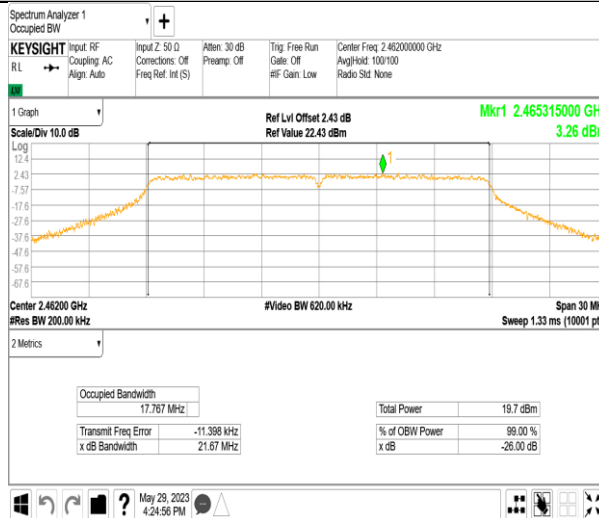



9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm]

≤8

Test result
802.11 b

Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-13.71	Pass
Middle channel 2437MHz	-13.6	Pass
High channel 2462MHz	-13.56	Pass

802.11 g

Frequency MHz	Power spectral density dBm	Result
Low channel 2412MHz	-13.86	Pass
Middle channel 2437MHz	-13.55	Pass
High channel 2462MHz	-14.04	Pass


802.11 n (HT20)

Frequency MHz	Power spectral density dBm	Result
Low channel 2412MHz	-13.76	Pass
Middle channel 2437MHz	-13.42	Pass
High channel 2462MHz	-13.70	Pass




Power spectral density



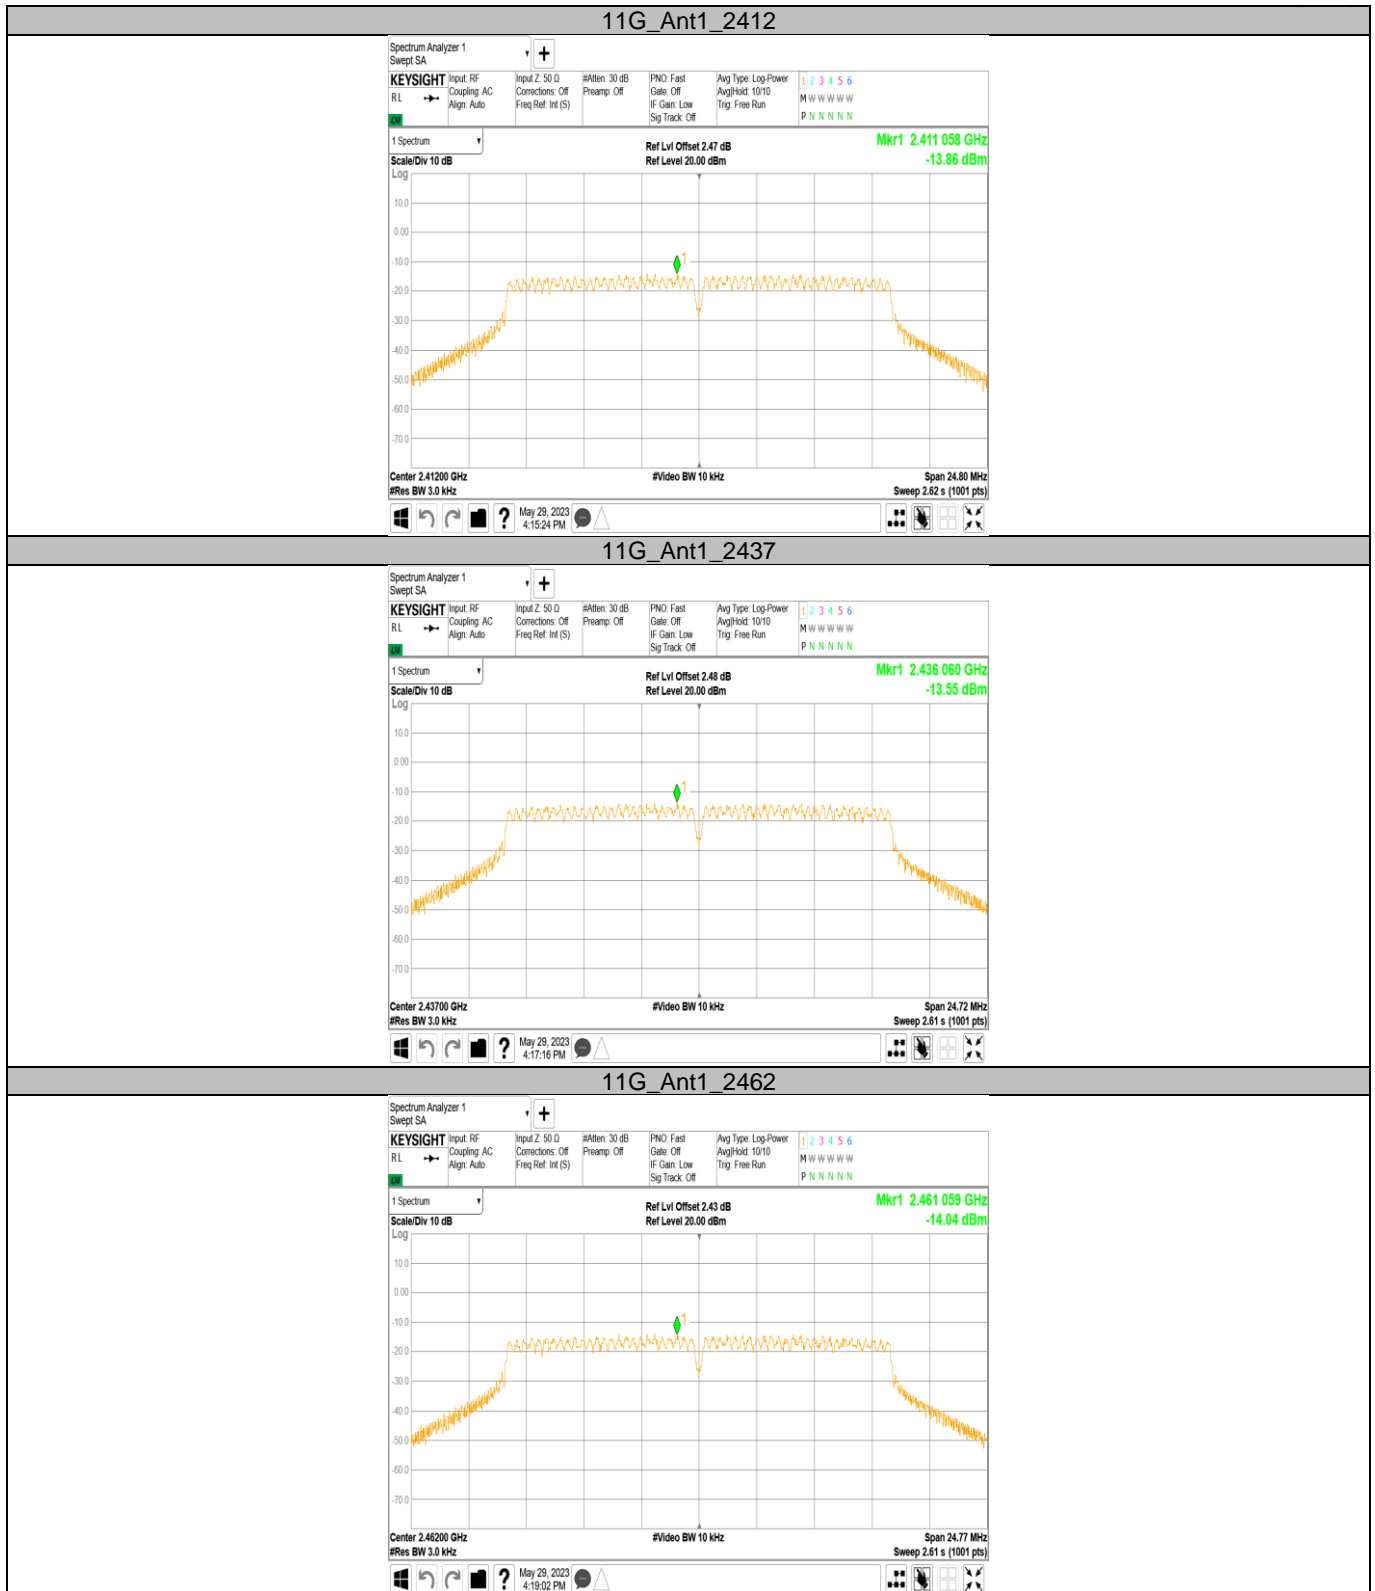





11N20SISO_Ant1_2412

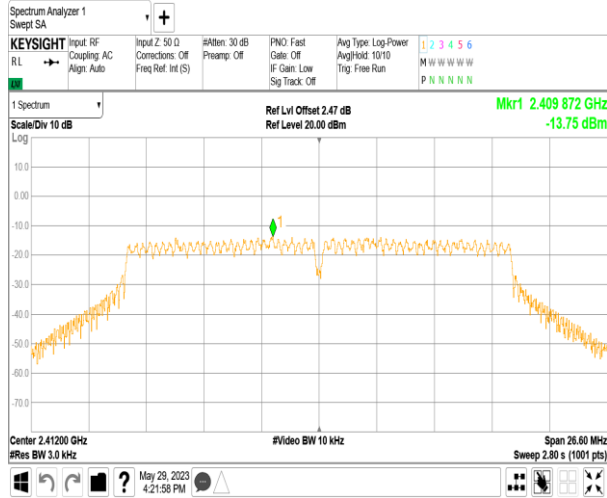

11N20SISO_Ant1_2437

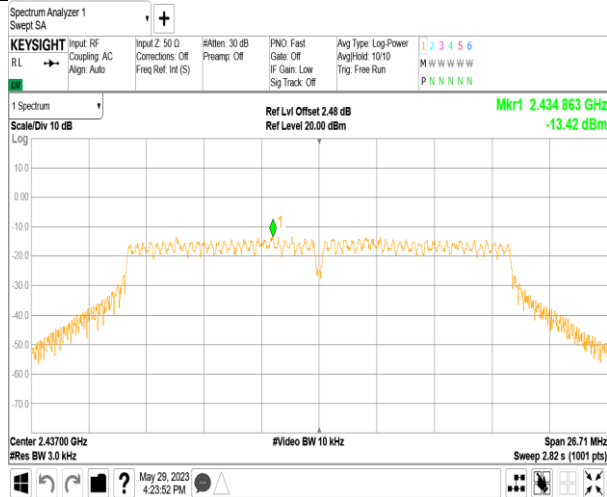

11N20SISO_Ant1_2462

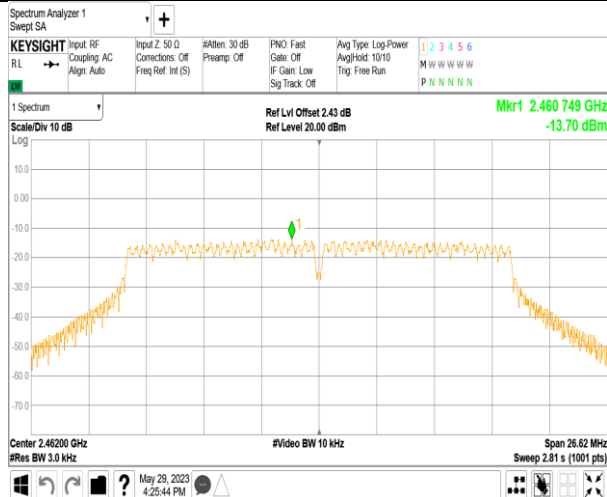



9.5 Spurious RF conducted emissions

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


802.11 B

Out-of-Band Emissions

Channel 1 (2412MHz)

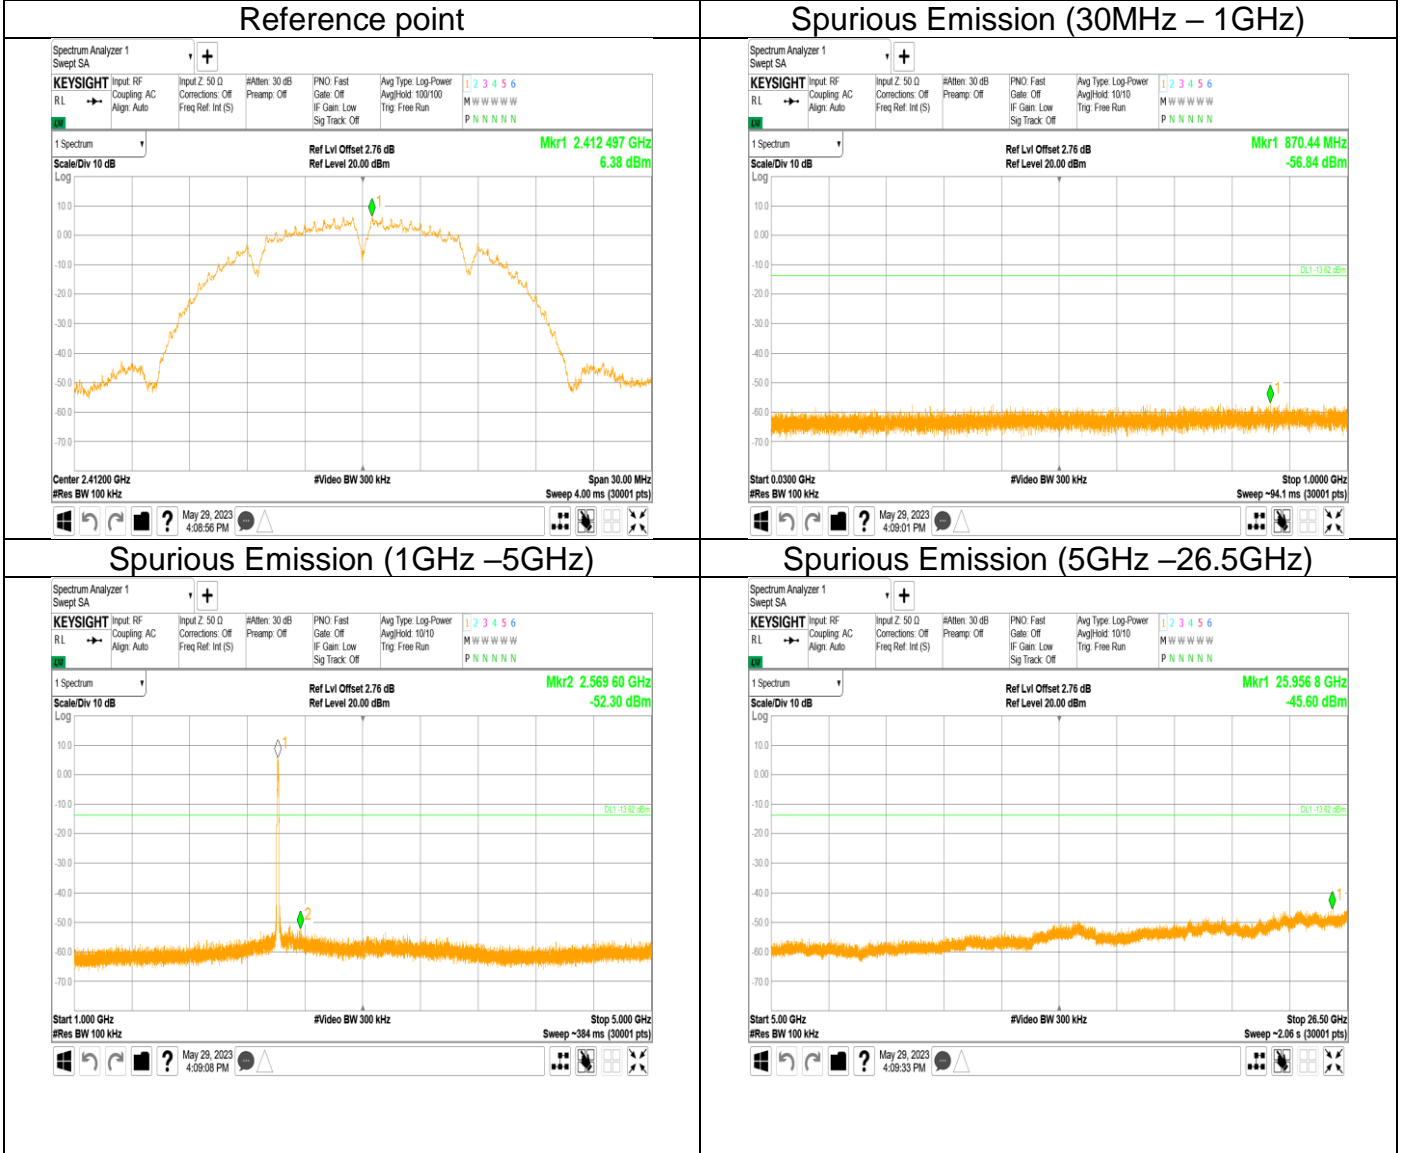


Out-of-Band Emissions Channel 6 (2437MHz)

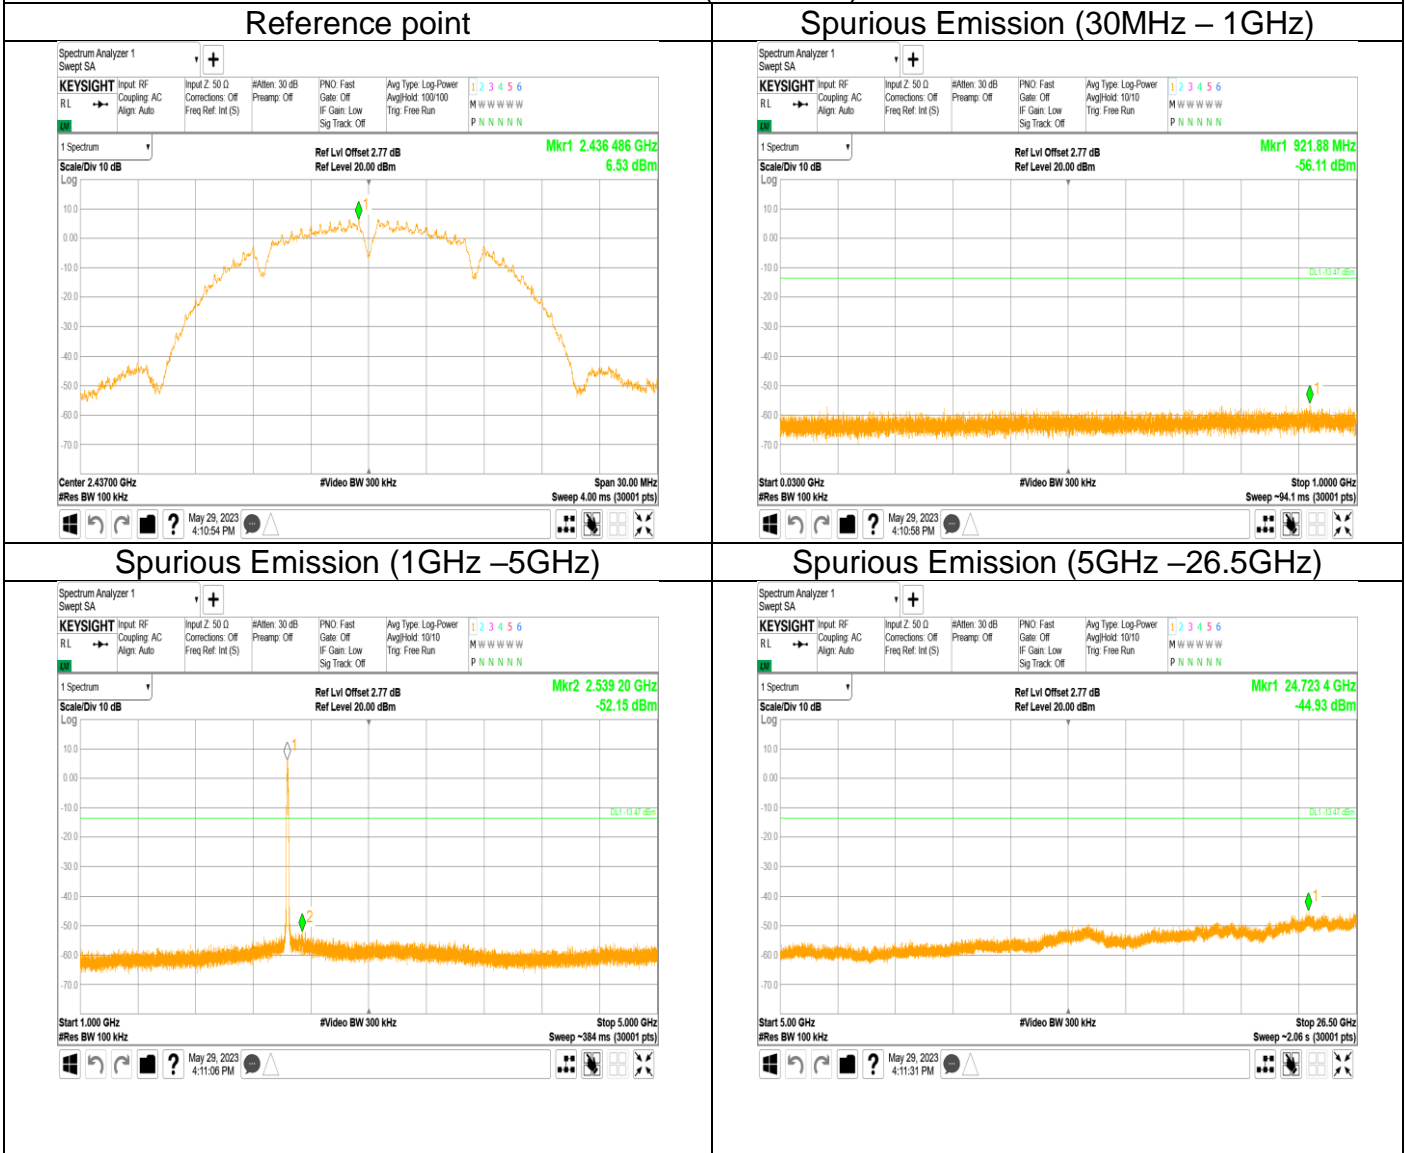


Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point

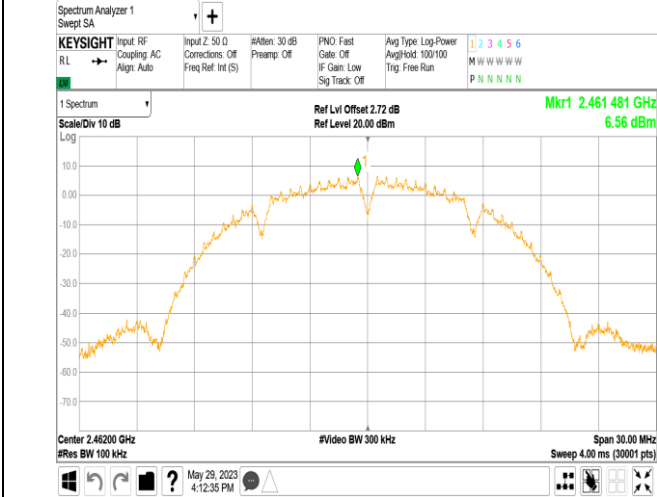


Spurious Emission (30MHz – 1GHz)

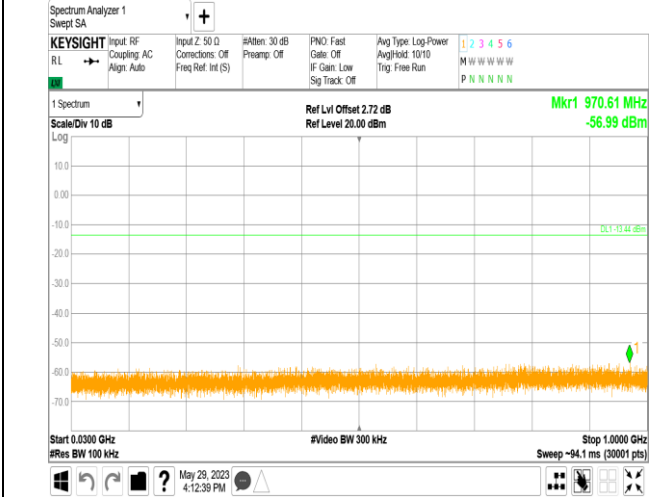

Spurious Emission (1GHz –5GHz)

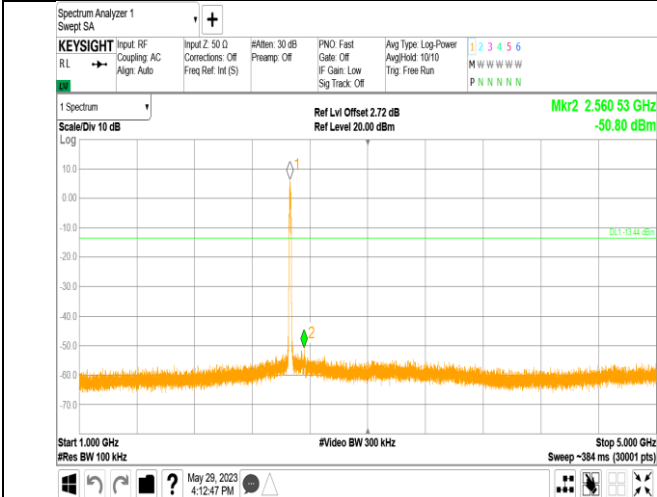


Spurious Emission (5GHz –26.5GHz)

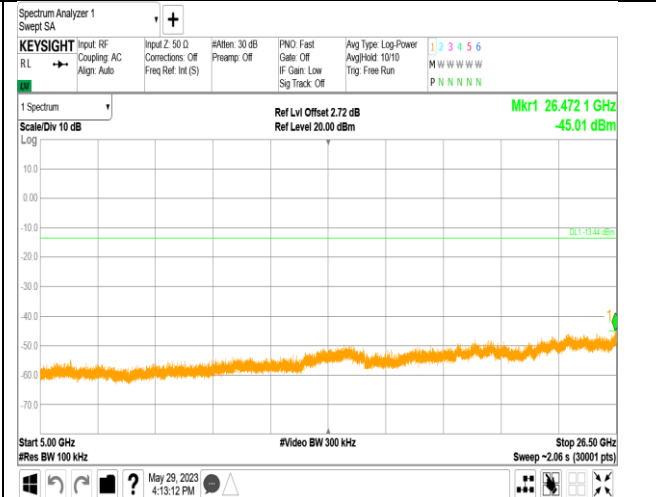


802.11 G

Out-of-Band Emissions
Channel 1 (2412MHz)


Reference point

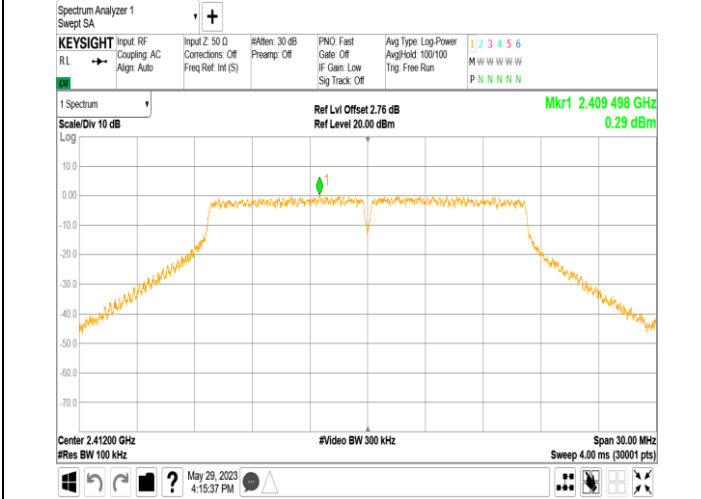


Spurious Emission (30MHz – 1GHz)

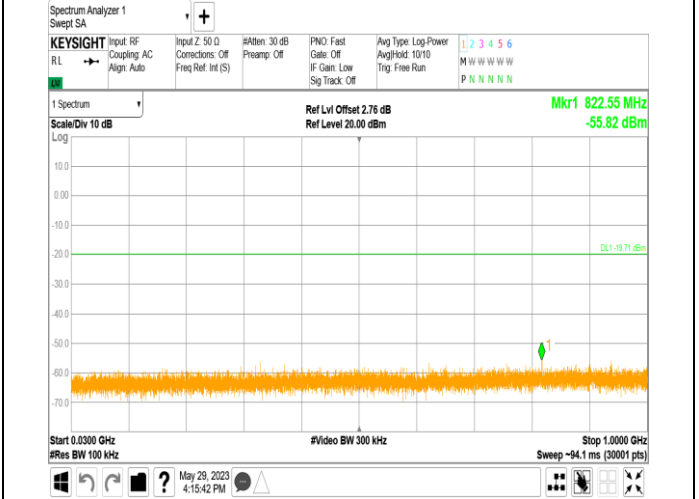

Spurious Emission (1GHz –5GHz)

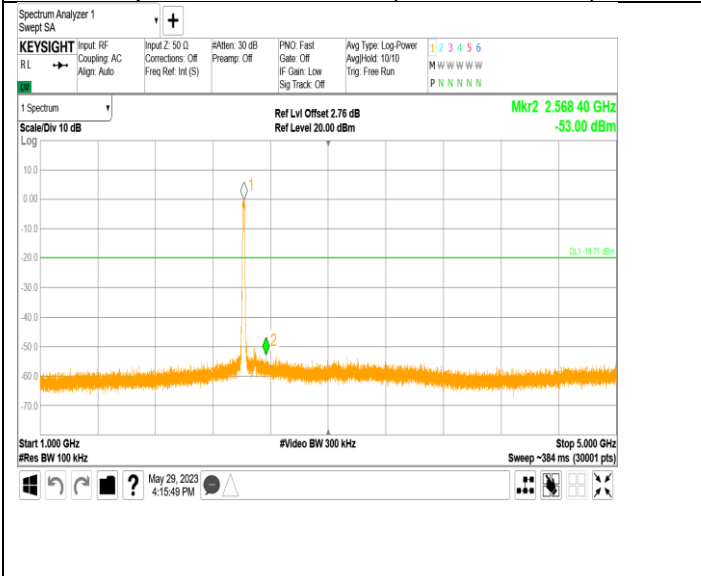


Spurious Emission (5GHz –26.5GHz)

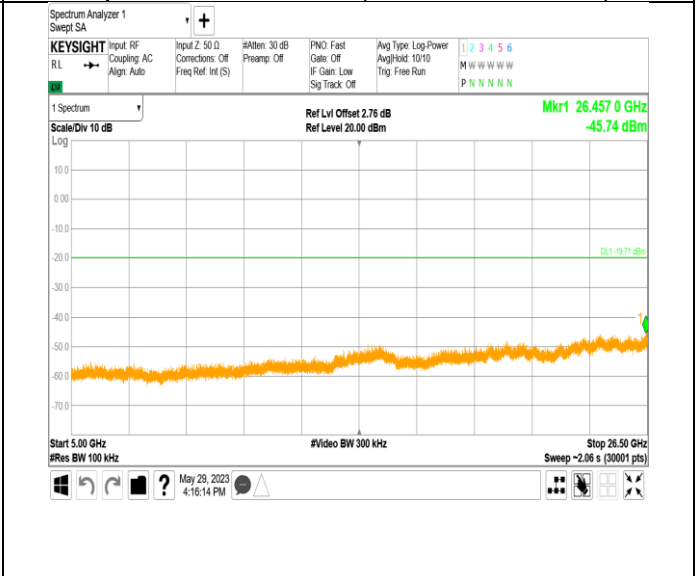


Out-of-Band Emissions
Channel 6 (2437MHz)


Reference point

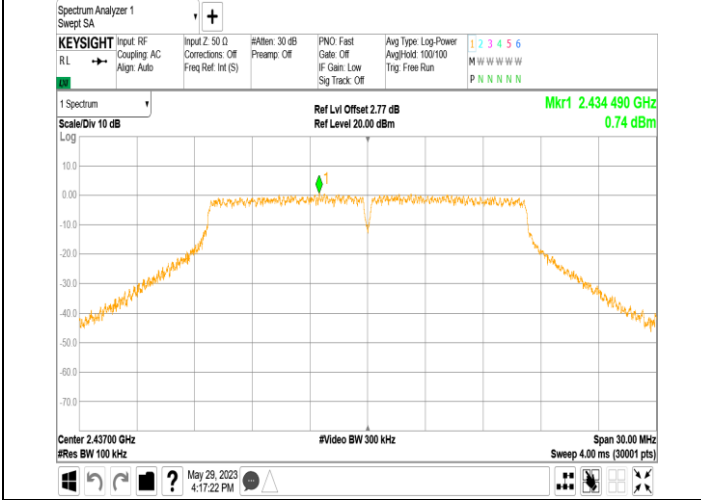


Spurious Emission (30MHz – 1GHz)

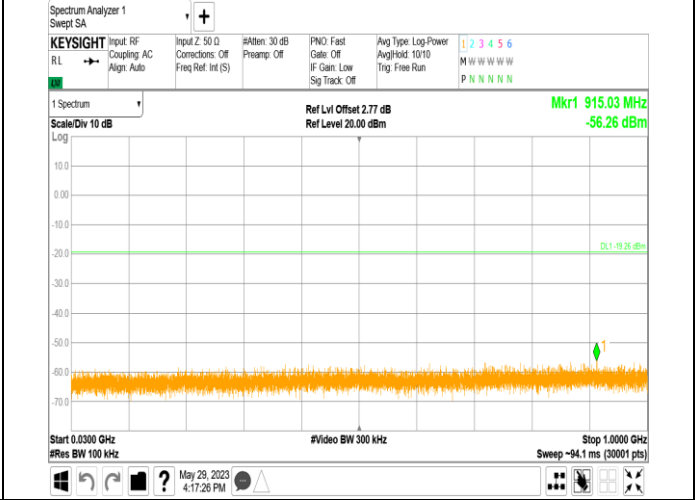

Spurious Emission (1GHz –5GHz)

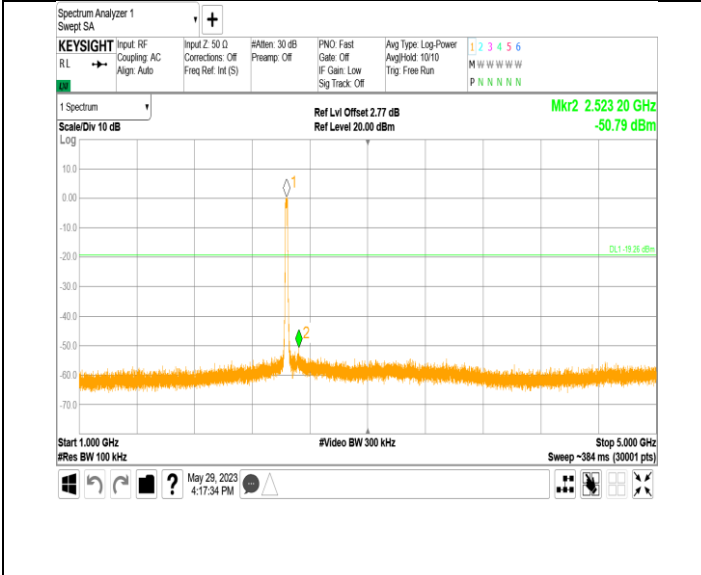


Spurious Emission (5GHz –26.5GHz)

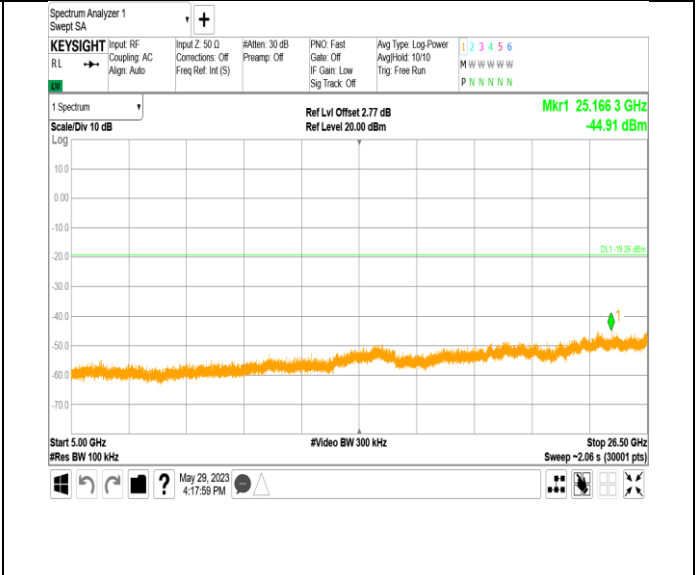




Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point

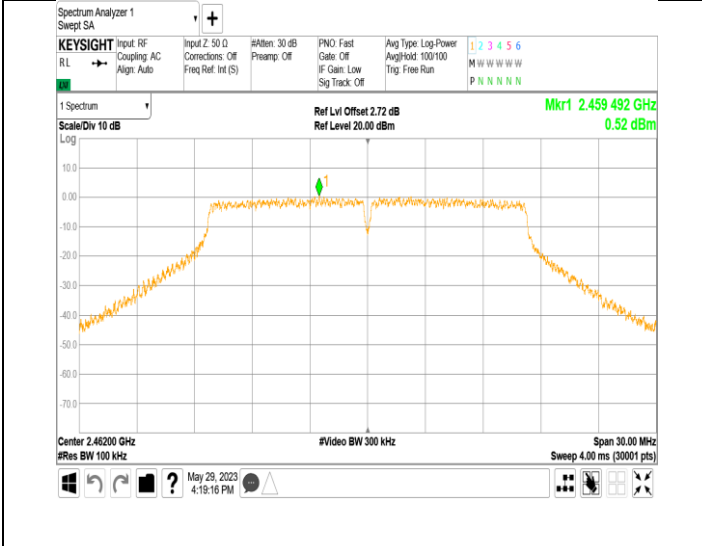


Spurious Emission (30MHz – 1GHz)

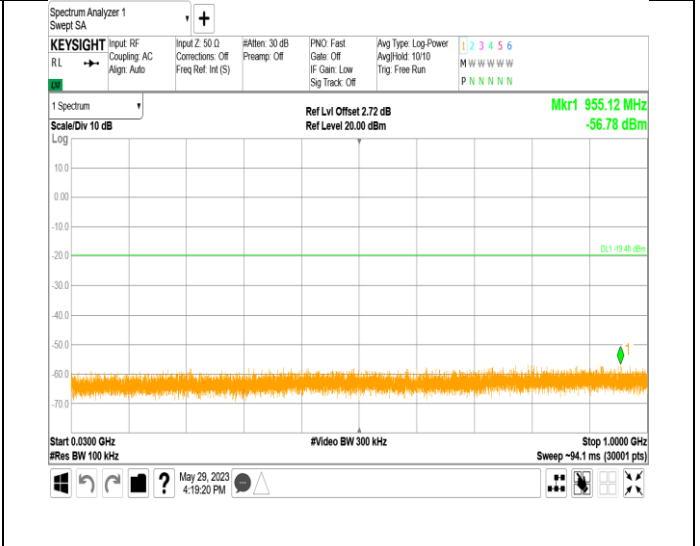

Spurious Emission (1GHz –5GHz)

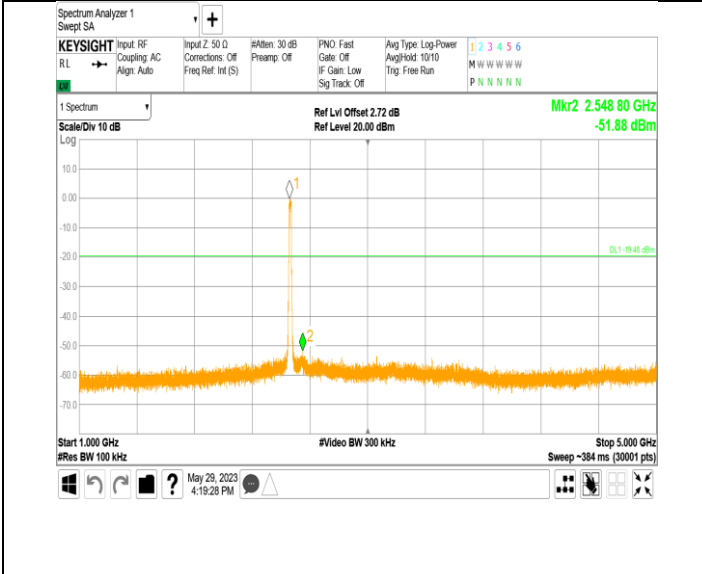

Spurious Emission (5GHz –26.5GHz)

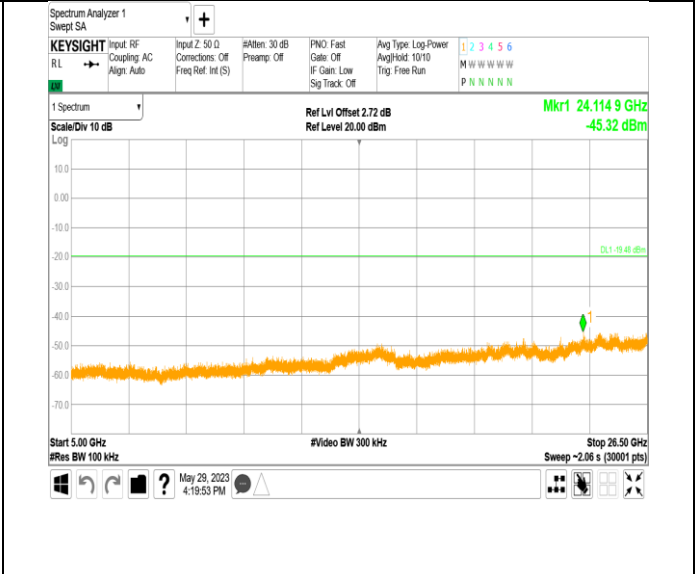


802.11 N HT20


Out-of-Band Emissions

Channel 1 (2412MHz)


Reference point

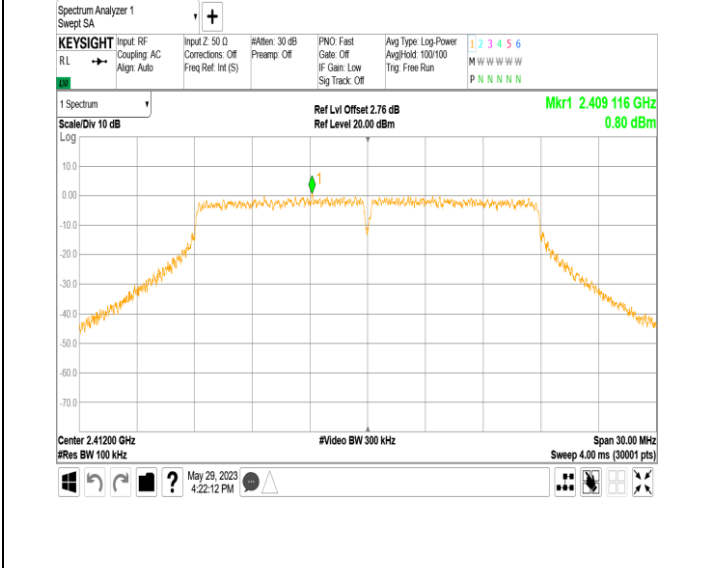


Spurious Emission (30MHz – 1GHz)

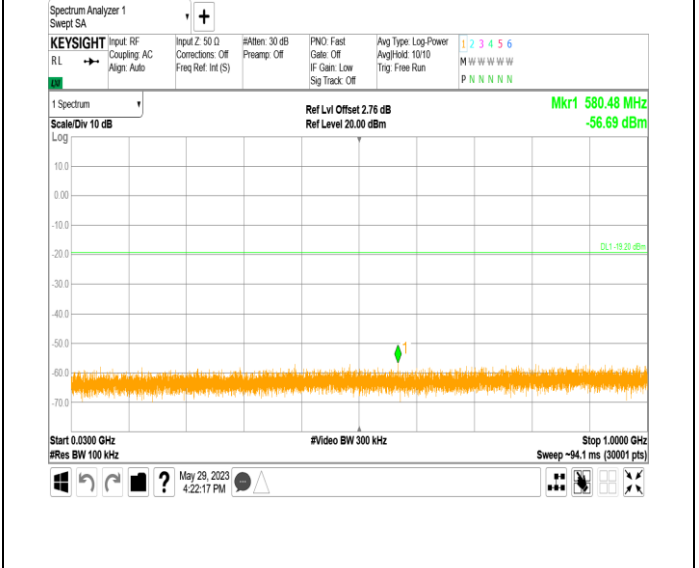

Spurious Emission (1GHz –5GHz)

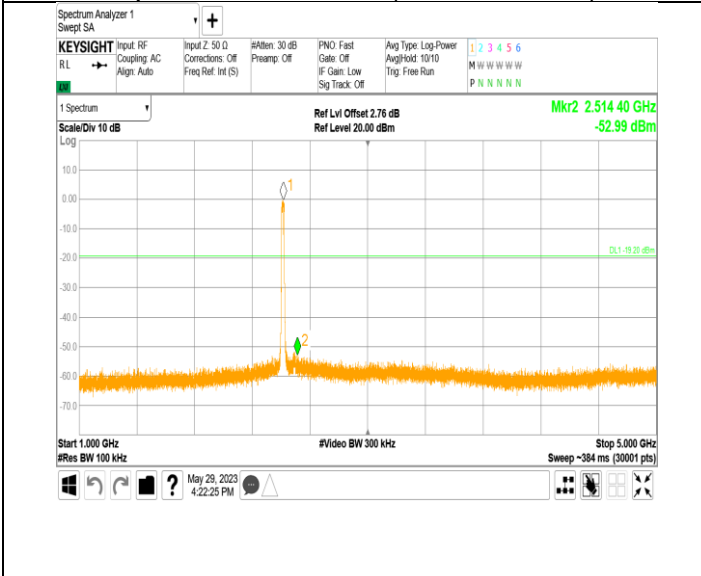


Spurious Emission (5GHz –26.5GHz)

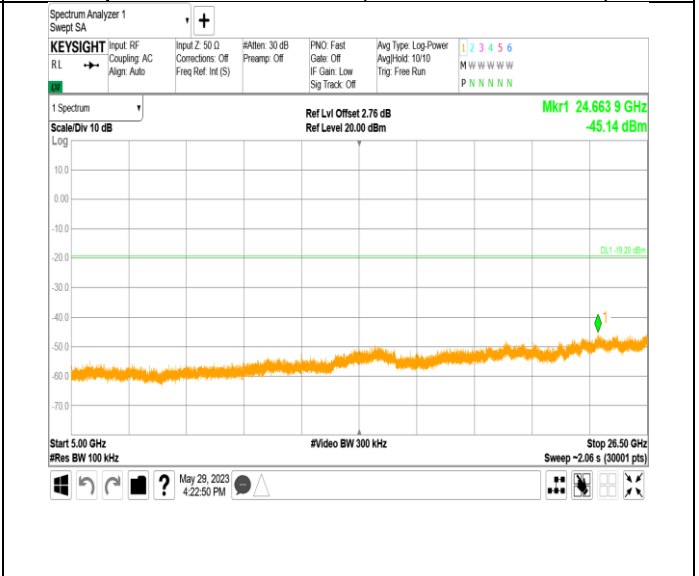


Out-of-Band Emissions
Channel 6 (2437MHz)


Reference point

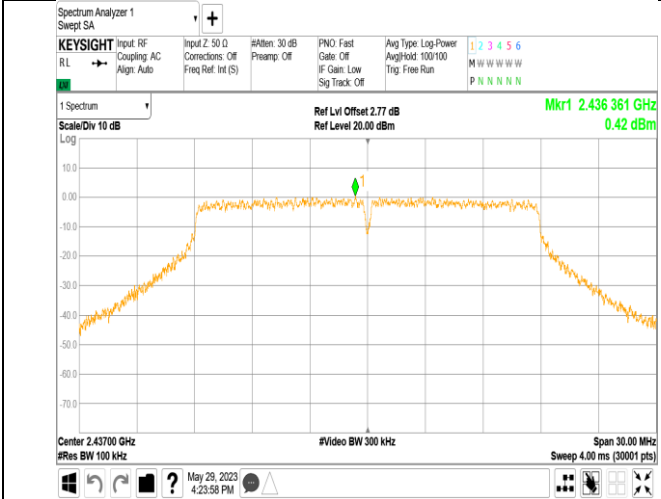


Spurious Emission (30MHz – 1GHz)

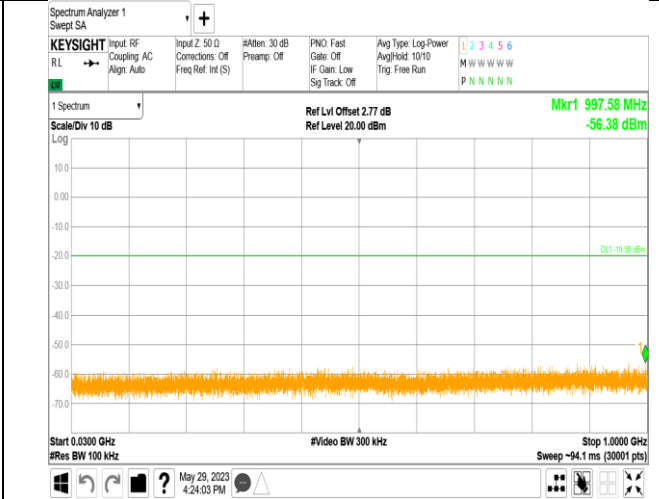

Spurious Emission (1GHz –5GHz)

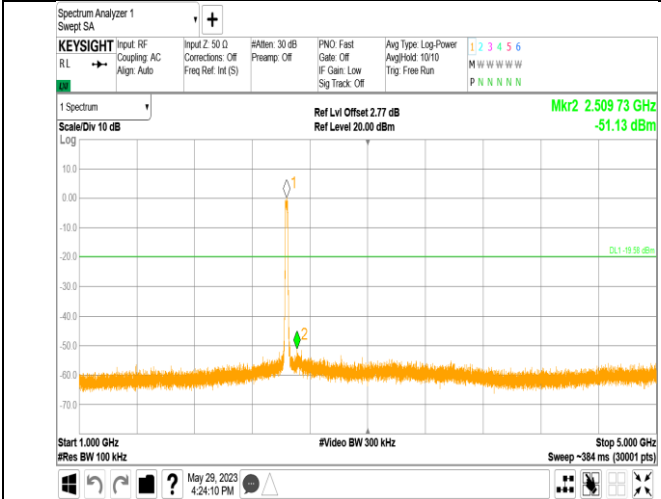


Spurious Emission (5GHz –26.5GHz)

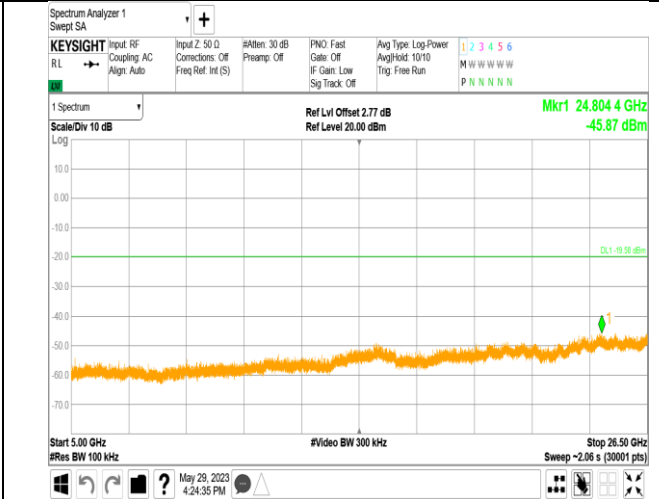


Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point

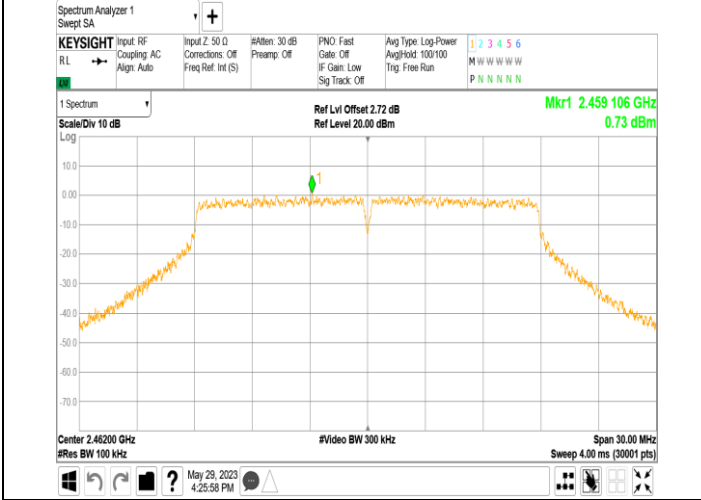


Spurious Emission (30MHz – 1GHz)

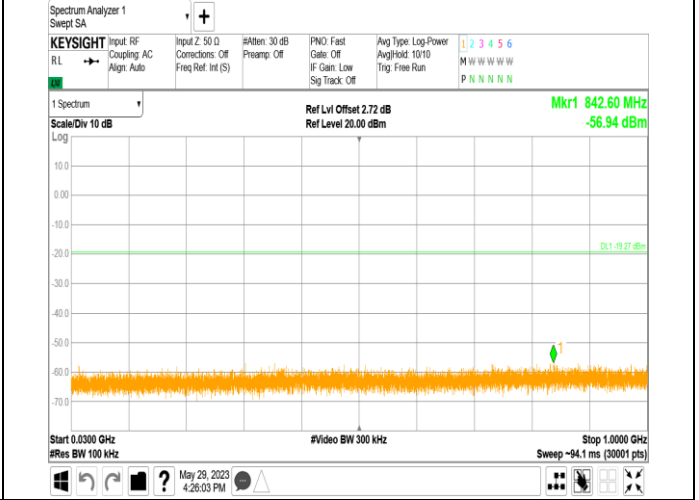

Spurious Emission (1GHz –5GHz)

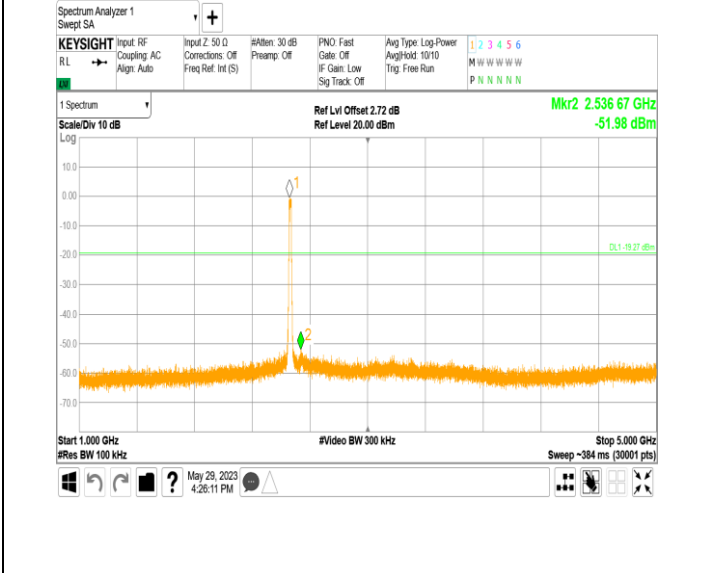

Spurious Emission (5GHz –26.5GHz)

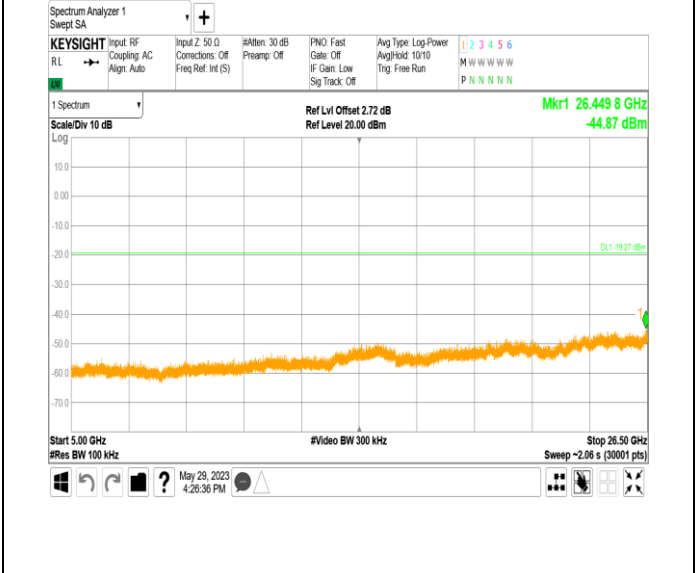

9.6 Band edge

Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.


Limit

According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.




Test result


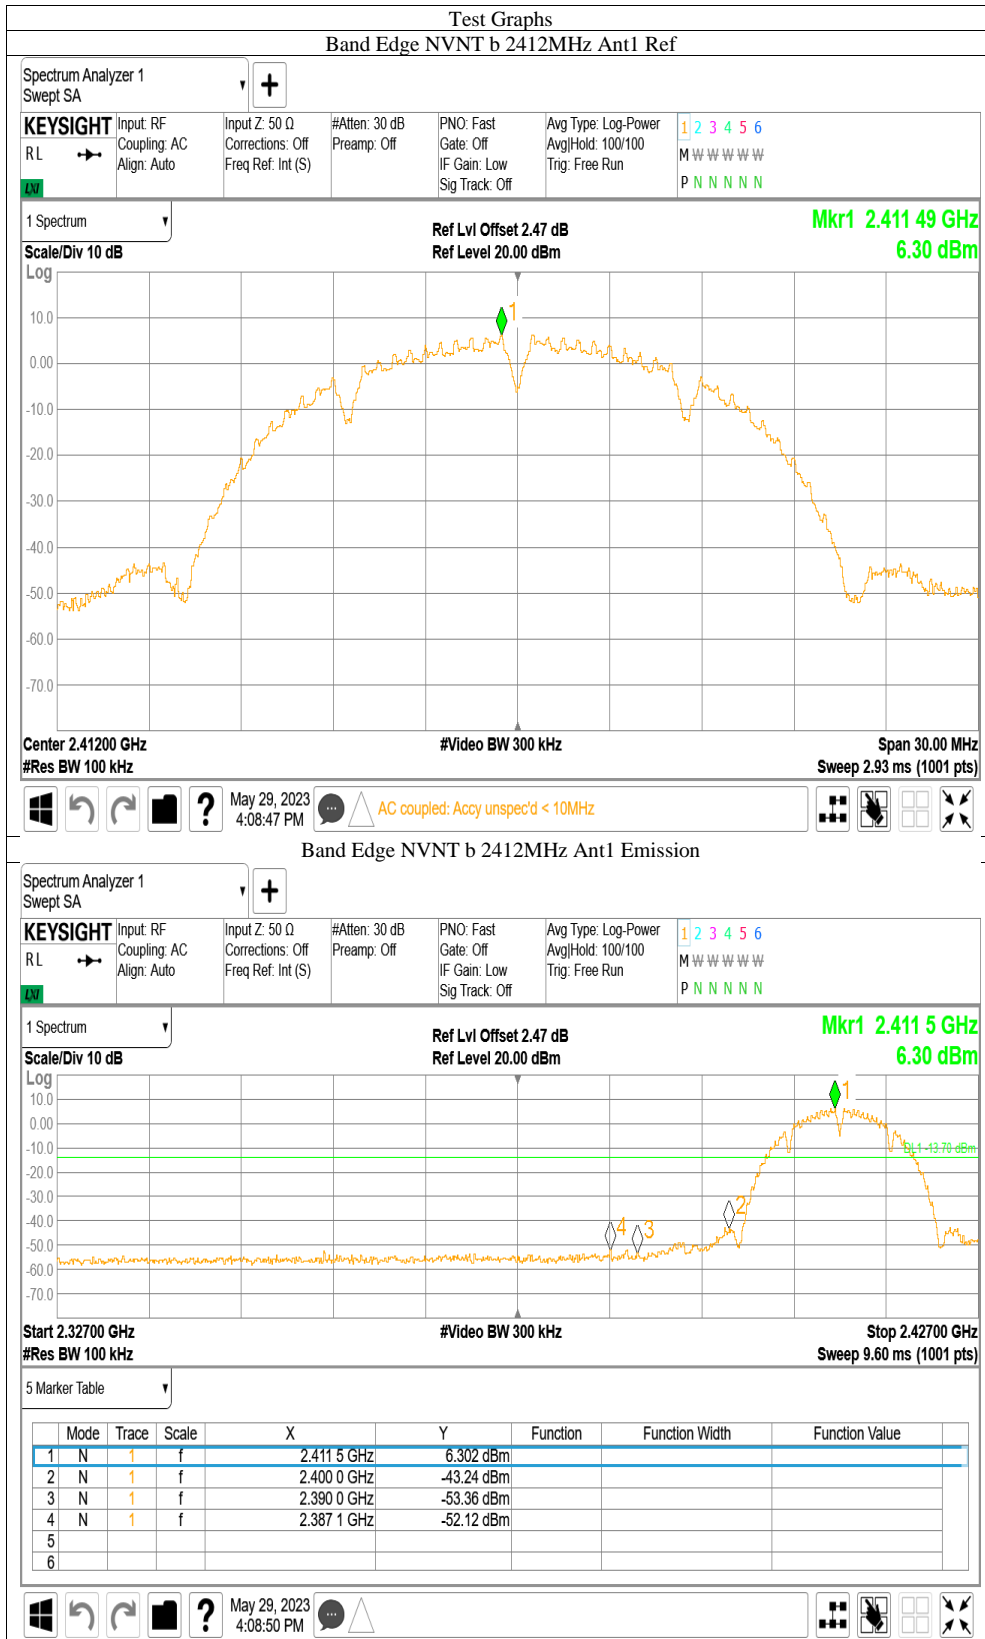


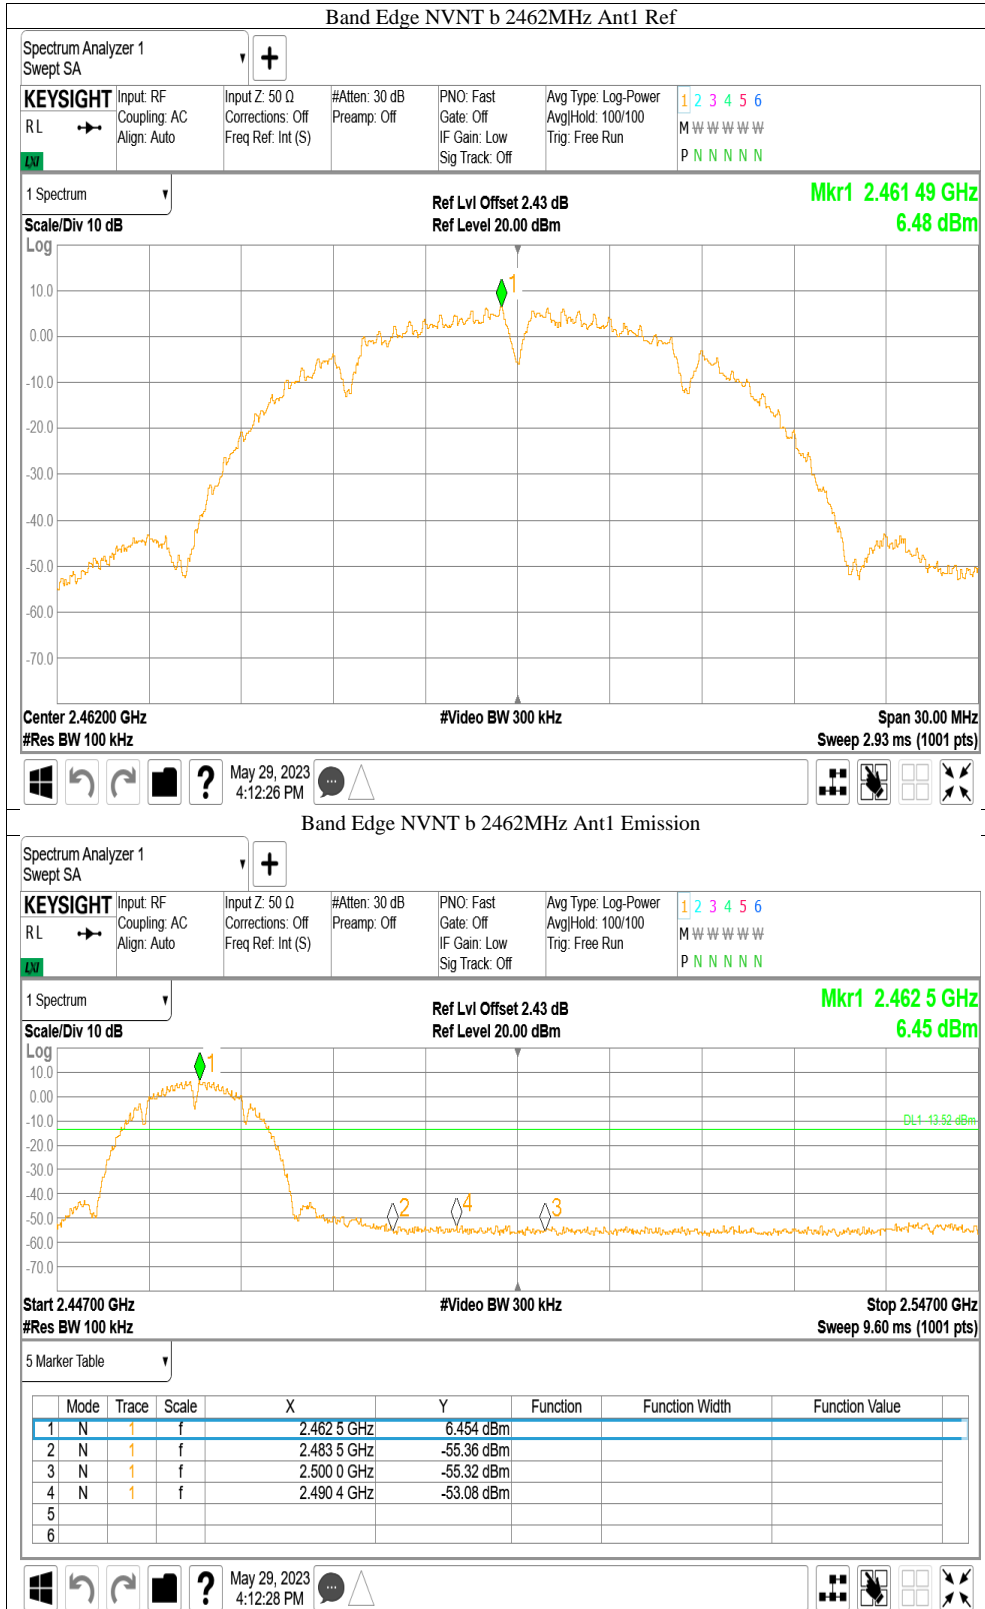





China

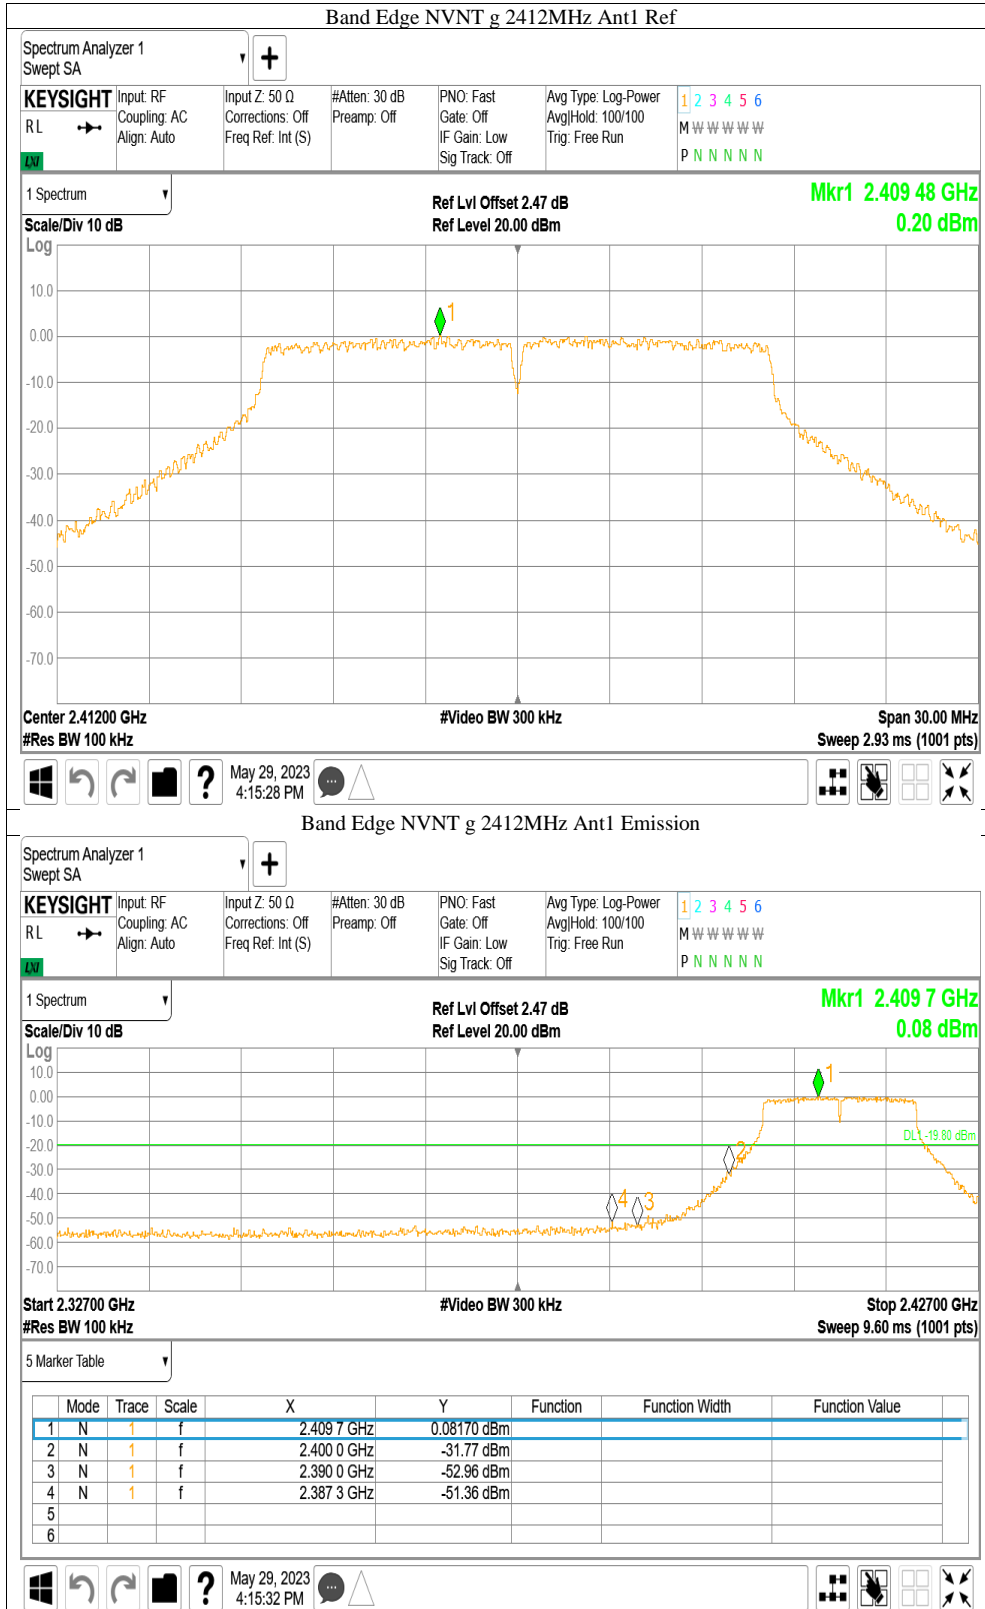

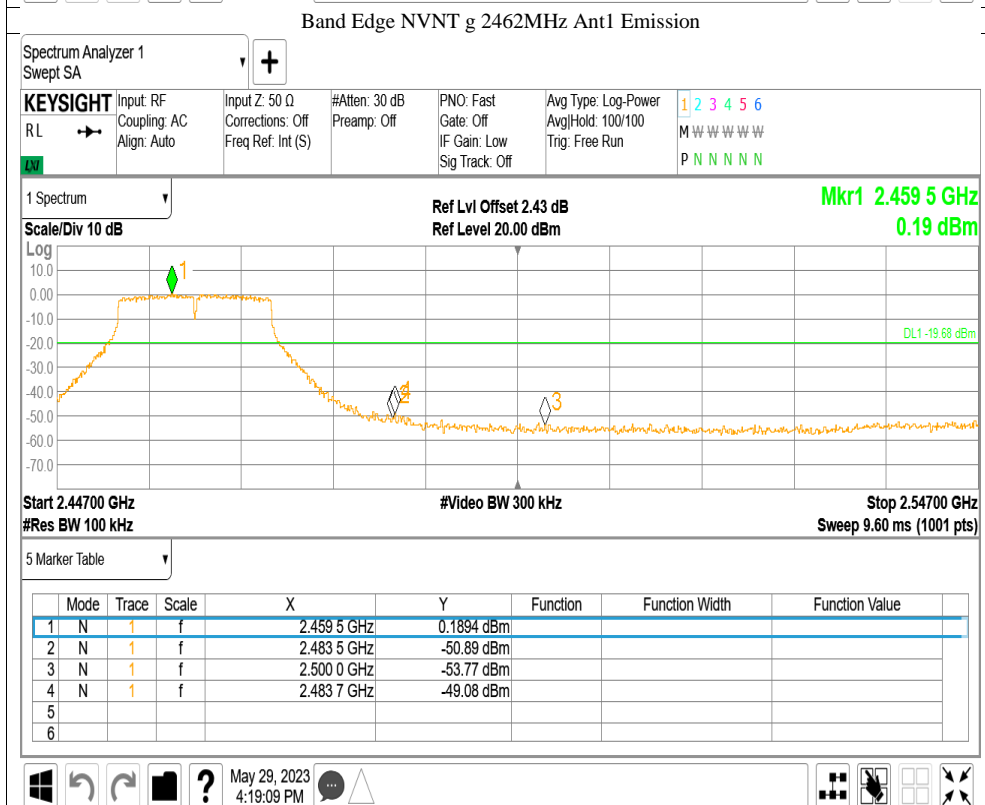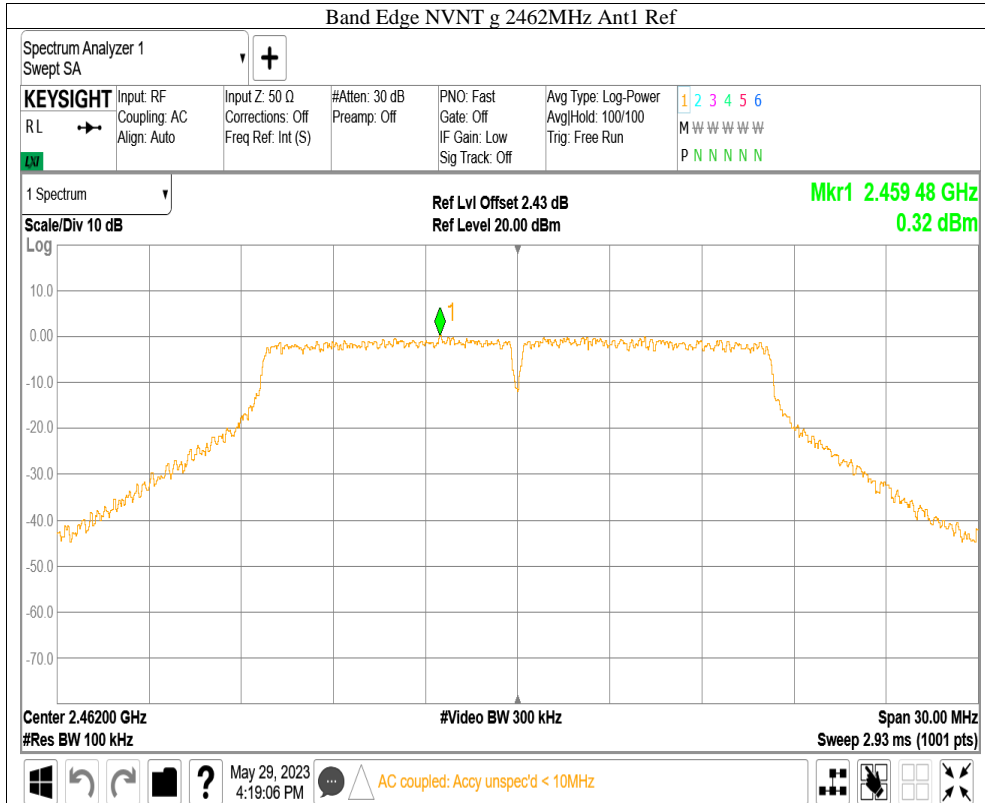





China

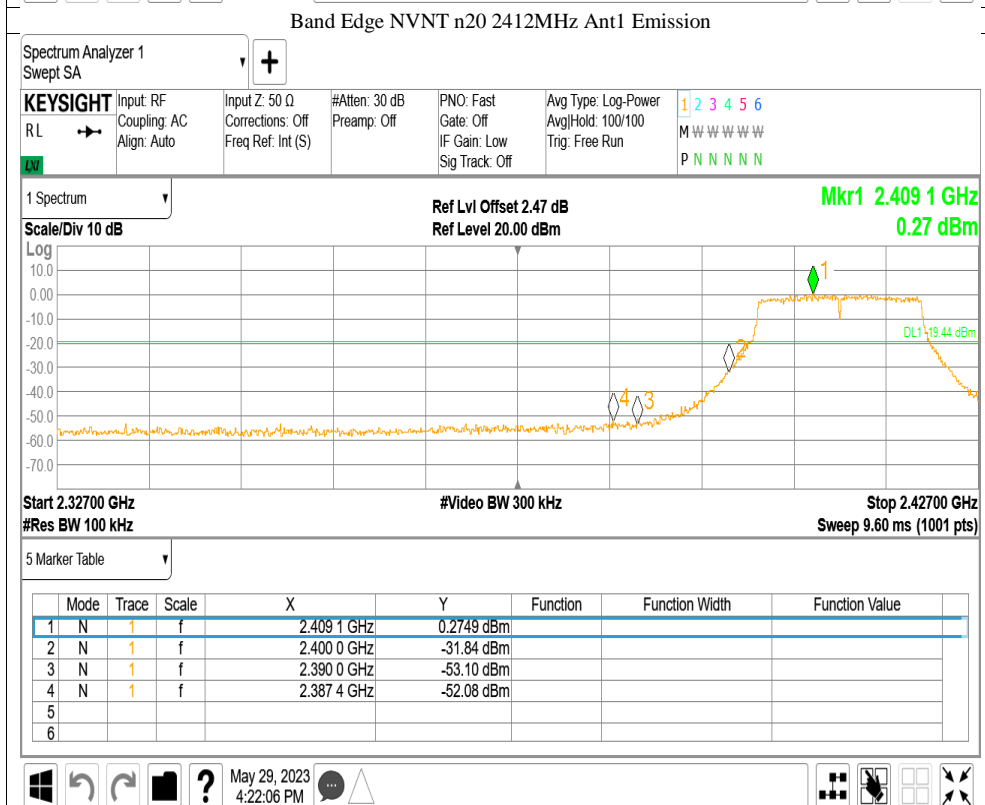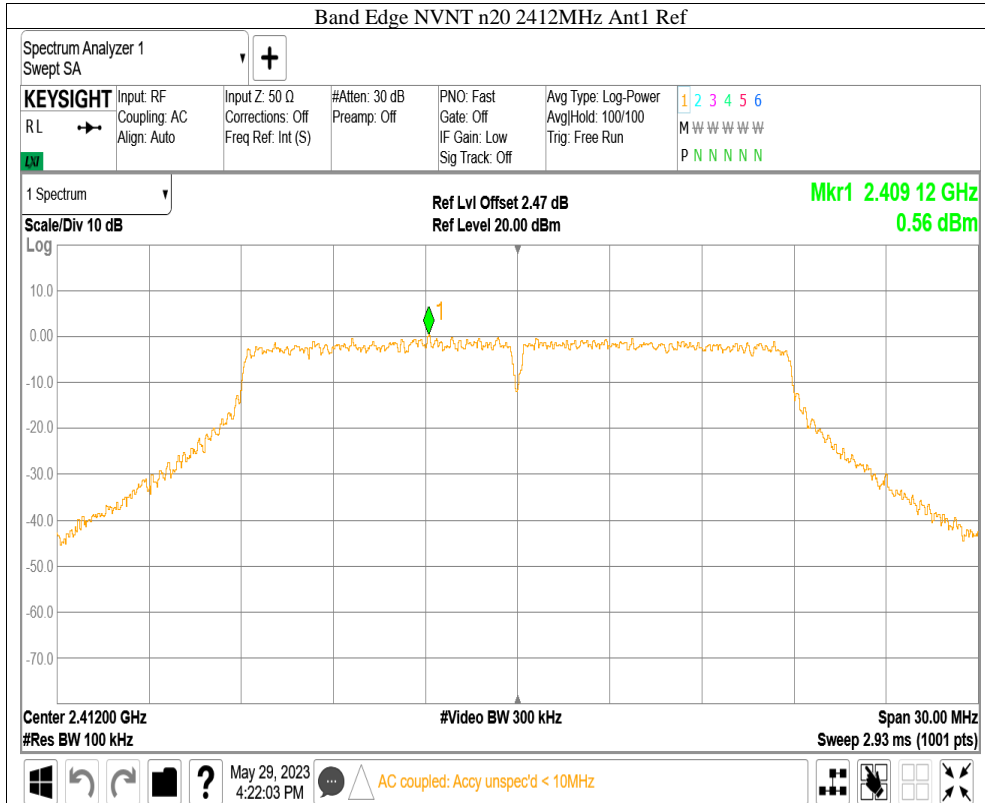



China

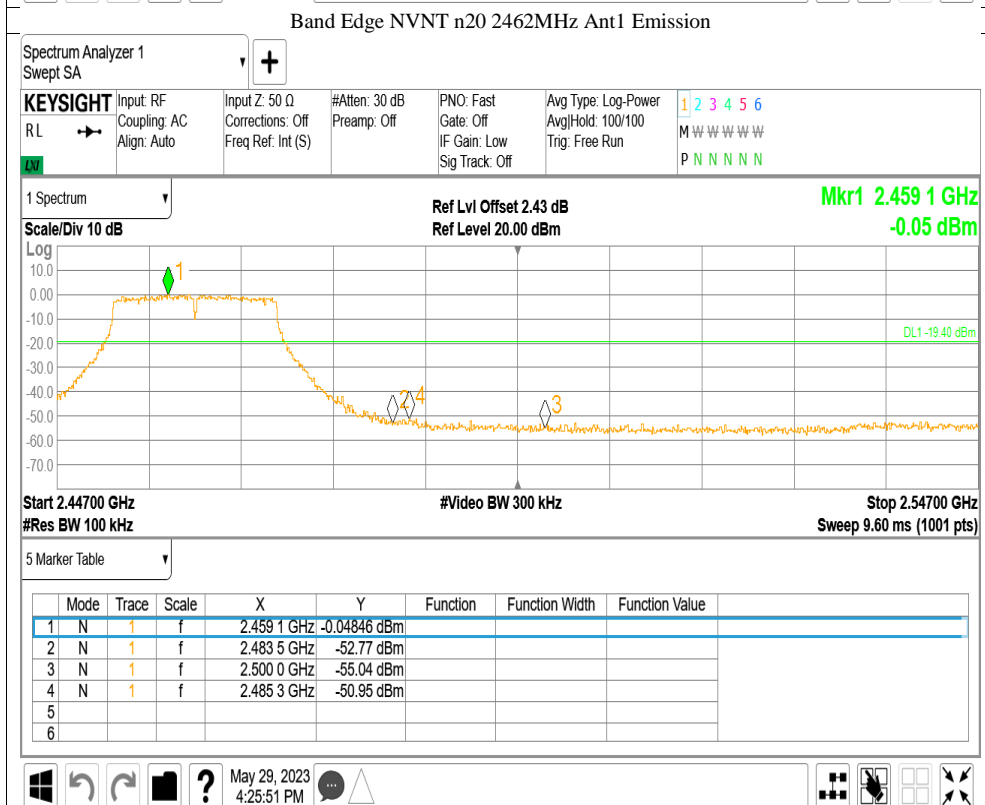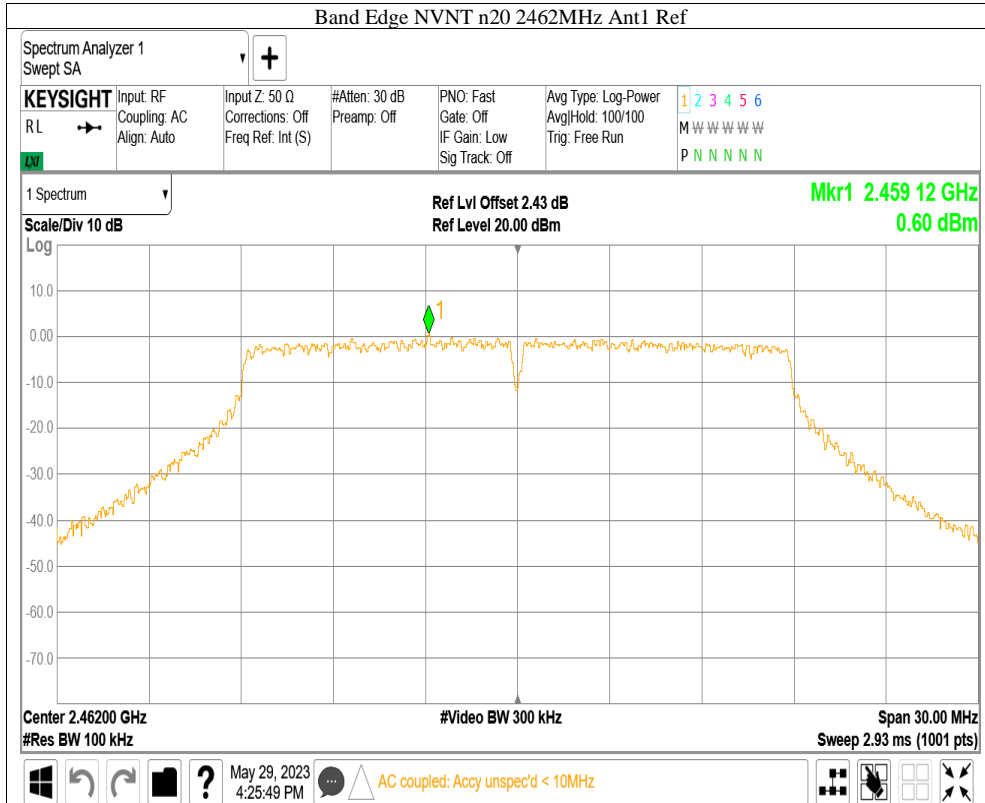

9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 kHz to 120 kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) VBW ≥ [3 × RBW].
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$.
 Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:



- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205 and RSS-GEN 8.10 must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Measured Distance Meters
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30	30	30

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK



Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Pre-scan with three orthogonal axis and worst case as X axis. The only worse case test result is listed in the report.

Transmitting spurious emission test result as below:

Test mode: 802.11B					
Channel 1 (2412MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
2386.77	48.47	74.00	25.53	Peak	Horizontal
4823.96	43.66	74.00	30.34	Peak	Horizontal
2382.51	43.95	74.00	30.05	Peak	Vertical
4823.96	42.63	74.00	31.37	Peak	Vertical

Test mode: 802.11B					
Channel 6 (2437MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
4874.30	42.16	74.00	27.73	Peak	Horizontal
4874.30	43.79	74.00	30.57	Peak	Vertical

Test mode: 802.11B					
Channel 1 (2462MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
2483.79	47.18	74.00	25.41	Peak	Horizontal
4924.16	43.21	74.00	26.3	Peak	Horizontal
2483.69	45.64	74.00	25.79	Peak	Vertical
4924.16	43.12	74.00	31.49	Peak	Vertical

Test mode: 802.11G					
Channel 1 (2412MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
2389.48	52.46	74.00	21.54	Peak	Horizontal
4824.43	41.91	74.00	32.09	Peak	Horizontal
2389.51	45.62	74.00	28.38	Peak	Vertical
4823.86	41.54	74.00	32.46	Peak	Vertical

Test mode: 802.11G					
Channel 6 (2437MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
4873.73	41.98	74.00	32.02	Peak	Horizontal
4873.73	42.37	74.00	31.63	Peak	Vertical

Test mode: 802.11G					
Channel 11 (2462MHz)					
Frequency	Measure	Limit	Margin	Detector	Polarization
(MHz)	Level (dBuV/M)	(dBuV/M)	(dB)		
2483.60	58.54	74.00	15.46	Peak	Horizontal
2483.60	44.50	54.00	9.50	AV	Horizontal
4924.73	43.11	74.00	30.89	Peak	Horizontal
2483.50	49.09	74.00	24.91	Peak	Vertical
4923.60	43.26	74.00	30.74	Peak	Vertical



Test mode: 802.11N(HT20)					
Channel 1 (2412MHz)					
Frequency (MHz)	Measure Level (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2388.76	52.03	74.00	21.97		
4823.86	41.09	74.00	32.91	Peak	Horizontal
2389.36	44.95	74.00	29.05	Peak	Vertical
4825.00	42.57	74.00	31.43	Peak	Vertical

Test mode: 802.11N(HT20)					
Channel 6 (2437MHz)					
Frequency (MHz)	Measure Level (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4874.30	41.39	74.00	32.61		
4875.43	41.84	74.00	32.16	Peak	Vertical

Test mode: 802.11N(HT20)					
Channel 11 (2462MHz)					
Frequency (MHz)	Measure Level (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.60	57.35	74.00	16.65		
2483.60	45.40	54.00	8.60	AV	Horizontal
4928.13	42.6	74.00	31.40	Peak	Horizontal
2483.74	48.72	74.00	25.28	Peak	Vertical
4921.90	42.42	74.00	31.58	Peak	Vertical

Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading



The worst case of Radiated Emission below 1GHz:

30-1000MHz Radiated Emission

EUT Information


EUT Name: Smart Kit
 Model: MDWBRCU1
 Client: Hangzhou Tuya Information Technology Co.,Ltd
 Op Cond: Power on, TX_2462_N20, DC 5V, T20.5, H48.3%, P101.5Pa
 Operator: Cheng Huali
 Test Spec: FCC Part 15.209(a); RSS-GEN
 Comment: Horizontal
 Sample No: SHA-731275-2

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
 Receiver: [ESR 3]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

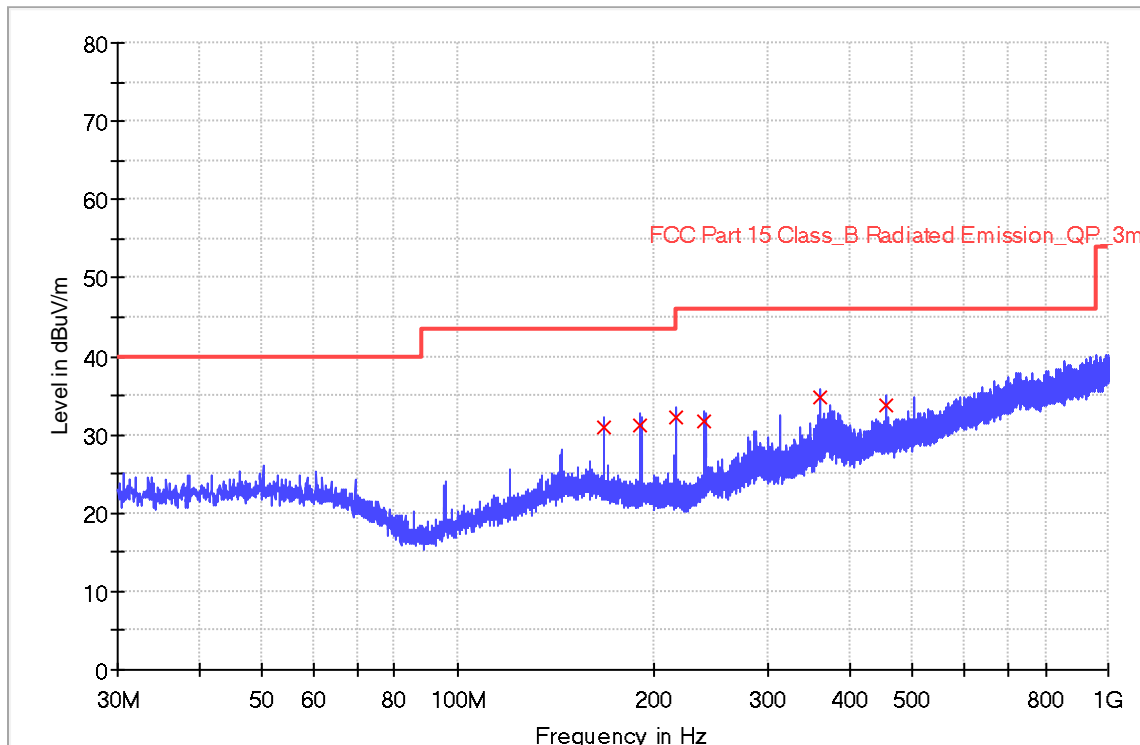

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
167.920000	30.9	1000.0	120.000	204.0	H	123.0	20.4	12.6	43.5
191.200000	31.1	1000.0	120.000	136.0	H	234.0	18.4	12.4	43.5
216.000000	32.2	1000.0	120.000	195.0	H	294.0	17.5	13.8	46.0
239.520000	31.8	1000.0	120.000	175.0	H	53.0	19.5	14.2	46.0
360.040000	34.7	1000.0	120.000	105.0	H	170.0	23.0	11.3	46.0
455.960000	33.8	1000.0	120.000	200.0	H	12.0	25.9	12.2	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



30-1000MHz Radiated Emission

EUT Information


EUT Name: Smart Kit
 Model: MDWBRCU1
 Client: Hangzhou Tuya Information Technology Co.,Ltd
 Op Cond: Power on, TX_2462_N20, DC 5V, T20.5, H48.3%, P101.5Pa
 Operator: Cheng Huali
 Test Spec: FCC Part 15.209(a); RSS-GEN
 Comment: Vertical
 Sample No: SHA-731275-2

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
 Receiver: [ESR 3]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

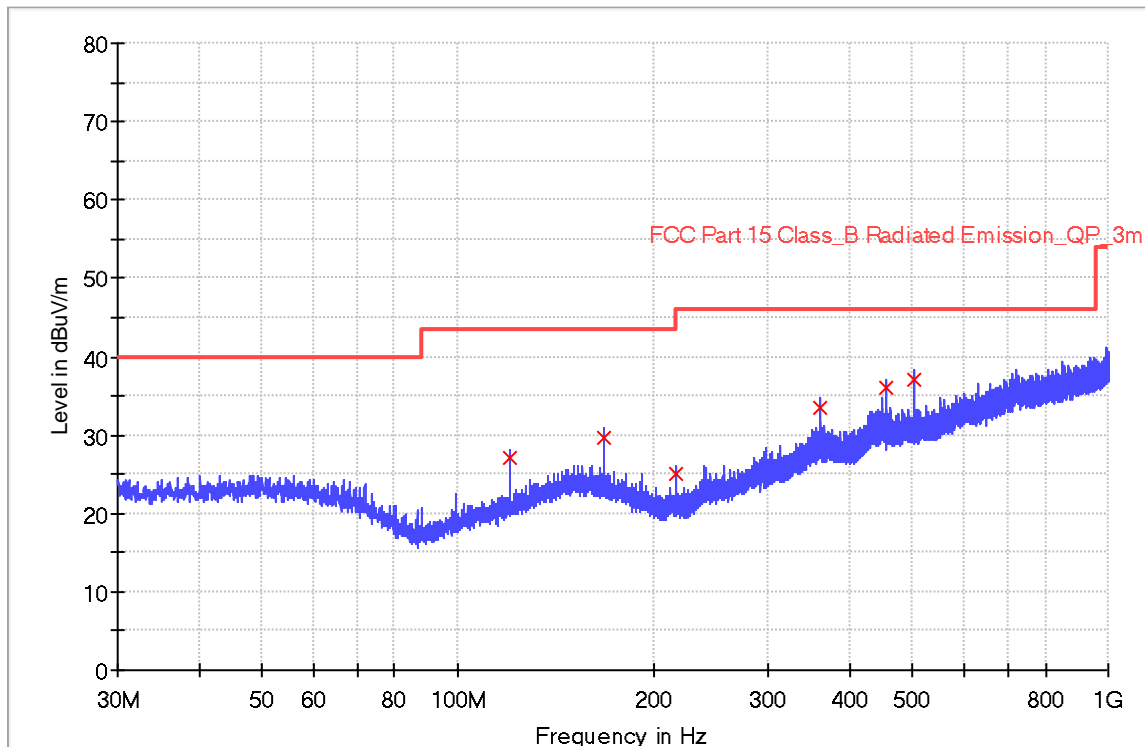

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
120.000000	27.0	1000.0	120.000	132.0	V	64.0	18.1	16.5	43.5
167.920000	29.7	1000.0	120.000	120.0	V	296.0	20.4	13.8	43.5
215.960000	25.0	1000.0	120.000	106.0	V	24.0	17.5	18.5	43.5
359.960000	33.5	1000.0	120.000	115.0	V	173.0	23.0	12.5	46.0
455.960000	36.1	1000.0	120.000	102.0	V	109.0	25.9	9.9	46.0
504.000000	37.1	1000.0	120.000	100.0	V	245.0	26.7	8.9	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



10 Test Equipment List

List of Test Instruments
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2022-8-1	2023-7-31
	Wideband power sensor	Rohde & Schwarz	NRP-Z81	104782	2022-3-18	2023-3-17
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2022-8-1	2023-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2022-8-1	2023-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2019-9-23	2024-9-22
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-3-15	2024-3-14
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2022-8-1	2023-7-31
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2022-6-13	2023-6-12
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	002222727	2020-9-23	2023-9-22
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-8	2024-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2022-8-1	2023-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2022-8-1	2023-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	MTS 8310	MWRFTest	2.0.0.0
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.16dB
Radiated Disturbance	30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB
Carrier power conducted measurement	50MHz~18GHz, 1.238dB
Spurious Emission Conducted Measurement	9kHz ~40GHz, 1.224dB

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----