



Certificate No.: 3745.01



# FCC - TEST REPORT

Report Number : **709502401316-00A** Date of Issue: March 13,2024

Model : T1-U-HL

Product Type : Wi-Fi and Bluetooth Module

Applicant : Hangzhou Tuya Information Technology Co.,Ltd

Address : Room 301,Building 1,Huace Center,Xihu District,  
Hangzhou,Zhejiang, China

Manufacturer : Hangzhou Tuya Information Technology Co.,Ltd

Address : Room 301,Building 1,Huace Center,Xihu District,  
Hangzhou,Zhejiang, China

Test Result :  **Positive**       **Negative**

Total pages including Appendices : 56



*TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*



# 1 Table of Contents

1	Table of Contents	2
2	Report Modification Record	3
3	Details about the Test Laboratory	3
4	Description of the Equipment under Test	4
5	Summary of Test Standards	6
6	Summary of Test Results	7
7	General Remarks	8
8	Test Setups	9
9	Systems test configuration	12
10	Technical Requirement	13
10.1	Conducted Emission	13
10.2	Conducted peak output power	18
10.3	6dB bandwidth	19
10.4	Power spectral density	23
10.5	Spurious RF conducted emissions	27
10.6	Band edge	37
10.7	Spurious radiated emissions for transmitter	44
11	Test Equipment List	53
12	System Measurement Uncertainty	54
13	Photographs of Test Set-ups	55
14	Photographs of EUT	56



## 2 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
-00A	First Issue	03/13/2024

## 3 Details about the Test Laboratory

### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch  
No.16 Lane, 1951 Du Hui Road,  
Shanghai 201108,  
P.R. China

Telephone: +86 21 6141 0123

Fax: +86 21 6140 8600

FCC Registration No.: 820234

FCC Designation Number: CN1183

ISED CAB identifier CN0101

IC Registration No.: 31668



## 4 Description of the Equipment under Test

Product: Wi-Fi and Bluetooth Module  
 Model no.: T1-U-HL  
 FCC ID: 2ANDL-T1-U-HL  
 Rating: 3.0-3.6V DC  
 RF Transmission Frequency: Wi-Fi:2412-2462MHz  
 Bluetooth LE:2402~2480MHz  
 No. of Operated Channel: 2.4GHz WIFI: 11 for 802.11b/g/n(HT20)  
 2.4GHz BLE: 40

Modulation: Direct Sequence Spread Spectrum (DSSS) for 802.11b  
 Orthogonal Frequency Division Multiplexing (OFDM) for 802.11g/n; 2.4GHz BLE: GFSK

Channel list:

802.11b/g/n(HT20)			
Ch	Fre(MHz)	Ch	Fre(MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Bluetooth Low Energy							
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



Antenna type: Onboard PCB antenna

Antenna Gain: -0.23dBi

Description of the EUT: The Equipment Under Test (EUT) is a Wi-Fi and Bluetooth module which support 2.4GHz Wi-Fi and BLE 5.2(support 1Mbps data rate). We tested it and listed the worst data in this report.

Test sample no.: SHA-793030-2 (RF radiated); SHA-793030-3 (RF conducted)

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



## 5 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2013.

## 6 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition	Pages	Test Site	Test Result			
			Pass	Fail	N/A	
§15.207	Conducted emission AC power port	13-17	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (3)	Conducted peak output power	18	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB bandwidth	19-22	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	23-26	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	27-36	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	37-43	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209	Spurious radiated emissions for transmitter	44-52	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses PCB antenna, which gain is -0.23dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.



## 7 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID:2ANDL-T1-U-HL, complies with Section 15.207,15.209,15.231,15.247 of the FCC Part 15, Subpart C Rules.

This report is only for the 2.4GHz Wi-Fi test report, for the 2.4GHz BLE test report please refer to 709502401316-00B.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: February 20, 2024

Testing Start Date: February 26, 2024

Testing End Date: March 8, 2024

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:



Hui TONG  
Review Engineer


Jiayi XU  
Project Engineer

Cheng Huali  
Test Engineer




## 8 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

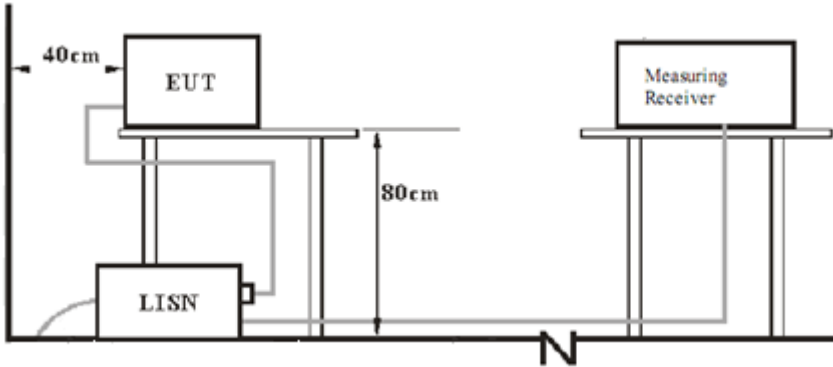


### 7.2 Radiated test setups


#### 9kHz ~ 30MHz Test Setup:

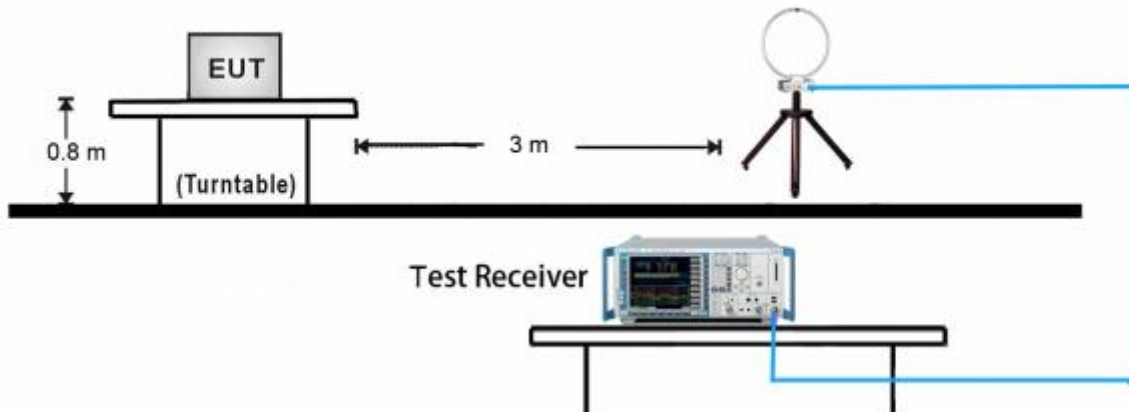


30MHz ~ 1GHz Test Setup:

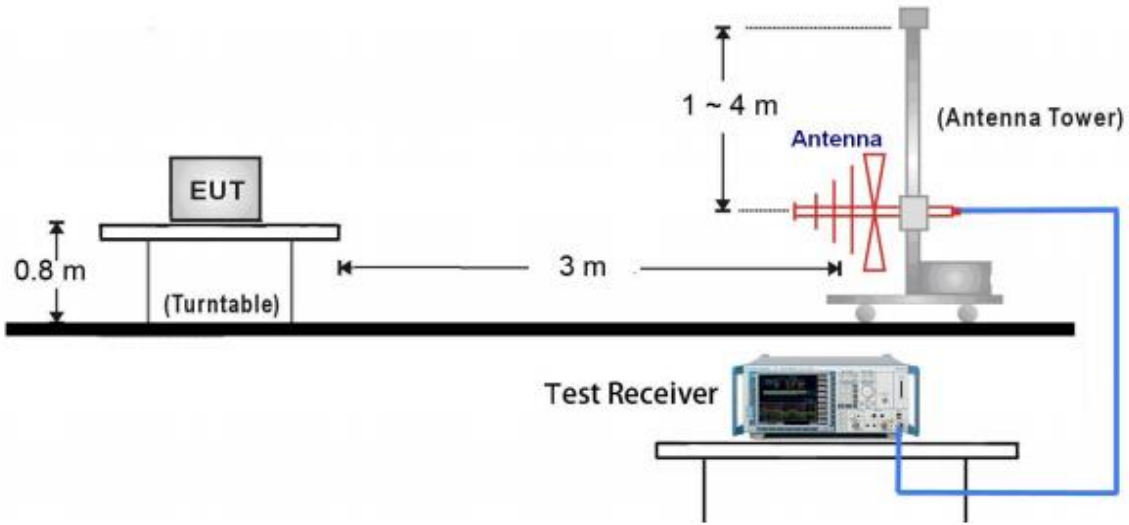

1GHz ~ 18GHz Test Setup:

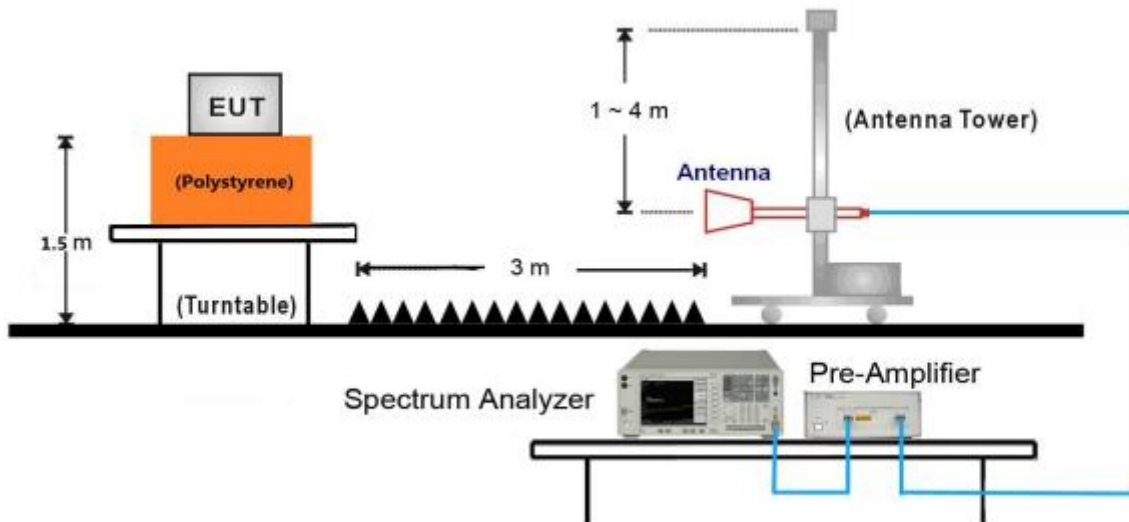


### 18GHz ~ 25GHz Test Setup:

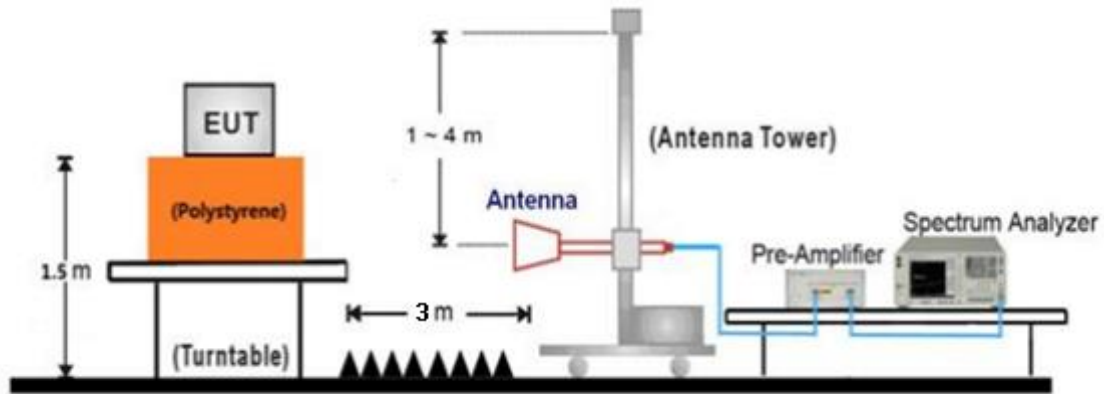

### 7.3 Conducted RF test setups

For Conducted peak output power

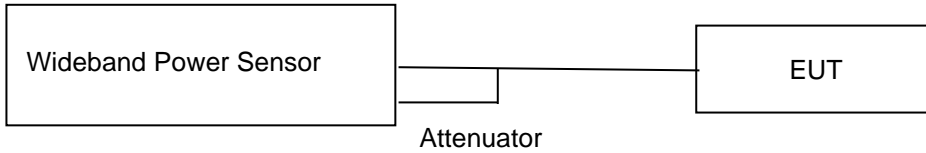

For other test items



## 9 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenovo	E470	PF-OU5TS7 17/09

Test software: Beken Wi-Fi test tool v1.7.4

Test Mode Applicability and Tested Channel Detail:

Mode	Tested Channel	Data Rate (Mbps)	Modulation	Index Value (Power level setting)
802.11b	1	1	CCK	75
	6	1	CCK	75
	11	1	CCK	75
802.11g	1	6	OFDM	92
	6	6	OFDM	92
	11	6	OFDM	92
802.11n HT20	1	MCS0	OFDM	88
	6	MCS0	OFDM	88
	11	MCS0	OFDM	88

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

## 10 Technical Requirement

### 10.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit

According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

**Conducted Emission**

# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name: Wi-Fi and BLE Module  
 Model: T1-U-HL  
 Client: Hangzhou Tuya Information Co., Ltd  
 Op Cond: Power on, TX\_2437MHz at g mode, AC 120V/60Hz, T17.5, H57.1%, P102.1kPa  
 Operator: Huali CHENG  
 Standard: FCC Part 15.207(a)  
 Comment: Phase L  
 Sample No.: SHA-793030-2

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN  
 Receiver: [ESR 3]  
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

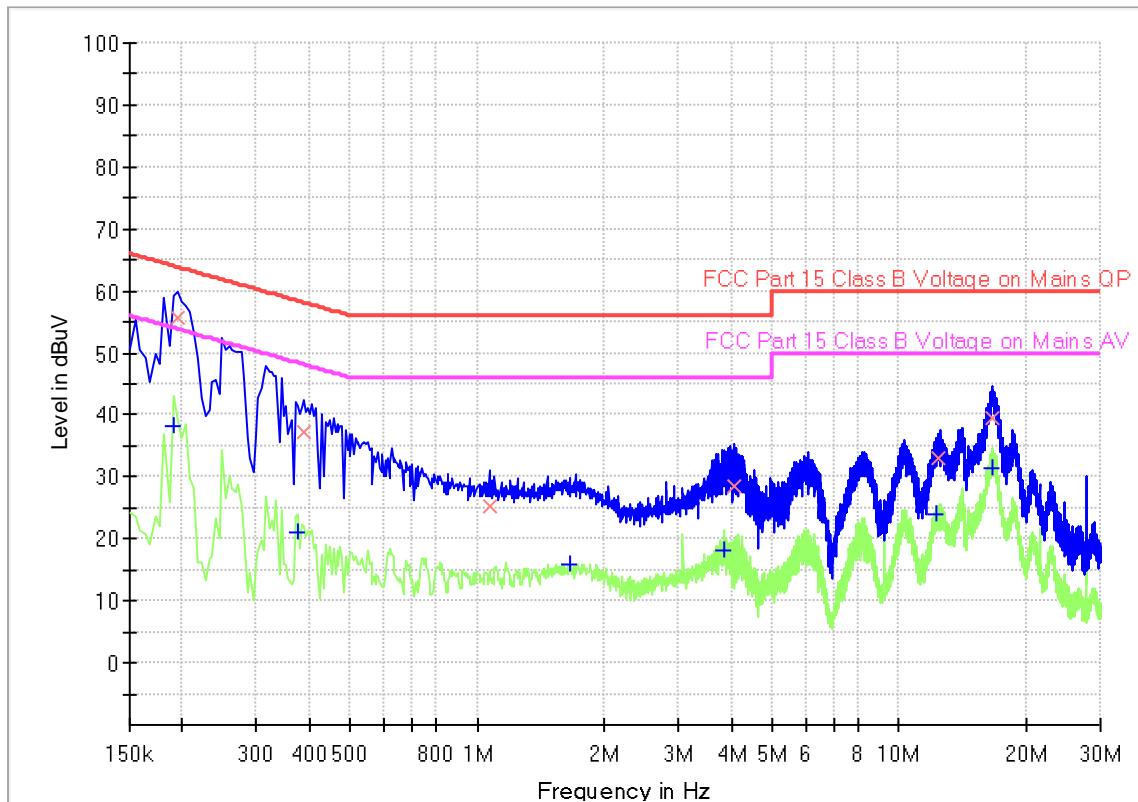



## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190500	---	38.12	54.01	15.89	1000.0	9.000	L1	19.4
0.195000	55.77	---	63.82	8.05	1000.0	9.000	L1	19.4
0.375000	---	20.95	48.39	27.44	1000.0	9.000	L1	19.5
0.388500	37.39	---	58.10	20.71	1000.0	9.000	L1	19.5
1.068000	25.22	---	56.00	30.78	1000.0	9.000	L1	19.5
1.657500	---	15.93	46.00	30.07	1000.0	9.000	L1	19.5
3.840000	---	18.28	46.00	27.72	1000.0	9.000	L1	19.6
4.047000	28.65	---	56.00	27.35	1000.0	9.000	L1	19.6
12.300000	---	23.85	50.00	26.15	1000.0	9.000	L1	19.9
12.345000	33.06	---	60.00	26.94	1000.0	9.000	L1	19.9
16.543500	39.59	---	60.00	20.41	1000.0	9.000	L1	20.2
16.701000	---	31.52	50.00	18.48	1000.0	9.000	L1	20.2

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)  
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator



# 150k-30MHz Conducted Emission Test


## EUT Information

EUT Name: Wi-Fi and BLE Module  
 Model: T1-U-HL  
 Client: Hangzhou Tuya Information Co., Ltd  
 Op Cond: Power on, TX\_2437MHz at g mode, AC 120V/60Hz, T17.5, H57.1%, P102.1kPa  
 Operator: Huali CHENG  
 Standard: FCC Part 15.207(a)  
 Comment: Phase N  
 Sample No.: SHA-793030-2

## Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN  
 Receiver: [ESR 3]  
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

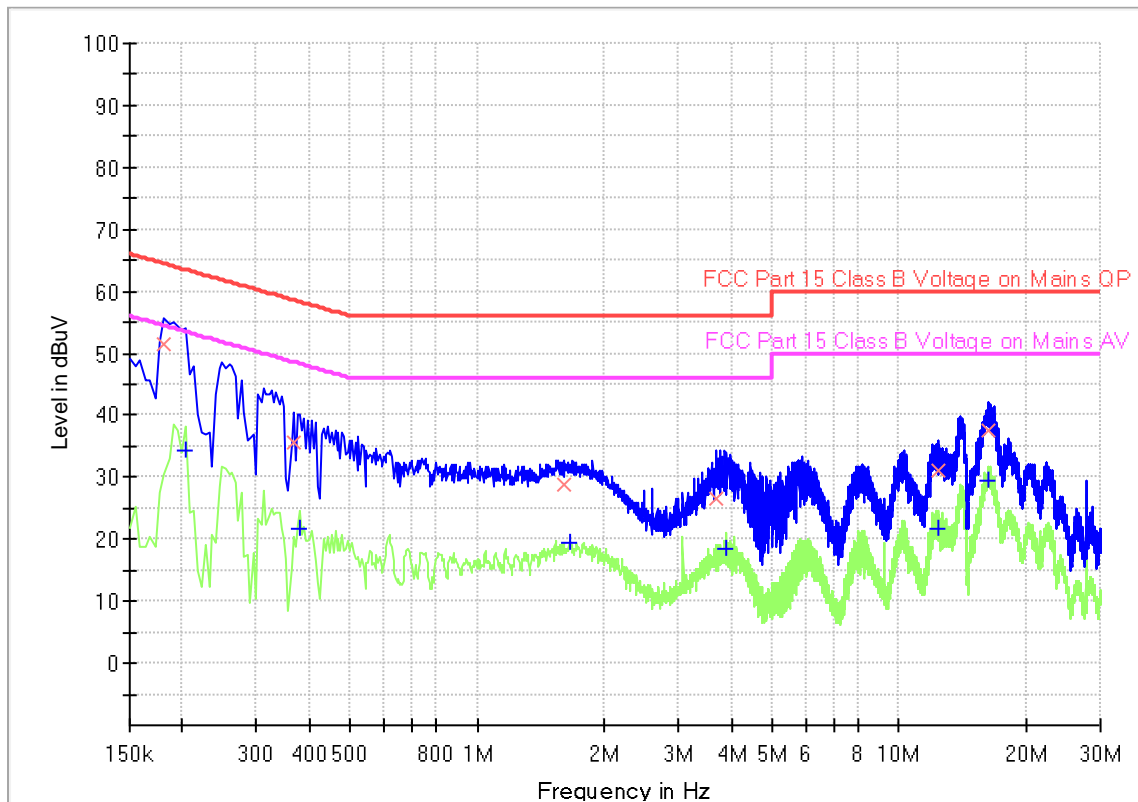

## Final\_Result

EMC\_SHA\_F\_R\_02.04E






Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.181500	51.45	---	64.42	12.97	1000.0	9.000	N	19.4
0.204000	---	34.32	53.45	19.13	1000.0	9.000	N	19.4
0.366000	35.56	---	58.59	23.03	1000.0	9.000	N	19.5
0.379500	---	21.74	48.29	26.55	1000.0	9.000	N	19.5
1.603500	28.91	---	56.00	27.09	1000.0	9.000	N	19.5
1.653000	---	19.53	46.00	26.47	1000.0	9.000	N	19.5
3.696000	26.66	---	56.00	29.34	1000.0	9.000	N	19.6
3.903000	---	18.40	46.00	27.60	1000.0	9.000	N	19.6
12.340500	---	21.78	50.00	28.22	1000.0	9.000	N	19.8
12.390000	31.05	---	60.00	28.95	1000.0	9.000	N	19.8
16.264500	---	29.41	50.00	20.59	1000.0	9.000	N	20.0
16.296000	37.41	---	60.00	22.59	1000.0	9.000	N	20.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)  
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

## 10.2 Conducted peak output power

### Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

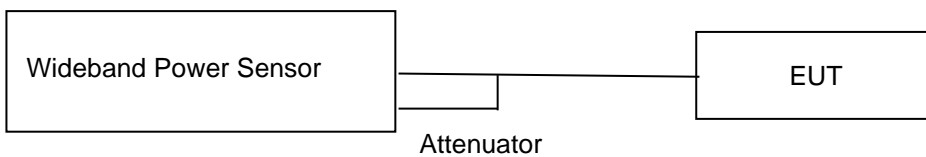

**Wideband Power Sensor conducted test setup**

### Limits

According to §15.247 (b) (3) conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below

802.11b

Frequency (MHz)	Conducted Peak Output Power(dBm)	Result
Low channel 2412MHz	18.34	Pass
Middle channel 2437MHz	18.48	Pass
High channel 2462MHz	18.81	Pass

802.11g

Frequency (MHz)	Conducted Peak Output Power(dBm)	Result
Low channel 2412MHz	23.11	Pass
Middle channel 2437MHz	23.20	Pass
High channel 2462MHz	23.14	Pass

802.11n(HT20)

Frequency (MHz)	Conducted Peak Output Power(dBm)	Result
Low channel 2412MHz	21.33	Pass
Middle channel 2437MHz	21.58	Pass
High channel 2462MHz	21.82	Pass



**10.36dB bandwidth**

**Test Method**

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW=100KHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

**Limit**

**Limit [kHz]**

≥500




**Test result**




Test Mode	Frequency MHz	6dB bandwidth (MHz)		Result
		result	limit	verdict
802.11b	2412	8.533	≥0.5	Pass
	2437	9.038	≥0.5	Pass
	2462	9.053	≥0.5	Pass
802.11g	2412	16.137	≥0.5	Pass
	2437	16.553	≥0.5	Pass
	2462	16.384	≥0.5	Pass
802.11n(HT20)	2412	15.135	≥0.5	Pass
	2437	15.126	≥0.5	Pass
	2462	15.142	≥0.5	Pass



6 dB Bandwidth



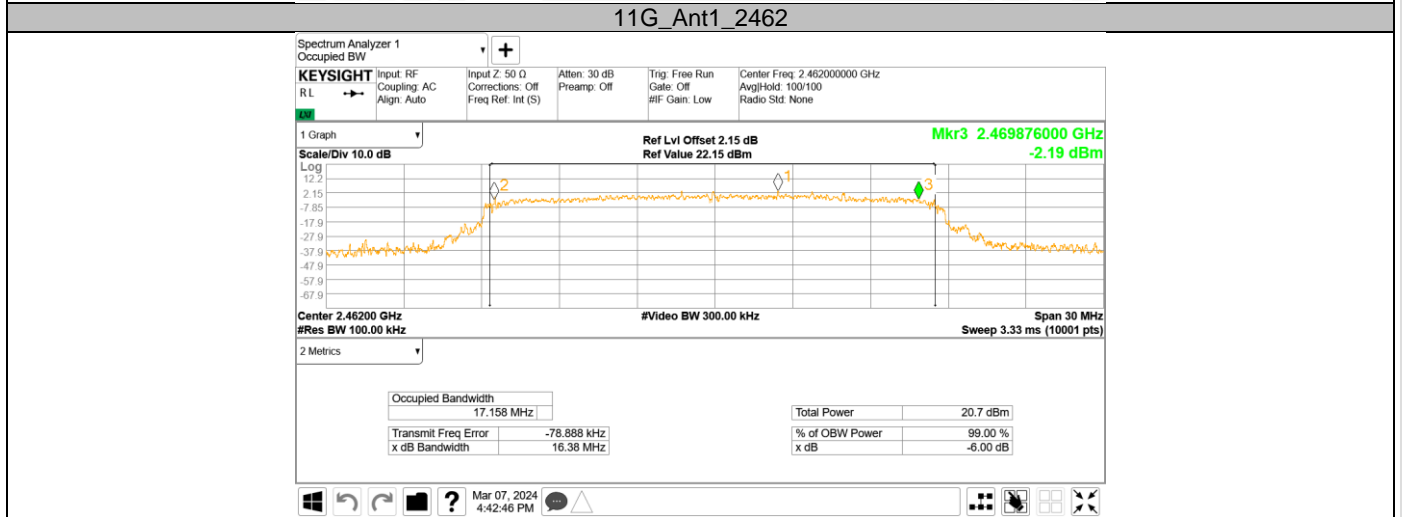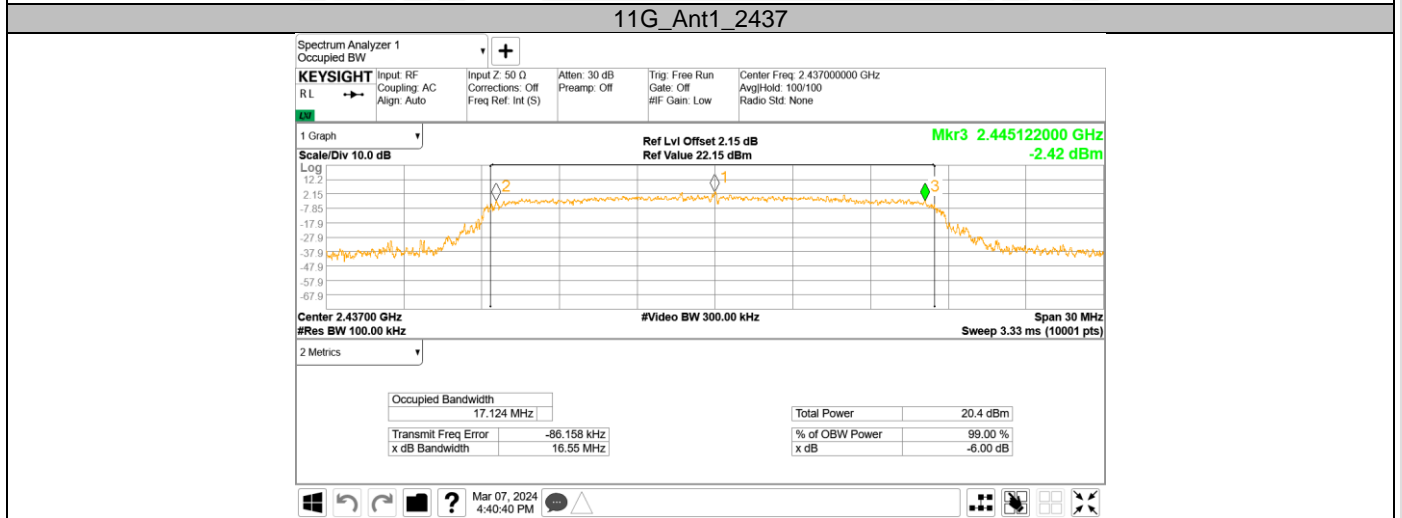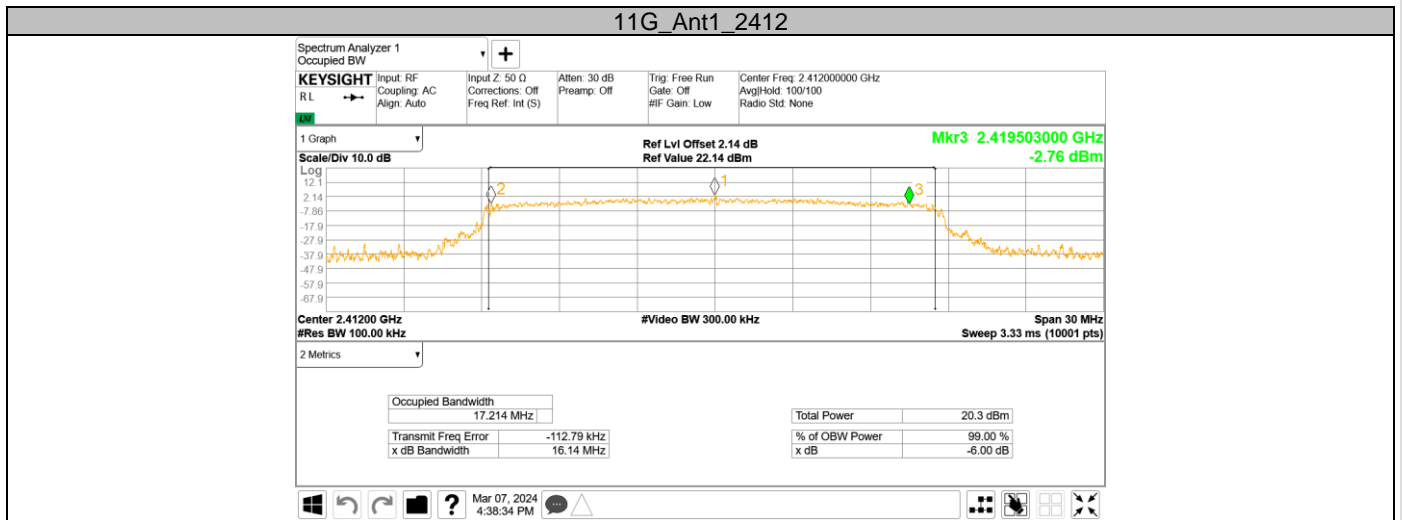

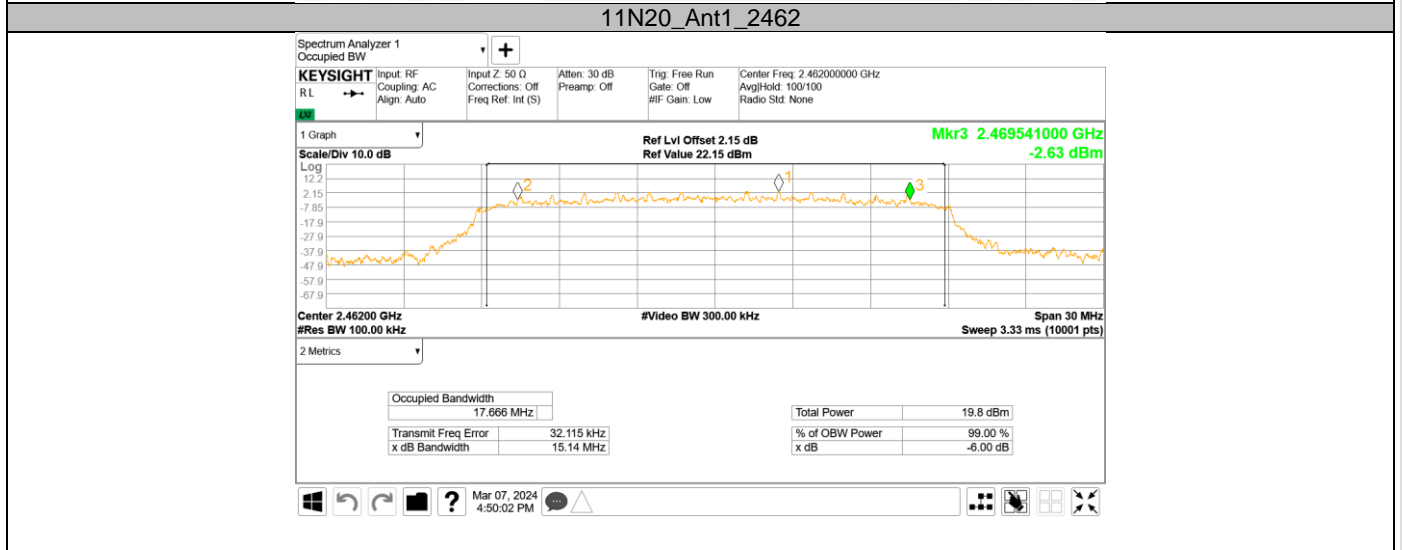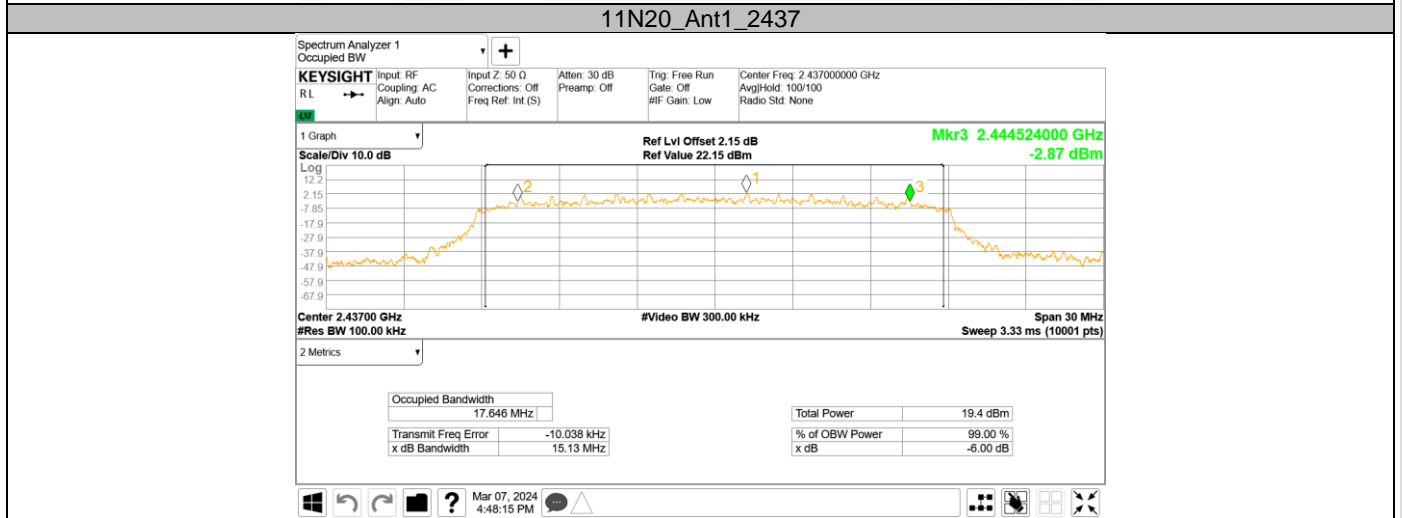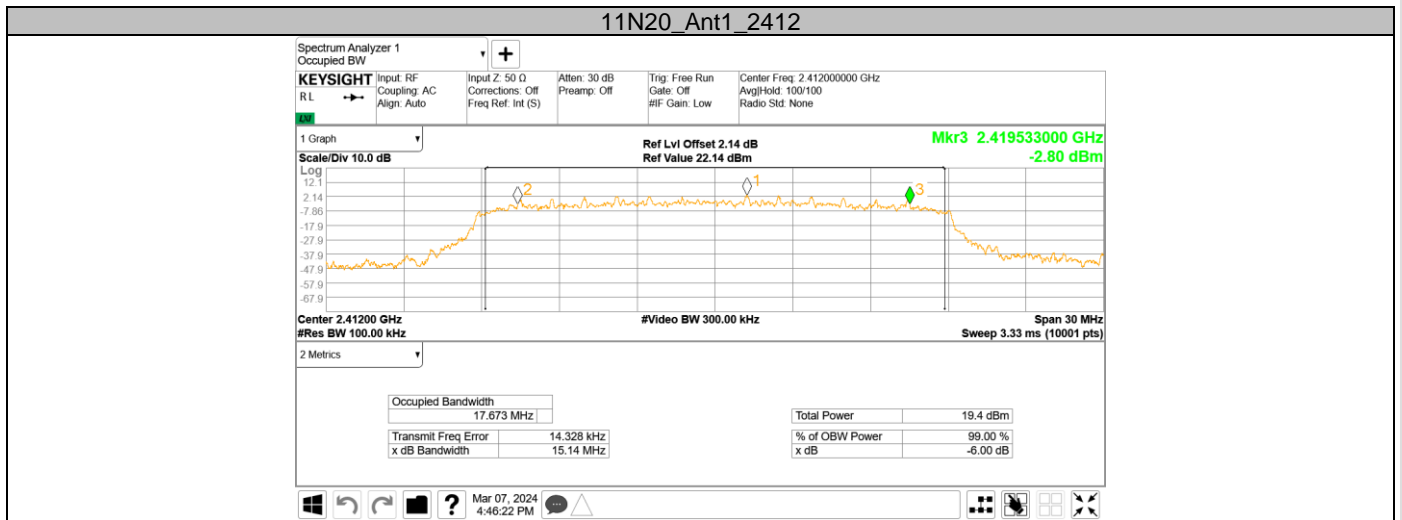



## 10.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

### Limit

**Limit [dBm/3kHz]**

≤8

#### Test result

802.11 b

Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-6.64	Pass
Middle channel 2437MHz	-6.78	Pass
High channel 2462MHz	-5.97	Pass

802.11 g


Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-10.32	Pass
Middle channel 2437MHz	-9.85	Pass
High channel 2462MHz	-9.98	Pass

802.11 n (HT20)

Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-10.51	Pass
Middle channel 2437MHz	-10.47	Pass
High channel 2462MHz	-10.00	Pass




### Power spectral density

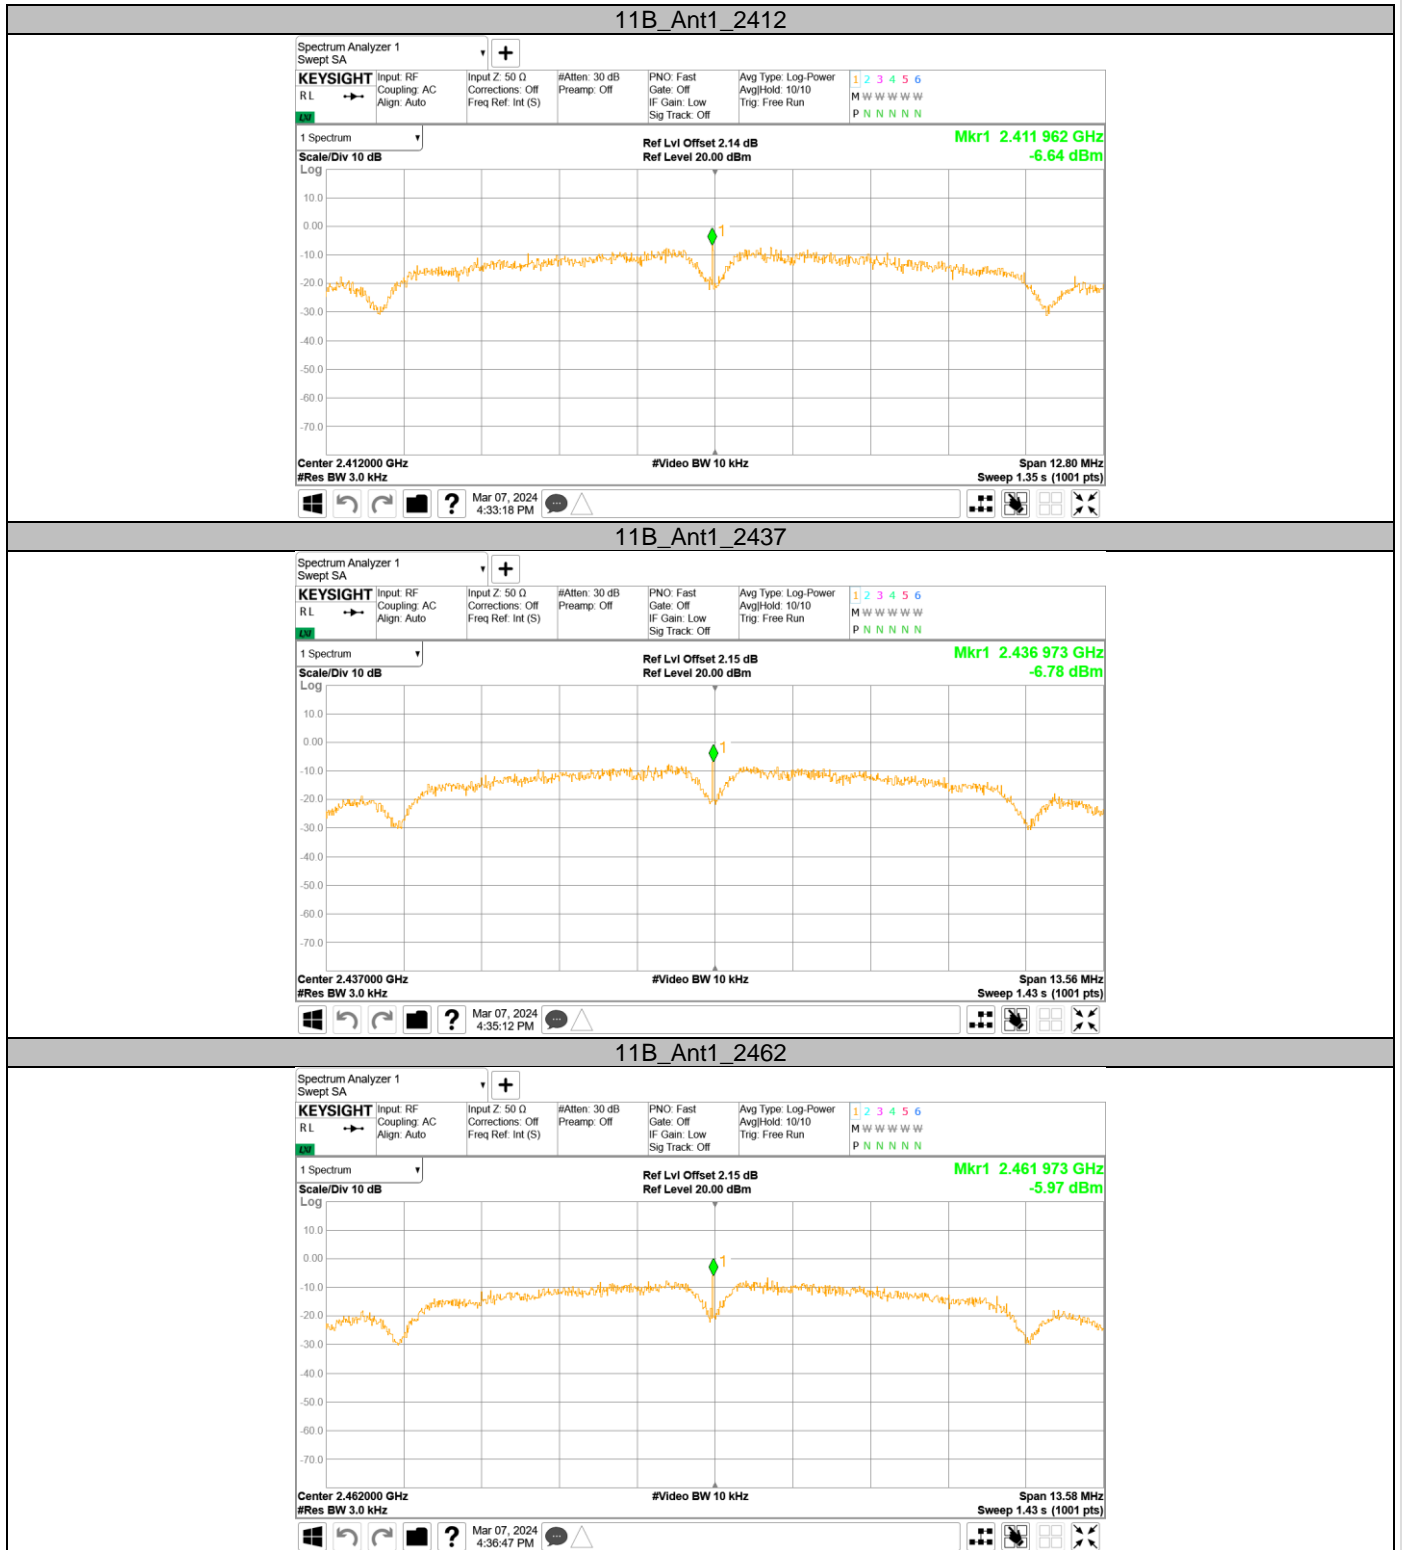







11G\_Ant1\_2412

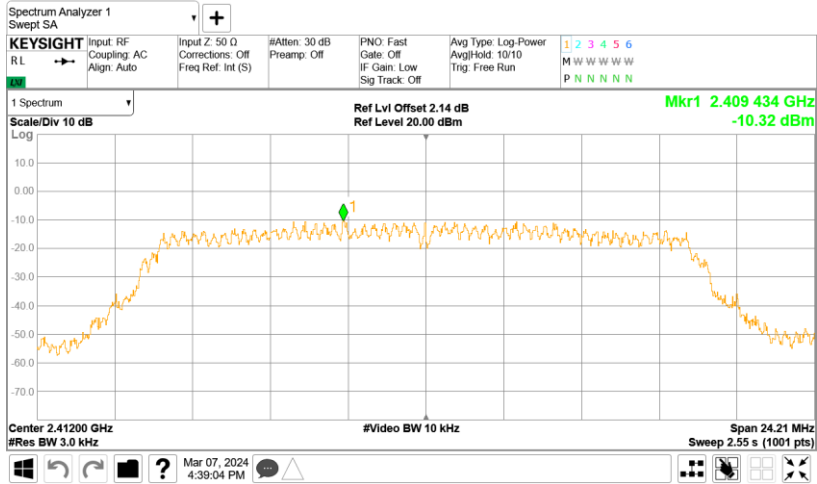

11G\_Ant1\_2437

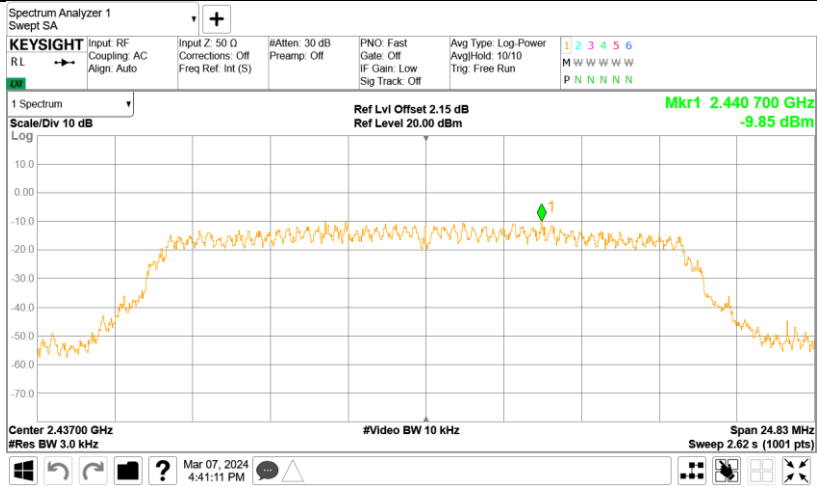


11G\_Ant1\_2462

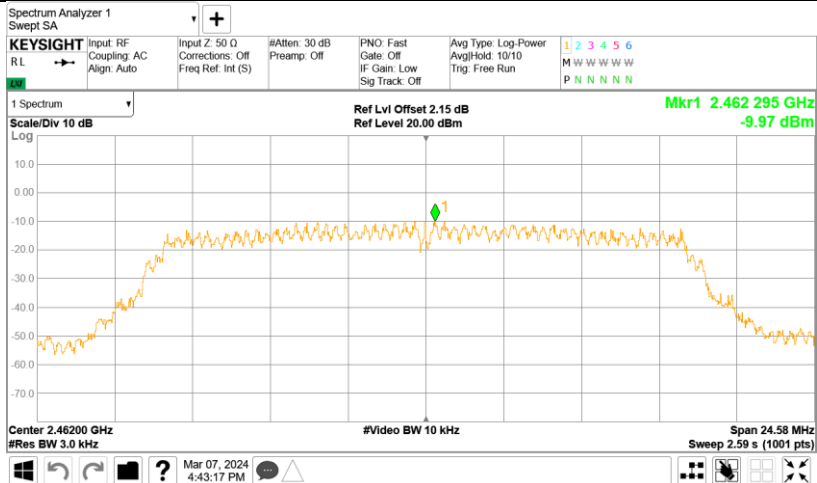





11N20SISO\_Ant1\_2412

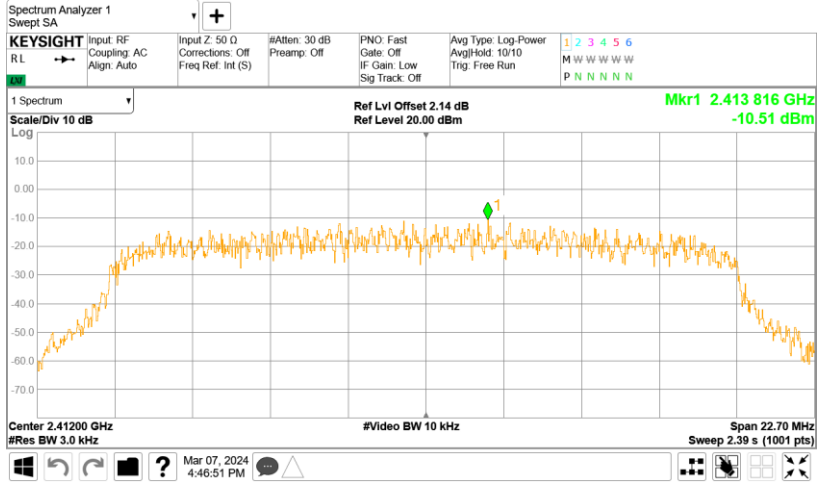

11N20SISO\_Ant1\_2437

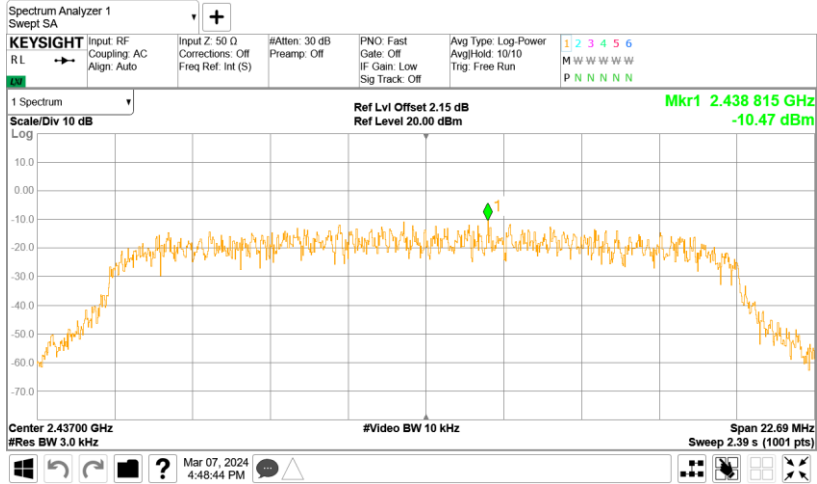

11N20SISO\_Ant1\_2462

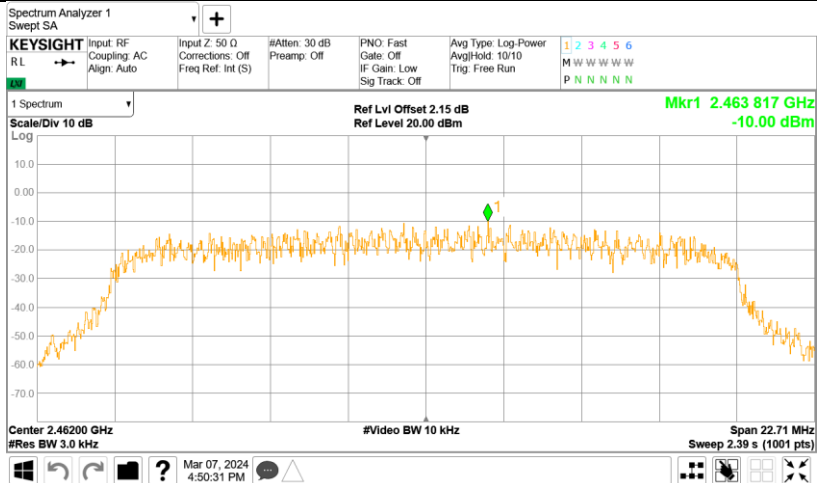

## 10.5 Spurious RF conducted emissions

### Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




Spurious RF conducted emissions

802.11 B


Out-of-Band Emissions

Channel 1 (2412MHz)

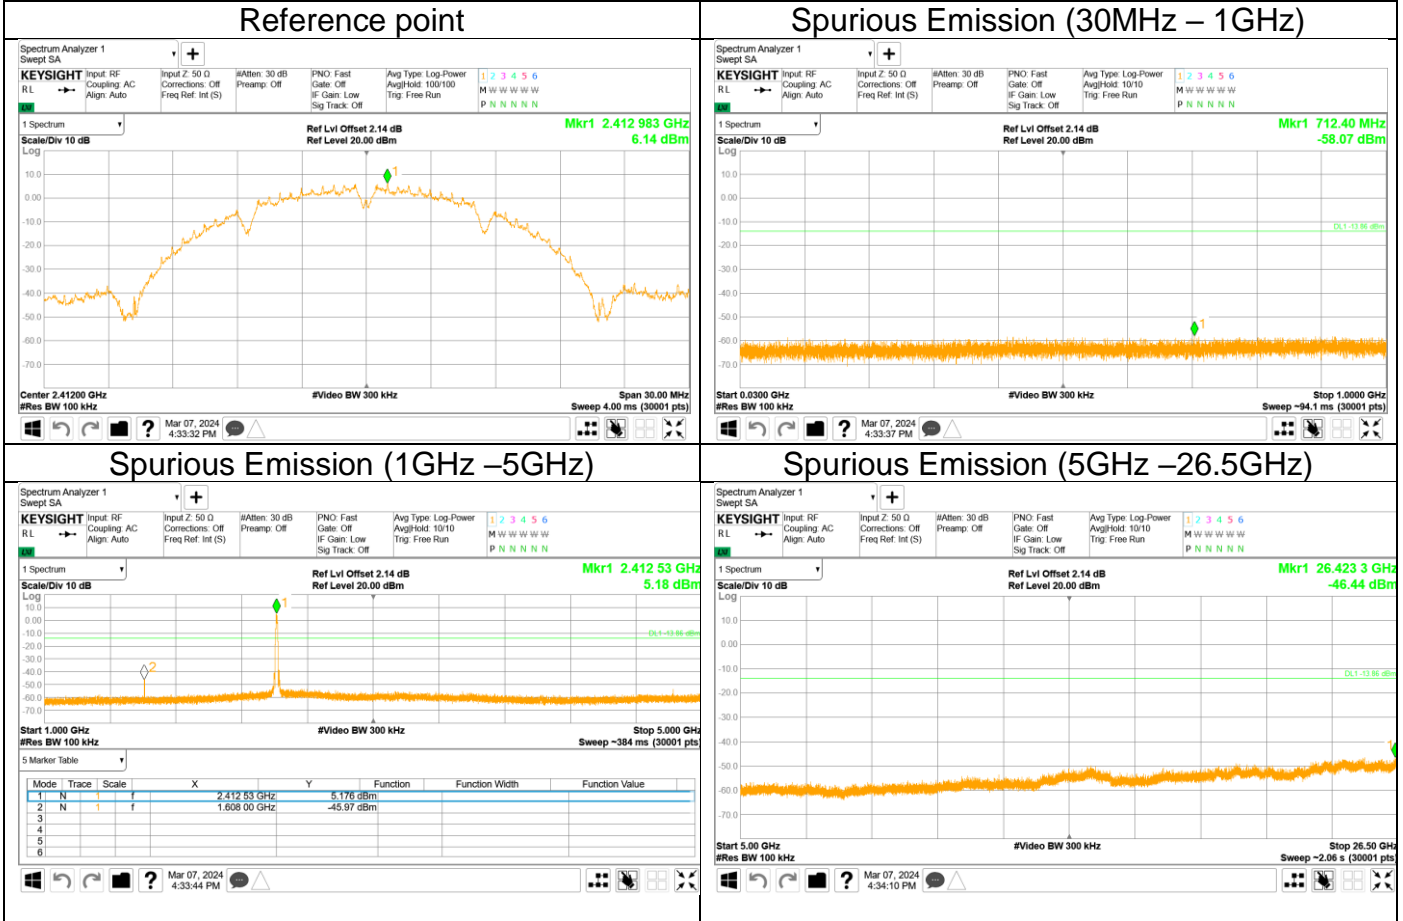




## Out-of-Band Emissions Channel 6 (2437MHz)

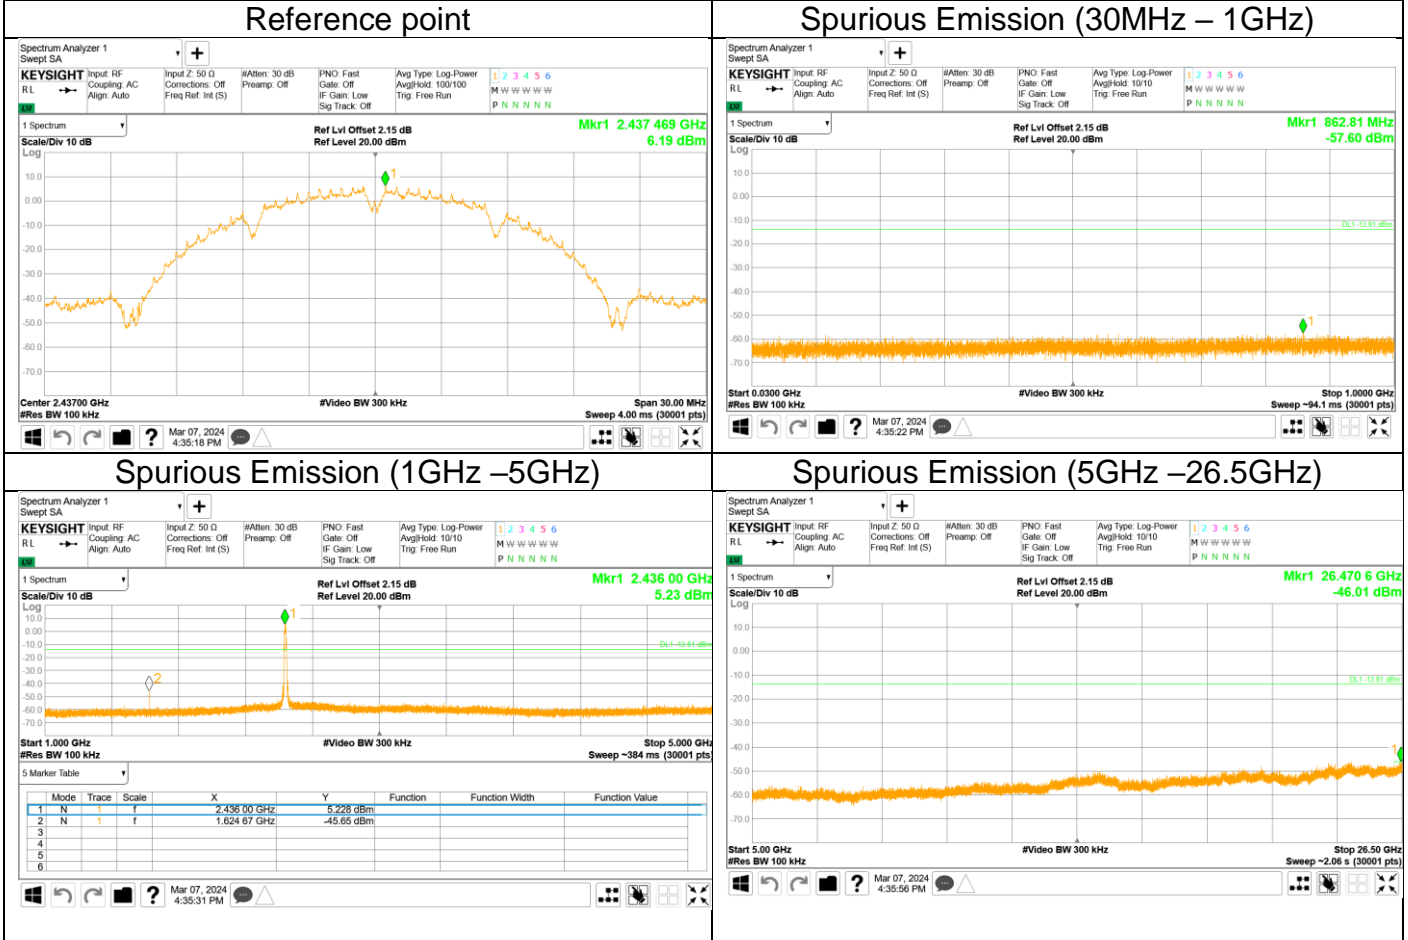




## Out-of-Band Emissions Channel 11 (2462MHz)

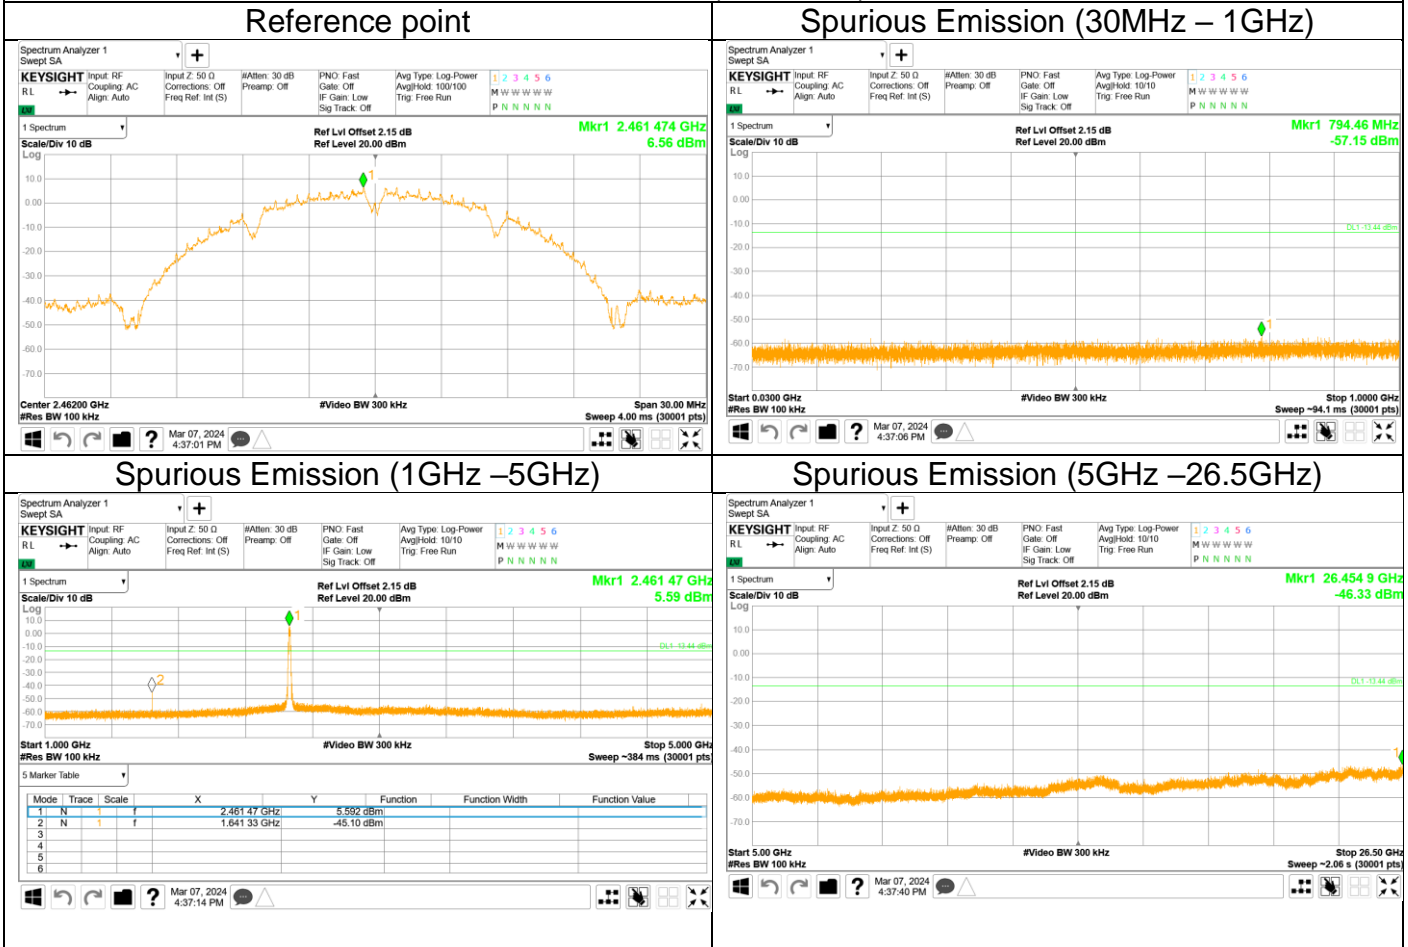




802.11 G

Out-of-Band Emissions  
Channel 1 (2412MHz)

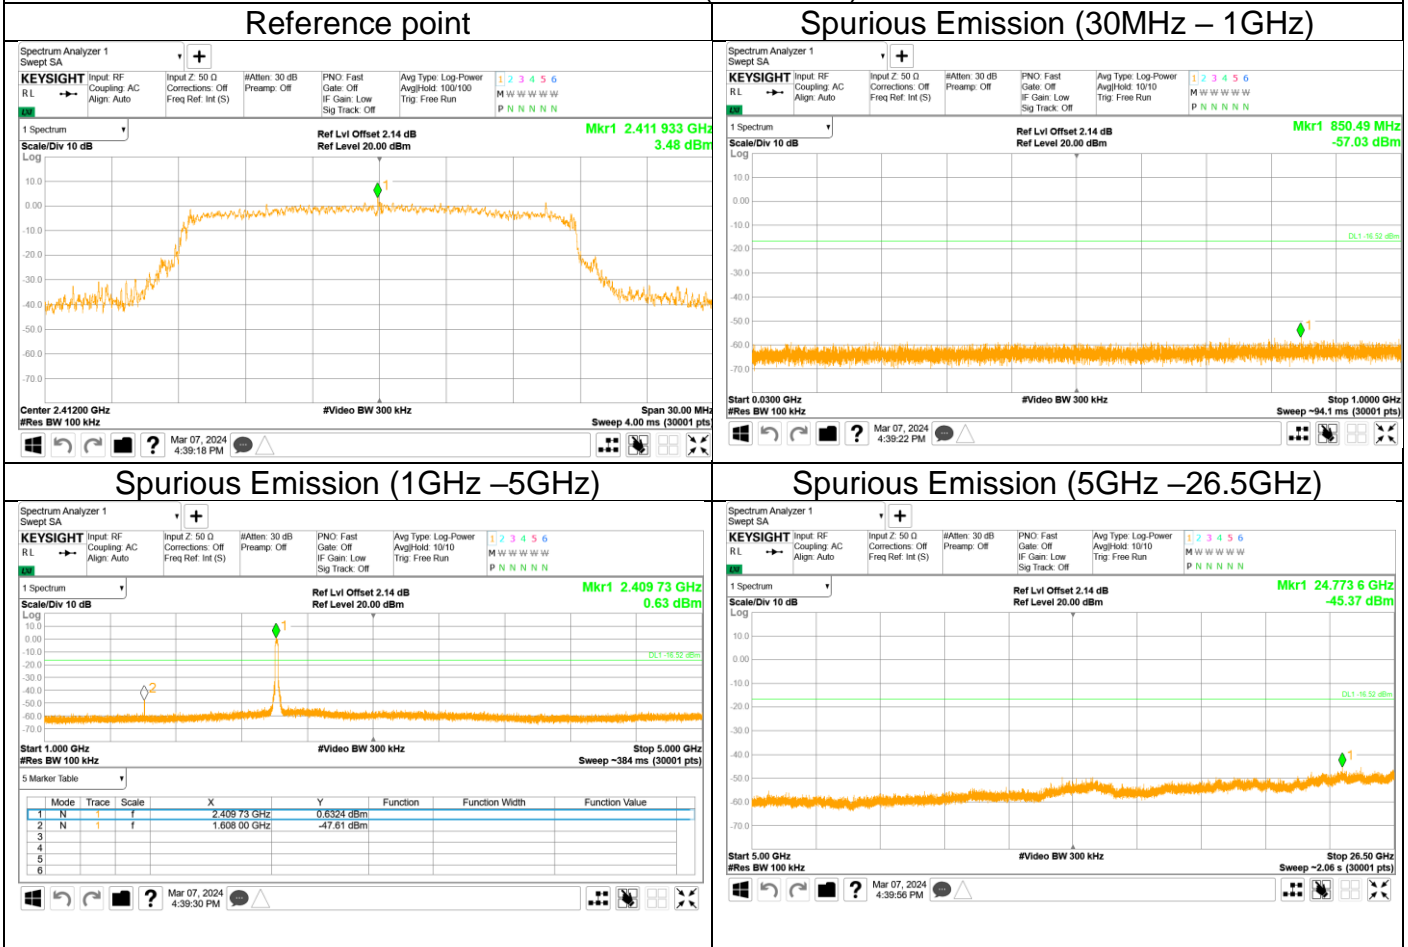




## Out-of-Band Emissions Channel 6 (2437MHz)

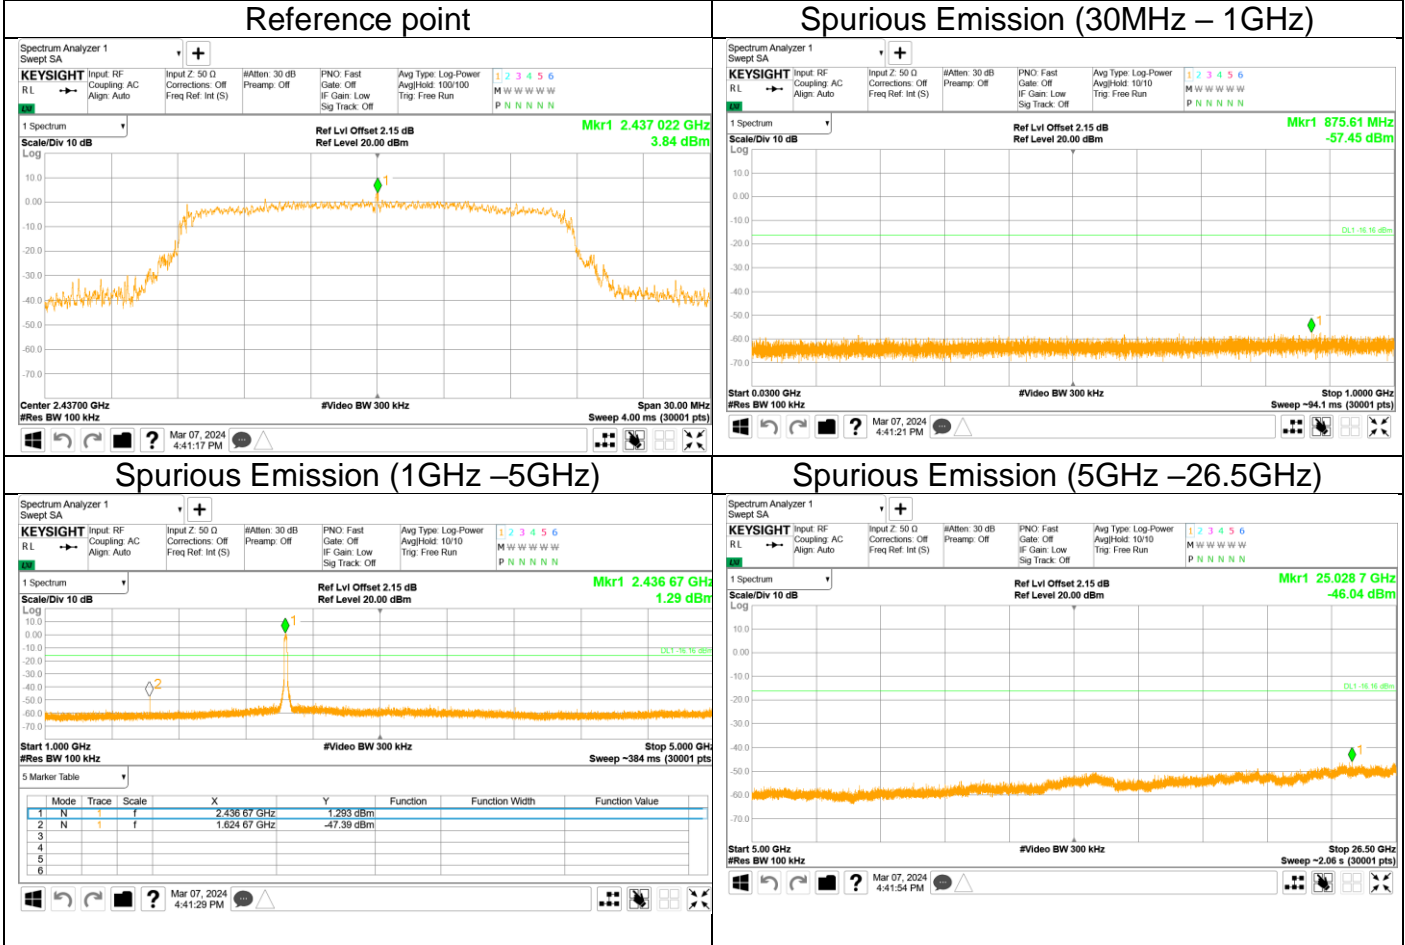






### Out-of-Band Emissions Channel 11 (2462MHz)

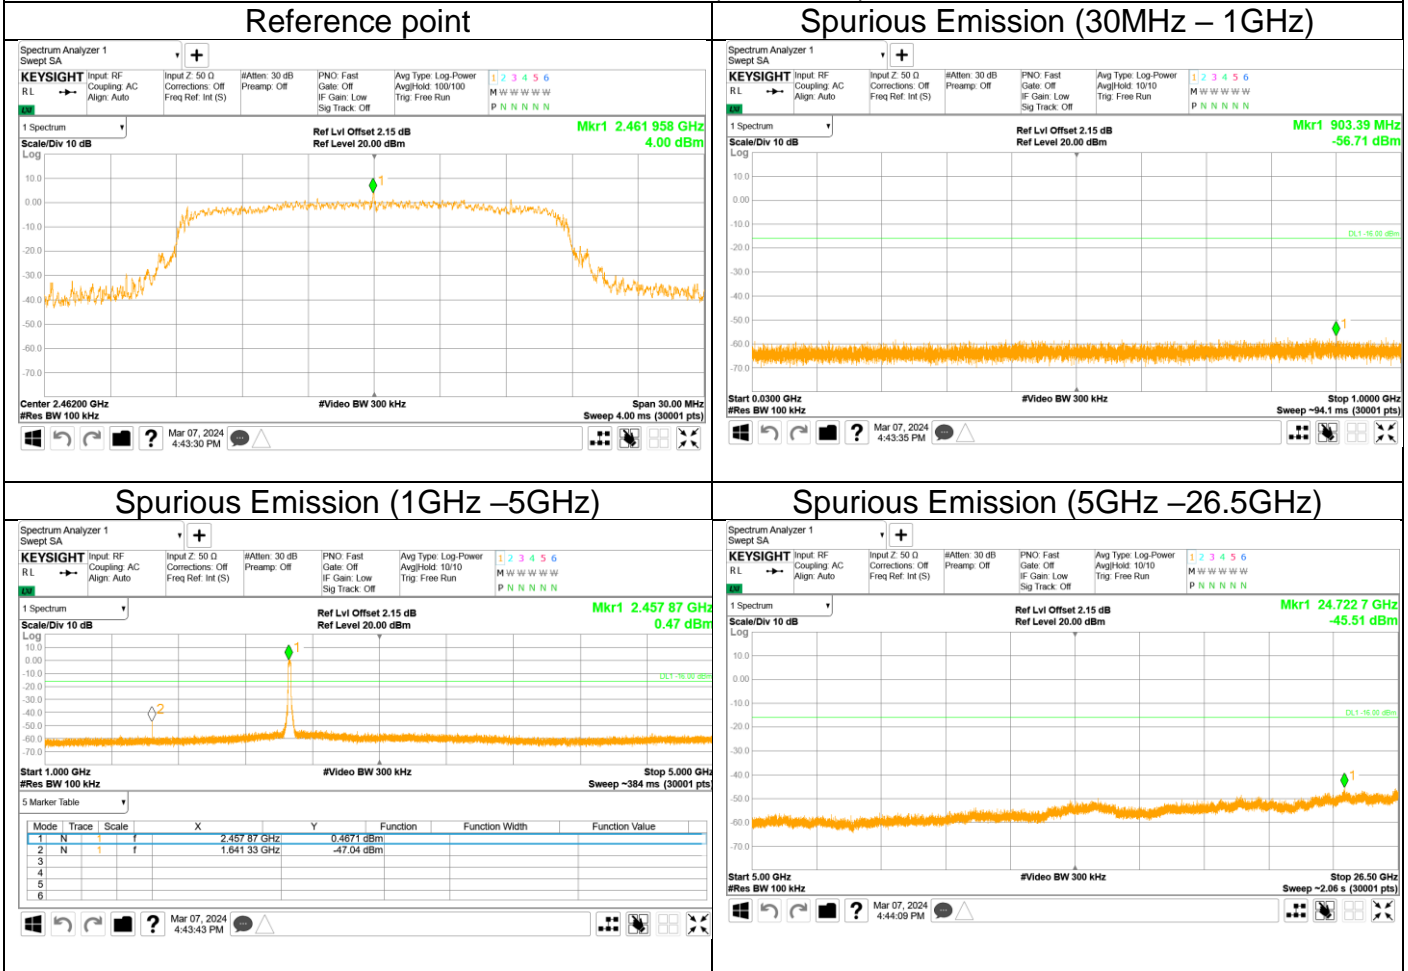




802.11 N HT20  
Out-of-Band Emissions  
Channel 1 (2412MHz)

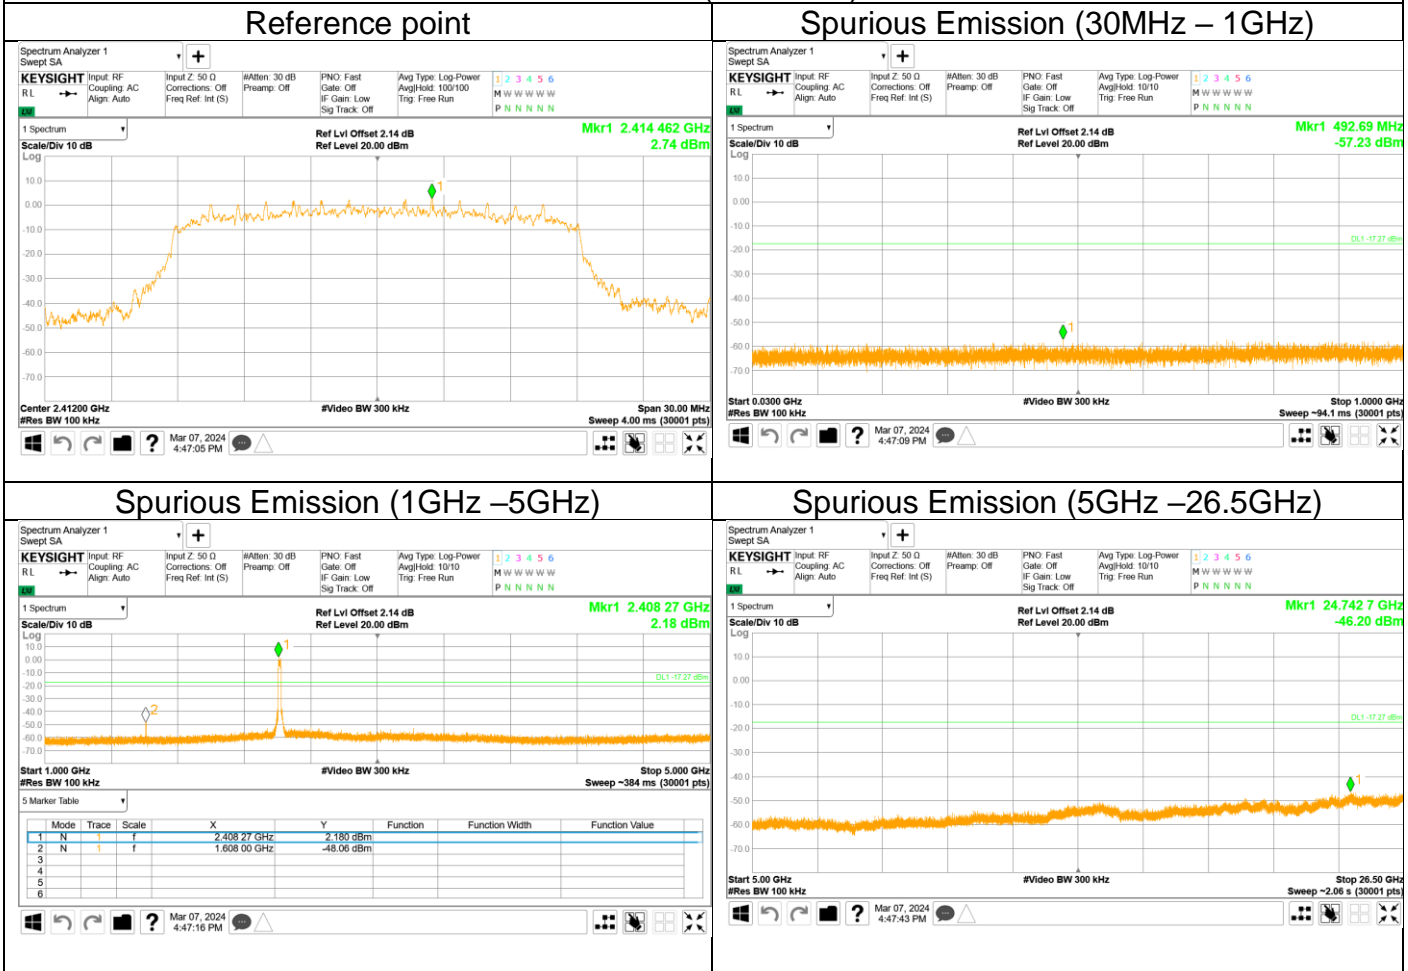




## Out-of-Band Emissions Channel 6 (2437MHz)

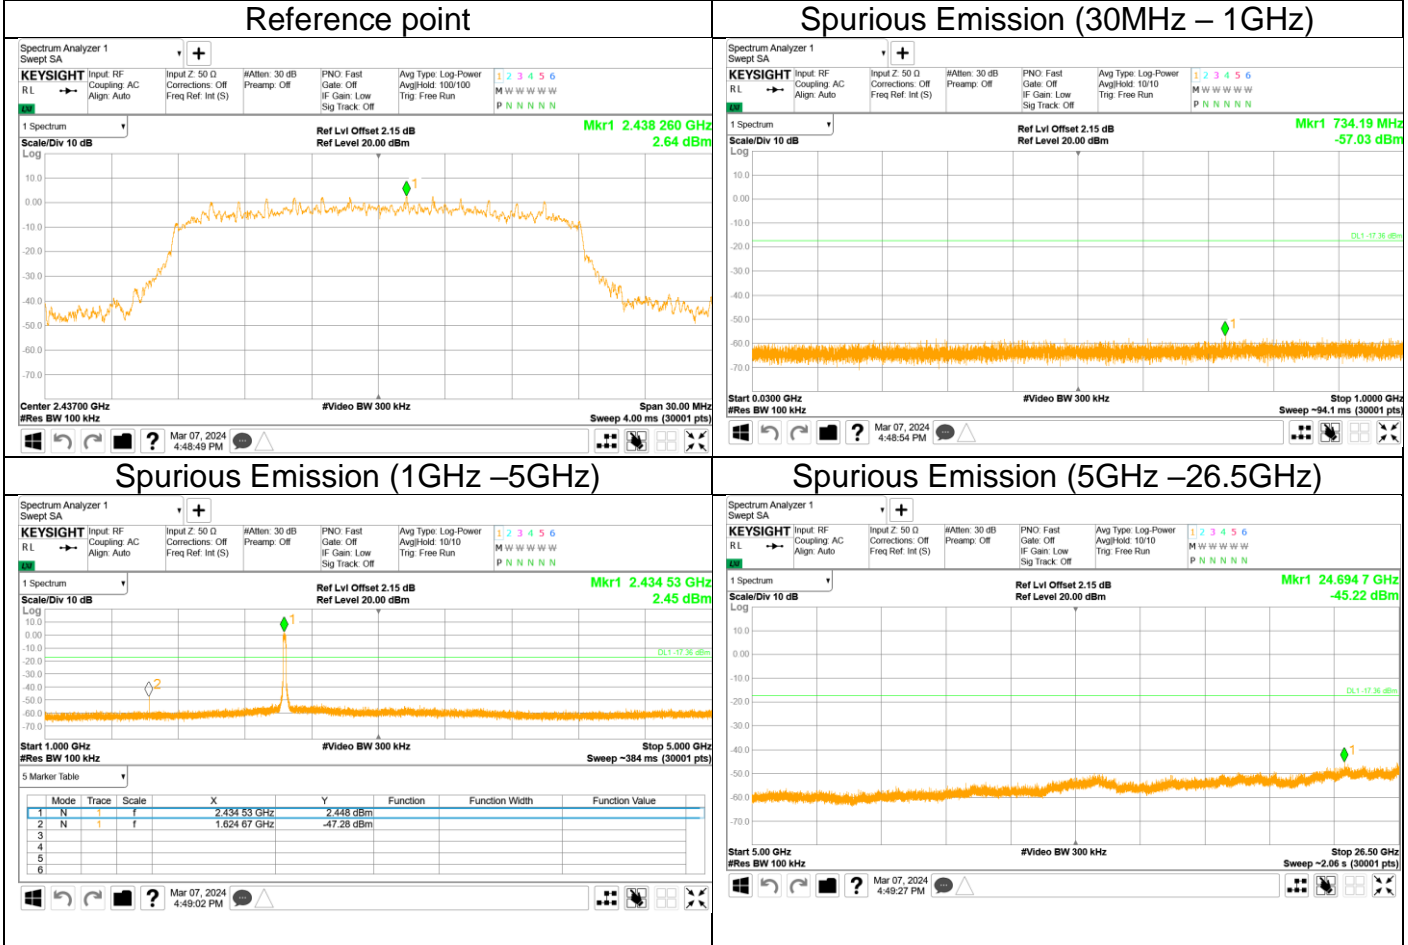



## Out-of-Band Emissions Channel 11 (2462MHz)

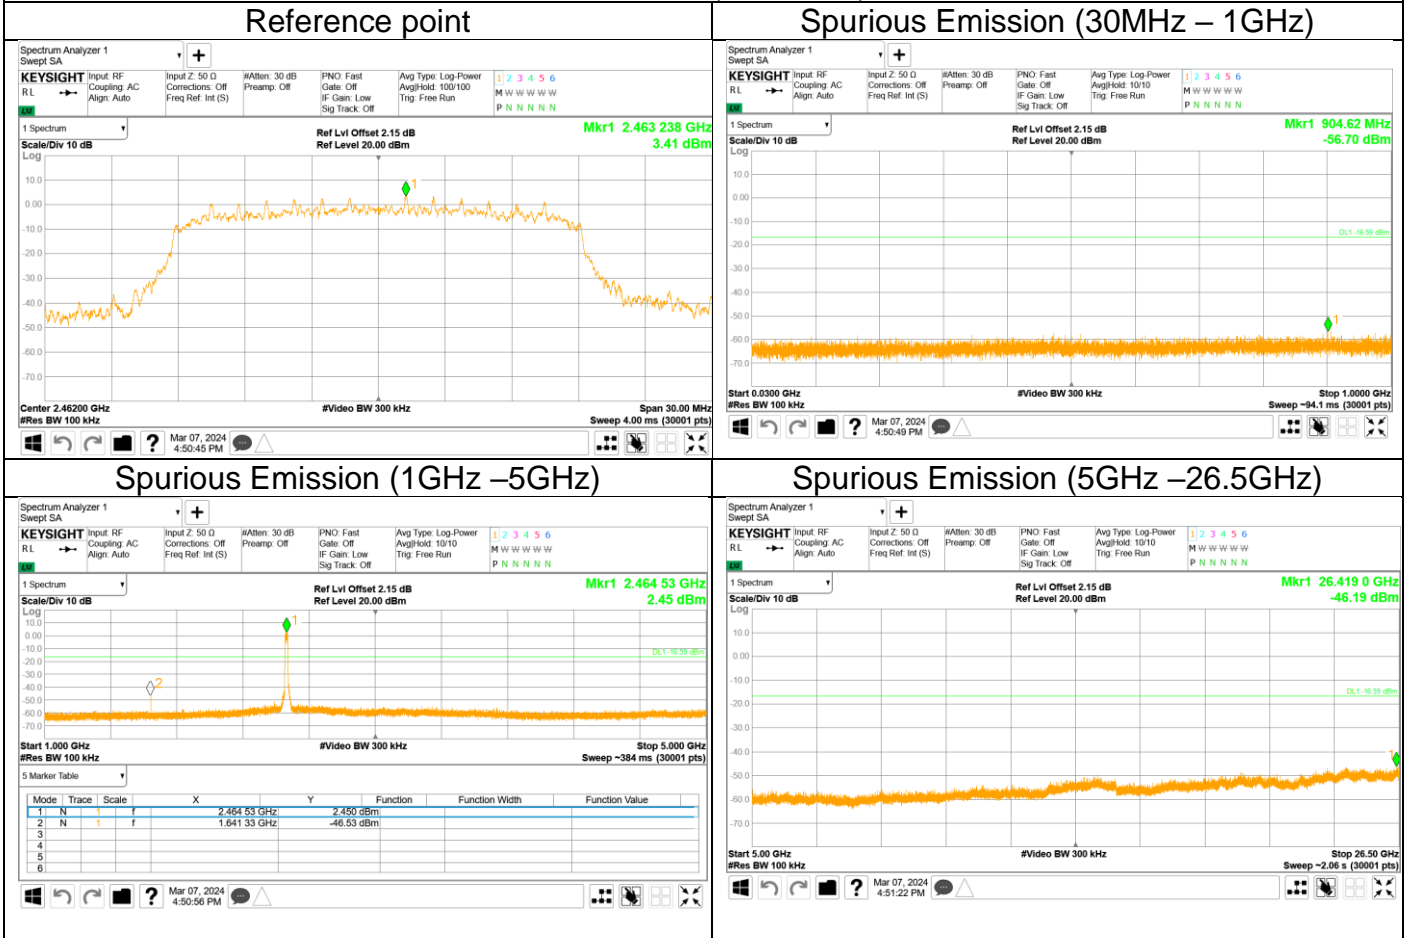

## 10.6 Band edge

### Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.



### Limit



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB.





Test result


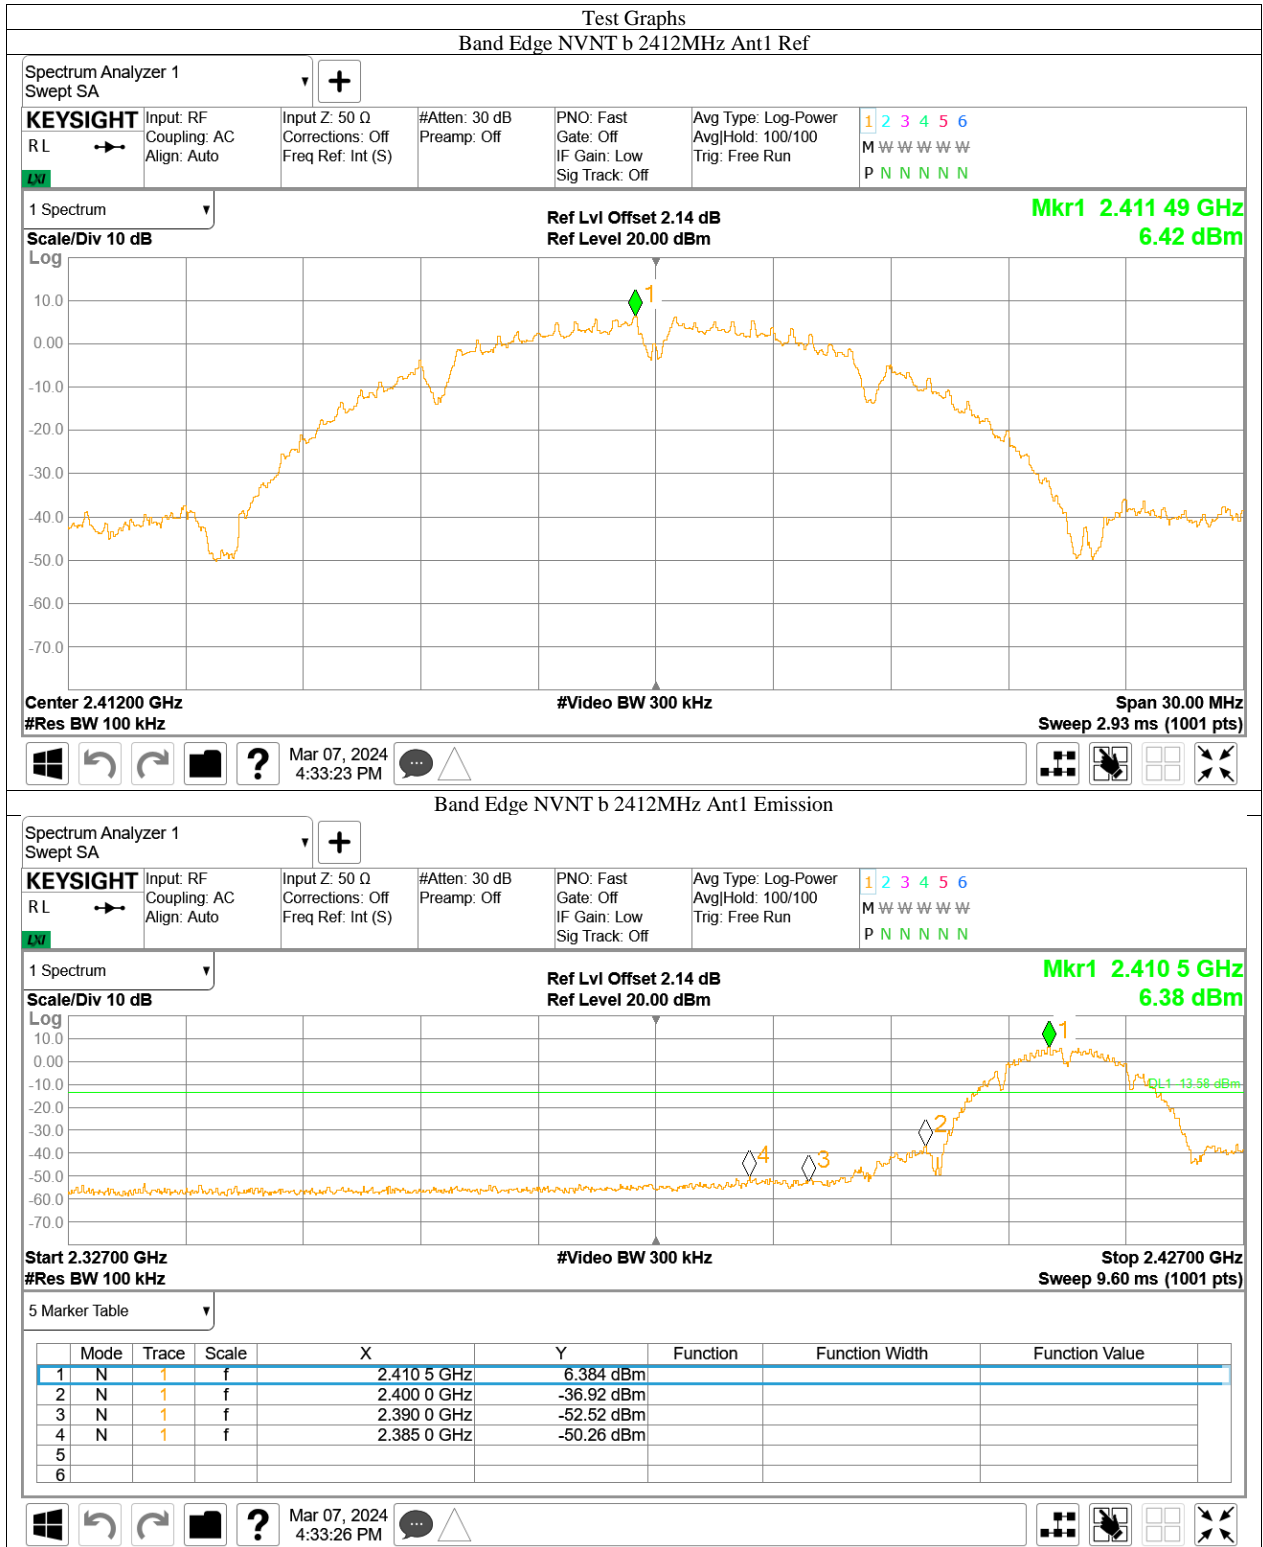


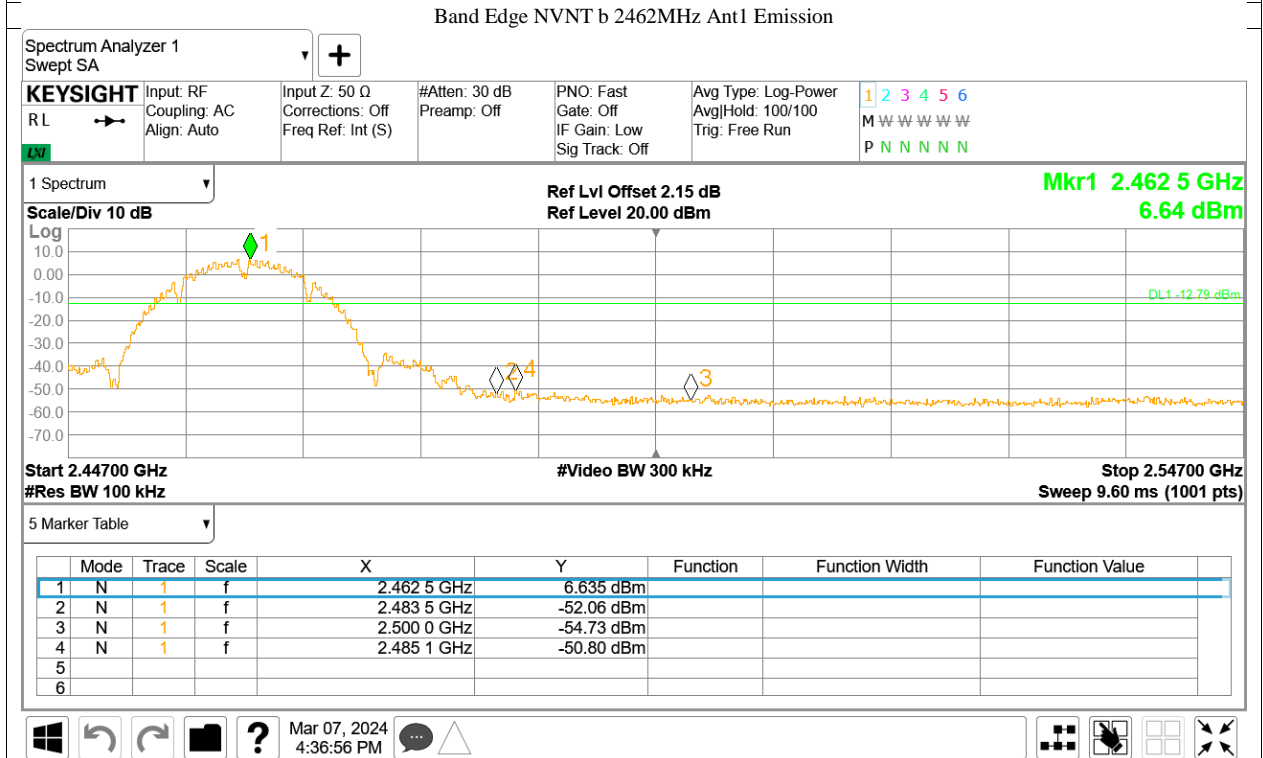
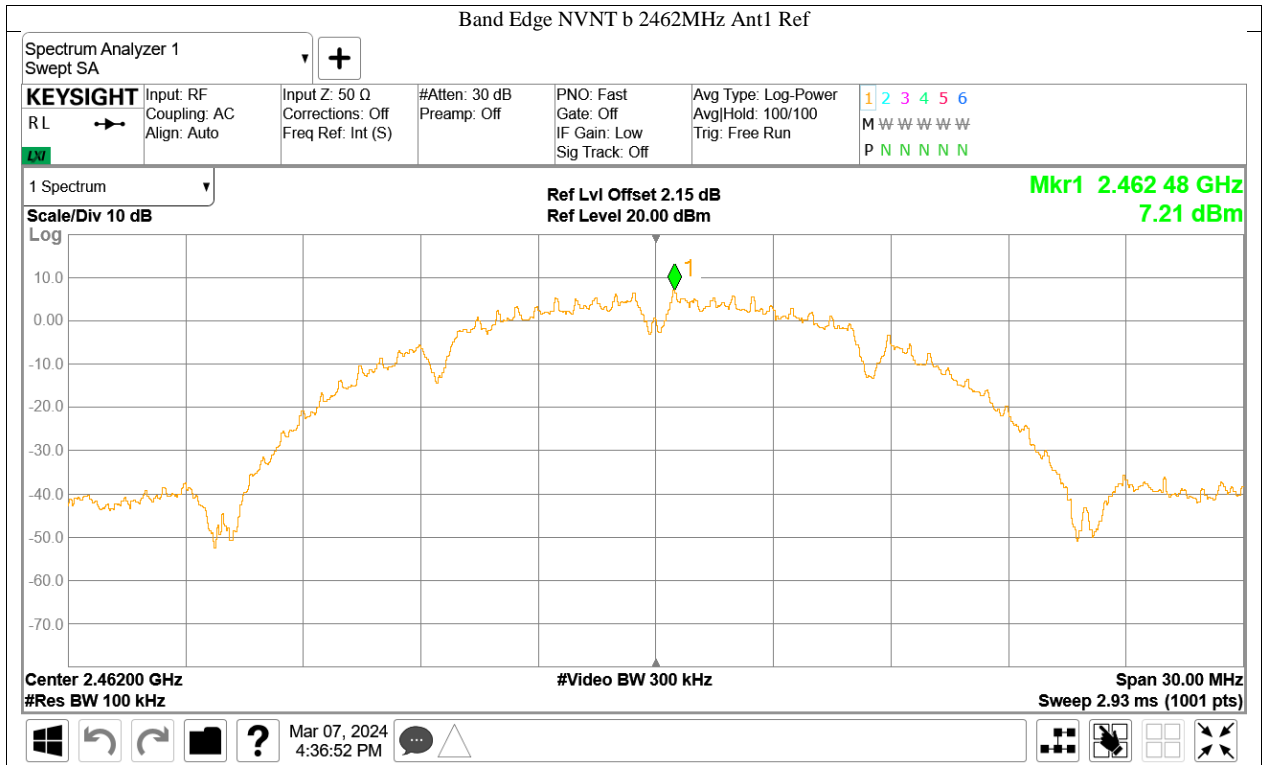


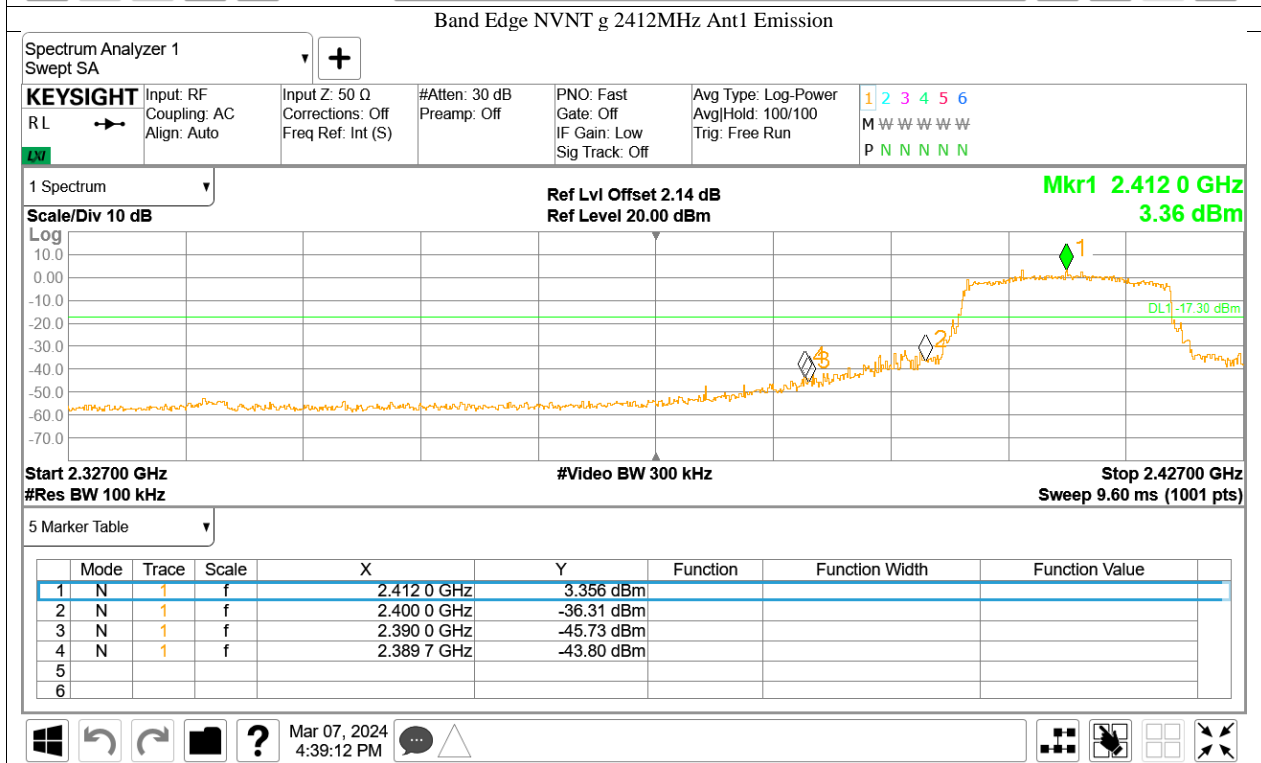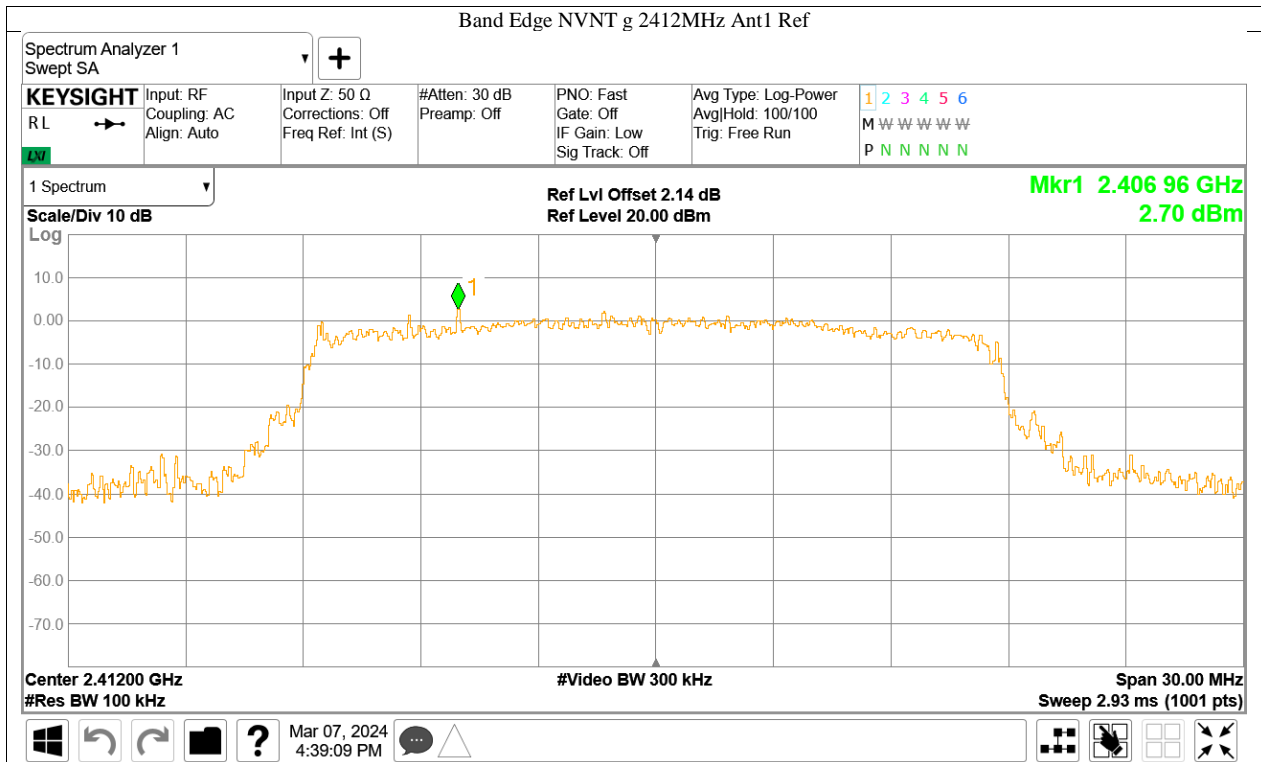



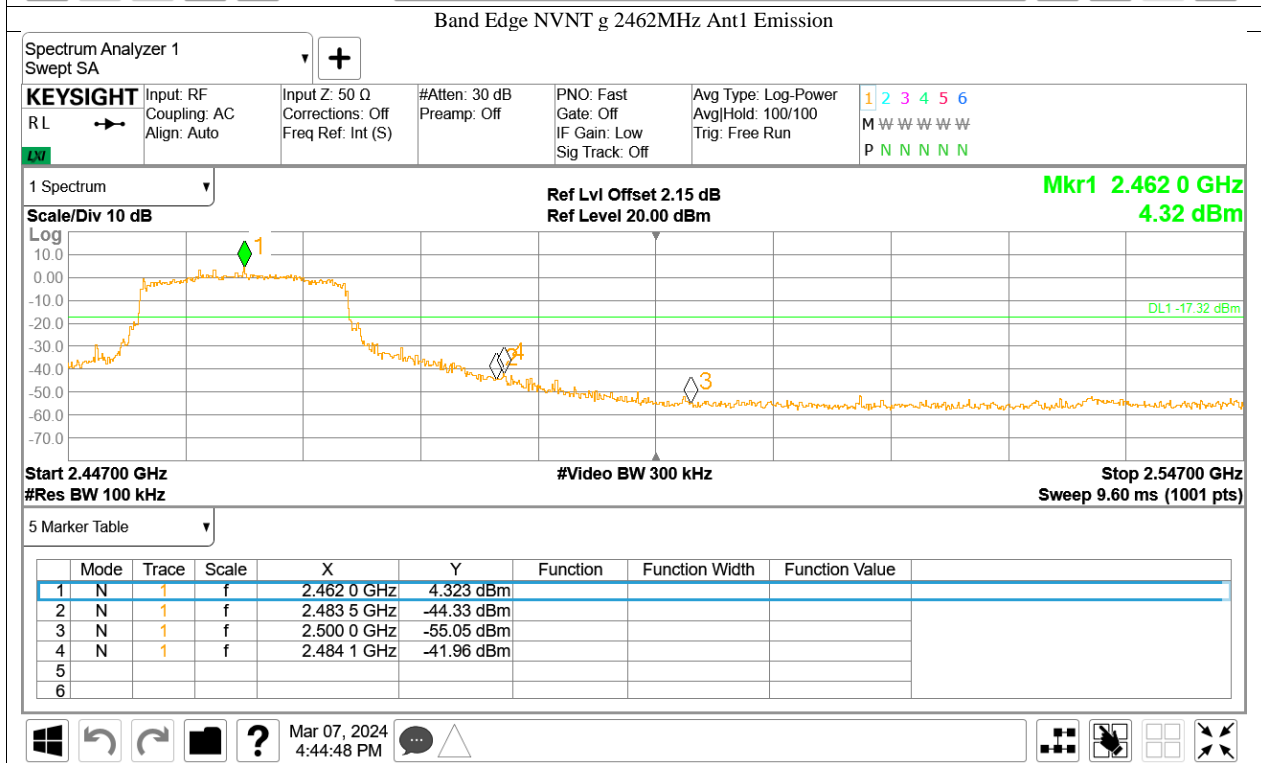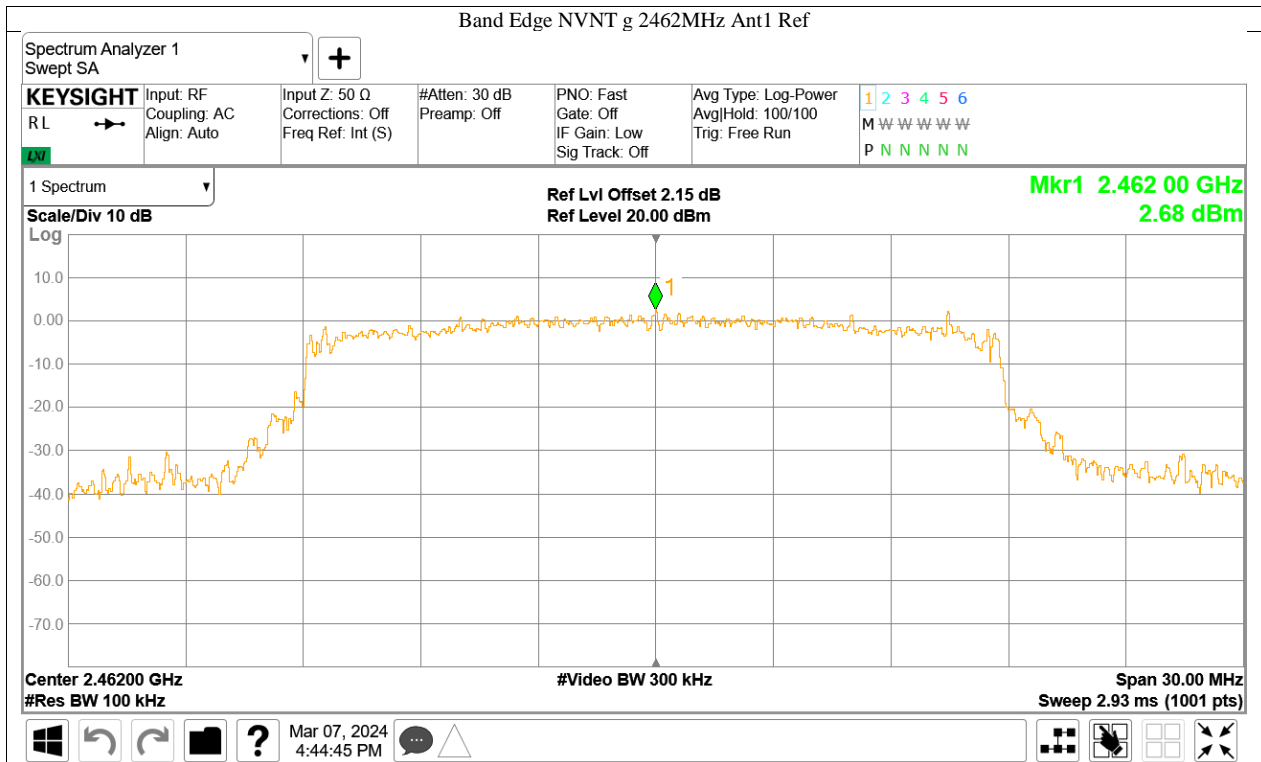

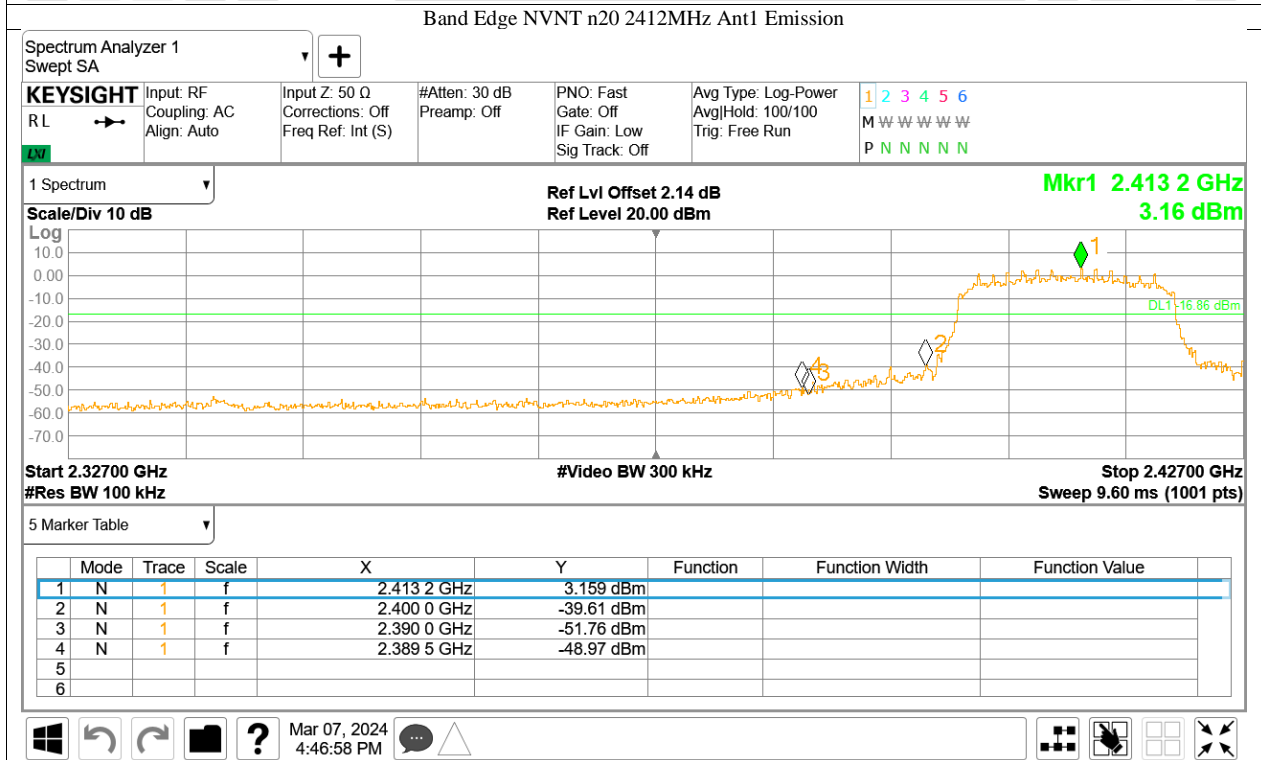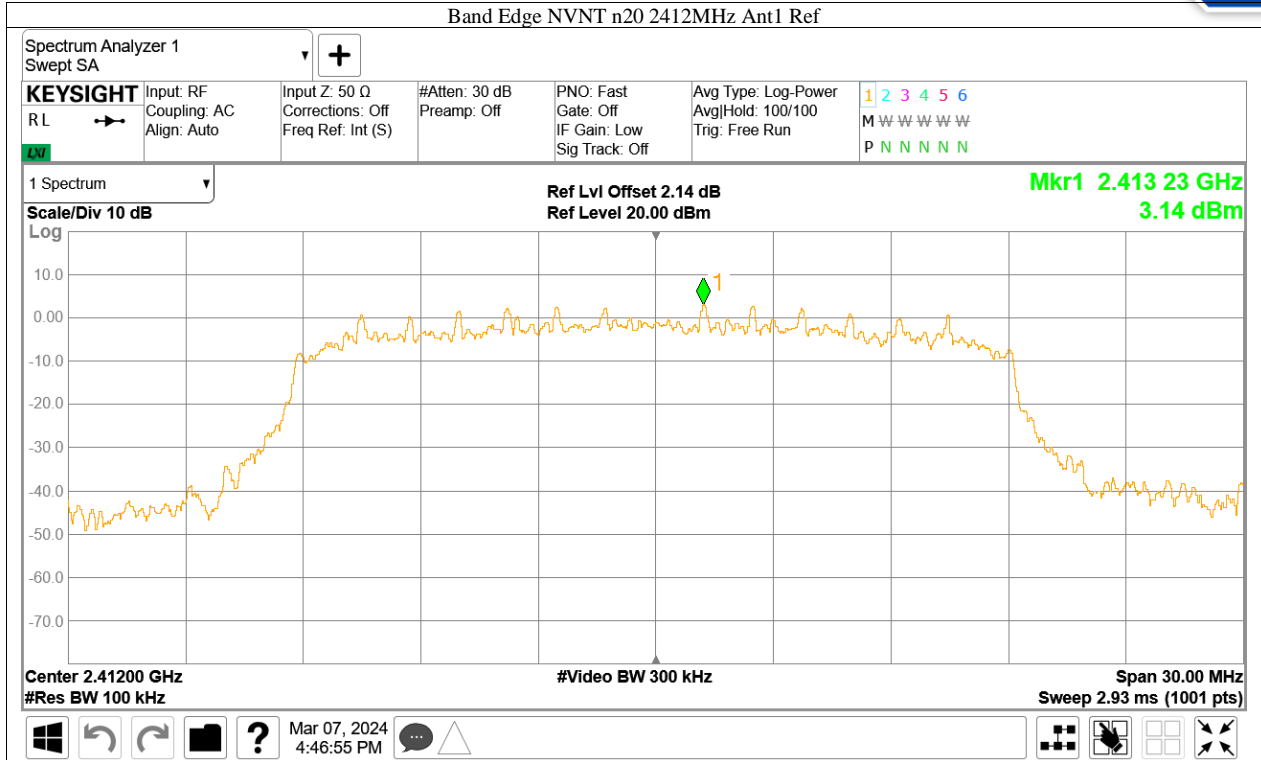

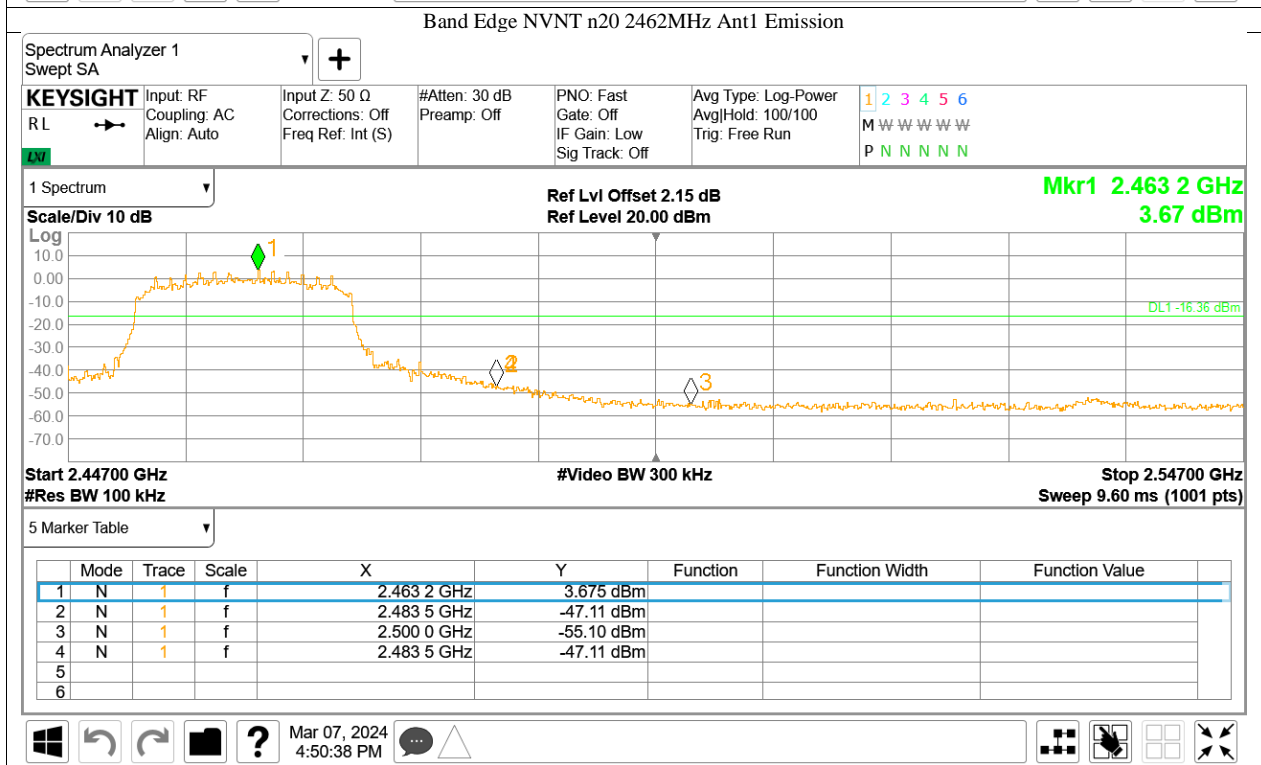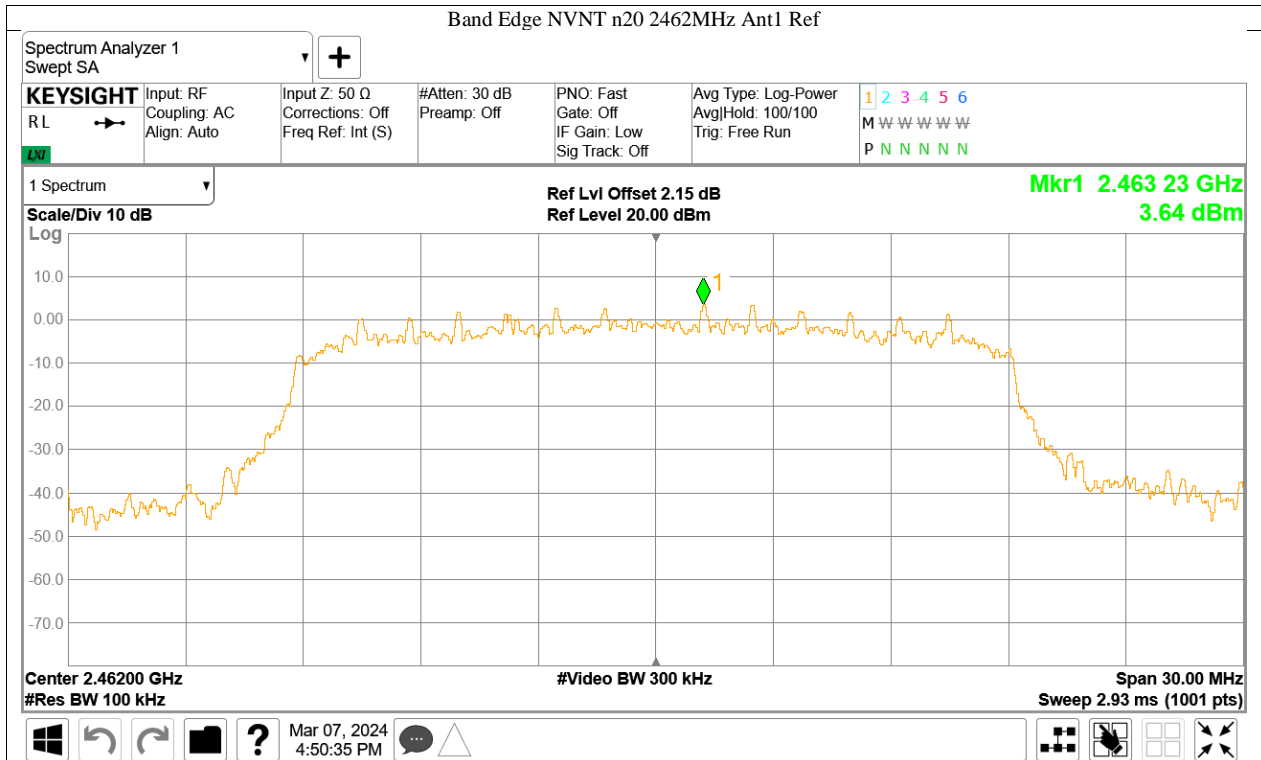

## 10.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10
  - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
  - 2) For Peak unwanted emissions Above 1GHz:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.  
Procedures for average unwanted emissions measurements above 1GHz
    - a) RBW = 1MHz.
    - b) VBW \ [3 × RBW].
    - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.  
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
    - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
    - e) Sweep time = auto.
    - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
    - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
      - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

## Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength $\mu\text{V}/\text{m}$	Field Strength $\text{dB}\mu\text{V}/\text{m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1:  $\text{Limit } 3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(300\text{m}/3\text{m})$  (Below 30MHz)

Note 2:  $\text{Limit } 3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$  (Below 30MHz)

### Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.

Pre-scan with three orthogonal axis and worst case as X axis listed below table

Test mode:802.11B (2412MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2384.72	49.45	74.00	24.55	PK	Hoizrnotal
4823.86	48.20	74.00	25.80	PK	Hoizrnotal
2384.75	49.14	74.00	24.86	PK	Vertical
4824.43	45.51	74.00	28.49	PK	Vertical

Test mode:802.11B (2437MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4873.73	48.54	74.00	25.46	PK	Hoizrnotal
4874.30	45.14	74.00	28.86	PK	Vertical

Test mode:802.11B (2462MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.58	50.20	74.00	23.80	PK	Hoizrnotal
4924.16	48.53	74.00	25.47	PK	Hoizrnotal
2483.67	49.69	74.00	24.31	PK	Vertical
4923.60	46.07	74.00	27.93	PK	Vertical

Test mode:802.11g (2412MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2389.48	50.28	74.00	23.72	PK	Hoirznotal
4823.86	45.64	74.00	28.36	PK	Hoirznotal
2384.59	48.93	74.00	25.07	PK	Vertical
4823.30	45.43	74.00	28.57	PK	Vertical

Test mode:802.11g (2437MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4873.73	46.08	74.00	27.92	PK	Hoirznotal
4873.73	45.59	74.00	28.41	PK	Vertical

Test mode:802.11g (2462MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.63	53.18	74.00	20.82	PK	Hoirznotal
2483.63	46.80	54.00	7.20	AV	Hoirznotal
4925.30	46.11	74.00	27.89	PK	Hoirznotal
2483.55	51.08	74.00	22.92	PK	Vertical
4922.46	45.73	74.00	28.27	PK	Vertical

Test mode:802.11n20 (2412MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2384.66	48.54	74.00	25.46	PK	Hoizrnotal
4825.00	44.75	74.00	29.25	PK	Hoizrnotal
2385.06	48.73	74.00	25.27	PK	Vertical
4824.43	45.66	74.00	28.34	PK	Vertical

Test mode:802.11n20 (2437MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4872.60	45.80	74.00	28.20	PK	Hoizrnotal
4876.56	45.38	74.00	28.62	PK	Vertical

Test mode:802.11n20 (2462MHz)					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.66	52.01	74.00	21.99	PK	Hoizrnotal
2483.66	46.40	54.00	7.60	AV	Hoizrnotal
4923.60	45.90	74.00	28.10	PK	Hoizrnotal
2483.70	50.53	74.00	23.47	PK	Vertical
4923.03	45.55	74.00	28.45	PK	Vertical

## Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading





The worst case of Radiated Emission below 1GHz: X axis transmitting TX at 2437MHz (802.11g)

## 30-1000MHz Radiated Emission

### EUT Information


EUT Name: Wi-Fi and BLE Module  
 Model: T1-U-HL  
 Client: Hangzhou Tuya Information Technology Co., Ltd  
 Op Cond: Power on, TX\_2437 at g Mode, DC 3.3V, T19.2, H49.4%, P101.9kPa  
 Operator: Huali CHENG  
 Test Spec: FCC Part 15.209(a)  
 Comment: Horizontal  
 Sample No: SHA-793030-2

### Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

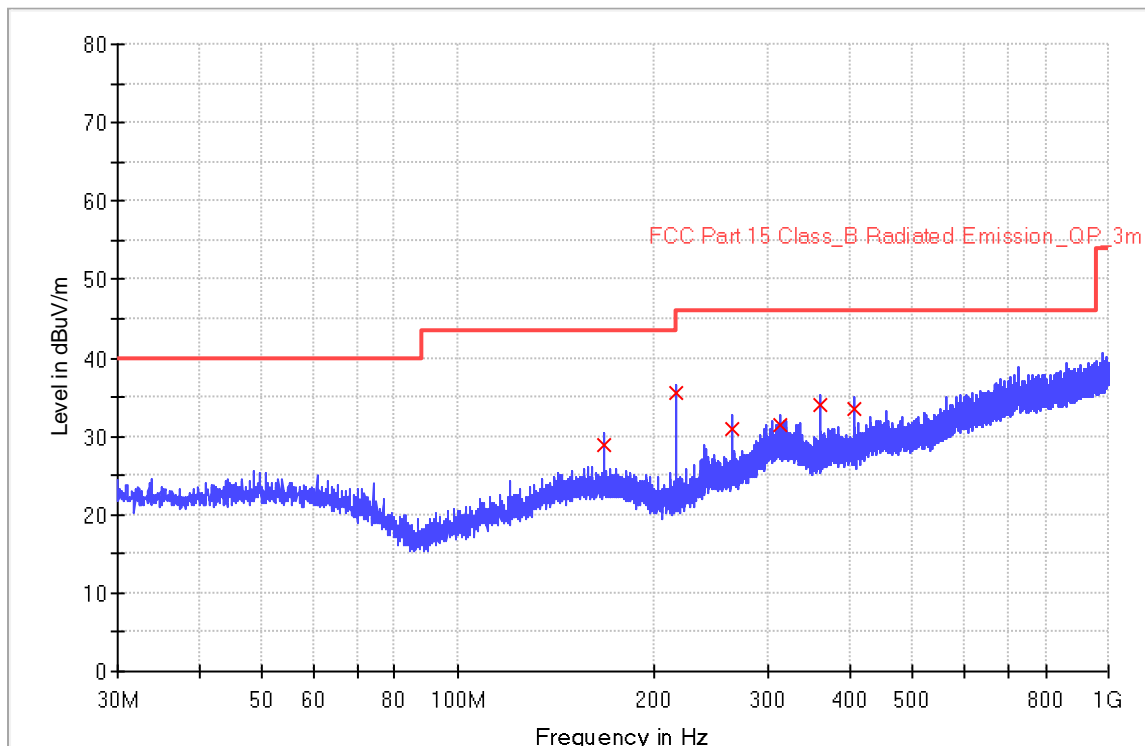



## Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
168.000000	28.9	1000.0	120.000	195.0	H	174.0	20.4	14.6	43.5
216.000000	35.6	1000.0	120.000	185.0	H	320.0	17.5	10.4	46.0
263.960000	30.9	1000.0	120.000	126.0	H	98.0	20.1	15.1	46.0
311.960000	31.3	1000.0	120.000	142.0	H	201.0	21.9	14.7	46.0
360.000000	33.9	1000.0	120.000	136.0	H	125.0	23.0	12.1	46.0
408.000000	33.5	1000.0	120.000	152.0	H	36.0	24.2	12.5	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



# 30-1000MHz Radiated Emission

## EUT Information


EUT Name: Wi-Fi and BLE Module  
 Model: T1-U-HL  
 Client: Hangzhou Tuya Information Technology Co., Ltd  
 Op Cond: Power on, TX\_2437 at g Mode, DC 3.3V, T19.2, H49.4%, P101.9kPa  
 Operator: Huali CHENG  
 Test Spec: FCC Part 15.209(a)  
 Comment: Vertical  
 Sample No: SHA-793030-2

## Sweep Setup: RE\_VULB9168\_pre\_Cont\_30-1000 [EMI radiated]

Hardware Setup: RE\_VULB9168  
 Receiver: [ESR 3]  
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE\_VULB9168\_pre\_Cont\_30-1000

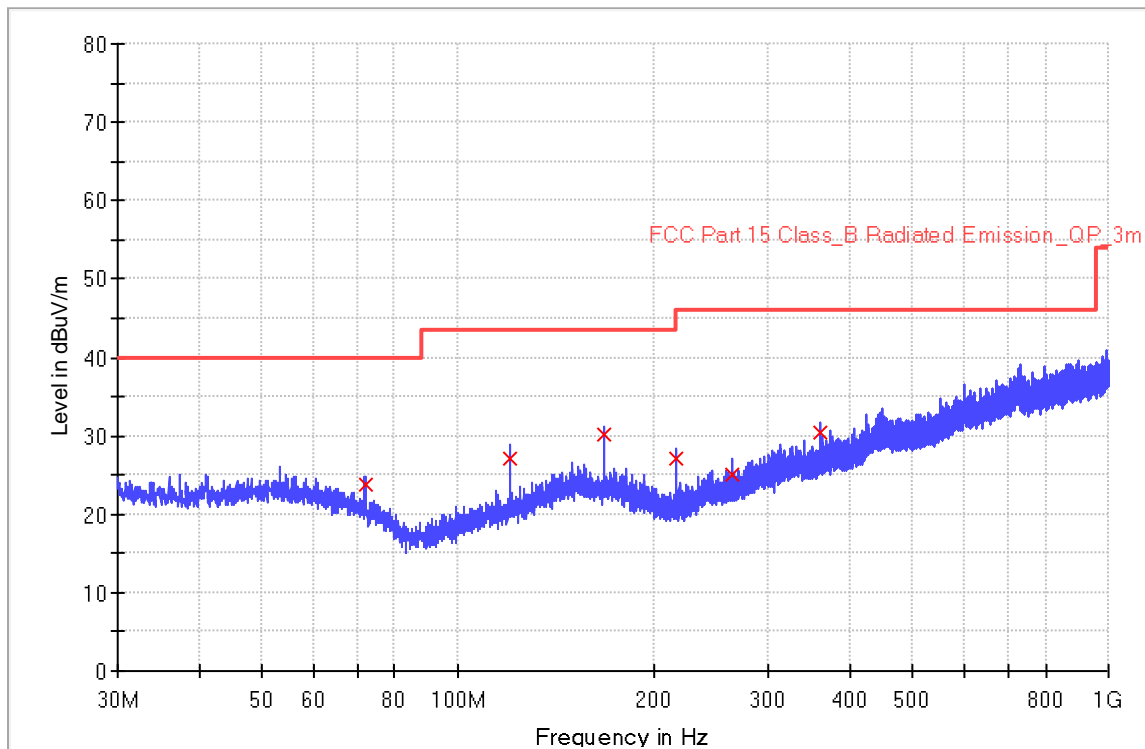



## Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
72.000000	23.8	1000.0	120.000	102.0	V	23.0	18.2	16.2	40.0
119.960000	27.2	1000.0	120.000	115.0	V	105.0	18.1	16.3	43.5
168.000000	30.2	1000.0	120.000	123.0	V	119.0	20.4	13.3	43.5
215.960000	27.0	1000.0	120.000	105.0	V	325.0	17.5	16.5	43.5
264.000000	24.9	1000.0	120.000	100.0	V	265.0	20.1	21.1	46.0
360.040000	30.5	1000.0	120.000	109.0	V	185.0	23.0	15.5	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



## 11 Test Equipment List

List of Test Instruments  
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal spectrum analyzer	Agilent	N9020B	MY59050168	2024-2-19	2025-2-18
	Wideband power sensor	Rohde & Schwarz	NRP-Z81	105903	2024-2-19	2025-2-18
	10dB Attenuator	Aeroflex Weinschel	CG-4689	93459	2024-2-19	2025-2-18
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2023-8-1	2024-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2023-8-1	2024-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2021-9-23	2024-9-22
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-4-13	2024-4-12
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2023-8-1	2024-7-31
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2023-6-15	2024-6-14
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C	00246076	2023-7-7	2026-7-6
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-8	2024-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2023-8-1	2024-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2023-8-1	2024-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	MTS 8310	MWRFTest	3.0.0.0
	Power Viewer	Rohde & Schwarz	V 11.0
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

**C - Conducted RF tests**

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density
- Spurious RF conducted emissions
- Band edge



## 12 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.16dB
Radiated Disturbance	30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB
Carrier power conducted measurement	50MHz~18GHz, 1.238dB
Spurious Emission Conducted Measurement	9kHz ~40GHz, 1.224dB

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.



## 13 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



## 14 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----