



## FCC Test Report

**Report No.:** ARFR-ESH-P19122002B-1

**FCC ID:** 2ANDLTY-R8808

**Product:** Smart Camera

**Test Model:** SC211-WE2

**Received Date:** Dec.20, 2019

**Test Date:** Dec.20, 2019 to Jan.09,2020

**Issued Date:** Jan.11,2020

**Applicant:** Hangzhou Tuya Information Technology Co., Ltd

**Address:** Room701, Building3, More Center,No.87 GuDun Road, Hangzhou, Zhejiang, China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Address:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.





## Table of Contents

Release Control Record .....	4
1 Certificate of Conformity .....	5
2 Summary of Test Results .....	6
2.1 Test Instruments .....	7
2.2 Measurement Uncertainty .....	8
2.3 Modification Record .....	8
3 General Information .....	9
3.1 General Description of EUT .....	9
3.2 Description of Test Modes .....	10
3.2.1 Test Mode Applicability: .....	11
3.2.2 Test Condition: .....	12
3.3 Duty Cycle of Test Signal .....	13
3.4 General Description of Applied Standards .....	13
4 Test Procedure and Results .....	14
4.1 6dB Bandwidth Measurement .....	14
4.1.1 Limit .....	14
4.1.2 Test Setup .....	14
4.1.3 Test Procedures .....	14
4.1.4 Deviation of Test Standard .....	14
4.1.5 Test Results .....	15
4.2 Conducted Output Power Measurement .....	23
4.2.1 Limit .....	23
4.2.2 Test Setup .....	23
4.2.3 Test Procedures .....	23
4.2.4 Deviation of Test Standard .....	23
4.2.5 Test Results .....	24
4.3 Power Spectral Density Measurement .....	25
4.3.1 Limit .....	25
4.3.2 Test Setup .....	25
4.3.3 Test Procedures .....	25
4.3.4 Deviation of Test Standard .....	26
4.3.5 Test Results .....	26



4.4	Emissions in non-restricted frequency bands .....	34
4.4.1	Limit .....	34
4.4.2	Test Setup.....	34
4.4.3	Test Procedures.....	34
4.4.4	Deviation of Test Standard.....	35
4.4.5	Test Results .....	36
4.5	Radiated Emission Measurement .....	60
4.5.1	Limits .....	60
4.5.2	Test Procedures.....	60
4.5.3	Deviation from Test Standard .....	62
4.5.4	Test Setup.....	63
4.5.5	EUT Operating Conditions.....	64
4.5.6	Test Results .....	64
4.6	Conducted Emission Measurement .....	74
4.6.1	Limits .....	74
4.6.2	Test Procedures.....	74
4.6.3	Deviation from Test Standard .....	74
4.6.4	Test Setup.....	75
4.6.5	EUT Operating Conditions.....	75
4.6.6	Test Results .....	76
4.7	Radiated Restricted Band Edge Measurement.....	78
4.7.1	Test Limit .....	78
4.7.2	Test Procedure Reference.....	79
4.7.3	Test Procedures.....	79
4.7.4	Test Setup.....	80
4.7.5	Test Results .....	81
5	Pictures of Test Arrangements .....	113



### Release Control Record

Issue No.	Description	Date Issued
ARFR-ESH-P19122002B-1	Original release	Jan.11,2020

## 1 Certificate of Conformity

**Product:** Smart Camera

**Brand:** --

**Test Model:** SC211-WE2


**Applicant:** Hangzhou Tuya Information Technology Co., Ltd

**Test Date:** Dec.20, 2019 to Jan.09,2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**



**Date:** Jan.11, 2020

Will Yan

Project Engineer

**Approved by :**



**Date:** Jan.11, 2020

Daniel Sun

RF Supervisor





## 2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.
15.247(d)	Emissions in non-restricted frequency bands	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



## 2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Feb.09,19	Feb.08,20
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.26,19	Aug.25,20
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Oct.18, 19	Oct.17, 20
Pre-Amplifier(1GHz-26.5GHz)	Agilent	8449B	E1A2002	Mar. 26, 19	Mar. 25, 20
EMI test receiver	R&S	ESR7	E1R1005	Dec.04, 19	Dec.03, 20
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23,19	Jul.22, 20
RF Unit Control System	Toscend	JS0806-2	E1CS003	Apr.11.19	Apr.18.20
EMI test receiver	R&S	ESCS30	E1R1001	Mar.26, 19	Mar.25, 20
LISN	R&S	ENV216	E1L1011	Jul.18, 19	Jul.17, 20
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 04, 19	Apr. 03, 20
Test Software	ADT	ADT_COND_V 7.3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A



## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ ) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

## 2.3 Modification Record

There were no modifications required for compliance.





### 3 General Information

#### 3.1 General Description of EUT

Product	Smart Camera
Brand	--
Test Model	SC211-WE2
Model Difference	See Note 2
Power Rating	5VDC/2A with adaptor 100-240V~,50/60Hz
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Operating Frequency	See clause 3.2
Number of Channel	See clause 3.2
Antenna Type	FPC Antenna
Antenna Connector	--
Antenna Gain	3.0dBi

Note: 1.For more details, please refer to the User's manual of the EUT.

Modulation Mode	TX /RX Function
802.11b	1TX / 1RX
802.11g	1TX / 1RX
802.11n (HT20)	1TX / 1RX
802.11n (HT40)	1TX / 1RX



### 3.2 Description of Test Modes

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20) and 802.11n (HT40)

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	-



### 3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz      **RE≤1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0



### **Antenna Port Conducted Measurement**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>EUT CONFIGURE MODE</b>	<b>MODE</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### **3.2.2 Test Condition:**

<b>Applicable to</b>	<b>Normal Environmental Conditions</b>	<b>Normal Input Power</b>
<b>RE ≥ 1G</b>	25deg. C, 60%RH	120Vac, 60Hz
<b>RE &lt; 1G</b>	25deg. C, 60%RH	120Vac, 60Hz
<b>PLC</b>	25deg. C, 60%RH	120Vac, 60Hz
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz

### 3.3 Duty Cycle of Test Signal

The Duty Cycle of the EUT is 98.57%.



#### Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

**FCC Part 15, Subpart C (15.247)**

**KDB 558074 D01 DTS Meas Guidance v05r02**

**ANSI C63.10:2013**

All relaxed test items have been performed and recorded as per the above standard.


## 4 Test Procedure and Results

### 4.1 6dB Bandwidth Measurement

#### 4.1.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

#### 4.1.2 Test Setup

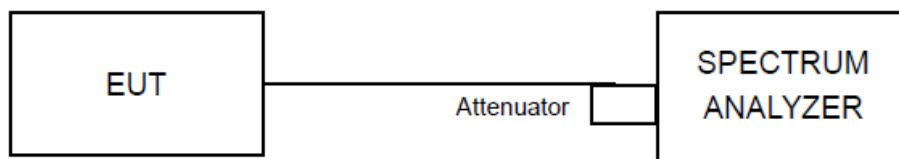

#### 4.1.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3 RBW, peak detector with maximum hold) is implemented by the instrumentation function.

#### 4.1.4 Deviation of Test Standard

No deviation.

### 4.1.5 Test Results

#### 802.11b

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	13.488	9.059	0.5	Pass
6	2437	13.585	9.060	0.5	Pass
11	2462	13.525	9.063	0.5	Pass

### Spectrum Plot

#### 802.11b(2412MHz)





### 802.11b(2437MHz)



### 802.11b(2462MHz)








802.11g

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.482	16.360	0.5	Pass
6	2437	16.475	16.350	0.5	Pass
11	2462	16.471	16.350	0.5	Pass


Spectrum Plot

802.11g(2412MHz)

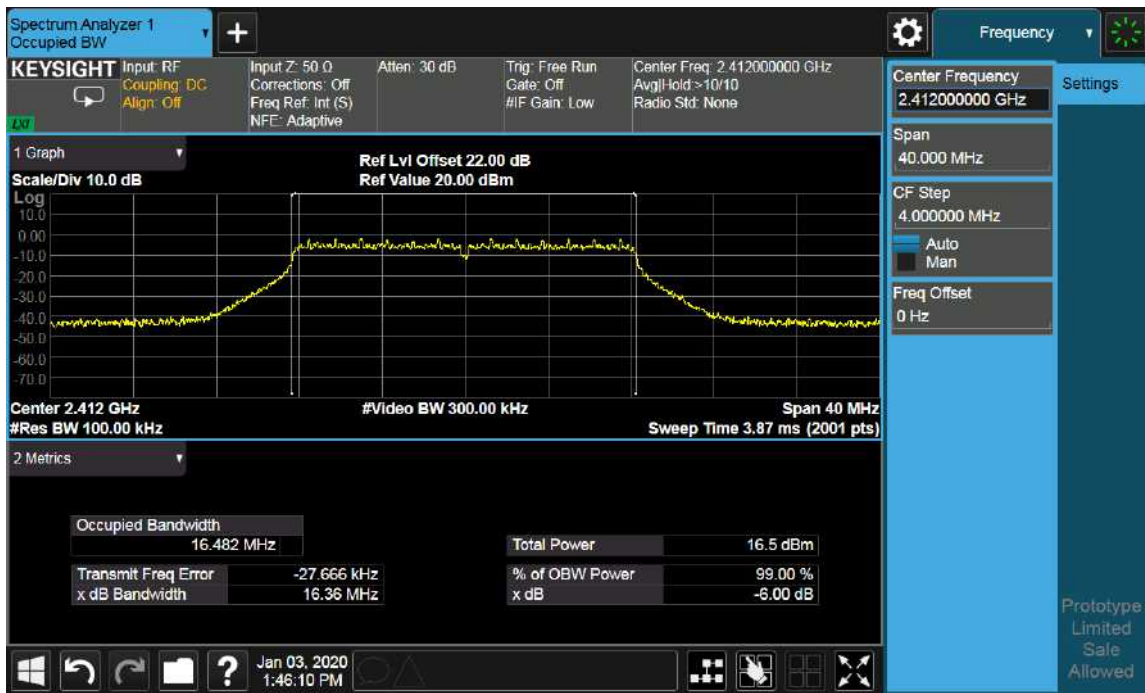




### 802.11g(2437MHz)

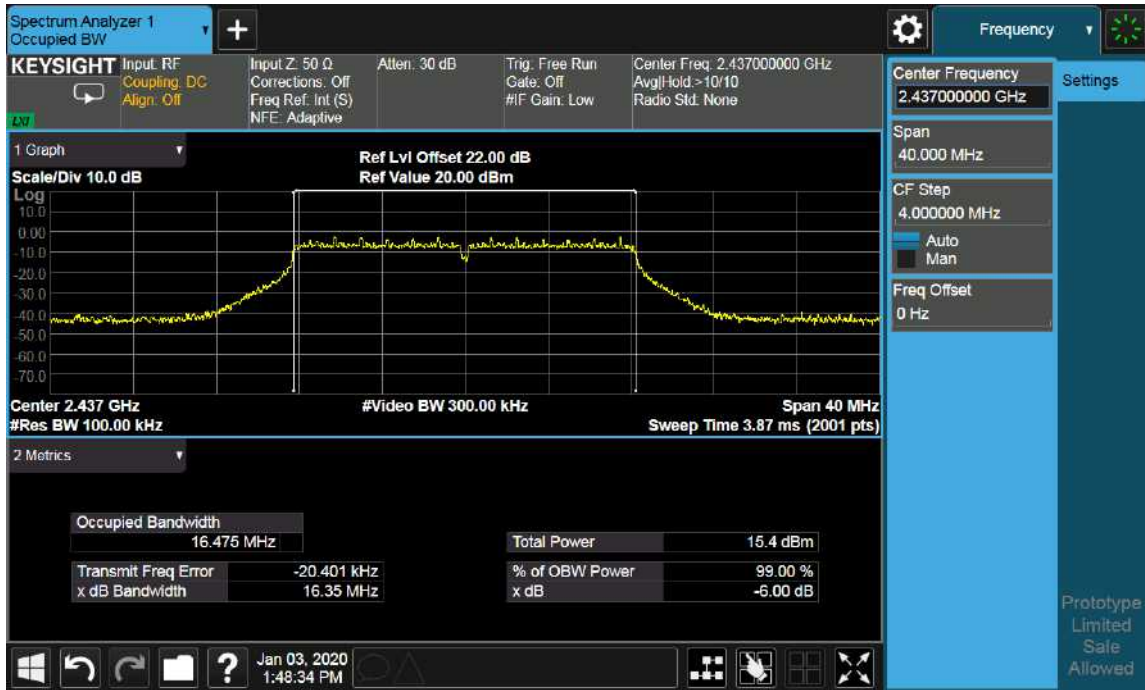

### 802.11g(2462MHz)

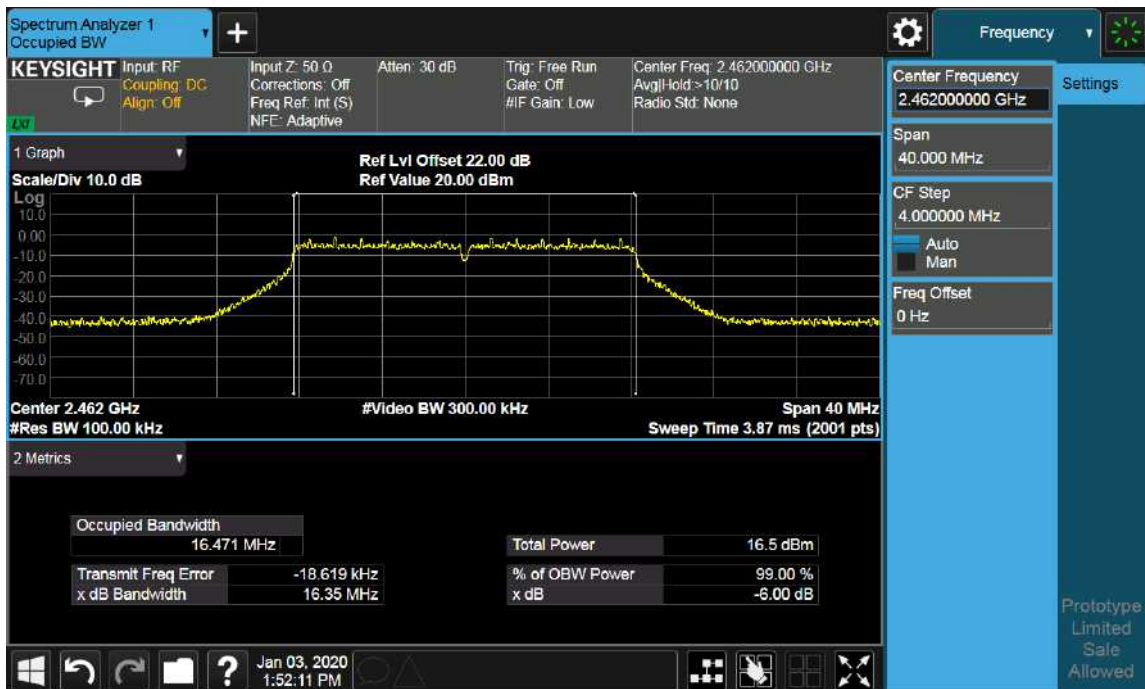




802.11 n(HT20)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.609	17.550	0.5	Pass
6	2437	17.613	17.550	0.5	Pass
11	2462	17.618	17.750	0.5	Pass

Spectrum Plot

802.11n(HT20)(2412MHz)

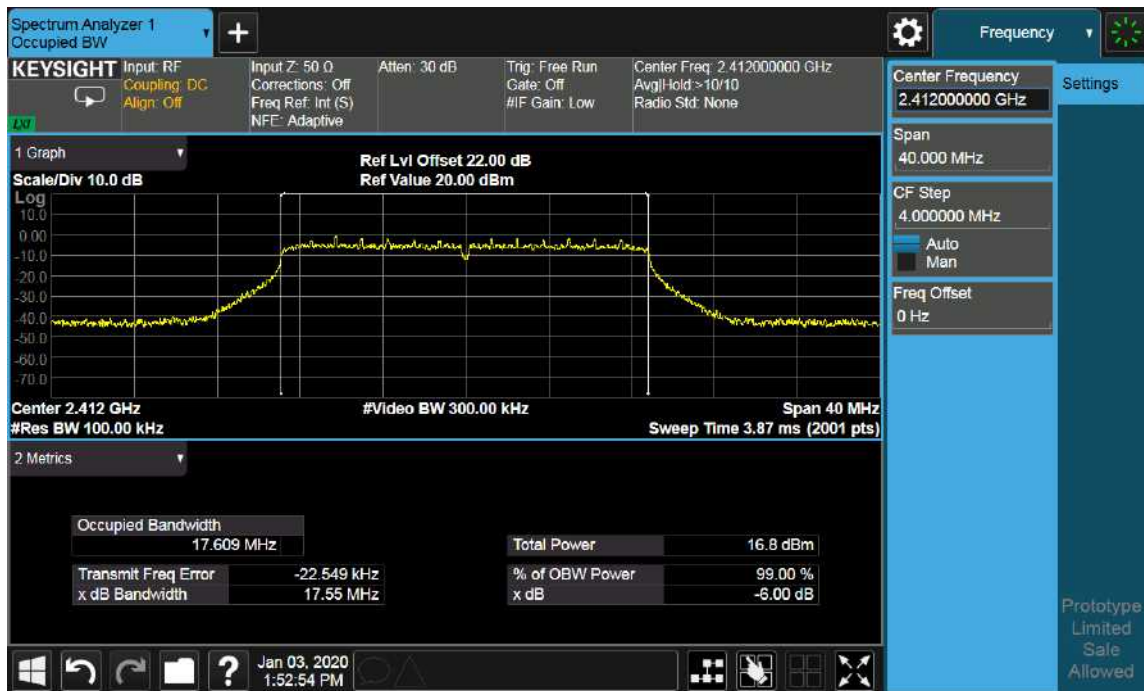



### 802.11n(HT20)(2437MHz)



### 802.11n(HT20)(2462MHz)






802.11n(HT40)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
3	2422	36.081	35.760	0.5	Pass
6	2437	36.103	35.940	0.5	Pass
9	2452	36.076	35.950	0.5	Pass

Spectrum Plot

802.11n(HT40)(2422MHz)

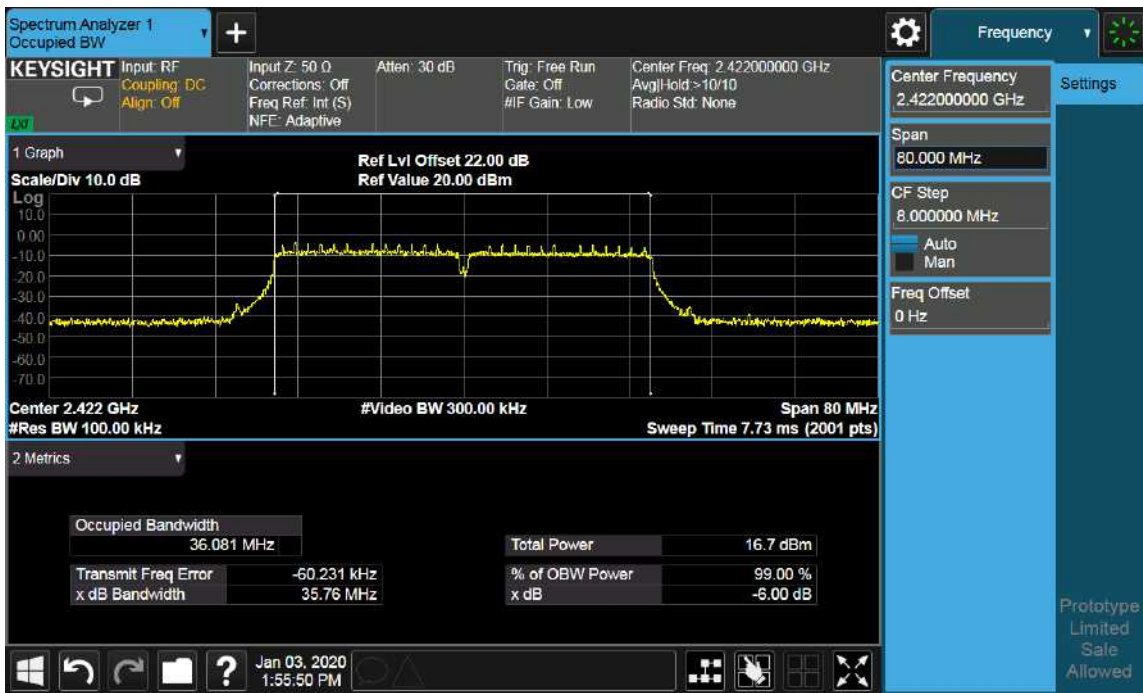





### 802.11n(HT40)(2437MHz)



### 802.11n(HT40)(2452MHz)




## 4.2 Conducted Output Power Measurement

### 4.2.1 Limit

For systems using digital modulation in the 2400 – 2483.5 MHz bands: 1 Watt (30 dBm)

### 4.2.2 Test Setup

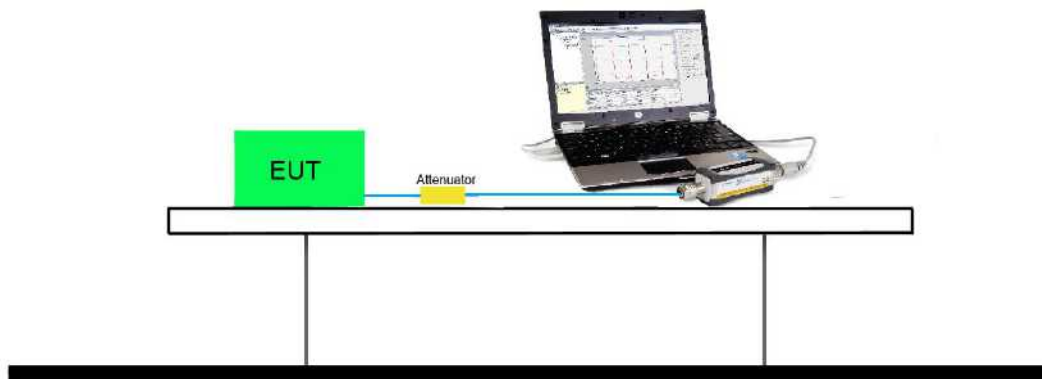

### 4.2.3 Test Procedures

#### **Method PKPM1 (Peak Power Measurement)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### **Method AVGPM-G (Measurement using a gated RF average-reading power meter)**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

### 4.2.4 Deviation of Test Standard

No deviation.



#### 4.2.5 Test Results

##### 802.11b

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	13.30	30	Pass
6	2437	14.30	30	Pass
11	2462	12.78	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	14.03	30	Pass
6	2437	13.26	30	Pass
11	2462	14.38	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	13.71	30	Pass
6	2437	13.06	30	Pass
11	2462	13.00	30	Pass

##### 802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
3	2422	13.26	30	Pass
6	2437	12.89	30	Pass
9	2452	13.28	30	Pass




### 4.3 Power Spectral Density Measurement

#### 4.3.1 Limit

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band.

#### 4.3.2 Test Setup

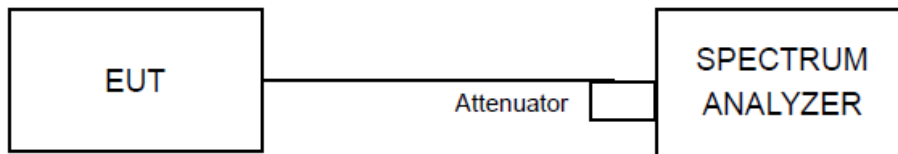

#### 4.3.3 Test Procedures

The power output per FCC § 15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance to FCC 47CFR 15.247 requirements.

- a) Measure the duty cycle (x) of the transmitter output signal.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 OBW.
- d) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- e) Set VBW  $\geq 3 \text{ RBW}$ .
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep  $\geq 2 \text{ span/RBW}$ .
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to “free run”.
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).



### 4.3.4 Deviation of Test Standard

No deviation.

### 4.3.5 Test Results

#### 802.11b

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-10.34	8	Pass
6	2437	-9.66	8	Pass
11	2462	-10.11	8	Pass

### Spectrum Plot

#### 802.11b(2412MHz)





### 802.11b(2437MHz)



### 802.11b(2462MHz)





802.11g


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-13.01	8	Pass
6	2437	-15.05	8	Pass
11	2462	-13.85	8	Pass

Spectrum Plot


802.11g(2412MHz)



### 802.11g(2437MHz)

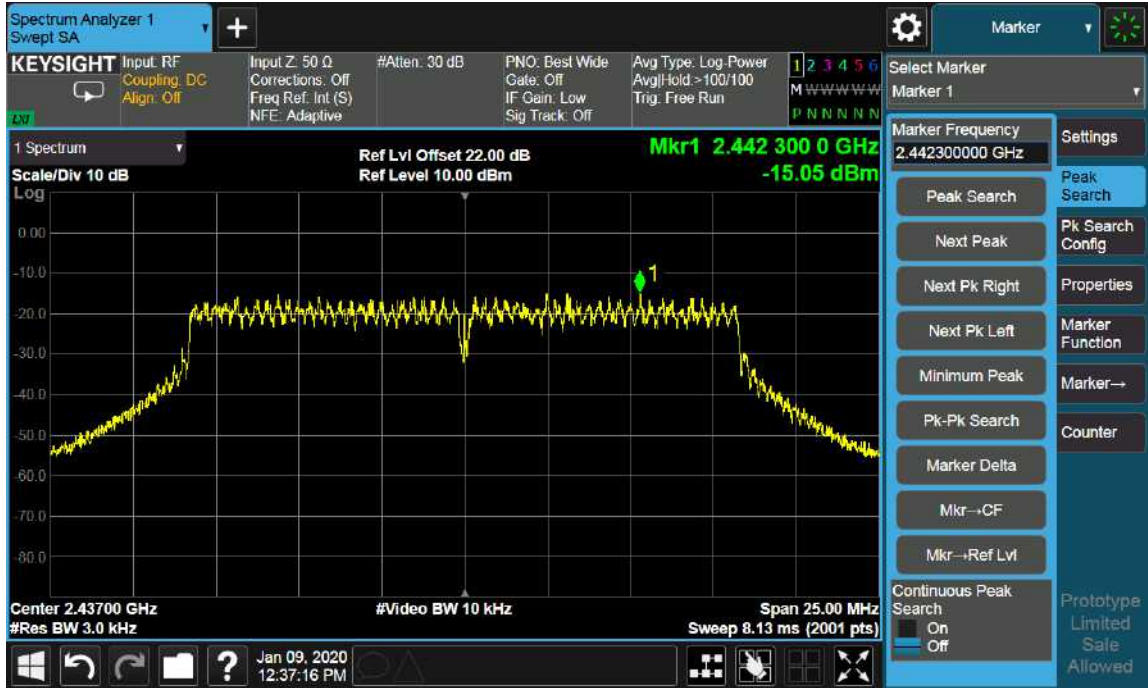

### 802.11g(2462MHz)

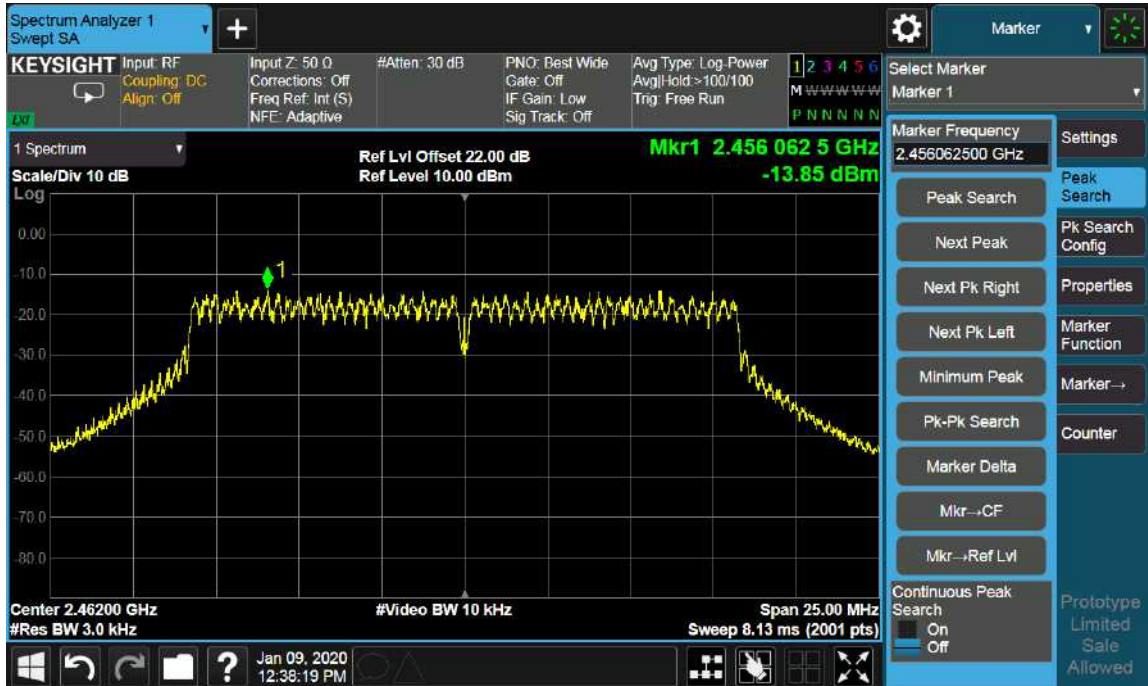

### 802.11n(HT20)







Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-13.54	8	Pass
6	2437	-13.72	8	Pass
11	2462	-14.49	8	Pass

### Spectrum Plot


802.11n(HT20)(2412MHz)

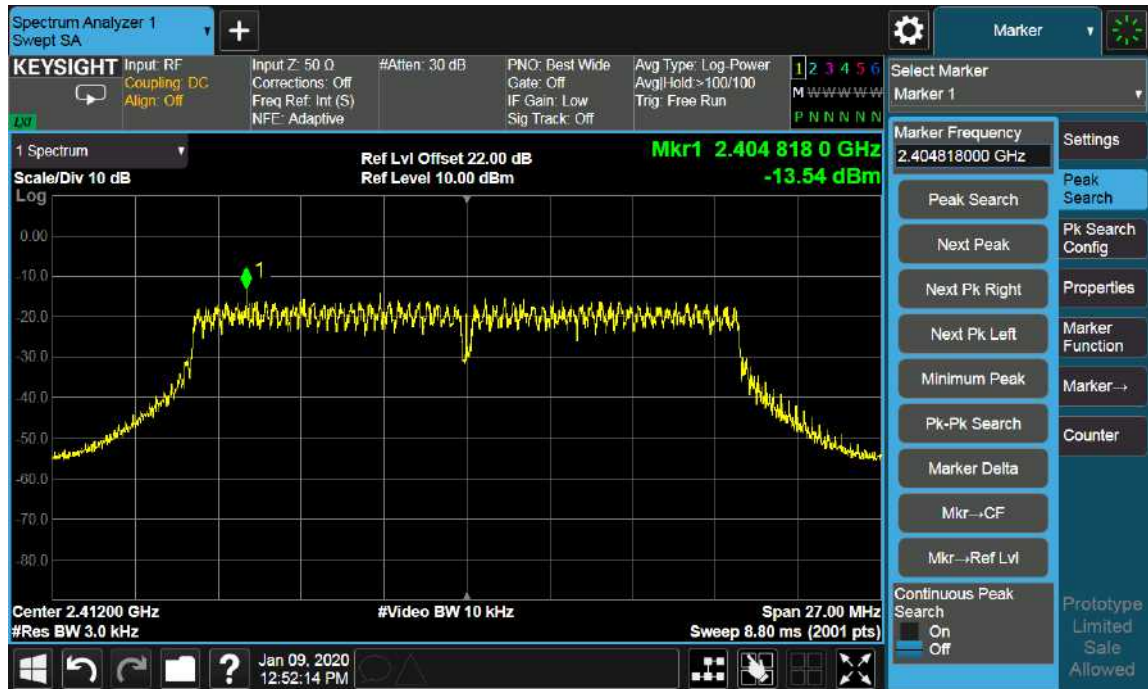

### 802.11n(HT20)(2437MHz)

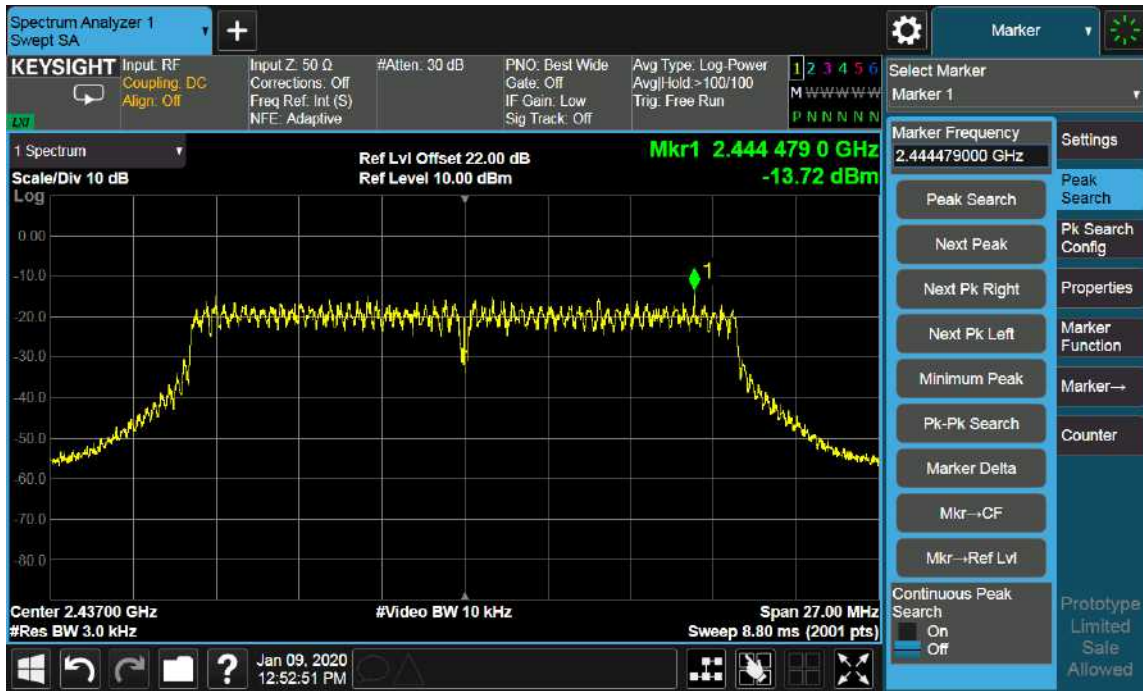

### 802.11n(HT20)(2462MHz)

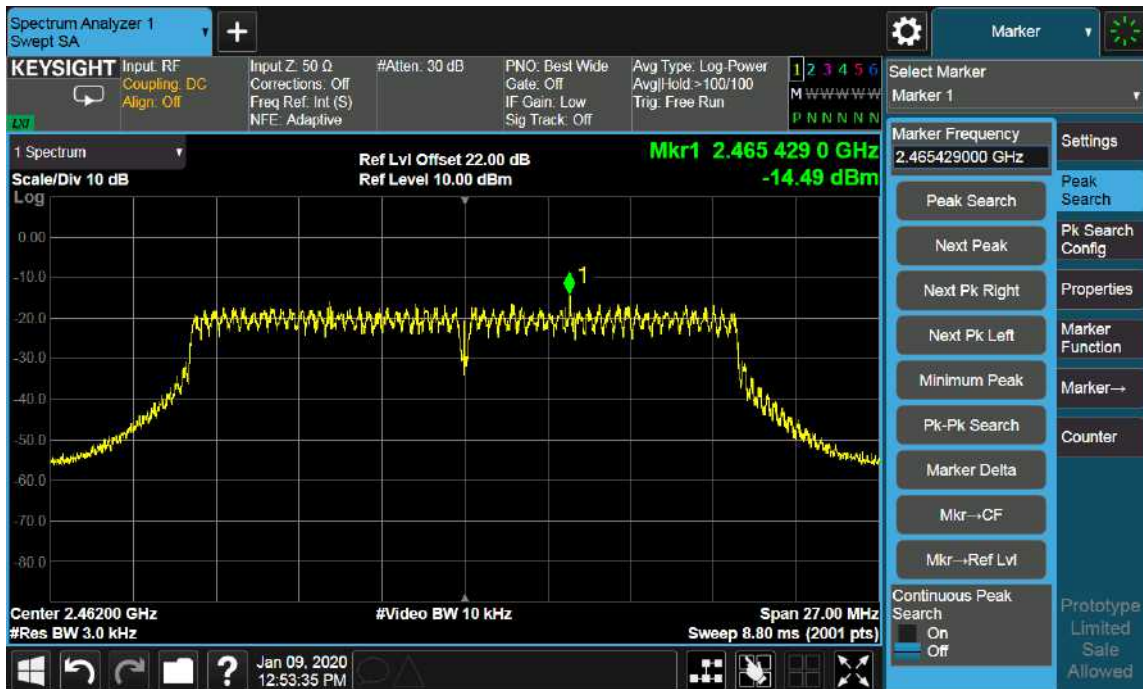




802.11n(HT40)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
3	2422	-16.58	8	Pass
6	2437	-16.65	8	Pass
9	2452	-17.55	8	Pass


Spectrum Plot

802.11n(HT40)(2422MHz)

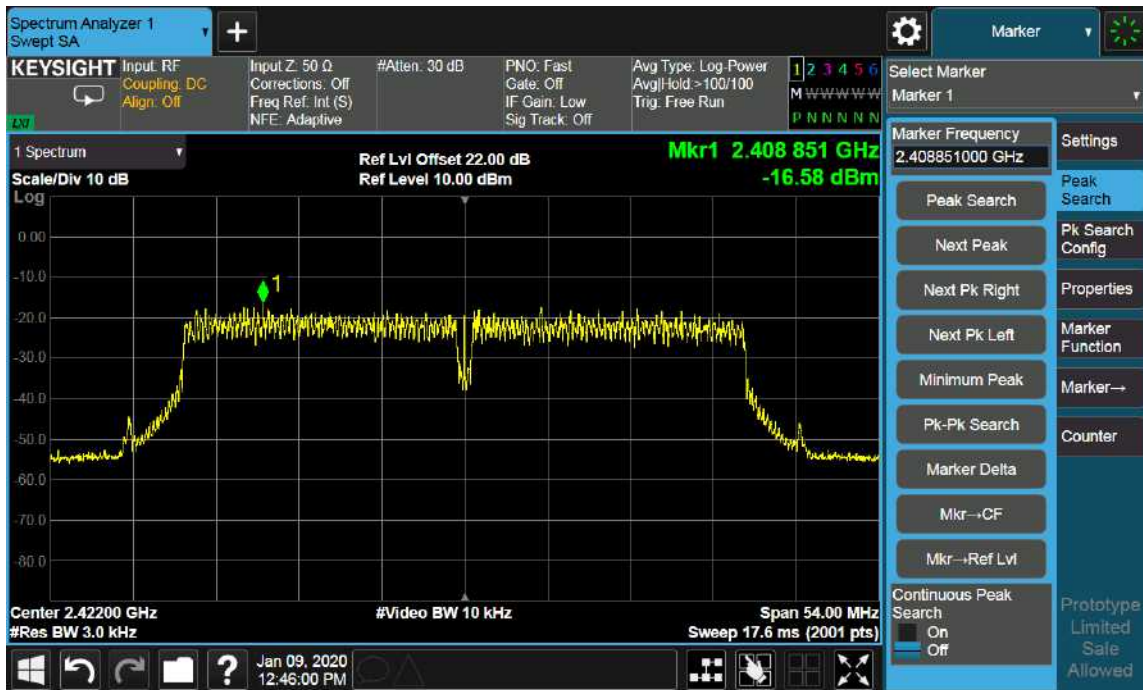



### 802.11n(HT40)(2437MHz)

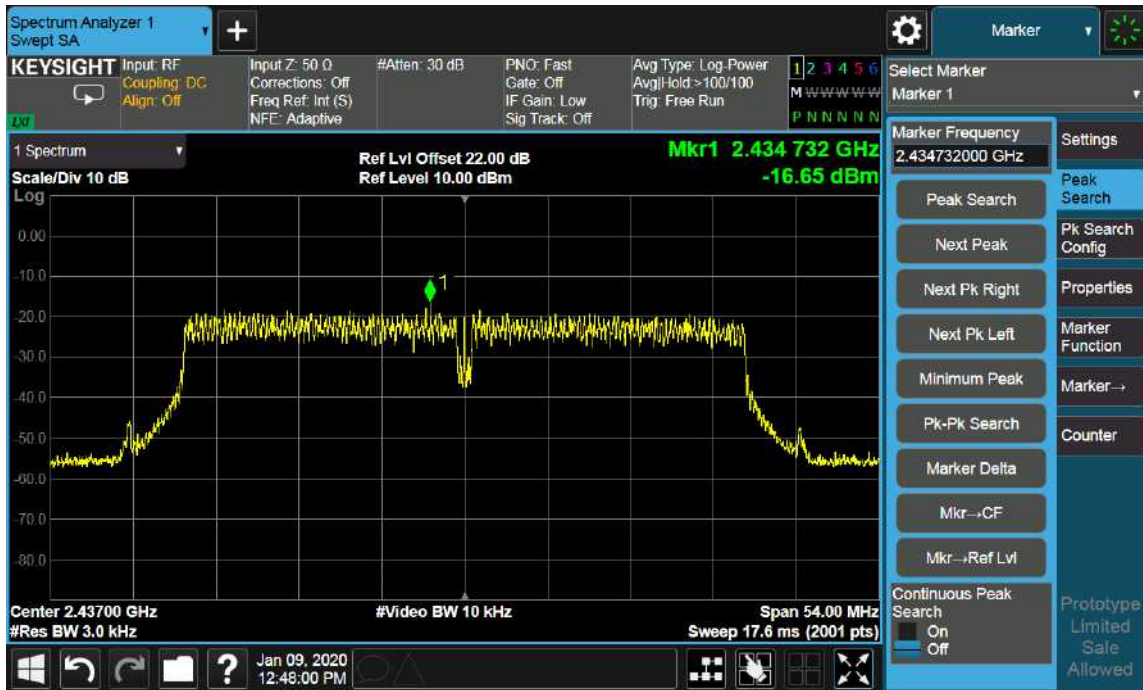

### 802.11n(HT40)(2452MHz)




#### 4.4 Emissions in non-restricted frequency bands

##### 4.4.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

##### 4.4.2 Test Setup

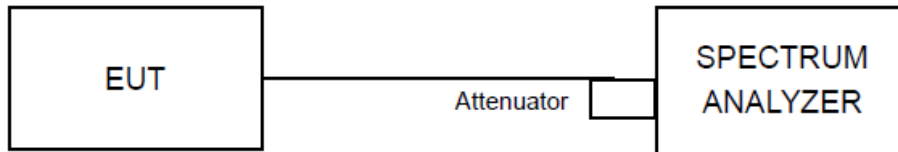

##### 4.4.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.



6. Allow trace to fully stabilize.

7. Use the peak marker function to determine the maximum amplitude level.

#### **4.4.4 Deviation of Test Standard**

No deviation.



### 4.4.5 Test Results

#### 802.11b

Channel	Frequency (MHz)	Pass / Fail
1	2412	Pass
6	2437	Pass
11	2462	Pass

#### Spectrum Plot

#### 802.11b(2412MHz)





### 802.11b(2437MHz)



### 802.11b(2462MHz)





### Spectrum Plot

#### 802.11b(2412MHz) Band Edge



#### 802.11b(2462MHz) Band Edge





### Spectrum Plot

### 802.11b(2412MHz) Out-of-Band Emissions



### Spectrum Plot

#### 802.11b(2437MHz) Out-of-Band Emissions







### Spectrum Plot

### 802.11b(2462MHz) Out-of-Band Emissions





802.11g

Channel	Frequency (MHz)	Pass / Fail
1	2412	Pass
6	2437	Pass
11	2462	Pass

Spectrum Plot

802.11g(2412MHz)



### 802.11g(2437MHz)



### Spectrum Plot

### 802.11g(2462MHz)





### Spectrum Plot

#### 802.11g(2412MHz) Band Edge



#### 802.11g(2462MHz) Band Edge





### Spectrum Plot

### 802.11g(2412MHz) Out-of-Band Emissions





### Spectrum Plot

### 802.11g(2437MHz) Out-of-Band Emissions





### Spectrum Plot

### 802.11g(2462MHz) Out-of-Band Emissions







802.11n(HT20)

Channel	Frequency (MHz)	Pass / Fail
1	2412	Pass
6	2437	Pass
11	2462	Pass

Spectrum Plot

802.11n(HT20)(2412MHz)



### 802.11n(HT20)(2437MHz)



### Spectrum Plot

### 802.11n(HT20)(2462MHz)



### Spectrum Plot

#### 802.11n(HT20)(2412MHz) Band Edge



#### 802.11n(HT20)(2462MHz) Band Edge







### Spectrum Plot

#### 802.11n(HT20)(2412MHz) Out-of-Band Emissions



### Spectrum Plot

#### 802.11n(HT20)(2437MHz) Out-of-Band Emissions



### Spectrum Plot

#### 802.11n(HT20)(2462MHz) Out-of-Band Emissions







802.11n(HT40)

Channel	Frequency (MHz)	Pass / Fail
3	2422	Pass
6	2437	Pass
9	2452	Pass

Spectrum Plot

802.11n(HT40)(2422MHz)



### 802.11n(HT40)(2437MHz)



### Spectrum Plot

### 802.11n(HT40)(2452MHz)



### Spectrum Plot

#### 802.11n(HT40)(2422MHz) Band Edge



#### 802.11n(HT40)(2452MHz) Band Edge







### Spectrum Plot

### 802.11n(HT40)(2422MHz) Out-of-Band Emissions



### Spectrum Plot

### 802.11n(HT40)(2437MHz) Out-of-Band Emissions



### Spectrum Plot

#### 802.11n(HT40)(2452MHz) Out-of-Band Emissions







## 4.5 Radiated Emission Measurement

### 4.5.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

### 4.5.2 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from



0 degree to 360 degree to find the maximum reading.

- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**Note:**

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

**For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle  $\geq$  98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.




#### 4.5.3 Deviation from Test Standard


No deviation.

#### 4.5.4 Test Setup


For Radiated emission below 30MHz

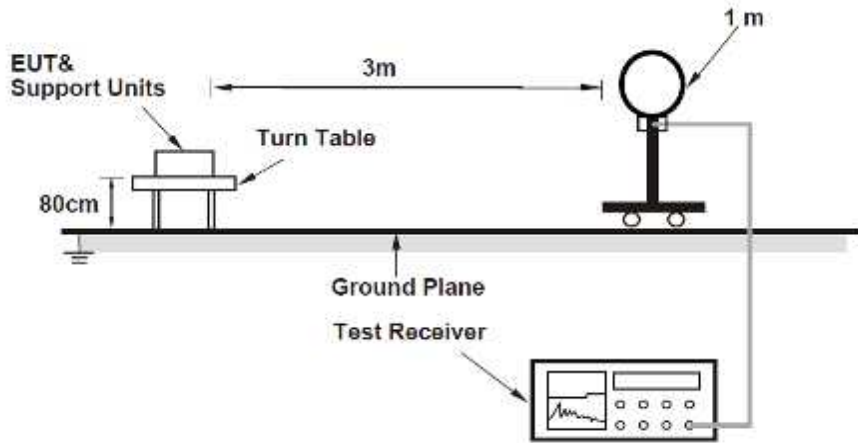

For Radiated emission 30MHz to 1GHz

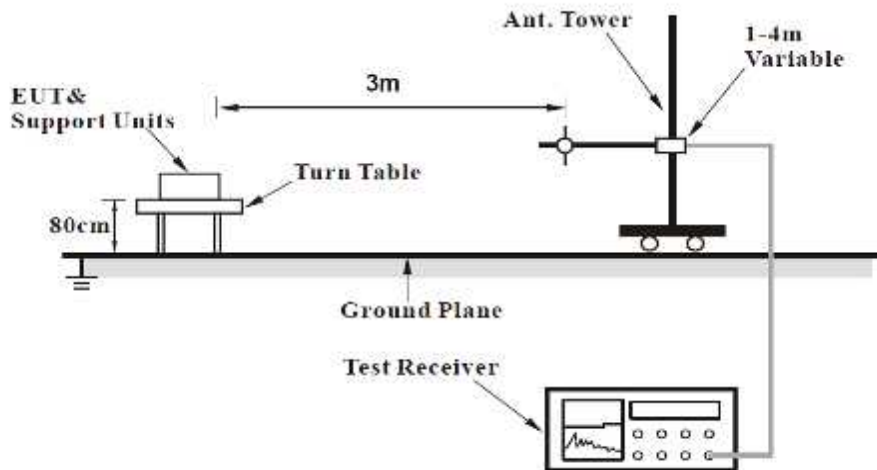

For Radiated emission above 1GHz

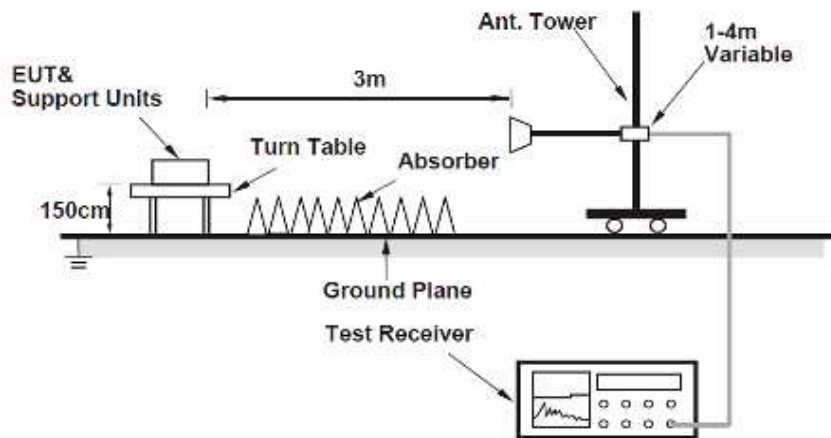



For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### **4.5.5 EUT Operating Conditions**

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### **4.5.6 Test Results**

##### **Radiated Emissions Range 9kHz~30MHz**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.



### Radiated Emissions Range 30MHz~1GHz

Mode	802.11b-2412MHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal

Test Plot:

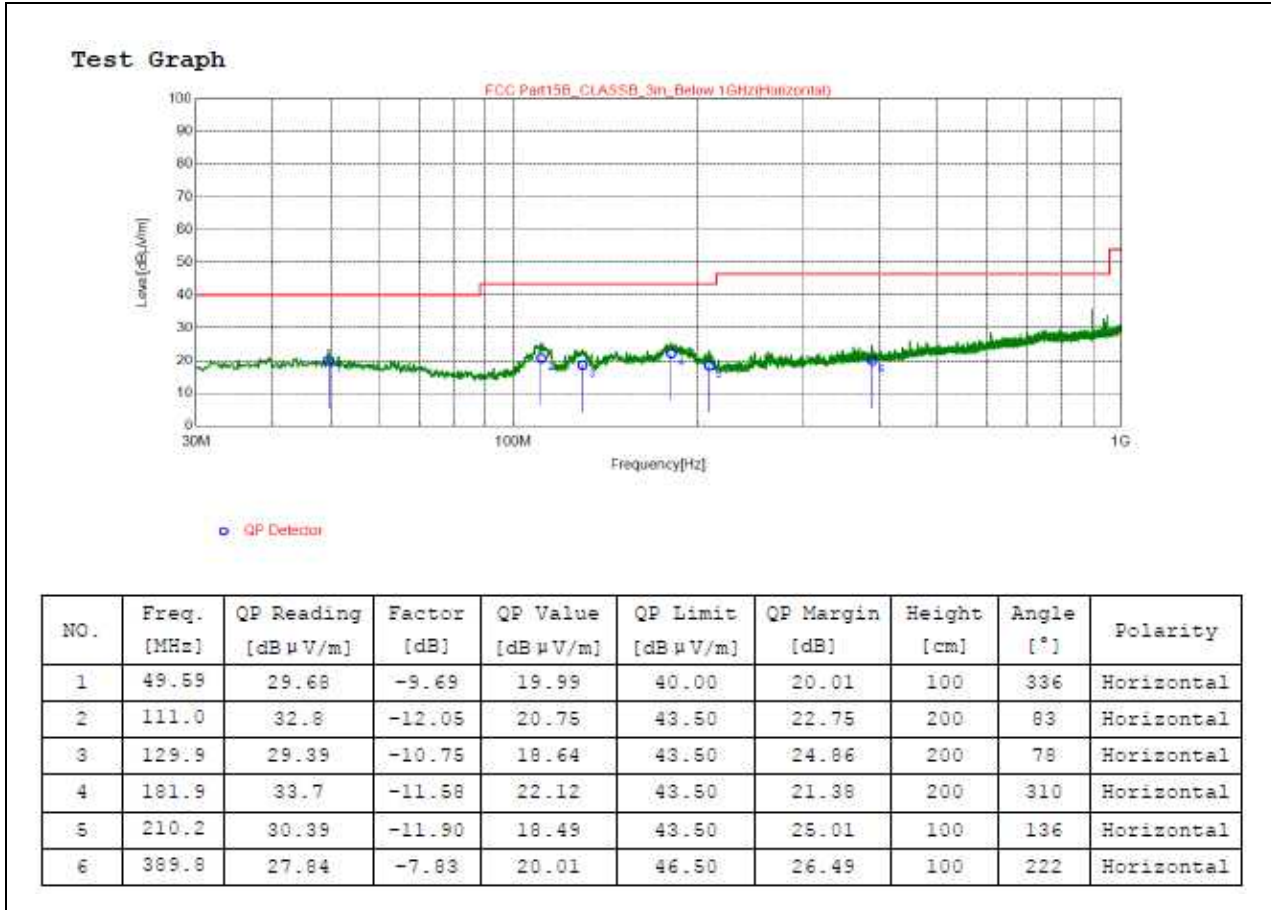

#### REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

<b>Mode</b>	802.11b-2412MHz	<b>Detector Function</b>	Quasi-Peak (QP)
<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Antenna Polarity</b>	Vertical

Test Plot:



**REMARKS:**

1. Emission Level(dBuV/m) = Spectrum reading (dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



**Radiated Emission Range 1GHz~10th Harmonic**

**802.11b**

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4853.90	51.74	74.00	-22.26	-6.33	H	PK
2	4853.90	45.59	54.00	-8.41	-6.41	H	AV
3	4841.15	51.80	74.00	-22.20	-6.31	V	PK
4	4841.15	46.15	54.00	-7.85	-6.34	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4874.00	51.63	74.00	-22.37	-6.33	H	PK
2	4874.00	44.60	54.00	-9.40	-6.33	H	AV
3	4874.00	52.36	74.00	-21.64	-6.27	V	PK
4	4874.00	45.10	54.00	-8.90	-6.34	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

<b>Spurious Emission Level</b>							
<b>No.</b>	<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Correction Factor (dB/m)</b>	<b>Antenna Polarity</b>	<b>Detector</b>
1	4928.70	51.95	74.00	-22.05	-6.48	H	PK
2	4928.70	43.20	54.00	-10.80	-6.48	H	AV
3	4928.70	51.93	74.00	-22.07	-6.32	V	PK
4	4928.70	45.14	54.00	-8.86	-6.30	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



**802.11g**

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4842.85	52.24	74.00	-21.76	-6.31	H	PK
2	4825.00	45.35	54.00	-8.65	-6.28	H	AV
3	4823.30	49.98	74.00	-24.02	-6.28	V	PK
4	4823.30	44.61	54.00	-9.39	-6.28	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4829.25	52.50	74.00	-21.50	-6.29	H	PK
2	4830.10	45.66	54.00	-8.34	-6.29	H	AV
3	4830.10	52.26	74.00	-21.74	-6.29	V	PK
4	4832.65	45.79	54.00	-8.21	-6.29	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value





<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4860.70	49.70	74.00	-24.30	-6.35	H	PK
2	4860.70	44.97	54.00	-9.03	-6.35	H	AV
3	4887.05	51.37	74.00	-22.63	-6.40	V	PK
4	4887.05	42.94	54.00	-11.06	-6.40	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



**802.11n (HT20)**

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4826.70	52.30	74.00	-21.70	-6.28	H	PK
2	4826.70	44.02	54.00	-9.98	-6.28	H	AV
3	4826.70	52.16	74.00	-21.84	-6.35	V	PK
4	4826.70	45.67	54.00	-8.33	-6.31	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4875.15	51.77	74.00	-22.23	-6.37	H	PK
2	4875.15	43.46	54.00	-10.54	-6.37	H	AV
3	4875.15	51.41	74.00	-22.59	-6.30	V	PK
4	4875.15	43.37	54.00	-10.63	-6.30	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4940.60	44.79	54.00	-9.21	-6.50	H	PK
2	4940.60	50.25	74.00	-23.75	-6.50	H	AV
3	4940.60	52.38	74.00	-21.62	-6.46	V	PK
4	4940.60	43.26	54.00	-10.74	-6.46	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

**802.11n (HT40)**

<b>Channel</b>	TX Channel 3	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4857.30	49.62	74.00	-24.38	-6.34	H	PK
2	4857.30	45.46	54.00	-8.54	-6.34	H	AV
3	4843.70	51.92	74.00	-22.08	-6.31	V	PK
4	4843.70	43.47	54.00	-10.53	-6.31	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4859.85	49.82	74.00	-24.18	-6.35	H	PK
2	4859.85	45.64	54.00	-8.36	-6.35	H	AV
3	4859.85	51.64	74.00	-22.36	-6.36	V	PK
4	4859.85	43.33	54.00	-10.67	-6.36	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

<b>Channel</b>	TX Channel 9	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4904.05	51.90	74.00	-22.10	-6.46	H	PK
2	4904.05	45.48	54.00	-8.52	-6.48	H	AV
3	4904.05	49.64	74.00	-24.36	-6.55	V	PK
4	4904.05	45.42	54.00	-8.58	-6.55	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.6 Conducted Emission Measurement

### 4.6.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.6.2 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.6.3 Deviation from Test Standard

No deviation.



#### 4.6.4 Test Setup

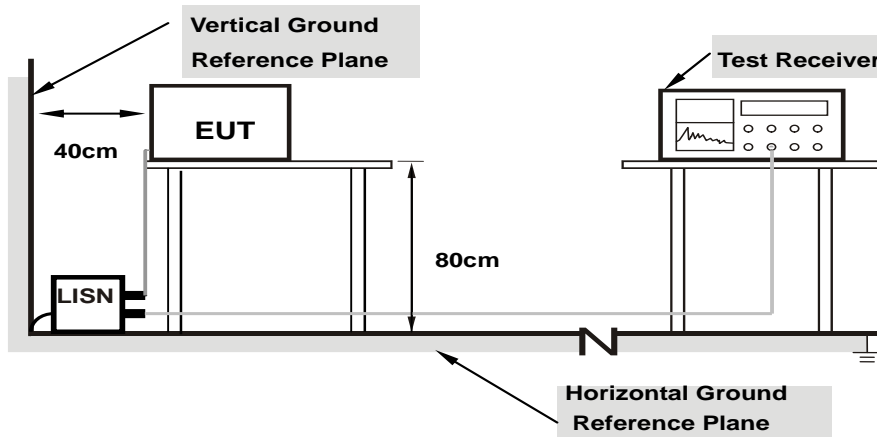

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.6.5 EUT Operating Conditions

Same as 4.1.6.



#### 4.6.6 Test Results

##### Working While Charging


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.83	37.51	18.10	47.34	27.93	66.00	56.00	-18.66	-28.07
2	0.17737	9.84	34.82	17.27	44.66	27.11	64.61	54.61	-19.95	-27.50
3	0.25557	9.76	27.83	13.01	37.59	22.77	61.57	51.57	-23.98	-28.80
4	0.51363	9.70	35.20	24.74	44.90	34.44	56.00	46.00	-11.10	-11.56
5	1.01173	9.59	19.51	5.31	29.10	14.90	56.00	46.00	-26.90	-31.10
6	24.20503	10.02	12.70	4.65	22.72	14.67	60.00	50.00	-37.28	-35.33

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Test Plot:

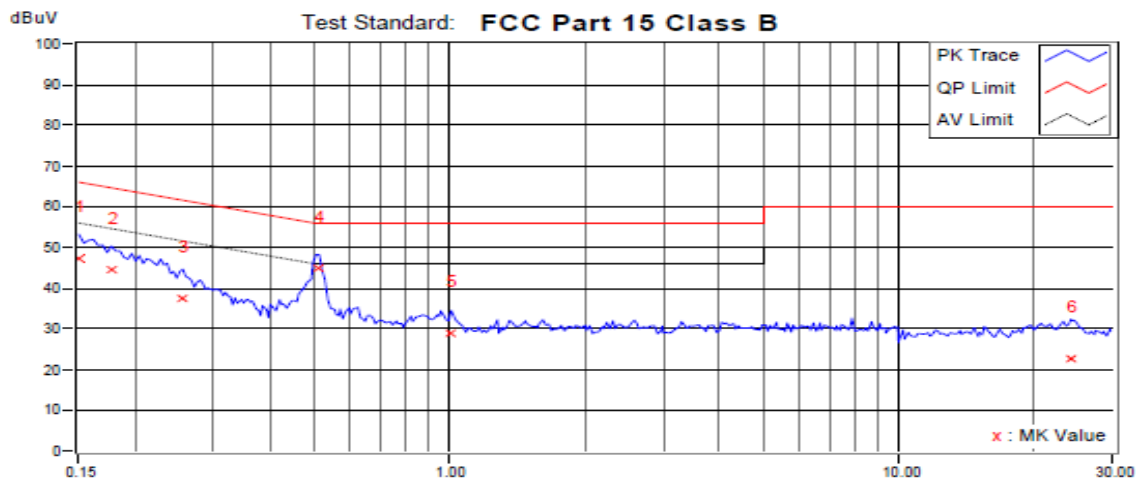




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	9.84	35.69	16.78	45.53	26.62	66.00	56.00	-20.47	-29.38
2	0.19692	9.79	31.62	15.72	41.41	25.51	63.74	53.74	-22.33	-28.23
3	0.34159	9.85	22.70	8.06	32.55	17.91	59.16	49.16	-26.61	-31.25
4	0.50000	9.83	32.62	23.74	42.45	33.57	56.00	46.00	-13.55	-12.43
5	0.86553	9.88	18.53	11.77	28.41	21.65	56.00	46.00	-27.59	-24.35
6	24.12683	10.22	11.18	2.24	21.40	12.46	60.00	50.00	-38.60	-37.54

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

**Test Plot:**

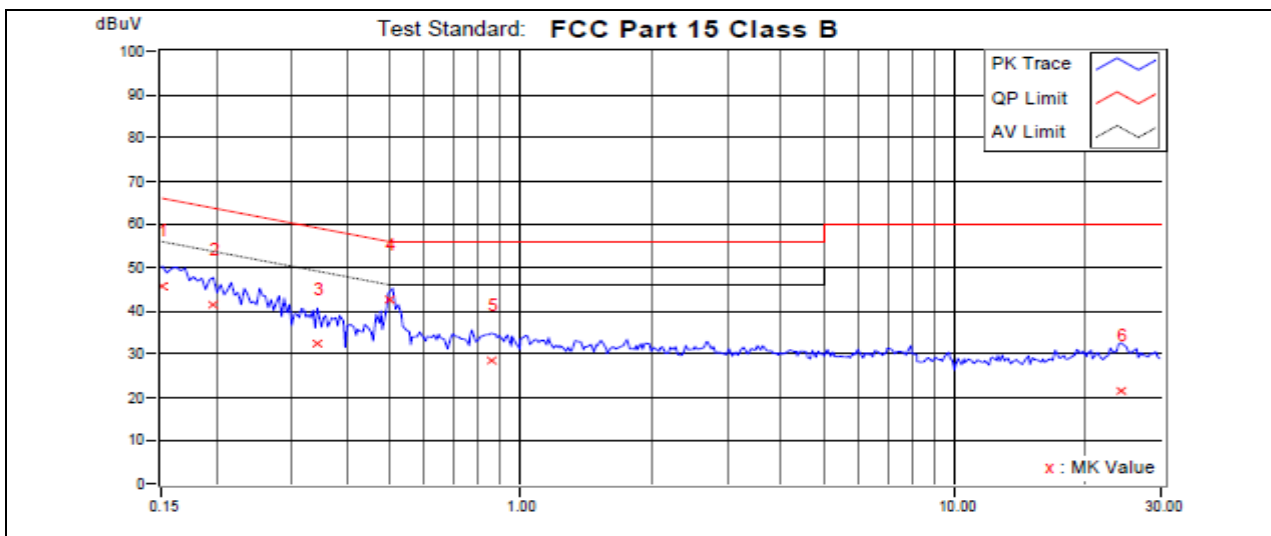



#### 4.7 Radiated Restricted Band Edge Measurement

##### 4.7.1 Test Limit

##### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

<b>FCC Part 15 Subpart C Paragraph 15.209</b>		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 4.7.2 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 4.7.3 Test Procedures

##### **Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize




### Average Measurements above 1GHz (Method VB)

8. 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. 2. RBW = 1MHz
10. 3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.
11. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
12. 4. Detector = Peak
13. 5. Sweep time = auto
14. 6. Trace mode = max hold
15. 7. Trace was allowed to stabilize

#### 4.7.4 Test Setup

For Radiated emission above 1GHz

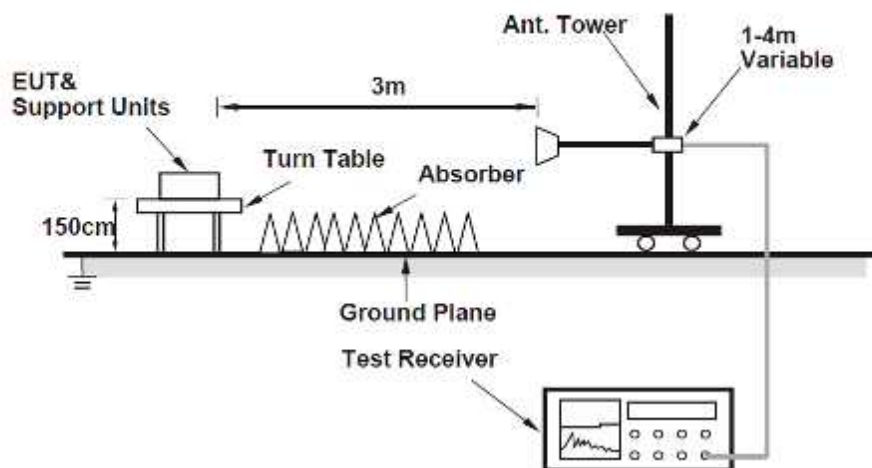


### 4.7.5 Test Results


**Test Plot**

---

**b-2412MHz/ Horizontal**

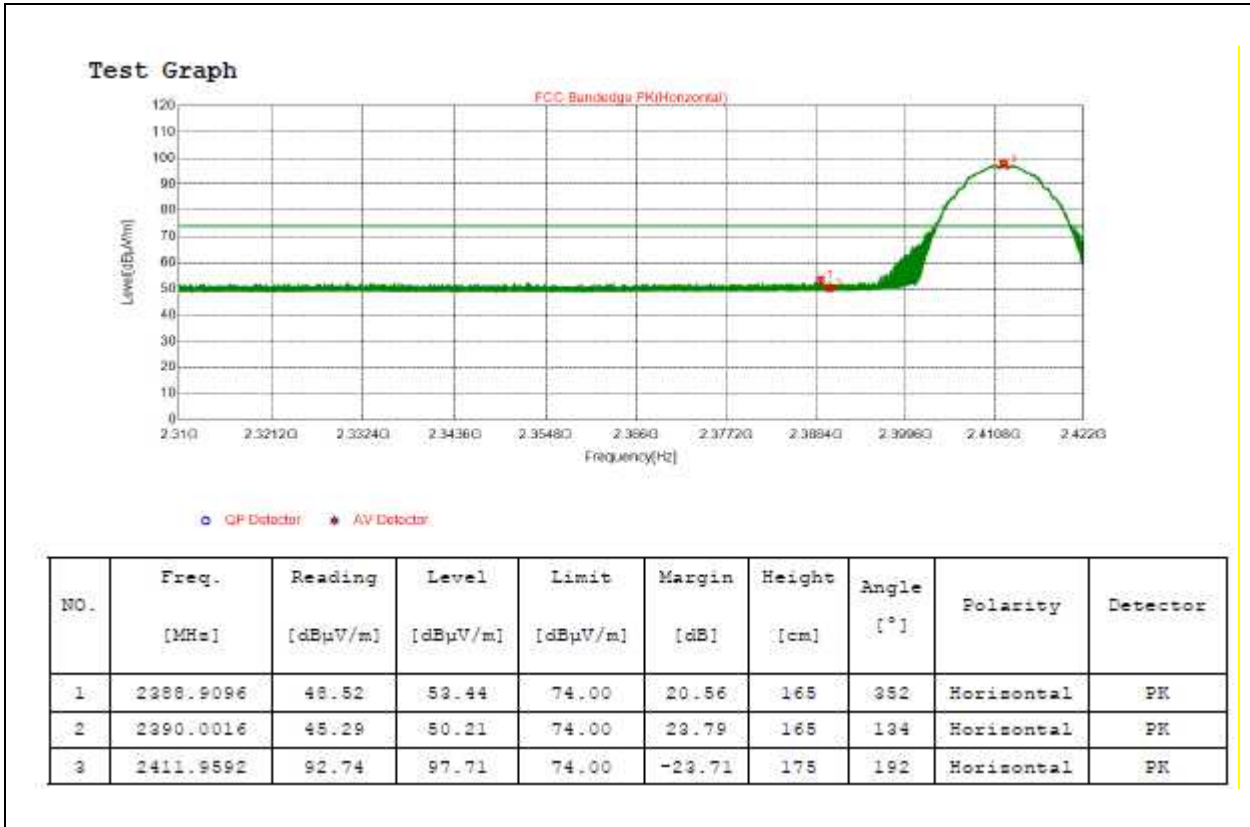

### Test Graph

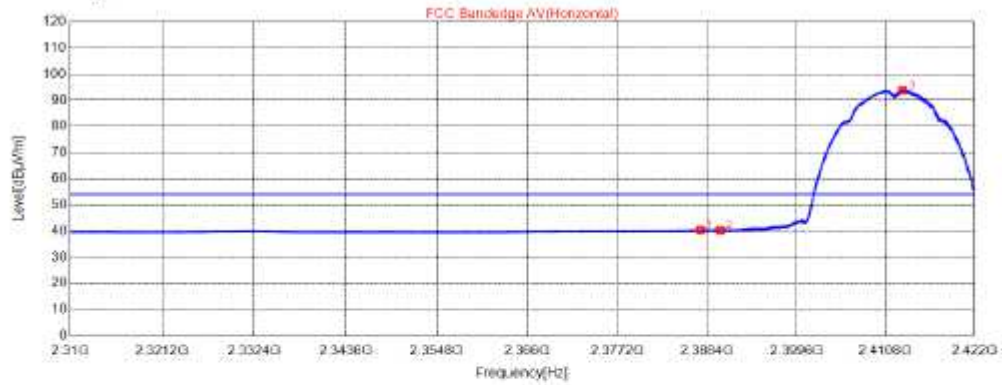


○ QF Detector    \* AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.5944	35.51	40.43	54.00	13.57	155	202	Horizontal	AV
2	2390.0016	35.39	40.31	54.00	13.69	155	202	Horizontal	AV
3	2412.9236	88.82	93.79	54.00	-39.79	165	211	Horizontal	AV

Test Plot

b-2412MHz/ Vertical


Test Graph

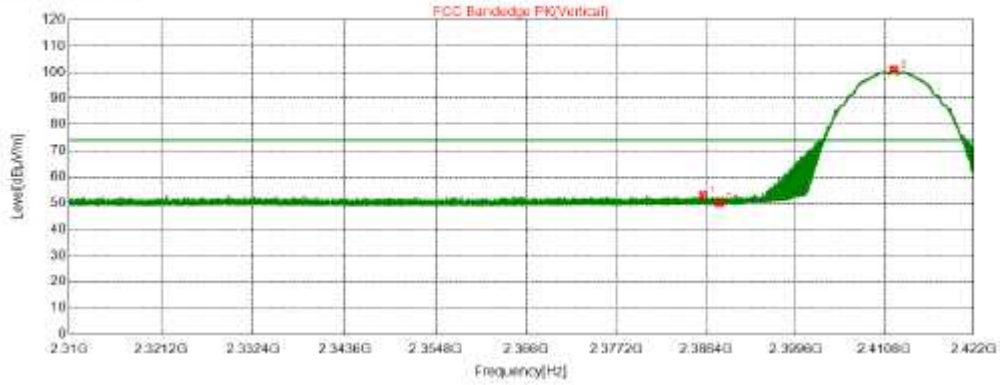

○ QP Detector    + AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.9800	48.12	52.04	74.00	20.96	175	295	Vertical	PK
2	2390.0016	45.09	50.01	74.00	23.99	155	18	Vertical	PK
3	2411.9760	98.92	100.89	74.00	-26.89	175	213	Vertical	PK

### Test Graph

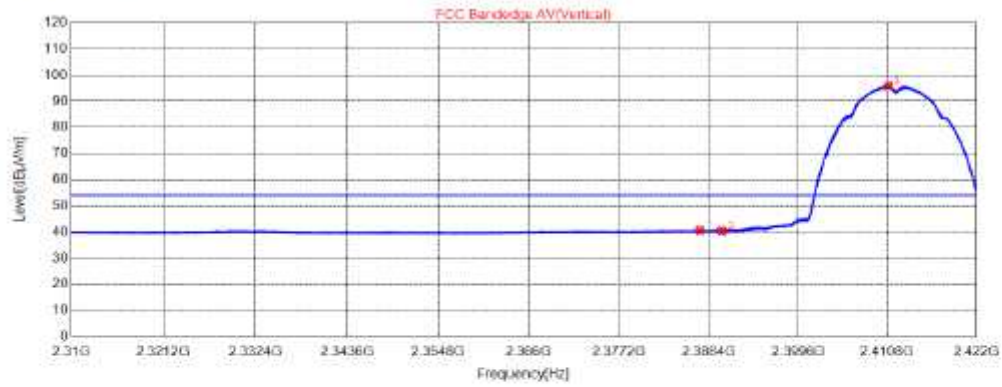

○ QP Detector    ★ AV Detector


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.2688	35.75	40.67	54.00	13.33	165	209	Vertical	AV
2	2390.0016	35.51	40.43	54.00	13.57	155	291	Vertical	AV
3	2410.9232	90.85	95.81	54.00	-41.81	155	207	Vertical	AV



Test Plot

b-2462MHz/ Horizontal


Test Graph

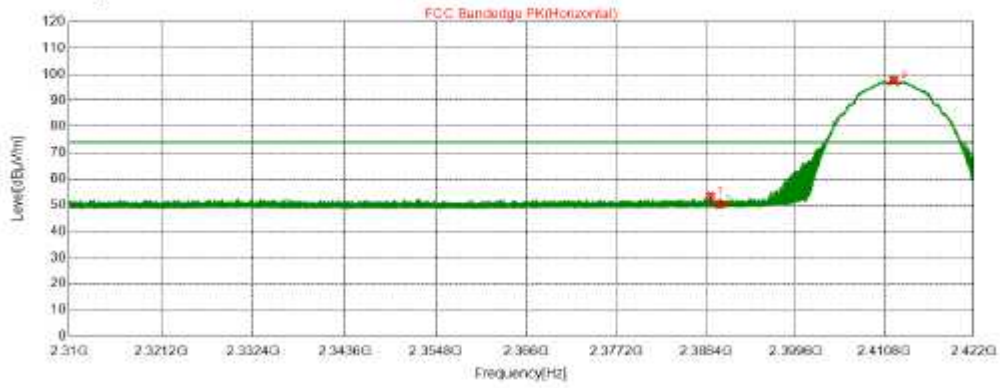

○ :QP Detector    ★ :AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.9096	48.52	53.44	74.00	20.56	165	352	Horizontal	PK
2	2390.0016	48.29	50.21	74.00	23.79	165	134	Horizontal	PK
3	2411.9592	92.74	97.71	74.00	-23.71	175	192	Horizontal	PK

### Test Graph

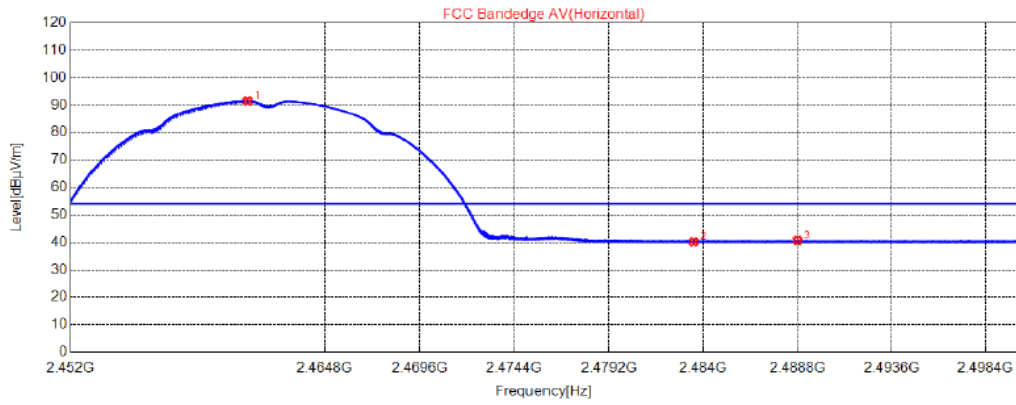

○ QP Detector    ★ AV Detector


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2460.9112	86.41	91.46	54.00	-37.46	165	235	Horizontal	AV
2	2483.5000	35.11	40.20	54.00	13.80	155	242	Horizontal	AV
3	2488.7920	35.60	40.70	54.00	13.30	155	142	Horizontal	AV



**Test Plot**

**b-2462MHz/ Vertical**


**Test Graph**

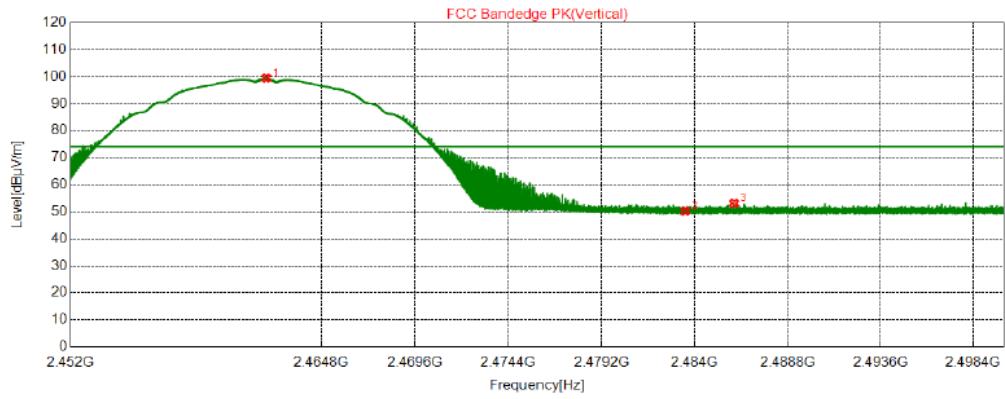

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2461.9840	94.41	99.46	74.00	-25.46	175	176	Vertical	PK
2	2483.5000	45.19	50.28	74.00	23.72	175	176	Vertical	PK
3	2486.0248	47.96	53.06	74.00	20.94	155	206	Vertical	PK

### Test Graph

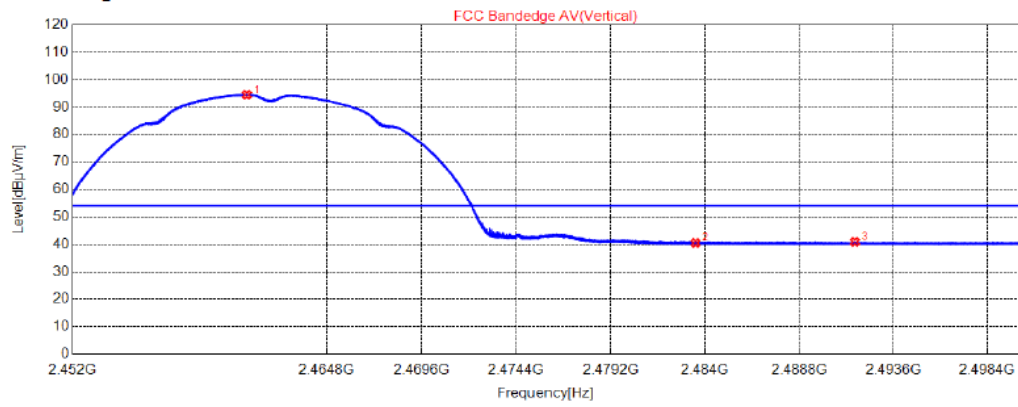


○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2460.7744	89.35	94.40	54.00	-40.40	175	202	Vertical	AV
2	2483.5000	35.41	40.50	54.00	13.50	175	185	Vertical	AV
3	2491.6264	35.77	40.88	54.00	13.12	155	186	Vertical	AV

### Test Plot

**g-2412MHz/ Horizontal**


#### Test Graph

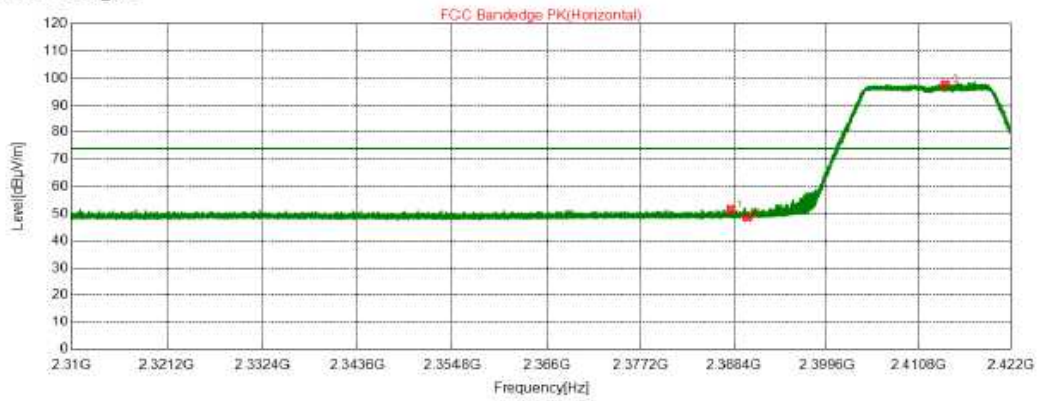

○ QP Detector    \* AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.9744	46.78	51.70	74.00	22.30	175	143	Horizontal	PK
2	2390.0016	43.73	48.65	74.00	25.35	165	167	Horizontal	PK
3	2414.0088	92.67	97.64	74.00	-23.64	175	143	Horizontal	PK

### Test Graph

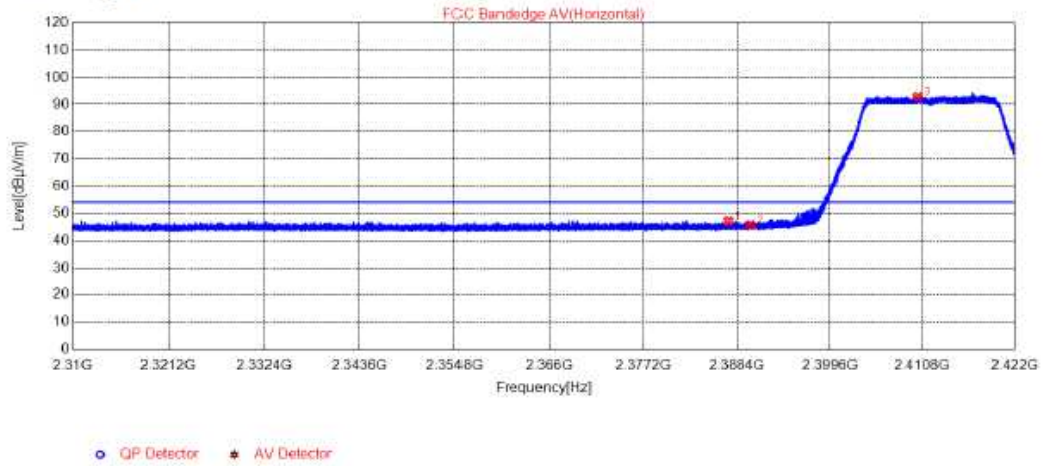


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2387.3640	42.20	47.12	54.00	6.88	165	253	Horizontal	AV
2	2390.0016	40.77	45.69	54.00	8.31	155	126	Horizontal	AV
3	2410.2064	87.96	92.92	54.00	-38.92	175	141	Horizontal	AV



### Test Plot

g-2412MHz/ Vertical


#### Test Graph

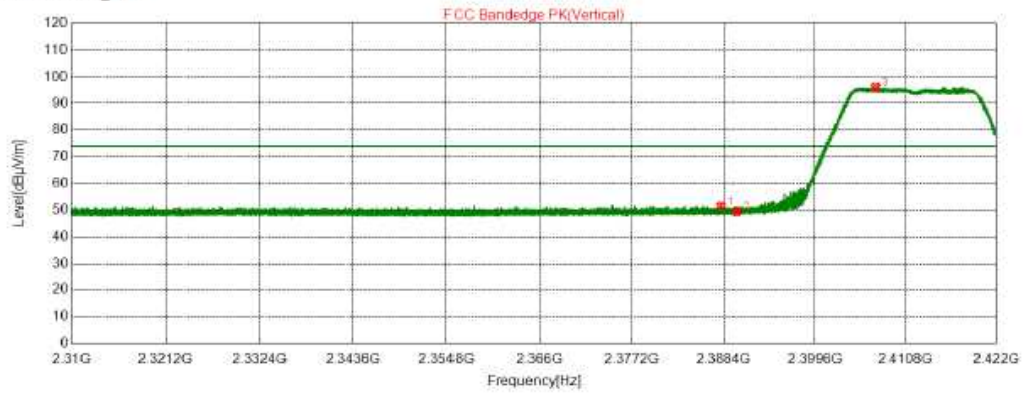

○ QP Detector \* AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.0528	46.48	51.40	74.00	22.60	155	117	Vertical	PK
2	2390.0016	44.52	49.44	74.00	24.56	165	126	Vertical	PK
3	2407.0760	91.26	96.22	74.00	-22.22	175	167	Vertical	PK

### Test Graph

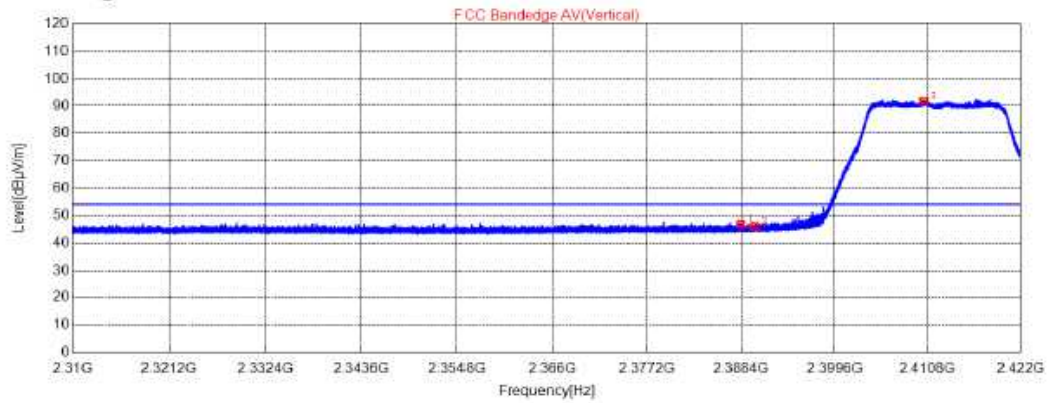

○ QP Detector \* AV Detector


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.3328	41.85	46.77	54.00	7.23	165	193	Vertical	AV
2	2390.0016	41.07	45.99	54.00	8.01	165	193	Vertical	AV
3	2410.3072	86.85	91.81	54.00	-37.81	165	160	Vertical	AV



### Test Plot

**g-2462MHz/ Horizontal**


#### Test Graph

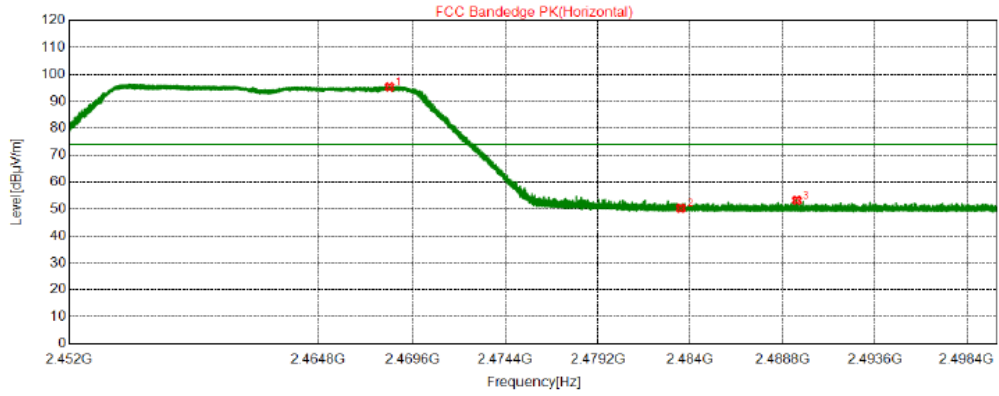

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2468.4136	90.24	95.30	74.00	-21.30	175	126	Horizontal	PK
2	2483.5000	45.21	50.30	74.00	23.70	165	17	Horizontal	PK
3	2489.5384	48.17	53.27	74.00	20.73	155	110	Horizontal	PK

### Test Graph

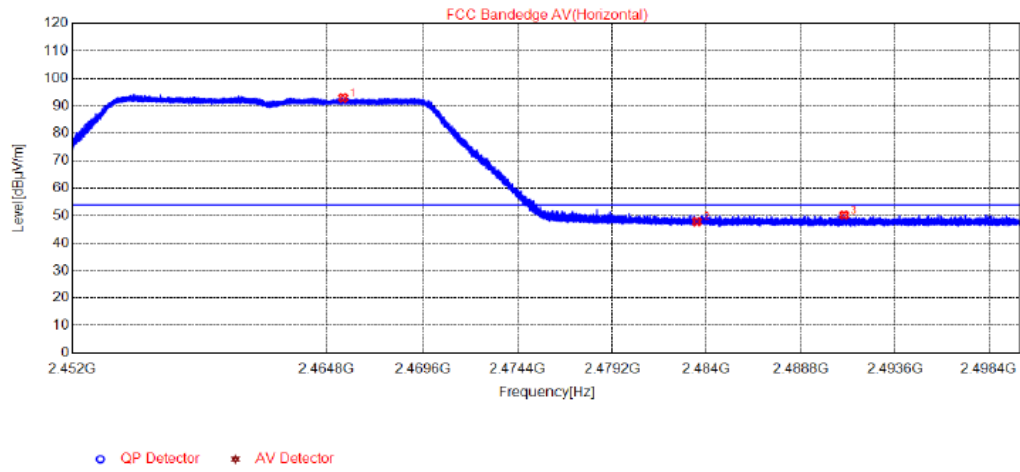


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2465.6344	87.82	92.88	54.00	-38.88	175	150	Horizontal	AV
2	2483.5000	42.75	47.84	54.00	6.16	165	93	Horizontal	AV
3	2491.0000	45.10	50.20	54.00	3.80	165	176	Horizontal	AV



**Test Plot**


**g-2462MHz/ Vertical**

**Test Graph**

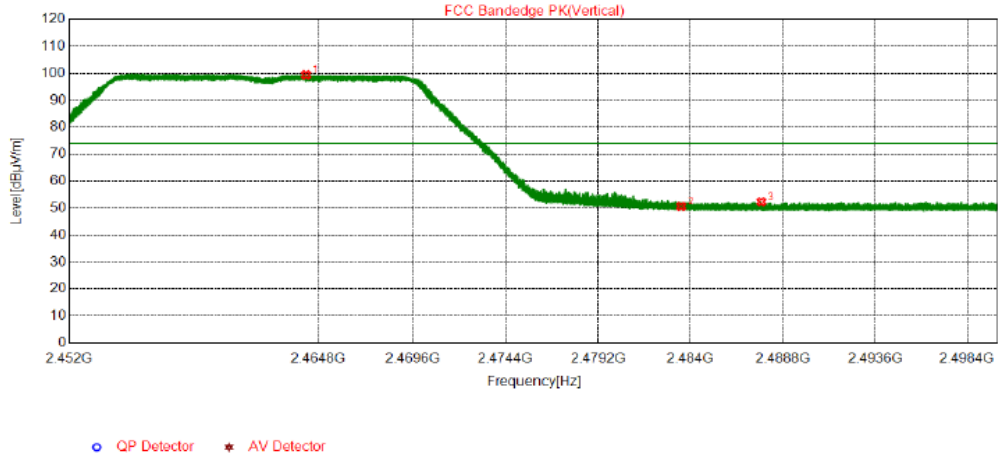

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2464.1680	94.32	99.38	74.00	-25.38	175	184	Vertical	PK
2	2483.5000	45.57	50.66	74.00	23.34	165	293	Vertical	PK
3	2487.6688	47.29	52.39	74.00	21.61	175	200	Vertical	PK

### Test Graph

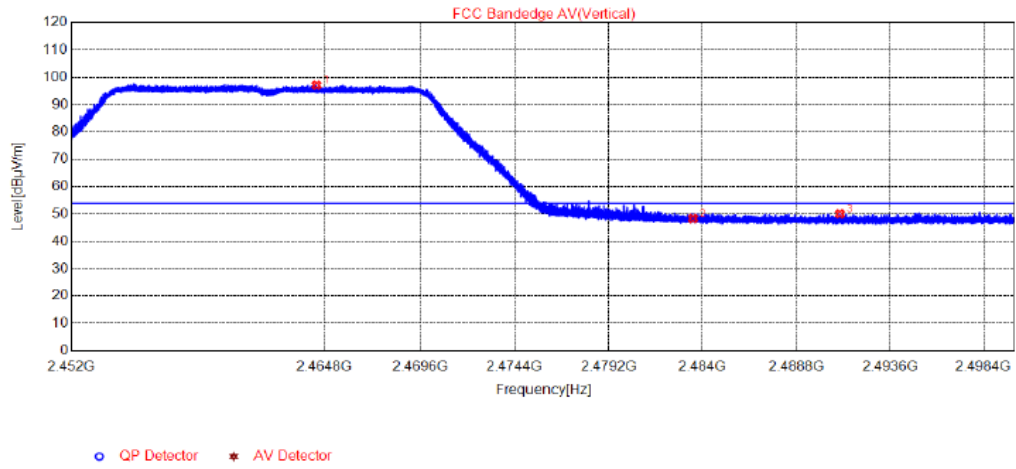

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2464.3984	92.01	97.07	54.00	-43.07	175	176	Vertical	AV
2	2483.5000	43.23	48.32	54.00	5.68	175	42	Vertical	AV
3	2491.0192	44.95	50.05	54.00	3.95	165	335	Vertical	AV






**Test Plot**

**n20-2412MHz/ Horizontal**


**Test Graph**

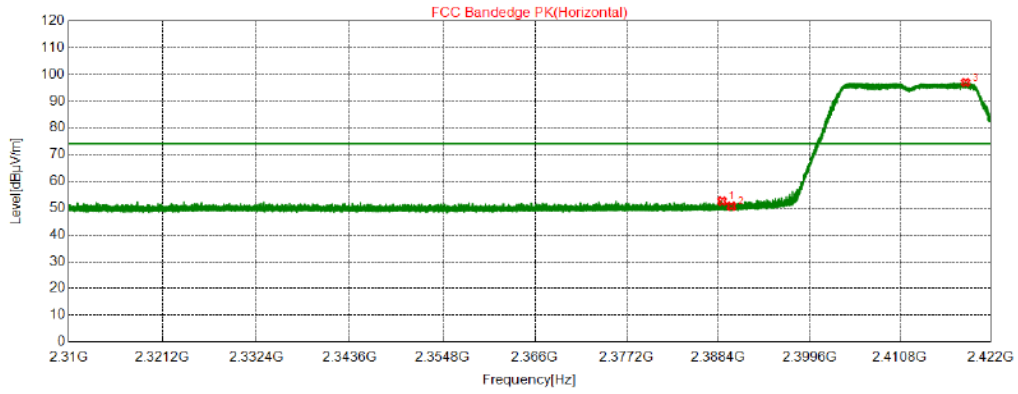

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.8592	47.66	52.58	74.00	21.42	155	184	Horizontal	PK
2	2390.0016	45.81	50.73	74.00	23.27	175	151	Horizontal	PK
3	2418.9368	91.94	96.92	74.00	-22.92	165	210	Horizontal	PK

### Test Graph

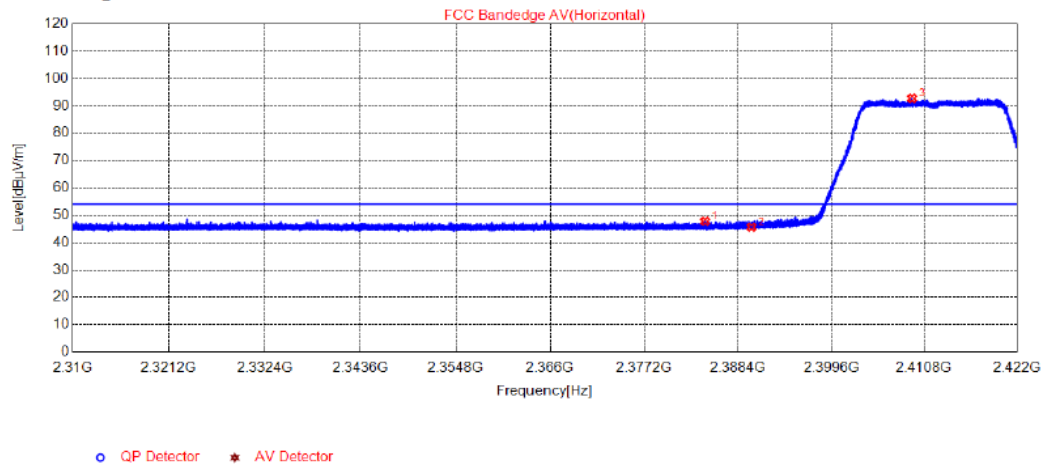


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2384.4576	42.84	47.75	54.00	6.25	175	234	Horizontal	AV
2	2390.0016	40.69	45.61	54.00	8.39	155	236	Horizontal	AV
3	2409.3384	87.70	92.66	54.00	-38.66	175	218	Horizontal	AV



**Test Plot**

**n20-2412MHz/ Vertical**


**Test Graph**

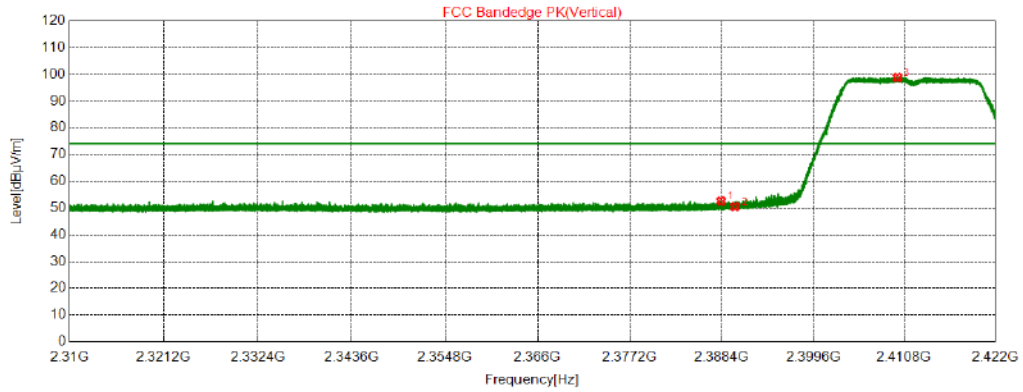

○ QP Detector    \* AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.3104	47.65	52.57	74.00	21.43	175	276	Vertical	PK
2	2390.0016	45.60	50.52	74.00	23.48	155	188	Vertical	PK
3	2409.9544	93.86	98.82	74.00	-24.82	155	171	Vertical	PK

### Test Graph

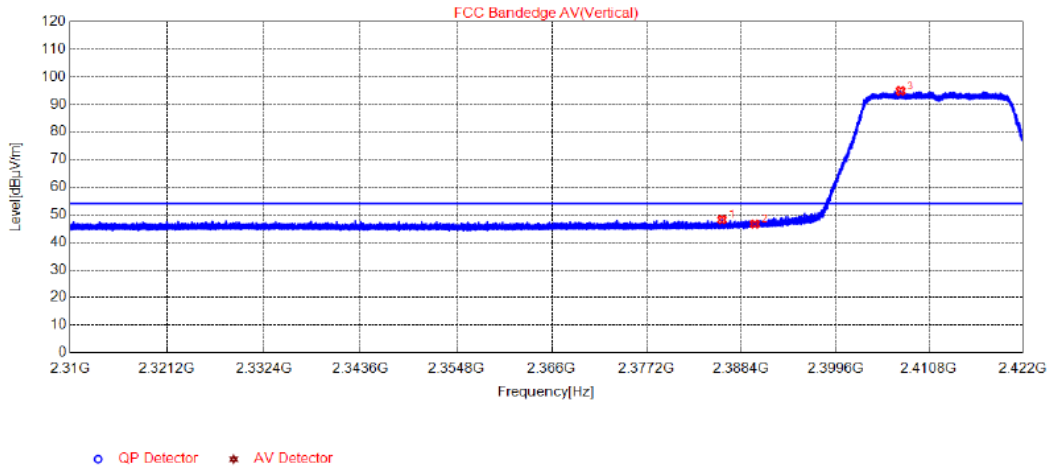


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2386.1040	43.31	48.22	54.00	5.78	155	260	Vertical	AV
2	2390.0016	41.68	46.60	54.00	7.40	175	176	Vertical	AV
3	2407.3952	89.81	94.77	54.00	-40.77	155	176	Vertical	AV



### Test Plot

n20-2462MHz/ Horizontal


#### Test Graph

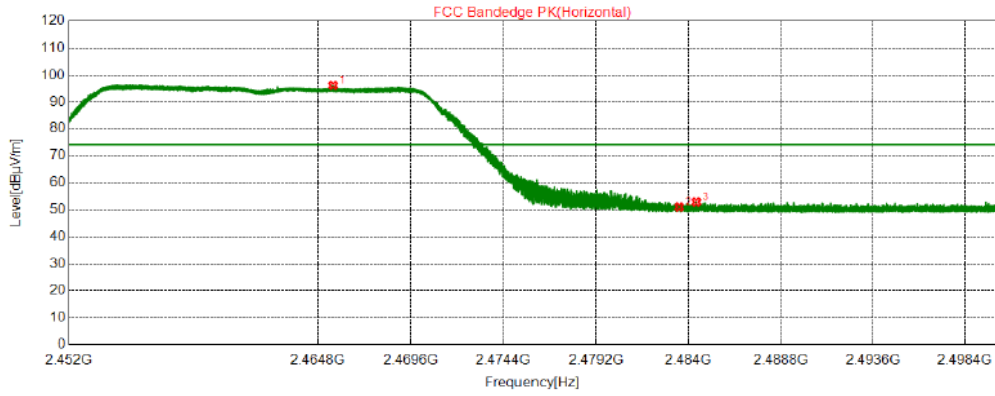

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2465.5912	91.13	96.19	74.00	-22.19	165	151	Horizontal	PK
2	2483.5000	45.88	50.97	74.00	23.03	175	326	Horizontal	PK
3	2484.3928	47.70	52.79	74.00	21.21	175	143	Horizontal	PK

### Test Graph

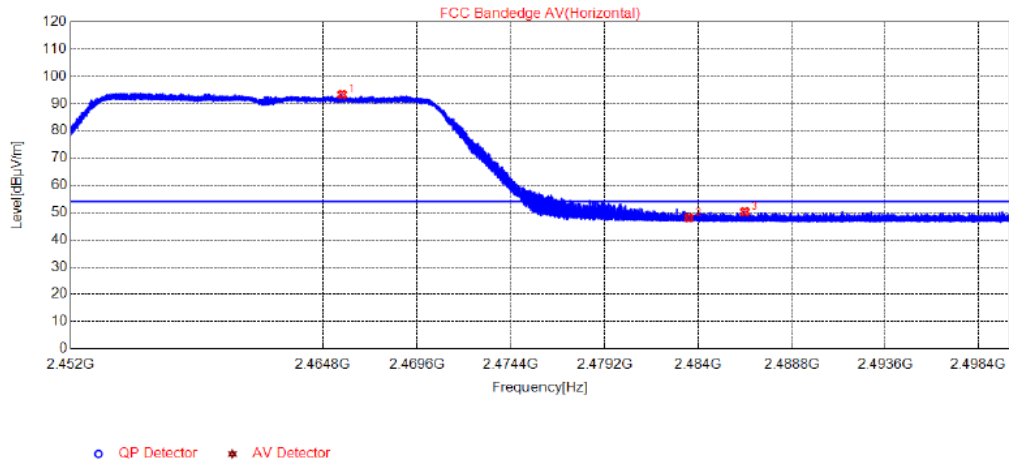

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2465.7880	88.17	93.23	54.00	-39.23	165	209	Horizontal	AV
2	2483.5000	42.96	48.05	54.00	5.95	175	267	Horizontal	AV
3	2486.3752	45.21	50.31	54.00	3.69	175	117	Horizontal	AV






**Test Plot**


**n20-2462MHz/ Vertical**

**Test Graph**

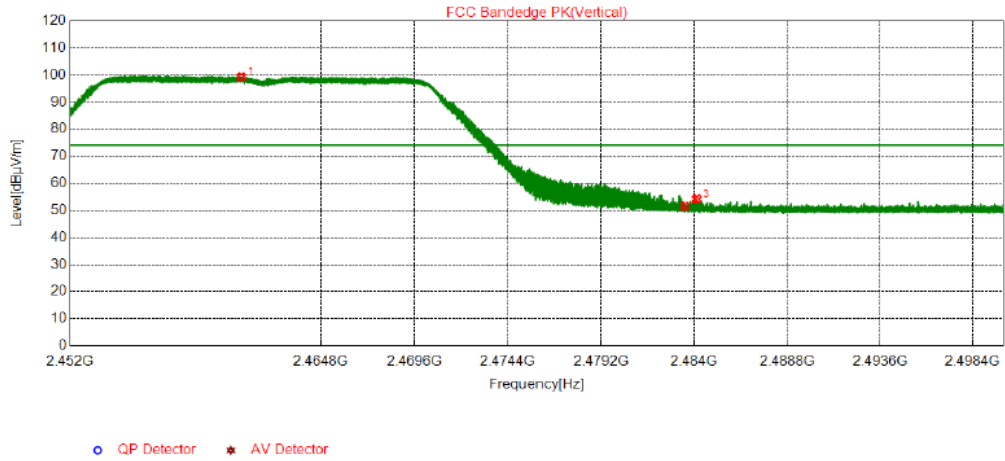

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2460.7456	94.22	99.27	74.00	-25.27	175	184	Vertical	PK
2	2483.5000	46.40	51.49	74.00	22.51	175	284	Vertical	PK
3	2484.1240	49.09	54.18	74.00	19.82	175	200	Vertical	PK

### Test Graph

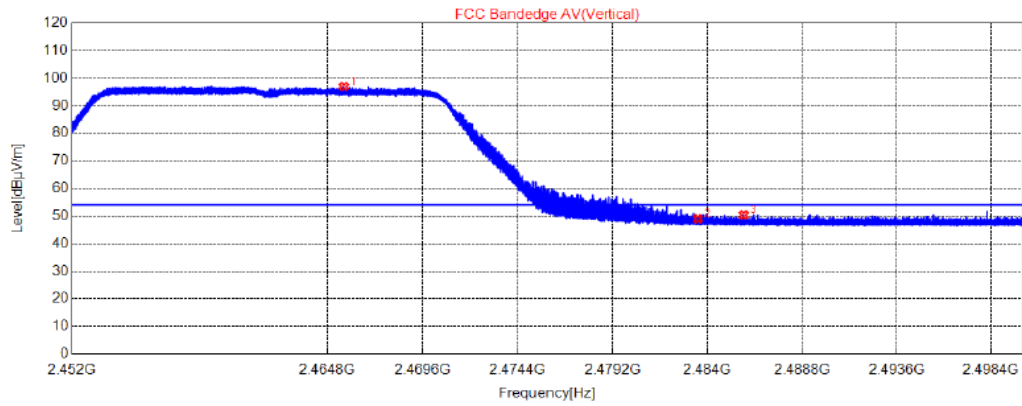


○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2465.6416	91.83	96.89	54.00	-42.89	175	176	Vertical	AV
2	2483.5000	43.91	49.00	54.00	5.00	175	276	Vertical	AV
3	2485.8256	45.27	50.37	54.00	3.63	155	92	Vertical	AV

### Test Plot


n40-2422MHz/ Horizontal

#### Test Graph

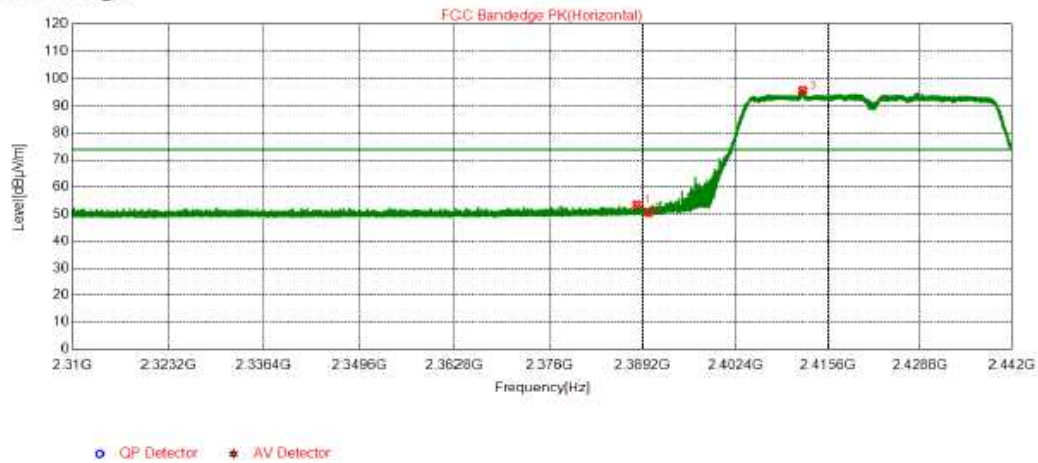

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2388.4014	48.59	53.51	74.00	20.49	165	176	Horizontal	PK
2	2390.0052	45.66	50.58	74.00	23.42	165	209	Horizontal	PK
3	2411.9700	90.72	95.69	74.00	-21.69	175	218	Horizontal	PK

### Test Graph

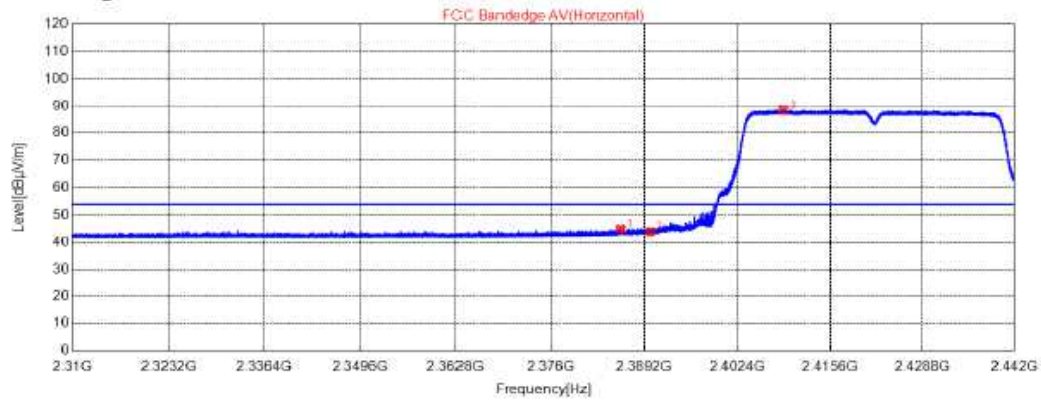


○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.8340	39.99	44.90	54.00	9.10	155	118	Horizontal	AV
2	2390.0052	39.03	43.95	54.00	10.05	155	185	Horizontal	AV
3	2408.9538	88.54	88.50	54.00	-34.50	155	202	Horizontal	AV

Test Plot

n40-2422MHz/ Vertical


Test Graph

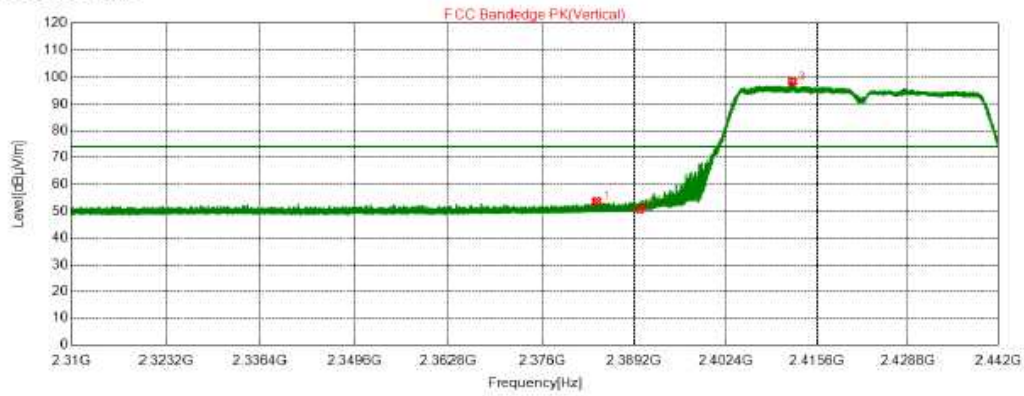

● QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2383.8276	48.83	53.74	74.00	20.26	165	201	Vertical	PK
2	2390.0052	45.97	50.89	74.00	23.11	165	302	Vertical	PK
3	2412.0360	93.51	98.48	74.00	-24.48	155	175	Vertical	PK

### Test Graph

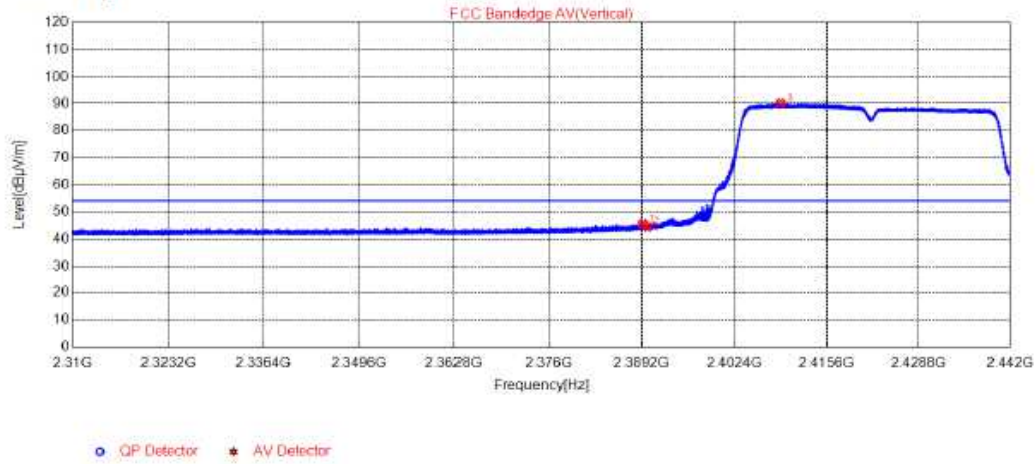


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.3716	40.55	45.47	54.00	8.53	165	285	Vertical	AV
2	2390.0052	39.50	44.42	54.00	9.58	155	176	Vertical	AV
3	2409.0000	85.19	90.15	54.00	-36.15	155	176	Vertical	AV



Test Plot

n40-2452MHz/ Horizontal


Test Graph

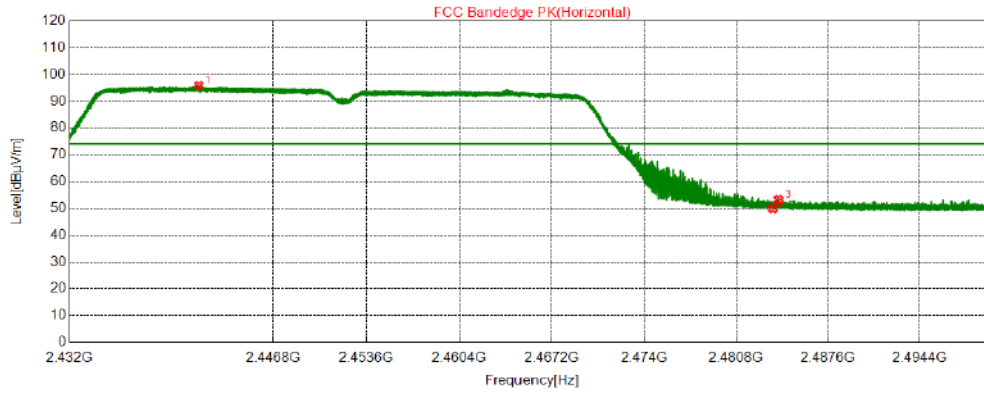

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2441.3840	90.82	95.84	74.00	-21.84	165	210	Horizontal	PK
2	2483.5032	44.87	49.96	74.00	24.04	155	85	Horizontal	PK
3	2483.9180	48.16	53.25	74.00	20.75	165	210	Horizontal	PK

### Test Graph

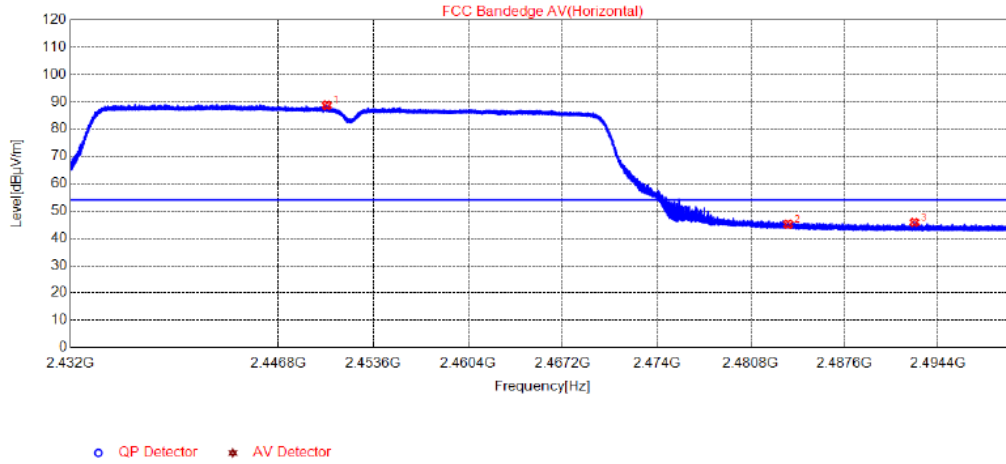


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2450.2716	83.69	88.72	54.00	-34.72	165	234	Horizontal	AV
2	2483.5032	40.03	45.12	54.00	8.88	165	184	Horizontal	AV
3	2492.6764	40.69	45.80	54.00	8.20	165	184	Horizontal	AV

### Test Plot

n40-2452MHz/ Vertical


#### Test Graph

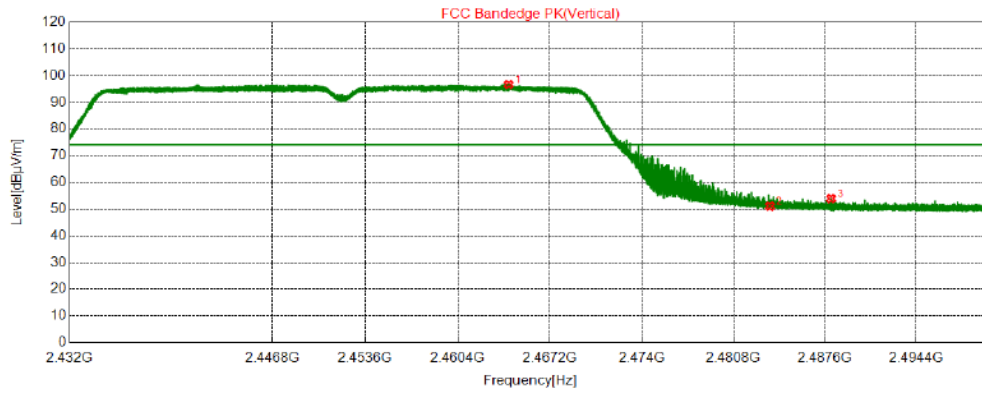

○ QP Detector    ★ AV Detector

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2464.1640	91.55	96.61	74.00	-22.61	175	176	Vertical	PK
2	2483.5032	45.99	51.08	74.00	22.92	165	201	Vertical	PK
3	2488.0456	48.76	53.86	74.00	20.14	175	159	Vertical	PK

### Test Graph

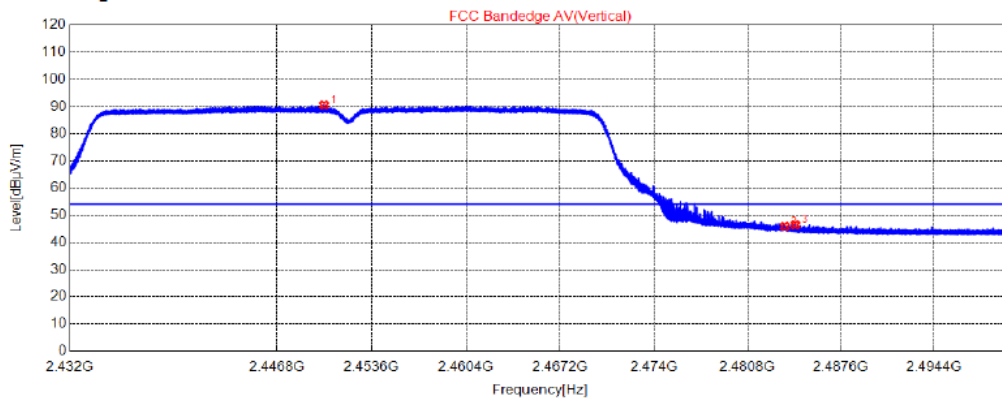

○ QP Detector    ✱ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2450.1866	85.54	90.57	54.00	-36.57	175	185	Vertical	AV
2	2483.5032	40.77	45.86	54.00	8.14	155	168	Vertical	AV
3	2484.2648	41.41	46.50	54.00	7.50	175	185	Vertical	AV



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

----- END -----