

DJ RDX2 3M mode 2404.5MHz Top side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2404.5 MHz;

Medium parameters used (interpolated): $f = 2404.5$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.945 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.59 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

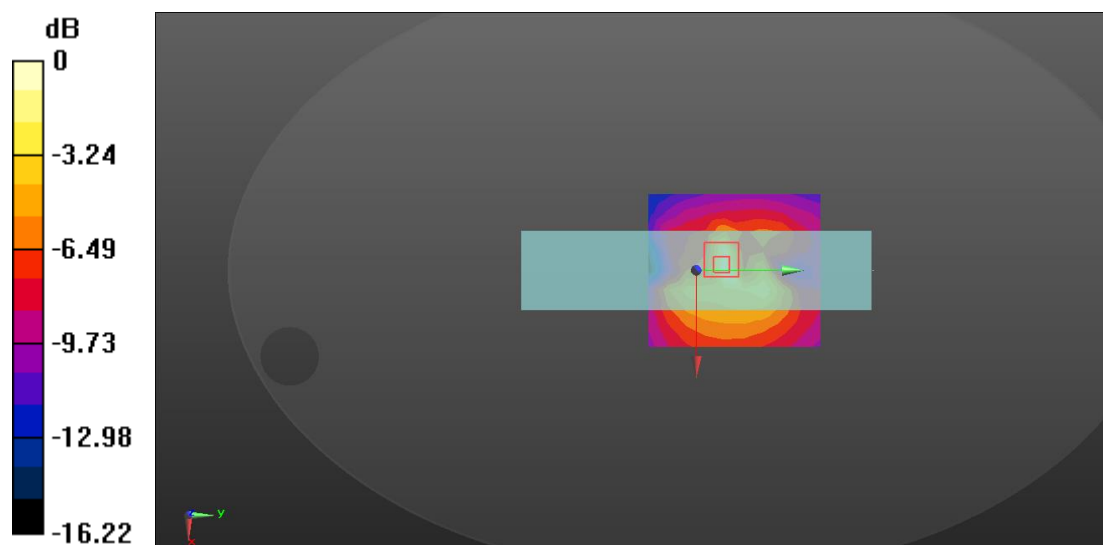

0 dB = 0.945 W/kg = -0.25 dBW/kg

DJ RDX2 20M mode 2437.5MHz Top side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2437.5 MHz;

Medium parameters used (interpolated): $f = 2437.5$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0665 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (10x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.096 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

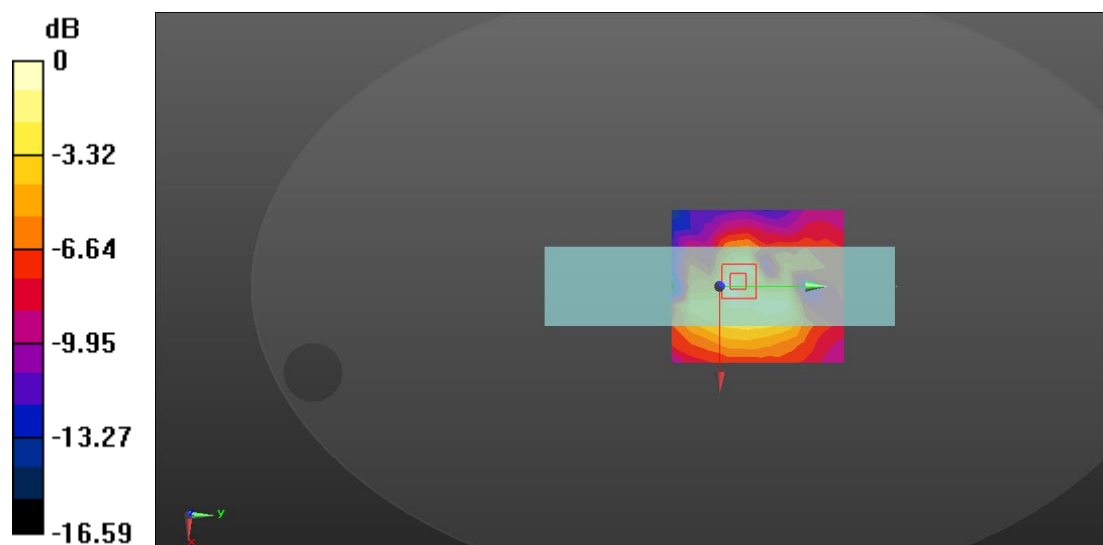

0 dB = 0.0665 W/kg = -11.77 dBW/kg

DJ RDX2 3M mode 5787.5MHz Top side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5787.5 MHz;

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 8.39 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (8x8x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 22.40 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 4.1 W/kg; SAR(10 g) = 1.82 W/kg

Maximum value of SAR (measured) = 9.02 W/kg

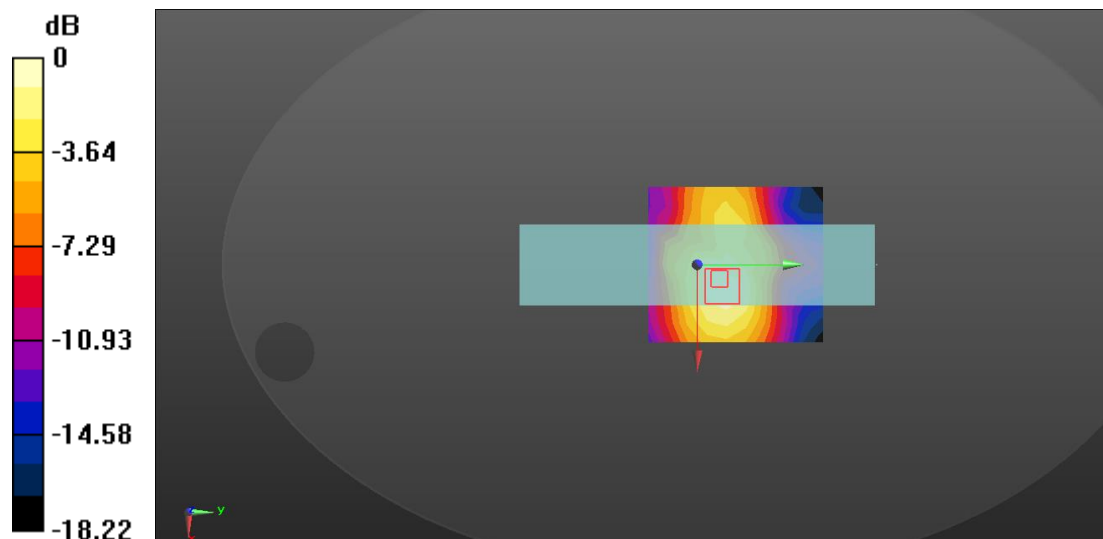

0 dB = 8.39 W/kg = 9.24 dBW/kg

DJ RDX2 20M mode 5786.5MHz Top side ANT0 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.893 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (8x8x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.813 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.941 W/kg

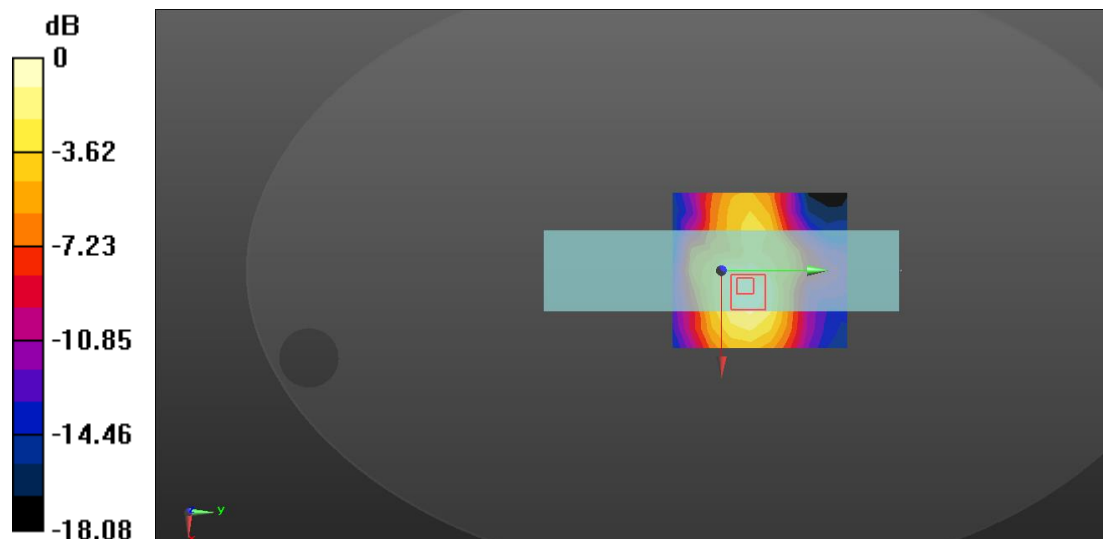

0 dB = 0.893 W/kg = -0.49 dBW/kg

DJ RDX2 3M mode 2434.5MHz Top side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2434.5 MHz;

Medium parameters used (interpolated): $f = 2434.5$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 3.75 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 16.34 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.573 W/kg

Maximum value of SAR (measured) = 5.37 W/kg

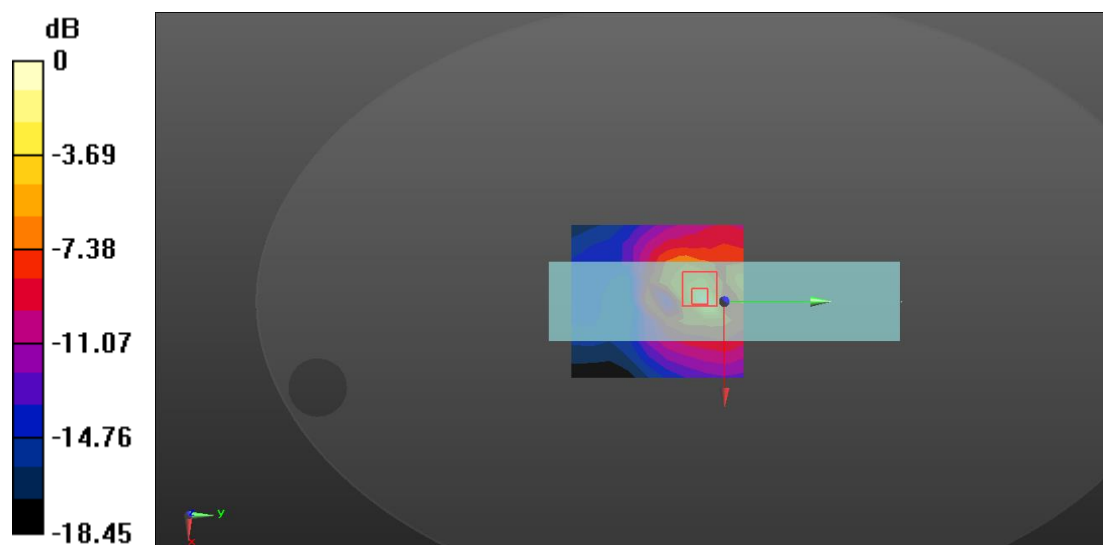

0 dB = 3.75 W/kg = 5.74 dBW/kg

DJ RDX2 10M mode 2407.5MHz Top side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2407.5 MHz;

Medium parameters used (interpolated): $f = 2407.5$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 40.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.159 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (10x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.050 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

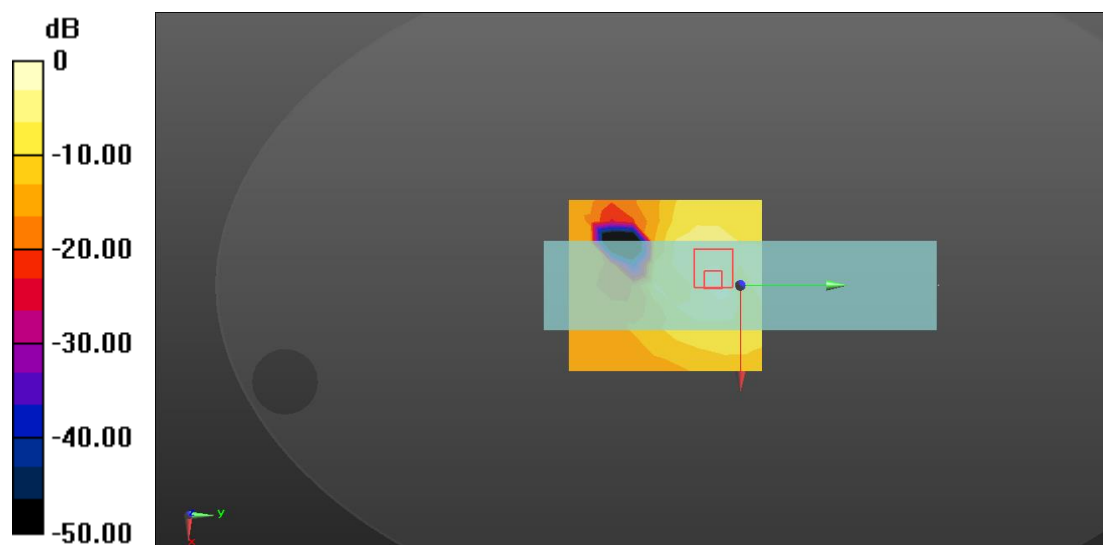

0 dB = 0.159 W/kg = -7.99 dBW/kg

DJ RDX2 3M CA mode 5730.2MHz Top side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5730.2 MHz;

Medium parameters used: $f = 5730.2$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 7.38 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (10x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 23.94 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 13.9 W/kg

SAR(1 g) = 3.5 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 7.95 W/kg

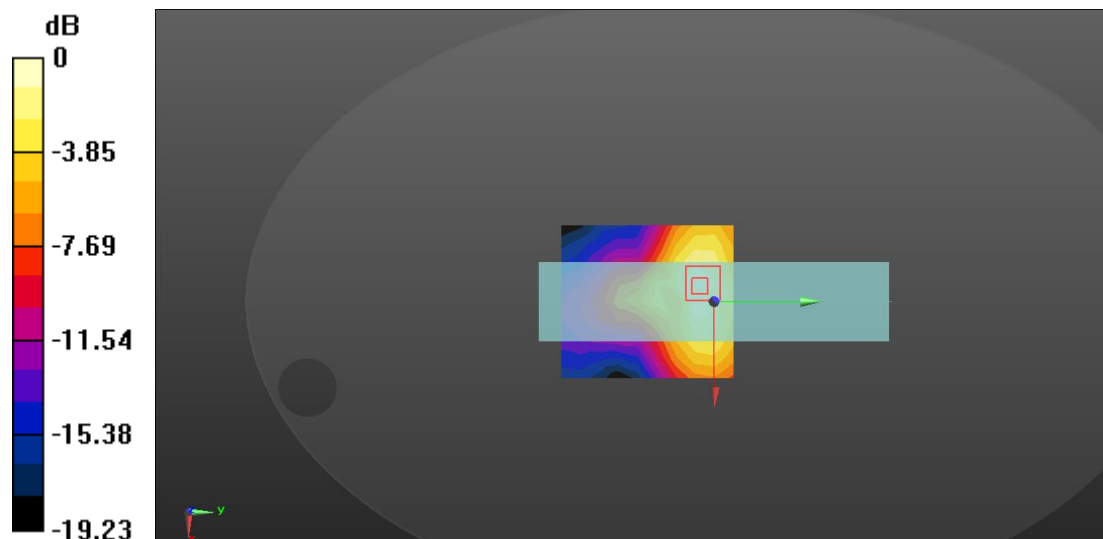

0 dB = 7.38 W/kg = 8.68 dBW/kg

DJ RDX2 20M mode 5839.5MHz Top side ANT1 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5839.5 MHz;

Medium parameters used: $f = 5839.5$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.928 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.526 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.761 W/kg

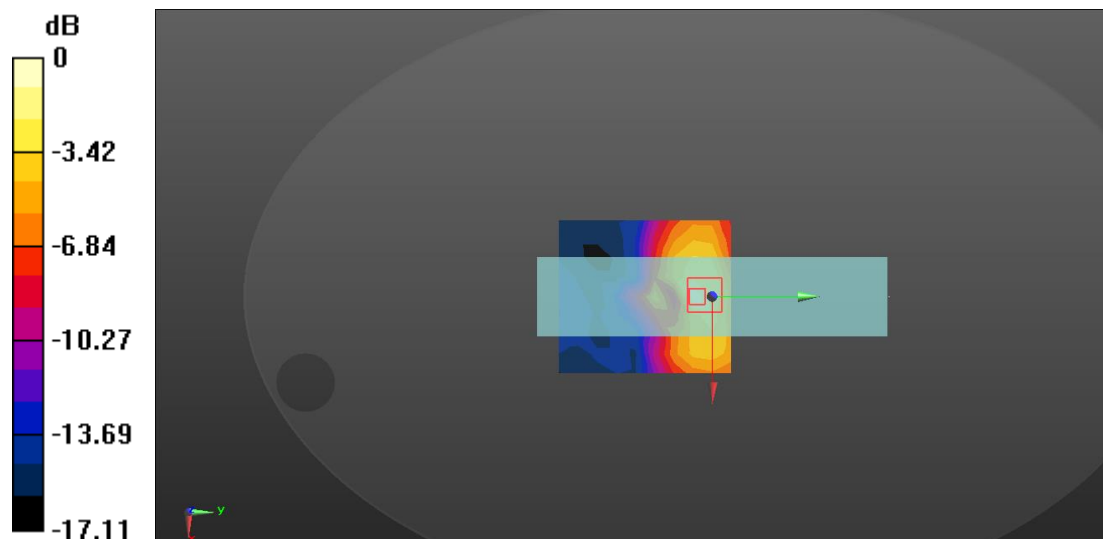

0 dB = 0.928 W/kg = -0.32 dBW/kg

DJ RDX2 3M mode 2404.5MHz Right side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2404.5 MHz;

Medium parameters used (interpolated): $f = 2404.5$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.874 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 16.80 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

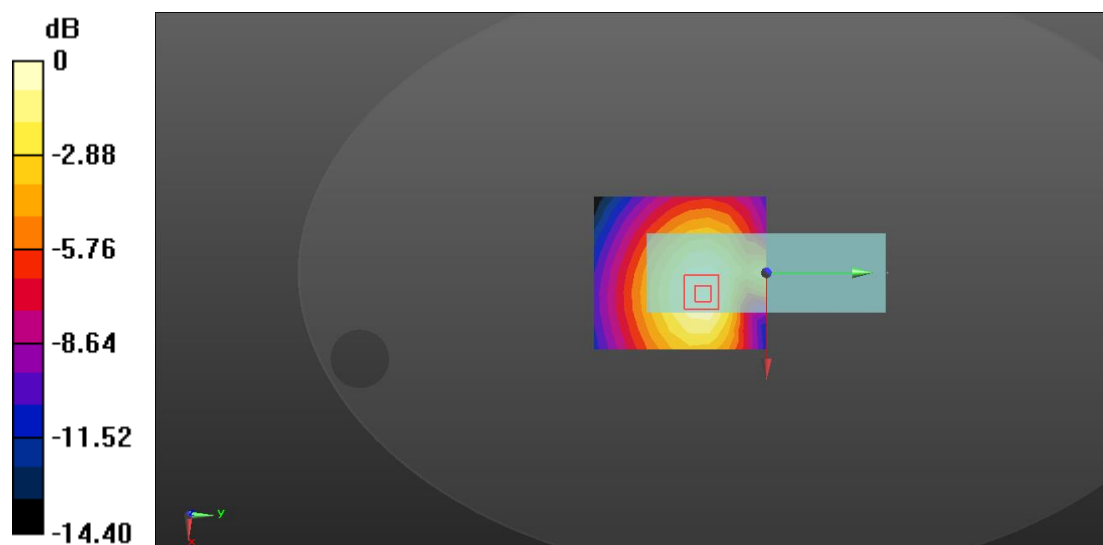

0 dB = 0.874 W/kg = -0.58 dBW/kg

DJ RDX2 10M mode 2467.5MHz Top side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2467.5 MHz;

Medium parameters used (interpolated): $f = 2467.5$ MHz; $\sigma = 1.844$ S/m; $\epsilon_r = 40.765$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.436 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (8x8x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.348 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.465 W/kg

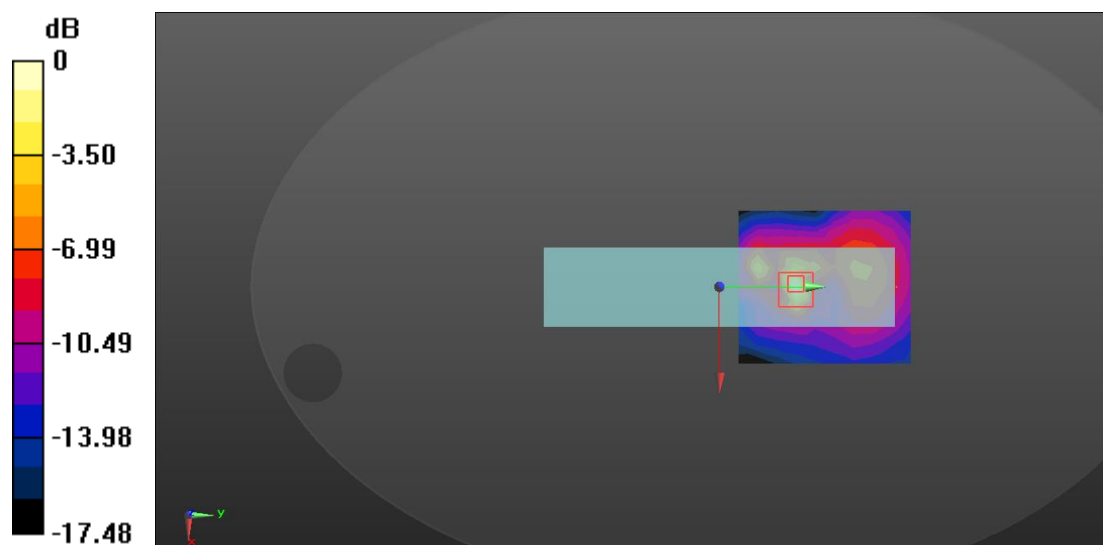

0 dB = 0.436 W/kg = -3.61 dBW/kg

DJ RDX2 3M CA mode 5790.2MHz Top side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5790.2 MHz;

Medium parameters used: $f = 5790.2$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 7.23 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (12x11x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.373 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 3.69 W/kg; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 7.76 W/kg

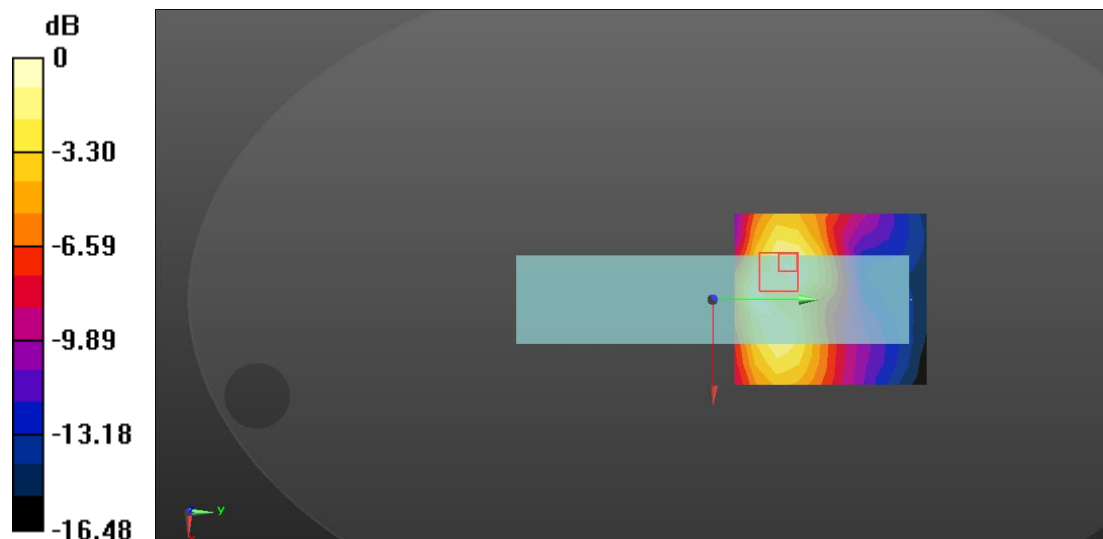

0 dB = 7.23 W/kg = 8.59 dBW/kg

DJ RDX2 10M mode 5786.5MHz Top side ANT2 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.534 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (8x8x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.690 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

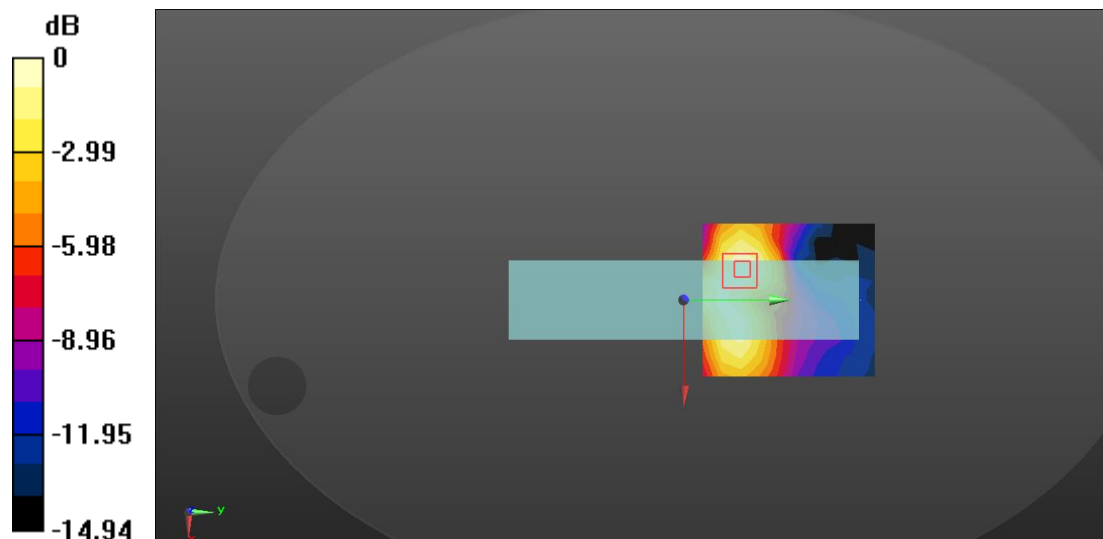

0 dB = 0.534 W/kg = -2.72 dBW/kg

DJ RDX2 3M mode 2434.5MHz Top side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2434.5 MHz;

Medium parameters used (interpolated): $f = 2434.5$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.831$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.39 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.543 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.30 W/kg

SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

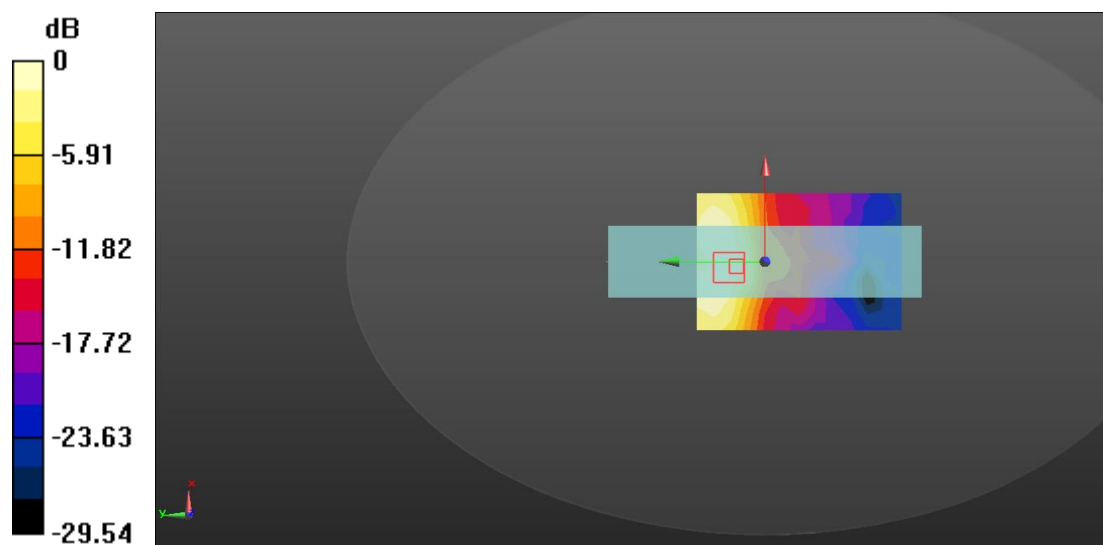

0 dB = 1.39 W/kg = 1.43 dBW/kg

DJ RDX2 20M mode 2437.5MHz Left side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2437.5 MHz;

Medium parameters used (interpolated): $f = 2437.5$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.825$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.150 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.147 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

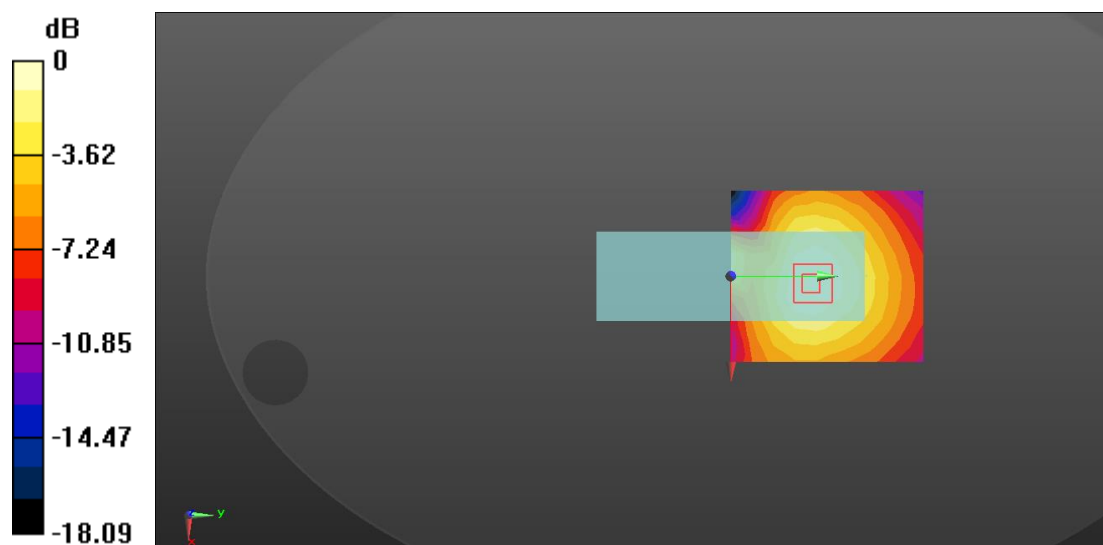

0 dB = 0.150 W/kg = -8.24 dBW/kg

DJ RDX2 1.4M mode 5726.5MHz Top side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5726.5 MHz;

Medium parameters used: $f = 5726.5$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 9.32 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 13.51 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 20.0 W/kg

SAR(1 g) = 4.62 W/kg; SAR(10 g) = 1.75 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

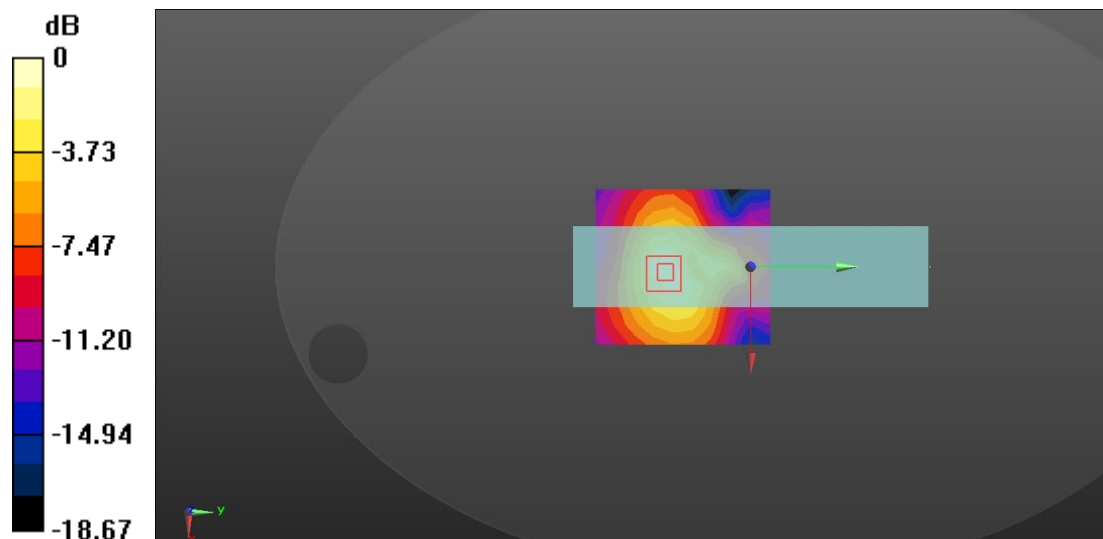

0 dB = 9.32 W/kg = 9.69 dBW/kg

DJ RDX2 10M mode 5786.5MHz Top side ANT3 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.40 W/kg

Configuration/OBD/Zoom Scan , dist=1.4mm (9x9x6)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.130 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 1.62 W/kg

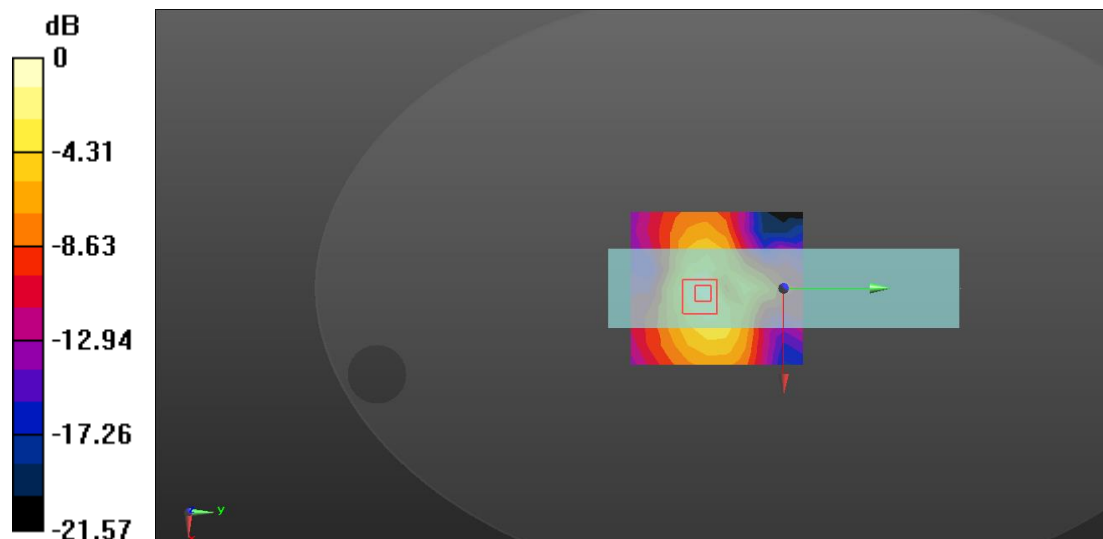

0 dB = 1.40 W/kg = 1.46 dBW/kg

DJ RDX2 10M mode 2467.5MHz Right side ANT2 0mm no shell

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2467.5 MHz;

Medium parameters used (interpolated): $f = 2467.5$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.924 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x6)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 20.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

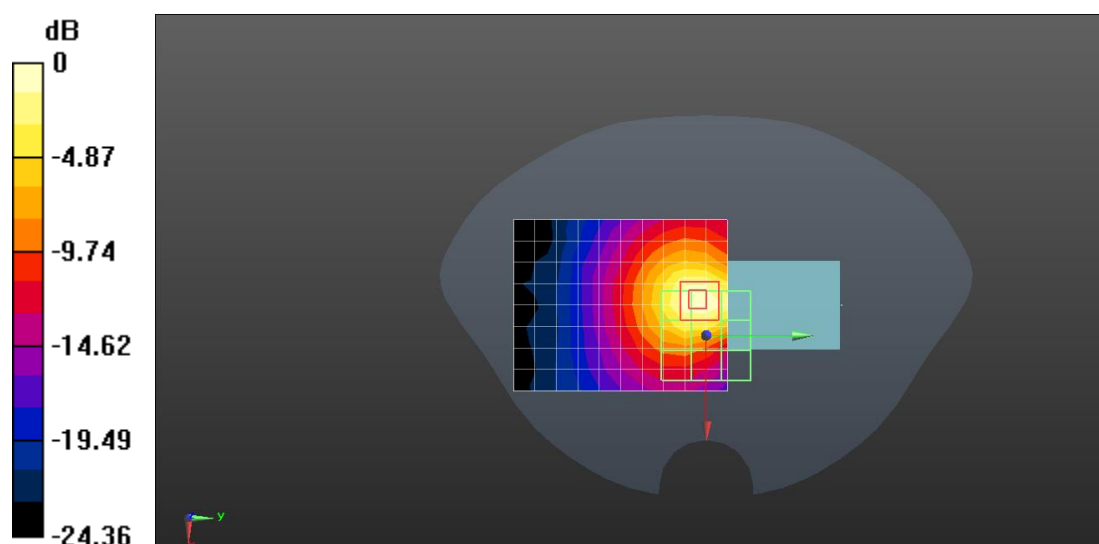

0 dB = 0.924 W/kg = -0.34 dBW/kg

Date: 2021/7/30

DJ RDX2 20M mode 5786.5MHz back side ANT0 0mm no shell

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5786.5 MHz;

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 35.109$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 23.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.45 W/kg


Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x9x6)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.814 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.294 W/kg

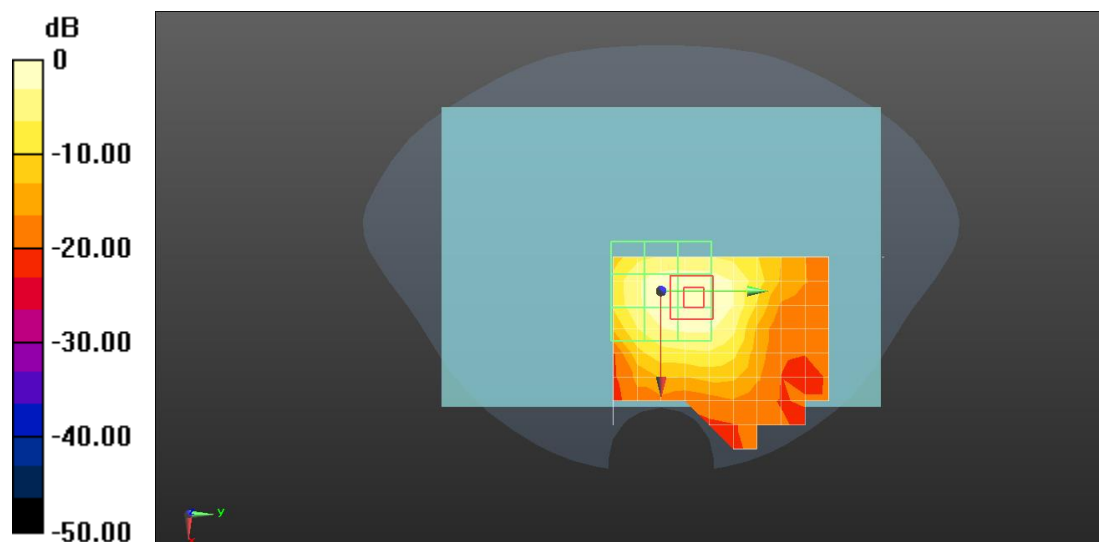

0 dB = 1.45 W/kg = 1.61 dBW/kg